# WellSky® Blood Centers

## User Guide

**Software Version: 2026 R1**

**Release Date: November 2025**

WBCGU2026R1_01

# Contact Us

WellSky Corporation.
11300 Switzer Road
Overland Park, KS 66210

**Web:** http://www.wellsky.com

**Phone:** 855-WELLSKY

## Contact WellSky Support

Please be sure to identify your full name and the name of your organization in voice mails or emails.

- **Client Experience Support Hub - 24/7:** https://wellsky.my.site.com/Bloodcenters
- **Client Experience Support Hot Line - 24/7:** (866) 714-9499
- **Fax Number:** (630) 684-0702
- **Transfusion Customer Support Email:** BloodCenters.Support@WellSky.com

# Disclaimer

WellSky Corporation provides the WellSky Blood Centers application or licensed software to the customer after extensive planning, designing, and validation of the system. Validation utilizes a range of hardware and data, which is necessarily limited. As such, in-house validation of the system can only assure that the system carries out its functions and routines as designed by WellSky. WellSky cannot represent validation of all functioning possibilities and related consequences under ultimate conditions of use. Any warranty or guarantee, explicit or implied, pertains to the level of quality and functionality of the system's software, as planned, designed and validated by WellSky.

The user facility, not WellSky, is responsible for the control, management, and supervision of the facility's use of the Blood Centers application or licensed software, including, but not limited to, ensuring that proper controls are in place to validate data, outcomes, and results obtained through its use. The user facility must run sufficient validation tests with appropriate frequency on the software and hardware, and on any modifications or supplements thereof as made available by WellSky, to be certain that the facility's use of the Blood Centers system, in the configuration and under the conditions at the facility, meets the facility's requirements in terms of policy, protocol, assumptions, and expectations, regardless of the participation or assistance of WellSky personnel in the form of suggested/published validation procedures and/or verbal discussions regarding Blood Centers systems capabilities, functions, performance, or validation.

WellSky may use data submitted by client and processed through the cloud services for interoperability and transparency between providers, payers, and patients for care coordination; continuity of care; and performance, payment, and claims related activities, including patient matching and claims data sharing with mutual patients of other providers and payers, making the matching patient information visible to these providers and payers. WellSky may aggregate the matching data from providers and payers for the creation, comparison, expansion, amendment, and maintenance of consumer or patient health records necessary for the deployment of features and functionality of the cloud services.

## Limitations to Functionality

The following limitations apply to the Blood Centers application:

- The application will not provide inventory label control functions for unit number labels, ABO/Rh labels, product code labels, expiration date labels, etc. The system is not coded to audit any such labels that have not been affixed to the donor form, blood bags, or tubes.
- The system will not track labels that have been reprinted or discarded.
- The application does not provide inventory control of supplies such as donor forms, blood bags, test tubes, reagents, controls, juice, cookies, etc.
- The application does not automatically re-instate indefinitely deferred donors. The user maintains the responsibility to terminate conditions causing the deferral status.
- The application does not automatically merge duplicate donors. The user maintains the responsibility to review and determine correctness of the merge.
- Tracking of the warehouse will not be performed in the Testing module.
- Final results of screening, confirmatory, supplementary, and antigen testing are transferred from the lab subsystem to the donor subsystem.
- Analyzer information not specifically related to test result, such as analyzer warning messages, codes, and analyzer quality control reports, will not be handled.
- The application will not replace or perform any functions of test analyzers.
- Scheduling or enforcing any specified test sequence will not be performed by the application.
- Interpretation of test results is the responsibility of the technologist and/or the analyzer used. The application will not interpret individual test results (reactive/non-reactive, positive/negative, etc.).
- The application will not automatically discard any units or components flagged as unacceptable. It is user responsibility for reconciliation of these products.
- If an interdiction or attribute gets assigned to a component that is subsequently aliquoted, the application will automatically assign that interdiction or attribute to all aliquots produced at that time.
- Blood Centers will not track personnel licensing status.
- The customer is responsible for validation of any operation(s) configured in Enhance Manufacturing Manager.
- Development and/or implementation of Standard Operating Procedures (SOPs) or control of day-to-day operation is not included in the application.
- The customer is responsible for providing an operational network to host Blood Centers. WellSky Corporation does not provide network installation or support.
- The topology and performance characteristics of the network are important factors in successfully implementing Blood Centers so that expected performance levels are met.
- Wireless feasibility and performance are dependent on several factors, including (but not limited to) the following:

    - Quality of routers and other peripheral equipment
    - Walls or other obstructions between the router and laptop computer(s)
    - Distance between the router and laptop computer(s)

- Limitations, if applicable, can be found listed with the documentation for each individual program.
- When the network software is upgraded, customers are responsible for validating the correct functioning of Blood Centers.

## Screen Limitations

The instructions for each screen in this User Guide detail any limitations that are applicable to that screen. Users must make themselves aware of any such limitations before attempting to enter data into a screen.



WellSky Corporation
Proprietary and confidential

# Revision History

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | Multiple sections throughout the User Guide. | Changed the word "Gender" to "Sex". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | Multiple sections throughout the User Guide. | Changed all references to On-Site to OnSite. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 1.2 What This Guide Covers | Removed Post Drive Analysis Module, Donor Enlistment Module, and Production Control and Transportation Module from Donor bullets.. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 1.4.5 Passwords | In Password Configuration changed 50 characters to 20 characters. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 1.4.6 Logging In From a PC | Updated the To log on to Blood Centers bullets as users can now open the app from their desktop instead of using an Internet browser. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 1.5.6 Tool Bars | Updated Menu Tool Bar screenshot. Removed Quality & Compliance Documents icon and description. Updated Screen Tool Bar screenshot and removed Alert Messages row from Button/Function grid. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 2.2 Screens and Descriptions | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 2.2.2 Create Alert Messages (ALERT) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 2.2.3 View Alert Messages (ALERTQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 2.2.4 All Alert Messages Query (ALLALERT) | Removed from Guide. No longer supported. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.2 Recruitment General Functions | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.2.3 Assign Procedures to a Drive (PROCDRV) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.2.4 Attach Campaign and Event to Drive (ATCAMP) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.2.7 Create or Remove Piggyback Links (PIGGY) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3 Recruitment Maintenance | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3.7 Create Events (EVENT) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3.8 Create and Modify Campaigns (CAMPAIGN) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3.8 Maintain Staff Details (STAFF) | Moved to 2026 R1 Admin Guide - 3.5.1 Common User Administration after doing the following: Removed references to STAFF2, STAFF3, STAFF4 in content and title. Removed references to Social Security Number. Updated the Accessing the Screen screenshot. Removed "If the employee is to be scheduled for pickups at a later date" from Schedule From Date. Removed existing prerequisites and changed to "None". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3.10 Assign Promotional Items to Campaigns (PROMOS) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.3.14 Merge or Split Territories (RTER) | Removed from Guide. No longer supported. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4 Recruitment Queries | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4.4 Piggyback Drives Query (PIGGYQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4.11 Campaigns Query (CAMPQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4.12 Campaign Items Query (PROMOQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4.19 Drive Sheet Print Status (DRPQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 3.4.21 Query Mobile Drive Slot Parameters (VSLOTS) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.1 Collection Staff Services Introduction | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.1.1 Structure | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.2 Collection Staff General Functions | Removed from Guide. No longer supported. Includes: 4.2.1 Enter Staff Unavailability (STAVAIL) 4.2.2 Enter Staff Unavailability - By Reason (STREAS) 4.2.3 Pre-Assignment of Staff (PREASIGN) 4.2.4 Enter Remarks/Skill Rating for a Drive (DRVNOTE) 4.2.5 Start Scheduling Program (STARTSCH) 4.2.6 Assign Staff Manually (MANSCH) 4.2.7 Finalize a Schedule (FINALIZE) 4.2.8 View All Staff Schedules with Comments (EVIEW) |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.1 Skill Definitions by Job Code (JOBSKILL) | Removed from Guide. No longer supported. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.1 Maintain Staff Details | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.3 Enter Job and Skills to Collection Staff (STFSKILL) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.4 Maintain Collection Staff Teams (TEAMS) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.5 Reason Codes for Staff Unavailability (REASCD) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.3.6 Mobile Staff Alerts (SWARN) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.4 Collection Staff Queries | Removed from Guide. No longer supported. Includes: 4.4.1 Weekly Schedule Query (SCHEDQ) 4.4.2 Staff Schedules Query (SCHSTFQ) 4.4.3 Constraint Violation Query (STRAINQ) 4.4.4 Collection Staff Details Query (STAFFQ) 4.4.5 Unassigned and On-Call Staff Query (STOCQ) 4.4.6 Unavailable Staff Query (SUNQ) 4.4.7 Individual Staff Schedule Query (SSCHDQ) 4.4.8 Drive Staff by Date Range Query (DRSTAFFQ) |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 4.1 Post Donation Drive Analysis | Because of Chapter 4 removals listed above, this section was renumbered as 4.1, with the following sections renumbered as a result: 4.1.1 Enter Post Drive Data for Staff CPU (CPU) and 4.1.2 Drives Above Optimal CPU Query (CPUQ). |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 5.2.2 List Browser (LISTBR) | Removed references to Social Security Number from Prerequisites and In the Donor Data Block. Updated the Accessing the Screen screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 5.2.3 List Call Status (LISTQ) | Updated the Accessing the Screen screenshot. Removed reference to Social Security Number from In the Donor List and Call Block. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 5.2.4 Released List Statistics (LSTATQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 5.2.5 Telerecruiter Performance (TODQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 6.2.6 Look-Up Sponsor Account Number (ACCTQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 6.3.4 Maintain Staff Details (STAFF2) | Removed from Guide. No longer supported. |
| | | Chapter 7 - Production Control and Transportation | Chapter removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 7.1 Production Control and Transportation Introduction | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 7.2 Production Control and Transport General Functions | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 7.2 Production Control and Transport Maintenance Functions | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 7.2.1 Maintain Staff Details | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 7.2.2 Maintain Vehicle Details (VEHICLE) | Moved to 2026 R1 Admin Guide - 4.2.9 Maintain Vehicle Details (VEHICLE) |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.1.4 The Donor Selection Process - Find Donor | Removed reference to Social Security Number, and removed the listed exceptions for the cursor not entering fields set to 'N' in the DONBLOCK table. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2 Registration General Functions | In Limitations, removed "The system can support only one Codabar unit scheme" and "HL7 message types ADT and ORM" bullets. In Prerequisites, removed BC_ SCAN_RE and BC_SCAN_ID bullets. Updated the Accessing the Screen screenshot. In Control Block Fields and Definitions > First/Last Unit ID section, removed "For Codabar alphanumeric unit IDs, the alpha characters must be identical" statement. In Donor Block Fields and Definitions, updated Alt ID, Alt Type, and Scan ID sections. In Entry in the Employer Block, removed "of staff assigned to this drive" from Lkup ID. In Entry in the Donation Details Block, removed "of staff assigned to this drive" from Phy ID, Hist ID, and Mat Veri ID. In PLASMA Loss, added "If the bleed data is not entered" Note. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2.2 Register Deferral (DEFREGIS) | In Prerequisites, removed "Your facility must define the following" bullets. Updated the Accessing the Screen screenshot. In the Donor Block Fields and Definitions, updated Alt ID, Alt Type, and Scan ID sections. In Entry in the Employer Block, removed "of staff assigned to this drive" from Lookup ID section. In Entry in the Deferral Details Block, removed "of staff assigned to this drive" from Phy ID, Historian ID, Rvw ID. Removed references to Social Security Number in the Alt ID and Alt Type sections. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2.3 Audit Donation (DONAUDIT) | Updated DONAUDIT screenshot in Accessing the Screen |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2.4 Audit Deferral (DEFAUDIT) | Updated the Accessing the Screen screenshot. Removed reference to Social Security Number in the Dfrl ID section. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2.5 Perform Visual Audit (VISNU) | Updated the VISNU screenshot in the Accessing the Screen section and the Reset Audit Flag screenshot in The Reset Audit Button section. Removed references to Social Security number in the Hold Reason, Comment, and Deferral ID sections. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.2.6 Paperless Nursing Audit (PAUDIT) | Added a Limitation about deferrals that are linked manually. Updated the PAUDIT screenshot in the Accessing the Screen section. Updated the descriptions of the Exc field. Updated the Query of Data Already Present in Table and Processing Units sections. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.2 Update Deferral (DEFMAINT) | In Limitations, removed "The requirement for entry of ALT ID: bullet. Updated screenshot in Accessing the Screen. In Control Block Fields and Definitions section, removed reference to Social Security Number, replaced SSN info with "Entry is optional unless defined in DONBLOCK as required entry. Enter the alternate type or select from list." to Alt ID and Alt Type, and updated Scan Id to "no longer used". In Deferral Details Block Fields and Definitions, removed "of personnel assigned to the drive" from Phy ID, Historian ID, and Rvw ID. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.3 Update Donation Audit (UDONAUD) | Updated the Accessing the Screen screenshot. Removed reference to Social Security Number in the Coll section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.4 Update Deferral Audit (UDEFAUD) | Updated the UDEFAUD screenshot. Removed reference to Social Security Number in the Drv Dt section. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.5 Release Audit Holds (NHOLD) | Removed reference to Social Security Number in the Retrieving Data section. Updated screenshots in Accessing the Screen, The Remove Hold With OK Button, The Remove Hold With NFT Button. New screenshot in The Hold Details Button. In the At Commit section stating that Report Audit Release Sessions Report (DPRNUHLD) automatically generates and can only be generated within the Release Audit Holds (NHOLD), depending on the data in the OK Units and NFT Unit sections. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.6 Release Audit Interdictions (RLINT) | Updated RLINT screenshot. In the Donor Data Block removed reference to Social Security Number and changed the word "Gender" to "Sex". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.7 Rollback Donation Audit (AUROLL) | Updated AUROLL screenshot |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.8 Detach Donor from Donation (DETACH) | Removed reference to Social Security Number in Coll Date section. Updated screenshots in Accessing the Screen. Updated screenshot at bottom of Alt Address (button). |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.9 Detach Donor from Deferral (DEFDET) | Updated the DEFDET screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.3.10 Attach Donor (ATTACH) | Updated the ATTACH screenshot. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.5.4 How To Use This Module | Changed "Appendix" to "Module" throughout this section. In Password Configuration changed 50 characters to 20 characters. In Returning CAC Users, updated Main Menu screenshot after Step 7. In Donor Banner, updated the Sex bullet adding "This label will be configured using the System Parameter GENDER_ LBL".Updated the Blood Centers OnSite menu screenshot. Updated the ABOUT screenshot and removed API Build, Auth API Build, and Client Chapter Offset bullets following the screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.5.5 Data Screens | Updated Drop-Down Lists section with new steps. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.6.4 The Donor Selection Process – OnSite Donor Search | Removed references to Social Security Number. Updated the Sex bullet adding "This label will be configured using the System Parameter GENDER_LBL". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.6.6 The Donor Selection Process – Find Donor | Updated the Sex bullet adding "This label will be configured using the System Parameter GENDER_LBL". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7 OnSite Registration Programs | Updated Drop-Down Lists section with new steps. Updated the Blood Centers OnSite menu screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.1 Set Drive Date and ID | Updated the screenshot in Accessing the Screen. Moved to Chapter 14 General Queries. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.3 Lookup/Registration and Modify Data | Removed FKSSN, SSN_MODE, and DONORCARD system parameters from the list of Prerequisites. Removed the description of the SSN field in the Control Block Fields and Definitions and Register a Donor by Scanning a Government-issued ID sections. In addition, removed reference to SSN in the Data Block Fields and Definitions section. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.4 Health History and Physical Findings | Removed FKSSN and SSN_MODE system parameters from the list of Prerequisites. Removed the description of the SSN field in the Selection of Donor section. In th Supply section, added a note stating "Supplies QC will list one of four values: PASS, FAIL, NOT QC'd, NA (does not require QC)". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.5 Link/Unlink Unit or Deferral | Removed SSN_MODE and FKSSN system parameters from the list of Prerequisites. Removed reference to SSN and removed the description of the SSN field in the Select Donor section. In addition, removed the description of the SSN field in the Unlink Deferral Button section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.6 Bleed Time / Phlebotomy Data | Removed FKSSN and SSN_MODE system parameters from the list of Prerequisites. Removed the description of the SSN field in the Fields and Definitions section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.9 OnSite Status Query | Updated the OnSite Status Query screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.11 Donor Walkout | Removed the description of the SSN field in the Donor Selection section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.12 Look Up and Print Donor Card | Updated the screenshot in the Accessing the Screen section. In Fields and Definitions added cross-reference to "Lookup/Registration and Modify Data " on page 508. Moved to Chapter 14 General Queries. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 8.7.13 Bleed Time Entry - Back Office | Removed FKSSN and SSN_MODE system parameters from the list of Prerequisites. Removed the description of the SSN field in the Fields and Definitions section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.1 Add Donor (ADDDONOR) | Removed reference to master codes in the Prerequisites section. Updated the ADDDONOR screenshot in the Accessing the Screen section, and removed the description of the SSN field. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.2 Modify Donor Data (MODKYDAT) | Updated MODKYDAT screenshot in the Accessing the Screen section. Removed references to Social Security Number from Prerequisites and In the Modifiable Non-Key Data Blocks. Also changed the word "gender" to "sex" in the In the Modifiable Non-Key Data Blocks note. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.3 Place Donor Attribute (DONPATT) | Removed reference to Social Security number in the Prerequisites and In the Donor Data Block sections. In addition, updated the DONPATT screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.4 Remove Donor Attribute (DONRATT) | Removed reference to Social Security number in the Prerequisites and In the Donor Data Block sections. In addition, updated the DONRATT screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.5 Place Donor Interdiction (DONPINT) | Removed reference to Social Security Number in the Prerequisites and the In the Donor Data Block sections. Updated the DONPINT screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.6 Remove Donor Interdiction (DONRINT) | Removed reference to Social Security Number in the Prerequisites and the In the Donor Data Block sections. Updated the DONRINT screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.7 Place Unit Interdiction (UNITPINT) | Updated the UNITPINT screenshot in the Accessing the Screen section, and removed reference to Social Security number in the In the Donation and Donor Data Blocks section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.2.8 Remove Unit Interdiction (UNITRINT) | Updated the UNITRINT screenshot in the Accessing the Screen section, and removed reference to Social Security number in the In the Donation Block section. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.1 Investigate Duplicate Donor Records (INVEST) | Updated INVEST and Donor Attributes screenshots. Removed references to Social Security Number from Searching by Batch ID and Investigating New Donors > Donor ID. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.2 Merge/Resolve Duplicate Donor Records (MERGDON) | Updated MERGDON and To Merge Donors screenshots. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.7 Donor Detail Query (SDONQ) | Updated the Prerequisites and In the Donor Details Block sections to remove reference to Social Security number. Also updated the SDONQ screenshot in the Accessing the Window section and the screenshot in The Merged Donors Button section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.8 Multiple Donors Query (MDONQ) | Updated the Prerequisites section to remove reference to Social Security number and system parameters. Also updated the MDONQ screenshot in the Accessing the Screen section. In addition, removed the description of the SSN field and removed reference to Social Security number in the In the Donor List Block section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.9 Interdictions Query (INTQ) | Updated the INTQ screenshot in the Accessing the Screen section, and removed reference to Social Security number in the Retrieving Data section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.11 Donor by Interdiction Query (DONIQ) | Updated the DONIQ screenshot in the Accessing the Screen section, and removed reference to Social Security number in the In the Donor Details Block section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.12 Unit Test Results Query (RESULQ) | Updated the RESULQ screenshot in the Accessing the Screen section, and removed reference to Social Security number in the Coll Date field description. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.14 Potential Duplicate Batch Query (DUPQ) | Updated the DUPQ screenshot. Removed reference to Social Security number and changed "gender" to "sex" in the Donor List Block section. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 9.3.15 Graded Donors Query (GRADEQ) | Updated the GRADEQ screenshot in the Accessing the Screen section and the Donor Holds screenshot in The Donor Holds Button section. In addition, removed reference to Social Security number in the In The Graded Donations Block and In the Graded Donors Block sections. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 10.2.1 Enter HLA/RBC Request (REQUEST) | Updated the REQUEST screenshot in the Accessing the Screen section, and removed the description of the SSN field in the To Create a New Recipient section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 10.2.2, Enter HLA Results (HLARESUL) | Updated the HLARESUL screenshot in the Accessing the Screen section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 10.2.4 Donor Antigens Query (ANTQ) | Updated the ANTQ screenshot in the Accessing the Window section and the screenshot in The Donor Interdictions Button section. Also updated the Donor Data Block section to remove reference to Social Security number. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 11.1.1 Prepare Donor Notification (DONNOTE) | Updated the DONNOTE screenshot and remove reference to Social Security number from the Retrieving Data section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 11.1.2 Authorize Donor Notification (AUTHLET) | Updated the AUTHLET screenshot Accessing the Screen and also the screenshot in the Viewing Merged Donors section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 11.1.3 Donor Details Query (NDONQ) | Updated the NDONQ screenshot in the Accessing the screen section and removed the reference to Social Security number from the Retrieving Data section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.1 Donor Communication Introduction | Removed references to functions that are no longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2 Donor Communication Functions | Updated screenshot |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.2 Donors by Events Query (DEQ) | Updated DEQ screenshot. In the Donor List Block removed reference to Social Security Number and changed the word "Gender" to "Sex". |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.3 Donor Communication Query (DCOMQ) | Updated screenshot in Accessing the Screen. In the Donor Records Block removed reference to Social Security Number. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.4 Donor Type Cards - Print History Query (TYPEQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.4 First Time and Gallon Donor Labels (DLABEL) | Updated the DLABEL screenshot in the Accessing the Screen section and the screenshot in the Viewing Merged Donors section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.6 Donors Yet to Receive Post-Donation Card (NOCARD) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 12.2.7 Generate Donor Post-Donation Card (DCARD) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 13.2.1 Register Special Donation Request (SPREQ) | Updated the SPREQ screenshot in the Accessing the Screen section and the screenshot in the Searching for an Existing Patient section. Removed reference to Social security number in the In the Patient Data Block section, and removed the description of the SSN field. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 13.2.2, Link Unit to Special Donation (SLINK) | Updated the SLINK screenshot in the Accessing the Screen section and the screenshot in the Retrieving Data section. Removed reference to Social security number in the In the Patient Data Block section and the Coll Date section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 14.2.4 Set Drive Date and ID | Updated the screenshot in Accessing the Screen. Moved to Chapter 14 General Queries. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 14.2.5 Look Up and Print Donor Card | Updated the screenshot in the Accessing the Screen section. In Fields and Definitions added cross-reference to "Lookup/Registration and Modify Data " on page 508. Moved to Chapter 14 General Queries. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.5 Authorize Notification Letter (DNWSNDLT) | Updated the DNWSNDLT screenshot in the Accessing the Screen section. Removed references to SSN. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.9 Deferral Entry Details (DRWDEFRL) | Updated the DRWDEFRL screenshot in the Accessing the Window section, and removed the reference to the VWSSN access class. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.10 Display Donor Information by Scan ID (DPWDSCAN) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.11 Donation Entry Details (DRWENTRY) | Updated the DRWENTRY screenshot in the Accessing the Window section, and removed the reference to the VWSSN access class. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.12 Donation History (DPWDCARD) | Updated the Accessing the Window screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.13 Donation History (DPWDNDTL) | In the Accessing the Screen section, updated the DPWDNDTL screenshot and removed SSN references below the screenshot. Updated screenshots in Show AUX Units Button, and Show Attributes Button |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.14 Donation History - Test Results (DPWDNTST) | Updated the DPWDNTST screenshot in the Accessing the Window section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.20 Donor Attributes (DPWPROPR) | Updated the DPWPROPR screenshot in the Accessing the Window section and The Show Term Button screenshot. Also added the description of the Note field. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.21 Donor Demographics (DPWDEMGR) | Updated the DPWDEMGR screenshot and description in the Accessing the Window section. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.22 Donor Eligibility (DPWELGBY) | Updated the DPWELGBY screenshot and description in the Accessing the Window section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.23 Donor Eligibility & Attributes (DNWELIGB) | Updated the DNWELIGB screenshot and description in the Accessing the Window section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.24 Donor Interdictions (DPWDNINT) | Updated the Show Term Button screenshot. Updated the DPWDNINT screenshot in the Accessing the Window section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.28 Find Donor (FIND DONOR) | Removed the FKSSN and SSN_ MODE system parameters from the Prerequisites section, and updated the description of the ALTID_MODE system parameter. Updated the FIND DONOR screenshot in the Accessing the Window section. Updated the description of the Control Block Fields and Definitions, removed the description of the SSN field, and moved the descriptions of the Alt ID and Ty fields to the end of the section. In addition, removed reference to Social Security number in the Retrieving Data section. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.29 Generate Notification Letter (DNWSNDLT) | In the Accessing the Screen section, updated the DNWSNDLT screenshot and removed Social Security number from bulleted list. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.34 Notification Log (DNWDCOMM) | In the Intended Use section,changed notification to notifictions. Updated the DNWDCOMM screenshot. In the Donor Data Block removed reference to Social Security Number and changed the word "Gender" to "Sex". |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 15.2.37 Search for Donor (DNWDFIND) | Updated the Prerequisites section to remove references to Master Codes. Updated the DNWDFIND screenshot in the Accessing the Window section. Updated the description of the Sex field to include reference to Alt ID rather than Social Security Number, and removed the description of the SSN field. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 18.2.9 Plasma Tube Manager | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 18.2.10 Check-In/Query Plasma Tube | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 18.2.11 Pack/Shipment Plasma Tube | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 18.2.12 EBL File | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 18.2.13 EU Config | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 19.3.4 Split Component into Aliquots - ISBT(ALIQUOTI) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 20.2.8 Enter Unit Interdiction (UNTINT) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 20.2.11 Release Unit Hold (RUHOLD) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 20.2.14 Release Unit Interdiction (RUINT) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.4 Test Staging Parameters | Updated screenshot. |

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.4.3 Enter Run Values for Test (RUNPARM) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.5 Common Testing Functions | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.5.2 Void Test Results Supervisory (SUPVOID) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.5.4 Void Test Batch (Two-Tech Option) - Tech1 (VOIDTB1)/Tech2 (VOIDTB2) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 21.5.8 Schedule Additional Test–Regional Sample (ADTEST) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 24.2.2 Imported Blood Product Check-In (IMPORT) | In Limitations section, removed "Components labeled with ABO group ONLY cannot be imported" bullet and added "Master Code PABO must be defined in Lab master codes" bullet. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 28.6 Order Queries Functions | Updated screenshot. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 28.6.8 Order Charges – By Patient Name (OPQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 28.6.11 Order Detail Query - Multiple Orders (DUMP) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 29.4.8 Shipments By Customer (SHIPC) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | 30.4.6 Products Returned From Hospitals (RETPQ) | Removed from Guide. No longer supported. |
| 2026 R1 November 2025 | WBCGU2026R1_01 | Appendix G Logging In to Blood Centers and Password Configuration | New Appendix. |


WellSky Corporation
Proprietary and confidential

| Software Release & Date | Document Number | Content Affected | Description of Change |
|---|---|---|---|
| 2026 R1 November 2025 | WBCGU2026R1_01 | Appendix H, OnSite Module | This appendix was moved to become Section 8.5 OnSite Module Introduction. |

# Solution Life Cycle

The WellSky® Solution Life Cycle describes the sequence of phases our solutions go through from General Availability (GA) through maturity and decline. The value of identifying the phases and applying timeframes, i.e. actual dates to each phase, allows you to plan your upgrades and migrations without any gaps in support.

To help realize the maximum value from WellSky's applications, customers should install the latest version of your WellSky solution. The latest versions allow customer(s) to benefit from the latest functionality and feature enhancements, are designed to handle modern workloads, and provide access to our most complete technical support and engineering assistance and resources.

WellSky strives to make each version easier to upgrade, and we also have a professional services team to assist with upgrade plans as well. WellSky understands that business constraints may delay customers from upgrading, and that certain customers may need to have the flexibility either to upgrade to new versions or decide to remain on an older version for a while longer. WellSky, at its discretion, may provide customers with additional support offerings that can extend certain limited features of maintenance/support coverage until the customer is able to upgrade.

| Milestone | Estimated Schedules |
|---|---|
| Major Release | Every two (2) years, at a minimum |
| Minor Release | At least one during the life cycle |
| Service Packs | One (1) – two (2) per life cycle, according to need during the life cycle |



WellSky Corporation
Proprietary and confidential

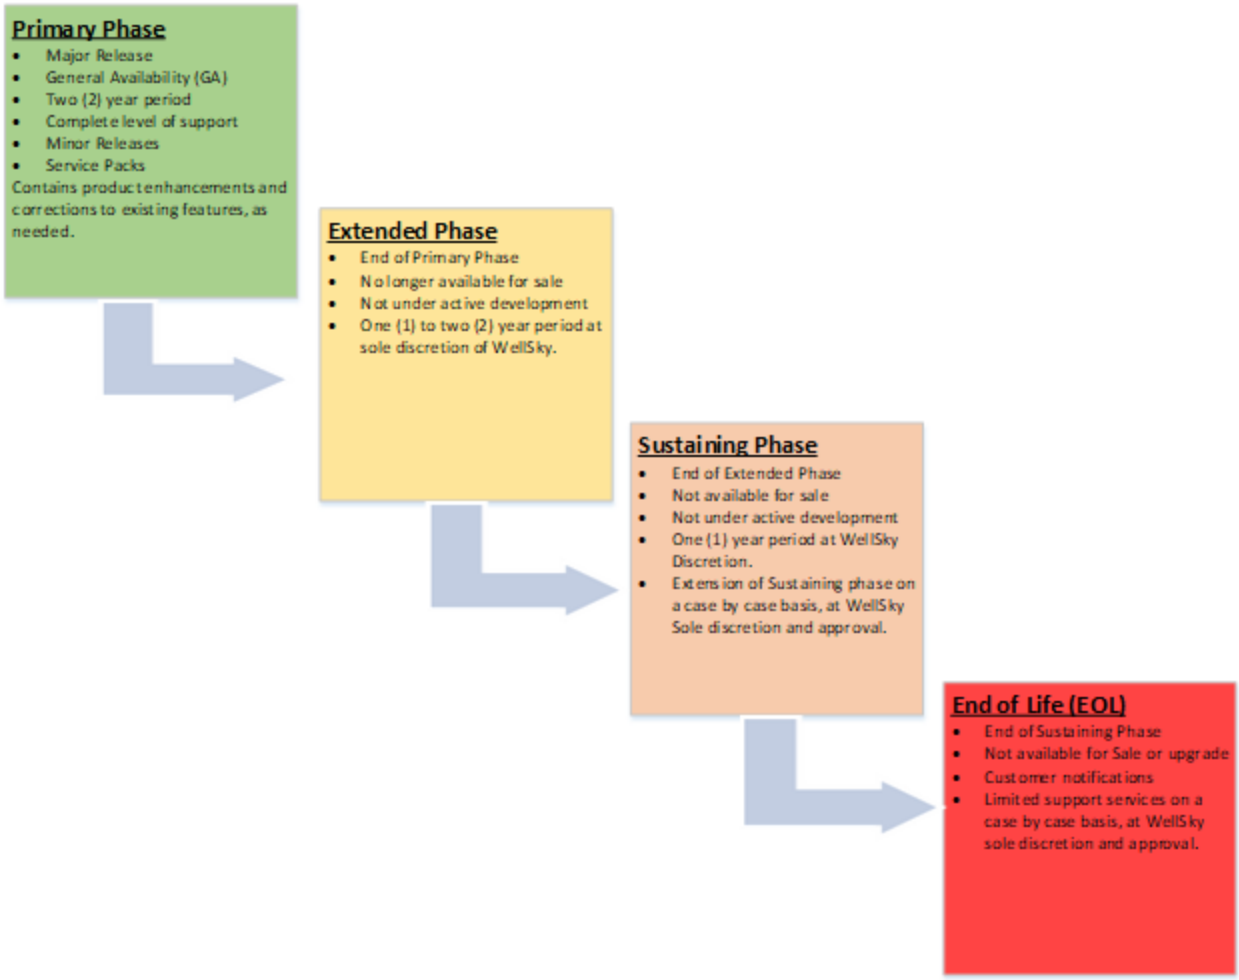
Primary Phase
Major Release
General Availability (GA)
Two (2) year period
Complete level of support
Minor Releases
Service Packs
Contains product enhancements and corrections to existing features, as needed.
Extended Phase
End of Primary Phase
No longer available for sale
Not under active development
One (1) to two (2) year period at sole discretion of WellSky.
Sustaining Phase
End of Extended Phase
Not available for sale
Not under active development
One (1) year period at WellSky Discretion.
Extension of Sustaining phase on a case by case basis, at WellSky Sole discretion and approval.
End of Life (EOL)
End of Sustaining Phase
Not available for Sale or upgrade
Customer notifications
Limited support services on a case by case basis, at WellSky sole discretion and approval.

# Contents

Chapter 1 - Introduction ..... 1
1.1 Indications for Use ..... 3
1.2 What This Guide Covers ..... 4
1.3 System Attributes ..... 6
1.3.1 Separation of Functions ..... 6
1.3.2 FDA Compliance ..... 6
1.3.3 No Operating System Access ..... 6
1.3.4 Controlled Access ..... 6
1.3.5 Security ..... 6
1.3.6 Data Access ..... 6
1.3.7 Data Responsibility ..... 7
1.3.8 Data Integrity ..... 7
1.3.9 Validity of Data ..... 7
1.3.10 Audit Tracking ..... 7
1.3.11 No Data Deletion ..... 8
1.3.12 Future Effective Dates ..... 8
1.3.13 Validation Tables ..... 8
1.3.14 Application Password ..... 8
1.3.15 Databases ..... 8
1.3.16 Interdictions ..... 8
1.3.17 Double Blind Entry ..... 9
1.3.18 Automatic Time-Out ..... 10
1.3.19 “STOP” Pop-Up ..... 11
1.3.20 Bar Code Interface ..... 11
1.3.21 Peripheral Devices ..... 12
1.3.22 SOP/User Guide Conflict ..... 12
1.4 How To Use This Guide ..... 13
1.4.1 The WellSky Blood Centers Family of Applications ..... 13
1.4.2 Required Training ..... 13
1.4.3 How to Use the Guide ..... 13



WellSky Corporation
Proprietary and confidential

1.4.4 Conventions Used in This Guide ..... 13
1.4.5 Passwords ..... 14
1.4.6 Logging In From a PC ..... 16
1.4.7 Logging on with a Common Access Card (CAC) ..... 18
1.4.8 Logging Out ..... 25
1.4.9 Web-Enabled Environment ..... 25
1.4.10 Screen Components ..... 26
1.4.11 Search By First Word ..... 27
1.4.12 Search By Any Character in String ..... 28
1.4.13 A List of Values Shortcut ..... 29
1.4.14 List of Values - Multiple Selections ..... 29
1.4.15 Entry Fields vs. Display Fields ..... 30
1.4.16 Mouse Operation ..... 30
1.4.17 Keyboard Keys ..... 30
1.4.18 Hot Keys ..... 31
1.4.19 Data Screen Format ..... 32
1.5 Data Screens ..... 34
1.5.1 Navigating ..... 34
1.5.2 Entering Data ..... 35
1.5.3 Committing Data to the Database ..... 41
1.5.4 Function Keys ..... 41
1.5.5 Other Function Keys ..... 44
1.5.6 Tool Bars ..... 44
1.5.7 The Menu Structure ..... 50
1.5.8 Keywords ..... 56
1.6 Generating a Report ..... 57
1.7 Automatically Printing a Report ..... 60
1.7.1 Called Windows and Routines ..... 61
1.7.2 Help Lines ..... 62
1.7.3 Error Messages ..... 63
Chapter 2 - Common Functions - User Utilities ..... 65

2.1 Introduction ..... 66
2.2 Screens and Descriptions ..... 66
2.2.1 Find Menu Tree (TREE) ..... 66
2.2.2 Document Library (DOCLIB) ..... 68
2.3 Viewing and Printing Reports (PRINT and SPRINT) ..... 74
2.3.1 Limitations ..... 74
2.3.2 Prerequisites ..... 74
2.3.3 Accessing the Screen ..... 74
Donor ..... 79
Chapter 3 - Recruitment ..... 81
3.1 Introduction ..... 83
3.1.1 Structure ..... 83
3.2 Recruitment General Functions ..... 84
3.2.1 View Master Calendar (CALEN) ..... 84
3.2.2 Create or Modify Mobile Drive (DRIVE) ..... 89
3.2.3 Modify Non-Critical Drive Data (DRVMOD) ..... 96
3.2.4 Create Drive from Temporary Drive (FROMTEMP) ..... 98
3.2.5 Cancel Drive (CANDRIVE) ..... 102
3.2.6 Maintain Drive Location (DRIVELOC) ..... 104
3.2.7 Customize Drive Checklist (DRVCUST) ..... 109
3.2.8 Update Drive Checklist (DRVCHK) ..... 112
3.2.9 Create Drive Sponsor Profile (SPON2) ..... 116
3.2.10 Maintain Sponsor Contacts (SPONCONT) ..... 126
3.2.11 Customize Checklist for a Sponsor (SPONCHK) ..... 130
3.2.12 Define Sponsor Rollover Preferences (SPONROLL) ..... 132
3.3 Recruitment Maintenance ..... 137
3.3.1 Confirm On-Hold Drives (CONFIRM) ..... 137
3.3.2 Modify Drive Details – Super (SDRIVE) ..... 140
3.3.3 Create or Modify Special Drives (SPDRIVE) ..... 141
3.3.4 Cancel Special Drive (CANSPDRV) ..... 144
3.3.5 Define Resource Exceptions (RESXP) ..... 147



WellSky Corporation
Proprietary and confidential

3.3.6 Enter Calendar Highlights (HILITE) ..... 150
3.3.7 Enter Promotional Items (ITEMS) ..... 153
3.3.8 Assign Territory to Recruiter (TTOR) ..... 155
3.3.9 Determine Care-Taker Recruiter (CTREC) ..... 158
3.3.10 Merge Duplicate Sponsors (SPMRG) ..... 160
3.4 Recruitment Queries ..... 164
3.4.1 Drive Details Query (DRIVEQ) ..... 164
3.4.2 Multiple Drive Selection Query (MDRIVEQ) ..... 169
3.4.3 Drives and Goals by Recruiter Query (RECQ) ..... 174
3.4.4 Monthly Collection Goals Query (GOALMONQ) ..... 177
3.4.5 Collection Goals by Date Query (GOALDTQ) ..... 181
3.4.6 Sponsors by Territory Query (SBYTQ) ..... 183
3.4.7 Sponsor Contacts Query (SPCONQ) ..... 187
3.4.8 Parent Sponsors Query (PSPONQ) ..... 189
3.4.9 Drives by Sponsor Query (DRSPONQ) ..... 191
3.4.10 Territory Statistics Query (TERQ) ..... 194
3.4.11 Goals vs Booked and Actuals Query (SAYQ) ..... 199
3.4.12 Draw Query (DRAWQ) ..... 203
3.4.13 Drives by Creation Date Query (CDQ) ..... 207
3.4.14 Temporary Drives Query (TDRIVEQ) ..... 210
3.4.15 Resource Status Query (RSTATQ) ..... 212
3.4.16 Recruiter Territories Query (RTQ) ..... 214
3.4.17 Goals vs Proj vs Actual Collections (BBQ) ..... 216
Chapter 4 - Post Drive Analysis ..... 219
4.1 Post Donation Drive Analysis ..... 220
4.1.1 Enter Post Drive Data for Staff CPU (CPU) ..... 220
4.1.2 Drives Above Optimal CPU Query (CPUQ) ..... 223
Chapter 5 - Donor Enlistment ..... 227
5.1 Introduction ..... 228
5.2 Enlistment General Functions ..... 229
5.2.1 Submit List and Create Template (LIST) ..... 229

5.2.2 List Browser (LISTBR) ..... 235
5.2.3 List Call Status (LISTQ) ..... 241
5.3 Enlistment Maintenance Functions ..... 244
5.3.1 List Manager – Super (LSUPER) ..... 244
5.3.2 Change List Priority (LISTPRI) ..... 249
5.3.3 Create Standard Templates (SLIST) ..... 251
5.3.4 Define List Types (LISTTYP) ..... 255
5.3.5 Define Search Criteria (SEARCH) ..... 258
Chapter 6 - Donor Center Management ..... 263
6.1 Introduction ..... 264
6.2 Donor Center General Functions ..... 265
6.2.1 Schedule Donors (APPT) ..... 265
6.2.2 Donor Schedule by Center Query (DONSQ) ..... 275
6.2.3 Donor Center Procs and Staff Query (FIXQ) ..... 279
6.2.4 Draw Statistics and Drives Query (DRAW2Q) ..... 281
6.2.5 Fixed Site Drives Data Query (FDRIVEQ) ..... 284
6.2.6 Donor Center Details Query (DCQ) ..... 286
6.3 Donor Center Maintenance ..... 292
6.3.1 Create or Modify Special Drives (SPDRIVE2) ..... 292
6.3.2 Cancel Fixed and Special Drives (CANSF) ..... 292
6.3.3 Create Fixed Drives Automatically (FIXDR2) ..... 292
6.3.4 Assign Staff to Donor Center (FIXSTAFF) ..... 295
6.3.5 Define Apheresis Machines (MCODE) ..... 296
Chapter 7 - Registration ..... 299
7.1 Introduction ..... 301
7.1.1 Registration General Functions ..... 301
7.1.2 Registration Queries ..... 302
7.1.3 Terminology Applicable to Registration ..... 302
7.1.4 The Donor Selection Process – Find Donor ..... 303
7.2 Registration General Functions ..... 304
7.2.1 Register Donation (REGIS) ..... 304



WellSky Corporation
Proprietary and confidential

7.2.2 Register Deferral (DEFREGIS) ..... 317
7.2.3 Audit Donation (DONAUDIT) ..... 326
7.2.4 Audit Deferral (DEFAUDIT) ..... 334
7.2.5 Perform Visual Audit (VISNU) ..... 343
7.2.6 Paperless Nursing Audit (PAUDIT) ..... 350
7.3 Registration Maintenance Functions ..... 354
7.3.1 Update Donation (REGMAINT) ..... 354
7.3.2 Update Deferral (DEFMAINT) ..... 361
7.3.3 Update Donation Audit (UDONAUD) ..... 369
7.3.4 Update Deferral Audit (UDEFAUD) ..... 378
7.3.5 Release Audit Holds (NHOLD) ..... 387
7.3.6 Release Audit Interdictions (RLINT) ..... 394
7.3.7 Rollback Donation Audit (AUROLL) ..... 398
7.3.8 Detach Donor from Donation (DETACH) ..... 401
7.3.9 Detach Donor from Deferral (DEFDET) ..... 405
7.3.10 Attach Donor (ATTACH) ..... 408
7.3.11 Change Drive ID or Collection Date (MODDRV) ..... 414
7.3.12 Maintain Donor Employer (EMP) ..... 417
7.4 Registration Queries ..... 420
7.4.1 Registered Donations Query (ENTRYQ) ..... 420
7.4.2 Registered Deferrals Query (DEFQ) ..... 423
7.4.3 Donations on Hold Query (DONHOLDQ) ..... 427
7.4.4 Deferrals on Hold Query (DEFHOLDQ) ..... 431
7.4.5 Donations Pending Audit Query (DONPENDQ) ..... 435
7.4.6 Deferrals Pending Audit Query (DEFPENDQ) ..... 437
7.4.7 Unregistered Donations (UNQ) ..... 440
7.4.8 Collection Date Mismatch Query (DCOLLQ) ..... 441
7.5 OnSite Module Introduction ..... 444
7.5.1 Indications for Use ..... 444
7.5.2 Interdictions ..... 444
7.5.3 Automatic Time-Out/Lock-Out ..... 448

7.5.4 How To Use This Module ..... 448
7.5.5 Data Screens ..... 464
7.5.6 Reset User Password ..... 471
7.6 OnSite Registration ..... 474
7.6.1 Introduction ..... 474
7.6.2 OnSite Registration General Functions ..... 474
7.6.3 Online Registration Queries ..... 476
7.6.4 The Donor Selection Process – OnSite Donor Search ..... 476
7.6.5 Terminology Applicable to Registration ..... 476
7.6.6 The Donor Selection Process – Find Donor ..... 477
7.7 OnSite Registration Programs ..... 479
7.7.1 Equipment & Supply QC ..... 480
7.7.2 Lookup/Registration and Modify Data ..... 494
7.7.3 Health History and Physical Findings ..... 523
7.7.4 Link/Unlink Unit or Deferral ..... 564
7.7.5 Bleed Time / Phlebotomy Data ..... 572
7.7.6 Donor Survey ..... 591
7.7.7 Pack/Ship Shippers to Lab ..... 600
7.7.8 OnSite Status Query ..... 607
7.7.9 Unit/Deferral Link Status Query ..... 613
7.7.10 Donor Walkout ..... 614
7.7.11 Bleed Time Entry - Back Office ..... 617
7.7.12 Tube Check-In ..... 631
7.7.13 Extract Mobile Server Data ..... 633
7.7.14 Mobile PC Upload/Download Utility ..... 634
7.7.15 Alternate Address ..... 644
7.7.16 International Address ..... 647
7.7.17 Lock/Unlock Mobile Users ..... 649
7.7.18 Reset User Password ..... 650
7.8 FastTrak Donor Response ..... 656
Chapter 8 - Donor Profile ..... 677



WellSky Corporation
Proprietary and confidential

8.1 Introduction ..... 678
8.1.1 Donor Profile - Process Flow ..... 678
8.2 Donor Profile General Functions ..... 682
8.2.1 Add Donor (ADDDONOR) ..... 682
8.2.2 Modify Donor Data (MODKYDAT) ..... 689
8.2.3 Place Donor Attribute (DONPATT) ..... 693
8.2.4 Remove Donor Attribute (DONRATT) ..... 696
8.2.5 Place Donor Interdiction (DONPINT) ..... 699
8.2.6 Remove Donor Interdiction (DONRINT) ..... 703
8.2.7 Place Unit Interdiction (UNITPINT) ..... 707
8.2.8 Remove Unit Interdiction (UNITRINT) ..... 710
8.3 Donor Profile Maintenance Functions ..... 715
8.3.1 Investigate Duplicate Donor Records (INVEST) ..... 715
8.3.2 Merge/Resolve Duplicate Donor Records (MERGDON) ..... 720
8.3.3 Place Group Interdiction on Donors (GPPDON) ..... 725
8.3.4 Remove Group Interdiction from Donors (GPRDON) ..... 728
8.3.5 Place Group Interdiction on Units (GPPUNIT) ..... 731
8.3.6 Remove Group Interdiction from Units (GPRUNIT) ..... 734
8.3.7 Donor Detail Query (SDONQ) ..... 737
8.3.8 Multiple Donors Query (MDONQ) ..... 745
8.3.9 Interdictions Query (INTQ) ..... 750
8.3.10 Unit by Hold Code Query (UNITHQ) ..... 752
8.3.11 Donor by Interdiction Query (DONIQ) ..... 755
8.3.12 Unit Test Results Query (RESULQ) ..... 760
8.3.13 Donor Antigens Query (ANTQ2) ..... 761
8.3.14 Potential Duplicate Batch Query (DUPQ) ..... 761
8.3.15 Graded Donors Query (GRADEQ) ..... 764
8.3.16 Donor Profile Audit Query (DPAQ) ..... 767
Chapter 9 - HLA/RBC ..... 773
9.1 Introduction ..... 774
9.1.1 Structure ..... 774

9.1.2 Terminology Applicable to the HLA/RBC Module ..... 774
9.1.3 Process Flow - HLA/RBC Search Operations ..... 775
9.2 HLA/RBC General Functions ..... 776
9.2.1 Enter HLA/RBC Request (REQUEST) ..... 776
9.2.2 Enter HLA Results (HLARESUL) ..... 784
9.2.3 HLA/RBC Request Query (REQUESTQ) ..... 786
9.2.4 Donor Antigens Query (ANTQ) ..... 791
9.3 HLA/RBC Maintenance Functions ..... 794
9.3.1 Define HLA Antigens (HLANTI) ..... 794
9.3.2 Define HLA Cross Reactive Groups (HLAEPI) ..... 796
9.3.3 Define HLA Matching Grades (HLAGRAD) ..... 798
9.3.4 Associate Strong Reactivity (HLAXX) ..... 801
9.3.5 Define HLA Interim Output (HLAINT) ..... 803
9.4 RBC Antigen Manager ..... 807
9.4.1 RBC Antigen Manager Configuration ..... 807
9.4.2 Donor RBC Ag Query (AGQ) ..... 825
9.4.3 Donor Antigen Discrepancy Report (AGRDISCR) ..... 836
Chapter 10 - Donor Notification ..... 839
10.1 Notification Functions ..... 840
10.1.1 Prepare Donor Notification (DONNOTE) ..... 840
10.1.2 Authorize Donor Notification (AUTHLET) ..... 844
10.1.3 Donor Details Query (NDONQ) ..... 848
10.1.4 View Donor Letters (LETQ) ..... 854
Chapter 11 - Donor Communication ..... 859
11.1 Introduction ..... 860
11.1.1 Screens ..... 860
11.2 Donor Communication Functions ..... 861
11.2.1 Multiple Donors Query (MDONQ2) ..... 861
11.2.2 Donors by Events Query (DEQ) ..... 861
11.2.3 Donor Communication Query (DCOMQ) ..... 865
11.2.4 First Time and Gallon Donor Labels (DLABEL) ..... 869



WellSky Corporation
Proprietary and confidential

11.2.5 Edit Standard Donor Comm Letters (EDLET) ..... 872
Chapter 12 - Special Donations ..... 875
12.1 Introduction ..... 876
12.1.1 Structure ..... 876
12.2 Special Donations Functions ..... 877
12.2.1 Register Special Donation Request (SPREQ) ..... 877
12.2.2 Link Unit to Special Donation (SLINK) ..... 884
12.2.3 Special Donation Status Query (SPUNITQ) ..... 889
12.2.4 Print Auto/Directed Tie Tags (ADTT) ..... 891
12.2.5 Print Special Instructions Tie Tags (SPTT) ..... 897
12.2.6 Maintain Physician List (PHY) ..... 901
12.2.7 Maintain Special Instructions (SPIN) ..... 905
Chapter 13 - General Queries ..... 907
13.1 Introduction ..... 908
13.2 General Queries and Functions ..... 909
13.2.1 Notes by Date Range Query (NOTEQ) ..... 909
13.2.2 City, State, and Zip Query (CITYQ) ..... 911
13.2.3 ISBT Unit Check Digit (ISBTQ) ..... 914
13.2.4 Set Drive Date and ID (SETDRV) ..... 915
13.2.5 Lookup and Print Donor Card (LOOKQ) ..... 917
Chapter 14 - Called Windows ..... 933
14.1 Introduction ..... 935
14.1.1 Access Control ..... 935
14.2 Called Windows Descriptions ..... 936
14.2.1 ABO Breakdown for Drive (MCWABODR) ..... 936
14.2.2 ABO Breakdown for Sponsor (MCWABOSP) ..... 937
14.2.3 Alternate Demographics (DPWAADDR) ..... 938
14.2.4 Assigned Equipment Information (DSWEQUIP) ..... 940
14.2.5 Authorize Notification Letter (DNWSNDLT) ..... 942
14.2.6 Collection Statistics (DRWCSTAT) ..... 945
14.2.7 Communication Letters (DCWVWLTR) ..... 948

14.2.8 Communication Log (DCWDCOMM) ..... 950
14.2.9 Deferral Entry Details (DRWDEFRL) ..... 954
14.2.10 Display Notification Letter (DNWLTQRY) ..... 955
14.2.11 Donation Entry Details (DRWENTRY) ..... 957
14.2.12 Donation History (DPWDCARD) ..... 958
14.2.13 Donation History (DPWDNDTL) ..... 960
14.2.14 Donation History—Test Results (DPWDNTST) ..... 964
14.2.15 Donation Hold Details (DRWHOLDS) ..... 966
14.2.16 Donation Notes (DRWNOTES) ..... 968
14.2.17 Donation Sites Available for a Given Time (DSWAVSIT) ..... 970
14.2.18 Donation Slots (DSWASLOT) ..... 971
14.2.19 Donation/Deferral Audit Details (DRWAUDIT) ..... 973
14.2.20 Donor Attributes (DPWPROPR) ..... 975
14.2.21 Donor Demographics (DPWDEMGR) ..... 976
14.2.22 Donor Eligibility (DPWELGBY) ..... 979
14.2.23 Donor Eligibility & Attributes (DNWELIGB) ..... 980
14.2.24 Donor Interdictions (DPWDNINT) ..... 981
14.2.25 Donor Schedule on Donor Centers (DSWDONIS) ..... 984
14.2.26 Donor Statistics (DCWLOOKS) ..... 986
14.2.27 Drive Statistics (DPWHLDRN) ..... 988
14.2.28 Find Donor (FIND DONOR) ..... 990
14.2.29 Generate Notification Letter (DNWSNDLT) ..... 994
14.2.30 Goal Information (MRWRPERF) ..... 997
14.2.31 International Address (DPWIADDR) ..... 998
14.2.32 New ZIP Code (VDWNWZIP) ..... 1000
14.2.33 Notification Letters (DNWVWLTR) ..... 1001
14.2.34 Notification Log (DNWDCOMM) ..... 1003
14.2.35 Past Drives Sponsor (MRWPADRV) ..... 1005
14.2.36 Schedule Status (SSWSSTAT) ..... 1007
14.2.37 Search for Donor (DNWDFIND) ..... 1010
14.2.38 Send Letter (DCWSNDLT) ..... 1013



WellSky Corporation
Proprietary and confidential

14.2.39 Site Collection Statistics (DRWSSTAT) ..... 1014
14.2.40 Sponsor Rollover Preferences (MRWROLLP) ..... 1017
14.2.41 User List Browser (DEWDONBR) ..... 1018
14.2.42 View Donors in List (DEWDONRS) ..... 1019
14.2.43 View List Criteria (DEWCRITN) ..... 1021
Chapter 15 - Blood Centers API - Donor Functions ..... 1023
15.1 Introduction ..... 1024
15.1.1 Donor to HEMONETICS Hemasphere Interface ..... 1024
15.2 Blood Centers API Functions ..... 1032
15.2.1 API Temporary Data Query (APITDQ) ..... 1032
15.2.2 Blood Centers API Log Query (APILOG) ..... 1034
15.2.3 Extract Data to File (EXTRACTD) ..... 1036
15.2.4 External to Blood Centers Data Translation (APICONV) ..... 1038
15.2.5 Mobile PC Upload/Download Utility (MOBPCUD) ..... 1040
15.2.6 Mobile PC Laptop Register (MOBPCLR) ..... 1044
Chapter 16 - Vista Interface ..... 1049
16.1 Introduction ..... 1050
16.2 Vista Interface Functions ..... 1051
16.2.1 Vista Interface Status (VSTATUS) ..... 1051
16.2.2 Vista-Blood Centers Conversion Table (VCONV) ..... 1054
16.2.3 Vista-Blood Centers Error Log (VERROR) ..... 1058
Lab ..... 1061
Chapter 18 - Material Check-In ..... 1063
18.1 Introduction ..... 1064
18.1.1 Overview ..... 1064
18.1.2 Structure ..... 1064
18.2 General Check-in Functions ..... 1065
18.2.1 Check-In and Donor Source Card Entry (DSCE or DSCE2) ..... 1065
18.2.2 Bag Check-In (BAGS) ..... 1070
18.2.3 Tube Check-In (TUBES) ..... 1074
18.2.4 Tube Shipment (TSHIP) ..... 1076

18.2.5 Lab Warehouse Checkout (LBWHOUT) ..... 1079
18.2.6 Lab Warehouse Check-In (LBWHIN) ..... 1083
18.2.7 Reconcile Lab Warehouse Batch (LBWHRCL) ..... 1085
18.2.8 Auto Transfer Data from Donor to Lab (AUTOCKIN) ..... 1088
18.3 Check-in Maintenance Functions ..... 1093
18.3.1 QC of Check-In Batch (QCCHK) ..... 1093
18.3.2 Modify Donor Source Card Details (MODDSC) ..... 1097
18.3.3 Modify Check-In Batch Details (MODBATCH) ..... 1102
18.3.4 Delete Non-Unit Tubes (DTUBE) ..... 1104
18.3.5 Change Unit Collection Date (COLLDATE) ..... 1106
18.3.6 Override Donor CUE (CUEOVR) ..... 1108
18.3.7 Delete Unit from System (DELUNIT) ..... 1110
18.4 Check-in Queries ..... 1113
18.4.1 Check-In Batch Query with Unit Data (BATCHQ) ..... 1113
18.4.2 Check-In Batch Data Query (BATCHDQ) ..... 1115
18.4.3 Check-In Batch Exception Query (BATCHEXQ) ..... 1117
18.4.4 Check-In Exception Query (CHECKEXQ) ..... 1119
18.4.5 CUE Override Query (CUEQ) ..... 1121
18.4.6 Lab Warehouse Transfer Query (LBWHQ) ..... 1122
Chapter 19 - Component Production ..... 1127
19.1 Introduction ..... 1129
19.1.1 Overview ..... 1129
19.1.2 Structure ..... 1129
19.2 Routine Component Production ..... 1131
19.2.1 Separation Times (SEP) ..... 1131
19.2.2 Components Made from the Unit - ISBT (COMPENTI) ..... 1133
19.2.3 Freeze Start Time (FRZ) ..... 1137
19.2.4 Discard Empty Bags (DISMTBAG) ..... 1139
19.2.5 Reject Unit/Component (REJECT) ..... 1141
19.2.6 Modify Component Weight (COMPWT) ..... 1144
19.2.7 Modify Separation Times (MODSEP) ..... 1146



WellSky Corporation
Proprietary and confidential

19.2.8 Modify Freeze Start Time (MODFRZ) ..... 1148
19.2.9 Separation Times: Offline (SEPO) ..... 1150
19.3 Component Modification ..... 1153
19.3.1 Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2) ..... 1153
19.3.2 Sterile Docking Definition (SDD) ..... 1155
19.3.3 Convert / Modify Components (ISBT) (CMCI) ..... 1161
19.3.4 Delete Units from SCD Worksheet (DELSCD) ..... 1164
19.3.5 Modify SCD Details (MODSCD) ..... 1165
19.4 Pheresis Processing ..... 1168
19.4.1 Enter Pheresis Components - ISBT (PHERI) ..... 1168
19.4.2 Enter Pheresis Count (PLCOUNT) ..... 1172
19.4.3 Update Number of Bags for Components (CHGBAGS) ..... 1174
19.5 Pathogen Reduction ..... 1176
19.5.1 Pathogen Reduction Manager ..... 1176
19.5.2 Verify Suitability ..... 1178
19.5.3 Intermediate Process ..... 1187
19.5.4 Final Transfer/Storage ..... 1193
19.5.5 Upload Manually ..... 1201
19.5.6 UPLOAD File Automatically (FTP) ..... 1204
19.6 CRYO Production ..... 1207
19.6.1 Scan Units for CRYO Processing (CRYO1) ..... 1207
19.6.2 Entry and Offline CRYO Separation/Freeze Details (CRYO2) ..... 1210
19.6.3 Delete Units from CRYO Worksheet (DELCRYO) ..... 1214
19.6.4 Modify CRYO Details (MODCRYO) ..... 1216
19.7 Component Pooling ..... 1219
19.7.1 Re-Check Products from Inventory (RECHECK2) ..... 1219
19.7.2 Prepare Pooled Components (POOL) ..... 1219
19.7.3 Modify Pooled Components (MODPOOL) ..... 1227
19.7.4 Delete Pooled Components (DELPOOL) ..... 1232
19.8 Special Component Processing ..... 1235
19.8.1 Verify Component Suitability (SUIT) ..... 1235

19.8.2 Spike a Component (SPIKE) ..... 1237
19.8.3 Commit Reagents for Component (REAG) ..... 1239
19.8.4 Convert Component into Spiked Bag – ISBT (CONVI) ..... 1242
19.8.5 Convert Component into Spiked Bag (CONV) ..... 1244
19.8.6 Enter Component Differential (DIFF) ..... 1246
19.8.7 Enter Note for Special Processing (NOTE) ..... 1248
19.8.8 Edit Spiking Details (EDITSP) ..... 1250
19.8.9 Release from Special Processing (RSP) ..... 1252
19.8.10 Verify Component Suitability – Offline (SUITO) ..... 1254
19.9 Component Maintenance Functions ..... 1256
19.9.1 Delete Component (DELCOMP) ..... 1256
19.9.2 Re-check Product from Inventory-Super (RECHK2) ..... 1260
19.9.3 Print Product Labels (PPLBL) ..... 1260
19.10 Component Queries ..... 1263
19.10.1 Component Query (COMPQ) ..... 1263
19.10.2 Unit and Component Attributes Query (ATTRQ2) ..... 1266
19.10.3 Units Awaiting CRYO Results Query (PENDCRY) ..... 1266
19.10.4 Pooled Component Query- by Pool ID (PLPIQ) ..... 1268
19.10.5 Products from Autologous/Directed Donations (AUTOQ) ..... 1269
19.10.6 Special Processing Query (SPQ) ..... 1273
19.10.7 Product Bags Combination Query (BPQ) ..... 1276
19.10.8 ISBT New/Old Attribute Lookup Query ..... 1277
Chapter 20 - Attributes and Interdictions ..... 1281
20.1 Introduction ..... 1282
20.1.1 Overview ..... 1282
20.1.2 Structure ..... 1282
20.2 Attributes and Interdictions ..... 1283
20.2.1 Unit and Component Attribute Query (ATTRQ or ATTRQ2) ..... 1283
20.2.2 Interdiction Query (LINTQ) ..... 1285
20.2.3 Enter Component Attributes (COMPATT) ..... 1288
20.2.4 Enter Unit Attributes (AUATTR) ..... 1290



WellSky Corporation
Proprietary and confidential

20.2.5 Delete Component Attributes (DCATTR) ..... 1292
20.2.6 Delete Unit Attributes (DUATTR) ..... 1294
20.2.7 Enter Component Interdiction (CMPINT2) ..... 1296
20.2.8 Add Interdictions for Units Not Checked (ADDIN) ..... 1297
20.2.9 Release Component Hold (RCHOLD) ..... 1298
20.2.10 Release Component Interdiction (RCINT) ..... 1300
20.2.11 Release Component System Interdiction (RCSYSINT) ..... 1302
20.2.12 Release Unit System Interdiction (RUSYSINT) ..... 1303
20.2.13 Place Group Interdiction or Hold (EGRPINT) ..... 1305
20.2.14 Release Group Interdiction or Hold (RGRPINT) ..... 1307
20.2.15 Component Notes (CNOTE) ..... 1310
20.2.16 Unit Notes (UNOTE) ..... 1312
20.2.17 Place/Release Multiple Unit Interdiction (UNTINT2) ..... 1313
Chapter 21 - Testing Module ..... 1321
21.1 Introduction ..... 1323
21.1.1 Overview ..... 1323
21.1.2 Structure ..... 1323
21.2 Manual Testing Functions ..... 1325
21.2.1 Create Test Batch/ Worksheet (WKS) ..... 1325
21.2.2 Assign Reagents to Test Batch/Worksheet (REAGENT) ..... 1328
21.2.3 First Tech Test Result (RES1) ..... 1330
21.2.4 Second Tech Test Result Verification (RES2) ..... 1333
21.2.5 Test Result Reconciliation (TRR) ..... 1335
21.2.6 Antigen Result Entry (AG) ..... 1337
21.2.7 Print Manual Testing Worksheet (LTRWKSHT) ..... 1339
21.2.8 Print Antigen Worksheet (TSRANTWS) ..... 1341
21.3 Multiple Observation Testing ..... 1342
21.3.1 Enter Test Observations: Tech 1 (OBS1) ..... 1342
21.3.2 Verify Test Observations: Tech 2 (OBS2) ..... 1346
21.3.3 Multiple Observation Reconciliation (RECOBS) ..... 1349
21.3.4 Edit Test Observation Results (EDITOBS) ..... 1352

21.3.5 Results Observation Query (OBSQ) ..... 1354
21.3.6 Print Multiple Observation Worksheet (LTRCNFWS) ..... 1356
21.4 Test Staging Parameters ..... 1358
21.4.1 Valid Test Staging Parameters (TPARM) ..... 1358
21.4.2 Define Critical Controls for Test (TSTPARM) ..... 1360
21.4.3 Enter Control Values for Test Batch (TECH1) ..... 1363
21.4.4 Verify Control Values for Test Batch (TECH2) ..... 1367
21.5 Common Testing Functions ..... 1371
21.5.1 Void/SUPVOID/Cancel Test Results (VOIDCA) ..... 1371
21.5.2 Void Test Batch (VOIDTB) ..... 1382
21.5.3 Edit Test Results (EDIT) ..... 1385
21.5.4 Additional Test Scheduling (ATS) ..... 1388
21.5.5 Enter 'NT' Results (NT) ..... 1393
21.5.6 Cancel Test Batch (in Holding Area) (CANCELTB) ..... 1396
21.6 Testing Queries ..... 1399
21.6.1 All Tests for a Unit Query (TESTQ) ..... 1399
21.6.2 Test Batches in Holding Area Query (HOLDQ) ..... 1401
21.6.3 Test Batches Details Query (TBQ) ..... 1405
21.6.4 Voided Tests by Test Batch ID Query (VTBQ) ..... 1412
21.6.5 Voided Tests by Unit ID Query (VTUQ) ..... 1413
21.6.6 Unscheduled Tests Query (UTQ) ..... 1415
21.6.7 Unit & Donor Tested Antigen Query (ANTQL) ..... 1418
21.6.8 Test Kit Reagents Query (REAGQ) ..... 1420
21.6.9 Instrument Upload Log Query (IULQ) ..... 1423
21.6.10 Instrument Error Log Query (IELQ) ..... 1425
21.6.11 Plate Controls Query (SPCQ) ..... 1427
21.6.12 RT Results File Detail Status Query (UPDQ) ..... 1429
21.6.13 RT Results and Upload Query by Unit ID (RUNT) ..... 1431
21.7 Reagent Qualification Functions ..... 1433
21.7.1 Valid Reagent Supplier Codes (VSUPPL) ..... 1433
21.7.2 Valid Reagent Codes (VREAG) ..... 1435



WellSky Corporation
Proprietary and confidential

21.7.3 Enter Reagents into Repository (STORE) ..... 1438
21.7.4 Enter Reagents into Repository – Super (STORE2) ..... 1441
21.7.5 Reagent Kit (No Pre-Qualification) (RKNPQ) ..... 1441
21.7.6 Prepare Reagents for Testing (RPREP) ..... 1443
21.7.7 Reagents Check-Out - Internal QC (CHKOQC) ..... 1446
21.7.8 Reagents QC Entry: Tech 1 (RTECH1) ..... 1449
21.7.9 Reagents QC Entry: Tech 2 (RTECH2) ..... 1450
21.7.10 Resolve Reagent QC Discrepancy (RSUPER) ..... 1452
21.7.11 Re-Check Reagents into Repository (RCHKIN) ..... 1455
21.7.12 Reagent Check-Out - - Send Out (CHKOUT) ..... 1457
21.7.13 Reagent Query (RGQRY) ..... 1459
21.7.14 Supplier Query (SPQRY) ..... 1462
Chapter 22 - Labeling Functions ..... 1467
22.1 Introduction ..... 1468
22.1.1 Overview ..... 1468
22.1.2 Structure ..... 1468
22.2 Change Labeling Function ..... 1469
22.2.1 Change Label Printer (CHLBP) ..... 1469
22.3 Common Labeling Functions ..... 1473
22.3.1 ABO Labeling - ISBT (LABELI) ..... 1473
22.3.2 Void Product Label into HOLD (LBLOVR) ..... 1480
22.3.3 Emergency Medical Release (EMGREL) ..... 1483
22.3.4 ABO Labeling - ISBT – Super (SUPLABLI) ..... 1488
22.3.5 Research Product Labeling (LBLRSH) ..... 1488
22.3.6 Pre-Label Frozen Product (PRELBL) ..... 1492
22.3.7 Reprint Labels (REPLBL) ..... 1498
22.3.8 Re-Label Codabar units to ISBT Schema (CDISBT) ..... 1503
22.3.9 ABO Labeling (LABEL or SUPLABEL) ..... 1508
22.3.10 ABO Labeling - Super (SUPLABEL) ..... 1512
22.3.11 ABO Labeling - Antigens (AGLBL) ..... 1512
22.4 Special Labeling Functions ..... 1519

22.4.1 QC for Labeling (LBLQC) ..... 1519
22.4.2 Unit Level QC for Labeling (LBLUNQC) ..... 1523
22.4.3 Link Test Results (LINKL) ..... 1527
22.5 Labeling Queries Functions ..... 1530
22.5.1 ABO Label Override Query (LBLOVRQ) ..... 1530
Chapter 23 - Sample Management ..... 1533
23.1 Introduction ..... 1535
23.1.1 Overview ..... 1535
23.1.2 Structure ..... 1536
23.2 Regional Sample Tracking Functions ..... 1537
23.2.1 Enter Regional Testing Contract (RGCON) ..... 1537
23.2.2 Enter Test Mapping (TMAP) ..... 1553
23.2.3 Enter Results Mapping (RMAP) ..... 1555
23.2.4 Tubes Check-In (REGTUBES) ..... 1557
23.2.5 Maintain Batch Data (RGMODBAT) ..... 1564
23.2.6 Skip Results from Extraction (RESKIP) ..... 1567
23.2.7 Enter Interim Result Code (EIRC) ..... 1569
23.2.8 Release Test Results (RGRQC) ..... 1571
23.2.9 Extract Test Results (EXTRACT) ..... 1580
23.2.10 Re-Extract Test Results (REXTRACT) ..... 1589
23.2.11 Reset Under Extract Flag (UNDEXT) ..... 1593
23.2.12 Delete Regional Sample Check-In Batch (SUPERDEL) ..... 1595
23.2.13 Reset Extract for Parm/Batch Sample (SUPEXRST) ..... 1597
23.2.14 Change Testing Unit Collection Date (TUCOLDAT) ..... 1599
23.3 Regional Sample Tracking Queries ..... 1604
23.3.1 Tubes Check-in Query (RGTUBEQ) ..... 1604
23.3.2 Missing Tubes Query (MSTUBEQ) ..... 1607
23.3.3 Interim Results Query (IRQ) ..... 1609
23.3.4 Non-Extracted Batches Query (NEBQ) ..... 1611
23.3.5 Results Extract Query (REQ) ..... 1614
23.3.6 Contract Profile Test Query (RGPROFQ) ..... 1616



WellSky Corporation
Proprietary and confidential

23.3.7 Batch In Progress Query (BIPQ) ..... 1618
23.3.8 Samples Query (SAMPQ) ..... 1625
23.4 Confirmatory Sample Management Functions ..... 1638
23.4.1 Sample Transfer Out (STOUT) ..... 1638
23.4.2 Sample Transfer In (STIN) ..... 1641
23.4.3 Skip Confirmatory Results for Extraction (CNSKIP) ..... 1649
23.4.4 Additional Confirmatory Test Scheduling (ATC) ..... 1652
23.4.5 Confirmatory Release Test Results (CNRQC) ..... 1660
23.4.6 Confirmatory Extract (CEXTRACT) ..... 1667
23.4.7 Re-Extract Confirmatory Test Results (CRXTRACT) ..... 1673
23.5 Confirmatory Queries (CNFQ) ..... 1678
23.5.1 Sample Transfer Out not Checked In Query (SAMPTQ) ..... 1678
23.6 Hospital/Patient Testing Functions ..... 1681
23.6.1 Hospital/Patient Testing Contract (TSCNTR) ..... 1681
23.6.2 Hospital/Patient Contract Profile Tests (TSTEST) ..... 1685
23.6.3 Hospital/Patient Ad Hoc Testing Contract (AHCNTR) ..... 1687
23.6.4 Fixed Profile Tube Check-In (TSTUBES) ..... 1691
23.6.5 Ad Hoc Tube Check-In (AHTUBES) ..... 1694
23.6.6 Modify Contract for Hospital/Patient Batch (MODTSCON) ..... 1698
Chapter 24 - Imported Blood Processing ..... 1701
24.1 Introduction ..... 1702
24.1.1 Overview ..... 1702
24.1.2 Structure ..... 1702
24.2 Imported Blood Processing ..... 1703
24.2.1 Imported Blood Contract (IMCONTR) ..... 1703
24.2.2 Imported Blood Product Check-In (IMPORT) ..... 1708
24.2.3 Correct Imported Unit Data (IMPCORR) ..... 1714
24.2.4 Valid Collection Facilities (COLLID) ..... 1718
Chapter 25 - Equipment Management ..... 1723
25.1 Introduction ..... 1724
25.1.1 Overview ..... 1724

25.1.2 Structure ..... 1724
25.2 Equipment General Functions ..... 1725
25.2.1 Enter Equipment Details (EQDET2) ..... 1725
25.2.2 Enter Equipment Downtime and Service Details (EQMAINT) ..... 1728
25.2.3 Enter Equipment QC Details – First Tech (EQC1) ..... 1730
25.2.4 Enter Equipment QC Details – Second Tech (EQC2) ..... 1734
25.2.5 Edit Equipment Details (EQEDIT) ..... 1737
25.2.6 Edit Equipment Downtime and Service Details (EQEDTMN) ..... 1739
25.2.7 Equipment Worksheet Report (EQWORK) ..... 1742
25.3 Equipment Supervisory Functions ..... 1744
25.3.1 Maintain Valid Equipment QC Data (EQWS) ..... 1744
25.3.2 Maintain Equipment Access Control – by Type (EQACCESS) ..... 1747
25.3.3 Configure Equipment Worksheet (EQCONFIG) ..... 1749
25.3.4 Enter Equipment Installation Qualifications (EQUALIF) ..... 1751
25.3.5 Edit or Reconcile Equipment QC Details (EQSUPQC) ..... 1753
25.4 Equipment Queries ..... 1757
25.4.1 Status and History Query (EQSTATQ) ..... 1757
25.4.2 Downtime History Query (EQMAINTQ) ..... 1761
25.4.3 Service History Query (EQSHISTQ) ..... 1763
25.4.4 QC History Details Query (EQCHISTQ) ..... 1765
Chapter 26 - General Queries ..... 1769
26.1 Introduction ..... 1770
26.1.1 Overview ..... 1770
26.1.2 Structure ..... 1770
26.2 General Query Functions ..... 1771
26.2.1 Unit Query (UNITQ or UNITI) ..... 1771
26.2.2 Unit Information (UNITI) ..... 1788
26.2.3 Any Lot Number Query (ANYLOTQ) ..... 1788
26.2.4 ISBT Unit Check Digit Query (ISBTQL) ..... 1789
26.2.5 Place Notes on Multiple Units (MUNOTE) ..... 1790
Chapter 27 - Called Windows ..... 1795



WellSky Corporation
Proprietary and confidential

27.1 Introduction ..... 1796
27.1.1 Access Control ..... 1796
27.2 Called Windows Descriptions ..... 1797
27.2.1 Notes (GEWNOTES) ..... 1797
27.2.2 Notation Window (CFWNOTAN) ..... 1800
Distribution ..... 1805
Chapter 28 - Order Entry ..... 1807
28.1 Introduction ..... 1808
28.1.1 Overview ..... 1808
28.1.2 Structure ..... 1808
28.2 Order Entry Functions ..... 1809
28.2.1 Enter Regular Order (ORDER) ..... 1809
28.2.2 Enter Special Order (SPECIAL) ..... 1818
28.2.3 Enter Export Order (EXPORT) ..... 1825
28.2.4 Schedule Auto/Directed Order (AUTO) ..... 1830
28.3 Order Allocation Functions ..... 1833
28.3.1 Special Order Allocation (SALLO) ..... 1833
28.4 Order Maintenance Functions ..... 1842
28.4.1 Change Or Cancel Order (CANCEL) ..... 1842
28.4.2 Enter Standing Order (STANDO) ..... 1850
28.4.3 Cancel Unfilled Orders (CUO) ..... 1854
28.4.4 Release Standing Orders Batch Program (DCONVERT) ..... 1856
28.4.5 Enter Order Charges (CHARGE) ..... 1858
28.5 Transfer Orders Functions ..... 1862
28.5.1 Initiate Hospital Transfer (TRANS1) ..... 1862
28.5.2 Close Hospital Transfer (TRANS2) ..... 1867
28.6 Order Queries Functions ..... 1870
28.6.1 Open Orders Query (OPENQ) ..... 1870
28.6.2 Customer Orders Query (OCQ) ..... 1874
28.6.3 Allocated Products Query (ALLUN) ..... 1877
28.6.4 Standing Order Query (STANDQ) ..... 1879

28.6.5 Order Processing Status (OFLOW) ..... 1881
28.6.6 Order History – Single Order (ORDQ) ..... 1884
28.6.7 Order History – Multiple Orders (MORDQ) ..... 1890
28.6.8 Order Charges – By Order No (OCHGQ) ..... 1892
28.6.9 Finance Interface Details (DUMPI) ..... 1896
Chapter 29 - Distribution Module ..... 1899
29.1 Introduction ..... 1900
29.1.1 Overview ..... 1900
29.1.2 Structure ..... 1900
29.2 Packing Functions ..... 1901
29.2.1 Pack Products (PACK) ..... 1901
29.2.2 Pack Recovered Plasma (PACKRP) ..... 1909
29.2.3 Pack Inv Rejects To Discard (PACKOD) ..... 1912
29.2.4 Pack Inv Rejects To Salvage (PACKOS) ..... 1916
29.2.5 Pack Lab Discards To Discard (PACKLD) ..... 1920
29.2.6 Pack Lab Discards To Salvage (PACKLS) ..... 1926
29.2.7 Close Box (CLBOX) ..... 1932
29.3 Shipping Functions ..... 1935
29.3.1 Ship Products (SHIP) ..... 1935
29.3.2 Ship Discard And Salvage Products (SHIPD) ..... 1941
29.3.3 Delivery Confirmation (DELCON) ..... 1947
29.3.4 Regenerate Electronic Plasma File (GENXML) ..... 1948
29.3.5 Electronic Plasma File Error Log (XMLLOG) ..... 1950
29.4 Distribution Queries ..... 1952
29.4.1 Pickslip Status (DPICKQ) ..... 1952
29.4.2 Open Boxes (OPENBOXQ) ..... 1954
29.4.3 Boxes Ready For Shipment (OKBOXQ) ..... 1957
29.4.4 Box Details (BOXDTQ) ..... 1959
29.4.5 Shipments In Transit (TXQ) ..... 1962
29.4.6 Delivered Shipments (DELQ) ..... 1964
29.4.7 Shipments By Ship Date (SHIPQ) ..... 1967



WellSky Corporation
Proprietary and confidential

Chapter 30 - Inventory Management ..... 1973
30.1 Introduction ..... 1974
30.1.1 Overview ..... 1974
30.1.2 Structure ..... 1974
30.2 Product Management ..... 1975
30.2.1 Check-In From Blood Centers Lab (CHKIN) ..... 1975
30.2.2 Check-In From Blood Centers Lab – Batch Process (BATCH) ..... 1978
30.2.3 Restock Unshipped Products (RESTOCK) ..... 1980
30.2.4 Hospital Returns (RETURN) ..... 1983
30.2.5 Release Returned Product Quarantine (RQU2) ..... 1986
30.2.6 Place Product Quarantine (PQU) ..... 1989
30.2.7 Release Product Quarantine (RQU) ..... 1991
30.2.8 Reject Inventory Products (INVREJ) ..... 1993
30.2.9 Checkin Discard Products to Inventory (CHKDIS) ..... 1995
30.2.10 Generate Outdates Picklist (OUTDATE) ..... 1997
30.2.11 Move Outdates To Outdate Location (MOVEOUT) ..... 1999
30.2.12 Change Inventory Class (CHCLASS) ..... 2002
30.2.13 Enter Product Attributes (ATTR) ..... 2004
30.2.14 Unit Transfer to Transfusion System (SNDHCLL) ..... 2006
30.3 Warehouse Transport ..... 2011
30.3.1 Warehouse Check-Out (WHOUT) ..... 2011
30.3.2 Warehouse Check-In (WHIN) ..... 2014
30.3.3 Reconcile Transport Batch (WHRCL) ..... 2017
30.3.4 Transport Batch Query (WHQ) ..... 2019
30.4 Inventory Queries ..... 2022
30.4.1 Available Products Query (APQ) ..... 2022
30.4.2 Unit And Product History (PHISTQ) ..... 2025
30.4.3 Product Current Status (PRODQ) ..... 2028
30.4.4 Products In Quarantine (QUQ) ..... 2031
30.4.5 Interdicted Active Stock (PINTQ) ..... 2033
30.4.6 Products with Antigens (PAGQ) ..... 2035

30.4.7 Find Units And Products (FINDU) ..... 2037
Chapter 31 - Offline Data Entry Functions ..... 2041
31.1 Introduction ..... 2042
31.1.1 Overview ..... 2042
31.1.2 Structure ..... 2042
31.2 Offline Data Entry Functions ..... 2043
31.2.1 Offline Product Check-In (CHKOFF) ..... 2043
31.2.2 Offline Product Packing (PACKO) ..... 2046
31.2.3 Offline Product Shipment (SHIPO) ..... 2052
31.2.4 Removal From Outdate List (ODTOFF) ..... 2057
Chapter 32 - Customer Debit/Credit ..... 2061
32.1 Introduction ..... 2062
32.1.1 Overview ..... 2062
32.1.2 Structure ..... 2062
32.2 Customer Debit/Credit ..... 2063
32.2.1 Blood Product Credit (CDPROD) ..... 2063
32.2.2 Order and Services Debit and Credit (CDSVC) ..... 2066
32.2.3 Cancel Debit/Credit Advice (CDCAN) ..... 2069
32.2.4 Debit and Credit Query (CDQL) ..... 2072
Chapter 33 - Customer and Internal Administration ..... 2075
33.1 Introduction ..... 2076
33.1.1 Customer Administration ..... 2076
33.1.2 Internal Administration ..... 2076
33.2 Customer Administration ..... 2078
33.2.1 Create Customer Profile (CUSTOMER) ..... 2078
33.2.2 Create Payee Details (PAYEE) ..... 2082
33.2.3 Create Consignee Details (CONSIGN) ..... 2085
33.2.4 Customer Contract Details (CONTRACT) ..... 2088
33.2.5 Customer Contact Names (CONTACT) ..... 2091
33.2.6 Setup Customer Preferred Product Tiers (CPPTIER) ..... 2094
33.2.7 Enter Customer Tier Pricing (CUSTIER) ..... 2096



WellSky Corporation
Proprietary and confidential

33.2.8 Customer Product Tier Pricing Query (TIERQ) ..... 2099
33.2.9 Customer Consignee Product Details (VCUSTPRD) ..... 2101
33.3 Internal Administration ..... 2104
33.3.1 Setup Inventory Levels for Blood Center (LEVEL) ..... 2104
33.3.2 Enter Standard Tier Pricing (TIER) ..... 2107
33.3.3 Enter Product Service Codes (CPROD) ..... 2110
33.3.4 Enter Master Service Codes (FCODE) ..... 2113
33.3.5 Enter Attribute Service Codes (CATTR) ..... 2116
33.3.6 Blood Center Inventory Level Query (LEVELQ) ..... 2118
33.3.7 Define Order Charges (VCHARGE) ..... 2120
33.3.8 Antigen Pricing Matrix (AGPRICE) ..... 2122
Chapter 34 - Application Interfaces ..... 2125
34.1 Introduction ..... 2126
34.2 Donor Interface Functions ..... 2127
34.2.1 Lab Interface Results (LABIN) ..... 2127
34.2.2 Lab- Donor Interface Log Query (ILOGQ) ..... 2130
34.3 Lab Interface Functions ..... 2134
34.3.1 Reset Donor Interface Status in Lab (DIRESET) ..... 2134
34.3.2 Re-Interface Donor to Lab (REINTER) ..... 2136
34.3.3 Drive Interface from Donor to Lab (AIIDNDRV) ..... 2137
34.3.4 Manual Donor Interface - NONPRODUCTION (DONINT) ..... 2139
34.3.5 Upload Test Results from Outside Source (APIUPLD) ..... 2141
34.3.6 Regional Check-in Batch API ..... 2143
34.3.7 API Add/Cancel Test and Place/Release Interdiction ..... 2146
Chapter 35 - Blood Centers API - Lab and Distribution Functions ..... 2151
35.1 Introduction ..... 2152
35.2 Blood Centers API Menu ..... 2153
35.2.1 Blood Centers API Log Information (APILOG) ..... 2153
35.2.2 Convert External Data to LT Data (APICONV) ..... 2155
Appendix A - REGMAINT Guidelines ..... 2159
Appendix B - Licensure Requirements ..... 2163

Appendix C - Audit Tables ..... 2167
Appendix D - Error Messages ..... 2169
Appendix E - Blood Centers Interface Operations ..... 2171
Appendix F - Scanning Product Labels ..... 2177
Appendix G - Logging In to Blood Centers and Password Configuration ..... 2181
Appendix H - Paperless Nursing Audit ..... 2193
H.1 Set-Up Required ..... 2194
H.2 Display of Data in the Paperless Nursing Audit Form (PAUDIT) ..... 2199
H.3 Exclusion of a Unit ..... 2201
H.4 Queries to be Used After Nursing Audit is Set ..... 2202
H.5 Release of the PAUD After Audit is Completed ..... 2205
Appendix I - Resolving an ABO Discrepancy Between Lab and Donor ..... 2207
I.1 Scenario for Resolving an ABO Discrepancy Between Lab and Donor ..... 2208
Appendix J - PHYRULE Examples ..... 2217
Appendix K - SalesForce API ..... 2221
Appendix L - View into WellSky Transfusion for Antigen Testing ..... 2231
L.1 Set-Up Required ..... 2232
L.2 External to Blood Centers Data Translation (APICONV) ..... 2233
L.3 Antigen Manager (AGMGR) ..... 2234
L.4 Cron Job, Scripts and Packages that Need to be Present ..... 2236
L.5 Processing the Records from Transfusion that are in the API Table ..... 2237
Glossary ..... 2239
Index ..... 2255
Keyboard Templates ..... 2311



WellSky Corporation
Proprietary and confidential

1

# Chapter 1 - Introduction


1.1 Indications for Use ..... 3
1.2 What This Guide Covers ..... 4
1.3 System Attributes ..... 6
1.3.1 Separation of Functions ..... 6
1.3.2 FDA Compliance ..... 6
1.3.3 No Operating System Access ..... 6
1.3.4 Controlled Access ..... 6
1.3.5 Security ..... 6
1.3.6 Data Access ..... 6
1.3.7 Data Responsibility ..... 7
1.3.8 Data Integrity ..... 7
1.3.9 Validity of Data ..... 7
1.3.10 Audit Tracking ..... 7
1.3.11 No Data Deletion ..... 8
1.3.12 Future Effective Dates ..... 8
1.3.13 Validation Tables ..... 8
1.3.14 Application Password ..... 8
1.3.15 Databases ..... 8
1.3.16 Interdictions ..... 8
1.3.17 Double Blind Entry ..... 9
1.3.18 Automatic Time-Out ..... 10
1.3.19 “STOP” Pop-Up ..... 11
1.3.20 Bar Code Interface ..... 11
1.3.21 Peripheral Devices ..... 12
1.3.22 SOP/User Guide Conflict ..... 12
1.4 How To Use This Guide ..... 13
1.4.1 The WellSky Blood Centers Family of Applications ..... 13
1.4.2 Required Training ..... 13
1.4.3 How to Use the Guide ..... 13
1.4.4 Conventions Used in This Guide ..... 13
1.4.5 Passwords ..... 14

1.4.6 Logging In From a PC ..... 16
1.4.7 Logging on with a Common Access Card (CAC) ..... 18
1.4.8 Logging Out ..... 25
1.4.9 Web-Enabled Environment ..... 25
1.4.10 Screen Components ..... 26
1.4.11 Search By First Word ..... 27
1.4.12 Search By Any Character in String ..... 28
1.4.13 A List of Values Shortcut ..... 29
1.4.14 List of Values - Multiple Selections ..... 29
1.4.15 Entry Fields vs. Display Fields ..... 30
1.4.16 Mouse Operation ..... 30
1.4.17 Keyboard Keys ..... 30
1.4.18 Hot Keys ..... 31
1.4.19 Data Screen Format ..... 32
1.5 Data Screens ..... 34
1.5.1 Navigating ..... 34
1.5.2 Entering Data ..... 35
1.5.3 Committing Data to the Database ..... 41
1.5.4 Function Keys ..... 41
1.5.5 Other Function Keys ..... 44
1.5.6 Tool Bars ..... 44
1.5.7 The Menu Structure ..... 50
1.5.8 Keywords ..... 56
1.6 Generating a Report ..... 57
1.7 Automatically Printing a Report ..... 60
1.7.1 Called Windows and Routines ..... 61
1.7.2 Help Lines ..... 62
1.7.3 Error Messages ..... 63


WellSky Corporation
Proprietary and confidential

# 1.1 Indications for Use

WellSky Blood Centers is a comprehensive, modular, computerized system intended to be used by trained personnel as a tool in the management of data processes performed by staff at blood centers and high-volume testing services. User access to individual modules is controlled through defined access levels. Individual staff may be actively engaged in functions that encompass the following:

- Dynamic donor eligibility status
- Register, track, and audit donations and deferrals
- On-line health history, physical findings, and collection process
- Interactive donor questionnaire (staff and/or donor/remote donor)
- Donor notification
- HLA/RBC search and match
- Donor schedules
- Component production and modification
- Testing
- Labeling
- Imported blood processing
- Inventory management
- Distribution
- Material check-in
- Offline data entry (Re-entry if downtime)
- Customer credit/debit
- Blood Centers interfaces and APIs (Application Programming Interfaces)
- Enhance Manufacturing Manager - facility-defined configurations for exception handling
- Blood Centers is usable with wired/wireless networks supporting TCP/IP protocol

# 1.2 What This Guide Covers

Blood Centers user operations are addressed in this user guide. System information is contained in Chapter 1, with the subsequent chapters addressing functionality.

The system is organized into key functional areas known as modules:

Donor:

- Recruitment Module
- Post Drove Analysis
- Donor Center Management Module
- Donor Enlistment
- Registration Module
- Donor Profile Module
- HLA/RBC Module
- Donor Notification Module
- Donor Communication Module
- Special Donations
- General Queries and Functions

Lab:

- Material Check-In
- Component Production
- Attributes and Interdictions
- Testing Module
- Labeling Functions
- Imported Blood Processing
- Equipment Management
- General Queries
- Sample Management
- Application Interfaces
- Called Windows

Distribution:

- Order Entry
- Distribution Module


WellSky Corporation
Proprietary and confidential

- Inventory Management
- Offline Data Entry
- Customer Debit/Credit
- Customer and Internal Administration
- Blood Centers API

# 1.3 System Attributes

## 1.3.1 Separation of Functions

System design considers separation of functions; that is, each function is designed and coded to perform a set of specific business needs. Unrelated business needs are not addressed in a single function.

For example, data modification is not combined with a data entry function; neither is a query function combined with any other operation. Such design ensures that each program performs only one basic function. Such design greatly enhances control of functional access to users.

## 1.3.2 FDA Compliance

Blood Centers helps to meet FDA regulations applicable to blood center functionality.

## 1.3.3 No Operating System Access

Blood Centers is a closed system. As such, users are not given access to the operating system or the various databases dedicated to the system.

The system is designed to employ captive access for the users; i.e., when users log in they can only see the application menu. Users will never have access to the operating system prompt or to the SQL prompt. This prevents inadvertent user access to privileged areas.

## 1.3.4 Controlled Access

The system is designed to control user access to both functions and data. Specific access is required to view, enter, and modify data.

## 1.3.5 Security

Security, as used here, is defined as preventing unauthorized access to WellSky Blood Centers. Security control design incorporates the business rules of the blood center and, at the same time, ensures that only authorized personnel can gain access to module functions. User levels are defined and regulated according to the blood center's business rules. The module's security control design further restricts a user's access to data authorized for that user level.

This gives the authorized user precisely the access needed to do the job efficiently and in line with the blood center's standard operating procedures (SOPs).

Once logged in to the Blood Centers system, the user will see only those menus and menu items for which access has been granted. The user need not navigate through irrelevant menu structures to access a needed screen.

## 1.3.6 Data Access

Data access, as used here, is defined as authorized user access that is limited to information specifically required to perform a user's assigned tasks. Data access is configurable to meet the specific needs of the blood establishment. User access is limited to information needed in the performance of authorized function.


WellSky Corporation
Proprietary and confidential

Blood Centers has controlled data access as an integral part of its design. Functions are clearly defined for each user level, and access to data is controlled for each function. User access to the most sensitive data, such as interdiction information, is tightly controlled as well, based upon the user's need to know in the performance of his/her duties. There is a clear delineation of supervisory and professional functions.

Data tables in Blood Centers are designed to avoid conflict with other systems and/or subsystems. Standardized data attributes are used where possible to promote uniform operation, consistency of data, and cross-subsystem access where required.

## 1.3.7 Data Responsibility

The person who has authority to enter or change data in any database within WellSky Blood Centers is defined here as the point of data responsibility. Data responsibility includes ensuring integrity of all the data associated with any particular data entry. Such responsibility is assigned in accordance with the business rules of the blood center. Only an authorized person accountable for the information contained in an entry can make changes to critical data entries.

Blood Centers can identify and track persons responsible for all database entries, modifications, and deletions.

## 1.3.8 Data Integrity

All data entered into screen fields is validated by the function into which it is entered. Entry of incorrect data, or any other unfavorable data condition unknown to the function, may raise exceptions. Functions are coded to handle all possible exceptions and provide meaningful error messages to the users. When users are attempting to enter illogical data or to perform incorrect functions, the system is able to handle such situations and provide appropriate error messages.

## 1.3.9 Validity of Data

It is imperative that procedures be closely followed when entering data into the Blood Centers system. The quality of data retrieved is directly related to the quality of data input into the system.

Several controls are incorporated into the design of the system:

- Validation Tables provide for the input of validation data. Whenever screens call for input of data that is stored in a validation data table, the system verifies that the entry matches a valid entry in the table, and rejects any entry that cannot be validated. Rejected entries always prompt a valid error message to display. Please refer to Appendix D for more information on error messages.
- Provision has been made for input of system parameters that permit the entire Blood Centers system to be customized to the institution's needs and requirements. Any entry outside such system parameters will prompt a valid error message to display.

If an entry is made that cannot be validated using one of the above methods, the validity of data being entered is the direct responsibility of the employee entering the data. The correct time to verify data accuracy is always before data entry rather than after data entry.

## 1.3.10 Audit Tracking

Design of Blood Centers provides forward and backward audit tracking capability for data in the database. If modification, change, or deletion of data from the database occurs, Blood Centers captures the user's name and

date/time stamp.

## 1.3.11 No Data Deletion

The system is designed to disallow deletion of critical data from data tables to provide a reliable and complete data history. Once such data is written to a table, it can be terminated but not deleted.

## 1.3.12 Future Effective Dates

The system is designed to permit entry of static data into validation and other data tables with an effective date in the future.

## 1.3.13 Validation Tables

The system is designed to store static data that is then used to validate entries in various entry and update screens. Such tables serve two valuable purposes:

- Users at all levels and in all functions can be presented with valid options from which they may select without having to commit numerous codes to memory.
- Regulatory and blood center rules can be associated with such valid data. The system can then automatically act upon the associated rules.

The *WellSky® Blood Centers Administration Guide* contains information for validation table configuration.

## 1.3.14 Application Password

The system is designed with an additional password safeguard for changes to validation data tables. Program functions that allow changes to validation data tables can be prompted for the user's password before modifications are committed to the validation data database.

## 1.3.15 Databases

The system is designed to display the database name in each function and in all reports. The typical blood center environment includes validation (QA), training, and production databases. Daily work is always performed in the production database. Logins and passwords are unique for each database.

## 1.3.16 Interdictions

### Donor

An interdiction is a means to identify a specific condition related to a donor or a donation. The condition may be related to test results, incomplete information, donor suitability, etc.

To view, place or remove an interdiction in Donor, a user must be assigned to an access class containing that interdiction and have appropriate level as compared to the level of each individual interdiction.  Your level of access within the class determines if you can view, place, or remove a specific interdiction.


WellSky Corporation
Proprietary and confidential

Donor incorporates a number of routines that automatically place, upgrade, and remove interdictions on the donor and/or donation according to general rules relating to those interdictions. It is the user's direct responsibility, however, to review each unique instance when interdictions are placed, upgraded, or removed, to ensure that the system has properly and correctly handled the interdictions.

### Lab/Distribution

An interdiction is a means to identify a specific condition related to a unit or a donor. The condition may be related to test results, unit/product acceptability, incomplete information, donor suitability, etc.

All interdictions can be seen regardless of user access. A user must be in the same interdiction class as specific interdictions, and have appropriate screen access to place or remove those interdictions. The ability to place and remove interdictions is associated with the assignment of the interdiction to the user's interdiction class. 'BIO' type interdictions cannot be removed by any individual. Test results and configured overrides control placement and removal, or override, of 'BIO' interdictions.

Lab incorporates a number of routines that automatically place and remove interdictions on a unit according to general rules relating to those interdictions. It is the user's direct responsibility, however, to review each unique instance when interdictions are placed or removed to ensure that the system has properly and correctly handled the interdictions.

## 1.3.17 Double Blind Entry

The system requires entering a Codabar Unit Number in double blind entry mode under the following conditions:

- Based on configuration of the donor key data.
- Based on matching a highlighted line in a List of Values (LOV).

In such an instance, you are required to enter data twice without viewing a previous entry. When both entries are identical, the entry is accepted.

The two steps for a double blind entry are described below:

1. Enter the unit ID and press **ENTER**. Your first entry will disappear when you press ENTER.
2. Re-enter the unit ID and press **ENTER**. If the two entries agree, the system will accept your manual entry. If they do not agree, you must make another double-matching entry.

**NOTE –** If a data entry error occurs during manual entry of the unit ID, press **F5** (Clear Field) while the cursor is in the *Unit ID* field. Re-entry will then be allowed.

## Donor Identification Number (DIN)- ISBT 128

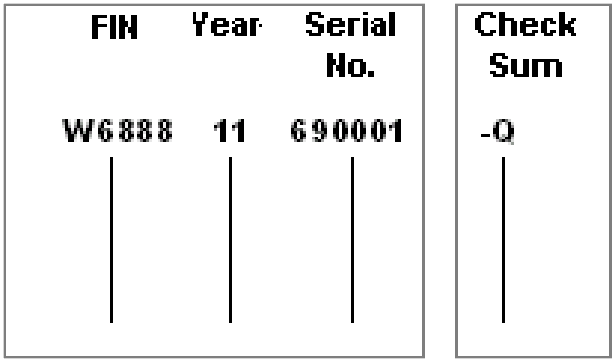


The Donor Identification Number (DIN) is a 13-character number comprising three parts:

1. Collection Facility Identification Number (FIN). A 5-character identification number that is assigned to a collection center when it is registered by ICCBBA. The center assigning the DIN will incorporate this FIN into the section.
2. Year of Collection. A 2-character number indicating the year in which the DIN was assigned.
3. Serial Number. A 6-character number controlled and maintained by the center assigning the DIN.

These three parts are necessary to make the DIN globally unique.

In addition to these three parts, a Check Sum is added to the end. This Check Sum is used to validate manual entry of the DIN. It is calculated and is not stored.

ISBT Code 128 requires only a single entry of the unit ID since the check digit is calculated by the unit ID.

1. Enter M, and then press **ENTER**. The cursor moves to the unit ID block.
2. Press **F4** (Previous Field) twice to move the cursor to the *Collection Facility ID* field.
3. Enter the Collection Facility ID and press **ENTER**.The cursor moves to the year block.
4. Enter the year that the sample was collected, and press **ENTER**. The cursor moves to the unit block.
5. Enter the 6-digit unit ID and check digit. The check digit should be preceded by a hyphen (-).

**NOTE –** If a data entry error occurs, press **F5** (Clear Field) to clear entries from the individual blocks. Press **F4** (Previous Field) to remove the unit ID number and move the cursor to the start.
The entire unit ID must be cleared from the field (collection ID, year, and unit ID). Use the **F4** (Previous Field) key to move the cursor to each element.

# 1.3.18 Automatic Time-Out

Automatic time-out, which is recommended by WellSky, can be set at the operating system level.

The application can be configured for a time-out feature, for when the client is inactive for extended periods of time. There are two settings in the LT_APPLICATION_CONFIG table that are used in the configuration of the time-out feature.


WellSky Corporation
Proprietary and confidential

- TOUT_IDLE: Determines the amount of time (in minutes) an end user can stay idle before the application displays an alert warning.
- TOUT_WARN: Determines the amount of time (in minutes) the warning alert is displayed before the system logs out the user automatically.

| TOUT_IDLE | TOUT_WARN | DESCRIPTION |
|---|---|---|
| 4 | 0 | System exits out of the application after 4 minutes of idle time without any warning alert. |
| 3 | 2 | System displays a warning alert after 3 minutes of idle time and the warning alert stays up for 2 minutes. |
| 3 | 1 | System displays a warning alert after 3 minutes of idle time and the warning alert stays up for 1 minute. |
| 2 | 3 | System displays a warning alert after 2 minutes of idle time and the warning alert stays up for 3 minutes. |
| 0 | N/A | Timeout feature is turned OFF. |

A message will display when the time-out has occurred, which will take the user back to the login screen, and allow the user to log back into the application.

Processes that occur when the time-out process executes:

- Partially entered data in a form that times-out during the session will not be committed to the database.
- The system will not print reports for a program that prints at the end of commit, if the session times-out.
- When users have multiple sessions open, the sessions that the user is not actively in that reach the time-out limit will close. The active session will not close.

**NOTE –** If there is database activity going on behind the scenes, the time-out event is delayed.

**EXAMPLE –** On the Donor Profile Audit Query screen, if data is being retrieved, the system will not start the time-out process until the data retrieval is finished.

## 1.3.19 “STOP” Pop-Up

Selected functions are designed to display a pop-up screen on selected user error and alert conditions that require user intervention to continue. Such pop-ups are designed to preclude inadvertent error at the point data is being entered or modified.

## 1.3.20 Bar Code Interface

The system is designed to read critical data via bar codes. Wherever possible, system functions are coded to interface with bar code readers with a manual entry override in the event a bar code cannot be read.

## 1.3.21 Peripheral Devices

Peripheral devices include personal computers (PCs), printers, bar code readers, and bar code printers. Personal and laptop computers are used as client devices that retrieve and display applications from the LAN and data from the primary host, and are the primary system input devices.

## 1.3.22 SOP/User Guide Conflict

In the event instructions in the standard operational procedures (SOPs) of the institution and/or department are in conflict with instructions contained in this User Guide, the SOP shall prevail. Instructions in this Guide are provided as a complete and correct aid to the efficient use of the Blood Centers system. Such instructions are, in all instances, intended to support and complement your organization's SOPs.


WellSky Corporation
Proprietary and confidential

# 1.4 How To Use This Guide

## 1.4.1 The WellSky Blood Centers Family of Applications

Blood Centers is a Web-enabled application that supports three major subsystems: Donor, Lab, and Distribution.

Donor addresses mobile recruitment, drive scheduling, donation registration, donor profile, donor communications, donor notification, drive analysis, collection staff scheduling, and HLA/RBC searches for matching donors, and special donations.

Lab addresses all phases of lab functionality: receiving, component processing, testing, labeling, blood imports, special component processing, and centralized testing for multiple donor center testing.

Each component contains appropriate interfaces with the other components, as well as lab instrumentation in Lab.

Distribution addresses all phases of inventory and distribution: order entry and allocation, pricing, order processing, inventory management, packing and shipping, transfers, customer, and debit/credit.

## 1.4.2 Required Training

Training for Blood Centers should be conducted in accordance to the blood center's SOPs.

## 1.4.3 How to Use the Guide

The Table of Contents located at the front of this guide is the primary reference, followed by the index. Each of the functional modules has a chapter number.

Most modules are organized by:

- General Functions
- Maintenance Functions (supervisory functions)
- Queries

Reports are maintained in the *WellSky® Blood Centers Reports Guide*.

## 1.4.4 Conventions Used in This Guide

**NOTE –** Indicates helpful information about the topic being discussed. Text of the note appears in italics.

**Important!** Indicates information that the user should carefully review and understand about the operation of a screen. Such a comment may indicate a functional limitation of a screen that requires increased vigilance on the part of the user to adhere to standard operational procedures (SOPs). Text of the comment will appear in italics.

**EXAMPLE –** Indicates examples used to clarify information as needed.

# 1.4.5 Passwords

The system administrator will issue a password to access Blood Centers to you as an authorized user. This is a different password than the one issued for access to the local area network (LAN). You must change the password issued by the system administrator to a password you choose the first time you access the system.

## Password Security

To increase system security, strong password functionality is now an option for Blood Centers. It forces you to create a more complex password and applies both when a new password is created and when an existing password is reset.

Another security feature locks you out of the system when a password is entered incorrectly a specified number of times. The number of times you may attempt an incorrect password entry before you are locked out is configurable.

**NOTE –** Both the strong password and the lockout options are enabled and configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information on enabling these features.

The Blood Centers password must be changed in accordance with the blood center's policy. The general rules for password protection apply:

- Do not reveal your password to anyone, not even your supervisor.
- Do not use a password that can be guessed by your coworkers or anyone else who knows you well.

Also, choose a password that you can remember easily.

## Password Configuration

You may enable the strong password feature and designate the password configuration requirements during installation. If a strong password is not enabled, the traditional password configuration requirements apply.

- A traditional password must contain 6-20 characters and must contain at least one alpha character and one numeric character. A traditional password must begin with an alpha character.
- We suggest that a strong password contain 15-20 characters and contain at least two upper case and two lower case alpha characters, two numbers, and two special characters.

Examples of traditional passwords:

- HEARTFELT would not be an acceptable password. It contains enough characters, but doesn't contain a numeric character.
- 1561342 would not be an acceptable password. It does not start with or contain an alpha character.
- DONOR98 might be accepted by the system, but would be a bad choice because it is easily guessed.
- EAGLE17 might be a good password unless your son is 17, just became an Eagle Scout, and your coworkers know it.

Examples of unacceptable and acceptable strong passwords:


WellSky Corporation
Proprietary and confidential

- Meaninglessness would not be a good strong password. It has enough characters, upper and lower case alpha, but no numbers or special characters. It is also not a good choice because it is based on a word found in the dictionary.
- MyP@ssW0rd1 would not be a good strong password. It has upper case alpha characters, lower case alpha characters, numbers and a special character, but is not 15 characters in length.
- mL7c!raQcy#4t is good because it contains 15 characters, upper case alpha character, lower case alpha character, and two special symbols.

## How to Change your Password

You will receive an initial password from your system administrator and will be prompted to change it the first time you log in to Blood Centers.

The Change Password window displays automatically the first time you log in:

**NOTE –** To change your password after your initial log on, click CHANGE PASSWORD on the toolbar.

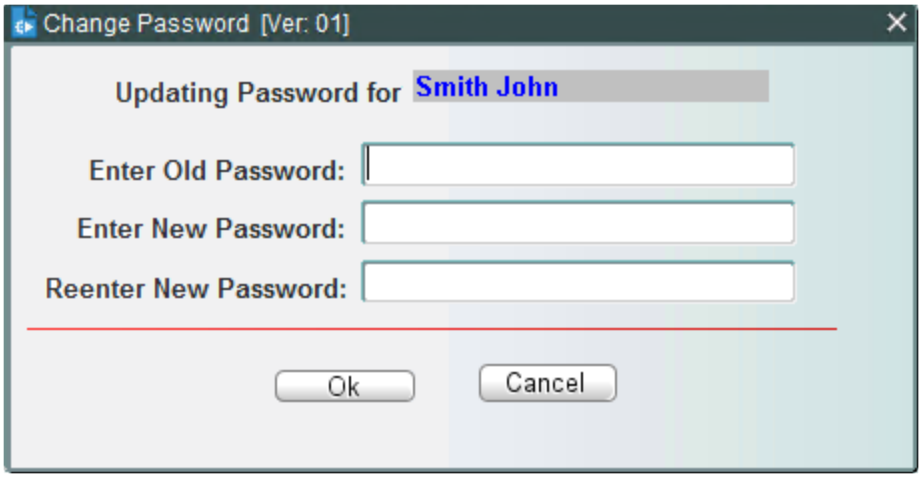


Complete the following steps:

1. In the *Enter Old Password* field, enter the password you received from your System Administrator or the existing password you want to change.
2. In the *Enter New Password* field, enter a new password that complies with either the traditional password configuration requirements or the strong password configuration requirements.

**NOTE –** The new password can be a maximum of 20 characters. If you are using Active Directory, you may be limited to a fewer number of characters if there are password restrictions with LDAP.

3. In the *Reenter New Password* field, retype the password you just entered to confirm your entry and then click OK.

   If your entries do not match, an error message displays and you must repeat steps 2 and 3 until the new password and reentered password match.

## Strong Password History

A password may not be reused immediately. You must reset your password a specified number of intervening times before you may use the same password again. The system will check that your new password has not been used in the last number of configurable times.

Additionally, your new password must vary by a minimum number of characters from your existing password.

**NOTE –** The value for both of these requirements is configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information.

## Password Expiration

All user passwords are valid for a limited period of time. You will be required to change your password after a configurable amount of time has passed.

The system will warn you at log in if your password is set to expire. The period of time you receive the warning before your password expires is configurable.

**NOTE –** The number of days for which a password is valid and the time interval that the warning message is displayed are both configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information.

# 1.4.6 Logging In From a PC

**NOTE –** If your system administrator has implemented Active Directory, use your network user ID and password to log into Blood Centers. When Blood Centers is using Active Directory authentication, your Blood Centers user ID and password will no longer allow you to log into Blood Centers.

Active directory applies only to your initial login to Blood Centers. Once you are in Blood Centers, use your normal Blood Centers user ID and password for all functions within Blood Centers.

To log on to Blood Centers, do the following:

- Log in to your system using local practices.
- On your desktop, click the tile or button provided by your facility.

The Login screen appears:


WellSky Corporation
Proprietary and confidential

**NOTE –** The picture and verbiage presented is only an example. This may be replaced with your facility name and logo, or other of facility choosing.

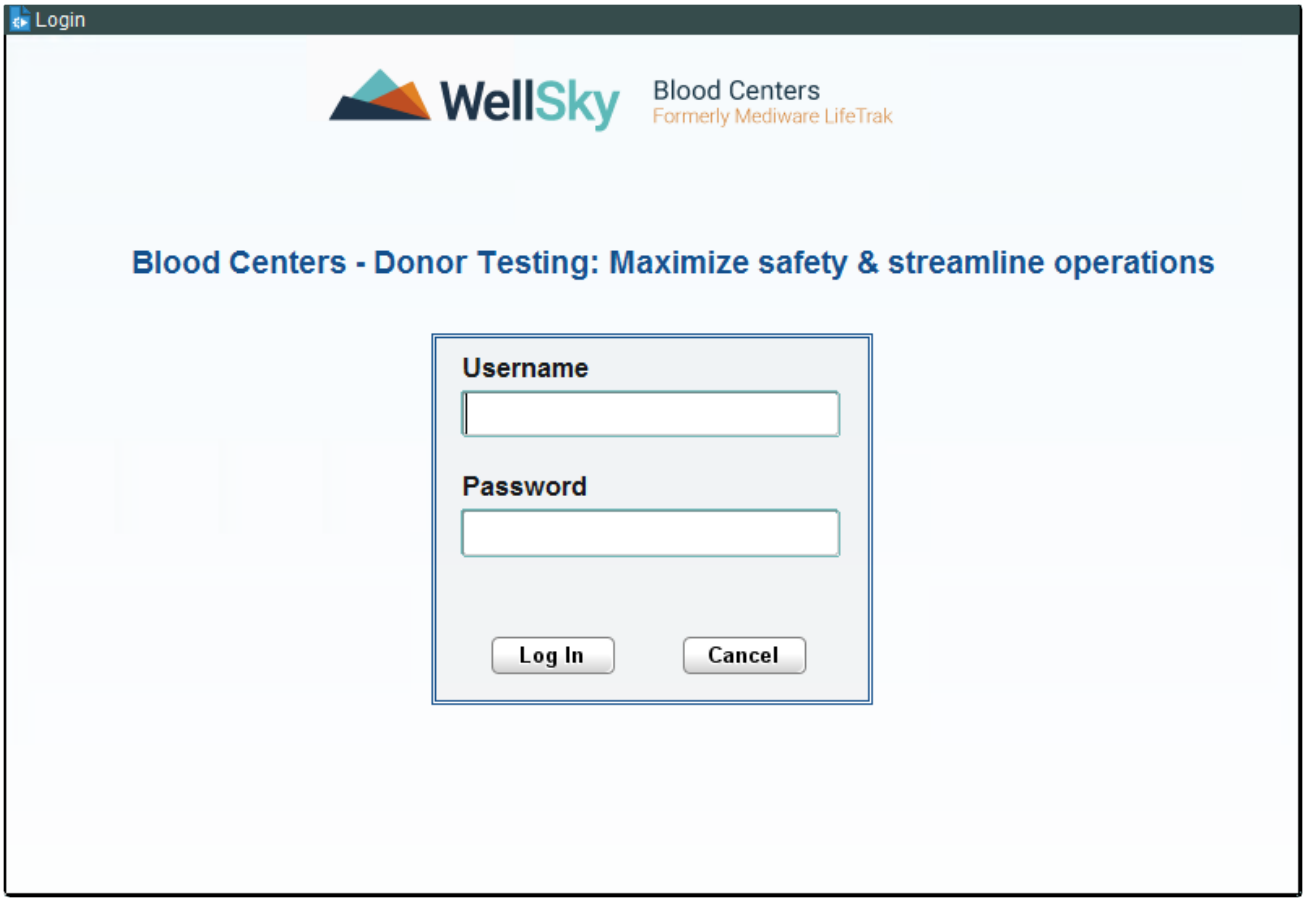


1. Enter your Blood Centers User ID.
2. Enter your Blood Centers Password.
3. Enter the Database, if applicable. There are three databases available, each one requiring a unique user ID and password for access:

    - Production Database
    - QA Database
    - Training Database

**NOTE –** If the Database Name in URL system parameter is set to TRUE, the Database field will be hidden, and the database designated in the system parameter will be auto-populated to the hidden field.

**NOTE –** The database name you are to use will be supplied by the system administrator.

4. Click **Login** to access Blood Centers.

**Important!** Logging in to Blood Centers identifies YOU to the system, and your identity is associated with all activity performed at that workstation until you log out. Therefore, to secure your user account and safeguard your professional integrity, you must log out anytime you leave your computer unattended.

## 1.4.7 Logging on with a Common Access Card (CAC)

A Common Access Card (CAC) is used to identify all military personnel. The CAC includes a photo ID, identification bar codes, and an embedded smart chip.

Blood Centers can now perform CAC authentication to authorize access to the Blood Centers application. CAC authentication will be used on the Login screen to verify the user's identity. After the user's station reads the CAC, Blood Centers login will confirm the CAC authentication and allow access to the Blood Centers system.

Additionally, you may self-register your CAC ID number to associate it to your Blood Centers user identity.

To use CAC authentication, you must:

- be a valid user in the Blood Centers system
- have a valid CAC

**Important!** The CAC number must be unique and identify a single individual. Similarly, a system user should have only one login ID. If one number is assigned to multiple individuals, or if an individual has multiple login IDs, a user may be identified incorrectly in the system.

### First Time CAC Users

The first time you attempt to log in using a CAC, you must register your CAC in the system. Perform the following steps:

1. Click the link to the Department of Defense Military Health System Web site. The Mandatory DOD Notice and Consent Banner appears.


WellSky Corporation
Proprietary and confidential

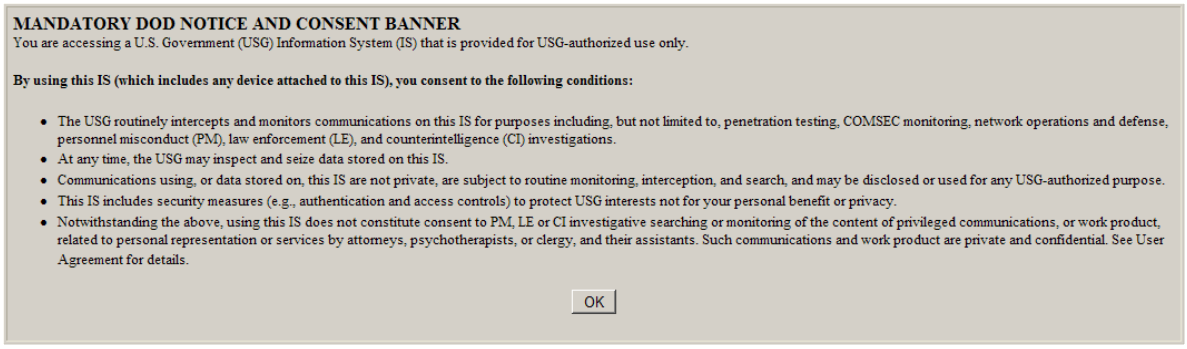


Be sure that you read and understand the information on this page. By clicking **OK**, you are acknowledging that you understand and agree to the listed conditions.

2. Click **OK**, and the Identity Authentication Services screen appears.

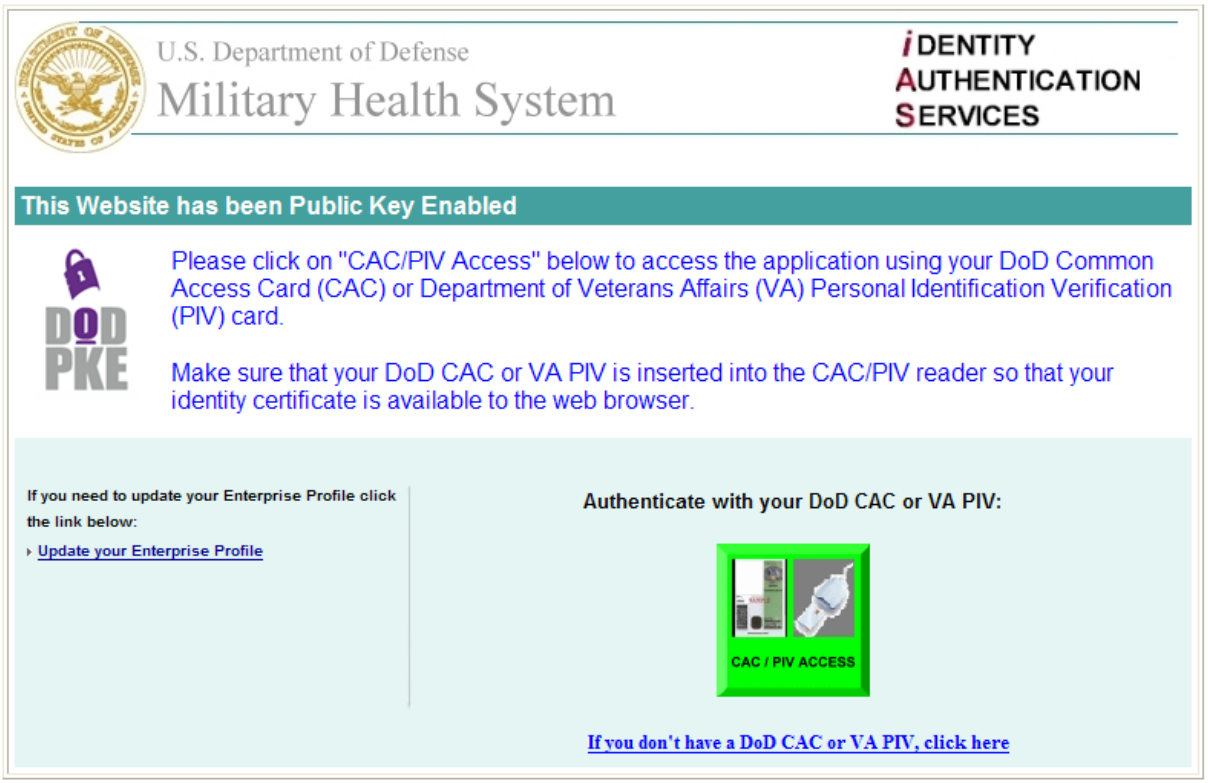


3. Scan your card and click the green **CAC/PIV ACCESS** button.

When a valid CAC is scanned and no associated user is located in the database, the following error message appears, 'Your CAC Card is not recognized. Please provide Username and Password on the next screen to register in the system.'

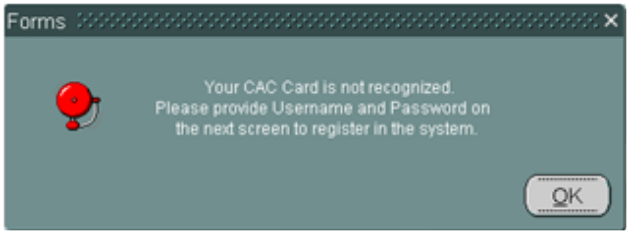


4. Click **OK**, and the Login screen appears.

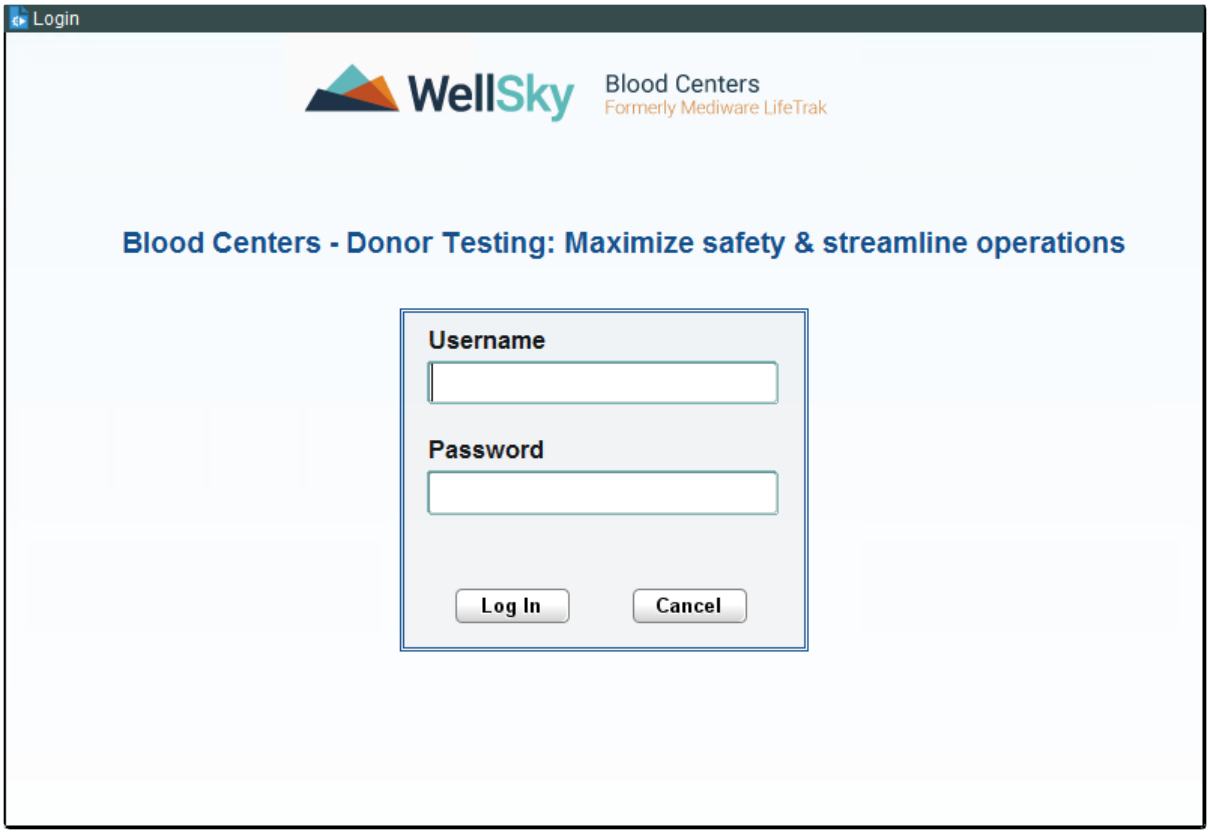


**NOTE –** The Login screen can appear with or without a login warning that explains your responsibility and consent to use the application. If the Login Warning system parameter is set to **TRUE**, the warning will display, and the operative buttons are labeled **LOGIN/ACCEPT** and **CANCEL/REJECT**. If the Login Warning system parameter is set to **FALSE**, the warning will not display, and the buttons are labeled **LOGIN** and **CANCEL**.

Complete the following fields to associate your Blood Centers username to your CAC.

1. In the Username field, enter your Blood Centers application user ID.
2. In the Password field, enter the strong password that is associated to your Blood Centers application user ID.

3. In the Database field, enter the name of the database you want to access. There are three databases available, each one requiring a unique user ID and password for access:

   **NOTE –** If the Database Name in URL system parameter is set to TRUE, the Database field will be hidden, and the database designated in the system parameter will be auto-populated to the hidden field.

   There are three databases available, each one requiring a unique user ID and password for access:

   - Production Database
   - QA Database
   - Training Database

   **NOTE –** The database name you use will be supplied by your system administrator.

4. Click LOGIN/ACCEPT or LOGIN. The system will validate your user ID and password.
   - If the validation does not succeed, the following error message displays:

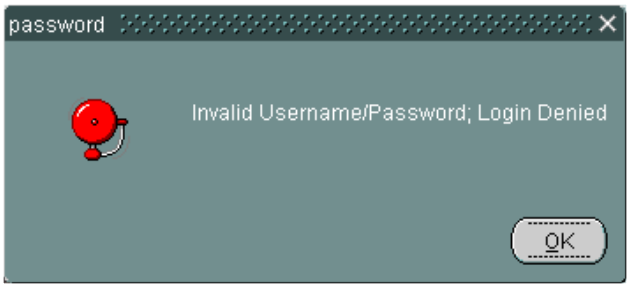


     An Unsuccessful CAC Registration - Password Failure event is logged to an audit table. Click OK and the screen clears. At this point, you must reaccess the Military Health System Web site and click the green CAC/PIV ACCESS button.

   - If the validation succeeds, your username and CAC ID will be registered in the system and associated to each other. A Successful CAC Registration event is logged to an audit table.

   The Donor User Main Application Menu displays.

## To Log in using a CAC

To log in to Blood Centers with a CAC, do the following:

1. Scan your CAC. When the system matches your CAC ID to a valid user in the system, the CAC Login screen appears.

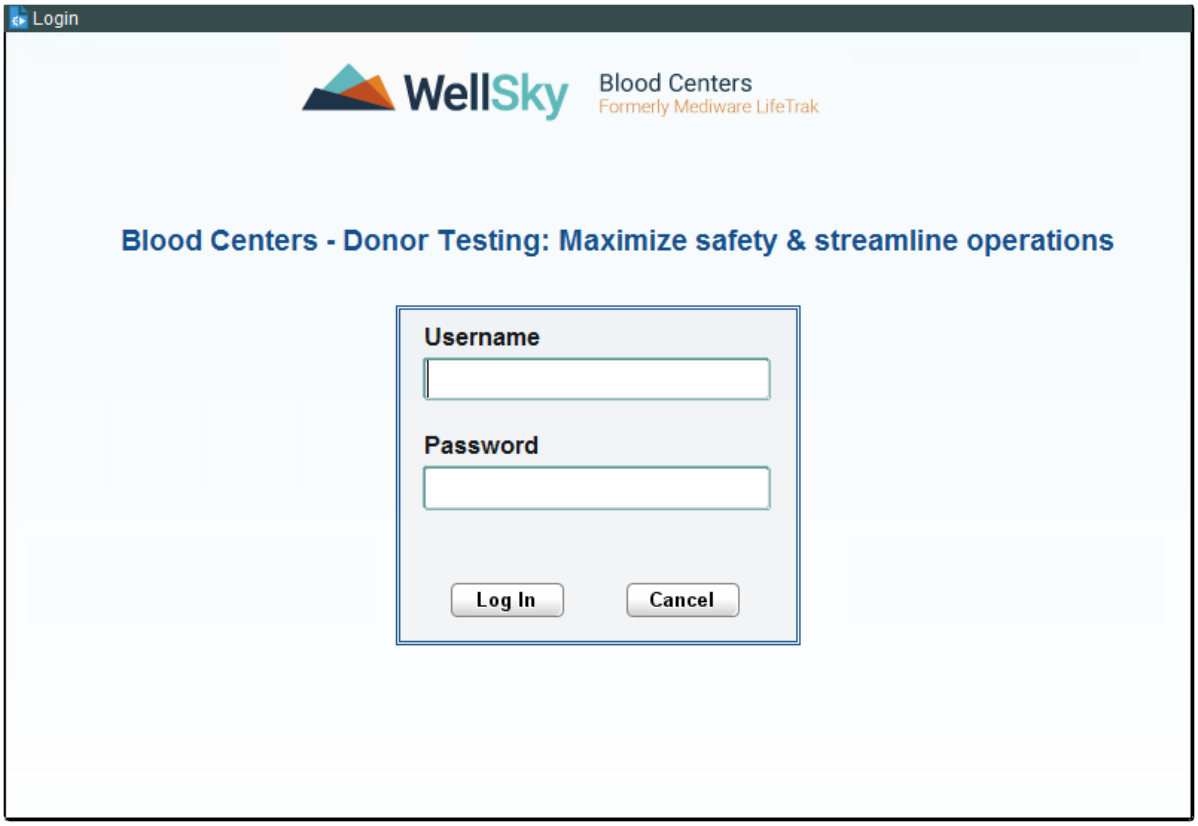


**NOTE –** The CAC Login screen can appear with or without a login warning that explains your responsibility and consent to use the application. If the Login Warning system parameter is set to TRUE, the warning will display, and the operative buttons are labeled LOGIN/ACCEPT and CANCEL/REJECT. If the Login Warning system parameter is set to FALSE, the warning will not display, and the buttons are labeled LOGIN and CANCEL.

2. In the Database field (if displayed), enter the name of the database you want to access. There are three databases available, each one requiring a unique user ID and password for access:

   **NOTE –** If the Database Name in URL system parameter is set to TRUE, the Database field will be hidden, and the database designated in the system parameter will be auto-populated to the hidden field.

   There are three databases available, each one requiring a unique user ID and password for access:

   - Production Database
   - QA Database
   - Training Database


WellSky Corporation
Proprietary and confidential

**NOTE –** The database name you use will be supplied by your system administrator.

3. Click LOGIN/ACCEPT or LOGIN.

   A Successful CAC Authentication event is logged to an audit table.

   The Main Menu displays.

## To Bypass CAC Log in

If a CAC is inserted incorrectly into the scanner, is damaged, or otherwise unreadable, the system will not be able to locate the CAC ID to authenticate the user. If this occurs, you may bypass the CAC log in process and authenticate your user ID by entering a strong password.

When the system does not find a CAC ID in the system, the error message, 'Your CAC is not inserted or is not reading properly. Would you like to Bypass CAC Login?' appears:

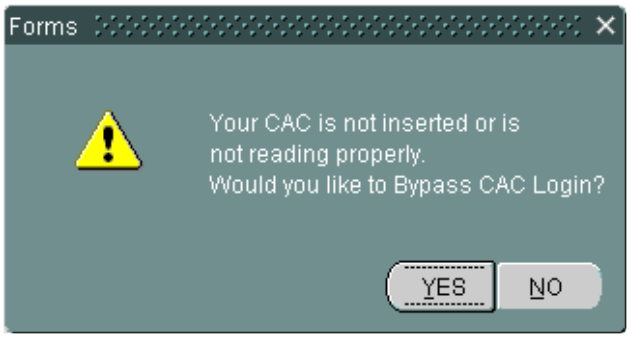


Perform the following steps:

1. Do one of the following:

   - Click No to try scanning your CAC again. The following message displays:

     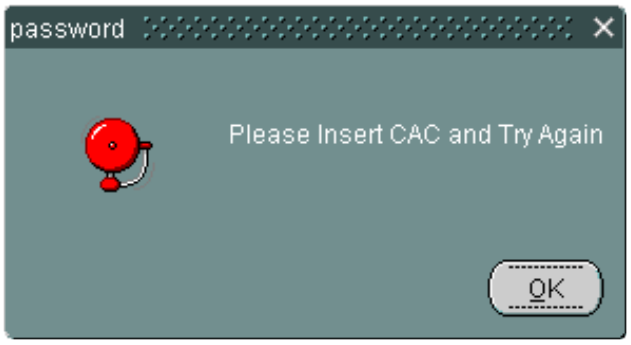
     

     Click OK and the screen clears. At this point, you must reaccess the Military Health System Web site and click the green CAC/PIV ACCESS button.

- Click **Yes** to bypass CAC authentication. The Blood Centers Login screen displays.

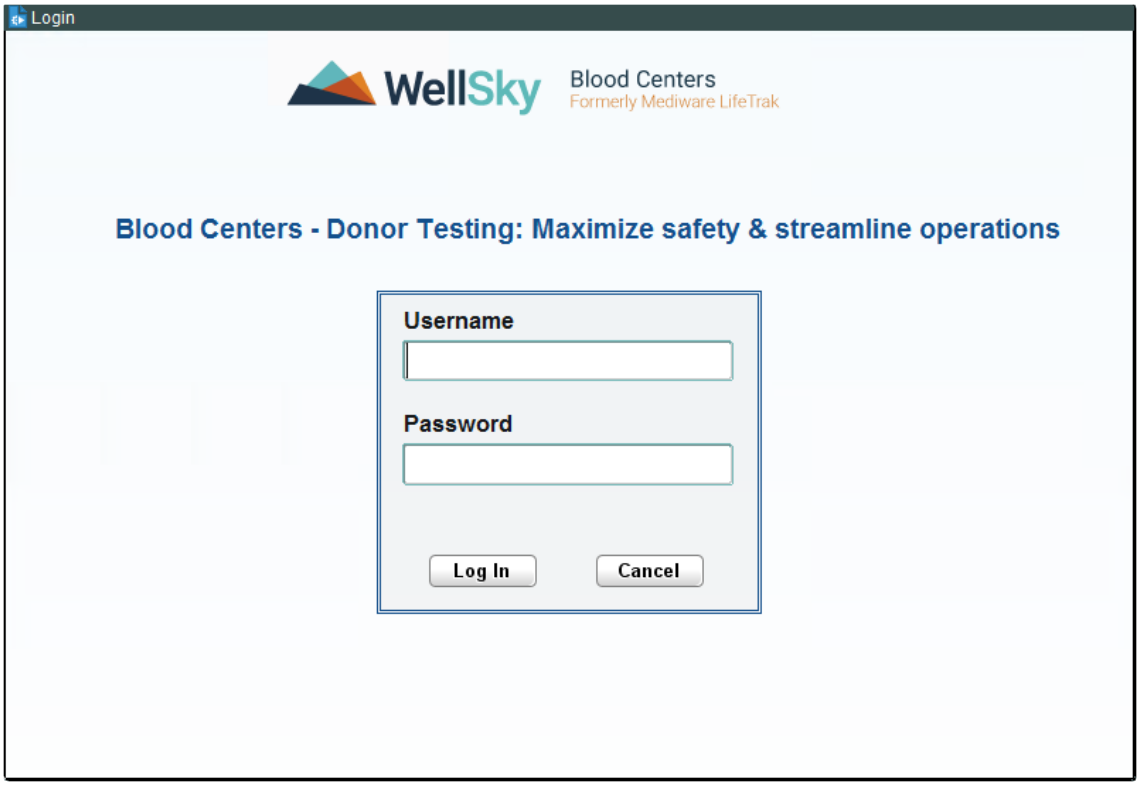


**NOTE –** The Blood Centers Login screen can appear with or without a login warning that explains your responsibility and consent to use the application. If the Login Warning system parameter is set to **TRUE**, the warning will display and the operative buttons are labeled **LOGIN/ACCEPT** and **CANCEL/REJECT**. If the Login Warning system parameter is set to **FALSE**, the warning will not display and the buttons are labeled **LOGIN** and **CANCEL**.

2. In the Username field, enter your Blood Centers application user ID that was provided by your system administrator.
3. In the Password field, enter the strong password that is associated to your Blood Centers application user ID.
4. In the Database field (if displayed), enter the name of the database you want to access. There are three databases available, each one requiring a unique user ID and password for access:

**NOTE –** If the Database Name in URL system parameter is set to **TRUE**, the Database field will be hidden, and the database designated in the system parameter will be auto-populated to the hidden field.

There are three databases available, each one requiring a unique user ID and password for access:

- Production Database
- QA Database
- Training Database

**NOTE –** The database name you use will be supplied by your system administrator.

5. Click LOGIN/ACCEPT or LOGIN.

   The system will validate your user ID and the strong password.

   - If the validation does not succeed, the following error message displays:

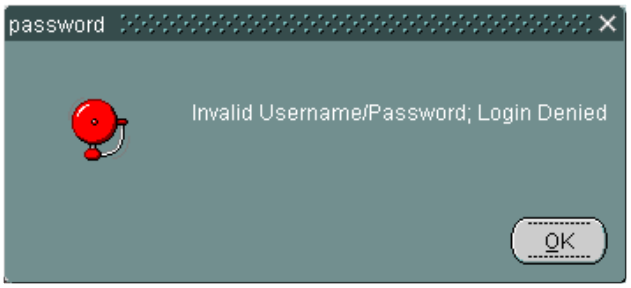


     A Strong Password Unsuccessful Login event is logged to an audit table. Click OK and the screen clears. At this point, you must reaccess the Military Health System Web site and click the green CAC/PIV ACCESS button.

   - If the validation succeeds, your username and CAC ID will be registered in the system and associated to each other. A Strong Password Successful Login event is logged to an audit table.

   The Main Menu displays.

## 1.4.8 Logging Out

To log out, do the following:

1. Press CTRL + F6 (Duplicate Field) two times to exit the application.
2. OR, use the tool bar to exit the application.
3. Close the Web browser.

## 1.4.9 Web-Enabled Environment

The Web-enabled environment employed by Blood Centers makes it possible to:

- Present an attractive and easy-to-read screen.
- Increase the functionality of a screen by calling additional windows.
- Click icons with a mouse rather than having to remember the purposes of numerous function keys.

To take full advantage of this environment, it is necessary to understand the standard components and navigation techniques used in each screen.

# 1.4.10 Screen Components

The screen contains several standard elements.

## The Banner Block

Across the top of all screens is the banner block, which always contains information described below in the position shown:

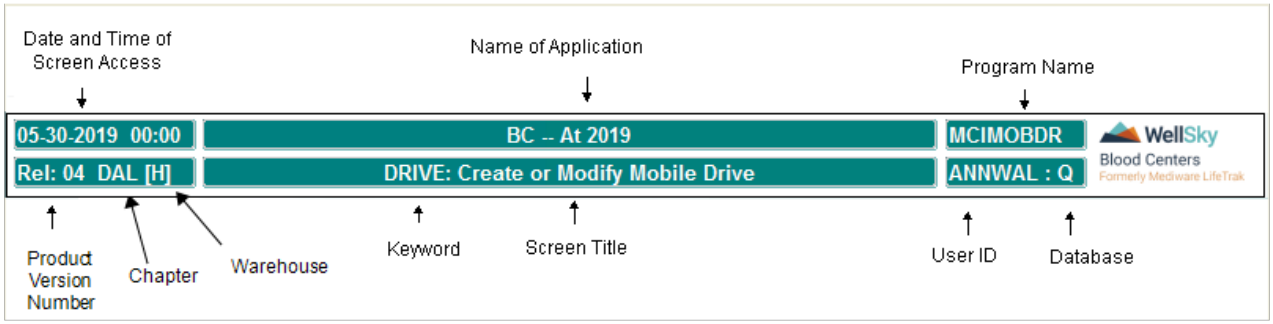


**NOTE –** The time displayed is not the current time, but is the time that the screen was first accessed. This time will not change as long as the user remains in the screen.

## The Control Block

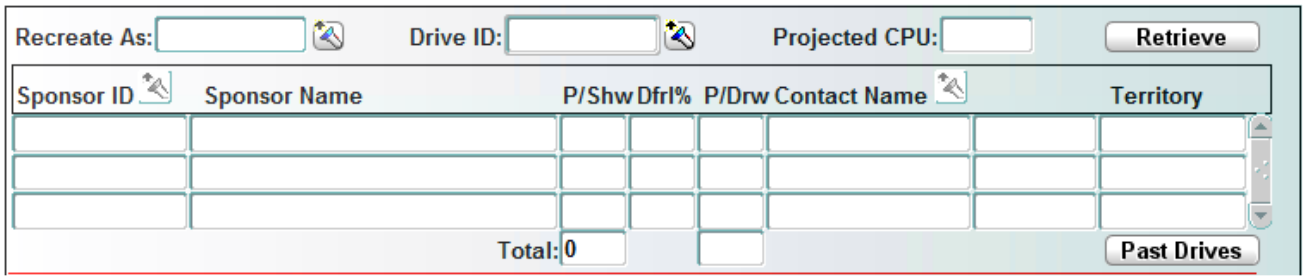


The screen is composed of numerous blocks of data. Each block contains data fields. A block can be identified by a thin horizontal line or box. Generally, all required data must be entered in the control block before you can access a detail block.

The Control Block accepts key user entries that determine what data the screen displays or accepts. Some control blocks are rather simple, as shown below. Some offer a number of options to the user and therefore are more complicated.

## The Detail Block

The data entered or displayed in a Detail Block is associated to all information entered in the Control Block. There may be one or more Detail Blocks in a screen.


WellSky Corporation
Proprietary and confidential

## List of Values

When a List of Values (LOV) is available in a field, usually there is a button immediately to the right of that field:

## List of Values Button

You can click the button to access the list of valid options and make a selection from that list. As an alternative, you can click LIST OF VALUES .

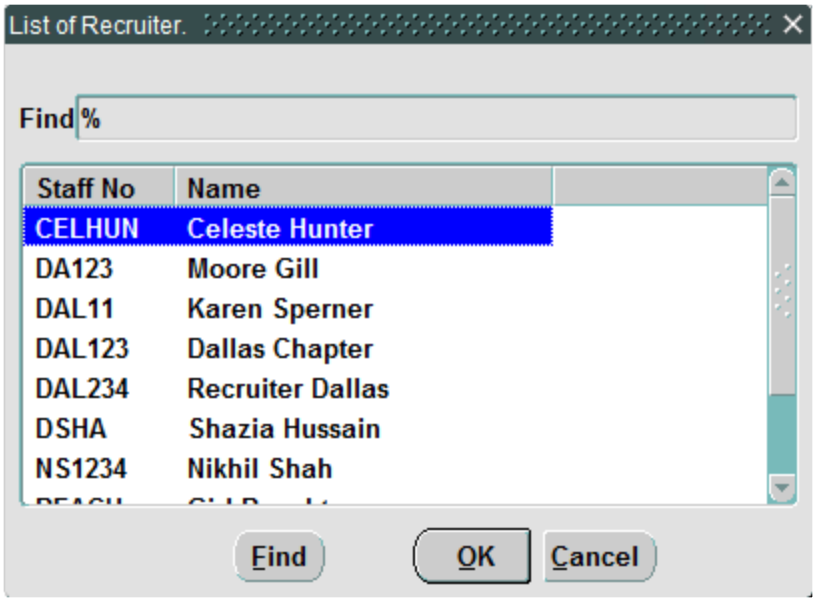


# 1.4.11 Search By First Word

You can shorten an LOV by entering the beginning letters (or numbers) of the first word in the column. The characters entered will display to the left of the percent sign in the *Find* field:

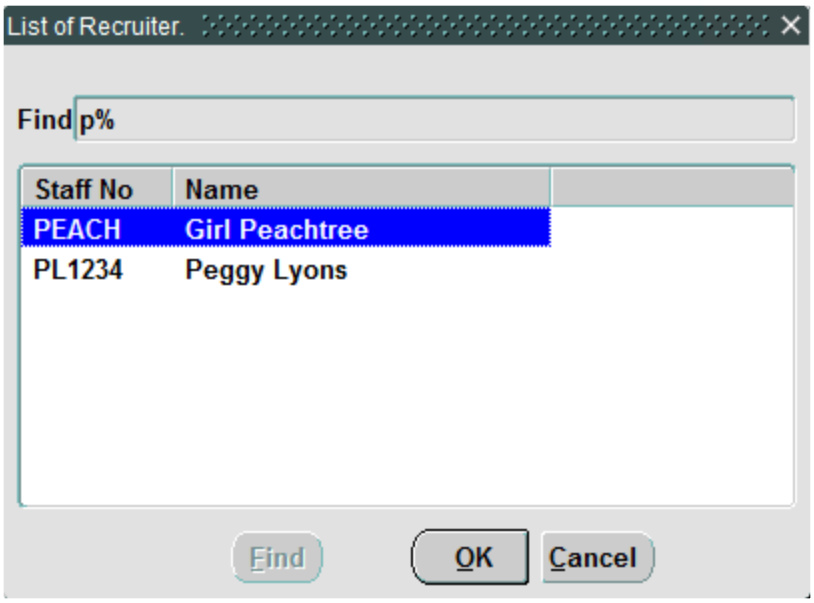


## 1.4.12 Search By Any Character in String

You can search for any characters in a string by clicking to the right of the percent sign in the *Find* field of the list window.

1. Make an entry that you want the system to match:




2. Click **Find** or press **ENTER**. The LOV will restrict the display to only those options that match your entry. You can then make a selection from the reduced number of options displayed:

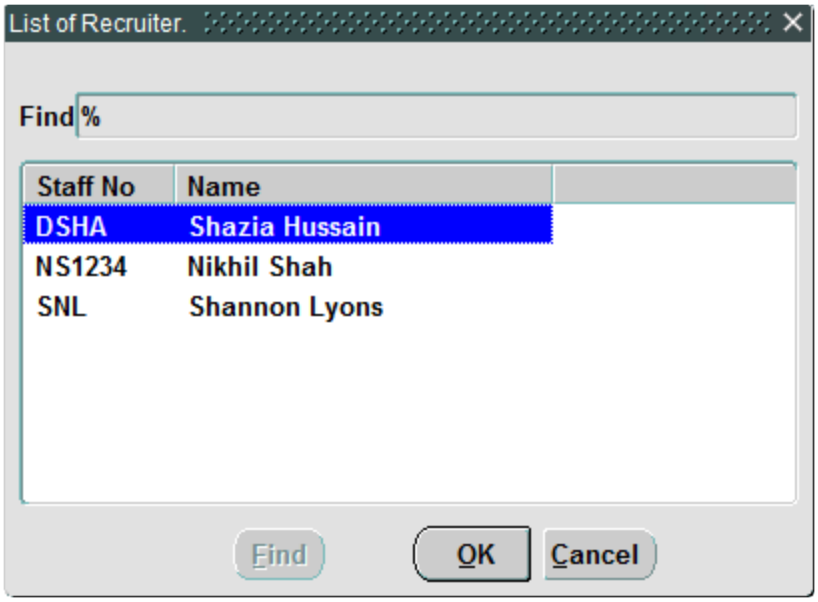



WellSky Corporation
Proprietary and confidential

# 1.4.13 A List of Values Shortcut

A shortcut may be used in most fields that host an LOV containing proper names, such as sponsor name, drive location name, patient name, etc.

1. Rather than clicking the List of Values (LOV) icon, make a partial entry of the name in the field:




2. Press ENTER.

   The resulting LOV only contains options that match your entry:

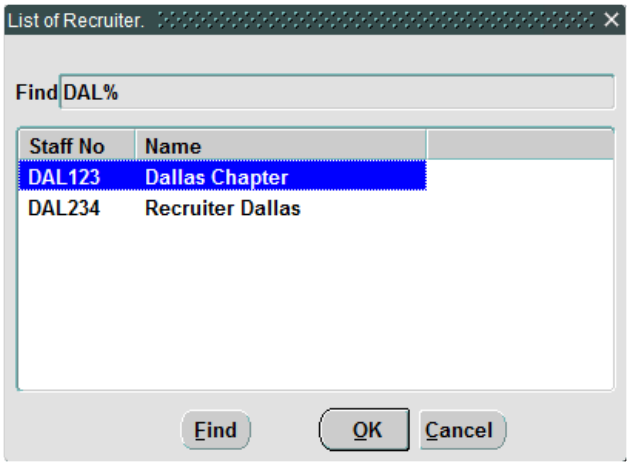


# 1.4.14 List of Values - Multiple Selections

In some instances, you can make multiple selections from an LOV. These lists have a button that contains a plus sign. Click the button to access the list.

The resulting LOV contains check boxes. Select the check box for any displayed item to select that item. Clear the checked box to remove the check mark in a check box.

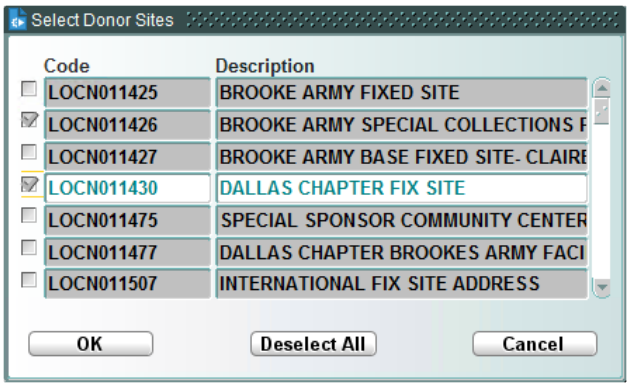

**NOTE –** The number of selections that can be made in a multiple selection LOV will often be restricted. This guide will describe any such limitations in the documentation for each screen.

The multiple selection LOV has the same search capability as the single-selection LOV.

Click Deselect All (if present on the screen) at the bottom of the LOV to clear all the check boxes and deselect all the items checked.

## 1.4.15 Entry Fields vs. Display Fields

Entries can be made in white fields. Gray fields are display-only fields that do not permit entry or modification of data.

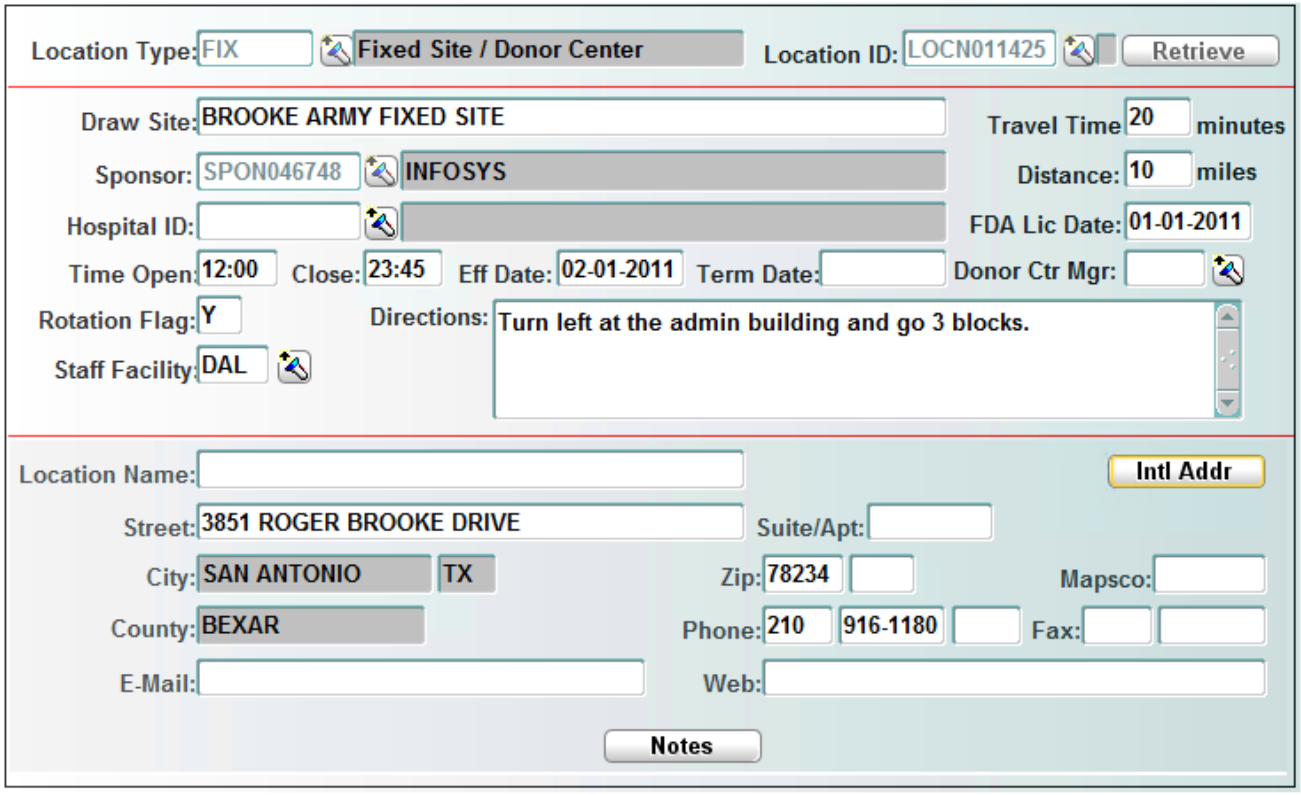


## 1.4.16 Mouse Operation

The left mouse button is used in Blood Centers, and a single click will activate a button or position the cursor in the selected field. The left mouse button is used primarily in Donor, but it can also be used in Lab and Distribution.

## 1.4.17 Keyboard Keys

As an alternative to the use of the mouse, you can use certain keys on the keyboard to navigate within screens:


WellSky Corporation
Proprietary and confidential

| Key | Function |
|---|---|
| TAB | In most screens, the tab key will move the cursor to the next field within a block. |
| SHIFT + TAB | In most screens, holding down the shift key while pressing the tab key will move the cursor to the previous field within a block. |
| Up/Down Arrow Keys | When multiple records (multiple drives, multiple sponsors, etc.) are displayed in a screen, you can use the UP and DOWN arrow keys on the keyboard to move up or down one record at a time. |
| ALT | In some screens, pressing ALT alone will activate the window, and if ENTER is pressed, a window opens.<br>  <br>To close the window, press ALT. You can tell when the window is activated by the underscore under the W; press ALT to deactivate.<br> 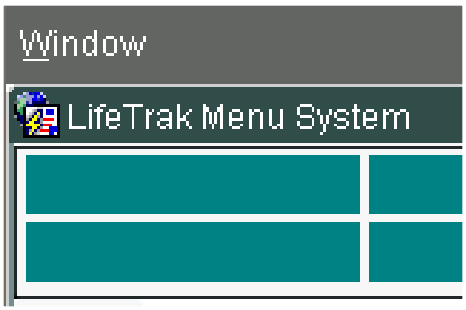 |

## 1.4.18 Hot Keys

When buttons are provided in a screen, one letter in the title of the button will be underlined. Hold down the ALT key and press the underlined letter to activate the button from the keyboard.

In the example below, press ALT + U to activate the Resources button, ALT + I to activate the Pickups button, and ALT + S to activate the Supplies button. The letter is not case sensitive when used with the ALT key.



# 1.4.19 Data Screen Format

Below is a sample entry/display screen. Although Data screens vary in the number of fields and blocks they contain, each requires some information to be entered. These parts are described in the following sections.

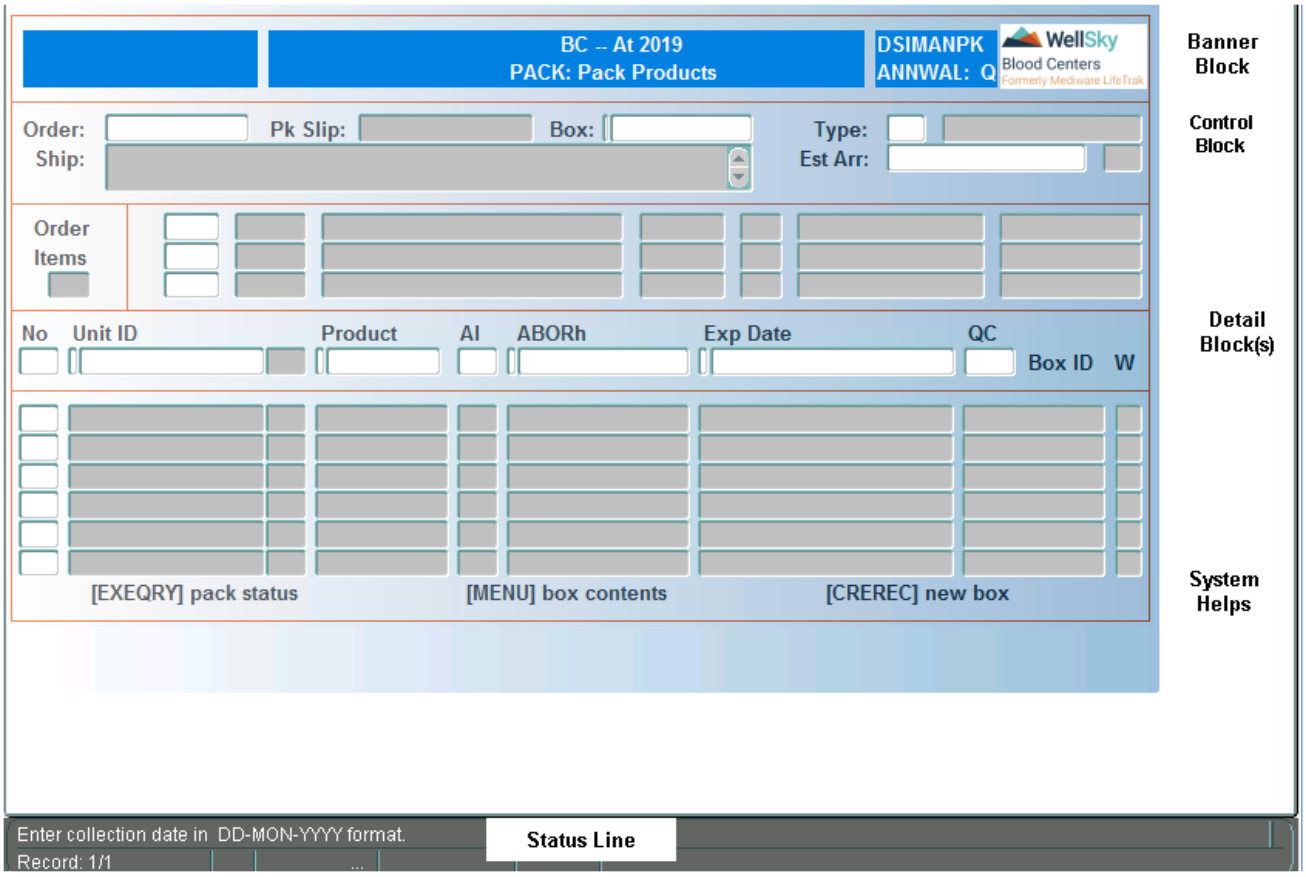



WellSky Corporation
Proprietary and confidential

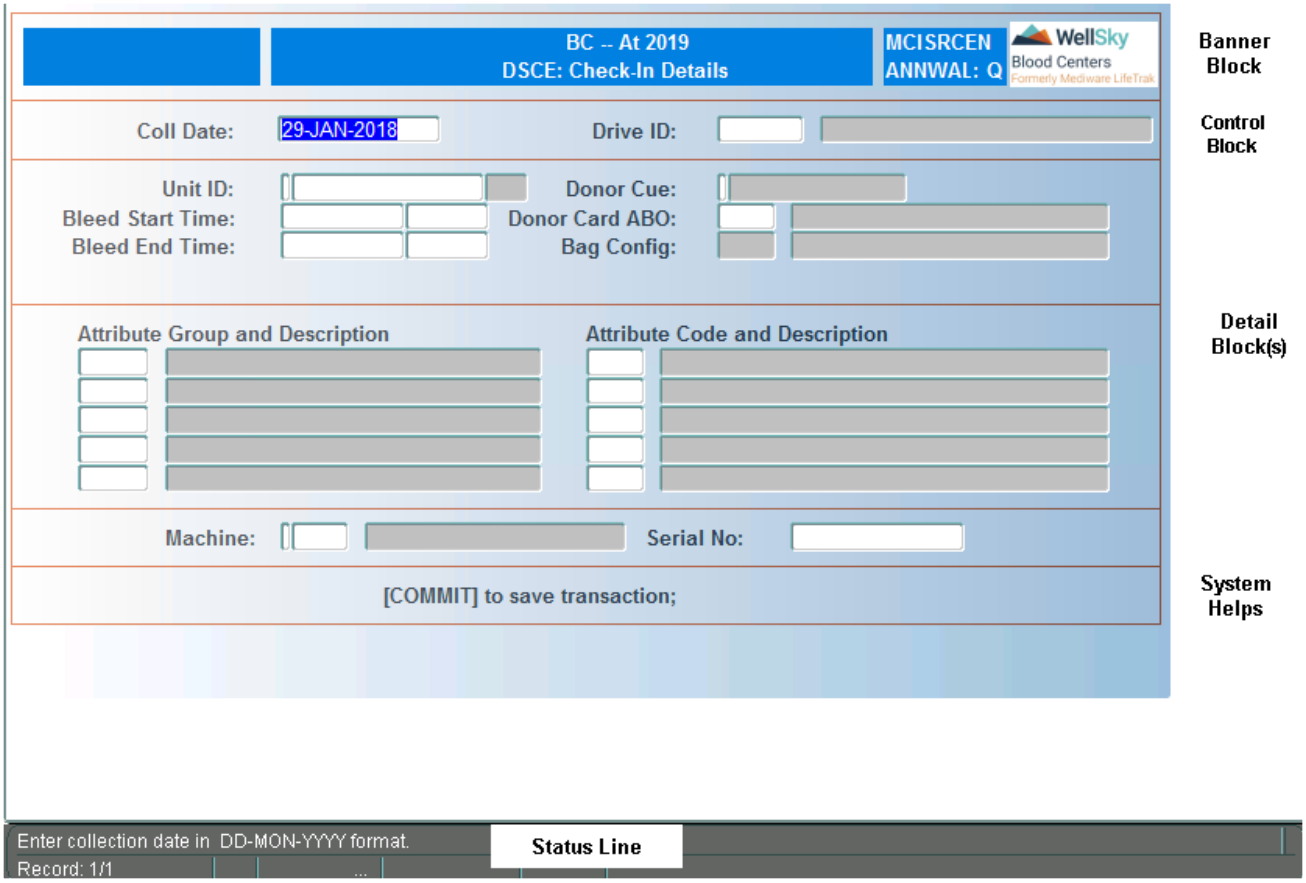


## Banner Block

The Banner Block for data screens contains the same information as the menu screen Banner Block, as previously described.

## Control Block

The Control Block asks you for important information about the data to be collected or displayed on that screen.

## Detail Block(s)

The Data Block contains fields for entering or reviewing data.

## System Helps

The System Helps line identifies function keys that can be used to expand the screen's functionality or data display.

## Status Line

The Status Line displays instructions on how to enter the current field, and displays error messages.

# 1.5 Data Screens

Your final destination in the menu structure is a data screen. These fall into two categories: entry and display.

Entry screens include data entry, update and QC screens because they allow the addition of data to the database. Display screens include query and report screens, which display data only.

The information you enter in data entry screens, update screens, and QC screens is committed to the database. In contrast, the information you enter in query and report screens is used to access information that already exists.

There are three primary tasks involved in using data screens:

- Navigating
- Entering data
- Committing data to the database

These tasks are accomplished through a variety of keyboard keys, including alphanumeric keys, function keys, and special keys, such as **CTRL**, **ALT**, and **UP** and **DOWN** arrow keys.

These tasks are described in the following sections.

## 1.5.1 Navigating

Navigating refers to moving the cursor within a field, from one field to another, or between blocks within a screen. These are general procedures; not all screens allow the use of all of these navigation techniques.

The following keys are used for navigation:

| Key | Use this key to ... |
|---|---|
| **Down Arrow** | Move the cursor down one line. |
| **Left Arrow** | Move the cursor one character to the left within a field. |
| **CTRL** + **F3** (Next Block) or **Page Down** | Move to the next block of data. |
| **CTRL** + **F4** (Previous Block) or **Page Up** | Move to the previous block of data. |
| **F4** (Previous Field) | Move the cursor back to the previous enterable field.<br>**NOTE –** If your cursor is positioned on the first menu option, pressing **F4** (Previous Field) moves the cursor to the last menu option. |


WellSky Corporation
Proprietary and confidential

| Key | Use this key to ... |
|---|---|
| Right Arrow | Move the cursor one character to the right within a field. |
| ALT + F2 (Scroll) | Used in Query or LIST FIELD VALUES mode. This key allows you to scroll to the next set of database records, as opposed to scrolling down one record using the DOWN arrow key. SCROLL must be used in conjunction with an UP or DOWN arrow key. |
| TAB | Move the cursor to the next enterable field.<br>**NOTE –** TAB returns the cursor to the first menu option if it is at the last option. |
| Up Arrow | Move the cursor up one line. |

## 1.5.2 Entering Data

Entering data refers to populating the individual fields in order to perform the needed functions. Several techniques are employed, depending on the type of field and type of data. The status line at the bottom of the screen provides guidance for how to enter data in the selected field.

There are several ways to enter data into fields:

- Using the keyboard
- Using a list of values
- Scanning
- Using manual entry as an alternate to scanning
- Copying from previous record

Entering date and time information must conform to certain formats. These formats are discussed in detail in this section.

### Enter using Keyboard

Entering data with the keyboard is used to enter basic text, such as names, addresses, phone numbers, etc., and for data that cannot be entered using other means. In addition to the normal alphanumeric keys, special keys are used to aid in entering and editing the information. These keys are listed below:

| Keys | Use this key to ... |
|---|---|
| CTRL + D | Erase characters, as follows. Use the RIGHT and LEFT arrow keys on the keyboard to move the cursor to any character in a field and highlight it. Hold down the CTRL key and press D. The highlighted character and the space it occupied will disappear. |
| F5 (Clear Field) | Erase characters from the cursor position to the end of the field. If the cursor is at the beginning or beyond the end of the field, the entire field will be erased. If the cursor is in the middle of the field, press F5 (Clear Field) twice to erase the entire field. |
| ALT + F5 (Clear Record) | Remove information from all fields displayed on the screen.. Any uncommitted new or updated data is erased. Information stored in the database is not affected. |
| CTRL + A Insert/ Replace | While in Insert mode, text is added, and existing text at the insertion point is moved to the right. While in Replace mode, you can type over existing text , replacing it with new text.<br>**NOTE –** This key acts as a toggle; that is, when you are in one mode (Insert or Replace), pressing CTRL + A switches to the other mode. |
| CTRL + R | For a screen "refresh" if it becomes cluttered with system messages, or by random characters produced by data transmission errors. Hold down the CTRL key and press R. |

# List of Values (LOV)

F2 (List of Values) is used to retrieve data from validation tables (tables within Lab that contain valid codes). It is only available when a status line message indicates it can be used. When used, F2 (List of Values) displays as a pop-up containing data.

Follow these steps to select from a list of values using function keys:

1. Press F2 (List of Values).
2. Scroll to your choice using the UP and DOWN arrow keys.
3. Press ENTER to transfer data from the validation table to the screen, or use Esc to leave the table. The selected data is displayed on the screen.
4. Press ENTER to complete the process.

## Using a Mouse

Follow these steps to select from a list of values using a mouse:

1. Press F2 (List of Values).
2. Select your choice with the cursor and double-click the choice. Alternatively, select your choice with the cursor and click OK. The selected data is displayed on the screen.

## Narrowing the Search

You can limit the LOV by entering a partial character string (for example, 'ABC') in the data field and then pressing ENTER. The list of values that displays will contain only those entries that match the character string you have


WellSky Corporation
Proprietary and confidential

entered. This works, of course, only in those data fields for which a list of values is available.

A search process employing the 'wildcard' method can also be used, substituting a percent sign (%) for unknown letters, (for example, '%ABC%' searches for all entries in the list of values that contain the letters 'ABC'). This method is helpful when the validation table contains a long list of data. This method will display all entries in the list of values that contain the character string anywhere (for example, program name, program title, etc.).

Follow the steps below to select a specific value from a list of values using the wildcard method:

1. Press **F2** (List of Values).
2. **TAB** to the *Find* field.
3. A percent sign (%) and any prefix that is common to all entries will automatically display. Enter the known characters followed by another percent (%) sign. Only the values containing the letters you typed will display.
4. Scroll to the correct choice using **UP** and **DOWN** arrows.
5. Press **F12** (Commit) to transfer data from the validation table to the screen, or press **ESC** to leave the table without retrieving data. The selected data is inserted in the screen.
6. Press **ENTER** to complete the process and advance to the next data field.

**NOTE –** The wildcard method of retrieval can only be used on validation tables that have *Find* fields. If the table does not have a *Find* field, this option is not available.

## Scanning

Certain fields throughout Blood Centers accept scanned data as a faster and more accurate technique than manual data entry. Such fields include:

- Unit ID
- Product Code
- Blood Type (ABORh)
- Expiration Date
- CUE (donor unit exclusion)
- Centrifuge ID
- Catalog Number
- Lot Number
- Box ID

The cursor will automatically advance to fields that accept a scanned entry, and the help line will always advise the user to either scan or make a manual entry.

When such data is scanned, the system will accept the entry and advance the cursor to the next field automatically.

# Manual Entry as an Alternative to Scanning

In the event you cannot scan data, manual entry techniques are provided as an alternative. The technique varies according to the type of data being entered.

## Unit – Codabar

When the unit ID is to be scanned or manually entered, the help line will always say "Scan Unit ID or enter 'M' for Manual Entry."

With the cursor positioned in the *Unit ID* field, type M and then press **ENTER**. The cursor will move to the right. A double blind entry of the unit ID is always required when substituting a manual entry for a scanned entry. The double blind entry technique requires you to re-enter the unit ID without having the benefit of seeing your initial entry. The *Unit ID* field is the only scannable field that requires a double blind manual entry.

The two steps for a double blind entry are:

1. Enter the unit ID and press **ENTER**. Your first entry will disappear when you press Enter.
2. Re-enter the unit ID and press **ENTER**. If the two entries agree, the system will accept your manual entry. If they do not agree, you must make another double-matching entry.

**NOTE –** If a data entry error occurs during manual entry of the unit ID, press **F5** (Clear Field) while the cursor is in the *Unit ID* field. Re-entry will then be allowed.

## Unit ID - ISBT 128

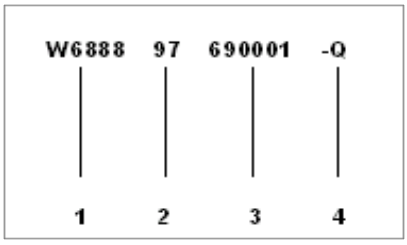


1. Collection Facility Identification Number
2. Year of Collection
3. 6-Digit Unit ID Number
4. Check Digit

ISBT Code 128 requires only a single entry of the unit ID since the check digit is calculated by the unit ID.

1. Press M, and then press **ENTER**. The cursor moves to the unit ID block.
2. Press **F4** (Previous Field) twice to move the cursor to the *Collection Facility ID* field. Enter the Collection Facility ID and press **ENTER**.
3. The cursor moves to the year block. Enter the year that the sample was collected, and press **ENTER**.
4. The cursor moves to the unit block. Enter the 6-digit unit ID and check digit. The check digit should be preceded by a hyphen (-).


WellSky Corporation
Proprietary and confidential

5. If a data entry error occurs, press **F5** (Clear Field) to clear entries from the individual blocks. Press **F4** (Previous Field) to remove the unit ID number and move the cursor to the start.

**NOTE –** The entire unit ID must be cleared from the field (collection ID, year, and unit ID). Use the **F4** (Previous Field) key to move the cursor to each element.

## Product Code

When the *Product Code* field will accept a scanned entry, the help line will always display, 'Scan Product Code or enter "M" for Manual Entry.'

With the cursor positioned in the *Product Code* field, type `M` and then press **ENTER**. The system will accept the valid entry.

## Blood Type (ABORh)

When the *Blood Type (ABORh)* field will accept a scanned entry, the help line will always display "Scan Blood Type (ABORh) or enter "M" for Manual Entry."

With the cursor positioned in the *Blood Type (ABORh)* field, type `M` and then press **ENTER**. The system will accept the valid entry. In virtually all instances, a list of values (LOV) is available in this field after the user has begun the manual entry technique.

## Centrifuge ID

When the *Centrifuge ID* field will accept a scanned entry, the help line will always display "Scan Centrifuge ID or enter "M" for Manual Entry."

With the cursor positioned in the *Centrifuge ID* field, type `M` and then press **ENTER**. The system will accept the valid entry. In virtually all instances, a list of values (LOV) is available in this field after the user has begun manual entry.

## Catalog Number

When the *Catalog Number* field will accept a scanned entry, the help line will always display "Scan Catalog Number" or enter "M" for Manual Entry."

With the cursor positioned in the *Catalog Number* field, type `M` and then press **ENTER**. The system will accept the valid entry. In virtually all instances, a list of values (LOV) is available in this field after the user has begun manual entry.

## Lot Number

When the *Lot Number* field will accept a scanned entry, the help line will always display "Scan Lot Number" or enter "M" for Manual Entry."

With the cursor positioned in the *Lot Number* field, type `M` and then press **ENTER**. The system will accept the valid entry. In virtually all instances, a list of values (LOV) is available in this field after the user has begun manual entry.

# Copying Data from the Previous Record

Certain screens allow you to copy data from the previous record using **CTRL** + **F6** (Duplicate Field). When this function is available, it is noted in the screen description.

## Data Entry Format

In the event you cannot scan data, manual entry techniques are allowed.

The date formats throughout Blood Centers are as follows:

- Collection Date
- Expiration Date
- Effective Date
- Termination Date

Expiration Date must be entered into the system to include the time portion. Entry into the system can be achieved by either:

DD-MON-YYYY HH24:MI

or, you may select a straight line entry format without hyphens, spaces, or colons:

DDMONYYYYHH24MI

Process Date/Time displays in the format which include both date and time the process occurred:

MM-DD-YY HH24:MI

Entry into the system can be achieved by either entering as indicated above or, you may select a straight line entry format without hyphens, spaces, or colons:

MMDDYYHH24MI

When date entry is required as a parameter for Report Submission, use the format:

MM-DD-YYYY

When both date and time are required as parameters for Report Submission, use the format:

MM-DD-YYYY HH24:MI

## Pick Slip ID and Debit /Credit Advice ID Format

Pick Slip and Debit/Credit Advice IDs are system generated and are used to uniquely identify each pick slip or credit/debit advice number. The format is as follows:

xxyy-zzzzzzzz, where

xx – ID type, as follows:

- CM – Credit memo
- DM – Debit memo
- PA – Allocated pick slip
- PO – Outdated pick slip
- PT – Regular Transfer pick slip


WellSky Corporation
Proprietary and confidential

- PU – Unpack pick slip
- RT – Return ID

yy – 2-digit year

zzzzzzzz – 8-digit unique identification number, which is system generated

For example, a pick slip for allocated products from 2010 would have the following format:

PA10-12345678

## 1.5.3 Committing Data to the Database

Once all data has been added to the form, the data must be committed to the database. Any data that is not committed is lost when the form is closed.

To commit data (make the database transaction permanent), press **F12** (Commit).

When exiting some screens, the following prompt displays:

"Do you want to commit the changes you have made?"

You may enter:

- `Y` for yes, and the transaction will be applied to the database, or
- `N` for no, and the transaction will not be committed to the database, and the screen will clear.

If part or all of a transaction fails during a commit, the entire transaction is automatically rolled back. The information you have entered remains on the screen for you to work with in locating and correcting the problem. The problem must be fixed before a failed transaction can be committed.

In cases where **ENTER** is used to commit, the User Guide indicates that commit is conducted on a line-by-line basis.

Warning messages display when a user attempts to perform an operation that should be carefully considered before committing data to the database.

## 1.5.4 Function Keys

The Blood Centers keyboard template identifies the use of each function key. A full-size keyboard template can be found at the end of this guide.

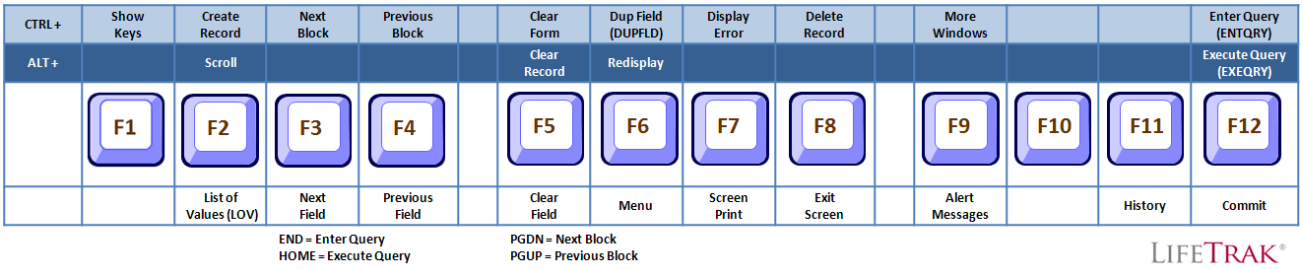


Function keys are located at the top of the keyboard and are labeled F1 through F12. When used in conjunction with the **CTRL** and **ALT** keys, the function keys have different uses. For example, **F5** is Clear Field, **CTRL** + **F5** is Clear Form, and **ALT** + **F5** is Clear Record.

Separate function key uses (basic function key, function key with CTRL, and function key with ALT) are shown in the following tables. A keyboard template is also provided for reference.

| Key | Function | Description |
|---|---|---|
| F1 | Commit | See F12 description. |
| F2 | List of Values | In menu screen, displays list of Keywords. On data screens, displays list of values for that field. |
| F3 | Next Field | Moves cursor to the next field. |
| F4 | Previous Field | Moves cursor to the previous field. |
| F5 | Clear Field | Erase characters from the cursor position to the end of the field. If the cursor is at the beginning or beyond the end of the field, the entire field will be erased. If the cursor is in the middle of the field, press Clear Field twice to erase the entire field. |
| F6 | Menu | In most cases, used to open a window for viewing additional information. In some screens, used to reprint labels. Other functions are detailed in the specific screen descriptions. |
| F7 | Screen Print | Prints the screen contents. |
| F8 | Exit Screen | Exits the screen without saving changes. |
| F9 | Alert Message | |
| F10 | Not Used | |
| F11 | History | |
| F12 | Commit | To make the database transaction permanent.<br>When exiting some screens, the following prompt displays:<br>"Do you want to commit the changes you have made?"<br>You may enter:<br>• `Y` for yes, and the transaction will be applied to the database, or<br>• `N` for no, and the transaction will not be committed to the database, and the screen will clear.<br>If part or all of a transaction fails during a commit, the entire transaction is automatically rolled back. The information you have entered remains on the screen for you to work with in locating and correcting the problem. The problem must be fixed before a failed transaction can be committed. |


WellSky Corporation
Proprietary and confidential

| Key | Function | Description |
|---|---|---|
| CTRL + F1 | Show Keys | To see a screen display of valid Blood Centers functions and their respective keystrokes for your current work mode. This display will vary according to the keyboard being used. |
| CTRL + F2 | Scroll | In query or LOV mode: key allows you to scroll to the next set of database records, as opposed to scrolling down one record using the arrow key. Scroll must be used in conjunction with an UP and DOWN arrow key. |
| CTRL + F3 | Next Block | Move to the next block of data. |
| CTRL + F4 | Previous Block | Move to the previous block of data. |
| CTRL + F5 | Clear Form | |
| CTRL + F6 | Duplicate Field | To copy data from the corresponding field of the previous record into the current record. (You can then edit the field.) |
| CTRL + F7 | Display Error | To display help text for a field that has an error. |
| CTRL + F8 | Delete Record | |
| CTRL + F9 | Not Used | |
| CTRL + F10 | Not Used | |
| CTRL + F11 | Not Used | |
| CTRL + F12 | Enter Query | Begin the query mode of operation. |

| Key | Function | Description |
|---|---|---|
| ALT + F1 | Not Used | |
| ALT + F2 | Create Record | To create a new blank record. |
| ALT + F3 | Not Used | |
| ALT + F4 | Not Used | |
| ALT + F5 | Clear Record | Remove information from the screen you are in. Any uncommitted new or updated data is erased. Information stored in the database is not affected. |
| ALT + F6 | Redisplay | |
| ALT + F7 | Not Used | |
| ALT + F8 | Not Used | |
| ALT + F9 | More windows | |
| ALT + F10 | Not Used | |
| ALT + F11 | Not Used | |
| ALT + F12 | Execute Query | |

## 1.5.5 Other Function Keys

Certain function keys are provided for help, as shortcuts in data entry, or other useful functions:

| Keys | Use this key ... |
|---|---|
| CTRL + R | For a screen "refresh" if it becomes cluttered with system messages, or by random characters produced by data transmission errors. Hold down the **CTRL** key and press R. |
| Exit/Can | To exit, either:<br>• From a screen back to a menu, or<br>• From a list of values (LOV).<br><br>**NOTE –** If you have partially entered a transaction, the system will ask whether you want to commit the transaction.<br><br>**NOTE –** [Exit/Can] does not work on a screen where the Option and Keyword Selection line is shown. |
| ENTER | Commit data to the system. In cases where **ENTER** is used to commit, the user guide indicates that commit is conducted on a line-by-line basis. The **ENTER** key is located on the terminal keyboard, and is labeled Enter on a PC keyboard.<br><br>**ENTER** can also be used in place of **TAB**. |

## 1.5.6 Tool Bars

Separate tool bars are provided for screens and menus. Click any icon to activate its function.

As you move the cursor over an icon without clicking, a pop-up displays, explaining the function of the icon.


WellSky Corporation
Proprietary and confidential

# The Menu Tool Bar

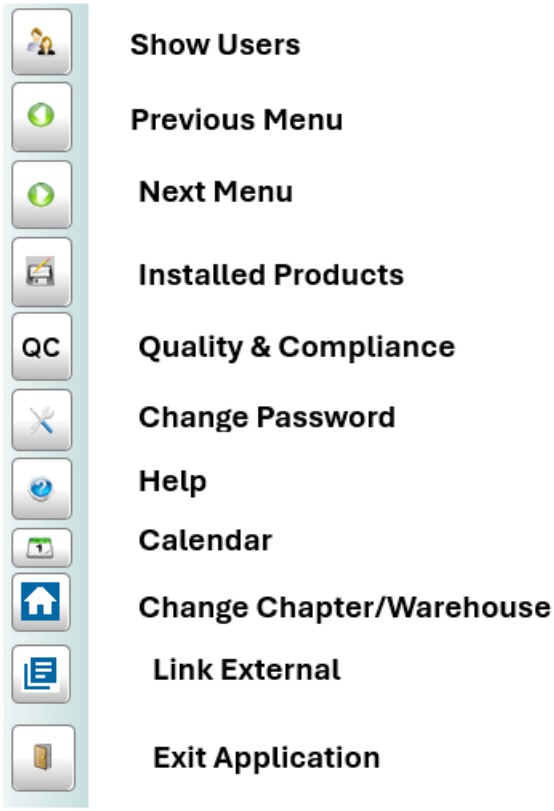


## WellSky Quality & Compliance

The Quality & Compliance icon is located on the left side of the Application Menu.

| | |
|---|---|
| | When you click this icon, the system will retrieve your system ID from the System Users table, and then perform a Web services call to launch Quality & Compliance in a separate browser window. |

The Quality & Compliance icon is enabled only if Quality & Compliance is installed and configured to be accessible within your Blood Centers application.

The Quality & Compliance status bar is located at the bottom, right-hand side of the Application Menu. It only displays if Quality & Compliance is installed and configured to be accessible within Blood Centers, and your Quality & Compliance User ID is mapped with your Blood Centers User ID. In addition, if Quality & Compliance is accessible but your Quality & Compliance User ID is not mapped with your Blood Centers User ID, you will receive the following message as the Application Menu opens:

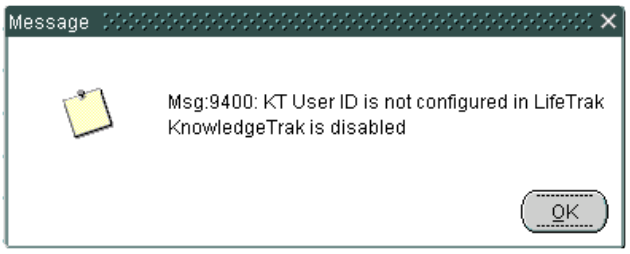


Click **OK** to close this message. The Application Menu will then display, and the Quality & Compliance status bar will not be visible.

At a glance, the Quality & Compliance status bar tells you the following:

- How many assignments (items) are currently due.
- How many assignments are past due.
- The number of alerts you currently have.

**NOTE –** Refer to the Quality & Compliance application help system for detailed information on using Quality & Compliance.

## Change Chapter/Warehouse

The Change Chapter/Warehouse icon is located on the left side of the Application Menu. When you click this icon, the system will retrieve the Change Chapter window.

When the window opens, it will display the chapters to which you are assigned on the left, and the warehouses associated to each chapter on the right.


WellSky Corporation
Proprietary and confidential

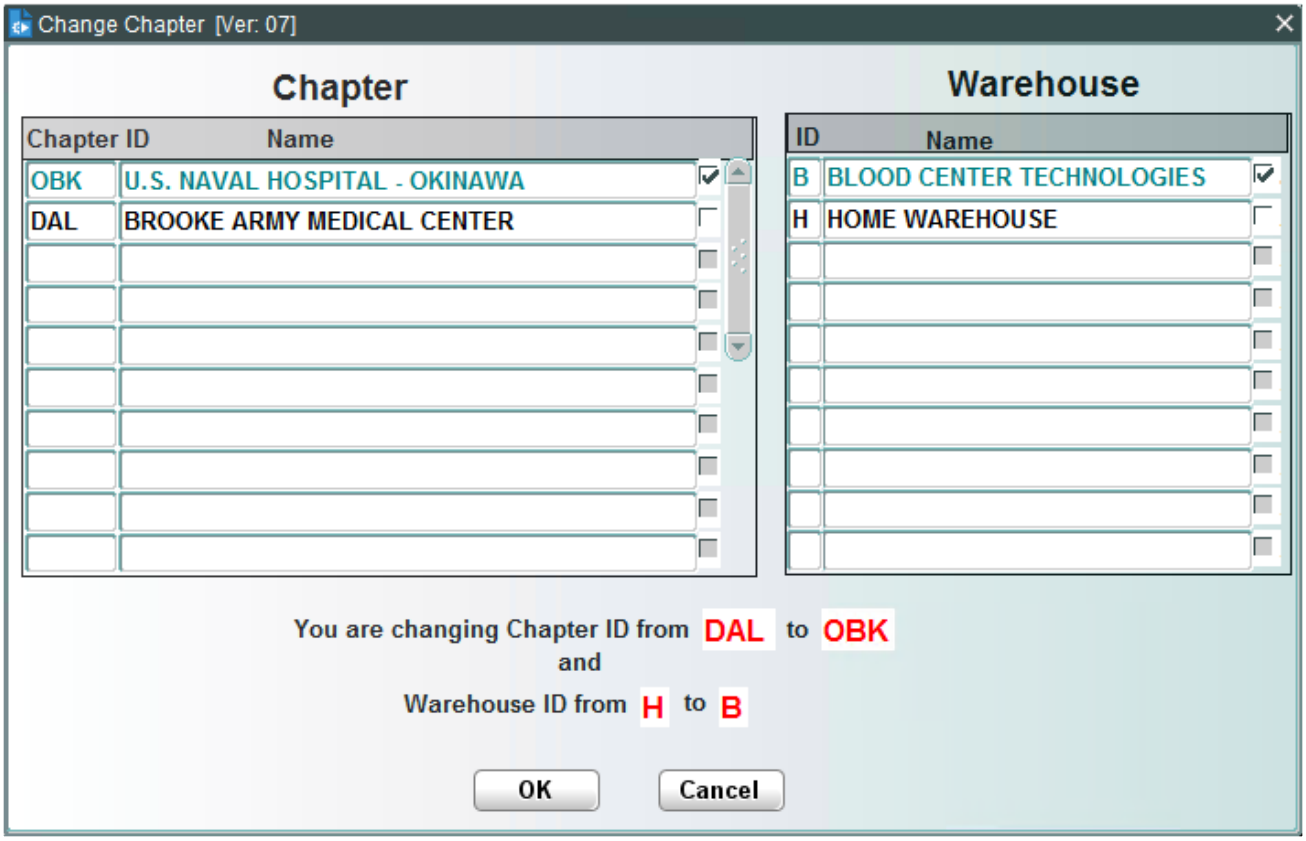


You are assigned a default chapter and warehouse in the ADDUSER screen, which will automatically display with a check mark by the chapter and warehouse.

When changing the chapter, the default warehouse assigned in ADDUSER will remain marked unless the chapter is not assigned to that warehouse. If needed, you can change the warehouse at any time by placing a check mark next to the warehouse to which you want to change.

The bottom of the screen will display what chapter you are currently in and what chapter you are moving to, and the same applies for the warehouse.

## The Screen Tool Bar

A standard tool bar displays in all Donor screens, although in a few screens an additional icon may be added to serve a specialized purpose. Any additional icons will be addressed in the documentation for the screen in which it is used.

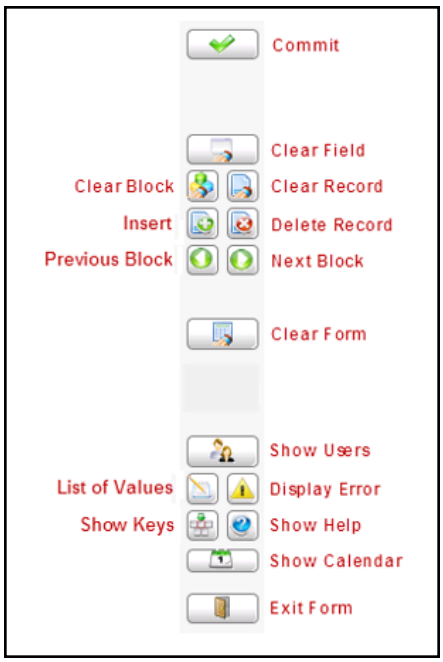


| Button | Function |
|---|---|
| Commit | Click this icon to immediately save all entered or modified data to the database. (Another button that serves the same purpose may be provided in a screen.) The keyboard equivalent is F12 (Commit). |
| Clear Field | Click this icon to clear data from the field in which the cursor rests. As an option, use the backspace key to delete data in the field. The keyboard equivalent is F5 (Clear Field). |
| Clear Block | Click this icon to clear all data in an entire block of the screen. There is no keyboard equivalent to this icon. |
| Clear Record | Click this icon to clear a record from a multi-record display. This icon will remove a record from the screen, but will not delete that record from the database. The keyboard equivalent is ALT + F5 (Clear Record). |
| Insert Record | Click this icon at the desired location in a multi-record display to insert a new record. This icon is not commonly available. The keyboard equivalent is ALT + F2 (Insert Record). |
| Delete Record | Click this icon to delete a record from the database. This icon is not usually available to departmental users. The keyboard equivalent is CTRL+ F8 (Delete Record). |
| Previous Block | Click this icon after entering all required data in a block to move the cursor to the previous block. The keyboard equivalent is CTRL + F4 (Previous Block). |
| Next Block | After entering all required data in a block, click this icon to advance the cursor to the next block. The keyboard equivalent is CTRL + F3 (Next Block). |


WellSky Corporation
Proprietary and confidential

| Button | Function |
|---|---|
| Clear Form | Click this icon to clear the screen of data without saving the data or exiting the screen. The keyboard equivalent is CTRL + F5 (Clear Form). |
| Show Users | Click this icon to call a window in which you can enter a user's name to retrieve all corresponding application user names, or enter an application user name to view the employee associated with that user name. |
| List of Values | Click this button to display a List of Values (LOV) when the cursor resides in a field containing a list of values. Use this icon as an alternative to clicking the LOV icon next to the field. The keyboard equivalent is F2 (List of Values). |
| Display Error | Click this icon after an error occurs in Donor. A window displays, providing a detailed explanation of the error situation. Information in this window will be of significant value to Blood Centers Customer Support as they attempt to resolve the error situation. The keyboard equivalent is CTRL + F7 (Display Error). |
| Show Keys | Click this button to call a window that displays functionality of various keyboard keys. The keyboard equivalent is CTRL + F1 (Show Keys). |

| Button | Function |
|---|---|
| Show Calendar | Click this button to display a monthly calendar. The current month displays by default. Select other months by using the two arrow keys on the calendar display (back and forward). Click any date in a displayed calendar, and the calendar calculates a date in the future or past based upon the number of days, weeks, months, or years you specify.<br> 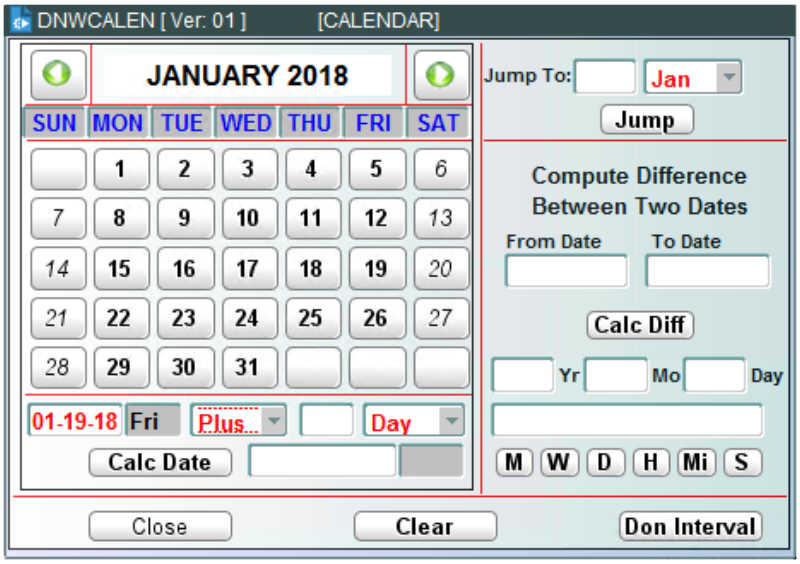 <br>**NOTE –** The calculator defaults to the server date. You may need to adjust the date for accurate calculations when using multiple time zones. |
| Exit Screen | Click this icon to exit a screen. No data will be saved to the database when this icon is clicked. The keyboard equivalent is F8 (Exit Screen). |

## 1.5.7 The Menu Structure

The Blood Centers menu is structured in a hierarchal manner that allows you to narrow menu choices until you reach the desired screen. The menus appear in the following order:

1. Main Menu displays.
2. Module Menu (lists all the modules).
3. Functional Screen Groupings Menu (groups general functions, maintenance functions, queries, and reports).
4. Individual Screens (all the screens within the selected grouping).

In any menu, you can select a menu item in any of four ways:

1. Click an item to select it, and then double-click to access the item.
2. Use the UP and DOWN arrow keys on the keyboard to highlight an item, and press ENTER to select it.

3. Select an item, and click **NEXT MENU** .

4. Type the desired menu item number, and press **ENTER** to proceed to that item.

> **NOTE –** The entire Blood Centers system is depicted in this document. However, you will see only those menus and menu items for which you have been granted access.

## The Main Menu

The Main Menu displays after you log in to the Blood Centers application.

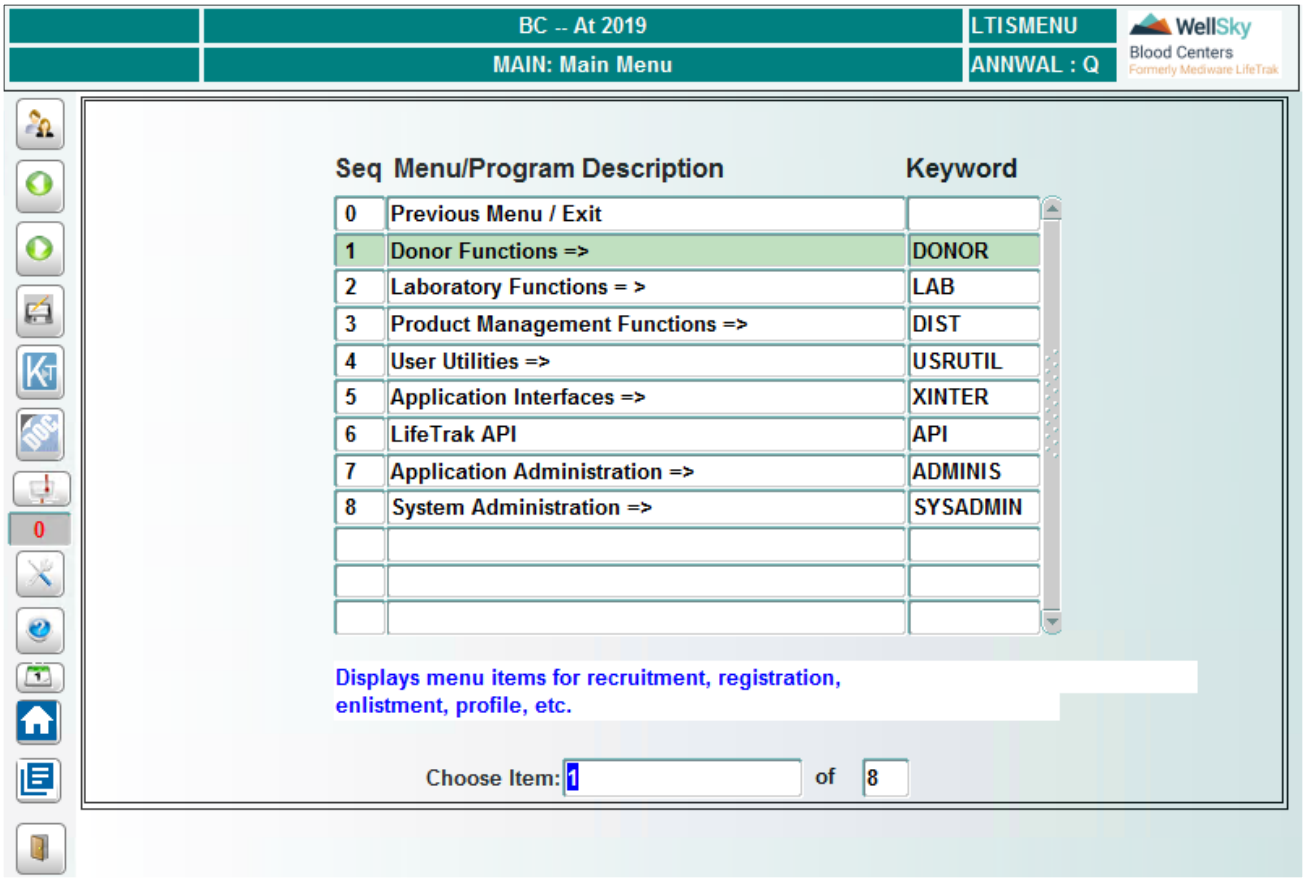


Double-click an application module to move to specific functions within the application:

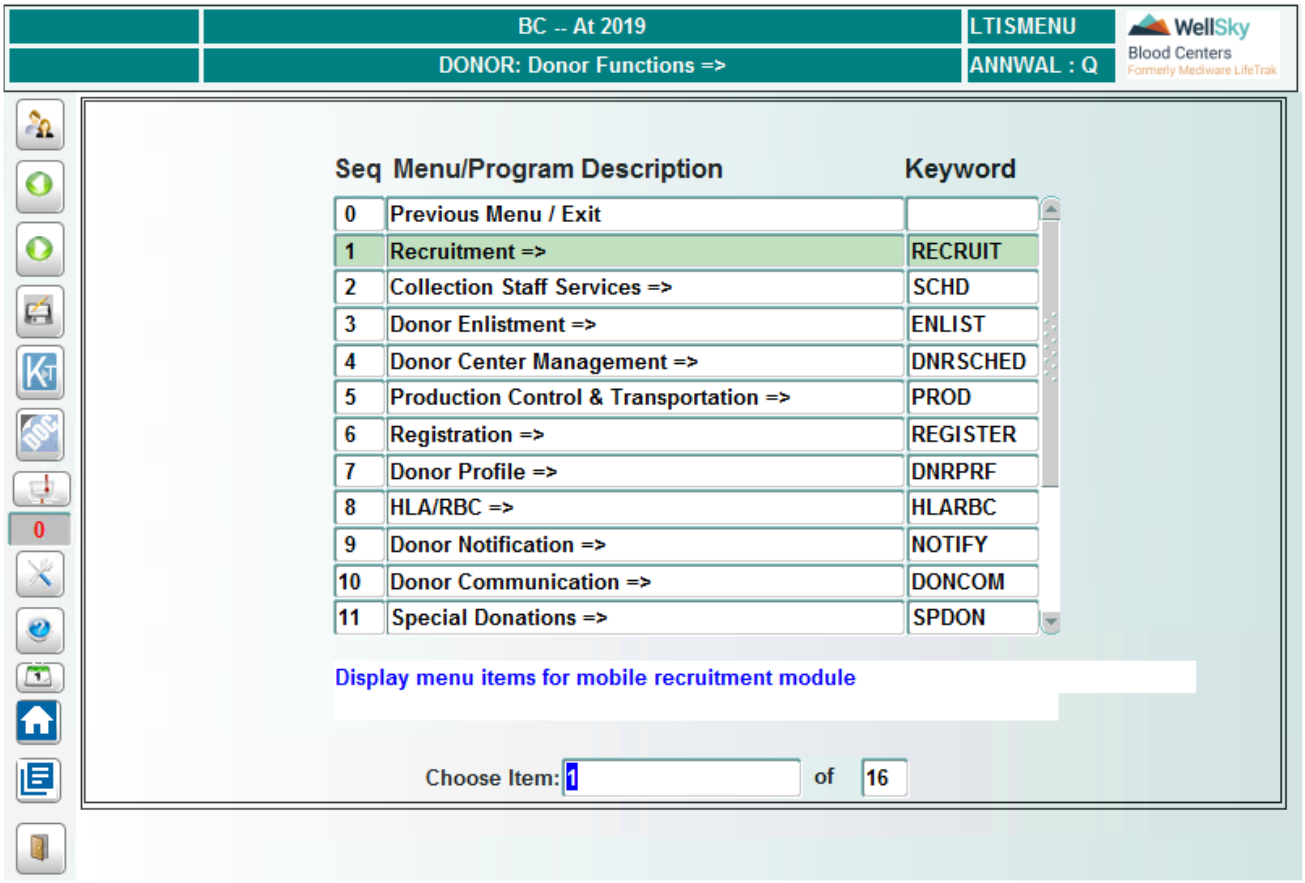


Double-click the specific function to move to that menu:

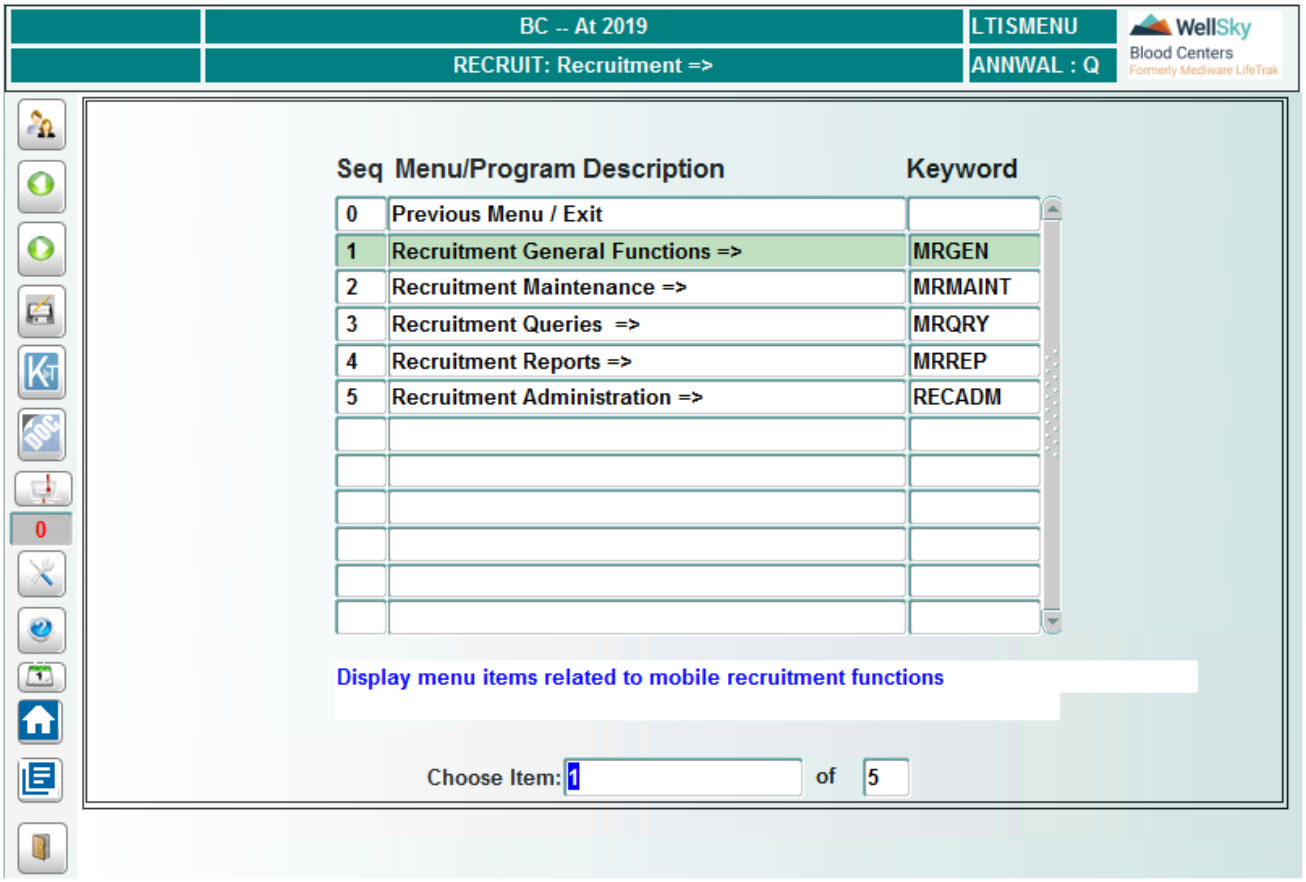


Select a functional screen grouping to advance to the menu for that grouping:

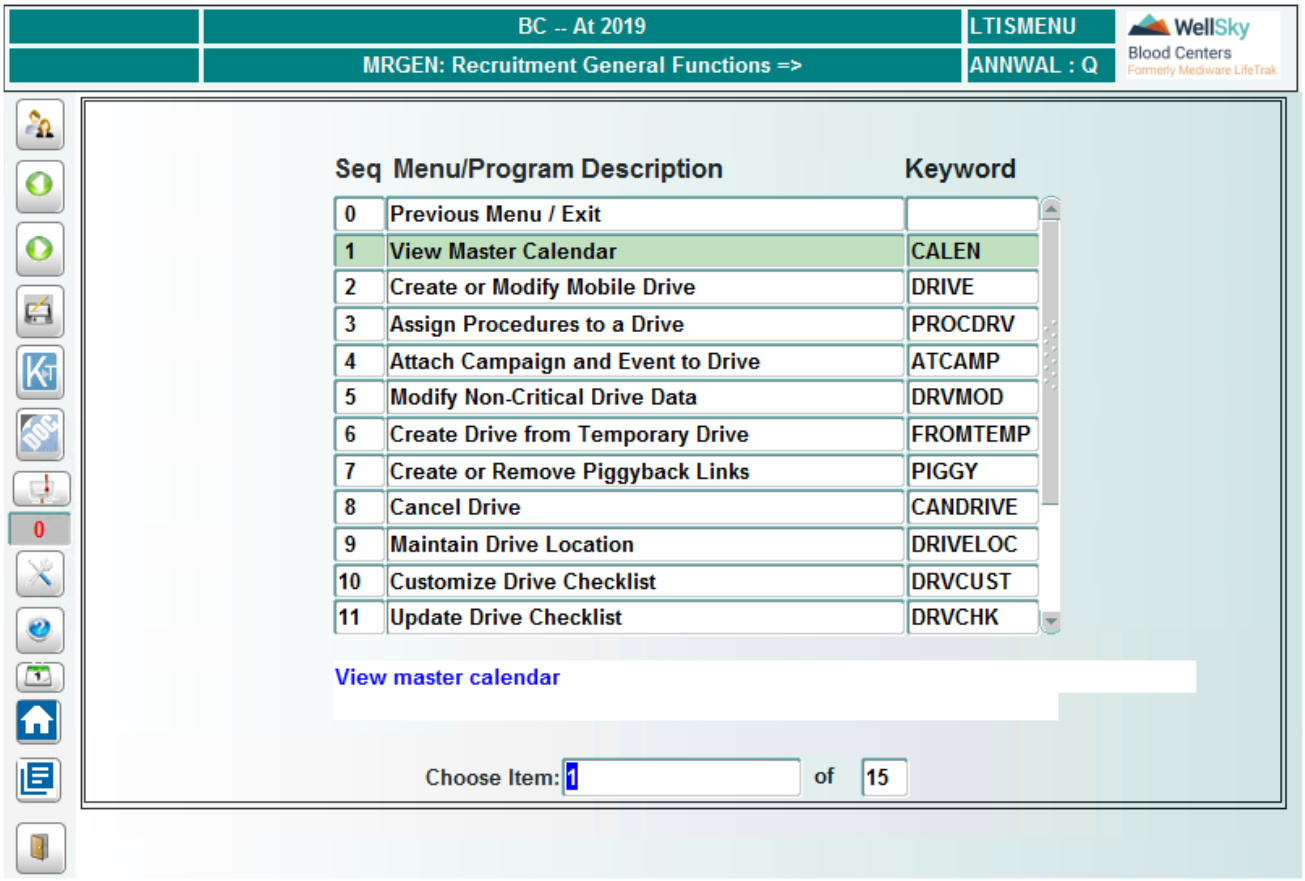


Select a function and double-click to open it:


WellSky Corporation
Proprietary and confidential

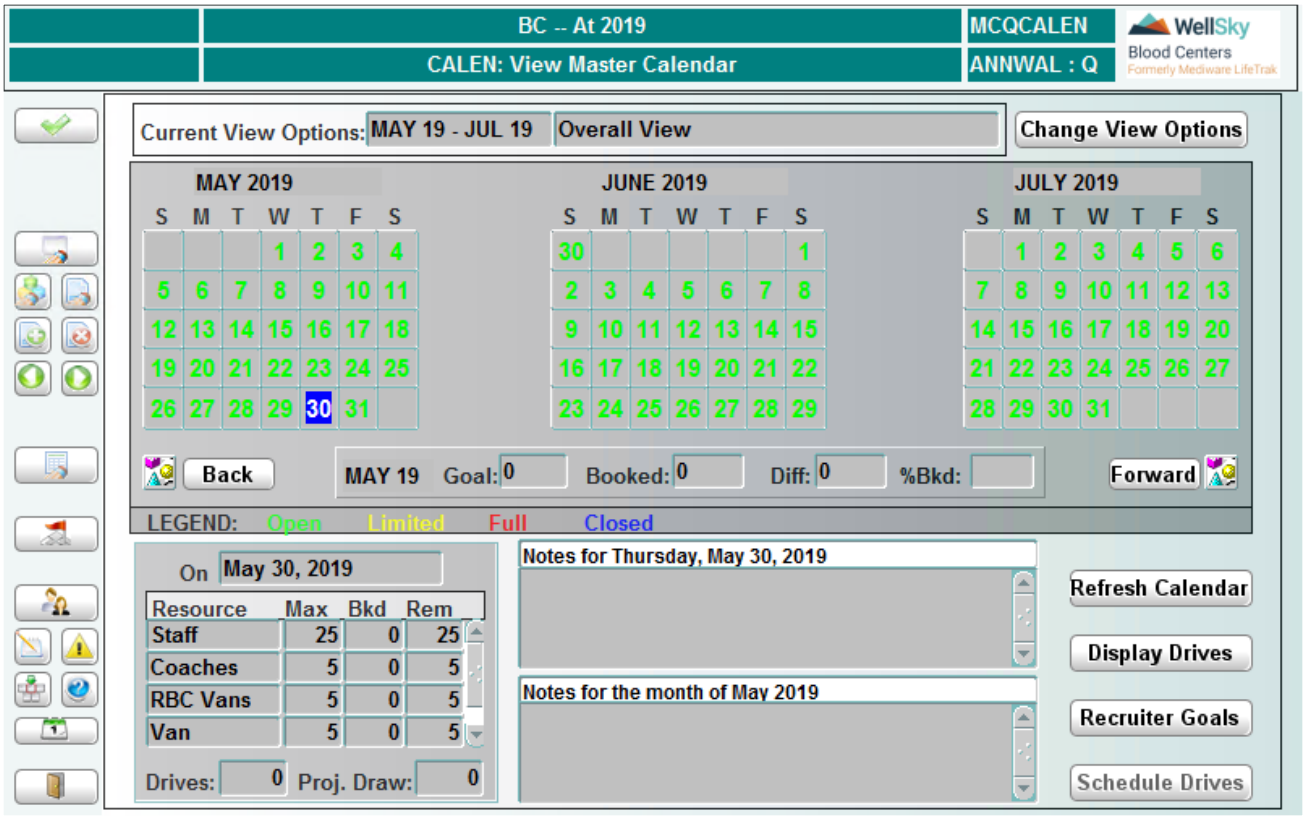


Back out of the menus one level at a time by clicking PREVIOUS MENU .

## Menu/Submenu Detail Block

The Menu/Submenu Detail Block lists submenus and screens you can access. This block contains three parts: Number, Menu/Screen Title, and Keyword.The Number Field lists the number choices for screens.

| Field | Description |
|---|---|
| Number Field | Lists number choices for screens. |
| Screen Title Field | Names screens/options to choose from on the menu. An arrow at the end of the description indicates that clicking the item will display a submenu. If there is no arrow, the item is a data screen. |
| Keyword Field | Lists keywords for screens. Keywords are unique identifiers assigned to screens and menus. |

## Description Field

The *Description* field describes the selected screen.

## Item Choice Field

The *Item Choice* field assists in moving from screen to screen. This field can be entered in one of four ways:

- By keyword
- By menu choice number
- By scrolling down to the correct choice
- By selecting from the LOV

## 1.5.8 Keywords

Go directly to a screen without moving through the menu structure by typing the screen's keyword in the *Choose Item* field of any menu except the Application Menu:

The keyword is identified in each screen to the left of the screen title in the Banner. In the View Master Calendar screen pictured below, the keyword is CALEN.

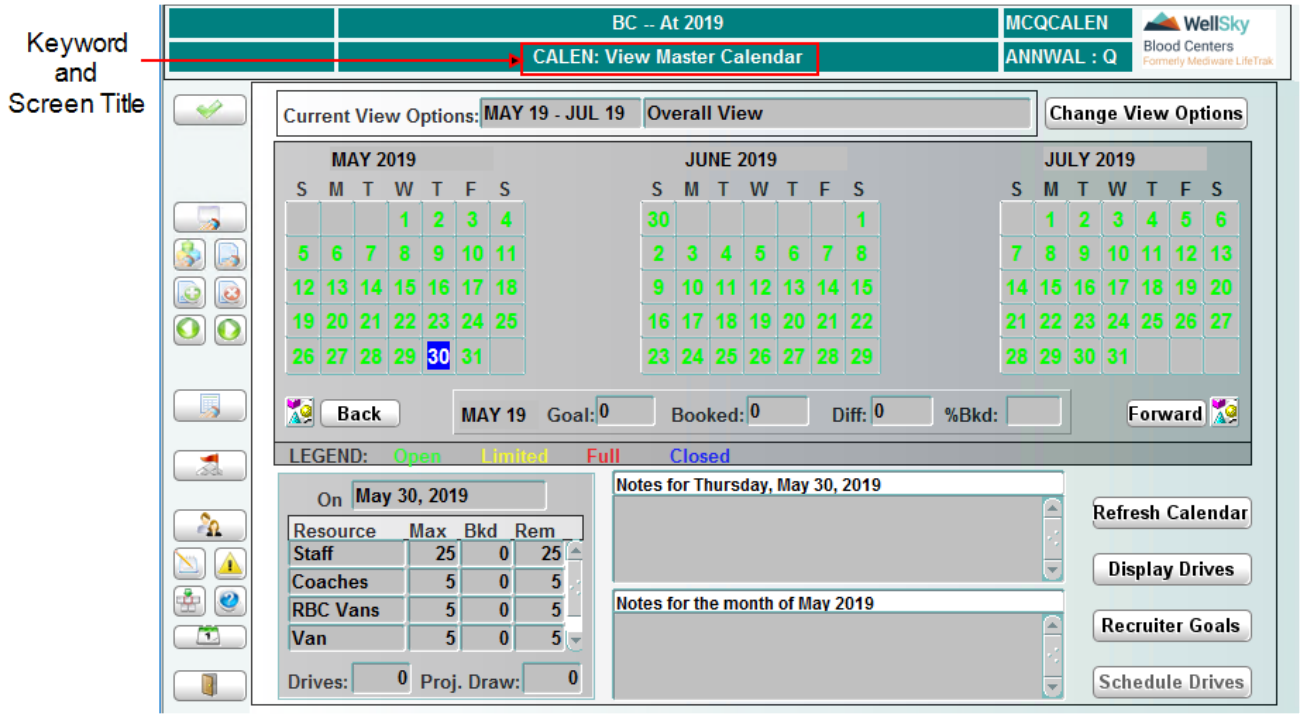


To search for a keyword, press F2 (List of Values) from any of the menu screens, and a searchable list of keywords displays:


WellSky Corporation
Proprietary and confidential

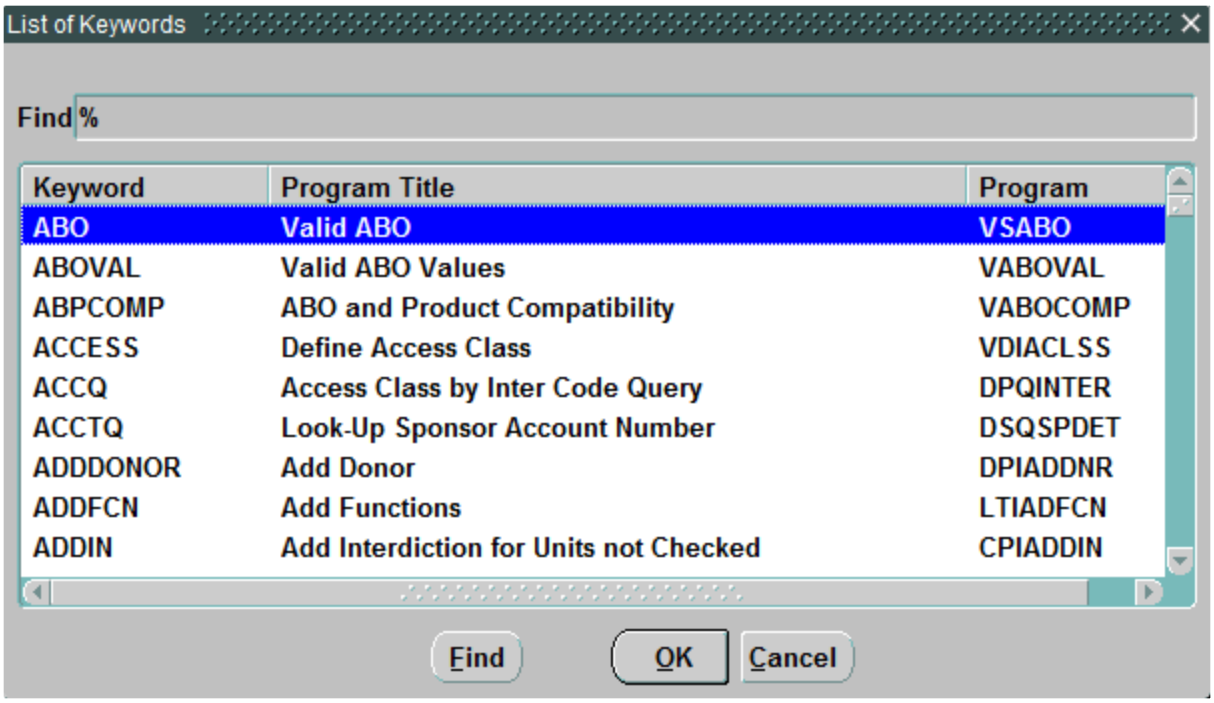


Narrow a search for a keyword by typing the first letters of the keyword. Although not a keyword, the *Find* field allows for a search string to be entered. Click **Find** to activate the search.

# 1.6 Generating a Report

## Purpose

Most Blood Centers modules have a menu devoted to generating reports. These report screens prompt the user to enter necessary parameter values, which the system uses when it searches the database. The parameter values act as pointers and tell the system where to find the required data.

For some parameters, you can enter more than one value. For instance, when generating a group/site summary report, the user can enter more than one group/site ID. This document indicates for each screen if this option is available.

After the report is generated using a report screen, it can then be reviewed on-line or printed using the User Report Actions screen or the Supervisory Report Actions screen. These screens list all the reports that are available for your review.

**NOTE –** For any report that requires ISBT unit ID (DIN) as a parameter value, do not enter its associated checksum (check digit). Entering the checksum will result in a blank report.

## Entering Data

Report screens are accessed from the report menus in each of the modules. Below is a sample report screen.

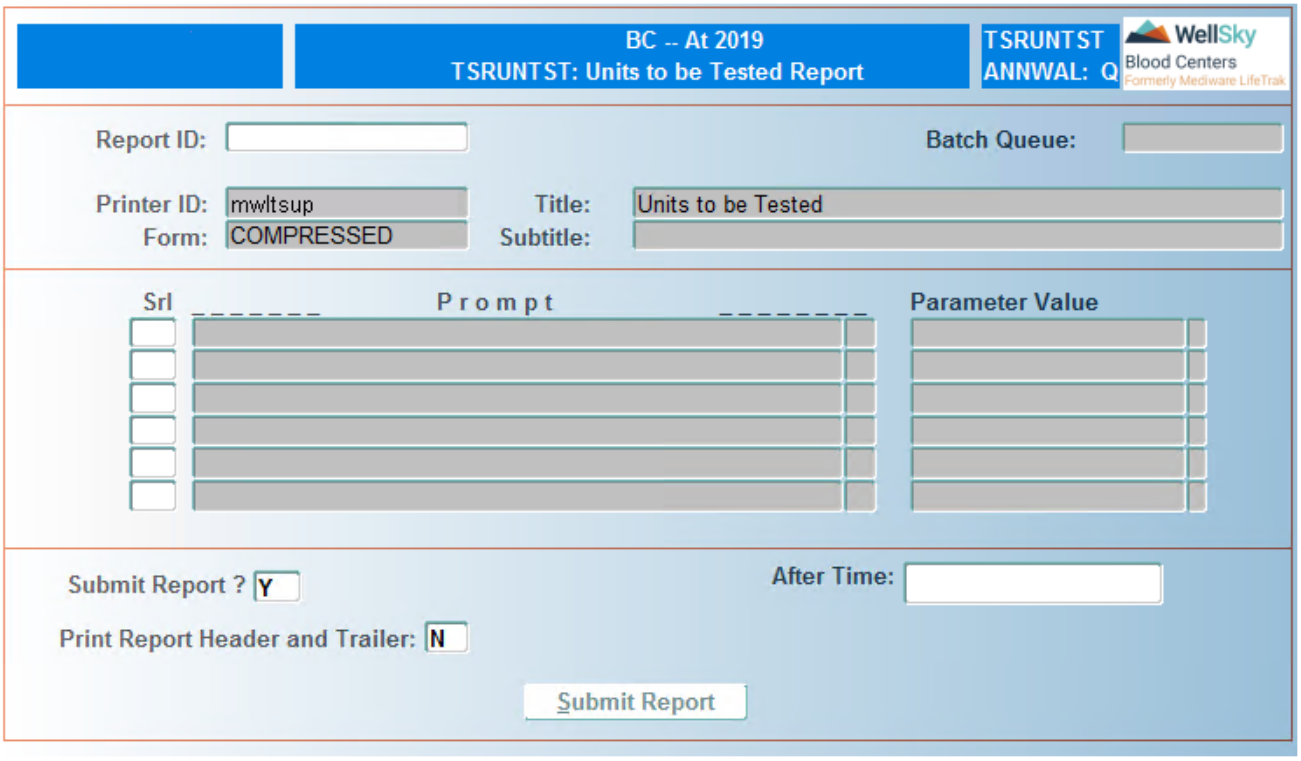


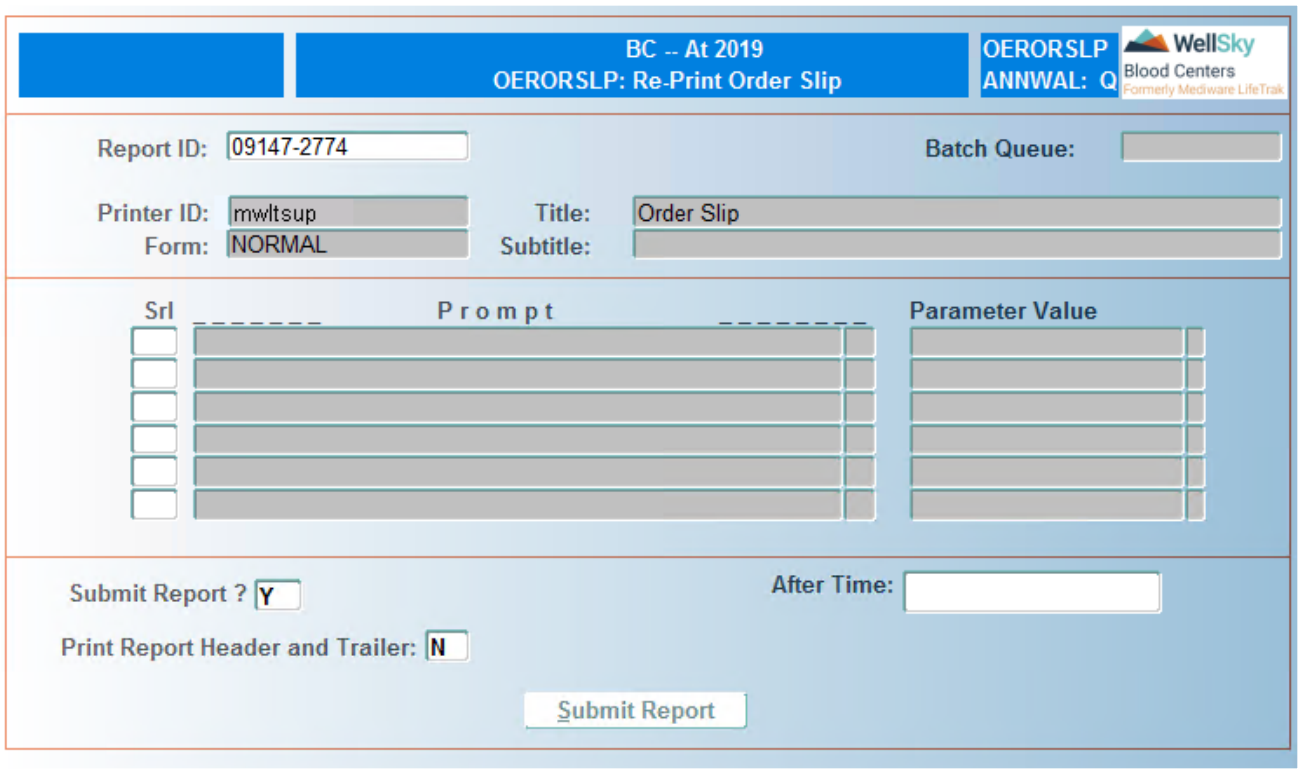


In order to generate a report, you must enter required data and parameter values in the Control Block:


WellSky Corporation
Proprietary and confidential

### Report ID

Entry is required. The system will automatically generate the report ID when you type **NEW** in the field or press ENTER to exit the field. The report ID generates with USER ID + DATE + system-generated number.

To re-print a report, open the LOV and select the report ID.

**NOTE –** Database sequence is created as part of the setup process (install script), and it is created under 'util' user. The application user is not allowed to change it. Sequence is not chapter-specific. Whenever the sequence is called, it generates the next number. For example, the current number of the sequence is 350. When the sequence is called, it increments by 1 and assigns 351. If it is called again, it assigns 352. Duplicate numbers do not happen because the database always give a unique number (next in sequence) when invoked.

### Batch Queue

Field is disabled for most reports. Do not enter any data.

After entering the required data in the Control Block, press TAB or ENTER to move to the Parameter Values section of the Report Parameters Block.

## In the Report Parameters Block

The *Prompt* field in the Report Parameters block describes the values that must be entered.. In the *Parameter Value* field, enter the first required parameter value and then press the DOWN arrow key. If an LOV is available for the parameter, press F2 (List of Values), use the UP and DOWN arrow keys to select the desired value, then press F12 (Commit). Continue entering parameter values until all are entered.

## Entering Multiple Values for a Parameter

Some of the parameters allow multiple values. To enter a multiple value, press ENTER instead of the DOWN arrow. The cursor moves to the next space in the Parameter Values section of the Report Parameters Block.

If you press ENTER for a parameter that does not allow multiple values, the hint line at the bottom of the screen displays a message to alert you that you are not allowed to enter multiple values for that parameter:




**NOTE –** This document notes which parameters allow multiple values.

## The Next Block

After entering all parameter values, press CTRL + F3 (Next Block) to move to the Submit Details block. The cursor moves to the *Submit Report* field.

### Submit Report

Entry is required. Default is Y (Yes) to generate the report; or enter N (No) to abort the report.

### Print Report Header and Trailer

Entry is required. Default is N (No) to not print a header and trailer if the report is printed; or enter `Y` (Yes) to create a cover page for the report.

### After Time

Entry is optional. To submit a report at a later time, enter the date and time, using the MM-DD-YYYY HH:MI format. This is especially useful when submitting a report within a given date range to minimally impact resources on the system. It is also used to have reports ready for work to be done overnight or on a weekend.

## The Submit Button

After entering the required and desired optional data in the Submit Details block, click **Submit** to submit the report. A window confirms that the transaction is committed in Donor:

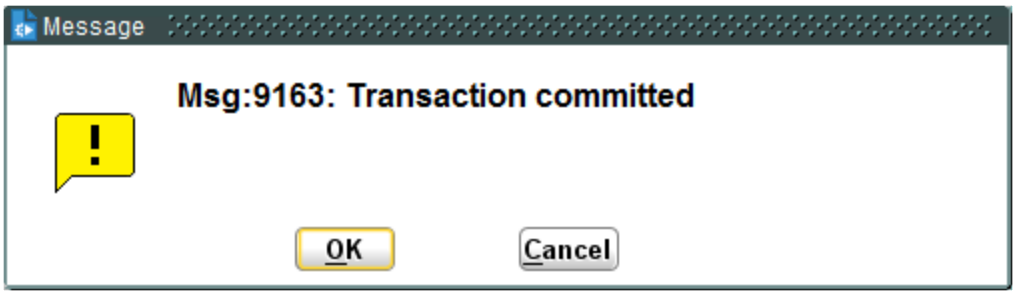


**NOTE –** Lab and Distribution will display 'Report Submitted' in the status line:

Press **ENTER** to return to the report screen.

## What to Do Next

Review the report by using the User Report Actions (PRINT) screen or the Supervisory Report Actions (SPRINT) screen.

# 1.7 Automatically Printing a Report

If your system is configured for automatic report printing, certain reports will be automatically printed to your specified network printer. You will not need to print them using PRINT or SPRINT. The reports will also be available for printing using PRINT or SPIRNT if you need to print them more than once.

The specific reports that print automatically are set up during the installation of the Blood Centers system. The network printer where the reports will print is set up by your system administrator.


WellSky Corporation
Proprietary and confidential

# 1.7.1 Called Windows and Routines

One of the advantages of the GUI environment is that windows may be called to overlay the existing screen. Such windows contain programming and functionality specific to that window. A screen's capability and functionality are significantly increased by using these called windows.

Access called windows by entering the screen or clicking buttons offered within the screen. The screen automatically calls a window in some instances, such as when required information must be entered into the system.

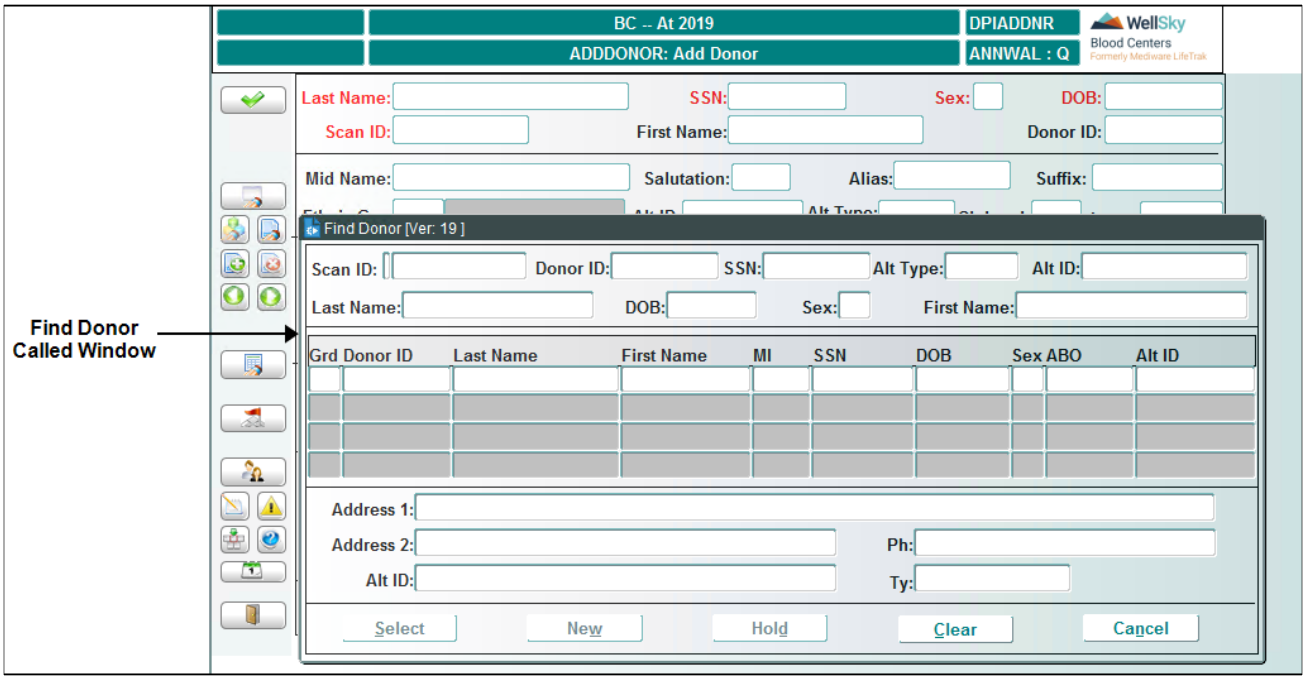


In the previous example, the screen automatically called the Find Donor window. This window accepts entry of data; but more importantly, it controls the logic to search the database for matching donors, analyze each match, and to allow or deny selection of the retrieved donors. That logic is referred to as a "routine."

These types of windows can be called in numerous screens and are addressed in Chapter 15 Called Windows and Routines of this guide. While the appearance of a called window is identical in each screen in which it is called, its full functionality may be unique in a particular screen. For example, the Find Donor called window might deny selection of a donor in one screen, and permit selection of the same donor in another screen. This is not an error. The key to the window's logic lies in the reason the window is called, and the purpose for which the donor is being identified.

Each called window includes buttons that allow you to take appropriate action, including closing the window and returning to the main screen.

## Called Screens

In some instances, one screen can directly access another screen. When a screen is accessed from another screen rather than through the menu and keyword structure, it is referred to as a called screen. When a called screen is accessed, its functionality is fully available to the user. The user's access to data, however, remains restricted to the assigned access level.

Upon conclusion of the task, you must click EXIT FORM to close the called screen and return to the original working screen. Called screens are available only if the user has access to the screen.

## Rules of Called Windows and Screens

A screen generally only calls a window that is similar in function. For example, a query screen might call a window that displays data but does not permit data entry. There are, however, exceptions to this rule when the data input is non-critical in nature.

A screen, regardless of its primary function, can call another screen regardless of its function. Whether called by another screen or accessed via the menu system, each screen always retains its full functionality and all access controls are observed.

Although a particular button that is associated to a called window or screen is seen, you must have access to use it. If the button appears gray, it is disabled and you have no access to that function.

# 1.7.2 Help Lines

Blood Centers displays a help line for most fields in most screens to assist the user in filling in the field.

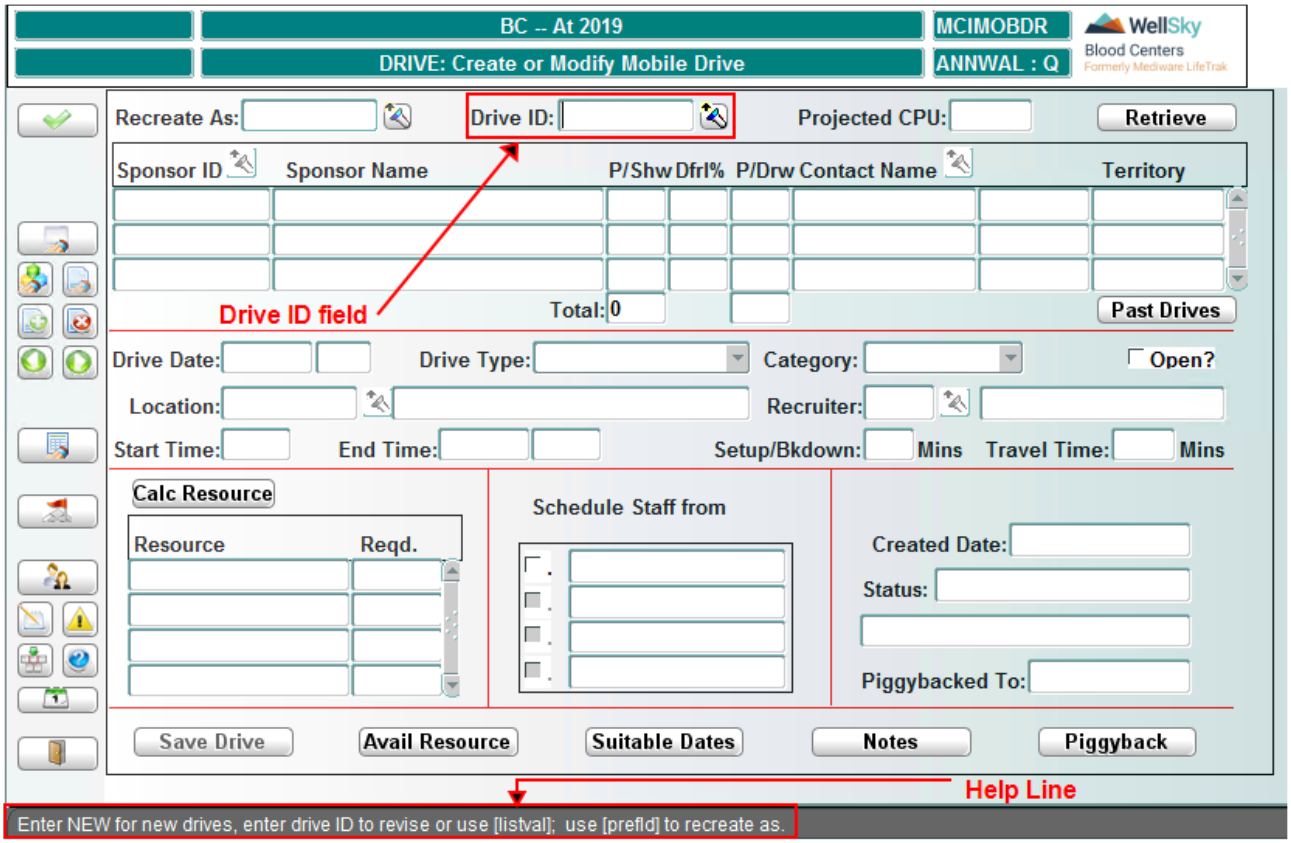


In this example, the help line directs the user to enter `NEW` for new drive, enter a Drive ID to revise, or use the List of Values (LOV). The cursor is in the *Drive ID* field, and this help message is for that field.


WellSky Corporation
Proprietary and confidential

## 1.7.3 Error Messages

Error messages appear in one of four types of pop-ups:

- System Error Messages are messages that must be acknowledged before you can continue.
- User Error Messages appear when you make an entry that cannot be accepted.
- Warning Messages display when you attempt to perform an operation that should be carefully considered before committing data to the database.
- Informational Messages display in a pop-up. Such messages are of an informational nature only, and you are required only to close the pop-up.

This Page Intentionally Left Blank

2

# Chapter 2 - Common Functions - User Utilities


2.1 Introduction ..... 66
2.2 Screens and Descriptions ..... 66
2.2.1 Find Menu Tree (TREE) ..... 66
2.2.2 Document Library (DOCLIB) ..... 68
2.3 Viewing and Printing Reports (PRINT and SPRINT) ..... 74
2.3.1 Limitations ..... 74
2.3.2 Prerequisites ..... 74
2.3.3 Accessing the Screen ..... 74

# 2.1 Introduction

The User Utilities menu (USRUTIL) contains the functions to create, send, read, and forward alert messages, change user passwords, read news, view unread news, change label printers, and query errors. Available queries allow you to view messages and locate functions via a menu.

# 2.2 Screens and Descriptions

These functions are accessed from the following menu:

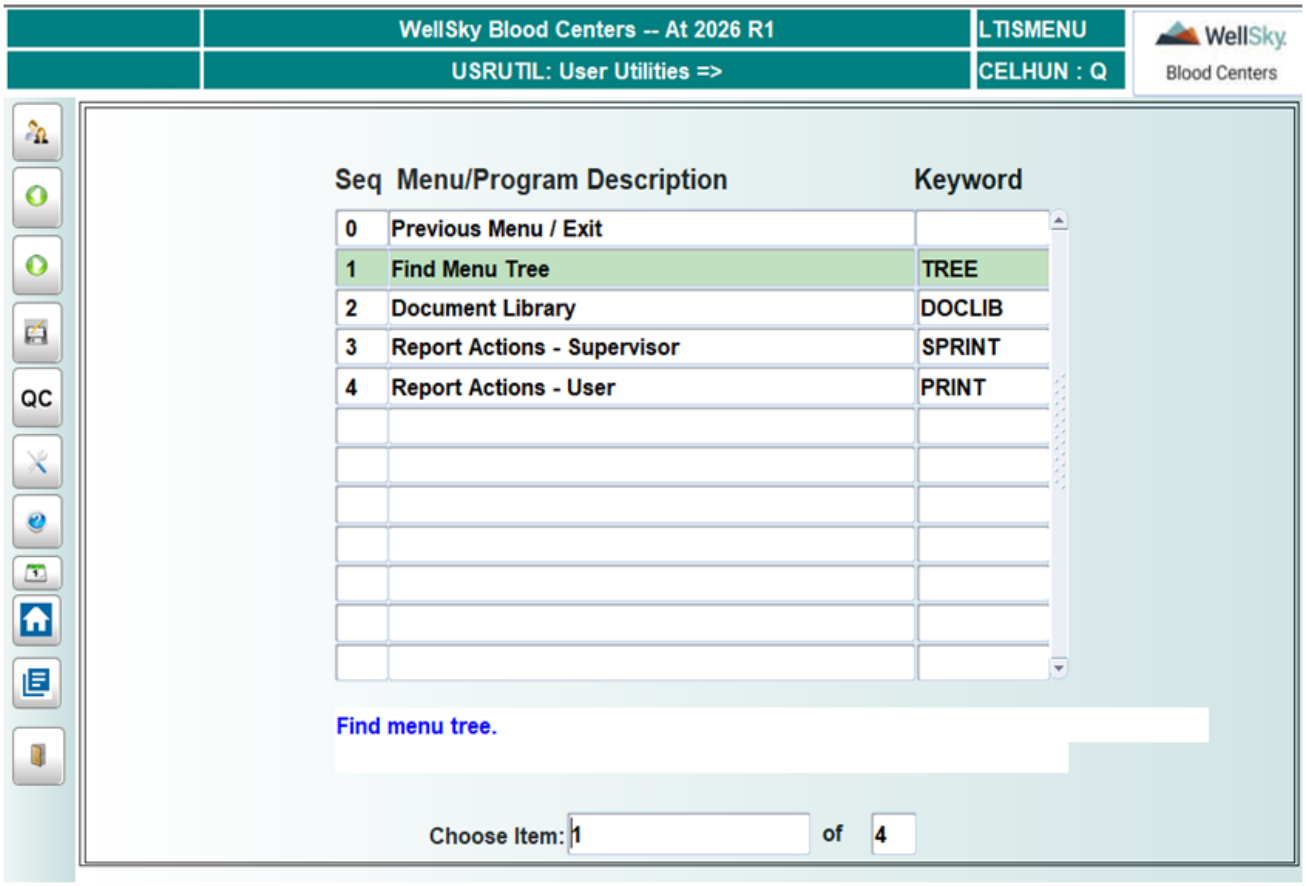


## 2.2.1 Find Menu Tree (TREE)

### Intended Use

Use this query screen to display where in the menu a particular function is located, starting from the main menu.

### Limitations

This screen only displays menu structure. You cannot access any function from this window or make any changes.


WellSky Corporation
Proprietary and confidential

# Prerequisites

None

# Accessing the Screen

Access this screen from the User Utilities menu or by entering the keyword `TREE`.

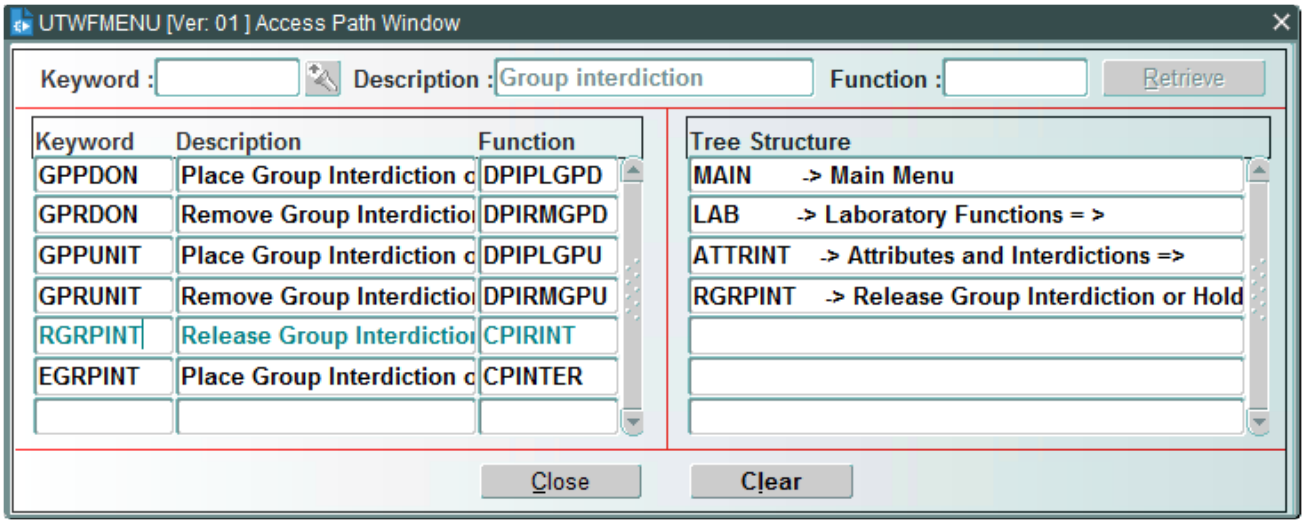


# Control Block Fields and Definitions

To retrieve data you must enter a keyword, description or function. No individual field is a required entry, but one of them must be entered in order to retrieve any information.

## Keyword

Enter a keyword or select from the LOV. This retrieves a single function. If a keyword is selected from the LOV, the description and function automatically display.

## Description

Enter a partial description of the menu item. This may retrieve multiple functions.

## Function

Enter the program name. This retrieves a single function.

Click **Retrieve** to display the function. If more than one function is retrieved, the tree structure displays for the selected function.

# At Commit

No changes can be made or saved from this screen.

# What to Do Next

There is no next step.

# 2.2.2 Document Library (DOCLIB)

## Intended Use

Use the Document Library screen to attach documents to or remove documents from donors, units, patients, etc. After documents have been attached, the same program will allow you to view the documents and print the documents, if required.

## Limitations

The documents should be accessible from the PC you are logged on to in order to be able to link the documents.

## Prerequisites

- Master Code LDOCS must be defined. The code must have a description defined with a simple description:Table name:Column name. See the Lab Master Code table for more information.
- User access must be defined in UDOC to allow the user to delete or remove a document from a specified value.

## Accessing the Screen

Access this screen from the User Utilities menu or by entering the keyword `DOCLIB`.

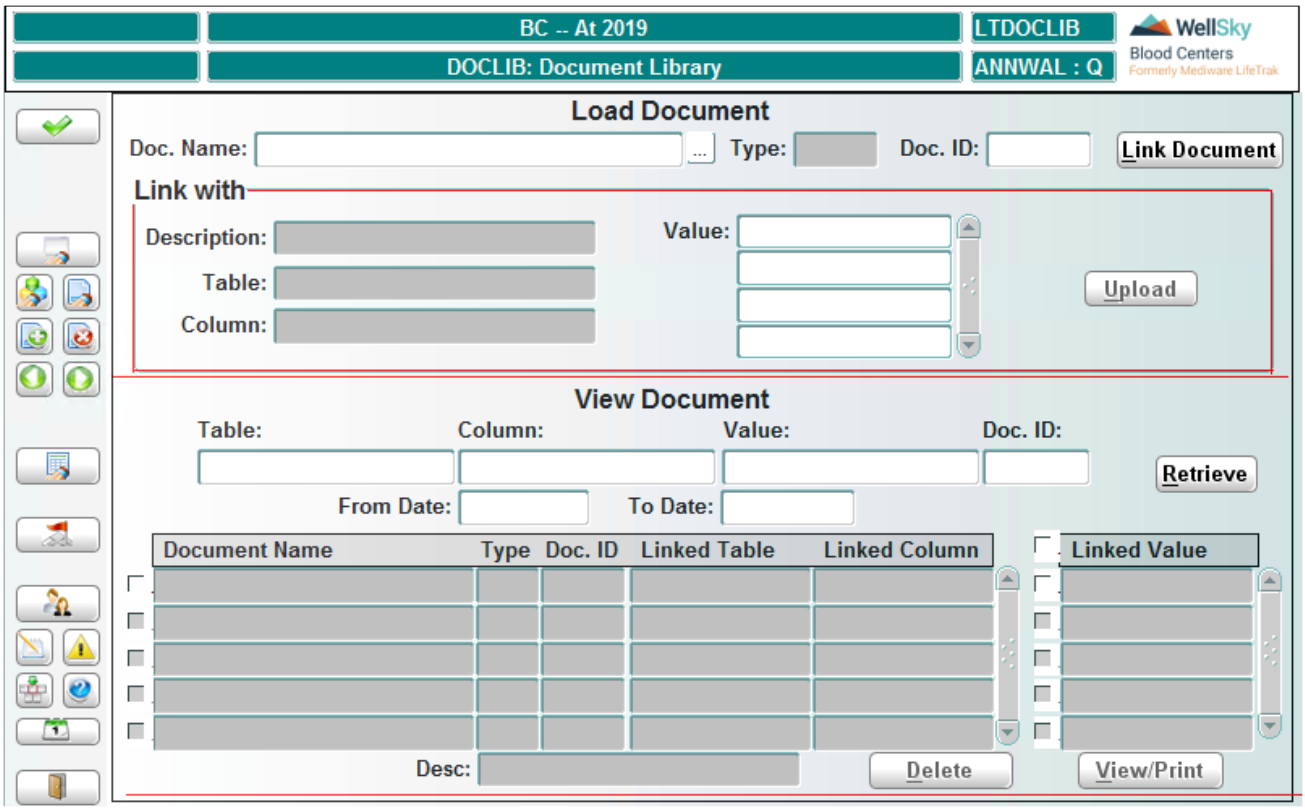



WellSky Corporation
Proprietary and confidential

# Load Document Block Fields and Definitions

## Doc. Name

To select a document, press the ... button next to the field. This will open Windows Explorer on the PC you are using. Search for the document you would like to attach, and highlight the document.

## Type

This field is for display purposes only.

## Doc. ID

Enter a document ID. This field can be used as a version number or a unique number you can define.

The DOC ID can be a maximum of 30 characters.

**NOTE –** The document ID cannot be duplicated for the same document.

**NOTE –** If you do not enter a document name or document ID, the following error message displays:

# Linking a Document

1. To link a document, you must select a document, enter a document ID, and then click **Link Document**.

   The selection list for the type of linkage to perform displays, as shown in the following figure. This list is populated through the Lab master code LDOCS.

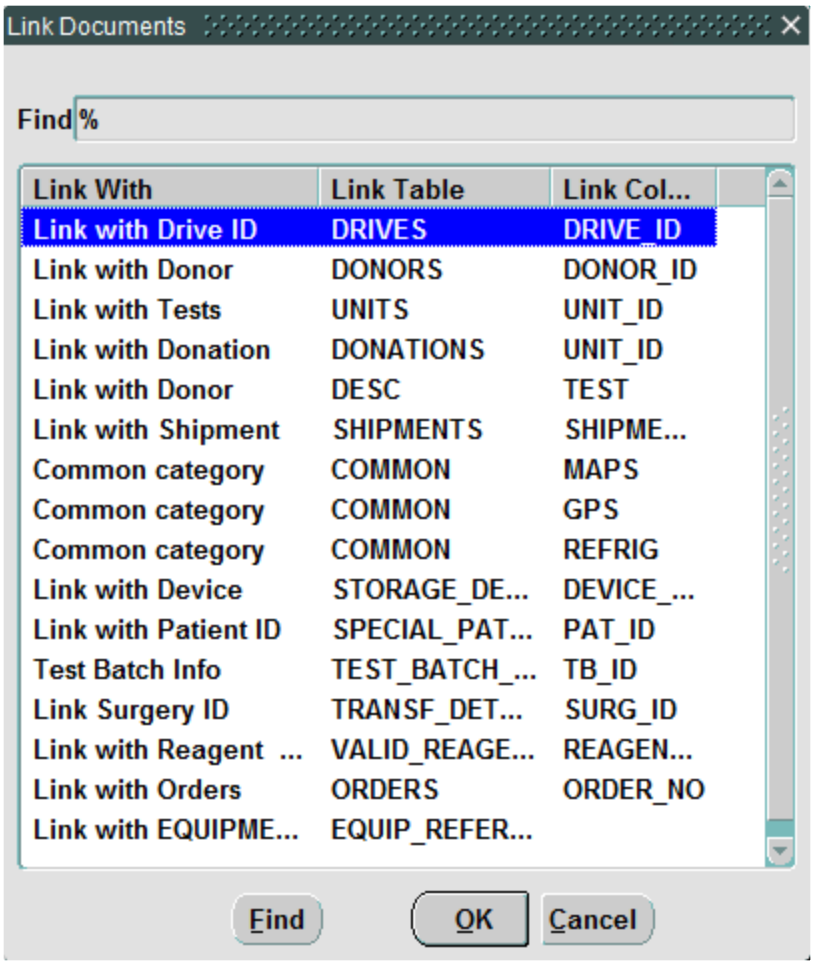


2. Select the type of link, and click **OK**.
   The selection will populate the left side of the form in the *Link with* section.

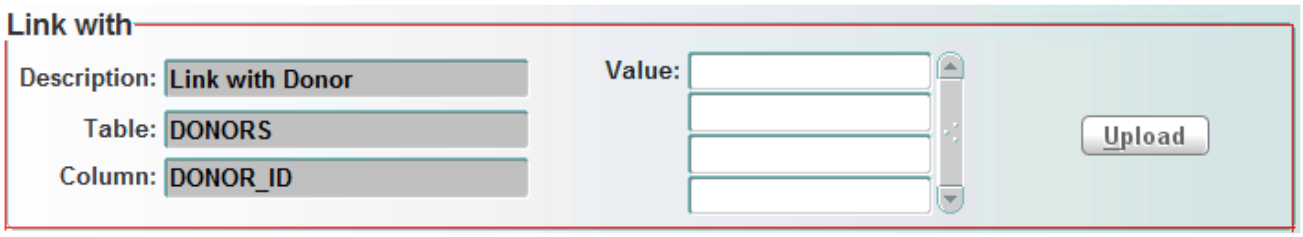


3. Enter one or more values to be linked to the document in the **Value** box(es).
4. After all of the values have been entered, tab out of the box to activate the Upload button.

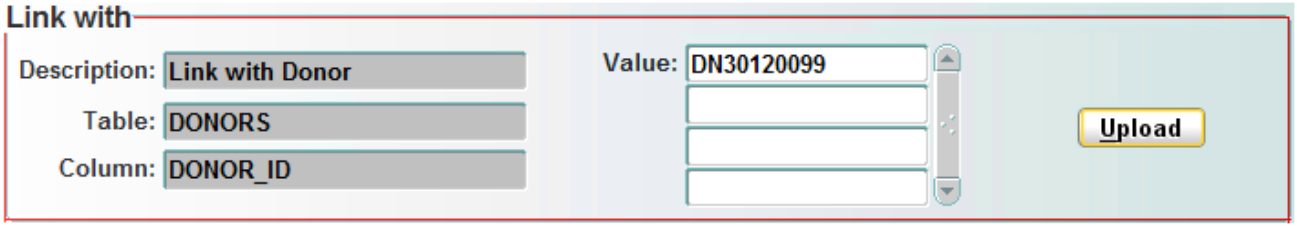



WellSky Corporation
Proprietary and confidential

5. Click **Upload**.

   Depending on the size of the file, you may see a processing box, similar to the one below.

   When the upload is finished, a message that the document has been stored displays, similar to the one below.

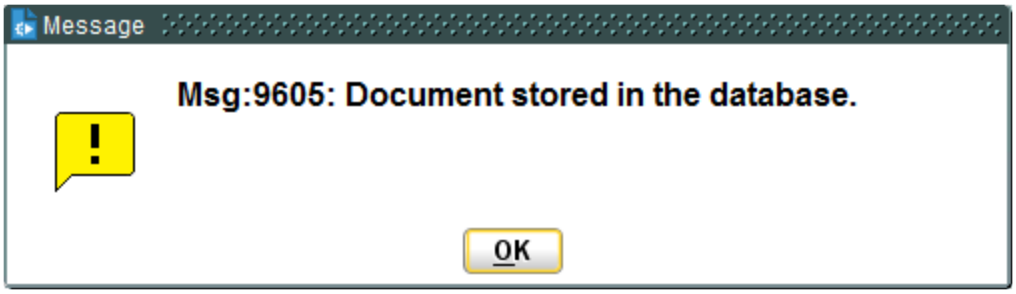


6. Click **OK**.

## View Document Block Fields and Definitions

Several fields can be used to query attached documents.

**NOTE –** Some type of search criteria must be entered. If you click **Retrieve** without entering any search criteria, the following error message displays:

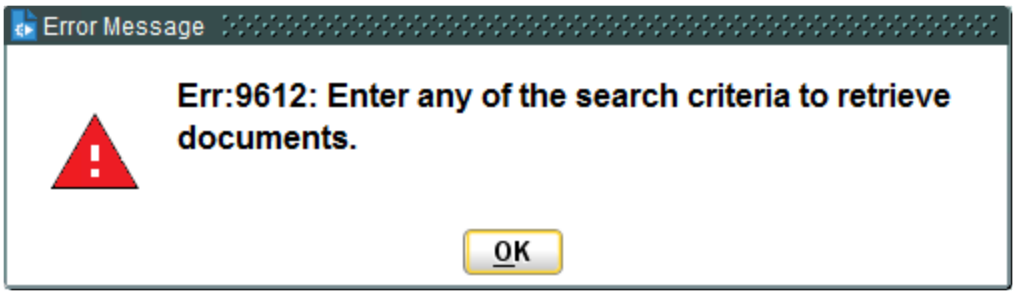


### Table

Enter a table name or select it from a list of values. The list of values comes from Lab Master Code LDOCS, and the table that have been defined in this master code.

**NOTE –** This is not a required field.

### Column

Enter a column name or select it from a list of values. The list of values comes from Lab Master Code LDOCS, and the columns that have been defined in this master code.

**NOTE –** This is not a required field.

### Value

Enter the value, but it is not required. The Value field does not have a list of values; you must know the value that was used when the document was attached.

### Doc. ID

Enter the document ID, but it is not required. The Doc ID field does not have a list of values; you must know the document ID that was used when the document was attached.

### From Date

Enter a date in the MMDDYYYY format. The From Date is associated with the date the document was inserted into the database.

**NOTE –** A date in the future is not allowed.

### To Date

Enter a date in the MMDDYYYY format. The From Date is associated with the date the document was inserted into the database. The specified To Date cannot be prior to the specified From Date.

**NOTE –** A date in the future is not allowed.

## Display Documents Attached to Linked Values

Display values are determined by the linked table and column names.

1. To view the values linked to each document name, select the check box next to the document name. The linked value(s) displays on the right side of the screen.


WellSky Corporation
Proprietary and confidential

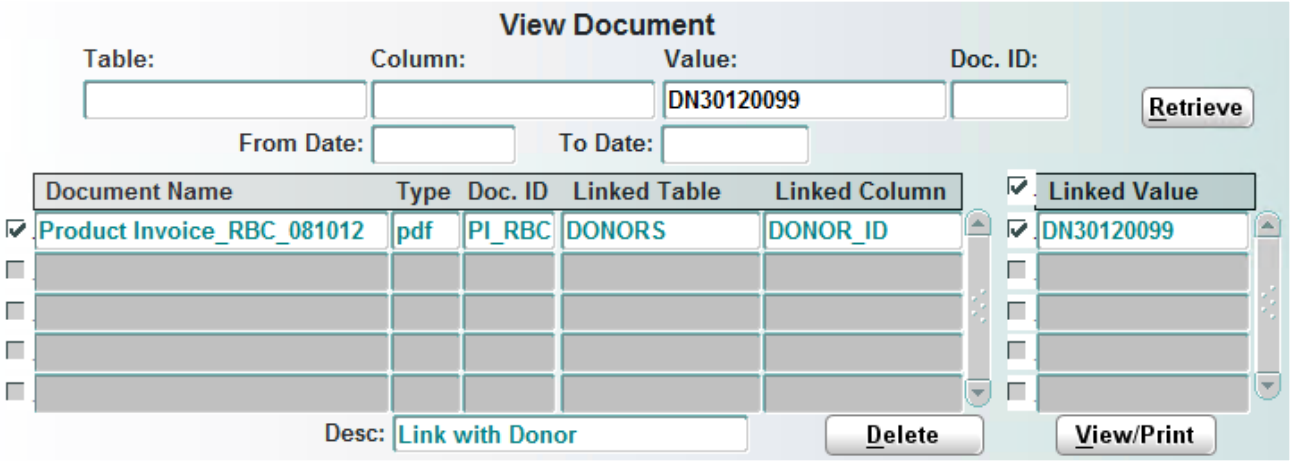


2. To scroll through the list of documents, use the scroll bar on the right side of each list to move up and down.

> **NOTE –** The description in the Desc box describes the type of link that was placed on the document.

## View/Print Attached Documents

1. Select the document that you want to view or print by clicking the check box next to the document name.
2. Press **View/Print**, or use `ALT+V`.
   Depending on the size of the file, you may see a processing box, similar to the one below.

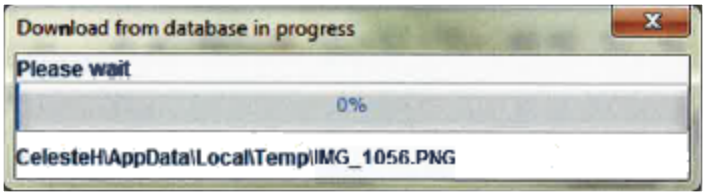


   When the download process completes, the document will display for viewing and printing.

## Delete Attached Documents

To delete or remove a document, the user must have access to UDOC. This is defined under User Access.

> **NOTE –** The Delete button will not be active if the user does not have access to UDOC.

1. Select the document that you want to delete by clicking the check box next to the document name.
2. Click **Delete**. The following message displays:

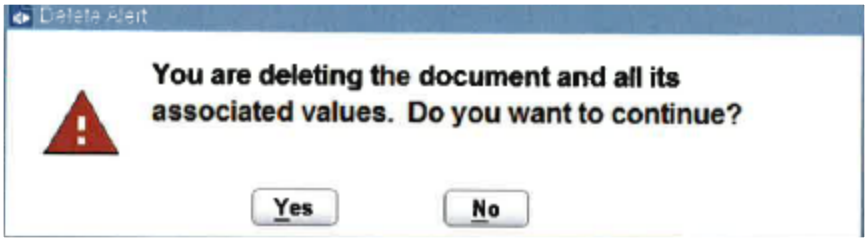


3. Do one of the following:
    - Click **Yes** to remove the document. You will receive a confirmation message once the document is removed.
    - Click **No** to cancel the process and clear the message.

## Main Menu Tool Bar

There is a button ( ) on the Main Menu Tool Bar that you can use to access the document library. Access to the Document Library button will be the same as the access defined in the MENUITM screen for the LTDOCLIB program.

**NOTE –** This button is only located on the Main Menu Tool Bar. It is not available under individual programs.

## What to Do Next

Go back to the User Utilities menu (USRUTIL).

# 2.3 Viewing and Printing Reports (PRINT and SPRINT)

## Intended Use

Use the Report Actions – User (PRINT) screen or the Report Actions – Supervisor (SPRINT) screen to review or delete a report. The user mode allows you to access reports you generated. The supervisory mode allows you to access reports generated by other users within your same functional group.

## 2.3.1 Limitations

You must have supervisory access to use the Report Actions – Supervisor (SPRINT) screen.

## 2.3.2 Prerequisites

You must have generated reports already.

## 2.3.3 Accessing the Screen

Access these screens from the System Administration/Report Administration/Blood Center Report Maintenance menu or by entering the keywords `PRINT` or `SPRINT`.


WellSky Corporation
Proprietary and confidential

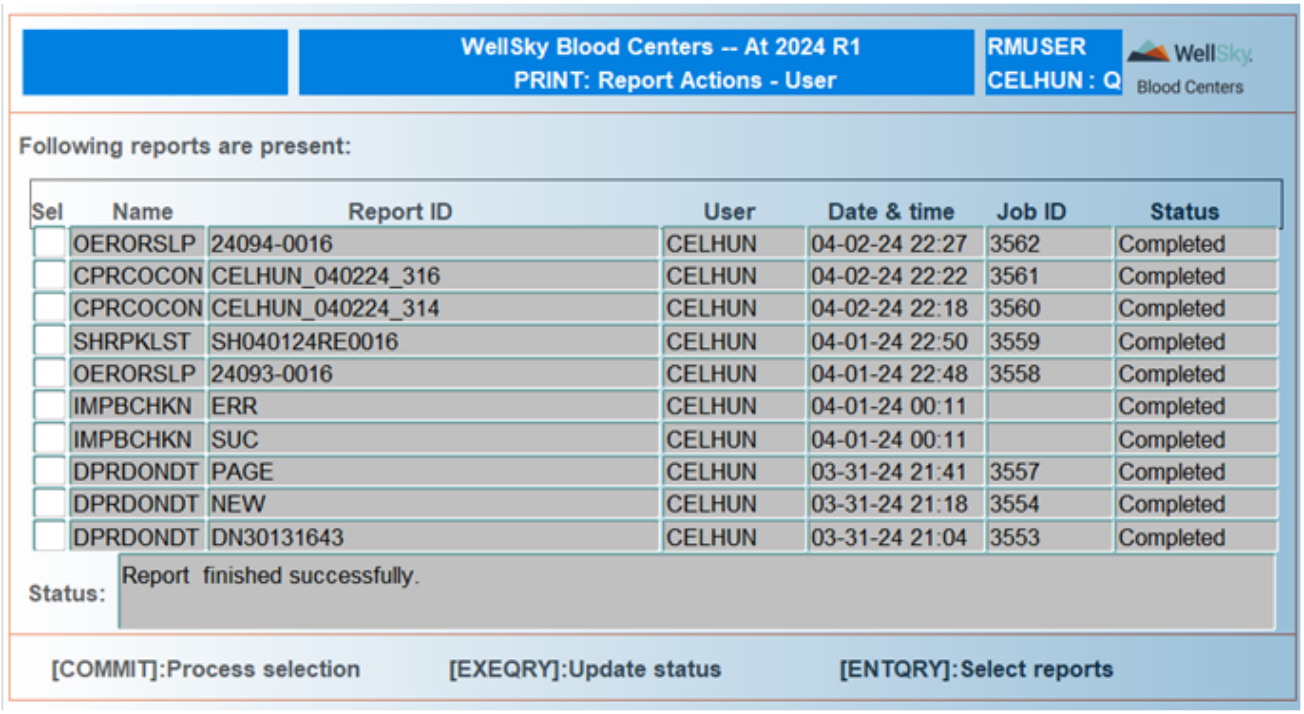


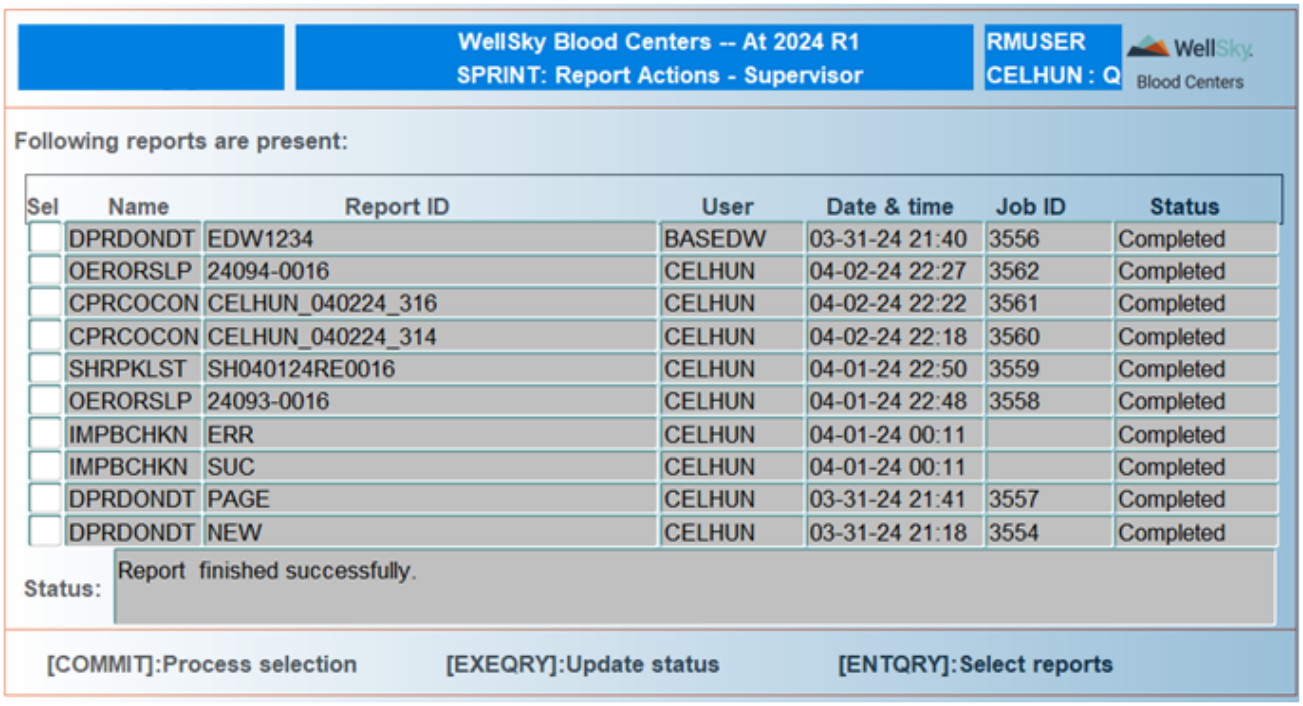


## Refreshing the Status Field

If a report is not complete, press ALT + F12 (Execute Query) to update the status.

System parameter PRINTTIMER can be defined with the number of seconds to automatically refresh the page.

**NOTE –** In order to review a report, the report status must show as *Completed* in the Status column.

## Searching for a Report

If the list of reports is long, you can search for specific criteria by following these procedures:

1. Press CTRL + F12 (Enter Query).
2. Tab to the field you want to use for your search.
3. Enter a value.
4. Press ALT + F12 (Execute Query).

## Selection Options

Select a report and choose either R (Review) or D (Delete) from the drop-down list in the *Selection* field.

## Review

Use this option to display the report in a separate Internet Explorer window (created in a .pdf format).

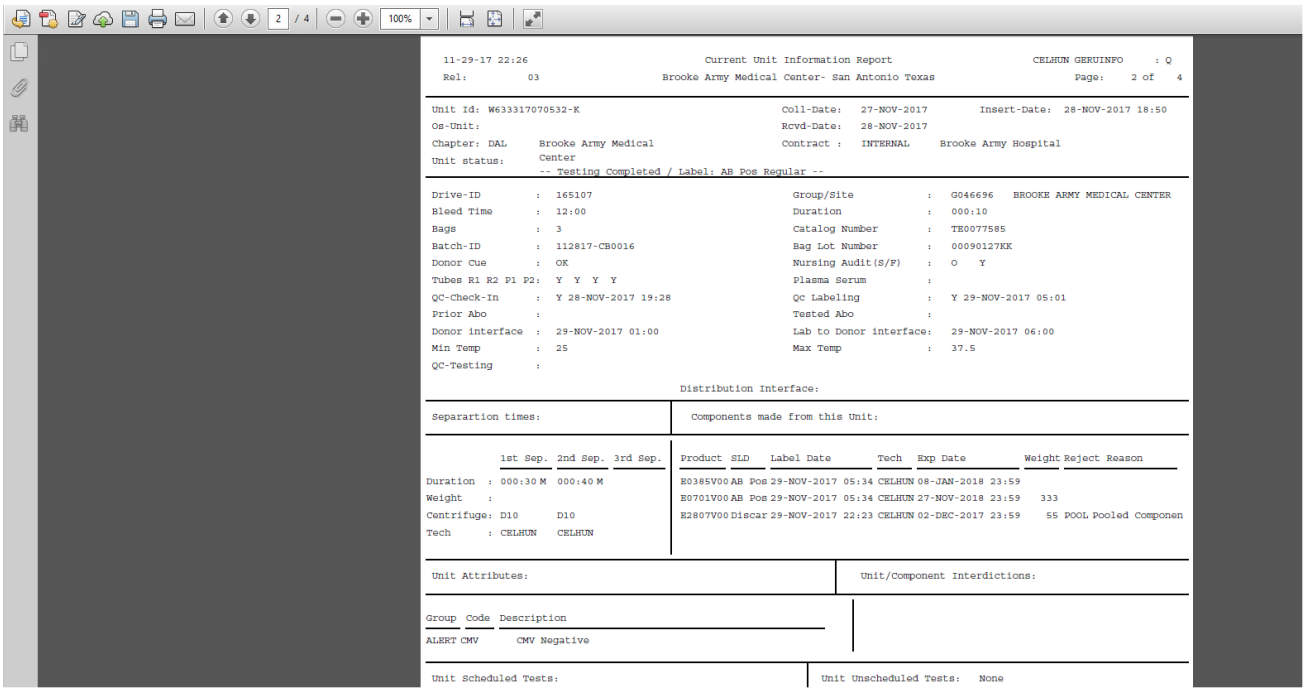

11-29-17 22:26 Current Unit Information Report CELHUN GERUINFO : Q
Rel: 03 Brooke Army Medical Center- San Antonio Texas Page: 2 of 4

Unit Id: W633317070532-K Coll-Date: 27-NOV-2017 Insert-Date: 28-NOV-2017 18:50
Os-Unit: Rcvd-Date: 28-NOV-2017
Chapter: DAL Brooke Army Medical Center Contract : INTERNAL Brooke Army Hospital
Unit status: -- Testing Completed / Label: AB Pos Regular --

Drive-ID : 165107 Group/Site : G046696 BROOKE ARMY MEDICAL CENTER
Bleed Time : 12:00 Duration : 000:10
Bags : 3 Catalog Number : TE0077585
Batch-ID : 112817-CB0016 Bag Lot Number : 00090127KK
Donor Cue : OK Nursing Audit(S/F) : O Y
Tubes R1 R2 P1 P2: Y Y Y Y Plasma Serum :
QC-Check-In : Y 28-NOV-2017 19:28 Qc Labeling : Y 29-NOV-2017 05:01
Prior Abo : Tested Abo :
Donor interface : 29-NOV-2017 01:00 Lab to Donor interface: 29-NOV-2017 06:00
Min Temp : 25 Max Temp : 37.5
QC-Testing :

Distribution Interface:

Separartion times:

| | 1st Sep. | 2nd Sep. | 3rd Sep. |
|---|---|---|---|
| Duration : | 000:30 M | 000:40 M | |
| Weight : | | | |
| Centrifuge: | D10 | D10 | |
| Tech : | CELHUN | CELHUN | |

Components made from this Unit:

| Product | SLD | Label | Date | Tech | Exp Date | Weight | Reject Reason |
|---|---|---|---|---|---|---|---|
| E0385V00 | AB Pos | 29-NOV-2017 05:34 | CELHUN | 08-JAN-2018 23:59 | | | |
| E0701V00 | AB Pos | 29-NOV-2017 05:34 | CELHUN | 27-NOV-2018 23:59 | 333 | | |
| E2807V00 | Discar | 29-NOV-2017 22:23 | CELHUN | 02-DEC-2017 23:59 | 55 | POOL Pooled Componen | |

Unit Attributes:

| Group | Code | Description |
|---|---|---|
| ALERT | CMV | CMV Negative |

Unit/Component Interdictions:

Unit Scheduled Tests:

Unit Unscheduled Tests: None

The report will open in Adobe Reader. If you are using Adobe Reader X, the file may open in read-only mode, in which case the toolbars at the top of the screen will not display. To display the toolbars for the report currently displayed, click the following icon at the bottom of the screen:


WellSky Corporation
Proprietary and confidential

The toolbars will display for the report currently being reviewed. The next time you open a report for review, the toolbars will not display.

If you want to display the toolbars for all reports you open in the future, you must change the Adobe Reader X setting so that it does not open in read-only mode. To do this, do the following:

1. Open Adobe Reader X.
2. Select **Edit -> Preferences**.
3. Select **Internet** under Categories.
4. Clear the *Display in Read Mode by default* check box.
5. Click **OK**.

The next time you review a report, the toolbars will display at the top of the screen.

Once displayed, all normal Adobe Reader functions (search, zoom, print, etc.) are available.

**NOTE –** Any generated report can be reviewed at any time and as often as needed by using the PRINT function. Alternatively, a report that is currently being displayed in Adobe Reader can be saved to the local (generally C:) drive. Once saved, this report is available for viewing at any time.

## Delete

Use this option to delete a report from the Available Reports list. After making the report selections, click **Process Selections** to delete the report. The following message displays to confirm the action:

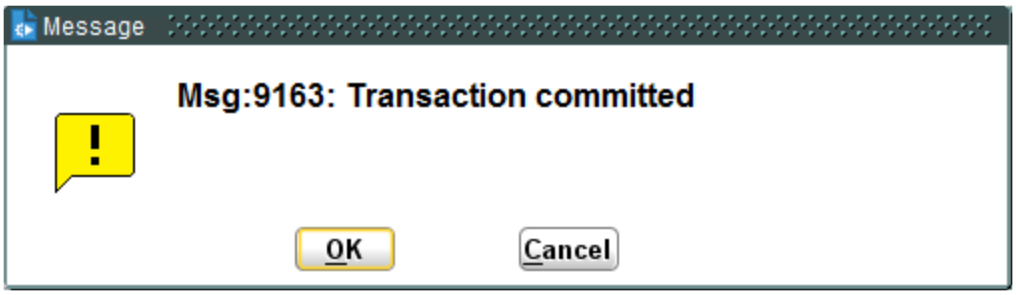


Click **OK** to return to the main window. The screen is cleared of selected actions and deleted reports are no longer listed.

Click **Cancel** to return to the main window without removing the selected reports from the list.

## What to Do Next

There is no next step.

This Page Intentionally Left Blank

[Donor Functions (DONOR)]

This Page Intentionally Left Blank

3

# Chapter 3 - Recruitment


3.1 Introduction ..... 83
3.1.1 Structure ..... 83
3.2 Recruitment General Functions ..... 84
3.2.1 View Master Calendar (CALEN) ..... 84
3.2.2 Create or Modify Mobile Drive (DRIVE) ..... 89
3.2.3 Modify Non-Critical Drive Data (DRVMOD) ..... 96
3.2.4 Create Drive from Temporary Drive (FROMTEMP) ..... 98
3.2.5 Cancel Drive (CANDRIVE) ..... 102
3.2.6 Maintain Drive Location (DRIVELOC) ..... 104
3.2.7 Customize Drive Checklist (DRVCUST) ..... 109
3.2.8 Update Drive Checklist (DRVCHK) ..... 112
3.2.9 Create Drive Sponsor Profile (SPON2) ..... 116
3.2.10 Maintain Sponsor Contacts (SPONCONT) ..... 126
3.2.11 Customize Checklist for a Sponsor (SPONCHK) ..... 130
3.2.12 Define Sponsor Rollover Preferences (SPONROLL) ..... 132
3.3 Recruitment Maintenance ..... 137
3.3.1 Confirm On-Hold Drives (CONFIRM) ..... 137
3.3.2 Modify Drive Details – Super (SDRIVE) ..... 140
3.3.3 Create or Modify Special Drives (SPDRIVE) ..... 141
3.3.4 Cancel Special Drive (CANSPDRV) ..... 144
3.3.5 Define Resource Exceptions (RESXP) ..... 147
3.3.6 Enter Calendar Highlights (HILITE) ..... 150
3.3.7 Enter Promotional Items (ITEMS) ..... 153
3.3.8 Assign Territory to Recruiter (TTOR) ..... 155
3.3.9 Determine Care-Taker Recruiter (CTREC) ..... 158
3.3.10 Merge Duplicate Sponsors (SPMRG) ..... 160
3.4 Recruitment Queries ..... 164
3.4.1 Drive Details Query (DRIVEQ) ..... 164
3.4.2 Multiple Drive Selection Query (MDRIVEQ) ..... 169
3.4.3 Drives and Goals by Recruiter Query (RECQ) ..... 174
3.4.4 Monthly Collection Goals Query (GOALMONQ) ..... 177

3.4.5 Collection Goals by Date Query (GOALDTQ) ..... 181
3.4.6 Sponsors by Territory Query (SBYTQ) ..... 183
3.4.7 Sponsor Contacts Query (SPCONQ) ..... 187
3.4.8 Parent Sponsors Query (PSPONQ) ..... 189
3.4.9 Drives by Sponsor Query (DRSPONQ) ..... 191
3.4.10 Territory Statistics Query (TERQ) ..... 194
3.4.11 Goals vs Booked and Actuals Query (SAYQ) ..... 199
3.4.12 Draw Query (DRAWQ) ..... 203
3.4.13 Drives by Creation Date Query (CDQ) ..... 207
3.4.14 Temporary Drives Query (TDRIVEQ) ..... 210
3.4.15 Resource Status Query (RSTATQ) ..... 212
3.4.16 Recruiter Territories Query (RTQ) ..... 214
3.4.17 Goals vs Proj vs Actual Collections (BBQ) ..... 216


WellSky Corporation
Proprietary and confidential

# 3.1 Introduction

The Recruitment Module is that portion of Donor designed to break down the various tasks of recruiter users and supervisors into specific functionalities.

The following screens provide the ability to perform necessary every day tasks; for example, booking and canceling drives; creating and modifying sponsors and sponsor locations; assigning procedures, campaigns, and events to drives; customizing and modifying check lists for sponsors.

## 3.1.1 Structure

The following sections are included in the Donor Recruitment module:

- Recruitment General Functions
- Recruitment Maintenance
- Recruitment Queries

Recruitment Reports are described in the *WellSky® Blood Centers Reports Guide*.

# 3.2 Recruitment General Functions

These functions are accessed from the following menu:

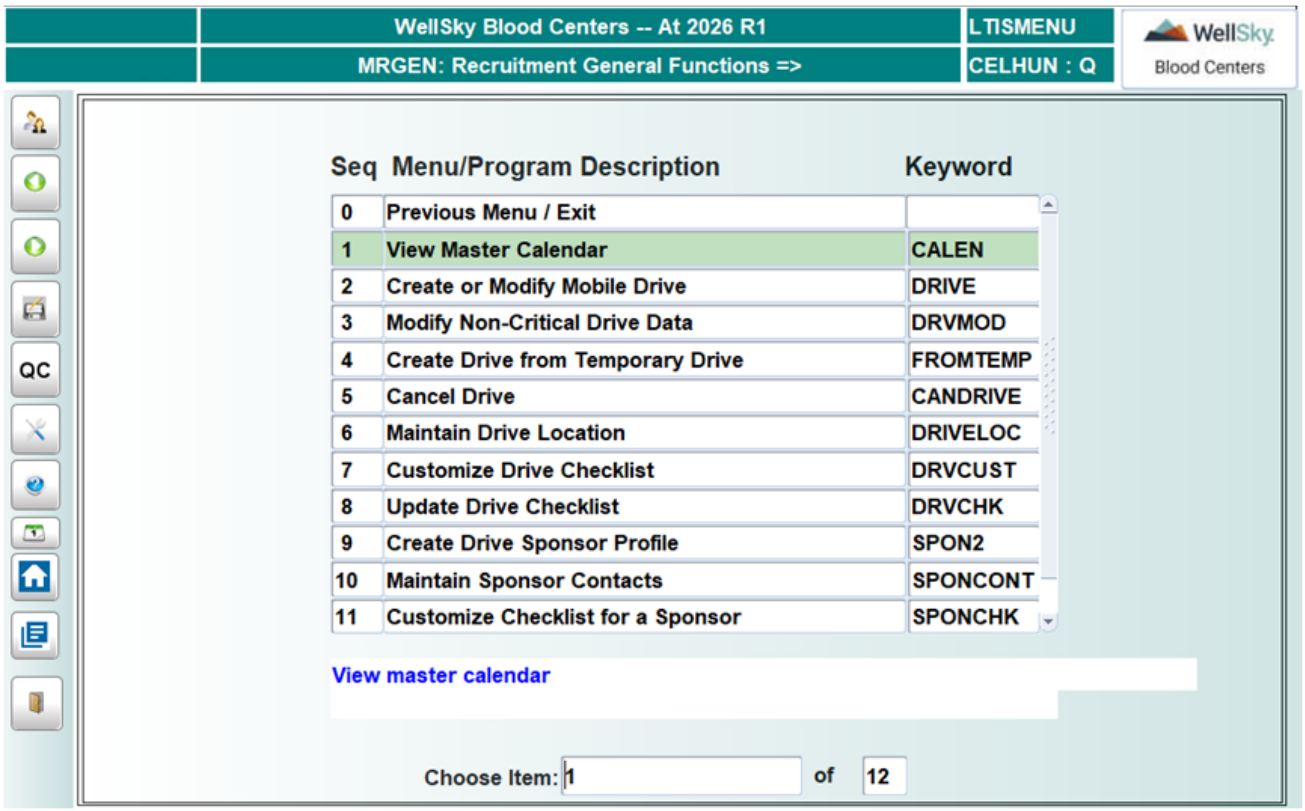


## 3.2.1 View Master Calendar (CALEN)

### Intended Use

Use this screen to view drive feasibility when negotiating a drive date. Each day in the three-month calendar display is color coded to indicate the feasibility of scheduling a drive for that day.

In addition, this screen may be used to do the following:

- View all drives scheduled for a specific date.
- View drive details for any scheduled drive.
- View recruiter and territory goals.
- Access a scheduling screen to schedule mobile drives.

### Limitations

Special and fixed-site drives cannot be viewed in this screen.


WellSky Corporation
Proprietary and confidential

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword CALEN.

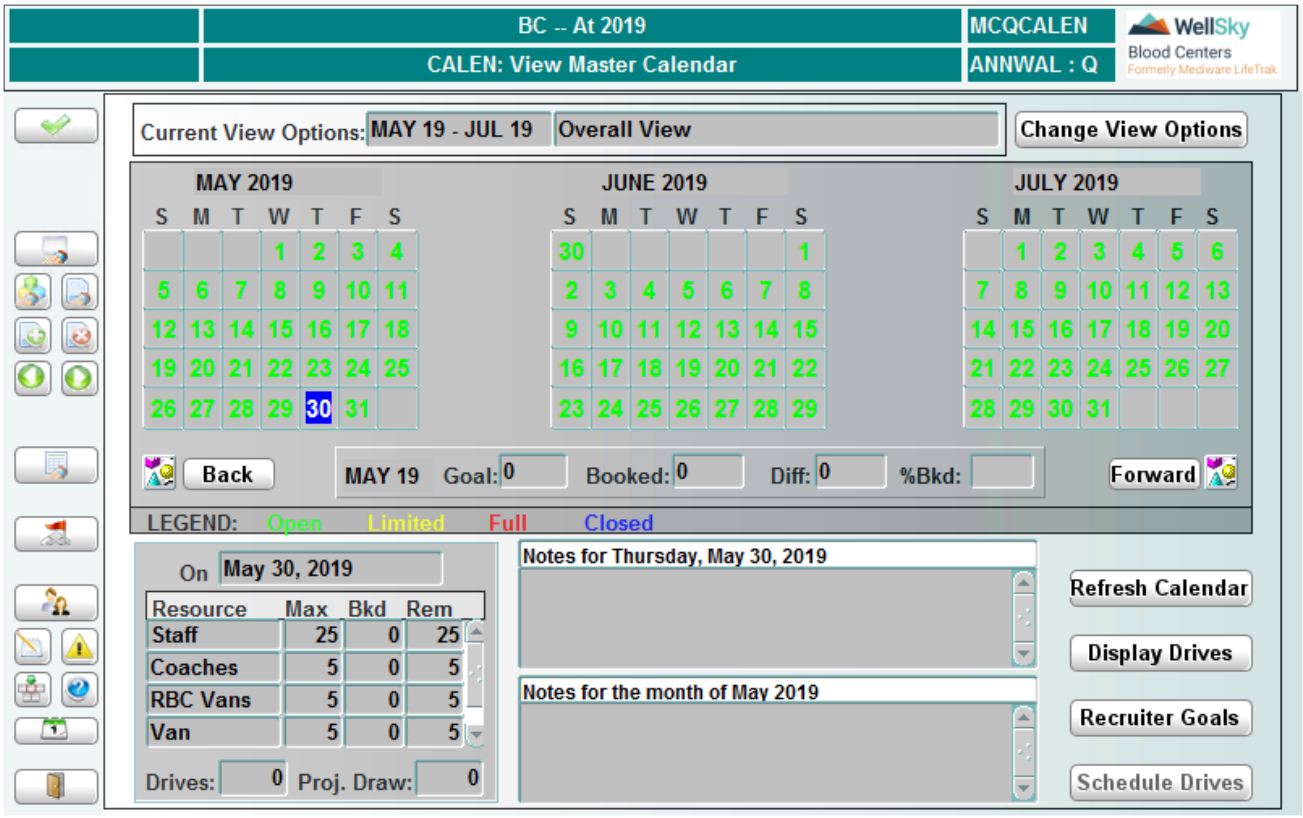


## Current View Options

When the screen is accessed, a three-month calendar displays, beginning with the current month. Each date on the calendar is color coded to indicate drive feasibility when considering all resources. This is the Overall View, which is indicated in the top line.

Click Change View Options to change the calendar months/year and/or view mode (drive feasibility using a single resource):

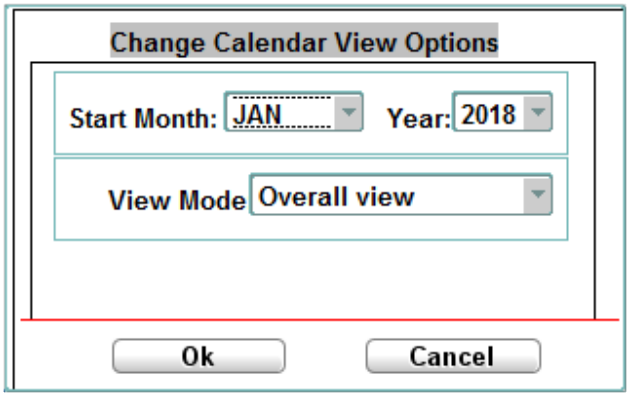


## Changing the Calendar Display

You can click the Forward and Back buttons and arrow keys at the bottom of the calendar display to advance or roll back the calendar display one month at a time. For more extensive changes, specify the beginning month under Change View Options.

## Color Coding

Once you have selected the resources to consider when determining drive feasibility, the color of each calendar date indicates drive feasibility for that date:

| | |
|---|---|
| Green | Date Open: Feasible date for drive; resources are plentiful. |
| Yellow | Date Limited: Drive may be feasible, but resources are limited. |
| Red | Date Full: Drive not feasible; resources are exhausted. |
| Blue | Date Closed: Date is closed to drive scheduling, although a drive can be scheduled with the approval of a supervisor using Confirm On-Hold Drives (CONFIRM). |

Additionally, an underlined date on the calendar indicates that the logged-in recruiter has one or more drives scheduled for that date.

## Selecting a Date with the Mouse

Click any displayed date with the mouse to select that date. Data displays on the screen pertaining to the month and date selected.

## Viewing Data for a Month and Date

Data displays immediately below the calendar for the calendar month in which a date is selected:




Data includes the following:


WellSky Corporation
Proprietary and confidential

- Collection goal for the month.
- Number of estimated collections for drives already booked.
- Number of collections that must be booked to reach the goal.
- Percentage of the goal that has been booked.

Resource availability data and notes for the day and month complete the data display for the month and date selected:

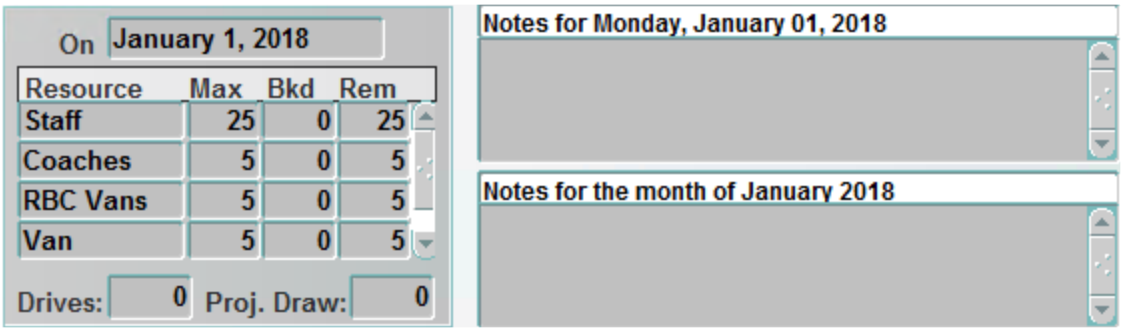


## The Refresh Calendar Button

Data on the screen is correct at the time you access the screen or identify another date. The data does not automatically refresh itself as changes occur. To update the data display, click **Refresh Calendar** at any time.

After accessing the screen, the user schedules a new mobile drive. To see how the new drive affects available resources on the drive date, click **Refresh Calendar**.

## The Display Drives Button

To view scheduled drives for a date, click that date on the calendar, and then click **Display Drives**. A pop-up appears that lists all mobile drives scheduled for the selected date:

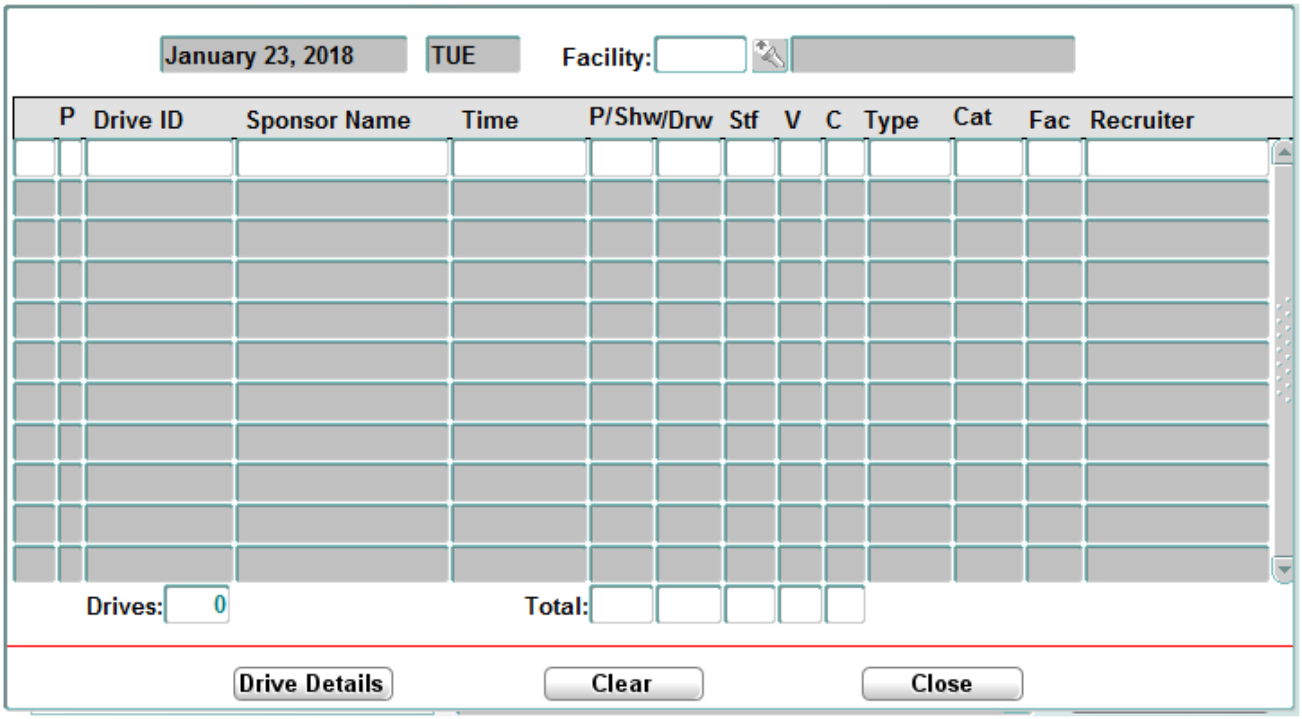


Click **Drive Details** to view details for the highlighted drive. The Drive Details Query screen displays. See the Drive Details Query (DRIVEQ) section of this chapter for instructions on using this screen.

Click **Close** to exit the pop-up and return to the Master Calendar.

## The Recruiter Goals Button

Click **Recruiter Goals** to open the Goal Information window. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Schedule Drives Button

To schedule a new mobile drive, click **Schedule Drives**. This button will only be active when a date is selected that is later than the system date. The Create or Modify Mobile Drive screen opens. See the Create or Modify Mobile Drive (DRIVE) section of this chapter for instructions on using this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 3.2.2 Create or Modify Mobile Drive (DRIVE)

## Intended Use

Use this screen to create and schedule mobile drives, and to modify drives for which you are the recruiter or caretaker recruiter.

## Limitations

- Only users with appropriate access can create or modify drives in this screen.
- Validation of the selected category rule and system parameter MAXDR is only performed when a drive is created and not if the drive is modified.

## Prerequisites

If a drive is to be modified, the drive must have been previously scheduled using this screen.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `DRIVE`.

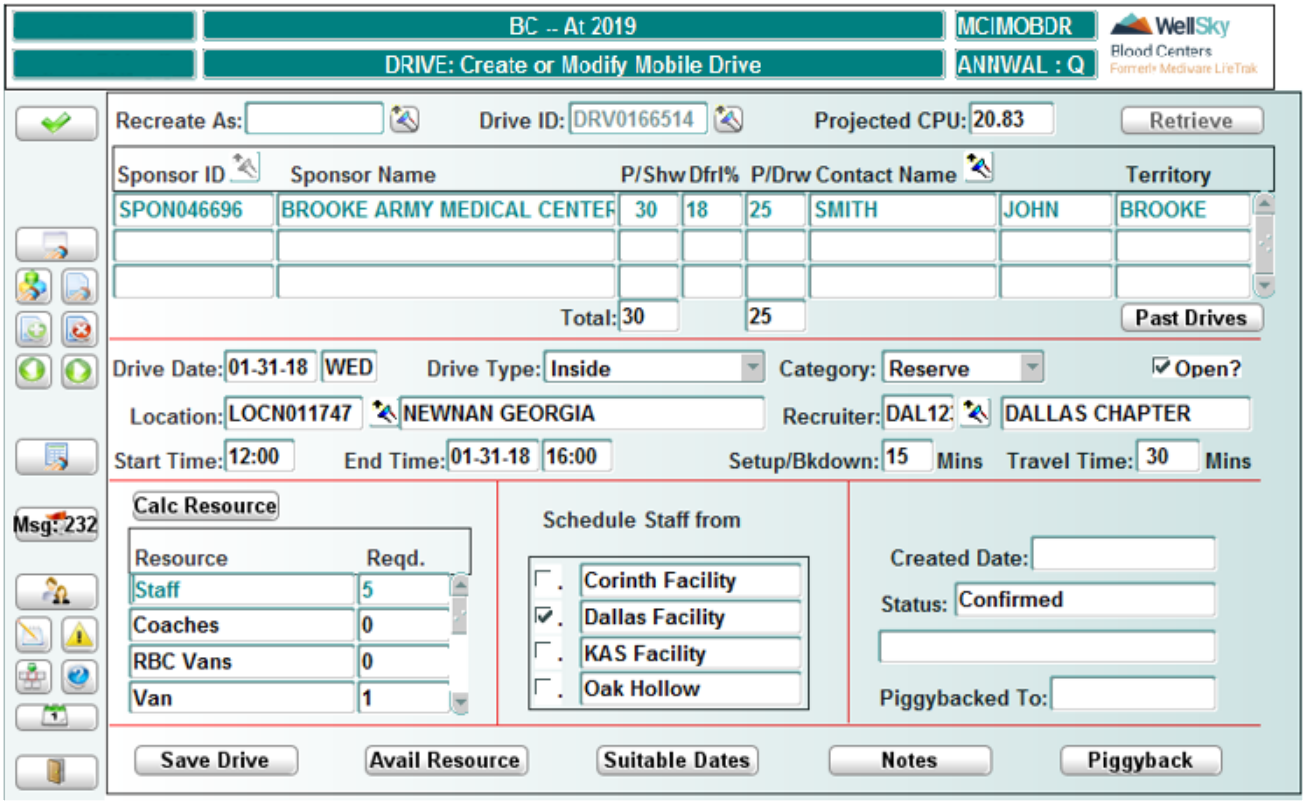

# Control Block Fields and Definitions

## Recreate As

The cursor appears in the *Drive ID* field. To activate the *Recreate As* field, press SHIFT + TAB. Enter an ID or select from the LOV. This allows a new drive to be created with the same parameters as an existing drive.

**NOTE –** Drive date defaults to the already scheduled date. User must change date for recreated drive before continuing.

## Drive ID

Entry is required. If you are:

- Creating a new mobile drive, enter a new mobile drive ID.
- Modifying an existing mobile drive, enter a valid mobile drive ID or select from the LOV.

**NOTE –** You can only modify a drive for which you are the recruiter or caretaker recruiter.

## Projected CPU

Display only. If an existing drive is entered or selected, the projected CPU displays.

# Retrieving Data

Click Retrieve to display data for an existing drive. Click New if scheduling a new drive.

# Modifying Details for a Mobile Drive

All entry fields (white fields) in the screen can be modified. Click Save Drive or COMMIT to save your modifications to the database.

# Creating a New Drive

If New has been specified, the cursor will automatically advance to the *Sponsor ID* field in the Sponsor block.

## Sponsor ID

Entry is required. Enter a valid sponsor ID or select from the LOV. If you press ENTER while the field is blank, the LOV displays automatically. The sponsor name, the primary sponsor contact's name, and the territory automatically display once a valid sponsor ID is entered or selected.

## P/Shw

Entry is required. Enter a numeric value to indicate the number of potential donors to be seen (projected show). The system calculates a default deferral percentage and projected draw based upon the projected show value entered.

## Dfrl%

Entry is required. The system automatically calculates the deferral percentage. You can, however, modify the value.


WellSky Corporation
Proprietary and confidential

### P/Drw

Display only. If you modify the deferral percentage, the projected draw value changes automatically. This field cannot be directly modified.

### Contact Name

Entry is required. The name of the primary sponsor contact displays in this field automatically. Change the sponsor contact by pressing **F5** (Clear Field) to clear the field and selecting another sponsor contact from the LOV.

> **NOTE –** The entire contact name may attempt to display in the last name field. This is normal in the case of converted data. A new sponsor contact cannot be created in this screen.

## The Past Drives Button

Click **Past Drives** to call a window that displays the sponsor's past three drives. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## The Scheduling Block

After entering the data in the Sponsor Block, press **ENTER** on the keyboard and the cursor moves to the *Drive Date* field of the Scheduling Block.

### Drive Date

Entry is required. Enter the drive date in MMDDYY format. The date cannot be prior to the system date. Once a date is entered, the day of week automatically displays.

### Drive Type

Entry is required. Enter a valid drive type or select from the drop-down list.

### Category

Entry is required. Enter a valid drive category or select from the drop-down list.

### Open?

Select the check box to indicate an open drive or clear the check box or leave blank to indicate a closed drive.

### Location

Entry is required. For some sponsors, this field may automatically populate. Enter a valid location code or select from the LOV. Enter a partial name to limit the LOV to locations matching your entry. Once a valid location code is entered or selected, the location name automatically displays.

> **NOTE –** A new drive location cannot be defined in this screen.

### Recruiter

Entry is required. The recruiter ID and name automatically populate when the sponsor is selected. You can select another recruiter by pressing **F5** (Clear Field) to clear the field and entering a valid recruiter ID or selecting from the LOV.

### Start Time

Entry is required. Enter the drive start time using the HHMI (24-hour clock) format. Example: 1:00 p.m. would be 1300.

### End Time

Entry is required. The drive date automatically populates as the date at the end of the drive. Enter the drive end time using the HHMI (24-hour clock) format. Example: 8:30 p.m. would be 2030. The end time must be later than the start time.

### Setup/Bkdown

Entry is required. Enter the total setup and breakdown time in minutes. Only a whole number can be accepted. The system will not accept an entry with a colon.

### Travel Time

Entry is required. Enter the total travel time in minutes. Only a whole number can be accepted. The system will not accept an entry with a colon.

## Drives that Extend Beyond Midnight

It is necessary to adjust the date associated with the end time if the drive will extend beyond midnight. After the start time is entered, the cursor advances to the *End Time* field. Press **F4** (Previous Field) to return the cursor to the date field and modify the date to the following day. A drive end time that appears to be earlier than the drive start time will then be accepted.

## The Calc Resource Button

Click **Calc Resource** to estimate drive resources. The staff estimate cannot be modified. You can manually enter requirements for all other resources.

This button calculates how many staff members are required for the drive at that time based on the projected show, total hours, and the efficiency range. The formula used to calculate required staff is as follows:

Staff_required= (projected_show/total hours)/efficiency_range

## Identifying the Facility

Identify the facility from which resources are to be scheduled by selecting the appropriate check box. Multiple facilities can be selected.

The buttons at the bottom of the screen can be used at any time after drive date and times are entered.

## The Save Drive Button

Click **Save Drive** to commit the created or modified drive to the database.


WellSky Corporation
Proprietary and confidential

## The Avail Resources Button

Click **Avail Resource** to view resource availability for the specified drive date:

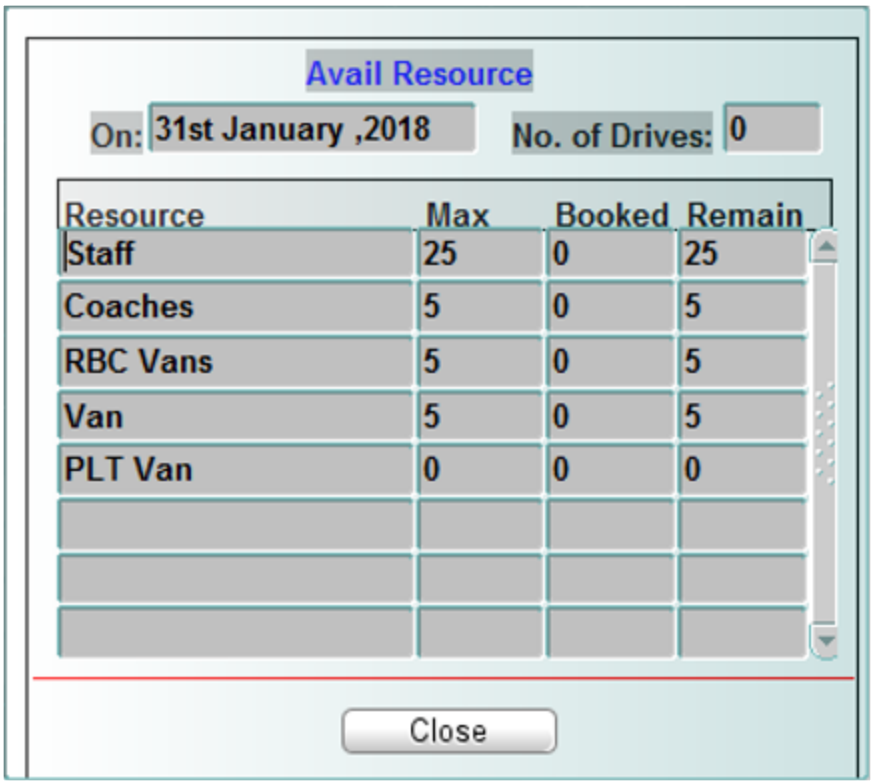


No data can be entered or modified in the window displayed. Click **Close** to return to the main canvas.

## The Suitable Dates Button

Click **Suitable Dates** to view dates for which adequate resources are available for your drive:

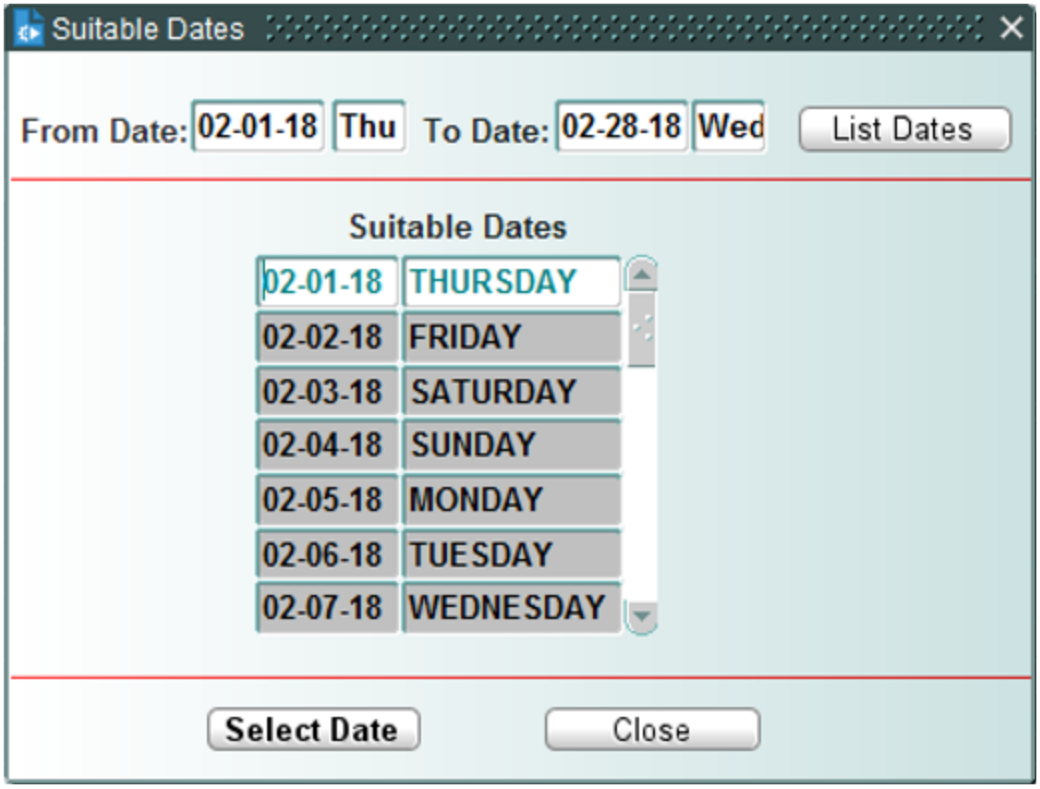


## From Date

Enter the earliest date you consider appropriate for the drive in MMDDYY format.

## To Date

Enter the latest date you consider appropriate for the drive in MMDDYY format.

Press **ENTER** or click **List Dates** to display dates within the specified date range for which adequate resources are available.

Use the **UP** and **DOWN** arrow keys on the keyboard or click with the mouse to highlight a displayed date and click **Select Date** to select the date and close the window. Click **Close** to close the window without selecting a displayed date.

# The Notes Button

Click **Notes** to open the Notes window:


WellSky Corporation
Proprietary and confidential

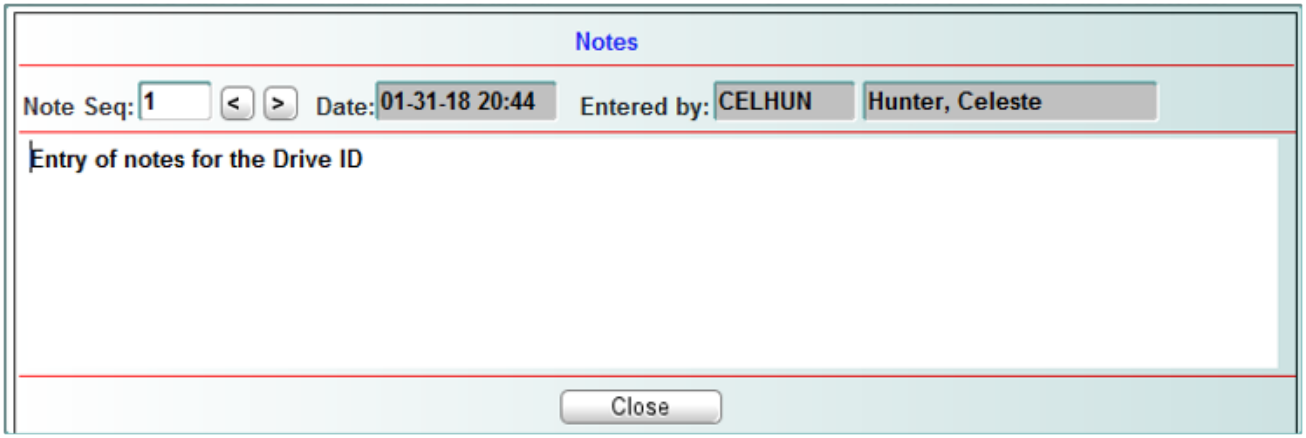


Use this window to enter any notes regarding the drive you are scheduling. Any notes entered are permanently saved and become part of the drive record. Click **Close** to return to the main screen.

## The Piggyback Button

Click **Piggyback** to view other drives scheduled for the same date if the drive you are scheduling can be piggybacked.

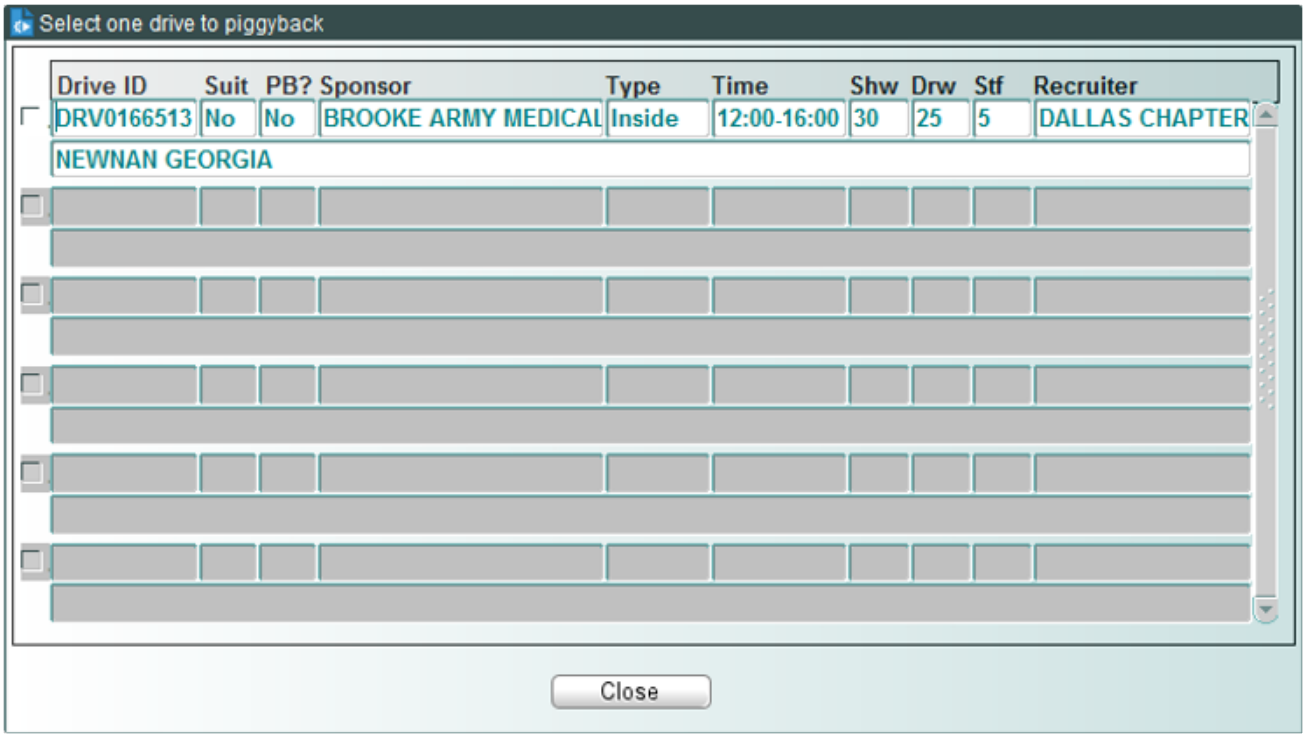


To select a drive for piggyback, select the check box to the left of that drive. Only one drive may be selected for piggyback. Click **Close** to return to the main screen.

**NOTE –** If the drive times for the drive you have selected overlap the drive times for the drive you are scheduling, a warning message advises you.

The drive with which your drive is piggybacked displays in the Piggybacked To field.

Click **Save Drive** or **COMMIT** to commit the drive to the database. A message pops up asking if you want to set the default values for transportation requirements.

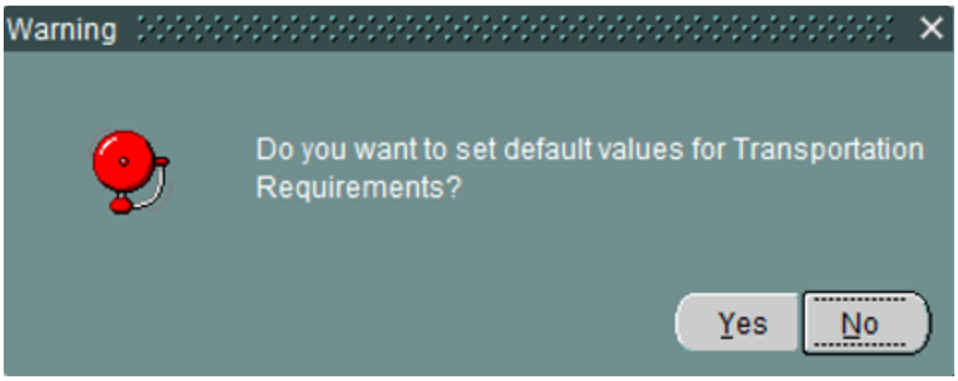


Click **Yes** for the defaults or **No** for no defaults. The data then commits.

**NOTE –** The Travel Time field cannot be zero for the location selected. If travel time is zero, the user will not receive the expected message for default travel time, "Do you want to set default values for Transportation Requirements?".

## At Commit

All entries and modifications are saved to the database. Data remains on display on the screen. Click **CLEAR FORM** or **EXIT FORM** on the tool bar to clear or exit the screen.

## What to Do Next

There is no next step.

# 3.2.3 Modify Non-Critical Drive Data (DRVMOD)

## Intended Use

Use this screen to modify non-critical drive data. Feasibility is not re-evaluated.

## Limitations

None

## Prerequisites

Drive must have already been created.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `DRVMOD`.


WellSky Corporation
Proprietary and confidential

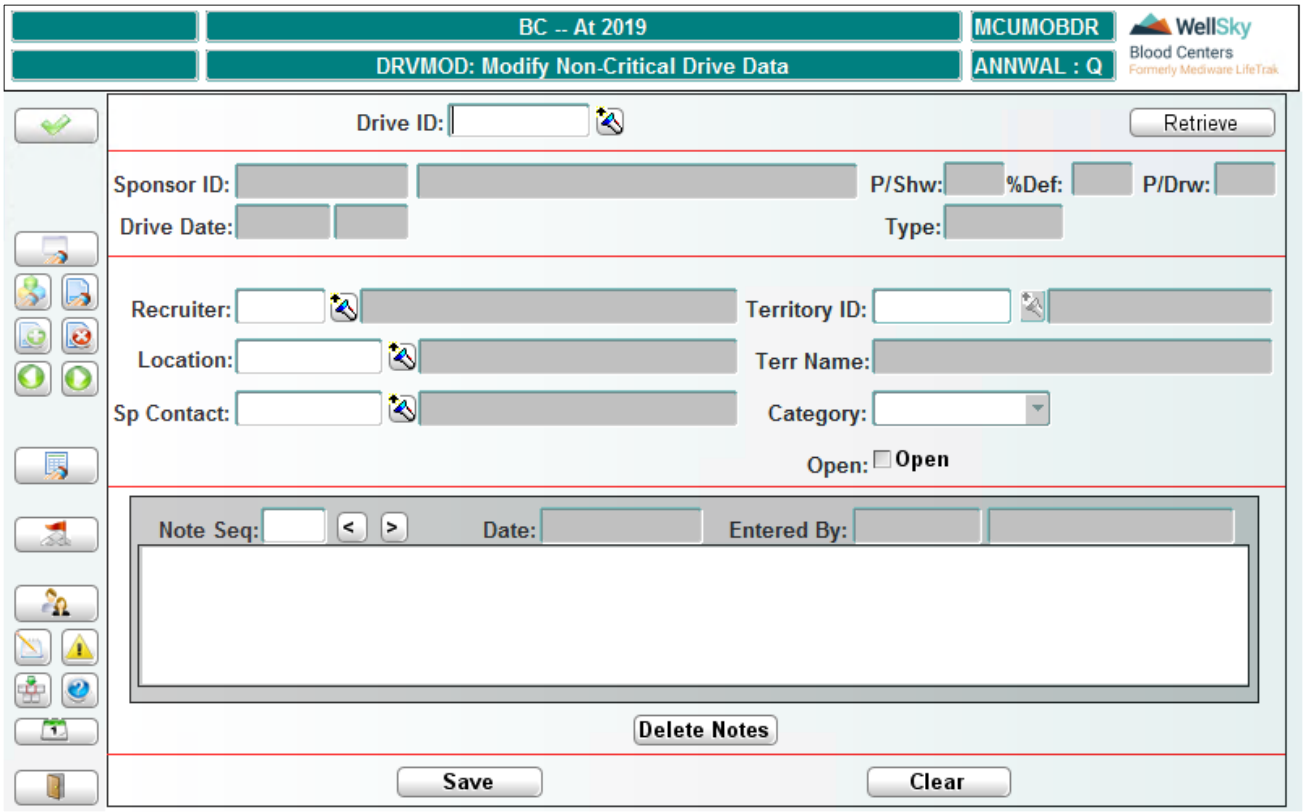


# Control Block Fields and Definitions

## Drive ID

Enter the drive ID or select from the LOV. Entry is required.

After drive ID has been entered or selected, click **Retrieve** to display the data for the selected drive.

The following data display:

- Sponsor ID and description
- Projected show
- Projected percent deferred
- Projected draw
- Drive date
- Type of drive
- Recruiter ID and name
- Territory ID, description, and name
- Location ID and description
- Drive category

- Sponsor contact ID and name
- Indication if drive is open

Fields that display in white can be modified. Fields in gray are protected against modification.

## The Notes Block

Previously entered notes display in the Notes block. Scroll through the notes by using the **UP** and **DOWN** arrows. The date the note was entered and the name of the employee who entered the note display.

Enter a new note by typing the note directly into the open *Notes* field. To delete previously entered notes, select the note so it displays in the *Notes* field, and click **Delete Notes**.

## The Save Button

Click **Save** to commit to the database any changes made to the drive data.

## The Clear Button

Click **Clear** to clear all data from the screen.

## What to Do Next

There is no next step.

# 3.2.4 Create Drive from Temporary Drive (FROMTEMP)

## Intended Use

Use this screen to create a scheduled mobile drive from a temporary drive. A temporary drive is created without resource allocation when required resources are not available.

## Limitations

You can only create a drive from a temporary drive that already exists in the database using this screen. To create a mobile drive, use Create or Modify Mobile Drive (DRIVE).

## Prerequisites

The drive must already exist in the database as a temporary drive.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `FROMTEMP`.

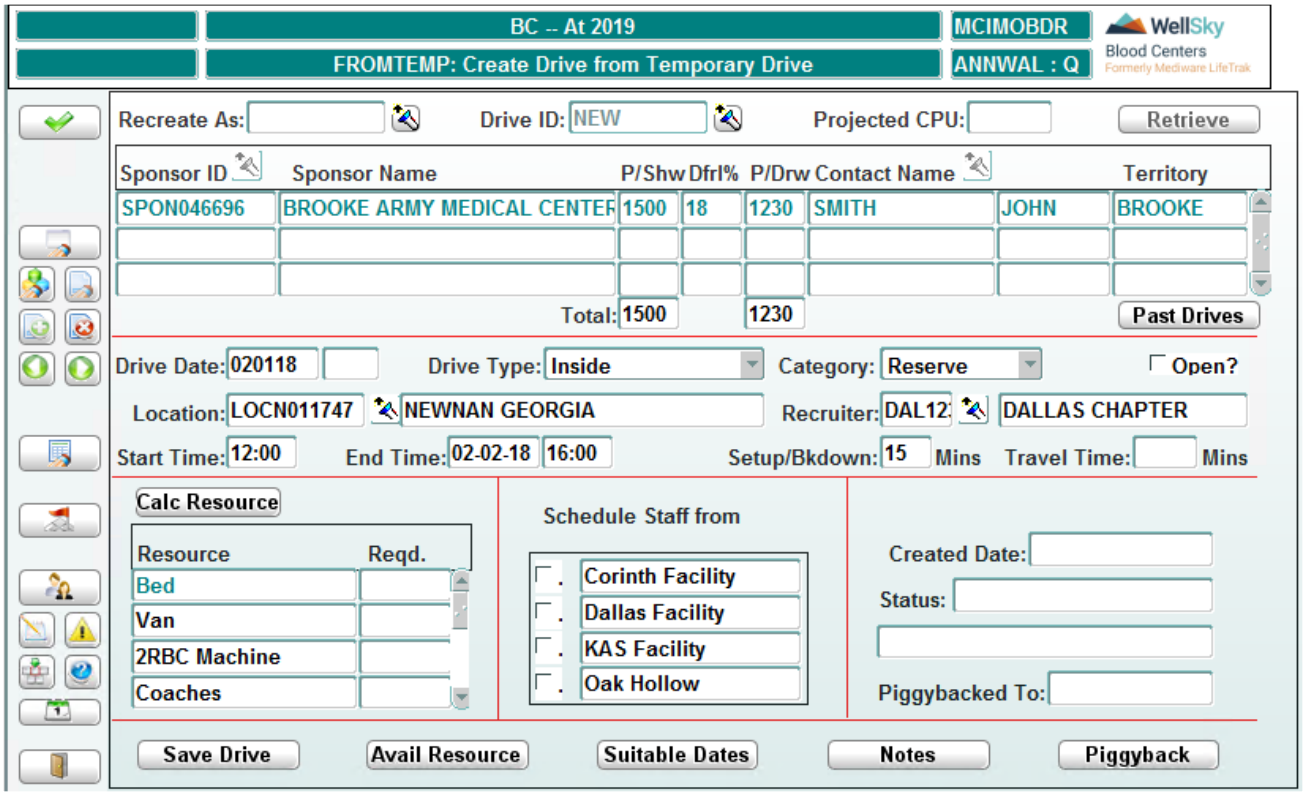


## Select a Temporary Drive

The Select Temp Drive LOV opens when this screen is accessed and displays all temporary drives existing in the database. Selection of a temporary drive from this window is mandatory.

Once a drive is selected from the LOV, the list disappears and the temporary drive displays in the Temp Drives window.

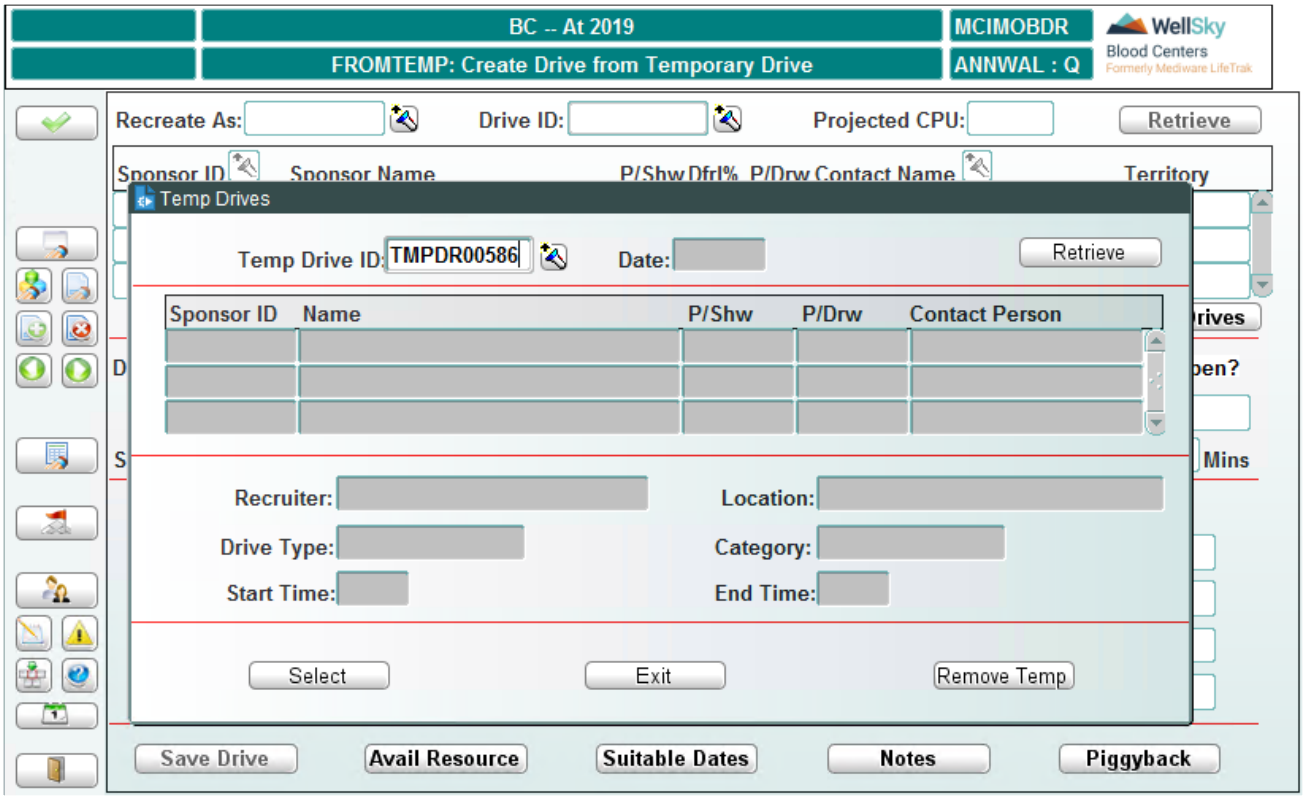


Click **Retrieve** to display data for the selected temporary drive.

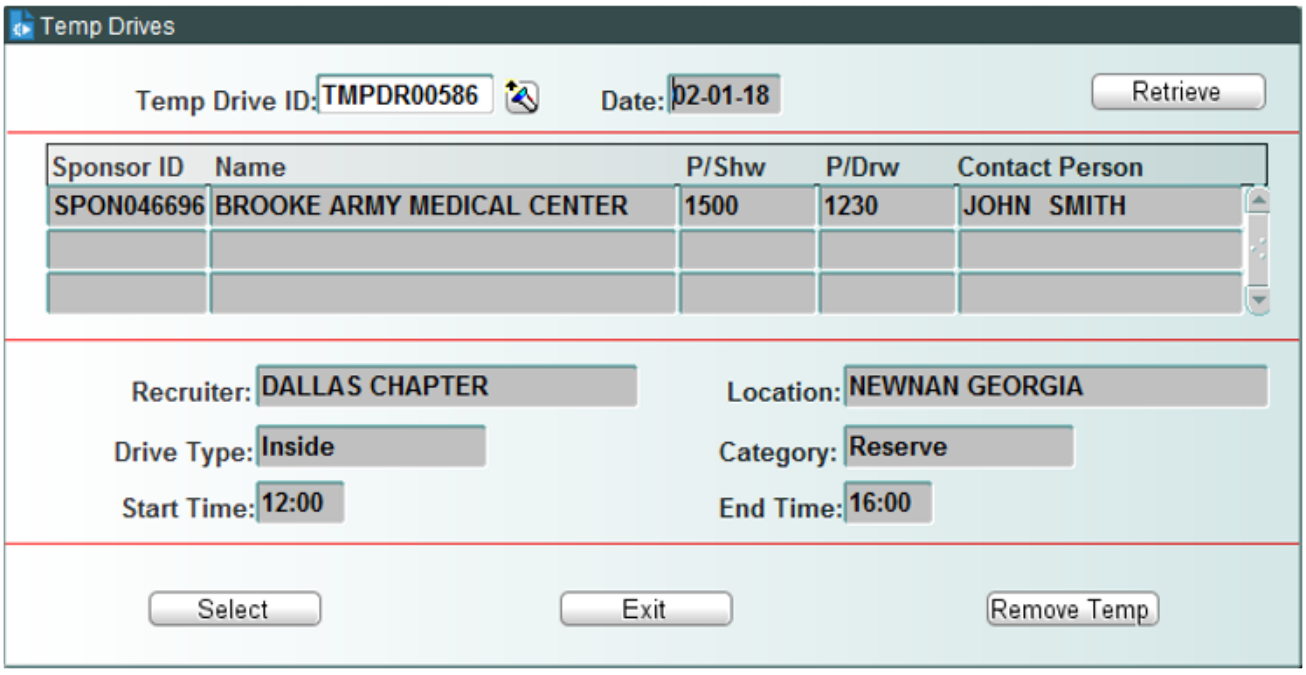


Perform one of the following actions:

- Click **Select** to select the temporary drive for creation of a valid mobile drive.
- Click **Exit** to exit the screen without affecting the selected temporary drive.
- Click **Remove Temp** to delete the temporary drive from the database.

When you click the Select button, the Temp Drives window closes and complete data for the selected temporary drive displays in the main screen. The cursor rests in the *Drive Date* field.

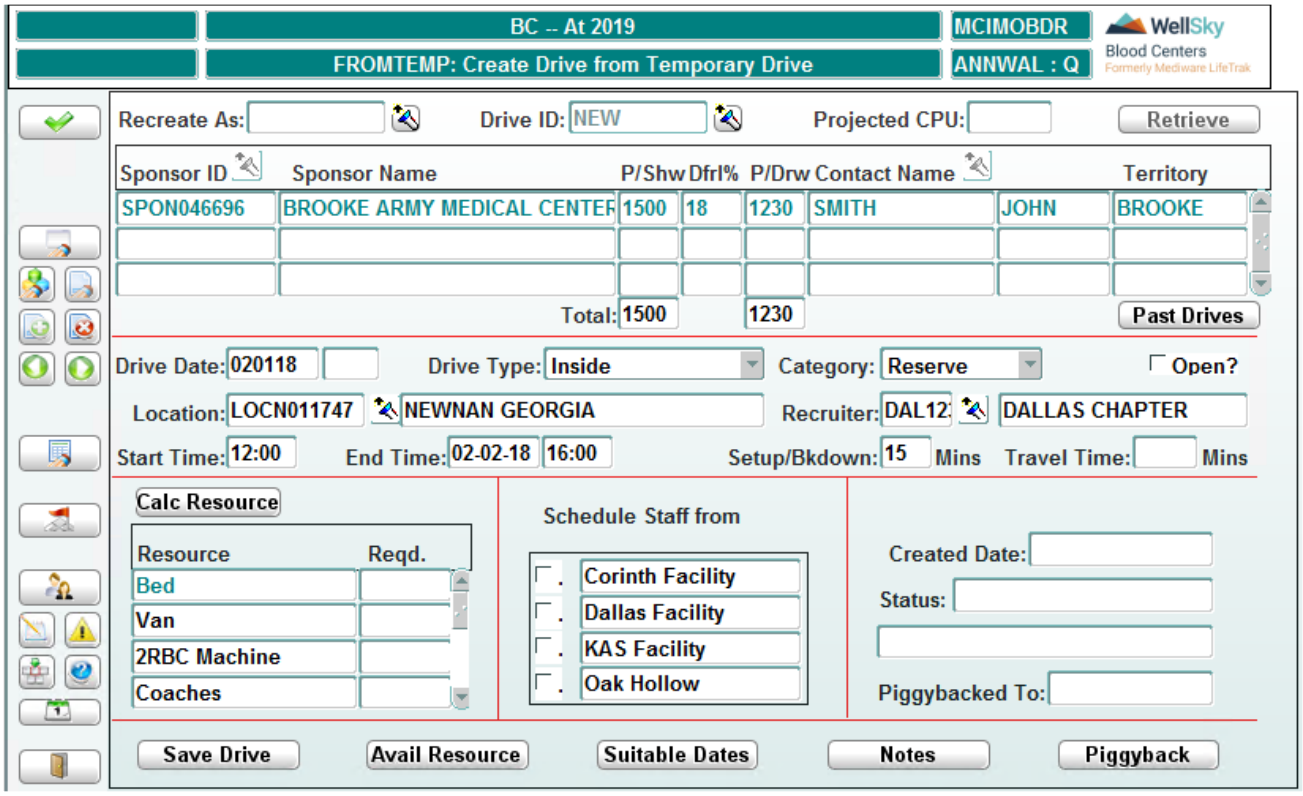


Most fields are already populated from data entered when the temporary drive was created. Fields that display in white can be modified. Fields in gray are protected against modification. See the Create or Modify Mobile Drive section of this chapter for instructions on entering data into these fields and on using the buttons at the bottom of the screen.

## At Commit

The screen remains populated with data, a pop-up confirms that the transaction is committed, and a new drive ID displays for the drive you created. Also, a drive checklist is generated, based upon the sponsor associated with the drive.

Press **CTRL** + **F5** (Clear Form) to clear the screen, or press **F8** (Exit Screen) to leave the screen.

## What to Do Next

There is no next step.

# 3.2.5 Cancel Drive (CANDRIVE)

## Intended Use

Use this screen to cancel a scheduled drive.

## Limitations

Past drives can only be canceled if the Master Code ERRTY, code type CANDR, is currently in effect. Past drives with associated donors cannot be canceled. The user must either be a recruiter or the caretaker recruiter for the drive.

## Prerequisites

A drive must have been scheduled using Create or Modify Mobile Drive (DRIVE).

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `CANDRIVE`.

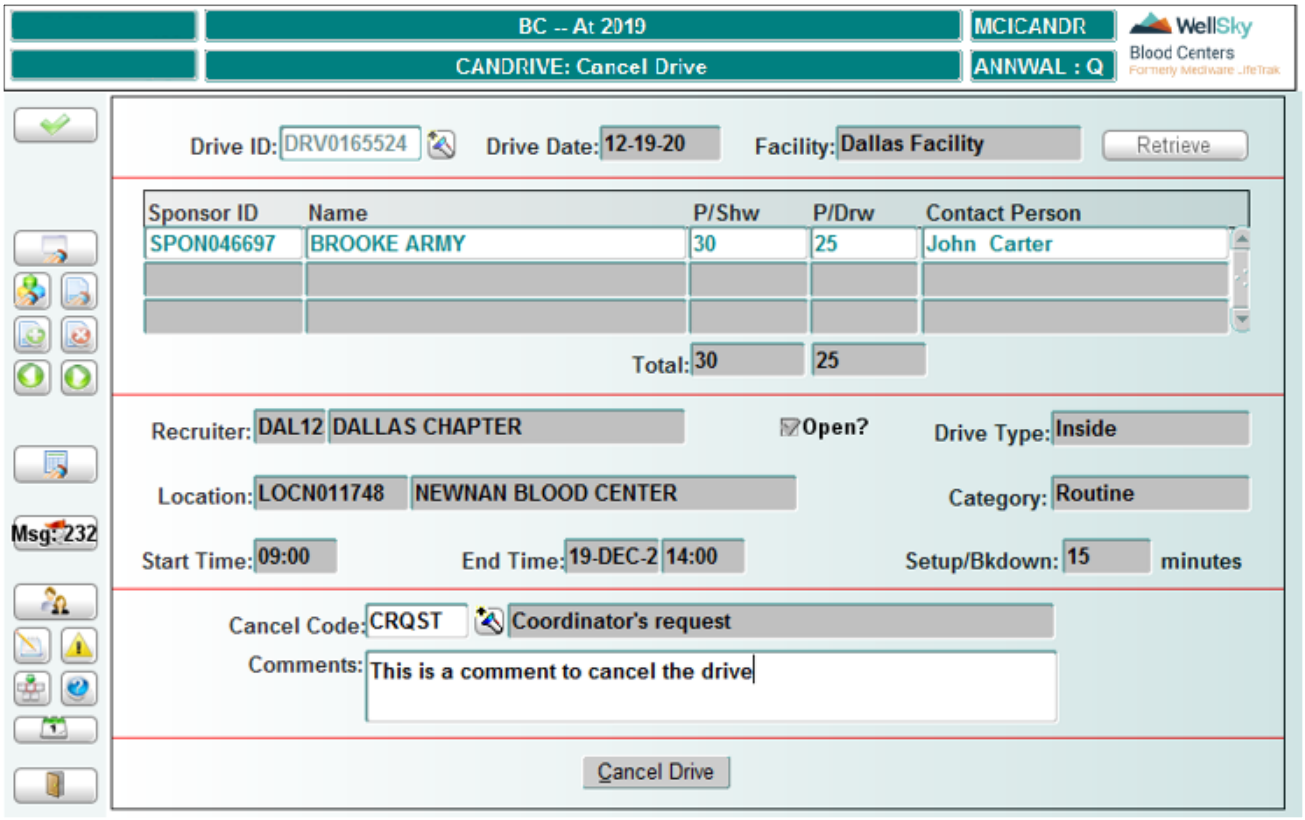


## Control Block Fields and Definitions

### Drive ID

Entry is required. Enter a valid drive ID or select from the LOV. Only those drives for which the user is the recruiter or caretaker recruiter appear in the LOV.


WellSky Corporation
Proprietary and confidential

### Drive Date

Display only. Automatically populates after a drive ID is selected or entered.

## Retrieving Data

Click **Retrieve** to display data for the specified drive.

The facility automatically populates in the Control Block. The following information also displays:

- Sponsor ID and name
- Projected show
- Projected draw
- Drive coordinator
- Recruiter ID and name
- Indication if status is open
- Drive type
- Drive location code and description
- Drive category
- Start and end times of drive
- Setup/breakdown time in minutes

## Canceling the Drive

Enter the following information:

### Cancel Code

Entry is required. Enter a cancellation code or select from the LOV. Once a valid code is entered or selected, the description displays.

### Comments

Entry is optional. Enter free-form comments, up to 100 characters.

Click **Cancel Drive** to cancel the drive. A message displays, asking you to confirm that the drive is to be canceled.

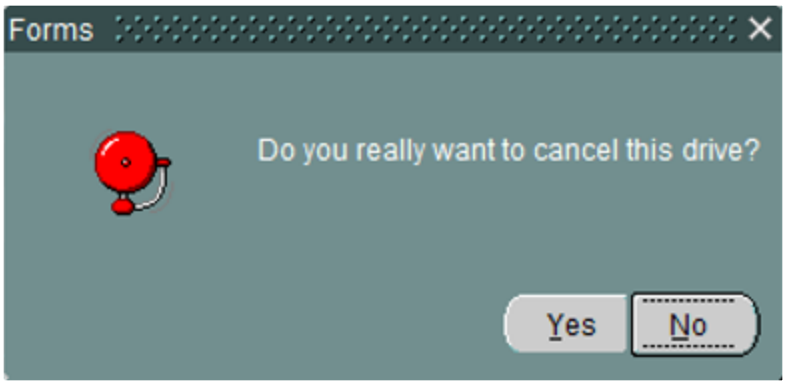


- Click **Yes** to cancel the drive.

  After clicking **Yes**, a message confirms that the transaction is committed to the database. Click **OK** to acknowledge the pop-up.

- Click **No** to return to the screen without canceling the drive.

## At Commit

The screen remains populated with data. Press **CTRL** + **F5** (Clear Form) to clear the screen, or press **F8** (Exit Screen) to leave the screen.

## What to Do Next

There is no next step.

# 3.2.6 Maintain Drive Location (DRIVELOC)

## Intended Use

Use this screen to establish permanent associations between drive sponsors and drive locations, and to maintain details for drive locations.

## Limitations

The system does not validate location descriptions. Therefore, the description for a single drive location can be used for multiple location IDs. The system considers such multiple location IDs to be separate locations.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `DRIVELOC`.


WellSky Corporation
Proprietary and confidential

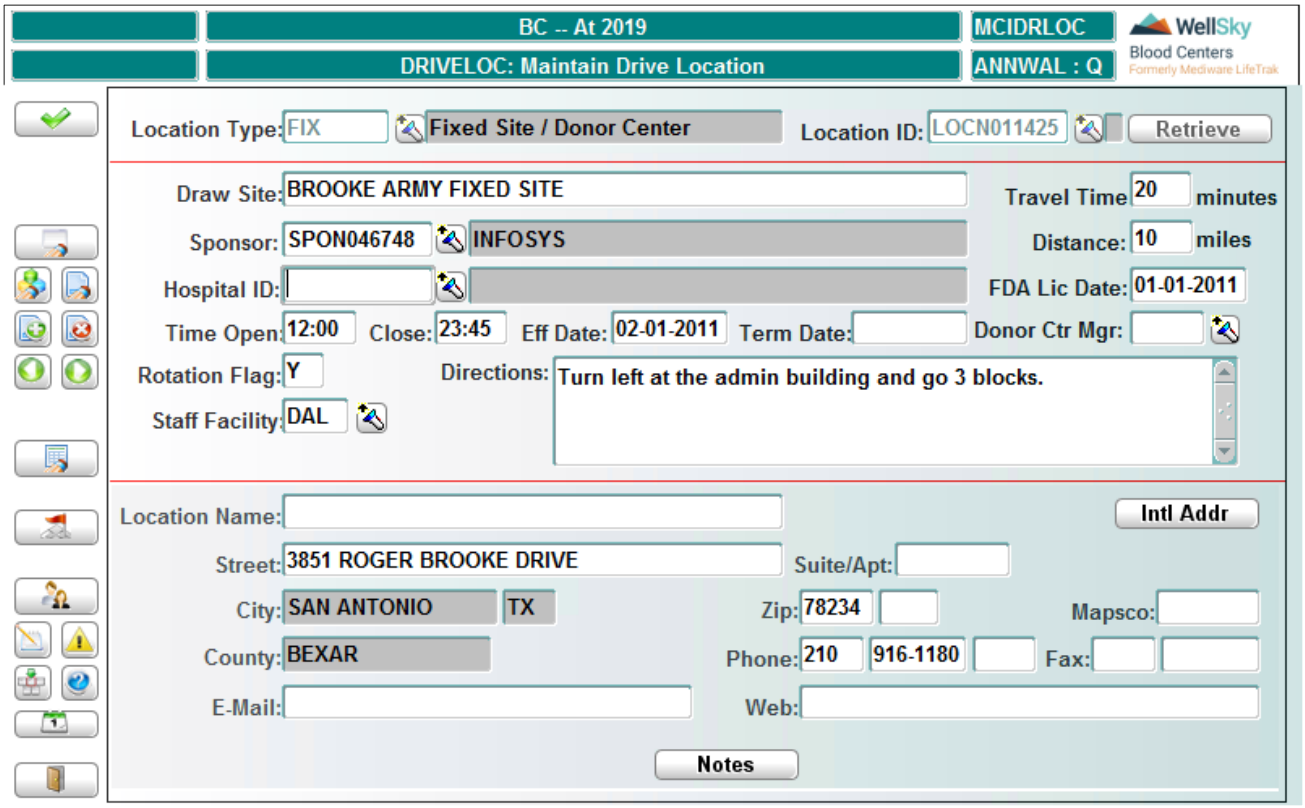


# Control Block Fields and Definitions

## Location Type

Entry is required. Enter a valid location type code or select from the LOV.

## Location ID

Entry is required. Enter a valid location ID, select from the LOV, or enter NEW to create a new location ID. Enter a partial location name to limit the LOV.

# Modifying an Existing Location

If an existing location ID is entered or selected, click **Retrieve** to display details for the specified ID.

You can modify any white field for an existing location. Gray fields are protected from modification. You cannot leave a required field blank.

# Entering a New Drive Location

If NEW is entered, a new location ID displays in the *Location ID* field and the cursor advances to the *Draw Site* field. Enter the following data:

# Draw Site

Entry is required. Enter the name of the facility at the new drive location. Up to 50 characters may be entered.

## Sponsor

Entry is optional. Enter a valid sponsor ID or select from the LOV. Once a valid ID is entered or selected, the sponsor name displays.

## Hospital ID

Entry is optional. Enter a valid hospital ID (hospital closest to the drive location) or select from the LOV. Once a valid ID is entered or selected, the hospital name automatically displays.

## Travel Time

Entry is required. Enter the distance (miles) from the central collection facility to the drive location. Only whole numbers are accepted.

**NOTE –** The Travel Time field cannot be zero. If the travel time is zero, the user will not received the expected message for default travel time, "Do you want to set default values for Transportation Requirements"?, when defining the drive.

## Distance

Entry is required. Enter the distance (miles) from the central collection facility to the drive location. Only whole numbers are accepted.

## FDA Lic Date

Entry is optional. Enter the effective date of FDA licensing for the institution, or for the drive location if different from the institution, using the MMDDYYYY format. If there is no FDA license date entered, all products collected at the site will be labeled as unlicensed products.

## Time Open

Entry is optional. Enter the opening time (HHMI format) for the facility. The system inserts the colon automatically.

## Close

Entry is optional. Enter the closing time (HHMI format) for the facility. The system inserts the colon automatically.

## Eff Date

Entry is required. The system date automatically populates this field, but a later date can be entered, using the MMDDYYYY format.

## Term Date

Entry is optional. Enter a termination date for the location record, if applicable in MMDDYYYY format.

## Donor Ctr Mgr

Entry is optional. Enter a valid employee ID or select from the LOV. The site manager is the blood center employee responsible for managing the drive location.


WellSky Corporation
Proprietary and confidential

## Rotation Flag
Entry is optional. If the location type is `FIX`, enter `Y` to create a rotation drive.

## Staff Facility
Entry is required. Enter the facility from which to assign staff or select from the LOV.

## Directions
Entry is optional. Use free-form entry to enter directions from the central collection facility to the drive location. Up to 300 characters are accepted.

## Location Name
Entry is optional. Enter the drive location name. Entry is limited to a maximum of 25 characters.

## Street
Entry is required. Enter the street address of the drive location. Entry is limited to a maximum of 50 characters.

## Suite/Apt
Entry is optional. Enter a suite number, if applicable.

## City
Display only. The city and state automatically populate when a valid Zip code is entered.

## Zip
Entry is required. Enter a valid Zip Code. Either a five-digit or a nine-digit Zip code may be entered.

**NOTE –** If multiple cities use the Zip code entered, an LOV displays from which you can select the correct city.

## Mapsco
Entry is optional. Enter the Mapsco reference using alphanumeric (numbers and letters) characters.

## County
Display only. Automatically populates when a valid Zip Code is entered. No entry or modification is permitted.

## Phone
Entry is optional. Enter a phone number nearest to the drive location. Three fields are provided for area code, phone number, and extension. Do not enter hyphens; the system automatically puts the hyphens in.

## Fax
Entry is optional. Enter a fax number nearest to the drive location.  Two fields are provided for area code and phone number. Do not enter hyphens; the system automatically puts the hyphens in.

## E-Mail

Entry is optional. Enter an e-mail address, if known, using alphanumeric (numbers and letters) entry. Entry is limited to a maximum of 128 characters.

## Web

Entry is optional. Enter a World Wide Web (WWW) address, if known, using up to 128 alphanumeric characters.

# The Intl Addr Button

Click **Intl Addr** to open the International Address window, as follows:

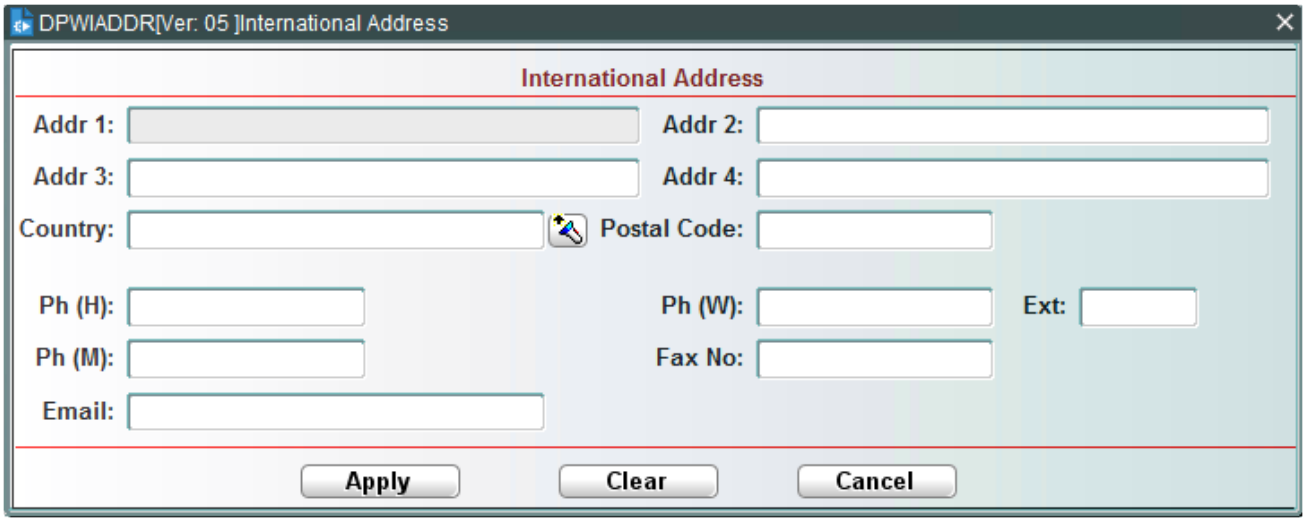


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

# The Notes Button

Click **Notes** to open the Notes window. You can enter notes that will be permanently associated with the drive location you are defining.

Click **Close** to exit the Notes window. Your notes will be saved with the drive location when you commit your entries to the database.

# Committing the Transaction

Click **COMMIT** to save all your entries for a single drive location to the database at once. The screen remains populated.

Click **CLEAR FORM** to clear the screen or click **EXIT FORM** to exit the screen and return to the menu.

# What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 3.2.7 Customize Drive Checklist (DRVCUST)

## Intended Use

Use this screen to add more checklist actions to a drive.

## Limitations

None

## Prerequisites

Drive must have been scheduled.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `DRVCUST`.

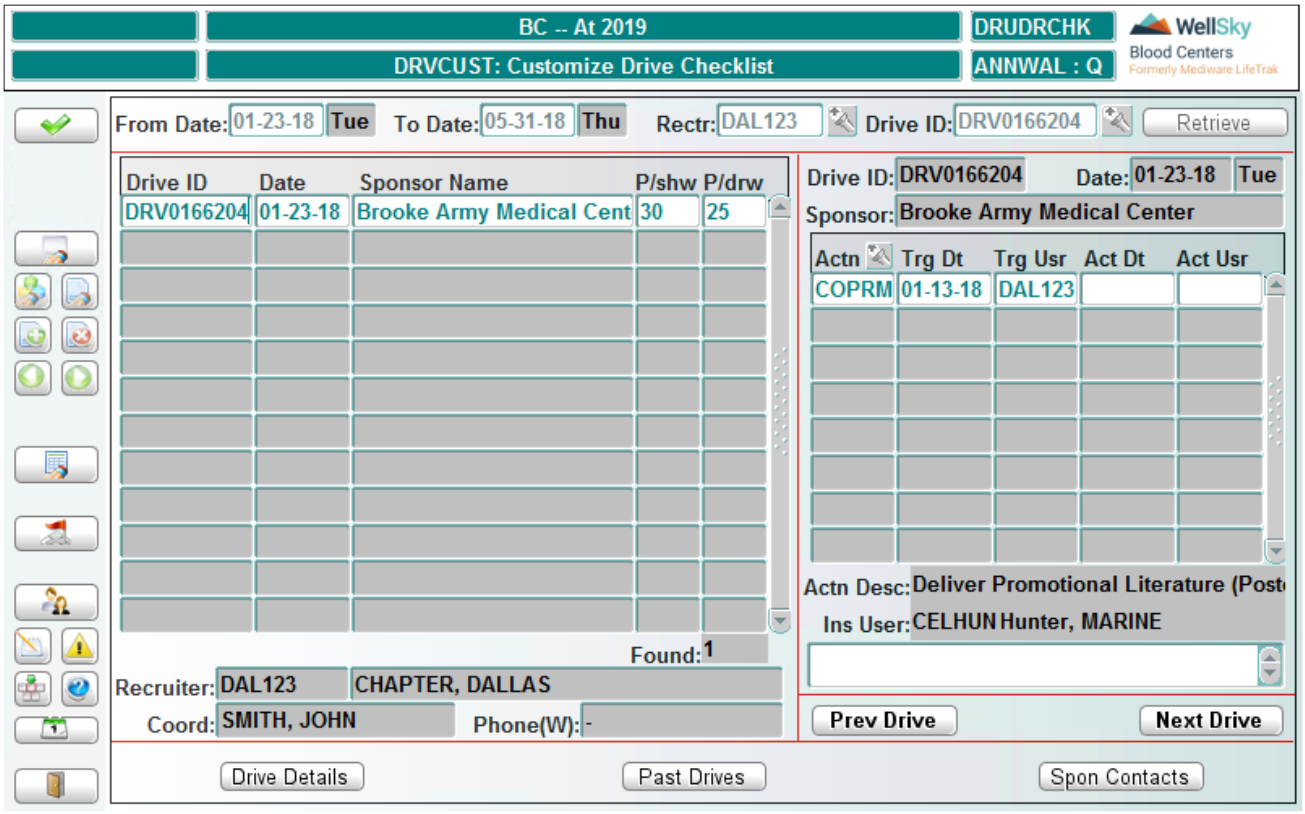


## Control Block Fields and Definitions

### From Date

Entry is required. Enter the beginning date of the date range to search, using the MMDDYY format.

### To Date

Entry is required. Enter the ending date of the date range to search, using the MMDDYY format.

### Rectr

Entry is optional. Enter recruiter ID or select from LOV.

### Drive ID

Entry is optional. Enter drive ID or select from the LOV.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of all drives that meet the entered criteria.

## In the Drive Block

The following data display for each retrieved drive:

- Drive ID
- Date of drive
- Sponsor
- Projected show
- Projected draw

The following data display for the selected drive:

- Recruiter's ID and name
- Coordinator
- Phone number of coordinator

## In the Checklist Block

The following data display for the selected drive:

- Action to be taken
- Date action to be taken
- User assigned to take action
- Date action taken
- User who completed action

The following data display for the selected action:

- Description of action
- User who inserted the action


WellSky Corporation
Proprietary and confidential

## To Customize the Checklist

From the Drive Block, select the desired drive. In the Checklist Block, click a blank line in the Actn column. Enter the following information:

### Actn

Entry is required. Enter an action code or select from the LOV.

### Trg Dt

Entry is optional. Enter a target date indicating when the action will occur.

### Trg Usr

Entry is optional. Enter the ID of user assigned to perform the action.

### Act Dt

Entry is optional. Enter the date action was taken.

### Act Usr

Entry is optional. Enter the ID of the user who performed the action.

Comments can be attached to the record by typing comments into the empty block at the bottom of the Checklist Block.

## The Prev Drive Button

Click **Prev Drive** to select the previous drive in the Drive Block. The data associated with the selected drive display.

## The Next Drive Button

Click **Next Drive** to select the next drive in the Drive Block. The data associated with that drive display.

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query screen. Use this screen to view further details about the selected drive. See that section of this chapter for instructions on using this screen.

## The Past Drives Button

Click **Past Drives** to open the Past Drives window, which displays a record of past drives held by the drive sponsor. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## The Spon Contacts Button

Click **Spon Contacts** to open the Sponsor Contacts window, which lists all contacts and sponsors for the selected drive:

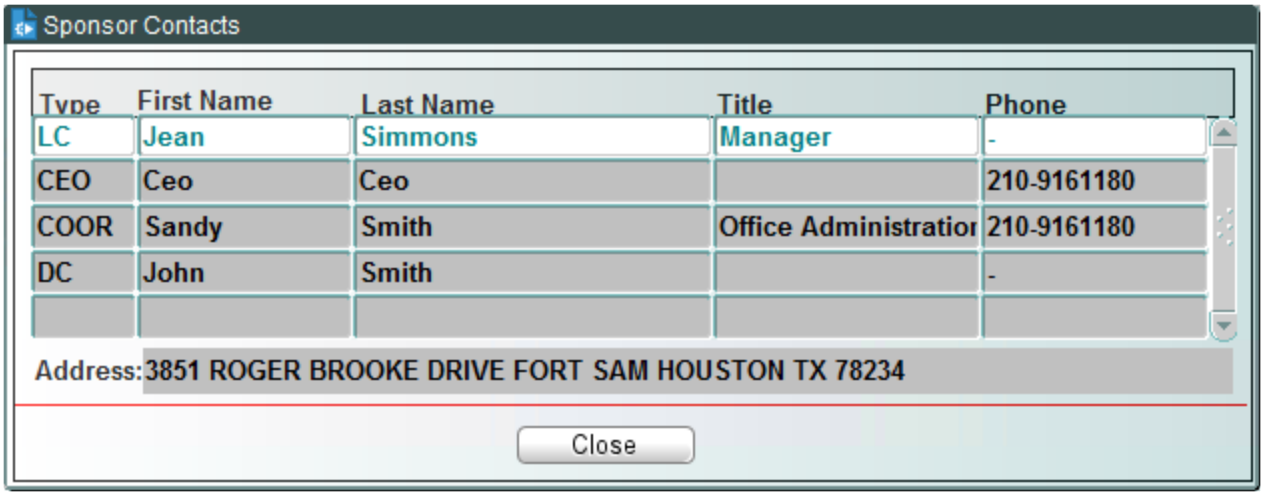


## At Commit

All checklist changes are committed to the database.

## What to Do Next

There is no next step.

# 3.2.8 Update Drive Checklist (DRVCHK)

## Intended Use

Use this screen to update drive planning activity for:

- Drive checklists for specified drives
- Drives within a specified date range
- Activities targeted for current date or specified date range

## Limitations

None

## Prerequisites

A drive must have been scheduled using Create or Modify Mobile Drive (DRIVE).

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `DRVCHK`.


WellSky Corporation
Proprietary and confidential

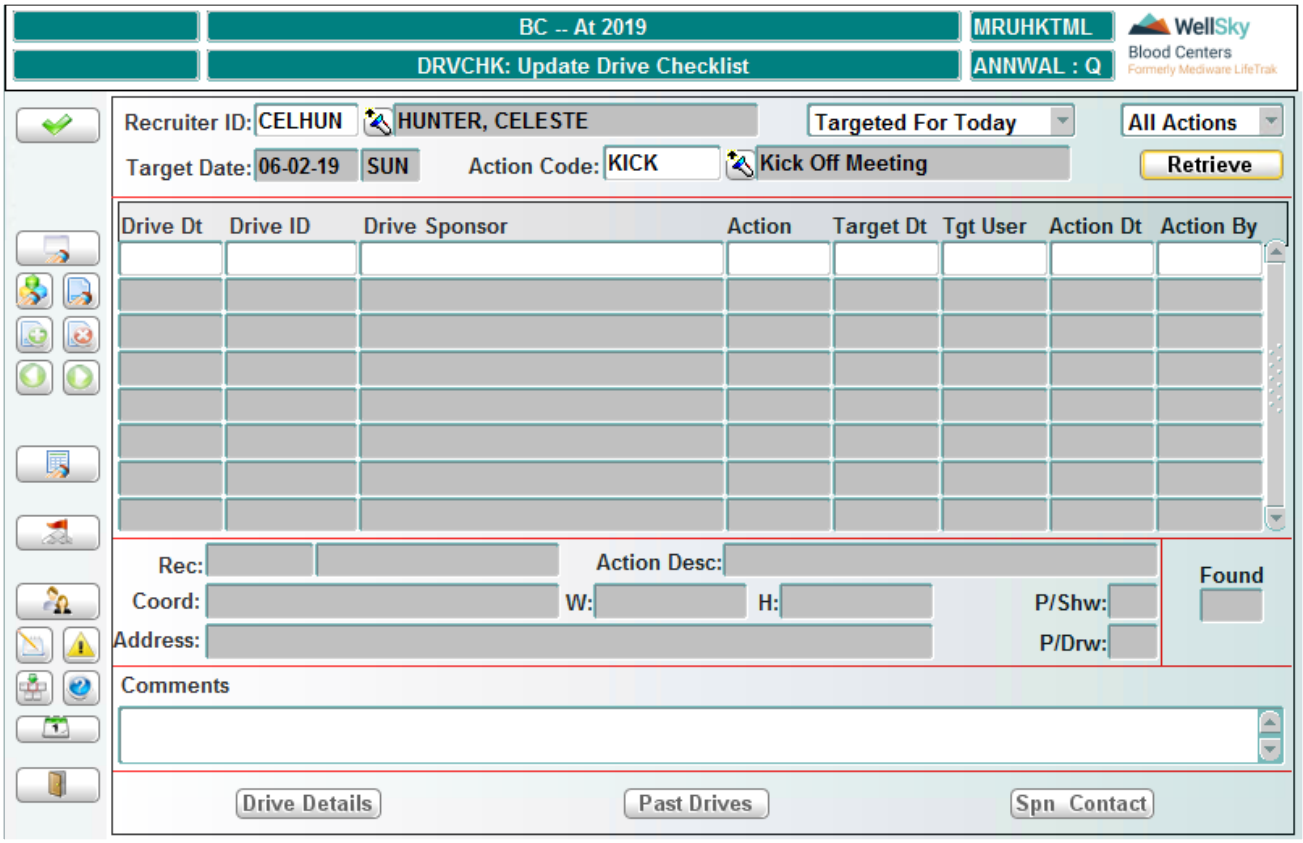


The parameters are modified based on the criteria selected.

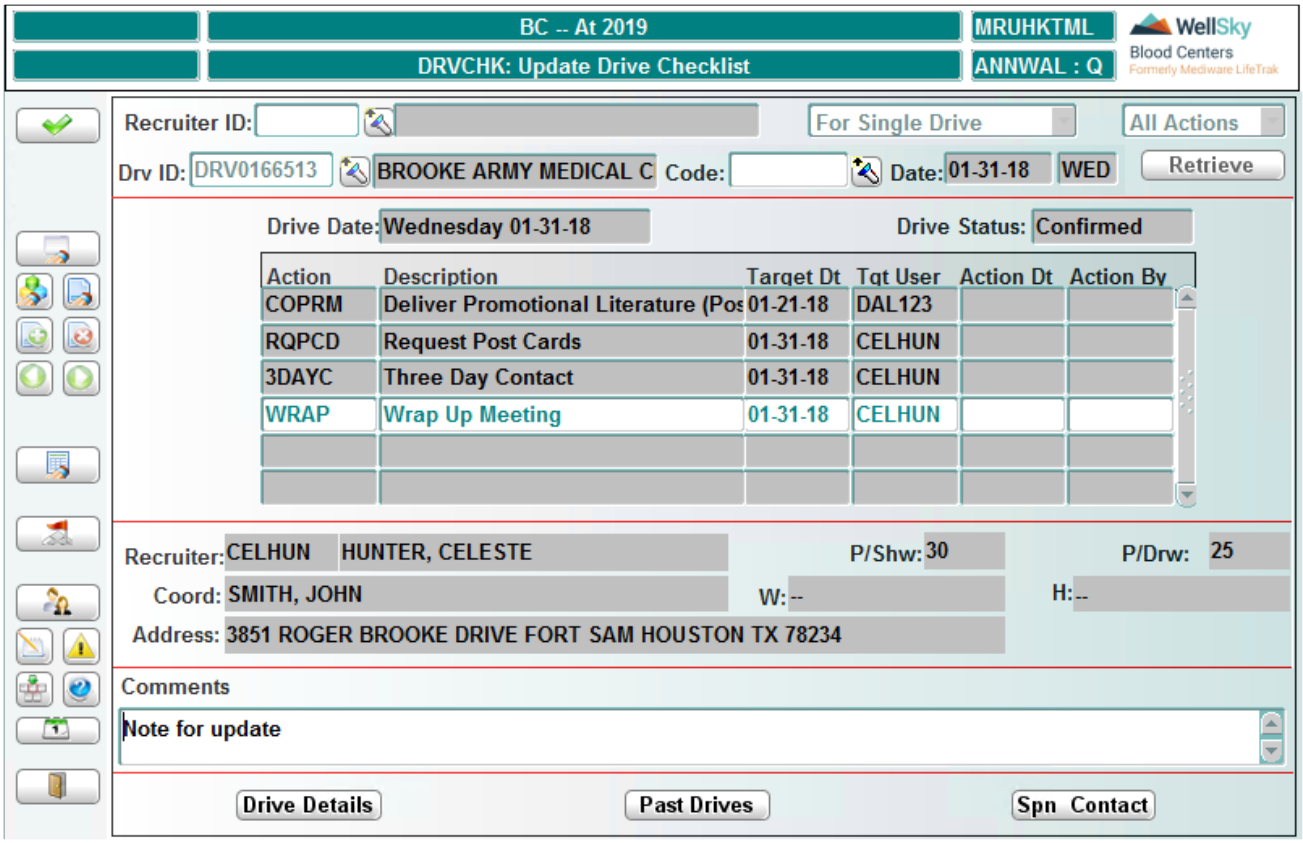


# Control Block Fields and Definitions

## Recruiter ID

Entry is optional. Enter a valid recruiter ID or select from the LOV. The list contains only valid recruitment personnel.

## Targeted for Today

Entry is required. Select from the drop-down list of drive search criteria. Other entry fields in the Control Block vary according to the selection made in this field.

## All Actions

Entry is required. Select from the drop-down list of actions.

## Target Date

Display only. Automatically populates with the system date if Targeted for Today is selected in the second field.

## Drive ID

Entry is required if For Single Drive is selected in the second field. Enter a drive ID or select from the LOV. Field only appears when For Single Drive is selected. Date automatically populates.


WellSky Corporation
Proprietary and confidential

### From Dt/To Dt

Entry is required if **Target Date Range**, **Drive Date Range**, or **Creation Date Range** is selected in the second field. Enter the starting and ending date using the MMDDYY format.

### Action Code

Entry is optional. Enter type of action or choose from the LOV. Name of field is Action Code, Action, or Code depending on the selection made in the second field.

## Retrieving Data

Click **Retrieve** to display checklist records according to the specified parameters.

## In the List Block

The following data displays in the List Block for each record retrieved:

- Drive date
- Drive ID
- Sponsor
- Action
- Target date
- Target user
- Date action was performed
- User who performed the action

The only columns that permit entry or modification are Action Dt and Action By.

### Action Dt

Entry is optional. Enter the date that any action was completed, using the MMDDYY format.

### Action By

Entry is required if an action date is entered in the *Action Dt* field. Enter a valid recruiter ID or select from the LOV.

## The Details Block

The following information displays for the selected drive in the Details Block:

- Recruiter
- Description of action
- Coordinator
- Coordinator's phone numbers
- Address of drive

- Projected show
- Projected draw
- Comments

To attach comments to a retrieved record, type comments in the *Comments* field.

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query screen. Use this screen to view details about the selected drive. See the Drive Details Query (DRIVEQ) section in this chapter for instructions on using this screen.

## The Past Drives Button

Click **Past Drives** to open the Past Drives window.

See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Spn Contact Button

Click **Spn Contact** to open the Sponsor Contacts window. Use this window to view the contacts for the drive sponsor.

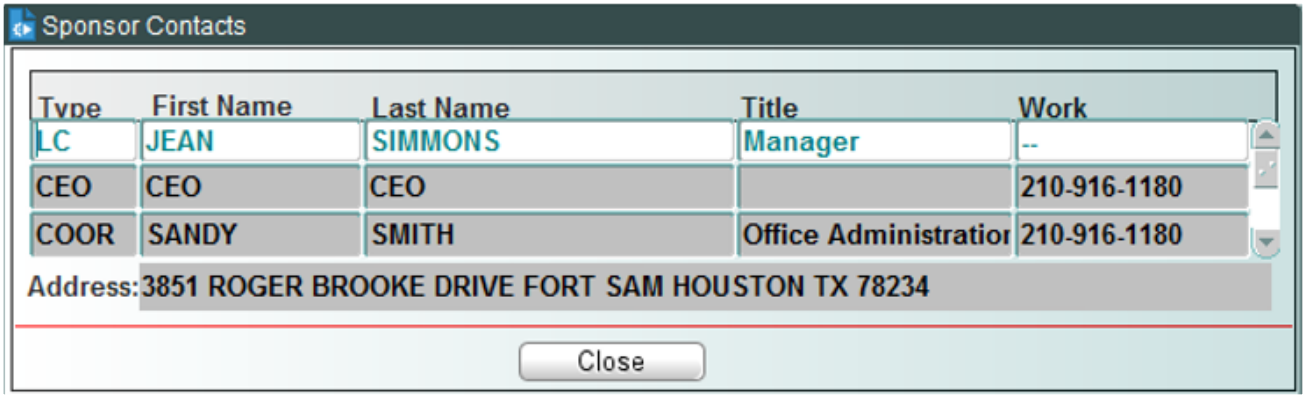


## At Commit

The screen remains populated with data and a message displays to confirm that the transaction is committed. Press **CTRL** + **F5** (Clear Form) to clear the screen, or press **F8** (Exit Screen) to leave the screen.

## What to Do Next

There is no next step.

# 3.2.9 Create Drive Sponsor Profile (SPON2)

## Intended Use

Use this screen to create a profile for a drive sponsor.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword SPON2.

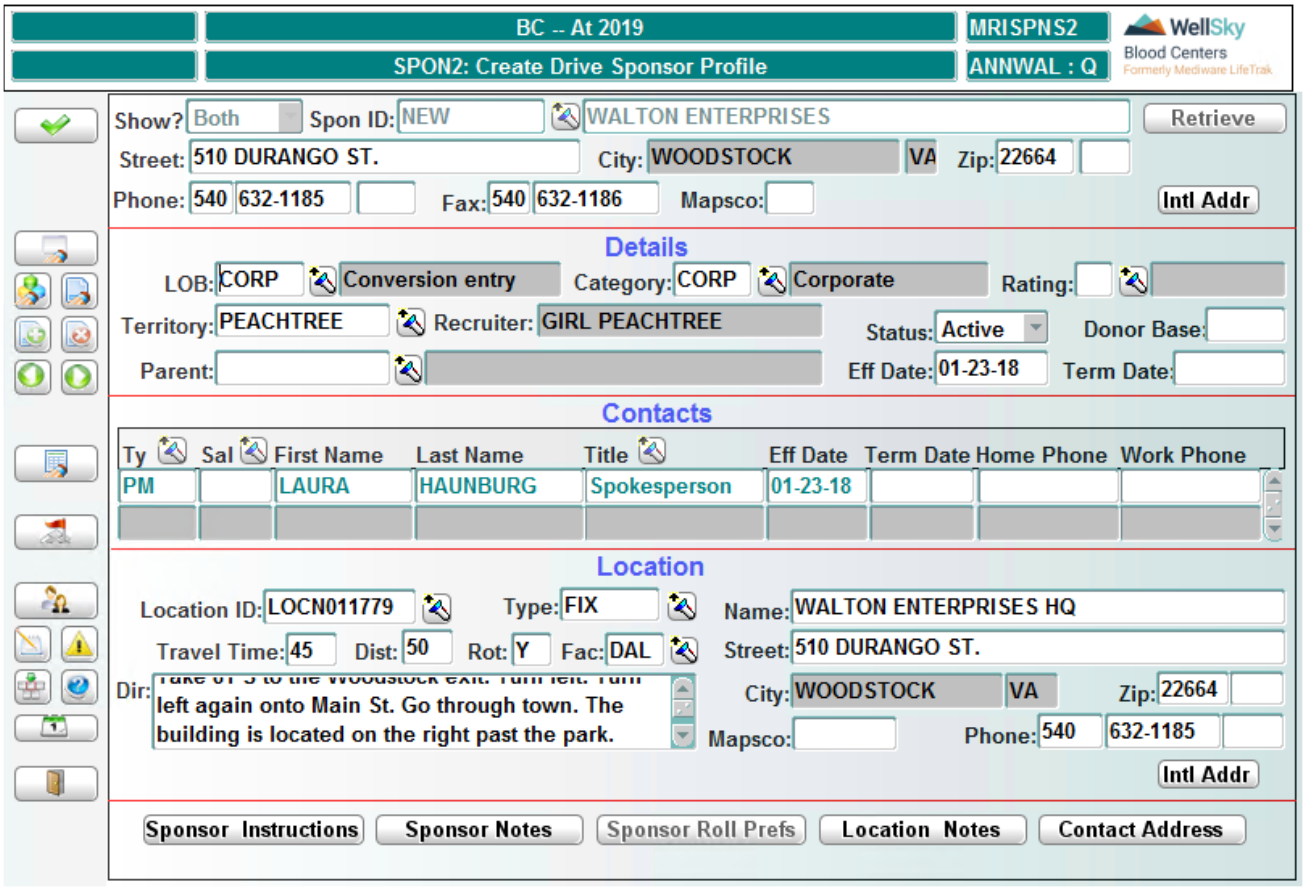


## Control Block Fields and Definitions

### Show?

Select type of drive from the drop-down list. Choose **Active**, **Inactive** or **Both**.

### Spon ID

Enter the sponsor ID or select a Sponsor ID from the LOV to update an existing sponsor. The description associated to the Sponsor ID you entered automatically populates. Enter NEW to create a new sponsor.

## Updating an Existing Sponsor

If a Sponsor ID was entered in the *Spon ID* field, click **Retrieve** to display data associated to that sponsor.

You can modify fields with a white background. Gray fields are protected against modification. Click **COMMIT** to save changes.

## Adding a New Sponsor

If NEW was entered in the *Spon ID* field, press **ENTER**. A message displays, asking for verification that you want to create a new sponsor:

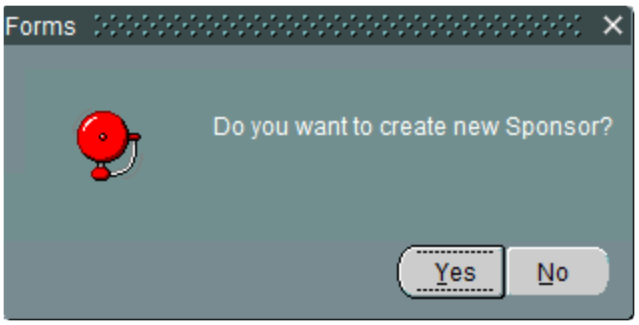


- Click **No** to return to the Create Drive Sponsor Profile screen.
- Click **Yes** to continue entering data for a new sponsor. Enter the sponsor's name in the field next to the *Spon ID* field. Then enter the appropriate information into the following fields.

### Street

Entry is required. Enter the street address for the sponsor.

### Zip

Entry is required. Enter the Zip code for the sponsor's address.

### City/State

Display only. When the Zip code is entered, the associated city and state automatically display.

### Phone

Entry is optional. Enter the phone number for the sponsor. The system automatically inserts the dashes.

### Fax

Entry is optional. Enter the fax number for the sponsor. The system automatically inserts the dashes.

### Mapsco

Entry is optional. Enter the Mapsco location.

### Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

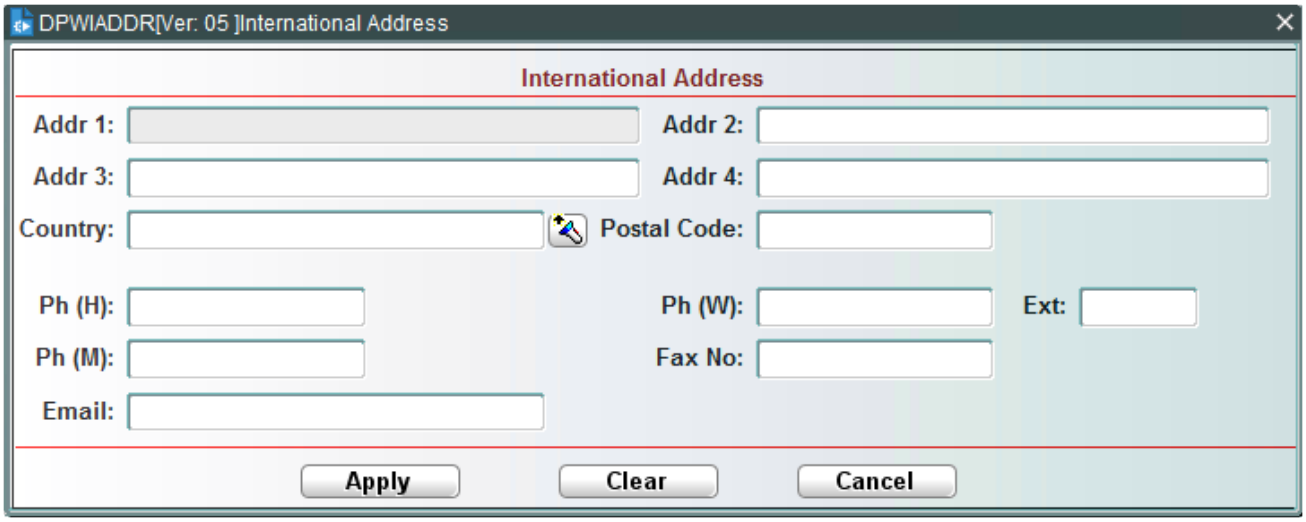


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

# Details Block Fields and Definitions

## LOB (Line of Business)

Entry is required. Enter the code for the line of business that the sponsor is in or select a code from the LOV. The description associated to the code you entered displays automatically.

## Category

Entry is required. Enter the code for the sponsor category or select a code from the LOV. The description associated to the code you entered displays automatically.

## Rating

Entry is optional. Enter the code for the sponsor rating or select a code from the LOV. The description associated to the code you entered displays automatically.

## Territory

Entry is required. Enter the sponsor territory or select from the LOV. The recruiter is automatically assigned and displays.

## Status

Entry is required. Choose **Active** or **Inactive** from the drop-down list.

## Donor Base

Entry is optional. Enter the donor base.

## Parent

Entry is optional. Enter the code for the parent sponsor, if any, or select from the LOV. The description associated to the code you entered displays automatically.

### Eff Date
Entry is required. Enter the effective date of the sponsor profile in MMDDYY format.

### Term Date
Entry is optional. Enter the termination date of the sponsor profile in MMDDYY format.

## Contacts Block Fields and Definitions

### Ty
Entry is optional. Enter the contact type or select from the LOV.

### Sal (Salutation)
Entry is optional. Enter the salutation to be used for the contact person or select from the LOV.

### First Name
Entry is optional. Enter the first name of the contact person.

### Last Name
Entry is required. Enter the last name of the contact person.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### Title
Entry is optional. Enter the job title of the contact person or select from the LOV.

### Eff Date
Entry is required. Enter the date when the person becomes the sponsor's contact, using the MMDDYY format. Do not enter a date prior to the system date.

### Term Date
Entry is optional. Enter the date when the person will no longer be the sponsor's contact, using the MMDDYY format.

### Home Phone
Display only. Click the Contact Address button at the bottom of the screen to enter the contact's home phone number.

### Work Phone
Display only. Click the Contact Address button at the bottom of the screen to enter the contact's work phone number.


WellSky Corporation
Proprietary and confidential

# Location Block Fields and Descriptions

## Location ID

Entry is required. Enter the drive location ID or select from the LOV. If creating a new location, enter `NEW`. A message displays, verifying that you want to create a new location:

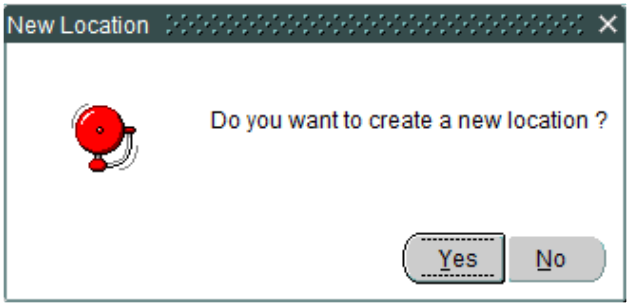


- Click **Yes** to continue. The system generates and assigns a new location ID.
- Click **No** to return to the Create Drive Sponsor Profile screen without creating a new Location ID.

## Type

Entry is required. Enter the drive location type or select from the LOV.

## Name

Entry is required. Enter the location name.

## Travel Time

Entry is required. Enter the travel time to the drive location.

**NOTE –** The Travel Time field cannot be zero. If travel time is zero, the user will not receive the expected message for default travel time, "Do you want to set default values for Transportation Requirements?", when the drive is created.

## Dist (Distance)

Entry is required. Enter the distance to the drive location.

## Rot (Rotation Drive)

If the location type is **FIX**, enter `Y` in this field to create a rotation drive.

## Fac (Facility)

Entry is required. Enter the facility to which drive staff is assigned or select from the LOV.

## Street

Entry is required. Enter the street address of the drive location.

### Zip
Entry is required. Enter the Zip code of for the drive location

### City/State
Display only. The city and state fields automatically populate when the Zip code is entered.

### Mapsco
Entry is optional. Enter the Mapsco location.

### Phone
Entry is optional. Enter the phone number of the drive location.

### Dir (Directions)
Entry is optional. Enter directions to the location.

## Intl Addr Button

Click **Intl Addr** to open the International Address window, as follows:

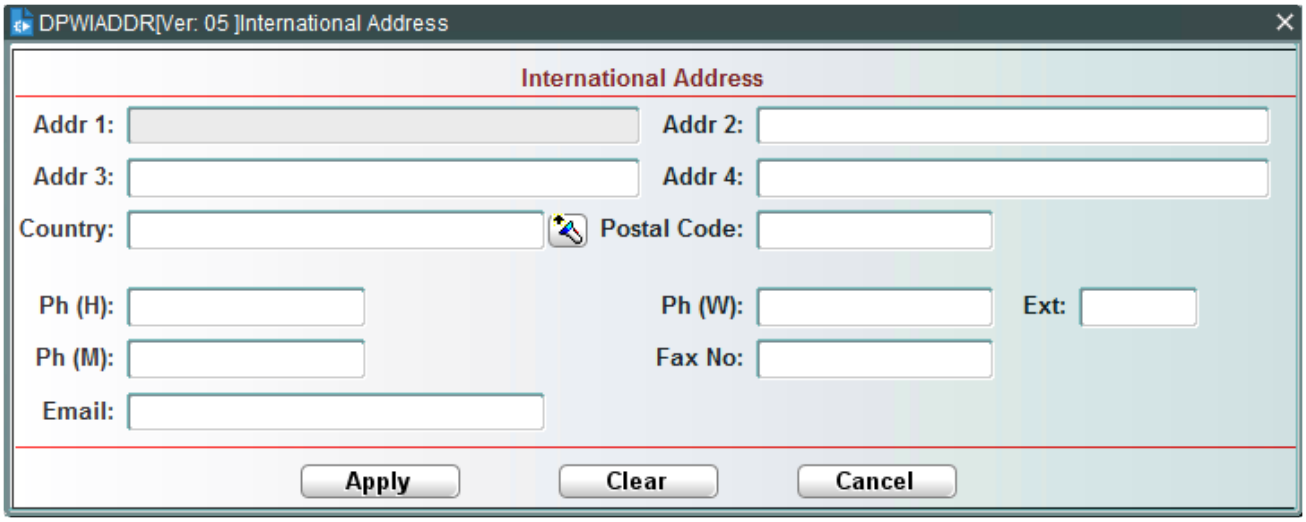


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## The Sponsor Instructions Button

Click **Sponsor Instructions** to open the Sponsor Preferences window:

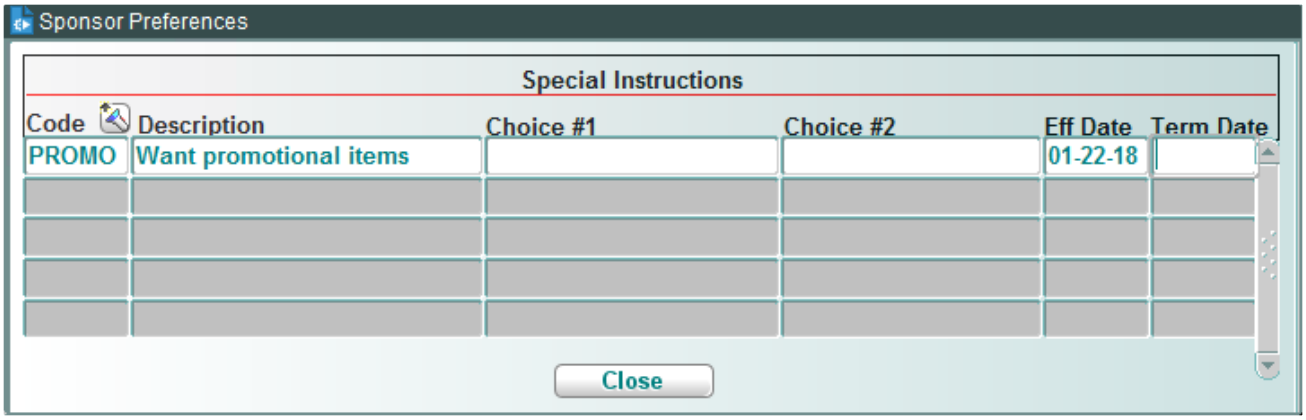


Use this window to attach special instructions to a sponsor. Enter the following data:

### Code

Entry is required. Enter a special instructions code or select from the LOV. Once a valid code is entered or selected, the code description automatically displays.

### Choice #1/#2

Entry is optional. Enter any specific details to clarify the special instructions.

### Eff Date

Entry is required. Enter the effective date using the MMDDYY format. The effective date cannot be prior to the system date.

### Term Date

Entry is optional. Enter the termination date using the MMDDYY format. The termination date cannot be prior to the system date or effective date.

## The Sponsor Notes Button

Click **Sponsor Notes** to open the Notes window. Use this window to attach notes to a sponsor profile:

Enter notes in the blank space. Insert date and user who entered the note automatically populate. Click **Close** when finished.

To delete a sponsor's note, select the note that needs to be deleted and click **Delete** or use **ALT + D**. Once you click **Close**, that will commit the deletion, and at commit it will complete the removal of the note.

**NOTE –** The Note Seq will skip the number that is deleted, so if you delete the second note and there is a third note, it will display sequence 1 note and then display sequence 3 note. If you delete the very last note, it will display the last sequence that has not been used.

If you delete the note and then decide the wrong note was selected, to keep the note that was wrongfully selected from being deleted you will need to click **Close** and then exit out of the form. If you click **Commit**, the note will be deleted.

## The Sponsor Roll Prefs Button

Click **Sponsor Roll Prefs** to open the Sponsor Rollover Preferences window. Use this window to query preferences for a rollover drive. This is for documentation of rollover preferences only; no drives are actually created in this screen. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Location Notes Button

Click **Location Notes** to open the Notes window. Use this window to enter notes about the site location.

Enter notes in the blank space. Insert date and user who entered the note automatically populate. Click **Close** when finished.

To delete a location's note, select the note that needs to be deleted, and click Delete or use ALT + D. Once you click Close, that will commit the deletion, and at commit it will complete the removal of the note.

**NOTE –** The Note Seq will skip the number that is deleted, so if you delete the second note and there is a third note, it will display sequence 1 note and then display sequence 3 note. If you delete the very last note, it will display the last sequence that has not been used.

If you delete the note and then decide the wrong note was selected, to keep the note that was wrongfully selected from being deleted you will need to click **Close** and then exit out of the form. If you click **Commit**, the note will be deleted.

## The Contact Address Button

Click **Contact Address** to open the Sponsor Contact Address window:

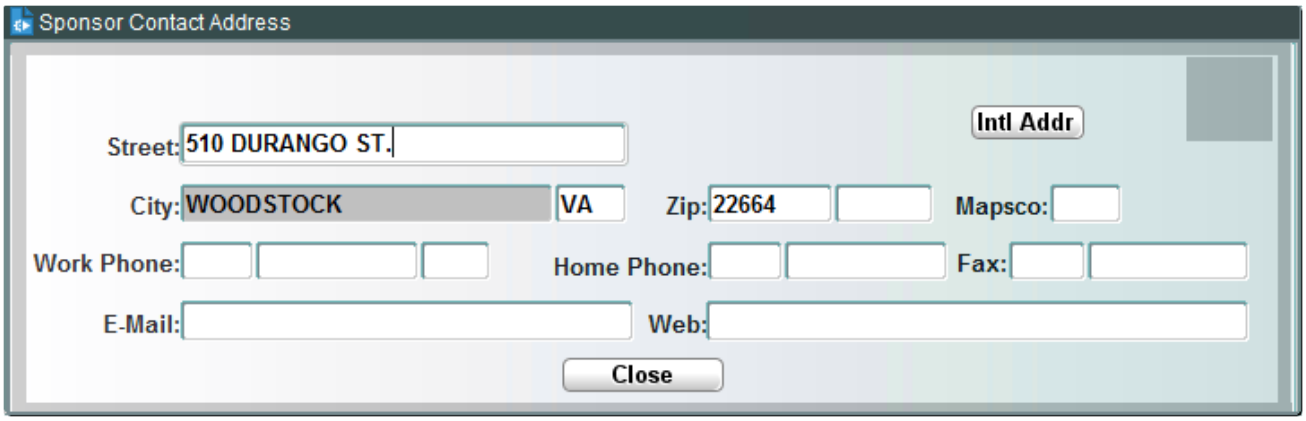


Use this window to enter a new contact's address information. An address entry is mandatory for a new contact. You may modify an existing sponsor contact address here. The sponsor's name and address populates the address window by default for a new sponsor contact. Correct the default information, if necessary.

Click **Close** to return to the main screen after adding and modifying data. Changes are saved to the database when you commit the data.

Click **Intl Addr** to open the International Address window, as follows:

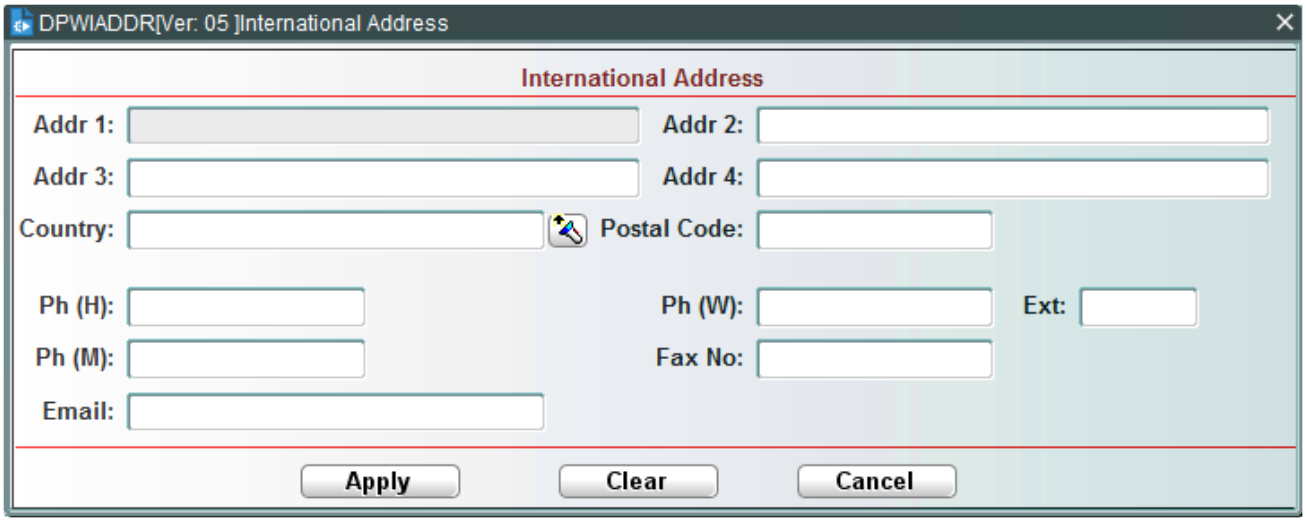


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## At Commit

All new data or updated changes are committed to the database.

## What to Do Next

There is no next step.

# 3.2.10 Maintain Sponsor Contacts (SPONCONT)

## Intended Use

Use this screen to create and maintain details for sponsor contacts.

## Limitations

None

## Prerequisites

A valid sponsor must already exist in the database.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword SPONCONT.

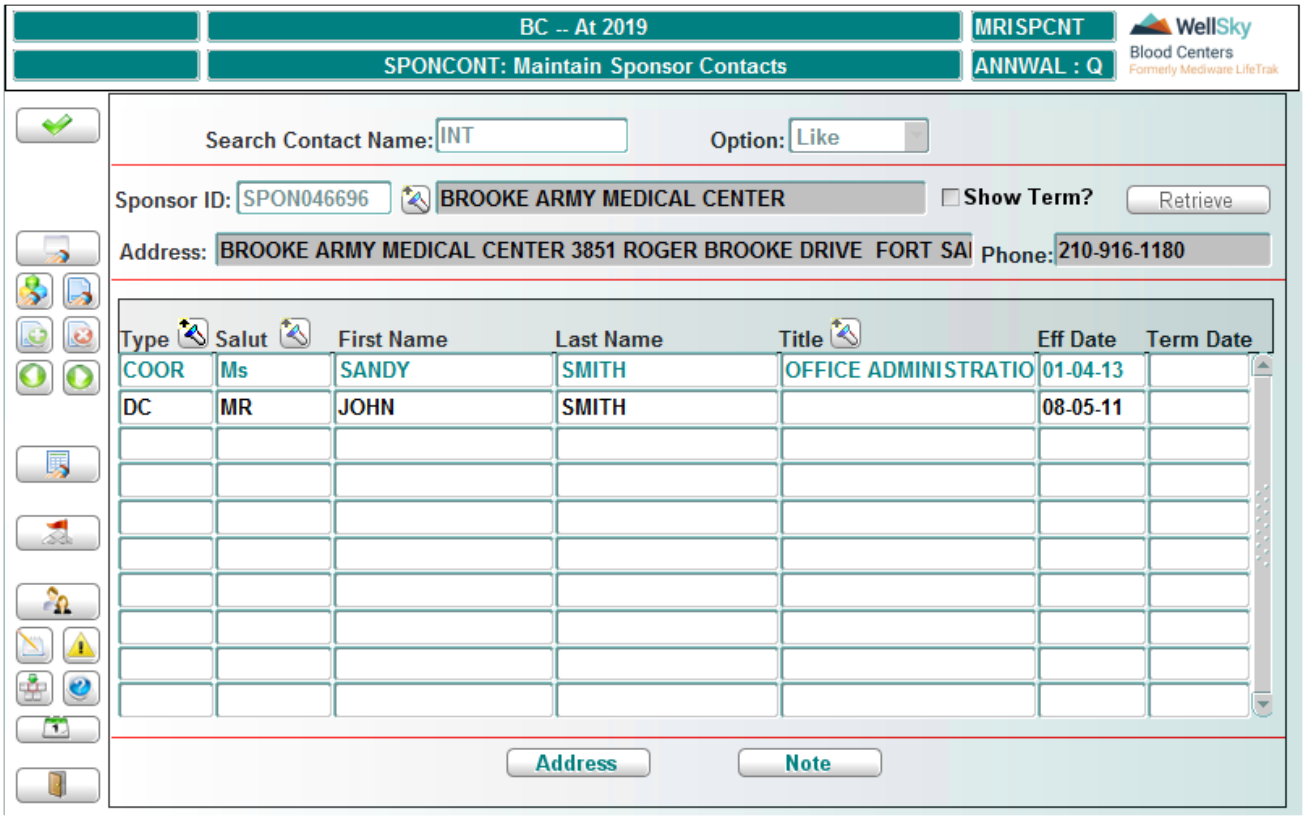


This program permits you to locate a sponsor contact by searching for the contact's first or last name, or by selecting a sponsor and displaying all contacts for that sponsor.

## Search Block Fields and Definitions

### Search Contact Name

To limit the search to a specific contact's first or last name, enter that name.


WellSky Corporation
Proprietary and confidential

### Option

Entry is required if a name is entered in the *Search Contact Name* field. Select one of the following:

- **Like** – The default is the Like option, which limits the search to contacts whose names are basically like your entry.

  Example: an entry of `Lind` would also retrieve Linda.

- **Exact** – Using the Exact option limits the search to contacts whose names exactly match your entry.
- **Soundex** – Using the Soundex option limits the search to contacts whose names sound like your entry.

If searching by the sponsor contact's first or last name, press **ENTER** to initiate the search. An LOV displays that contains only sponsors having contacts with names that qualify for your entry and match option.

Once you've selected the desired sponsor, click **OK** and the sponsor ID displays. Press **ENTER** and the sponsor name, sponsor address, sponsor phone number populate.

Click **Retrieve** to populate the Contact Details block.

## Control Block Fields and Definitions

To display all contacts for a known sponsor, skip the search block and enter the following data:

### Sponsor ID

Enter a valid sponsor ID or select from the LOV. To limit the LOV, enter a partial sponsor name and press **ENTER**. The resulting LOV contains only selections that match your partial entry.

### Show Term

Select the *Show Term* check box to include sponsor contacts that have been terminated in the database.

## Retrieving Data

Once a sponsor ID has been entered or selected, press **ENTER** and the sponsor name, address, and phone number display. Click **Retrieve** to populate the Contact Details block.

## To Modify a Sponsor Contact

Modify any field in any displayed record by entering new data. Click **COMMIT** to save changes.

## To Create a New Sponsor Contact

In the Contact Sponsor Details Block, use the **UP** and **DOWN** arrows to move the cursor to a blank line or click the first blank record. Enter the following data:

### Type

Entry is required. Enter a valid contact type code or select from the LOV.

### Salut

Entry is optional. Enter a salutation or select from the LOV.

### First Name
Entry is optional. Enter the contact's first name. Up to 50 characters are permitted.

### Last Name
Entry is required. Enter the contact's last name. Up to 50 characters are permitted.

### Title
Entry is optional. Enter the contact's duty title or select from the LOV.

### Eff Date
Entry is required. Enter the effective date for the record, using the MMDDYY format. The effective date cannot be prior to the system date.

### Term Date
Entry is optional. Enter the termination date for the record, using the MMDDYY format, if applicable. The termination date must be later than the effective date.

## The Address Button
Click **Address** to open the Sponsor Contact Address window:

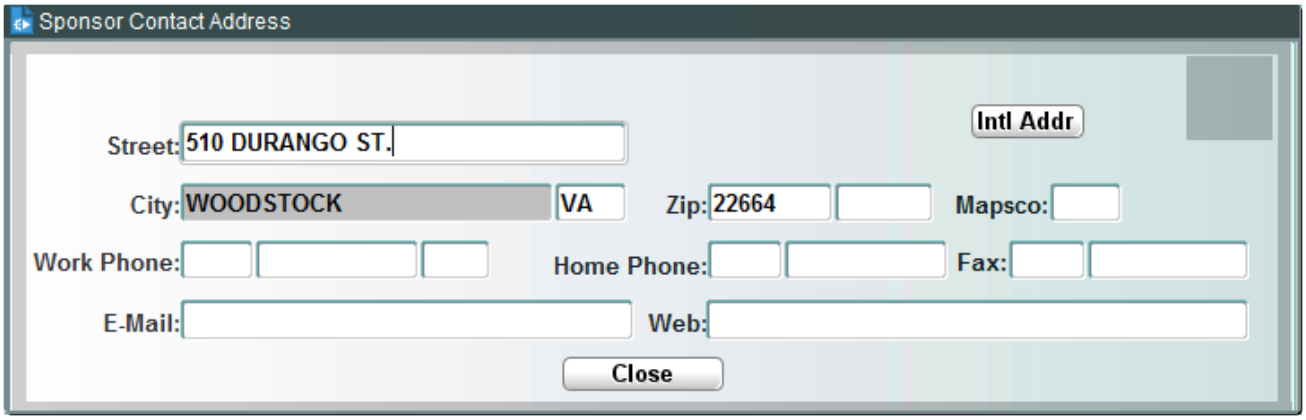


Use this window to enter a new contact's address information. An address entry is mandatory for a new contact. You may modify an existing sponsor contact address here. The sponsor's name and address populates the address window by default for a new sponsor contact. Correct the default information, if necessary.

Click **Close** to return to the main screen after adding and modifying data. Changes are saved to the database when you commit the data.

Click **Intl Addr** to open the International Address window, as follows:


WellSky Corporation
Proprietary and confidential

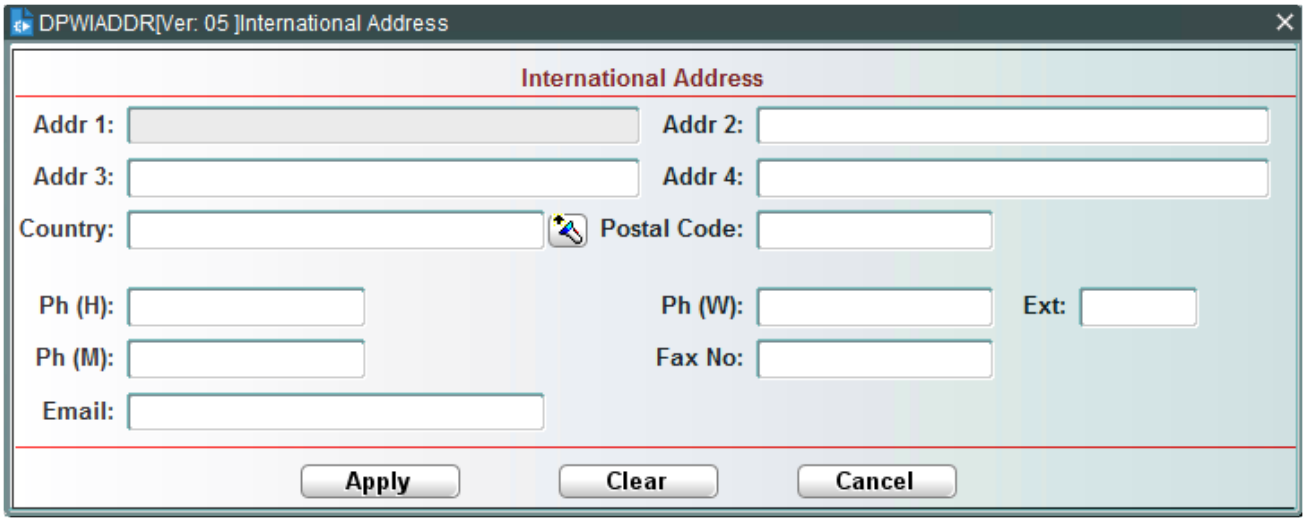


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## The Note Button

Click **Note** to open the Notes window:

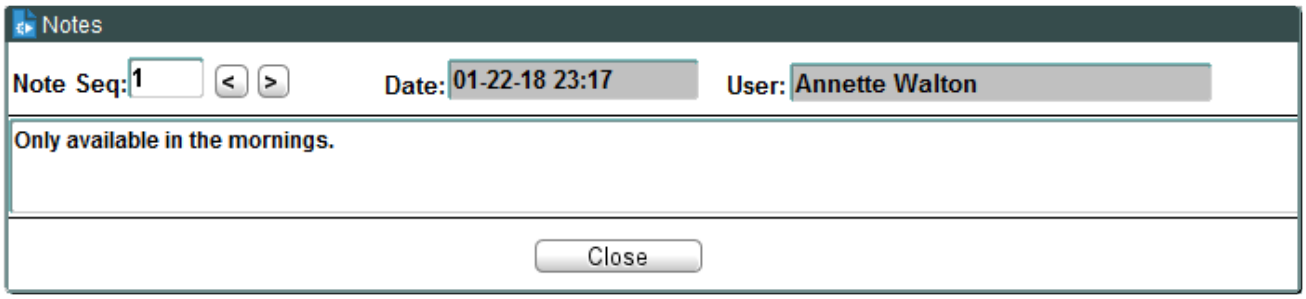


Notes up to 240 characters in length may be entered. For existing contacts, notes already entered may be viewed, but not modified.

## Committing the Transaction

Click **COMMIT** to save the transaction to the database. The screen remains populated and message displays, confirming that the transaction is committed. Click **CLEAR FORM** to clear the screen, or **EXIT FORM** to exit the screen.

## What to Do Next

Sponsor contacts entered or modified in this screen may be associated with scheduled drives on or after the effective dates entered here.

# 3.2.11 Customize Checklist for a Sponsor (SPONCHK)

## Intended Use

Use this screen to create or modify a customized drive checklist for a sponsor. Unless a customized checklist is created for a sponsor, the default checklist is automatically assigned to all drives for that sponsor.

## Limitations

None

## Prerequisites

The sponsor must have been defined in the Donor system.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword SPONCHK.

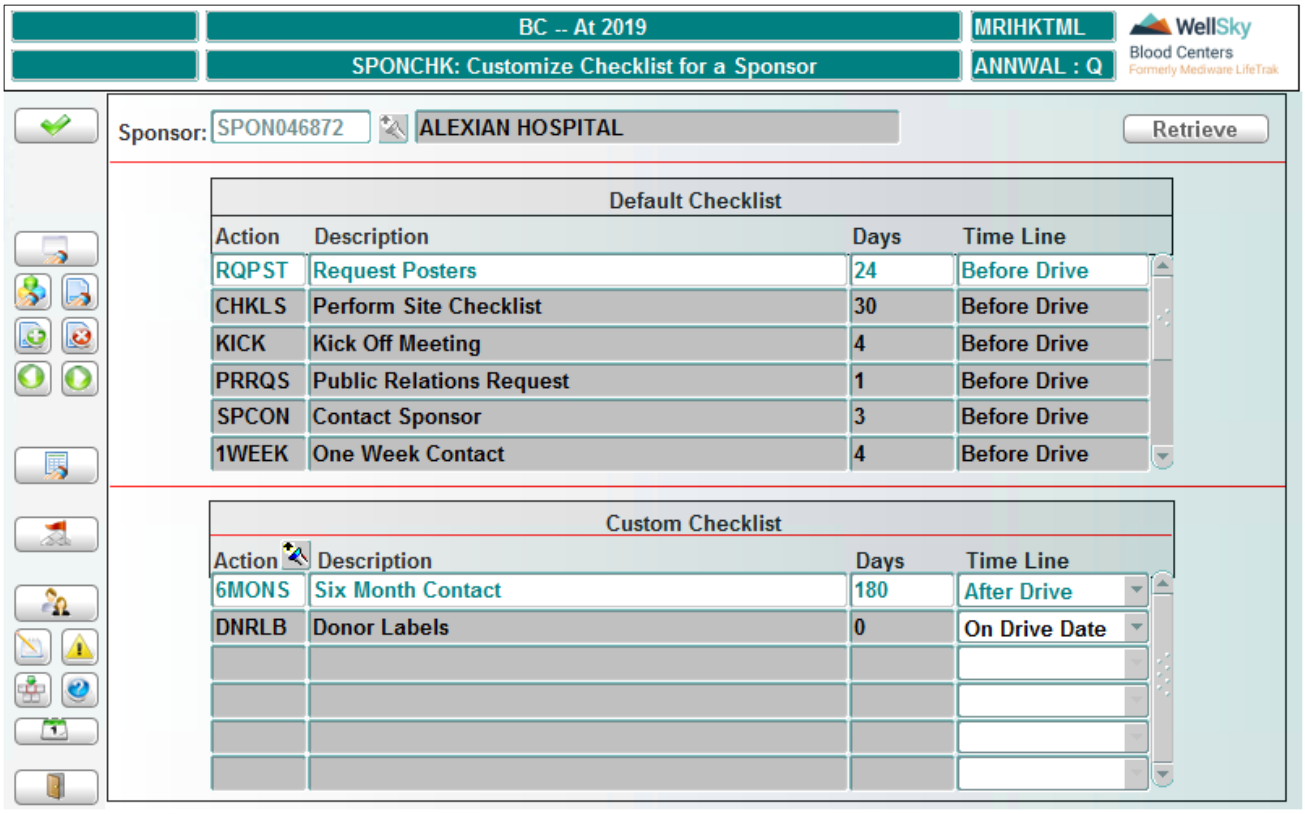


## Control Block Fields and Definitions

### Sponsor

Entry is required. Enter a sponsor ID or select from the LOV. Once a valid sponsor ID is entered or selected, the sponsor name automatically displays. You may enter a partial sponsor name to restrict the list to sponsor names


WellSky Corporation
Proprietary and confidential

matching your partial entry.

If no customized checklist exists for the sponsor you have specified, a message displays, asking if you want to create a new one:

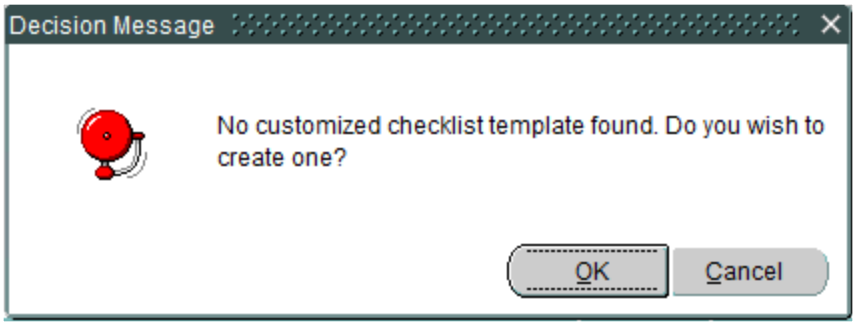


Click **OK** to create a customized template for the sponsor, or click **Cancel** to clear the screen.

When you click **OK**, the screen populates with the default drive checklist.

The customized checklist is a modification of the default checklist in all instances.

Default checklist items display in the upper block. Customized checklist items are entered in the lower block. You may not modify default checklist items in any way. You may only customize the checklist by adding items in the lower block.

## To Customize a Checklist

Enter the following data:

### Action

Entry is required. Enter an action code or select from the LOV.

### Description

Display only. Once a valid action code is entered or selected, the code description automatically displays. No entry or modification is permitted in this column.

### Days

Entry is required. Enter a whole number that represents the number of days before or after the drive that the action item is to be acted upon.

### Time Line

Entry is required. Use the drop-down list in this column to select an appropriate time line option.

Multiple action items may be defined for a sponsor by repeating this process. All modifications to the default checklist may then be committed to the database at once.

## At Commit

Click COMMIT to save the transaction to the database. A pop-up confirms that the transaction is committed.

The screen clears and another sponsor can be selected.

## What to Do Next

Each time a drive is scheduled for this sponsor, the customized checklist is associated with the drive. Use Update Drive Checklist (DRVCHK) to record completion of action items on the checklist.

# 3.2.12 Define Sponsor Rollover Preferences (SPONROLL)

## Intended Use

Use this screen to specify rollover drive preferences for a sponsor.

## Limitations

This is for documentation of rollover preferences only; no drives are actually created in this screen.

## Prerequisites

A sponsor must exist in the database.

## Accessing the Screen

Access this screen from the Recruitment General Functions menu or by entering the keyword `SPONROLL`.


WellSky Corporation
Proprietary and confidential

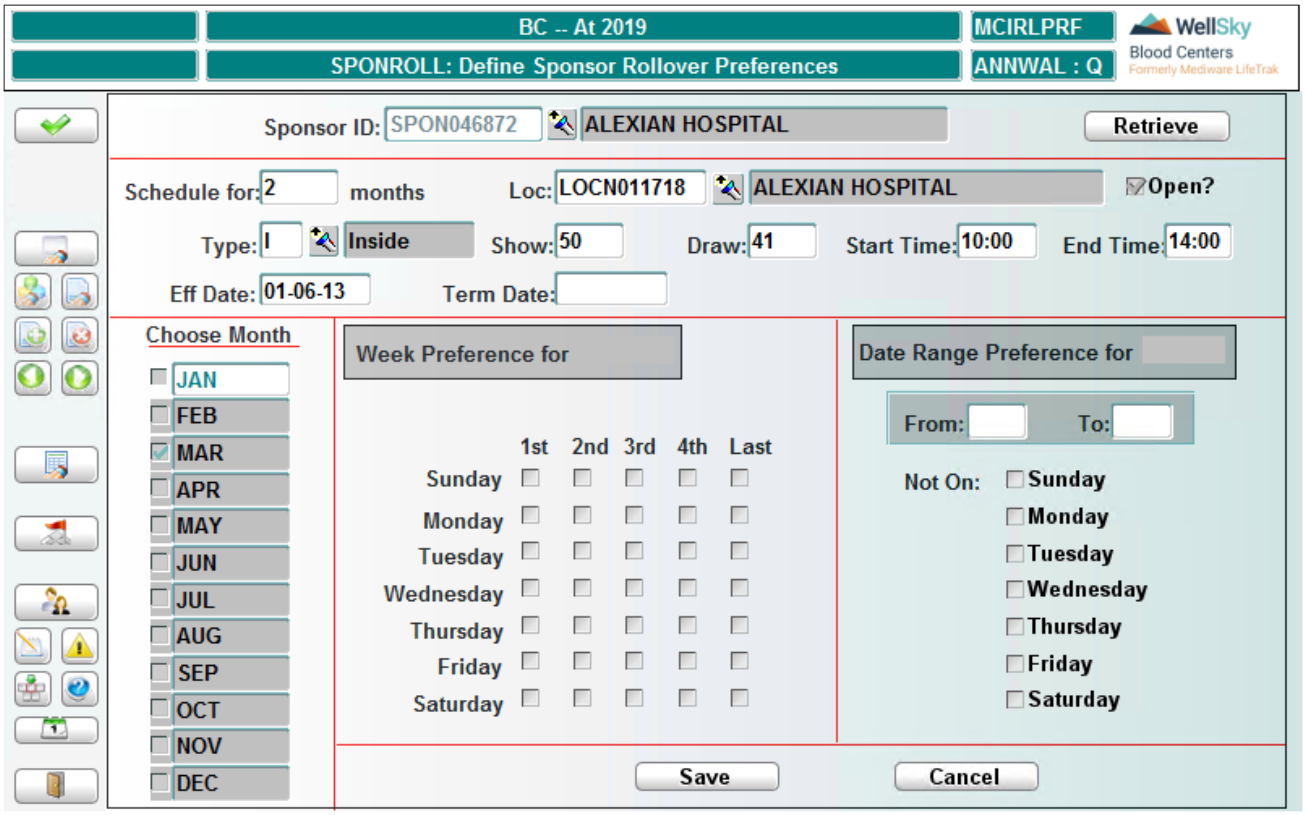


# Control Block Fields and Definitions

## Sponsor ID

Entry is required. Enter a sponsor ID or select from the LOV. A new sponsor cannot be created in this screen. Once a valid sponsor ID is entered or selected, the sponsor name displays automatically.

Click **Retrieve** to display data for the selected sponsor.

# Drive Profile Block Fields and Definitions

## Schedule for

Entry is required. Enter or modify the sponsor's preference for drive frequency expressed in number of months.

## Loc

Entry is required. Enter or select a drive location code from the LOV based upon the sponsor's drive location preference. The location name automatically displays.

## Open?

Select this check box to designate that the drives are to be open drives.

## Type

Entry is required. Enter a valid drive type code or select from the LOV.

The next four fields populate automatically with details from past drives, if available. Data in each field can be modified.

### Show
Entry is required. Enter projected show for rollover drives.

### Draw
Entry is required. Enter projected draw for rollover drives.

### Start Time
Entry is required. Enter the projected start time for rollover drives, using the HHMI format (24-hour clock). The system automatically inserts the colon.

### End Time
Entry is required. Enter the projected end time for rollover drives, using the HHMI format (24-hour clock). The system automatically inserts the colon.

### Eff Date
Entry is required. The default is the system date. Modify for a future date in MMDDYY format.

### Term Date
Entry is optional. Enter a termination date in MMDDYY format.

## Entering Scheduling Preferences

Click any month at the left side of the screen to select that month. The month selected is reflected in both the Week Preference and Date Range Preference blocks.

For any month highlighted, you may define the sponsor's preference by week or date range, but not both.

### Example 1
Sponsor desires to have a drive on the fourth Wednesday of March:


WellSky Corporation
Proprietary and confidential

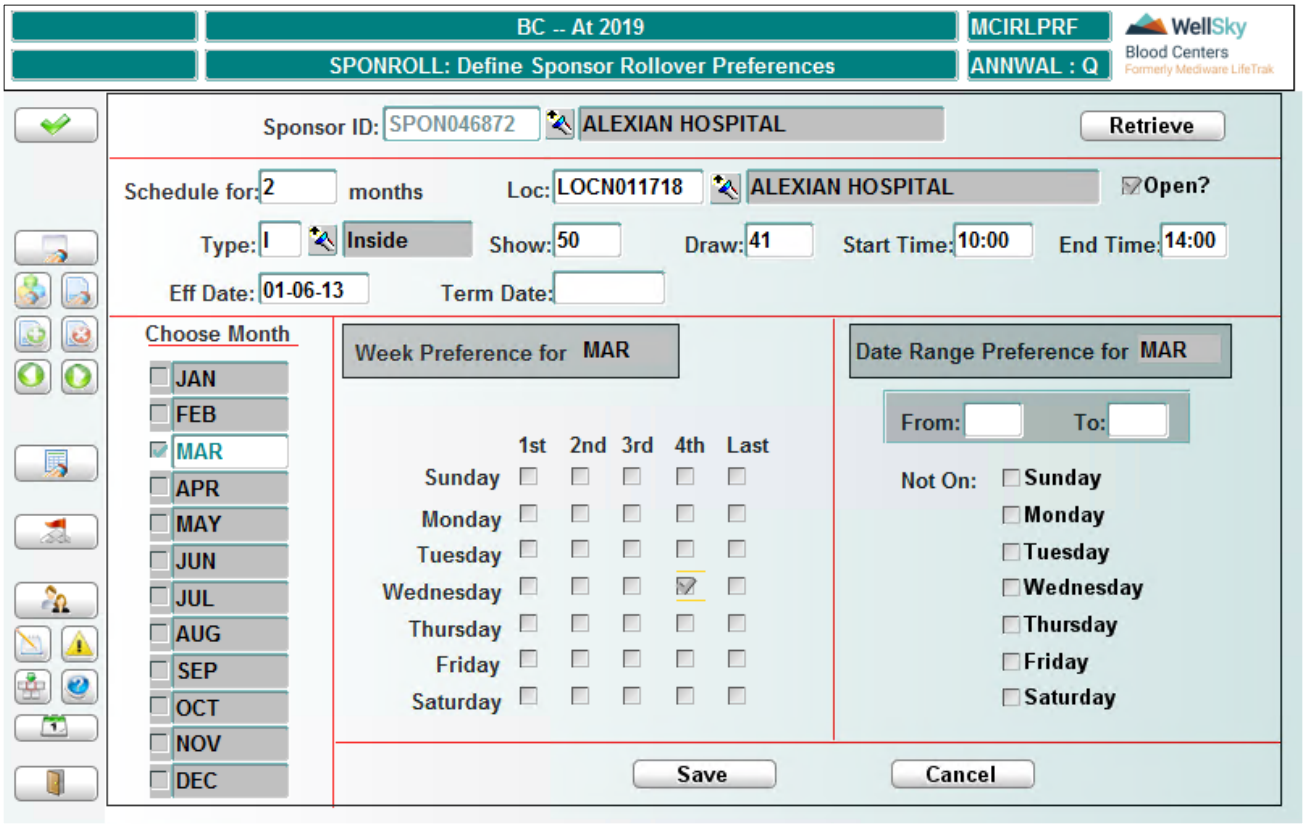


## Example 2

Sponsor is more flexible, and says that rollover drives can be scheduled for any Wednesday between March 10 and March 22:

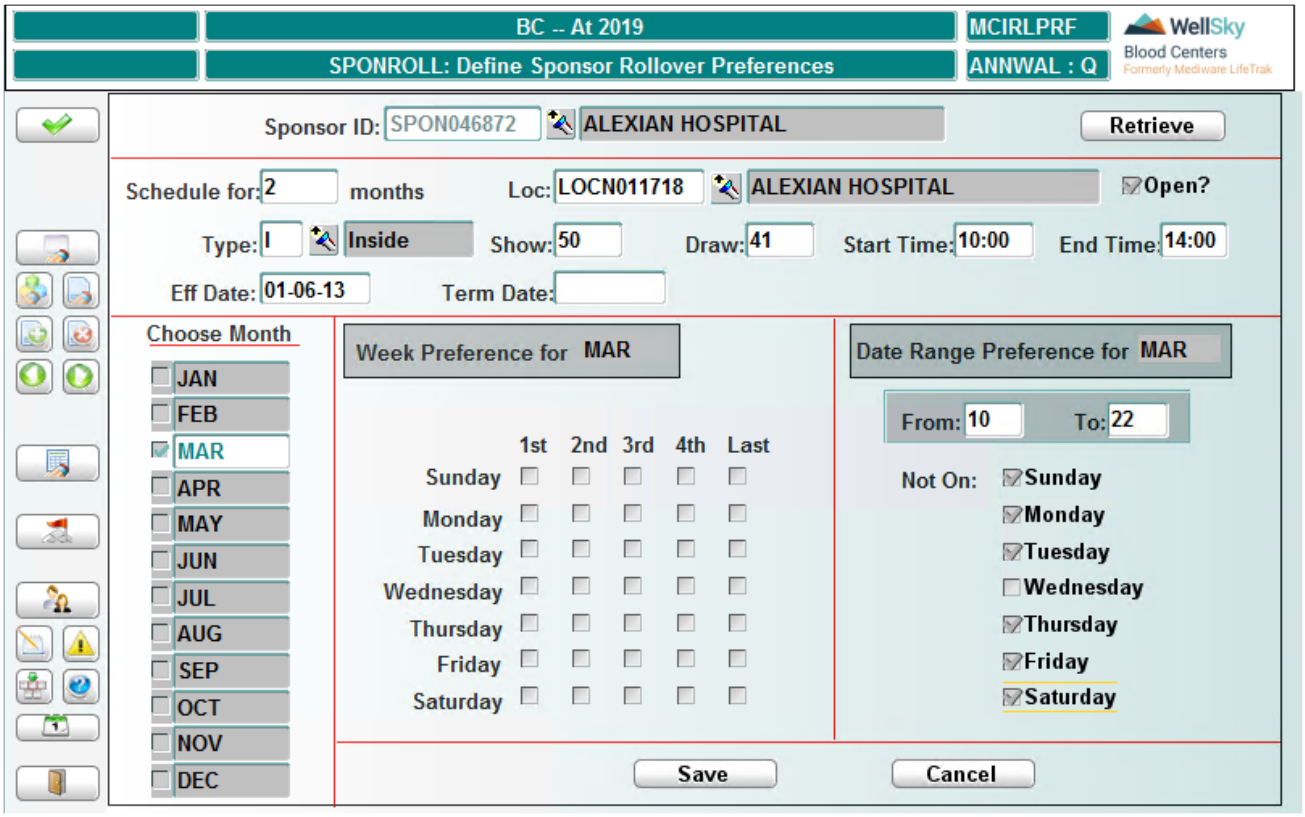


## The Save Button

Once a preference is defined for any highlighted month, that preference must be temporarily saved. Click **Save**. If another month is highlighted without temporarily saving the data, the data is lost and must be redefined. A check mark appears to the left of each month for which a scheduling preference is saved.

## The Cancel Button

Select the month and click **Cancel** . A monthly preference can be cleared whether or not it has been saved.

## Saving Your Entries to the Database

Click **COMMIT** to save all entries and modifications to the database at once. A pop-up confirms the data is committed.

A rollover drive is automatically scheduled for the sponsor following the sponsor's next scheduled drive. In addition to the rollover preferences defined in this screen, the rollover drive is scheduled at least 56 days later than the latest drive already scheduled. Resources are allocated for the rollover drive as it is scheduled.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 3.3 Recruitment Maintenance

These functions are accessed from the following menu:

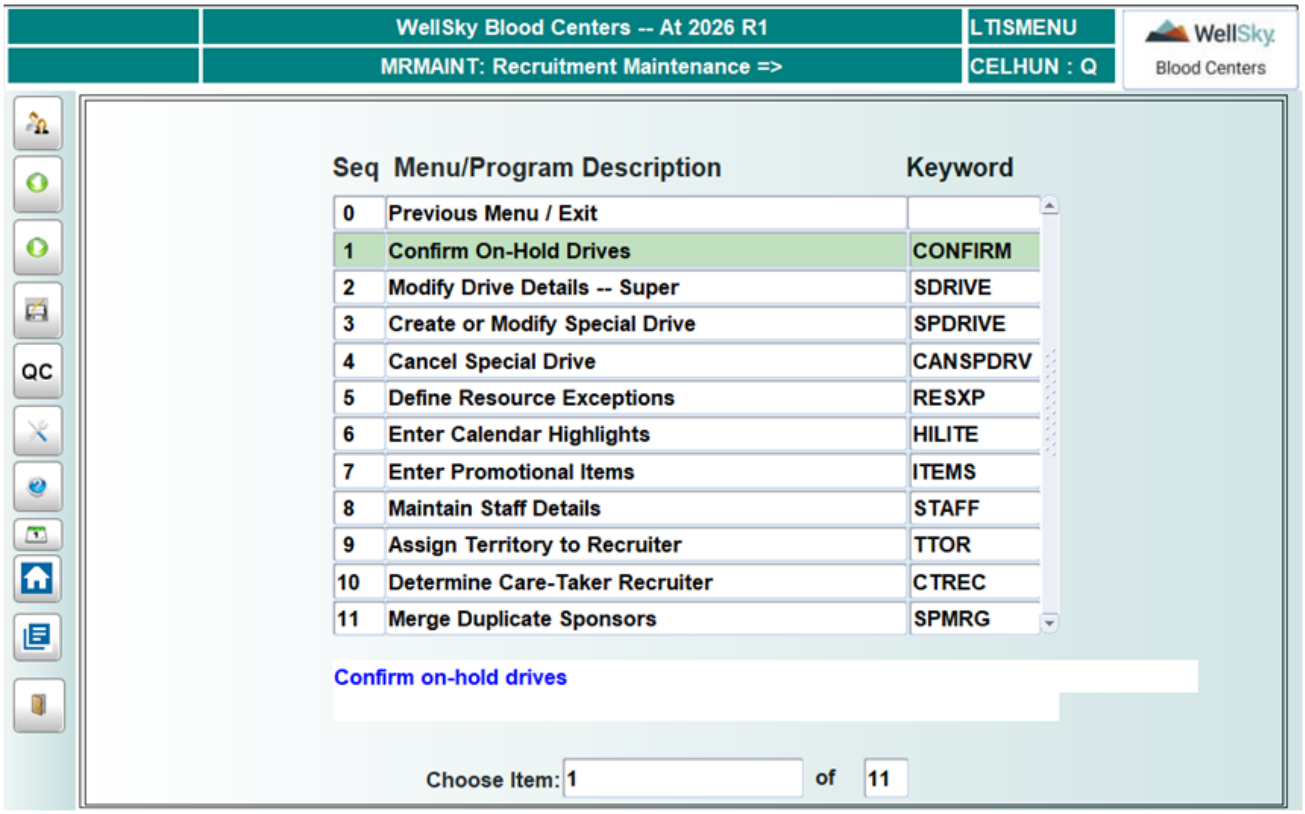


## 3.3.1 Confirm On-Hold Drives (CONFIRM)

### Intended Use

Use this screen to confirm a scheduled on-hold drive that is violating drive rules.

### Limitations

None

### Prerequisites

The drive must be on hold due to violation of drive rules.

### Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `CONFIRM`.

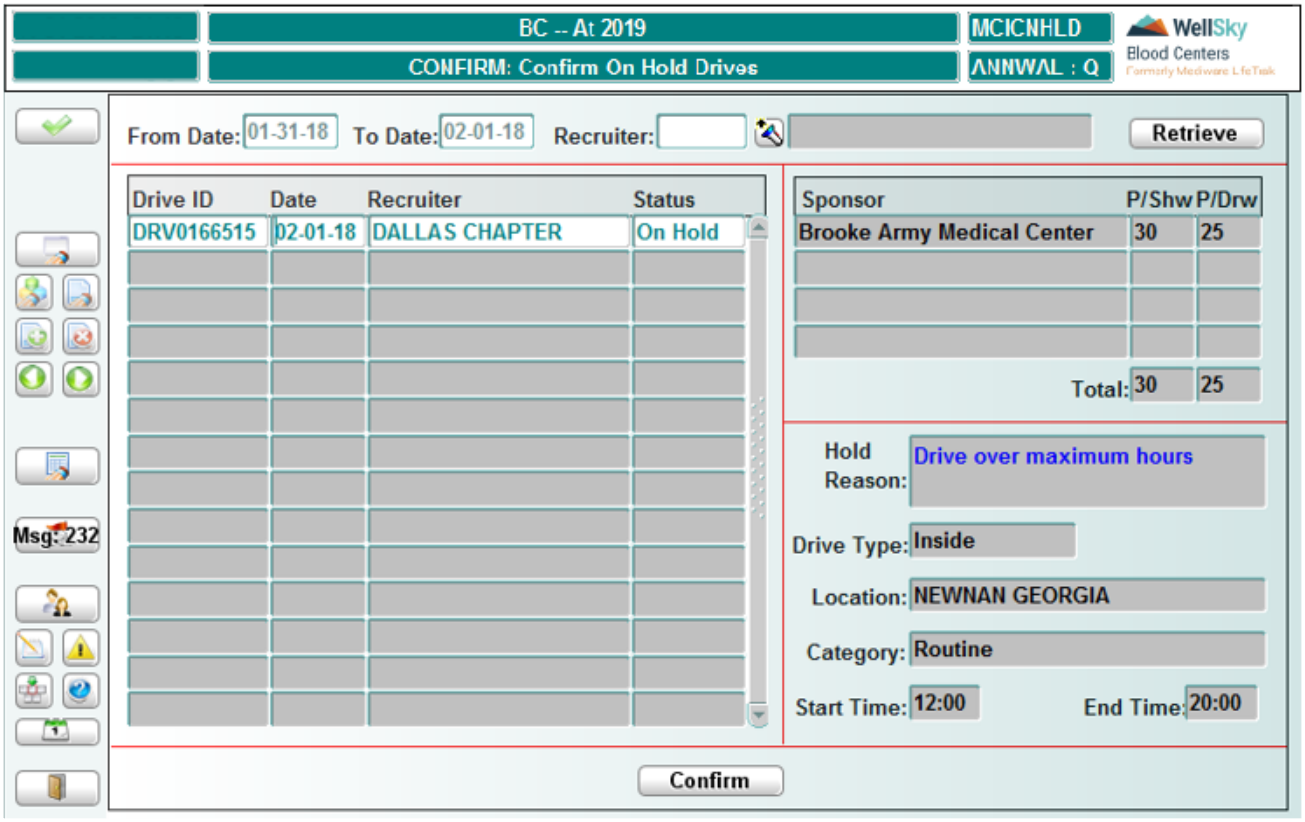


# Control Block Fields and Definitions

## From Date

Entry is required. Enter the earliest date to consider in retrieving records of drives on hold, using the MMDDYY format. Date cannot be prior to system date.

## To Date

Entry is required. Enter the latest date to consider in retrieving records of drives on hold, using the MMDDYY format.

## Recruiter

Entry is optional. Enter a recruiter ID or select from the LOV. Once a valid recruiter ID is entered, the recruiter name displays automatically.

# Retrieving Data

Click **Retrieve** to display all records of drives on hold within the specified drive date range.

Use the **UP** and **DOWN** arrows or select any displayed record and view data for that drive.

# In the Drive Details Block

The following data displays for each drive retrieved:

- Drive ID
- Drive date
- Recruiter
- Status

## In the Drive Sponsor Block

The following data displays for the selected drive:

- Drive ID
- Sponsor
- Projected show
- Projected draw
- Total projected show and projected draw for all sponsors

## In the Drive Hold Block

The following data displays for the selected drive:

- Hold reason
- Drive type
- Location
- Category
- Start time
- End time

## The Confirm Button

Click **Confirm** at the bottom of the screen to confirm any selected drive.

A message displays that asks you to acknowledge that drive is to be confirmed:

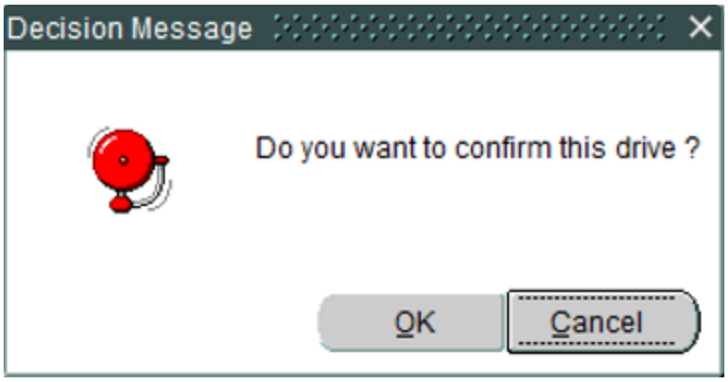


Click **OK** to commit the transaction. Click **Cancel** to return to the screen without committing the transaction.

## At Commit

The screen remains populated with data and a window confirms that the transaction is committed. The hold status is removed from the drive.

## What to Do Next

There is no next step.

# 3.3.2 Modify Drive Details – Super (SDRIVE)

## Intended Use

This is a supervisory screen that allows modification to existing drives.

## Limitations

You can only modify a drive for which you are the recruiter or caretaker recruiter.

## Prerequisites

If a drive is to be modified, the drive must have been previously scheduled using this screen.

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `SDRIVE`.

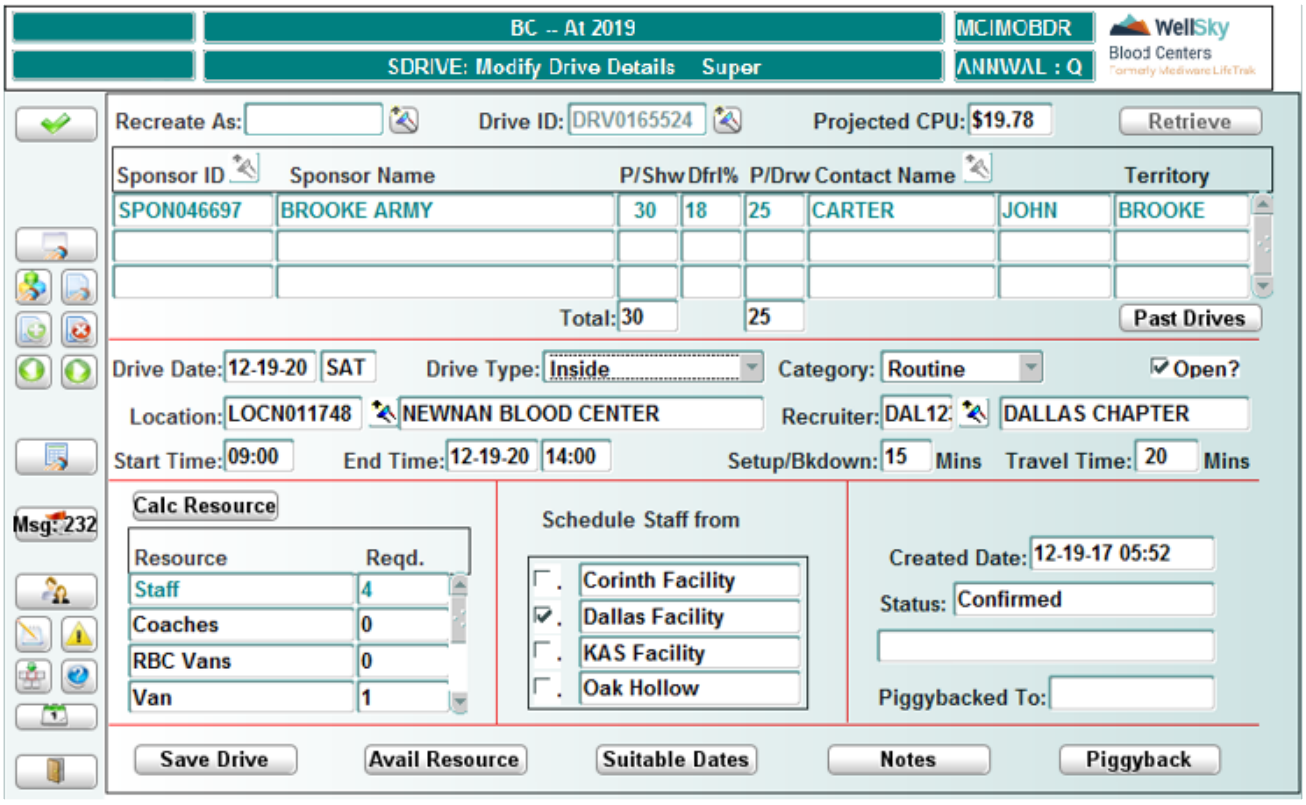



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

### Recreate As

The cursor appears in the *Drive ID* field. To activate the *Recreate As* field, press SHIFT + TAB. Enter an ID or select from the LOV. This allows a new drive to be created with the same parameters as an existing drive.

**NOTE –** Drive date defaults to the already scheduled date. User must change date for recreated drive before continuing.

### Drive ID

Entry is required. Enter NEW if scheduling a new mobile drive. Enter a valid drive ID or select from the LOV if modifying an existing drive.

### Projected CPU

Display only. If an existing drive is entered or selected, the projected CPU displays.

## Modifying an Existing Drive

The procedures for modifying an existing drive are identical to those of the Create or Modify Mobile Drive (DRIVE) screen. See that section of this chapter for instructions on modifying an existing drive.

## Creating a New Drive

The procedures for creating a new drive are identical to those of the Create or Modify Mobile Drive (DRIVE) screen. See that section of this chapter for instructions on creating a new drive.

## Buttons at Bottom of Screen

The buttons at the bottom of the screen are identical to those of the Create or Modify Mobile Drive (DRIVE) screen. See that section of this chapter for instructions on using the buttons.

## At Commit

All entries and modifications are saved to the database. Data remains displayed on the screen.

## What to Do Next

There is no next step.

# 3.3.3 Create or Modify Special Drives (SPDRIVE)

## Intended Use

Use this screen to create a special drive or to modify an existing scheduled special drive.

## Limitations

- Special drives cannot be associated to a facility.
- Special drives do not take away from mobile staff and are not included in the staff schedule.
- Special drives are not accounted for in the master calendar and do not influence the availability of resources.
- Only future drives can be updated or modified.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `SPDRIVE`.

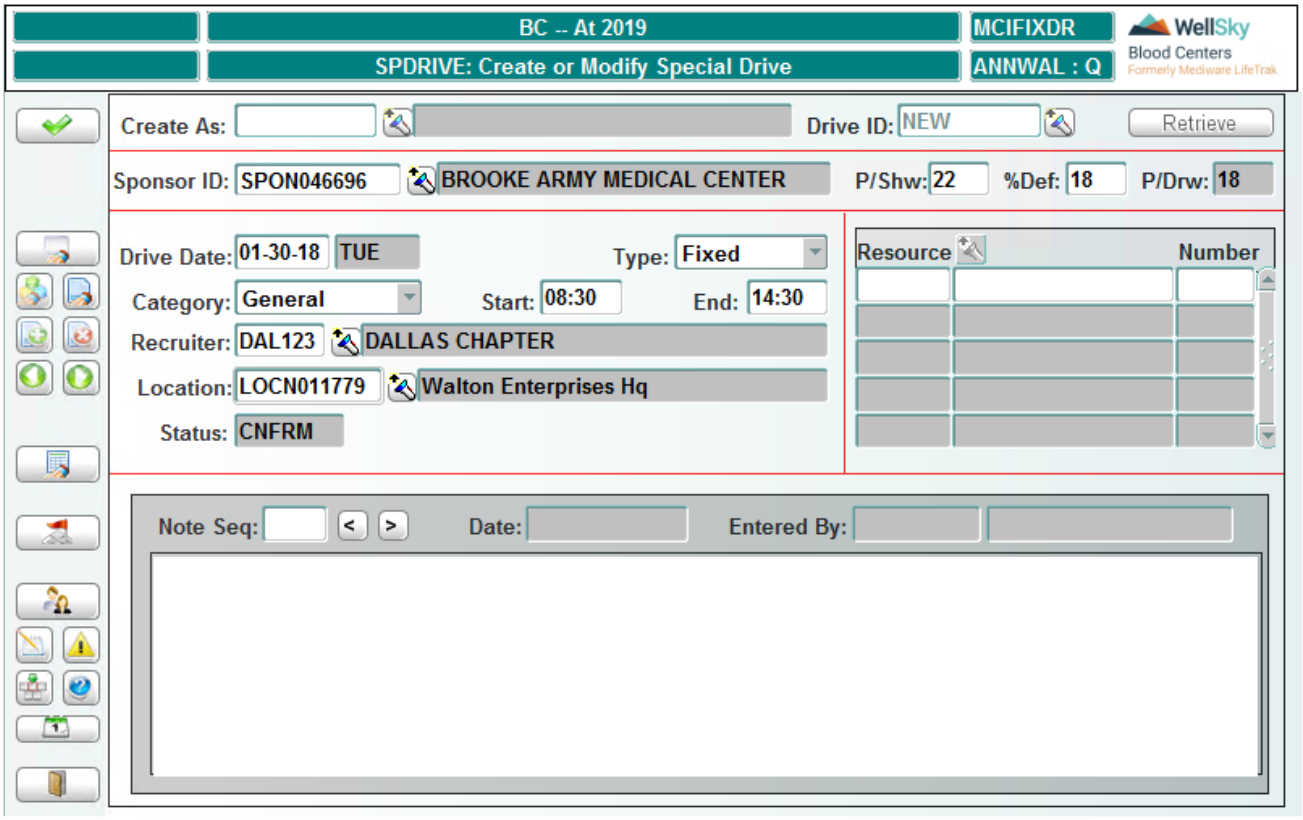


## Control Block Fields and Definitions

### Create As

Entry is optional. The cursor will be in the *Drive ID* field. To activate the *Create As* field, press SHIFT+TAB. Enter an ID or or enter at least 3 characters of the sponsor name to search in the LOV. This allows a new drive to be created with the same parameters as an existing drive.


WellSky Corporation
Proprietary and confidential

### Drive ID
Entry is required. To modify an existing special drive, enter a valid drive ID or enter at least 3 characters of the sponsor name to search in the LOV. To create a new special drive, enter `NEW`.

## Modifying Existing Drive
If an existing drive ID is entered, click **Retrieve** to display all data associated with the drive.

To modify drive data, change the appropriate data and commit.

## Creating New Drive
If creating a new drive, no data is displayed. Data must be entered. A drive ID is automatically assigned when the entered drive information is committed.

## Sponsor Block Fields and Definitions

### Sponsor ID
Entry is required. Enter sponsor ID or select from the LOV. The sponsor name automatically displays.

### P/Shw
Entry is required. Enter the projected show for the drive.

### %Def
Entry is required. Enter the projected percent of deferral. Default is 18%. The percent can be changed.

### P/Drw
Display only. This field automatically populates based on the entered projected show and deferral percentages.

## Drive Details Block Fields and Definitions

### Drive Date
Entry is required. Enter the drive date using the MMDDYY format. The date cannot be prior to system date. The day of the week automatically displays.

### Type
Entry is required. Enter the type of drive or select from the drop-down list.

### Category
Entry is required. Enter the category or select from the drop-down list.

### Start Time
Entry is required. Enter the drive start time, using the HHMI (24 hour) format.

### End Time
Entry is required. Enter the drive end time, using the HHMI (24 hour) format.

### Recruiter
Entry is required. Enter the recruiter ID or select from the LOV. Recruiter name displays.

### Location
Entry is required. Enter the location code or enter at least 3 characters of the location name to search in the LOV. The location name displays.

### Status
Display only. Current drive status displays.

## Resource Block Fields and Definitions

### Resource
Entry is optional. Enter the resource code or select from the LOV.

### Number
Entry is required if a resource is entered. Enter the quantity of the resource required.

## In the Notes Block
Click anywhere in the Notes Block. The following information displays automatically:

- **Note Seq** – The number of the note in the sequence of existing notes.
- **Date** – The date the note is being entered.
- **Entered By** – The user entering the notes.

Click the **LEFT** arrow and **RIGHT** arrow buttons to scroll through existing notes. To enter a new note, advance to a blank record and enter the new note.

## At Commit
All new entries and modifications are committed to the database.

## What to Do Next
There is no next step.

# 3.3.4 Cancel Special Drive (CANSPDRV)

## Intended Use
Use this screen to cancel a scheduled drive.


WellSky Corporation
Proprietary and confidential

## Limitations

The date of the drive to be canceled must be later than the system date, and the user must either be the recruiter or caretaker recruiter for the drive.

## Prerequisites

A drive must have been scheduled using the Create or Modify Special Drive (SPDRIVE) screen.

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `CANSPDRV`.

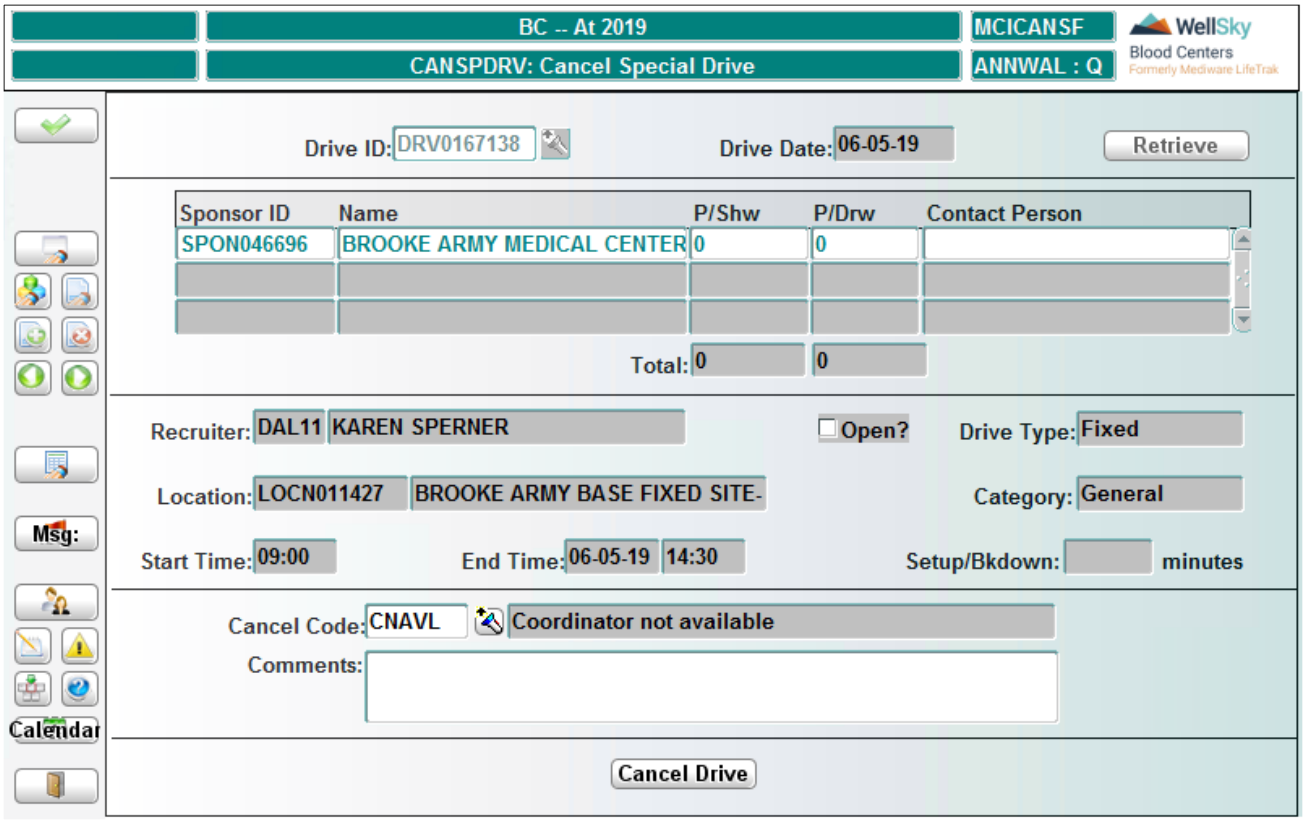


## Control Block Fields and Definitions

### Drive ID

Entry is required. Enter a drive ID or select from the LOV. The date of the drive entered or selected must be later than the system date. Only those drives for which the user is the recruiter or caretaker recruiter display in the LOV. Once a valid drive ID is entered, the drive date automatically populates.

Click **Retrieve** to display data for the specified drive.

The following information displays for the retrieved drive:

- Sponsor ID and name
- Projected show
- Projected draw
- Contact person
- Recruiter ID and name
- Open status
- Drive type
- Location code and description
- Drive category
- Start time
- End time and end date
- Setup/breakdown time in minutes

# Canceling the Drive

## Cancel Code

Entry is required. Enter a cancellation code or select from the LOV. Once a valid code is entered or selected, the description displays.

## Comments

Entry is optional. Enter free-form comments up to 100 characters in length.

Click **Cancel Drive** to cancel the drive. A message displays, asking for confirmation that the drive is to be canceled:

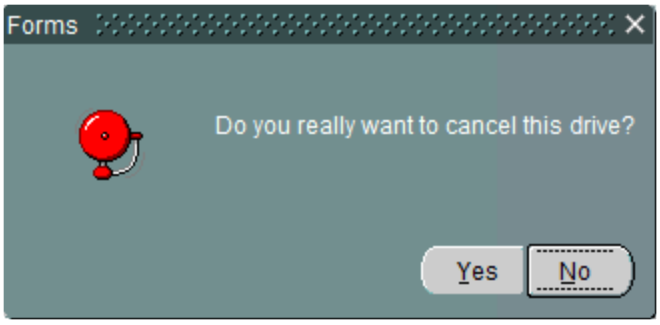


Click **Yes** to cancel the drive, or click **No** to return to the screen without canceling the drive.

# At Commit

After clicking **Yes**, a message displays, confirming that the transaction is committed to the database. Click **OK** to acknowledge the message. The screen remains populated with data. Press **CTRL** + **F5** (Clear Form) to clear the screen, or press **F8** (Exit Screen) to leave the screen.


WellSky Corporation
Proprietary and confidential

## What to Do Next

There is no next step.

# 3.3.5 Define Resource Exceptions (RESXP)

## Intended Use

Use this screen to display current resource availability and define availability exceptions for a specified:

- Date range
- Resource
- Days within a date range
- Reason

## Limitations

None

## Prerequisites

Maximum available resources must have been defined in Define Resource Availability Rules (RESRULE). Reason codes must have been defined in Master Code RESON.

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `RESXP`.

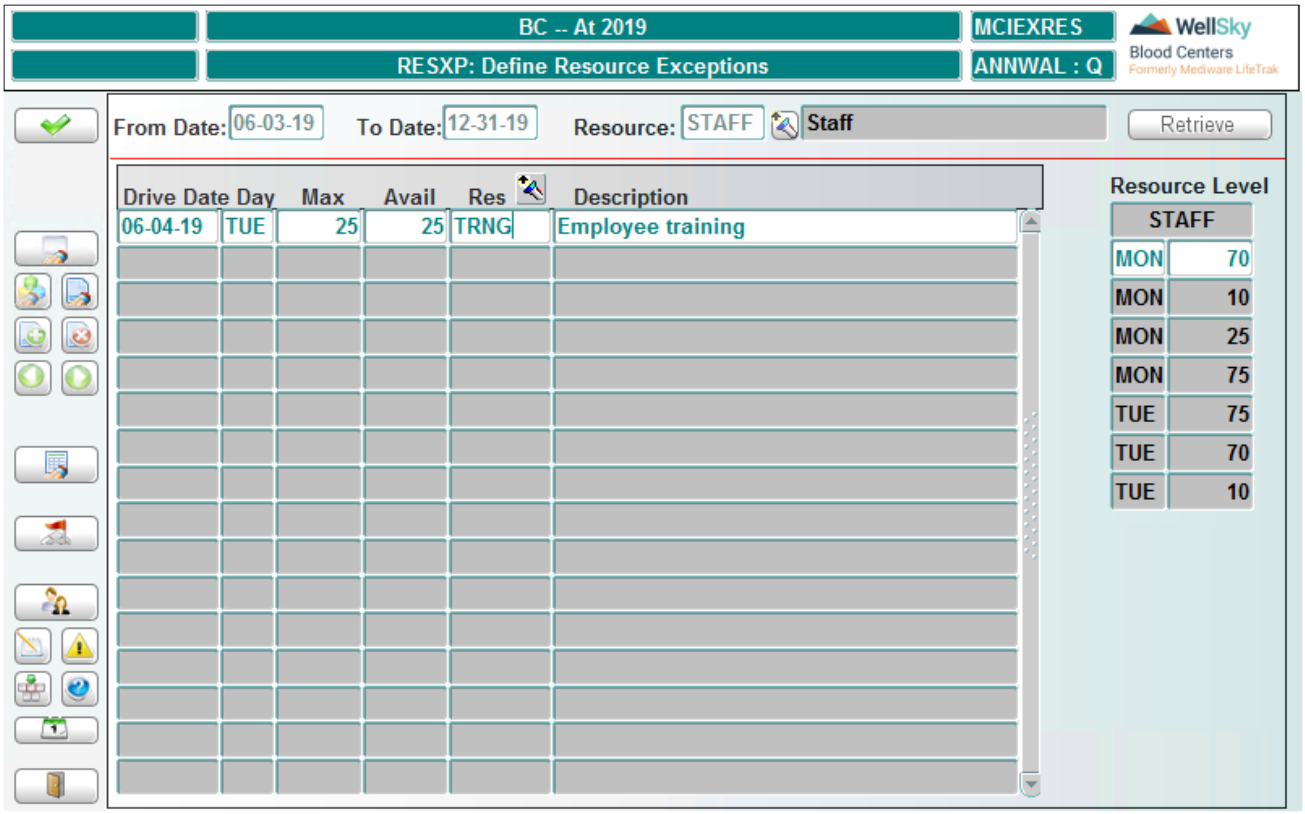


# Control Block Fields and Definitions

## From Date

Entry is required. Enter the starting date in MMDDYY format. Date cannot be prior to system date.

## To Date

Entry is required. Enter the ending date in MMDDYY format.

## Resource

Entry is required. Enter a resource type code or select from the LOV.

> **NOTE –** This screen is designed to increase or decrease resource availability for all days retrieved. You must, therefore, be specific with the date range that you specify.

# Retrieving Data

Click **Retrieve** to display daily resource availability records for the resource, date range, and specific days of the week.

# In the Resource Block

The following data displays:

- Drive date
- Day of the week
- Maximum number of resource availability for that date
- Usual number of resource availability
- Reason code for exception between maximum number of resource availability and usual number of resource availability
- Description of exception reason code

## In the Resource Level Block

The following data displays for the specified resource:

- Day of the week
- Resource availability that day of the week

## Modifying or Entering Resource Availability

Select a record to modify, or place the cursor on a blank line to enter, resource availability.

### Drive Date

Entry is required. Enter or change drive date in MMDDYY format.

### Day

Display only. Automatically populates based on the drive date entered.

### Max

Display only. Automatically populates based on the amount of the resource usually available for the day of the week selected.

### Avail

Entry is required. Enter the actual number of resource available for the specified date.

### Res

Entry is required. Enter the reason code for discrepancy between maximum resource availability and the resource availability for the date or choose from the LOV.

### Description

Display only. Automatically populates when the reason code is entered.

## To Commit the Transaction

Click **COMMIT** to save your transaction to the database. The resource availability adjustments apply to drive scheduling operations for the dates you indicated. The screen remains populated. Click **CLEAR FORM** to clear

the screen or **EXIT FORM** to leave the screen.

## What to Do Next

There is no next step.

# 3.3.6 Enter Calendar Highlights (HILITE)

## Intended Use

Use this screen to enter or modify daily and monthly drive scheduling notations (highlights) that will be displayed for reference as the Master Calendar is viewed. Highlights entered in this screen display on the Master Calendar when either a date or month is selected for which a highlight exists.

## Limitations

- Text for the highlight is limited to 200 characters.
- A highlight that applies to more than one date (but not an entire month) must be entered for each date.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `HILITE`.


WellSky Corporation
Proprietary and confidential

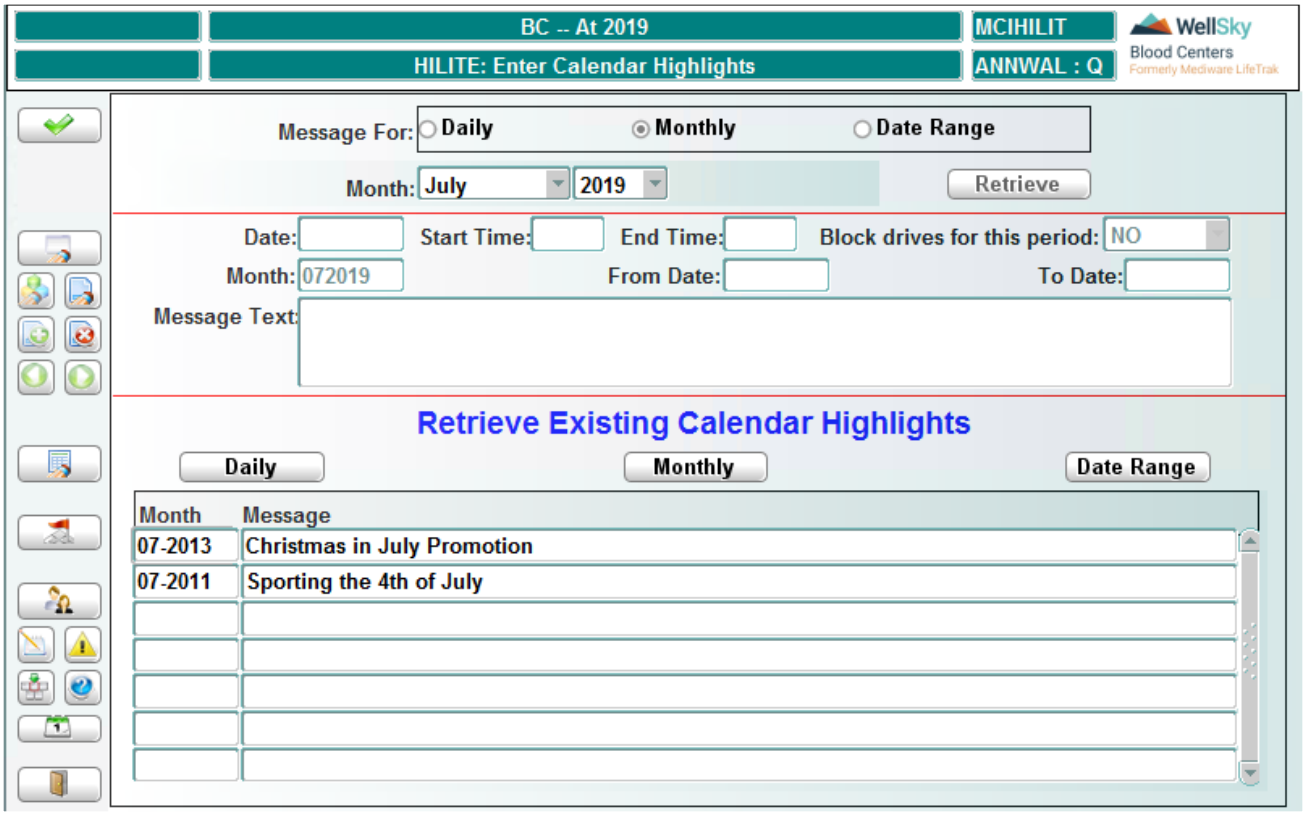


# Control Block Fields and Definitions

## Message For

Entry is required. Click **Daily**, **Monthly**, or **Date Range** to indicate the type of highlight to enter or modify. The cursor advances to the appropriate field depending on the selection made.

## Date

Entry is required if Daily is selected in the *Message For* field. Enter a date using the MMDDYY format, or select a date from the LOV if an existing highlight is to be modified. The LOV contains only dates for which highlights have already been entered.




## Month

Entry is required if Monthly is selected in the *Message For* field. Select a month from the drop-down list. The month field is followed by an unlabeled year field with the current year as the default. Use the drop-down list in that field to select another year.




### Start Date

Entry is required if Date Range is selected in the *Message For* field. Enter the earliest date using the MMDDYY format. Entry cannot be prior to system date.

### To Date

Entry is required if Date Range is selected in the *Message For* field. Enter the latest date using the MMDDYY format.

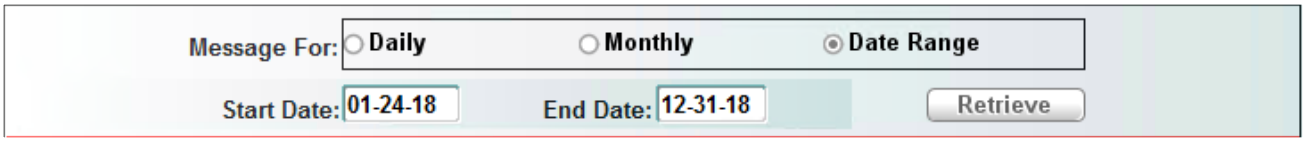


## Retrieving Data

Click **Retrieve** to display a highlight already existing for the specified date, month, or date range.

## Date Block Fields and Definitions

### Date

Display only. Date displays if entering a daily message.

### Start Time

Entry is optional if entering a daily message. Field inactive for monthly and date range messages. Enter the message start time for the date, using the HHMI format.

### End Time

Entry is optional if entering a daily message. Field inactive for monthly and date range messages. Enter the message end time for the date, using the HHMI format.

### Block drives for this period

Entry is required if entering a daily message. Field inactive for monthly and date range messages. Select `YES` or `NO` from the drop-down list.

### Month

Display only. Month displays if entering a monthly message.

### From Date

Display only. Beginning date displays if entering a date range message.

### To Date

Display only. Ending date displays if entering a date range message.


WellSky Corporation
Proprietary and confidential

### Message Text

Click in this field to enter a highlight message of up to 200 characters. Existing highlight messages display here automatically and can be modified.

## In the Retrieve Existing Calendar Highlights Block

To view calendar highlights that have been entered for a specific day, click **Daily**.

To view calendar highlights that have been entered for a specific month, click **Monthly**.

To view calendar highlights that have been entered for a specific period of time other than a day or calendar month, click **Date Range**.

## Committing the Entry

Click **COMMIT** to save all entries and modifications to the database. The screen clears.

## What to Do Next

There is no next step.

# 3.3.7 Enter Promotional Items (ITEMS)

## Intended Use

Use this screen to enter valid promotional items into the system that may be attached to campaigns and drives.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `ITEMS`.

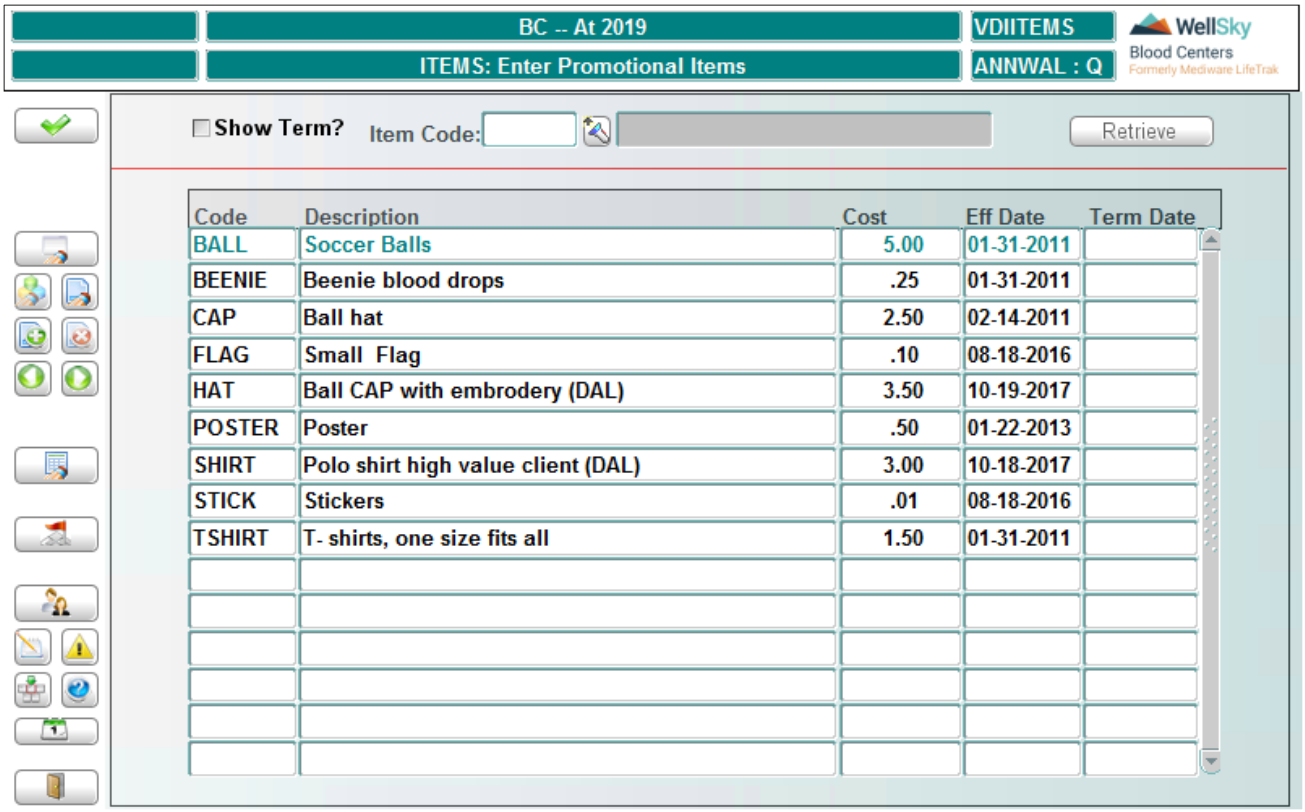


# Control Block Fields and Definitions

## Show Term?

Select the check box to include terminated promotional items in the display; otherwise, leave the check box blank.

## Item Code

Entry is optional. Enter a valid item code or select from the LOV. If no item code is entered, all item codes display.

# Retrieving Data

Click **Retrieve** to display a list of promotional items.

# To Enter a New Item

Use the **UP** and **DOWN** arrows or the mouse to navigate to the first blank record row.

## Code

Entry is required. The code must be new. Terminated codes cannot be duplicated.

## Description

Entry is required. Enter a description for the new code.


WellSky Corporation
Proprietary and confidential

### Cost

Entry is optional. Enter the average cost per unit of the item. Valid entries are numeric only and can include two decimal places. If entering a whole dollar amount, you do not have to enter the decimal places.

### Eff Date

Entry is required. Enter an effective date for the item, using the MMDDYYYY format. Effective date cannot be prior to system date.

### Term Date

Entry is optional. Enter a date for the item to be terminated as a promotional item, using the MMDDYYYY format. The termination date must be equal to or later than both the effective date and the current date.

## To Modify an Existing Code Description

Use the **UP** and **DOWN** arrows or the mouse to select the desired record.

Click in the Description column for the desired record. You can modify the code, description, cost, and the termination date. The effective date is protected against modification.

## Committing the Transaction

Click **COMMIT** to save the transaction to the database. All changes and additions are committed to the database at once.

## What to Do Next

There is no next step.

# 3.3.8 Assign Territory to Recruiter (TTOR)

## Intended Use

Use this screen to associate a recruiter with a recruitment territory and, therefore, all drives scheduled for sponsors within that territory.

## Limitations

You cannot assign a territory that is already assigned to a recruiter.

## Prerequisites

Both the recruiter and territory must have been previously defined.

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `TTOR`.

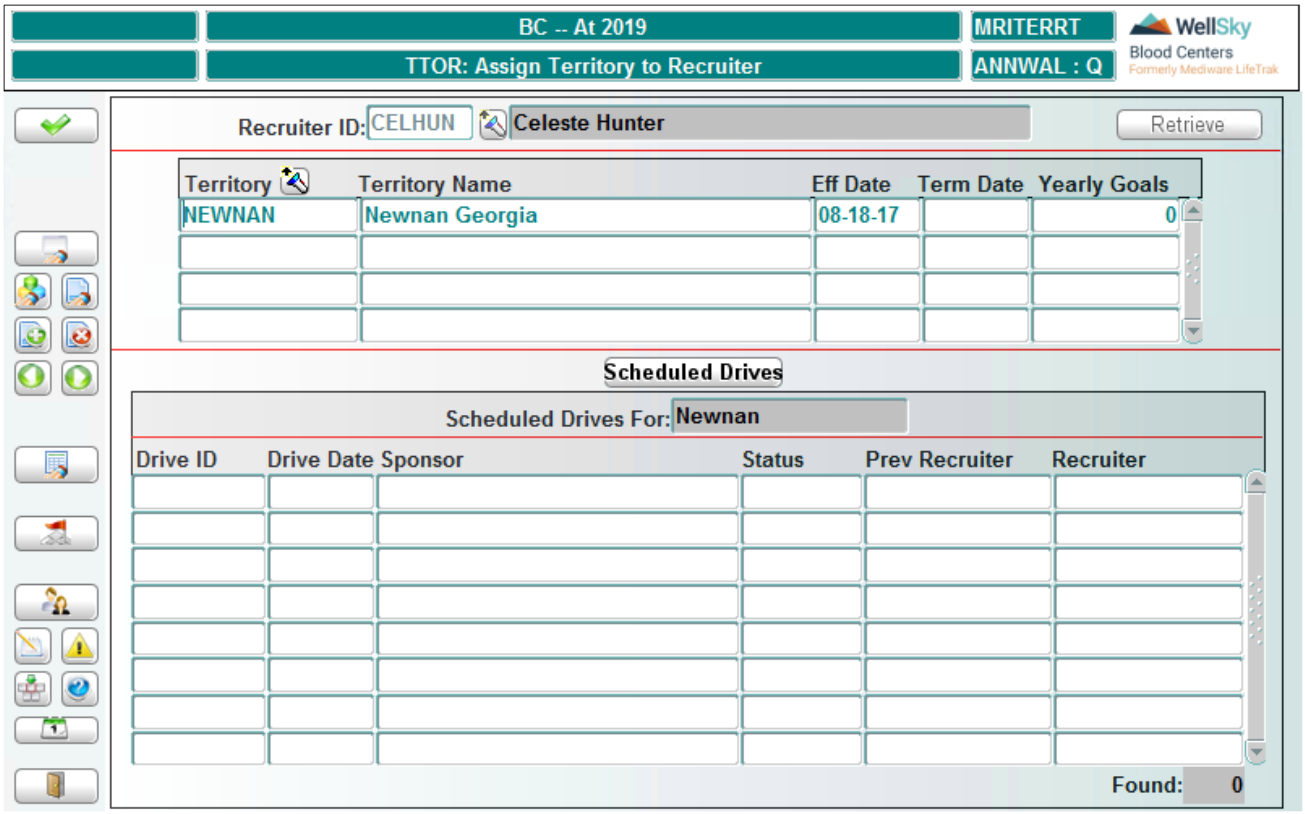


# Control Block Fields and Definitions

## Recruiter ID

Entry is required. Enter a recruiter ID or select from the LOV.

Click **Retrieve** to display the entered recruiter.

# In the Territory Block

The following data display:

- Territory ID
- Territory name
- Date recruiter became effective in the territory
- Date recruiter was terminated from the territory
- Recruiter's yearly goals

The only field that can be modified for existing entries is the *Term Date* field.

# The Scheduled Drives Button

Click **Scheduled Drives** to view a list of all scheduled drives assigned to the recruiter:


WellSky Corporation
Proprietary and confidential

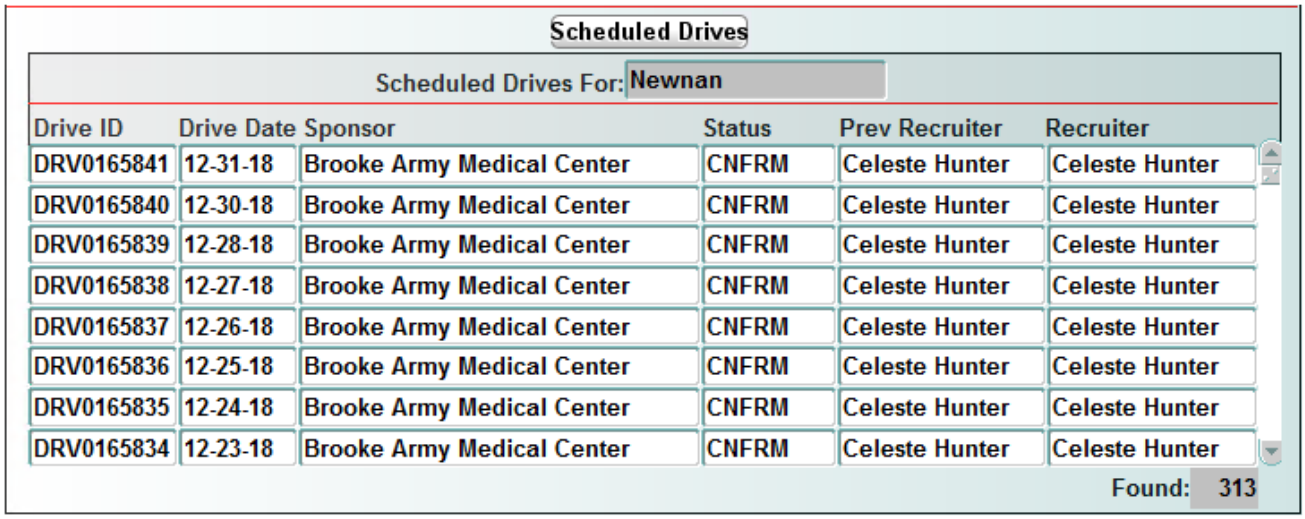


The following data displays in the Scheduled Drives Block for each drive retrieved:

- Drive ID
- Drive date
- Sponsor
- Drive status
- Previous recruiter
- Current recruiter

No data can be modified in the Scheduled Drives block.

## To Assign a New Territory to a Recruiter

To assign a new territory to a recruiter, click in a blank record in the Territory block. Enter the following data.

**NOTE –** You cannot assign a territory that is already assigned to another recruiter. If you attempt to do this, the following window opens:

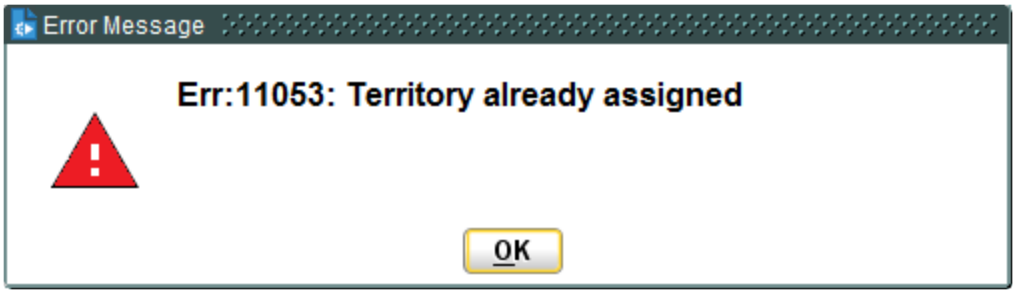


Click **OK** to close the window.

### Territory

Entry is required. To assign a territory to the specified recruiter, enter a territory name or select from the LOV. The territory name displays automatically when a valid territory name is entered or selected.

### Eff Date

Entry is required. Enter an effective date for assignment of the territory, using the MMDDYY format.

**NOTE –** The effective date cannot overlap with the effective date of another record.

### Term Date

Entry is optional. Enter a termination date for assignment of the territory, using the MMDDYY format.

**NOTE –** The termination date cannot overlap with the termination date of another record.

### Yearly Goals

Display only. Any collection goal existing for the territory being assigned automatically displays. This field cannot be modified.

## Committing the Transaction

To save the transaction, click COMMIT . The specified recruiter will be attached or detached from the territory specified as well as all scheduled drives for the territory. This screen does not clear when a transaction is committed.

To clear the screen, exit the screen or click CLEAR FORM .

## What to Do Next

Once a recruiter is assigned to a territory, that recruiter can then modify scheduled drives, schedule additional drives for the territory, and associate campaigns with those drives. There are, however, no follow-up steps to this screen.

# 3.3.9 Determine Care-Taker Recruiter (CTREC)

## Intended Use

Use this screen to assign entry and modification rights to a recruitment employee for drives assigned to one or more recruiters.

## Limitations

New or additional recruitment personnel cannot be entered in this screen.


WellSky Corporation
Proprietary and confidential

# Prerequisites

All recruitment personnel, including recruiters, must exist in the database. Use Maintain Staff Details (STAFF) to enter new or additional recruitment personnel. See the ***Common User Administration*** section in the WellSky Blood Centers Administration Guide.

# Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword `CTREC`.

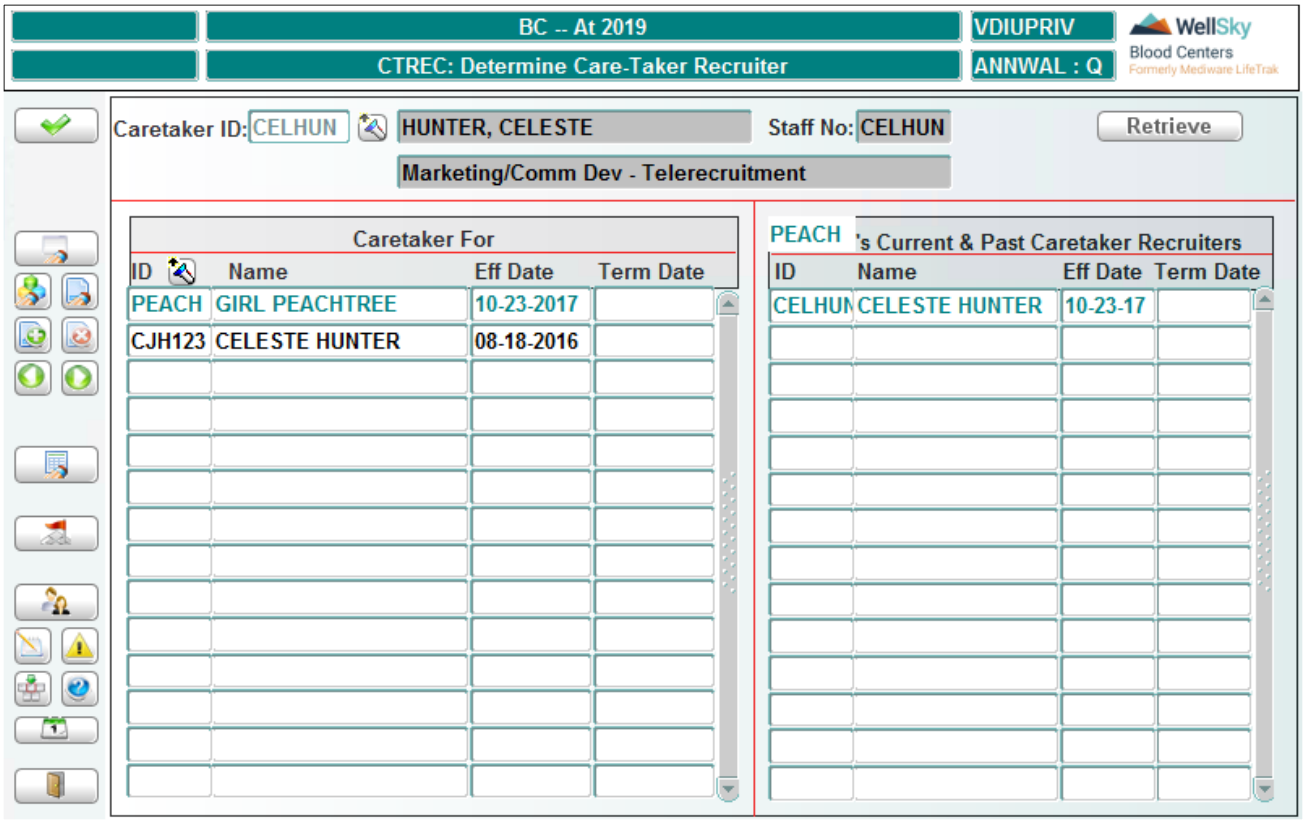


# Control Block Fields and Definitions

## Recruiter ID

Entry is required. Enter an employee ID or select from the LOV. The employee's name and department automatically display.

Click **Retrieve** to display any recruiters for which the specified employee has already been assigned as caretaker.

# In the Caretaker For Block

The following data displays:

- Recruiter ID for whom caretaker recruiter is caretaker
- Name of recruiter

- Date caretaker recruiter was assigned to that recruiter
- Date caretaker recruiter was terminated for that recruiter

## In the Current & Past Caretaker Recruiters Block

The following data displays for the selected recruiter:

- Caretaker recruiter ID
- Name of caretaker recruiter
- Date caretaker recruiter was assigned to that recruiter
- Date caretaker recruiter was terminated from being caretaker recruiter

## Assigning Recruiters to the Caretaker

In the Caretaker For block, position the cursor on a blank record line by using the arrow keys or clicking with the mouse.

### ID

Entry is required. Enter a recruitment employee ID or select from the LOV. Once a valid ID is entered or selected, the *Name* field populates automatically. The name cannot be modified.

### Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. Effective date cannot be prior to the system date.

### Term Date

Entry is optional. If a termination date is applicable, enter the date using the MMDDYYYY format. Termination dates can be entered for existing recruiters.

## Saving Changes and Additions

Click **COMMIT** to save the new caretaker assignment to the database. All entries and modifications are saved to the database and a message confirms that the transaction is committed. The screen remains populated.

## What to Do Next

There is no next step.

# 3.3.10 Merge Duplicate Sponsors (SPMRG)

## Intended Use

Use this screen to merge two duplicate sponsors into one sponsor.

## Limitations

Must have a sponsor with identical names and unique Sponsor IDs.


WellSky Corporation
Proprietary and confidential

## Prerequisites

Sponsors must have previously been created.

## Accessing the Screen

Access this screen from the Recruitment Maintenance menu or by entering the keyword SPMRG.

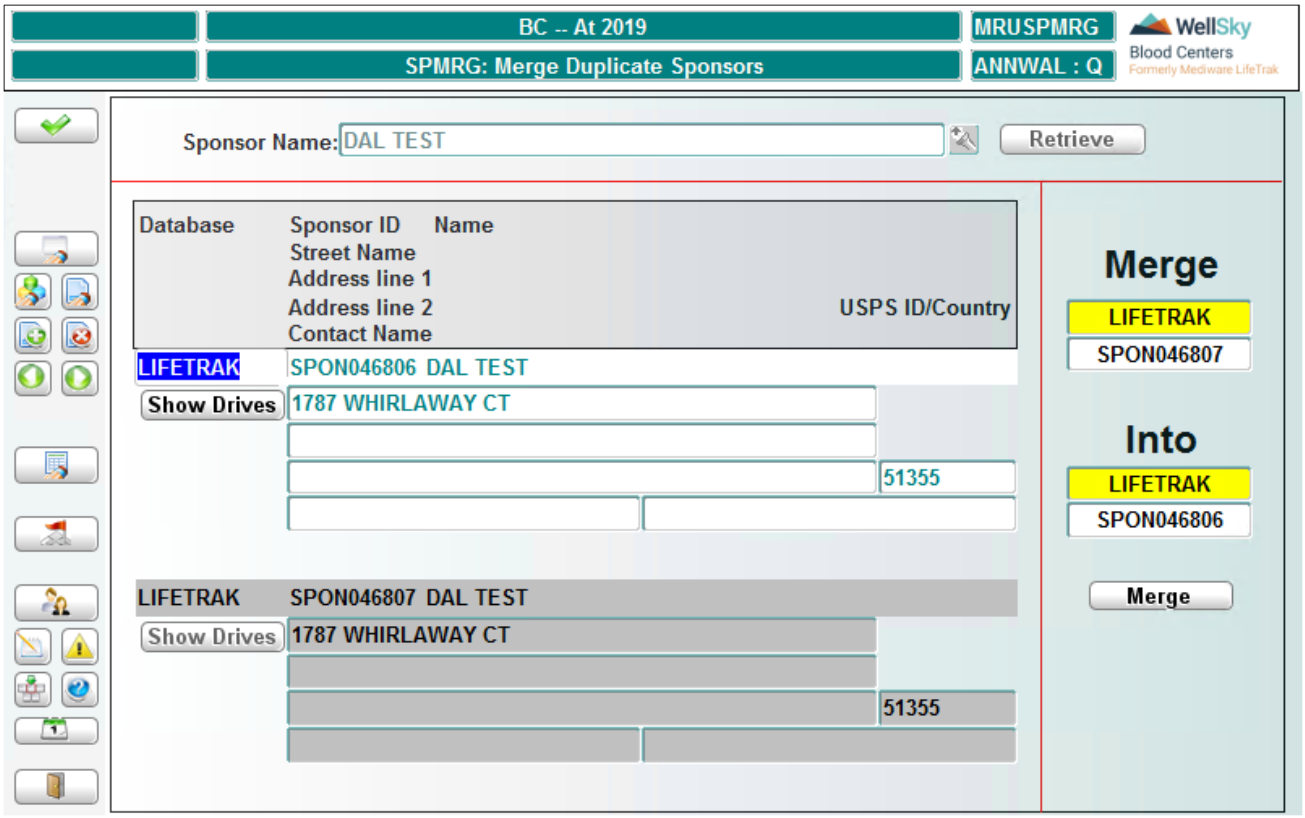


## Control Block Fields and Definitions

### Sponsor Name

Entry is required. Enter the name of sponsor or select from the LOV. The LOV only displays sponsors that have a duplicate sponsor name entry.

Click **Retrieve** to display the duplicate sponsors in separate Sponsor Blocks.

## In the Sponsor Blocks

The following data about each sponsor record displays in separate Sponsor Blocks:

- Database that lists the sponsor
- Sponsor ID
- Name

- Address and Zip code
- Name of contact person

## The Show Drives Button

Click in the desired Sponsor Block to enable (highlight) its associated Show Drives button. Click **Show Drives** to view a list of drives by the sponsor. The following window opens:

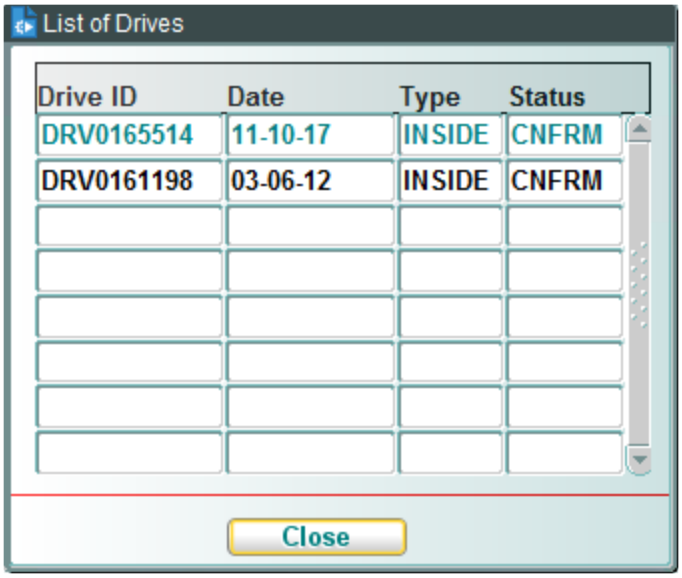


Click **Close** to close the window and return to the main view.

## To Merge Sponsors

To merge the two sponsors into one, click in (highlight) the Sponsor Block of the sponsor you want to remain after the merge takes place.

- The Sponsor ID to be merged appears in the Merge block.
- The Sponsor ID that will remain after the merge appears in the Into block.

**Important!** Pay close attention to which sponsor is being merged. Remember, the selected sponsor is the sponsor that will remain after the merge.

Click **Merge** to merge the sponsors into one. The following window opens, requesting confirmation of the merge:

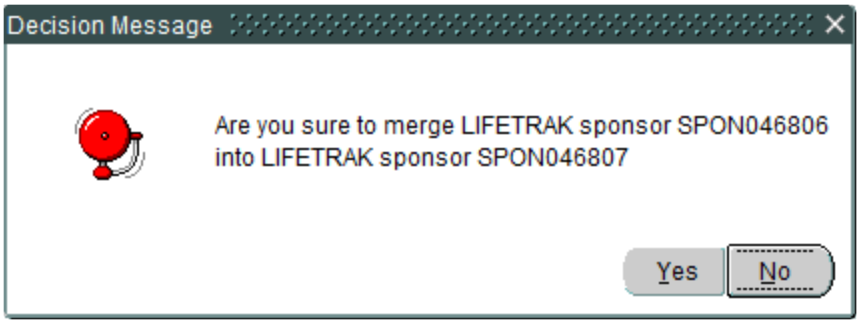


Click **Yes** to continue with the merge. If you click **Yes**, you will receive a message confirming that the merge is committed to the database.

Click **No** to cancel the merge. The screen clears.

## What to Do Next

There is no next step.

# 3.4 Recruitment Queries

These functions are accessed from the following menu:

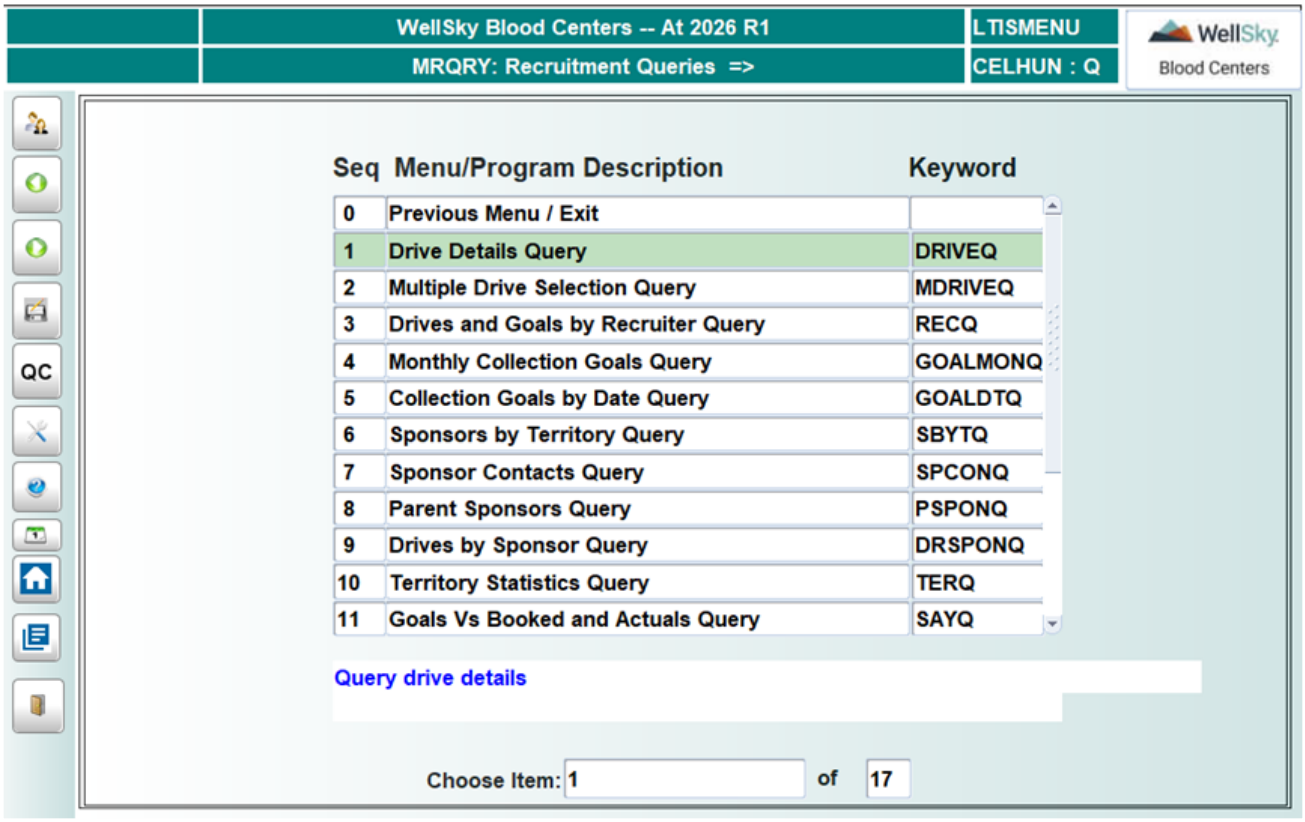


## 3.4.1 Drive Details Query (DRIVEQ)

### Intended Use

Use this screen to query drive details for past and future drives.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `DRIVEQ`.

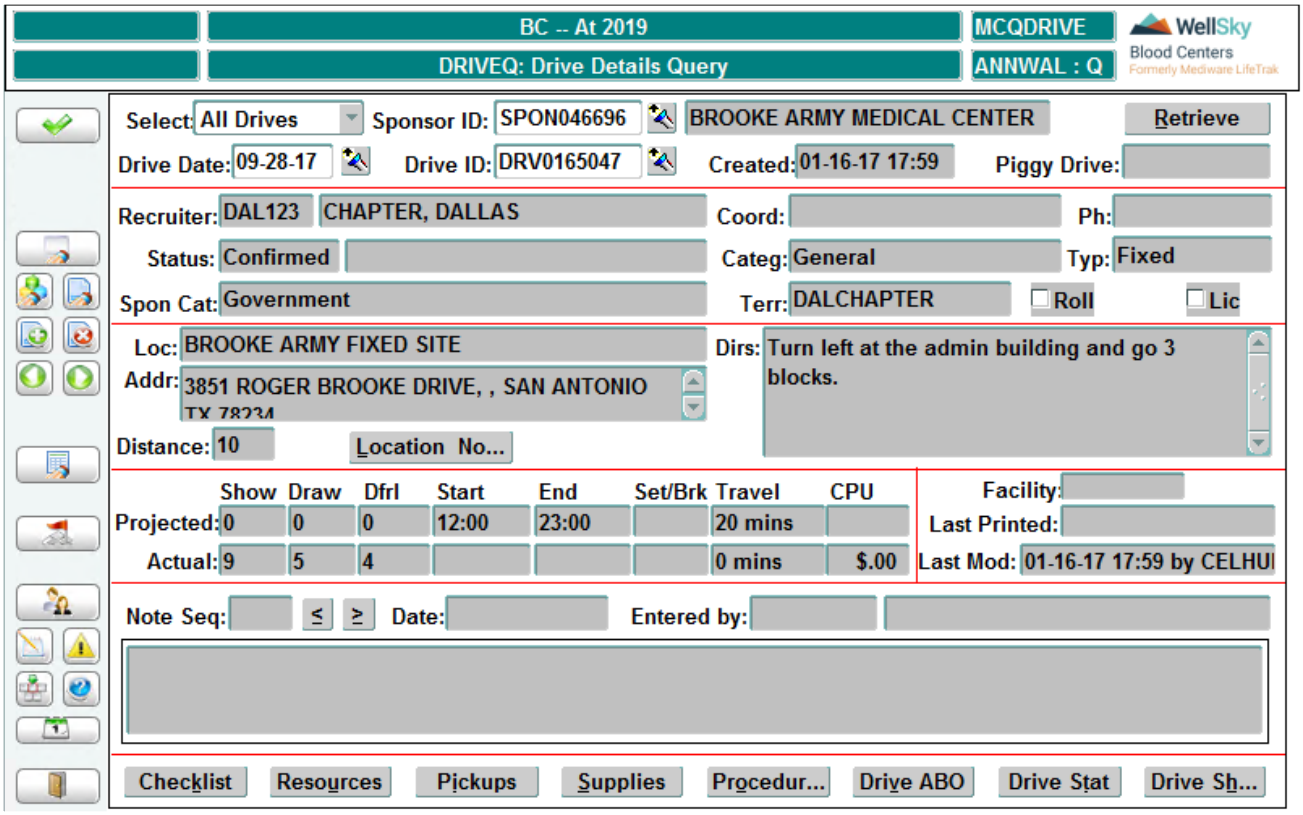


# Control Block Fields and Definitions

## Select

Entry is required. Use the drop-down list in this field to select the type of drives to query: past, future, or all drives.

## Sponsor ID

Entry is optional. Enter a sponsor ID or select from the LOV. The sponsor name displays after entry or selection of a valid sponsor ID.

## Drive Date

Entry is optional. Enter a date using the MMDDYY format. If a sponsor is specified, select a valid drive date for that sponsor from the LOV in this field.

**NOTE –** For Past Drives, the LOV is restricted to drives within the last 21 days. For Future Drives, the LOV is restricted to drives scheduled for the following three months.

## Drive ID

Entry is required. Enter a valid drive ID or select from the LOV.

**NOTE –** If a sponsor ID and drive date are entered, the drive ID populates automatically. If no sponsor ID or drive date are specified, the LOV contains scheduled drives and past drives for a limited period. This limitation is a system variable and can be adjusted.

## Retrieving Data

Click **Retrieve** to display details for the specified drive:

Displayed data cannot be modified in this screen. The seven buttons at the bottom of the screen, however, extend the screen's query capability.

## The Checklist Button

Click **Checklist** to open the Drive Checklist window:

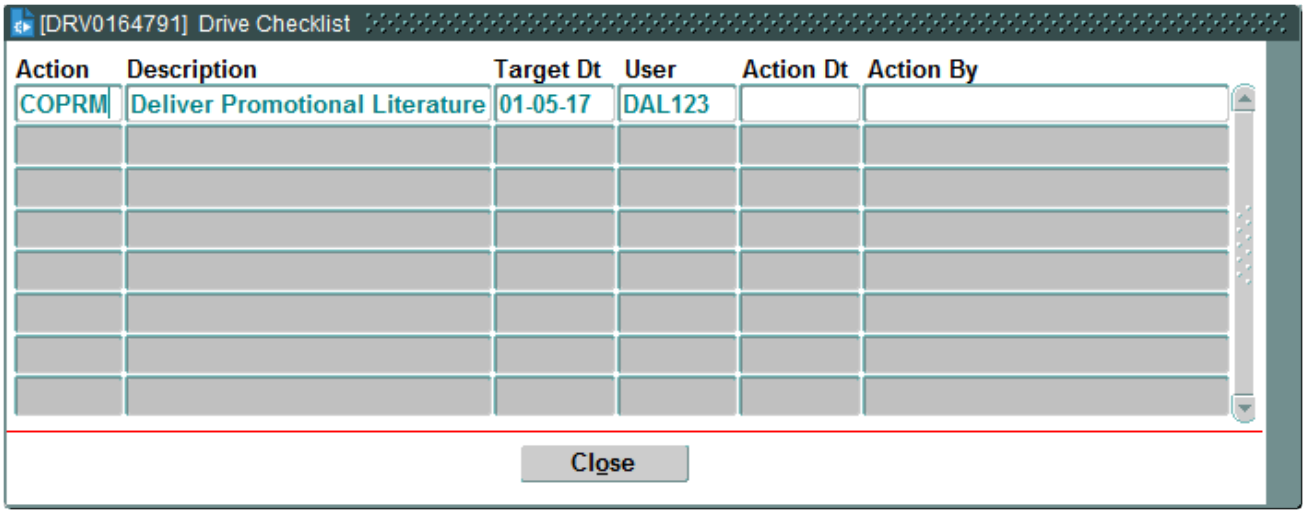


Use this window to view the checklist for the displayed drive. No data can be modified in this window. Click **Close** to return to the main screen.

## The Resources Button

Click **Resources** to view a window that displays scheduled and actual resources for a drive, scheduled staff members, and staff members who worked a past drive:


WellSky Corporation
Proprietary and confidential

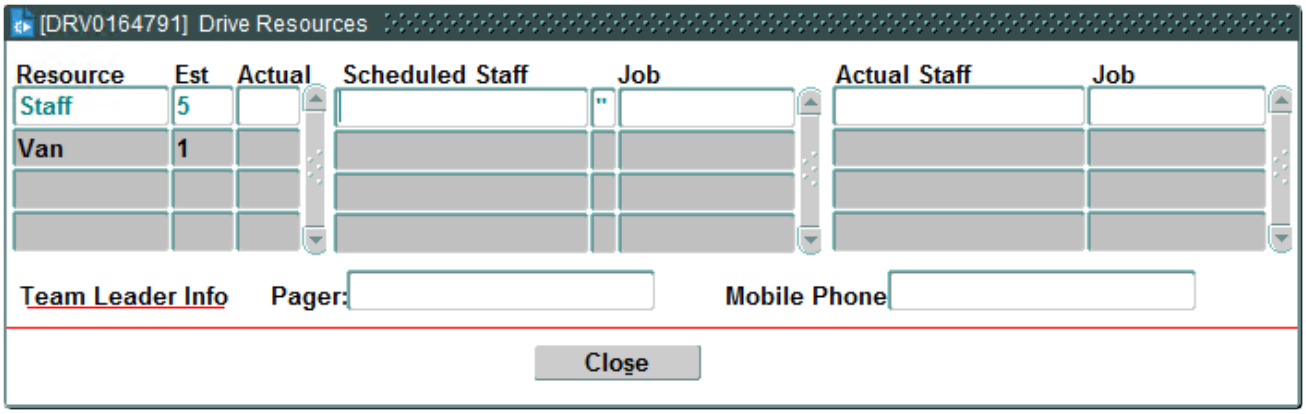


## The Pickups Button

Click **Pickups** to view a window that displays scheduled pickups for the displayed drive, if applicable:

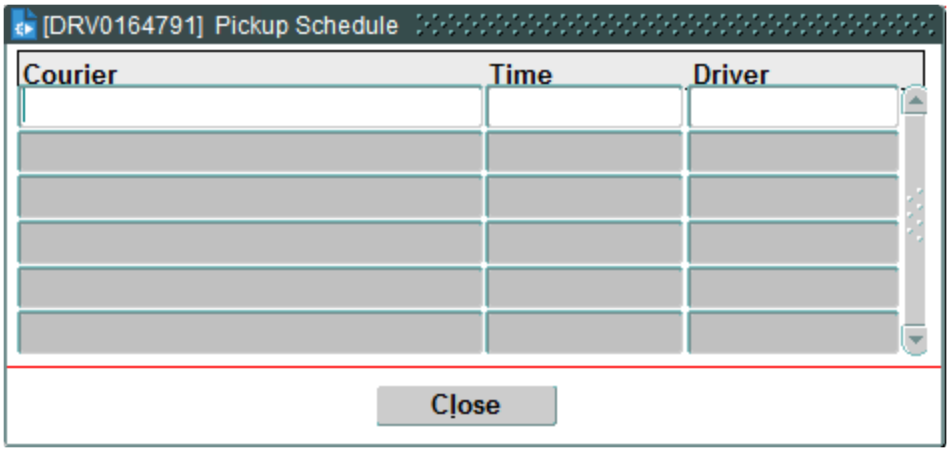


No data can be modified in this window. Click **Close** to return to the main screen.

## The Supplies Button

Click **Supplies** to view a window that displays campaign items and bags that have been defined for a drive:

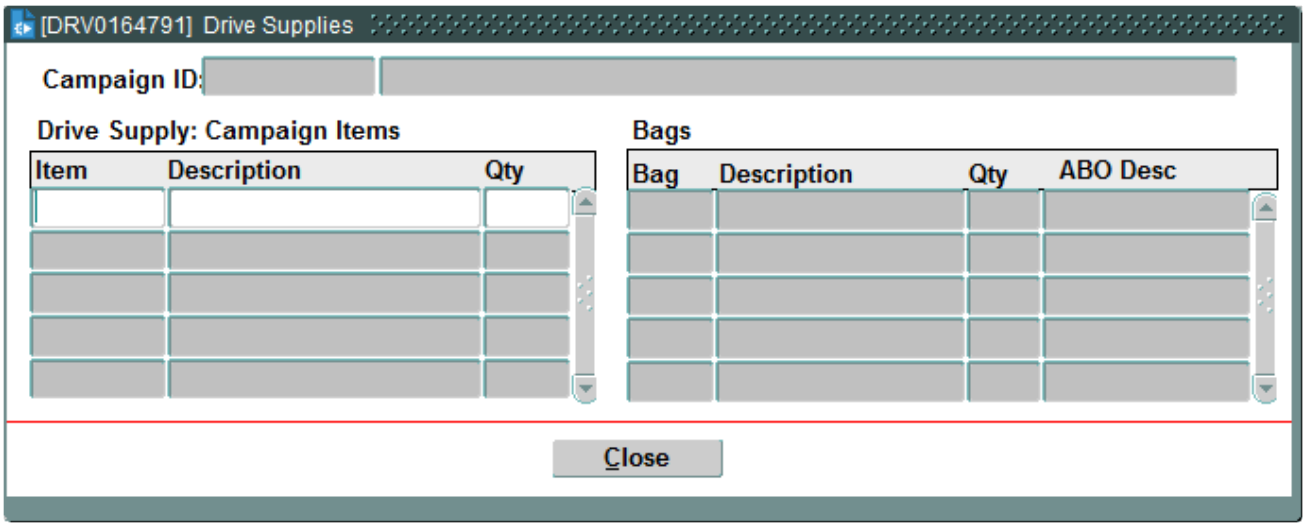


No entry or modification of data is permitted. Click **Close** to return to the main screen.

## The Procedures Button

Click **Procedures** to view a window that displays any specific procedure/donation type combinations assigned to a drive, along with projected and actual figures for those procedures:

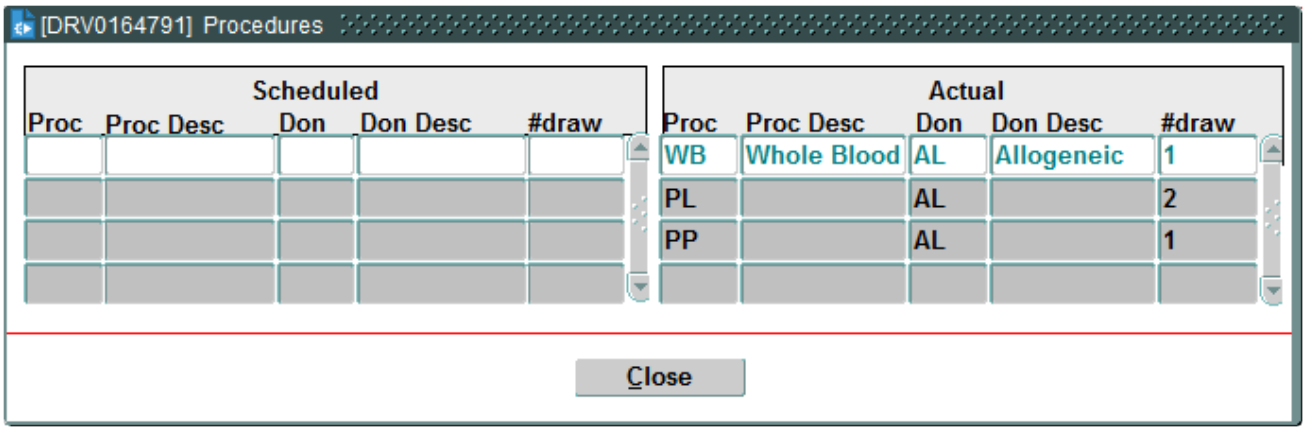


No entry or modification of data is permitted in this window. Click **Close** to return to the main screen.

## The Drive ABO Button

Click **Drive ABO** to view the ABO spread of collections for a displayed past drive. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## The Drive Stat Button

Click **Drive Stat** to view statistics for the displayed drive. See Chapter 14 Called Windows and Routines for instructions on using this screen.


WellSky Corporation
Proprietary and confidential

## The Drive Sheet Button

Click **Drive Sheet** to print a drive sheet report for the drive. A message displays, asking for confirmation that you want to print the report:

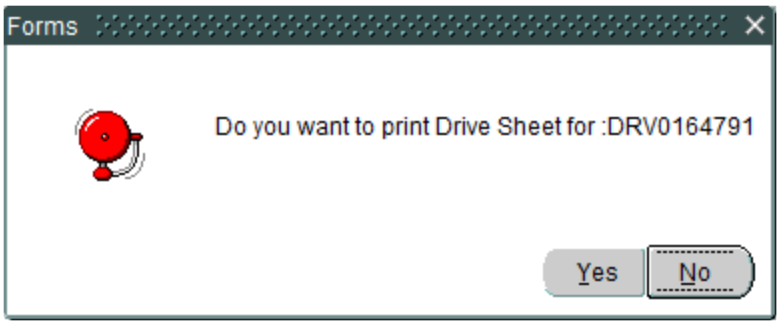


- Click **Yes** to continue.
- Click **No** to cancel the operation.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.2 Multiple Drive Selection Query (MDRIVEQ)

## Intended Use

Use this screen to query drives by a number of multiple logical criteria:

- Past, future, or all drives
- Within a specified date range
- Having one or more statuses
- By one or more sponsors
- By one or more sponsor categories
- By one or more territories
- By one or more phlebotomy procedures
- By one or more drive categories
- By projected draw range
- By specified travel time
- By a specified drive duration range

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `MDRIVEQ`.

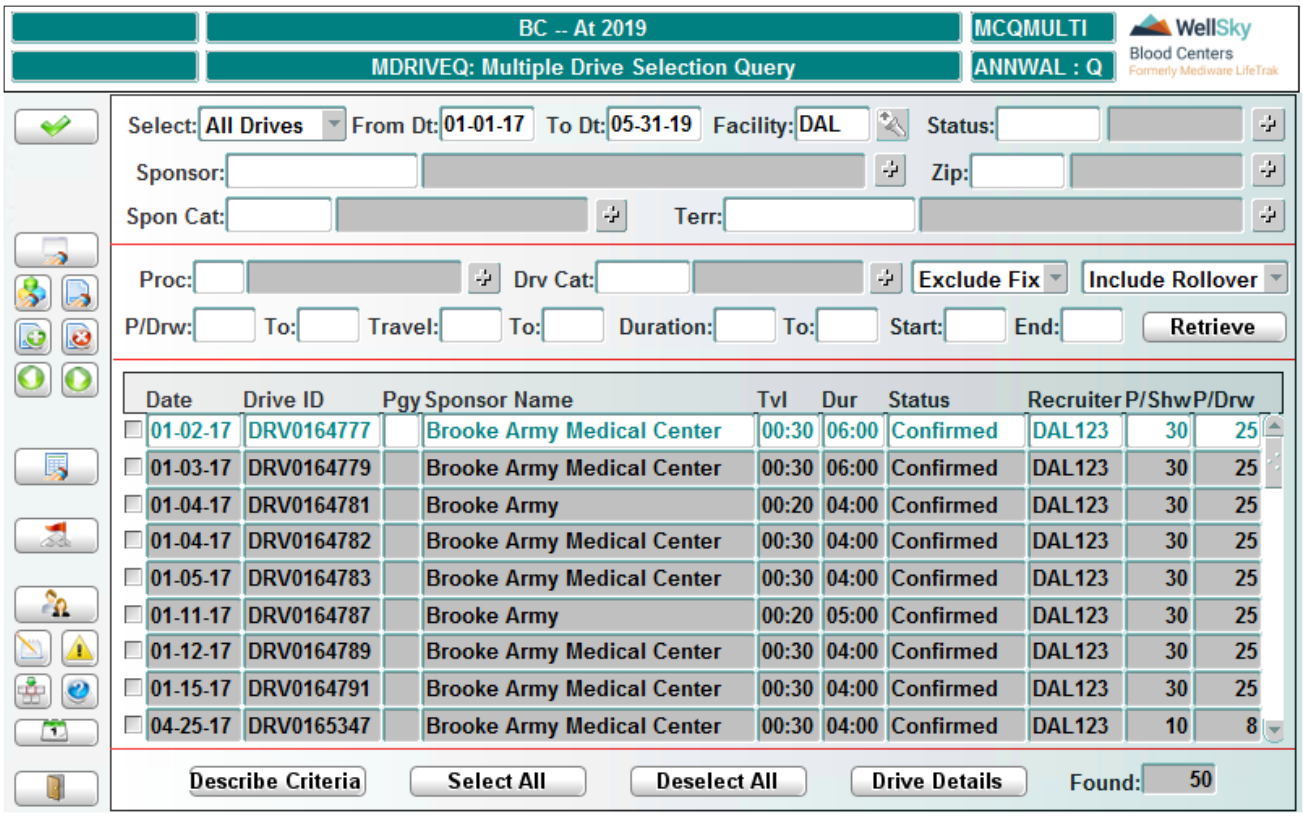


## Control Block Fields and Definitions

A red check mark to the right of any field in the control block indicates that multiple selections can be made from the LOV in that field. The number of selections that can be made in these lists is limited. If multiple selections are made, the field displays Multiple Selection rather than an individual selection.

### Select

Entry is required. Use the drop-down list in this field to select the type of drives to query: past, future, or all drives.

### From Dt

Entry is required. Enter a date using the MMDDYY format. The date can be a past, current, or future date.


WellSky Corporation
Proprietary and confidential

### To Dt
Entry is required. Enter a date using the MMDDYY format. The date can be a past, current, or future date.

### Facility
Entry is optional. Enter the facility code from which staff are (to be) assigned or select from the LOV.

### Status
Entry is optional. Enter a valid drive status or select up to two from the LOV.

### Sponsor
Entry is optional. Enter a valid sponsor ID or select up to five sponsors from the LOV.

### Zip
Entry is optional. Enter a valid local Zip code or select up to five Zip codes from the LOV.

### Spon Cat
Entry is optional. Enter a valid sponsor category code or select up to two sponsor categories from the LOV.

### Terr
Entry is optional. Enter a valid territory code or select up to two territories from the LOV.

### Proc
Entry is optional. Enter a valid procedure code or select up to five procedure codes from the LOV.

### Drv Cat
Entry is optional. Enter a valid drive category code or select up to three drive categories from the LOV.

### Fixed Drive Selection
Entry is required. Default is Exclude Fix. Use the drop-down list to select a different fixed drive option if desired.

### Rollover Selection
Entry is required. Default is Include Rollover. Use the drop-down list to select a different rollover option if desired.

### P/Drw/To
Entry is optional. The field has two parts and permits entry of a range. Enter a whole number in each field to indicate the projected draw range to consider in the query. The larger number must be in the second field.

### Travel/To
Entry is optional. Two fields are provided to permit entry of a range. Enter a whole number to indicate one-way travel time in minutes from the blood center to the drive location, making both minimum and maximum entries. The larger number must be in the second field.

### Duration/To

Entry is optional. Two fields are provided to permit entry of a range. Entry is in the HHMI format. The entry in each field is hours and minutes, expressed as a duration, not time of day. The minimum duration is entered in the left field, followed by a maximum duration in the right field.

### Start/End

Entry is optional. Enter a minimum starting time and maximum ending time using the HHMI format.

## Execute the Query

After entering the search criteria, click **Retrieve** to display drive records according to the specified criteria. The total number of records retrieved displays in the lower-right corner of the screen

For each record retrieved, the following data displays:

- Drive date
- Drive ID
- Piggyback indicator
- Sponsor name
- Travel time one way from blood center
- Drive duration in hours and minutes
- Drive status
- Recruiter ID
- Projected show
- Projected draw

## The Describe Criteria Button

Click **Describe Criteria** to open the Search Criteria window:


WellSky Corporation
Proprietary and confidential

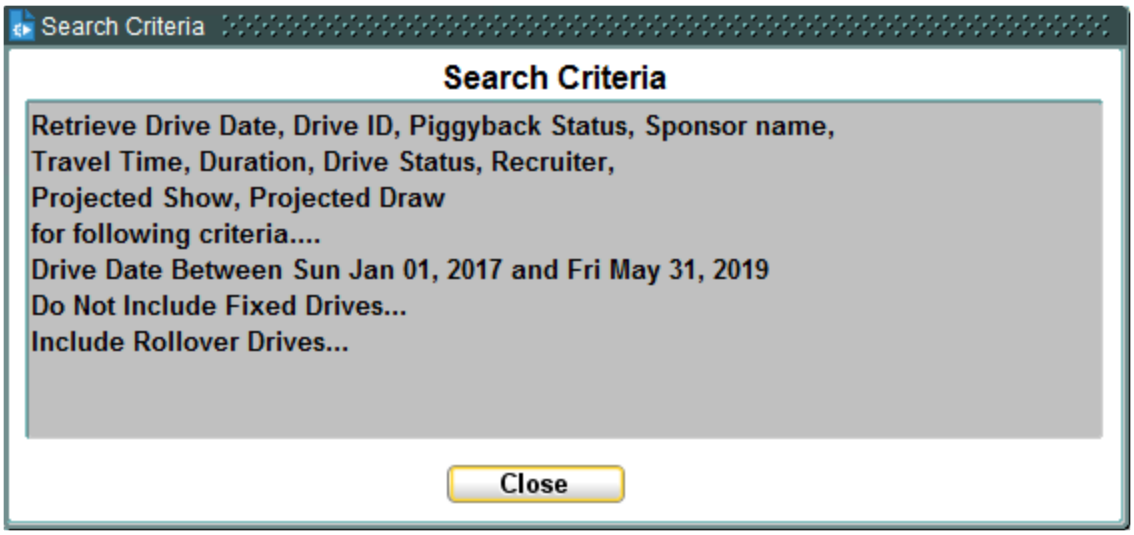


Use this window to review the search criteria for the query. Click **Close** to return to the main screen.

## Selecting and Viewing Drive Details

The data that display in this screen is projected data for each drive. To view actual data for a drive that has already happened, view drive details for that screen as described below.

Select the check box to the left of each listed drive to select that drive. You may select up to ten drives in this fashion.

If you have selected more than ten records, an error message displays when attempting to use the Drive Details button:

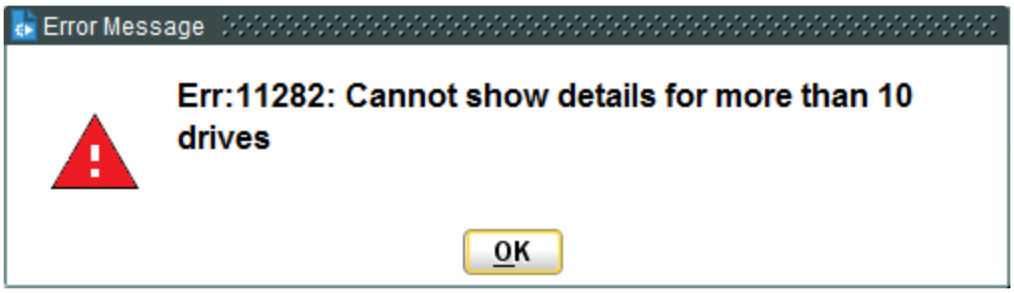


Click **OK** to exit the message and then reduce the number of selections to ten or less.

## The Select All Button

If fewer than ten drives are displayed and you want to view details for all the drives, click **Select All** .

## The Deselect All Button

If you desire to clear the selections you have made, click **Deselect All**.

## The Drive Details Button

Once your selections are complete, click **Drive Details** . The Drive Details Query (DRIVEQ) screen opens, populated with data for the first selected drive record.

Click the UP and DOWN arrows in the toolbar to move forward and backward through the selected drives. Details display for each drive as it is reached in the sequence.

See the section in this chapter for more information on this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.3 Drives and Goals by Recruiter Query (RECQ)

## Intended Use

Use this screen to view drives and goals for a recruiter or territory within a specified date range.

## Limitations

None

## Prerequisites

To query a recruiter, the recruiter must have been created in the Employee Details table as a recruiter and assigned to a valid territory.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `RECQ`.


WellSky Corporation
Proprietary and confidential

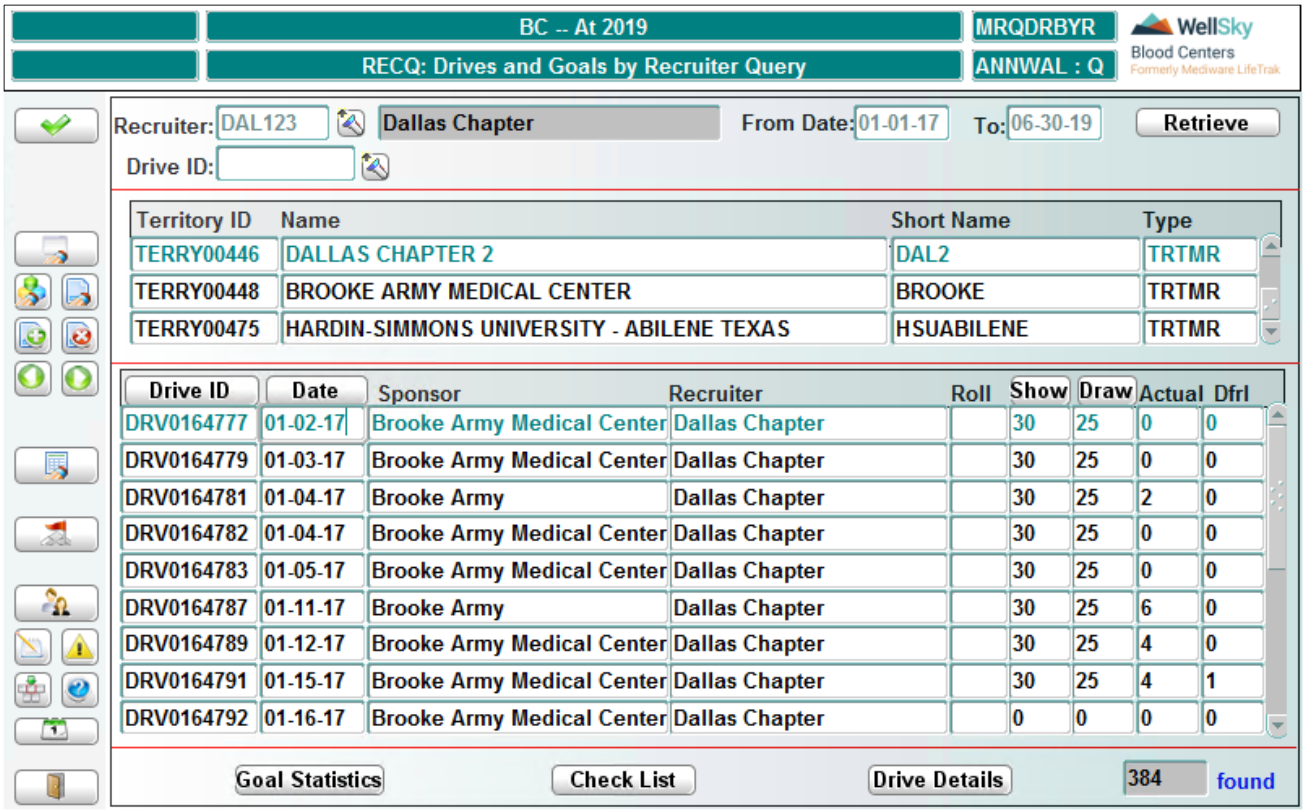


# Control Block Fields and Definitions

## Recruiter

Entry is required. Default is the user ID of the person who accesses the screen. To specify another recruiter, enter a recruiter ID or select from the LOV. Once a valid ID is entered or selected, the recruiter name displays automatically.

## From Date

Entry is required. Enter the earliest drive date to consider, using the MMDDYY format.

## To

Entry is required. Enter the latest drive date to consider, using the MMDDYY format.

## Drive ID

Entry is optional. The LOV contains only drives assigned to the specified recruiter within the specified date range.

# Retrieving Data

Click **Retrieve** to display data according to the specified criteria.

# In the Territory Block

The following data displays for the territories assigned to the specified recruiter:

- Territory ID
- Full name
- Short name
- Type

## In the Drive Block

The following data displays for the retrieved drives:

- Drive ID
- Date of drive
- Sponsor
- Recruiter
- Rollover status
- Projected show
- Projected draw
- Actual draw
- Actual number of deferrals

## Sorting the Data

Click the following column headers to sort displayed records by data in that column:

- Drive ID
- Date
- Show
- Draw

Clicking the same column header again reverses the sort order by data in that column.

## The Goal Statistics Button

Click **Goal Statistics** to open the Goal Information window. Use this window to view goals for any recruiter or territory along with achievement statistics. This window initially displays the recruiter ID of the recruiter defined in the Drives and Goals by Recruiter screen, but any recruiter can be selected. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## The Check List Button

Click **Check List** to open the Update Drive Checklist (DRVCHK) screen. This screen appears in display-only mode and displayed data cannot be modified. See that section of this chapter for information on interpreting this screen.

Click **EXIT FORM** to return to the Drives and Goals by Recruiter Query screen.


WellSky Corporation
Proprietary and confidential

## The Drive Details Button

Click **Drive Details** to directly access the Drive Details Query (DRIVEQ) screen. For more information, see the Drive Details Query section in this chapter.

Click **EXIT FORM** to return to the Drives and Goals by Recruiter screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.4 Monthly Collection Goals Query (GOALMONQ)

## Intended Use

Use this screen to view monthly goals for a calendar year by:

- Donor
- Facility
- Field
- Fixed goals
- Institution
- Recruiter
- Sponsor
- Fixed site
- Telerecruiter
- Territory

## Limitations

None

## Prerequisites

Goals must have been defined for the months and years specified using the Define Collection Goals by Month (GOALMON) screen, or the Define Collection Goals by Date Range (GOALDT) screen.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `GOALMONQ`.

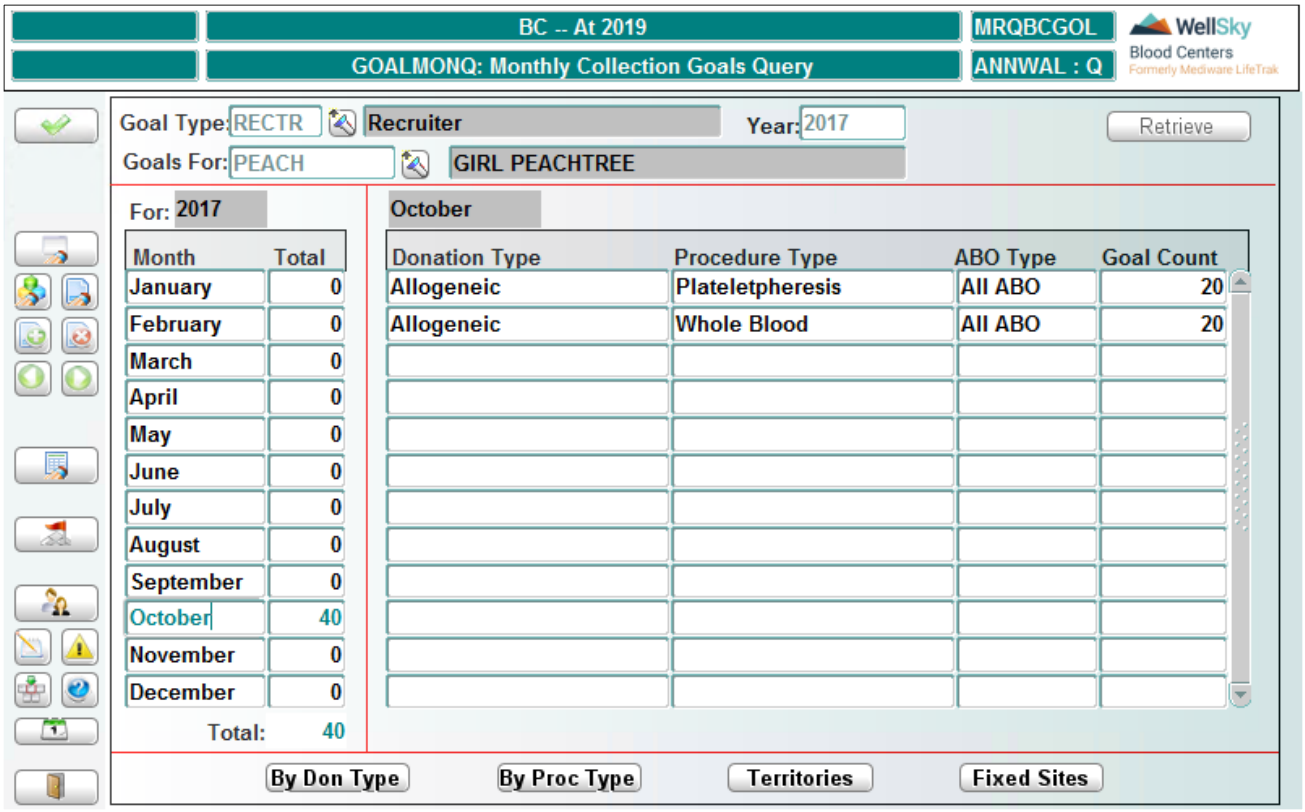


# Control Block Fields and Definitions

## Goal Type

Entry is required. Enter a valid goal type code or select from the LOV.

## Year

Current year automatically defaults in this field. To update value, enter a 4-digit year.

## Goals For

Entry is required. Select a valid code from the LOV that displays automatically. Entries in the LOV are restricted according to the goal type specified.

# Retrieving Data

Click **Retrieve** to display monthly goals according to the specified parameters:

# In the Monthly Goals Block

A total goal value displays for each month of the specified year. The yearly goals total displays at the bottom.


WellSky Corporation
Proprietary and confidential

## In the Goals Details Block

Use the **UP** and **DOWN** arrow keys to scroll among displayed months, selecting one month at a time. As each month is selected, goals for that month display in the Goals Details Block.

## The By Don Type and By Proc Type Buttons

Click **By Don Type** or **By Proc Type** to open the Institutional Goals window:

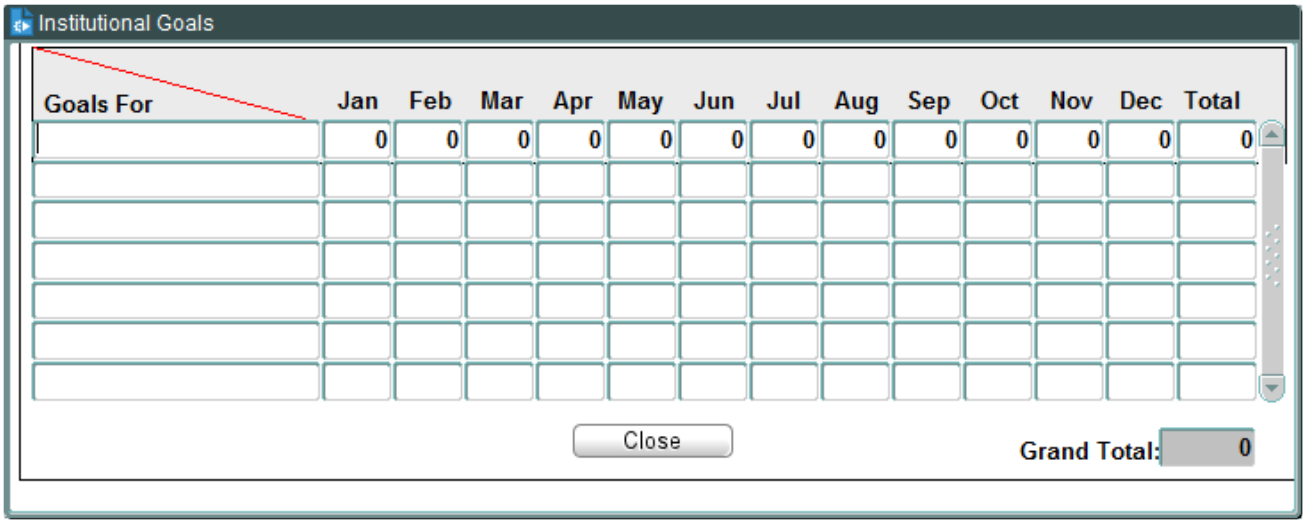


Use this screen to view the yearly goals by donation or procedure type. This window populates with data only when a goal type of Institution is selected in the Control Block.

Click **Close** to return to the main view.

## The Territories Button

Click **Territories** to open the Monthly Goals for Territories window:

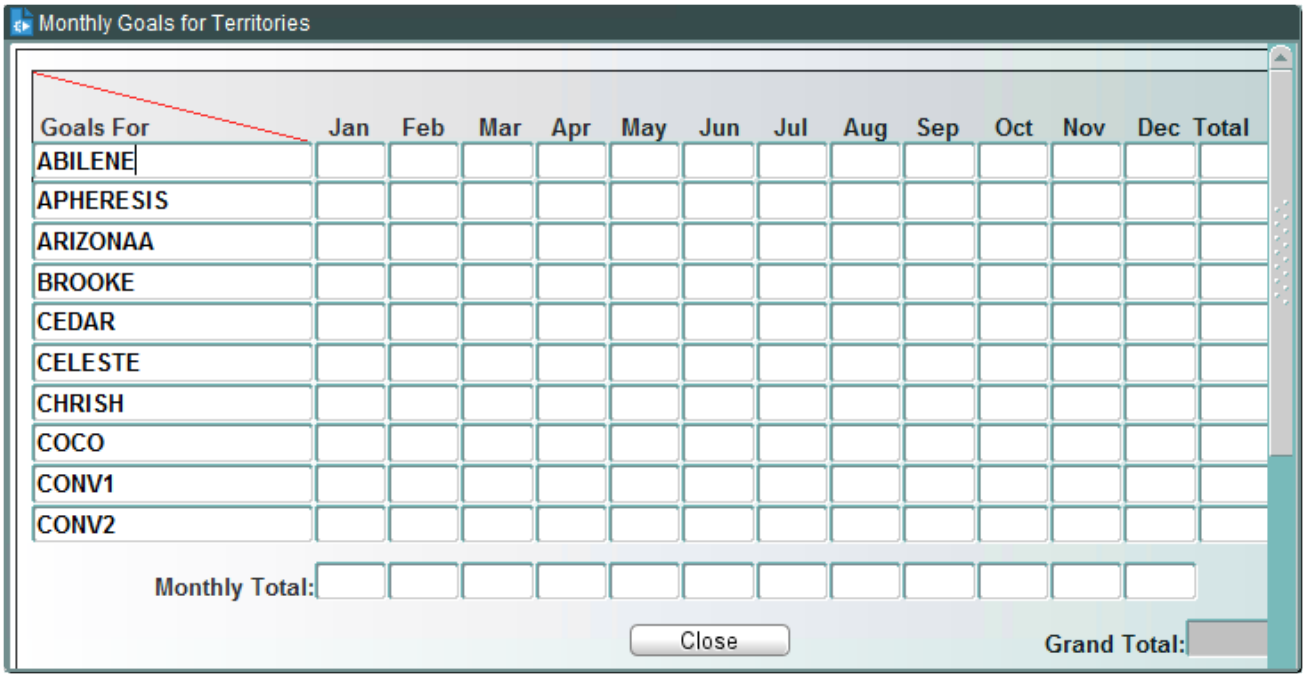


Use this window to view monthly goals for all the territories.

Click **Close** to return to the main view.

## The Fixed Sites Button

Click **Fixed Sites** to open the Monthly Goals for Fixed Sites window:

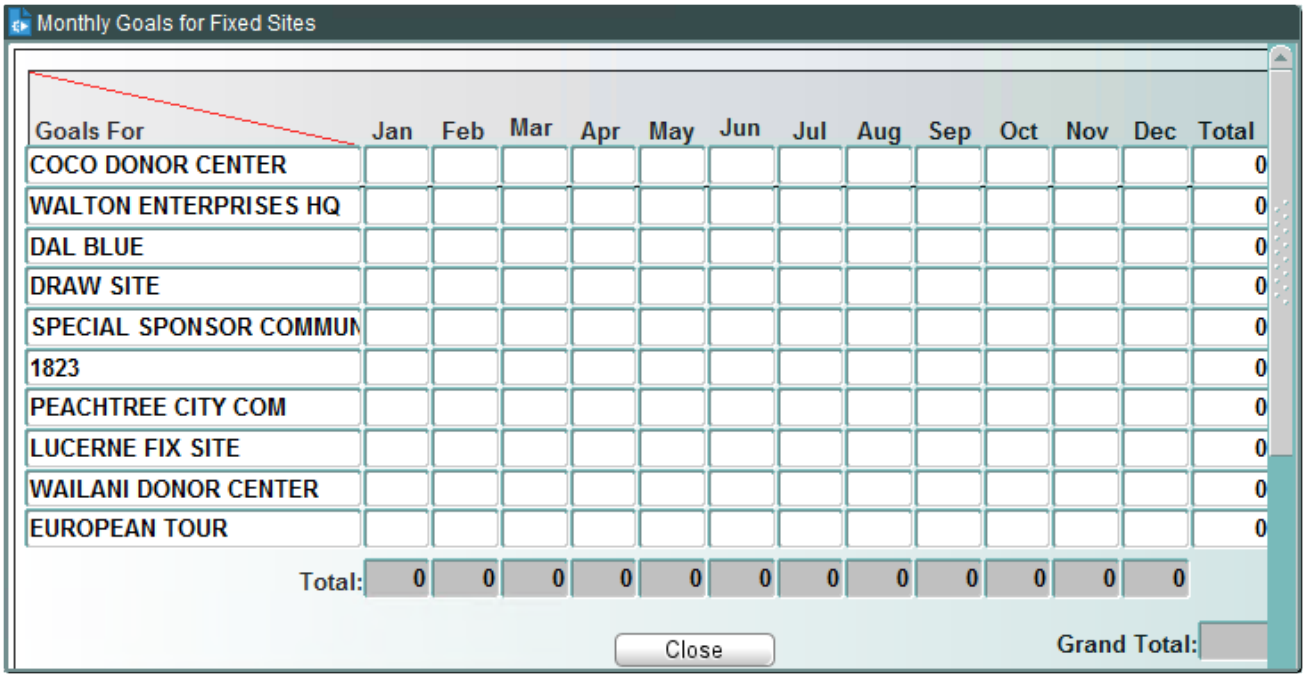


Use this window to view monthly goals for all fixed sites.

Click **Close** to return to the main view.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.5 Collection Goals by Date Query (GOALDTQ)

## Intended Use

Use this screen to view collection goals for a specified date range by:

- Recruiter
- Telerecruiter
- Territory
- Sponsor
- Fixed Site
- Institution
- Facility
- Fixed goals
- Field
- Donor

## Limitations

Process for Lab (PLAB) – will not always equal A/Drw – total, since unit can have more than one venipuncture code.

## Prerequisites

Goals must have been entered using the Define Collection Goals by Date Range (GOALDT) screen.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `GOALDTQ`.

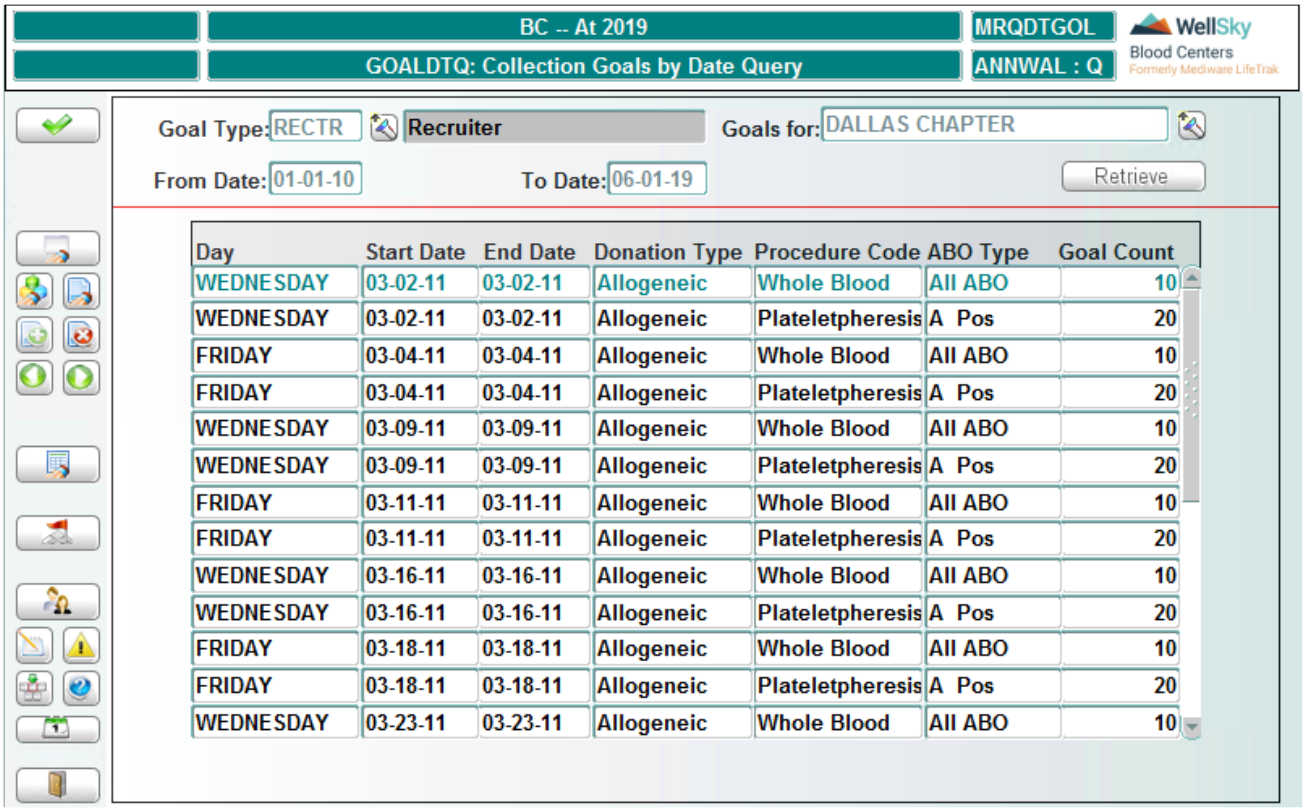


# Control Block Fields and Definitions

## Goal Type

Entry is required. Enter a goal type or select from the LOV. Once a valid goal type code is entered or selected, the code description displays automatically.

## Goals for

Entry is required. Enter a valid code or select from the LOV. The LOV contains entries based upon the goal type selection.

## From Date

Entry is required. Enter the earliest date for which a goal is to be displayed, using the MMDDYY format.

## To Date

Entry is required. Enter the latest date for which a goal is to be displayed, using the MMDDYY format.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of goals that match the entered criteria.


WellSky Corporation
Proprietary and confidential

If more goals are retrieved than can be viewed in one screen, use the vertical scroll bar to rapidly bring other goals into view. You may use the UP and DOWN arrow keys on the keyboard to advance up or down one goal at a time.

### At Commit

No data may be committed to the database from this screen.

### What to Do Next

There is no next step.

## 3.4.6 Sponsors by Territory Query (SBYTQ)

### Intended Use

Use this screen to query the database for sponsors within a specified recruitment territory.

### Limitations

None

### Prerequisites

The territory must have been entered using Create and Maintain Territories (TERINFO), and sponsors must have been assigned to the territory using Create Drive Sponsor Profile (SPON2).

### Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `SBYTQ`.

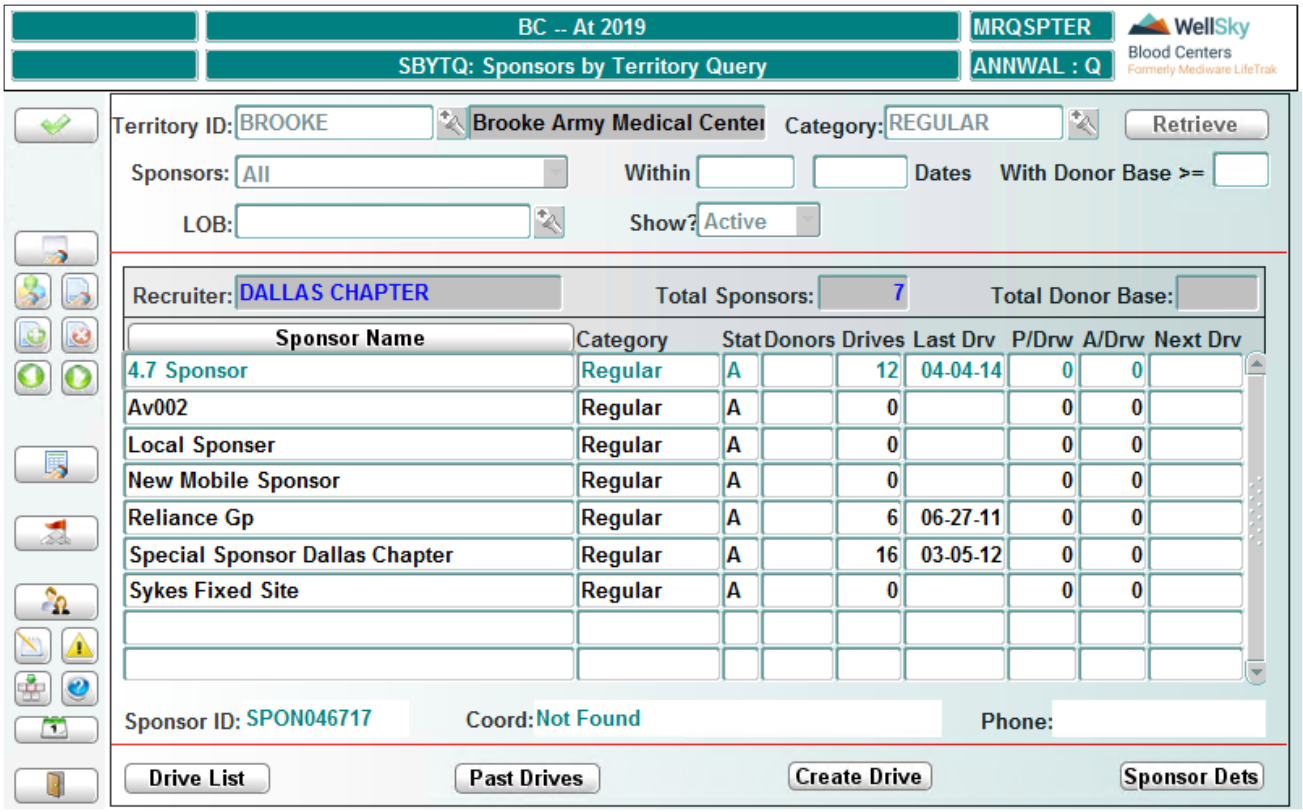


# Control Block Fields and Definitions

## Territory ID

Entry is required. Enter a territory code or select from the LOV. Once a valid territory code is entered or selected, the territory name displays automatically.

## Category

Entry is optional. Enter a valid category code or select from the LOV to display only sponsors of a single category.

## Sponsors

Entry is optional. The default in this field is All sponsors. Select **Eligible** from the list to have drive.

## Within

Entry is required if you specified Eligible to have drive in the *Sponsors* field. Enter a date using the MMDDYY format.

## With Donor Base

Entry is optional. Enter a whole number to limit the query to only those sponsors having a donor base of a certain size or larger.


WellSky Corporation
Proprietary and confidential

### LOB

Entry is optional. Enter a valid code or select from the LOV to restrict the query to sponsors of a particular line of business.

### Show?

Entry is required. The default in this field is Active. Use the drop-down list to select inactive sponsors or both active and inactive.

## Retrieving Data

Click **Retrieve** to display records according to the specified criteria.

The following data display:

- Recruiter for the specified territory
- Number of sponsors retrieved
- Combined donor base for sponsors retrieved
- List of sponsors that meet the specified criteria

## Navigating and Viewing Data

Use the **UP** and **DOWN** arrow keys the mouse to select one sponsor record at a time.

As the sponsor record is selected, the sponsor ID, primary sponsor contact, and the sponsor phone number display at the bottom of the screen.

For each sponsor record displayed, the following data display if it exists in the database:

- Sponsor name
- Sponsor category
- Sponsor status code: **A** = Active or **I** = Inactive
- Size of donor base
- Number of drives held
- Date of last drive
- Projected draw of last drive
- Actual draw of last drive
- Date of next scheduled drive

## The Drive List Button

Click **Drive List** to open the Drive List window:

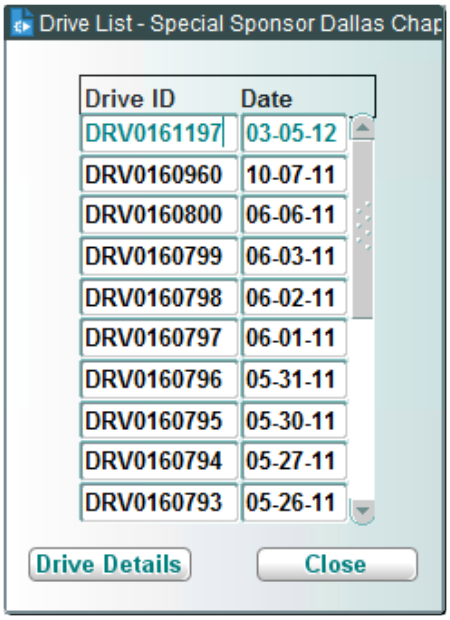


Use this window to view a historical listing of drives held by the selected sponsor.

Click **Drive Details** to open the Drive Details Query screen. See the Drive Details Query section of this chapter for information on using this screen.

Click **Close** to return to the main screen.

## The Past Drives Button

Click **Past Drives** to open the Past Drives Sponsor window. Use this window to view past drives data for the selected sponsor. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Create Drive Button

Click **Create Drive** to open the Modify Drive Details – Super (SDRIVE) screen. Use this screen to create a new drive or modify an existing drive. See the Modify Drive Details – Super section of this chapter for instructions on using this screen. Click **EXIT FORM** to return to the Sponsors by Territory Query screen.

## The Sponsor Dets Button

Click **Sponsor Dets** to open the Create Drive Sponsor Profile (SPON2) screen. Use this screen to create or edit sponsor profile details. See the Create Drive Sponsor Profile section of this chapter for instructions on using this screen.

## At Commit

No data may be committed to the database from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 3.4.7 Sponsor Contacts Query (SPCONQ)

## Intended Use

Use this screen to view details for a sponsor contact.

## Limitations

None

## Prerequisites

A valid sponsor must already exist in the database.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword SPCONQ.

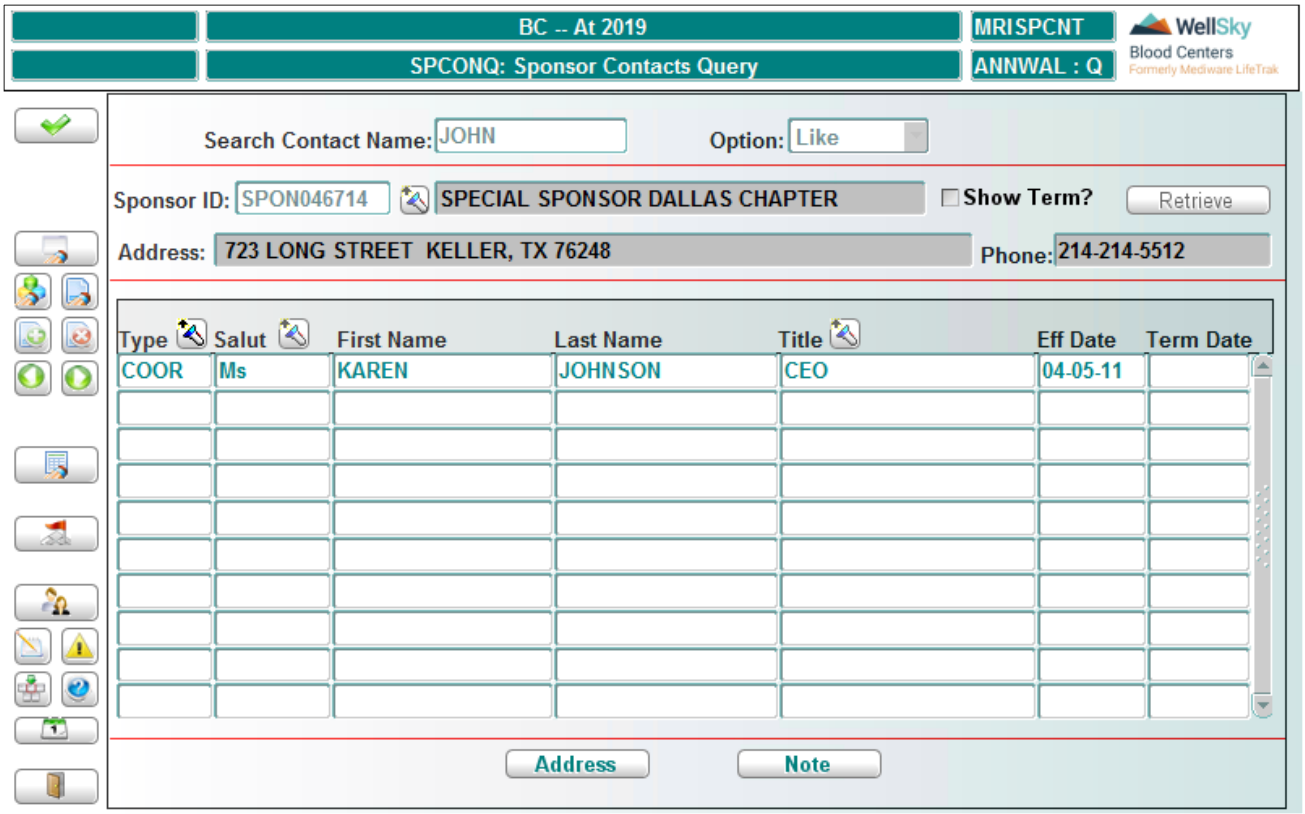


Locate a sponsor contact by searching for the first or last name, or by selecting a sponsor and displaying all contacts for that sponsor.

## Search Block Fields and Definitions

### Contact Name

If you desire to limit the display to a contact's first or last name, enter that name.

### Option

Select an option from the drop-down list.

- Like – The default; limits the search to contacts whose names are basically like your entry.
- Exact – Limits the search to contacts whose names exactly match your entry.
- Soundex – Limits the search to contacts whose names sound like your entry.

If searching by the sponsor contact's first or last name, press ENTER to initiate the search. An LOV displays that contains only sponsors having contacts with names that qualify for your entry and match option:

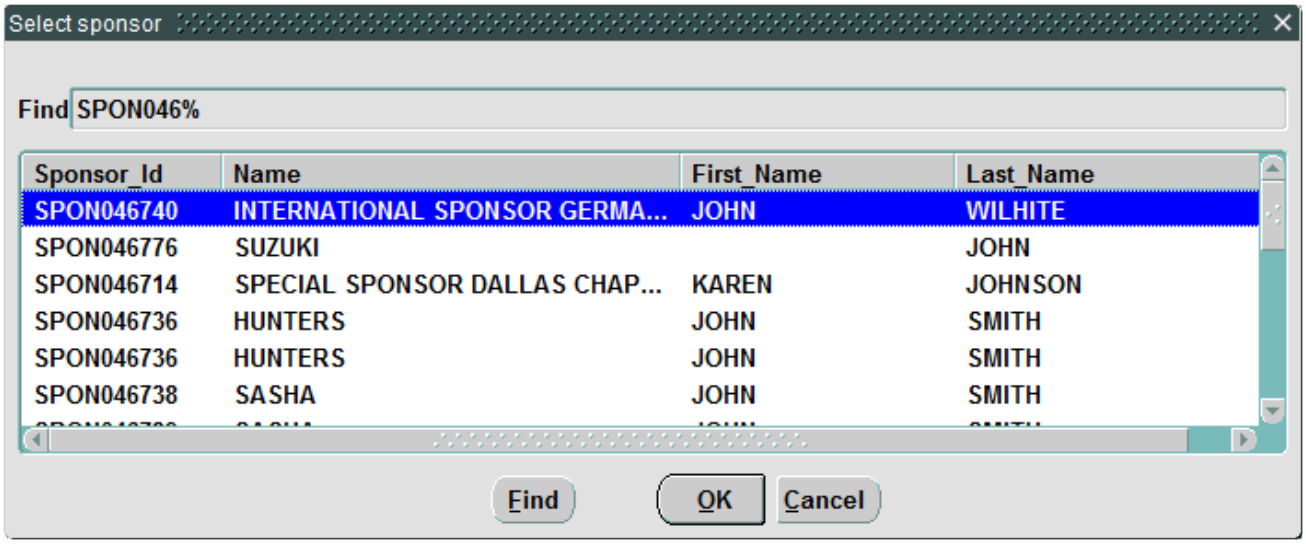


Select the sponsor to retrieve and click OK. The sponsor ID displays in the Control Block. Press ENTER and the sponsor name, address, and phone number populate the other fields in the Control Block.

## Control Block Fields and Definitions

If you want to display all contacts for a known sponsor, skip the search block and enter the following:

### Sponsor ID

Enter a sponsor ID or select from the LOV. To limit the LOV, enter a partial sponsor name and press ENTER. The resulting LOV contains only selections that match your partial entry. Once a valid sponsor ID is entered or selected, the sponsor name, address, and phone number display.

### Show Term

Select the check box to include sponsor contacts that have been terminated in the database.

## Retrieving Data

Click Retrieve to display the sponsor contact information.

No data can be entered or modified in this screen.


WellSky Corporation
Proprietary and confidential

## The Address Button

The Address button is not functional in this screen.

## The Notes Button

The Notes button is not functional in this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.8 Parent Sponsors Query (PSPONQ)

## Intended Use

Use this screen to view constituent sponsors for a parent sponsor, as well as drive performance criteria for those constituent sponsors within a drive date range.

## Limitations

None

## Prerequisites

At least one sponsor must have been defined as a constituent of a parent sponsor in Create Drive Sponsor Profile (SPON2) before that sponsor can be queried in this screen.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `PSPONQ`.

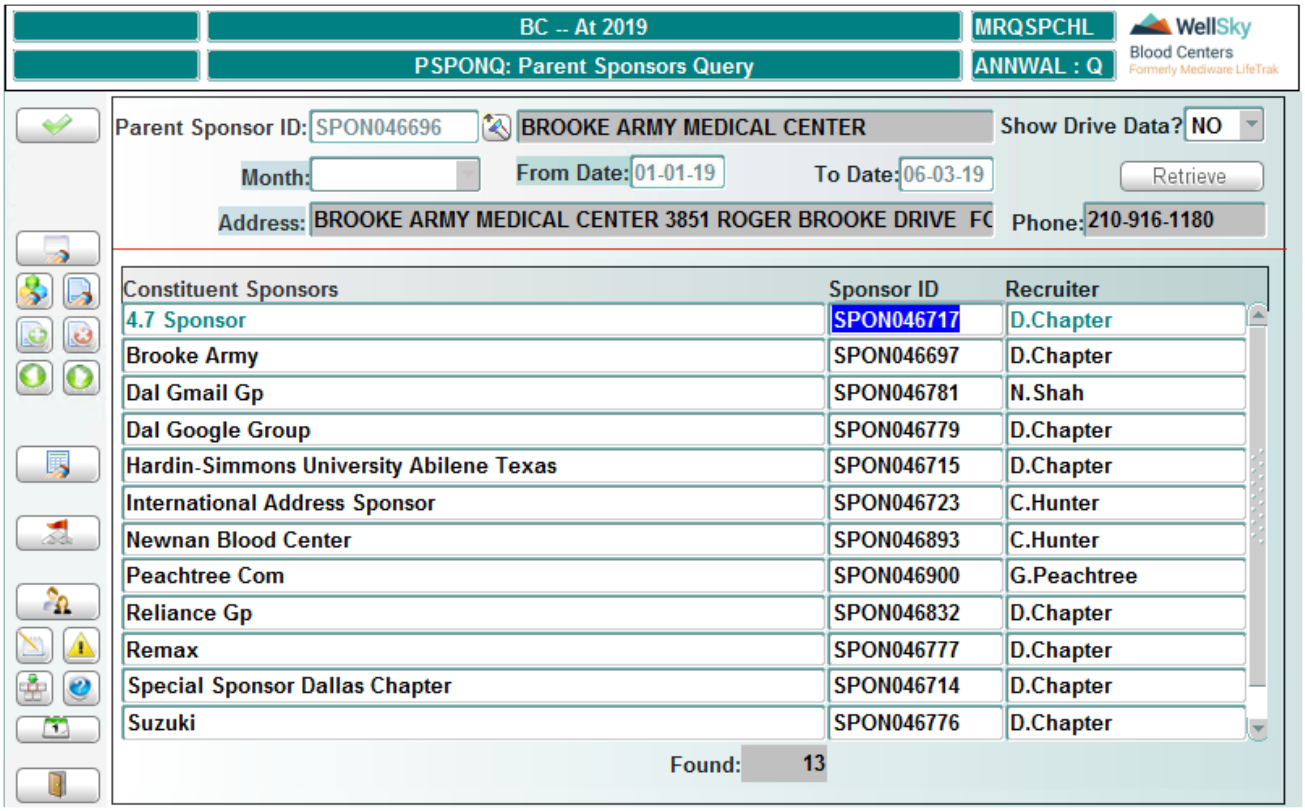


# Control Block Fields and Definitions

## Parent Sponsor ID

Entry is required. Enter a sponsor ID or select from the LOV. The LOV is restricted to valid parent sponsors. Once a valid sponsor ID is entered or selected, the sponsor name, address, and phone number display automatically.

## Show Drive Data

Entry is required. Indicate whether to display drive data when parent sponsors are retrieved. Defaults to No or select Yes from the drop-down list.

## Month

Entry is optional. Select a month from the current year from the drop-down list. If a month (or Yearly) is selected, the date range populates automatically using the current year. Use the scroll bar to scroll among selection options. If querying for a year other than the current year, skip this field.

## From Date

Entry is optional. Enter the earliest drive date to be considered using the MMDDYY format. A past, current, or future date is accepted.

## To Date

Entry is optional. Enter the latest drive date to be considered using the MMDDYY format. A past, current, or future date is accepted, as long as it is greater than the starting date entered.


WellSky Corporation
Proprietary and confidential

**NOTE –** If no selection or entry is made in the *Month* or date range fields, system defaults to start of the current year to the current date for the date range.

## Retrieving Data

Click **Retrieve** to display all sponsors that are defined as constituents of the parent sponsor selected.

The following information displays:

- Constituent sponsor
- Sponsor ID
- Name of recruiter

If Yes is selected in the *Show Drive Data?* field in the Control Block, the following drive data display for each constituent retrieved:

- Donor base
- Number of drives held
- Historical penetration percentage
- Actual draw
- Historical deferral percentage

Totals will display for the Donors, Drives, and % Pen columns.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.9 Drives by Sponsor Query (DRSPONQ)

## Intended Use

Use this screen to view drives for a sponsor.

## Limitations

None

## Prerequisites

Sponsor has to have been created in Create Drive Sponsor Profile (SPON2).

# Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword DRSPONQ.

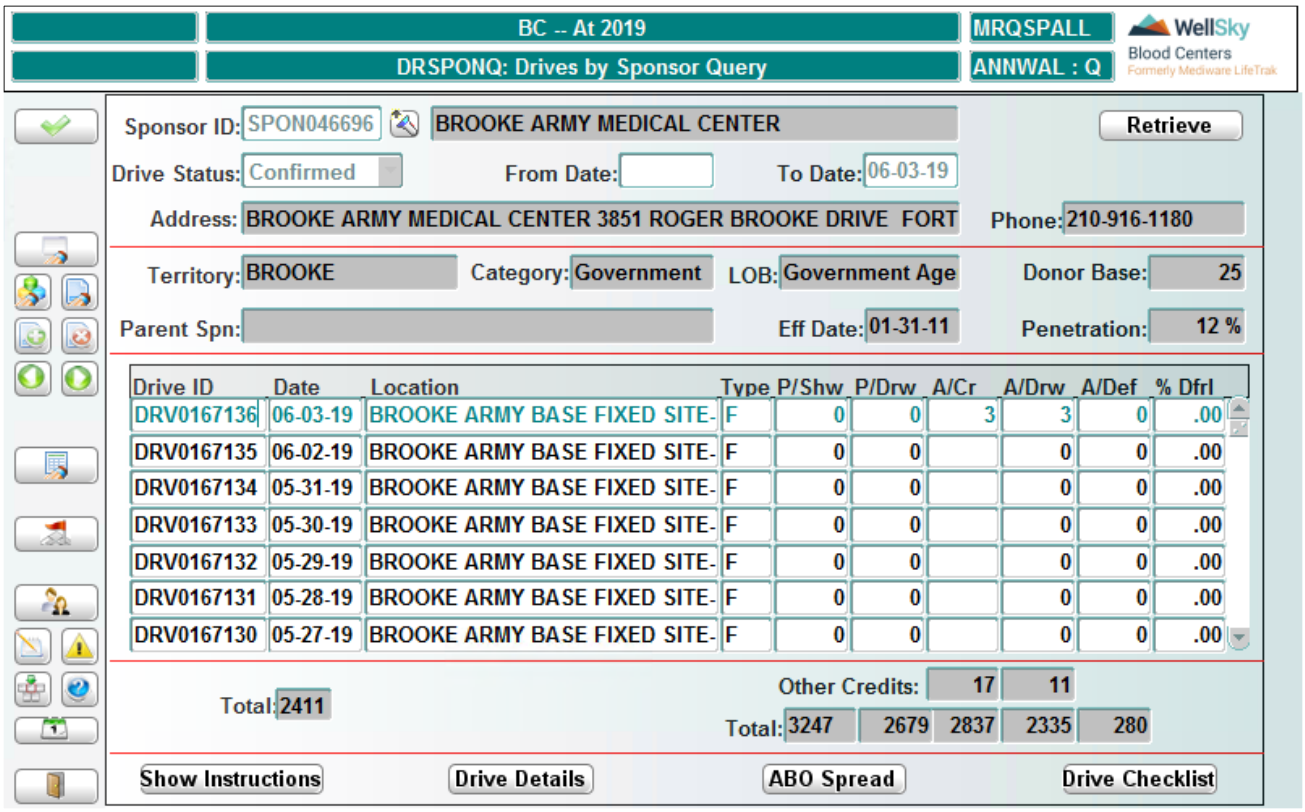


# Control Block Fields and Definitions

## Sponsor ID

Entry is required. Enter a sponsor ID or select from the LOV. Once a valid sponsor ID is entered or selected, the sponsor name, address, and phone number display automatically.

## Drive Status

Entry is required. The system default is Confirmed drives. Use the drop-down list to query drives that have a different status.

## From Date

Entry is optional. Enter the earliest date to consider in the query, using the MMDDYY format. The date can be a past, current, or future date. If no date is entered, only past drives are retrieved.

## To Date

Entry is optional. Enter the latest date to consider in the query, using the MMDDYY format. If no dates are entered, the default is the system date.


WellSky Corporation
Proprietary and confidential

**NOTE –** The system limits the maximum number of drive records that can be retrieved by this query. It is recommended that you limit your query by specifying the drive status or by shortening the date range.

## Retrieving Data

Click **Retrieve** to display drive records according to the specified criteria.

## In the Sponsor Details Block

The following data display for the specified sponsor:

- Recruitment territory
- Sponsor category
- Sponsor's line of business
- Donor base
- Parent sponsor, if any
- Sponsor effective date
- Donor penetration

None of the above data can be modified.

## In the Drives Block

or each drive record retrieved, the following data display:

- Drive ID
- Drive date
- Location
- Drive type
- Projected show
- Projected draw
- Actual credit
- Actual draw
- Actual deferral
- Percentage of deferrals

## The Show Instructions Button

Click **Show Instructions** to display any special instructions for the specified sponsor:

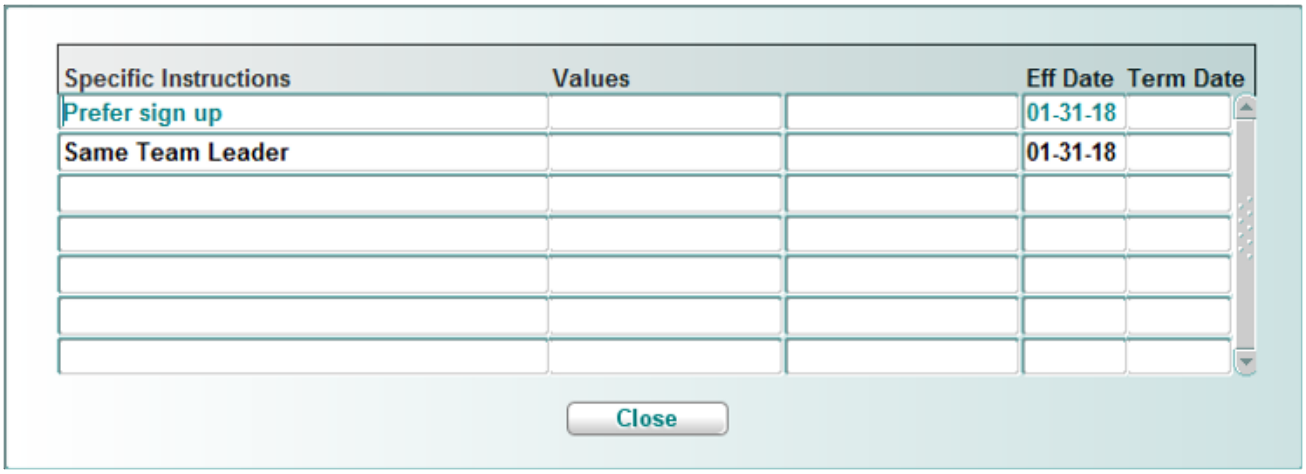


No data can be modified in this window.

Click **Close** to return to the main screen.

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query screen. Use this screen to query details about a selected drive. See the Drive Details Query section of this chapter for information on this screen.

## The ABO Spread Button

Click **ABO Spread** to open the ABO Breakdown for Sponsor window that displays data for the sponsor's last three drives. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Drive Checklist Button

Click **Drive Checklist** to access the Update Drive Checklist (DRVCHK) screen. See the Update Drive Checklist section of this chapter for information on this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.10 Territory Statistics Query (TERQ)

## Intended Use

Use this screen to query territory information by drives, recruiter, statistics, campaign goals, etc.


WellSky Corporation
Proprietary and confidential

## Limitations

- Maximum query is a 12-month period.
- Cannot query an invalid territory.

## Prerequisites

Must have existing and valid territories.

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `TERQ`.

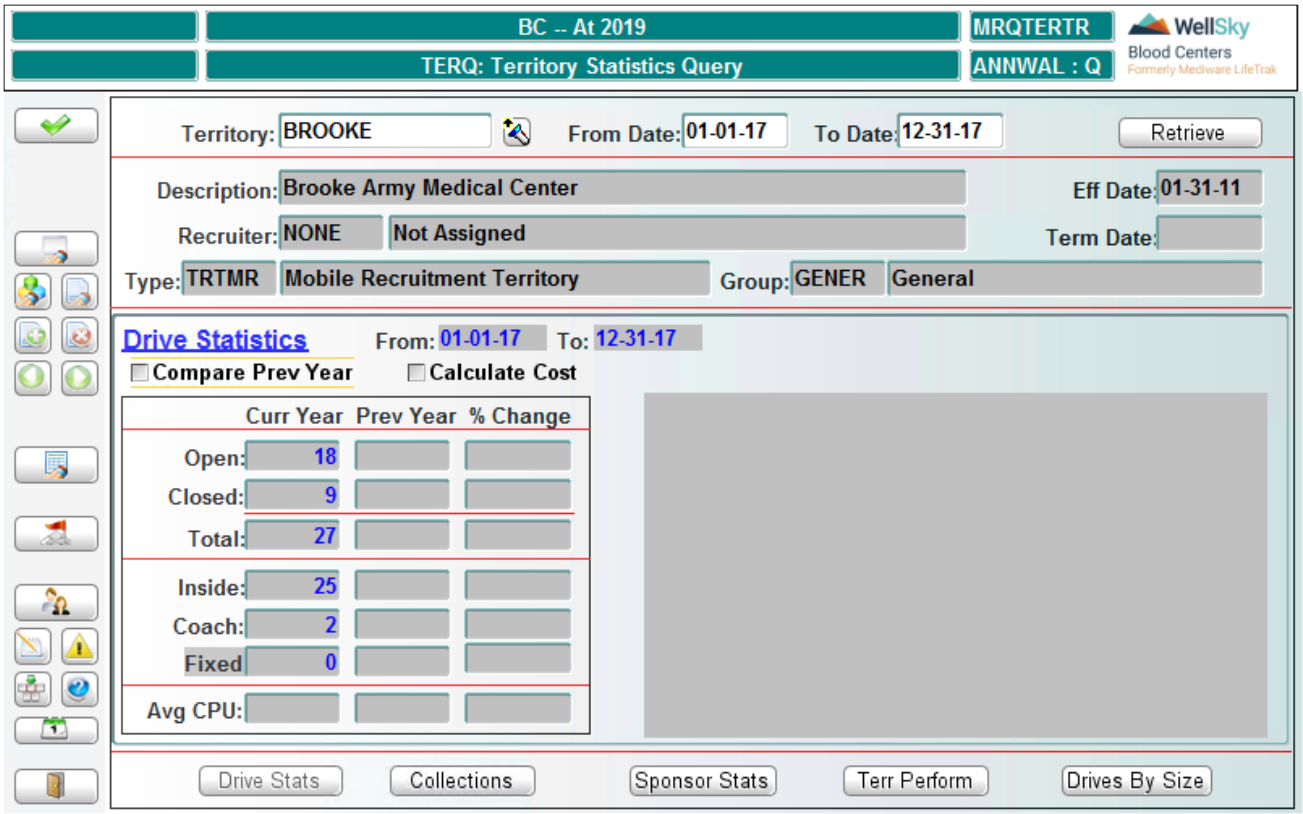


## Control Block Fields and Definitions

### Territory

Entry is required. Enter territory ID or select from the LOV.

### From Date

Entry is required. Enter the beginning date of date range in MMDDYY format.

### To Date

Entry is required. Enter the ending date of date range in MMDDYY format.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display the territory data.

## In the Territory Data Block

The following data displays for the retrieved territory:

- Description of territory ID code
- Effective date
- Recruiter responsible
- Termination date
- Type of territory
- Territory group

At the bottom of the screen are five buttons. These buttons determine territory statistics that can be viewed.

## The Drive Stats Button

Click **Drive Stats** to view drive statistics for drives within the territory and date range.

Drive Stats is the default button.

Select the **Compare Prev Year** box to view and compare drive statistics from the previous year.

Click **Calculate Cost** to calculate cost per unit.

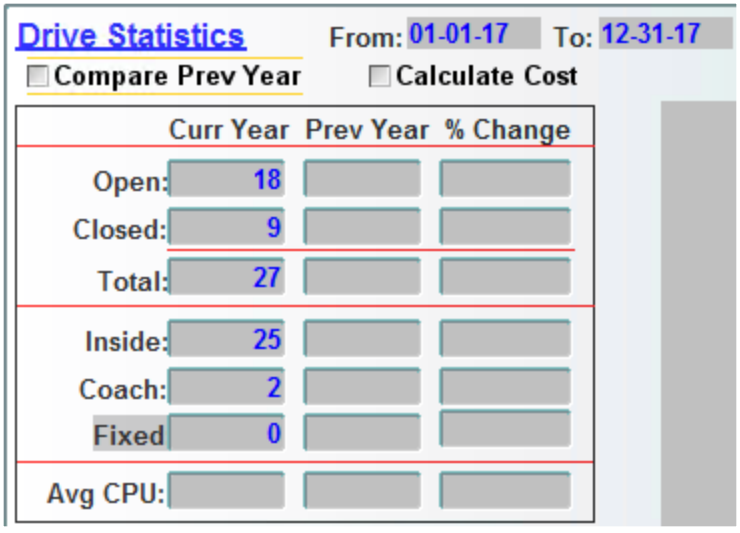


## The Collections Button

Click **Collections** to view collections by procedure:


WellSky Corporation
Proprietary and confidential

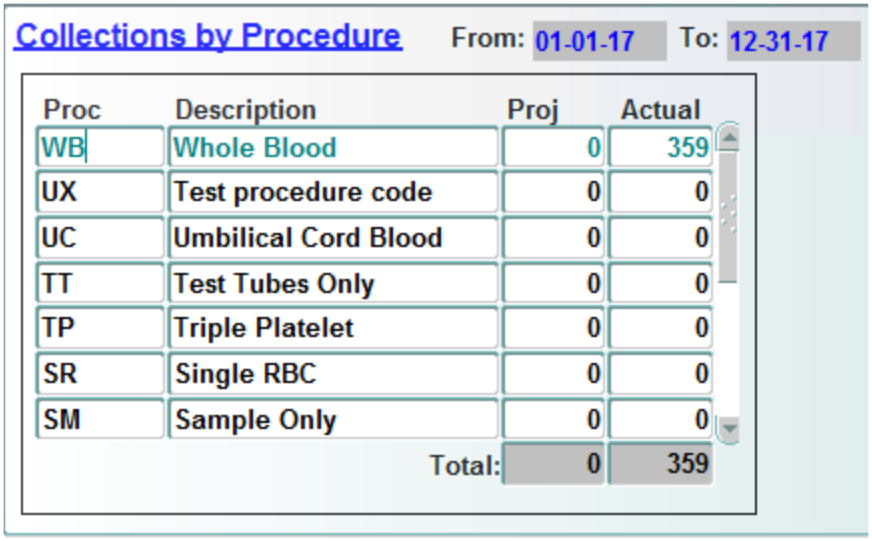


This view displays the procedure codes, procedure descriptions, projected number of procedures and actual number of procedures within the territory and date range.

## The Sponsor Stats Button

Click **Sponsor Stats** to view the sponsor statistics:

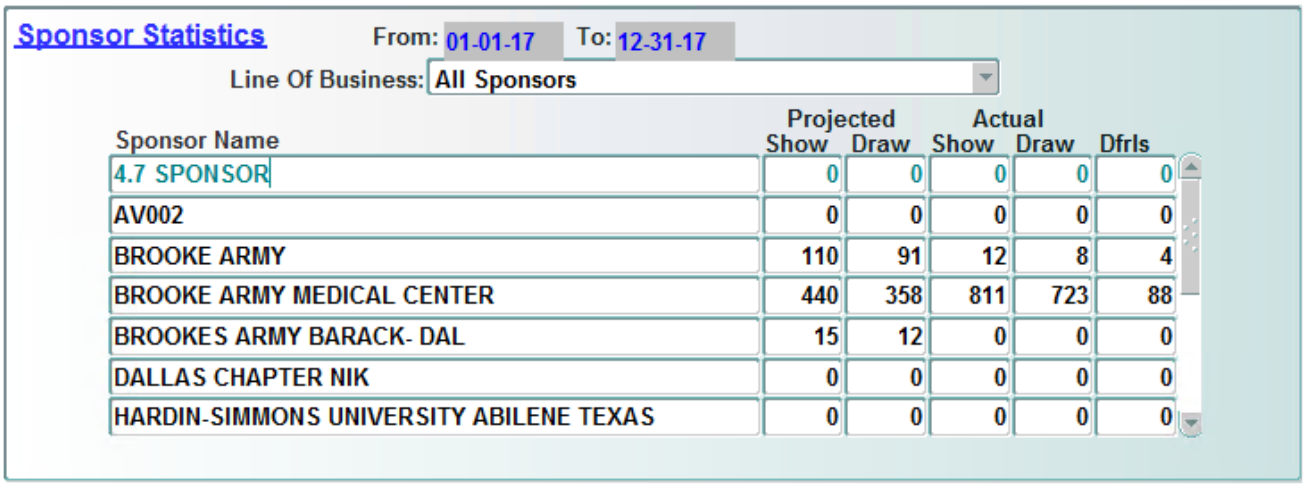


This view displays the statistics for all drive sponsors with the territory. The window displays the sponsor name, projected show and draw, actual show and draw, and deferrals.

The default line of business is All Sponsors.

To limit the display to a specified type of business, select a line of business from the drop-down list.

## The Terr Perform Button

Click **Terr Perform** to view the territory statistics:

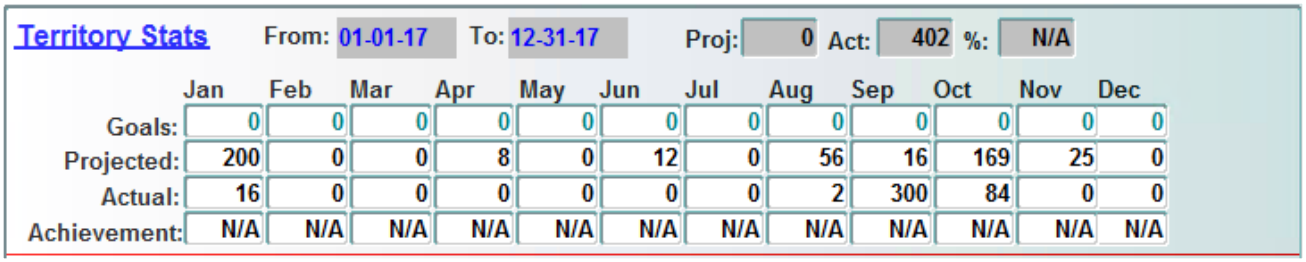


| | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Goals: | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Projected: | 200 | 0 | 0 | 8 | 0 | 12 | 0 | 56 | 16 | 169 | 25 | 0 |
| Actual: | 16 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 300 | 84 | 0 | 0 |
| Achievement: | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |

This view displays goals, projected draw, actual draw, and achievement level for all months within the territory and date range.

## The Drives By Size Button

Click **Drives By Size** to view draws by projected size:

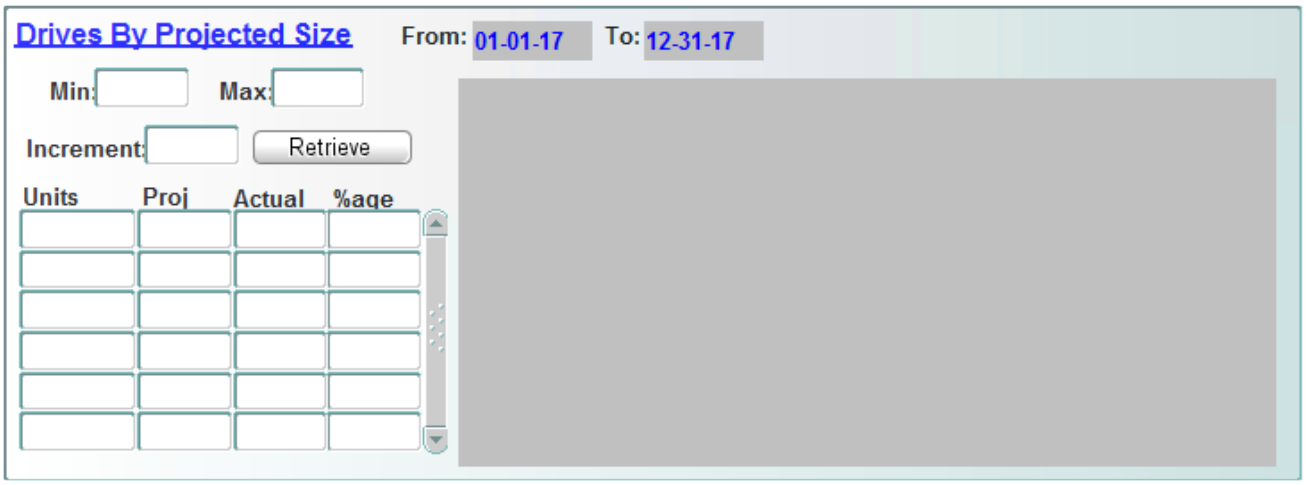


### Min

Entry is required. Enter a minimum number of projected draws. Minimum units must be zero (0) or greater.

### Max

Entry is required. Enter a maximum number of projected draws. Maximum units must be zero (0) or greater.

### Increment

Entry is required. Enter number of unit increments. Unit lot size must be at least one (1).

Click **Retrieve** to display a list of projected draws by size:


WellSky Corporation
Proprietary and confidential

The window displays projected drives by draw, projected draws of that size, actual draws of that size, and percent of draws that size.

The Retrieve button changes to a Clear button.

Click **Clear** to enter new minimum and maximum units and lot size.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.11 Goals vs Booked and Actuals Query (SAYQ)

## Intended Use

Displays drive goals and actuals for drive custodians.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `SAYQ`.

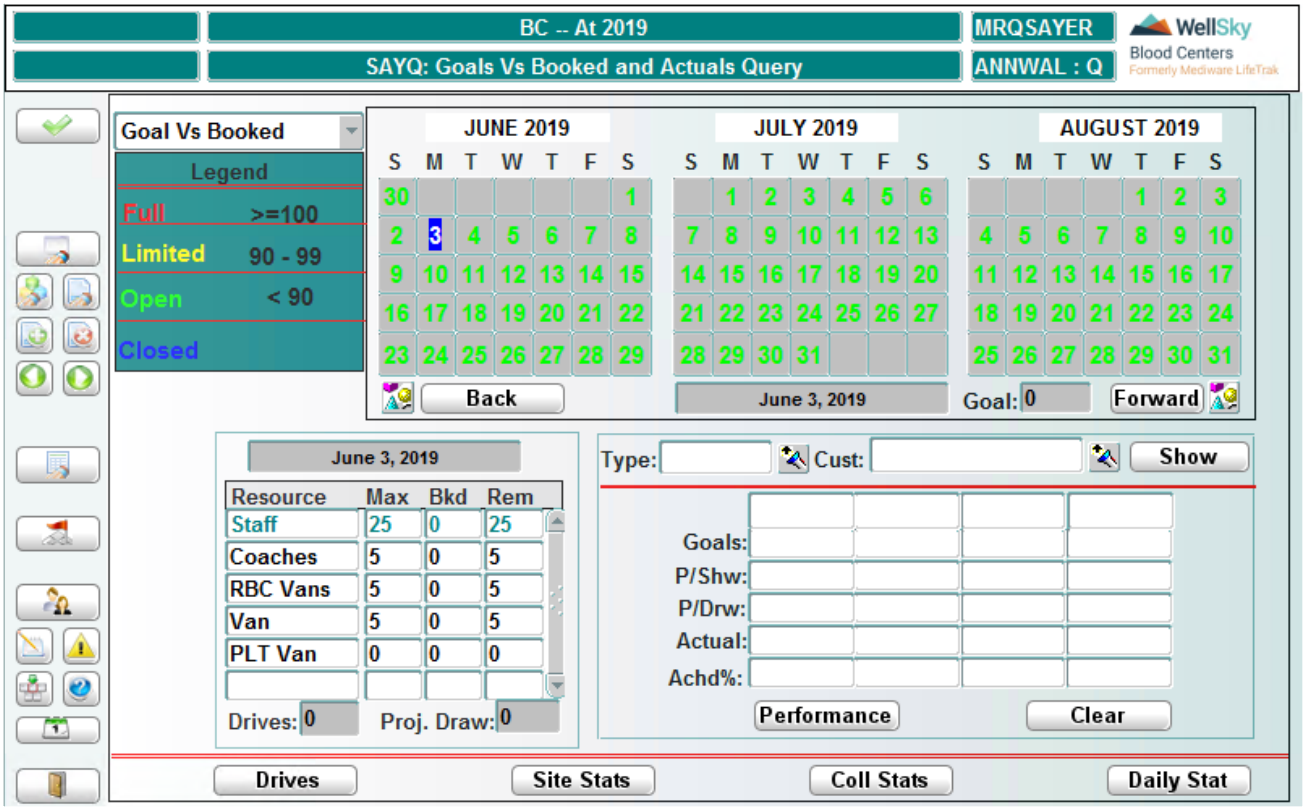


# Control Block Fields and Definitions

## In the Legend Block

This block tells the meaning of the color of the dates that display in the Calendar Block. Depending on the color of the date, you can tell how many drives are booked for that date.

## In the Calendar Block

This screen automatically displays data for the system date.

To choose a different date, click the desired date in the calendar window.

Use the arrow keys in the calendar window to scroll through all months.

## In the Resource Block

The following data display for the selected date:

- Resource list
- Maximum number of that resource available
- Number of that resource that are booked
- Remaining number of that resource


WellSky Corporation
Proprietary and confidential

- Drives scheduled for the selected date
- Projected draw of all drives scheduled for the selected date

# Goal Type Block Fields and Definitions

## Type

Entry is required. Enter goal type or select from the LOV.

## Cust

Entry is required. Enter goal custodian or select from the LOV.

Click **Show** to display the goals that match the entered criteria:

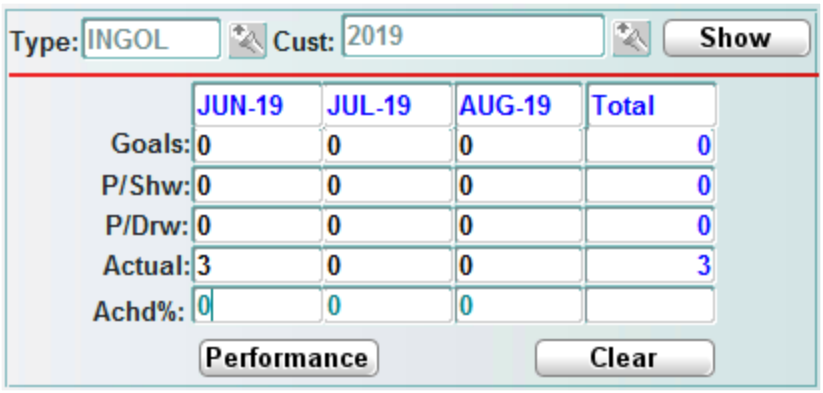


The following data display for a three-month span:

- Goals
- Projected show
- Projected draw
- Actual draw
- Achieved draw percentage

# The Performance Button

Click **Performance** to open the Goal Information window. Use this window to view goal information by recruiter and territory. See Chapter 14 Called Windows and Routines for instructions on using this window.

Click **Close** to return to the main screen.

# The Drives Button

Click **Drives** to open the Display Drives window:

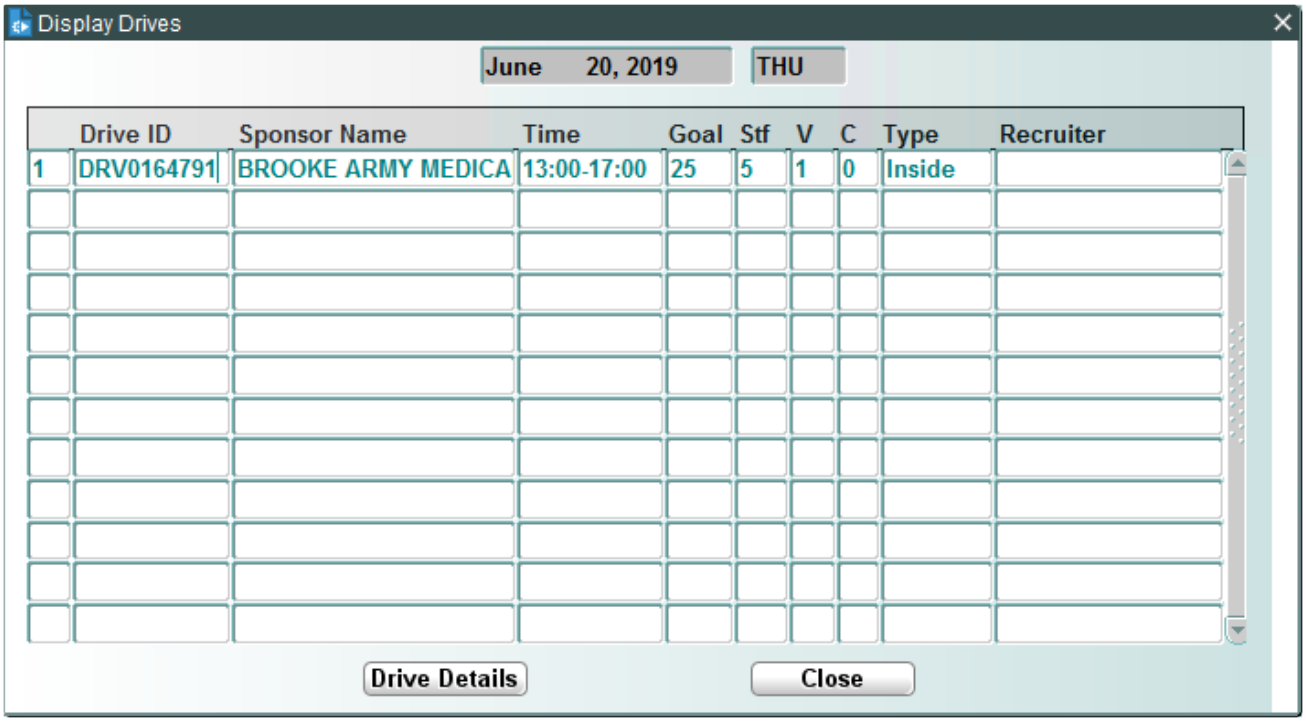


Use this window to view a list of drives scheduled for the selected date. The following data display:

- Drive ID
- Sponsor
- Time of drive
- Draw goal
- Number of staff assigned
- Number of vans assigned
- Number of coaches assigned
- Type of drive
- Recruiter

Click **Drive Details** to open the Drive Details Query screen. Use this screen to view details about a selected drive. See the Drive Details Query section of this chapter for instructions on using this screen.

Click **Close** to return to the main view.

## The Site Stats Button

Click **Site Stats** to open the Site Collection Statistics window. See Chapter 14 Called Windows and Routines for instructions on using this window.

Click **Close** to return to the main view.


WellSky Corporation
Proprietary and confidential

## The Coll Stats Button

Click **Coll Stats** to open the Collection Statistics window. Use this window to view collection statistics for a date range. See Chapter 14 Called Windows and Routines for instructions on using this window.

Click **Close** to return to the main view.

## The Daily Stat Button

Click **Daily Stat** to open the Goals by Day window:

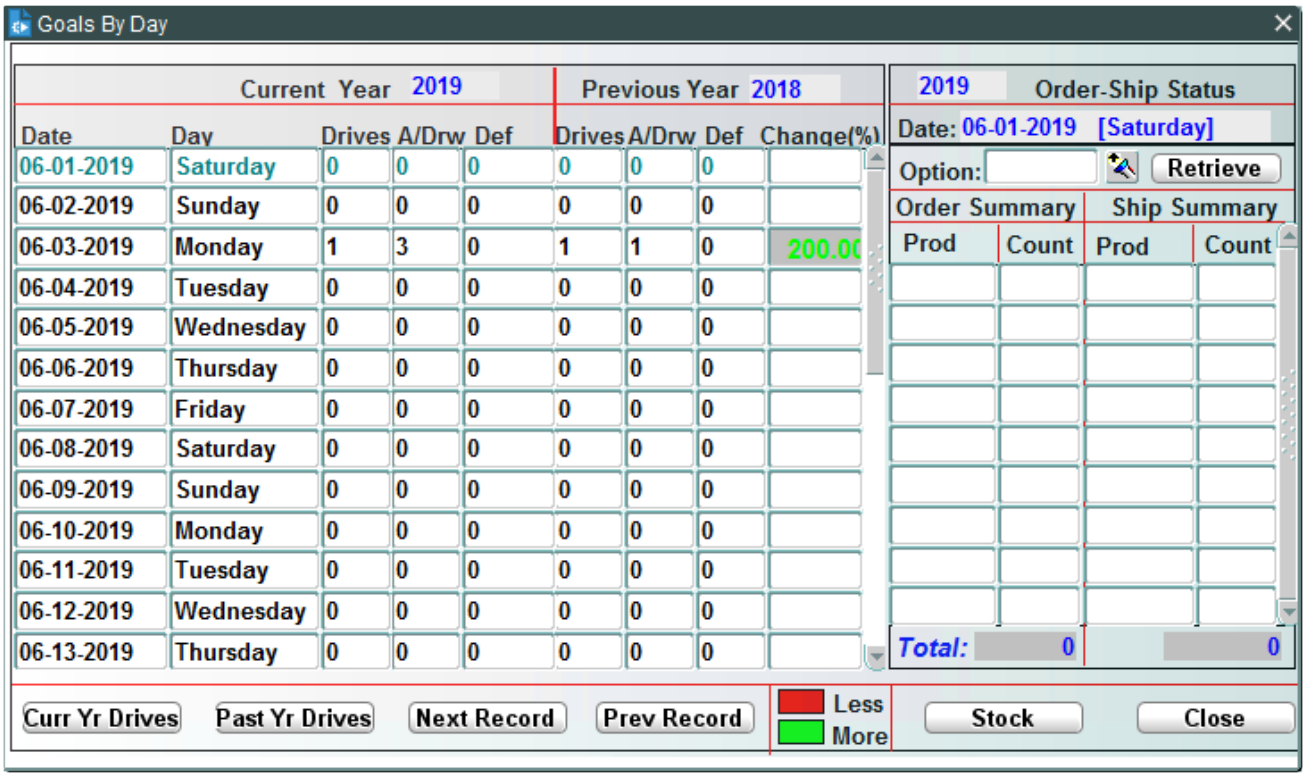


Use this window to view collection goals by day and compare to previous year's drives.

Click **Close** to return to the main view.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.12 Draw Query (DRAWQ)

## Intended Use

Use this screen to view projected and actual draw statistics for a specified drive type and for a specified date range.

## Limitations

Process for Lab (Plab) – will not always equal A/Drw – total, since a unit can have more than one venipuncture code.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `DRAWQ`.

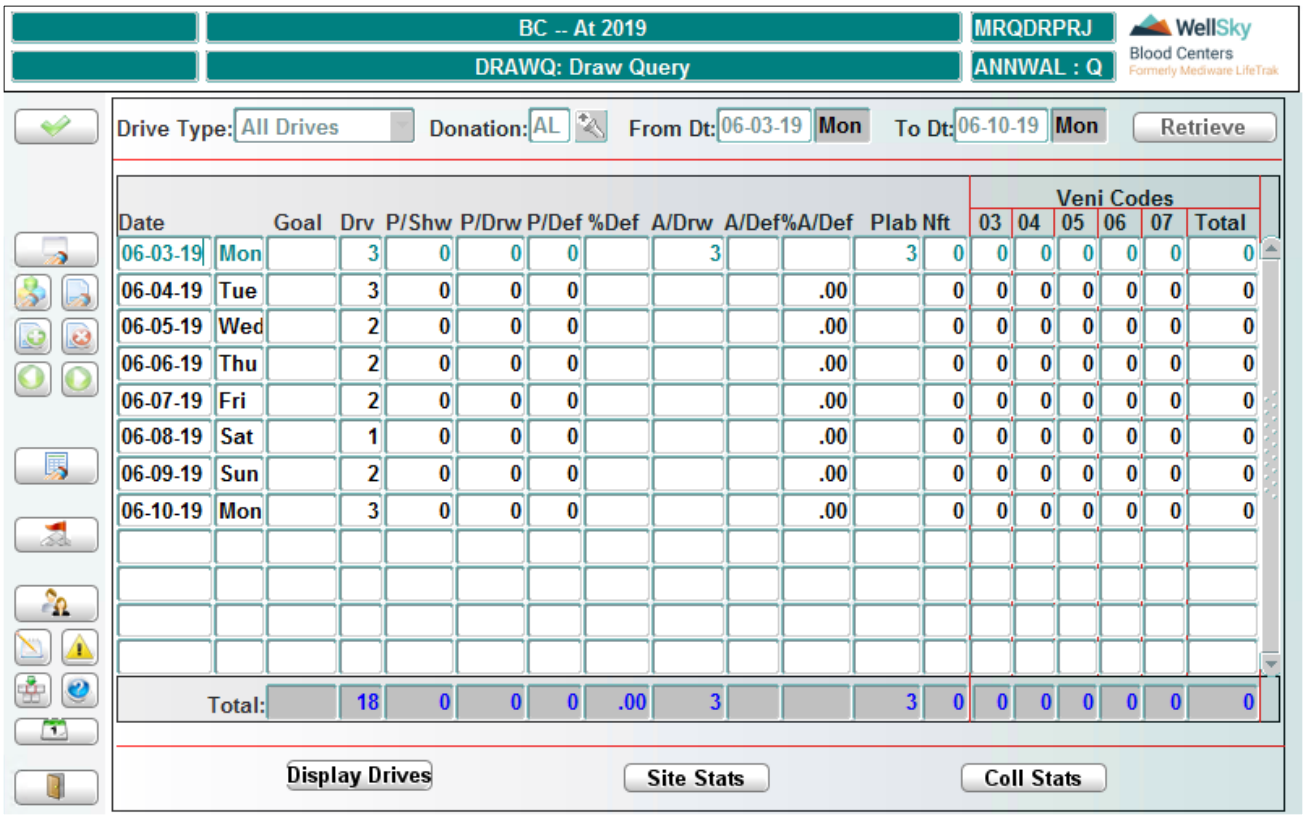


## Control Block Fields and Definitions

### Drive Type

Entry is required. Use the drop-down list in this field to make your selection. The default is All Drives.

### Donation

Entry is optional. Select one or more procedures from the LOV.

### From Dt

Entry is required. Default is system date. To change, enter the beginning date of the date range in MMDDYY format. The date can be a past, current, or future date.


WellSky Corporation
Proprietary and confidential

### To Dt

Entry is required. Default is one week after the starting date. Enter the ending date of date range in MMDDYY format.

## Retrieving Data

Click **Retrieve** to display draw statistics according to the specified criteria.

For each date displayed, the following data display:

- Date and day of week
- Goal
- Number of drives
- Projected show
- Projected draw
- Projected deferrals
- Projected deferral percentage
- Actual draw for past dates
- Actual number of deferrals for past dates
- Actual deferral percentage for past dates
- Process for lab – actual collections without any attributes
- Number of collections that are not for transfusion
- Venipuncture codes 03-07 and total

Totals for all numerical columns display at the bottom of the columns.

## The Display Drives Button

To display the drives for any listed date:

Select the date.

Click **Display Drives**.

The screen displays drive records for the selected date:

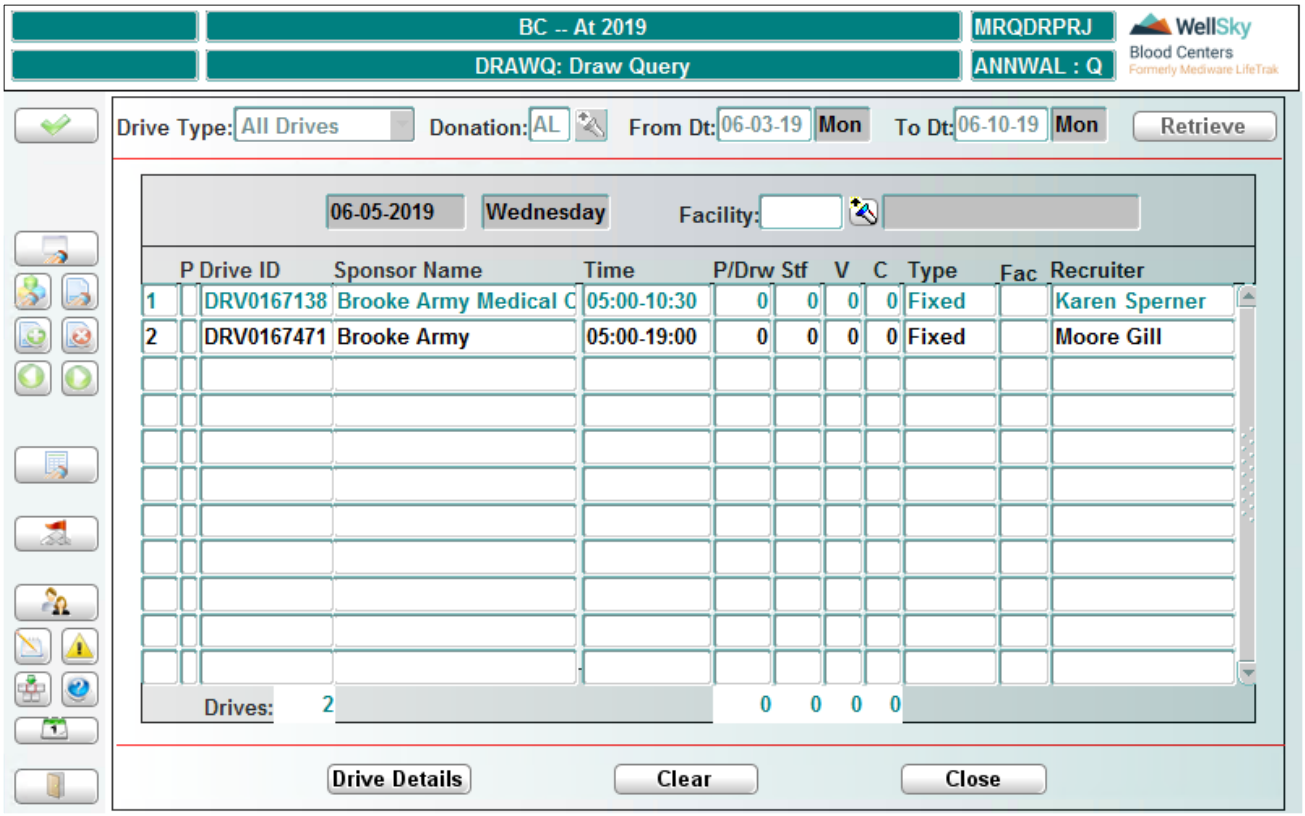


The following data display:

- Drive ID
- Sponsor name
- Drive times
- Projected draw
- Number of assigned staff
- Numbers of vans
- Number of coaches
- Drive type
- Facility staff is assigned from
- Recruiter name

Click **Drive Details** to open the Drive Details Query screen.

Use this screen to view details about a selected drive. See the Drive Details Query section in this chapter for instructions on using this screen.

Click **Close** to return to the main view.


WellSky Corporation
Proprietary and confidential

## The Site Stats Button

Click **Site Stats** to open the Site Collection Statistics window. See Chapter 14 Called Windows and Routines for instructions on using this window.

Click **Close** to return to the main view.

## The Coll Stats Button

Click **Coll Stats** to open the Collection Statistics window. Use this window to view collection statistics for a date range. See Chapter 14 Called Windows and Routines for instructions on using this window.

Click **Close** to return to the main view.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.13 Drives by Creation Date Query (CDQ)

## Intended Use

Use this screen to view a list of drives by recruiter and creation date.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `CDQ`.

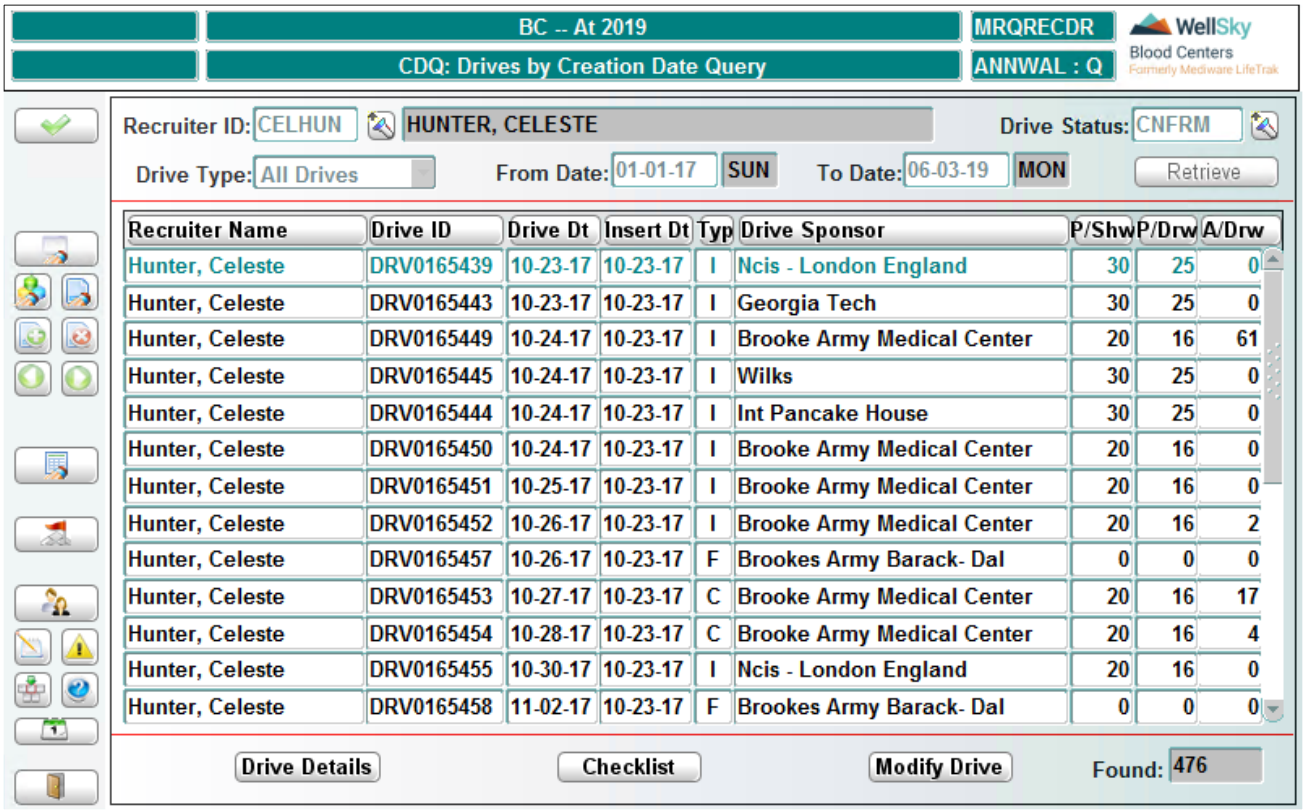


| Recruiter Name | Drive ID | Drive Dt | Insert Dt | Typ | Drive Sponsor | P/Shw | P/Drw | A/Drw |
|---|---|---|---|---|---|---|---|---|
| Hunter, Celeste | DRV0165439 | 10-23-17 | 10-23-17 | I | Ncis - London England | 30 | 25 | 0 |
| Hunter, Celeste | DRV0165443 | 10-23-17 | 10-23-17 | I | Georgia Tech | 30 | 25 | 0 |
| Hunter, Celeste | DRV0165449 | 10-24-17 | 10-23-17 | I | Brooke Army Medical Center | 20 | 16 | 61 |
| Hunter, Celeste | DRV0165445 | 10-24-17 | 10-23-17 | I | Wilks | 30 | 25 | 0 |
| Hunter, Celeste | DRV0165444 | 10-24-17 | 10-23-17 | I | Int Pancake House | 30 | 25 | 0 |
| Hunter, Celeste | DRV0165450 | 10-24-17 | 10-23-17 | I | Brooke Army Medical Center | 20 | 16 | 0 |
| Hunter, Celeste | DRV0165451 | 10-25-17 | 10-23-17 | I | Brooke Army Medical Center | 20 | 16 | 0 |
| Hunter, Celeste | DRV0165452 | 10-26-17 | 10-23-17 | I | Brooke Army Medical Center | 20 | 16 | 2 |
| Hunter, Celeste | DRV0165457 | 10-26-17 | 10-23-17 | F | Brookes Army Barack- Dal | 0 | 0 | 0 |
| Hunter, Celeste | DRV0165453 | 10-27-17 | 10-23-17 | C | Brooke Army Medical Center | 20 | 16 | 17 |
| Hunter, Celeste | DRV0165454 | 10-28-17 | 10-23-17 | C | Brooke Army Medical Center | 20 | 16 | 4 |
| Hunter, Celeste | DRV0165455 | 10-30-17 | 10-23-17 | I | Ncis - London England | 20 | 16 | 0 |
| Hunter, Celeste | DRV0165458 | 11-02-17 | 10-23-17 | F | Brookes Army Barack- Dal | 0 | 0 | 0 |

# Control Block Fields and Definitions

## Recruiter ID

Entry is optional. Enter recruiter ID to query or select from the LOV.

## Drive Status

Entry is optional. Enter drive status code to query or select from the LOV.

## Drive Type

Entry is required. Defaults to All Drives. Select type of drive to query from the drop-down list.

## From Date

Entry is required. Enter beginning date of date range to query, using the MMDDYY format.

## To Date

Entry is required. Enter ending date of date range to query, using the MMDDYY format.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of drives that match the entered criteria.

The following data display for each drive retrieved:


WellSky Corporation
Proprietary and confidential

- Name of recruiter
- Drive ID
- Drive date
- Date drive was inserted in system
- Type of drive
- Sponsor
- Projected show
- Projected draw
- Actual draw

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query screen. Use this screen to view details about a selected drive. See the Drive Details Query section of this chapter for instructions on using this screen.

Click **EXIT FORM** to return to the Drives by Creation Date Query screen.

## The Checklist Button

Click **Checklist** to open the Update Drive Checklist screen. See the Update Drive Checklist section of this chapter for instructions on using this screen.

Click **EXIT FORM** to return to the Drives by Creation Date Query screen.

## The Modify Drive Button

Click **Modify Drive** to open the Create or Modify Mobile Drive screen. See the Create or Modify Mobile Drive section of this chapter for instructions on using this screen.

Click **EXIT FORM** to return to the Drives by Creation Date Query screen.

**NOTE –** If travel time for the location is zero, the user will not receive the expected message for default travel time, "Do you want to set default values for Transportation Requirements?", when modifying the drive.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 3.4.14 Temporary Drives Query (TDRIVEQ)

## Intended Use

Use this screen to query a list of temporary drives.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `TDRIVEQ`.

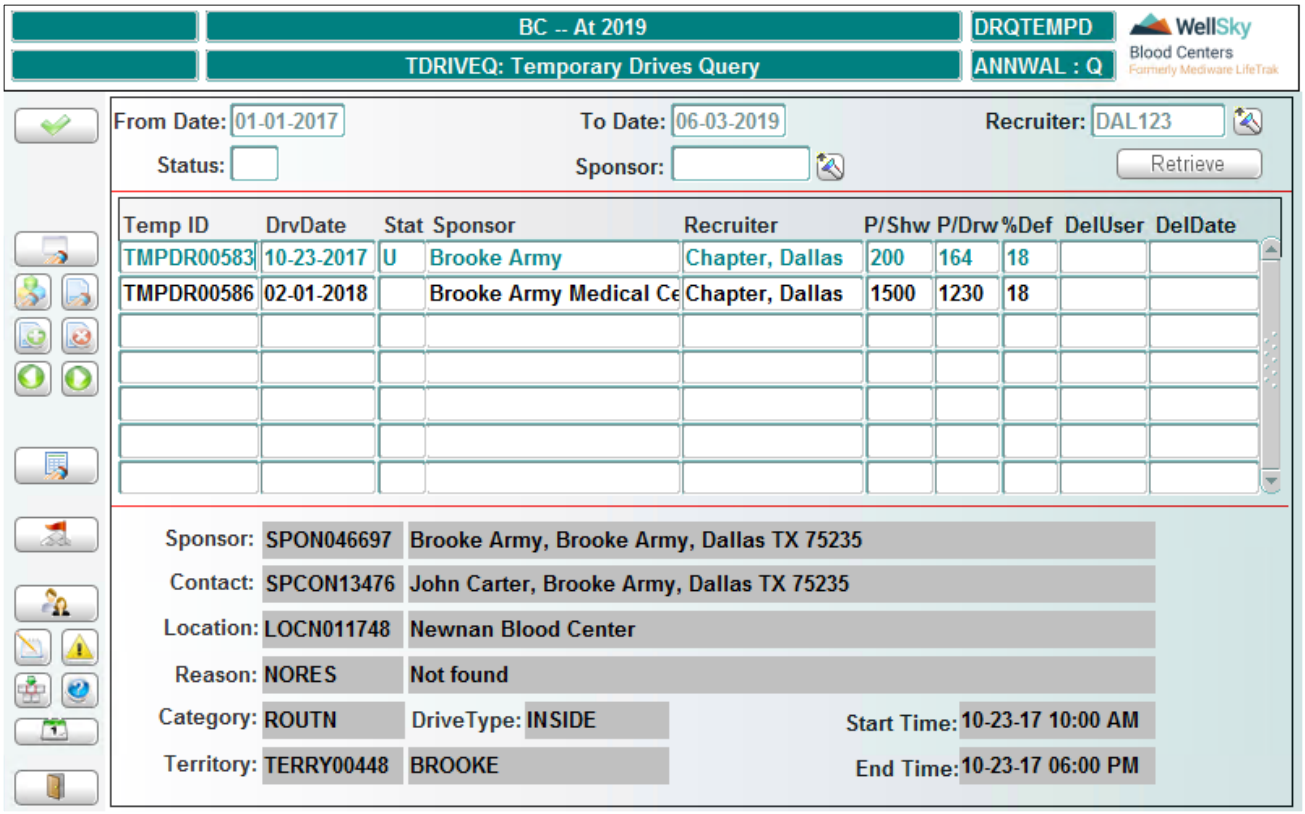


## Control Block Fields and Definitions

### From Date

Entry is required. Enter beginning date of search range in MMDDYYYY format.


WellSky Corporation
Proprietary and confidential

### To Date
Entry is required. Enter ending date of search range in MMDDYYYY format.

### Recruiter
Entry is optional. Enter recruiter ID or select from the LOV.

### Status
Entry is optional. Enter drive status:

- `U` for Used
- `N` for Unused
- `D` for Deleted

### Sponsor
Entry is optional. Enter sponsor code or select from the LOV.

## Retrieving Data
After entering query criteria, click **Retrieve** to display a list of temporary drives that match the search criteria.

## In the Drive Details Block
The following data display:

- Temporary ID
- Drive date
- Status
- Sponsor
- Recruiter
- Projected show
- Projected draw
- Projected percentage of deferral
- ID of user who deleted drive
- Date drive was deleted

## In the Sponsor Block
The following data display:

- Sponsor ID and description
- Sponsor contact and description
- Location ID and description

- Reason code and description
- Drive category code
- Drive type
- Territory ID and description
- Start time
- End time

### At Commit

No data can be committed from this screen.

### What to Do Next

There is no next step.

## 3.4.15 Resource Status Query (RSTATQ)

### Intended Use

Use this screen to query resource status and availability.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `RSTATQ`.


WellSky Corporation
Proprietary and confidential

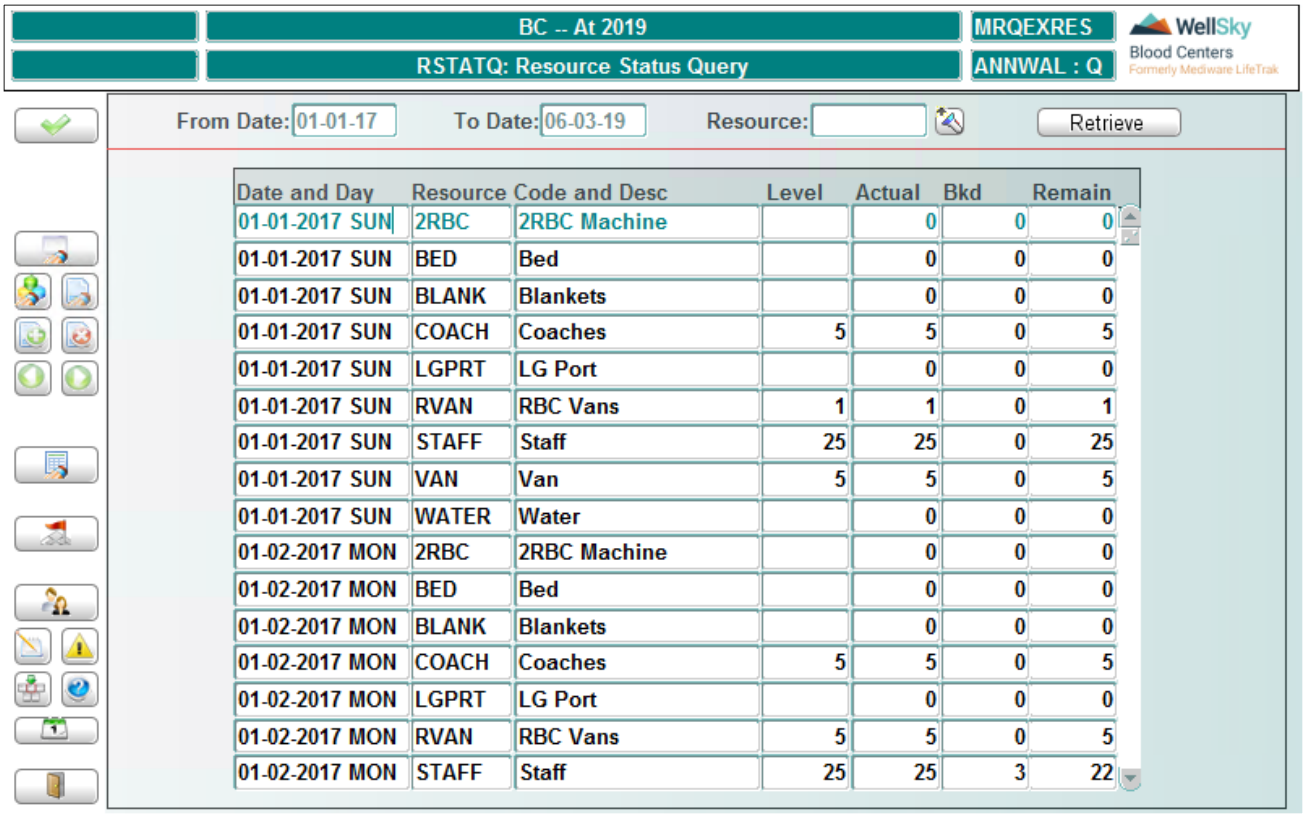


# Control Block Fields and Definitions

## From Date

Entry is required. Enter beginning date of date range to query, using the MMDDYY format.

## To Date

Entry is required. Enter ending date of date range to query, using the MMDDYY format.

## Resource

Entry is optional. Enter resource to query or select from the LOV.

# Retrieving Data

Click **Retrieve** to display a list of resources that match the entered criteria.

The following data display:

- Date and day
- Resource code
- Resource description
- Level of resource available

- Actual number of resource available
- Number of resource booked
- Number of resource remaining

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 3.4.16 Recruiter Territories Query (RTQ)

## Intended Use

Use this screen to query recruiters and their territories.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `RTQ`.


WellSky Corporation
Proprietary and confidential

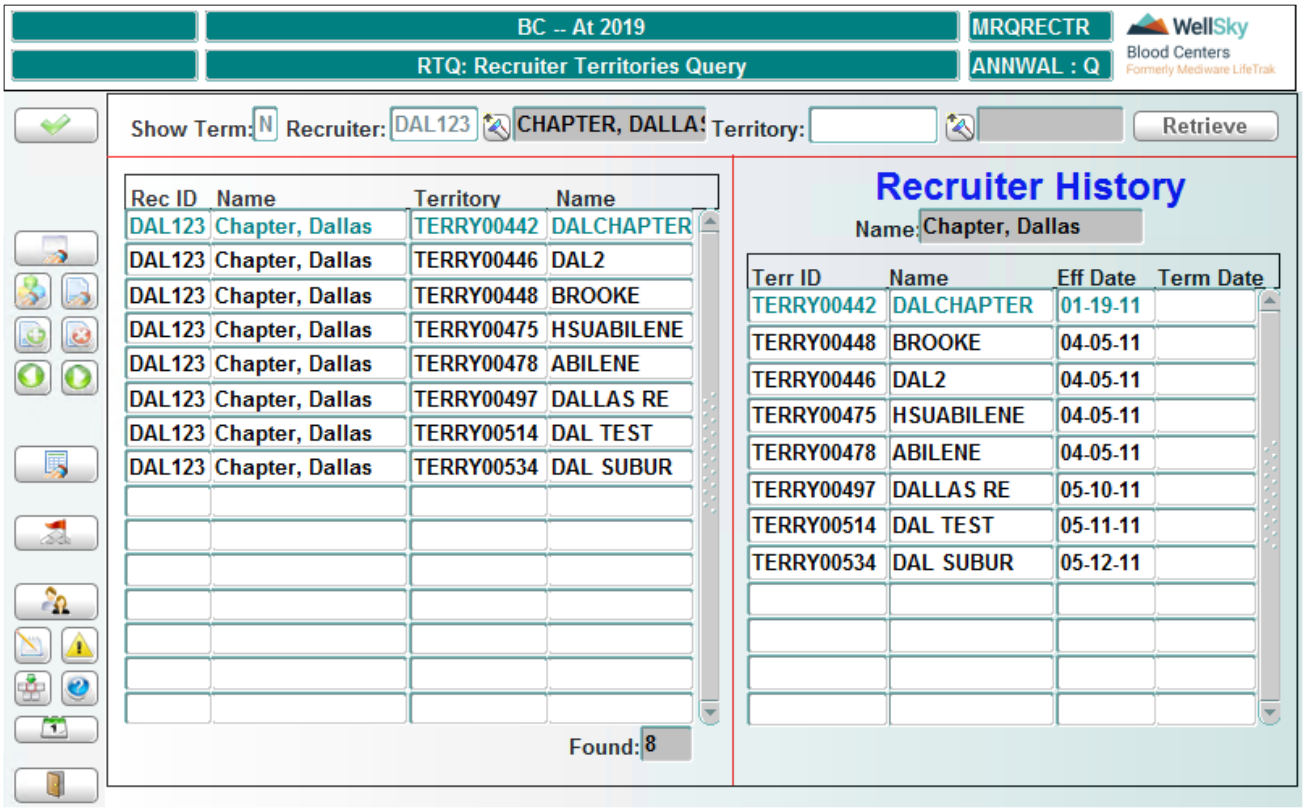


# Control Block Fields and Definitions

## Show Term

Entry is required. Default is N to query active recruiters. Enter Y to query active and terminated recruiters.

## Recruiter

Entry is optional. Enter recruiter ID or select from the LOV.

## Territory

Entry is optional. Enter territory ID or select from the LOV.

# Retrieving Data

After entering query criteria, click **Retrieve** to display a list of records that match the entered criteria.

# In the Recruiter List Block

The following data display:

- Recruiter ID
- Recruiter name

- Recruiter territory
- Territory description

### In the Recruiter History Block

The following data display:

- Territory ID of all territories to which the recruiter is or has been assigned
- Name of territories
- Date recruiter became responsible for territory
- Date recruiter was terminated from territory

### At Commit

No data can be committed to the database from this screen.

### What to Do Next

There is no next step.

## 3.4.17 Goals vs Proj vs Actual Collections (BBQ)

### Intended Use

Use this screen to query and compare donation goals versus projected goals versus actual donation numbers.

### Limitations

Can only query date to the year 2020.

### Prerequisites

Goal information must be defined for FLGOL (Field Goals-Mobile) and FXGOL (Fixed Goals-Fixed) in the Define Collection Goals by Month (GOALMON) screen in order for Fixed Goals and Mobile Goals to display and for Act/Goal % to calculate.

### Accessing the Screen

Access this screen from the Recruitment Queries menu or by entering the keyword `BBQ`.


WellSky Corporation
Proprietary and confidential

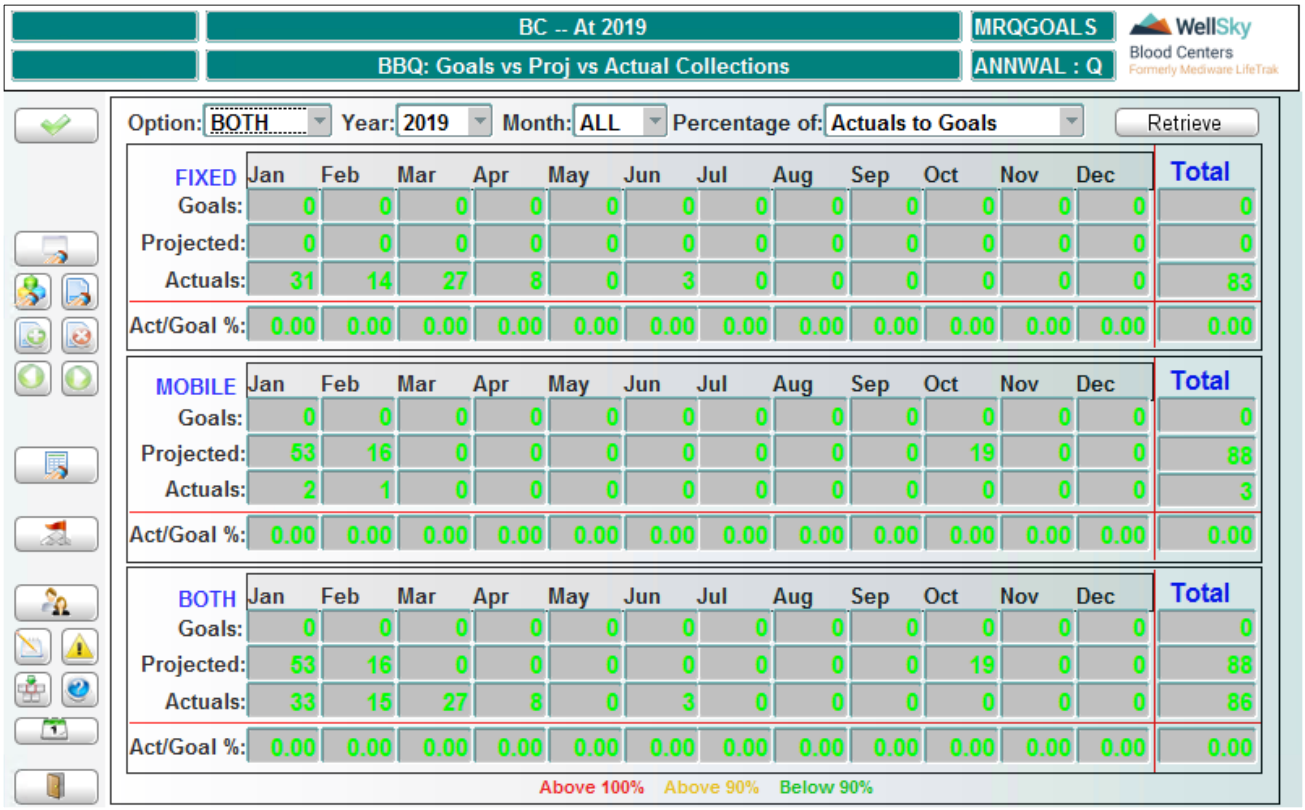


# Control Block Fields and Definitions

## Option

Entry is required. Select drive type. Choose **Fixed**, **Mobile** or **Both** from the drop-down list. Data for all drive types display regardless of the selection made, but the selection determines which drive type is selected.

## Year

Entry is required. Select year from the drop-down list.

## Month

Entry is required. Select month from the drop-down list. Data for all months display regardless of the selection made, but the selection determines which month is selected.

## Percentage of

Entry is required. Select percentage to compare from the drop-down list.

# Retrieving Data

After entering the search criteria, click **Retrieve** to process the query.

The following data display:

- Goal for each month
- Projected draw for each month
- Actual draw for each month
- Percentage of actual to goals or to projected

Figures above 100% appear in red. Figures at exactly 100% appear in black. Figures 90.00% to 99.99% appear in yellow. Figures 89.99% and below appear in green.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

4

# Chapter 4 - Post Drive Analysis


4.1 Post Donation Drive Analysis ..... 220
4.1.1 Enter Post Drive Data for Staff CPU (CPU) ..... 220
4.1.2 Drives Above Optimal CPU Query (CPUQ) ..... 223

# 4.1 Post Donation Drive Analysis

These functions are accessed from the following menu:

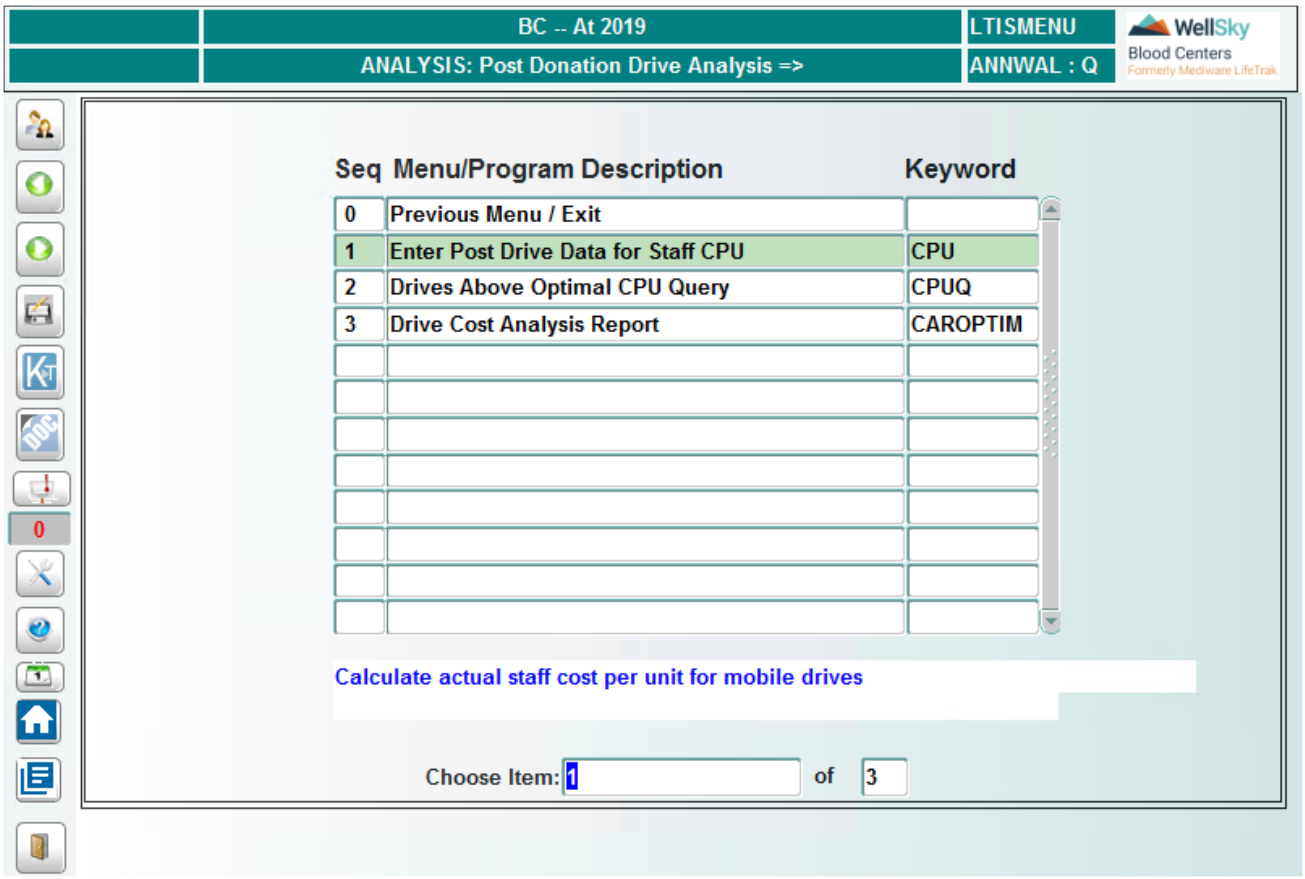


## 4.1.1 Enter Post Drive Data for Staff CPU (CPU)

### Intended Use

Use this screen to enter post-drive data to calculate the staff cost per unit (CPU) for a drive.

### Limitations

If actual information has already been entered, updates and changes can be made only within a number of days determined by system parameters.

### Prerequisites

The drive must have already occurred. Staff must have been assigned to the drive if not done previously.

### Accessing the Screen

Access this screen from the Post Donation Drive Analysis menu or by entering the keyword `CPU`.


WellSky Corporation
Proprietary and confidential

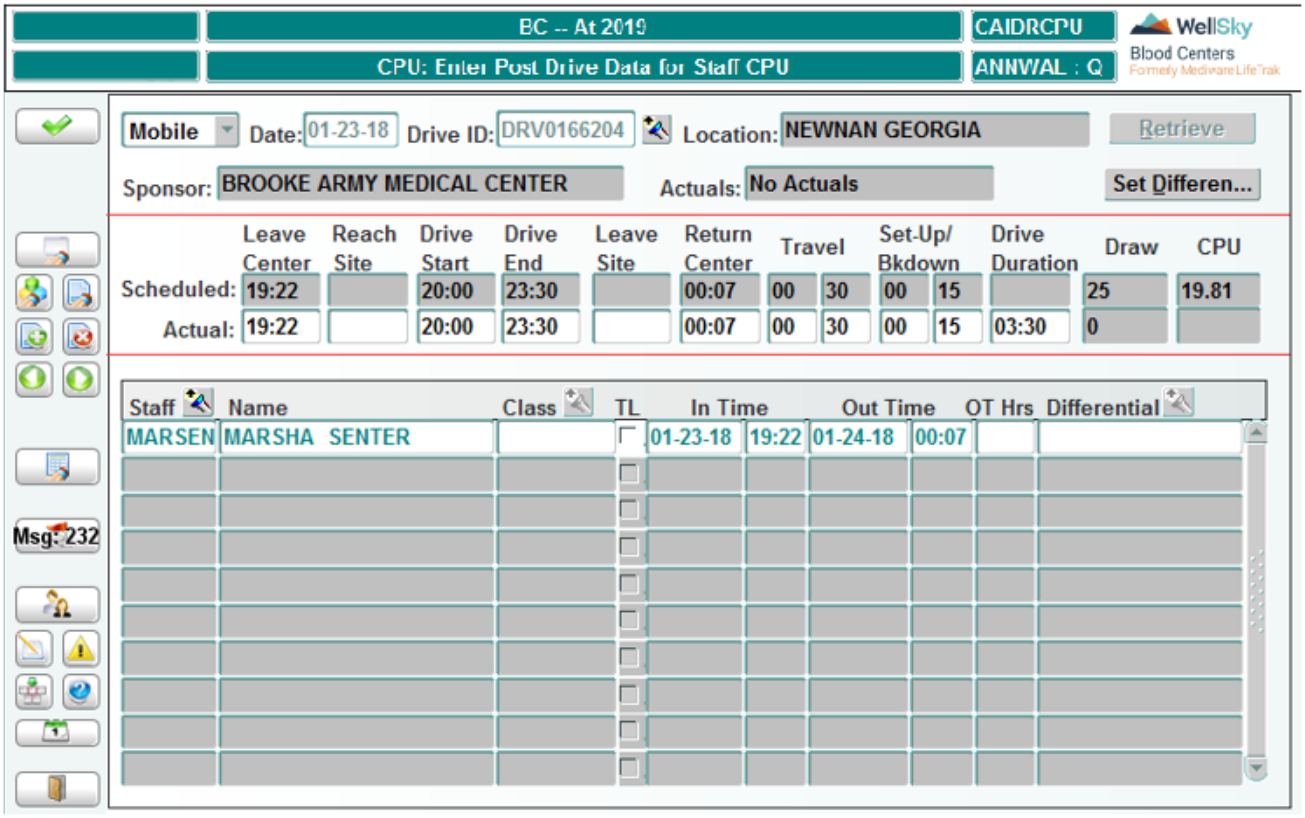


## Control Block Fields and Definitions

In the first drop-down list, Mobile is displayed by default as the drive type. Click on the arrow to select Fixed.

### Date

Entry is required. Enter the drive date in MMDDYY format. Date cannot be greater than the system date.

### Drive ID

Entry is required. Enter the drive ID or select from the LOV. The Location, Sponsor, and Actuals fields automatically populate.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display the designated drive and associated information.

## In the Scheduled/Actuals Block

The following estimated or scheduled information displays in the Scheduled row:

- Scheduled leave time
- Scheduled return time
- Scheduled start time
- Scheduled end time

- Estimated travel time
- Estimated set-up/breakdown time
- Estimated draw
- Estimated CPU

In the Actual row, if no actual data for the drive have been entered the default information that displays is the same as the scheduled data. Actual data, if different from scheduled data, can be updated.

**NOTE –** Exception: Actual Draw and Actual CPU cannot be entered in this screen.

## In the Staff Block

The default information that displays is the staff information that has previously been entered in the Staff Scheduling screen. The following information displays:

- Staff ID number
- Name
- Class type
- Designated team leader
- Date and time of In time
- Date and time of Out time
- Overtime hours
- Differential

This information can be updated if it is different from the default information that displays. To update:

### Staff

Enter staff ID number or select from the LOV. The Name field automatically populates.

### Class

Enter class rating or select from the LOV.

### TL

Click to designate as team leader.

### In Time

Change date or time as necessary.

### Out Time

Change date or time as necessary.


WellSky Corporation
Proprietary and confidential

### OT Hrs

Enter or change overtime hours as necessary.

### Differential

Enter differential code or select from the LOV.

## The Set Differential Button

Click **Set Differential** to open the differential list selection window.

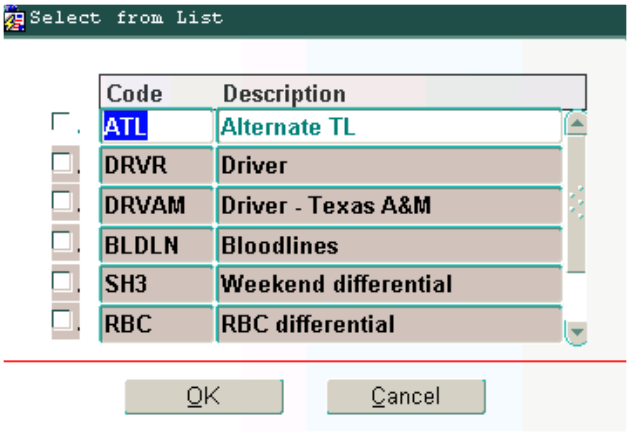


Use this block to select differentials to apply to all staff assigned to the drive. Click in the box next to each differential to be selected. More than one differential can be selected at a time. When differentials are selected, click **OK**. All selected differentials are applied to all staff on the drive.

## At Commit

All data entered or changed is committed and actual cost per unit is calculated and committed.

## What to Do Next

There is no next step.

# 4.1.2 Drives Above Optimal CPU Query (CPUQ)

## Intended Use

Use this screen to view drives that were above or below optimal CPU.

## Limitations

None

## Prerequisites

The drive must have already occurred. Actual show, actual draw and actual CPU must have been entered using the Enter Post Drive Data for Staff CPU (CPU) screen.

# Accessing the Screen

Access this screen from the Post Donation Drive Analysis menu or by entering the keyword CPUQ.

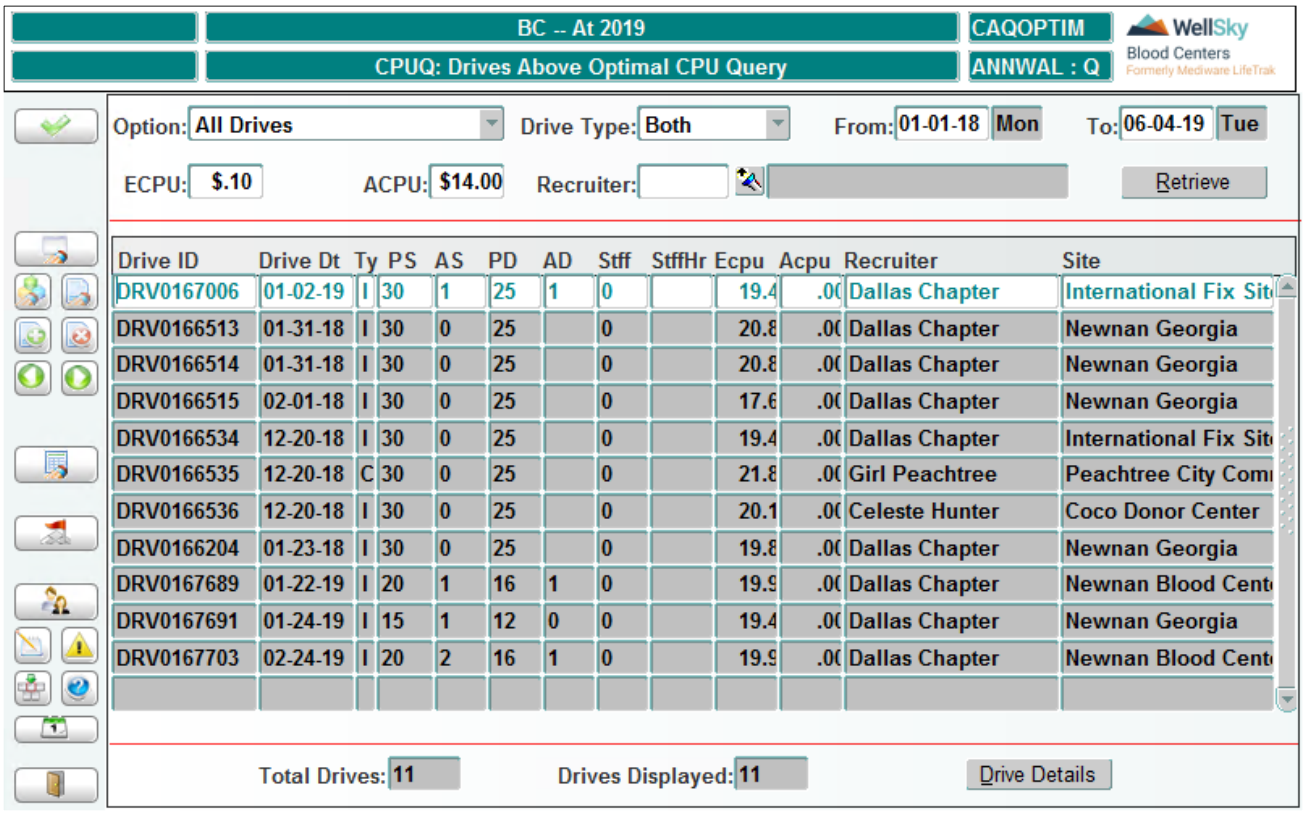


# Control Block Fields and Definitions

## Option

Entry is required. From the drop-down list, choose drives above optimal CPU, drives below optimal CPU or all drives.

## Drive Type

Entry is required. From the drop-down list, choose Inside, Coach or Both.

## From

Entry is required. Enter start of date range in MMDDYY format.

## To

Entry is required. Enter end of date range in MMDDYY format.

## ECPU

Entry is required. Enter estimated cost per unit to query.


WellSky Corporation
Proprietary and confidential

### ACPU

Entry is required. Enter actual cost per unit to query. Displays with default amount.

### Recruiter

Entry is optional. Enter Recruiter ID number or select from the LOV.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of drives that match the criteria.

## In the Drive Block

The following information displays for each drive:

- Drive ID
- Date
- Type
- Projected show
- Actual show
- Projected draw
- Actual draw
- Number of assigned staff
- Number of staff hours worked
- Estimated cost per unit
- Actual cost per unit
- Name of recruiter
- Site

At the bottom of the block, the following information displays:

- Total number of drives during date range
- Number of drives displayed

## The Drive Details Button

Click the Drive Details button to open the Drive Details Query screen. See Chapter 2 Recruitment for instructions on using this screen.

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

5

# Chapter 5 - Donor Enlistment


5.1 Introduction ..... 228
5.2 Enlistment General Functions ..... 229
5.2.1 Submit List and Create Template (LIST) ..... 229
5.2.2 List Browser (LISTBR) ..... 235
5.2.3 List Call Status (LISTQ) ..... 241
5.3 Enlistment Maintenance Functions ..... 244
5.3.1 List Manager – Super (LSUPER) ..... 244
5.3.2 Change List Priority (LISTPRI) ..... 249
5.3.3 Create Standard Templates (SLIST) ..... 251
5.3.4 Define List Types (LISTTYP) ..... 255
5.3.5 Define Search Criteria (SEARCH) ..... 258

# 5.1 Introduction

The Donor Enlistment Module is that portion of Donor designed to:

- Create and submit donor enlistment lists
- Control lists
- Query list details
- Browse lists/schedule donors
- Change list priority
- View released lists
- Query released list statistics

This module consists of enlistment functions, maintenance functions, queries, and reports.

Enlistment reports are described in the *WellSky® Blood Centers Reports Guide*.

Terminology Applicable to Donor Enlistment are as follows:

## Enlistment Type

The type of donors for which the database is being searched. Enlistment types are defined in the Master Code ENLST.

## List ID

An identifying number associated with a list.

## List Type

The type of list being submitted. This defines donor contact and non-donation lists. List type is specific to an enlistment type and encompasses list life, priority, list size, eligibility check and donor override.

## Priority

Priority of a submitted list. Priority can be Low, Normal or High.

## Status

The current status of the list. List status can be Aborted, Active, Canceled, Executing, Released, Scheduled, Submitted or Tobrowser.

## Template

A model to use for making other templates or for submitting frequently used lists. Each template has an ID number.


WellSky Corporation
Proprietary and confidential

# 5.2 Enlistment General Functions

These functions are accessed from the following menu:

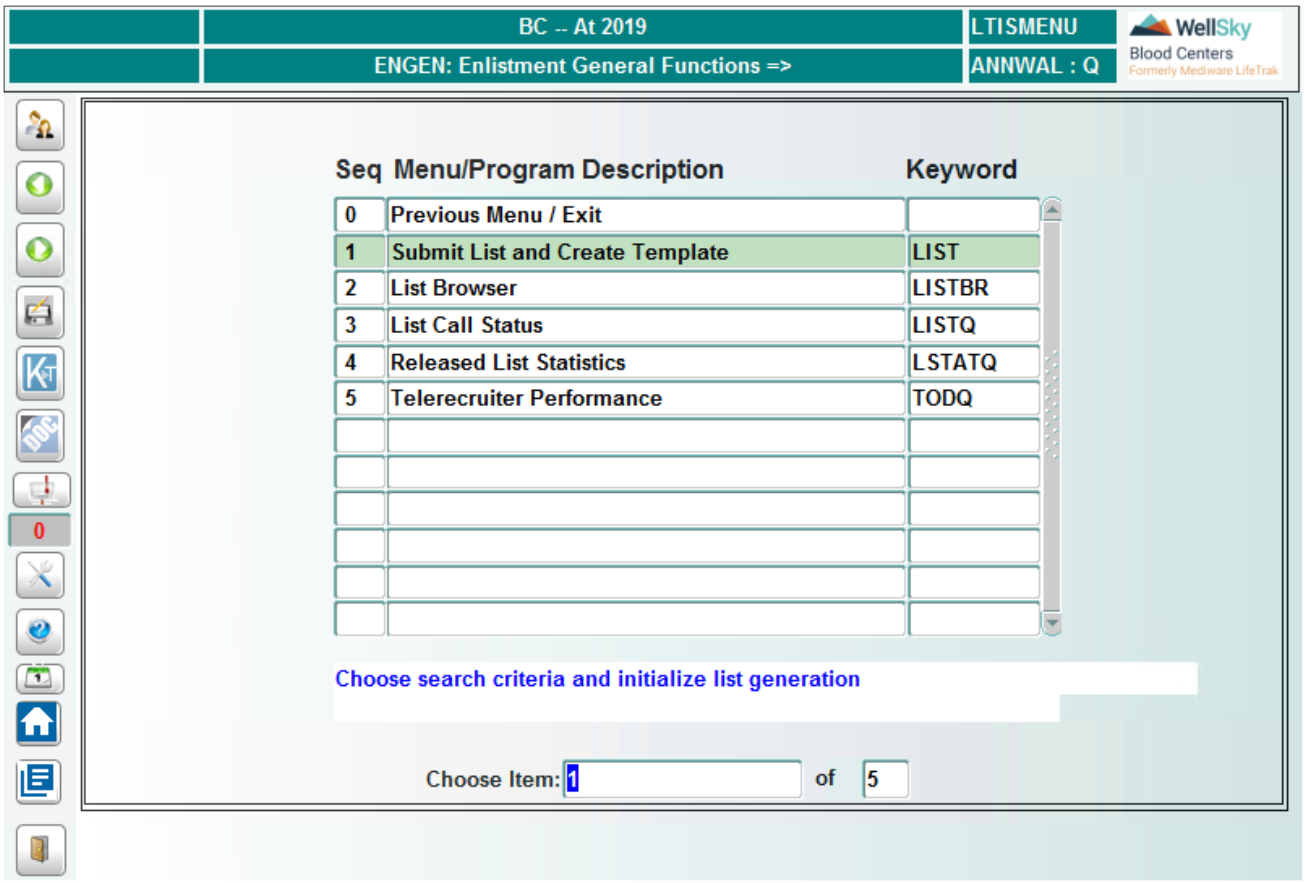


## 5.2.1 Submit List and Create Template (LIST)

### Intended Use

Use this screen to:

- Create a list template
- Modify an existing list template
- Submit a list based on a template
- Create a new search list without using a template
- Copy an existing template into a new template

## Limitations

- List size cannot exceed the limit defined for the list type.
- The system generates the list using the criteria defined in this screen plus any standard criteria for the list type.
- If a list does not complete generation (ABORT status) or does not yield the expected number of donors, reconsider and adjust criteria associated to the list.

## Prerequisites

- In order to use this screen, the user must have entered enlistment types in the Master Code ENLST.
- List types must be defined in the Define List Types (LISTTYP) screen. If standard criteria is to be used for a list, refer to Create Standard Templates (SLIST).

## Accessing the Screen

Access this screen from the Enlistment Functions menu or by entering the keyword `LIST`.

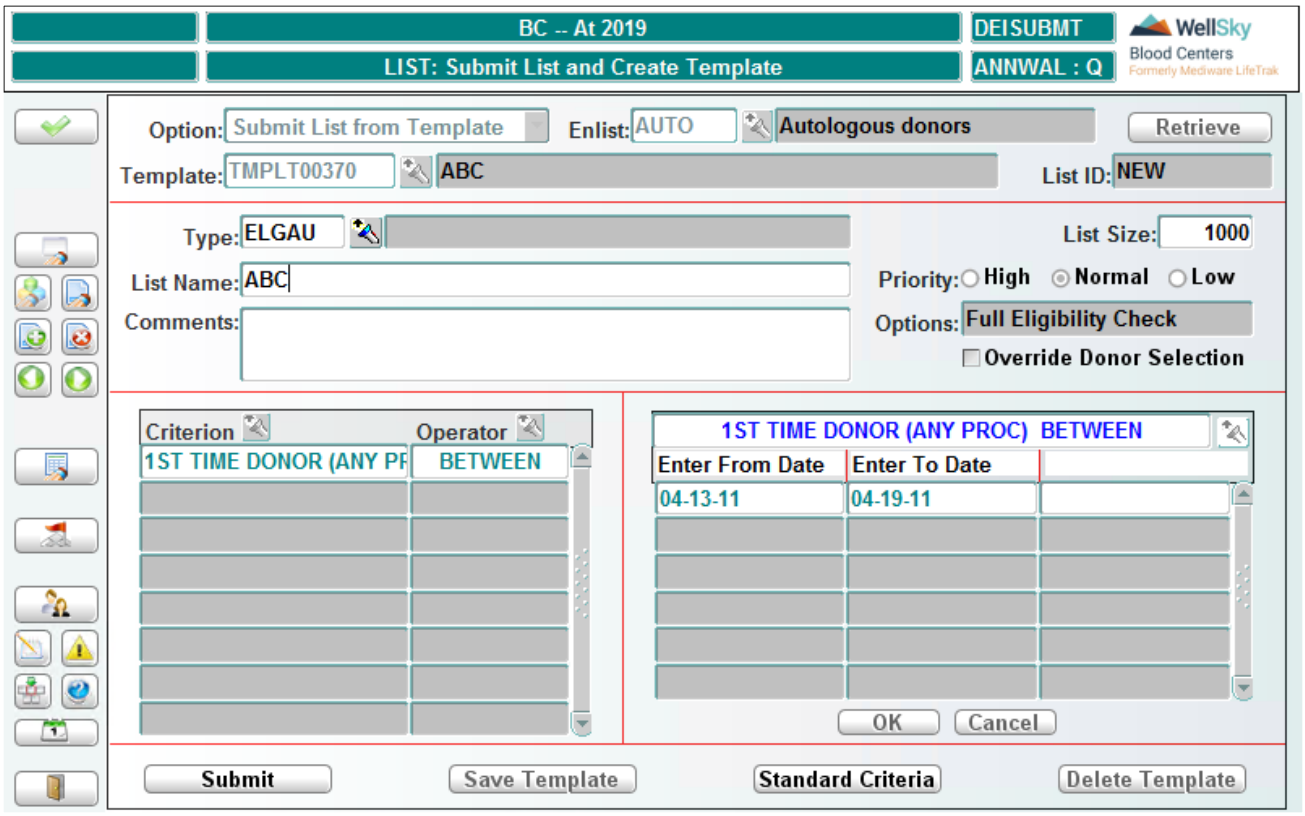


## Control Block Fields and Definitions

### Operator

Enter the operator for the criterion or select from the LOV. The operator defines the selection of the criterion.


WellSky Corporation
Proprietary and confidential

### Enlist
Entry is required. Enter the enlistment type or select from the LOV. The enlistment type description displays.

### Template
Entry is required for the following options:

- Modify Template
- Submit List from Template
- Copy into New Template

This field is skipped for the following options:

- Create New List
- Create Template

Enter the template or select from the LOV. The template description and List ID displays.

## Retrieving Data
After entering Option, Enlist and Template selections, click **Retrieve** to display the chosen template.

## In the List Block
Fill in the List Block information when using the following options:

- Create a Template
- Create a New List

The information defaults from previous lists entries but can be modified when using the following options:

- Modify Template
- Submit a List from a Template
- Copy a Template into a New Template

### Type
Entry is required. Enter the list type or select from the LOV. A default value can be modified.

### List Size
This field automatically displays the list size predetermined by the Define List Types validation table. This number can be decreased, but not increased from the default value.

### List Name
Entry is required if Create Template or Create New List are chosen as option type. Enter a name for the list. A default value can be modified.

### Comments
Entry is optional. Enter any comments pertaining to the list or template.

### Priority

Display only. Describes the priority of the list execution. Predetermined in the Define List Type (LISTTYP) table and for viewing only.

**NOTE –** Priority may be changed in the Change Priority screen.

### Option

Entry is required. Select from the drop-down list:

- Create Template is used to create a new template.
- Modify Template is used to modify an existing template. The previous version of the template is overwritten.
- Submit List from Template is used to submit a list from an existing template. User may temporarily modify the template for submission of a list. The modifications are not saved.
- Create New List is used to create an immediate list. This creates a temporary list, and the list criteria are not saved.
- Copy into New Template is used to copy an existing template into a new template. The original template and the new template are both saved.

### Override Donor Selection

Display only. If checked, a donor can be placed on this list even if on another list. Predetermined in the Define List Type (LISTTYP) table and for viewing only.

## Entering or Modifying Criteria

### In the Criterion Block:

### Criterion

Enter search criterion or select from the LOV. The criteria define the composition of the list. Any existing criterion can be deleted by pressing CTRL+ F8 (Delete Record).

### Operator

Enter the operator for the criterion or select from the LOV. The operator defines the selection of the criterion.

### In the Operator Parameter Selection Block:


WellSky Corporation
Proprietary and confidential

This block displays the specific search parameters for each criterion. It may require a direct entry, such as a date or a range of values, or it may allow the user to select from a list of valid data in the database.

When the LOV is available it will open a Multiple Selection canvas that is unique for each criterion. Multiple selections can be made at one time. See the example below:

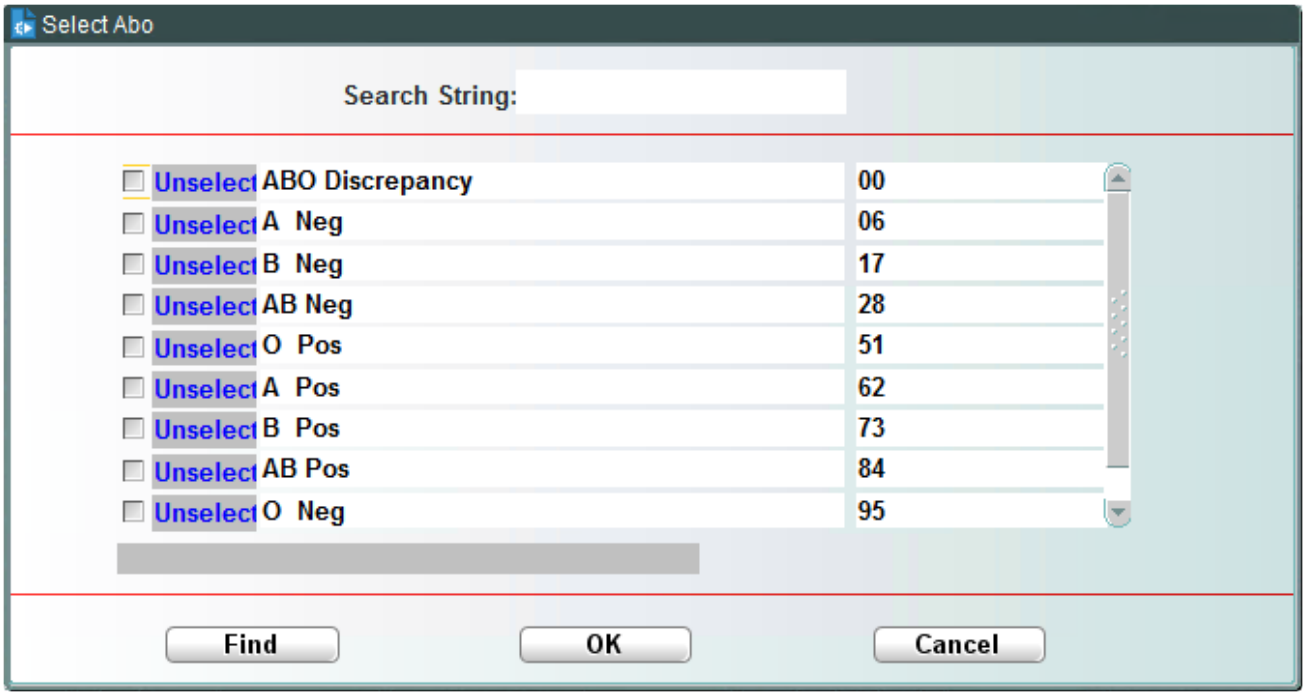


Click Find to execute a Search String entry. See example below:

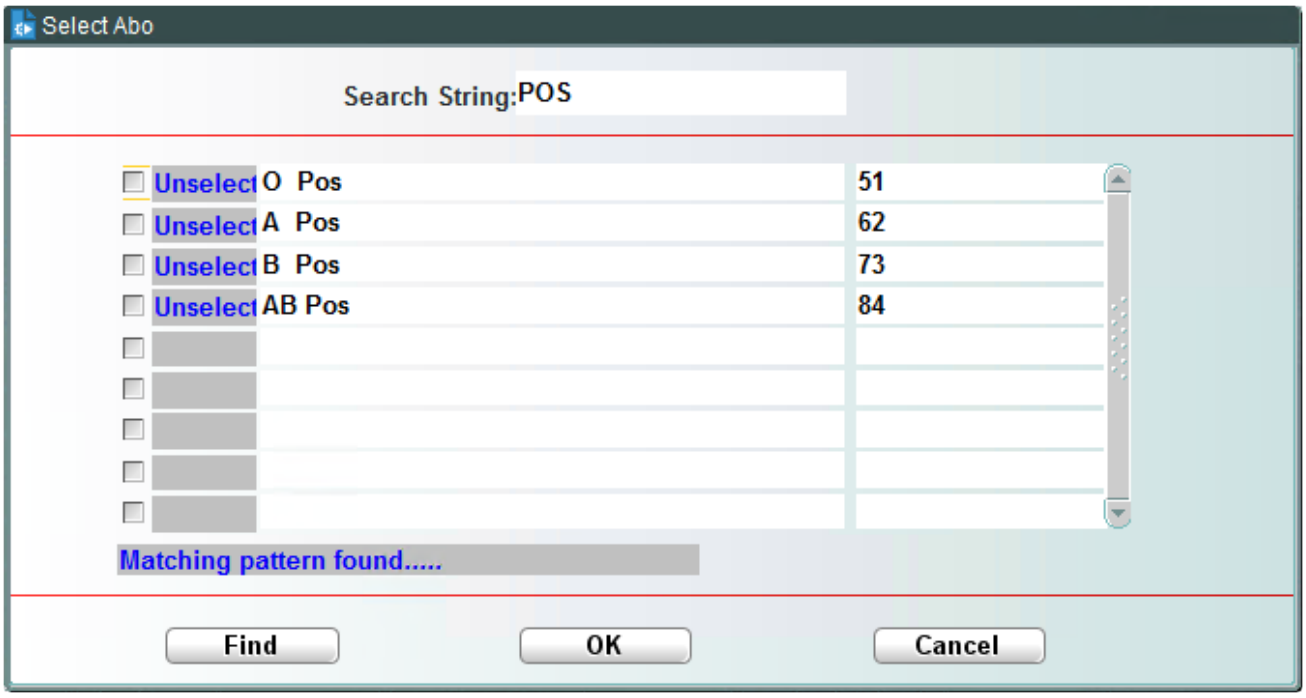

Click **OK** to accept the selections and return to the main screen. The selected criteria display in the Operator Parameter Selection Block.

Click **Cancel** to close the canvas and return to the main screen.

### At the Main Screen in the Operator Parameter Selection Block:

Click **OK** to accept the selected search criterion.

Click **Cancel** to remove the selected search criterion.

Once the information for the list is entered or retrieved, there are four function buttons across the bottom of the screen that may be highlighted depending on your current actions.

## The Submit Button

To submit a list, click **Submit**. The Schedule List window appears with a field for date and time for list to be submitted:

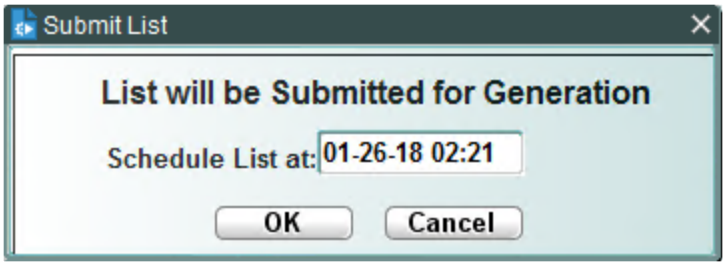


The default time is the system time. The submit time can be changed to a future time.

Click **Cancel** to cancel the operation.

Click **OK** when the date and time are entered and are correct. Verification of list creation appears with the list identifier number:

## The Save Template Button

Click **Save Template** to save a template that has been created or modified.

## The Standard Criteria Button

To view a description of search criteria, click **Standard Criteria**. This standard criteria will be applied to your list as well as the criteria you entered. This is criteria that should be constant for a particular list type without having to enter it each time a new list is created. This opens the View List Criteria window. See Chapter 15 Called Window and Routines for instructions on how to use this program.

## The Delete Template Button

Click **Delete Template** to delete the template from the list of templates.


WellSky Corporation
Proprietary and confidential

## What to Do Next

There is no next step.

# 5.2.2 List Browser (LISTBR)

## Intended Use

Use this screen to browse a list of donors by List ID. This screen can also be used to access donor scheduling, view and change donor demographics, view a record of a donor's previous donations, view, place, or release attributes on a donor, and view a history of communications with a donor.

## Limitations

A list can be submitted to All or to specific telerecruiters.

## Prerequisites

- A list must have a status of To Browser and not be expired.

## Accessing the Screen

Access this screen from the Enlistment Functions menu or by entering the keyword `LISTBR`.

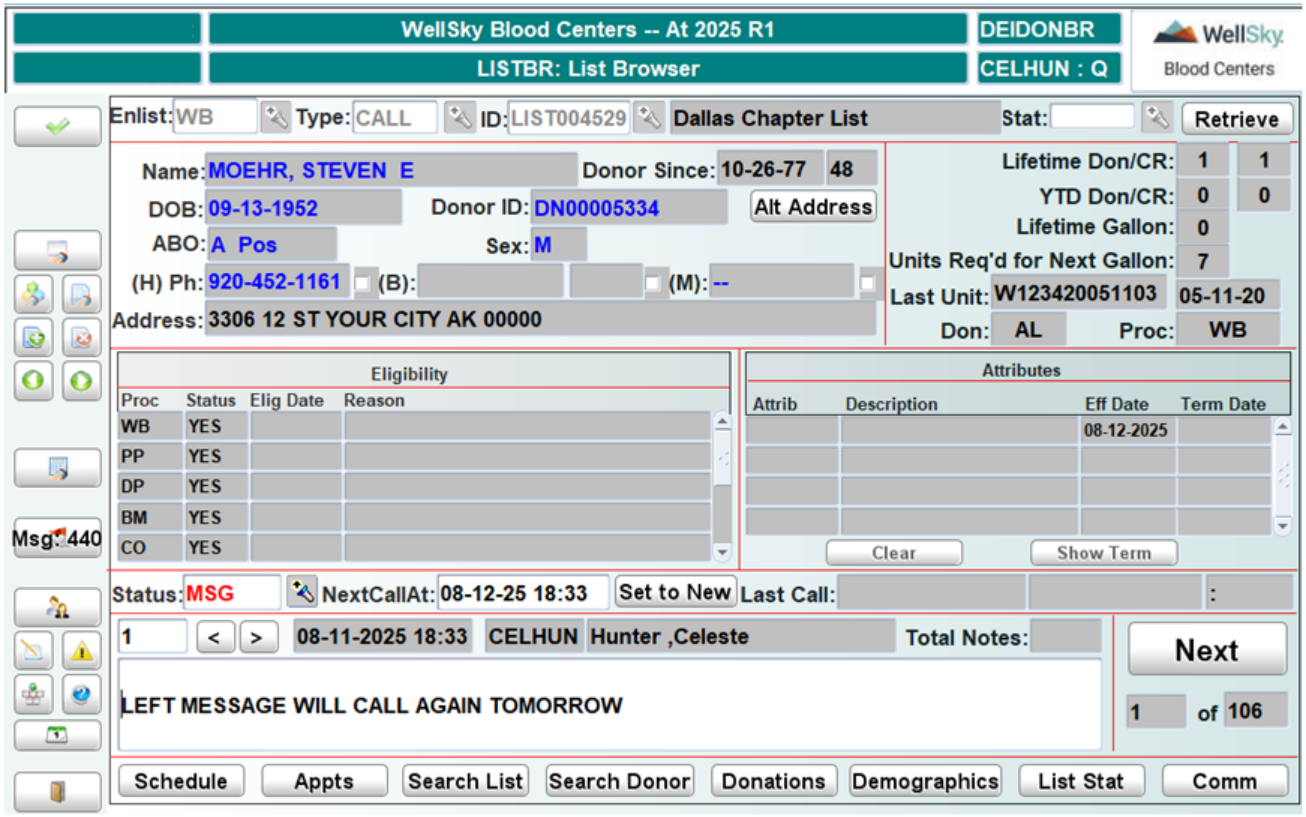

# Control Block Fields and Definitions

## Enlist

Entry is required. Enter enlistment type or select from the LOV.

## Type

Entry is required. Enter list type or select from the LOV.

## ID

Entry is required. Enter list ID or select from the LOV. The name of the list automatically displays in the area to the right of the List ID field.

## Stat

Entry is optional. Enter a donor call status or select a call status from the LOV. Leave blank to retrieve all statuses.

CLBCK call status retrieves only those that are current date/time or before. Future CLBCK statuses will not be retrieved.

# Retrieving Data

Click **Retrieve** when the requested call back status is entered or blank for all. The first record in the list of donors displays.

# In the Donor Data Block

The following donor information displays:

- Name
- Year that donor began donating
- Date of birth
- Donor ID number
- ABO type
- Sex
- Home (H) Telephone Number – a check mark beside the phone number designates it as the preferred contact number.
- Business (B) Telephone Number – a check mark beside the phone number designates it as the preferred contact number.
- Mobile (M) Telephone Number – a check mark beside the phone number designates it as the preferred contact number.
- Mailing address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:


WellSky Corporation
Proprietary and confidential

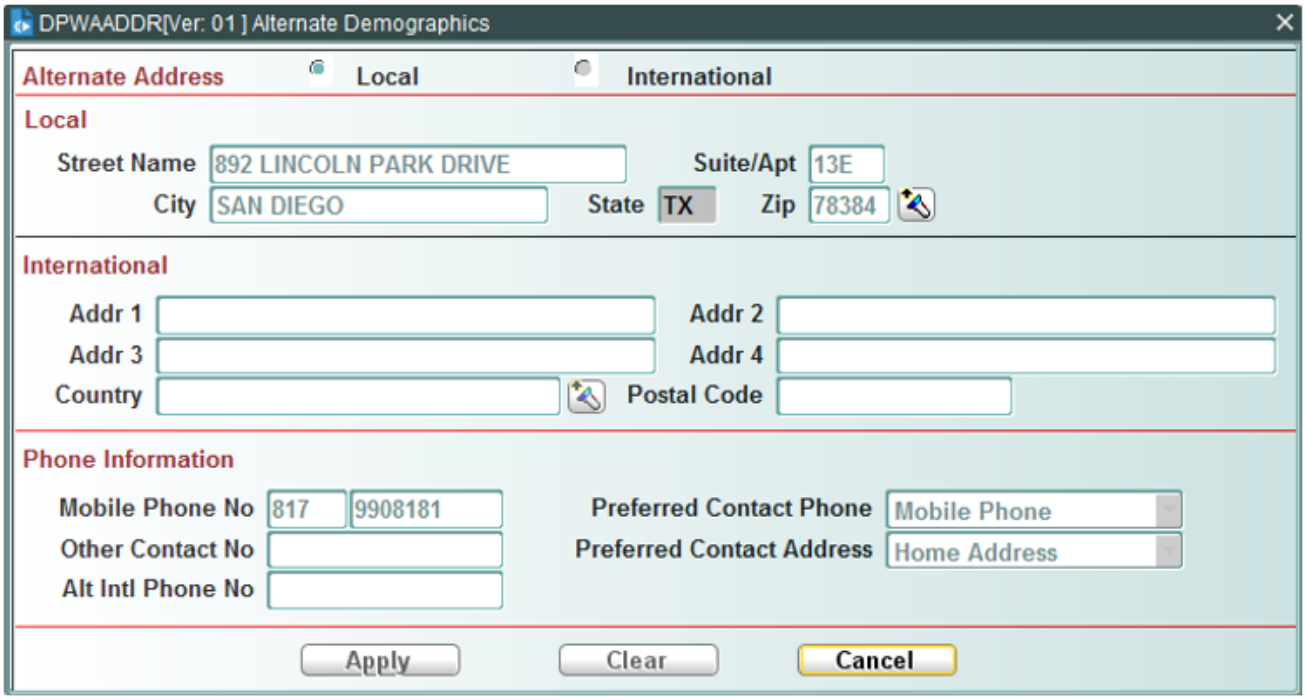


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

You can update alternate demographics information by doing the following:

- Click **Demographics** at the bottom of the screen, which opens the Donor Demographics window.
- Click **Alt Addr** in the Donor Demographics window, which opens the Alternate Demographics window in update mode.
- Make any necessary changes to alternate demographics information.
- Click **Apply** to save any changes made to the donor's alternate demographics.

## In the Donation History Block

The following donation history information displays:

- Lifetime donations and credits.
- Year-to-date donations and credits.
- Lifetime gallons donated.
- Units required for next gallon.
- Unit ID of last non-deferred donation and date collected.
- Donation and procedure type.

## In the Eligibility Block

The following donor eligibility information displays:

- Donation procedure code.
- Donor eligibility status for each procedure code.
- Date donor will become eligible, if temporarily ineligible for a donation procedure. Date will remain blank for indefinitely deferred donors.
- Reason donor is ineligible for the procedure.

## In the Attributes Block

The following information, if it is within the user's view level, displays:

- Attribute code and description.
- Effective date attribute was placed on donor.
- Termination date.

Click **Clear** to clear the data in the Attributes block. Click **Show Term** to display a list of terminated attributes.

## In the Call Status Block

Communication with a donor is defined in the Call Status Block. Status codes are entered for the purpose of removing donors from a list temporarily (i.e., Call Back) or permanently (i.e., Scheduled). These codes are also used to query the effectiveness of a list (i.e., number of scheduled appointments or number of no contacts).

Enter the correct status or select from the LOV. The LOV contains the following options:

| Status Code | Description |
|---|---|
| CLBCK | Call after specified time. Donors with this status remain on the list. In the NextCallAt field, the current date and time are the defaults, but can be changed. Enter the date and time to call the donor in the NextCallAt field, using the MMDDYY HHMI format. The donor cannot be retrieved again until this date/time is reached. |
| MSG | Message left. Donors with this status remain on the list. The NextCallAt field automatically displays the date and time 24 hours ahead of the system date and time. This date and time can be changed. |
| NEW | Not called yet. If a donor has not yet been contacted, the Status field automatically displays **NEW** when the donor record is retrieved. The NextCallAt field is not enabled. |
| NOCNT | No contact with donor. Donors with this status remain on the list. The NextCallAt field is not enabled. |
| NOELG | Donor not eligible. Donors with this status are removed from the list. NextCallAt field is not enabled. |
| SCHLD | Donation scheduled. This field populates automatically if the donor is scheduled through the Schedule Donor program. The donor is removed from the list when the next record is retrieved. The NextCallAt field is not enabled. |

## In the Notes Block

Notes associated to a donor are displayed in the Notes block. Scroll through attached notes by clicking the **<** and **>** buttons. The following information displays:


WellSky Corporation
Proprietary and confidential

- Current message displayed.
- Date and time note was attached to donor.
- User who attached note.
- Total number of notes attached to the donor.
- Text of the current message.

Click **Next** to save changes and go to the next donor in the list.

## The Next Button

Click **Next** to go to the next donor in the list. Changes made to a donor's record are saved when you click **Next**.

Directly below the Next button, the system displays a number indicating which donor is active:

## The Schedule Button

Click **Schedule** to schedule the donor for an appointment to donate. This button opens the Schedule Donors (APPT) screen. The donor information is passed to this screen from the list browser. If an appointment is scheduled, the donor status automatically updates upon return to the List Browser screen. See Chapter 5 Donor Center Management for instructions on using the Schedule Donors (APPT) screen.

## The Appts Button

Click **Appts** to open the Donor Schedule on Donor Centers window. Use this window to view donor schedules at a donor center by date range. See Chapter 14 Called Window and Routines for instructions on using this program.

## The Search List Button

Click **Search List** to open the Select Donor window. Use this window to search all donors in the list. The Find option is available to search for a particular donor or enter a string of letters to limit the Name column. The donor selected will be retrieved and display on the screen.

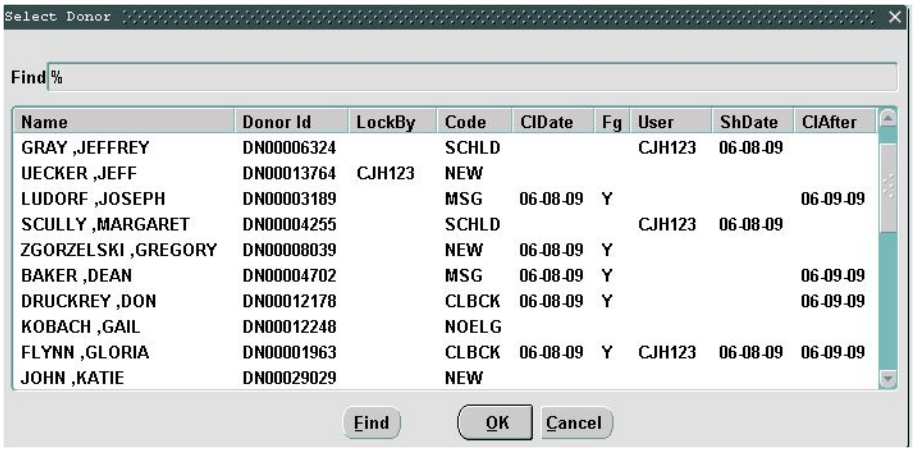


**NOTE –** A **Y** in the Fg column indicates that the donor has already been contacted.

## The Search Donor Button

Click **Search Donor** to open the Search for Donor window. Use this program to search for a different donor in the donor database. See Chapter 14 Called Window and Routines for instructions on using this program.

Use this to retrieve a particular donor from the database or who is associated with any list. This is helpful for donors who call back when messages are left. The donor displays on the screen. Click **Next** to return to the previous donor on the list.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's donation history. See Chapter 14 Called Window and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. Donor demographics can be updated in this window. See Chapter 14 Called Window and Routines for instructions on using this program.

## The List Stat Button

Click **List Stat** to open the User List Browser window. List information, the Telerecruiters, and the call statuses default for the current List ID. A different List ID can be selected as needed. See Chapter 14 Called Window and Routines for instructions on using this program.

## The Comm Button

Click **Comm** to open the Communications Log window. Use this program to view a history of communications with a donor or to make a new communication log entry. See Chapter 14 Called Window and Routines for instructions on using this program.


WellSky Corporation
Proprietary and confidential

## What to Do Next

There is no next step.

# 5.2.3 List Call Status (LISTQ)

## Intended Use

Use this query screen to view donors in a list, their call status, list status summary, and the list criteria.

## Limitations

Only lists with a status of To Browser can be queried.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Enlistment Functions menu or by entering the keyword `LISTQ`.

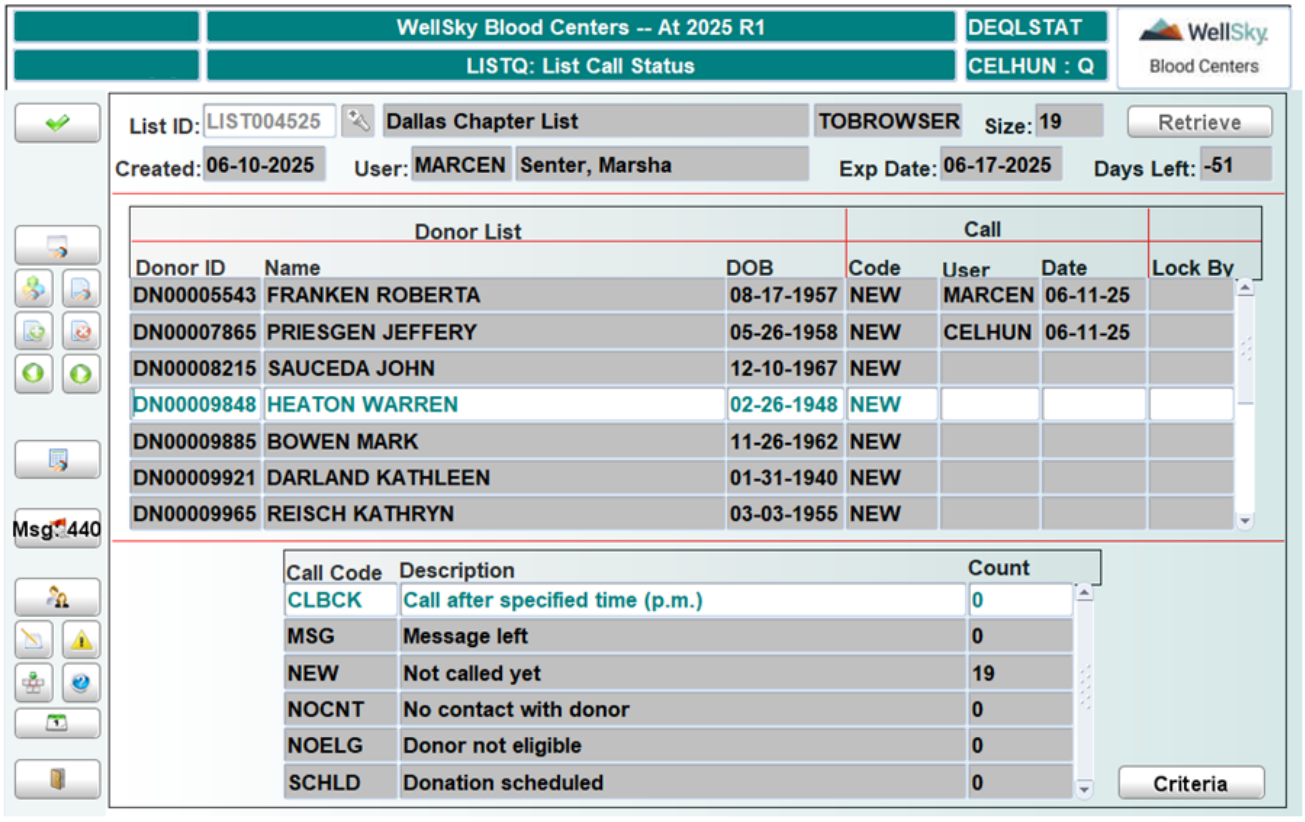

# Control Block Fields and Definitions

## List ID

Entry is required. Enter the list ID or select from the LOV.

When a list ID is selected, the following information appears in the display fields in the Control Block:

- List name
- List status
- Date list was created
- Date list will expire
- Remaining number of days the list will be active

Click **Retrieve** to retrieve the list of donors attached to the list and call status of those donors.

In the control block, additional information displays:

- List size
- User who created list

# In the Donor List and Call Block

The following information, if it exists in the database, displays for each donor:

- Donor ID
- Name
- Date of birth
- Call status code for each donor
- User who called or made contact with donor
- Date contact or call was made
- If an action is currently being performed on that donor in the List Browser screen, name of employee performing action (Lock By)

# In the Call Code Block

The following list summary information displays in the Call Code block:

- Call code
- Description of call code
- Number of donors in the list that have that code assigned to them

# The Criteria Button

Click **Criteria** to open the View List Criteria window. The list criteria displays. The standard criteria for the list does not display. Use this window to view criteria used to make a list. See Chapter 14 Called Window and Routines for


WellSky Corporation
Proprietary and confidential

instructions on using this program.

## What to Do Next

There is no next step.

# 5.3 Enlistment Maintenance Functions

These functions are accessed from the following menu:

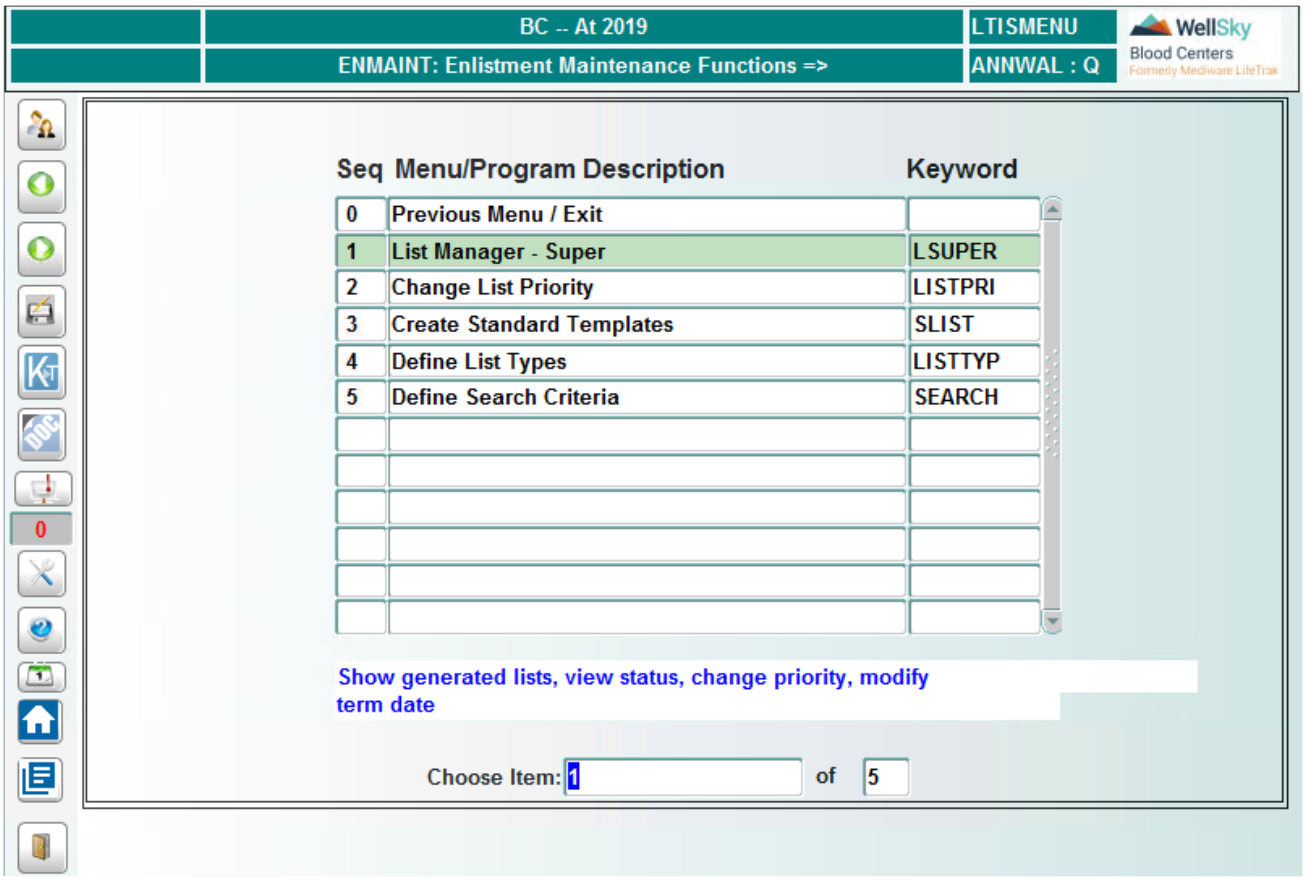


## 5.3.1 List Manager – Super (LSUPER)

### Intended Use

Use this screen to control list operations and to view/control the current status of lists in the system. This screen utilizes the supervisory mode rather than the user mode as in List Manager (LCONTROL)

### Limitations

When used in Super mode, this screen has no limitations as applicable in user mode (LCONTROL).

### Prerequisites

A list must exist in the database in order to be viewed.

### Accessing the Screen

Access this screen from the Enlistment Maintenance Functions menu or by entering the keyword `LSUPER`.


WellSky Corporation
Proprietary and confidential

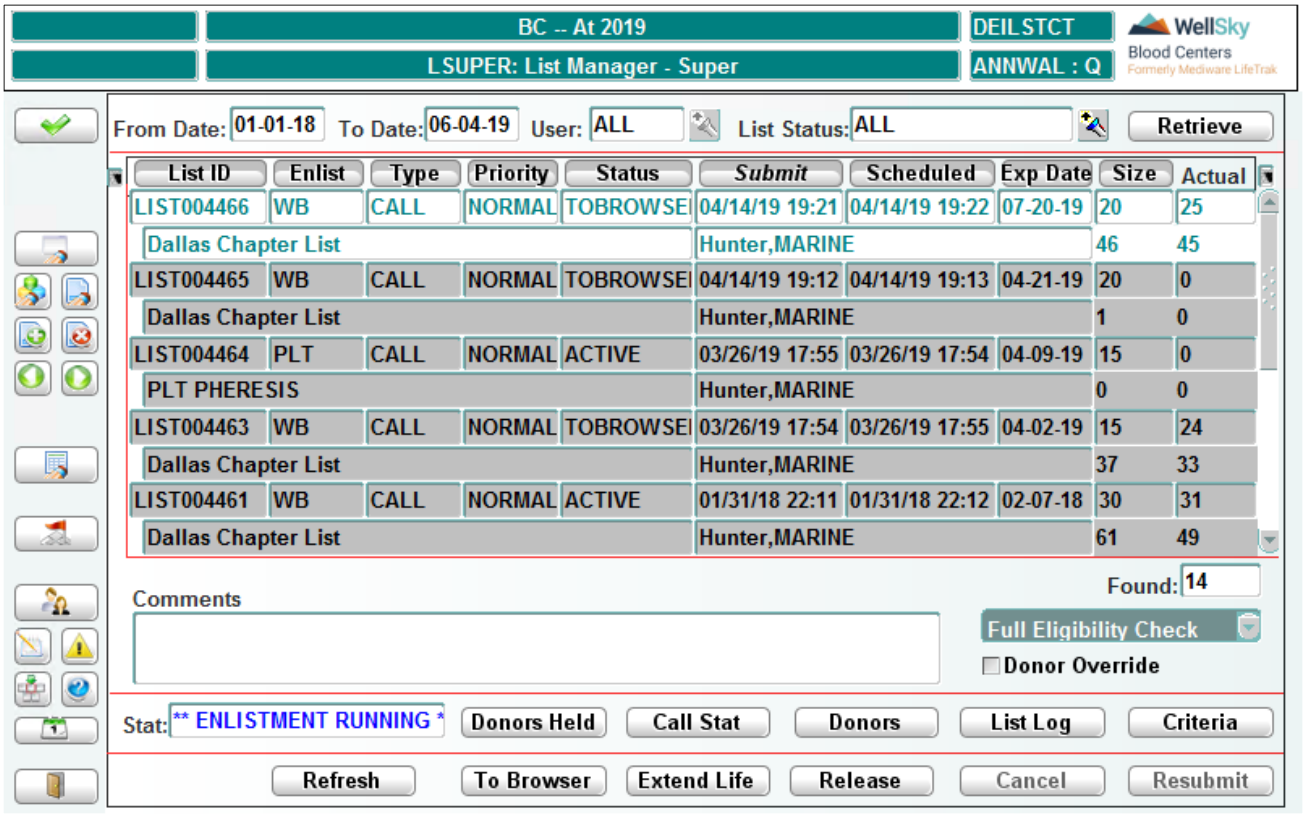


# Control Block Fields and Definitions

## From Date

Entry is required. Enter the start date of a submitted list, using the MMDDYY format.

## To Date

Entry is required. Enter the end date of a submitted list, using the MMDDYY format.

## User

Entry is required. Enter the user or select from the LOV. Default is ALL. Using the default retrieves all users.

## List Status

Entry is required. Enter the list status or select from the LOV. Default is ALL. Using the default retrieves all list statuses.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display all lists that match the criteria.

# In the List Block

The following information displays for each retrieved list:

- List ID
- Enlistment type
- List type
- Priority of list
- Status of the list
- Date and time list submitted
- Scheduled run time
- Expiration date of the list
- Requested size of the list
- Actual size of the list
- Comments for the selected list
- Eligibility check of list
- Check mark visible if donor not restricted to this list

Click any column heading button to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the **UP** and **DOWN** arrow keys to scroll among the displayed records. When more records are retrieved than can be viewed at once, use the scroll bar on the right side of the list area to quickly scroll through the displayed records.

## The Stat Field

The Stat field displays current status of Enlistment Running.

The button options available depend on the status of the highlighted list. It may change when moving to a new list status.

## The Donors Held Button

Click **Donors Held** to open the ABO Count window.


WellSky Corporation
Proprietary and confidential

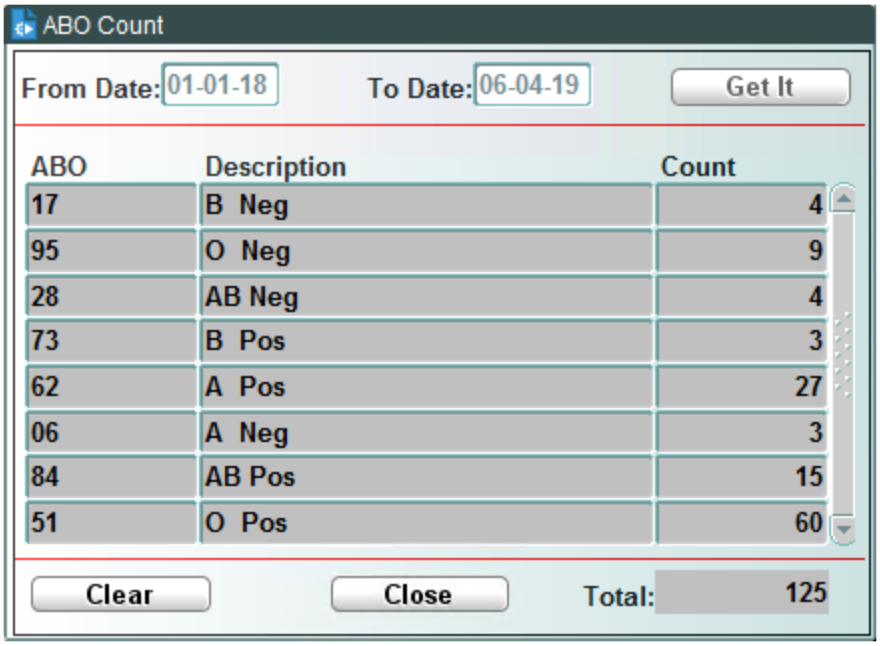


Use this window to query the number of donors by ABO/Rh on all lists for the given date range. The query defaults to the date range in the Control Block.

Click **Clear** to clear the query data in order to enter new data.

Click **Close** to close the block and return to the main window.

## The Call Stat Button

Click **Call Stat** to open the User List Browser window. This window displays call statistics for the highlighted list. See Chapter 15 Called Window and Routines for instructions on using this window.

## The Donors Button

Click **Donors** to open the View Donors in List window. This window displays donor name, phone number, and list status associated to a particular list. See Chapter 15 Called Window and Routines for instructions on using this window.

## The List Log Button

Click **List Log** to open the List Generation Log window. Use this window to view the generation history of a list:

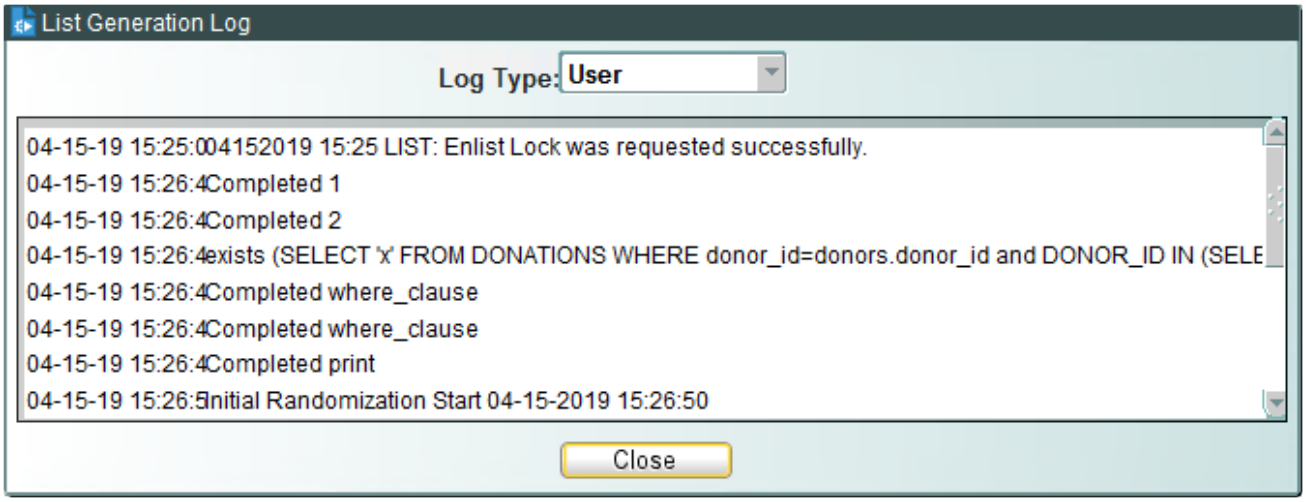


## The Criteria Button

Click **Criteria** to open the View List Criteria window. Use this window to view details on search criteria specific to this list (excludes Standard search criteria). See Chapter 15 Called Window and Routines for instructions on using this window.

## The Refresh Button

Click **Refresh** to update the screen.

## The To Browser Button

Click **To Browser** to assign an active list to a recruiter and send to the browser.

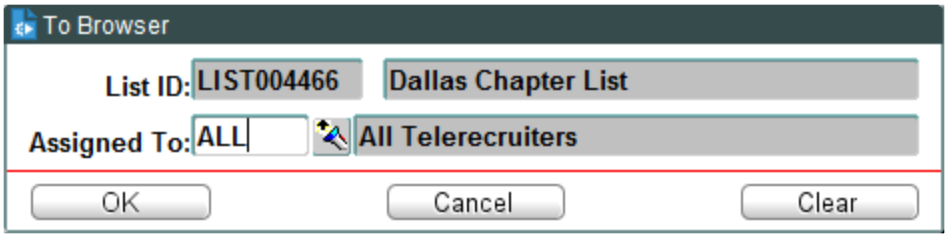


## The Extend Life Button

Click **Extend Life** to display the number of days extension information.

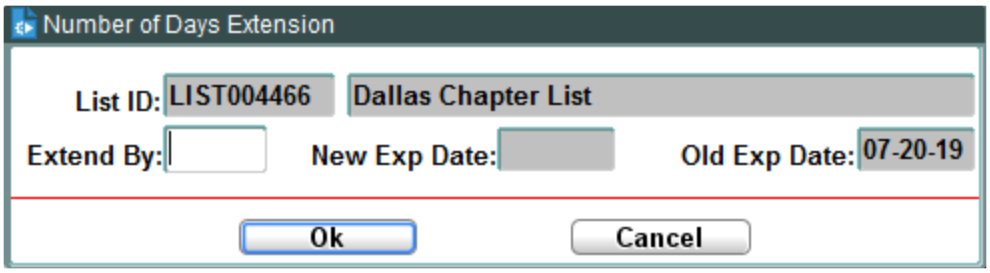



WellSky Corporation
Proprietary and confidential

## The Release Button

Click **Release** to release donors from a list.

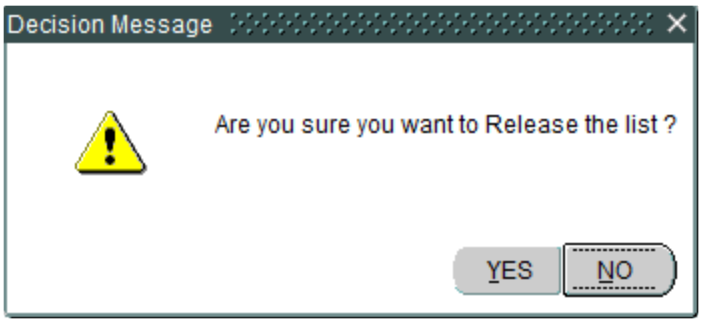


## The Cancel Button

Click **Cancel** to cancel a scheduled list that has not been sent to the list browser.

## The Resubmit Button

Click **Resubmit** to resubmit an aborted list to the browser.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 5.3.2 Change List Priority (LISTPRI)

## Intended Use

Use this screen to view lists pending execution and to change their generation priority.

## Limitations

The status of an executing list cannot be changed. Only lists that have not been generated display.

## Prerequisites

At least two scheduled lists must be available.

## Accessing the Screen

Access this screen from the Enlistment Maintenance Functions menu or by entering the keyword `LISTPRI`.

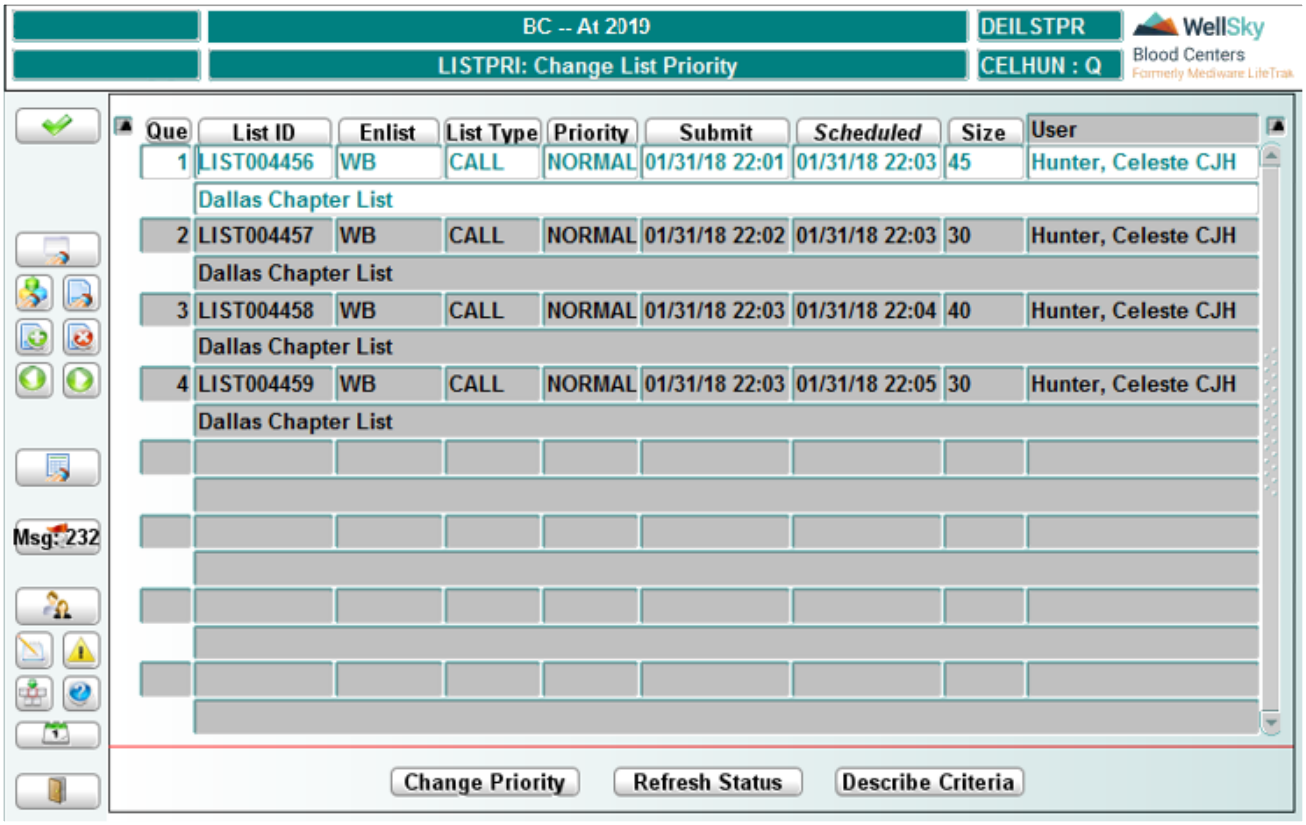


The following information displays, if it exists in the database:

- Order in which the lists are queued for submission
- List ID number
- Enlistment type
- Type of list
- List priority
- Date and time list was submitted
- Date and time list is scheduled for generation, if applicable
- Requested size of the list
- Employee who created the list
- List name

## Controlling and Moving Within the Data Display

The information displayed can be sorted by the individual column headings except for Que and User. This sort option is for display purposes only and does not affect the order of list generation.


WellSky Corporation
Proprietary and confidential

Use the **UP** and **DOWN** arrow keys to scroll among the displayed records. When more records are retrieved than can be viewed at once, use the scroll bar on the right side of the list area to quickly scroll through the displayed records.

## The Change Priority Button

To change the priority of a list, click **Change Priority** to open the Change Priority window. The selected list displays in the Move List field:

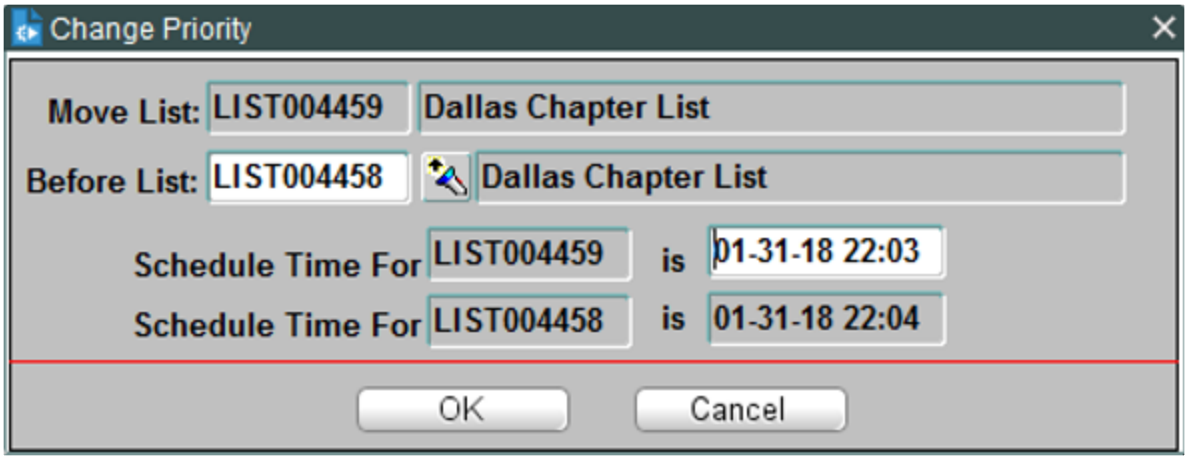


### Before List

You can move the generation of a list before another. Enter the ID of the list you wish to move in front of, or select it from the LOV.

Press **ENTER**. The scheduled execution time for the two lists displays. The scheduled execution time for the list to be moved defaults to one minute prior to the scheduled time for the selected Before List ID. To change the time, enter the new scheduled execution time for the list to be moved.

Click **OK** and the priority of the list changes.

## The Refresh Status Button

To refresh the screen, click **Refresh Status**. This removes executing lists, displays newly scheduled lists, and updates the queue.

## The Describe Criteria Button

Click **Describe Criteria** to open the View List Criteria window. Standard criteria are not displayed. See Chapter 14 Called Window and Routines for instructions on using this window.

# 5.3.3 Create Standard Templates (SLIST)

## Intended Use

Use this screen to create a standard template of search criteria to apply automatically to all lists of a specified Enlistment Type. This template should contain all criteria to each list of a specific type without any modification.

## Limitations

List size cannot exceed the limit defined for the list type or the system limit. Once the standard criteria are changed, the change affects all lists pending execution of the same enlistment type. Only one standard template can exist for each enlistment type.

## Prerequisites

Enlistment types must be entered in the Master Codes table.

## Accessing the Screen

Access this screen from the Enlistment Maintenance Functions menu or by entering the keyword `SLIST`.

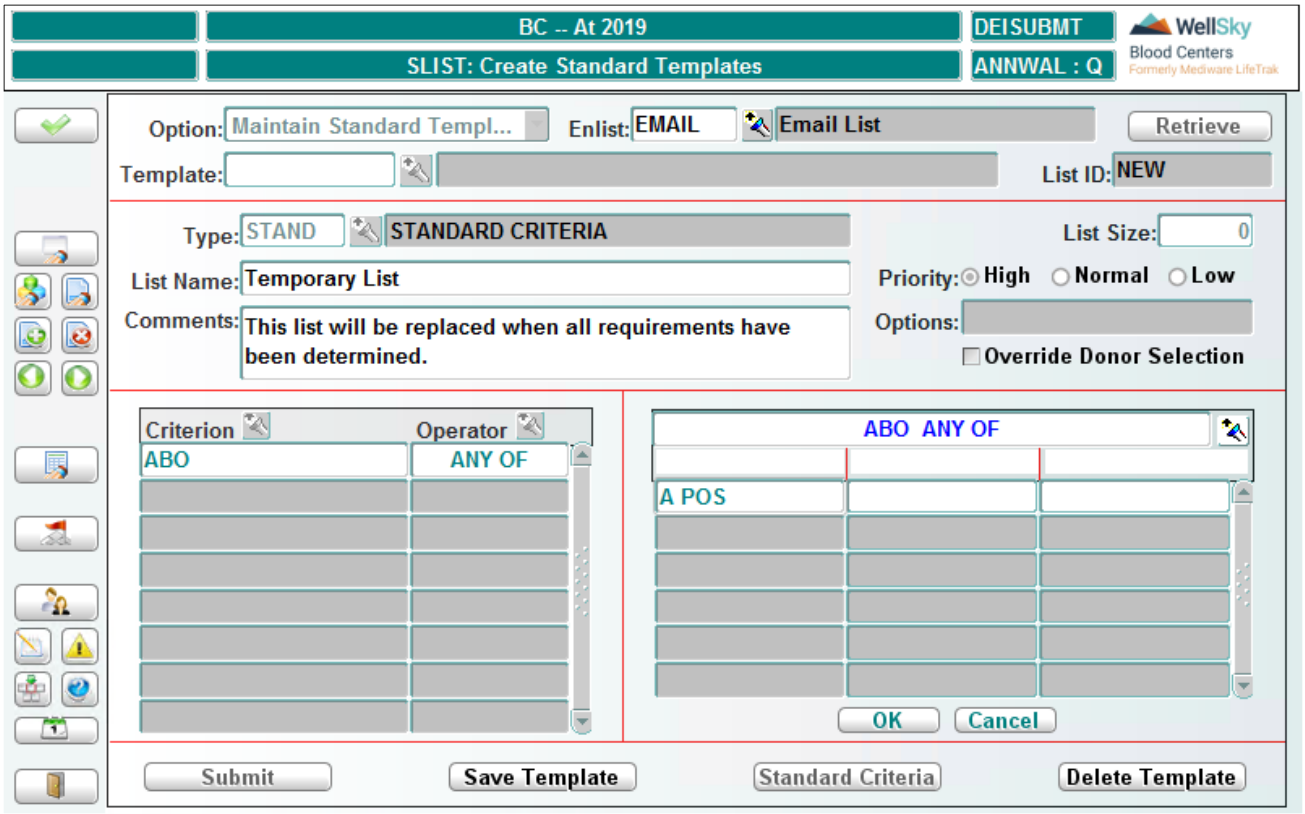


## Control Block Fields and Definitions

### Option

Display only. The system default is Submit List From Template and cannot be changed.

### Enlist

Entry is required. Enter the enlistment type or select from the LOV.

### Template

Display only. This field is not accessible in this mode.


WellSky Corporation
Proprietary and confidential

## Retrieving Data

After entering the search criteria, click **Retrieve** to display the information that matches the criteria.

## In the List Block

### Type

Display only. Default is **STAND** for standard criteria, and cannot be changed.

### List Name

Entry is required, although this field is not utilized for the Standard Template. System may default an existing name, or the user can enter the name of the new list.

### Comments

Entry is optional. Enter any comments pertaining to the standard template.

### List Size

Display only. Default is zero and cannot be changed.

### Priority, Options and Override Donor Selection

Display only. This does not reflect true status of subsequently generated lists.

## Entering Criteria In the Criterion Block

### Criterion

Enter search criterion or select from the LOV. The criteria define the composition of the list. Any existing criterion can be deleted by using the **DEL** key.

### Operator

Enter the operator for the criterion or select from the LOV. The operator defines the selection of the criterion.

## Entering Criteria In the Operator Parameter Selection Block

This block displays the specific search parameters for each criterion. It may require a direct entry, such as a date or a range of values, or it may allow the user to select from a list of valid data in the database.

When the LOV is available, it will open a Multiple Selection canvas that is unique for each criterion. Multiple selections can be made at one time. See the example below:

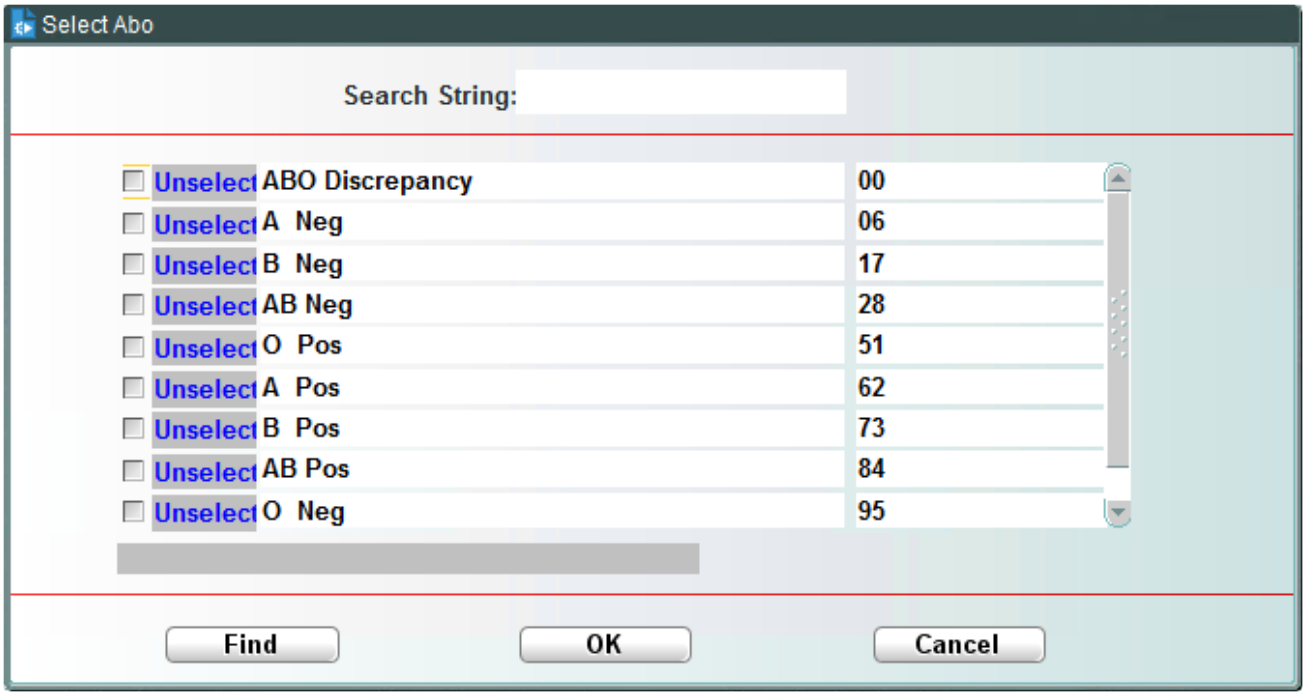


Click Find to execute a Search String entry. See example below:

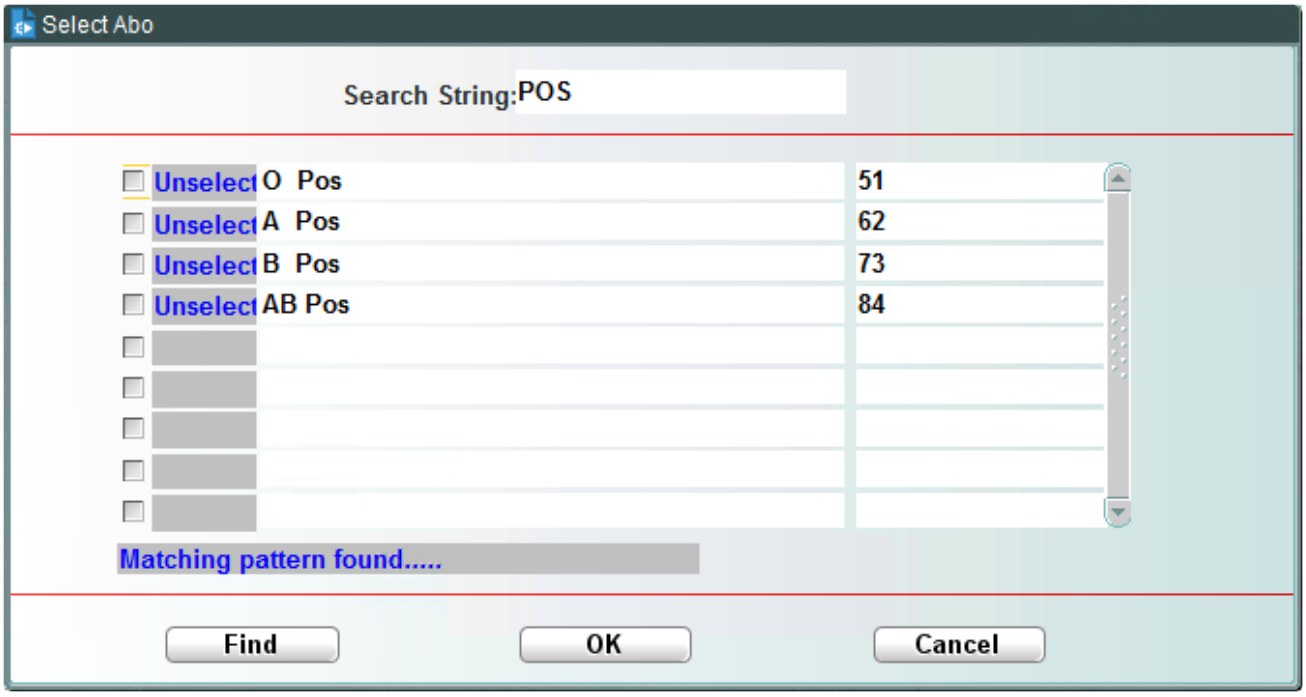


Click OK to accept the selections and return to the main screen. The selected criteria display in the Operator Parameter Selection Block.

Click Cancel to close the canvas and return to the main screen.

At the Main Screen in the Operator Parameter Selection Block, click OK to accept the selected search criterion.


WellSky Corporation
Proprietary and confidential

Click **Cancel** to remove the selected search criterion.

Once the information for the list is entered or retrieved, there are four function buttons across the bottom of the screen that may be highlighted depending on your current actions.

## The Submit Button

The **Submit** button is disabled in this mode.

## The Save Template Button

Click **Save Template** to save a created or modified template. This applies the criteria to any list of this type pending execution.

## The Standard Criteria Button

To view a description of search criteria, click **Standard Criteria**. This opens the View List Criteria window, which displays all the standard criteria associated to this template. See Chapter 14 Called Window and Routines for instructions on using this window.

## The Delete Template Button

Click **Delete Template** to delete the standard template. If deleted, these criteria will not be applied to any list of this type pending execution.

## What to Do Next

The user can now use Submit List and Create Template (LIST).

# 5.3.4 Define List Types (LISTTYP)

## Intended Use

Use this screen to create and modify list types to be associated with enlistment types.

## Limitations

'Don' and 'Proc' have to be defined to assure full eligibility check for the donation type/procedure code.

## Prerequisites

Active codes must exist in:

- Master Code ENLIST Enlistment types
- Define Donation Types (DONS)
- Define Procedure Codes (PROCS)

# Accessing the Screen

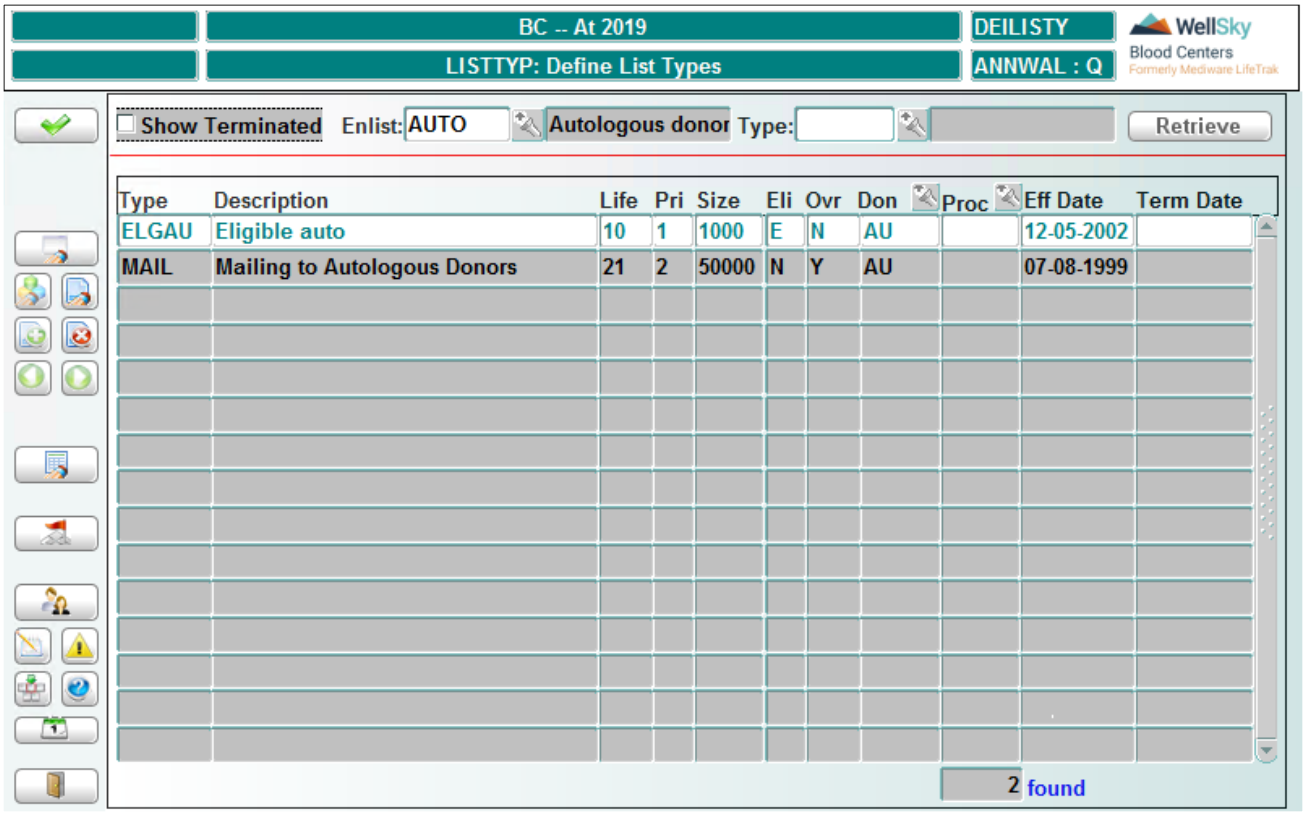


# Control Block Fields and Definitions

## Show Terminated

Click this option to view terminated list types.

## Enlist

Entry is required. Enter an enlistment type or select from the LOV.

## Type

Entry is optional. Enter a list type or select from the LOV. The LOV displays all effective types in this screen associated to the Enlistment Type.

# Retrieving Data

Click **Retrieve** to display the list types that meet the selected criteria.

The following information displays, if it exists in the database:

- List type code
- Description


WellSky Corporation
Proprietary and confidential

- Defaulted life, in days, of list
- Priority of list
- Size of list
- Eligibility status of donors to be selected
- Donor inclusion allowed if on another list
- Donation type
- Donation procedure code
- Effective date of list type
- Termination date of list type

**NOTE –** Information in all fields can be modified.

A display field at the bottom right of the screen shows the number of records retrieved.

## To Define a New List Type

### Type
Entry is required. Enter a list type. This field creates a new list type.

### Description
Entry is required. Enter a description for the list type. You can enter up to 33 characters.

### Life
Entry is required. Enter the default lifespan of the list in days.

### Pri
Entry is required. Enter the list priority as 0 (low), 1 (normal) or 2 (high).

### Size
Entry is required. Enter the maximum number of donors to retrieve. When creating the list, the user can make the number of donors retrieved smaller than this number, but cannot exceed this number.

### Eli
Entry is required. Enter the eligibility check for the list type as E (full eligibility), T (include temporarily deferred) or N (no eligibility check).

### Ovr
Entry is optional. Indicate donor exclusion override to allow selection of donors associated to other lists. Enter `Y` (yes) to include donors that may be on another list, or `N` (no) to exclude donors on another list.

### Don

Entry is optional. Enter donation type for this list or select from the LOV. If you do not want to limit the list to a specific donation type, leave this field blank.

**NOTE –** To pull donors who are eligible for a specific donation type and procedure code combination, you must have an entry in this field. If you do not have an entry, you may have donors pulled on the list who are not eligible for all procedures.

### Proc

Entry is optional. Enter procedure type for this list or select from the LOV. If you do not want to limit the list to a specific procedure code, leave this field blank.

**NOTE –** To pull donors who are eligible for a specific donation type and procedure code combination, you must have an entry in this field. If you do not have an entry, you may have donors pulled on the list who are not eligible for all procedures.

### Eff Date

Entry is required. Enter the date list will become effective in MMDDYYYY format.

### Term Date

Entry is optional. Enter the date list type will be terminated, using the MMDDYYYY format, or leave blank to remain indefinitely effective.

## At Commit

List types and their standard size are created.

## What to Do Next

The user can now use Create Standard Templates (SLIST) and/or Submit List and Create Template (LIST).

# 5.3.5 Define Search Criteria (SEARCH)

## Intended Use

Use this screen to define search criteria for templates in list generation in the Donor Enlistment (ENLIST) module.

**NOTE –** Specific pre-defined criteria relate to specific geographic areas. Therefore, during implementation you should work with WellSky to update these criteria to reflect your specific geographic area.

## Limitations

None


WellSky Corporation
Proprietary and confidential

# Prerequisites

You must have a knowledge of SQL and database tables.

The following data must be defined:

- Enlistment type in Master Code ENLST.
- Operator in Define Operators (OPER), WellSky Restricted.

Review the list creation programs to become familiar with use of this program data, Create Standard Templates (SLIST) and Submit List and Create Template (LIST).

# Accessing the Screen

Access this screen from the Restricted Validation Tables menu or by entering the keyword SEARCH.

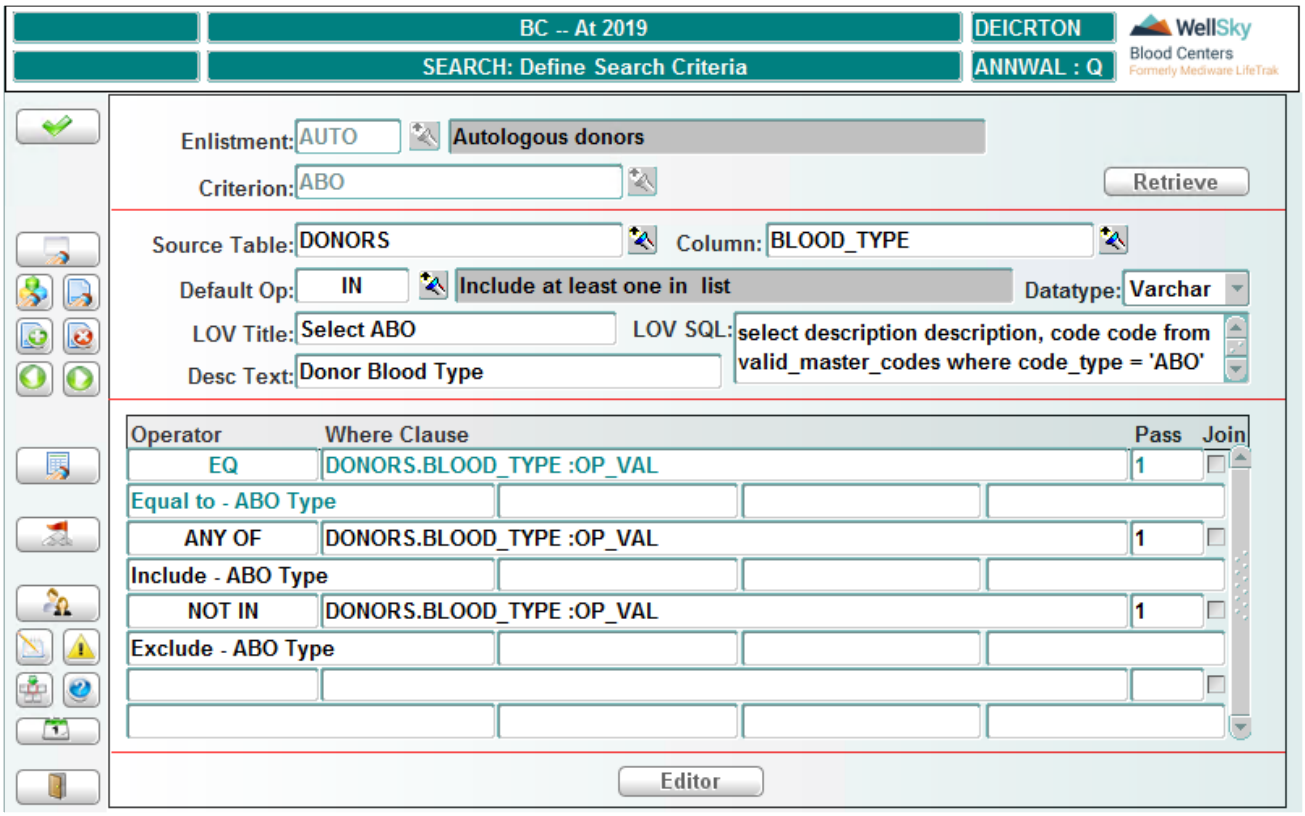


# Control Block Fields and Definitions

## Enlistment

Entry is required. Enter the enlistment type or select from the LOV.

**NOTE –** Search criteria for enlistment types are specific for that enlistment type with the exception of STAND (standard template). Criteria created using STAND are automatically retrieved into templates for other enlistment types using the same criterion name.

### Criterion

Entry is required. Enter the list criterion or select from the LOV.

> **NOTE –** To create a new criterion, enter up to 25 characters for an identifier and click Retrieve. A pop-up appears. Click Yes to create a new criterion, or No to return to the Criterion field in the main screen.

## Retrieving Data

Click **Retrieve** to display the data that matches the search criteria.

## To Define New or Modify Existing Search Criteria

### In the Criterion Block:

In the Criterion Block, enter or modify the following data:

### Source Table

Entry is required. Enter source table or select from the LOV.

### Column

Entry is required. Enter the column name or select from the LOV.

### Default Op

Entry is required. Enter the default operator or select from the LOV. All operators must be entered in the Operator block.

### Datatype

Entry is required. Choose the datatype from the drop-down list. This datatype applies to all operators defined in the Operator block.

### LOV Title

Entry is optional. Enter up to 30 characters for the description of the LOV.

### LOV SQL

Entry is optional. Enter the SQL for the LOV. Up to 2000 characters allowed.

### Desc Text

Entry is required. Enter a description hint text for the criterion. Up to 100 characters allowed.

### In the Operator Block:

In the Operator Block, enter or modify the following data:

### Operator

Entry is required. Enter the operator or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Where Clause
Entry is optional. Enter the SQL for the Where clause. Up to 2000 characters allowed.

### Pass
Entry is required. Enter the execution sequence 1 to 9.

### Join
Field is not utilized.

On the second line are four optional description fields used in the criterion selection block in list creation programs (LIST and SLIST).

### Title Text
Enter up to a 30-character title text for the 'Where' clause.

### Field 1 Title
Enter up to a 20-character title text for the criterion selections.

### Field 2 Title
Enter up to a 20-character title text for the criterion selections.

### Field 3 Title
Enter up to a 20-character title text for the criterion selections.

## The Editor Button
With the cursor in the Where Clause field, click **Editor** to open the Where Clause editor window:

Use this window to create a new Where clause SQL formula or to edit an existing formula. Edit or enter formula using SQL and click **OK** to accept. Click **Cancel** to return to the main screen.

## To Search for Specific Coding String
Click **Search** to open the Search/Replace window:

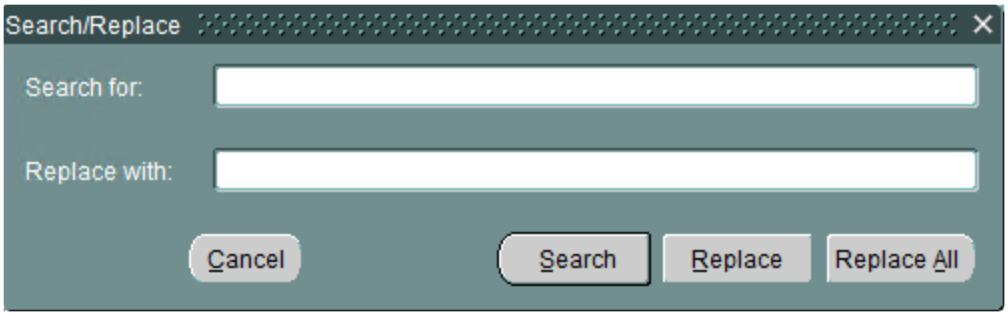


By using an Oracle search/replace feature, you may search, replace, replace all of a coding string or cancel out.

## At Commit

All changes are saved to the database.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

6

# Chapter 6 - Donor Center Management


6.1 Introduction ..... 264
6.2 Donor Center General Functions ..... 265
6.2.1 Schedule Donors (APPT) ..... 265
6.2.2 Donor Schedule by Center Query (DONSQ) ..... 275
6.2.3 Donor Center Procs and Staff Query (FIXQ) ..... 279
6.2.4 Draw Statistics and Drives Query (DRAW2Q) ..... 281
6.2.5 Fixed Site Drives Data Query (FDRIVEQ) ..... 284
6.2.6 Donor Center Details Query (DCQ) ..... 286
6.3 Donor Center Maintenance ..... 292
6.3.1 Create or Modify Special Drives (SPDRIVE2) ..... 292
6.3.2 Cancel Fixed and Special Drives (CANSF) ..... 292
6.3.3 Create Fixed Drives Automatically (FIXDR2) ..... 292
6.3.4 Assign Staff to Donor Center (FIXSTAFF) ..... 295
6.3.5 Define Apheresis Machines (MCODE) ..... 296

# 6.1 Introduction

The Donor Center Management Module is that portion of Donor designed to:

- Schedule donors for donations
- Create or modify drives
- Maintain collection staff details
- Assign collections staff to donor center
- Define apheresis machines
- Perform Queries

The following screens provide the capability to schedule donors, query donor schedules, create and modify drives, define donor centers, and query details about donor centers.


WellSky Corporation
Proprietary and confidential

# 6.2 Donor Center General Functions

These functions are accessed from the following menu:

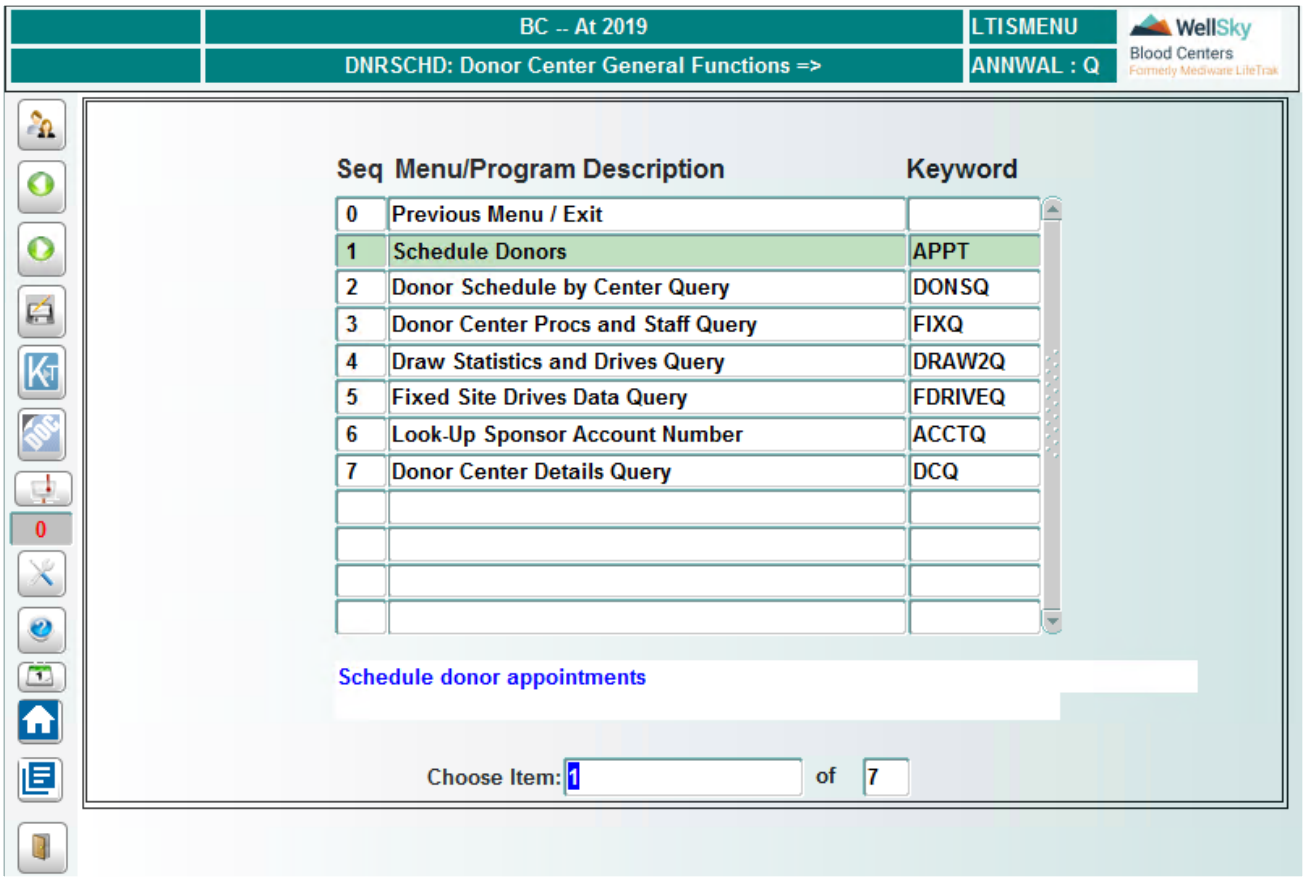


## 6.2.1 Schedule Donors (APPT)

### Intended Use

Use this screen to schedule donor appointments at a donor center.

### Limitations

- Cannot set appointments for mobile drives.
- Time slots appear only for allogeneic donation types.

### Prerequisites

- Fixed sites must be defined.
- Time slots and number of donors that can be seen during that time must be defined.
- Equipment-apheresis machines must be defined.

# Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword APPT.

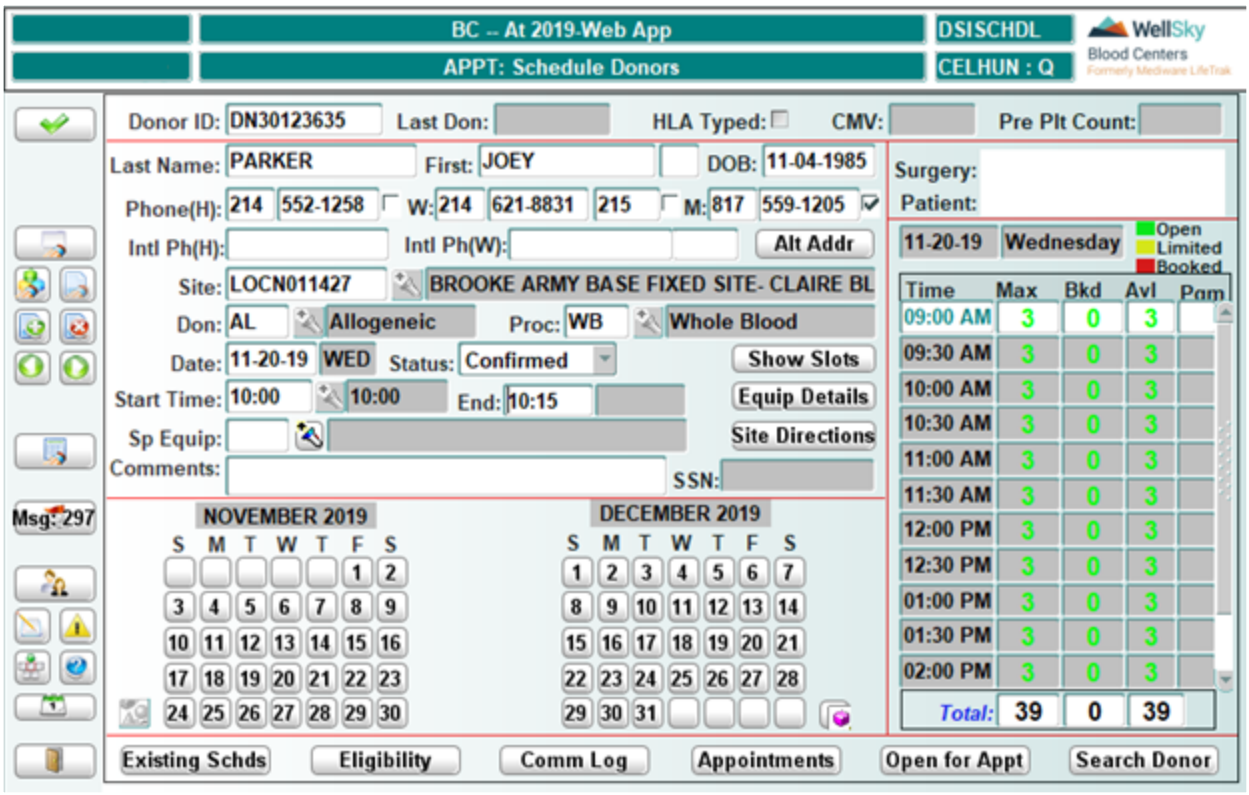


# If Scheduling an Existing Donor

Enter the following information into the Control Block:

## Donor ID

Enter the donor's ID number. Press **Enter**.

The following donor information displays, if it exists in the database:

- Date of last donation
- Indication if HLA has been typed
- Positive or negative CMV
- Platelet count
- Last name
- First name
- Date of birth


WellSky Corporation
Proprietary and confidential

- Home, work, and mobile phone numbers – able to select preferred phone number. The entry of a new phone number and preferred status does not update the DONORS record, but saves that information in the donor schedule table.
- International home and work phone numbers

### Alt Addr (button)

Click **Alt Addr** to view the donor's alternate demographics information, as follows:

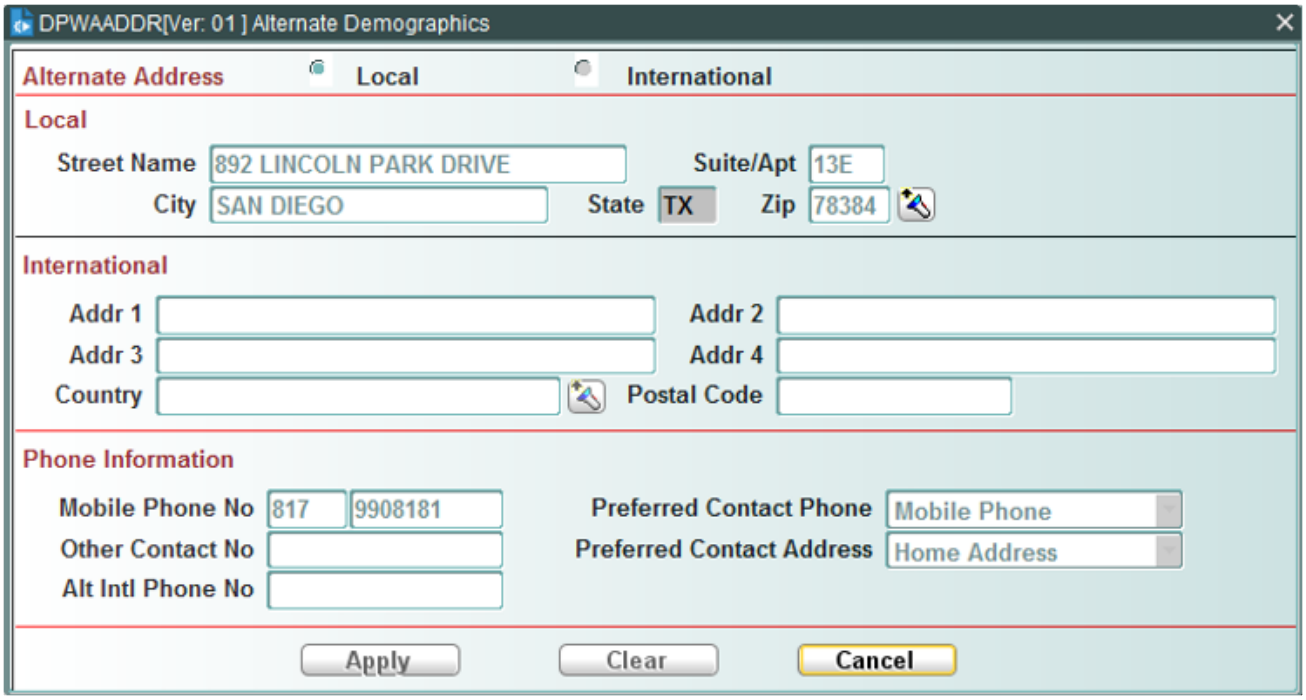


This window is read-only and can not be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 15 Called Windows and Routines for field descriptions.

## If Scheduling a New Donor

Enter the following information into the Donor Data Block:

### Last Name

Entry is required. Enter the donor's last name.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### First

Entry is required. Enter the donor's first name. The donor's middle name can be entered in the field to the right of first name field.

### DOB

Entry is optional. Enter the donor's date of birth, using the MMDDYYYY format.

### Phone(H)
Entry is optional. Enter the donor's home phone number. Select the preferred box if this is the number at which the donor prefers to be contacted. This information does not save to the DONORS table, but it will be put in the donors schedule table.

### W
Entry is optional. Enter the donor's work phone number and extension. Select the preferred box if this is the number at which the donor prefers to be contacted. This information does not save to the DONORS table, but it will be put in the donors schedule table.

### M
Entry is optional. Enter the donor's mobile phone number. Select the preferred box if this is the number at which the donor prefers to be contacted. This information does not save to the DONORS table, but it will be put in the donors schedule table.

### Intl Phone (H)
Entry is optional. Enter the donor's international home phone number.

### Intl Phone (W)
Entry is optional. Enter the donor's international work phone number and extension.

## Scheduling Donation Site, Time, and Date (Existing or New Donor)

### Site
Entry is required. Enter the location or select from the LOV.

### Don
Entry is required. Enter the donation type or select from the LOV. For existing donors, this field automatically populates.

### Proc
Entry is required. Enter the procedure type or select from the LOV. For existing donors, this field automatically populates.

### Date
Entry is required. Enter the date using the MMDDYY format, or click on a date on one of the calendars at the bottom of the screen. For allogeneic donations all available slots for the chosen date display in the time slots block on the right side of the screen. Special Donations will not display time slots. When date is entered, the system performs an eligibility check for the donation type and procedure that was entered.


WellSky Corporation
Proprietary and confidential

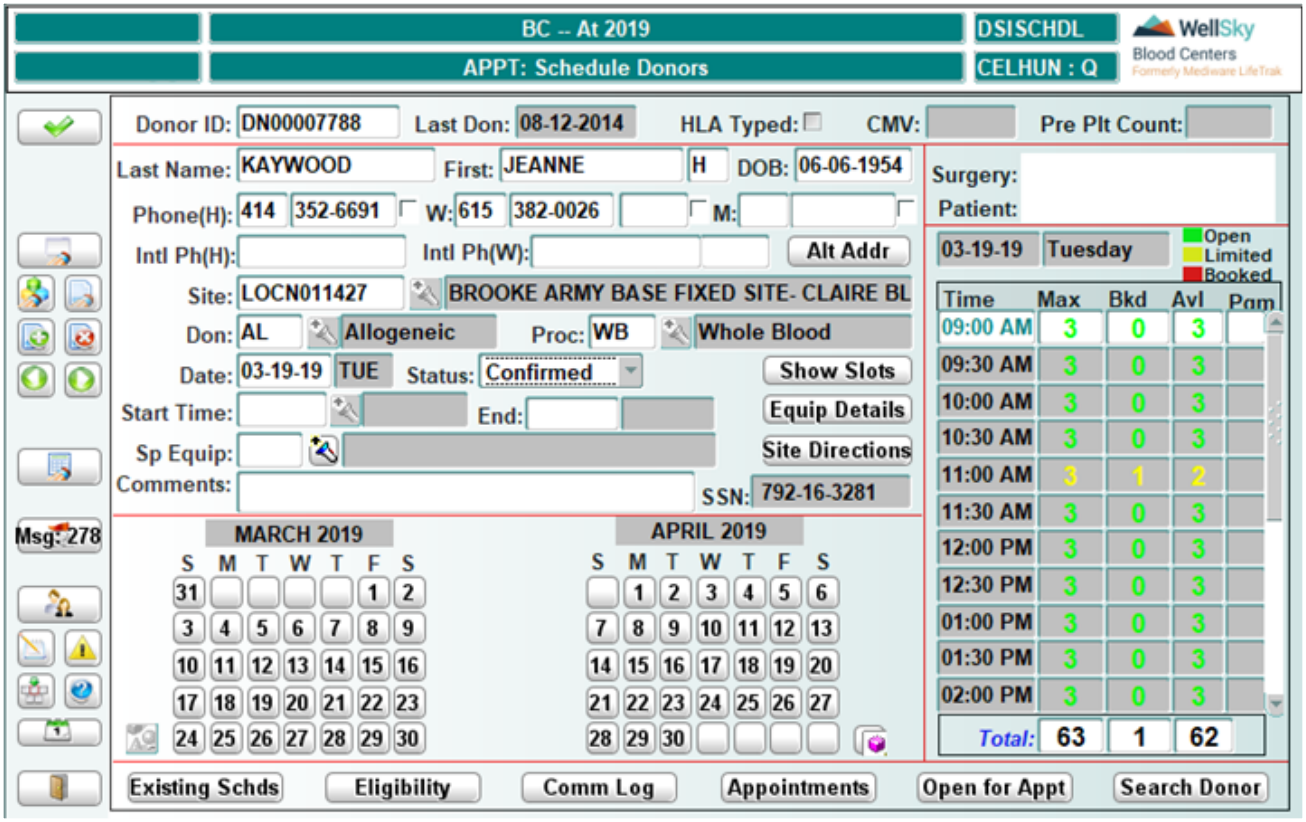


## Status

Entry is required. Click the drop-down list to choose the appointment status. Default is **Confirmed**.

## Start Time

Entry is required. Enter the start time of the donation using the HHMI format (24 hour clock), or select from the LOV.

## End

End time of the donation. The value is determined by the Duration field in the PROCS screen. The value varies, based on the donation type and procedure recorded in the appointment. This value cannot be changed

## Sp Equip

Entry is optional. Select from the LOV any special equipment to assign to the donor during the donation.

## Comments

Entry is optional. Enter any comments to associate to the donor or donation.

# The Show Slots Button

Click **Show Slots** to view the Donation Slots window. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Equip Details Button

Click **Equip Details** to open the Assigned Equipment Information window. See Chapter 15 Called Windows and Routines for information on using this program.

## The Site Directions Button

Click **Site Directions** to open the Site Directions window and view directions to the donation site displayed in the query:

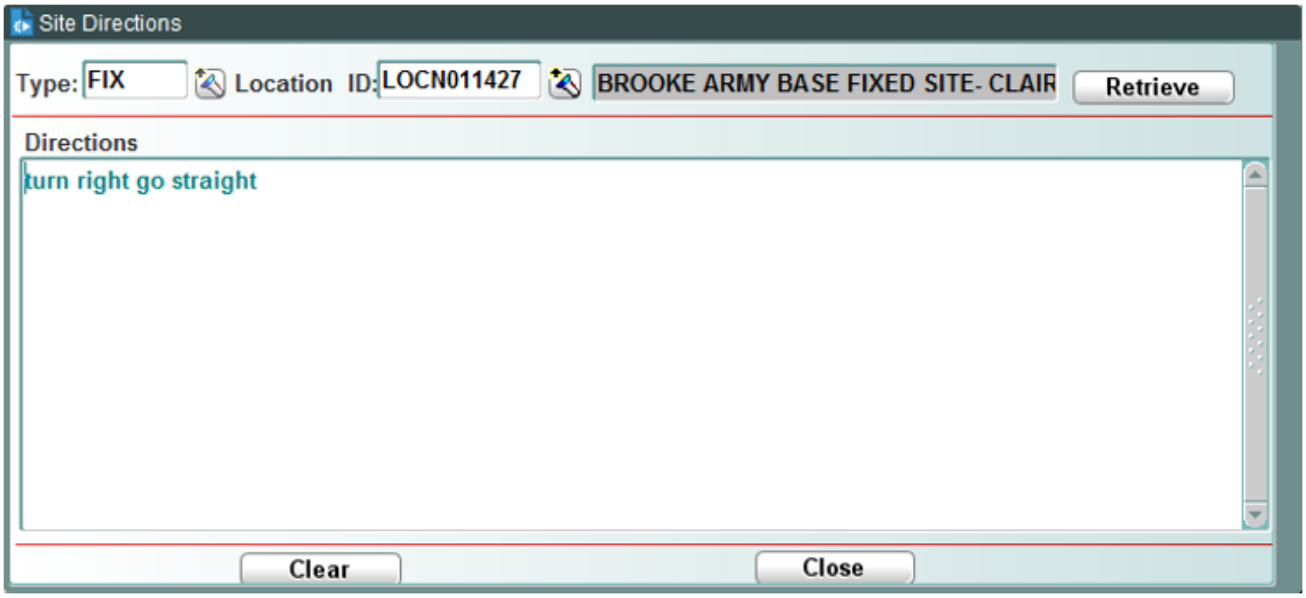


**NOTE –** These directions are entered during the creation of the donor center or fixed site.

By clearing the window, the user can display any available directions to a particular location by entering the code for the type of drive in the Type field.

## The Existing Schds Button

Click **Existing Schds** to open the Existing Schedules window. Use this window to query a list of donation appointments by donor, site, date, recruiter or phone number.


WellSky Corporation
Proprietary and confidential

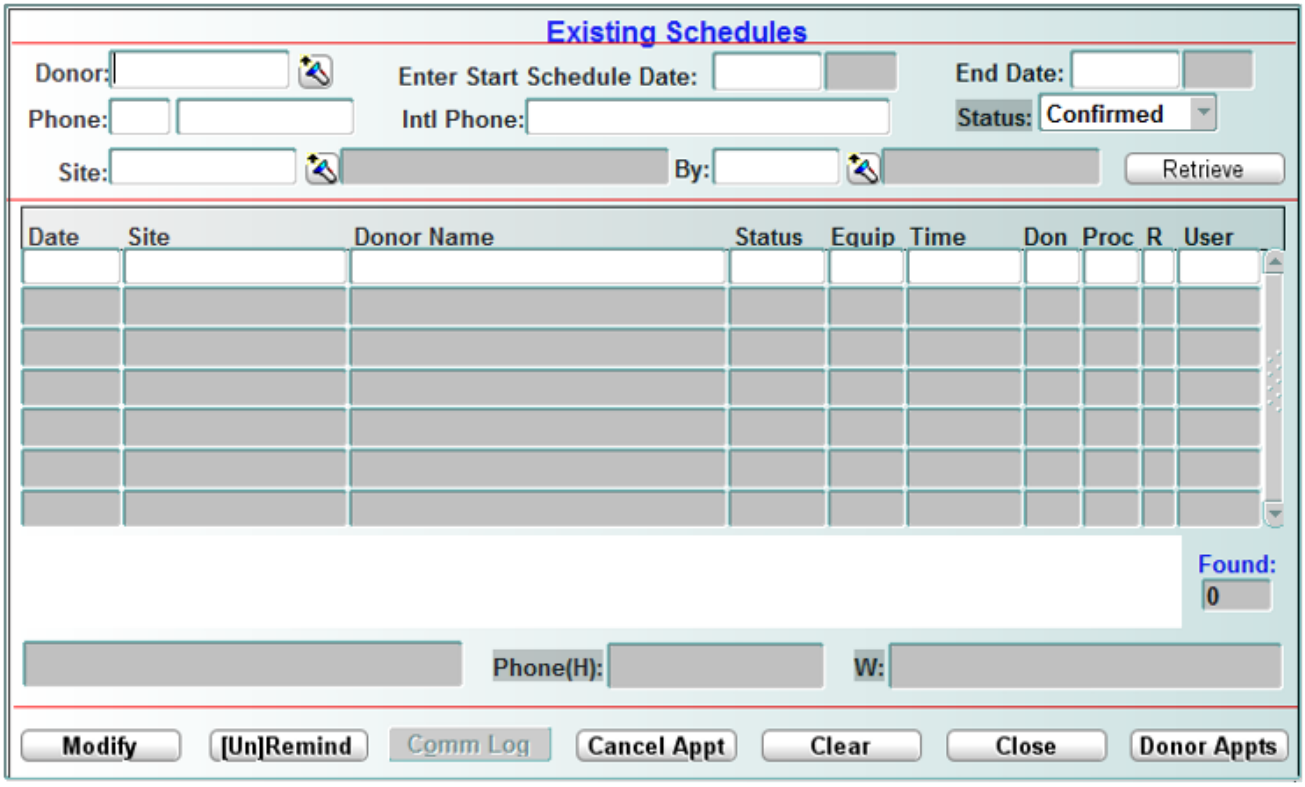


At least one of the following criteria (other than Status) must be entered in the Control Block:

## Donor

Enter the donor ID number or select from the LOV. The LOV displays only donors scheduled for a date greater than the system date, and with a status of anything except CANCL.

## Enter Start Schedule Date

Enter the start of date range to query, using the MMDDYY format.

## End Date

Enter the end of date range to query, using the MMDDYY format.

## Phone

Enter donor's phone number.

## Status

Entry is required. Enter the appointment status or choose from the drop-down list. Default status is Confirmed.

## Site

Enter the donation site ID or select from the LOV.

## By

Enter the recruiter ID or select from the LOV.

# Retrieving Scheduled Donations

After entering all desired criteria, click **Retrieve** to display a list of scheduled donations:

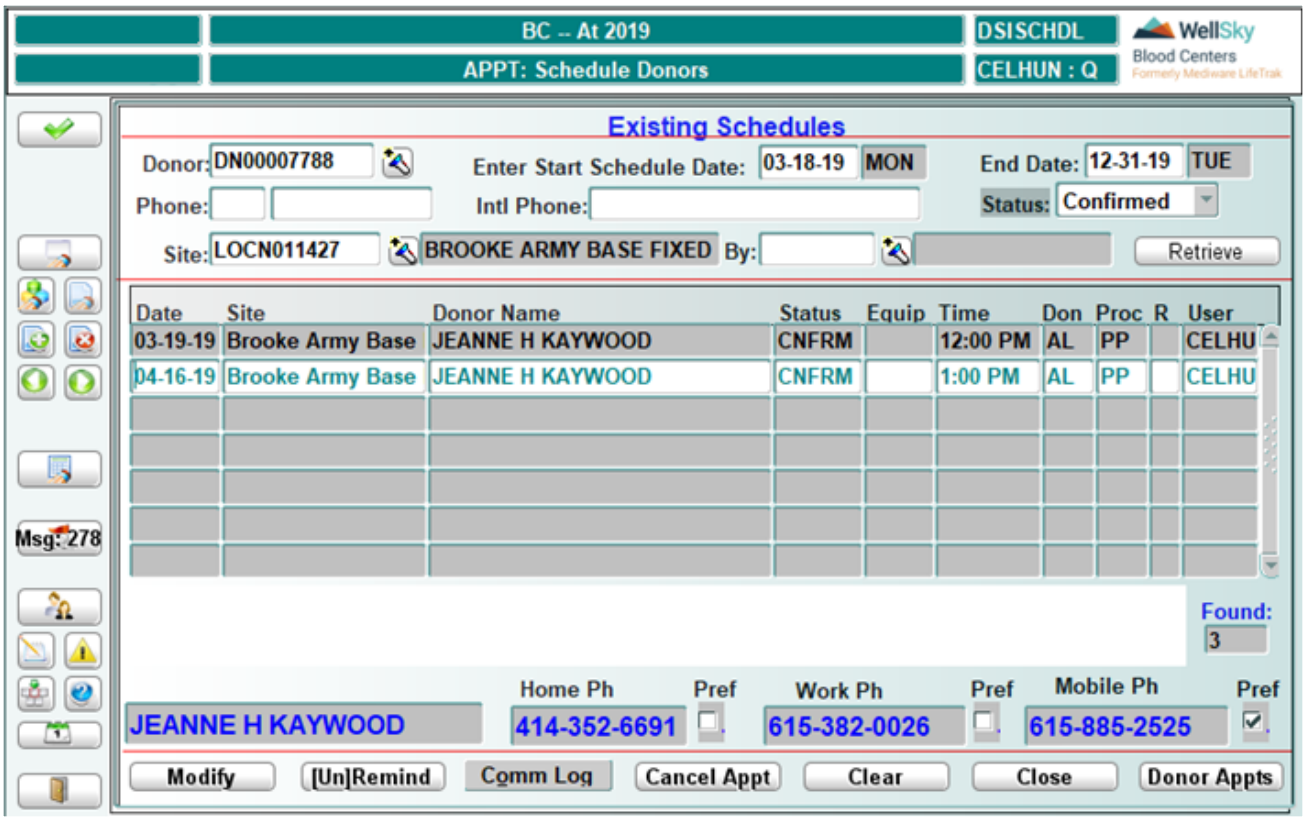


The following information displays, if it exists in the database:

- Scheduled date of the donation
- Site of donation
- Name of donor
- Status of scheduled donation
- Equipment assigned for donation
- Time of donation
- Donation type
- Donation procedure
- Reminder indication
- User who scheduled the donation

In the Existing Schedules window, there are buttons at the bottom of the screen that can display more information or allow the user to perform other functions.


WellSky Corporation
Proprietary and confidential

## The Modify Button

Click **Modify** to return to the Schedule Donors screen to modify the appointment of the selected donor.

## The (Un)Remind Button

Click **(Un)Remind** to open the (Un)Reminder window. If the reminder indicator in the Existing Schedules window is blank, then the following window opens:

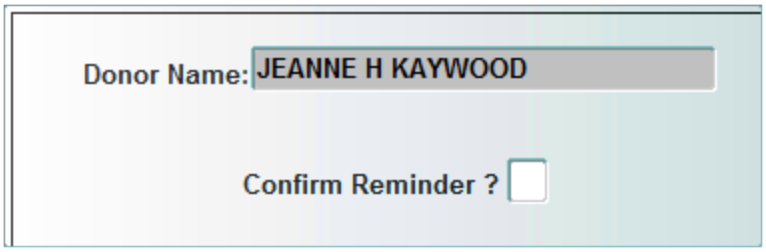


Enter **Y** to confirm a reminder call to the donor. Entering **Y** inserts **REMCL** in donor communication for a reminder call.

If the reminder indicator in the Existing Schedules window contains **Y**, then the following screen opens:

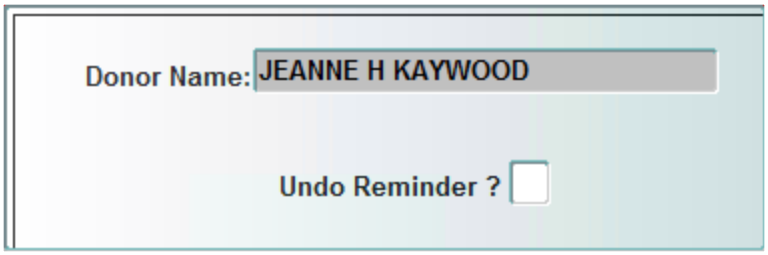


Enter **Y** to remove **REMCL** from donor communication and set the flag to null value in the Existing Schedules window.

## The Comm Log Button

Click **Comm Log** to open the Communication Log window. Use this program to view a history of communications with the selected donor or to send a letter to the selected donor. The Communications Log window can be opened only if scheduling an existing donor with a Donor ID number. See Chapter 15 Called Windows and Routines for more instructions on using this window.

## The Cancel Appt Button

Click **Cancel Appt** to open the Cancel Appointment window:

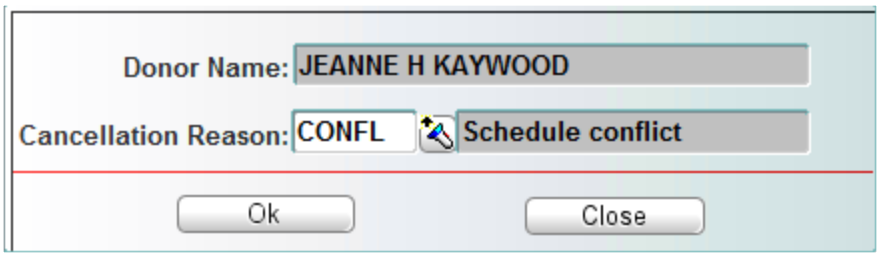

Use this window to cancel a scheduled donation. Enter the cancellation reason or select from the LOV. Click **Ok** to save the cancellation, or click **Close** to return to the Existing Schedules screen with no changes.

## The Clear Button

Click **Clear** to clear the window to begin a new search.

## The Close Button

Click **Close** to return to the Schedule Donors screen.

## The Donor Appts Button

Click **Donor Appts** to generate a report of appointments for the selected donor.

## The Eligibility Button

Back in the Schedule Donors screen, click the Eligibility button to open the Donor Eligibility window. Use this program to view the current eligibility of the selected donor. The Donor Eligibility window can be opened only if scheduling an existing donor with a Donor ID number. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Appointments Button

Click **Appointments** to open the Donor Schedule on Donor Centers window. Use this program to query a list of donors scheduled to donate at fixed sites. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Open for Appt Button

Click **Open for Appt** to open the Donation Sites Available for a Given Time window. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Search Donor Button

Click **Search Donor** to open the Search for Donor window. Use this program to search for a donor in the donor database. A search for the donor should be made before the donor is scheduled for a donation. See Chapter 15 Called Windows and Routines for instructions on using this window.

## At Commit

The scheduled appointment and donor information is saved to the database.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 6.2.2 Donor Schedule by Center Query (DONSQ)

## Intended Use

Use this screen to query donor schedules at each collection site by date and time range.

## Limitations

None

## Prerequisites

Donors must have been previously scheduled.

## Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword DONSQ.

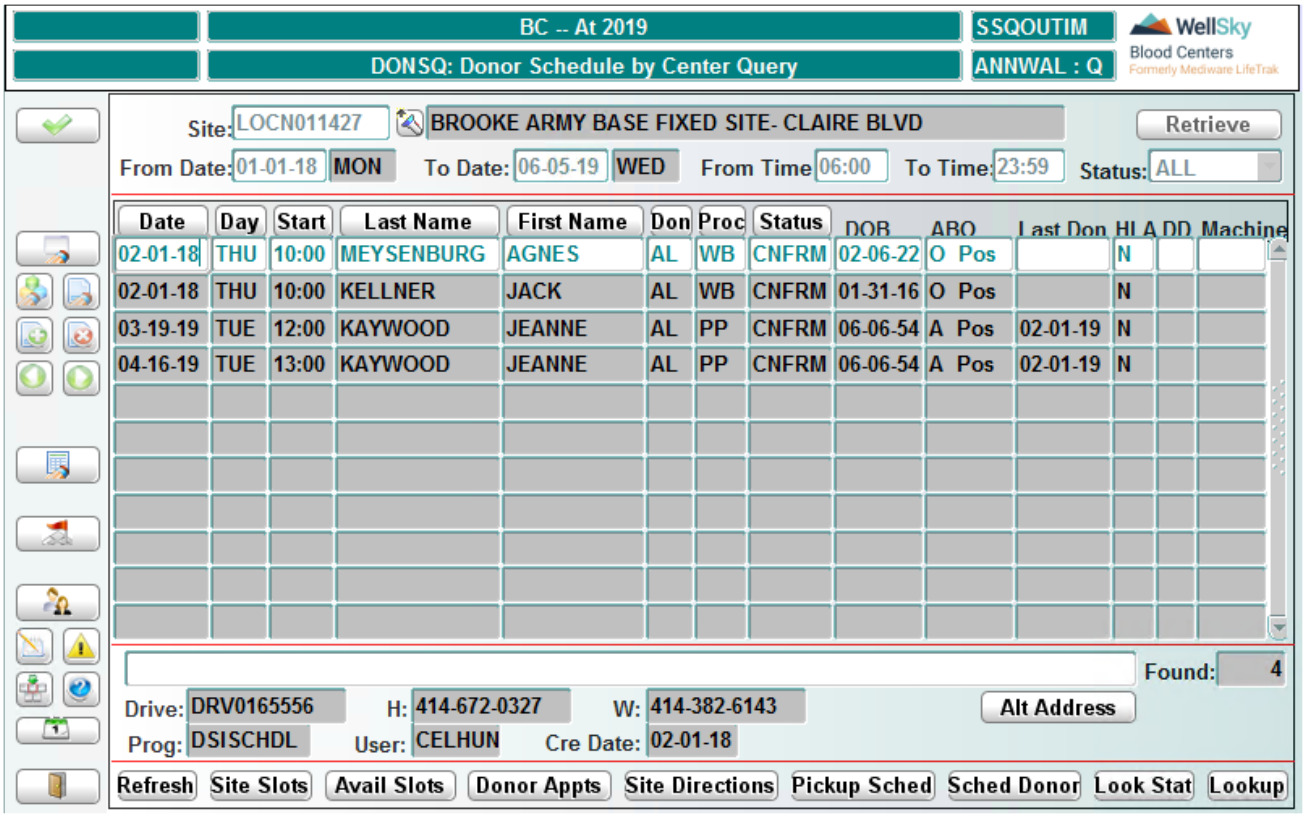


## Control Block Fields and Definitions

### Site

Entry is required. Enter the collection site ID, select from the LOV, or enter part of the site name.

## From Date

Entry is required. Enter the beginning date of the date range in MMDDYY format. Default is the system date.

## To Date

Entry is required. Enter the ending date of the date range in MMDDYY format. Default is the system date.

## From Time

Entry is required. Enter the beginning time of the time range. Default is 06:00 (6 a.m.).

## To Time

Entry is required. Enter the ending time of the time range. Default is 23:59 (one minute before midnight).

## Status

Enter donor status from the drop-down list. Default is All appointments, which encompasses the following:

- Confirm – Donors with confirmed appointments
- Cancel – Donors who canceled appointments
- Walk In – Donors scheduled as a walk-in
- Waiting List – Donors who are waiting for a specific time slot that is not available

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

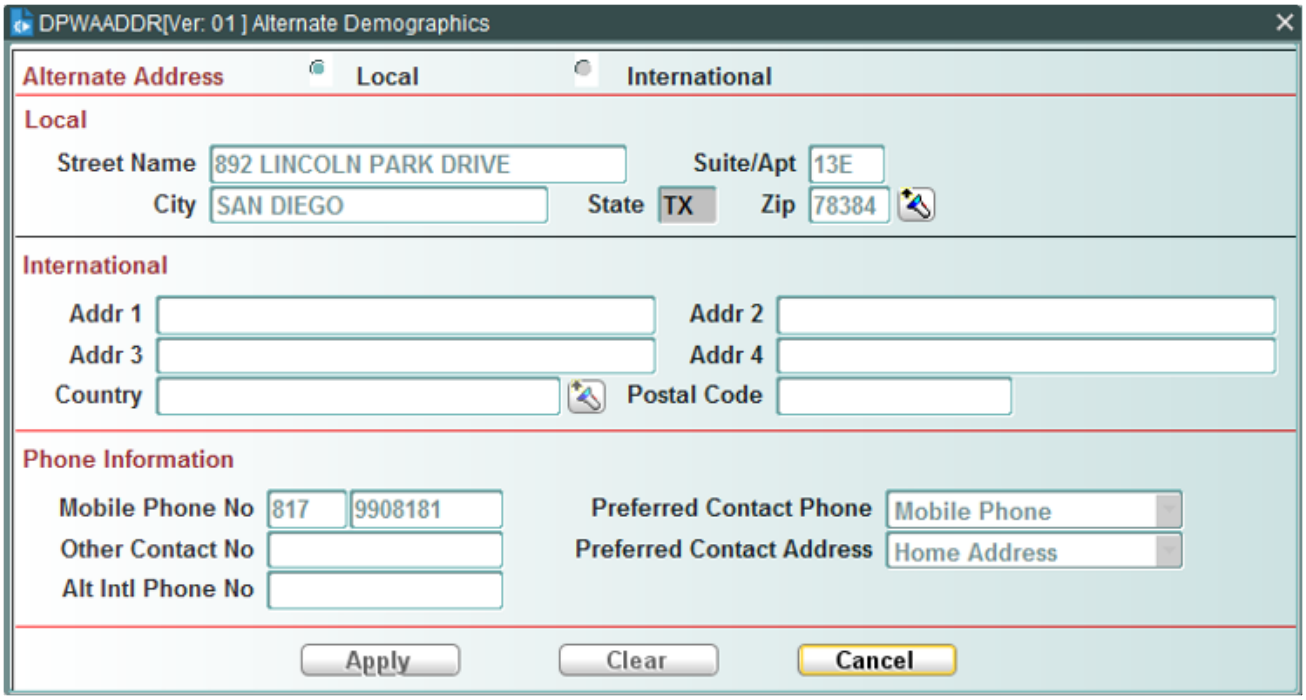



WellSky Corporation
Proprietary and confidential

This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

## The Refresh Button

Click **Refresh** to refresh the screen and view updated information.

## The Site Slots Button

Click **Site Slots** to open the Donation Slots window. Use this program to view donation slots available as specified in the Control Block. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Avail Slots Button

Click **Avail Slots** to open the Donation Sites Available for a Given Time window. Use this program to view the donation sites available for a specified date and time period. The user may specify a donation type and/or procedure code. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Donor Appts Button

Click **Donor Appts** to open the Donor Schedule on Donor Centers window. Use this program to view a scheduled donor or donor center. If not requested parameter is entered in the Control Block, the query defaults to the current date and display a week of data for all donor centers. See Chapter 15 Called Windows and Routines for instructions on using this window.

## The Site Directions Button

Click **Site Directions** to open the Site Directions window.  Use this window to view directions to the donor center displayed in the query.

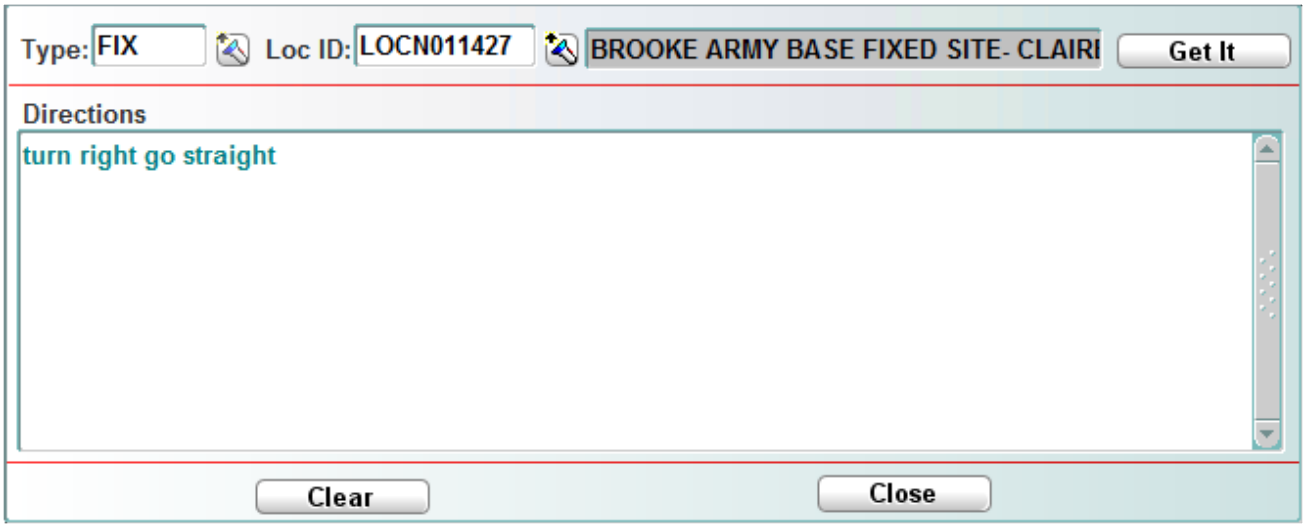


By clearing the window, the user can display any available directions to a particular location by the type of drive.

## The Pickup Sched Button

Click **Pickup Sched** to open the Schedule Pickups window:

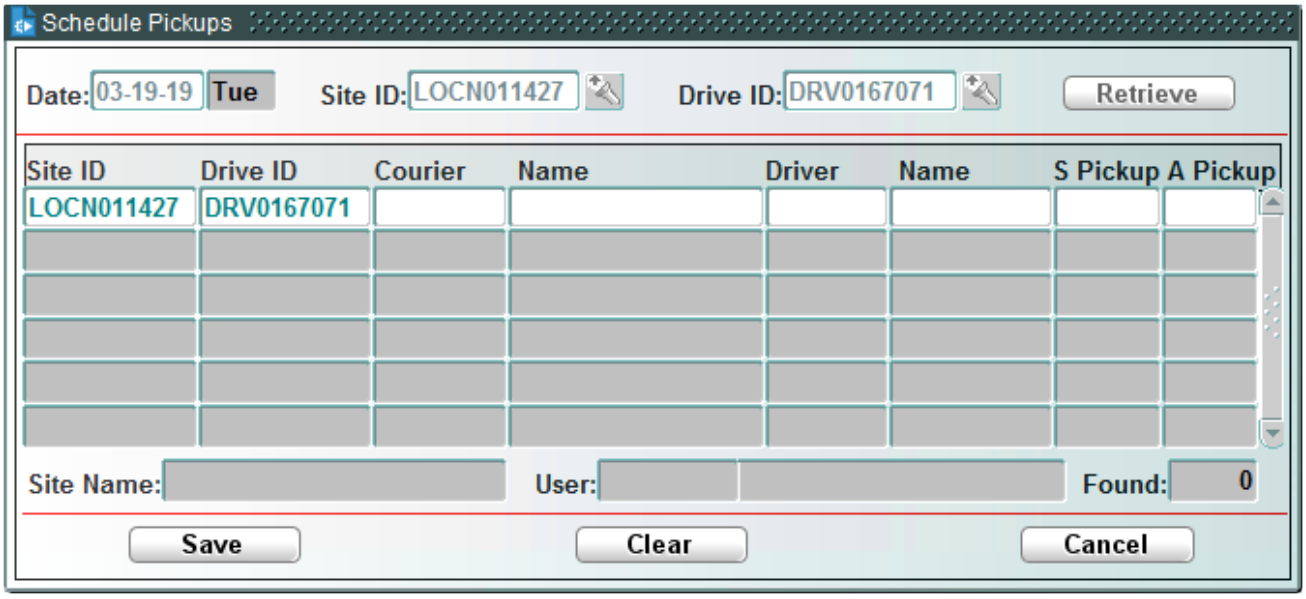


The Save button is not functional. Any data entered in this query window will not be saved.

## The Sched Donor Button

Click **Sched Donor** to re-schedule a donor appointment. A decision window pops up asking if you want to schedule a new donor or re-schedule the current donor. Click on whichever is appropriate, or click **Cancel** to return to the Donor Schedule by Center Query screen.

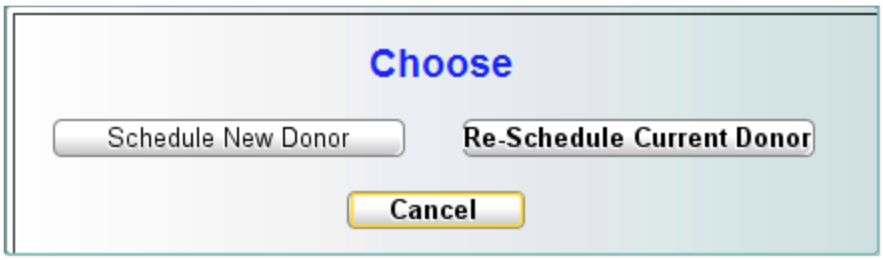


After making your selection, the Schedule Donors (APPT) screen opens. See the previous section of this chapter for information on using this screen.

## The Look Stat Button

Click **Look Stat** to open the Donor Statistics window. Use this program to view statistics about a donor. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Lookup Button

Click **Lookup** to open the Find Donor screen. Use this screen to lookup a donor and retrieve data on that donor. See Chapter 14 Called Windows and Routines for instructions on using this window.


WellSky Corporation
Proprietary and confidential

**NOTE –** If the *Drive* field is not populated for the selected donor, the Set Drive (SETDRV) screen opens when you click **Lookup**. You must then enter the drive date and drive ID on the SETDRV screen. If the drive ID is populated, the SETDRV screen does not open.

### At Commit

No data can be committed to the database from this screen.

### What to Do Next

There is no next step.

## 6.2.3 Donor Center Procs and Staff Query (FIXQ)

### Intended Use

Use this screen to query donation schedule details at each donor center.

### Limitations

Only details for one donor center can be queried at a time.

### Prerequisites

- Donor center details must have already been entered.
- Time slots and capacity has to have been defined.

### Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword `FIXQ`.

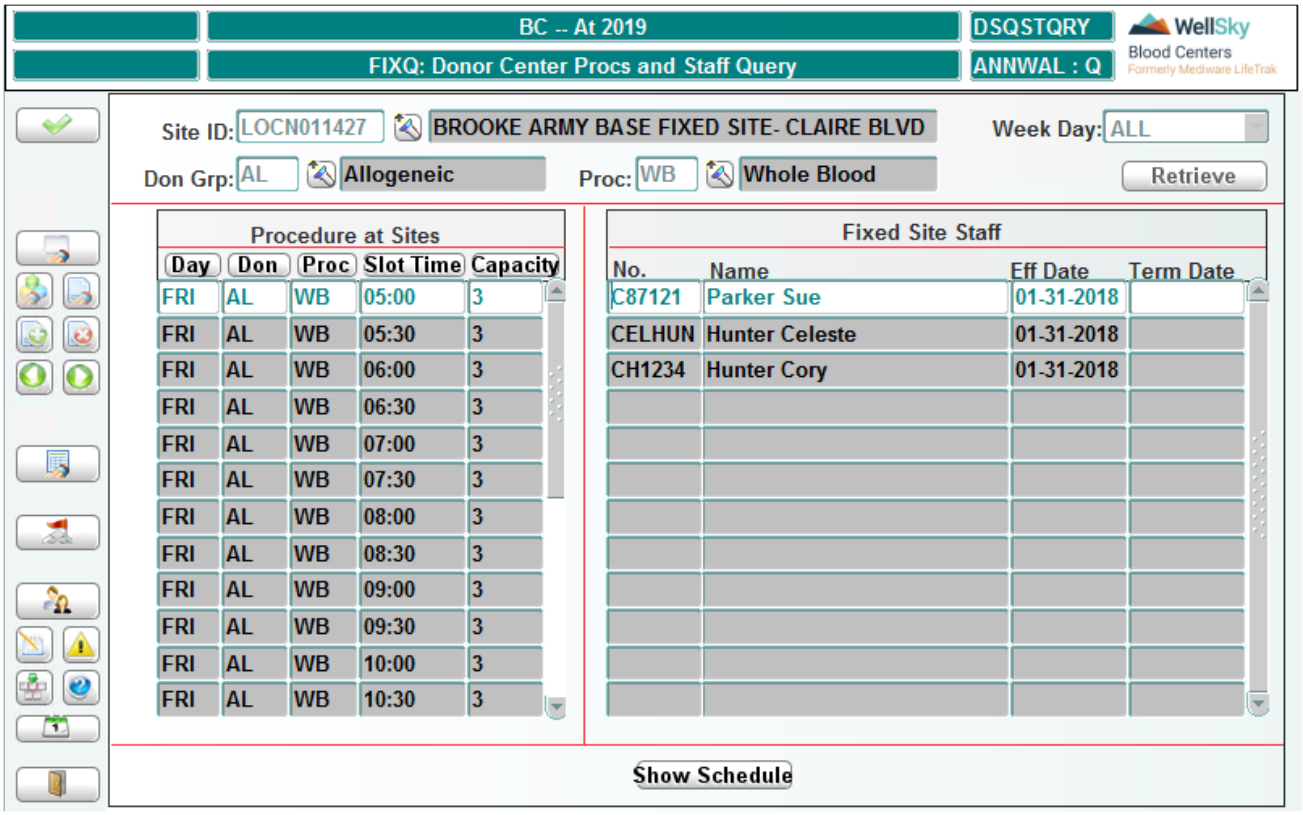


# Control Block Fields and Definitions

## Site ID

Entry is required. Enter the collection site ID or select from the LOV.

## Week Day

Enter the day of the week to query or select from the drop-down list. Default is All.

## Don Grp

Entry is optional. Enter the donation type group or select from the LOV.

## Proc

Entry is optional. Enter the donation procedure type to query or select from the LOV.

# In the Procedure at Sites Block

The following information displays:

- Day of the week
- Donation type
- Procedure type


WellSky Corporation
Proprietary and confidential

- Times the procedure is done
- Number of procedures that can be done during the time slot

## Controlling and Moving Within the Data Display

Click any column heading to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

## In the Fixed Site Staff Block

The following information displays:

- ID number of staff
- Name of staff

**NOTE –** If "Unknown Name" displays in the Name column, it means the staff ID is not defined.

- Date staff was assigned to the fixed site
- Date staff was removed from assignment at fixed site

## The Show Schedule Button

Click **Show Schedule** to open the Donor Schedule on Donor Centers window. Use this program to view a list of scheduled donors at fixed sites by date, name, status and procedure. See Chapter 14 Called Windows and Routines for instructions on using this window.

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 6.2.4 Draw Statistics and Drives Query (DRAW2Q)

## Intended Use

Use this screen to view projected and actual draw statistics for a specified drive type and for a specified date range.

## Limitations

None

## Prerequisites

None

# Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword DRAW2Q.

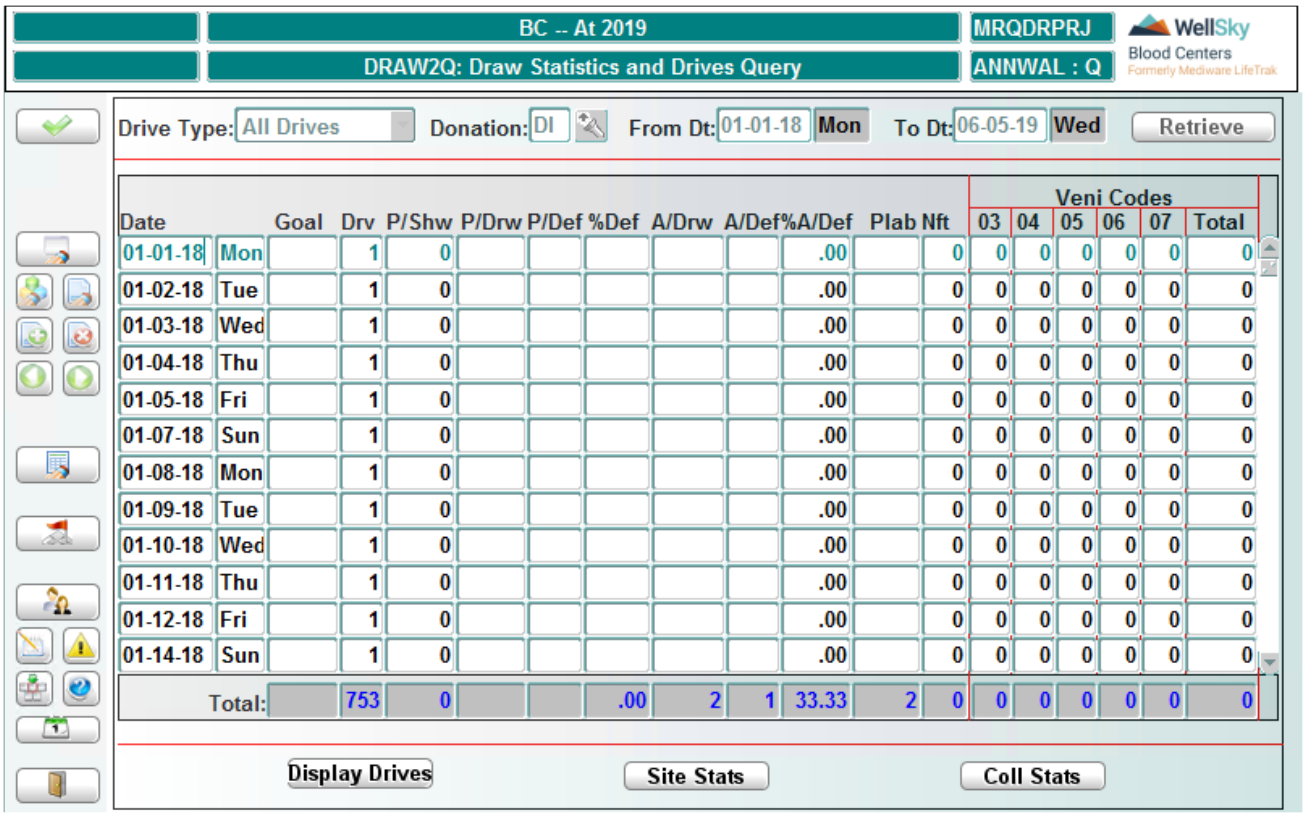


# Control Block Fields and Definitions

## Drive Type

Entry is required. Use the drop-down list in this field to select a drive type. Default is All Drives.

## Donation

Entry is optional. Select donation type code from the LOV.

## From Date

Entry is required. Enter the earliest drive date to consider, using the MMDDYY format. The default is the system date, but you can change it to a past or future date.

## To Date

Entry is required. Enter the latest drive date to consider, using the MMDDYY format. Default is one week past the From Date field entry.

# The Display Drives Button

Click **Display Drives** to open a screen displaying a list of the drives for the selected date:


WellSky Corporation
Proprietary and confidential

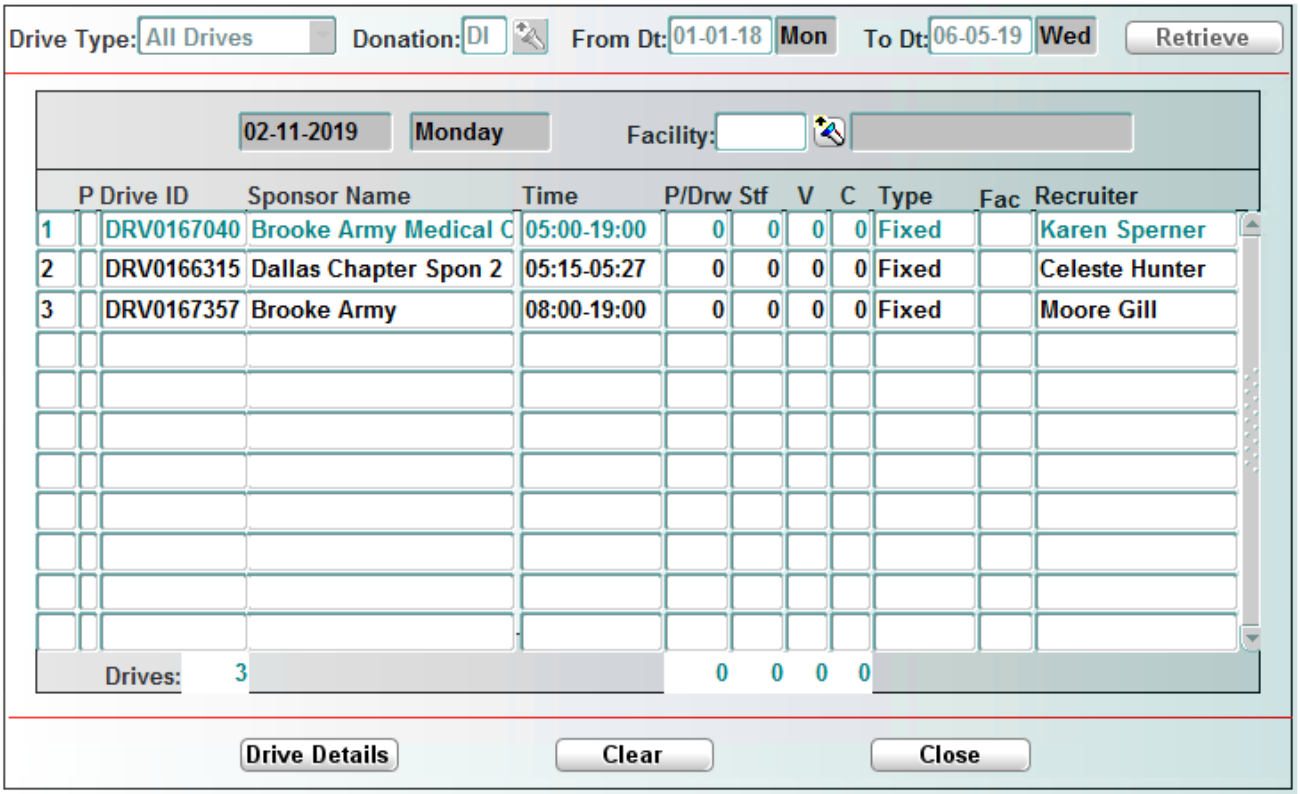


The following information displays:

- Drive ID
- Sponsor name
- Drive times
- Projected draw
- Number of assigned staff
- Numbers of vans
- Number of coaches
- Drive type
- Facility staff assigned to
- Recruiter name

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query screen. See Chapter 3 Recruitment for instructions on using this screen.

Click **EXIT FORM** to return to the drive list.

Click the **Close** button to return to the Draw Statistics and Drives Query screen.

### The Site Stats Button

Click **Site Stats** to open the Site Collection Statistics window. See Chapter 15 Called Windows and Routines for instructions on using this window.

### The Coll Stats Button

Click **Coll Stats** to open the Collection Statistics window. See Chapter 15 Called Windows and Routines for instructions on using this window.

### At Commit

No data can be committed to the database from this screen.

### What to Do Next

There is no next step.

## 6.2.5 Fixed Site Drives Data Query (FDRIVEQ)

### Intended Use

Use this screen to query drive ID and collection statistics for one or more donor centers.

### Limitations

None

### Prerequisites

Donor center details must have already been entered.

### Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword `FDRIVEQ`.


WellSky Corporation
Proprietary and confidential

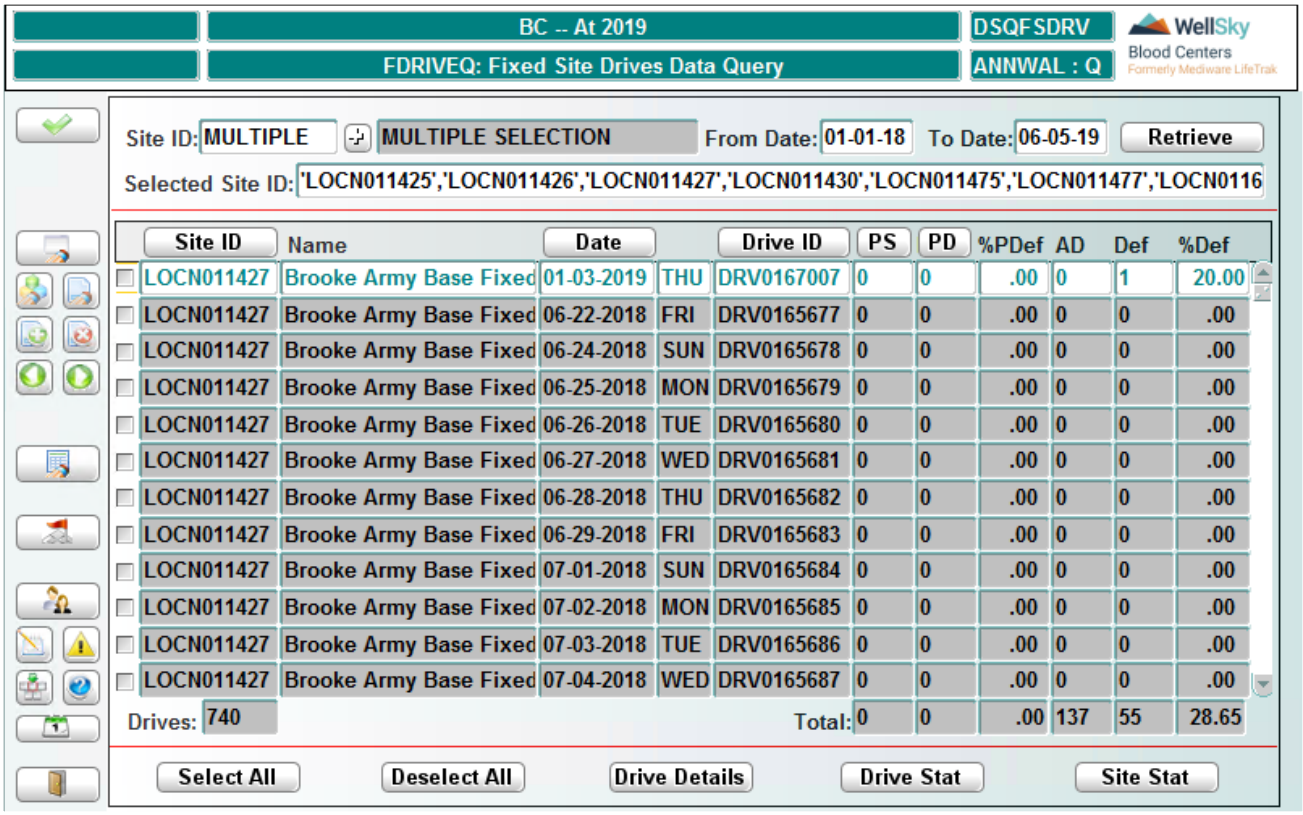


# Control Block Fields and Definitions

## Site ID

Entry is optional. Enter a site ID or click the checkmark button to open the Site ID selection box:

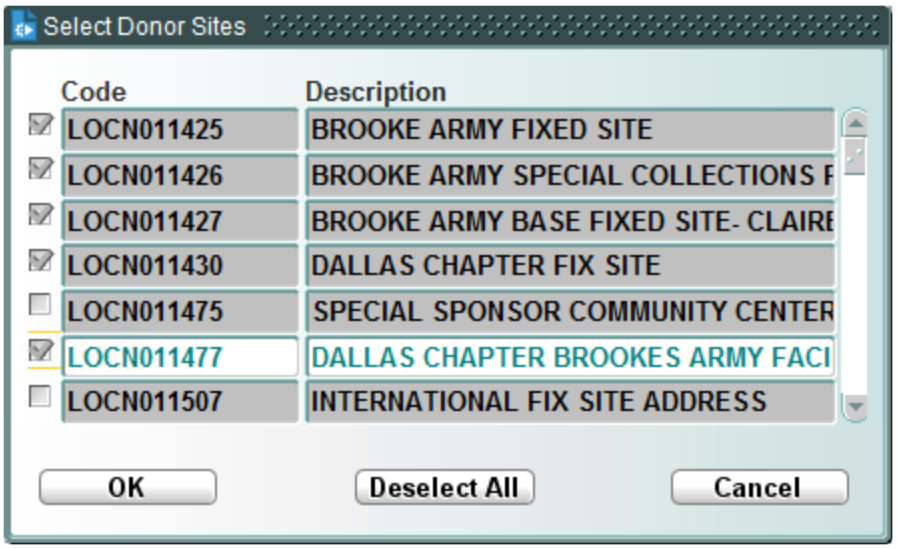


Choose one or multiple sites from this block. If multiple sites are selected, the site IDs display in the Selected Site ID field.

### From Date

Entry is required. Enter beginning date of date range to query, using the MMDDYY format.

### To Date

Entry is required. Enter ending date of date range to query, using the MMDDYY format.

## The Select All Button

Click **Select All** to select all retrieved records for viewing further details.

## The Deselect All Button

Click **Deselect All** to deselect all selected records.

> **NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Drive Details Button

Click **Drive Details** to open the Drive Details Query (DRIVEQ) screen. The screen populates with data from the selected drive. Click **EXIT FORM** to return to the Fixed Site Drives Data Query screen. See Chapter 2 Recruitment for instructions on using this screen.

## The Drive Stat Button

Click **Drive Stat** to open the Drive Statistics window. Use this program to view statistics for the selected drive. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Site Stat Button

Click **Site Stat** to open the Site Collection Statistics window. Use this program to view collection statistics for the selected site. See Chapter 14 Called Windows and Routines for instructions on using this window.

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 6.2.6 Donor Center Details Query (DCQ)

## Intended Use

Use this screen to view details about a selected donor center.


WellSky Corporation
Proprietary and confidential

## Limitations

None

## Prerequisites

Donor center details must have already been entered.

## Accessing the Screen

Access this screen from the Donor Center General Functions menu or by entering the keyword DCQ.

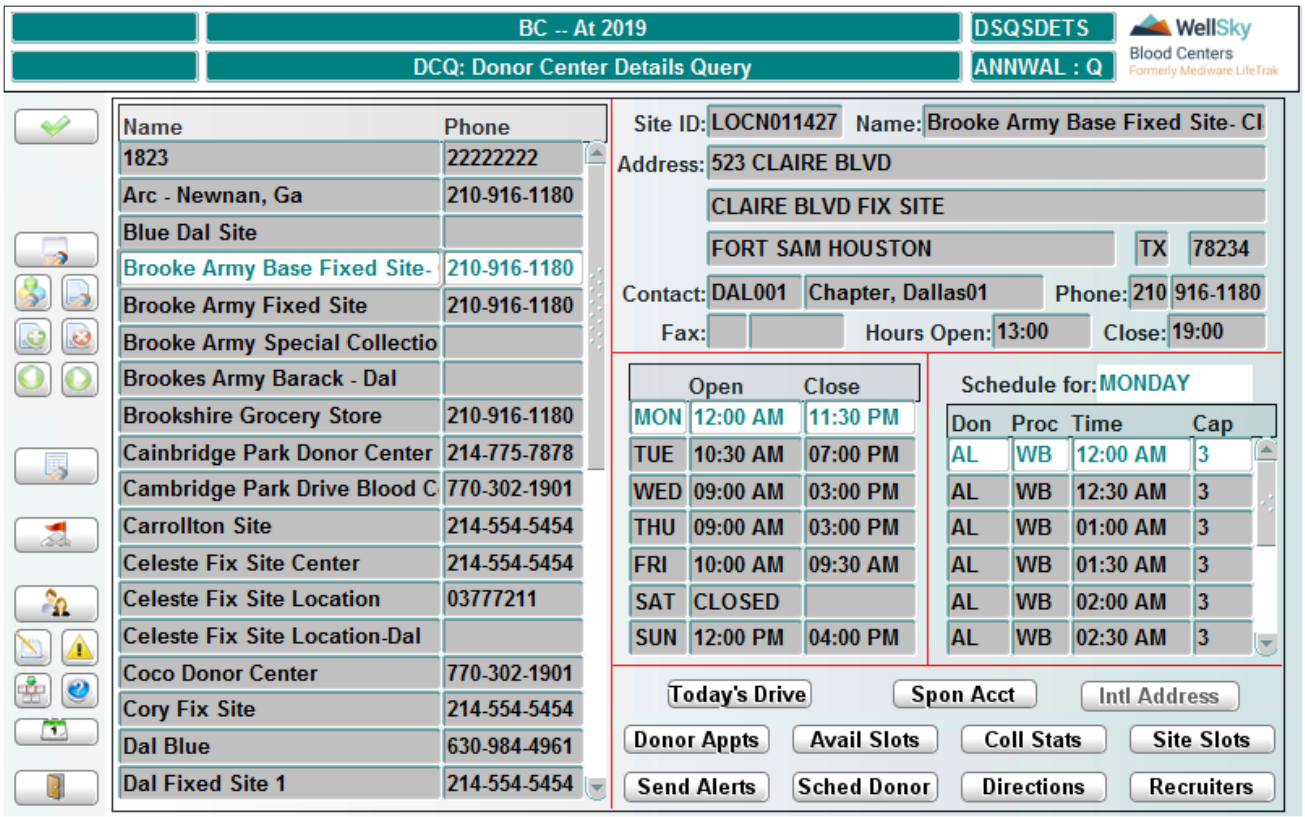


## In the Donor Center List Block

The following information displays for each donor center:

- Name
- Phone number

## In the Address Block

The following information displays for the highlighted donor center:

- Donor site ID
- Site name

- Address
- Contact person
- Contact phone number
- Fax number
- Hours of operation

## In the Schedule Block

The following information displays:

- Day of the week
- Opening time
- Closing time
- Donation types
- Donation procedures
- Time of procedure scheduled
- Procedure capacity for that time

## The Today's Drive Button

Click **Today's Drive** to open the Drive IDs for Entered Date window.

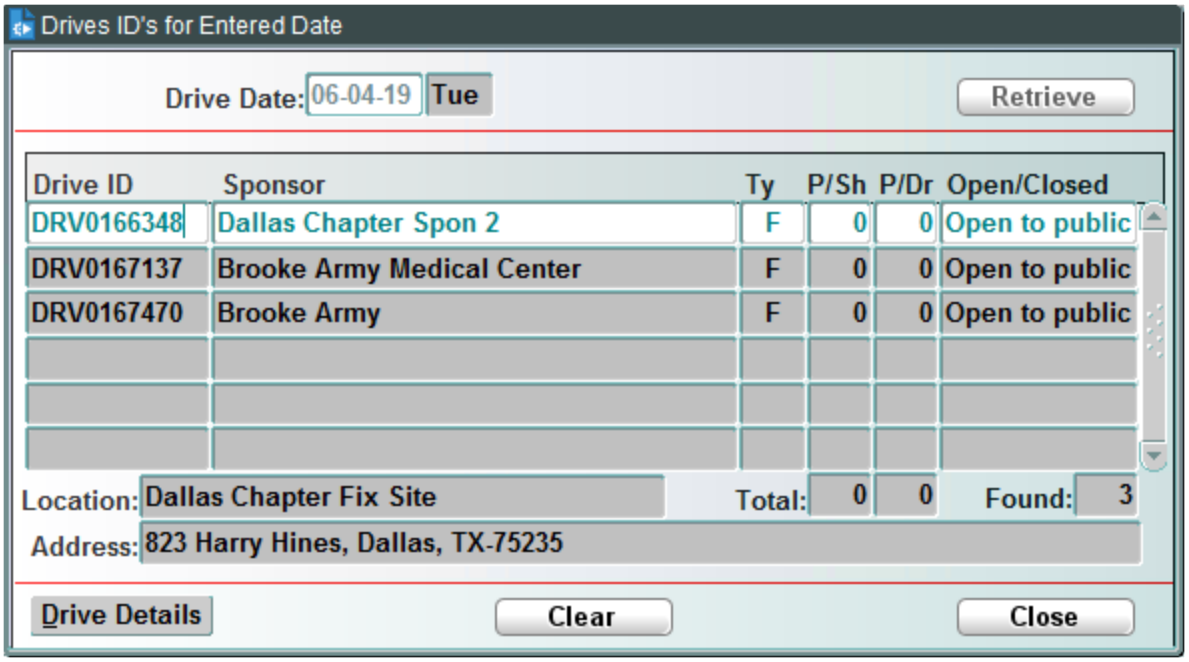


Use this window to view drives scheduled for the system date or a date entered by the user.


WellSky Corporation
Proprietary and confidential

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Spon Acct Button

Click **Spon Acct** to open the Look-Up Sponsor Account Number (ACCTQ) screen. See previous section of this chapter for information on using this screen.

## The Intl Address Button

Click **Intl Address** to open the International Address window, as follows:

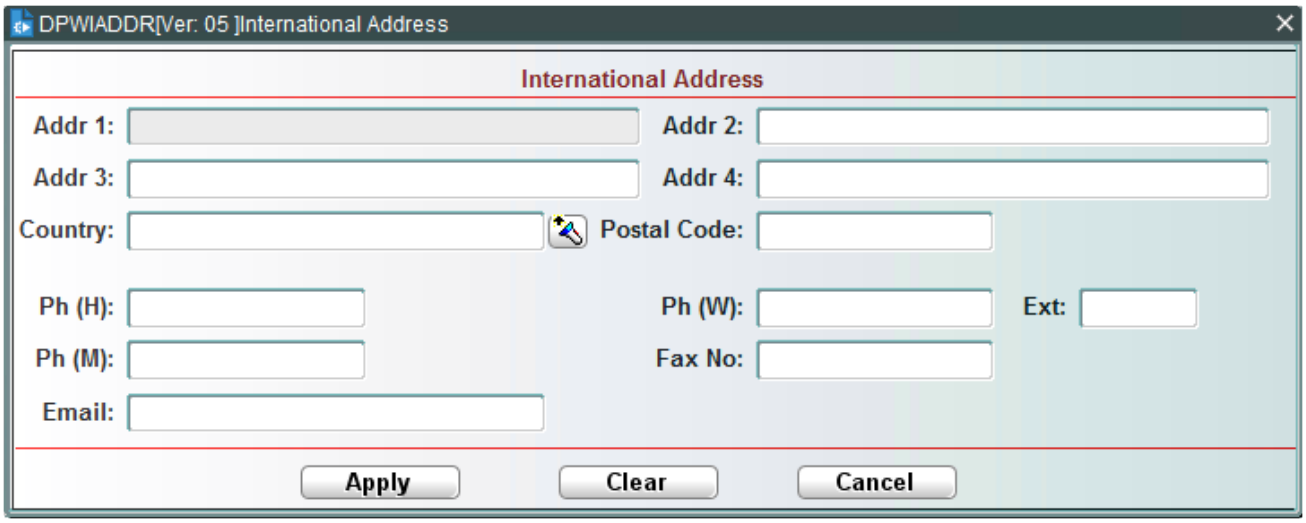


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 15 Called Windows and Routines for instructions on using this window.

## The Donor Appts Button

Click **Donor Appts** to open the Donor Schedule on Donor Centers window. See Chapter 15 Called Windows and Routines for instructions on using this program.

## The Avail Slots Button

Click **Avail Slots** to open the Donation Sites Available for a Given Time window. See Chapter 15 Called Windows and Routines for instructions on using this program.

## The Coll Stats Button

Click **Coll Stats** to open the Collection Statistics window. See Chapter 15 Called Windows and Routines for instructions on using this program.

## The Site Slots Button

Click **Site Slots** to open the Donation Slots window. See Chapter 15 Called Windows and Routines for instructions on using this program.

## The Send Alerts Button

Click **Send Alerts** to open the Create Alert Messages window. Use this screen to send an alert message to other users within the Donor system. See the Administrator's Guide for instructions on using this program.

## The Sched Donor Button

Click **Sched Donor** to open the Schedule Donors (APPT) screen. See previous section of this chapter for information on using this screen.

## The Directions Button

Click **Directions** to open the Site Directions window:

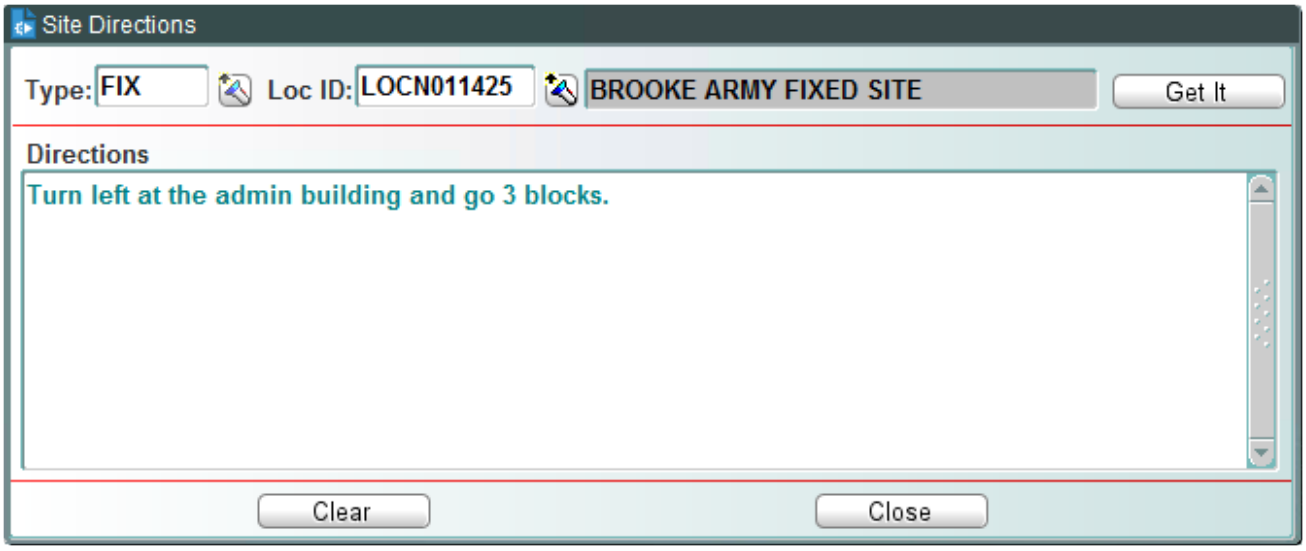


Use this window to get directions to a donor center. By clearing the window, the user can display any available directions to a particular location by the type of drive.

## The Recruiters Button

Click **Recruiters** to open the Recruiters window. Use this window to view a list of recruiters and corresponding location, phone number, and territory.


WellSky Corporation
Proprietary and confidential

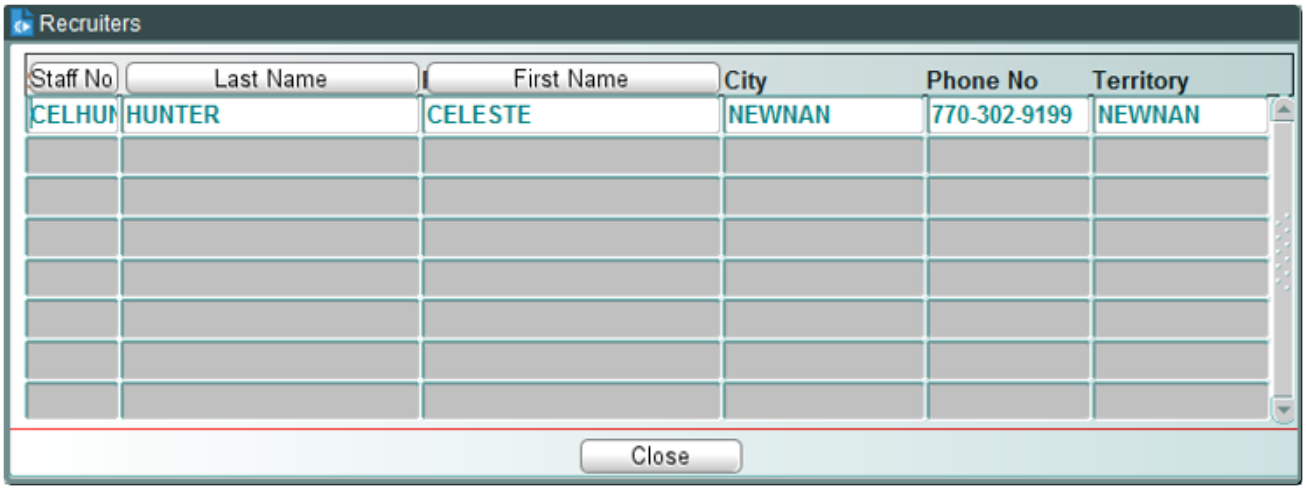


**NOTE –** In order for recruiter information to display, the following are required:

- An employee record should be available in the employees table for the logged in chapter with the active status.
- The employee class (EMP_CLASS) should be RECRT.
- The employee's staff number should be assigned to the corresponding user in the ADDUSER table (ie. the staff number should be linked to the user).

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 6.3 Donor Center Maintenance

These functions are accessed from the following menu:

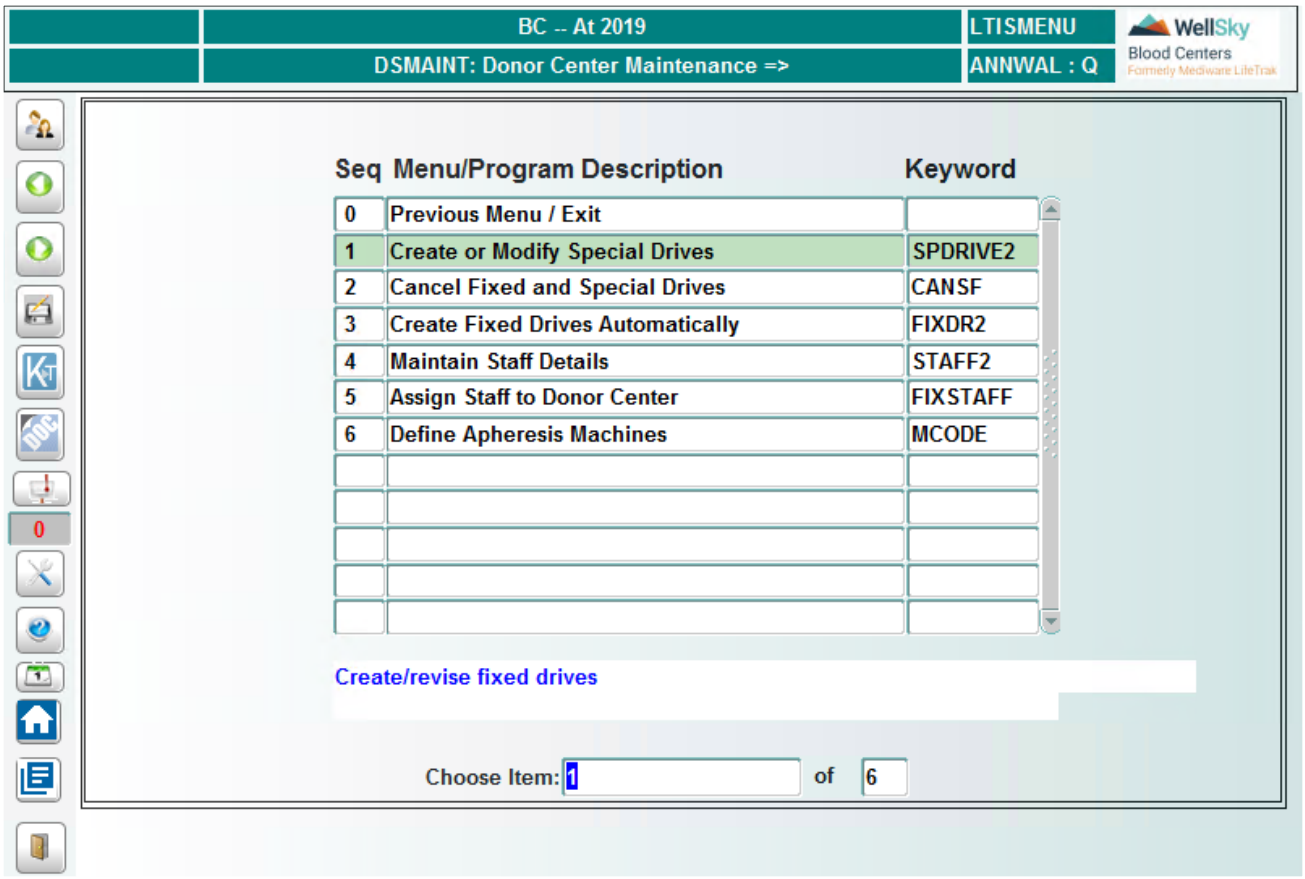


## 6.3.1 Create or Modify Special Drives (SPDRIVE2)

For instructions on using this screen, refer to the Create or Modify Special Drive section in Chapter 3 Recruitment.

## 6.3.2 Cancel Fixed and Special Drives (CANSF)

For instructions on using this screen, refer to the Cancel Special Drive section in Chapter 3 Recruitment.

## 6.3.3 Create Fixed Drives Automatically (FIXDR2)

### Intended Use

Use this screen to automatically create fixed drives for a specified date range and donor center.


WellSky Corporation
Proprietary and confidential

## Limitations

- Only one drive can be created for a fixed site per day. If a fixed site already has drives scheduled for the selected dates, they cannot be modified from this screen. To check if a site already has drives scheduled, use the Fixed Sites Drives Data Query (FDRIVEQ) screen.
- If timeslots have been defined in VDIFXST for multiple donation/procedure codes and were defined on separate days (different insert dates), when the automatic creation of fixed drives occurs it pulls the start time from the first entry that was inserted into the time slot table.
- Create Fix Drive Automatically will not generate drive IDs for ad hoc slots that were opened using OPENSITE. The following needs to be done:
    - Enter Time Slots and Capacity (TIMESLOT)
    - Open Appointment Calendar (OPENSITE)
    - Create Fixed Drives Automatically (FIXDR2)

## Prerequisites

Time slots for a site must be created and opened before a drive can be created.

## Accessing the Screen

Access this screen from the Donor Center Maintenance menu or by entering the keyword `FIXDR2`.

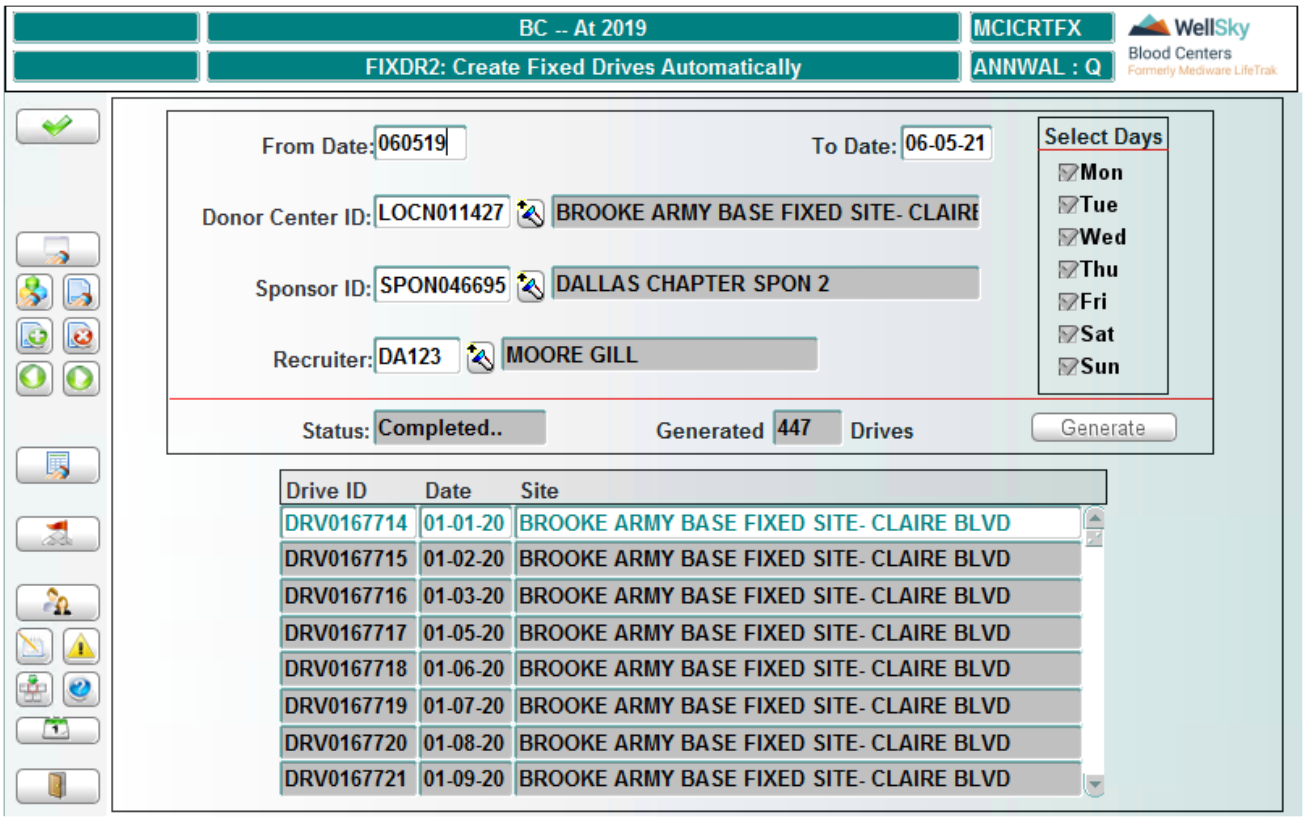

# Control Block Fields and Definitions

## From Date

Entry is required. Enter the beginning of the date range in MMDDYY format. Date cannot be prior to the system date.

## To Date

Entry is required. Enter the end of the date range in MMDDYY format. Date cannot be prior to the system date or the starting date.

## Donor Center ID

Entry is required. Enter the site ID or select from the LOV. Default is All. User can enter a partial name or single letter to display a limited LOV. If the user enters a partial name, and only one Center ID matches, that ID automatically populates the field.

## Sponsor ID

Entry is required. Enter the sponsor ID or enter at least three characters to select from the LOV.

## Recruiter

Entry is optional. Enter recruiter ID or select from the LOV.

## Select Days

Entry is required. Click days on which to have drive.

# Generating the Drive

After entering criteria, click **Generate** to automatically create fixed drives for the entered date range and sponsor.

The system automatically schedules a fixed drive at each site location for each day (checked in Select Days) and date within the specified date range.

**NOTE –** The system does not generate drives for days that the site is closed.

Above the drive block, the screen indicates the status of drive generation and the number of fixed drives generated.

For each generated drive, the following drive information displays in the Drive Block:

- Drive ID
- Date
- Site

# At Commit

Fixed drives are automatically committed to the database when they are generated.

# What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 6.3.4 Assign Staff to Donor Center (FIXSTAFF)

## Intended Use

Use this screen to assign collections staff to donor centers.

## Limitations

None

## Prerequisites

Staff must have been created and assigned as FSTAF type.

## Accessing the Screen

Access this screen from the Donor Center Maintenance menu or by entering the keyword `FIXSTAFF`.

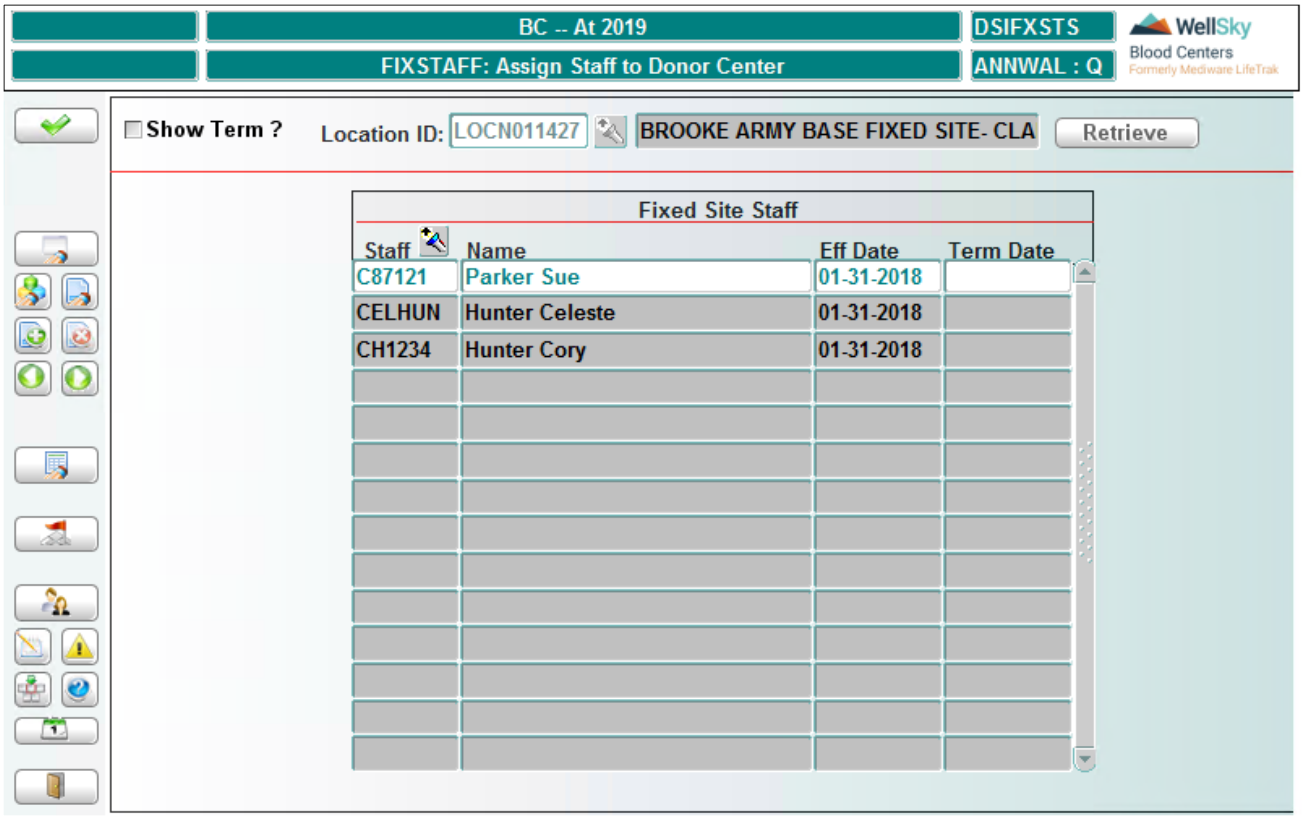


## Control Block Fields and Definitions

### Show Term

Click to select from terminated employees also.

### Location ID

Entry is required. Enter the donor center location ID or select from the LOV. Partial entry will display the LOV. You can enter the name of the location and the system automatically populates the location ID.

## Retrieving Data

Click **Retrieve** to display a list of collections staff assigned to the donor center.

## To Assign Staff

Click in an unpopulated field in the Staff column in the Fixed Site Staff block:

### Staff

Entry is required. Enter the staff ID number or select from the LOV.

### Name

Display only. Automatically populates when staff ID number is entered.

### Eff Date

Entry is required. Enter the date that the staff member will be assigned to the fixed site in MMDDYYYY format. Effective date cannot be prior to system date.

### Term Date

Entry is optional. Enter the date that the staff member will be removed from assignment at the fixed site in MMDDYYYY format.

## At Commit

All staff assigned to donor center is committed to the database.

## What to Do Next

There is no next step.

# 6.3.5 Define Apheresis Machines (MCODE)

## Intended Use

Use this screen to define apheresis machines to donation sites.

## Limitations

None

## Prerequisites

Fixed sites must have been defined.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Donor Center Maintenance menu or by entering the keyword MCODE.

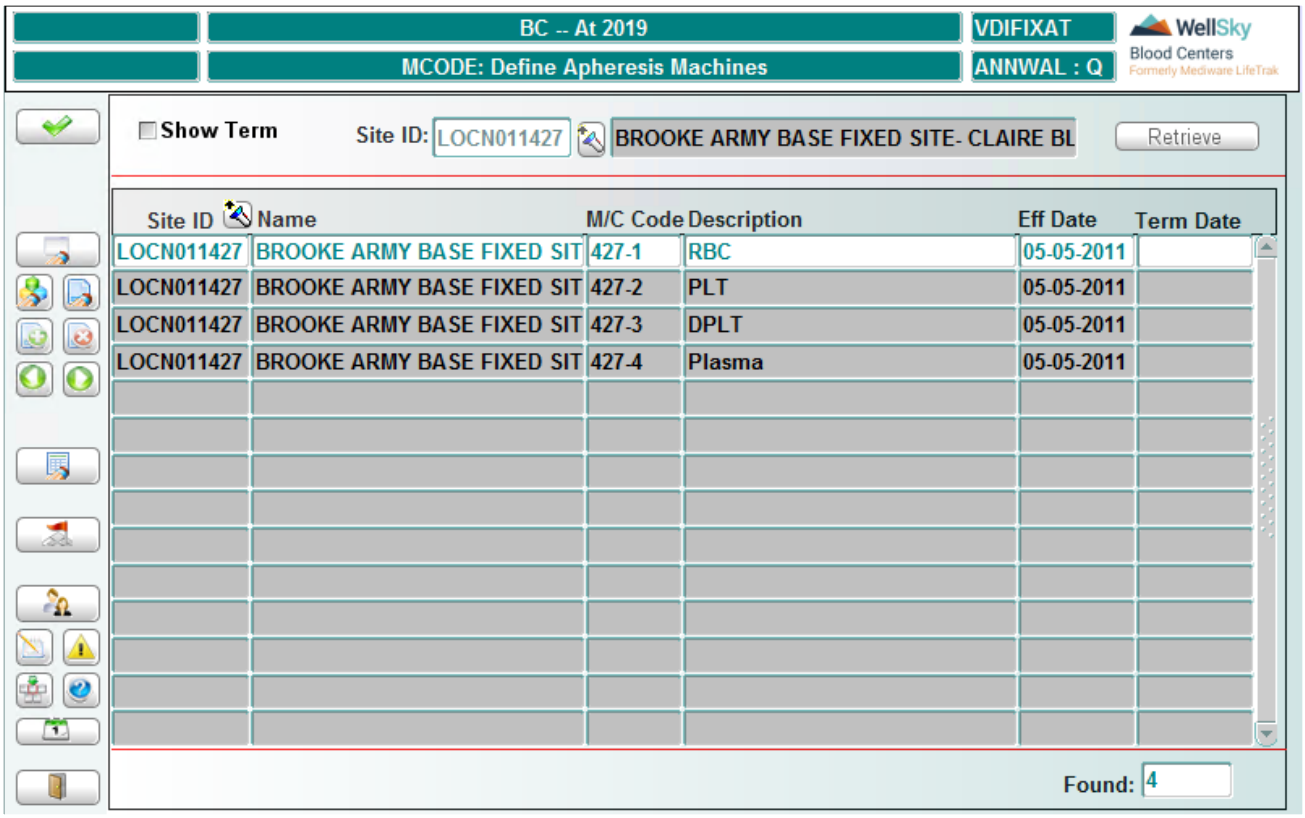


# Control Block Fields and Definitions

## Show Term

Click to include terminated machines in the search.

## Site ID

Entry is optional. Enter the site ID code or select from the LOV. Partial entry will display the LOV. If entering the full name of the site, the system automatically populates the site ID.

# Retrieving Data

Click **Retrieve** to display a list of apheresis machines at the specified site. If no site ID is entered, a list of apheresis machines at all sites is displayed.

The following information displays:

- Site ID
- Site name
- Code of apheresis machine

- Description of machine
- Date machine became effective
- Date machine terminated

## To Modify an Existing Apheresis Machine

Modify an existing apheresis machine by placing the cursor in the field to change, and entering the desired modification.

## To Define a New Apheresis Machine

With the cursor on the last of the retrieved apheresis machines, press the down arrow key on the keyboard to go to an empty line.

### Site ID

Entry is required. Enter the site ID or select from the LOV. Site name automatically displays. Partial entry will display the LOV. If entering the full name of the site, the system automatically populates the site ID.

### M/C Code

Entry is required. Enter the machine code.

### Description

Entry is required. Enter a description for the machine.

### Eff Date

Entry is required. Enter date machine became effective in MMDDYYYY format.

### Term Date

Entry is optional. Enter date machine will be terminated, using the MMDDYYYY format.

## At Commit

The modified or new apheresis machine is saved and committed to the database.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

7

# Chapter 7 - Registration


7.1 Introduction ..... 301
7.1.1 Registration General Functions ..... 301
7.1.2 Registration Queries ..... 302
7.1.3 Terminology Applicable to Registration ..... 302
7.1.4 The Donor Selection Process – Find Donor ..... 303
7.2 Registration General Functions ..... 304
7.2.1 Register Donation (REGIS) ..... 304
7.2.2 Register Deferral (DEFREGIS) ..... 317
7.2.3 Audit Donation (DONAUDIT) ..... 326
7.2.4 Audit Deferral (DEFAUDIT) ..... 334
7.2.5 Perform Visual Audit (VISNU) ..... 343
7.2.6 Paperless Nursing Audit (PAUDIT) ..... 350
7.3 Registration Maintenance Functions ..... 354
7.3.1 Update Donation (REGMAINT) ..... 354
7.3.2 Update Deferral (DEFMAINT) ..... 361
7.3.3 Update Donation Audit (UDONAUD) ..... 369
7.3.4 Update Deferral Audit (UDEFAUD) ..... 378
7.3.5 Release Audit Holds (NHOLD) ..... 387
7.3.6 Release Audit Interdictions (RLINT) ..... 394
7.3.7 Rollback Donation Audit (AUROLL) ..... 398
7.3.8 Detach Donor from Donation (DETACH) ..... 401
7.3.9 Detach Donor from Deferral (DEFDET) ..... 405
7.3.10 Attach Donor (ATTACH) ..... 408
7.3.11 Change Drive ID or Collection Date (MODDRV) ..... 414
7.3.12 Maintain Donor Employer (EMP) ..... 417
7.4 Registration Queries ..... 420
7.4.1 Registered Donations Query (ENTRYQ) ..... 420
7.4.2 Registered Deferrals Query (DEFQ) ..... 423
7.4.3 Donations on Hold Query (DONHOLDQ) ..... 427
7.4.4 Deferrals on Hold Query (DEFHOLDQ) ..... 431
7.4.5 Donations Pending Audit Query (DONPENDQ) ..... 435

7.4.6 Deferrals Pending Audit Query (DEFPENDQ) 437
7.4.7 Unregistered Donations (UNQ) 440
7.4.8 Collection Date Mismatch Query (DCOLLQ) 441
7.5 OnSite Module Introduction 444
7.5.1 Indications for Use 444
7.5.2 Interdictions 444
7.5.3 Automatic Time-Out/Lock-Out 448
7.5.4 How To Use This Module 448
7.5.5 Data Screens 464
7.5.6 Reset User Password 471
7.6 OnSite Registration 474
7.6.1 Introduction 474
7.6.2 OnSite Registration General Functions 474
7.6.3 Online Registration Queries 476
7.6.4 The Donor Selection Process – OnSite Donor Search 476
7.6.5 Terminology Applicable to Registration 476
7.6.6 The Donor Selection Process – Find Donor 477
7.7 OnSite Registration Programs 479
7.7.1 Equipment & Supply QC 480
7.7.2 Lookup/Registration and Modify Data 494
7.7.3 Health History and Physical Findings 523
7.7.4 Link/Unlink Unit or Deferral 564
7.7.5 Bleed Time / Phlebotomy Data 572
7.7.6 Donor Survey 591
7.7.7 Pack/Ship Shippers to Lab 600
7.7.8 OnSite Status Query 607
7.7.9 Unit/Deferral Link Status Query 613
7.7.10 Donor Walkout 614
7.7.11 Bleed Time Entry - Back Office 617
7.7.12 Tube Check-In 631
7.7.13 Extract Mobile Server Data 633
7.7.14 Mobile PC Upload/Download Utility 634
7.7.15 Alternate Address 644
7.7.16 International Address 647
7.7.17 Lock/Unlock Mobile Users 649
7.7.18 Reset User Password 650
7.8 FastTrak Donor Response 656


WellSky Corporation
Proprietary and confidential

# 7.1 Introduction

The Registration Module is that portion of Donor designed to record:

- Drive identification
- Presentation of a donor to donate
- Donation and deferral data
- Unexpected answers to questions relating to health history
- Findings from a mini-physical examination given at the time of donation
- Changes to donor demographics and employers

Twenty-five screens provide the capability to enter, modify, and query data relating to the registration process. Screens are grouped by their functional purposes.

## 7.1.1 Registration General Functions

### Register Donation

1. Create a data entry batch:
    - Identify a drive date
    - Identify a valid drive ID
    - Enter limits for the data entry batch
2. Scan the unit ID of the donation to be registered:
    - Attach a donor to the donation
    - Attach an existing donor
    - Attach a new donor
3. Enter details for the donation:
    - Enter or update non-critical demographic data for the donor
    - Identify the donor's employer or school
    - Identify blood center employees who assisted with the donation
        - Identify the donation type and procedure code
        - Enter the bleed time and determine the collection date
        - Enter deferral information
        - Enter donor reactions

- Scan the confidential unit exclusion (CUE) sticker (if applies to user's facility)

The OnSite Registration Module is that portion of Donor designed to record:

- Drive identification
- Presentation of a donor to donate
- Donation and deferral data
- Answers to questions relating to health history
- Findings from a mini-physical examination given at the time of donation
- Changes to donor demographics and employers

Ten screens provide the capability to enter, modify, and query data relating to the OnSite registration process. Screens are grouped by their functional purposes.

## 7.1.2 Registration Queries

- Unit/Deferral Link Status Query
- Lookup and Print Donor Card Query
- OnSite Status Query

## 7.1.3 Terminology Applicable to Registration

### Batch ID

An identification number generated by the system when a registration range of unit IDs is defined, or when the first deferral is registered. The ID represents a set of registrations.

### Deferral

Presentation of a donor that does not result in collection of a unit of blood because some factor renders the donor ineligible to donate.

### Deferral ID

An identifying number for the deferral. The deferral is recorded on the Donation Record when a donor is deferred and no donation occurs.

### Donation

Presentation of a donor that results in collection of a unit of blood.

### Donation Type

The intended purpose of a donation (autologous, allogeneic, directed, etc.).


WellSky Corporation
Proprietary and confidential

### Donor Record

A written record of a donation or deferral that includes donor data, health history questions and answers, physical findings data, and the donor signature. The Donor Record was previously referred to as the Donor Source Card.

### Procedure Code

A code that identifies the specific phlebotomy procedure that applies to a donation or deferral (whole blood, apheresis, etc.).

### Registration

The process of entering data for a donation or a deferral into the Donor system.

### Transaction ID

A number generated by the system when any donation or deferral registration is committed.

## 7.1.4 The Donor Selection Process – Find Donor

The Find Donor window is used to select donors from the database based upon entry of key donor data:

- Last Name
- Date of Birth
- Sex
- First Name (optional entry)

The system uses this key data to identify similar records and then grades those records using a Donor Grading Matrix. A match as defined in the configuration of the Find Donor block is required to select an existing donor. A match of other grades or of multiple records prohibits selection of a new donor during registration.

# 7.2 Registration General Functions

These functions are accessed from the following menu:

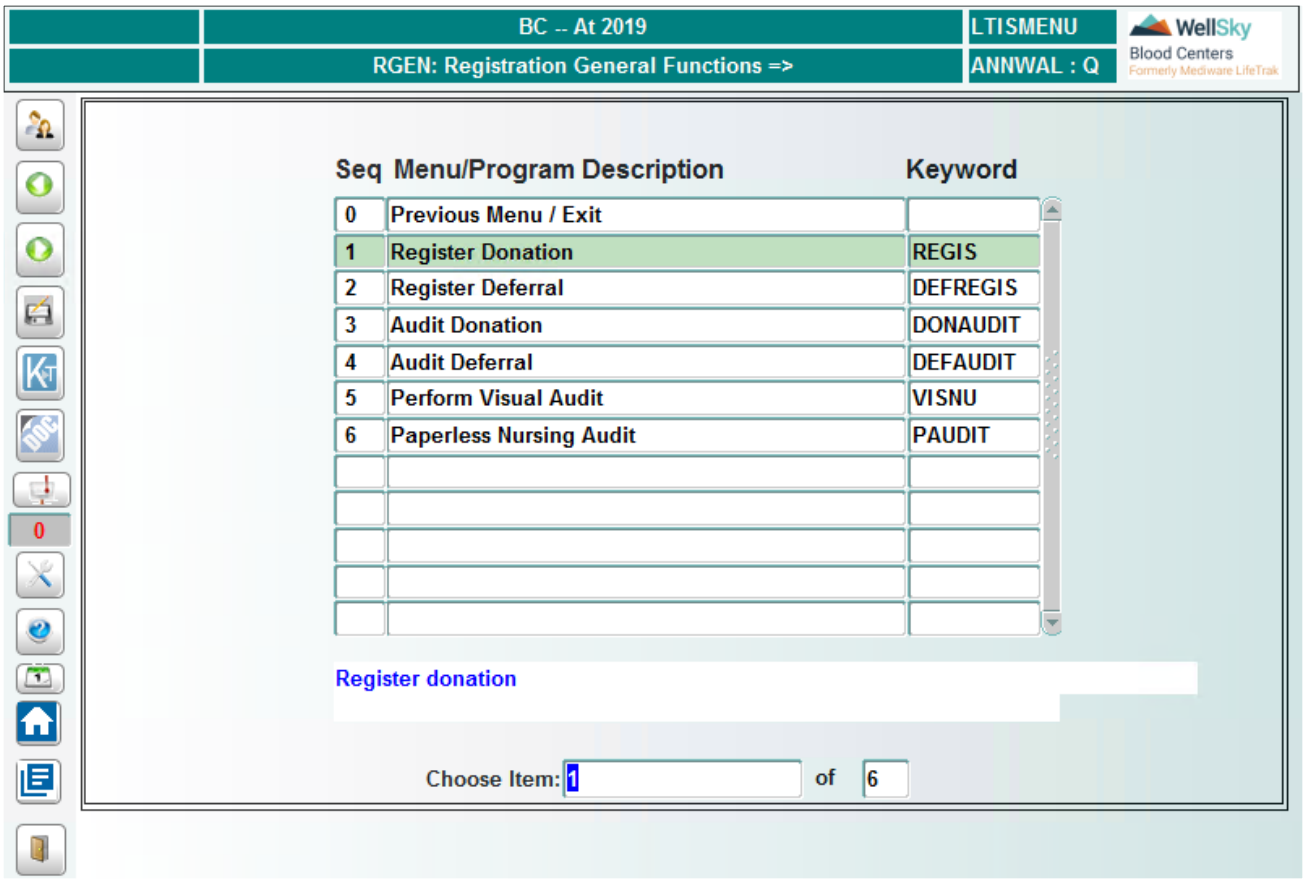


## 7.2.1 Register Donation (REGIS)

### Intended Use

Use this screen to register donors and donations for a specific drive. At any point during the registration process, the user may place a hold on the donation.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

### Limitations

- Only donations associated with valid drives can be registered.
- Mouse navigation is not available for this screen.


WellSky Corporation
Proprietary and confidential

- A configurable limit exists in the Donor system that prohibits registration of donations beyond a specified time limit.
- A configurable limit exists in the Donor system that prohibits registration of duplicate unit or deferral IDs until a specified time limit has expired.

## Prerequisites

- A valid drive must exist in the database for which donations can be registered.
- In the System Parameters table, your facility must define the following:
  - BATCH_REG – to determine if batch mode will be used in registering donors.
  - CUEYN – If your facility sets CUEYN to `Y`, then the CUE field is required. If CUEYN is set to `N`, then the CUE field does not appear.
- Institution – your facility must set the unit scheme format.

## Accessing the Screen

Access this screen from the Registration General Functions menu or by entering the keyword `REGIS`.

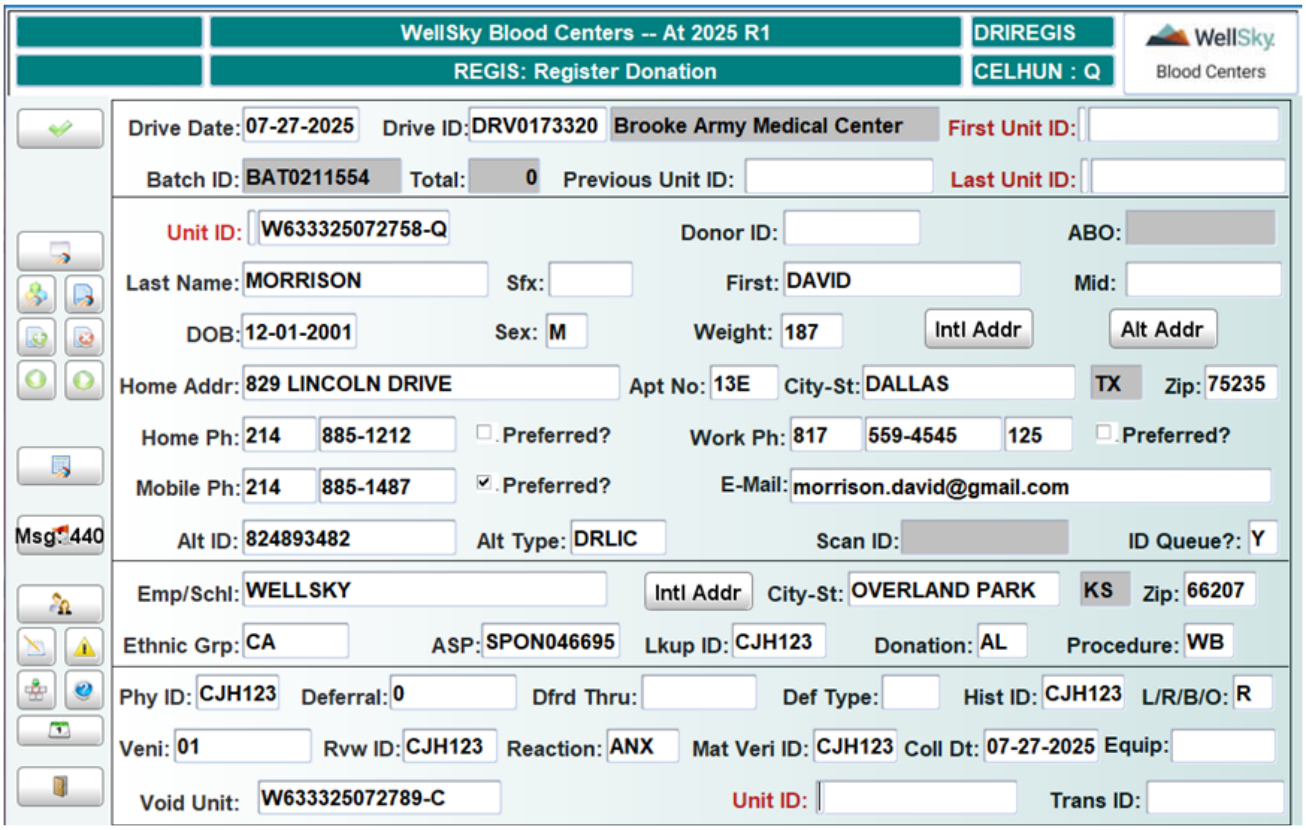


## Control Block Fields and Definitions

All entry fields in the control block require double entry for verification. Selections from lists of values require a manual re-entry. Data scanned into the system is exempt from the requirement for double entry.

## Drive Date

Entry is required.

The current date is the default. To accept the current date:

1. Press **ENTER**.
2. Retype the date using MMDDYYYY format.
3. Press **ENTER** again.

To enter a date other than the current date:

1. Type the new date using MMDDYYYY format.
2. Press **ENTER**.
3. Retype the date.
4. Press **ENTER**.

If the two entries match, an LOV displays containing all valid drives for the date entered.

**NOTE –** The system rejects the entry and displays an error message when dates are entered that do not match. Press **ENTER** to acknowledge the message. The date field will clear for another double date entry.

## Drive ID

Entry is required. Select a drive ID from the LOV. Then enter the drive ID manually.

**NOTE –** An error message displays if your drive ID entry does not match the LOV selection. Press **Enter** to acknowledge the error message. The previous entry will continue to display in the field. Backspace to the point of error and retype the drive ID.

The name of the drive automatically displays and the cursor advances to the First Unit ID field (only if the facility is using batch registration. If batch registration is not being used, the cursor moves to Unit ID in the Donor Block).

**NOTE –** Registrations must occur in sequence to satisfy entry requirements for the batch. Therefore, the lowest unit ID number to be registered must be entered as the First Unit ID. Likewise, the highest unit ID number to be registered must be entered as the Last Unit ID.

## First/Last Unit ID

Entry is required if using batch registration. Scan the bar code for the lowest unit ID to be registered. If the bar code cannot be scanned, you must make double blind entry of the unit ID. (See Double Blind Entry in Chapter 1). Repeat this procedure for the Last Unit ID field, using the highest unit ID to be registered.

The system generates and displays a new batch ID in the Batch ID field, and displays a zero in the Total field. The cursor advances to the Unit ID field in the second block.


WellSky Corporation
Proprietary and confidential

**NOTE –** As you continue to register donations, the Total field displays the total number of donations registered thus far in the batch. Also, the last donation registered displays in the Previous Unit ID field.

The system assumes that it can account for each unit within the defined batch range. If a unit ID is skipped at any point during the registration process, the system alerts you that a donation has been skipped, but will allow you to continue.

The system alerts you if you attempt to exit the screen before all donations in the batch range are registered. Whenever you exit the screen, the registration batch automatically closes.

**NOTE –** The system will not permit you to register a donation outside the batch range you have defined.

After defining a registration batch range, you may begin registering donations in sequence within that batch range.

# Donor Block Fields and Definitions

## Unit ID

Entry is required. Scan the unit ID bar code or manually enter the unit ID of the donation to be registered. The Find Donor window opens.

**NOTE –** If a field clears in the Find Donor window, and the cursor remains in that field after you have made an entry and pressed ENTER, a confirming entry is required. For more information about the Find Donor window, see Chapter 14 Called Windows and Routines.

After finding the donor, click **Select** to retrieve the highlighted donor record.

**NOTE –** Only a donor match as defined in the configuration of the Find Donor block can be selected. If no match is retrieved, follow facility SOPs for resolution. In such a case, you may click **Hold** to place a hold on the donation and continue the registration without attaching a donor. Interdiction NODON is placed.

The Donor Block automatically displays information about the selected donor, including donor ID and blood type, if available. If a donor has been started in the Onsite module but for some reason is completed in the back office registration, the following pop-up will display after donor is entered in the Find Donor window:

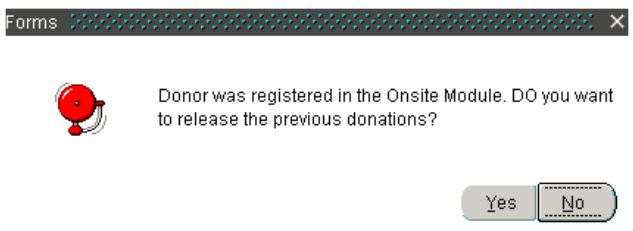

- Click Yes to remove the donation from Onsite and allow the donation to be completed in DRIREGIS (REGIS).
- Click No to return to the Unit ID field.

The cursor moves to the First Name field. Press ENTER to proceed through each field, regardless of whether you enter or modify data. Fields that are white permit entry or update. Fields that are gray do not permit entry or modification of data.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified: enter an F in the Sex field to automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; enter an M in the Sex field to automatically place an interdiction that is defined for the INTRMALE Inter reason.

## Sfx

Press F3 (Previous Field) to move the cursor back to the Sfx (Suffix) field. You may enter a suffix, such as Sr., Jr., or III, to further identify the donor.

## Weight

This is a required field. Enter the donor's weight (in pounds).

## City-St and Zip

The system validates your city and ZIP Code entries. If they disagree, the system does not accept the entries. An LOV is available in both fields. Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contain only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the home phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Work Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated to a phone number.

## Preferred?

Entry is optional. If the work phone is the preferred contact number, then select the check box.


WellSky Corporation
Proprietary and confidential

**NOTE –** Only one phone number can have the preferred flag selected.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the mobile phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. Up to 128 characters are accepted. When you press ENTER to exit the E-mail field, the cursor advances to the Employer Block.

## Int Addr (button)

Click Intl Addr to open the International Address window, as follows:

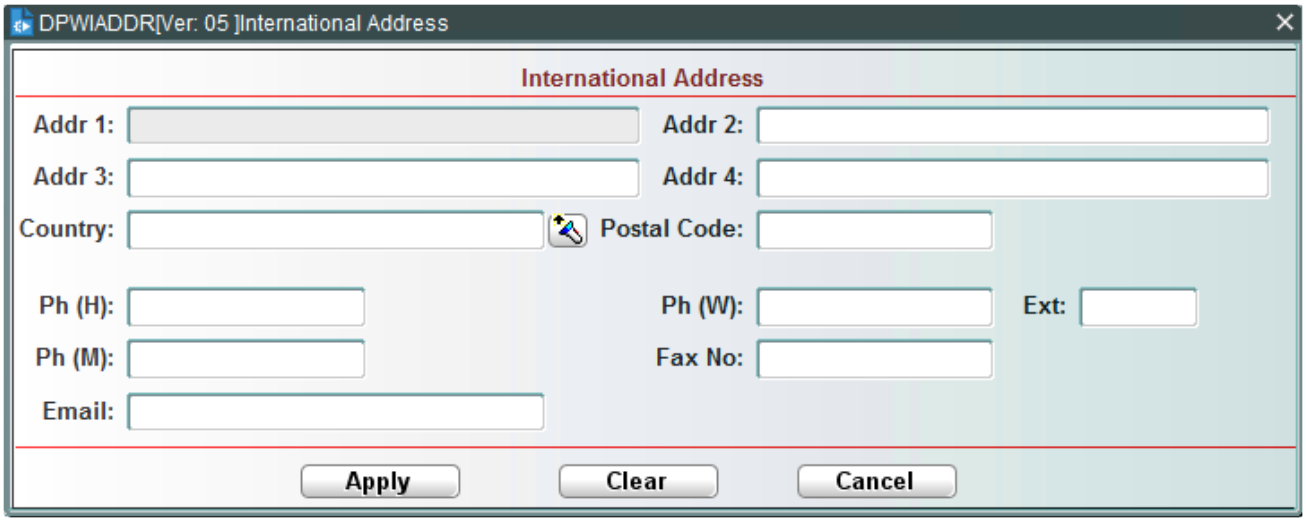


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Alt Addr (button)

Click Alt Addr to open the Alternate Demographics window, as follows:

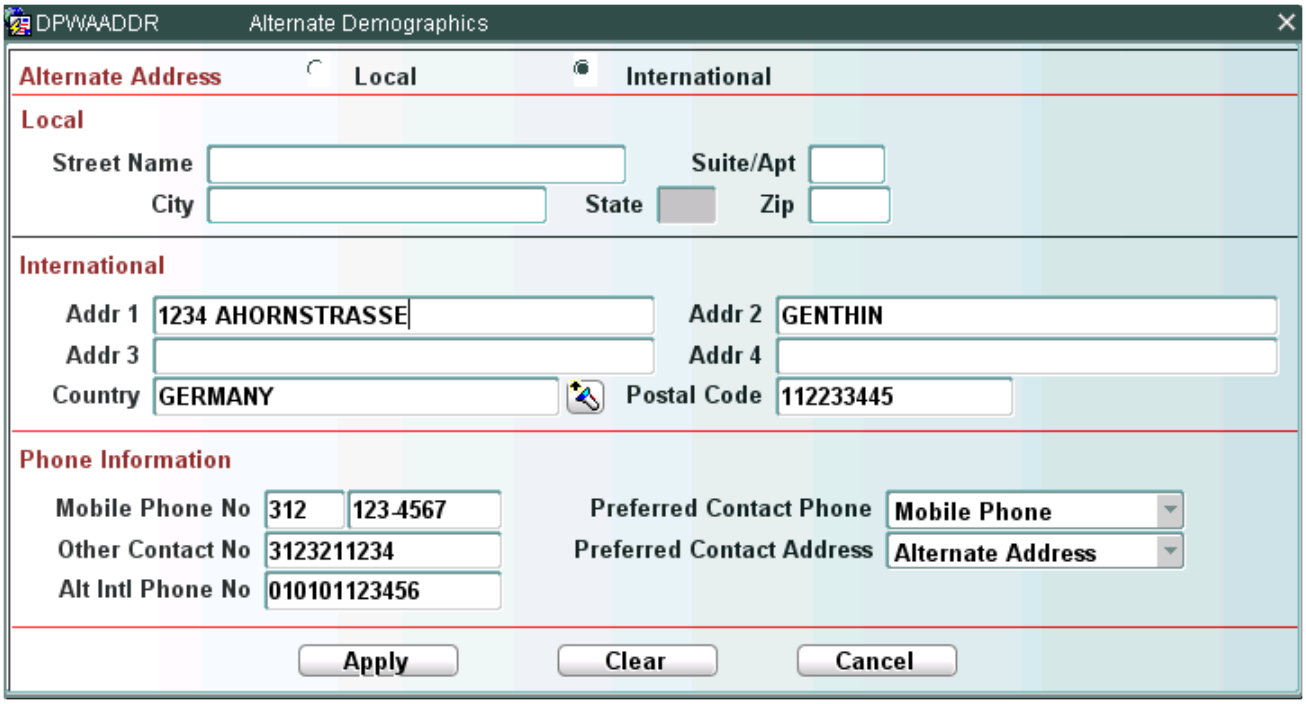


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Alt ID

Entry is optional. Entry is up to 20 characters alpha/numeric value. This field becomes required if the Configure Find Donor Block for Programs (DONBLOCK) was configured to require alternate ID and type.

## Alt Type

Entry is optional. Enter the alternate type or select from the LOV. This field becomes required if the Configure Find Donor Block for Programs (DONBLOCK) was configured to require alternate ID and type.

## Scan ID

This field is no longer used.

## ID Queue?

Enter `Y` to allow the Donor ID card to be printed at a later date. A `Y` in this field allows the donor ID to be placed automatically in the Donor Communications Query (DCOMQ) screen using the donor communication code and type of DRQST for later printing of the Donor ID card.

**NOTE –** The Donor ID card is a wallet-sized card that shows the donor's name, address, blood type, and so on. It is generally mailed to a donor after a donation.


WellSky Corporation
Proprietary and confidential

# In the Case of a New Donor

If you have created a new donor in the Find Donor window, all key donor data fields are white and require re-entry of the key data. Data entered in these fields must exactly match data as it was entered in the Find Donor window, or the entry is rejected.

# Entry in the Employer Block

You must navigate through each field in the Employer Block. If no entry is required or correction needed, press **ENTER** to proceed to the next field.

## Empl/Schl

Entry is optional. If an existing employer is displayed, you can select another employer for the donor. Type a partial employer name and press **ENTER** to access the LOV in this field.

If you enter an employer name in this field that does not match an employer in the database, a pop-up asks if you want to create a new employer.

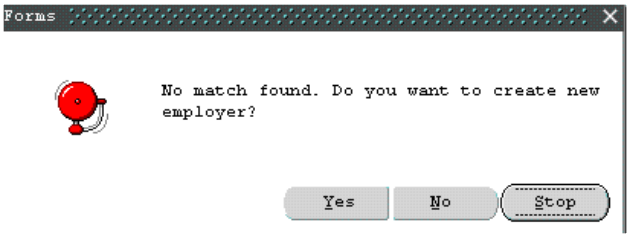


- Click **Yes** to create a new employer.
- Click **No** to return to the Empl/School field to correct your entry.
- Press **ENTER** to activate the Stop button; a pop-up remains until you click **Yes** or **No**.

## City- St/Zip

Entry is required if a new employer is being created. ZIP Code and city entries will be validated and must agree. If an existing employer is selected, the data for that employer cannot be modified.

## Ethnic Grp

Entry is required if System Parameter ETHNIC is set to `Y`; entry is optional if System Parameter ETHNIC is set to `N` or is blank. Select a valid ethnic group code from the LOV. The LOV is populated from the Master Code ETHGP.

## ASP

Entry is optional. Select a valid alternate sponsor code from the LOV. If an alternate sponsor is entered, the donation credit is given to the alternate sponsor.

## Lkup ID

Entry is optional. Enter the employee ID of the person who performed the donor lookup, or select from the LOV. This field accepts any valid employee ID in the Donor system.

### Donation

Entry is required. Enter a valid donation type code or select from the LOV. If no donation type is recorded on the Donor Record, enter `99` to place the donation on hold and continue the registration. A facility-defined interdiction is placed when a 99 donation code is entered.

### Procedure

Entry is required. Enter a valid procedure code or select from the LOV. If no procedure code is recorded on the Donor Record, enter `99` to place the donation on hold and continue the registration. A facility-defined interdiction is placed when a 99 procedure code is entered. Once a valid procedure code is entered, the cursor advances to the Donation Details Block.

## Entry in the Donation Details Block

### Phy ID

Entry is required. Enter a valid collection staff employee ID or select from the LOV. If the entry on the Donation Record is illegible or missing, enter `99` in this field to place the donation on hold and continue the registration. A facility-defined interdiction is placed when a 99 physical ID is entered.

### Deferral

Entry is required. Enter any deferral codes (question numbers) listed on the Donation Record, separating deferral codes with a comma. Interdiction DRDEF is placed. If no deferral code is noted for this donation, enter a `0` (zero). If you re unable to determine the entry for deferral, enter `99`. A facility-defined interdiction is placed when a 99 is entered. The cursor advances to the Historian ID field.

### Dfrd Thru

Entry is optional. If a deferral code was indicated in the previous field, the cursor advances to this field; otherwise, the cursor skips this field. Enter the ending date of the deferment recorded on the Donation Record.

### Def Type

Entry is required if no entry is made in the *Dfrd Thru* field. Enter one of the following:

- `IND` for indefinite deferral
- `NA` for not applicable
- `99` for unknown deferral type.

A facility-defined interdiction is placed on the unit.

### Hist ID

Entry is required. Enter a valid collection staff employee ID or select from the LOV. If the entry on the Donation Record is illegible or missing enter `99` in this field to place the donation on hold and continue the registration. A facility-defined interdiction is placed on the unit.

### L/R/B/O

Entry is required. Enter one of the following codes to indicate the point of venipuncture:


WellSky Corporation
Proprietary and confidential

- L – Left arm
- R – Right arm
- B – Both arms
- O – Other
- U – Unknown

A window appears for entry of bleed time details. The cursor is positioned in the DS (double stick) field.

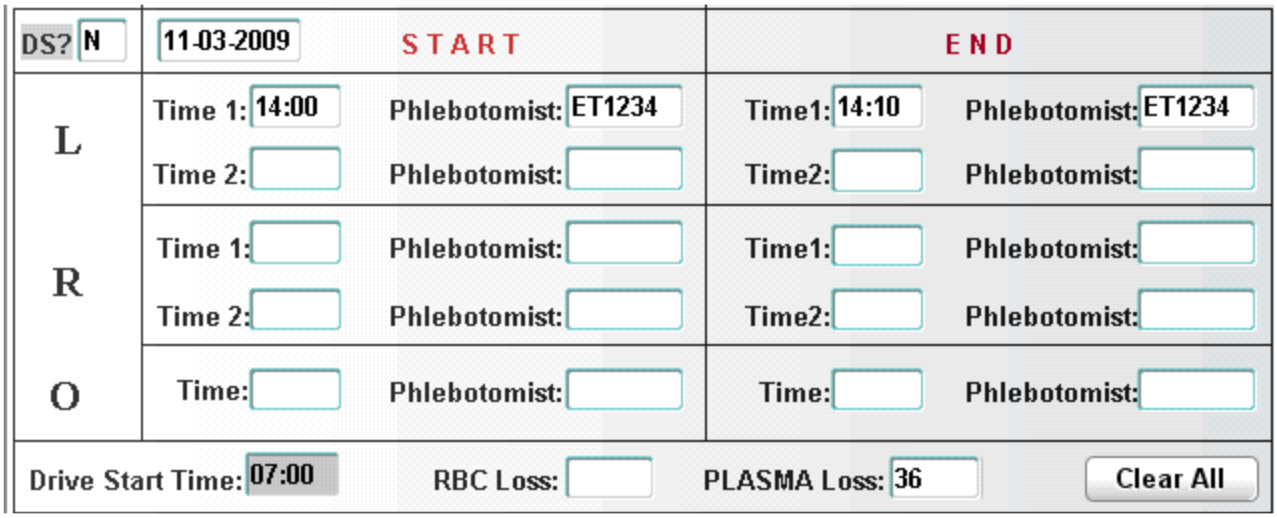


Enter Y to specify a double stick. Otherwise, press ENTER to leave an N in the field and proceed to record venipuncture times. The cursor will be positioned in the correct set of time fields based upon the point of venipuncture you have specified.

If you enter a bleed time that is outside of the start and end time of the blood drive, the following window opens:

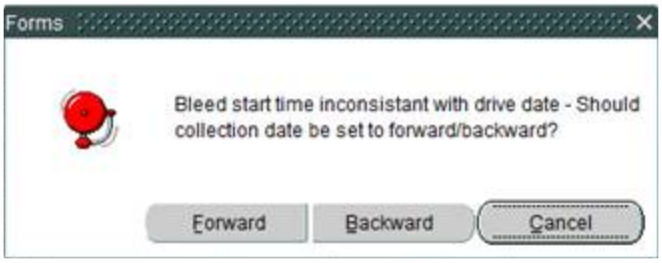


Click one of the following:

- Forward – set the collection date forward.
- Backward – set the collection date backward.
- Cancel – do not adjust the collection date. The current collection date is accepted.

**Important!** If you do not want to change the collection date, you *must* click Cancel.

## Drive Start Time

Enter the start time (using the HH:MI format), employee ID of the person who made the stick, end time (using the HH:MI format), and the employee ID of the person who completed the draw. If a double stick is indicated, the cursor automatically advances through a second set of times (Time 2).

## RBC Loss

Enter the RBC loss for that donation. If a value is not entered it will default to the value entered for the standard red cell loss defined in the procedure code table.

## PLASMA Loss

Enter the PLASMA loss for that donation. If a value is not entered, it will default to the value entered for the standard plasma loss defined in the procedure code table.

The pop-up disappears when all data is entered, or when you have moved through all applicable fields in the pop-up.

**NOTE –** Entry of bleed times is not mandatory. If bleed times are not available, press ENTER a sufficient number of times to move through all applicable fields. When bleed times are entered, the phlebotomist ID becomes mandatory. If the phlebotomist ID is unknown, enter `99`, and the donation is placed on hold. A facility-defined interdiction is placed on the unit.

**NOTE –** When the bleed start time logically indicates that the collection date should be increased or decreased from the drive date, a pop-up appears that asks you to specify the adjustment. Click the appropriate button (or press ALT+F for Forward, or ALT+B for Backward). If the collection date is not to be adjusted, activate the Cancel button (ALT+C) to return to the Drive Start Time field to proceed with or correct your entry.

**NOTE –** If the bleed data is not entered then the RBC and plasma loss will not be counted. The bleed date has to be present in the DONATIONS table for the loss to be considered.

The collection date displays in the Coll Date field upon exiting the bleed times window.

## Veni

Entry is optional. If the Donation Record indicates venipuncture codes, enter them or select from the LOV.

## Rvw ID

Entry is required. Enter a collection staff employee ID or select from the LOV. Entry of `99` will place HOLD interdiction that is defined in the RHOLDS table for Inter Reason NOREVIEW.

## Reaction

Entry is optional. If a reaction code is indicated on the Donor Record, enter it here or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Mat Veri ID

Entry is optional. Indicate who performed the material verification by entering the collection staff employee ID or select from the LOV.

### Coll Date

Display only. The collection date displays in this field based upon the phlebotomy time entry. This data cannot be modified here.

### Equip

Entry is optional. If the donation was collected using a piece of equipment, then manually enter it or select it from the list of values. The list of values comes from the master code EQUIP.

### Void Unit

Entry is optional. If a voided unit is indicated on the Donor Record, enter its unit ID here. Double entry of the unit ID is required. The voided unit will be considered by the system when validating batch sequencing and duplication of unit ID.

### CUE

Scan the donor confidential unit exclusion (CUE) sticker. If no CUE sticker is present on the Donor Record or if the CUE sticker is not scannable, the user must scan a generic NO CUE or AMBIGUOUS CUE bar code.

**NOTE –** The CUE field is only required if the facility has defined that the use of CUE is required. If the facility is not using CUE, the field will not be present on the form.

### Unit ID

Entry is required. Re-scan the bar code or re-enter the unit ID. It must match the original scan or entry. If the two do not match, the screen clears and you must begin the registration again.

## Placing a MANUAL HOLD on a Donation

At any point during the registration process (after a batch is defined and before the registration is committed to the database), you can press F10 to place a hold on the donation. The Manual/Automatic Holds window displays to enable you to define the hold.

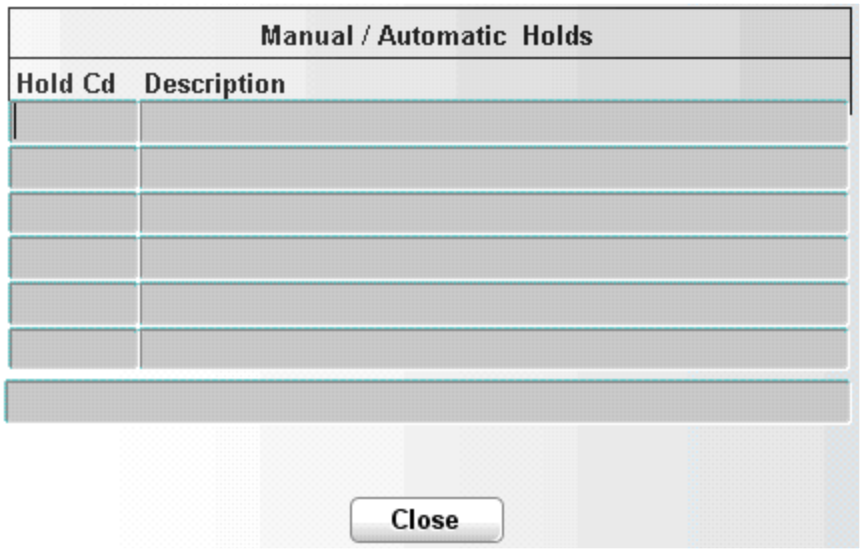


A LOV is available in the Hold Cd field that lists all valid hold codes. Once a code is selected from the LOV, the code and its description display in the Manual Holds window.

Click **Close** to return to the registration screen. The hold you have defined will be placed on the donation when the registration is committed to the database.

To remove the hold you have defined:

1. Press **ALT+F5** (Clear Record).
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed in this screen at any time before the registration is committed to the database.

## At Commit

All data is immediately committed to the database when the second pass of the unit ID is accepted. The screen clears and the cursor advances to the Unit ID field for the next registration. If your facility is set for batch registration, the batch report automatically prints when the batch is closed (when you exit the screen or the last unit in the batch is registered).

**NOTE –** Batch Registration only: A batch ID is saved to the database immediately as it is generated. A batch ID cannot, however, be queried unless it has at least one donation registered. Further, a batch will be closed by the system if the user presses **ALT+F8** (Exit) and confirms the action before all donations within the batch range are registered. The batch is also closed by the system automatically when the last donation within the batch range is registered.


WellSky Corporation
Proprietary and confidential

## What to Do Next

1. To update registration data, use the Update Donation (REGMAINT) screen.
2. Each registered donation requires an audit. Use the Audit Donation (DONAUDIT) screen to audit donations.
3. To resolve a hold placed on a donation due to lack of a donor, use the Attach Donor (ATTACH) screen.
4. To query donations that are already registered, use the Registered Donations Query (ENTRYQ) screen.
5. To query donations on hold, use the Donations on Hold Query (DONHOLDQ) screen.

# 7.2.2 Register Deferral (DEFREGIS)

## Intended Use

Use this screen to register deferrals for a specific drive. At any point during the registration process, the user may place a manual hold and/or enter comments for the deferral.

Registration via this screen involves two primary steps:

1. Creation of a deferral registration batch.
2. Registration of deferrals to associate with the batch.

## Limitations

- No deferral can be registered unless it is associated with a valid drive.
- Mouse navigation is not available for this screen.
- A configurable limit in the Donor system prohibits registration of deferrals for drives beyond a defined age limit.
- A configurable limit in the Donor system prohibits registration of a duplicate deferral ID unless a specified time limit has expired.

## Prerequisites

- A valid drive must exist for which deferrals can be registered.

## Accessing the Screen

Access this screen from the Registration General Functions menu or by entering the keyword `DEFREGIS`.

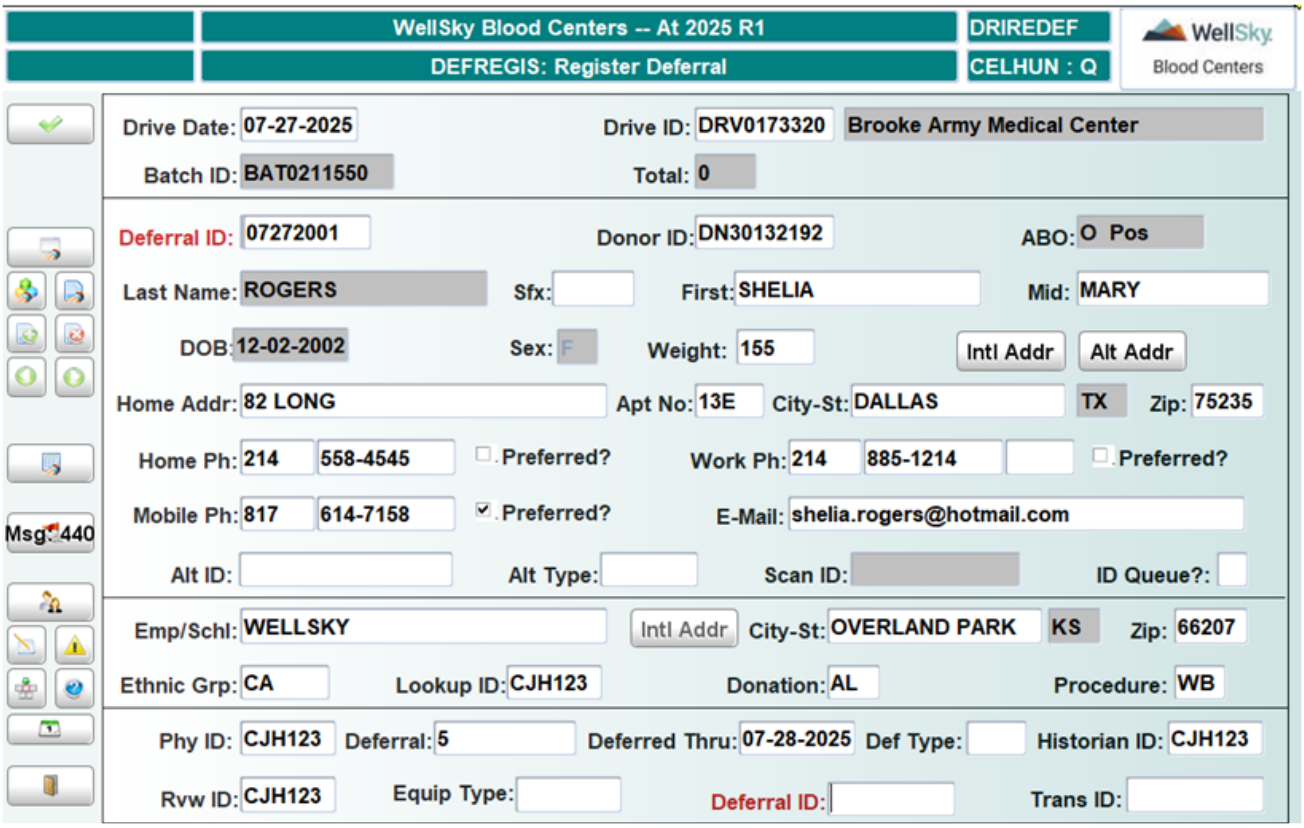


# Control Block Fields and Definitions

All entry fields in the control block require double entry for verification. Selections from LOVs require a manual reentry. Data scanned into the system is exempt from the requirement for double entry.

## Drive Date

Entry is required.

The current date is the default. To accept the current date:

1. Press **Enter**.
2. Retype the date using the MMDDYYYY format.
3. Press **Enter** again.

To enter a date other than the current date:

1. Type the new date using the MMDDYYYY format.
2. Press **Enter**.
3. Retype the date.
4. Press **Enter**.

If the two entries match, an LOV displays containing all valid drives for the date entered.


WellSky Corporation
Proprietary and confidential

**NOTE –** The system rejects the entry and displays an error message when dates are entered that do not match. Press **Enter** to acknowledge the message. The date field will clear for another double date entry.

### Drive ID

Entry is required. Select a drive ID from the LOV. Then enter the drive ID manually.

**NOTE –** An error message displays if your drive ID entry does not match the LOV selection. Press **Enter** to acknowledge the error message. The previous entry will remain on display in the field. Backspace to the point of error and retype it correctly.

The name of the drive automatically displays and the cursor advances to the Deferral ID field

The system generates and displays a new batch ID in the Batch ID field, and displays a zero in the Total field. The cursor advances to the Deferral ID field in the second block.

**NOTE –** As you continue to register deferrals, the Total field displays the total number of deferrals registered thus far in the batch.

## Donor Block Fields and Definitions

### Deferral ID

Scan the bar code or manually enter the eight-character deferral ID using double blind entry. The Find Donor window opens.

### Troubleshooting Tip:

If a field clears in the Find Donor window, and the cursor remains in that field after you have made an entry and have pressed **Enter**, a confirming entry is required. For more information about the Find Donor window, see Chapter 14 Called Windows and Routines.

After finding the donor, select a donor record and click **Select** .

**NOTE –** Only a donor match as defined in the configuration of the Find Donor block can be selected. If no match is retrieved, follow facility SOPs for resolution. In such a case, you may click **Hold** to place a hold on the donation and continue the registration without attaching a donor. Interdiction NODON is placed.

The Donor Block automatically displays information about the selected donor, including donor ID and blood type, if available. If a donor has been started in the Onsite module but for some reason is completed in the back office registration the following pop-up will occur after donor is entered in the Find Donor window:

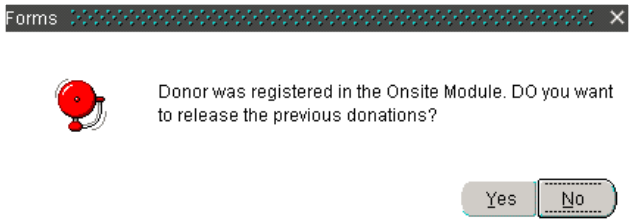


- Click **Yes** to remove the donation from onsite and allow the donation to be completed in DRIREGIS (REGIS).
- Click **No** to return to the Unit ID field.

The cursor moves to the First name field. Proceed through each field by pressing **Enter**, regardless of whether you enter or modify data. Fields that are white permit entry or update. Fields that are gray do not permit entry or modification of data.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified: an **F** in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; an **M** in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

## Sfx

Press **F4** (Previous Field) to move the cursor back to the Sfx (Suffix) field. You may enter a suffix (Sr., Jr., III, etc.) to further identify the donor.

## Weight

Enter the donor's weight (in pounds) in this field.

## City-St and Zip

The system validates your entry of city and ZIP Code. If they disagree, the system does not accept the entry. An LOV is available in both fields (see note below). Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contain only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the home phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.


WellSky Corporation
Proprietary and confidential

## Work Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated to a phone number.

## Preferred?

Entry is optional. If the work phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the mobile phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. Up to 128 characters are accepted. As you press ENTER to exit the E-mail field, the cursor advances to the Employer Block.

## Alt ID

Entry is optional. Entry is up to 20 characters alpha/numeric value. This field becomes required if the'Configure Find Donor Block for Programs (DONBLOCK) was configured to require alternate ID and type.

## Alt Type

Entry is optional. Enter the type of alternate ID or select from the LOV. This field becomes required if the Configure Find Donor Block for Programs (DONBLOCK) was configured to require alternate ID and type.

## Scan ID

This field is no longer used.

## ID Queue?

Enter `Y` to allow the Donor ID card to be printed at a later date. A `Y` in this field allows the donor ID to be placed automatically in the Donor Communications Query (DCOMQ) screen using the donor communication code and type of DRQST for later printing of the Donor ID card.

**NOTE –** The Donor ID card is a wallet-sized card that shows the donor's name, address, blood type, and so on. It is generally mailed to a donor after a donation.

## Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

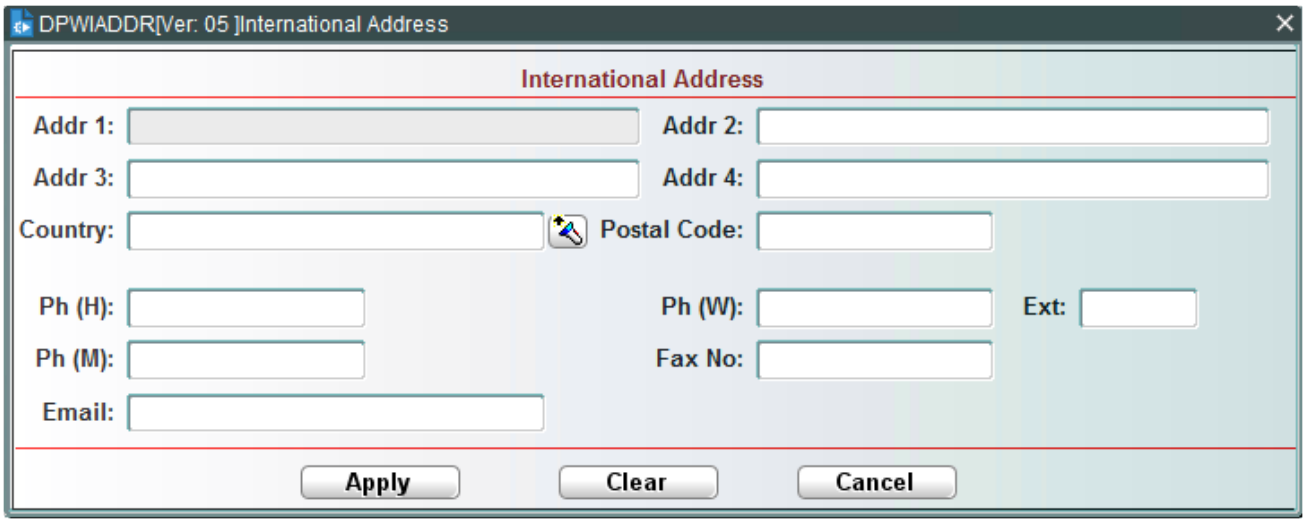


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Alt Addr (button)

Click **Alt Addr** to open the Alternate Demographics window, as follows:

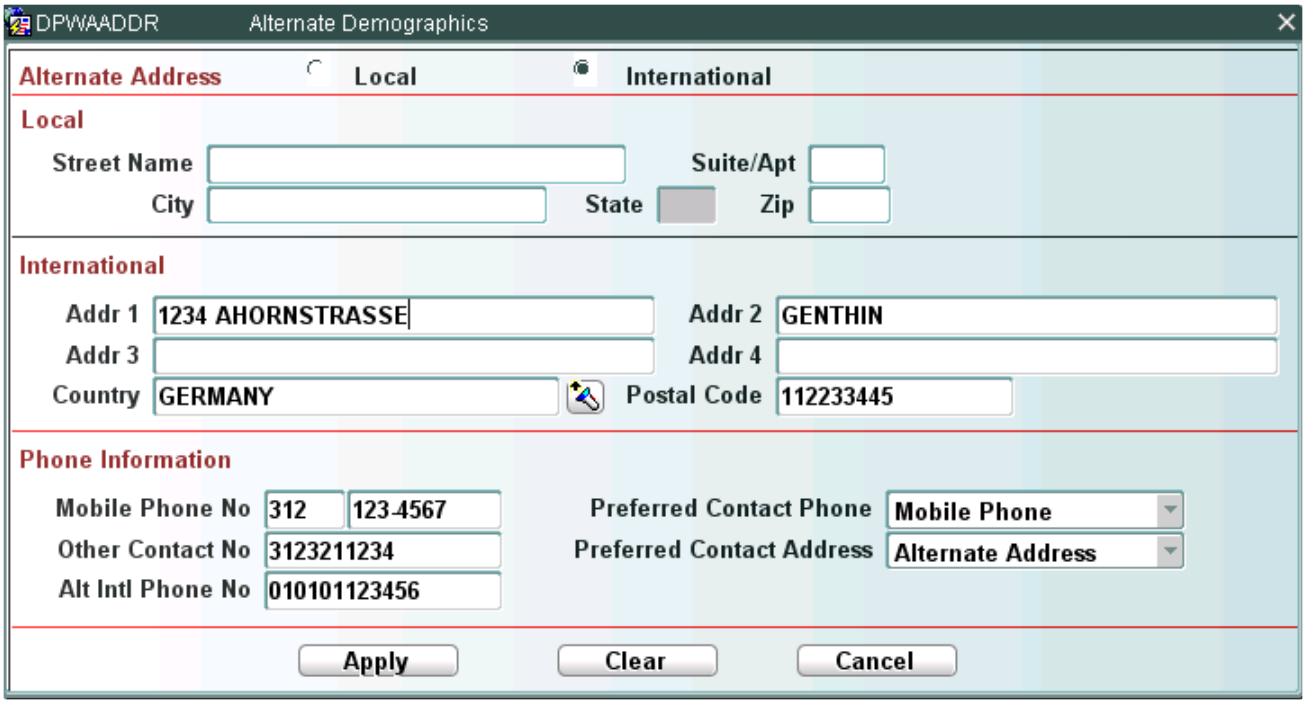

Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## In the Case of a New Donor

If you have created a new donor in the Find Donor window, all key donor data fields are white and require re-entry of the key data. Data entered in these fields must exactly match data as it was entered in the Find Donor window or the entry is rejected.

## Entry in the Employer Block

You must navigate through each field in the Employer Block. If no entry is required or no correction is needed, press ENTER to proceed to the next field.

### Empl/Schl

Entry is optional. If an existing employer is displayed, you can select another employer for the donor. Type a partial employer name and press ENTER to access the LOV in this field.

If you enter an employer name in this field that does not match an employer in the database, a pop-up asks if you want to create a new employer.

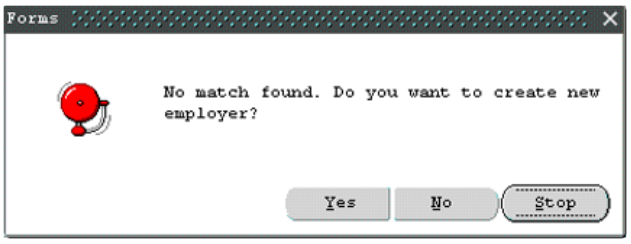


- Click Yes to create a new employer.
- Click No to return to the Empl/School field and correct your entry.
- Press ENTER to activate the Stop button; a pop-up remains until you click either Yes or No.

### City- St/Zip

Entry is required if a new employer is being created. ZIP Code and city entries will be validated and must agree. If an existing employer is selected, the data for that employer cannot be modified.

### Ethnic Grp

Entry is required if the ETHNIC system parameter (sysparm) is set to Y; otherwise, entry is optional. Select a valid ethnic group code from the LOV.

### Lookup ID

Entry is optional. Enter the employee ID of the person who performed the donor lookup, or select from the LOV. This field accepts any valid employee ID in the Donor system.

### Donation

Entry is required. Enter a valid donation type code or select from the LOV. Enter **99** to place the deferral on hold and continue the registration. A facility-defined interdiction is placed when a 99 donation code is entered.

### Procedure

Entry is required. Enter a valid procedure code or select from the LOV. Enter **99** to place the deferral on hold and continue the registration. A facility-defined interdiction is placed when a 99 procedure code is entered. Once a valid procedure code is entered, the cursor advances to the Donation Details Block.

## Entry in the Deferral Details Block

### Phy ID

Entry is optional. Enter a collection staff employee ID or select from the LOV. If the entry on the Donor Record is illegible or missing, enter **99** in this field to place the deferral on hold and continue the registration. A facility-defined interdiction is placed when a 99 ID is entered.

### Deferral

Entry is required. Enter the deferral codes (question numbers) listed on the Donation Record, separating multiple codes with commas. Interdiction DRDEF is placed. If the entry on the Donor Record is illegible or missing, enter **99** in this field to place the deferral on hold and continue the registration. A facility-defined interdiction is placed when a 99 is entered.

### Deferred Thru

Entry is optional. Enter the ending date of the deferral, if known.

### Def Type

Entry is required if no entry is made in Deferred Thru field. Entry may be either one of the following:

- **IND** for Indefinite Deferral
- **N/A** for Not Applicable.

A facility-defined interdiction is placed when a 99 deferral type is entered.

### Historian ID

Entry is optional. Enter a collection staff employee ID or select from the LOV. If the entry on the Donation Record is illegible or missing, enter **99** in this field to place the deferral on hold and continue the registration. A facility-defined interdiction is placed when a 99 is entered.

### Rvw ID

Entry is required. Indicate who reviewed the Donation Record by entering a collection staff employee ID or selecting from the LOV of staff assigned to this drive. If the entry on the Donor Record is illegible or missing, press **F10** to manually place the deferral on hold.


WellSky Corporation
Proprietary and confidential

### Equip

Entry is optional. If the donation was collected using a piece of equipment, then manually enter it or select it from the list of values. The list of values comes from the master code EQUIP.

### Deferral ID

Entry is required. Rescan the bar code or reenter the deferral ID using double blind entry. It must match the original scan or entry. If the two do not match, the screen clears and you must begin the registration again.

## Placing a HOLD on a Deferral

Press **F10** at any point before the registration is committed to the database to place a manual hold on the deferral. The Manual/Automatic Holds window displays, allowing you to define the hold.

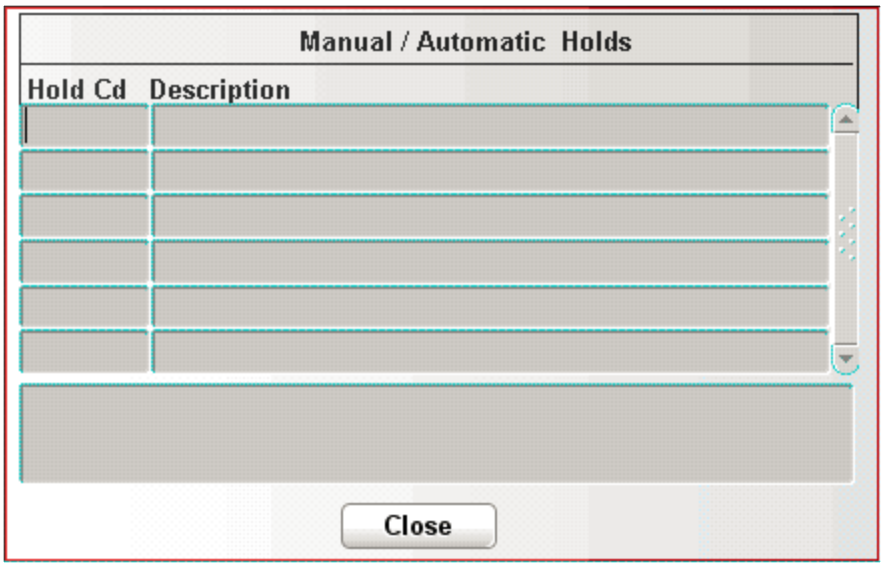


An LOV is available in the Hold Cd field that contains all valid hold codes. Once a code is selected from the LOV, the code and its description display in the Deferral Holds window.

Press **Close** to return to the registration screen. The hold you have defined will be placed on the deferral as you commit the registration to the database.

To remove the hold you have defined:

1. Press **Clear Record**.
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be removed manually using this screen at any time before the registration is committed to the database.

## At Commit

All data is immediately committed to the database when the second pass of the deferral ID is accepted. The screen clears and the cursor is positioned in the first Deferral ID field for the next registration. The batch report automatically prints when the screen is exited.

A Batch ID exists in the database immediately when it is generated. A batch ID cannot, however, be queried unless it has at least one deferral registered.

## What to Do Next

1. To update registration data, use Update Deferral (DEFMAINT).
2. Each registered deferral requires an audit. Use Audit Deferral (DEFAUDIT) to audit deferrals.
3. To resolve a hold placed on a deferral during registration, use Attach Donor (ATTACH).
4. To query deferrals that are already registered, use Registered Deferrals Query (DEFQ).
5. To query deferrals on hold, use Deferrals on Hold Query (DEFHOLDQ).

# 7.2.3 Audit Donation (DONAUDIT)

## Intended Use

Use this screen to perform an audit of registered donations. Unexpected answers to health history questions and physical findings recorded on the Donation Record at the time of donation are entered in this screen. A hold can be manually placed on a donation at any point during the audit process after the unit ID has been specified and before the audit is committed to the database.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

## Limitations

- A donation cannot be audited if no donor is associated with the donation.
- The mouse function is disabled for this screen.
- Donations registered using OnSite Registration Module cannot be entered in this screen.
- The PREVIOUS BLOCK button and CTRL + F4 (Previous Block) hot key are disabled in this screen. The NEXT BLOCK button and CTRL + F3 (Next Block) hot key are disabled, except as follows: you can use NEXT BLOCK and CTRL + F3 (Next Block) to navigate from the Physical Findings block in the form to the last field in the form (Dfrl ID).

## Prerequisites

- A donation must have been registered using Register Donation (REGIS).


WellSky Corporation
Proprietary and confidential

- A donor must be associated with the donation.
- Master code for HHCOM (Health History canned comments)
- Master code for PFCOM (Physical Findings canned comments)
- Create Physical Findings Template (HHQTEMP) must be defined.
- Define Health History Responses (HHR) must be defined.
- Create Physical Findings Template (PHYTEMP) must be defined.
- Define Physical Finding Values (PHYRULE) must be defined.

## Accessing the Screen

Access this screen from the Registration General Functions menu or by entering the keyword `DONAUDIT`.

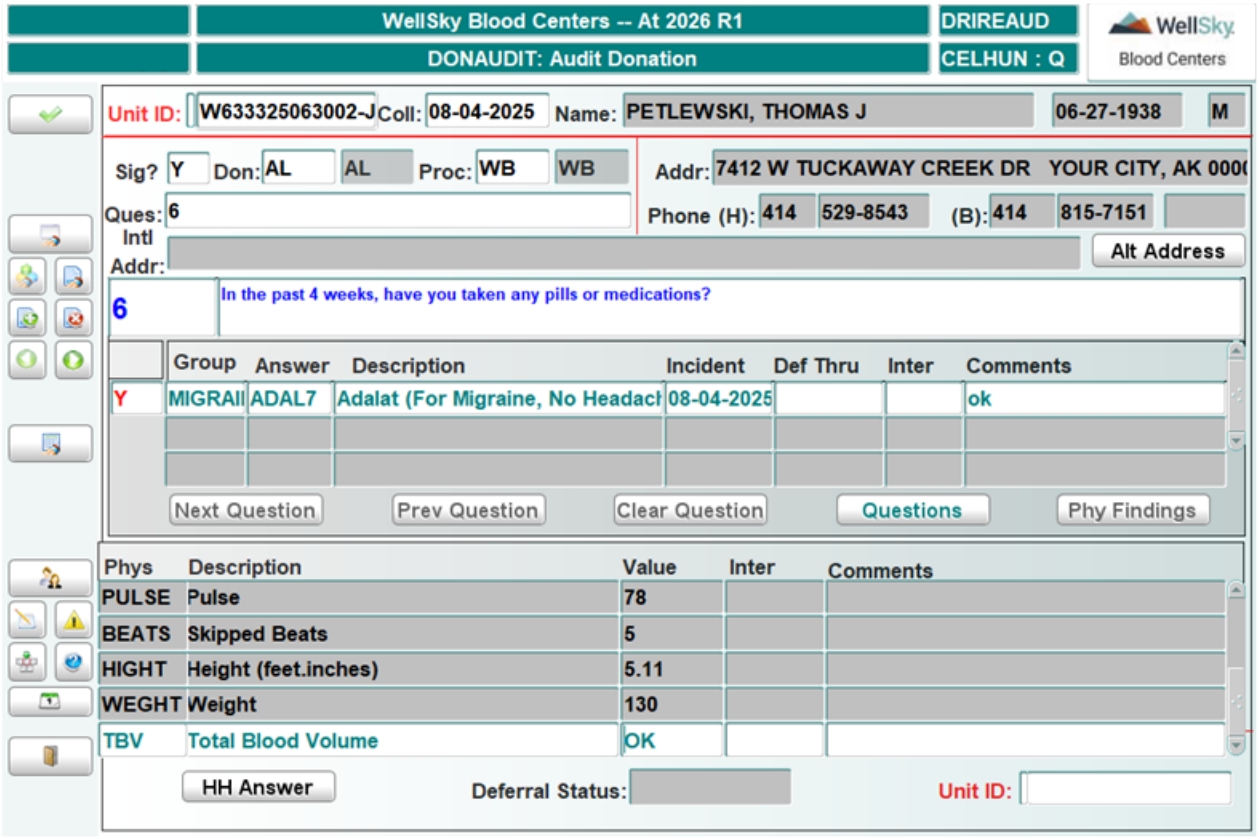


## Control Block Fields and Definitions

### Unit ID

Entry is required. Scan the unit ID bar code or manually enter the unit ID using double blind entry.

### Coll

Entry is required if duplicate records exist for the unit ID specified. Enter the donation date using the MMDDYYYY format.

The cursor advances to the Sig? field and the following information displays if it exists in the database:

- Collection date
- Donor's name
- Date of birth
- Sex
- Address
- Phone numbers (home and business)
- International address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

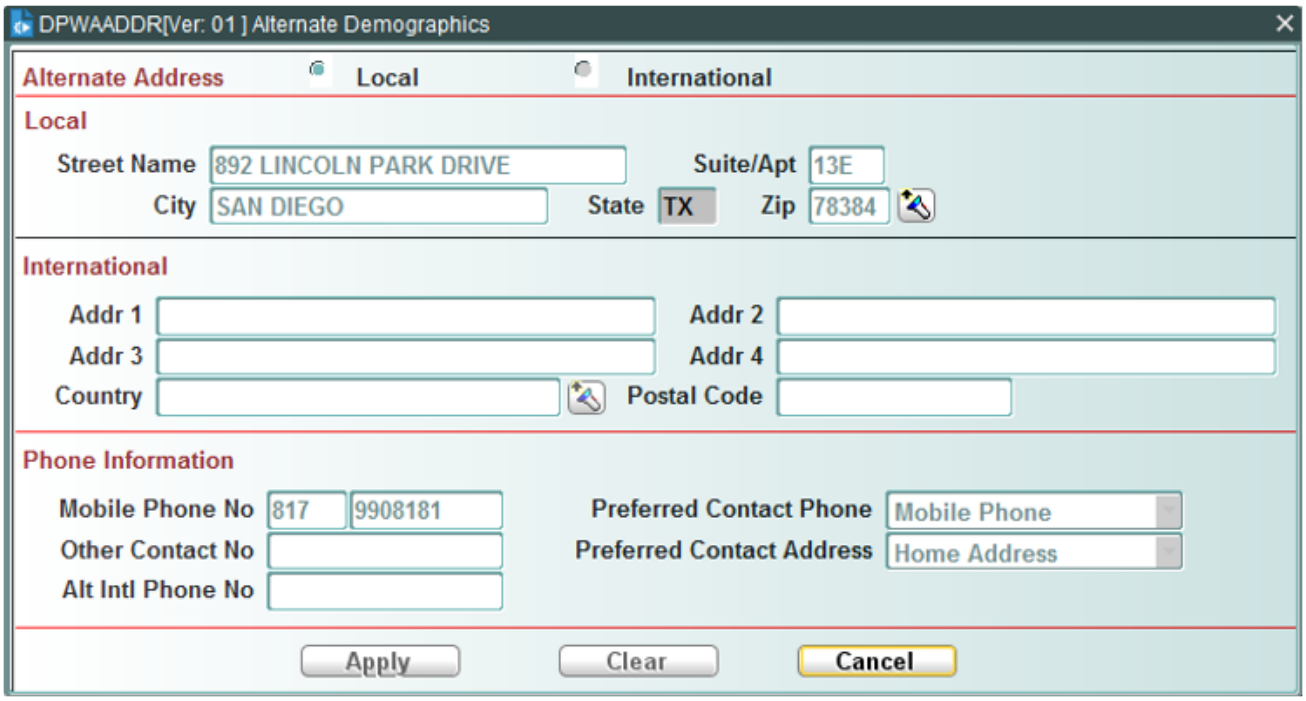


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

## Sig?

Entry is required. Enter `Y` if the donor signed the Donation Record.


WellSky Corporation
Proprietary and confidential

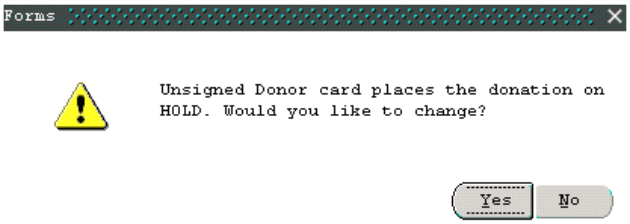


Enter N if the signature is missing, in which case a pop-up advises you that the donation will be placed on hold, and asks if you wish to change your entry.

Click **Yes** to change your entry. Click **No** to place the unit on hold and continue the audit. Facility defined interdiction is placed.

## Don

Entry is required. Enter the donation type code from the Donation Record or select from the LOV. A pop-up displays if your entry does not match the entry made during registration:

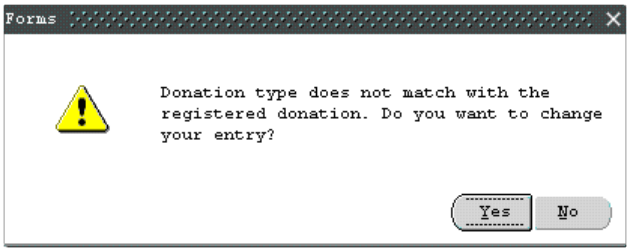


Click **Yes** to change your entry, or **No** to leave your entry as-is. The entry made during registration displays as you leave this field.

## Proc

Entry is required. Enter the procedure code from the Donation Record or select from the LOV. A pop-up displays if your entry does not match the entry made during registration:

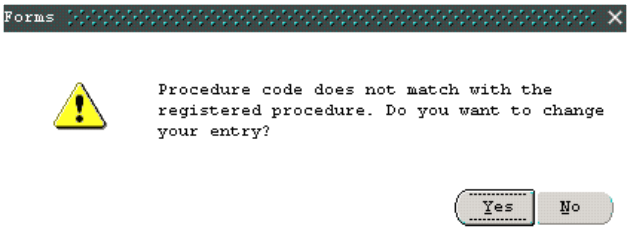


Click **Yes** to change your entry, or **No** to leave your entry as-is.

The entry made during registration displays as you leave this field.

## Ques

Entry is optional. Enter all question numbers from the Donation Record for which unexpected answers were recorded. Separate multiple question numbers with commas.

Once all applicable question numbers are entered, press **ENTER**. The cursor moves to the Resp field in the Answer Block, and the first question number entered displays with the question text.

## In the Answer Block

### Resp

Entry is required. Enter the donor's response to the question. The only valid responses are `Y` (Yes), `N` (No), or `U` (Unanswered).

### Group

Entry is optional. Enter the group code for the question or select it from the LOV.

### Answer

Entry is required. Enter a valid answer code or select it from the LOV. The description for the answer code automatically displays.

**NOTE –** This field calls for an explanation of the yes or no response recorded in the Resp field.

### Start Date

Entry is required if the additional date flag has been set to Y in the Define Health History Responses. Enter the date in MMDDYYYY format.

### End Date

Entry is optional. Enter a date in MMDDYYYY format.

### Incident

Entry is required. Enter the incident date as recorded on the Donor Record, using the MMDDYYYY format.

### Def Thru

Entry is optional. Enter the date the deferral ends, if applicable. In some instances, the system automatically makes the entry. A system entry here can be modified by the user, but only to a later date. Entry format is MMDDYYYY.

### Inter

Display only. This field automatically populates if the donation will be interdicted due to the answer. This field cannot be entered or modified.


WellSky Corporation
Proprietary and confidential

### Comments

Entry is optional. Enter comments up to 248 characters in length. Press **F2** (List of Values) to enlarge the entry window.

Comment entry is based on response. If the response has been defined in Define Physical Findings Responses (PHYRULE) with comment flag of Y, then the comment field becomes required, and the user must enter a comment. The comment can be entered in free format text and/or by canned comments that are defined in master code PFCOM. The comment can be up to 240 characters in length.

**NOTE –** The Comment field becomes required if set in the Define Health History Responses to require a comment if the flag is set.

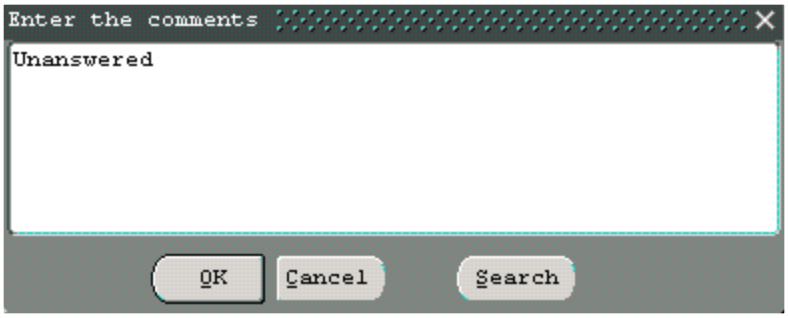


## Using the Buttons

- To advance to the next question, click **Next Question**.
- To go back to the previous question, click **Prev Question**.
- To delete the highlighted question from the list of questions for which unexpected answers were received, click **Clear Question**.
- To add to or delete from the list of questions for which unexpected answers were received, click **Questions**.
- Once entries are complete for all questions listed, click **Phy Findings** to advance to the Physical Findings Block.

**NOTE –** In order for the Phy Findings button to be enabled, you must keep your cursor in the *Comments* Field.

## In the Physical Findings Block

Each required physical procedure automatically displays. Only the value needs to be entered for each physical finding. The physical procedures listed cannot be modified or deleted.

### Value

Entry is required for each physical procedure. An LOV is available for each procedure for which the value to enter is not numerical.

**NOTE –** Weight value will populate from the registration in REGIS (DRIREGIS).

## Inter

Display only. If the donation is interdicted due to the value entered, the system displays the interdiction code. No entry or modification is permitted.

**NOTE –** For the hemoglobin (HGB) and hematocrit (HCT) findings, the system will examine the sex of the donor and place a PHYTD interdiction if the value falls outside of the range specified in the Define Physical Findings Values (PHYRULE) screen.

**EXAMPLE –** The range for HGB specified in PHYRULE is as follows:

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AL | CO | HGB | D | 12.0 | 16.0 | BETWEEN | F | | | PHYTD | 09-18-2015 | |
| AL | CO | HGB | D | 13.0 | 18.0 | BETWEEN | M | | | PHYTD | 09-18-2015 | |

If you enter an HGB value of 18.1 for a female donor, the system will place a PHYTD interdiction, as shown:

| Phys | Description | Value | Inter | Reason |
|---|---|---|---|---|
| HGB | Hemoglobin | 18.1 | PHYTD | Value should be in between 13.0 - 18 |

## Reason

Display only. If the donation is interdicted due to a physical finding, the reason displays here. No entry or modification is permitted.

After entering values for all physical procedures, a pop-up requests confirmation that all entries are complete:

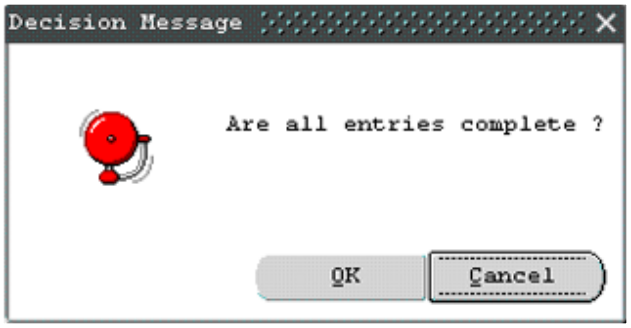


Click **OK** to complete the audit.

Click **Cancel** to correct entries.

If you answer OK, the cursor automatically advances to the Unit ID field for confirmation of the unit ID.

Click **HH Answer** to return to the Answer Block.


WellSky Corporation
Proprietary and confidential

Click **Physical** to return to the Physical Findings Block.

# Completing the Audit

## Unit ID

Entry is required. Re-scan the bar code or re-enter the unit ID using double blind entry. The scan or entry must match the original scan or entry. If the two do not match, the screen clears and you must begin the audit again.

# Placing a HOLD on a Donation

At any point during the audit process (after the unit ID is accepted and before the audit is committed to the database), you can manually place a hold on the donation by pressing **F10**. The resulting pop-up permits you to place the hold:

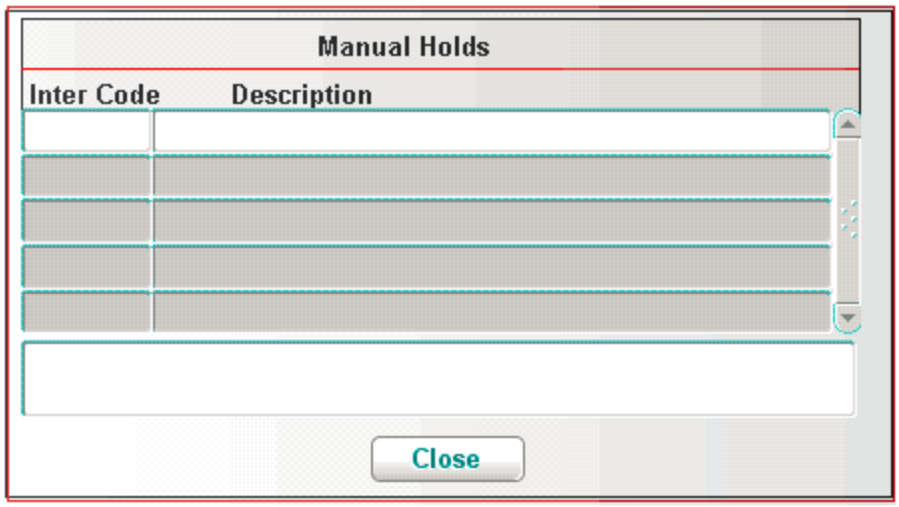


An LOV is available in the Inter Code field that lists all valid hold codes.

Once a code is selected from the LOV, the code and its description display in the Manual Holds window:

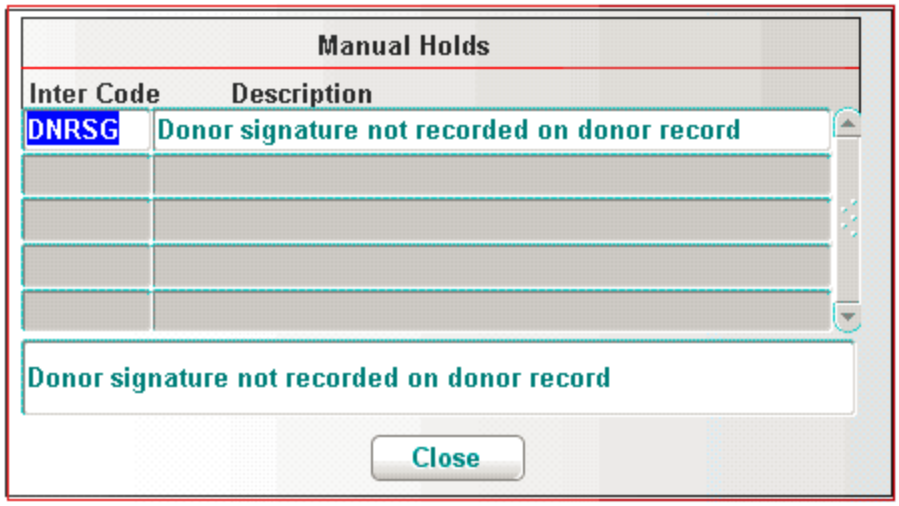

Click **Close** to return to the audit screen. The hold you have defined is placed on the donation as you commit the audit to the database.

To remove the hold you have defined:

1. Press **DELETE RECORD** .
2. Press **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed at any time in this screen before the registration is committed to the database.

## At Commit

All data is immediately committed to the database when the second pass of the unit ID is accepted. The screen clears and the cursor is positioned in the first Unit ID field for the next audit.

Any system holds resulting from entry in this screen are applied to the donation.

## To View Interdictions Placed Through Audit

Interdictions placed through audit by entering answers for health history and entering values for physical findings must be viewed by using the Donor Detail Query (SDONQ) and clicking **Interdictions**. This will display all active interdictions that were placed.

**NOTE –** If a health history answer is entered, and the answer did not place an interdiction, but a comment was entered for the answer, go to the Donor Detail Query (SDONQ). Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the questions to view the comments entered for those questions.

If a physical code value is entered, and an interdiction was not placed, but a comment is placed, go to the Donor Detail Query (SDONQ) to view those comments. Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the physical findings to view the comments entered for those physical values.

## What to Do Next

Other donations pending audit can be identified using Donations Pending Audit Query (DONPENDQ).

# 7.2.4 Audit Deferral (DEFAUDIT)

## Intended Use

Use this screen to perform an audit of registered deferrals. Unexpected answers to health history questions and physical findings recorded on the Donation Record at the time of deferral are also entered in this screen.


WellSky Corporation
Proprietary and confidential

## Limitations

- A deferral cannot be audited if no donor has been associated with the deferral.
- The mouse function is disabled for this screen.
- Deferrals registered through the OnSite Registration Module cannot be entered.
- The **PREVIOUS BLOCK** icon, **CTRL** + **F4** (Previous Block) function key, **NEXT BLOCK** icon, and **CTRL** + **F3** (Next Block) function key are all disabled in this screen.

## Prerequisites

- A deferral must have been registered using Register Deferral (DEFREGIS).
- Master code for HHCOM (Health History canned comments)
- Master code for PFCOM (Physical Findings canned comments)
- Create Physical Finding Template (HHQTEMP) must be defined.
- Define Health History Responses (HHR) must be defined.
- Create Physical Findings Template (PHYTEMP) must be defined.
- Define Physical Findings Values (PHYRULE) must be defined.

## Accessing the Screen

Access this screen from the Registration General Functions menu or by entering the keyword `DEFAUDIT`.

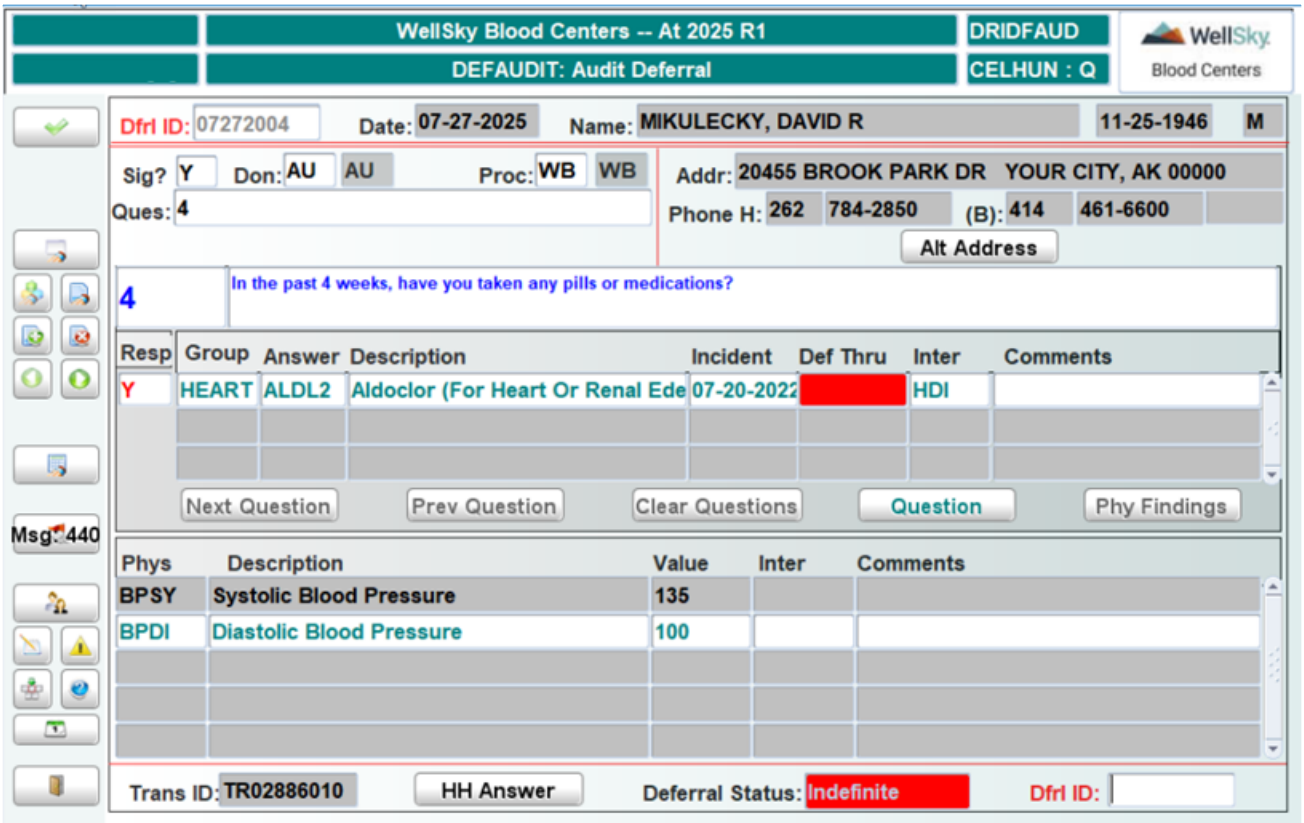


# Control Block Fields and Definitions

## Dfrl ID

Scan the bar code or manually enter the eight-character deferral ID using double blind entry.

The following donor information displays if it exists in the database:

- Collection date
- Name
- Date of birth
- Sex
- Address
- Phone (home and business)

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:


WellSky Corporation
Proprietary and confidential

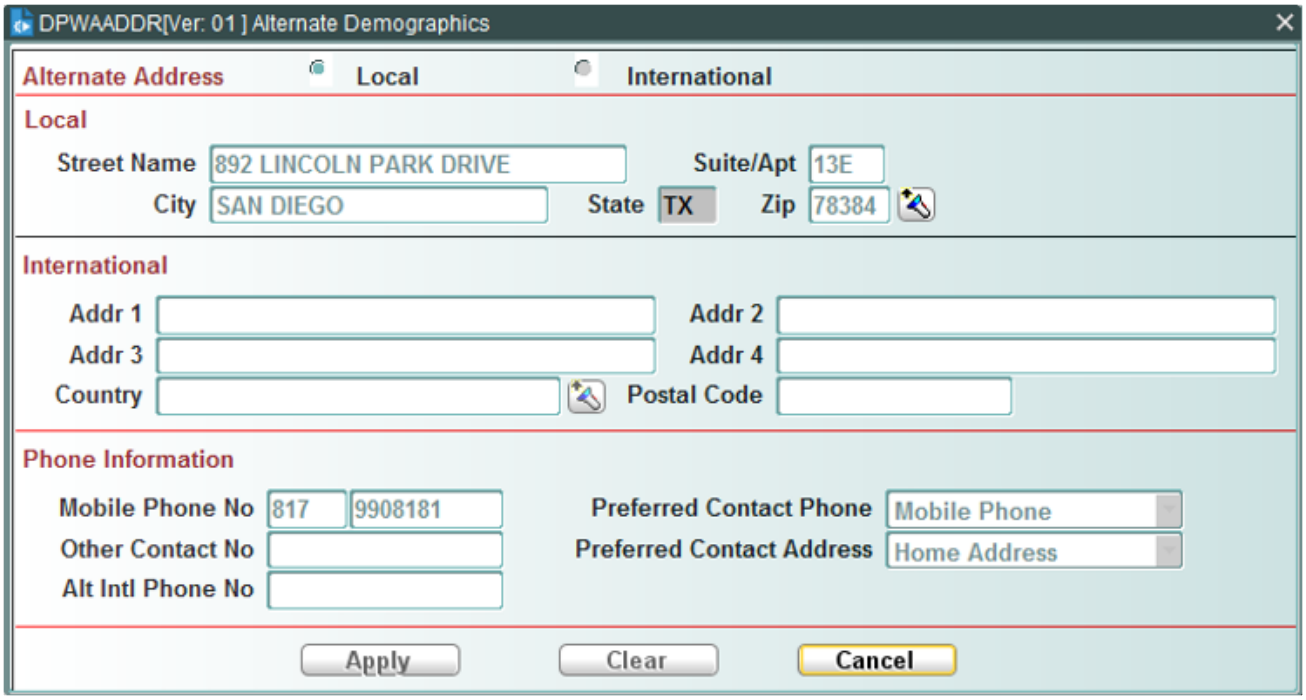


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

The cursor advances to the Sig? field.

## Sig?

Entry is required.

Enter `Y` if the donor signed the Donation Record.

Enter `N` if the signature is missing, in which case a pop-up advises you that the deferral will be placed on hold, and asks if you wish to change your entry.

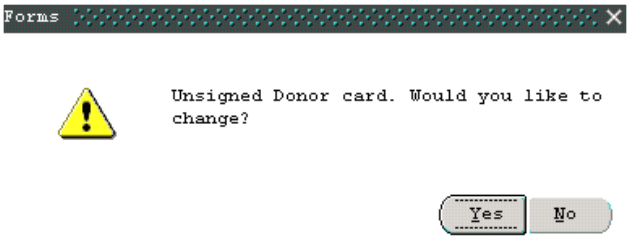


Click **Yes** to change your entry.

Click **No** to place the deferral on hold and continue the audit.

Facility defined interdiction is placed.

## Don

Entry is required. Enter the donation type code from the Donation Record or select from the LOV. A pop-up displays if your entry does not match the entry made during registration:

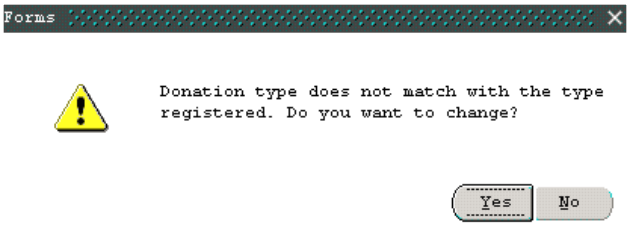


Click **Yes** to change your entry.

Click **No** to leave your entry as-is.

The entry made during registration displays as you leave this field.

## Proc

Entry is required. Enter the procedure code from the Donation Record or select from the LOV. A pop-up advises if your entry does not match the entry made during registration:

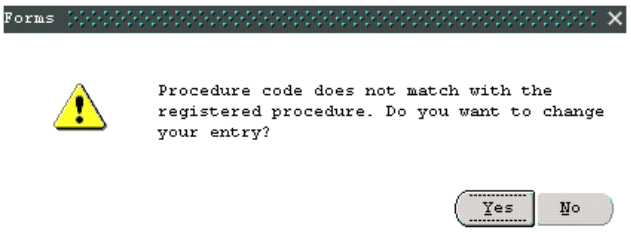


Click **Yes** to change your entry.

Click **No** to leave your entry as-is.

The entry made during registration displays as you leave this field.

The cursor advances to the Ques field.

## Ques

Entry is optional. Enter all question numbers from the Donation Record for which unexpected answers were recorded. Separate multiple question numbers with commas.

After entering all applicable question numbers, press **ENTER**. The cursor moves to the Resp field in the Answer Block, and the first question number entered displays with the question text.

# In the Answer Block

## Resp

Entry is required. Enter the donor's response to the question. The only valid responses are **Y** (Yes), **N** (No), or **U** (Unanswered).


WellSky Corporation
Proprietary and confidential

## Group

Entry is optional. Enter the group code for the question or select it from the LOV.

## Answer

Entry is required. Enter a valid answer code or select from the LOV. The description of the answer code automatically displays. This field calls for an explanation of the Yes or No response recorded in the Resp field.

## Start Date

Entry is required if the additional date flag has been set to Y in the Define Health History Responses. Enter the date in MMDDYYYY format.

## End Date

Entry is optional. Enter a date in MMDDYYYY format.

## Incident

Entry is required. Enter the incident date as recorded on the Donation Record in MMDDYYYY format.

## Def Thru

Entry is optional. Enter a deferred-through date, if applicable, using the MMDDYYYY format. In some instances, the system makes the entry for you. A system entry can be modified by the user, but only to a later date.

**NOTE –** If the answer has resulted in an indefinite deferral, the Def Thru column displays as a solid red box to indicate the indefinite deferral.

## Inter

Display only. This field automatically populates if the deferral will be interdicted due to the answer. This field cannot be entered or modified.

## Comments

Entry is optional. Enter comments up to 248 characters in length. Press **F2** (List of Values) to enlarge the entry field.

Comment entry is based on response. If the response has been defined in Define Physical Findings Responses (PHYRULE) with comment flag of Y, then the comment field becomes required, and the user must enter a comment. The comment can be entered in free format text and/or by canned comments that are defined in master code PFCOM. The comment can be up to 240 characters in length.

**NOTE –** The Comment field becomes required if set in the Define Health History Responses to require a comment if the flag is set.

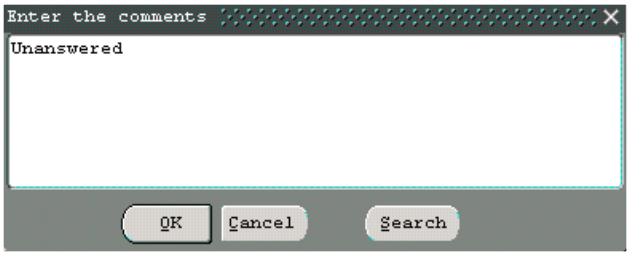


## Using the Buttons

- To advance to the next question, click **Next Question**.
- To go back to the previous question, click **Prev Question**.
- To delete the highlighted question from the list of questions for which unexpected answers were received, click **Clear Question**.
- To add to or delete from the list of questions for which unexpected answers were received, click **Questions**.
- Once entries are complete for all questions listed, click **Physical** to advance to the Physical Findings Block.

**NOTE –** In order for the Phy Findings button to be enabled, you must keep your cursor in the *Comments* Field.

## In the Physical Findings Block

Any physical findings noted on the Donation Record can be entered here. Entry of physical findings is optional.

### Phys (Physical Procedure Code)

Entry is optional. Enter a valid physical procedure code or select from the LOV.

### Description

Display only. This field automatically populates as a code is entered or selected. This field cannot be modified.

### Value

Entry is required for each physical procedure selected. An LOV is available for each procedure for which the value to be entered is not numerical.

### Inter

Display only. If the deferral is interdicted due to the value entered, the system displays the interdiction code here. No entry or modification is permitted.


WellSky Corporation
Proprietary and confidential

**NOTE –** For the hemoglobin (HGB) and hematocrit (HCT) findings, the system will examine the sex of the donor and place a PHYTD interdiction if the value falls outside of the range specified in the Define Physical Findings Values (PHYRULE) screen.

**EXAMPLE –** The range for HGB specified in PHYRULE is as follows:

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| AL | CO | HGB | D | 12.0 | 16.0 | BETWEEN | F | | | PHYTD | 09-18-2015 |
| AL | CO | HGB | D | 13.0 | 18.0 | BETWEEN | M | | | PHYTD | 09-18-2015 |

If you enter an HGB value of 18.1 for a female donor, the system will place a PHYTD interdiction, as shown:

| Phys | Description | Value | Inter | Reason |
|---|---|---|---|---|
| HGB | Hemoglobin | 18.1 | PHYTD | Value should be in between 13.0 - 18 |

## Reason

Display only. If the deferral is interdicted due to a physical finding, the reason displays here. No entry or modification is permitted.

Click HH Answer to return to the Answer Block.

Click Phy Findings to return to the Physical Findings Block.

To complete the audit, press CTRL + F3 (Next Block).

The transaction number generated when the deferral was registered displays in the Trans ID field. The donor's deferral status (deferred-through date) displays in the Deferral Status field for a temporary deferral, or Indefinite displays in a red box for an indefinite deferral.

## Dfrl ID

Entry is required. Re-scan the bar code or re-enter the deferral ID using double blind entry. The scan or entry must match the original scan or entry. If the two do not match, the screen clears and you must begin the audit again.

# Placing a HOLD on a Deferral

At any point during the audit process (before the audit is committed to the database), you can place a manual hold on the deferral by pressing F10. The resulting pop-up permits you to place the hold:

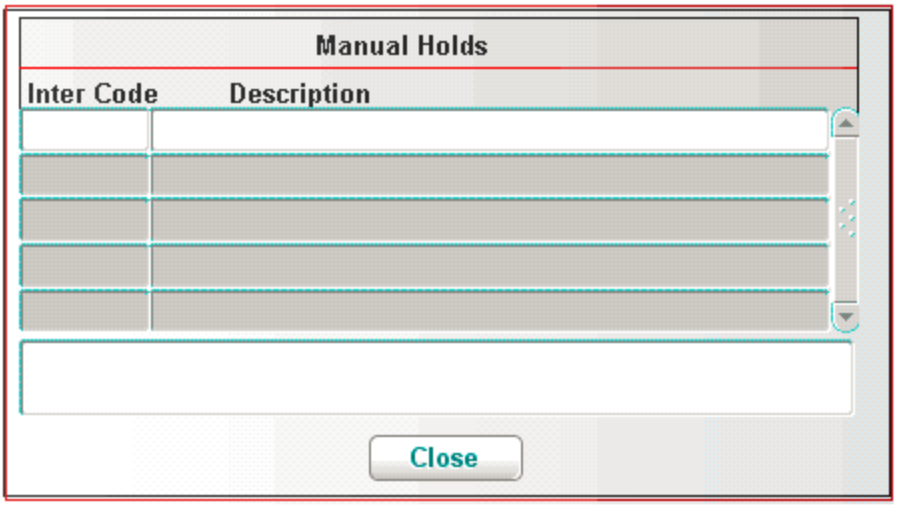


An LOV is available in the Hold Cd field that contains all valid hold codes.

Once a code is selected from the LOV, click **OK** and the code and its description display in the Manual Holds window.

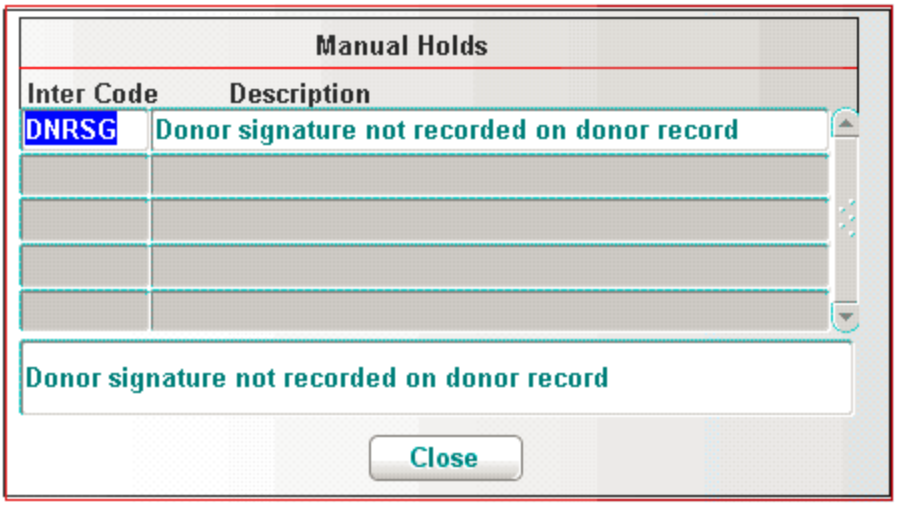


Click **Close** to return to the audit screen.

The hold is placed on the deferral as you commit the audit to the database.

To remove the hold you have defined:

1. Press **Delete Record**.
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed in this screen at any time before the registration is committed to the database.


WellSky Corporation
Proprietary and confidential

## At Commit

All data is immediately committed to the database when the second pass of the deferral ID is accepted. The screen clears and the cursor is positioned in the first Dfrl ID field for the next audit.

## To View Interdictions Placed Through Audit

Interdictions placed through audit by entering answers for health history and entering values for physical findings must be viewed by using the Donor Detail Query (SDONQ) and clicking **Interdictions**. This will display all active interdictions that were placed.

**NOTE –** If a health history answer is entered, and the answer did not place an interdiction, but a comment was entered for the answer, go to the Donor Detail Query (SDONQ). Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the questions to view the comments entered for those questions.

If a physical code value is entered, and an interdiction was not placed, but a comment is placed, go to the Donor Detail Query (SDONQ) to view those comments. Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the physical findings to view the comments entered for those physical values.

## What to Do Next

Other registered deferrals pending audit can be identified by using Deferrals Pending Audit Query (DEFPENDQ).

# 7.2.5 Perform Visual Audit (VISNU)

## Intended Use

Use this screen to visually audit registration of donations or deferrals. You can also use this screen to reset the audit flag of a donation or deferral. The nursing audit interface will automatically occur when the audit is reset.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

**NOTE –** When the update is committed, the donor interface is automatically called to send over new nursing audit information to Lab.

## Limitations

This program can be configured to audit donations only, deferrals only, or both.

## Prerequisites

- Validation tables must be configured to use this screen.
- Master Codes ADTDN and ADTPG must be configured to use this screen.
- You must have the user access class of AUDRE in order to use the Reset Audit Button.

## Accessing the Screen

Access this screen from the Registration General Functions menu or by entering the keyword `VISNU`.

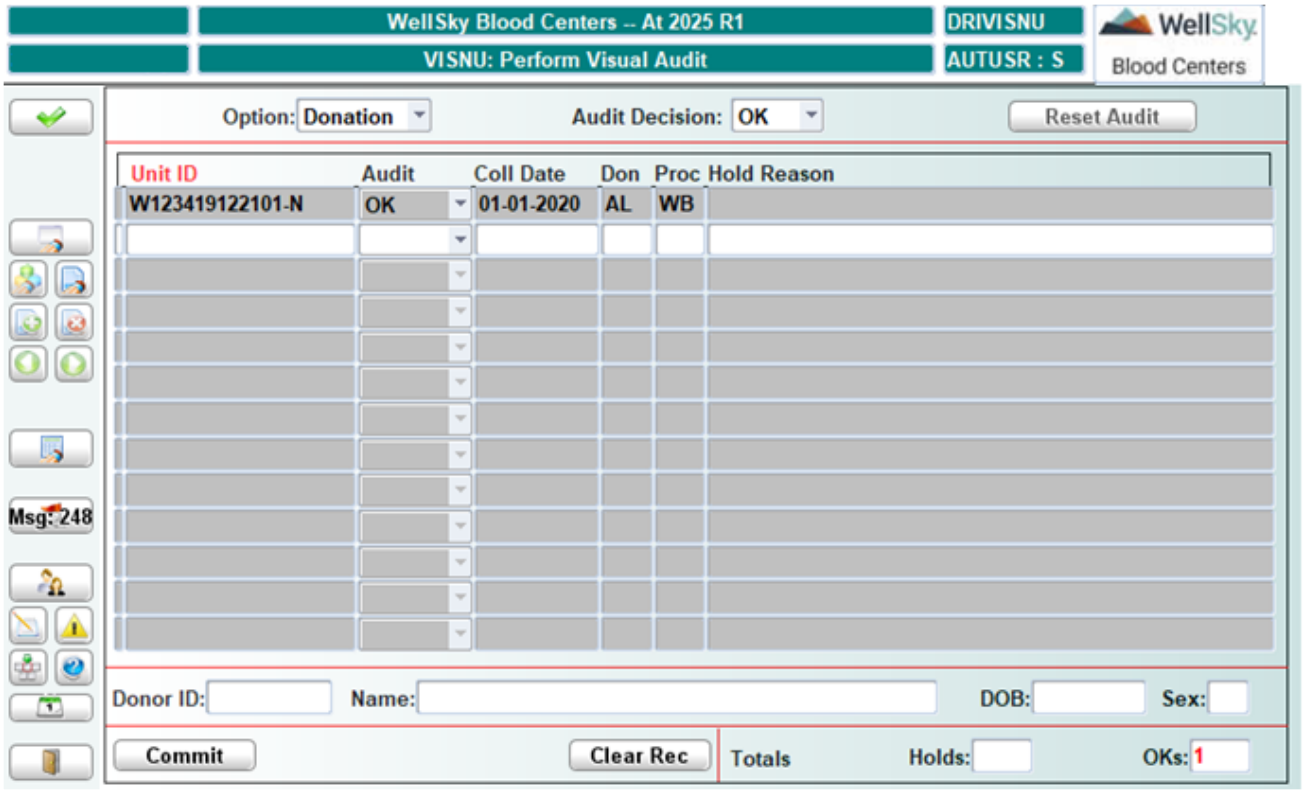


## Control Block Fields and Definitions

### Option

Accept default of Donation or select Deferral from the drop-down list (only available if screen is configured to perform visual audit on deferrals).

### Audit Decision

This field is viewable only if Donation is selected in Option field. Accept default of OK or select HOLD from the drop-down list.

# If Donation is Selected in Option Field

## Unit ID

Scan the unit ID or enter M for manual entry. Entry is double-blind. Both entries must match exactly.

The following information displays:

- Unit ID
- Date unit was collected (LOV is available if unit has multiple collection dates)
- Donation type code
- Donation procedure code

## Audit

Defaults to OK if OK was chosen in the Audit Decision field in the Control Block. To place a hold, choose HOLD from the drop-down list.

## Hold Reason

Entry is required if HOLD is selected in the Audit field. Enter the reason for the hold.

The following information also displays:

- Donor ID
- Name
- Date of birth
- Sex
- Number of units marked for hold
- Number of units marked as OK

## The Commit Button

Click **Commit** to commit the unit as OK or to be placed on Hold. The following pop-up appears:

Click **OK** to continue with the commit.

Click **Cancel** to cancel the commit and return to the main screen to make corrections.

If OK is clicked, the following confirmatory pop-up appears:

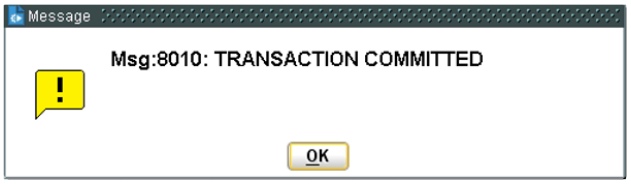


Click **OK** to return to the screen.

## The Clear Rec Button

Click **Clear Rec** to clear all data from the screen.

## If Deferral is Selected in Option Field in the Control Block

### Deferral ID

Scan the eight-character deferral ID or enter manually. If entering manually, double-entry is required. Both entries must match exactly.

### Deferral Type

Defaults to No Def. To place a deferral, choose Temp Def or Indef Def from the drop-down list.

The following information displays:

- Date deferred unit was collected
- Donation type code
- Donation procedure code
- Deferral codes
- Date deferral ends
- Comments

### Def Till

Entry is required if Temp Def is selected in Deferral Type column.

### Comment

Entry is required if a temporary or indefinite deferral is being placed. Enter comments.

The following information also displays:

- Donor ID
- Name
- Date of birth
- Sex
- Total number of deferral types marked as No Def (no deferral)
- Number of temporary deferrals


WellSky Corporation
Proprietary and confidential

- Number of indefinite deferrals

## The Commit Button

Click **Commit** to commit the unit as OK or to be placed on hold. The following pop-up appears:

Click **OK** to continue with the commit.

Click **Cancel** to cancel the commit and return to the main screen to make corrections.

If OK is clicked, the following confirmatory pop-up appears:

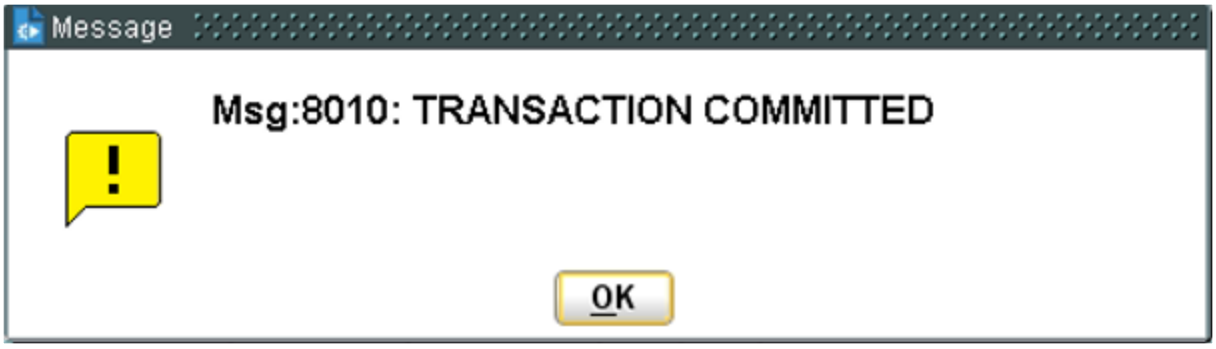


Click **OK** to return to the screen.

## The Clear Rec Button

Click **Clear Rec** to clear all data from the screen.

## Exiting the Screen Without Saving the Audit

If the user attempts to exit the screen without committing the audit, the following pop-up appears:

- Click **Save** to save the audit and exit the screen.
- Click **Discard** to exit the screen without saving the audit.
- Click **Cancel** to close the pop-up and return to the screen without performing any action

## The Reset Audit Button

Click **Reset Audit** to open the Reset Audit Flag window. This window allows you to reset the audit flag of the donation or deferral. The nursing audit interface will automatically occur when the audit is reset. The following window opens:

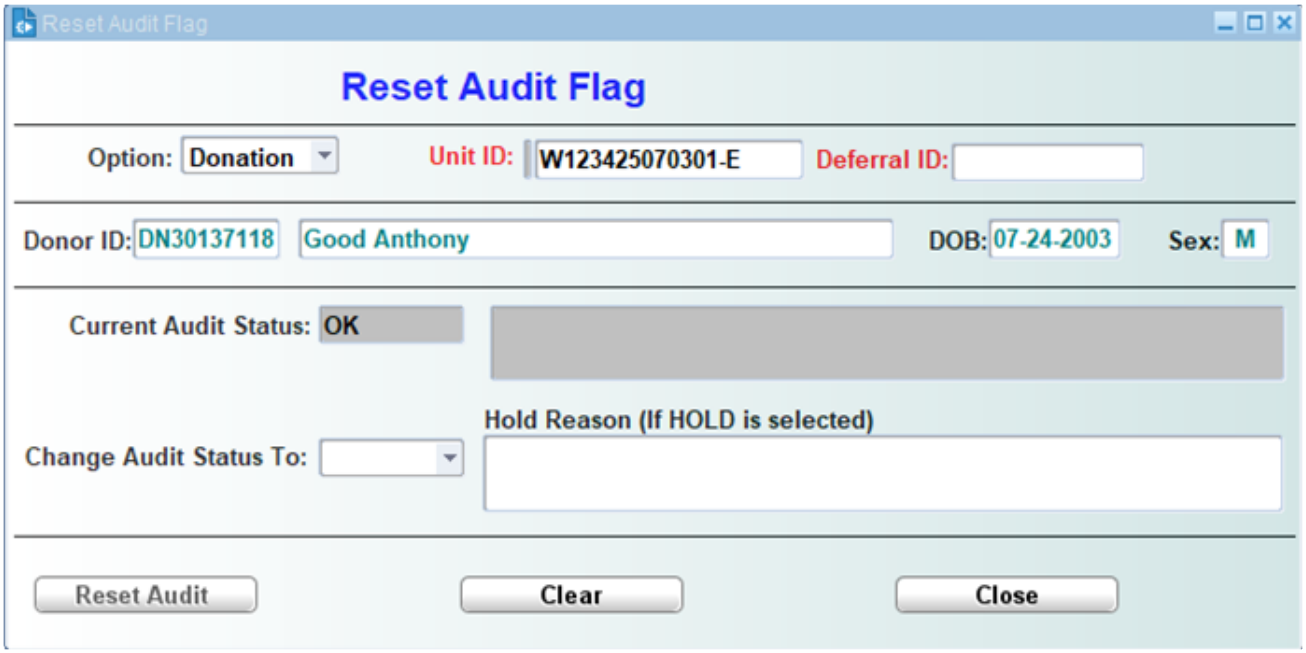


### Option

Select Donation or Deferral from the drop-down. The cursor will move to the *Unit ID* field if Donation is selected. The cursor will move to the *Deferral ID* field if Deferral is selected.

### Unit ID

If the Donation option is selected, scan the unit ID or enter manually.

### Deferral ID

If the Deferral option is selected, enter the deferral ID. Wait for field to clear, then enter deferral ID a second time.

After you enter the unit ID or deferral ID, the following information displays:

- Donor ID
- DOB
- Sex
- Current Audit Status


WellSky Corporation
Proprietary and confidential

## Change Audit Status To

Select the audit status you want to change the flag to from the drop-down.

## Hold Reason (If HOLD is selected)

If you are changing the audit status to HOLD, enter the hold reason.

## Resetting the Audit

Click **Reset Audit**to reset the audit. The following window opens:

Click **OK** to proceed, or click **Cancel** to cancel the operation without resetting the audit. If you click **OK**, the following window opens:

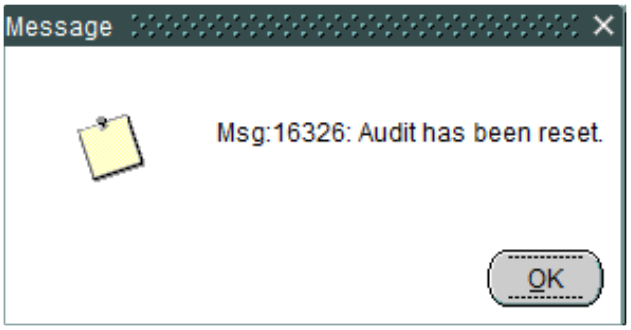


Click **OK** to close the window.

**NOTE –** Once the audit has been reset, the Reset Audit Flag window will remain open to allow you to reset the audit flag for additional unit IDs or deferral IDs. Once you have completed all resets, click **Close** to close the Reset Audit Flag window and return to the VISNU screen.

Click **Clear** to clear all the fields in the Reset Audit Flag window. This will allow you to re-enter data. Click **Close** to close the window.

# At Commit

All committed data is saved to the database.

## What to Do Next

There is no next step.

# 7.2.6 Paperless Nursing Audit (PAUDIT)

## Intended Use

Use the Paperless Nursing Audit to perform an audit on a unit or a deferral. Reasons will display if the nursing audit needs to have a manual audit performed.

## Limitations

- Only displays units/deferrals that were registered through the OnSite Module.
- Does not place Hold for the audit if the donation went through the Override process where the OVRDF is placed.
- Deferrals that are linked manually through the Link/Unlink Unit or Deferral and a DDT or DDI interdiction is placed will not appear in Paperless Nursing Audit since these deferrals did not go through health history or physical findings.

## Prerequisites

The following tables need to be configured in order to determine manual audits:

- Define Physical Findings Values (PHYRULE)
- Health History Questions Bank (HHQBANK)
- Define Health History Responses (HHR)

Master Code:

- Nursing Audit key data change criteria (NUKEY) – the name of key fields that are changed in the registration process will make the unit show up as HOLD.
- Allow Visual Audit for donations/deferrals (ADTPG).

Registration Holds (RHOLDS):

- PAUDITHOLD and enter the HOLD that will be placed when a manual audit is required.

System Parameters:

- PAUDIT – Y enables the use of paperless nursing audit; N disables the function. If set to N, when the user goes to DRIMAUDT, the following error will display:

## Accessing the Screen

Access this screen from the General Registration Functions menu or by entering the keyword `PAUDIT`.

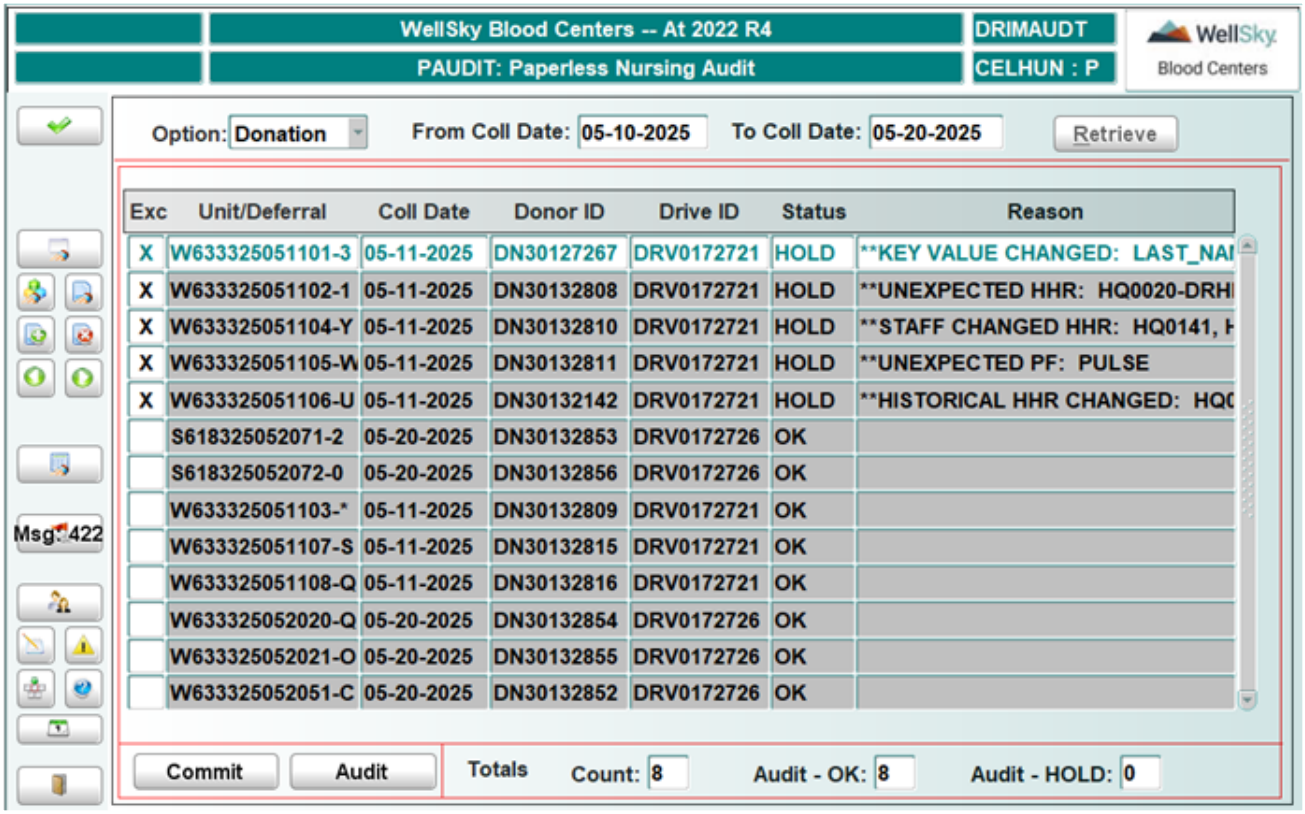


## Control Block Fields and Definitions

### Option

Accept the default of 'Donation', or select **Deferral** from the drop-down (only available if the screen is configured to perform the audit on deferrals). Master code ADTPG controls the selection of donation and/or deferrals.

### From Coll Date

Enter the collection date in MMDDYYYY format.

### To Coll Date

Enter the collection date in MMDDYYYY format. The date entered here is the last collection date to be used to display units.

## Detail Block Fields and Definitions

### Exc

This is an optional field. Enter "**x**" to exclude the unit from going through the completion of the audit. After entering control block data, the "**x**" will automatically default for any donation or deferral with the status of HOLD.

### Totals
This displays the total number of units pulled to the detail block. This field cannot be updated.

### Audit - OK
This field displays the number of units with a status of 'OK'.

### Audit - HOLD
This field displays the number of units with a status of 'HOLD'.

## Query of Data Already Present in Table
The control block field entry will determine the data that is brought to the screen.

- The units that were collected using the OnSite Module in the date range entered for the type collection will display in the detail block.
- If you decide to exclude a unit, enter a "X" by the unit/deferral, and the unit/deferral will not have the audit flag set.
- For any unit/deferral that has the audit status set to "HOLD", there will be a reason displayed to explain why it is being placed on HOLD.
  - The Reason field can be scrolled in case there is more than one reason for the unit to be placed on HOLD.
  - The Donations on Hold Query or the Deferrals on Hold Query will list the units or deferrals that were placed on hold through the paperless nursing audit.

## Audit (Button)
To audit a unit or a deferral in the Update Audit programs, select a row and click **AUDIT**. It will populate the unit/deferral in the Update Audit programs and allow you to update the audit and set the audit flag in the Update Audit programs. Once the audit has been completed, the unit will have the audit flag set, but it will still be in Paperless Nursing Audit until you refresh the page. The nursing audit flag will be set for the unit.

## Processing Units
There are three processes that can be used to complete the audit function.

### Process 1:
Select the Option from the drop-down menu and bring all units/deferrals into the form. The number of units/deferrals with OK audits and the number of units/deferrals with audits On Hold will display. Click **Commit**. The OK audit flag will be set for those units/deferrals with an OK audit, and an interdiction will be placed for those units/deferrals with a Hold status. You can go to the Donations on Hold Query and complete those units there or the Deferrals on Hold query and complete the deferrals there.

### Process 2:
Exclude all units/deferrals that have a HOLD flag present, and click **Commit** to set the audit as OK. Clear the form, enter the collection date range in the control block at the top of the form, and click **Retrieve**. The system will display all units within the specified date range where the flag is set to HOLD. Click **Audit** to move to the Donation Audit or


WellSky Corporation
Proprietary and confidential

Deferral Audit function to complete the long audit.

### Process 3:

Move through the list of units/deferrals, and for each unit/deferral that has a HOLD flag, click **Audit** to perform the audit for that unit/deferral. After you complete the audit, go back to the Paperless Nursing Audit page to select another unit/deferral that has a HOLD flag, and repeat the steps to complete the audit for that unit/deferral. Once audits have been completed for all of the units/deferrals that have a HOLD flag, click **Commit**. To remove the unit from the list, the program will have to be refreshed by clearing the screen and re-entering the control block information.

## At Commit

The system commits the data to the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Registration General Functions menu.

# 7.3 Registration Maintenance Functions

These functions are accessed from the following menu:

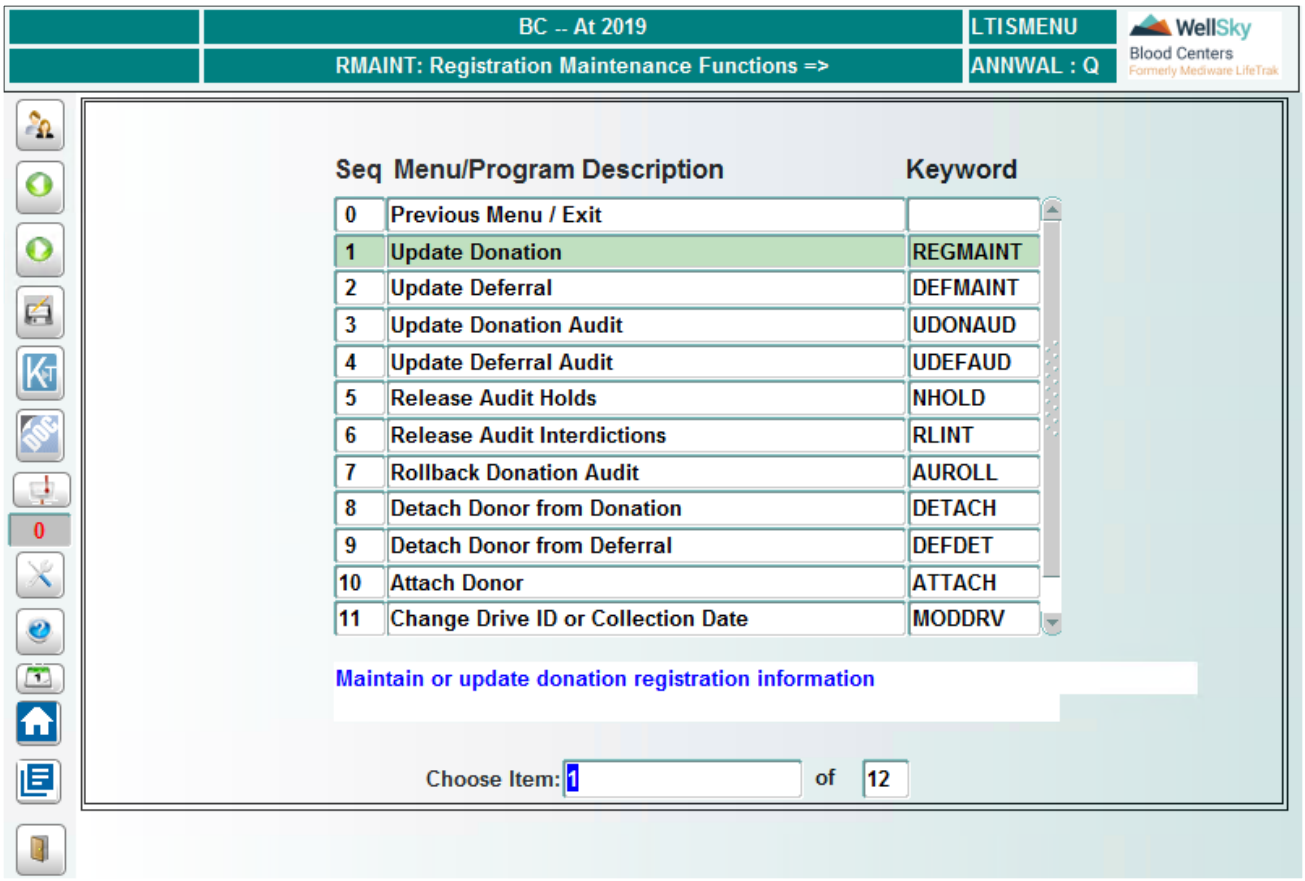


## 7.3.1 Update Donation (REGMAINT)

### Intended Use

Use this screen to update non-critical data entered during donation registration.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

### Limitations

- This screen cannot be used to attach or change a donor for a donation.
- Donation type and procedure code cannot be modified if the donation has been audited.
- Donations registered through OnSite Registration will not have the Dfrd Thru and Def Type fields pre-populated. You will be responsible for these entries.


WellSky Corporation
Proprietary and confidential

- Entry of ALT_MODE has only one selection and that is “A”. Entry of Alternate type and ID is controlled through the Configuration of Find Donor Block for a program (DONBLOCK)

## Prerequisites

The donation must have been registered using Register Donation (REGIS).

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `REGMAINT`.

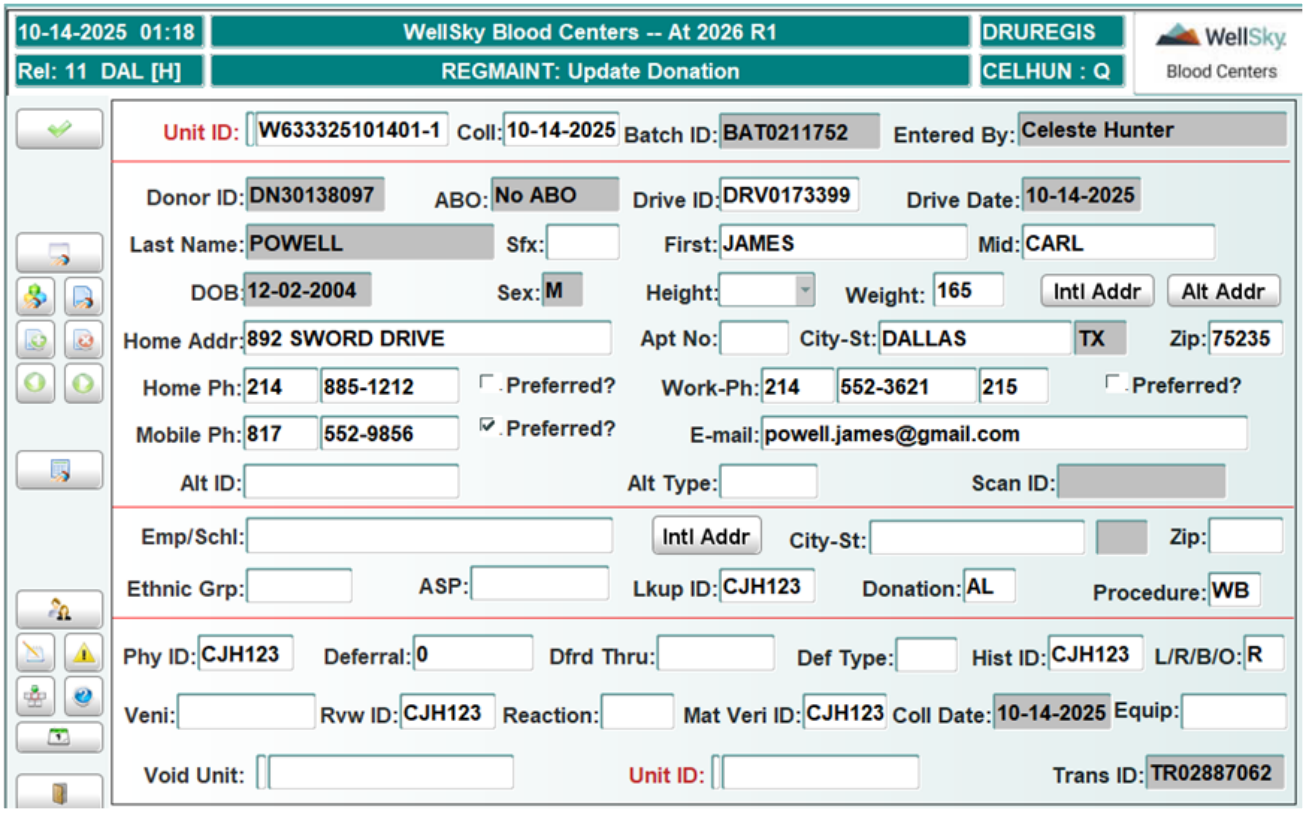


## Control Block Fields and Definitions

### Unit ID

Entry is required. Scan the bar code or manually enter the unit ID.

### Coll

If multiple records exist for the unit ID specified, the cursor advances to this field for entry of the collection date; otherwise, the collection date of the unit ID displays here and the cursor skips this field.

If the donation has been audited, a window informs you:

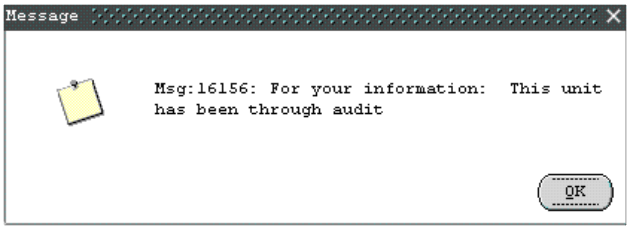


Click **OK** to close the window.

The registration batch ID and the name of the person who registered the donation display.

## Donor Data Block

Data displays in the Donor Data Block provided a donor is attached to the donation. The cursor advances to the Home Addr field in the Employer Block.

Press **F4** (Previous Field) to access and enter or modify data in any white field prior to the cursor position in the Donor Data Block or the Employer Block. Data in gray fields cannot be modified. LOVs are available in the City, Zip, and Emp/Schl fields. Press **ENTER** to move forward from field to field without making an entry.

### Height

Use the up and down arrow to select the appropriate height. Height values displayed are associated to the Master Code HGHT.

### Weight

Enter the donor's weight (in pounds) in this field.

### Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

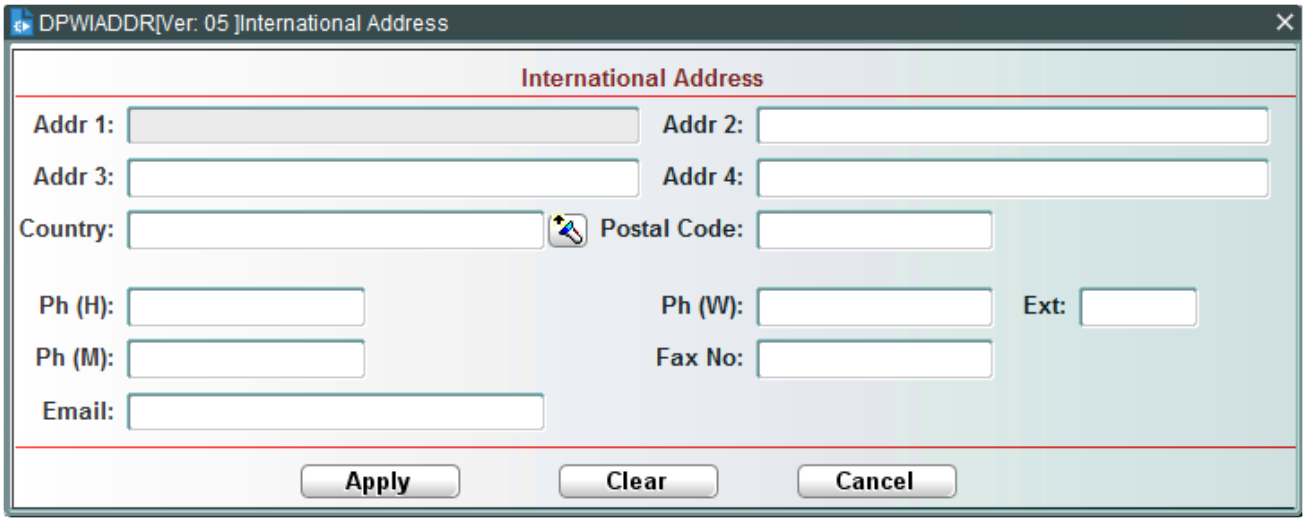


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Alt Addr (button)

Click **Alt Addr** to open the Alternate Demographics window, as follows:

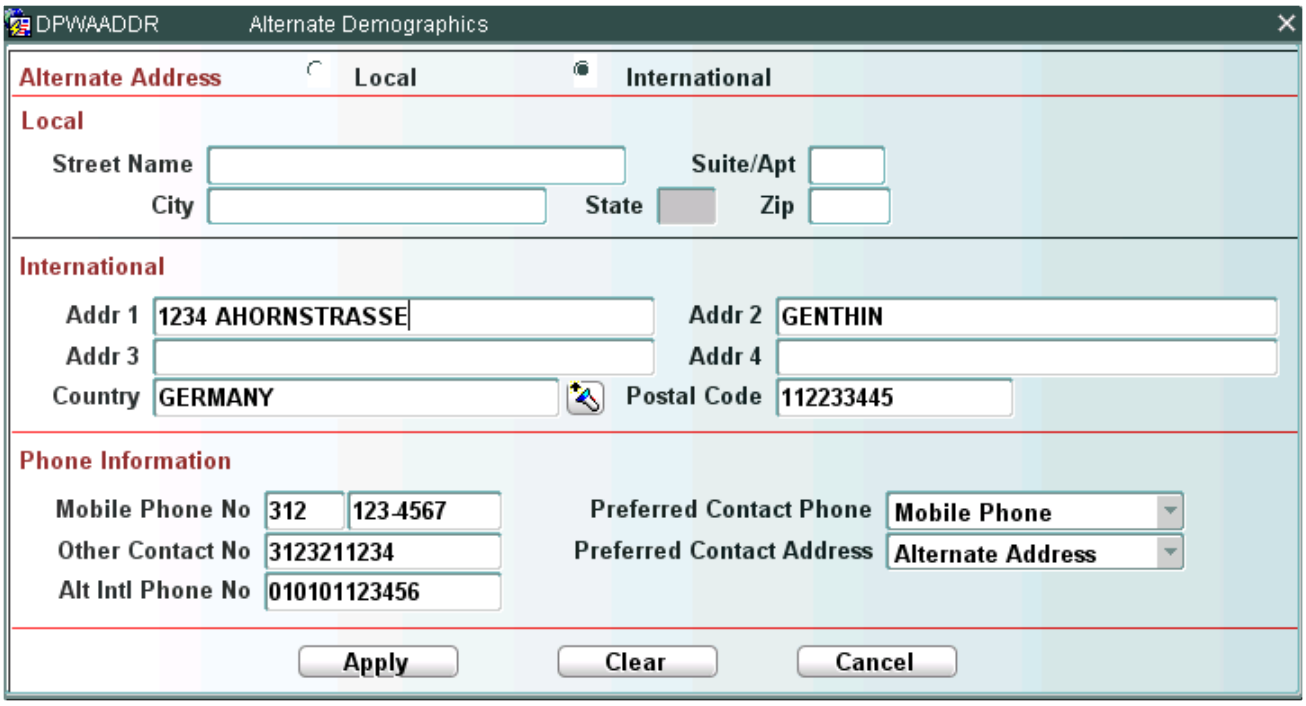


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Home Address

Entry is required. This field will accept a maximum of 50 characters.

## Apt No

Entry is optional. If an apartment number is entered, it can be a maximum of 10 characters.

## City-St and Zip

The system validates your city and ZIP Code entries. If they disagree, the system does not accept the entries. An LOV is available in both fields. Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contains only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the home phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Work-Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated with the phone number.

## Preferred?

Entry is optional. If the work phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the mobile phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. A maximum of 128 characters are accepted.

## Alt ID

Entry is optional if not configured in the Configure Find Donor Block for Programs (DONBLOCK). If the ALT_ID and Alternate Type are not configured for entry it will not require entry in the form. The entry can be a maximum of 20 alphanumeric characters.

## Alt Type

Entry is optional if not configured in the Configure Find Donor Block for Programs (DONBLOCK). If the ALT_ID and Alternate Type are not configured for entry it will not require entry in the form. If alternate ID is entered then the alternate type field is mandatory. Enter the alternate type or select it from the LOV.

## Scan ID

Entry is optional. Your facility must define BC_SCAN_RE in System Parameters (SYSPARM) to make the field mandatory. Manually enter a scan ID, which is a thirteen-digit number.


WellSky Corporation
Proprietary and confidential

# Employer Block Fields and Definitions

## Ethnic Grp

Enter ethnic group.

> **NOTE –** Entry is required in the *Ethnic Grp.* field if the System Parameter ETHNIC is set to `Y`; entry is optional if System Parameter ETHNIC is set to `N` or is blank. Select a valid ethnic group code from the LOV.

## ASP (Alternate Sponsor Code)

Entry is optional. Enter or modify the alternate sponsor code or select from the LOV. If an alternate sponsor is entered, the donation credit is given to the alternate sponsor.

## Lkup ID

Entry is optional. Enter or modify the employee ID of the person who performed the donor lookup, or select from the LOV.

## Donation

Entry is required. The donation type can be modified only if the audit process is not complete. An LOV is available from which you may select. Enter 99 to place the donation on hold when the donation type is missing or illegible. A facility-defined interdiction is placed if 99 is entered.

## Procedure

Entry is required. The procedure code can be modified only if the audit process is not complete. An LOV is available from which you may select. Enter 99 to place the donation on hold when the procedure code is missing or illegible. A facility-defined interdiction is placed if 99 is entered.

# Details Block Fields and Definitions

## Phy ID

Entry is required. Modify the employee ID or select from the LOV of personnel assigned to the drive. Enter 99 to place the donation on hold if the ID of the person who performed the physical is missing or illegible. A facility-defined interdiction is placed if 99 is entered.

## Deferral

Entry is required. Modify existing deferral codes, if appropriate. Enter 0 if no deferral code is recorded on the Donor Record. If entering a deferral code, DRDEF interdiction is placed. Enter 99 to place the donation on hold if the code is illegible or not known. A facility-defined interdiction is placed if 99 is entered.

## Dfrd Thru

Entry is optional. The cursor skips this field if a zero is entered in the Deferral field. Enter or modify the date the deferral ends.

## Def Type

Entry is required if no entry is made in the Dfrd Thru field. Enter either `IND` for indefinite deferral or `N/A` for not applicable.

## Hist ID

Entry is required. The existing entry can be modified. Enter a new employee ID or select from the LOV of employees assigned to the drive. Enter 99 to place the donation on hold if the entry is missing or illegible. A facility-defined interdiction is placed if 99 is entered.

## L/R/B/O

Entry is required. Modify the point of venipuncture by indicating:

- L = Left arm
- R = Right arm
- B = Both arms
- O = Other
- U = Unknown

The Venipuncture Details window displays:

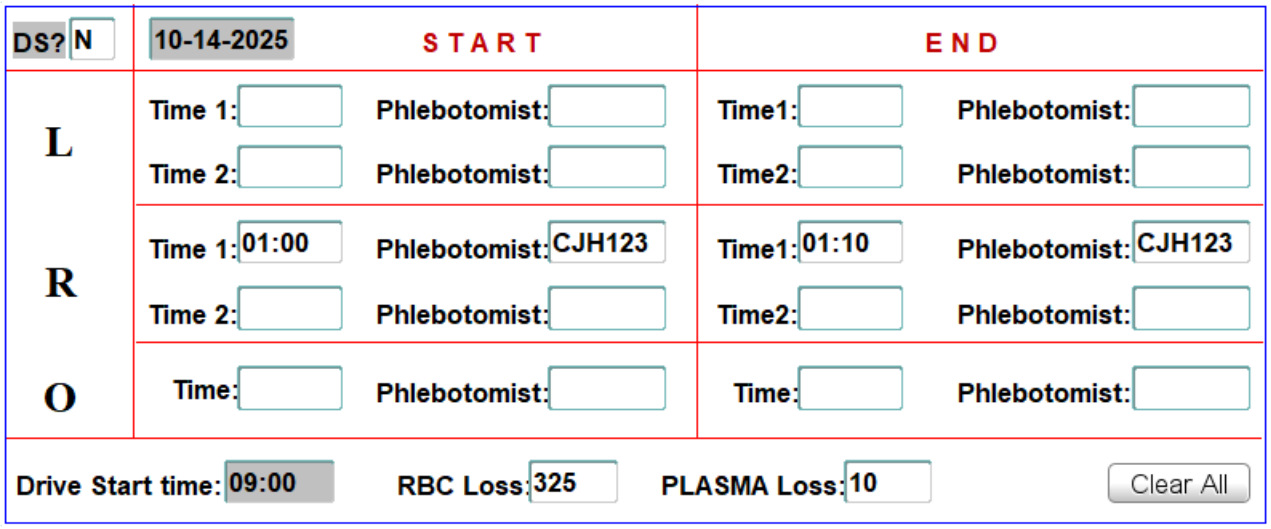


Modify times, employee IDs, RBC and PLASMA loss as necessary.

**NOTE –** If the code in the L/R/B/O field is changed, venipuncture details previously entered are cleared. To retrieve previously-entered data, clear the screen without committing data and begin again.

To exit this window without altering data, press ENTER a sufficient number of times to move through all populated fields. The window automatically closes and the cursor advances to the Veni field.


WellSky Corporation
Proprietary and confidential

### Veni
Entry is optional. Enter or modify any venipuncture codes, separating multiple codes with commas.

### Rvw ID
Entry is required. Enter the employee ID of the person who reviewed the Donation Record or select from the LOV. Entry of `99` will place HOLD interdiction that is defined in RHOLDS table for Inter Reason NOREVIEW.

### Reaction
Entry is optional. Enter a valid reaction code or select from the LOV.

### Mat Veri ID
Entry is optional. Enter the employee ID of the person who reviewed the Donation Record or select from the LOV of personnel assigned to the drive.

### Coll Date
Display only. The collection date displays and cannot be modified.

### Equip
Entry is optional. If the donation was collected using a piece of equipment, then manually enter it or select it from the list of values (LOV). The LOV comes from the master code EQUIP.

### Void Unit
Entry is optional. Enter a valid unit ID to indicate a voided unit.

### Unit ID
Entry is required. Re-scan the bar code or re-enter the unit ID using double blind entry. The second entry must match the original scan or entry. If the two do not match, the screen clears and you must begin again.

## At Commit
All modified data is committed to the database and replaces previously existing data.

## What to Do Next
If the donation has not been audited, it must be audited using Audit Donation (DONAUDIT). Otherwise, there is no step that follows a donation update.

# 7.3.2 Update Deferral (DEFMAINT)

## Intended Use
Use this screen to update non-critical data entered during deferral registration.

## Limitations
- This screen cannot be used to attach or change a donor for a deferral.

- Donation type and procedure code cannot be modified if the deferral has been audited.
- The mouse function is disabled for this screen.
- Deferrals registered through OnSite Registration will not have the Dfrd Thru and Def Type field pre-populated. User will have to be responsible for these entries.

## Prerequisites

The deferral must have been registered using Register Deferral (DEFREGIS).

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `DEFMAINT`.

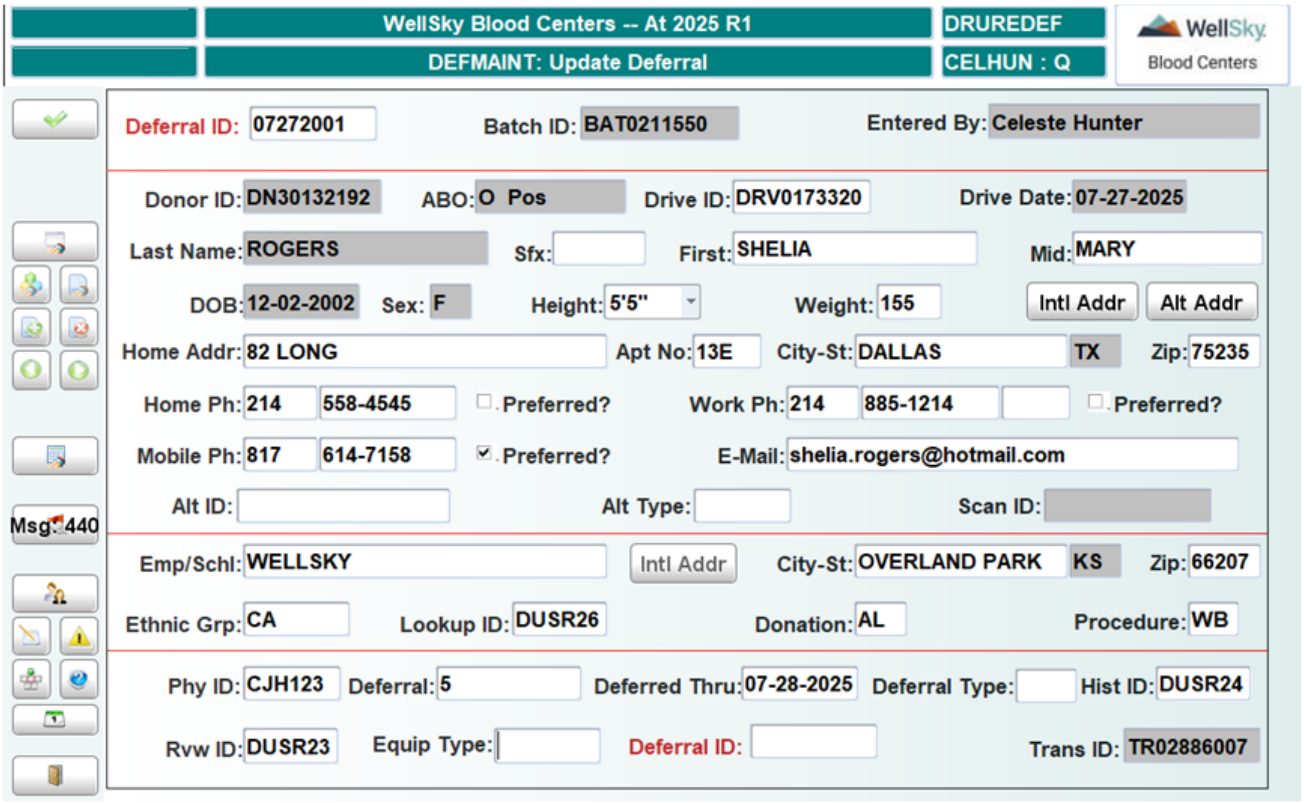


## Control Block Fields and Definitions

### Deferral ID

Scan the bar code or manually enter the deferral ID using double blind entry.

The registration batch ID and the name of the person who registered the deferral displays. Data displays in the Donor Data Block provided a donor is attached to the deferral.

The cursor moves to the Address field. Proceed through each field by pressing ENTER, regardless of whether you enter or modify data. Fields that are white permit entry or update. Fields that are gray do not permit entry or modification of data.


WellSky Corporation
Proprietary and confidential

Press **F4** (Previous Field) to access and enter or modify data in any white field prior to the cursor position in the Address field. Proceed through each field by pressing **ENTER**, regardless of whether you enter or modify data. Fields that are white permit entry or update. Fields that are gray do not permit entry or modification of data. LOVs are available in the City-St, Zip, and Emp/Schl fields. Press **ENTER** to move forward from field to field without making an entry.

## Sfx

Press **F4** (Previous Field) to move the cursor back to the Sfx (Suffix) field. You may enter a suffix (Sr., Jr., III, etc.) to further identify the donor.

## First Name

Press **F4** (Previous Field) to move the cursor back to the First (First name) field. You may modify the first name.

## Mid Name

Press **F4** (Previous Field) to move the cursor back to the Mid (middle name)field. You may modify the first name.

## DOB

Date of Birth is display only. Updates are not allowed.

## Sex

Sex is display only. Updates are not allowed.

## Height

Use the up and down arrow to select the appropriate height. Height values displayed are associated to Master Code HGHT.

## Weight

Enter the donor's weight (in pounds) in this field.

## Home Address

Enter or modify the home address field. This field will except up to 50 characters.

## Apt

Enter the apartment number or leave blank. This field takes 25 characters.

## City-St and Zip

The system validates your entry of city and ZIP Code. If they disagree, the system does not accept the entry. An LOV is available in both fields (see hint below). Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contain only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the home phone number is the preferred contact number, then either press the space bar or use the mouse to select the check box.

## Work Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated to a phone number.

## Preferred?

Entry is optional. If the work phone number is the preferred contact number, then either press the space bar or use the mouse to select the check box.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the mobile phone number is the preferred contact number, then either press the space bar or use the mouse to select the check box.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. Up to 128 characters are accepted. As you press **ENTER** to exit the E-mail field, the cursor advances to the Employer Block.

## Alt ID

Entry is optional unless defined in DONBLOCK as required entry. Entry is up to 20 characters alpha/numeric value.

## Alt Type

Entry is optional unless defined in DONBLOCK as required entry. Enter the alternate type or select from list.

## Scan ID

This field is no longer used.

## Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:


WellSky Corporation
Proprietary and confidential

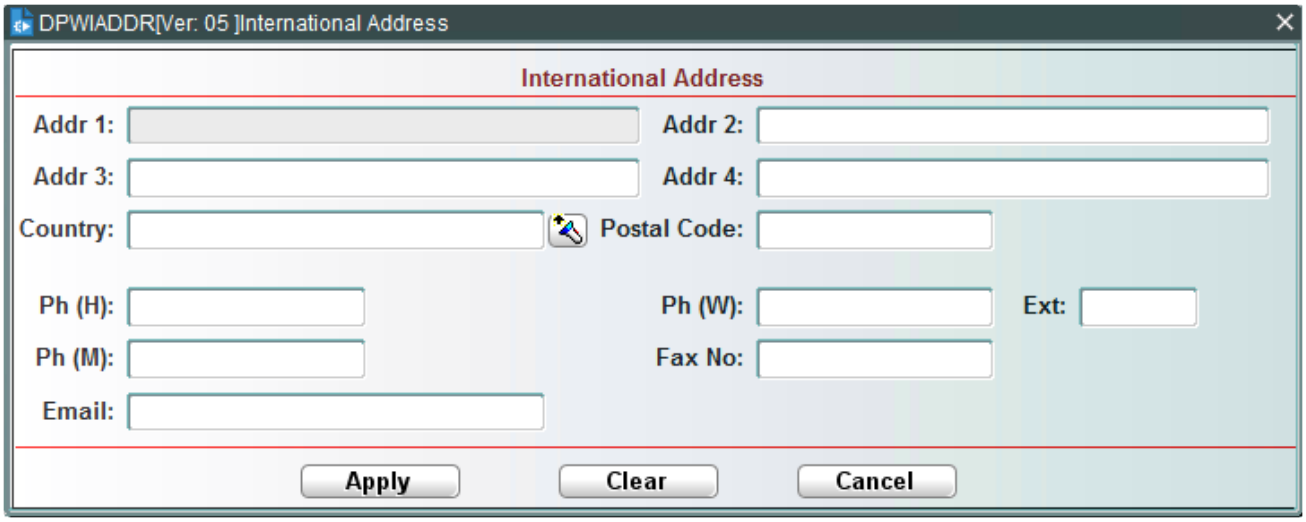


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Alt Addr (button)

Click **Alt Addr** to open the Alternate Demographics window, as follows:

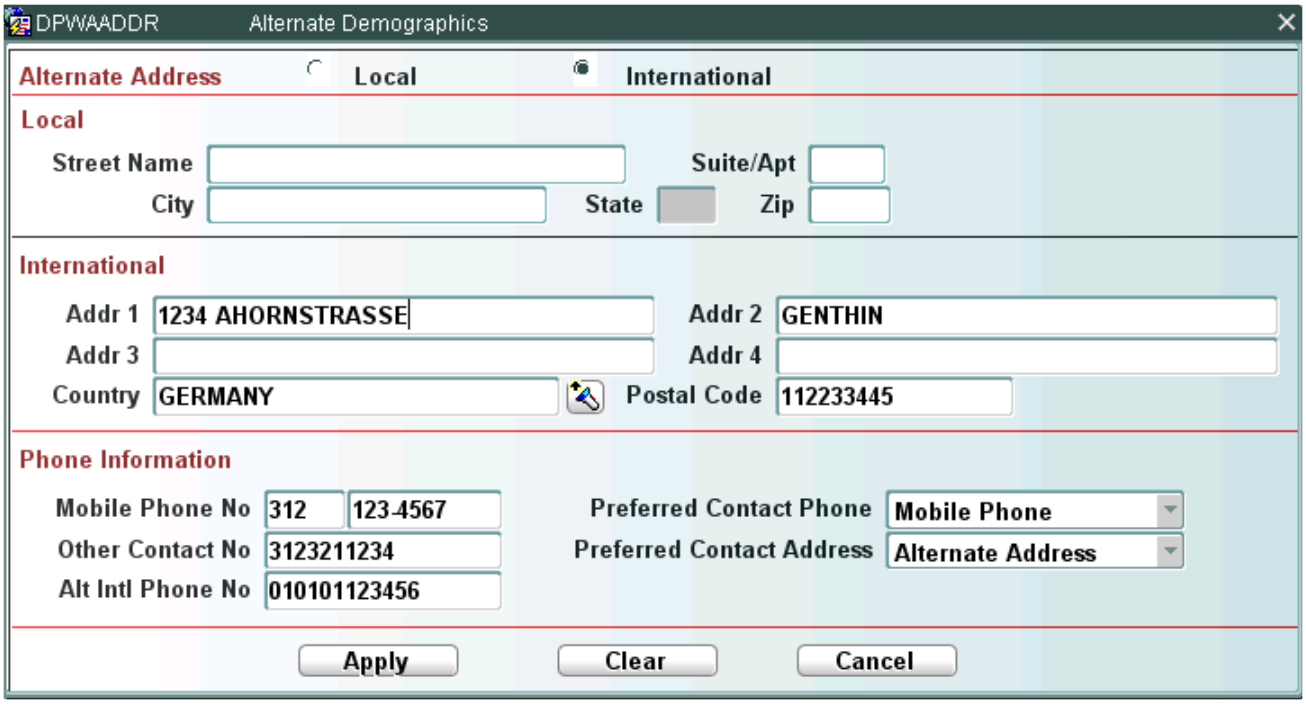


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

# Employer Block Fields and Definitions

You must navigate through each field in the Employer Block. If no entry is required or correction needed, press ENTER to proceed to the next field.

## Empl/Sch

Entry is optional. If an existing employer is displayed, you can select another employer for the donor. Type a partial employer name and press ENTER to access the LOV in this field.

If you enter an employer name in this field that does not match an employer in the database, a pop-up asks if you want to create a new employer.

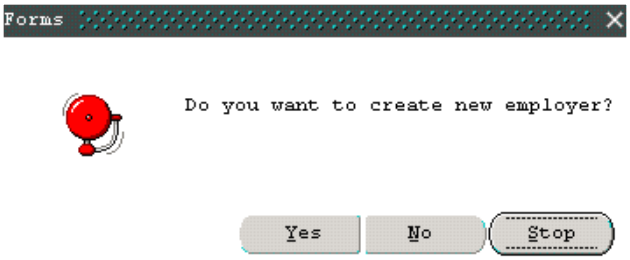


If you answer Yes, a new employer is created. If you answer No, the cursor returns to the Empl/School field for correction of your entry. If you press ENTER, the Stop button is activated and a pop-up remains until you select Yes or No.

## City- St/Zip

Entry is required if a new employer is being created. ZIP Code and city entries will be validated and must agree. If an existing employer is selected, the data for that employer cannot be modified.

## Ethnic Grp

Entry is required if System Parameter ETHNIC is set to `Y`; entry is optional if System Parameter ETHNIC is set to `N` or is blank. Select a valid ethnic group code from the LOV. The LOV is populated from the Master Code ETHGP.

Press F4 (Previous Field) to access and enter or modify data in any white field prior to the cursor position in the Donor Data Block or the Employer Block. Data in gray fields cannot be modified. LOVs are available in the City-St, Zip, and Emp/Schl fields. Press ENTER to move forward from field to field without making an entry.

## Lookup ID

Entry is optional. Enter or modify the employee ID of the person who performed the donor lookup, or select from the LOV.

## Donation

Entry is required. Modify the donation type code or select from the LOV. This code cannot be changed if the donation has been audited. Enter `99` to place the deferral on hold if the entry on the Donor Record is missing or illegible.


WellSky Corporation
Proprietary and confidential

### Procedure

Entry is required. Modify the procedure code or select from the LOV. This code cannot be changed if the donation has been audited. Enter `99` to place the deferral on hold if the entry on the Donor Record is missing or illegible.

## Deferral Details Block Fields and Definitions

### Phy ID

Modify the employee ID of the person who performed the physical or select from the LOV. Enter `99` to place the deferral on hold if the entry on the Donor Record is missing or illegible.

### Deferral

Entry is required. Modify existing deferral codes, if appropriate. Separate multiple codes with commas. Enter `99` to place the deferral on hold if the entry on the Donor Record is missing or illegible. You cannot enter 0 in this field.

### Deferred Thru

Entry is optional. Enter or modify the deferred through date, if appropriate.

### Deferral Type

Entry is required if no entry is made in the Deferred Thru field. Entry may be either `IND` for indefinite deferral or `N/A` for not applicable.

### Historian ID

Entry is required. Modify the existing employee ID of the historian or select from the LOV. Enter `99` to place the deferral on hold if the entry on the Donor Record is missing or illegible.

### Rvw ID

Entry is required. Enter the employee ID of the person who reviewed the Donor Record or select from the LOV.

### Equip Type

Entry is optional. If the donation was collected using a piece of equipment, then manually enter it or select it from the list of values (LOV). The LOV comes from the master code EQUIP.

### Deferral ID

Entry is required. Re-scan the bar code or re-enter the deferral ID using double blind entry. The scan or entry must match the original scan or entry. If the two do not match, the screen will clear and you must begin again.

## Placing a HOLD on a Deferral

You can place a manual hold on the deferral by pressing **F10** at any point before the registration is committed to the database. A pop-up displays that allows you to define the hold:

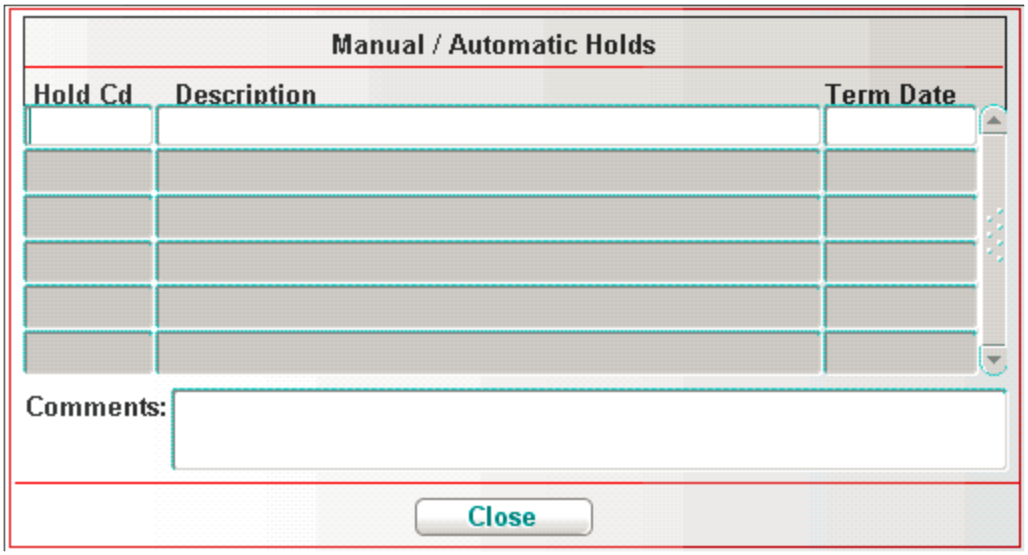


An LOV is available in the Hold Cd field that contains all valid hold codes. Once a code is selected from the LOV, the code and its description display in the Deferral Holds window.

Click **Close** to return to the Update deferral registration screen. The hold you have defined will be placed on the deferral as you commit the registration to the database.

To remove the hold you have defined:

1. Press **ALT** + **F5** (Clear Record).
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed in this screen at any time before the registration is committed to the database.

## At Commit

All data is immediately committed to the database when the second pass of the deferral ID is accepted. The screen clears and the cursor is positioned in the first Deferral ID field for the next registration. The batch report automatically prints when the screen is exited.

A Batch ID exists in the database immediately when it is generated. A batch ID cannot, however, be queried unless it has at least one deferral registered.

All modified data is committed to the database and replaces previously existing data when the confirmation entry of the deferral ID is accepted.

## What to Do Next

If the deferral has not been audited, it must be audited using Audit Deferral (DEFAUDIT). Otherwise, there is no function that follows deferral update.


WellSky Corporation
Proprietary and confidential

# 7.3.3 Update Donation Audit (UDONAUD)

## Intended Use

Use this screen to modify data entered during donation audit, including adding or deleting health history questions and responses, modifying responses to health history questions, and modifying values entered for physical findings.

**NOTE –** When the update is committed, the donor interface is automatically called to send over new nursing audit information to Lab.

## Limitations

- Neither the donation type nor procedure code can be modified.
- The mouse function is disabled in this screen.
- The nursing audit flag will be set for donations entered using the OnSite Registration Module
- The **PREVIOUS BLOCK** icon, **CTRL** + **F4** (Previous Block) function key, **NEXT BLOCK** icon, **CTRL** + **F3** (Next Block) function key, and **DELETE RECORD** icon are all disabled in this screen.

## Prerequisites

The registered donation must have been audited using the following to allow the unit to be entered in the program:

- Audit Donation (DONAUDIT)
- Health History Physical Findings (OnSite Module)
- Perform Visual Audit (VISNU)

Master codes to be defined:

- Master code for HHCOM (Health History canned comments)
- Master code for PFCOM (Physical Findings canned comments)

Definition of questions and templates:

- Create Physical Findings Template (HHQTEMP) must be defined.
- Define Health History Responses (HHR) must be defined.
- Create Physical Findings Template (PHYTEMP) must be defined.
- Define Physical Finding Values (PHYRULE) must be defined.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `UDONAUD`.

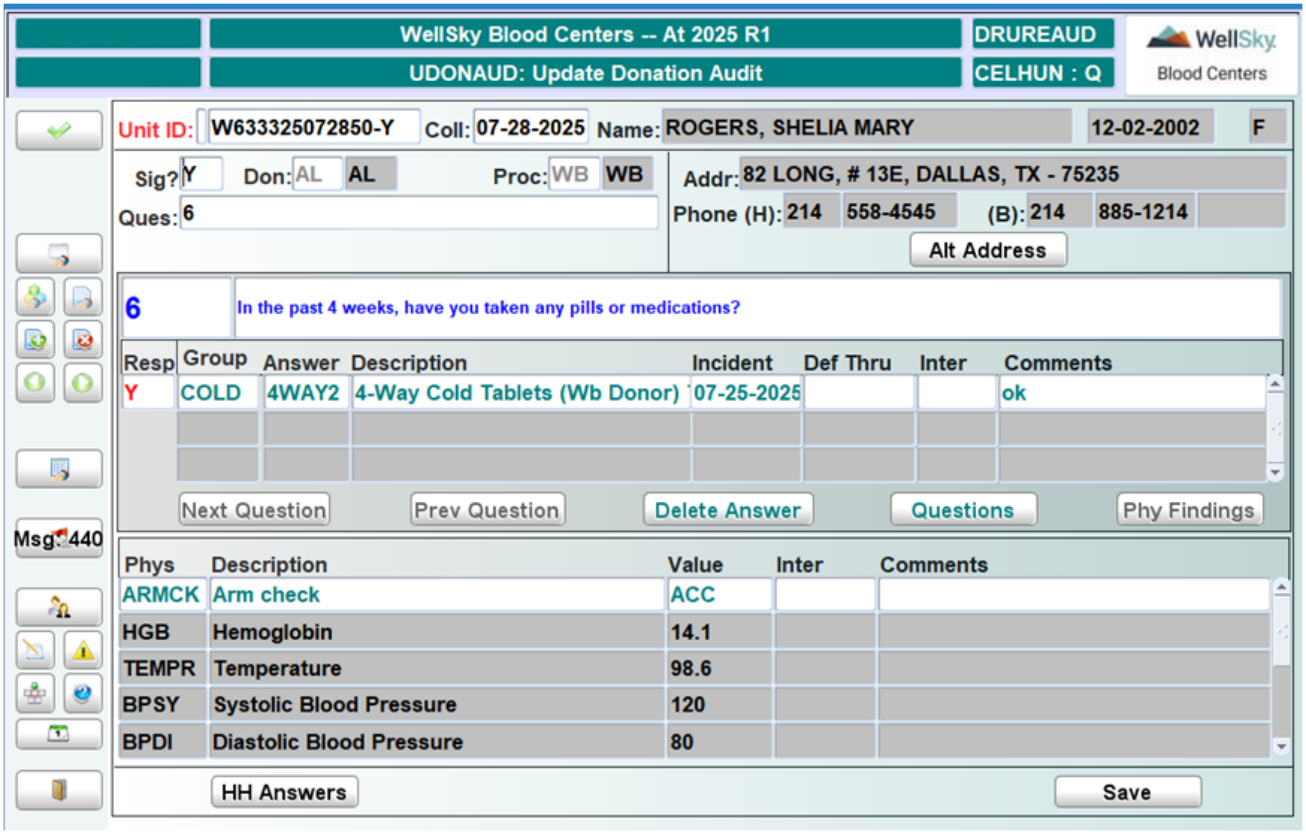


# Control Block Fields and Definitions

## Unit ID

Entry is required. Scan the bar code or manually enter the unit ID using double blind entry.

## Coll

If duplicate records exist for the unit ID specified, the cursor advances to this field for entry of the collection date. Otherwise, the collection date displays as the donation record is retrieved, and the cursor advances to the Sig? field.

The following information displays:

- Collection Date
- Name
- Date of birth
- Sex
- Address
- Phone (home and business)
- Verification of donor signature
- Donation type

- Procedure code

**NOTE –** Of the above data items, only the verification of donor signature can be modified.

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

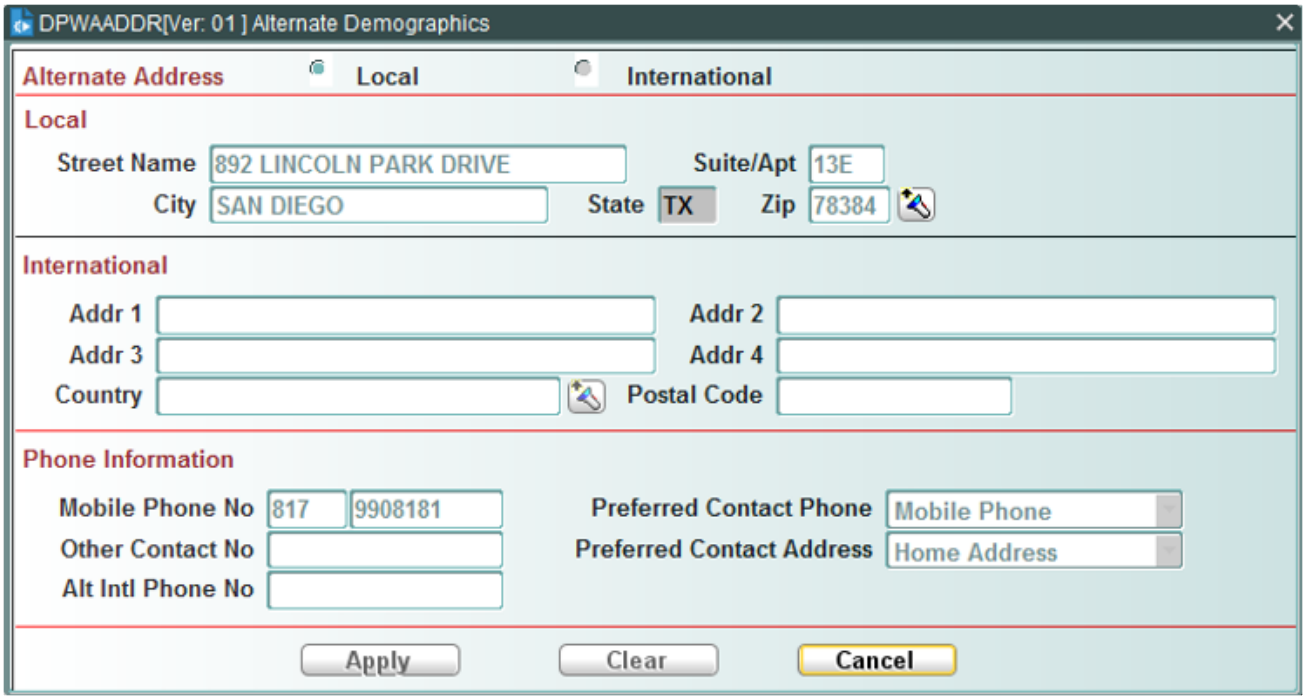


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

# Questions Block Fields and Definitions

## Sig?

You may modify the existing entry in this field. Enter `N` if no signature is present on the Donor Record, or `Y` if the signature is present. An entry of N invokes a pop-up that requires a user decision:

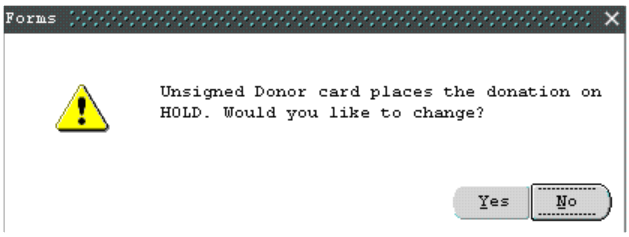


Answer **Yes** to return to the field or a corrected entry, or **No** to place the donation on hold. The cursor advances to the Ques field.

## Ques

Enter any question numbers for which the donor gave unexpected answers. Separate multiple question numbers with commas.

**NOTE –** If a question is deleted for which the answer prompted an interdiction, the associated interdiction is automatically terminated.

After listing question numbers, press **ENTER** to continue to the Answer Block. The first question number and its full text displays in blue text.

## Resp

Enter the donor response (`Y` or `N`) to the question number displayed in blue text.

## Group

Entry is optional. Enter the group code for the question or select it from the LOV.

## Answer

Enter a valid answer code or select from the LOV. Once a valid answer code is entered or selected, the description automatically displays.

## Start Date

Entry is required if the additional date flag has been set to Y in the Define Health History Responses. Enter the date in MMDDYYYY format.

## End Date

Entry is optional. Enter a date in MMDDYYYY format.

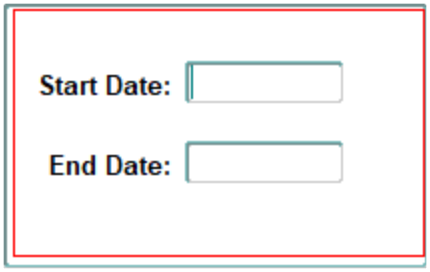


## Incident

Entry is required. Enter the date of the incident, if known, using the MMDDYYYY format.

## Def Thru

Entry is optional. If the answer caused an automatic deferral with a minimum deferral period, the deferred through date displays. This field displays as a red block in the event of an indefinite deferral.


WellSky Corporation
Proprietary and confidential

**NOTE –** If the def thru date needs to be updated, then the current record needs to be deleted, and you must create a new record with the correct term date.

## Inter

Display only. The code for any interdiction prompted by the answer displays here. No entry or modification is permitted.

## Comments

Entry is optional. Enter comments up to 248 characters in length. Press F2 (List of Values) to enlarge the entry window:

Comment entry is based on response. If the response has been defined in Define Physical Findings Responses (PHYRULE) with comment flag of Y, then the comment field becomes required, and the user must enter a comment. The comment can be entered in free format text and/or by canned comments that are defined in master code PFCOM. The comment can be up to 240 characters in length.

**NOTE –** The Comment field becomes required if set in the Define Health History Responses to require a comment if the flag is set.

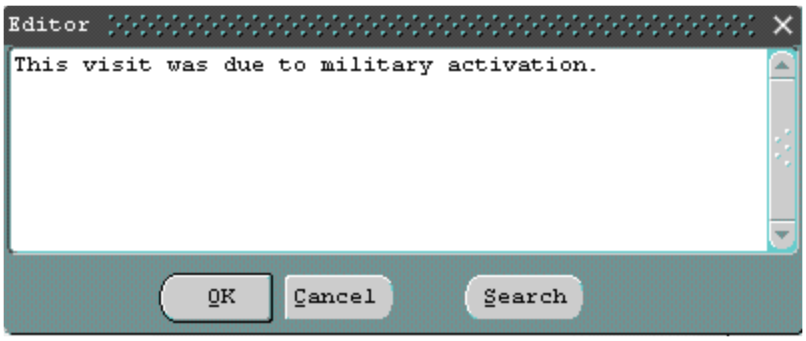


# Using the Buttons

- To advance to the next question, click Next Question.
- To go back to the previous question, click Prev Question.
- To delete an answer and update the response, highlight the answer to be removed, and click Delete Answer.

**NOTE –** To update the response, use **`Shift + Tab`** to move back to the Response field and update with the correct response. Click SAVE when finished. All answers must be removed to update the response.

To highlight the answer, press **`Enter`** until the cursor is on the row that contains the answer that needs to be removed. Click Delete Answer, and you will get the following message:

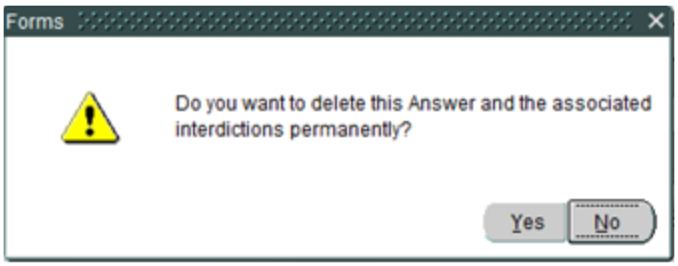


Click **Yes** to remove the answer and the associated interdiction. Click **No** to take the cursor back to the answer code and leave the answer as it is.

- To add to the list of questions for which unexpected answers were received, click **Questions**.
- Once entries are complete for all questions listed, click **Phy Findings** to advance to the Physical Findings Block.

**NOTE –** In order for the Phy Findings button to be enabled, you must keep your cursor in the Comments Field.

## Physical Findings Block Fields and Definitions

Each required physical procedure displays. Only the value can be modified for each physical finding.

### Value

Entry is required for each physical procedure. An LOV is available for each procedure for which the value to be entered is not numerical.

**NOTE –** If a new value removes the interdiction, the only way to see that the interdiction was placed is through the database by checking the audit table for donor interdictions.

### Inter

If the donation is interdicted due to the value entered, the system displays the interdiction code here. Modification is permitted. Changing a value terminates or adds interdictions automatically where applicable.

**NOTE –** For the hemoglobin (HGB) and hematocrit (HCT) findings, the system will examine the sex of the donor and place a PHYTD interdiction if the value falls outside of the range specified in the Define Physical Findings Values (PHYRULE) screen.

**EXAMPLE –** The range for HGB specified in PHYRULE is as follows:

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AL | CO | HGB | D | 12.0 | 16.0 | BETWEEN | F | | | PHYTD | 09-18-2015 | |
| AL | CO | HGB | D | 13.0 | 18.0 | BETWEEN | M | | | PHYTD | 09-18-2015 | |

If you enter an HGB value of 18.1 for a female donor, the system will place a PHYTD interdiction, as


WellSky Corporation
Proprietary and confidential

shown:

| Phys | Description | Value | Inter | Reason |
|---|---|---|---|---|
| HGB | Hemoglobin | 18.1 | PHYTD | Value should be in between 13.0 - 18 |

### Reason

If the donation is interdicted due to a physical finding, the reason displays here. No entry or modification is permitted.

To return to the Answer Block, click **HH Answers**. The cursor advances to the Resp field in the Questions Block.

## Placing a MANUAL HOLD on a Donation

At any point during the registration process (after a batch is defined and before the registration is committed to the database), you can press **F10** to place a hold on the donation. The Manual/Automatic Holds window displays to enable you to define the hold.

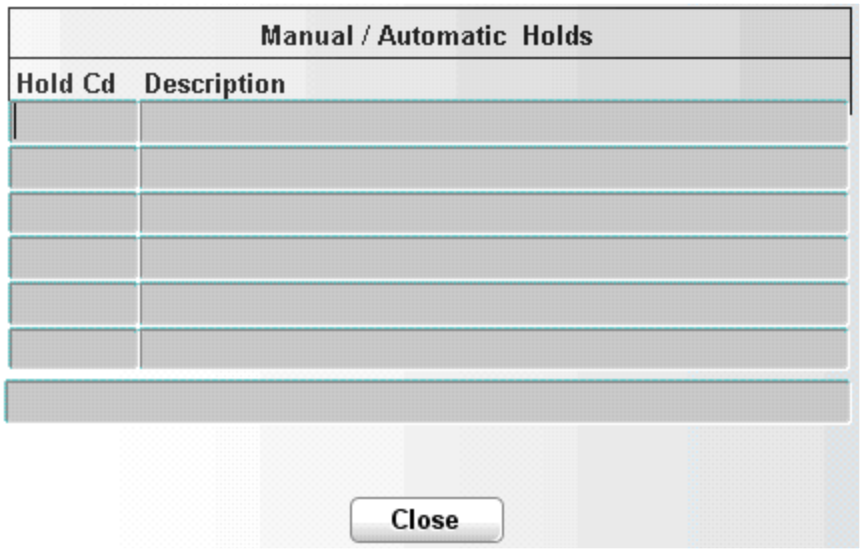


A LOV is available in the Hold Cd field that lists all valid hold codes. Once a code is selected from the LOV, the code and its description display in the Manual Holds window.

Click **Close** to return to the registration screen. The hold you have defined will be placed on the donation when the registration is committed to the database.

To remove the hold you have defined:

1. Click **CLEAR RECORD** or press **CTRL+ F8** (Delete Record).
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed in this screen at any time before the registration is committed to the database.

## Updating and Reviewing OnSite Donation

When moving from the Paperless Nursing Audit, the control block will be populated based on the selection of the unit number. If going directly to the program, scan the donation ID.

To remove an answer to update, the following steps must be followed:

1. Select the question, and move to the *Answer* field.
2. In the Answer field, press **`Enter`** to move down to the specific answer that was entered.
3. Click Delete Answer. You will receive the following message:

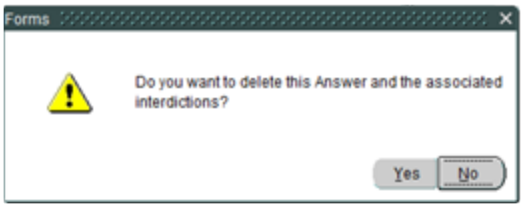


   a. Click Yes to remove the answer, or click No to cancel the process.

Once the answer is removed, you can enter the answer that applies.

## Updating Response for OnSite Donation

To update a response, ALL answers must be deleted prior to changing the response.

1. In the Answer field, press **`Enter`** to move down to the specific answer that was entered.
2. Click Delete Answer. You will receive the following message:

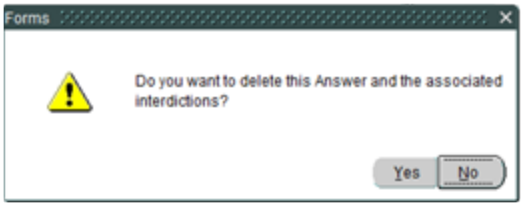


3. Click Yes to remove the answer.
4. To change the response, the cursor should be on the response row. Click Delete Answer. You will receiving the following message:

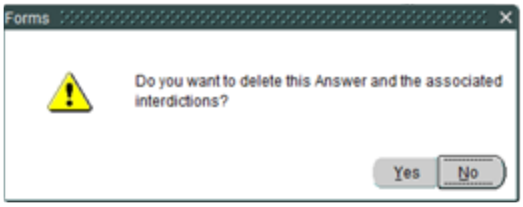


5. Click **Yes**, and the cursor will be in the Response field.
   a. Enter **Y**, and the cursor will move to the Answer field. Enter the answer code, or use the List Val to pull from the list.
   b. Enter **N**, and the cursor will move to the Answer field. If the answer codes are not linked to NO, then type **NO** and click **Save**.

## Committing the Transaction to the Database

Click **Save** or press **ALT + S** to save any modifications to the database. The screen clears for update of another donation audit.

The system automatically calls the Donor-to-Lab Interface when you click **Commit**, regardless of how the audit is updated.

**NOTE –** The Donor-to-Lab interface does not interface interdictions on autologous (AU) or therapeutic (TH) units.

## To View Interdictions Placed Through Audit

Interdictions placed through audit by entering answers for health history and entering values for physical findings must be viewed by using the Donor Detail Query (SDONQ) and clicking **Interdictions**. This will display all active interdictions that were placed.

**NOTE –** If a health history answer is updated, and the updated answer removes an interdiction, but a comment was entered for the updated answer, go to the Donor Detail Query (SDONQ). Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the questions, and the comments entered for updated answers will display under the questions.

If a physical code value is updated, and an interdiction either was not placed or was removed, but a comment was entered for the update, go to the Donor Detail Query (SDONQ) to view those comments. Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the physical findings to view the comments entered for those physical values that were updated.

## What to Do Next

There is no next step.

# 7.3.4 Update Deferral Audit (UDEFAUD)

## Intended Use

Use this screen to modify data entered during deferral audit, including:

- Adding or deleting health history questions and responses
- Modifying responses to health history questions
- Adding or deleting physical findings and their values
- The **PREVIOUS BLOCK** icon, **CTRL** + **F4** (Previous Block) function key, **NEXT BLOCK** icon, **CTRL** + **F3** (Next Block) function key, and **DELETE RECORD** icon are all disabled in this screen.

## Limitations

- Neither the donation type nor procedure code can be modified.
- The mouse function is disabled for this screen.
- The nursing audit flag will be set for deferrals entered using the OnSite Registration Module.

## Prerequisites

- The registered deferral must have been audited using the Audit Deferral (DEFAUDIT) screen.
- Master code for HHCOM (Health History canned comments)
- Master code for PFCOM (Physical Findings canned comments)
- Create Physical Findings Template (HHQTEMP) must be defined.
- Define Health History Responses (HHR) must be defined.
- Create Physical Findings Template (PHYTEMP) must be defined.
- Define Physical Finding Values (PHYRULE) must be defined.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `UDEFAUD`.


WellSky Corporation
Proprietary and confidential

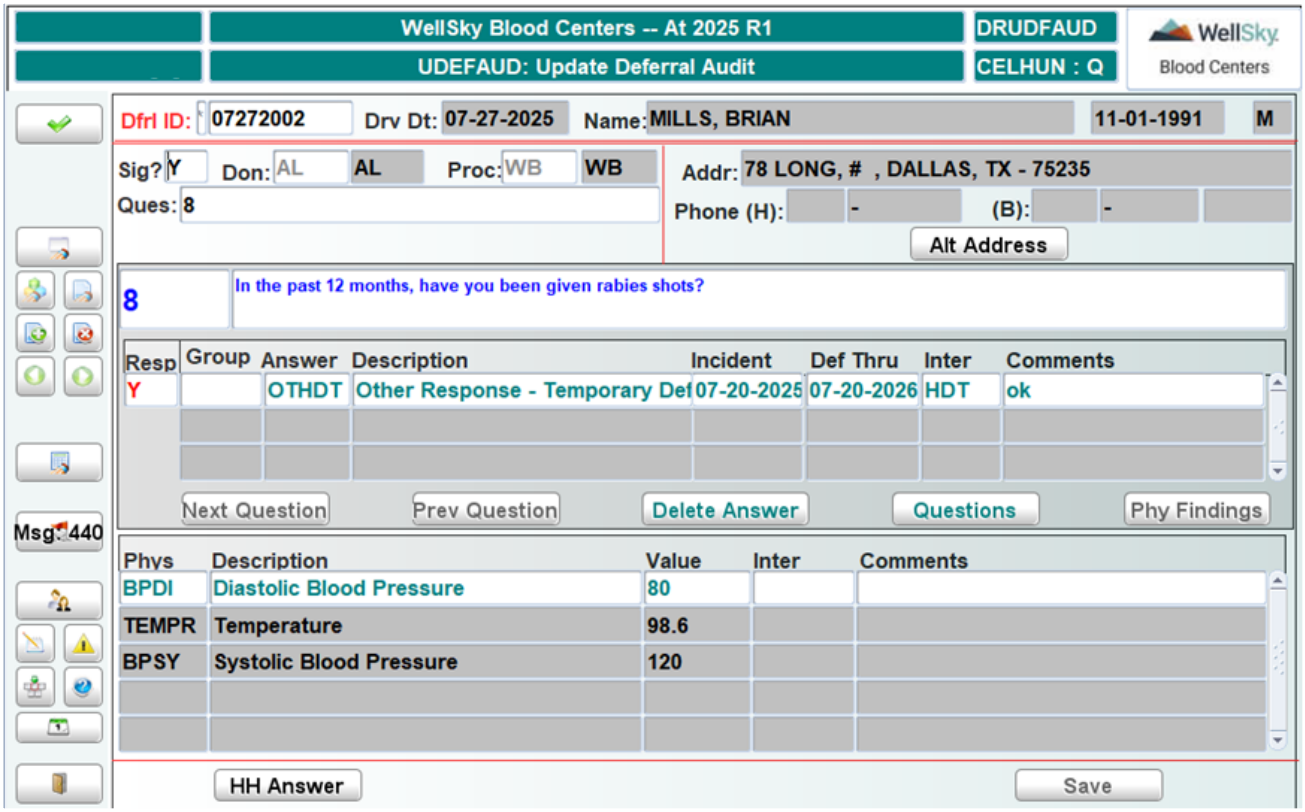


# Control Block Fields and Definitions

## Dfrl ID

Entry is required. Scan the bar code or manually enter the deferral ID using double blind entry.

## Drv Dt

Display only. The drive date displays and cannot be modified. The cursor advances to the Sig? field.

The following information displays:

- Drive date
- Name
- Date of birth
- Sex
- Address
- Phone (home and business)
- Verification of donor signature
- Donation type
- Procedure code

**NOTE –** Of the above data items, only the verification of donor signature can be modified.

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

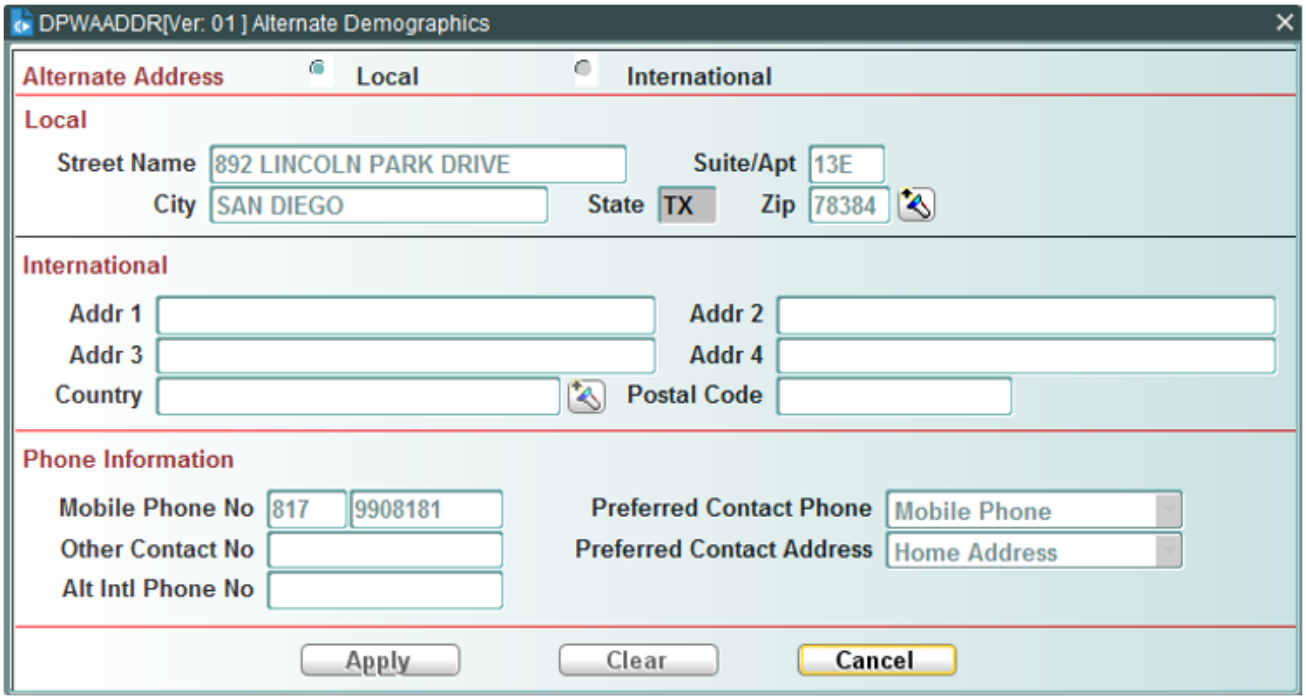


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

# Questions Block Fields and Definitions

## Sig?

You may modify the existing entry in this field. Enter `N` if no signature is present on the Donor Record, or `Y` if the signature is present. An entry of N invokes a window that requires a user decision:

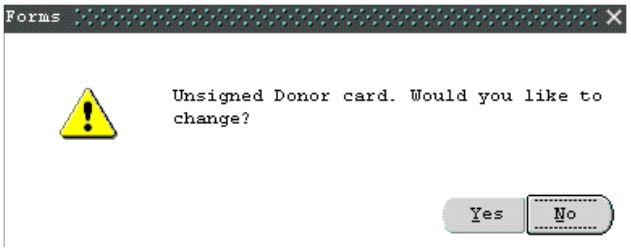


Click **Yes** to return to the field for a corrected entry, or click **No** to place the deferral on hold. The cursor advanced to the Ques field.

## Ques

Enter any question numbers for which the donor gave unexpected answers. Separate multiple question numbers with commas. After listing question numbers, press **ENTER** to continue to the Answer Block. The first question number and its full text displays in blue text.

## Resp

Enter the donor response `Y` (Yes), `N` (No), or `U` (Unanswered) to the question number that is displayed in blue text.

## Group

Entry is optional. Enter the group code for the question or select from the LOV.

## Answer

Enter a valid answer code or select from the LOV. Once a valid answer code is entered or selected, the description automatically displays.

## Start Date

Entry is required if the additional date flag has been set to Y in the Define Health History Responses. Enter the date in MMDDYYYY format.

## End Date

Entry is optional. Enter a date in MMDDYYYY format.

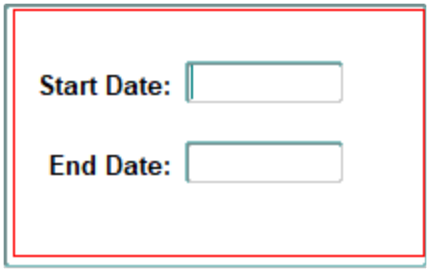


## Incident

Enter the date of the incident, if known, using the MMDDYYYY format.

## Def Thru

Entry is optional. If the answer caused an automatic deferral with a minimum deferral period, the deferred through date displays. This field displays as a red block in the event of an indefinite deferral.

**NOTE –** If the def thru date needs to be updated, then the current record needs to be deleted, and you must create a new record with the correct term date.

## Inter

If the donation is interdicted due to the value entered, the system displays the interdiction code here. Modification is permitted. Changing a value terminates or adds interdictions automatically where applicable.

## Comments

An entry in this field is optional. Enter comments up to 248 characters in length. Press F2 (List of Values) to enlarge the entry window.

Comment entry is based on response. If the response has been defined in Define Physical Finding Responses (PHYRULE) with comment flag of Y, then the comment field becomes required, and the user must enter a comment. The comment can be entered in free format text and/or by canned comments that are defined in master code PFCOM. The comment can be up to 240 characters in length.

**NOTE –** The Comment field becomes required if set in the Define Health History Responses to require a comment if the flag is set.

# Using the Buttons

- To advance to the next question, click Next Question.
- To go back to the previous question, click Prev Question.
- To delete an answer and update the response, highlight the answer to be removed, and click Delete Answer.

**NOTE –** To update the response, use **`Shift + Tab`** to move back to the Response field and update with the correct response. Click SAVE when finished. All answers must be removed to update the response.

To highlight the answer, press **`Enter`** until the cursor is on the row that contains the answer that needs to be removed. Click Delete Answer, and you will get the following message:

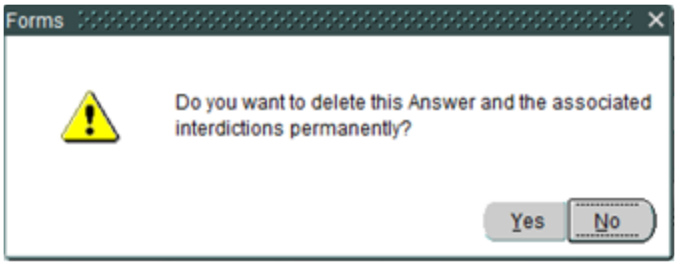


Click Yes to remove the answer and the associated interdiction. Click No to take the cursor back to the answer code and leave the answer as it is.

- To add to or delete from the list of questions for which unexpected answers were received, click Questions.
- Once entries are complete for all questions listed, click Phy Findings to advance to the Physical Findings Block.

**NOTE –** In order for the Phy Findings button to be enabled, you must keep your cursor in the *Comments* Field.


WellSky Corporation
Proprietary and confidential

# Physical Findings Block Fields and Definitions

## Phys

Entry is required for each physical finding entered. Enter a valid physical procedure code or select from the LOV. Physical procedures can be added or deleted.

To delete a physical procedure, highlight the row and click **Delete** on the left tool bar. A reason is required if the physical procedure is deleted and an interdiction is associated.

**NOTE –** To make any modifications to physical codes or values, you must delete and then re-add the information.

## Description

Display only. Once a valid physical finding code is entered, the code description automatically displays. No entry or modification is permitted.

## Value

Entry is required. A value in this field is mandatory for each physical procedure. An LOV is available for each procedure for which the value to be entered is not numerical. Existing values can be modified. Associated interdictions are added or removed automatically, if applicable.

**NOTE –** If a new value removes the interdiction, the only way to see that the interdiction was placed is through the database by checking the audit table for donor interdictions.

## Inter

Display only. If an interdiction is prompted by the value entered, the system displays the interdiction code here. No entry or modification is permitted.

**NOTE –** For the hemoglobin (HGB) and hematocrit (HCT) findings, the system will examine the sex of the donor and place a PHYTD interdiction if the value falls outside of the range specified in the Define Physical Findings Values (PHYRULE) screen.

**EXAMPLE –** The range for HGB specified in PHYRULE is as follows:

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| AL | CO | HGB | D | 12.0 | 16.0 | BETWEEN | F | | | PHYTD | 09-18-2015 | |
| AL | CO | HGB | D | 13.0 | 18.0 | BETWEEN | M | | | PHYTD | 09-18-2015 | |

If you enter an HGB value of 18.1 for a female donor, the system will place a PHYTD interdiction, as shown:

e.g.

| Phys | Description | Value | Inter | Reason |
|---|---|---|---|---|
| HGB | Hemoglobin | 18.1 | PHYTD | Value should be in between 13.0 - 18 |

### Reason

Display only. If the deferral is interdicted due to a physical finding, the reason displays here. No entry or modification is permitted.

To return to the Answer Block, click **HH Answer**. The cursor advances to the Resp field in the Questions Block.

## Onsite Registration Deferral IDs

If the deferral ID was assigned when the donor was being registered, and the donor was deferred through Inquiry in the program ONILKREG, the following window opens:

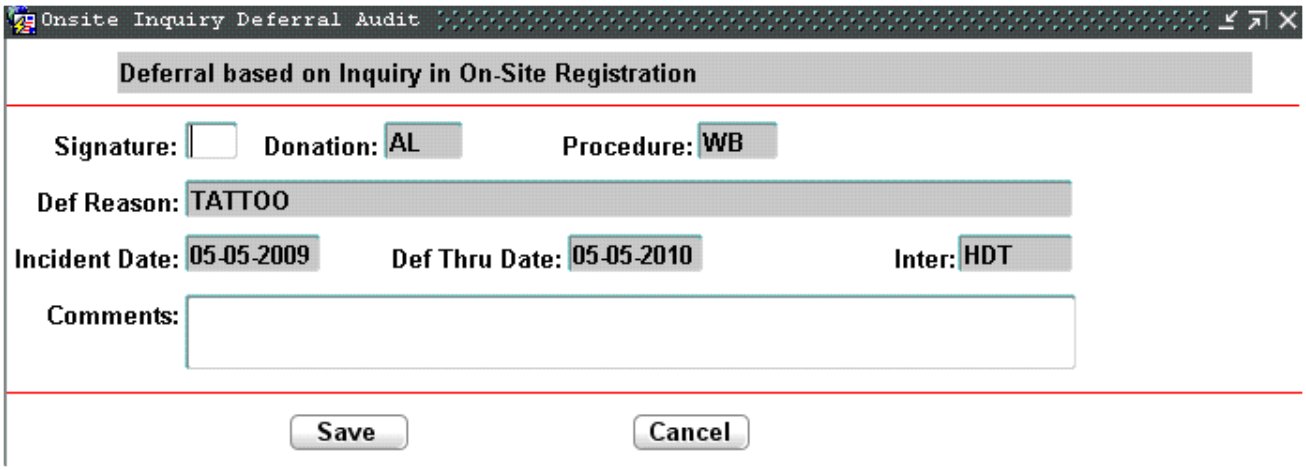


### Signature

Enter N if no signature is present on the Donor Record, or Y if the signature is present. An entry of N opens a window that requires a user decision:

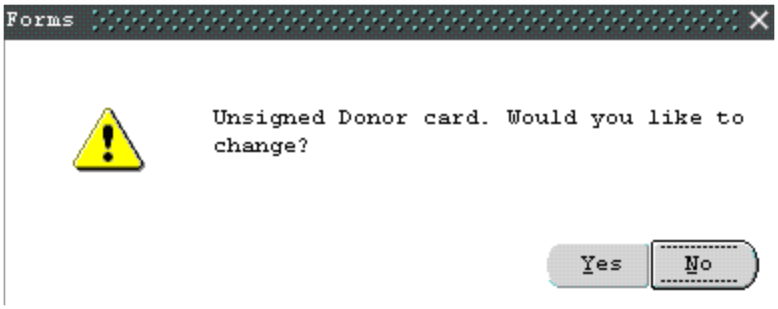


Click **Yes** to return to the field for a corrected entry, or click **No** to place the deferral on hold. The cursor advances to the Ques field.


WellSky Corporation
Proprietary and confidential

### Comments

This field is optional. Entry will allow up to 240 characters.

## Placing a MANUAL HOLD on a Donation

At any point during the registration process (after a batch is defined and before the registration is committed to the database), you can press **F10** to place a hold on the donation. The Manual/Automatic Holds window opens to enable you to define the hold.

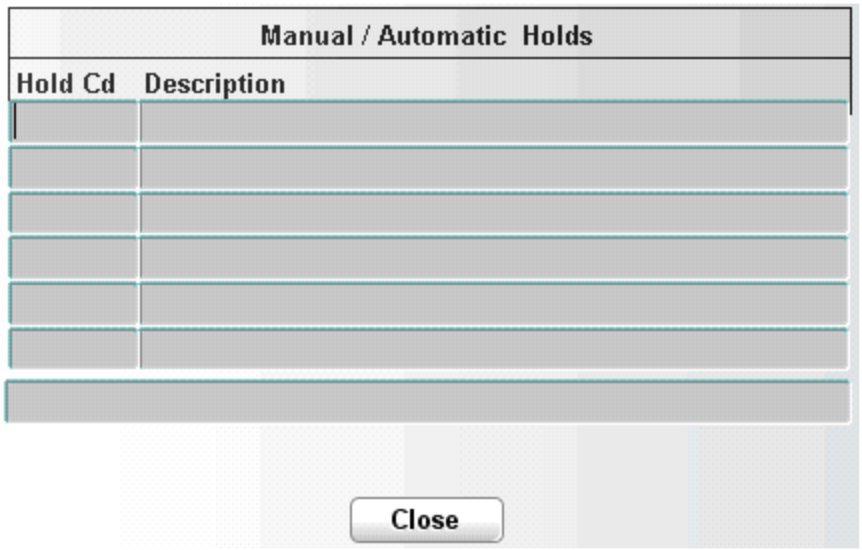


A LOV is available in the Hold Cd field that lists all valid hold codes. Once a code is selected from the LOV, the code and its description display in the Manual Holds window.

Click **Close** to return to the registration screen. The hold you have defined will be placed on the donation when the registration is committed to the database.

To remove the hold you have defined:

1. Press **ALT+F5** (Clear Record).
2. Click **Close**.

The registration will not be committed to the database with the hold.

**NOTE –** Holds automatically placed by the system are automatically removed by the system when the condition warrants removal. Holds placed manually can be manually removed in this screen at any time before the registration is committed to the database.

## Updating and Reviewing OnSite Deferral

When moving from the Paperless Nursing Audit, the control block will be populated based on the selection of the Deferral ID. If going directly to the program, scan the deferral ID into the screen.

To remove an answer, the following steps must be followed:

1. Select the question, and move to the Answer field.
2. In the Answer field, press **Enter** to move down to the specific answer that was entered.
3. Click Delete Answer. You will receive the following message:

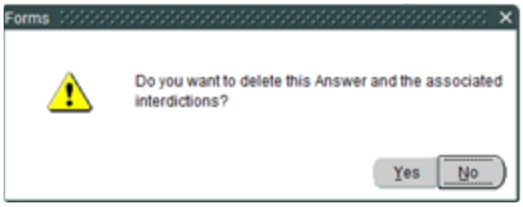


   a. Click Yes to remove the answer, or click No to cancel the process.

Once the answer is removed, you can enter the answer that applies.

## Updating Response for OnSite Deferral

To update a response, ALL answers must be deleted prior to changing the response.

1. In the Answer field, press **Enter** to move down to the specific answer that was entered.
2. Click Delete Answer. You will receive the following message:

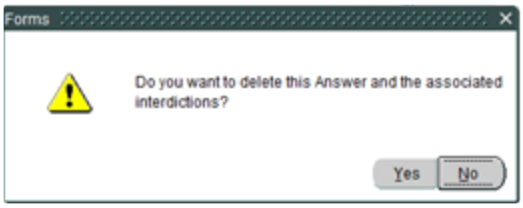


3. Click Yes to remove the answer.

> **NOTE –** This process has to be done for each answer code.

4. To change the response, the cursor should be on the response row. Click Delete Answer. You will receive the following message:

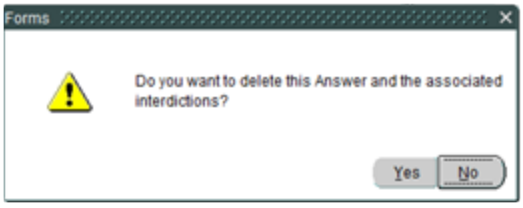


5. Click Yes, and the cursor will be in the Response field.
   a. Enter **Y**, and the cursor will move to the Answer field. Enter the answer code, or use the List Val to pull from the list.
   b. Enter **N**, and the cursor will move to the Answer field. If the answer codes are not linked to NO, then type **NO** and click Save.


WellSky Corporation
Proprietary and confidential

## Committing the Transaction to the Database

Click **Save** or press **ALT + S** to save any modifications to the database. The screen clears for update of another deferral audit.

## To View Interdictions Placed Through Audit

Interdictions placed through audit by entering answers for health history and entering values for physical findings must be viewed by using the Donor Detail Query (SDONQ) and clicking **Interdictions**. This will display all active interdictions that were placed.

**NOTE –** If a health history answer is updated, and the updated answer removes an interdiction, but a comment was entered for the updated answer, go to the Donor Detail Query (SDONQ). Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the questions, and the comments entered for updated answers will display under the questions.

If a physical code value is updated, and an interdiction either was not placed or was removed, but a comment was entered for the update, go to the Donor Detail Query (SDONQ) to view those comments. Click **DONATIONS**, and click **Don/Def Audit**. You can scroll through the physical findings to view the comments entered for those physical values that were updated.

## What to Do Next

There is no next step.

# 7.3.5 Release Audit Holds (NHOLD)

## Intended Use

Use this screen to release an audit hold from a donation when placed during visual audit function or entering physical findings during regular audit.

**NOTE –** When the update is committed, the donor interface is automatically called to send over new nursing audit information to Lab.

## Limitations

The user may remove only those audit holds to which he or she has access.

## Prerequisites

- Audit hold must have previously been placed.
- In order to view an interdiction, the interdiction must be defined in Master Code AHOLD.

**Important!** The system parameter ADATE must be set to a date that precedes the system date for the appropriate interdiction to be placed. If the parameter value is the same as or later than the system date, the interdiction will not be placed.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword NHOLD.

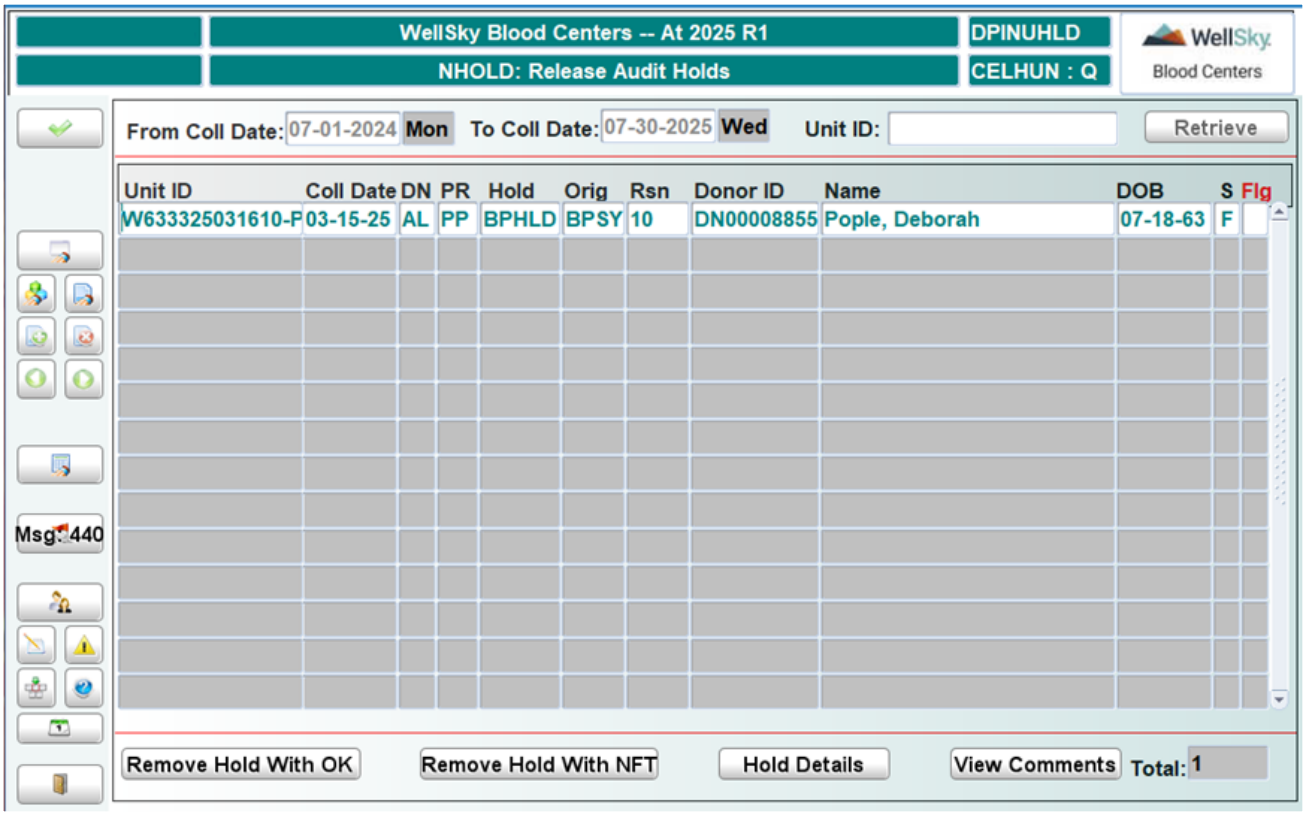


## Control Block Fields and Definitions

### From Coll Date

Entry is required. Enter beginning date of date range in MMDDYYYY format.

### To Coll Date

Entry is required. Enter ending date of date range in MMDDYYYY format.

### Unit ID

Entry is optional. Enter unit ID.

## Retrieving Data

Click **Retrieve** to display a list of audit holds within that date range.


WellSky Corporation
Proprietary and confidential

The following information displays:

- Unit ID
- Collection date
- Donation type
- Donation procedure
- Audit hold type
- Physical finding that originated audit hold
- Reason code of physical finding
- Donor ID
- Name
- Date of birth
- Sex
- Flagged with X when hold has been removed

## The Remove Hold With OK Button

Select the audit hold to remove. Click **Remove Hold With OK** to open the Removing Hold With OK window:

The following data displays:

- Unit ID
- Date unit was collected
- Hold code and description of code

Enter the following data:

## Reason

Entry is required. Enter the removal reason code or select from the LOV.

## Term Dt

Entry is required. Automatically populates with the system date. A future date may be entered.

## Defer Donor

Entry is required. Select deferral type from the drop-down list.

## Eff Date

Display only. Automatically populates with effective date, which is the collection date plus one day. Displays if Temporary or Indefinite is selected in the Defer Donor field.

## Defer Through

Entry is required if Temporary selected in Defer Donor field. Enter date to defer donor through, using the MMDDYYYY format.

## Comm

Entry is required if Temporary or Indefinite is selected in the Defer Donor field. Enter comments to attach to removal.

Click **Remove** to remove the audit hold. The following window opens:

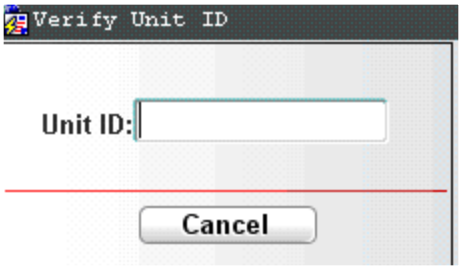


Enter the unit ID for verification and press **ENTER**, or click **Cancel** to return to the main Release Audit Holds screen with no changes. If you continue with the removal action, the following window opens:

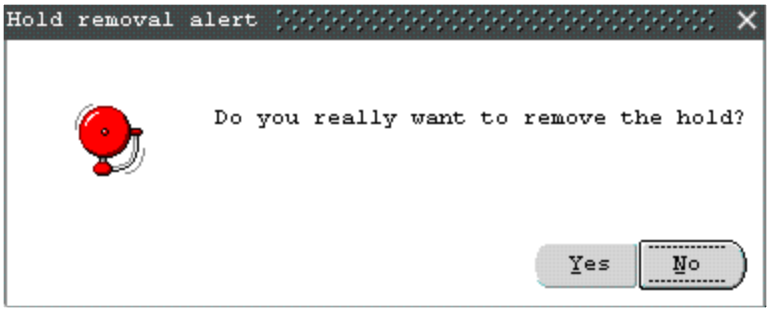


Click **Yes** to remove the hold. Click **No** to return to the main Release Audit Holds screen with no changes. If you press Yes, in the Flg column, an X appears, indicating that the hold has been released.


WellSky Corporation
Proprietary and confidential

- If the hold is released with OK and the donor deferral option Temporary is selected, then the VAPT interdiction will be placed if the hold is released the day after the collection date. If the hold is released on the collection date, the interdiction will *not* be placed because the effective date is the collection date plus one day.
- If the hold is released with OK and the donor deferral option Indefinite is selected, then the VAPI interdiction will be placed if the hold is released the day after the collection date. If the hold is released on the collection date, the interdiction will *not* be placed because the effective date is the collection date plus one day.

The system automatically calls the Donor-to-Lab Interface when you click **Commit**, regardless of how the audit is updated.

**NOTE –** The Donor-to-Lab interface does not interface interdictions on autologous (AU) or therapeutic (TH) units.

## The Remove Hold With NFT Button

Click **Remove Hold With NFT** to open the Removing Hold With NFT window:

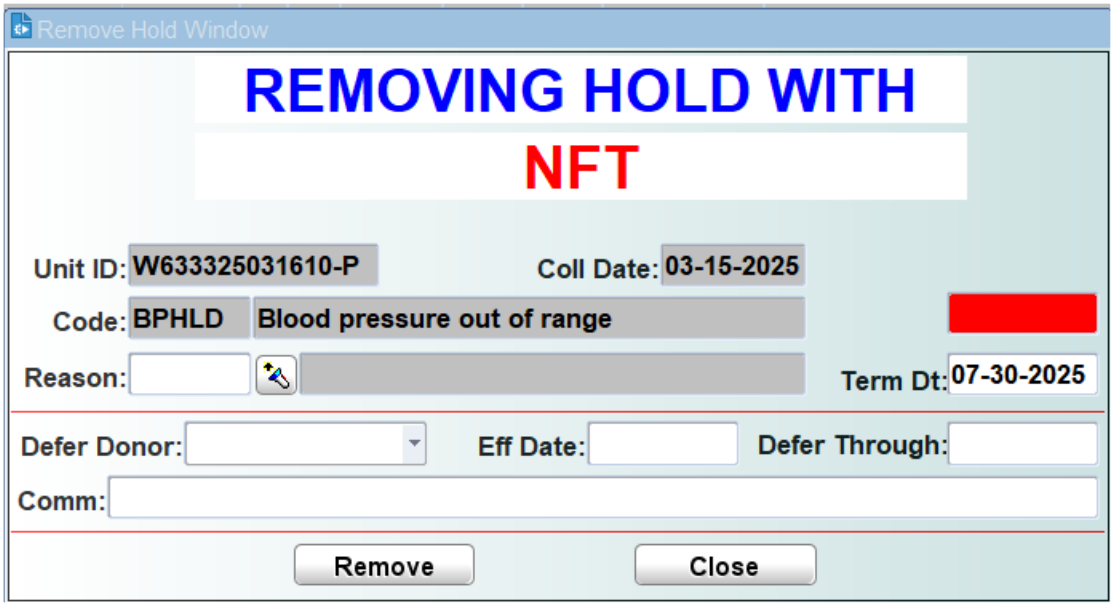


The following data displays:

- Unit ID
- Date unit was collected
- Hold code and description of code

Enter the following data:

### Reason

Entry is required. Enter the removal reason code or select from the LOV.

## Term Dt

Entry is required. Automatically populates with the system date. A future date may be entered.

## Defer Donor

Entry is required. Select deferral type from the drop-down list.

## Eff Date

Display only. Automatically populates with effective date if Temporary or Indefinite selected in Defer Donor field.

## Date Through

Entry is required if Temporary selected in Defer Donor field. Enter date to defer donor through, using the MMDDYYYY format.

## Comm

Entry is required if Temporary or Indefinite selected in Defer Donor field. Enter comments to attach to removal.

Click **Remove** to remove the audit hold. The following pop-up appears:

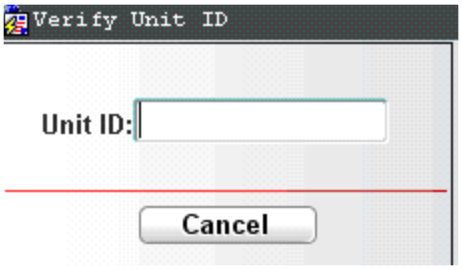


Enter the unit ID for verification and press **ENTER**, or click **Cancel** to return to the main Release Audit Holds screen with no changes. If you continue with the removal action, the following pop-up appears:

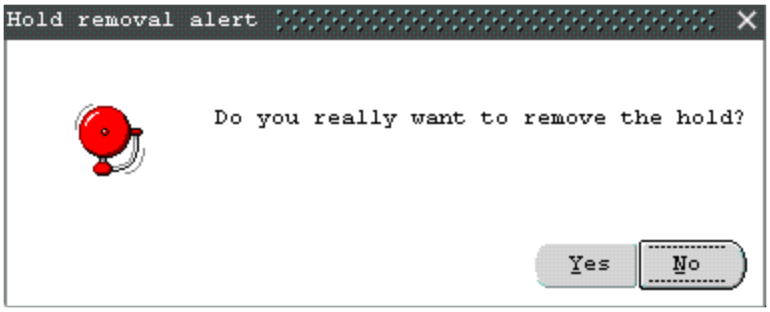


Click **Yes** to remove the hold. Click **No** to return to the main Release Audit Holds screen with no changes. If you press Yes, in the Flg column, an X appears, indicating that the hold has been released.

- If the hold is released with NFT and the donor deferral option Temporary is selected then the VAHT interdiction will be placed
- If the hold is released with NFT and the donor deferral option Indefinite is selected then the VAHI interdiction will be placed


WellSky Corporation
Proprietary and confidential

The system automatically calls the Donor-to-Lab Interface when you click **Commit**, regardless of how the audit is updated.

> **NOTE –** The Donor-to-Lab interface does not interface interdictions on autologous (AU) or therapeutic (TH) units.

## The Hold Details Button

Click **Hold Details** to open the Donation Hold Details window. See Chapter 14 Called Windows and Routines for instructions on using this screen.

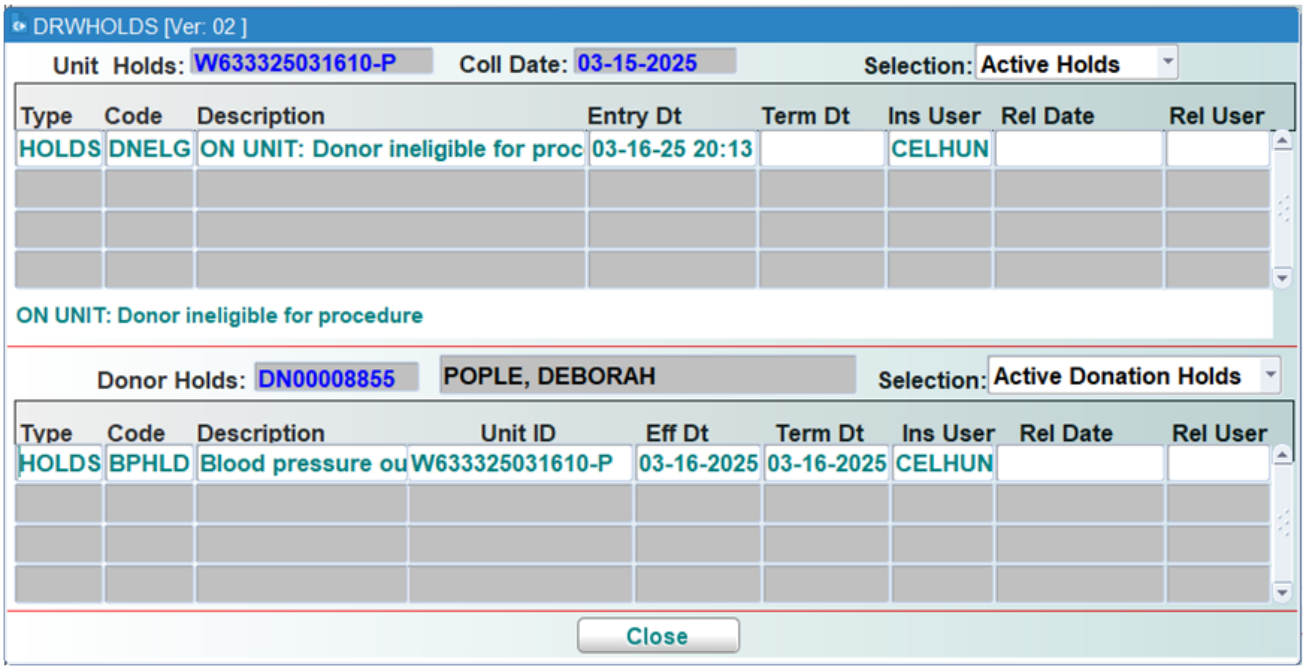


## The View Comments Button

Click **View Comments** to open the Hold Reason window:

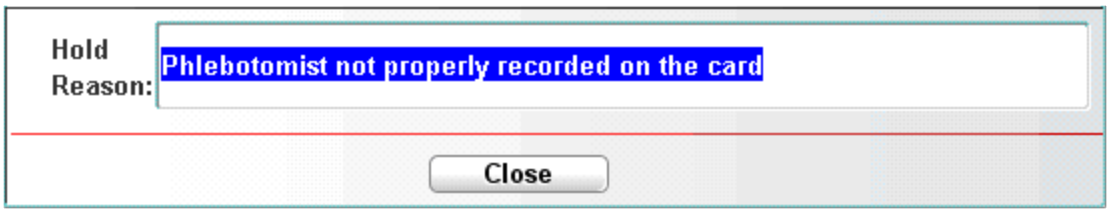


Comments and the reason attached to the audit hold display in this window. Click **Close** to close the Hold Reason window and return to the main screen.

## At Commit

Audit holds are removed and committed to the database. At exit, the following window opens:

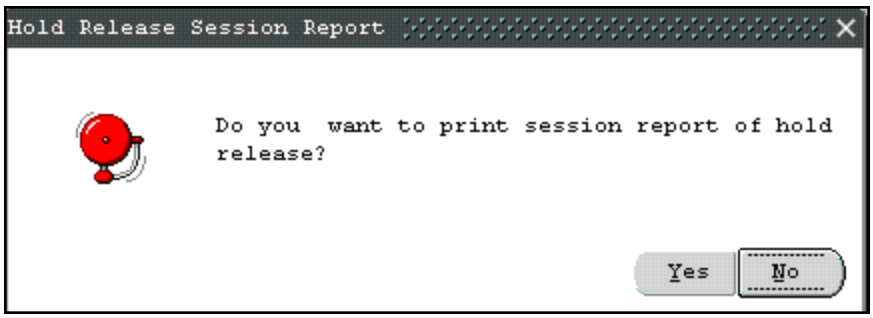


Click Yes to generate a session report. It automatically prints to the default printer. Click No to exit the program without printing a report.

Report Audit Release Sessions Report (DPRNUHLD) automatically generates and can only be generated within the Release Audit Holds (NHOLD). The content of the report depends on the following data per section:

### OK Units Section:

1. Must be a Donation Hold present, release.
2. Release date present (populated through form).
3. No other HOLDS can be present on the donation without a release date.
4. RNFT (hard coded) cannot be present.

### NFT Unit Section:

1. Should not any other HOLDS present without a release date.
2. Should have RNFT present on the donation (hard coded placed by program.

## What to Do Next

There is no next step.

# 7.3.6 Release Audit Interdictions (RLINT)

## Intended Use

Use this screen to release an audit interdiction from a donor.

**NOTE –** If a donor has been modified in this screen, you must re-interface the donor using the Re-Interface Donor to Lab (REINTER) screen in Lab. This will place the updated donor information in Lab.

## Limitations

- The user may view and remove only those interdictions for which he or she has access.
- Only interdictions placed through the audit process can be released through this function. All donor type interdictions can be released as long as the interdiction was placed through the audit process.


WellSky Corporation
Proprietary and confidential

- If the interdiction is set with a level of 9 in the interdiction table, the user will not be able to release since level 9 is the highest level and the user cannot have access of 10. Make sure that if you need a user to release an interdiction that the interdiction is not at a level 9.
- Indefinite (permanent) deferrals cannot be released in this form.

## Prerequisites

- The user must know the unit ID number of the unit on which he or she wants to remove an interdiction.
- The user must have the appropriate access to release the donor interdictions. User access must be greater than the access defined in the Donor Interdictions table (INTER).

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `RLINT`.

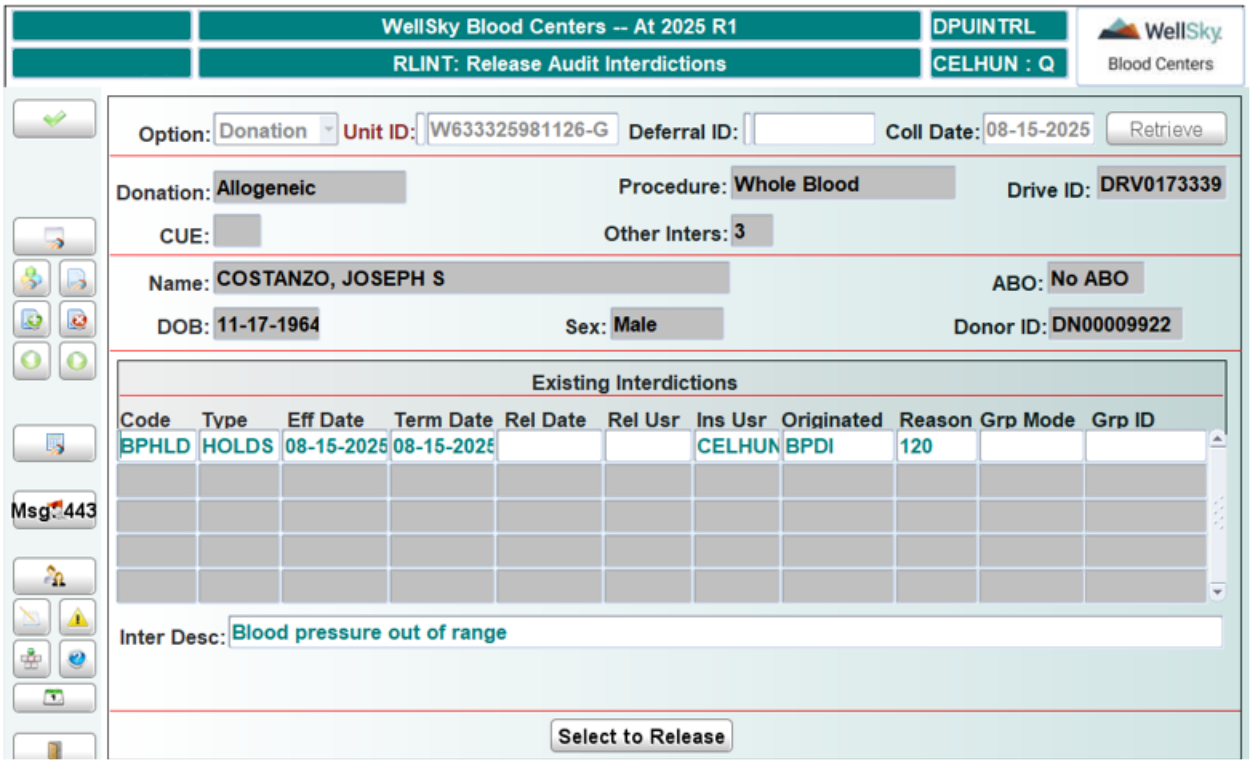


## Control Block Fields and Definitions

### Option

Entry is required. Select the option from the drop-down list.

### Unit ID

Entry is required if Donation is selected in the Option field. Scan the unit number or enter `M` for manual entry. If entering manually, a double blind entry is required.

### Deferral ID

Entry is required if Deferral is selected in the Option field. Enter the deferral ID number.

### Coll Date

If the unit ID number is unique, the collection date automatically populates. If the unit ID number is not unique, an LOV appears. Choose the correct collection date from the list.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display all associated unit interdiction data.

## In the Donation Block

The following information displays, if it exists in the database:

- Donation type
- Procedure type
- Drive ID
- Donor CUE (Y or N)
- Number of other interdictions

## In the Donor Data Block

The following information displays, if it exists in the database:

- Name
- ABO type
- Date of birth
- Sex
- Donor's ID number

## In the Existing Interdictions Block

The following information displays, if it exists in the database:

- Interdiction code
- Type of interdiction
- Effective date of the interdiction
- Termination date of the interdiction
- Release date of interdiction
- ID of user who released the interdiction
- ID of user who inserted the interdiction


WellSky Corporation
Proprietary and confidential

- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode if associated with a group interdiction
- ID number of group if associated with a group interdiction

A description of the interdiction appears at the bottom of the Existing Interdictions block.

## To Release an Interdiction

Click the interdiction to be removed. Click **Select to Release**. The Interdiction Release Alert pop-up appears.

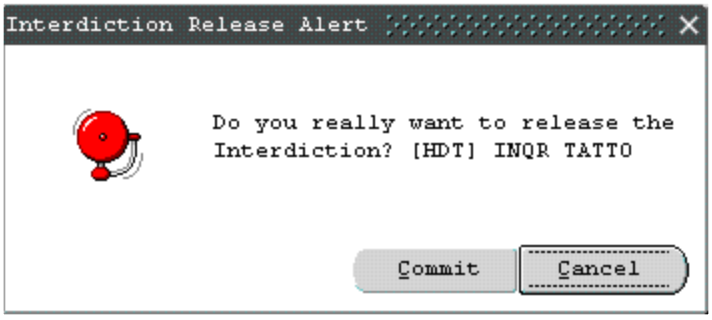


Click **Commit** to release the interdiction or click **Cancel** to return to the main screen without releasing the interdiction.

## At Commit

The interdiction is released and committed to the database. The user is returned to the main Release Audit Interdictions screen and the Rel Date field in the Existing Interdictions block is populated with the release date:

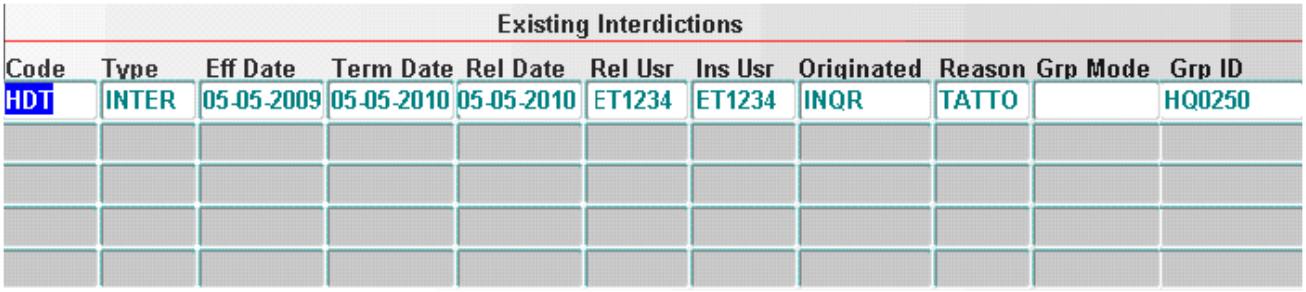


**NOTE –** If the interdiction that is selected to be released is an indefinite (permanent) deferral, the interdiction will not be released after clicking **Commit**.

## What to Do Next

There is no next step.

# 7.3.7 Rollback Donation Audit (AUROLL)

## Intended Use

Use this screen to rollback a donation or deferral audit.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

**NOTE –** When the update is committed, the donor interface is automatically called to send over new nursing audit information to Lab.

## Limitations

Donations/Deferrals entered using OnSite Registration cannot be entered in this screen.

## Prerequisites

An audit must have previously been performed.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `AUROLL`.


WellSky Corporation
Proprietary and confidential

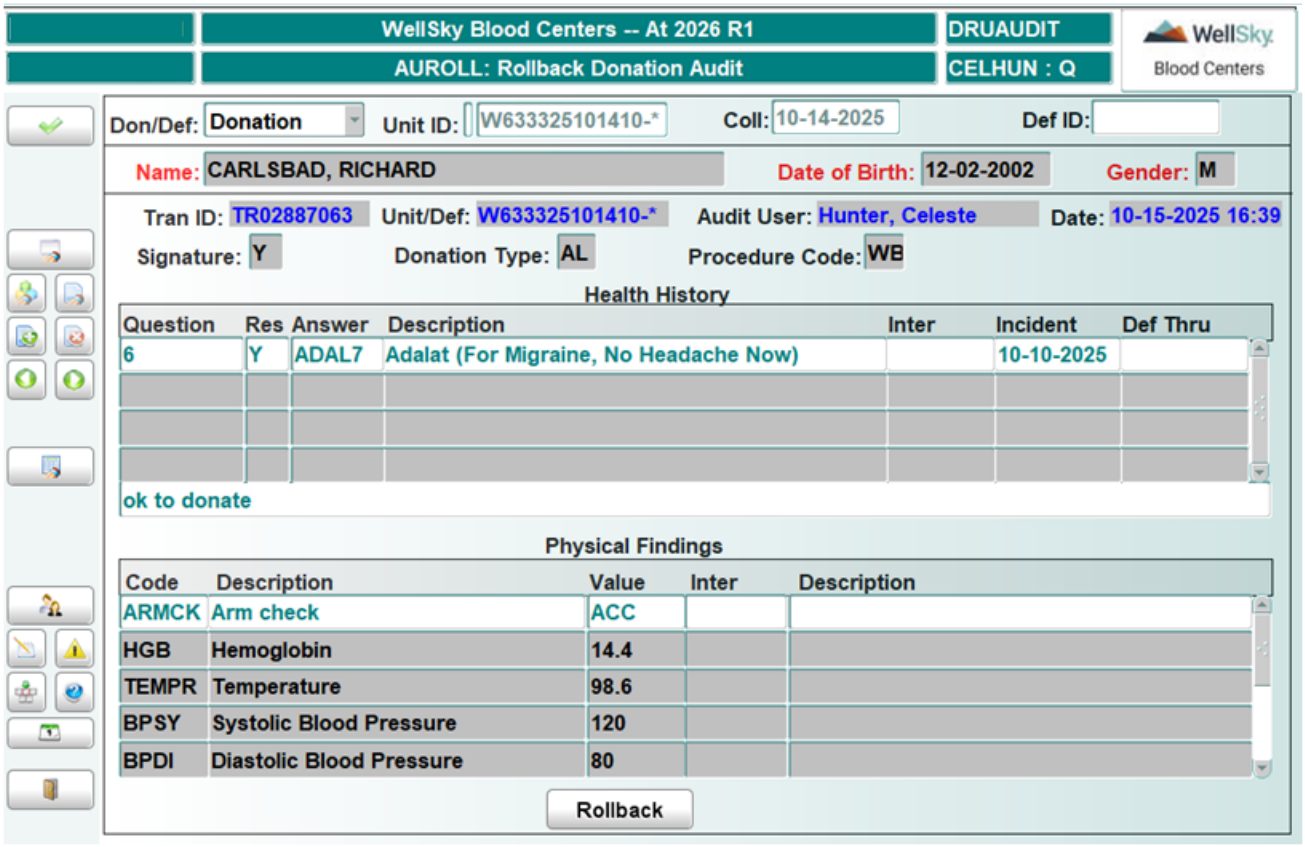


# Control Block Fields and Definitions

## Don/Def

Entry is required. Select either Donation or Deferral from drop-down list.

## Unit ID

Entry is required if Donation is selected in Don/Def field. Enter the unit ID. Requires double-blind matching entry or scan donor ID.

## Coll

Collection date automatically populates if this is the only unit ID associated with this collection date. If not, enter the collection date.

## Def ID

Entry is required if Deferral is selected in Don/Def field. Enter the deferral ID. Requires double-blind matching entry or scan deferral ID.

# In the Donor Details Block

The following information displays:

- Name

- Date of birth
- Sex

## In the Donation Details Block

The following information displays:

- Transaction ID
- Unit or deferral ID number
- User who performed audit
- Date and time of audit
- Indication if donor signed card
- Type of donation
- Donation procedure

## In the Health History Block

The following information displays:

- Question number that caused interdiction
- Response to question
- Answer to question
- Description of answer
- Interdiction code
- Date of incident that caused interdiction
- Date deferred thru

## In the Physical Findings Block

The following information displays:

- Physical finding code
- Description of code
- Physical finding result value
- Interdiction code
- Description of interdiction

## The Rollback Button

To rollback an audit, click **Rollback**. The following window opens:


WellSky Corporation
Proprietary and confidential

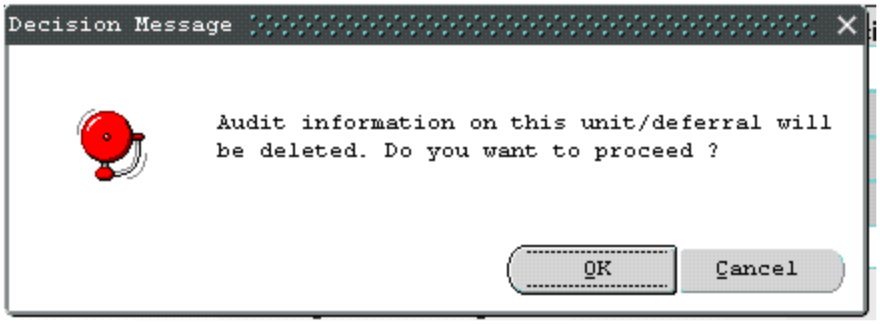


Click **OK** to remove the audit, or click **Cancel** to close the window without removing the audit.

### At Commit

The audit is rolled back. The system automatically calls the Donor-to-Lab Interface when you click **Commit**, regardless of how the audit is updated.

> **NOTE –** The Donor-to-Lab interface does not interface interdictions on autologous (AU) or therapeutic (TH) units.

### What to Do Next

There is no next step.

## 7.3.8 Detach Donor from Donation (DETACH)

### Intended Use

Use this screen to remove the association between a donor and a donation.

### Limitations

- If test results that place testing-related interdictions are present on a unit and a unit is detached from the donor, the testing-related interdictions remain on the detached donor. Interdictions must be removed using a manual method. Pending and generated donor notification still remain on the detached donor.
- Manually-placed interdictions that are placed on the donor before the donor is detached remain on the detached donor. Interdictions must be removed using a manual method and placed on newly-attached donors using a manual method.

### Prerequisites

A donation must have been registered using either Register Donation (REGIS) or through Onsite (WELCOME).

### Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `DETACH`.

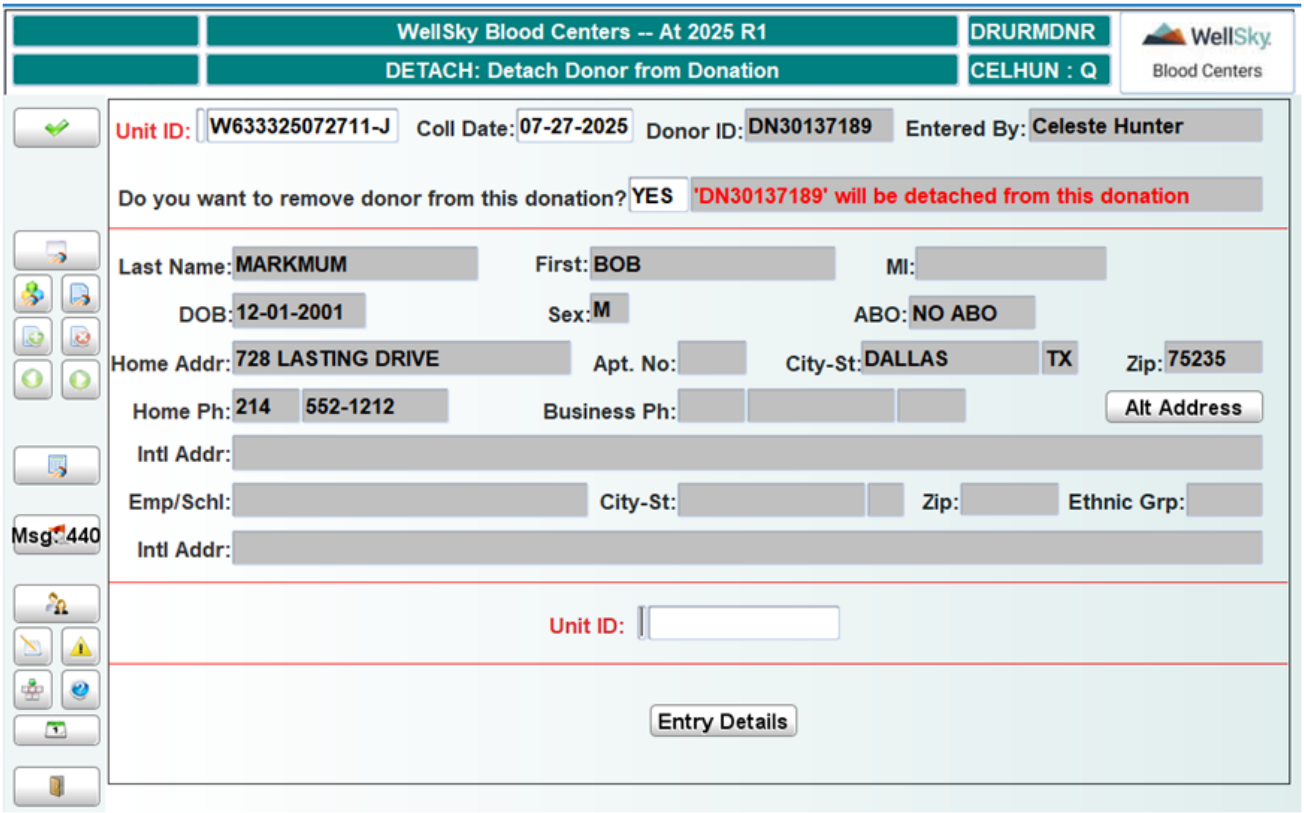


# Control Block Fields and Definitions

## Unit ID

Entry is required. Scan the bar code or manually enter the unit ID.

## Coll Date

Entry is required if a duplicate exists in the database for the unit ID specified. Enter the collection date in MMDDYYYY format. Otherwise, the collection date displays and the cursor skips this field.

The following information displays if it exists in the database:

- Donor ID
- Person who registered the donation
- Donor Name
- ABO
- Date of birth
- Sex
- Address
- Phone numbers


WellSky Corporation
Proprietary and confidential

- International address
- Employer or school information
- Ethnic group

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

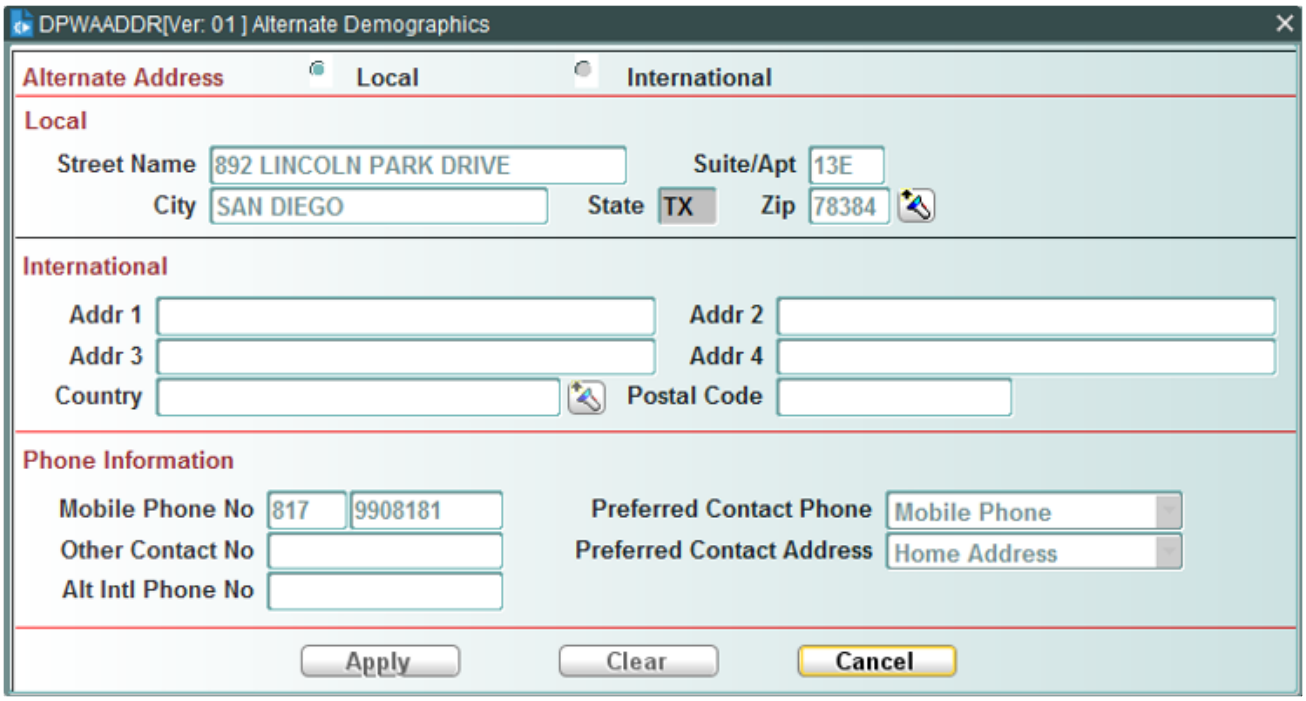


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

The cursor advances to the Do you want to remove donor from this donation? field. Data for the attached donor displays in the Donor Data Block.

The only acceptable entry is **YES**. An alert message in red text advises you that the donor will be detached from the donation:

# The Entry Details Button

Phlebotomy details may be viewed by clicking **Entry Details**:

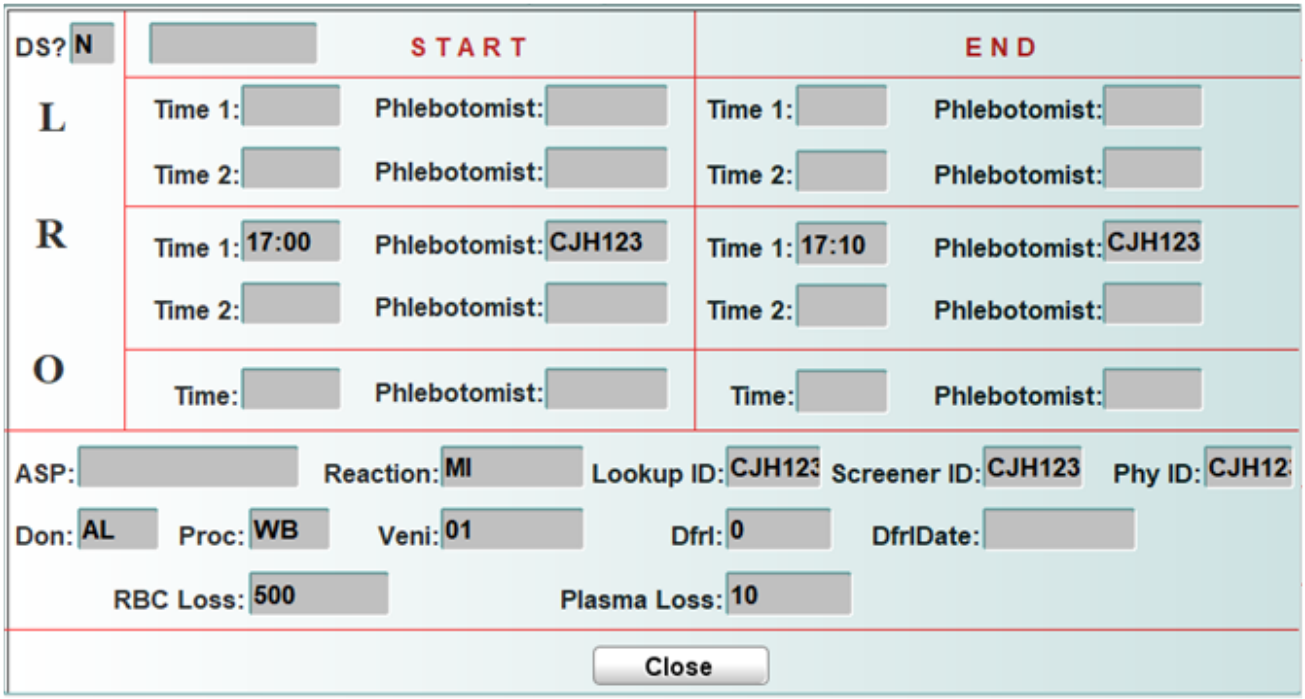


Click **Close** to close the Phlebotomy Details window and return to the main screen.

## Committing the Transaction to the Database

The bar code must be re-scanned or the unit ID re-entered before the transaction is committed. The entry must match the original unit ID entry. If the two do not match, the screen clears and you must begin again. If they agree, the transaction is committed immediately.

The following occurs during committing to the database:

- The donation is placed on hold with a NODON interdiction, and the donor association is removed from the donation.
- Any health history or physical findings interdictions placed through out-of-range answers or physical will be released on the donor.
- Registration interdictions (male and female interdictions) are released from the donor.
  - When the detached donor is registered again, the male and female interdictions are placed on the donor.
- Audit flags are removed.
- The donor is removed from the OnSite Status Query. The donor reappears in the OnSite Status Query when a donor ID is attached to the donation.
- Health history records and physical findings records remain in the table and will be linked back to the donor when attached.
- Donor association is removed from donor responses.
- Donor association is removed from the donor survey.


WellSky Corporation
Proprietary and confidential

- Interdictions placed through INQUIRY and through linking a deferral manually (DDI or DDT) are released from the donor.
- Donor association is removed from donor consents.

## What to Do Next

There are no specific follow-up steps to the use of this screen. For the donation now without an attached donor; however, the following must occur:

1. A donor must be attached using the Attach Donor (ATTACH) screen.
2. An audit must be performed on the donation using the Audit Donation (DONAUDIT) screen or Perform Visual Audit (VISNU).

# 7.3.9 Detach Donor from Deferral (DEFDET)

## Intended Use

Use this screen to remove the association between a donor and a deferral.

## Limitation

Manually-placed interdictions that are placed on the donor before the donor is detached remain on the detached donor. Interdictions must be removed using a manual method and placed on newly-attached donors using a manual method.

## Prerequisites

A deferral must have been registered using Register Deferral (DEFREGIS) or through the OnSite Module.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `DEFDET`.

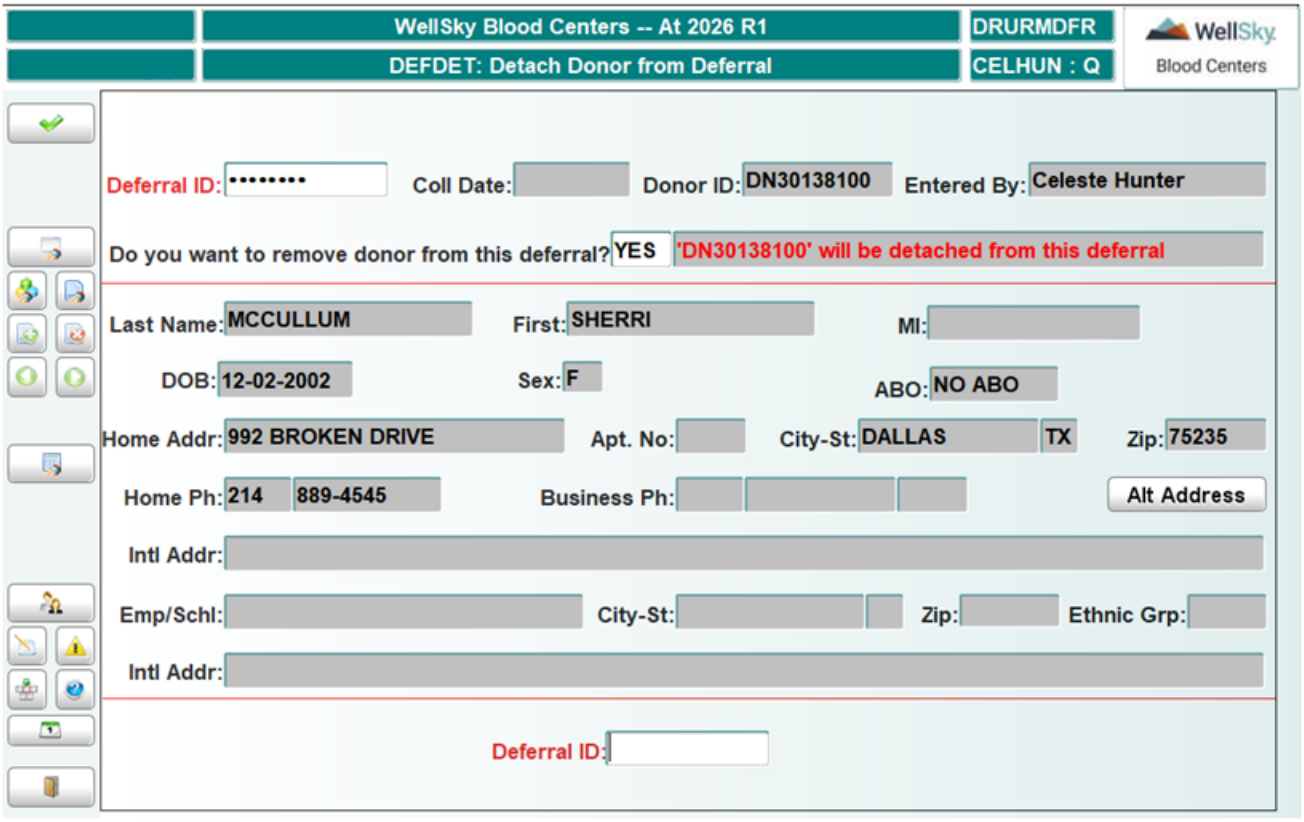


# Control Block Fields and Definitions

## Deferral ID

Entry is required. Scan the bar code or manually enter the deferral ID using double blind entry.

## Coll Date

Display only. The drive date automatically displays.

## Donor ID

Display only. The donor ID automatically displays.

## Entered By

Display only. The name of the person who registered the deferral displays. The cursor advances to the Do you want to remove donor from this deferral? field.

Data for the attached donor displays in the Donor Data Block.

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:


WellSky Corporation
Proprietary and confidential

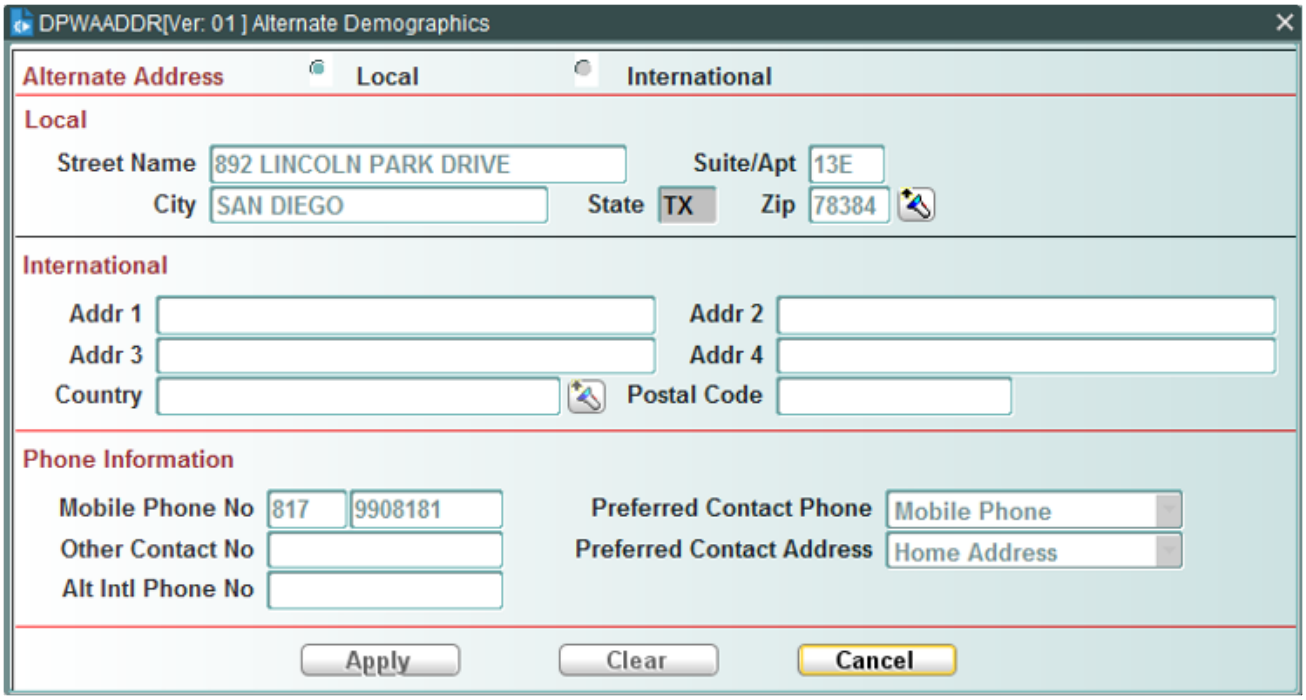


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

## Committing the Transaction to the Database

The bar code must be re-scanned or the deferral ID re-entered before the transaction is committed. The entry must match the original deferral ID entry. If the two do not match, the screen clears and you must begin again. If they agree, the transaction is committed immediately.

The following occurs during committing to the database:

- The deferral is placed on hold with a NODON interdiction, and the donor association is removed.
- Any donor interdictions and all answers to health history questions and physical findings are removed from the deferral.
- Audit flags are removed.
- Registration interdictions (male and female interdictions) are released from the donor.
  - When the detached donor is registered again, the male and female interdictions are placed on the donor.
- Any health history or physical findings interdictions placed through out-of-range answers will be removed from the donor.
- The donor is removed from the OnSite Status Query. The donor reappears in the OnSite Status Query when a donor ID is attached to the deferral.
- Health history records and physical findings records remain in the table and will be linked back to the donor when attached.

- Donor association is removed from donor responses.
- Donor association is removed from the donor survey.
- Interdictions placed through INQUIRY and through linking a deferral manually (DDI or DDT) are released from the donor.
- Donor association is removed from donor consents.

## What to Do Next

There are no follow-up steps to the use of this screen. For the deferral now without an attached donor, however, the following must occur:

1. A donor must be attached using the Attach Donor (ATTACH) screen.
2. An audit must be performed on the deferral using the Audit Deferral (DEFAUDIT) screen or Perform Visual Audit (VISNU).

# 7.3.10 Attach Donor (ATTACH)

## Intended Use

Supervisors will use this screen to resolve holds placed on donations and deferrals when a donor could not be attached during registration.

## Limitations

- Mouse functions are disabled for this screen.
- In the event potential duplicate donor records must be resolved prior to donor selection, they must be resolved using the Investigate Duplicate Donor Records (INVEST) and Merge/Resolve Duplicate Donor Records (MERGDON) screens. The Attach Donor screen cannot be used to resolve potential duplicate donor records.
- If a previously detached unit is again attached to a donor, and test results are associated with the unit, testing related interdictions are not placed on the newly attached unit. Interdictions must be placed on the newly attached donor using manual methods.

## Prerequisites

- The donation or deferral must have been registered using the Register Donation (REGIS) screen, the Register Deferral (DEFREGIS) screen, or in the OnSite Module.
- A donor must not be attached.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `ATTACH`.


WellSky Corporation
Proprietary and confidential

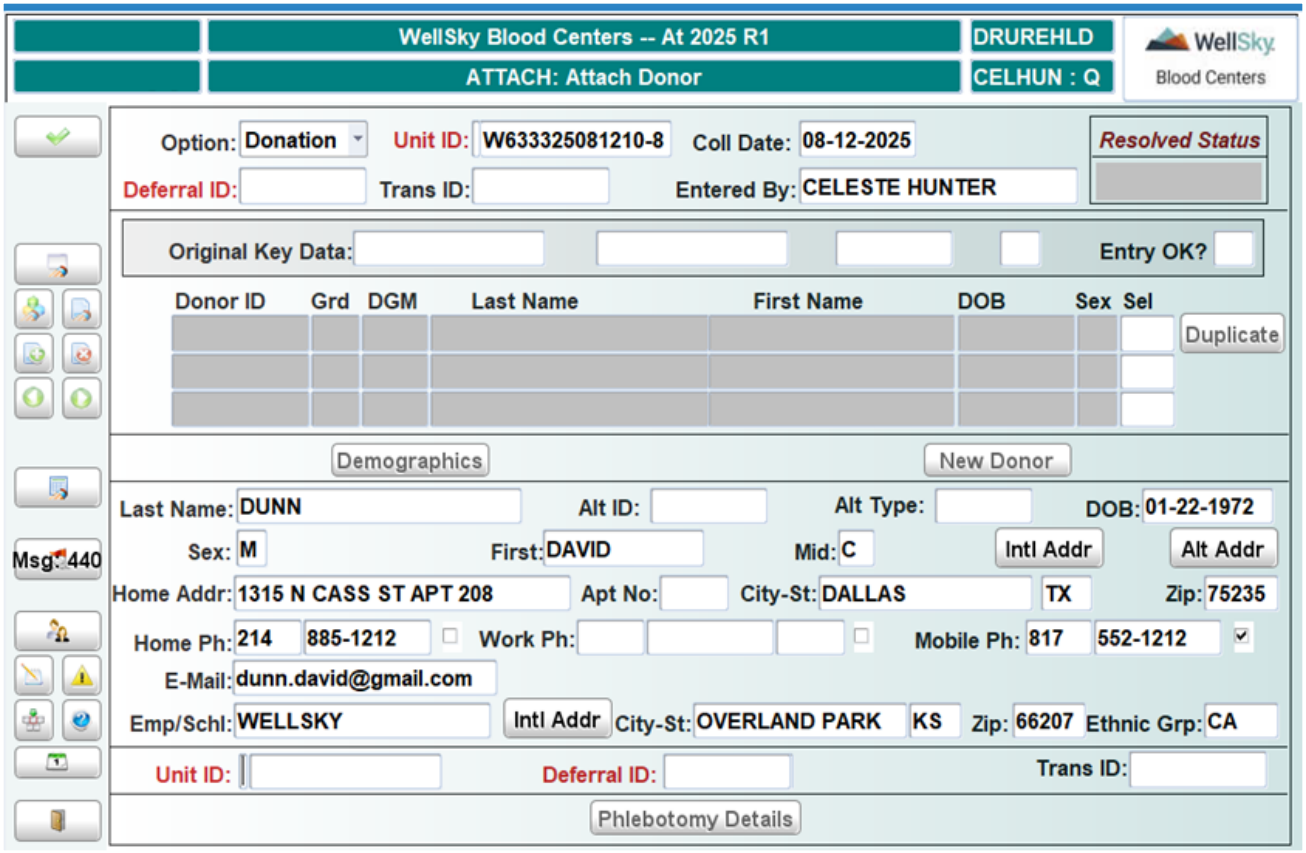


**NOTE –** In addition to being accessible from the menu, this screen is accessible from the Donations on Hold Query (DONHOLDQ) and Deferrals on Hold Query (DEFHOLDQ) screens.

# Control Block Fields and Definitions

## Option

Entry is required. Indicate whether a donor is to be attached to a donation or a deferral. Select from the drop-down list.

## Unit ID

Entry is required if attaching a donor to a donation. Scan the bar code or manually enter the unit ID using double blind entry. If attaching a donor to a deferral, the cursor will skip this field and advance to the Deferral ID field. After entering the unit ID, the collection date and the name of the person who registered the donation displays.

## Coll Date

Entry is required if the system detects a duplicate unit ID for the donation.

## Deferral ID

Entry is required if attaching a donor to a deferral. Scan the bar code or manually enter the deferral ID using double blind entry. After entering the deferral ID, the drive date, transaction ID, and name of the person who registered the

deferral displays.

### Entry OK?

Indicate whether key donor data entered at registration is correct. Enter Y if all displayed data is correct. Enter N if the data is to be modified.

> **NOTE –** If a donor was detached from a donation, there will be no original key data to display. In such a case, the screen populates with the donor you select in the Find Donor window, and the cursor advances to the Last (Name) field.

If you enter N, the Find Donor window opens. Proceed through the normal donor selection process to attach the donor. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If you enter Y, donor records retrieved during registration display:

> **NOTE –** If a donor could not be attached at registration due to potential duplicate donor records, and if that potential duplicate has not been resolved, an error message displays to advise you. It will not be possible to attach a donor until the potential duplicate is resolved.

Data in each donor record that disagrees with the entered data is highlighted in yellow.

Use the UP and DOWN arrow keys to highlight a displayed donor record. For the highlighted donor record, view and update demographics data by clicking Demographics. The Donor Demographics window opens. See Chapter 14 Called Windows and Routines for instructions on using this window.

## Selecting a Displayed Donor

Using the UP and DOWN arrow keys, highlight a displayed donor record. In the Sel field, enter an S and press ENTER. Existing data from the database populates the Donor Details Block, and the cursor moves to the Last (name) field.

Any data field can be modified, but key data must match data entered for the donor during registration.

> **NOTE –** The Last Name field can only contain alpha characters (A to Z and a-z), space, apostrophe ('), and dash (-).

You must advance through each field in the Donor Data Block, modifying and entering data where appropriate. When you press ENTER in the Ethnic Grp field, the cursor advances to the confirmation Unit ID field for a donation or the Deferral ID field for a deferral.

## Intl Addr (button)

Click Intl Addr to open the International Address window, as follows:


WellSky Corporation
Proprietary and confidential

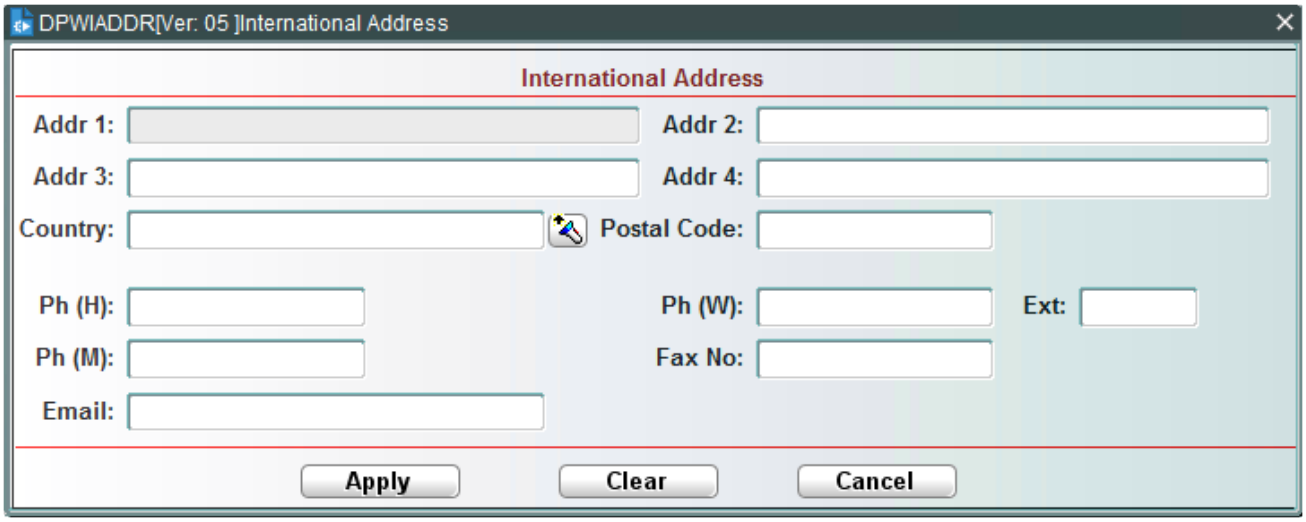


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

**NOTE –** There are two Intl Addr buttons: one for donor information, and one for employer information. Both buttons operate in the same manner.

## Alt Addr (button)

Click Alt Addr to open the Alternate Demographics window, as follows:

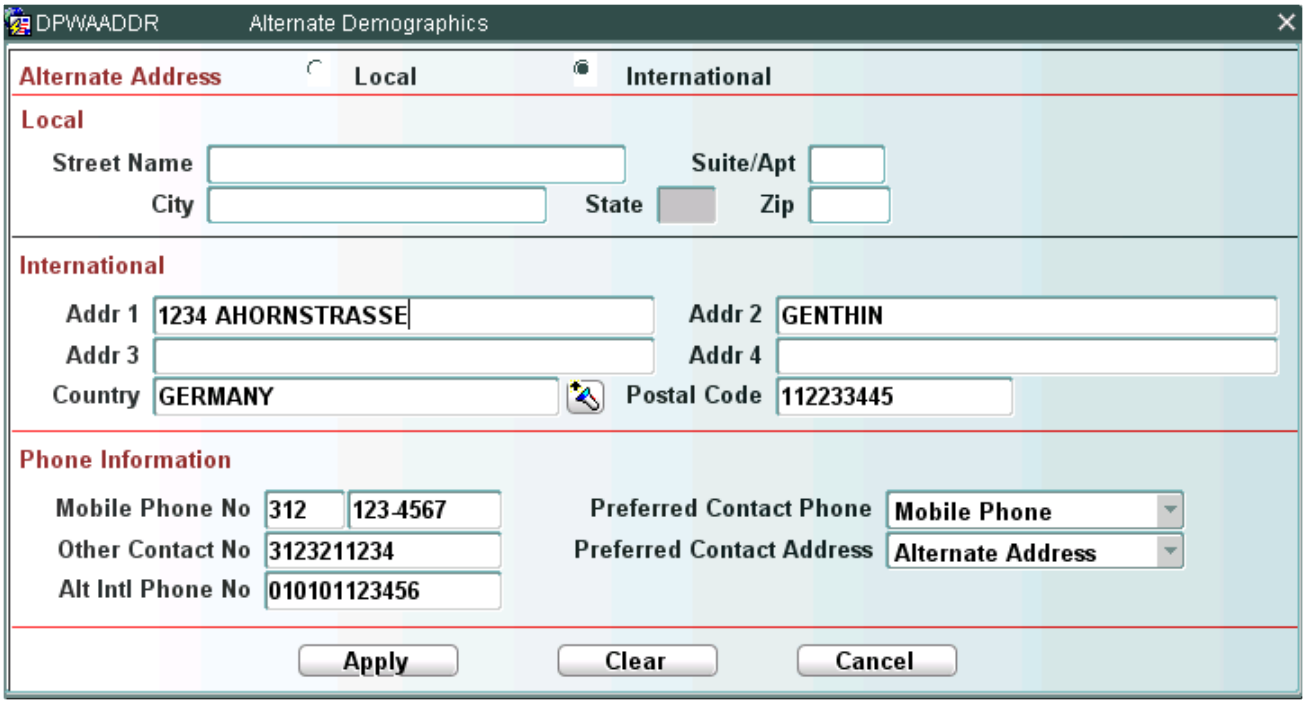

Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## To Create a New Donor (Accept/Modify Original Key Data)

Click **New Donor** to create a new donor. The cursor advances to the Last (name) field in the Donor Data Block.

> **Important!** The cursor resides in the Sel field. If you enter S to select a donor, the user is able to modify donor information for an existing donor without receiving a warning from the system. This will not result in creating a new donor, but in modifying an existing donor.

Enter all available data for the new donor. Key data fields must match data entered for the donor at registration.

All other data fields are optional. Enter data or press **ENTER** in each field until all fields have been entered or skipped. The cursor advances to the confirmation Unit ID field for a donation or the Deferral ID field for a deferral.

Phone number fields represent home, work, and mobile phone numbers. By placing a check mark in one of the boxes by a phone number, that phone number is designated as the preferred contact method for the donor. Only one phone number can be designated as preferred.

Unit ID/Deferral ID – Re-scan the bar code or re-enter the unit or deferral ID using double blind entry. If the entry does not match the original entry, the screen clears and you must begin again.

## Alternate ID

Provision has been made for an identification number other than the Social Security number in the Alt field. The field accepts up to 20 characters, even though the visible field is smaller. Entry in this field is not validated by the system.

## To Mark Records as Possible Duplicates

There has to be two donor records displayed before the Duplicate button is enabled. Press the Duplicate button. The cursor advances to the confirmation Unit ID field for a donation or the Deferral ID field for a deferral.

## View Phlebotomy Details

At any point in this screen after the unit ID is accepted by the system for a donation, click **Phlebotomy Details** to view phlebotomy and other donation details:


WellSky Corporation
Proprietary and confidential

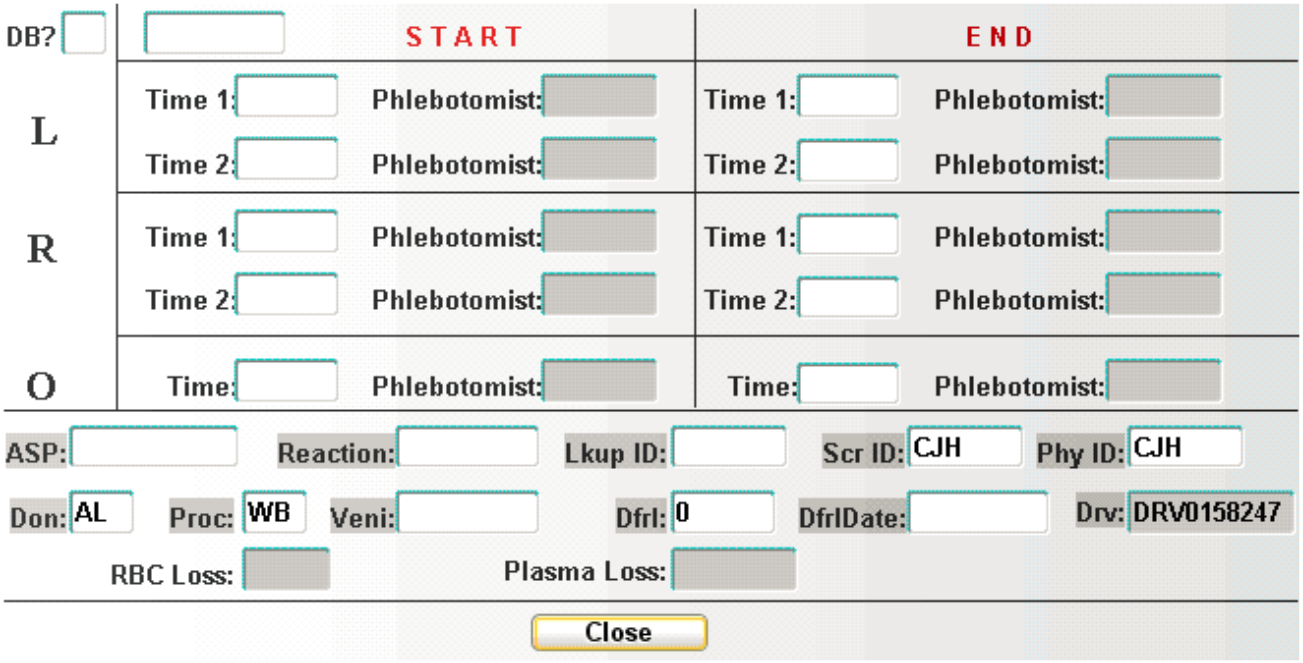


## At Commit

The transaction is automatically committed to the database upon successful completion of the confirmation scan or entry of the unit or deferral ID.

New Donor / SELECT Donor Scenario Only

- The donor is attached to the donation or deferral.
  - Donor records identified as possible duplicates are included as possible duplicates requiring resolution.
  - A new donor record created is committed to the database and the system assigns a donor ID.
- Removes HOLDS - NODON, DRDEF, DDI, DDT.
- Places DRDEF hold on new donor if the deferral has DRDEF hold.
- Places MALE/FEMALE sex-based interdictions.
- Donations and deferrals appear in OnSite Status Query once the donor is attached and updates the status to 'C' for Unit ID and 'D' for Deferral.
- Places DDI, DDT hold on new donor if deferral has DDI/DDT hold.
- Place Health History-related interdictions and Physical Findings-related interdictions. Able to view the responses to health history and physical findings.
- Associate the donor in Donor Survey.

## What to Do Next

The donation or deferral must be audited using Audit Donation (DONAUDIT), Audit Deferral (DEFAUDIT), or Perform Visual Audit (VISNU).

# 7.3.11 Change Drive ID or Collection Date (MODDRV)

## Intended Use

Use this screen to change the collection date and/or drive ID for a registration batch, single unit ID, or single deferral ID.

## Limitations

Collection date cannot be after the registration insert date.

## Prerequisites

A valid registration batch, unit ID, or deferral ID must exist.

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `MODDRV`.

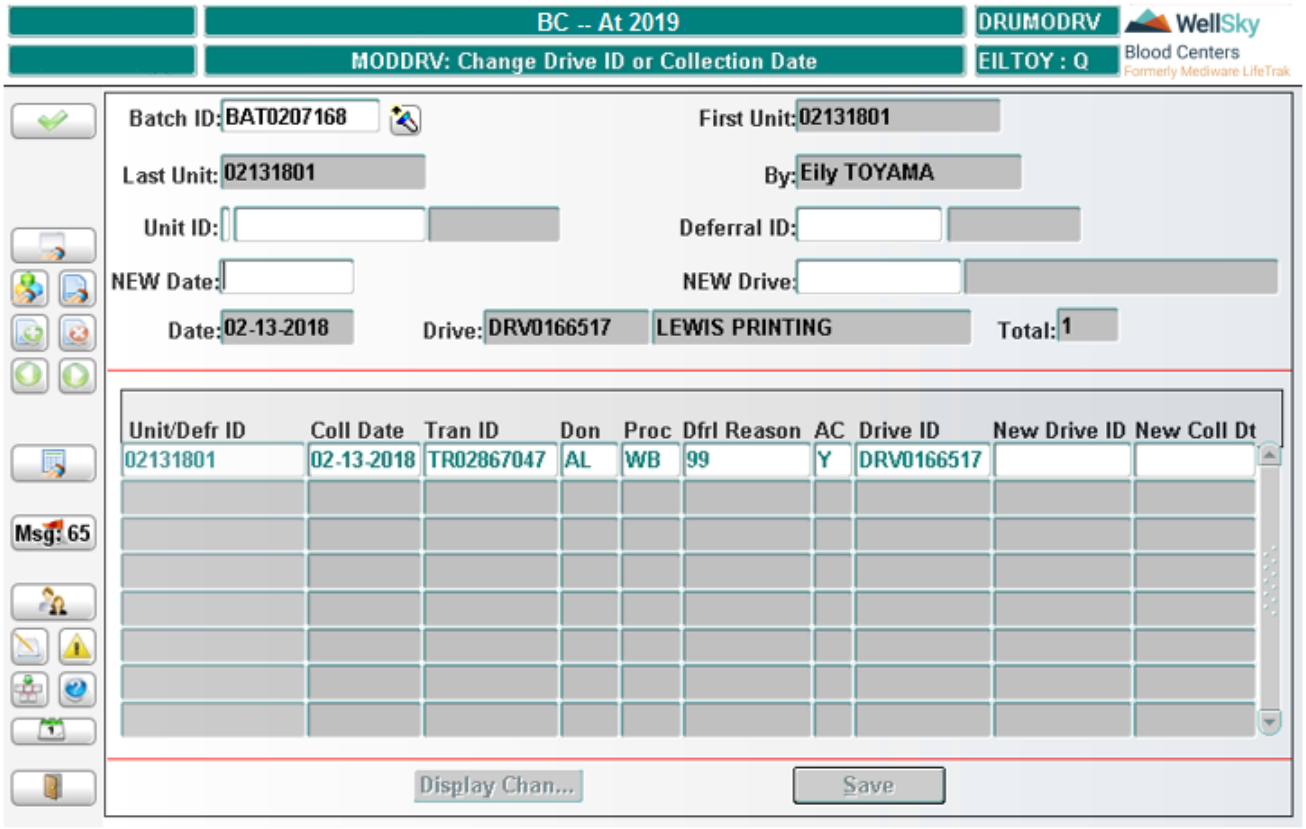



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Batch ID

Enter the batch ID for which the donations or deferrals were registered or select from LOV. Leave field blank to modify by unit or deferral ID.

**NOTE –** LOV displays registration batches from the last 30 days. Batches that are greater than 30 days old can be manually entered.

## First Unit

First unit in registration batch automatically displays after batch ID is entered. Field remains blank if batch ID not entered. Field is not navigable.

## Last Unit

Last unit in registration batch automatically displays after batch ID is entered. Field remains blank if batch ID not entered. Field is not navigable.

## By

Name of user creating registration automatically displays after batch ID is entered. Field remains blank if batch ID not entered. Field is not navigable.

## Unit ID

Scan or manually enter unit ID to be modified. Current collection date display after unit ID is entered. Leave field blank to modify deferral ID.

## Deferral ID

Scan or manually enter deferral ID to be modified. Current collection date display after deferral ID is entered. Entry required in this field if Batch ID and Unit ID fields left blank.

## NEW Date

Enter correct collection date using the MMDDYYYY format. Leave field blank if collection date modification is not necessary.

The following warning displays if no drives exist for the collection date entered:

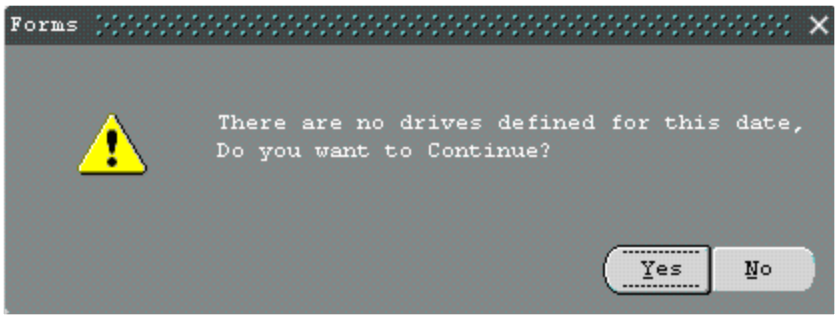

Click **Yes** to continue with the newly entered date; click **No** to return to the NEW Date field.

**NOTE –** Collection date cannot be after actual registration is entered into the system.

### NEW Drive

Enter correct drive ID or leave field blank. Entry is required in this field only if the NEW Date field is left blank.

The following warning displays if the drive ID entered was not scheduled for the collection date:

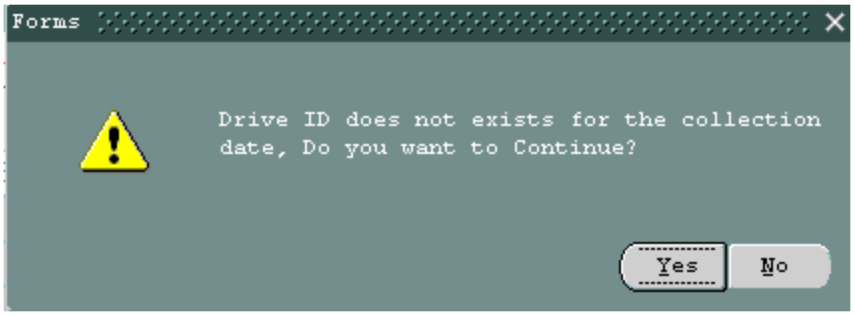


Click **Yes** to continue with the newly entered drive ID; click **No** to return to the NEW Drive field.

The Display Change button is enabled after entry is made in the NEW Drive field.

### Date

The schedule date for the current drive ID automatically displays. Field is not navigable.

### Drive

The current drive ID automatically displays. Field is not navigable.

### Total

Total number of batches displays after the batch ID is entered. Field is not navigable.

Click **Display Change** to view the new information entered.

The new collection date and/or drive ID displays beside each donation or deferral record displayed, and the Save button is enabled.

## Committing the Transaction

Click **Save**. The transaction is immediately committed to the database. Each donation or deferral is associated with the new collection date and/or drive ID. A pop-up advises that the transaction was committed. The screen clears when you acknowledge the pop-up.

## What to Do Next

There is no next step.

# 7.3.12 Maintain Donor Employer (EMP)

## Intended Use

Use this screen to activate or deactivate records of donor employers in the database.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Registration Maintenance Functions menu or by entering the keyword `EMP`.

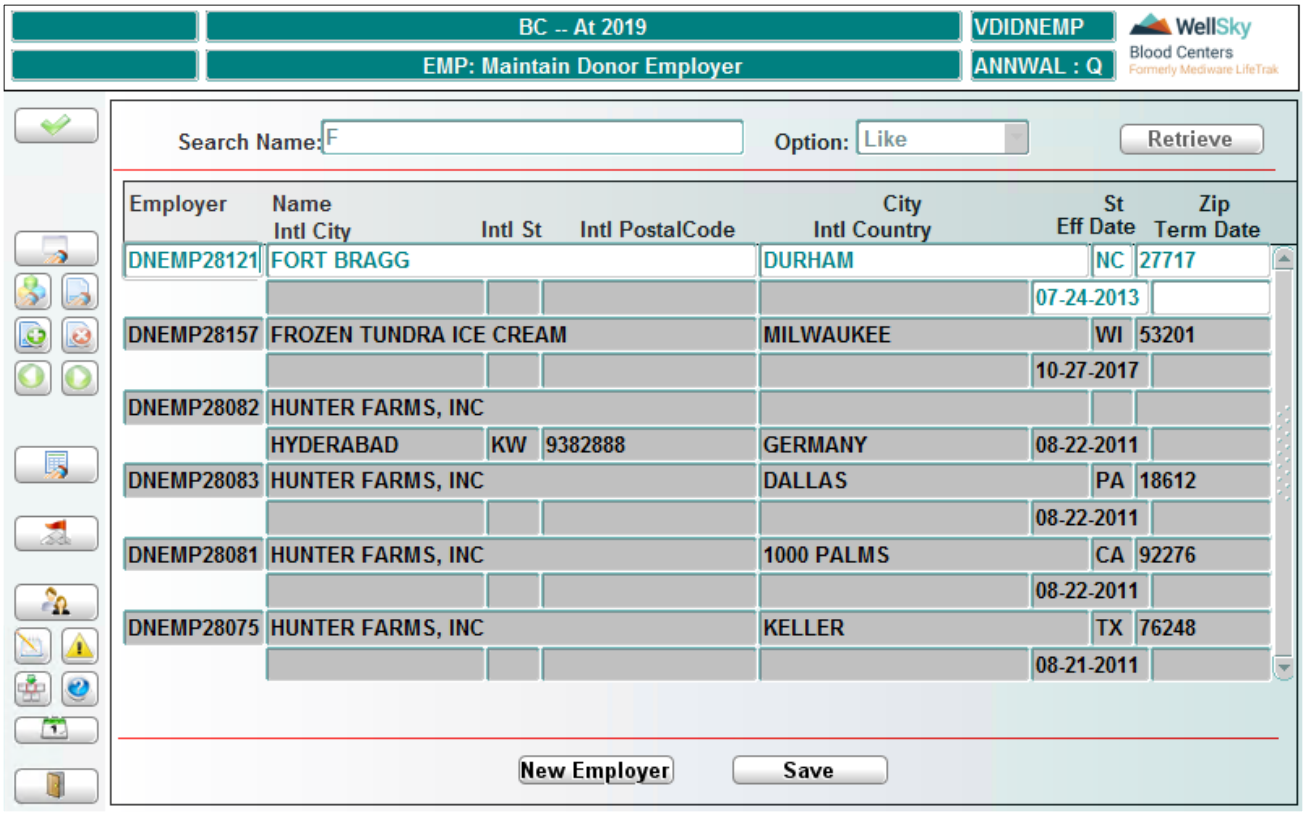


## Control Block Fields and Definitions

### Search Name

Entry is required. Enter a full or partial employer name.

### Option

Entry is required. The system default is Matching, which retrieves records that match your entry exactly. Use the drop-down list to select Like to retrieve records that include your entry, or Soundex to retrieve records that sound like your entry.

## Retrieving Data

Click **Retrieve** to display records that match the specified criteria.

Use the **UP** and **DOWN** arrow keys on the keyboard to highlight one employer record at a time. The following data displays:

- Employer ID
- Employer name
- City, State, and ZIP Code where employer is located
- Effective date (can be modified to a future date)
- Termination date (can be entered or modified to a future date)

## Saving Termination Dates to the Database

You may terminate any number of records by highlighting each desired record and entering a termination date. Click **Save** or press **ALT + S** to commit the termination dates to the database.

## Creating a New Donor Employer

To create a new donor employer, click **New Employer** or press **ALT + N**. A window opens that permits you to enter a new record of a donor employer:

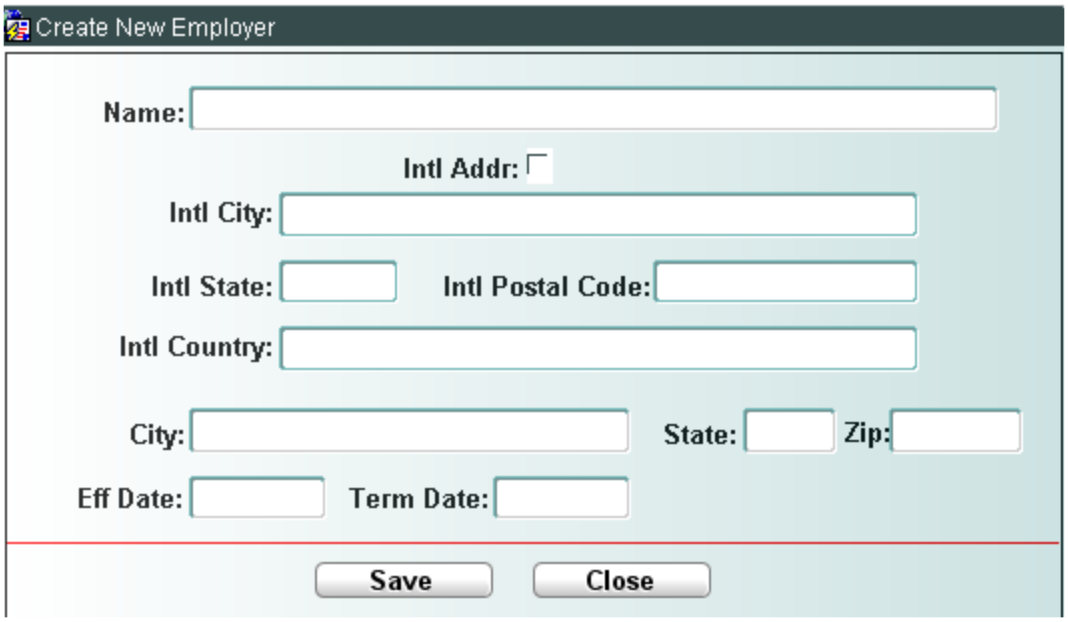



WellSky Corporation
Proprietary and confidential

### Name
Entry is required. Enter the name of the new employer.

### Intl Addr (Check Box)
Select this check box if the employer has an international address; otherwise, leave this check box cleared.

If the employer has an international address, enter the appropriate information into the following fields:

- City
- State
- Postal Code
- Country

### City
Entry is required. Enter the employer's city, or enter at least three characters of the city name and press ENTER to retrieve an LOV that matches your partial entry.

### State
Display only. This field automatically populates once a valid city and ZIP Code are entered or selected.

### Zip
Entry is required. Enter the employer's ZIP Code or select from the LOV. The list contains only valid ZIP Codes for the city you selected.

### Eff Date
Entry is required. Enter the effective date for the employer, using the MMDDYYYY format. Cannot be a past date.

### Term Date
Entry is optional. Enter the termination date for the employer, using the MMDDYYYY format. Cannot be a past date.

## Committing a New Employer to the Database
Click Save to close the Create New Employer screen and commit the new employer record to the database. The new employer window closes, and the main window is cleared of all data. You must re-enter query criteria in order to add or terminate additional employer records.

A pop-up advises you that the transaction is committed. Click OK or press ALT + O to acknowledge the message. The screen remains populated.

**NOTE –** Click Close at any time to close the Create New Employer window without committing the new employer to the database.

## What to Do Next
There is no next step.

# 7.4 Registration Queries

These functions are accessed from the following menu:

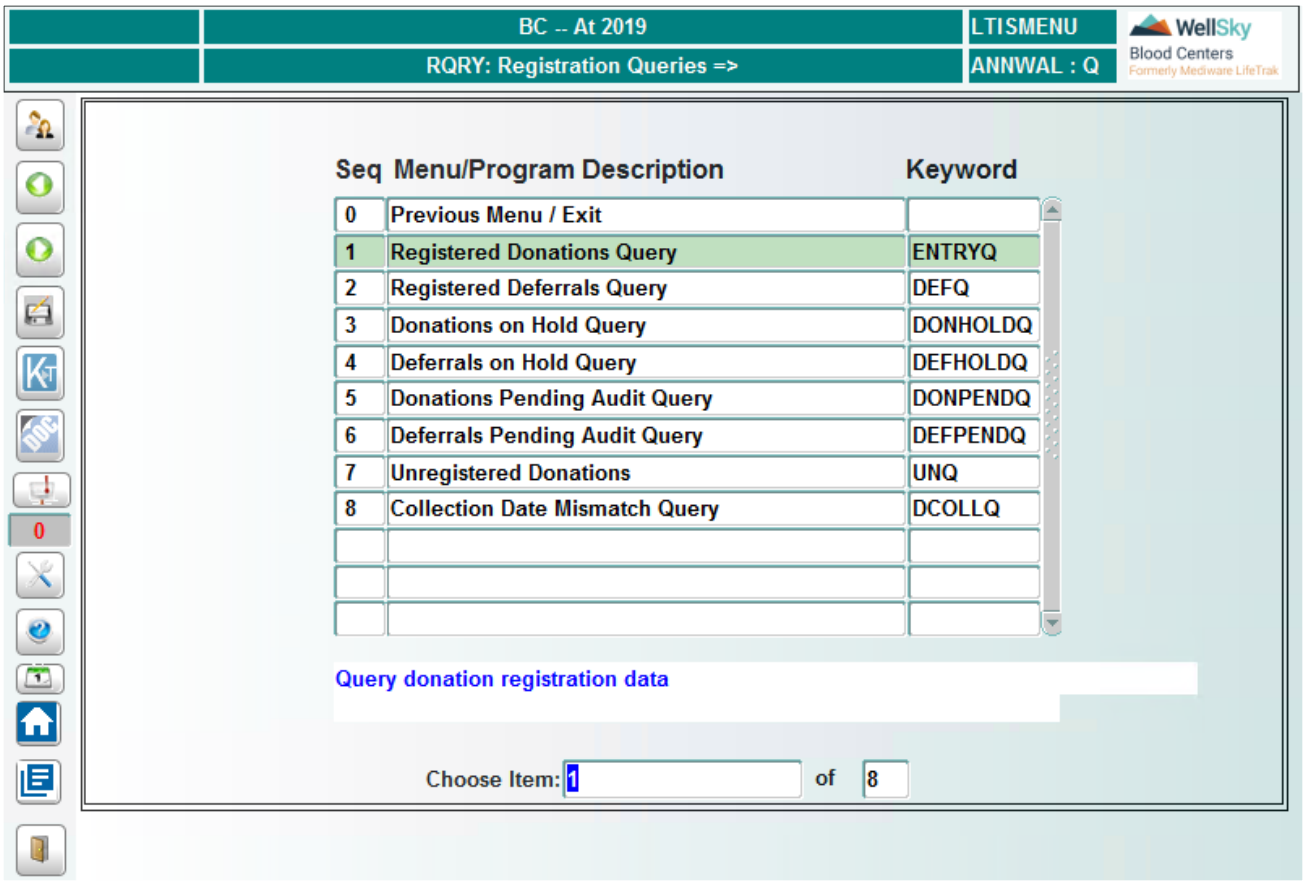


## 7.4.1 Registered Donations Query (ENTRYQ)

### Intended Use

Use this program to query registered donations through the back-office or through the OnSite application. Query by drive date range, drive ID, registration batch ID, user ID of the person who registered the donation, individual unit ID, or any logical combination of the above.

For any retrieved donation record, additional details may be viewed:

- Entry details
- Audit details
- Phlebotomy details
- Unit and donor holds


WellSky Corporation
Proprietary and confidential

## Limitations

None

## Prerequisites

A unit must have been registered using Register Donation (REGIS) or through the OnSite Module.

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword ENTRYQ.

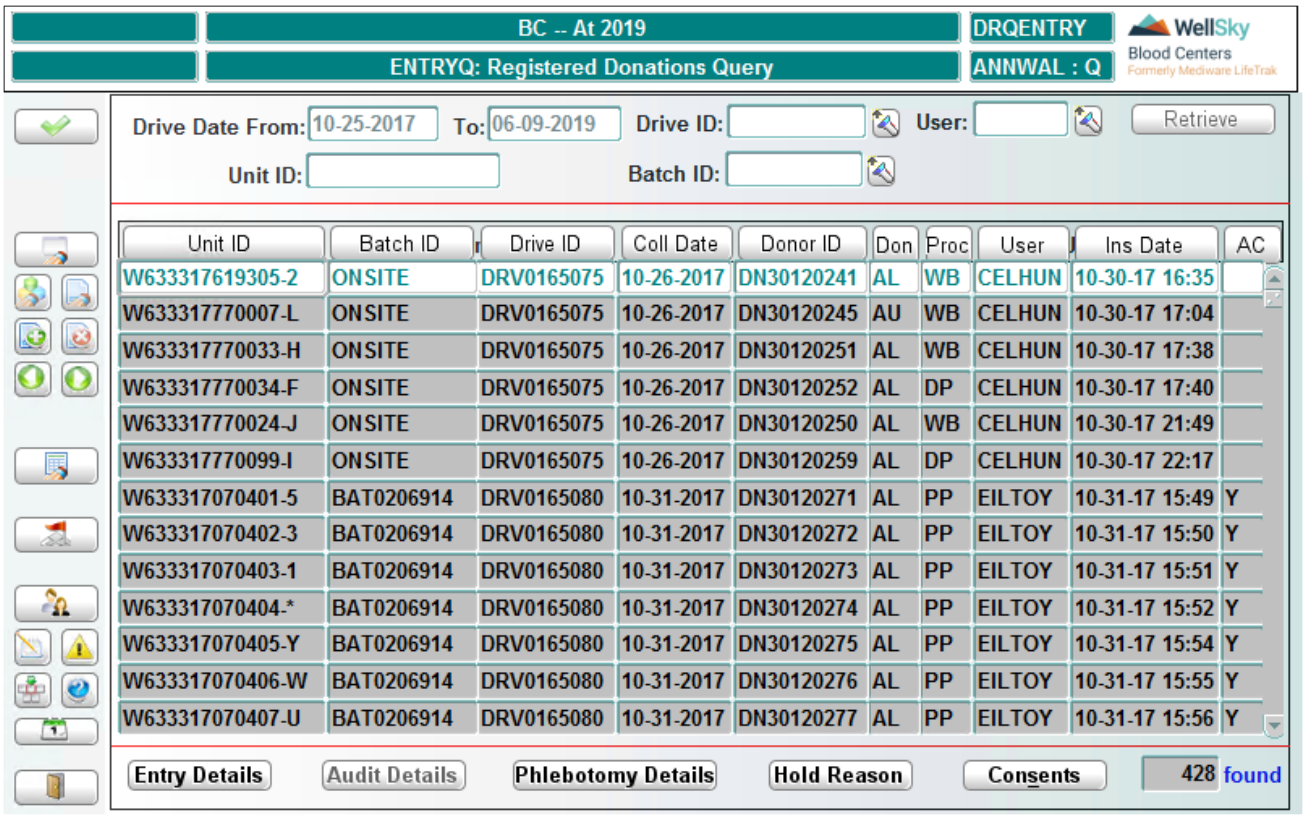


## Control Block Fields and Definitions

If no criteria is entered for the query, the system retrieves all donations registered within a set number of days configured by the user in the System Parameters table for LOV_LIMIT. The system populates the to date with the current date and populates the from date based upon the current date.

### Drive Date From

Entry is optional. Enter the earliest drive date to be considered, using the MMDDYYYY format.

### To

Entry is optional. Enter the latest drive date to consider, using the MMDDYYYY format. If this field is entered, the from date must be entered. If a from date was entered and this field is left blank, it automatically populates with the from

date entered.

### Drive ID

Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

### User

Entry is optional. Enter a valid user ID or select from the LOV. The LOV is restricted to users who have registered donations within the specified date range, or within the set number of days configured by the user if no date range is specified.

### Unit ID

Entry is optional. Enter a valid unit ID.

### Batch ID

Entry is optional. Enter a valid registration batch ID or select from the LOV. If a drive date range is specified, the LOV is restricted to registration batches for drives within that range.

## Retrieving Data

After defining the query, click **Retrieve** to execute the query. Donation records display according to the specified parameters:

The following data displays for each record:

- Unit ID
- Registration Batch ID – if the batch was registered through the OnSite Module it will display 'ONSITE'.
- Drive ID
- Collection Date
- Donor ID (if the donor ID is missing, it means that no donor is attached to the donation)
- Donation type
- Procedure code
- User who registered the donation
- Date and time of registration
- Audit complete (AC) Y if the audit is complete, blank if the audit is not complete

## Controlling and Moving Within the Data Display

Click any column heading to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the **UP** and **DOWN** arrow keys to scroll among displayed records or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar may be used to quickly scroll the display.


WellSky Corporation
Proprietary and confidential

## Viewing Details for a Donation

The buttons at the bottom of the screen display details for the selected donation record. Click on the desired button to view those details.

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## Entry Details

Click **Entry Details** to view details entered during registration of the donation. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click **Close** to exit the window and return to the main screen.

## Audit Details

The Audit Detail button is disabled if the audit is not complete. If enabled, click **Audit Details** to view unexpected answers to health history questions and physical findings values entered during donation audit. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click **Close** to exit the window and return to the main screen.

## Phlebotomy Details

Click **Phlebotomy Details** to view bleed times for the donation. Click **Close** to exit the window and return to the main screen.

## Hold Reason

Click **Hold Reason** to view any holds, active or terminated, on the donation. Only holds for which you have user viewing rights will display. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click **Close** to exit the window and return to the main screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.4.2 Registered Deferrals Query (DEFQ)

## Intended Use

Use this program to query registered deferrals. Query by drive date range, drive ID, registration batch ID, user ID of the person who registered the deferral, individual deferral ID, or any logical combination of the above.

For any retrieved deferral record, additional details may be viewed:

- Entry details

- Donor holds
- Audit details

## Limitations

None

## Prerequisites

A deferral must have been registered using the Register Deferral (DEFREGIS) screen.

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword `DEFQ`.

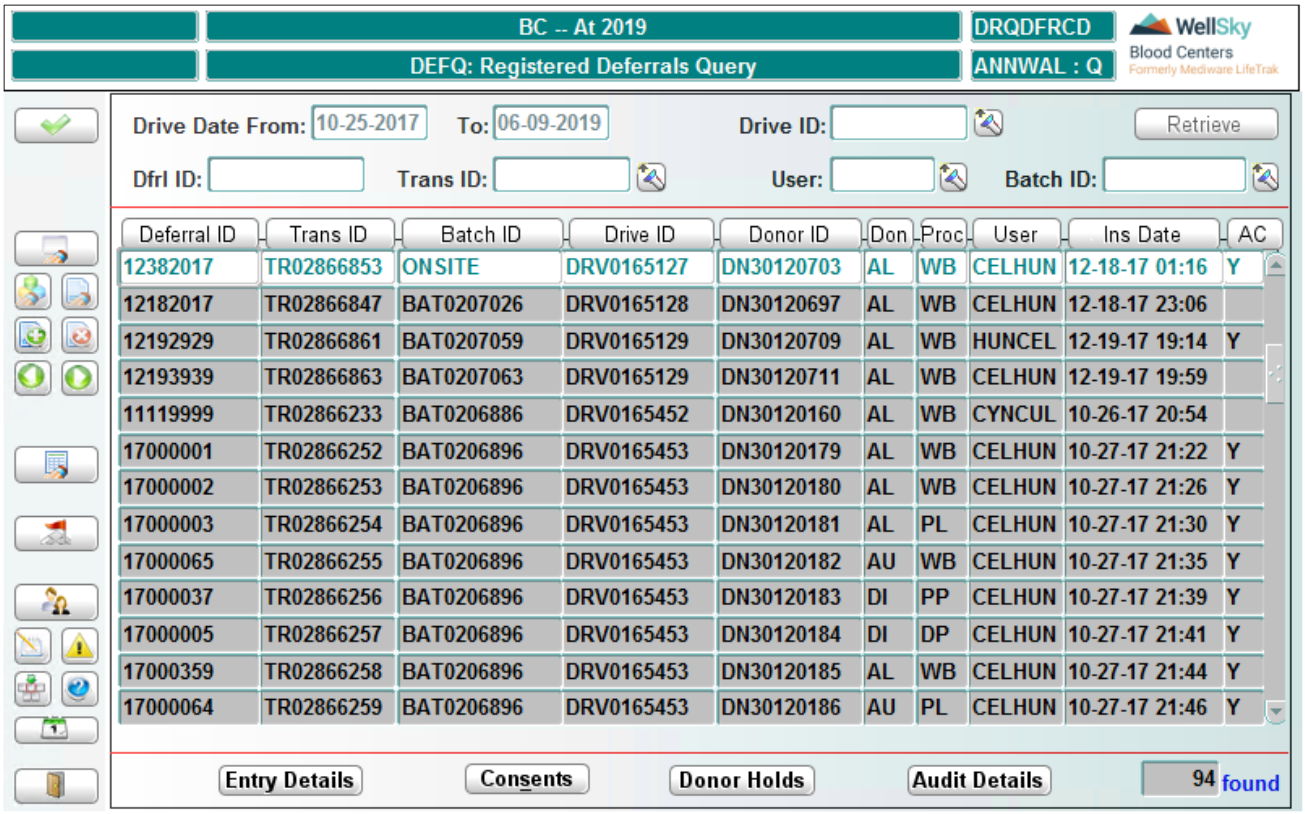


## Control Block Fields and Definitions

If no criteria is entered for the query, all deferrals registered during a set number of days configured by the user in the System Parameters table under LOV_LIMIT are retrieved.

### Drive Date From

Entry is optional. Enter a starting date using the MMDDYYYY format.


WellSky Corporation
Proprietary and confidential

### To
Entry is optional. Enter an ending date using the MMDDYYYY format. If this field is entered, the from date must be entered. If a from date is entered and no date is entered here, the field automatically populates with the from date entered.

### Drive ID
Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

### Dfrl ID
Entry is optional. Enter a valid deferral ID.

### Trans ID
Entry is optional. Enter or select from the LOV the transaction ID generated by the system when the deferral was registered.

### User
Entry is optional. Enter a valid user ID or select from the LOV. The LOV is restricted to users who registered deferrals within the specified date range, or within the set number of days configured by the user if no date range was specified.

### Batch ID
Entry is optional. Enter a valid registration batch ID or select from the LOV. If a drive date range is specified, the LOV is restricted to registration batches for drives within that range.

## Retrieving Data
After defining the query, click **Retrieve** to execute the query. Deferral records display according to the specified parameters.

The following data displays for each record:

- Deferral ID
- Transaction ID
- Registration batch ID
- Drive ID
- Donor ID
- Donation type
- Procedure code
- User who registered the deferral
- Date and time of registration
- Audit complete (AC) Y if the deferral audit is complete, or blank if the deferral audit is not complete

## Controlling and Moving Within the Data Display

Click any column heading to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the UP and DOWN arrow keys to scroll among displayed records or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar may be used to quickly scroll the display.

## Viewing Details for a Deferral

Each button at the bottom of the screen displays details for any selected deferral record. Click on the desired button to view those details.

> **NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## Entry Details

Click Entry Details to open the Deferral Entry Details window. Use this screen to view details entered during registration of the deferral. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click Close to exit the window and return to the main screen.

## Donor Holds

Click Donor Holds to open the Deferral Holds window:

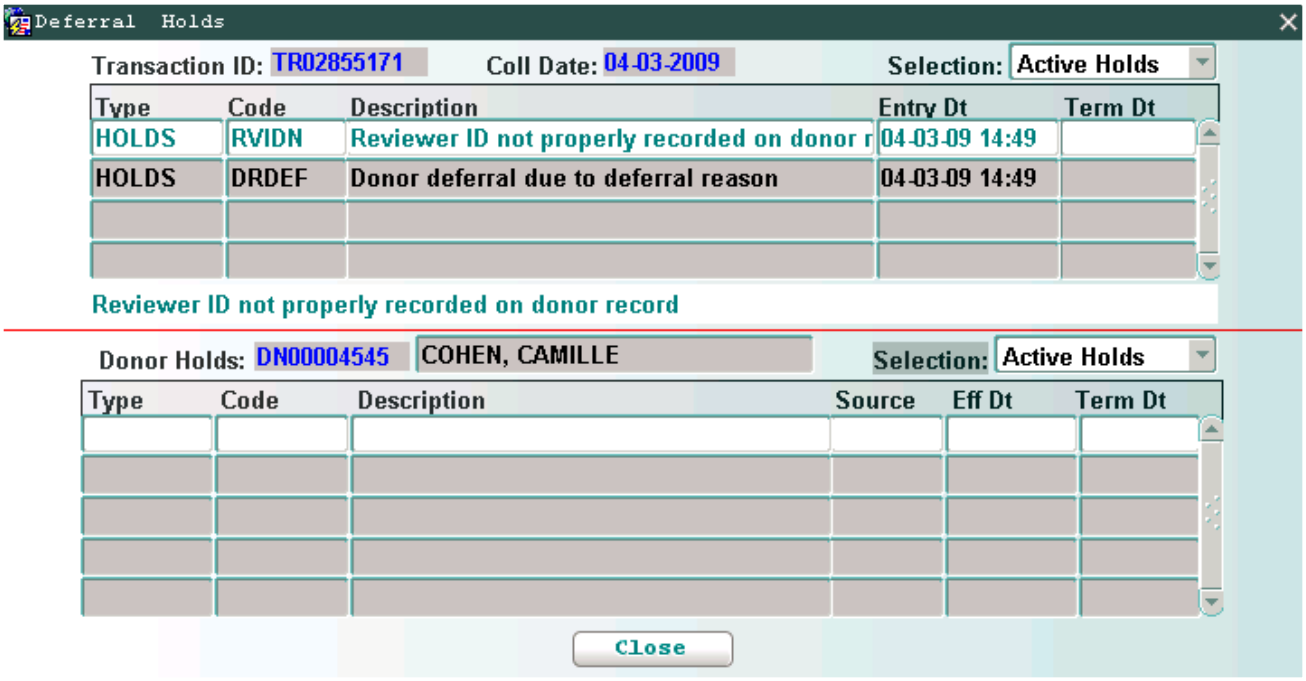



WellSky Corporation
Proprietary and confidential

Use this screen to view any holds on the donor. Only holds for which you have user viewing rights display. Click **Close** to exit the window and return to the main screen.

### Audit Details

The Audit Details button is disabled if the audit has not been completed. If enabled, click **Audit Details** to open the Donation/Deferral Audit Details window. Use this screen to view unexpected answers to health history questions and physical findings values entered during donation audit. See Chapter 14 Called Windows and Routines for instructions on using this screen.

### At Commit

No data can be committed to the database from this screen.

### What to Do Next

There is no next step.

## 7.4.3 Donations on Hold Query (DONHOLDQ)

### Intended Use

Use this screen to query donations on hold. Query by drive date range, drive ID, registration batch ID, user ID of the person who registered the donation, individual unit ID, single or multiple hold code, or any logical combination of the above.

### Limitations

Donations will only appear in this query if the donation has a HOLDS type interdiction that has a setting in the 'Lab Flg' field of a value other than 'N' or left blank in the INTER table.

**NOTE –** The donation will not appear in the query if the mapped Lab interdiction is type 'N'.

### Prerequisites

A unit must have been registered using the Register Donation (REGIS) screen, and a hold must exist on the donation.

### Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword `DONHOLDQ`.

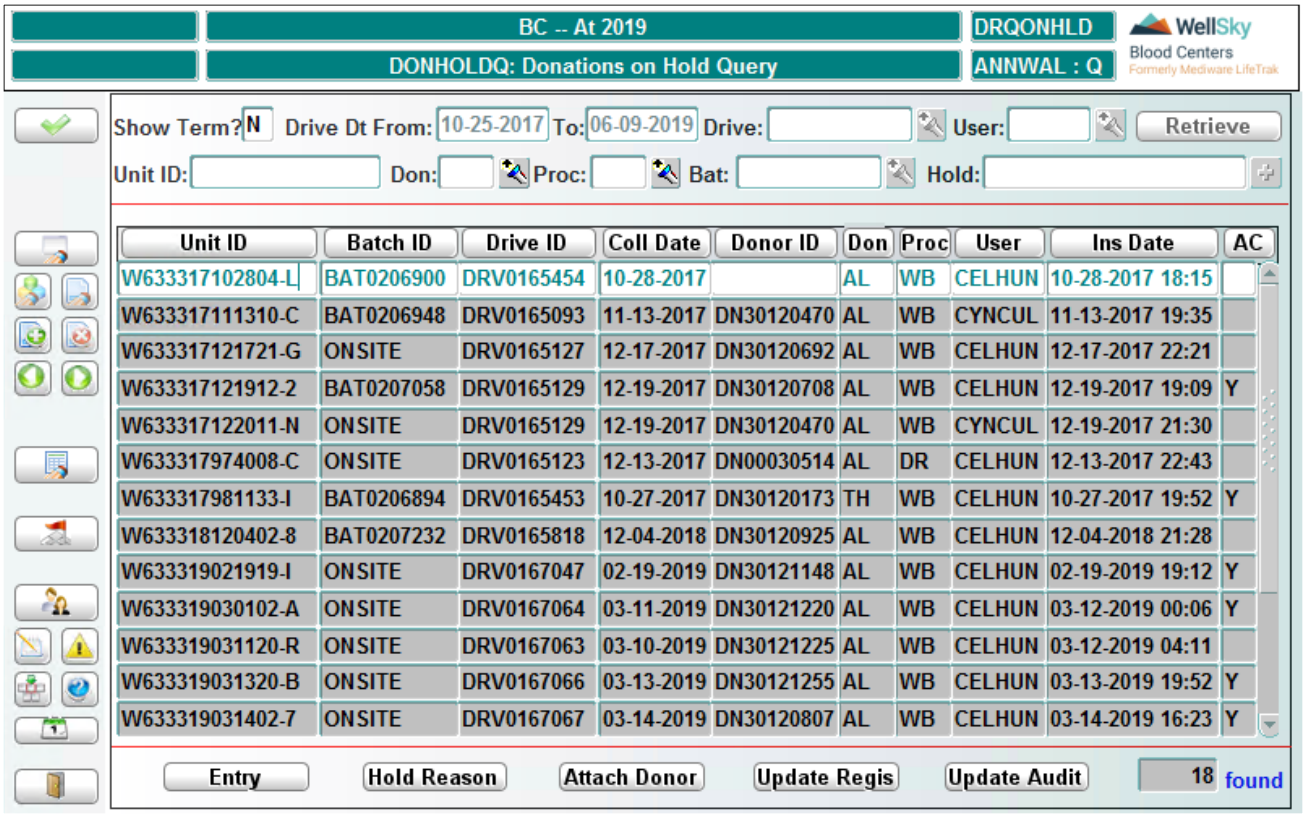


# Control Block Fields and Definitions

If no query criteria are entered, the query retrieves only donations on hold with a collection date within a set number of days configured by the user in the System Parameters table for LOV_LIMIT.

## Show Term

Entry is required. Enter `Y` to retrieve terminated donations on hold. Default is `N` for no.

## Drive Dt From

Entry is optional. Enter a starting date using the MMDDYYYY format. If this field is entered, a to date must be entered.

## To

Entry is optional. Enter an ending date using the MMDDYYYY format. If this field is entered, the from date must be entered.

## Drive

Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

## User

Entry is optional. Enter a valid user ID or select from the LOV. The LOV is restricted to users who registered donations for drives within the date range specified, or within the number of days configured by the user if no date range is

specified.

### Unit ID
Entry is optional. Enter a valid unit ID.

### Don
Entry is optional. Enter a donation type or select from the LOV.

### Proc
Entry is optional. Enter a procedure code or select from the LOV.

### Bat
Entry is optional. Enter a valid registration batch ID or select from the LOV. If a drive date range is specified, the LOV is restricted to registration batches for drives within that range.

### Hold
Entry is optional. Select one or more hold codes from the LOV.

## Retrieving Data
After defining the query, click **Retrieve** to execute the query. Donation records display according to the specified parameter.

The following data displays for each record retrieved:

- Unit ID
- Registration batch ID
- Drive ID
- Collection date
- Donor ID
- Donation type code
- Procedure code
- User who registered the donation
- Date and time of registration
- Audit complete (AC) Y indicates a complete audit; a blank field indicates an incomplete audit

## Controlling and Moving Within the Data Display
Click any column heading to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the **UP** and **DOWN** arrow keys to scroll among displayed records or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar may be used to quickly scroll the display.

## Accessing Other Screens

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## Viewing Hold Reasons for a Donation

Click **Hold Reason** at the bottom of the screen to open the Donation Hold Details screen. Use this screen to view hold reasons for a highlighted donation record. Only holds for which you have user viewing rights will display. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click **Close** to exit the window and return to the main screen.

## Donation Entry Details

Click **Entry** to access the Donation Entry Details screen. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## Attach Donor

Click **Attach Donor** to access the Attach Donor screen. A donation record selected in the query screen is not transferred to the Attach Donor screen. See the Attach Donor section of this chapter for instructions on using this screen.

## Update Regis

Click **Update Regis** to access the Update Donation screen. A donation record selected in the query screen is not transferred to the Update Donation screen. See the Update Donation section of this chapter for instructions on using this screen.

## Update Audit

Click **Update Audit** to access the Update Donation Audit screen. A donation record selected in the query screen is not transferred to the Update Donation Audit screen. See the Update Donation Audit section of this chapter for instructions on using this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 7.4.4 Deferrals on Hold Query (DEFHOLDQ)

## Intended Use

Use this screen to query deferrals on hold. Query by drive date range, drive ID, registration batch ID, user ID of the person who registered the deferral, individual deferral ID, transaction ID, single or multiple hold codes, or any logical combination of the above.

For any highlighted deferral, all holds and reasons for the holds may be viewed.

## Limitations

None

## Prerequisites

A deferral must have been registered using Register Deferral (DEFREGIS) and a hold must exist on the deferral.

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword `DEFHOLDQ`.

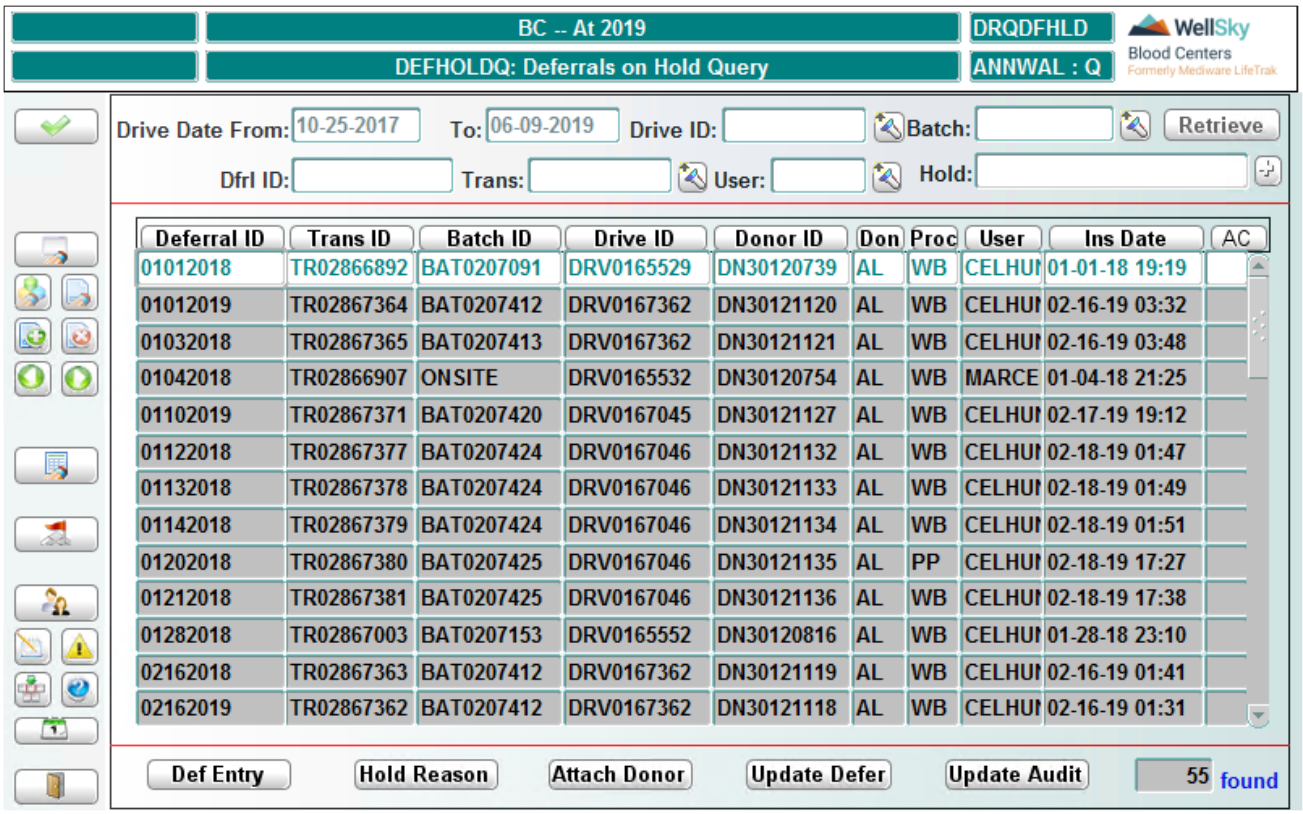

## Control Block Fields and Definitions

If no query criteria are entered, the system automatically retrieves all deferrals within the set number of days configured by the user in the System Parameters table for LOV_LIMIT. Only deferrals with holds can be retrieved in this screen.

### Drive Date From

Entry is optional. Enter a starting date in MMDDYYYY format. If this field is entered, an ending date must be entered.

### To

Entry is optional. Enter an ending date in MMDDYYYY format. If this field is entered, the starting date must be entered.

### Drive ID

Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

### Batch

Entry is optional. Enter a valid registration batch ID or select from the LOV. If a drive date range is specified, the LOV is restricted to registration batches for drives within that range.

### Dfrl ID

Entry is optional. Enter a valid deferral ID.

### Trans

Entry is optional. Enter a valid transaction ID or select from the LOV. The transaction ID was generated by the system when the deferral was registered.

### User

Entry is optional. Enter a valid user ID or select from the LOV. The LOV is restricted to users who registered deferrals for drives within the date range specified, or within the number of days configured by the user.

### Hold

Entry is optional. Select one or more hold codes from the LOV.

## Retrieving Data

After defining the query, click **Retrieve** to execute the query. Deferral records display according to the specified parameters.

The following data displays for each record retrieved:

- Deferral ID
- Transaction ID
- Registration batch ID


WellSky Corporation
Proprietary and confidential

- Drive ID
- Donor ID
- Donation type
- Procedure code
- User who registered the donation
- Date and time of registration
- Audit Complete (AC) Y indicates a completed audit, a blank field indicates an incomplete audit.

## Controlling and Moving Within the Data Display

Click any column heading to sort the display by data in that column. Click the same column heading again to reverse the sort order.

Use the **UP** and **DOWN** arrow keys to scroll among displayed records or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar can be used to scroll the display.

## Accessing Other Screens

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Def Entry Button

Click **Def Entry** to access the Deferral Entry Details screen. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## Viewing Hold Reasons for a Deferral

Click **Hold Reason** at the bottom of the screen to open the Donor Holds and Automatic/Manual Holds screen:

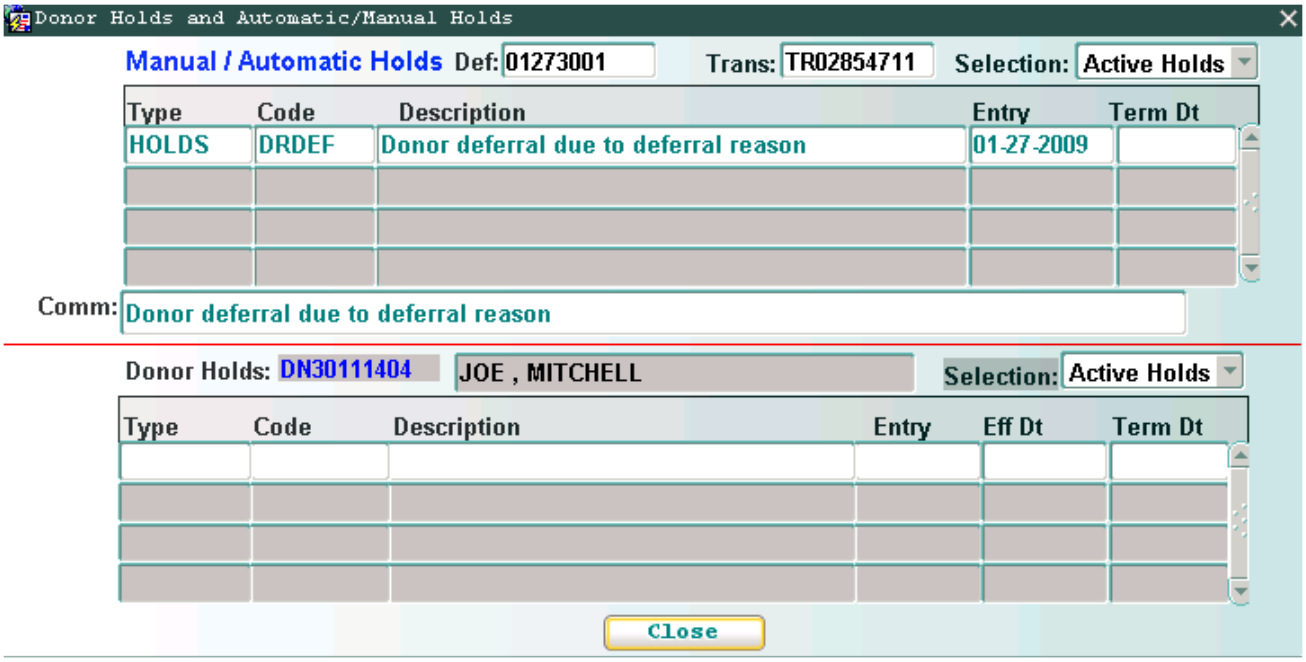


Use this screen to view hold reasons for a highlighted deferral record. Only holds for which you have user viewing rights will display. See Chapter 14 Called Windows and Routines for instructions on using this screen. Click **Close** to exit the window and return to the main screen.

## The Attach Donor Button

Click **Attach Donor** to access the Attach Donor screen. A deferral record selected in the query screen is not transferred to the Attach Donor screen. See the Attach Donor section of this chapter for instructions on using this screen.

## The Update Defer Button

Click **Update Defer** to access the Update Deferral screen. A deferral record selected in the query screen is not transferred to the Update Deferral screen. See the Update Deferral section of this chapter for instructions on using this screen.

## The Update Audit Button

Click **Update Audit** to access the Update Deferral Audit screen. A deferral record selected in the query screen is not transferred to the Update Deferral Audit screen. See the Update Deferral Audit section of this chapter for instructions on using this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 7.4.5 Donations Pending Audit Query (DONPENDQ)

## Intended Use

Use this screen to query registered donations that have not been audited. The Audit Donation (DONAUDIT) screen is directly accessible from this screen.

## Limitations

None

## Prerequisites

The donations must have been registered using Register Donation (REGIS), and the audit cannot be complete.

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword DONPENDQ.

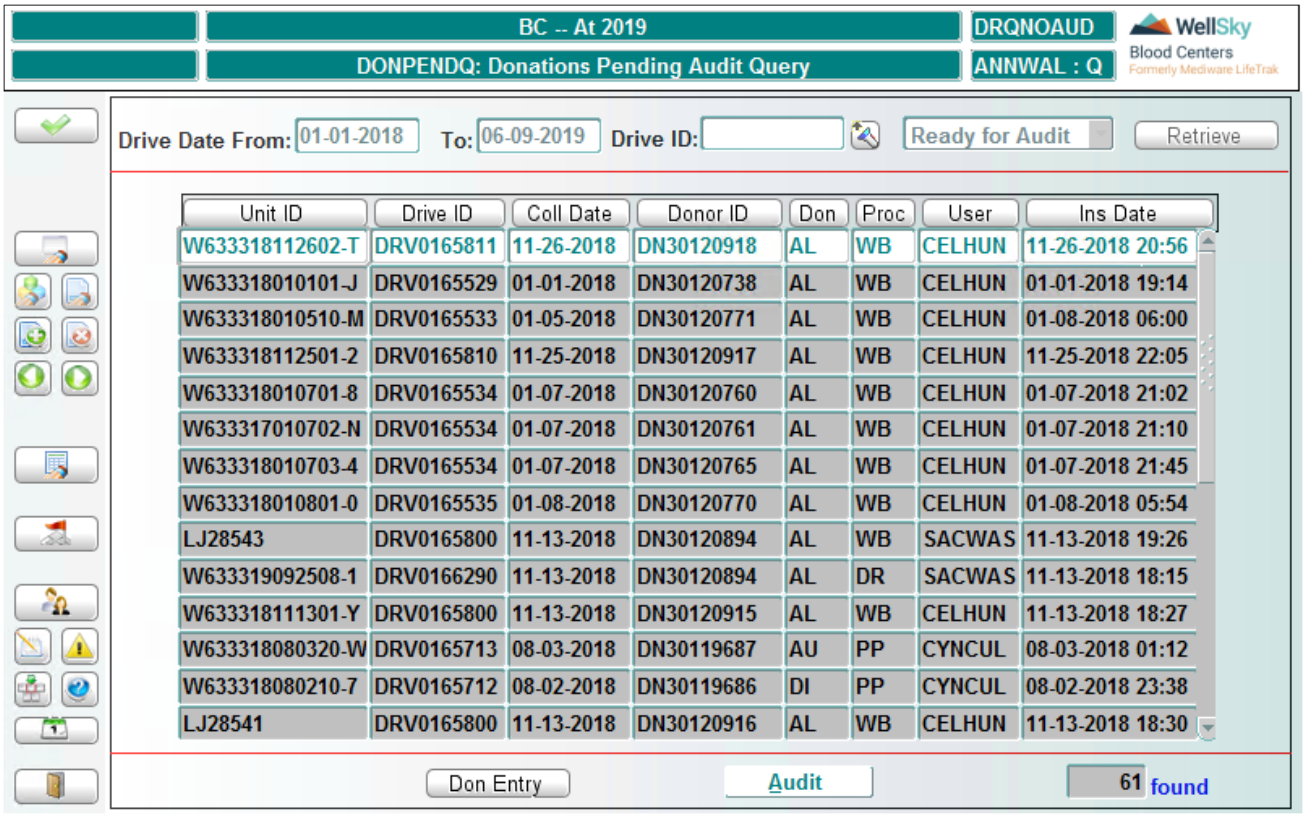


## Control Block Fields and Definitions

### Drive Date From

Entry is optional. Enter a starting date using the MMDDYYYY format.

### To

Entry is optional. Enter an ending date using the MMDDYYYY format. If this field remains blank and a starting date was entered, the query retrieves all records having collection dates between the starting date and the current date.

### Drive ID

Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

The drop-down box next to the Retrieve button permits you to select what type of deferral records to retrieve.

- Select `All` to retrieve all donations that have not been audited.
- Select `Ready for Audit` to retrieve only eligible donations (having a donor attached).
- Select `No Donor` to retrieve only ineligible donations (no donor attached).

## Retrieving Data

After defining the query, click **Retrieve** to execute the query. Records for registered deferrals that have not been audited display according to the specified parameters.

The following data displays for each record retrieved:

- Unit ID
- Drive ID
- Collection date
- Donor ID
- Donation type
- Procedure code
- User who registered the donation
- Date and time of registration

The total number of records retrieved displays at lower right.

## Controlling and Moving Within the Data Display

Click any of the column headings to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the **UP** and **DOWN** arrow keys to scroll among displayed records, or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar may be used to quickly scroll the display.

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.


WellSky Corporation
Proprietary and confidential

## The Don Entry Button

Click **Don Entry** to open the Donation Entry Details window. Use this window to view entry details for a donation.

See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Audit Button

You can directly access Audit Donation (DONAUDIT) from this query by clicking **Audit**. You cannot, however, select a donation for audit while in the query screen. See the Audit Donation section of this chapter for instructions on using this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.4.6 Deferrals Pending Audit Query (DEFPENDQ)

## Intended Use

Use this screen to query registered deferrals that have not been audited. The Audit Deferral (DEFAUDIT) screen can be directly accessed from this screen.

## Limitations

None

## Prerequisites

The deferrals must have been registered using Register Deferral (DEFREGIS), and the audit has not been completed. Users registered with ONSITE will also display in the query.

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword `DEFPENDQ`.

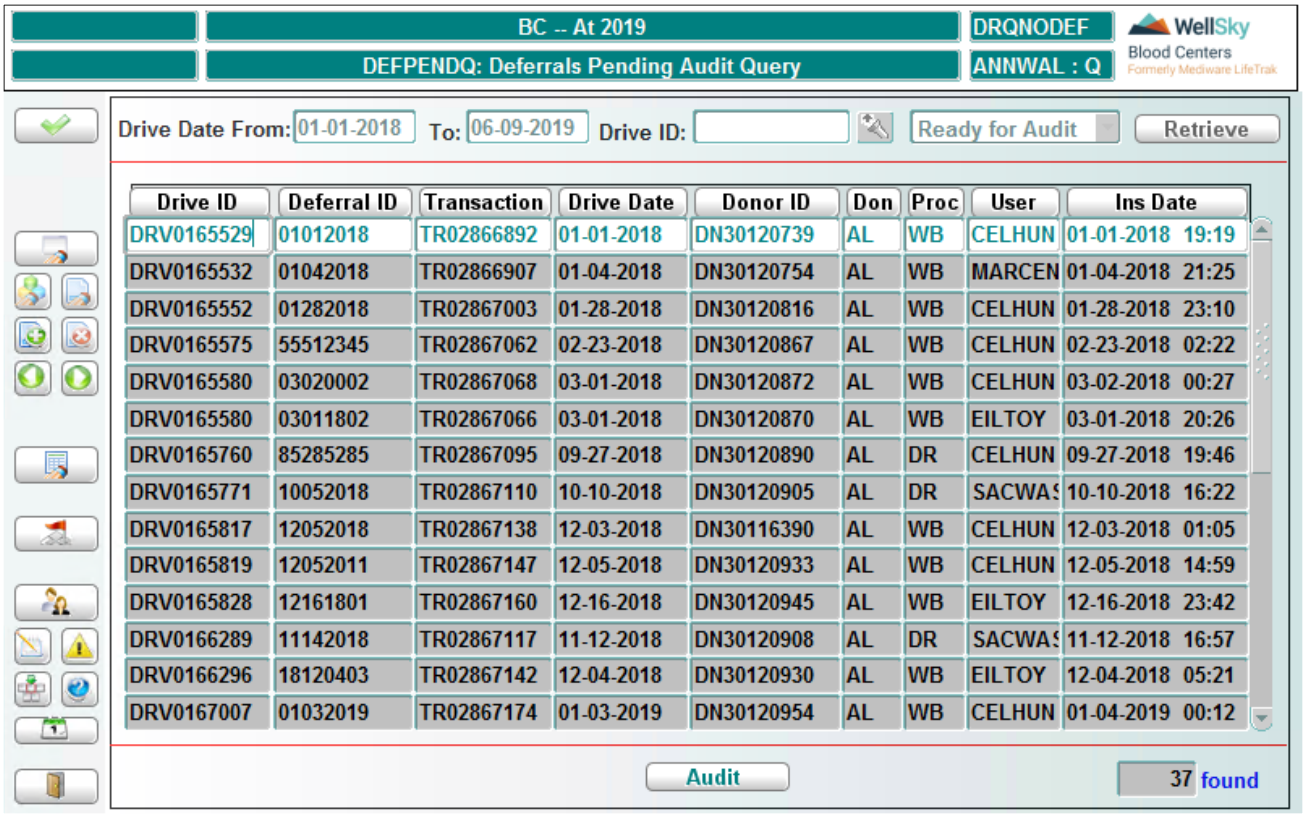


# Control Block Fields and Definitions

## Drive Date From

Entry is optional. Enter a starting date using the MMDDYYYY format.

## To

Entry is optional. Enter an ending date using the MMDDYYYY format. If this field remains blank and a starting date is entered, the query retrieves all deferrals with dates between the starting date and the current date.

## Drive ID

Entry is optional. Enter a valid drive ID or select from the LOV. If a drive date range is entered, the LOV is restricted to drives within the specified date range.

The drop-down box next to the Retrieve button permits you to select what type of deferral records to retrieve.

- Select `All` to retrieve all deferrals that have not been audited.
- Select `Ready for Audit` to retrieve only eligible deferrals (having a donor attached).
- Select `No Donor` to retrieve only ineligible deferrals (no donor attached).

# Retrieving Data

After defining the query, click **Retrieve** to execute the query. Records for registered deferrals that have not been audited display according to the specified parameters:


WellSky Corporation
Proprietary and confidential

The following data displays for each record retrieved:

- Drive ID
- Deferral ID
- Transaction ID
- Drive date
- Donor ID
- Donation type
- Procedure code
- User who registered the donation
- Date and time of registration

The total number of records retrieved displays at lower right.

## Controlling and Moving Within the Data Display

Click any of the column headings to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

Use the **UP** and **DOWN** arrow keys to scroll among displayed records, or click on any record to select it. When more records are retrieved than can be viewed at once, the scroll bar may be used to quickly scroll the display.

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Audit Button

You can directly access Audit Deferral (DEFAUDIT) from this query by clicking **Audit** . You cannot, however, select a record for audit in the query screen. See the Audit Deferral section of this chapter for instructions on using this screen.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.4.7 Unregistered Donations (UNQ)

## Intended Use

Use this screen to view units that have been registered in Donor or Lab, but not registered in the other. Allows the user to reconcile what donors and units have not been entered into the system.

## Limitations

Must be interfaced to Lab.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Registration Queries menu or by entering the keyword UNQ.

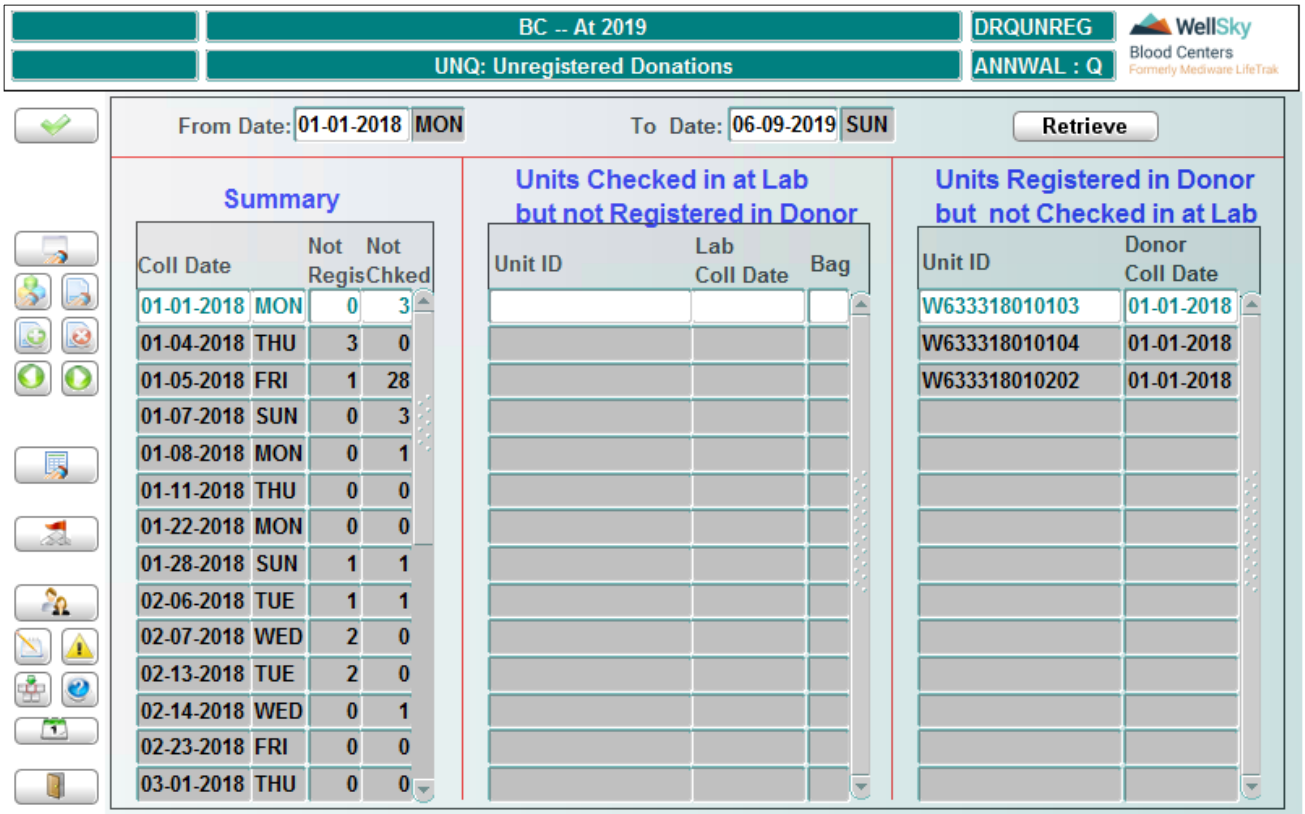


## Control Block Fields and Definitions

### From Date

Entry is required. Enter the beginning date of date range to query, using the MMDDYYYY format.


WellSky Corporation
Proprietary and confidential

### To Date

Entry is required. Enter the ending date of date range to query, using the MMDDYYYY format.

## Retrieving Data

After entering the date range, click **Retrieve** to display a list of unregistered donations within the date range

The following information displays:

### Summary Block:

- Collection date and day
- Number of units collected but not registered in Donor that day
- Number of units collected but not checked in Lab that day

### Units Checked in at Lab but not Registered in Donor Block:

- Unit ID
- Date unit was checked into Lab
- Bag-type number in which unit was collected

### Units Registered in Donor but not Checked in at Lab Block:

- Unit ID
- Date unit was registered in Donor

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 7.4.8 Collection Date Mismatch Query (DCOLLQ)

## Intended Use

Use this screen to query, by date range, units that have a different collection date between the Donor and Lab systems.

## Limitations

- Must be interfaced to the Lab application.
- Query can be performed only for a time range up to the value defined in System Parameters (SYSPARM), parameter CDIFF.

## Prerequisites

Day limit must be defined in System Parameters (SYSPARM), parameter CDIFF.

## Accessing the Screen

Access this screen from the Registration Query menu or by entering the keyword DCOLLQ.

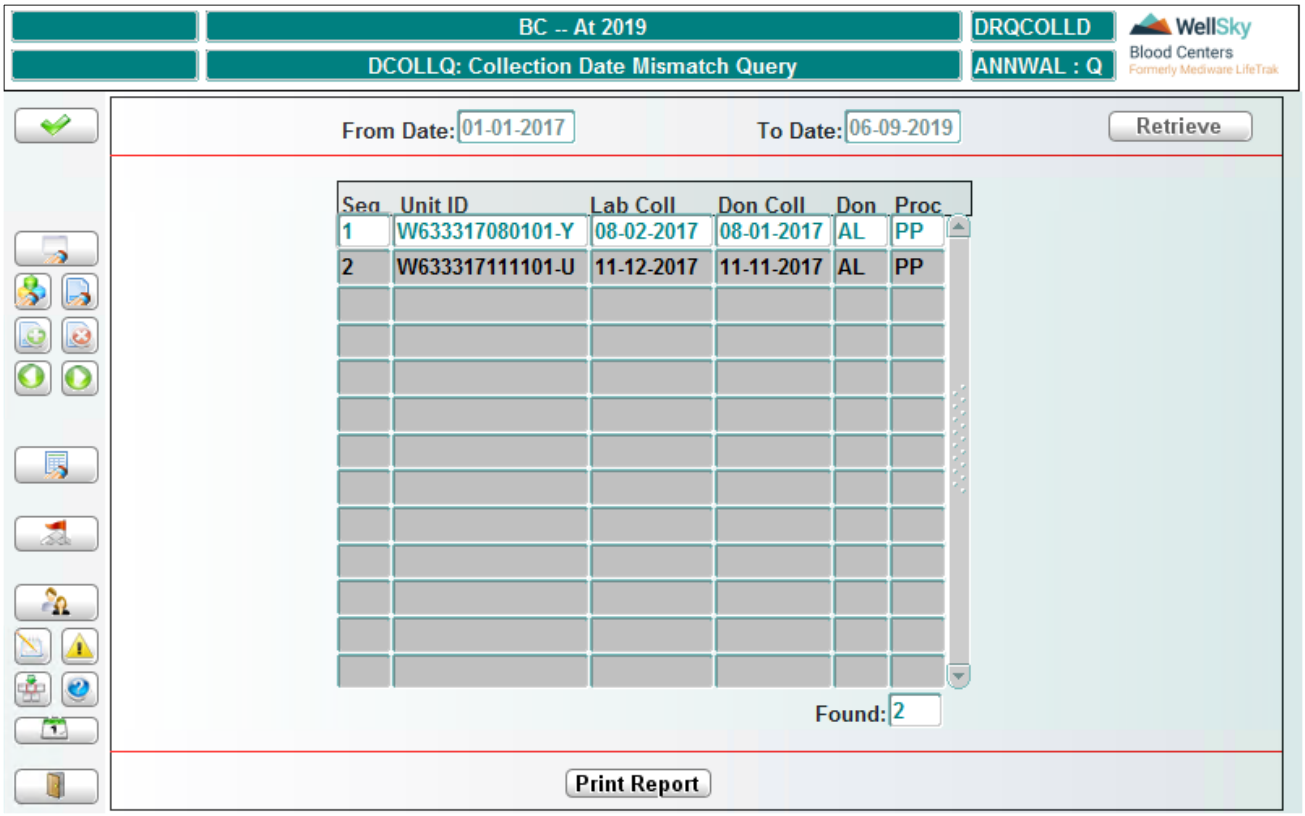


## Control Block Fields and Definitions

### From Date

Entry is required. Enter beginning date of date range in MMDDYYYY format.

### To Date

Entry is required. Enter ending date of date range in MMDDYYYY format.

## Retrieving Data

After entering the date range, click **Retrieve** to display a list of units that have different collection dates in Lab and in Donor.

The following information displays:

- Sequence of the retrieved unit within the list

- Unit ID number
- Lab collection date
- Donor collection date
- Donation type
- Donation procedure

## The Print Report Button

Click **Print Report** to print a report detailing the retrieved data.

## At Commit

No changes are made in this screen.

## What to Do Next

There is no next step.

# 7.5 OnSite Module Introduction

## 7.5.1 Indications for Use

WellSky Blood Centers OnSite Module is intended to be used by trained personnel as a tool in the management of data processes performed by staff at blood centers and high-volume testing services. User access to individual modules is controlled through defined access levels. Individual staff may be actively engaged in functions that encompass the following:

- Drive identification
- Presentation of a donor to donate
- Changes to donor demographics and employers
- Donation and deferral data
- Answers to questions relating to health history
- Finding from a mini-physical examination given at the time of donation
- Capture of the bleed times and reactions
- Capture of the Equipment QC and equipment/supplies that is used during the donation
- Obtain responses from a donor survey

## 7.5.2 Interdictions

An interdiction is a means to identify a specific condition related to a donor or a donation. The condition may be related to test results, incomplete information, donor suitability, etc.

Donor incorporates a number of routines that automatically place, upgrade, and remove interdictions on the donor and/or donation according to general rules relating to those interdictions. It is the user's direct responsibility, however, to review each unique instance when interdictions are placed, upgraded, or removed, to ensure that the system has properly and correctly handled the interdictions.

### Placement of DNELG and OVRDF in the OnSite Module

#### Registration

During the registration process, the donor's eligibility is checked and determined. During the eligibility check, the following information is evaluated:

- Eligibility of a donor with an interdiction associated to their record.
  - Deferral flag, Termination Date. Interdiction type
- Eligibility of a donor based upon number of donations in the past period.
  - Procedure code, number of donations, time period
- Eligibility of a donor using the requirement for minimum time between donations.


WellSky Corporation
Proprietary and confidential

- Eligibility of a donor based upon donation attributes associated to the previous donation.
  - Donor attribute, procedure code
- Eligibility based upon precedence of eligibility criteria.
  - Interdictions and donations
- Eligibility of a donor based upon donations per period requirements.
  - Procedure code, collection date, eligibility credit count
- Eligibility of a donor based upon interdictions placed for the procedure code.
- Eligibility of a donor based upon cellular loss requirements.
  - Procedure code, collection date, actual RBC loss, actual plasma loss, maximum RBC loss, maximum plasma loss, standard RBC loss, standard plasma loss, standard RBC extra-corporeal volume, standard plasma extra-corporeal volume
- Eligibility of a donor based upon cellular loss and weight of donor.
  - Procedure code, collection date, actual RBC loss, actual plasma loss, maximum RBC loss, maximum plasma loss by weight, standard RBC loss, standard plasma loss, standard RBC extra-corporeal volume, standard plasma extra-corporeal volume
- Checking System Parameter for minimum weight value and weight value in Physical Findings table

This determination occurs in the eligibility card in Registration, Health History, and the BLEED screen.

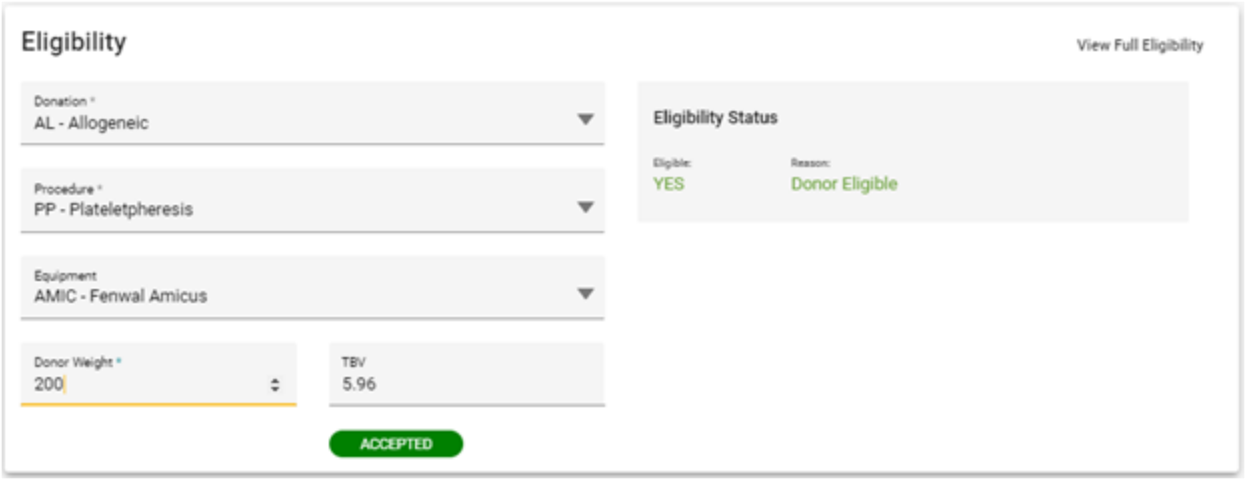


Click **View Full Eligibility** to see the eligibility for each procedure.

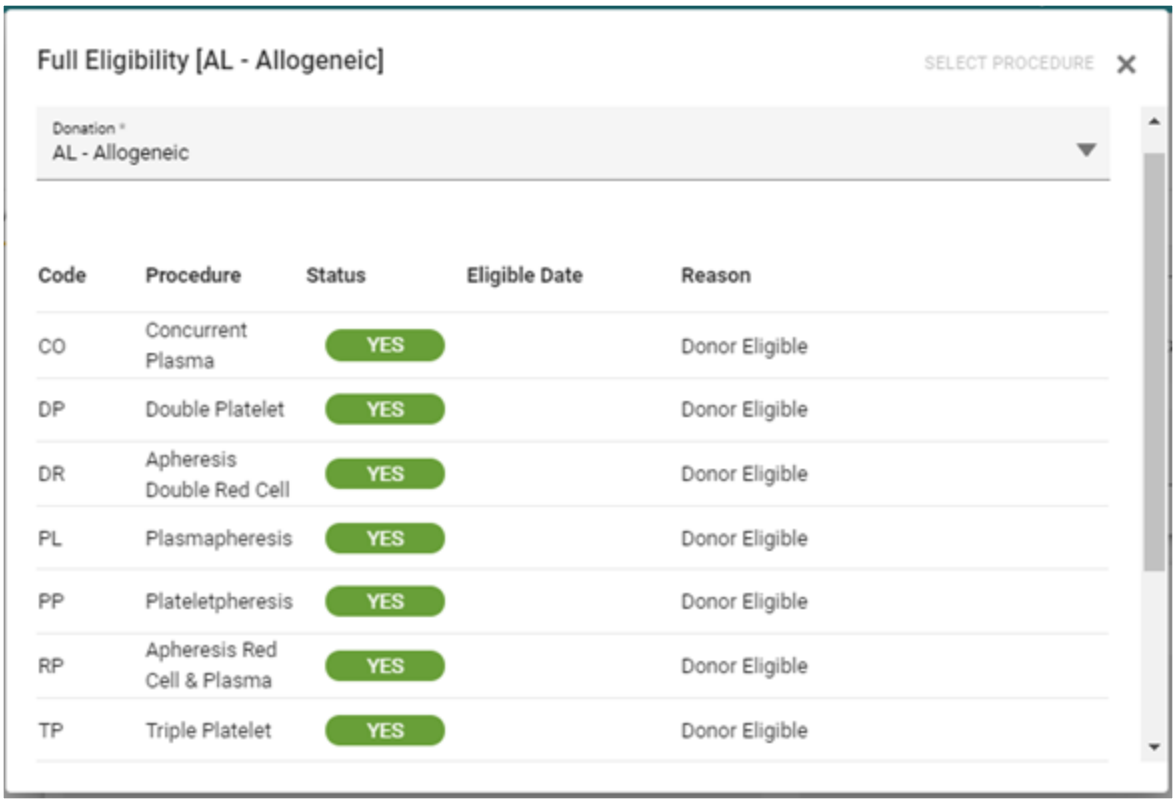


If a procedure is selected for which the donor is not eligible, when the data is committed to the database, the user can select to link a deferral, or if the user has access, the user can override the deferral.

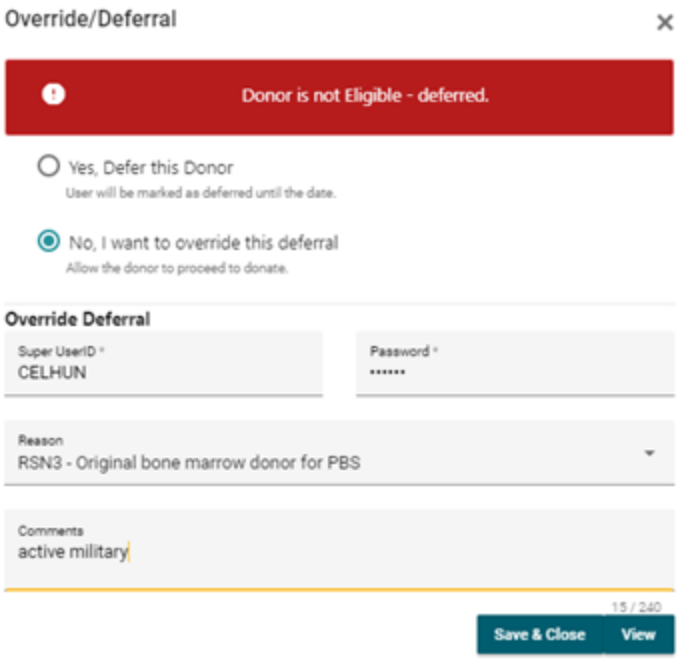


When the override occurs, it places OVRDF on the donor.

## DNELG, OVRDF, and Physical Value Interdiction Placed Due to Total Blood Volume (TBV)

Total blood volume uses the donor height, weight, sex, and equipment that is used to collect the donation.

After entry of the donor's height and weight and selection of the procedure and equipment, the total blood volume is calculated. If the TBV is out of range, the system will place the interdiction that is defined in the Define Physical Finding Values (PHYRULE).

The following information is placed on the donor:

- Interdiction from PHYRULE for the TBV
- Origination will be populated with TBV so that you know from where the interdiction is coming
- Reason code will have the value of the TBV

If the donation is overridden, the following information gets inserted:

- Interdiction OVRDF
- Group ID of the interdiction is TBV
- The reason code that was entered in the Override window will display in the Reason Code field.

## Updating Donor Weight, Height, Procedure or Equipment in Registration:

If you update any of the fields that impact the Total Blood Volume, the following scenarios occur:

- If the fields are updated and the total blood volume is now within an acceptable range:
  - The Physical Rule interdiction is removed from the donor.
  - The OVRDF does remain on the donor, but it is released for the TBV.
  - If a deferral is added to the donor, you will have to unlink the deferral from the donor to move forward.
- If the donor information is updated and the OVRDF is still active on the donor, DNELG is placed on the donation using the transaction ID due to the OVRDF.

## Updating the Donor Weight, Procedure or Equipment in the Health History Parent Form:

If you update any of the fields that impact the Total Blood Volume, the following scenarios occur:

- If the fields are updated from Registration and the total blood volume is now within an acceptable range:
  - The Physical Rule interdiction is removed from the donor.
  - The OVRDF is released for the TBV.
  - If a deferral is added to the donor, you will have to unlink the deferral from the donor to move forward.
- If the fields are updated and the total blood volume is now out of range, the interdiction is not placed until the physical findings card is completed.
  - The following information placed on the donor when the physical findings card is completed:
    - Interdiction from the PHYRULE for the TBV.

- *Originated* will be populated with 'TBV' so that you know from where the interdiction is coming, and the reason code is the value entered for TBV.
- OVRDF is placed if you override the TBV, and the reason code will be the value entered in the Override window.

**NOTE –** If multiple physical findings code rules are out of range, then the group ID will not be inserted, and the OVRDF will not be released.

### Updating the Donor Weight, Procedure or Equipment in BLEED:

If you update any of the fields that impact the Total Blood Volume, the following scenarios occur:

- If the fields are updated and the total blood volume is now within an acceptable range:
  - The Physical Rule interdiction is removed from the donor.
  - The OVRDF is released for the TBV.
  - If a deferral is added to the donor, you will have to unlink the deferral from the donor to move forward.
- If the fields are updated and the total blood volume is now out of range:
  - The following information is placed on the donor when the bleed is completed:
    - Interdiction from the PHYRULE for the TBV.
    - *Originated* will be populated with 'TBV' so that you know from where the interdiction is coming.
    - Reason code will have the value of the TBV.

## 7.5.3 Automatic Time-Out/Lock-Out

The system can be configured to automatically log off after a specified period of inactivity. This configuration is done at the time of install. Refer to the *WellSky® Blood Centers Installation Guide* for more information.

## 7.5.4 How To Use This Module

### The WellSky Blood Centers OnSite Module

The Blood Centers OnSite Module is a Web-enabled module that supports the registration of the donor, collection of health history answers, and mini-physical and bleed time entries.

The other functions include capturing the equipment QC, donor surveys, and associating the supplies and equipment to the donation.

### Limitation

The WellSky Blood Centers OnSite Module is only qualified on the Google Chrome browser on a Windows operating system. It is not designed or qualified to operate on any other devices, e.g.; iPad, Android.

### Required Training

Training for the Blood Centers OnSite Module should be conducted in accordance to the blood center's SOPs.


WellSky Corporation
Proprietary and confidential

# How to Use this Module

The Table of Contents located at the front of this guide is the primary reference, followed by the index. The OnSite Module is organized to follow the process of using the OnSite Registration Module.

# Passwords

The system administrator will issue a password to access Blood Centers to you as an authorized user. This is a different password than the one issued for access to the local area network (LAN). You must change the password issued by the system administrator to a password you choose the first time you access the system.

## Password Security

To increase system security, strong password functionality is now an option for the Blood Centers OnSite Module. It forces you to create a more complex password and applies both when a new password is created and when an existing password is reset.

Another security feature locks you out of the system when a password is entered incorrectly a specified number of times. The number of times you may attempt an incorrect password entry before you are locked out is configurable.

**NOTE –** Both the strong password and the lockout options are enabled and configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information on enabling these features.

The Blood Centers password must be changed in accordance with the blood center's policy. The general rules for password protection apply:

- Do not reveal your password to anyone, not even your supervisor.
- Do not use a password that can be guessed by your coworkers or anyone else who knows you well.

Also, choose a password that you can remember easily.

## Password Configuration

You may enable the strong password feature and designate the password configuration requirements during installation. If a strong password is not enabled, the traditional password configuration requirements apply.

- A traditional password must contain 6-20 characters and must contain at least one alpha character and one numeric character. A traditional password must begin with an alpha character.
- We suggest that a strong password contain 15-20 characters and contain at least two upper case and two lower case alpha characters, two numbers, and two special characters.

**NOTE –** A password can be a maximum of 20 characters. If you are using Active Directory, you may be limited to a fewer number of characters if there are password restrictions with LDAP.

Examples of traditional passwords:

- HEARTFELT would not be an acceptable password. It contains enough characters, but doesn't contain a numeric character.

- 1561342 would not be an acceptable password. It does not start with or contain an alpha character.
- DONOR98 might be accepted by the system, but would be a bad choice because it is easily guessed.
- EAGLE17 might be a good password unless your son is 17, just became an Eagle Scout, and your coworkers know it.

Examples of unacceptable and acceptable strong passwords:

- Meaninglessness would not be a good strong password. It has enough characters, upper and lower case alpha, but no numbers or special characters. It is also not a good choice because it is based on a word found in the dictionary.
- MyP@ssW0rd1 would not be a good strong password. It has upper case alpha characters, lower case alpha characters, numbers and a special character, but is not 15 characters in length.
- mL7c!raQcy#4t is good because it contains 15 characters, upper case alpha character, lower case alpha character, and two special symbols.

## Strong Password History

A password may not be reused immediately. You must reset your password a specified number of intervening times before you may use the same password again. The system will check that your new password has not been used in the last number of configurable times.

Additionally, your new password must vary by a minimum number of characters from your existing password.

**NOTE –** The value for both of these requirements is configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information.

## Password Expiration

All user passwords are valid for a limited period of time. You will be required to change your password after a configurable amount of time has passed.

The system will warn you at log in if your password is set to expire. The period of time you receive the warning before your password expires is configurable.

**NOTE –** The number of days for which a password is valid and the time interval that the warning message is displayed are both configured during installation. See the *WellSky® Blood Centers Installation Guide* for more information.

## Password Interval

All user passwords are valid for a limited period of time. You will be required to change your password after a configurable amount of time has passed (PWD_INTRVL).

The system will warn you at login if your password is set to expire. The length of time you receive the warning before your password actually expires is configurable (PWD_WAR_MSG).


WellSky Corporation
Proprietary and confidential

**NOTE –** The number of days for which a password is valid and the time interval for which the warning message is displayed are both configured during installation. Refer to the *WellSky® Blood Centers Installation Guide* for more information.

## Password Lockout

All user passwords are verified at the time of log in. The user has "X" number of attempts at logging in before the user will be locked out of the system. The PWD_LOCKOUT is the number of times a user can attempt to enter a password before being locked out of the system.

The system will check within a certain number of minutes (PWD_LOCKOUT_INTERVAL) if the user has reached the number of log in attempts specified in PWD_LOCKOUT to automatically lock out the user.

The system will automatically release the user after reaching the number of minutes specified in PWD_LOCKOUT_PERIOD.

**NOTE –** The configuration of password lockout is configured during installation. Refer to the *WellSky® Blood Centers Installation Guide* for more information.

# Logging In From a PC

**NOTE –** If your system administrator has implemented Active Directory, use your network user ID and password to log into Blood Centers. When Blood Centers is using Active Directory authentication, your Blood Centers user ID and password will no longer allow you to log into Blood Centers.

Active directory applies only to your initial login to Blood Centers. Once you are in Blood Centers, use your normal Blood Centers user ID and password for all functions within Blood Centers.

To log on to Blood Centers, do the following:

- Log in to your system using local practices.
- Open an Internet browser.
- Enter the Blood Centers URL or IP address, following local practices or as defined by your system administrator.

The Login screen appears:

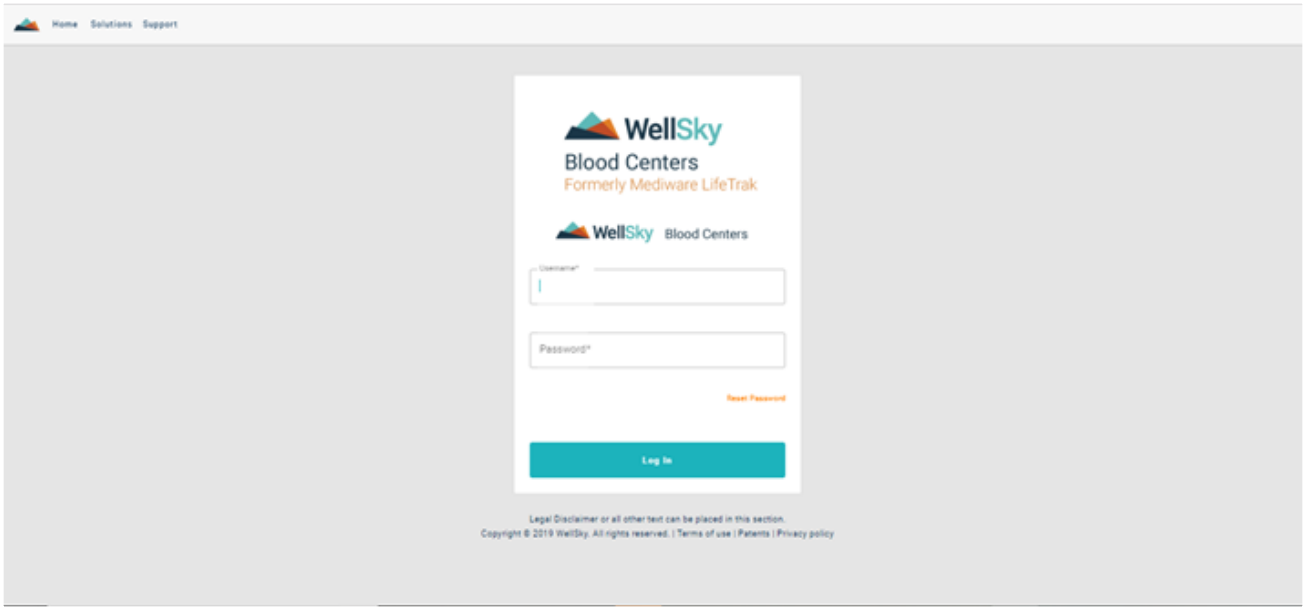


1. Enter your Blood Centers User ID.
2. Enter your Blood Centers Password.

**NOTE –** The database name you are to use will be supplied by the system administrator.

3. Click **Login** to access the Blood Centers OnSite Module.

**Important!** Logging in to Blood Centers identifies YOU to the system, and your identity is associated with all activity performed at that workstation until you log out. Therefore, to secure your user account and safeguard your professional integrity, you must log out anytime you leave your computer unattended.

## Logging In with a Common Access Card (CAC)

A Common Access Card (CAC) is used to identify all military personnel. The CAC includes a photo ID, identification bar codes, and an embedded smartchip.

Blood Centers can now perform CAC authentication to authorize access to the Blood Centers OnSite (.net) application. CAC authentication will be used on the Login screen to verify the user's identity. After the user's station reads the CAC, Blood Centers login will confirm the CAC authentication and allow access to the Blood Centers system.

Additionally, you may self-register your CAC ID number to associate it to your Blood Centers user identity.

To use CAC authentication, you must:

- be a valid user in the Blood Centers system
- have a valid CAC

**Important!** The CAC number must be unique and identify a single individual. Similarly, a system user should have only one login ID. If one number is assigned to multiple individuals, of if an individual has multiple login IDs, a user may be identified incorrectly in the system.

## First Time CAC Users

The first time you attempt to log in using a CAC, you must register your CAC in the system. Perform the following steps to register your CAC.

1. Click the link to the Department of Defense Military Health System web site. The Mandatory DOD Notice and Consent Banner displays.

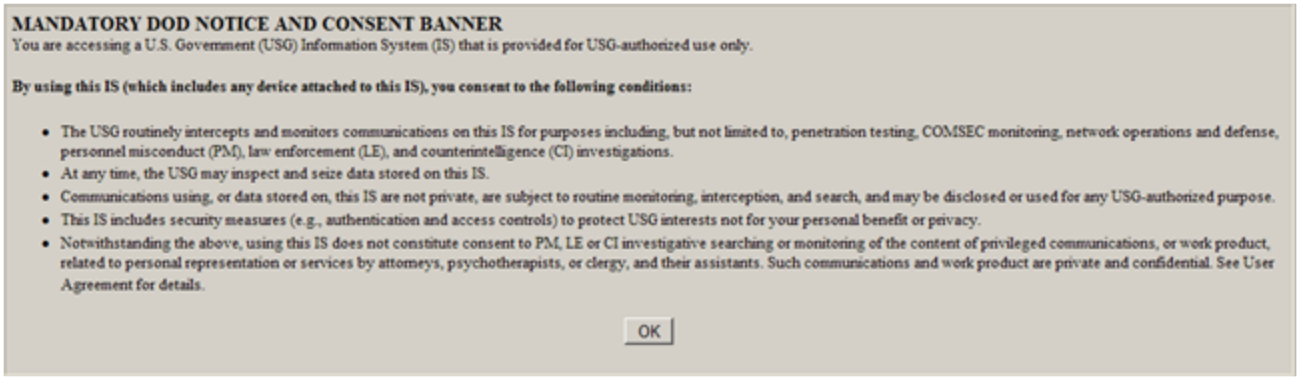


**NOTE –** Be sure that you read and understand the information on this page. By clicking OK, you are acknowledging that you understand and agree to the listed conditions.

2. Click **OK**, and the Identity Authentication Services screen displays.

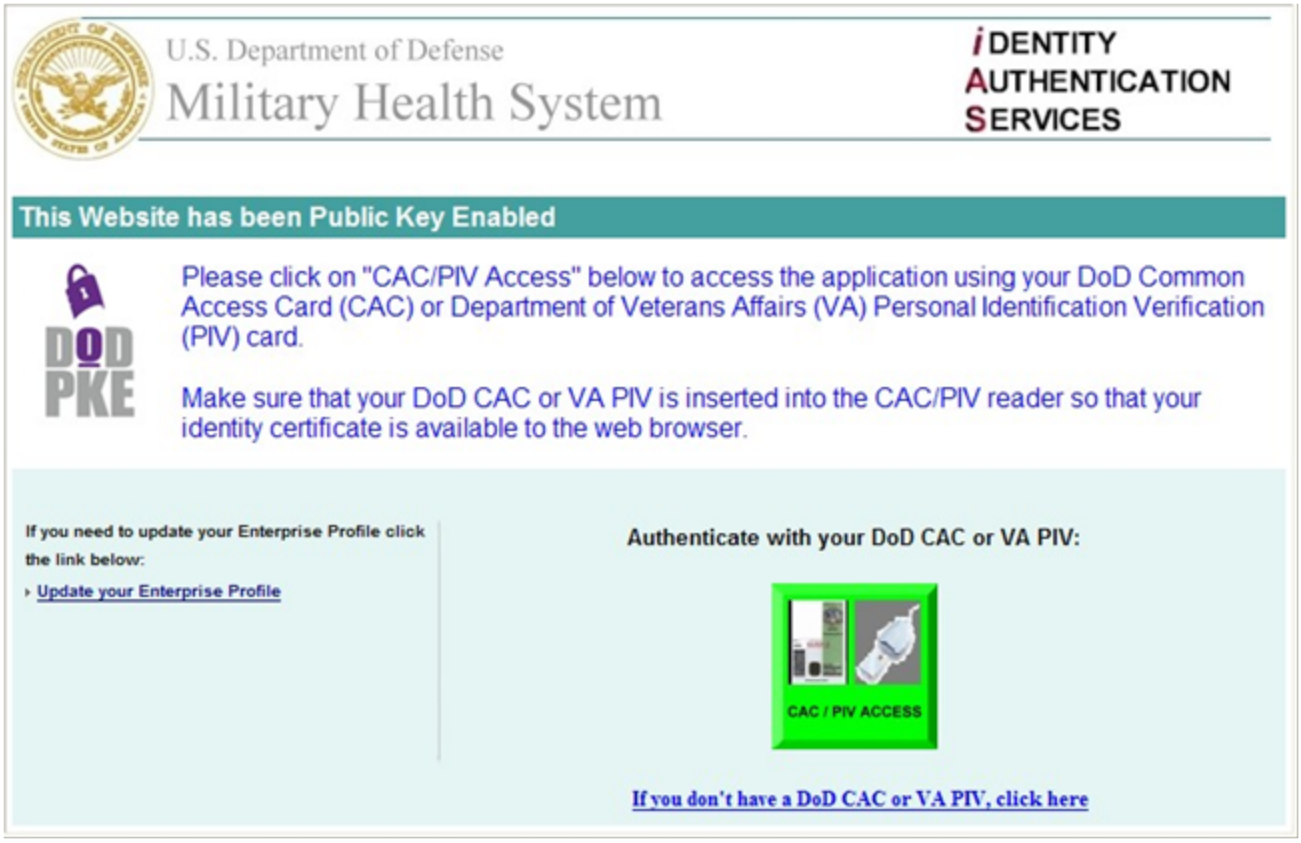


3. Scan your CAC, and click the green **CAC/PIV Access** button.
4. Enter your PIN, and click **OK**.

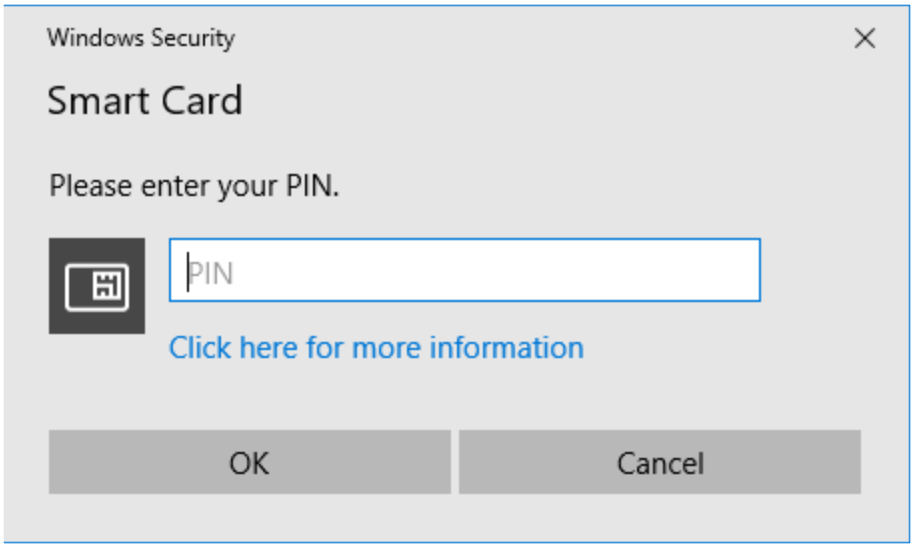


When a valid CAC is scanned, but no associated user is located in the database, the following error message appears, "Your authentication card is not recognized. Please provide UserName and Password on the next screen to register in the System."


WellSky Corporation
Proprietary and confidential

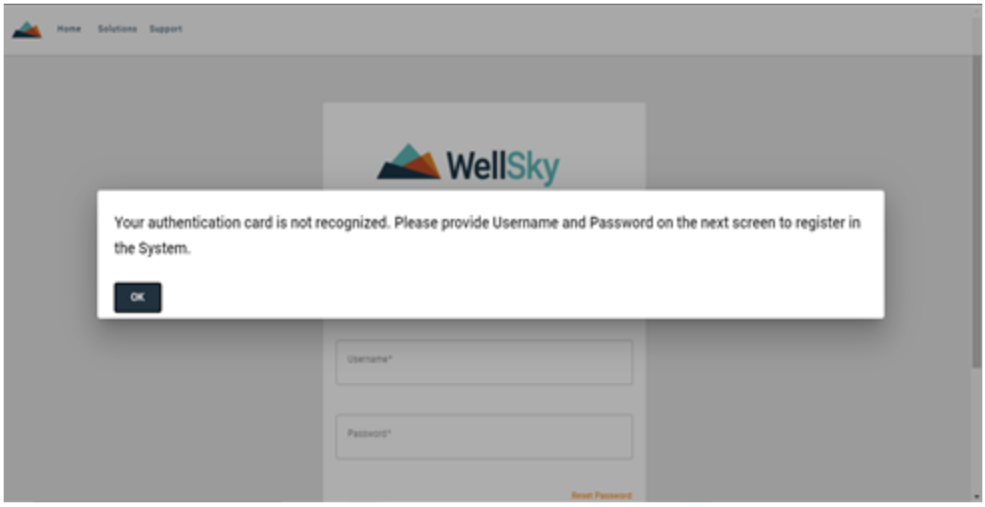


5. Click **OK**, and the login screen displays.

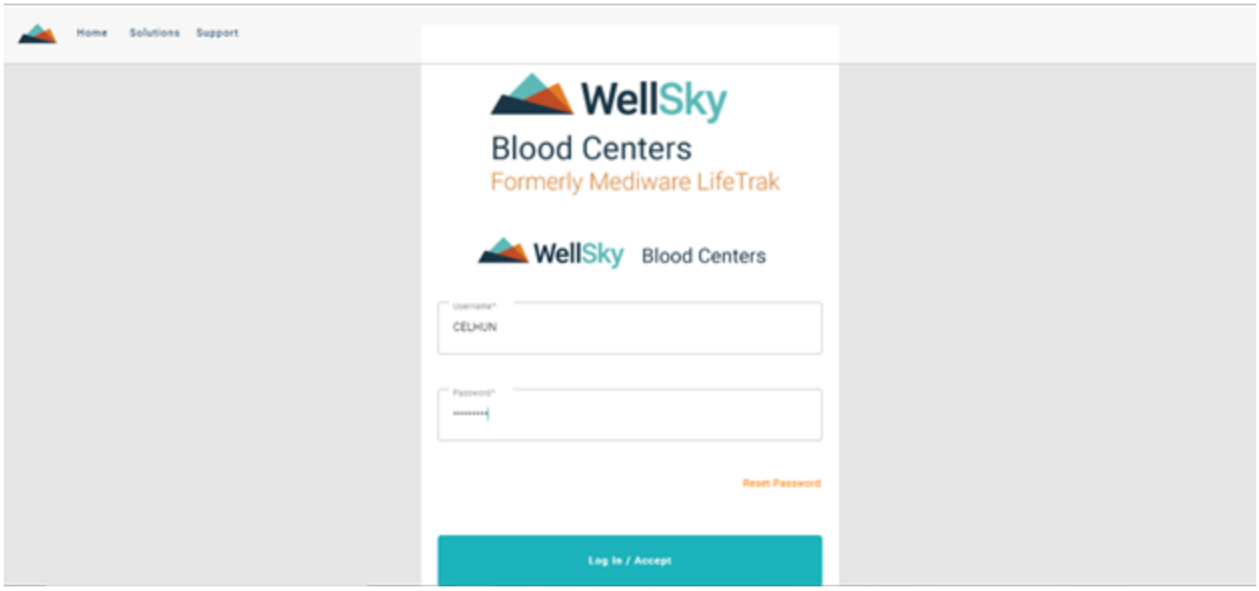


6. Complete the following fields to associate your Blood Centers username to your CAC.
    a. In the Username field, enter your Blood Centers application user ID.
    b. In the Password field, enter the strong password that is associated to your Blood Centers application user ID.
    c. Click **Log In / Accept**.

    If you are a first-time user, you will be prompted to enter a new password, which must follow the standards set by the facility. Once the password has been validated, the application will open. If the user name and password do not match, you will receive the following message.

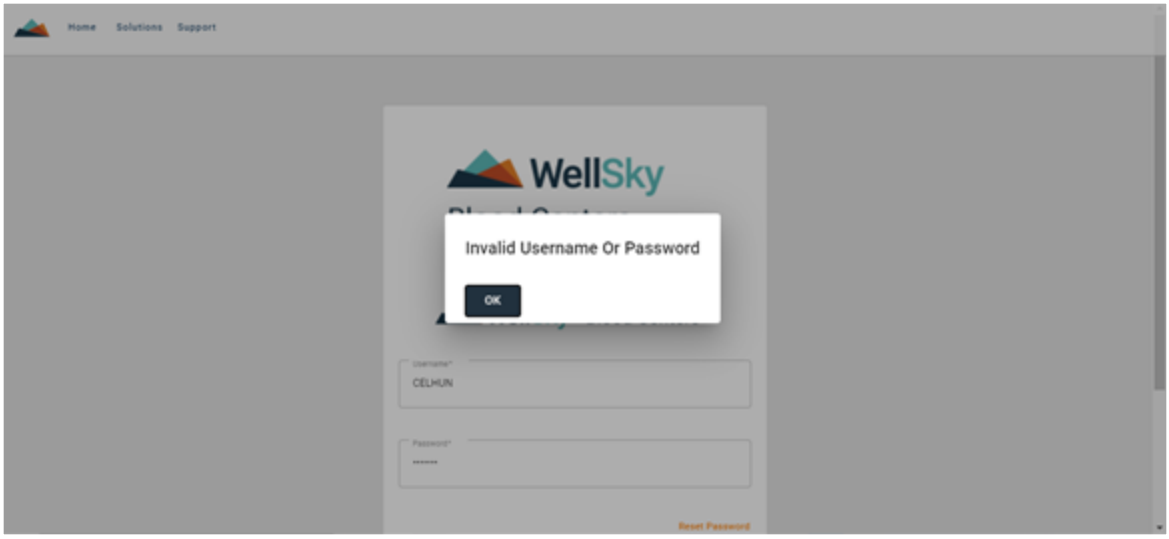


If the user ID and password are validated, the application menu opens.

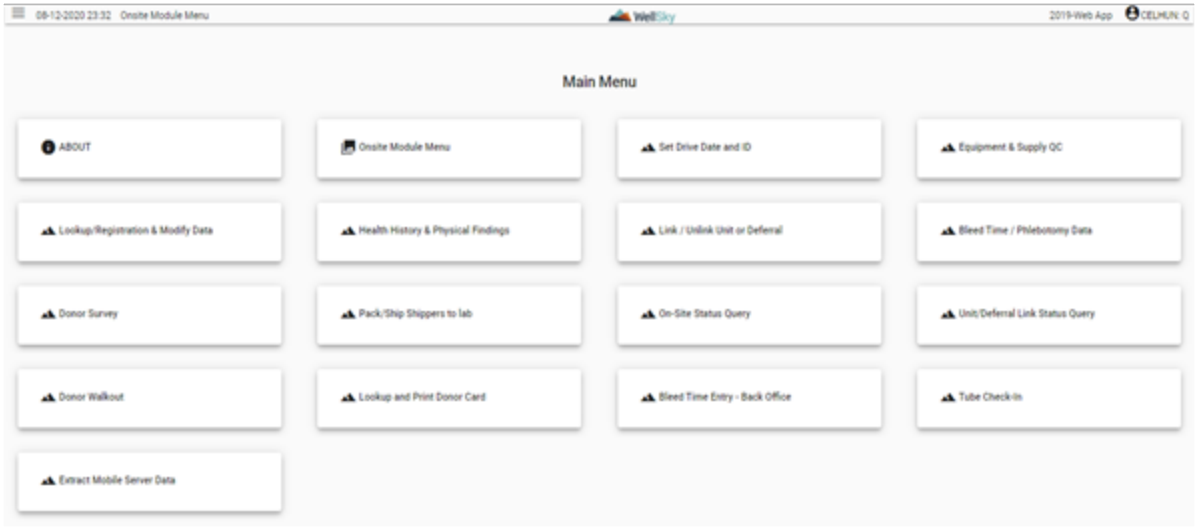


## Returning CAC Users

The first time you attempt to log in using a CAC, you must register your CAC in the system. Perform the following steps.

1. Click the link to the Department of Defense Military Health System web site. The Mandatory DOD Notice and Consent Banner displays.

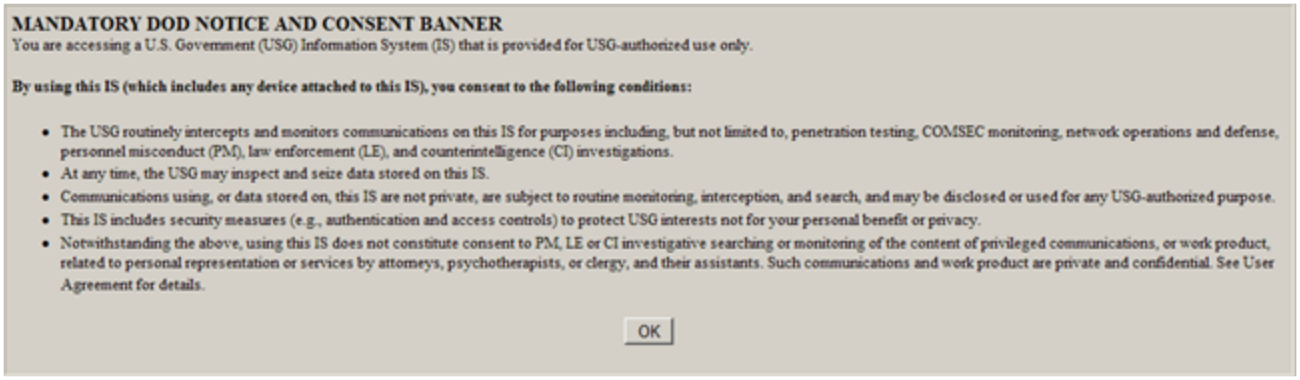


**NOTE –** Be sure that you read and understand the information on this page. By clicking OK, you are acknowledging that you understand and agree to the listed conditions.

2. Click **OK**, and the Identity Authentication Services screen displays.

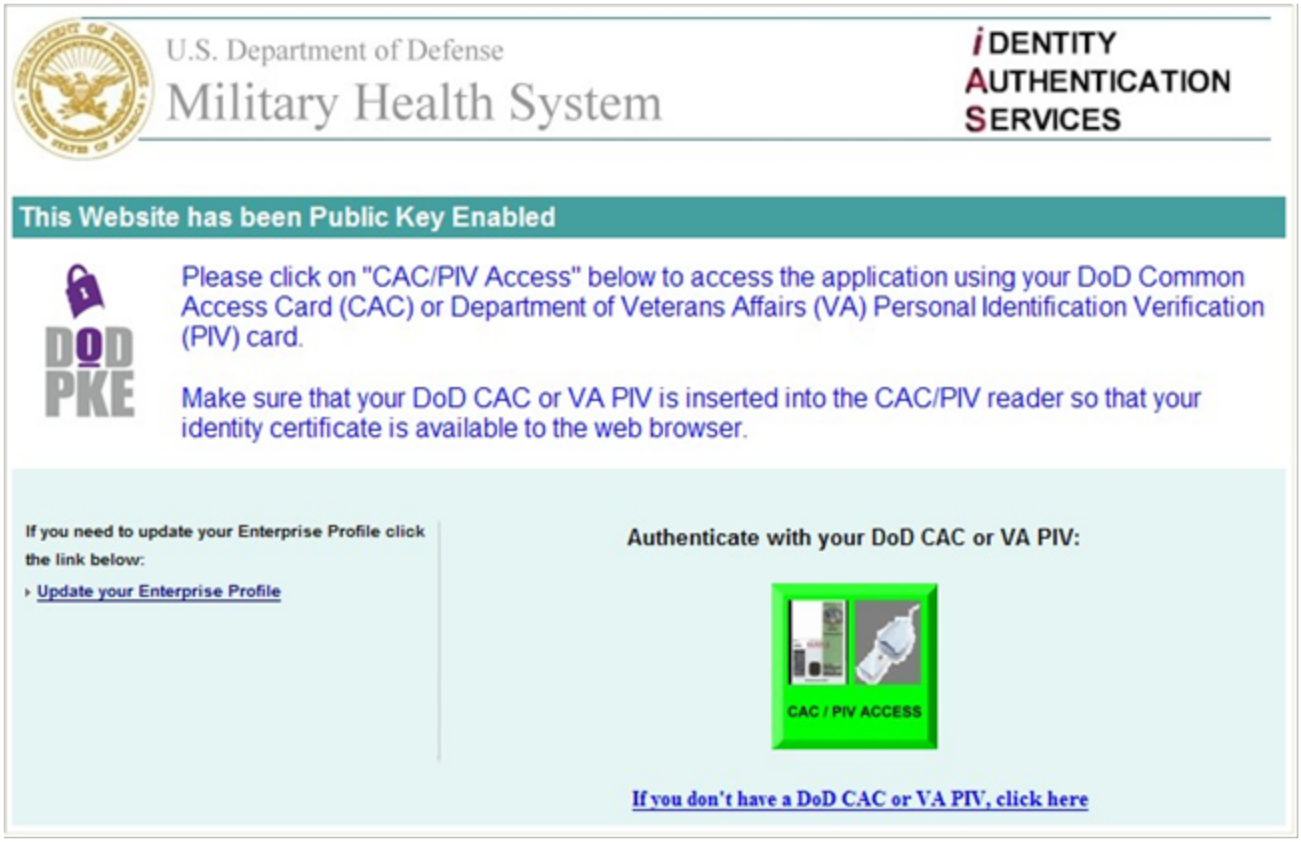


3. Scan your CAC, and click the green **CAC/PIV Access** button.
4. Enter your PIN, and click **OK**.

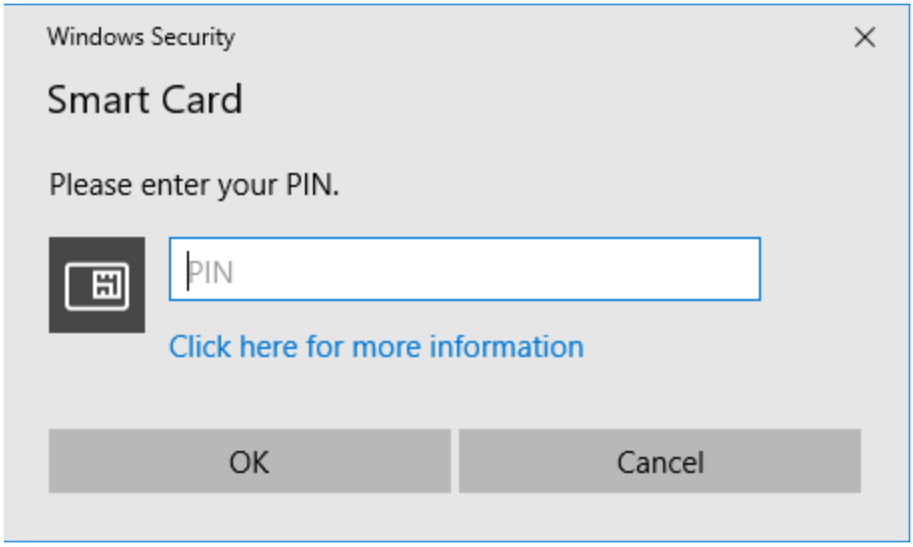


5. The login screen displays.

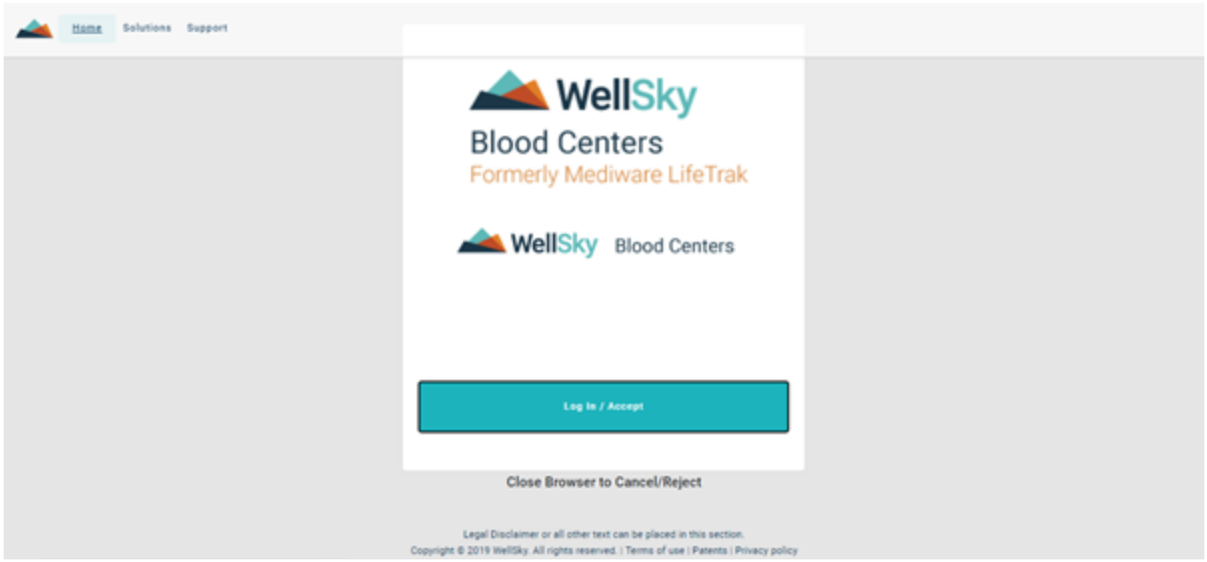


6. Click Log In / Accept.
7. The OnSite Module displays.

## Logging Out

To log out, do the following:

1. Click on the user ID in the upper right corner of the screen to open the drop-down.




When the drop-down opens, you will see the Logout option.




2. Click **Logout**, and the application will close.

**NOTE –** If you do not log out properly, it could leave a donor record in progress, and that record would need to be unlocked for any future activity.

## Logging Out with a Common Access Card (CAC)

To log out when using a CAC, do the following:

1. Click the user ID in the upper right corner of the screen to open the drop-down.

2. Click **Logout** on the drop-down, and the application will close.

The following screen will display.

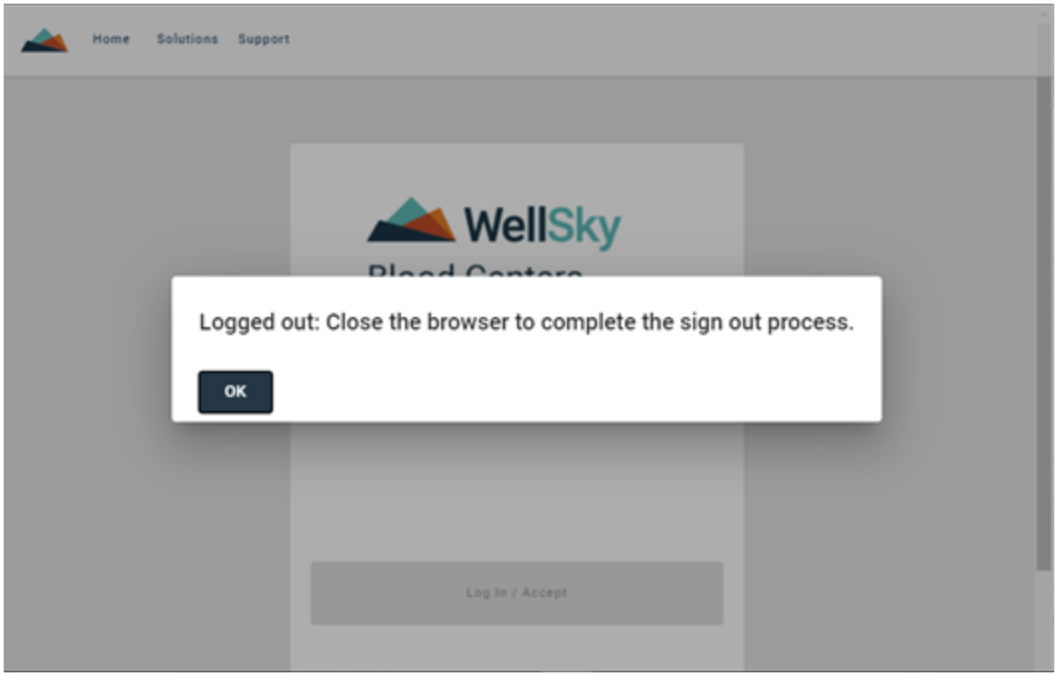


3. Click **OK**, and close the browser.

## Web-Enabled Environment

The Web-enabled environment employed by Blood Centers makes it possible to:

- Present an attractive and easy-to-read screen.
- Increase the functionality of a screen by calling additional windows.
- Click icons with a mouse rather than having to remember the purposes of numerous function keys.

To take full advantage of this environment, it is necessary to understand the standard components and navigation techniques used in each screen.

## Common Screen Components

The screen contains several standard elements.

### Corporate Header

Across the top of all screens is the Corporate Header block, which always contains information described below in the position shown:

- Displays the corporate WellSky logo
- Displays the application release number


WellSky Corporation
Proprietary and confidential

- Displays the logged-in user

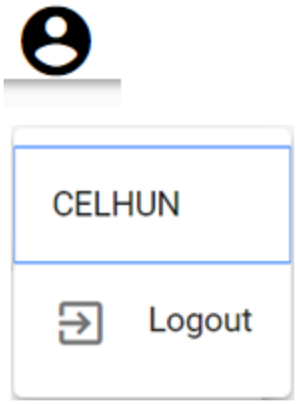


**NOTE –** The time displayed is not the current time, but is the time that the screen was first accessed. This time will not change as long as the user remains in the screen.

## Drive Banner

The drive banner displays once the user selects the drive in *Activate Drive*.

The drive banner contains the following information:

- Location Name
- Drive ID
- Chapter the user is logged into
- Address of the drive
- Date/Time - the time portion will update as the clock ticks.

## Donor Banner

The donor banner displays once the user selects a donor. The donor banner contains the following information:

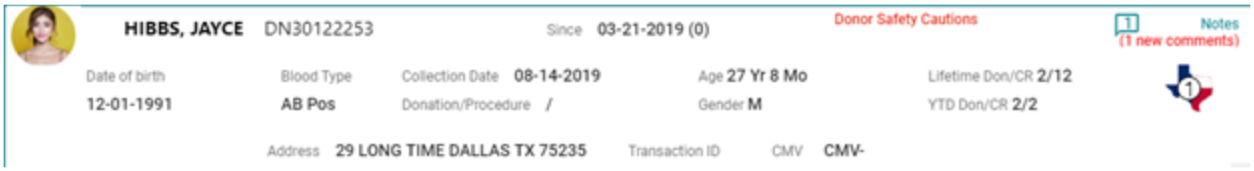


- Donor picture
- Name of donor (last name, first name) – middle name or initial will display after first name
- Donor ID
- Date of birth

- Blood Type
- Address
- Transaction ID
- Collection Date
- Donation type/Procedure code
- Age of donor
- Sex - This label will be configured using the System Parameter GENDER_LBL.
- Since – date of first donation (number of years)
- Donor cautions – if the donor has donor cautions, they will display in red and flash to alert the user
- Lifetime Don/CR – lifetime donations and credits
- YTD/CR – year-to-date donations/credits
- Notes – if new notes are present from the current drive, the comment will display in red
- If the donor is a gallon donor, the gallon donor icon will display with the number of gallons the donor has given

## Drop-Down List

When a drop-down list is available in a field, usually there will be a triangle next to that field:

If a triangle is present next to a field, click on it to display a list. When you start typing in the field, the list of values will start to narrow. Alternatively, you can choose a value from the drop-down list.

WellSky Corporation
Proprietary and confidential

## Search By Character or Words

You can shorten a list by entering the beginning letters (or numbers) of a word or entering the entire word.

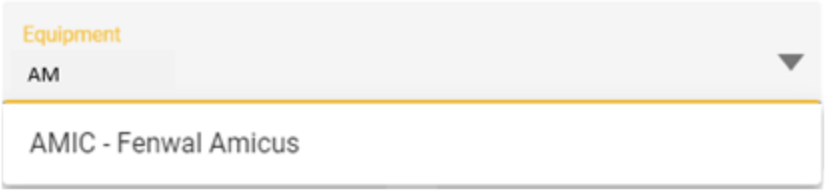


## Entry Fields vs. Display Fields

Entries can be made in white fields. Gray fields are display-only fields that do not permit entry or modification of data.

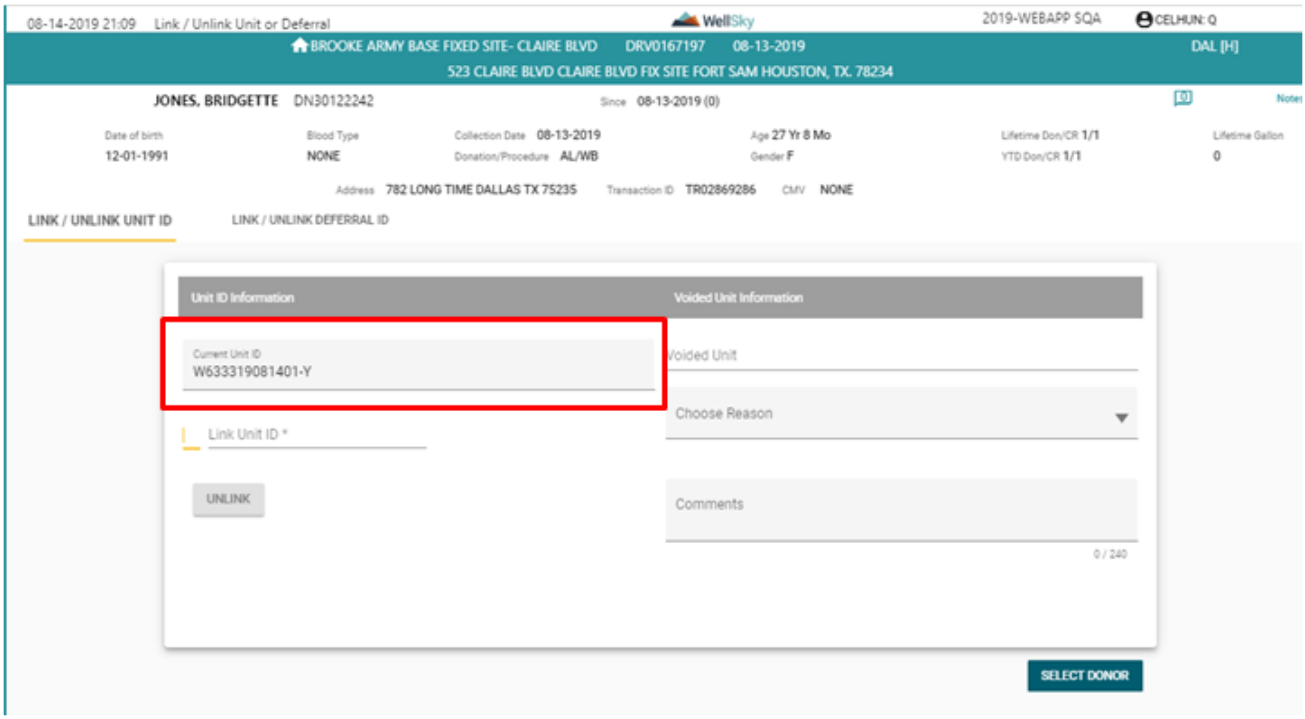


## Mouse Operation

The left mouse button is used in Blood Centers, and a single click will activate a button or position the cursor in the selected field.

## Keyboard Keys

As an alternative to the use of the mouse, you can use certain keys on the keyboard to navigate within screens:

| Key | Function |
|---|---|
| TAB | In most screens, the Tab key will move the cursor to the next field within a block. |
| SHIFT + TAB | In most screens, holding down the Shift key while pressing the Tab key will move the cursor to the previous field within a block. |

## Data Screen Format

Below is a sample entry/display screen. Although Data screens vary in the number of fields and blocks they contain, each requires some information to be entered. These parts are described in the following sections.

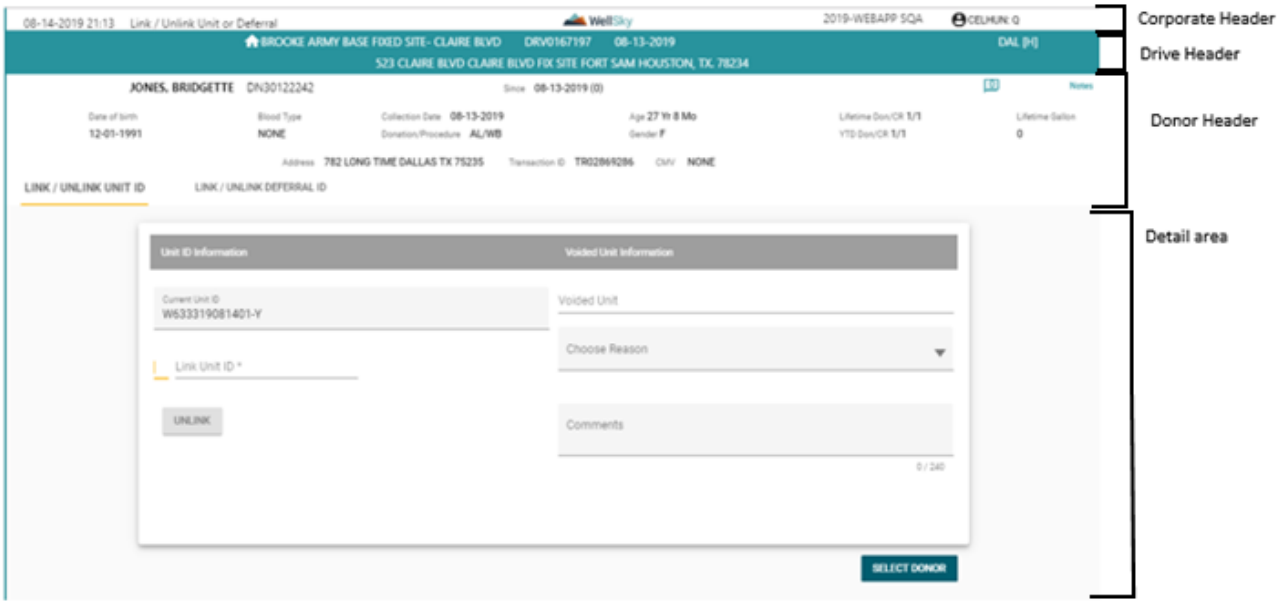


# 7.5.5 Data Screens

Your final destination in the menu structure is a data screen. These fall into two categories: entry and display.

Entry screens include data entry, update and QC screens because they allow the addition of data to the database. Display screens include query and report screens, which display data only.

The information you enter in data entry screens, update screens, and QC screens is committed to the database. In contrast, the information you enter in query and report screens is used to access information that already exists.

There are three primary tasks involved in using data screens:

- Navigating
- Entering data
- Committing data to the database

These tasks are accomplished through a variety of keyboard keys, including alphanumeric keys and function keys.


WellSky Corporation
Proprietary and confidential

# Navigating

Navigating refers to moving the cursor within a field, from one field to another, or between blocks within a screen. These are general procedures; not all screens allow the use of all of these navigation techniques.

The following keys are used for navigation:

| Key | Use this key to ... |
|---|---|
| Down Arrow | Move the cursor down one line. |
| Left Arrow | Move the cursor one character to the left within a field. |
| SHIFT + TAB | Move the cursor back to the previous enterable field. |
| TAB | Move the cursor to the next enterable field. |

The user can also click on the field by using either a mouse or a touch screen.

# Entering Data

Entering data refers to populating the individual fields in order to perform the needed functions. Several techniques are employed, depending on the type of field and type of data. The status line at the bottom of the screen provides guidance for how to enter data in the selected field.

There are several ways to enter data into fields:

- Using the keyboard
- Using drop-down lists
- Scanning
- Using manual entry as an alternate to scanning
- Copying from previous record

Entering date and time information must conform to certain formats. These formats are discussed in detail in this section.

## Enter using Keyboard

Entering data with the keyboard is used to enter basic text, such as names, addresses, phone numbers, etc., and for data that cannot be entered using other means. In addition to the normal alphanumeric keys, special keys are used to aid in entering and editing the information.

## Drop-Down Lists

is used to retrieve data from validation tables. When used, the list displays as a pop-up containing data.

Follow these steps to select from a list of values using function keys:

1. Press the that is beside the field.



2. Scroll to your choice using the UP and DOWN arrow keys.
3. Press ENTER to transfer data from the validation table to the screen, or use Esc to leave the table. The selected data is displayed on the screen.
4. Press ENTER to complete the process.

## Using a Mouse or Touch Screen

The mouse is fully functional in the OnSite module. If your notebook or computer has touch screen capability, the OnSite Module supports this feature.

## Scanning

Certain fields in the OnSite module accept scanned data as a faster and more accurate technique than manual data entry. Such fields include:

- Unit ID
- Equipment Reference Numbers
- Blood Type (ABORh)
- CUE (donor unit exclusion)
- Centrifuge ID
- Catalog Number
- Lot Number

The cursor will automatically advance to fields that accept a scanned entry. When such data is scanned, the system will accept the entry and advance the cursor to the next field automatically.

## Manual Entry as an Alternative to Scanning

In the event you cannot scan data, manual entry techniques are provided as an alternative. The technique varies according to the type of data being entered.

## Unit ID - ISBT 128

With the cursor positioned in the *Unit ID* field, type `M` and then press ENTER. The cursor will move to the right. A single entry, along with the check digit of the unit ID is always required when substituting a manual entry for a scanned entry.

**NOTE –** If a data entry error occurs during manual entry of the unit ID, clear the field while the cursor is in the *Unit ID* field. Re-entry will then be allowed.

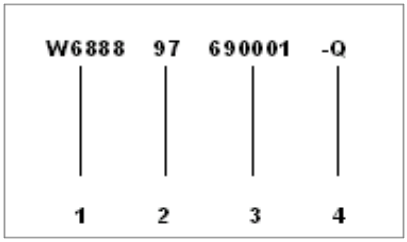

1. Collection Facility Identification Number
2. Year of Collection
3. 6-Digit Unit ID Number
4. Check Digit

ISBT Code 128 requires only a single entry of the unit ID since the check digit is calculated by the unit ID.

1. Press M, and then press ENTER. The cursor moves to the unit ID block.
2. Enter the 15-digit unit number with the check digit.
3. If a data entry error occurs, clear the field to start over. Remove the unit ID number and move the cursor to the start of the field.

### Reference ID

The *Reference ID* field is a scanned-entry field, but the reference ID can also be manually entered. Scan the reference ID with the cursor in the field. Once the scan is entered, the cursor will move to the next field.

With the cursor positioned in the *Reference ID* field, type M and then press ENTER. The system will accept the valid entry. In virtually all instances, a drop-down list is available in this field after the user has begun manual entry.

### Catalog Number

**NOTE –** The *Catalog Number* field will accept a scanned entry.

With the cursor positioned in the *Catalog Number* field, type M and then press ENTER. The system will accept the valid entry. In virtually all instances, a drop-down list is available in this field after the user has begun manual entry.

### Lot Number

**NOTE –** The *Lot Number* field will accept a scanned entry.

With the cursor positioned in the *Lot Number* field, type M and then press ENTER. The system will accept the valid entry. In virtually all instances, a drop-down list is available in this field after the user has begun manual entry.

### Data Entry Format

In the event you cannot scan data, manual entry techniques are allowed.

The date formats throughout the OnSite Module are as follows:

- Collection Date
- Drive Date

All date formats are in the MMDDYYYY format. The system will reformat the dates to the MM-DD-YYYY format.

## Committing Data to the Database

Once all data has been added to the form, the data must be committed to the database. Any data that is not committed is lost when the form is closed.

To commit data (make the database transaction permanent), click a button that is used to commit data. The buttons that could be used are:

- REGISTER
- COMPLETE FORM
- SAVE

If part or all of a transaction fails during a commit, the entire transaction is automatically rolled back. The information you have entered remains on the screen for you to work with in locating and correcting the problem. The problem must be fixed before a failed transaction can be committed.

# The Menu Structure

The OnSite Module menu is structured in the manner that the OnSite process typically flows:

1. Main Menu displays.
2. Individual pages for the OnSite Module.

    a. Place the cursor on the page you wish to open. Once the cursor is on the page, the title will be **BOLD** and will be UNDERLINED.

    b. Double-click to open the page.

## The Main Menu

The Main Menu displays after you log in to the OnSite Module.


WellSky Corporation
Proprietary and confidential

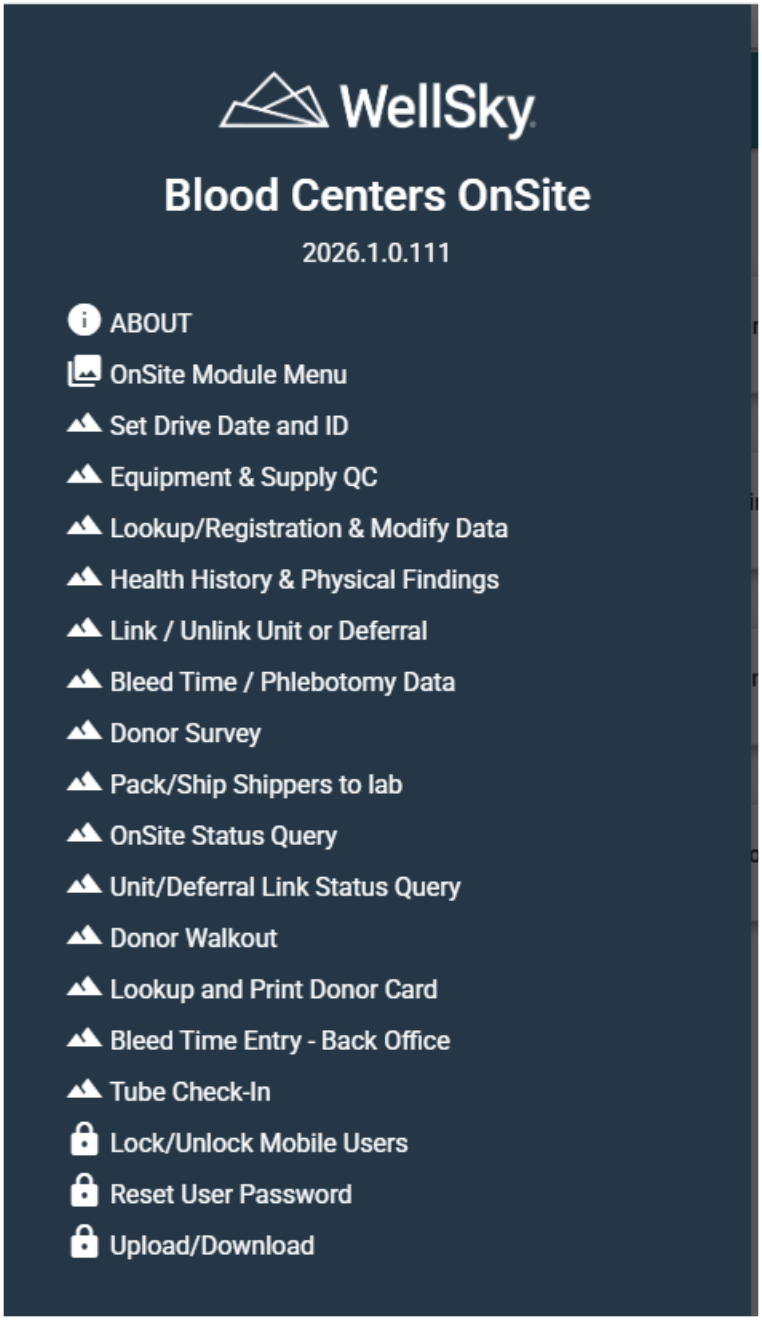


Double-click on a page to move to specific functions within the module.

### ABOUT

The ABOUT page displays the following information:

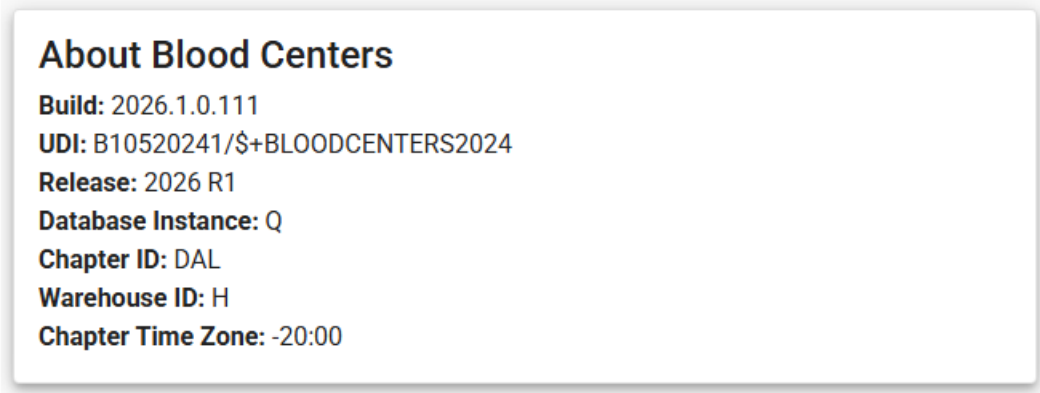


- **Build:** this is the actual version number of the software released
- **UDI:** this is a FDA number assigned to the specific release
- **Release:** release number of the software
- **Database Instance:** database the user has signed into
- **Chapter ID:** chapter ID for the chapter the user has signed into. Will be the default chapter ID for the user.
- **Warehouse ID:** default warehouse ID
- **Chapter Time Zone:** GMT time zone assigned in Chapters table

## Error Messages

Error messages appear in one of four types of pop-ups:

- **System Error Messages** are messages that must be acknowledged before you can continue.
- **User Error Messages** appear when you make an entry that cannot be accepted. Some display under the field in red; others will be a pop-up message.
- **Warning Messages** display when you attempt to perform an operation that should be carefully considered before committing data to the database.
- **Informational Messages** display in a pop-up. Such messages are of an informational nature only, and you are required only to close the pop-up.

## Error Logging or Exception Handling Feature

This feature helps WellSky to handle unforeseen errors that appear in the application code. The application will log all the unhandled errors and present the user with an Error ID. This ID is used to trace the exception from the log file, and it helps in resolving the issue.

### Definitions

**Unhandled Exceptions:** Exceptions that are generated by .NET Framework due to bugs in the application code.


WellSky Corporation
Proprietary and confidential

**Handled Exceptions:** Exceptions that are generated by the application and display as friendly error messages to the client (for example, validation errors, business logic-related errors).

When error logging occurs, a message will display to the user:

The API ErrorID is the ID that is needed by the WellSky Support Team in order to be able to view the log file that is generated. The log file contains specific information that will help WellSky Support/Development figure out the exception that is occurring.

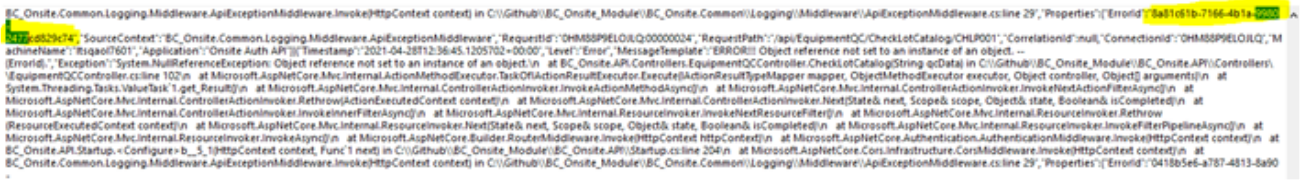

This log file will need to be sent when submitting a report. The system administrator should know where the log file is located. The location of the log file is configurable in the appsettings.json file.

# 7.5.6 Reset User Password

## Intended Use

Use this screen to reset a staff member's password when the staff member cannot reset or remember his or her login password.

## Limitations

- You must have the appropriate privileges to reset a password based on the user's group, access level, and menu settings.
- The staff member is allowed one login under the reset password, then the staff member is forced to change that password.
- The check for minimal character change from last password to new password is not performed. This check must occur between the old password and new password. Since this screen does not contain the old password, the check cannot be performed.

- The password reset will not export in the mobile upload. The user will need to update the password in the main database.

## Prerequisites

- The staff member whose password is being reset must already be a valid system user.
- If strong password configuration is required, the Strong Password feature must be enabled during installation, and the new password must meet the strong password configuration requirements.

> **NOTE –** See the *WellSky® Blood Centers Installation Guide* for more information on enabling and configuring strong passwords.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Reset User Password**.

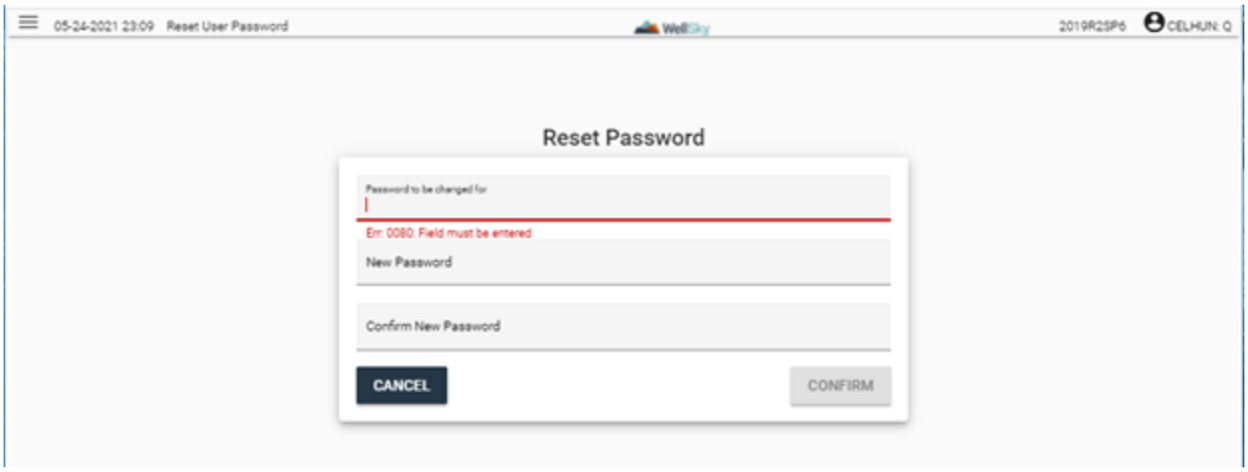


### Password to be Changed for:

Enter the user ID of the staff member whose password requires changing.

### New Password

Enter the new password. The password entry must match the requirements set up by the facility for passwords.

- If strong password is set for the facility, you will need to follow those guidelines:
  - Uppercase
  - Lowercase
  - Number
  - Special character
  - Length
- If strong password is not set up, the password will need to meet the minimal length requirement, contain a number, and begin with an uppercase character.

### Confirm New Password

Re-enter the new password for verification; it must match the New Password entry. If the two entries do not match, you will see the following error: Err: 16000: First and second entries are mismatched.

### The CONFIRM Button

Click **CONFIRM** to commit the new password to the database.

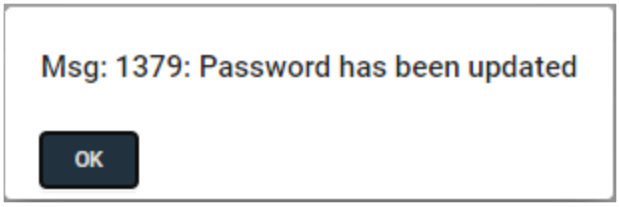


## After the User Password has been Reset

The staff member that has the password reset will need to log in to the system, and upon login will automatically be taken to the Reset Password window. The staff member will need to enter a new password.

If the user resetting the password is the same user that is having the password reset, once the password has been verified, the user will receive the following message:

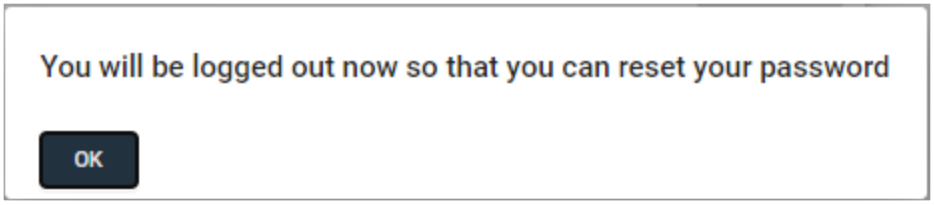


The user will be required to log back in to the system and reset their password.

## At Commit

Data is committed to the database.

## What to Do Next

Exit the page and return to the Main Menu.

# 7.6 OnSite Registration

## 7.6.1 Introduction

The OnSite Registration Module is that portion of Donor designed to record:

- Drive identification
- Presentation of a donor to donate
- Donation and deferral data
- Answers to questions relating to health history
- Findings from a mini-physical examination given at the time of donation
- Changes to donor demographics and employers

Ten screens provide the capability to enter, modify, and query data relating to the OnSite registration process. Screens are grouped by their functional purposes.

## 7.6.2 OnSite Registration General Functions

### Set Drive Date and ID

To begin registration, a drive date and ID must be defined. Once this date is defined, all donors registered at that location would be associated to that drive.

**Important!** During the registration process, if a user changes his chapter through the ADDUSER function and data entry has already been started in the OnSite module, you must reset the drive date and drive ID before proceeding with the registration of the drive information.

### Register Donation/Deferrals

1. Look-up a donor in order to determine his or her eligibility to donate
2. Generates a batch ID of ONSITE
3. Enter details for the donation and deferrals:
    - Enter or update demographic data for the donor
    - Identify the donor's employer or school
    - Identify blood center employees who assisted with the donation
    - Identify the donation type and procedure code
    - Enter deferral information


WellSky Corporation
Proprietary and confidential

- Register Deferral- Perform the basic functions as defined for a donation except for venipuncture details and CUE. A bar code on the deferral sticker is scanned as opposed to the unit ID bar code for a donation.
- Override the deferral with specific security to allow a donation during special circumstances
- Link a deferral ID at time of deferral

## Health History and Physical Findings

- Allow the donor or screener to enter answers to health history questions
- Capture the review of the health history questions by the screener
- Enter physical findings for the donation

## Link/Unlink Unit or Deferral

- Associate the unit ID to the donor for the specified procedure
- Void a unit ID for a specific donor
- Link or Unlink a deferral ID from the donor

## Bleed Time/Phlebotomy Data

- Enter bleed times for the donation that later can be interfaced to Lab
- Capture the phlebotomist for the donation
- Update the procedure code that was actually drawn
- Associate special venipuncture and reaction codes to the donation
- Associate equipment and supplies used in collection of the donation
- Check-in tubes collected on the donation (to be sent back to the donor center for processing)

## Donor Walkout

- Walkout the donor to not return to the drive
- Walkout the donor to return to the drive at a later time (HOLD)
- Place walkout attribute on the donor

## Equipment QC for the Drive

- Capture the QC of the equipment
- Link equipment and disposables to a donation
- Place HOLD interdiction if equipment/supplies are used and not QC'd

## Shipment of Donation Material for Lab Check-in

- Creation of a shipment of units, tubes, donor cards
- Ship the shippers back to the donor center to allow the shipments to be received

# 7.6.3 Online Registration Queries

- Unit/Deferral Link Status Query
- Lookup and Print Donor Card Query
- OnSite Status Query

# 7.6.4 The Donor Selection Process – OnSite Donor Search

The OnSite Search Donor window is used to select donors from the database based upon entry of key donor data:

- Last Name
- Date of Birth
- Sex - This label will be configured using the System Parameter GENDER_LBL
- First Name (optional entry)
- ALT Type (optional entry)
- ALT ID (optional entry)

The system uses this key data to identify similar records and then grades those records using a Donor Grading Matrix. A match as defined in the configuration of the Find Donor block is required to select an existing donor. A match of other grades or of multiple records prohibits selection of a new donor during registration.

The system allows the user to scan special IDs, such as driver's license or Common Access Card (CAC) to populate key field entries. Field entries are populated based on the state's driver's license; states are different in what key fields will be populated.

# 7.6.5 Terminology Applicable to Registration

## Batch ID

An identification number generated by the system when a registration range of unit IDs is defined, or when the first deferral is registered. The ID represents a set of registrations.

## CAC

The standard identification card for active duty uniformed Service personnel, Selected Reserve, DoD civilian employees, and eligible contractor personnel.

## Deferral

Presentation of a donor that does not result in collection of a unit of blood because some factor renders the donor ineligible to donate.


WellSky Corporation
Proprietary and confidential

### Deferral ID
An identifying number for the deferral. The deferral is recorded on the Donation Record when a donor is deferred and no donation occurs.

### Donation
Presentation of a donor that results in collection of a unit of blood.

### Donation Type
The intended purpose of a donation (autologous, allogeneic, directed, etc.).

### Donor Record
A written record of a donation or deferral that includes donor data, health history questions and answers, physical findings data, and the donor signature. The Donor Record was previously referred to as the Donor Source Card.

### Procedure Code
A code that identifies the specific phlebotomy procedure that applies to a donation or deferral (whole blood, apheresis, etc.).

### Registration
The process of entering data for a donation or a deferral into the Donor system.

### Transaction ID
A number generated by the system when any donation or deferral registration is committed.

## 7.6.6 The Donor Selection Process – Find Donor

The Find Donor window is used to select donors from the database based upon entry of key donor data:

- Last Name

  **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

- Date of Birth
- Sex - This label will be configured using the System Parameter GENDER_LBL.
- First Name (optional entry) – set system parameter FNAME to 'Y' to use first name in search.
- ALT Type (optional entry)
- ALT ID (optional entry)

The system uses this key data to identify similar records and then grades those records using a Donor Grading Matrix. A match as defined in the configuration of the Find Donor block is required to select an existing donor. A match of other grades or of multiple records prohibits selection of a new donor during registration.

The configuration of the DONBLOCK table will determine what fields will allow data entry. If the fields are set to 'N' for not required, the cursor will never enter the field.

The F1 flag should be set to Y: Enter Y (yes) if you want to display message 13022: "The specified criteria finds no match in the donor database" if no matching donors are found.


WellSky Corporation
Proprietary and confidential

# 7.7 OnSite Registration Programs

Access the OnSite Registration Programs using the following menu.

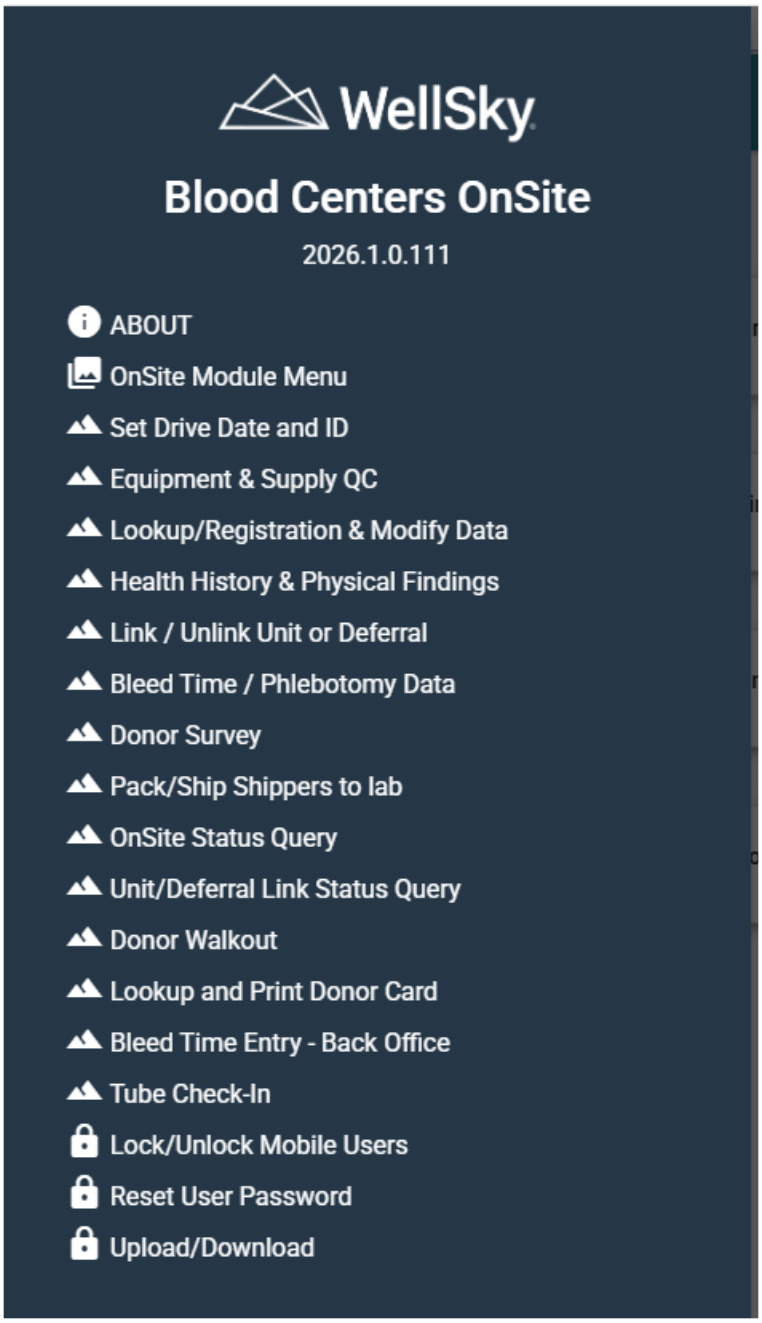

# 7.7.1 Equipment & Supply QC

## Intended Use

Use the Equipment & Supply QC screen to perform quality control for the drive regarding equipment and supplies linked to the drive type.

## Limitations

Only displays units that were registered through the OnSite Module.

## Prerequisites

- The QC Equipment Parameter table needs to be defined.
  - Drive Profiles
  - QC Parameters
  - QC Dependency
- The following Master Codes need to be defined:
  - DREQP – Drive Equipment
  - DRSUP – Drive Supplies
  - DRVTY – Drive Types
  - QCCON – QC Conditions
  - QCPAR – QC Test Parameters
  - QCRES – Equipment/Supplies QC Acceptable Results
  - QCVTY – QC Value Types
  - DRPTY – Drive Profile Type
  - EQBRQ – Definition of bag, equipment, and number of tubes required by procedure
- The following System Parameters need to be defined:
  - EQUIPQC_RQ – determines if you are going to use equipment QC in Donor

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Equipment & Supply QC**.


WellSky Corporation
Proprietary and confidential

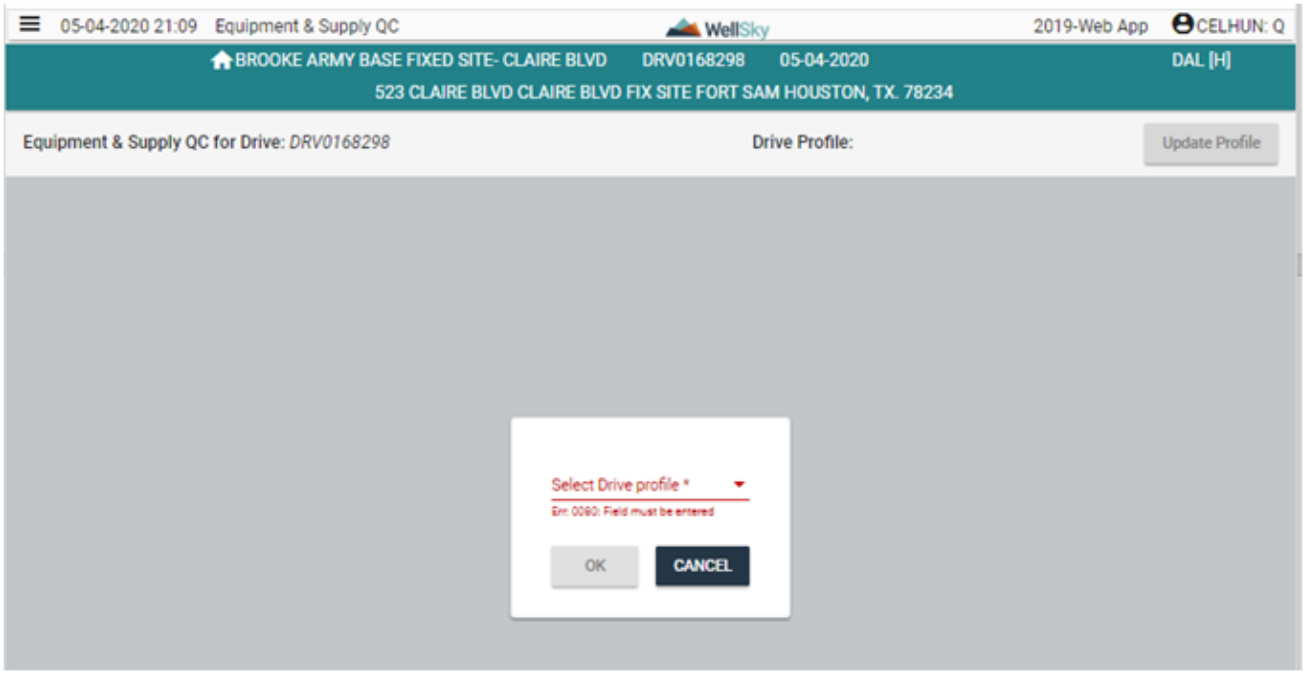


## Fields and Definitions

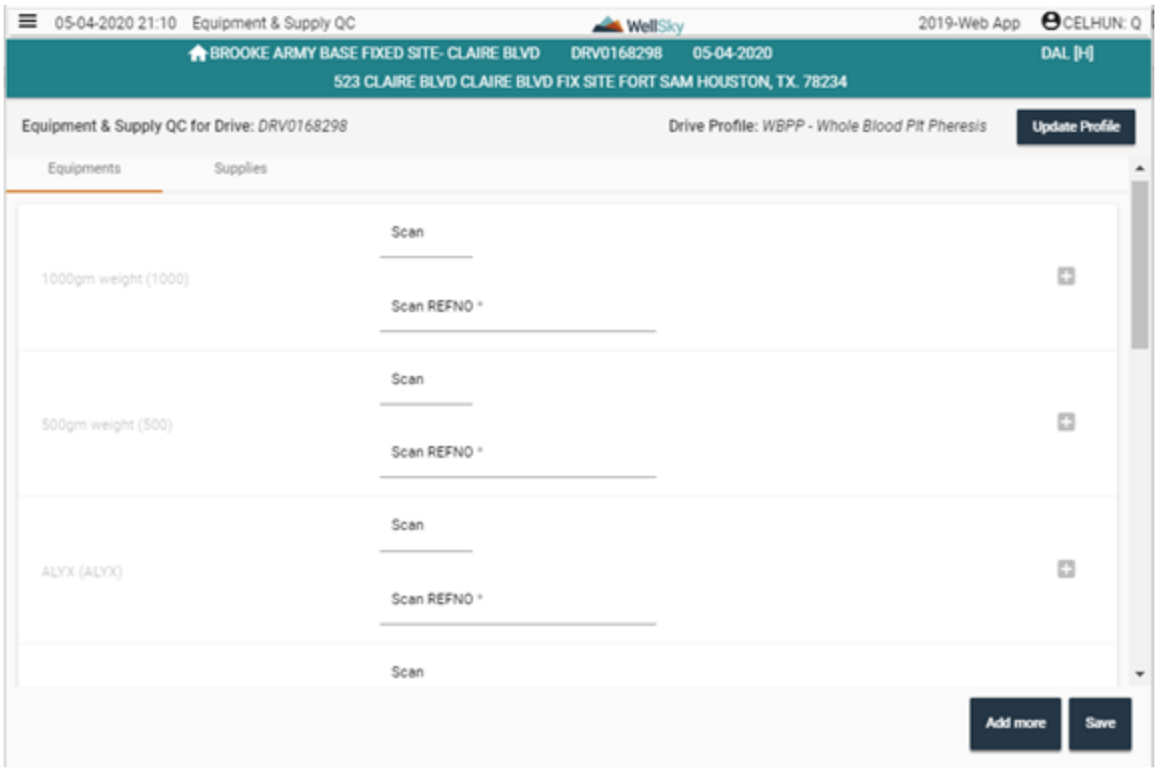

## Drive Profile

Entry is required in this field. Manually enter or select from the drop-down the drive profile type. This list is populated from Drive Equipment Parameters – Drive Profile.

The equipment and supplies assigned to the selected drive type will automatically display.

When starting entry of QC and one user selects a profile and a second user selects a different profile, when **Save** is clicked, the system will check for duplicates. If duplicates are found, the second user that clicks **Save** will receive a message, and the equipment will not be saved.

**NOTE –** The data is not saved due to the presence of different profiles and the system not knowing which profile should be saved for the drive. The first saved drive profile will be used as the defining profile. If a profile needs to be updated, all QC should be saved before updating the profile.

## Update Profile Button

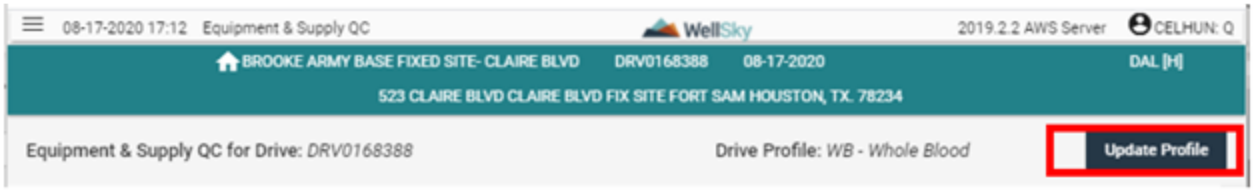


# Update Drive Profile

## Update Drive Profile After QC Entry Concluded

The Update Profile button can be used to change the drive profile selected. If equipment has been QC'd from the other profile, those pieces of equipment will display in the new drive profile. When the user clicks **Update Profile**, the following message will display:

Click **YES**, and the drive profile selection screen will display:


WellSky Corporation
Proprietary and confidential

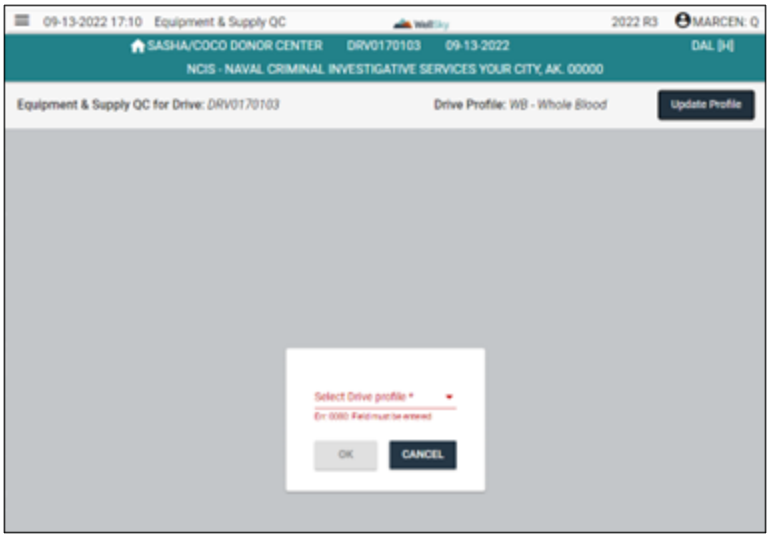


Select the drive profile, and click OK to accept. Click CANCEL to not change the profile, and return to the main menu page.

If duplicate equipment is found during the Save process, the user will receive a message informing them the equipment reference number is a duplicate.

## Update Drive Profile During QC Entry Concluded

If equipment and supply QC is being performed, and a user changes the drive profile during the entry of QC, when the user clicks Save, the following message is displayed to a second user:

**NOTE –** The data is not saved due to the presence of different profiles and the system not knowing which profile should be saved for the drive. The first saved drive profile will be used as the defining profile. If a profile needs to be updated, all QC should be saved before updating the profile.

When the save occurs, the duplicate equipment will not be saved, but any additional equipment will be added to the first saved drive profile.

# Equipment Fields and Definitions

## Scan/Scan REFNO

Scan the equipment reference number, or manually enter it by typing **M**. The cursor will move to the Scan REFNO field, and you can enter the equipment reference number (e.g. EQ-000123).

Once the equipment reference number has been entered, it will activate the button, which will allow you to expand the QC parameter list to enter the values.

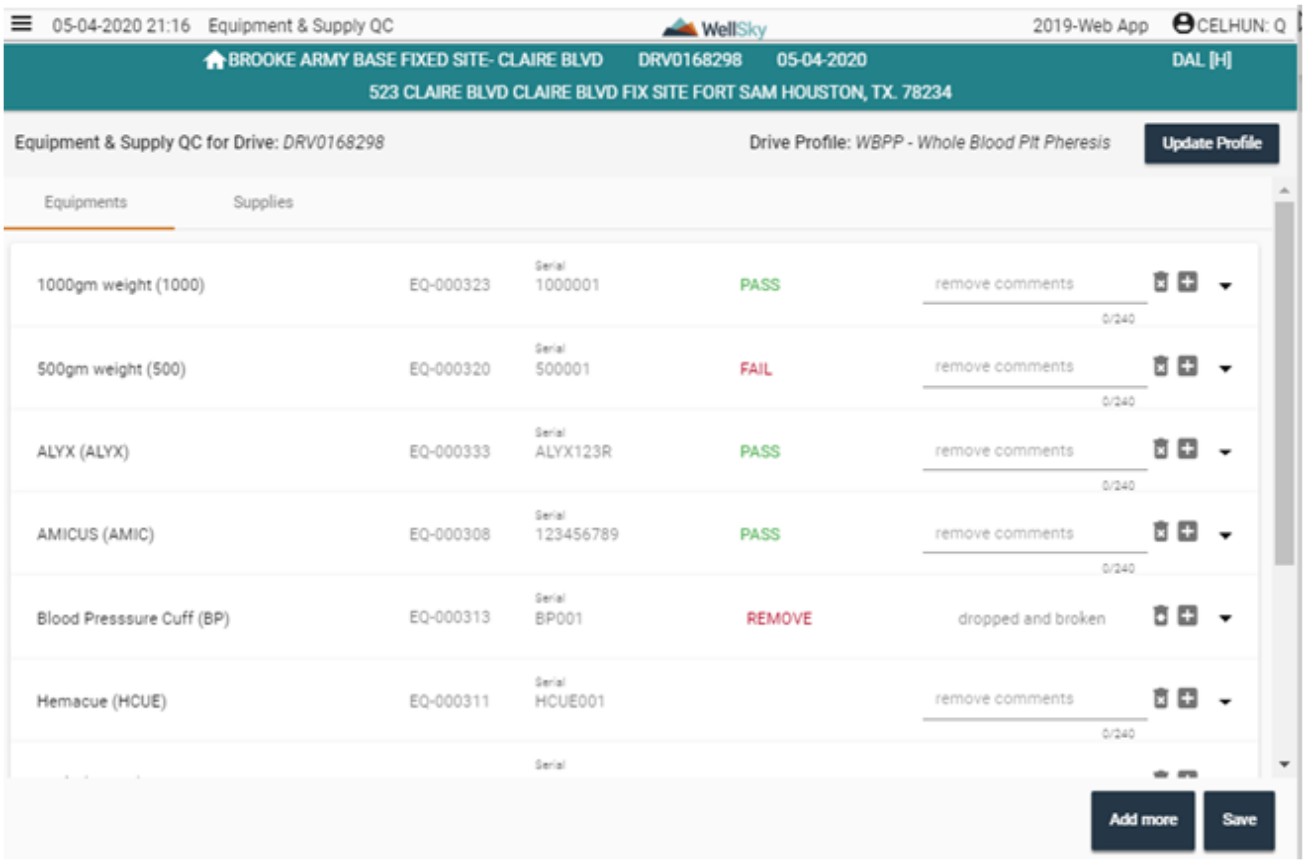


## QC Test

The QC Test field displays a description of the parameter that will be tested, and the code linked to that parameter in parentheses.


WellSky Corporation
Proprietary and confidential

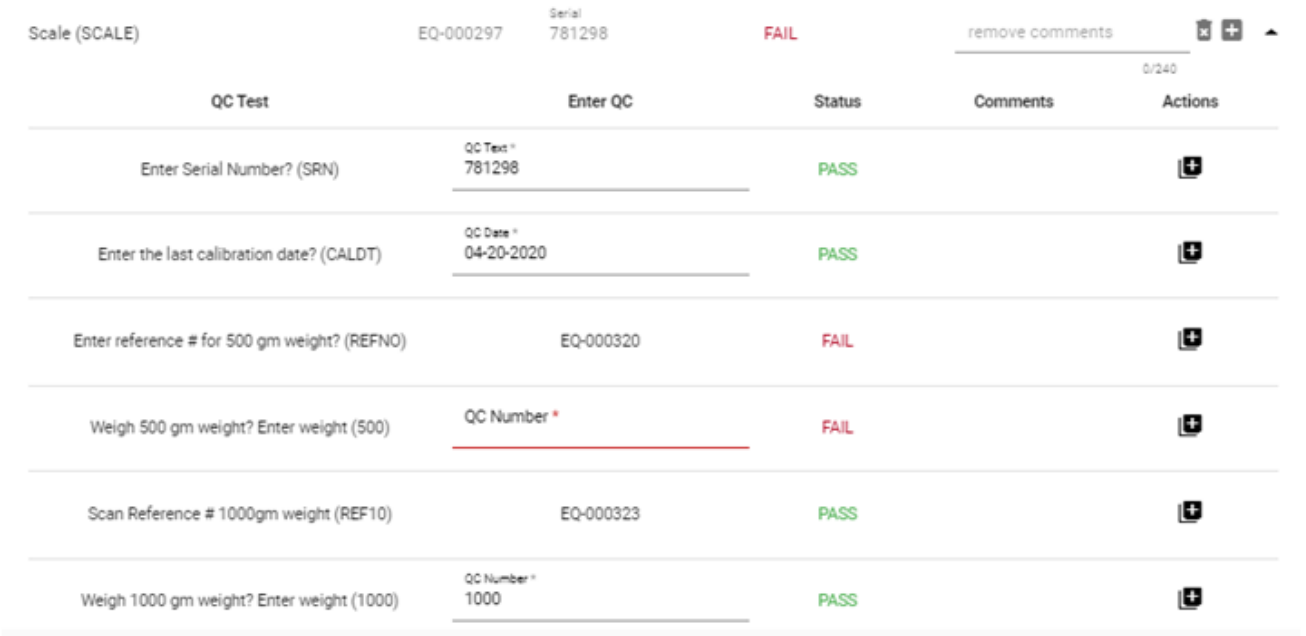


## Enter QC

The Enter QC field is the place where you enter your target value for the QC test. The target value entry will determine if the status is PASS or FAIL.

If a QC test fails, you can repeat the value by pressing to insert a repeat row.

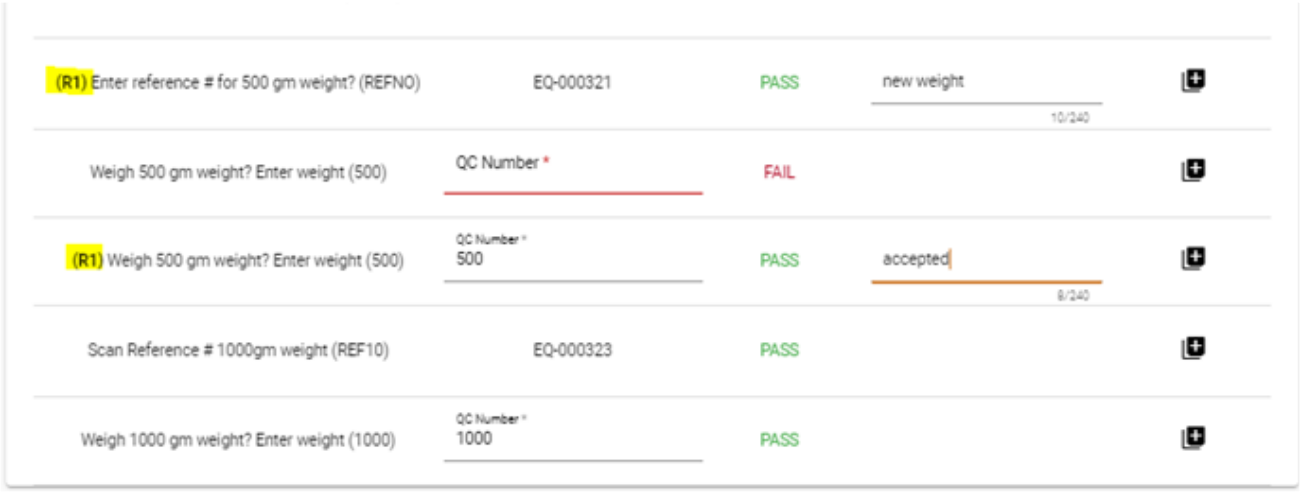


The repeat row will be designed with a (R) so you can tell the QC parameter has been repeated. You can repeat the parameter as many times as needed.

## Status

This field is display only. The system calculates the status of the QC test based on the configuration of the QC Test in Equipment Management.

## Comments

The Comments field is required when the QC test is repeated. Entry in the field can be free text, canned comments, or both. Canned comments are configured in master code EQCOM. The field accepts a maximum of 240 characters. To enter a canned comment, double-click in the field, and the list of canned comments will display for selection.

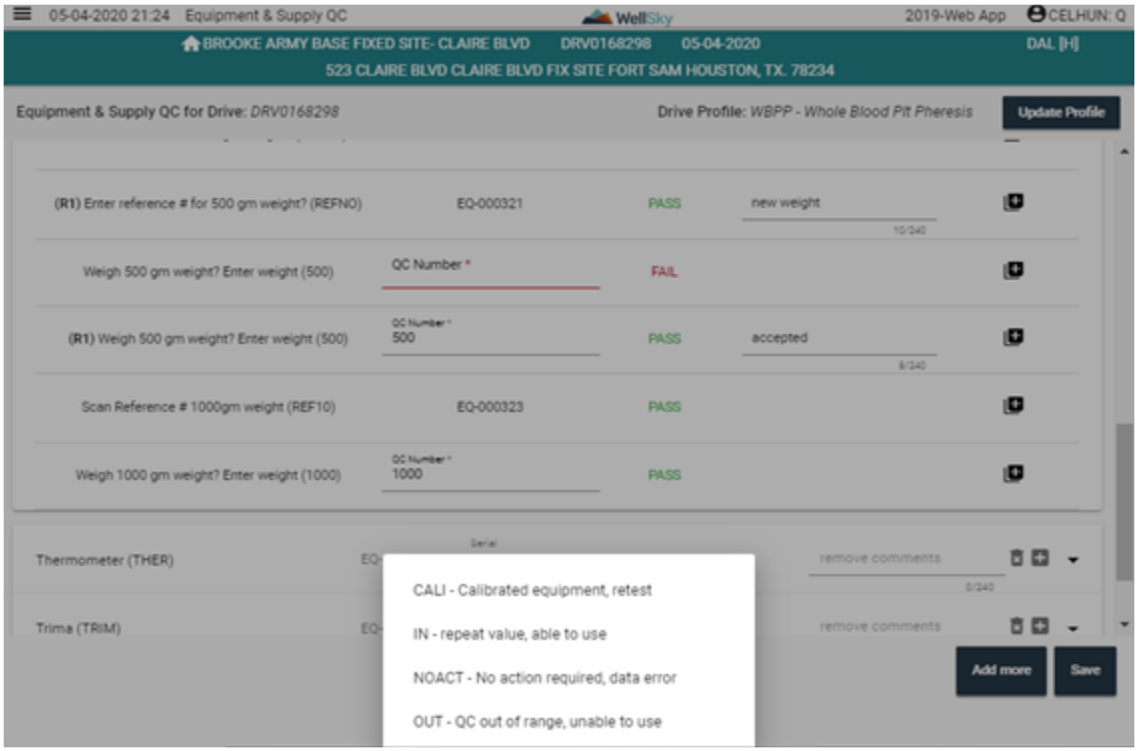


To minimize all of the QC parameters, press the **^** button in the upper right corner, and the parameters will minimize to one row.

# Entering QC for the Same Equipment Type

1. Select the equipment type that has more than one piece to enter.

2. Press in the upper right corner of the screen. This will duplicate the equipment and all of the QC parameters associated to the equipment type.
3. Enter QC as previously described.

# Supply Fields and Definitions

Click on the **Supplies** tab to display the list of supplies to be QC'd for the drive.

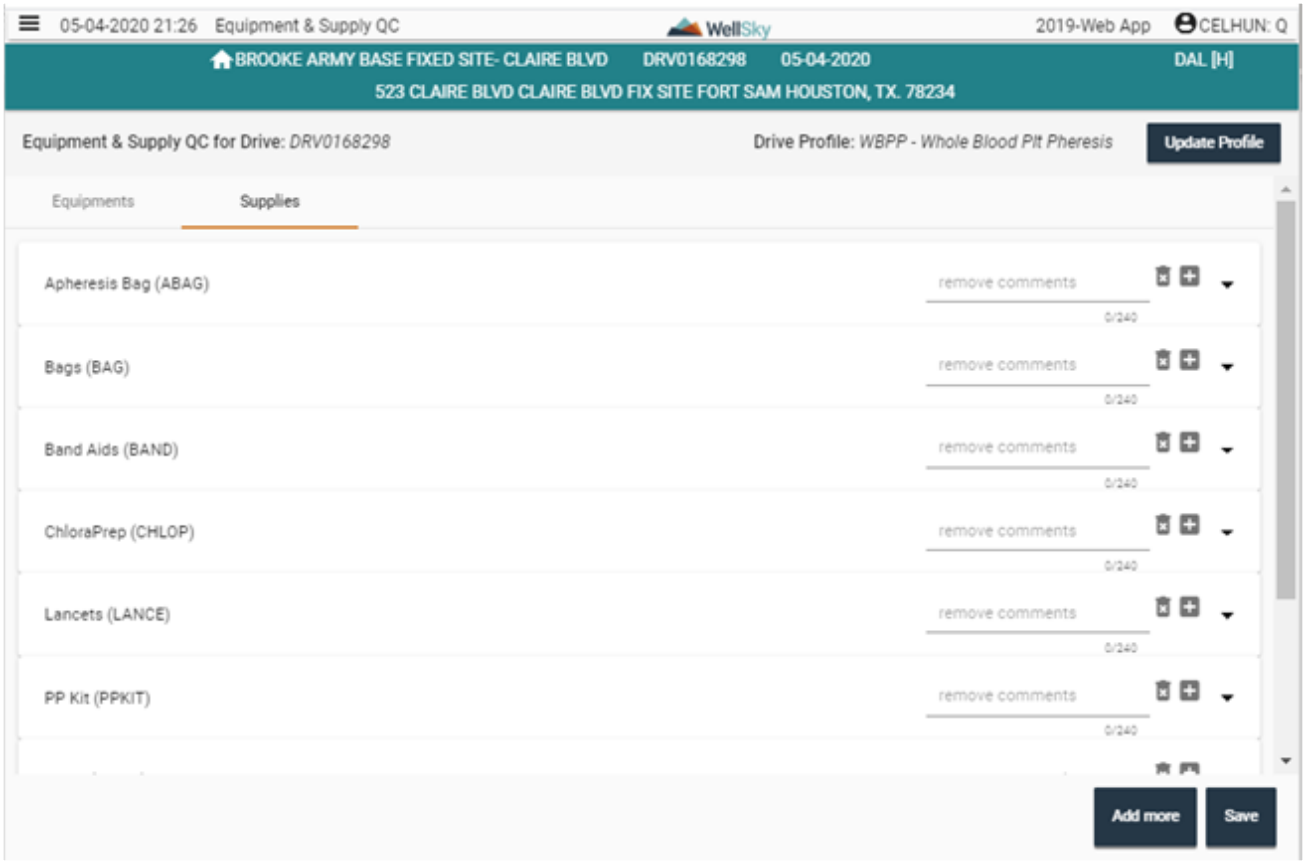


## Opening a Supply

Highlight the row that you want to enter QC on, and click , which will allow you to expand the QC parameter list to enter the values.

### QC Test

The QC Test field displays a description of the parameter that will be tested, and the code linked to that parameter in parentheses.

### Enter QC

The Enter QC field is the place where you enter your target value for the QC test. The target value entry will determine if the status is PASS or FAIL.

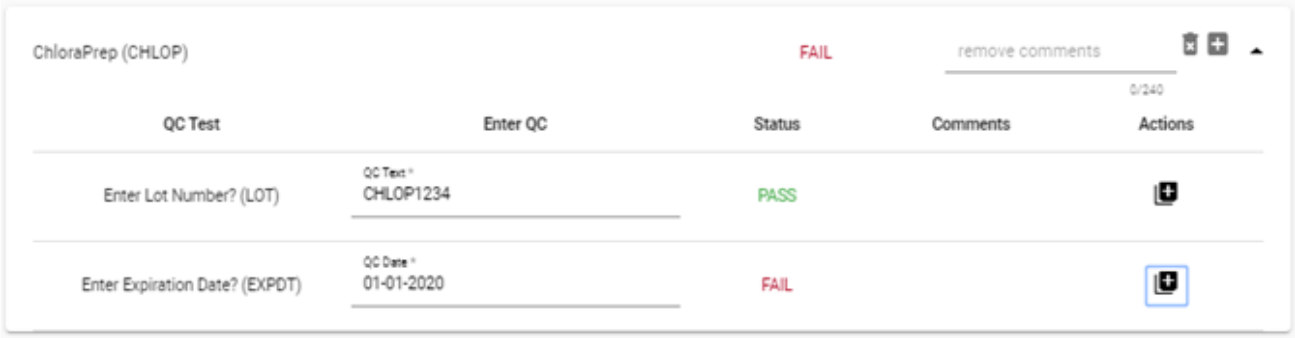


If a QC test fails, you can repeat the value by pressing to insert a repeat row.

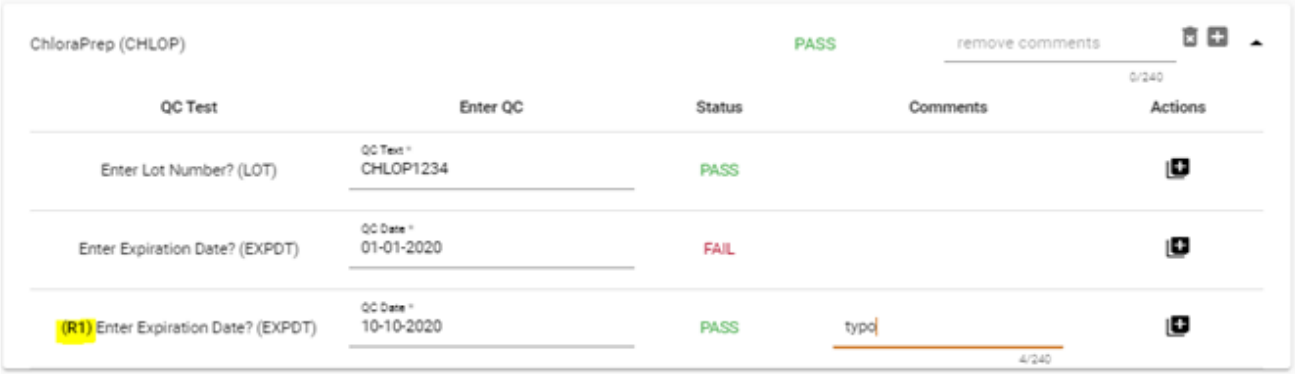


The repeat row will be designed with a (R) so you can tell the QC parameter has been repeated. You can repeat the parameter as many times as needed.

## Status

This field is display only. The system calculates the status of the QC test based on the configuration of the QC Test in Equipment Management.

## Comments

The Comments field is required when the QC test is repeated. Entry in the field can be free text, canned comments, or both. Canned comments are configured in master code EQCOM. The field accepts a maximum of 240 characters. To enter a canned comment, double-click in the field, and the list of canned comments will display for selection.

To minimize all of the QC parameters, press the **^** button in the upper right corner, and the parameters will minimize to one row.


WellSky Corporation
Proprietary and confidential

## Entering QC for the Same Supply Type

1. Select the supply type that has more than one to enter.

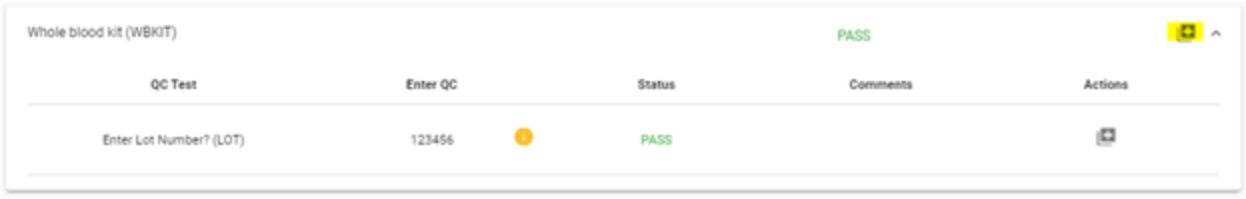


2. Press in the upper right corner of the screen. This will duplicate the supply and all of the QC parameters associated to the supply type.
3. Enter QC as previously described.

## ADD MORE Button

Use the ADD MORE button to add equipment or supplies that are found at the drive that were not configured. Click **ADD MORE**, and the list will display selections based on type:

Equipment

Supply

Select the device or supply, and it will appear in the list of equipment/supplies.

Select the device:

The selected device appears in the list to be completed:

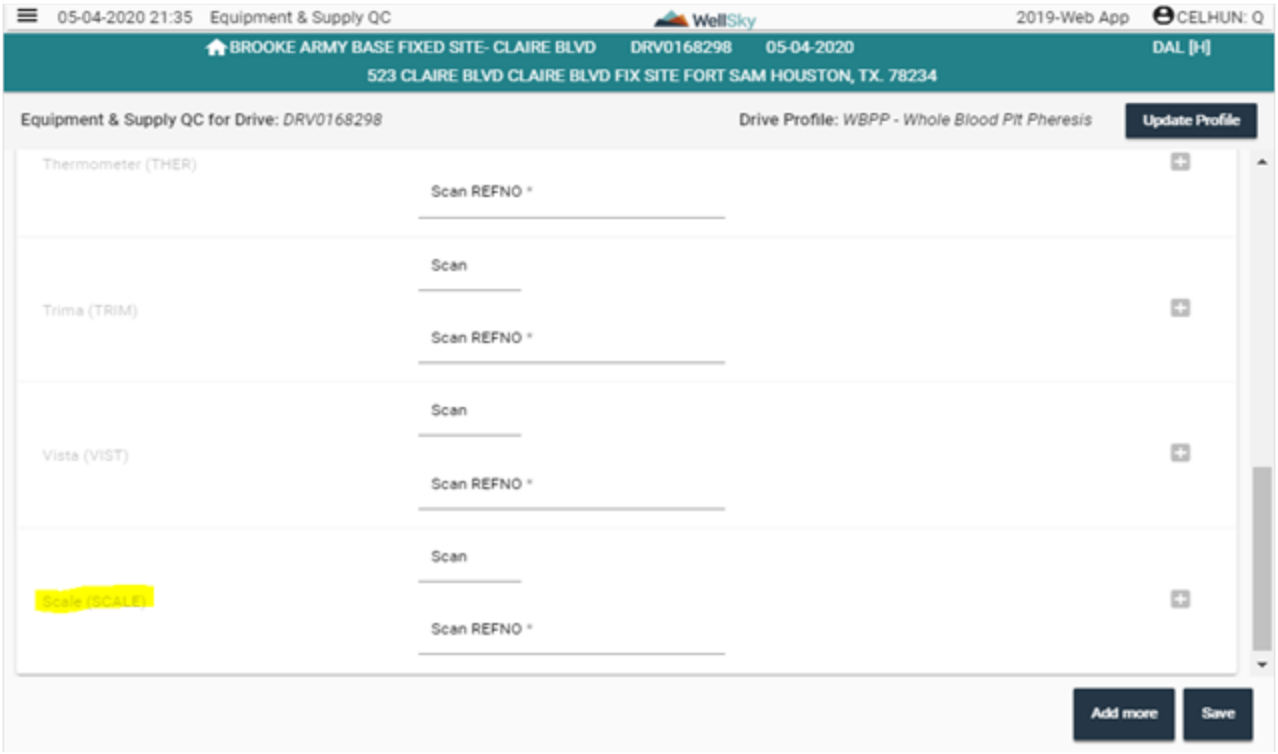


## Remove Equipment From a Drive

To remove equipment based on failure, damage, or lack of use, click the icon to remove the equipment from use in the drive.

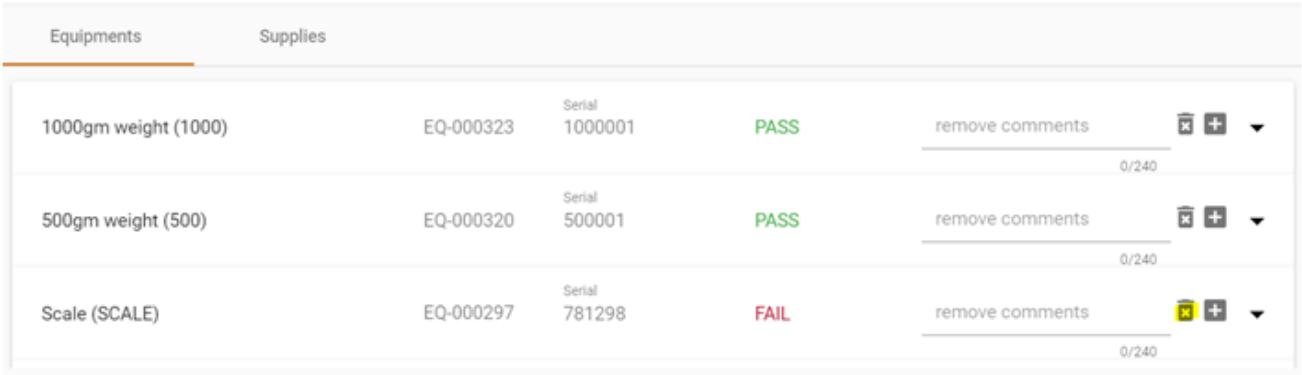


Click the icon, and the status will update to FAIL, and you will be required to add a comment for the action. Comment entry is limited to a maximum of 240 characters, and only free text entry is allowed.

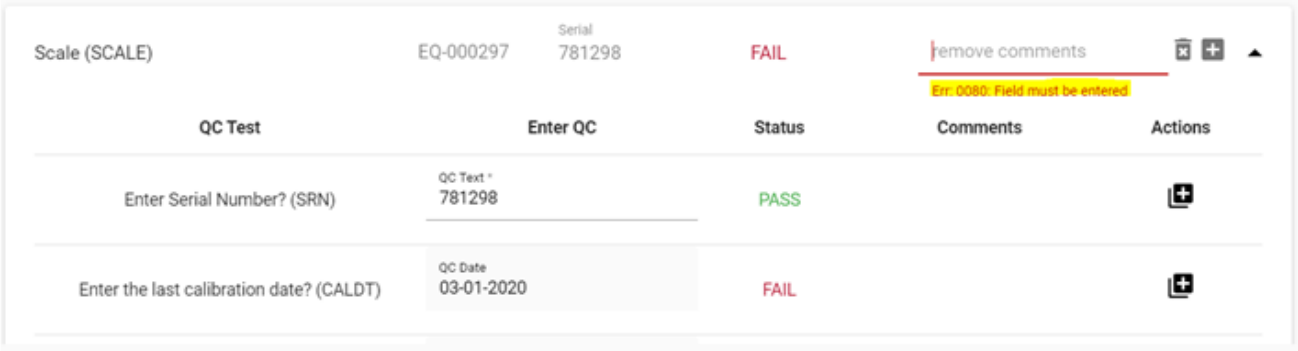


Once the comment is entered, click the icon again, and the status of the equipment will be updated to REMOVE.

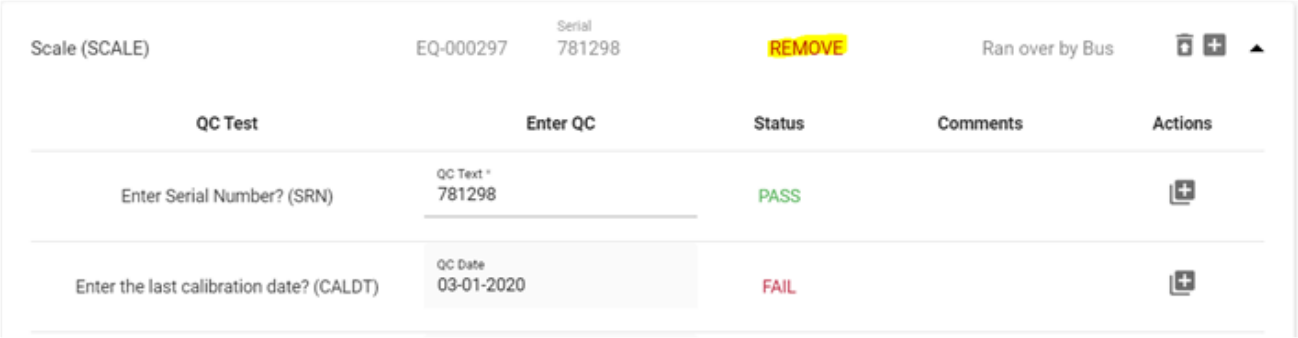


## Re-instate Equipment that has been Removed

If a piece of equipment has been removed by accident, you can re-instate it so that it can be used. Click the icon.

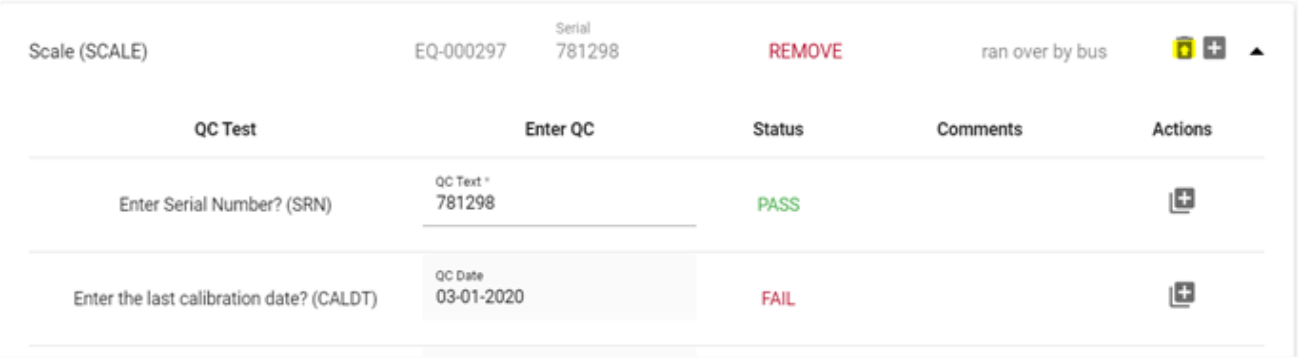


Once the icon is clicked, the equipment is re-instated, and the comment is removed. The system will re-instate the equipment with the same status it had prior to being removed.

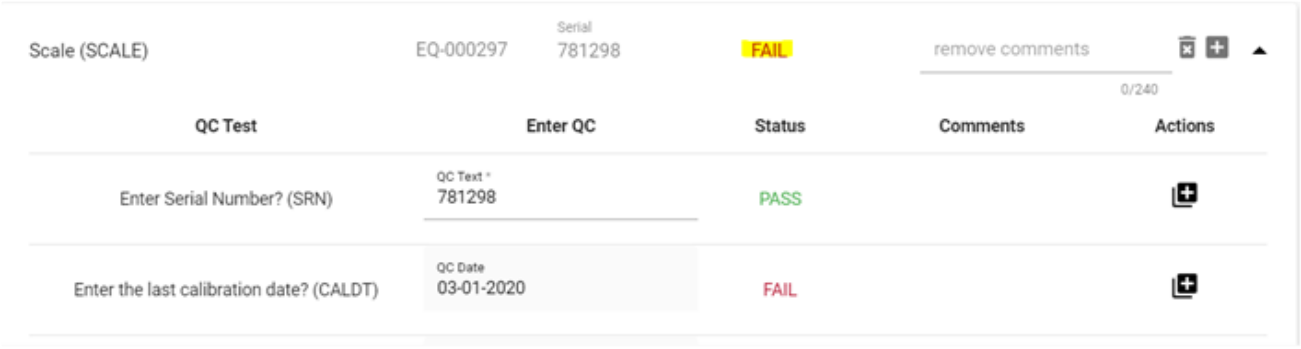


## Inter-Dependency Between Equipment

The Drive Profile Management table for QC Dependency must be defined. This checks for any QC tests that are linked to dependent equipment, and determines the status of these QC tests based on the equipment used.

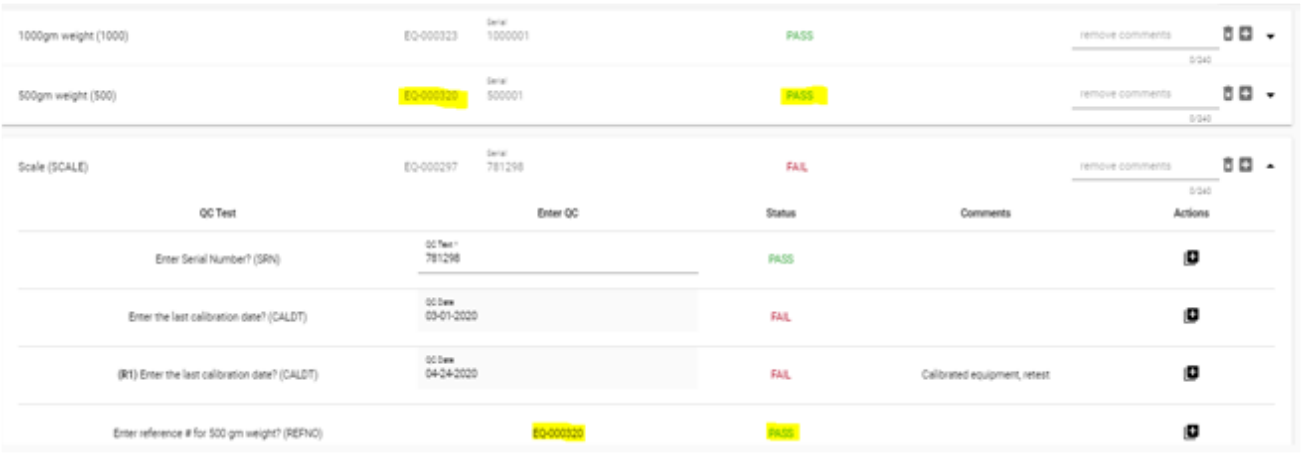


The inter-dependency will determine if the equipment is set to pass based on the equipment being used. As an example, the 500 gm weight was QC'd and passed when it is used to QC the scale and the same reference number is used; it sets the status based on the 500 gm weight status.

WellSky Corporation
Proprietary and confidential

The entry of the weight in the scale is also linked to how much the scale stated the weight is weighing. So, if the weight on the scale is out of range, it will fail the equipment reference number linked to it. As shown above, the 500 gm weight was out of range on the scale, so it also failed the reference number linked to that QC parameter.

Also, if you enter a reference number that has FAIL for the status, it will automatically fail the parameter linked to it, as shown below.

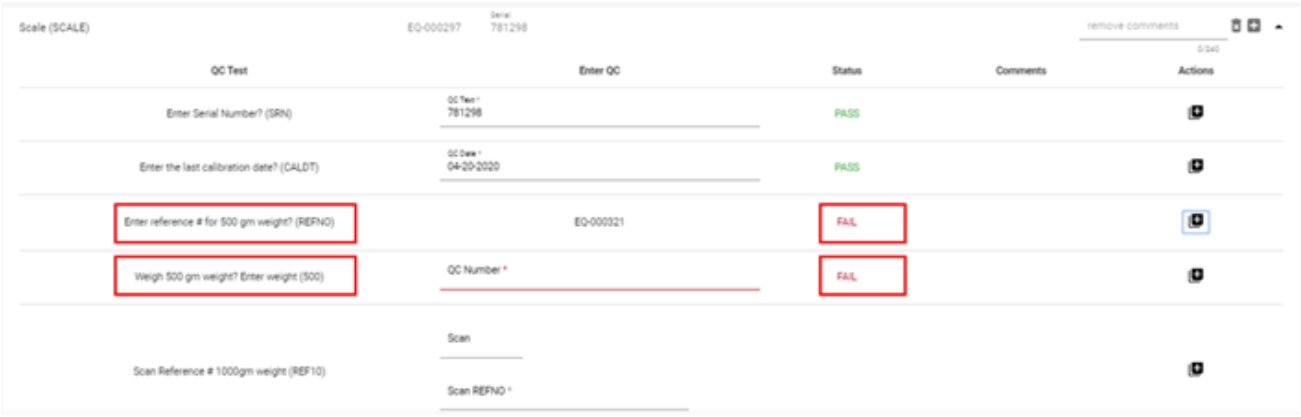


## Duplicates Found During Commit

If duplicates are found during the save process, the user will receive a message to list the reference number in equipment of supply code during the saving of supplies.

Upon commit, a single entry (who saves the duplicate equipment first) will be saved for the duplicate equipment or supplies. All equipment/supplies that are not duplicated will be saved.

## At Commit

The system commits the data to the database.

When clicking **Save** in the Supply tab, the cursor will remain in the Supply tab. The user must click the **Equipment** tab to move to equipment.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Registration General Functions menu.

# 7.7.2 Lookup/Registration and Modify Data

## Intended Use

Use this screen to look up the donor to determine eligibility for the procedure. After completion of lookup, the donor can be registered as a donation or a deferral. A donor that does not result in collection of a unit of blood because some factor renders the donor ineligible to donate would be classified as a deferral.

## Limitations

- Only donations/deferrals associated with valid drives can be registered.
- Only allows selection of ±1 day from current date.
- A configurable limit exists in the Donor system that prohibits registration of duplicate unit or deferral IDs until a specified time limit has expired.
- The OnSite Module only supports ISBT 128 unit scheme at this time.
- For electronic donor registration:
  - If the barcode you scan is a 1D barcode, you will receive an invalid scan ID message. Some states have both 1D and 2D barcodes. If you scan repeatedly with no results, make sure you are scanning the correct barcode.
  - Only one of the following government-issued IDs can be used for electronic donor registration:
    - AAMVA-compliant Driver's License
    - AAMVA-compliant State ID
    - Department of Defense Common Access Card (CAC)
  - Data retrieved electronically from a scanned ID will be subject to the same donor search criteria currently applied to manually-entered information.
  - The scan ID entered will populate the donor information, if the ID has previously been scanned in the system. If the ID is new, you may need to enter additional information manually.

## Prerequisites

- A valid drive must exist in the database for which donations can be registered.
- In the System Parameters table, your facility must define the following:
  - REGNXT – to determine if the find donor block is to appear automatically after registering a donation.
  - GALLON_VAL – number of donations that defines a gallon donation. When registering if that specific donation is the defining donation for a gallon, a message will display at time of registration.
  - AGE_LOW – lower age limit for a donor to donate. At time of look-up, a warning message will display.
  - AGE_UPPER – the upper age limit for a donor to donate. At time of look-up, a warning message will display.
  - CNFM_FLD – when DONBLOCK has been configured as `Y` in the entry column for donor ID, this field determines what other field will be entered. This field is also used when the BC_SCAN_RE is set to `Y`. It is limited to only one field.


WellSky Corporation
Proprietary and confidential

- AUTO_PRINT – to determine if the donor card will print automatically.
- ONACCESS – to allow the user to go directly to the health history and physical finding screen from registration.
- HGHT – used to populate the list of values for the height field.
- BC_SCAN_RE – if plan on using special ID card (driver's license, CAC, etc.)
- ETHNIC – this is to set the ethnicity field to be a required or optional entry in the system.
- PIC_ENABLE – used to enable or disable the donor picture function.
- ID_VERIFY – used to display message for x days based on system parameter (used for verification of the donor address)
- TBVH – set to **Y** to make the Height field required; set to **N** to make the Height field optional.

- Configure the find donor block for NEW_CHECK to determine what fields must be re-entered in the registration screen. If the NEW_CHECK flag is configured for required N, it will not check for number of entries.
- Define the following Master Codes:
  - HGHT – to enter the height of the donor.
  - PHOTO – location where donor picture-related files are stored.
  - EQBRQ must be defined for procedures that require equipment and bags. Used to determine if equipment is needed to be entered for the procedure.

## Accessing the Screen

Access this screen from the OnSite Module menu by clicking on **Lookup, Registration & Modify Data**.

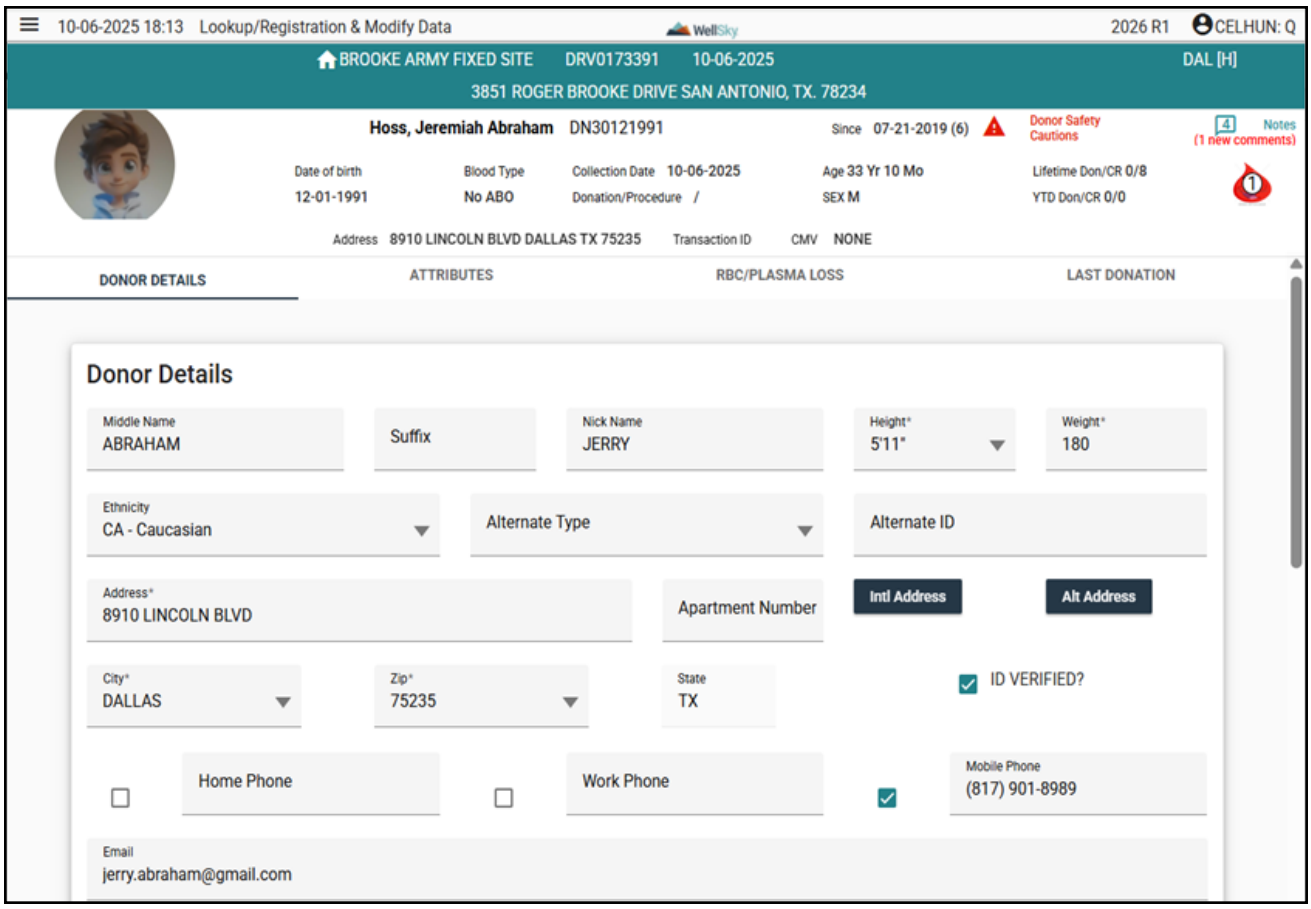


## Selection of Donor

**NOTE –** If the donor is eligible for the abbreviated questionnaire, the word 'Abbreviated' will appear in red at the bottom of the screen.

Prior to entering the screen, the user will perform a lookup and select the donor that will be registered.

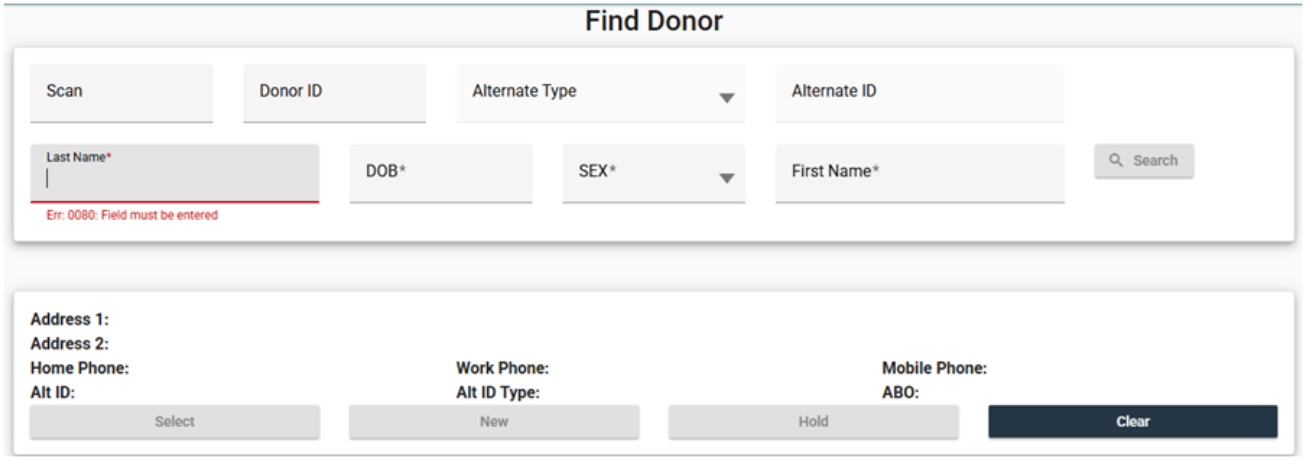



WellSky Corporation
Proprietary and confidential

Entry of key data fields in the Find Donor requires credentials to be entered to begin the search. Once the key data fields are entered, the Search button is active, and then credentials must be entered. When the search begins, the following indicator will display until the search is over.

This circle will turn to indicate the search is occurring. When the search is over, the circle will disappear. Search is over:

If there are no donors found, the NEW button will automatically activate.

When the search is completed a list of donors displays single or multiple donors the cursor lands on the first donor in the list that will activate the buttons according to the grade of the first donor in the list and the configuration in the DONBLOCK.

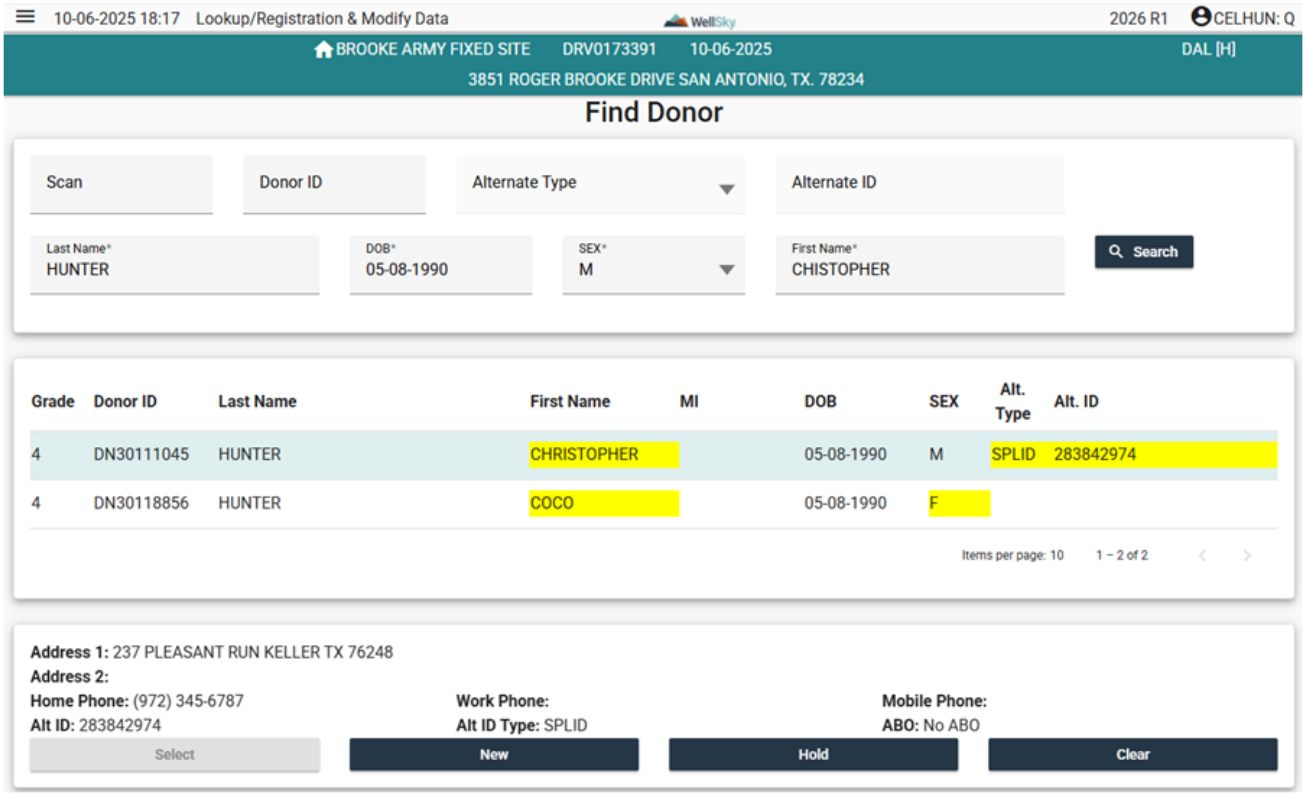


If any key data fields are changed when the user tabs or clicks out of the field, the list disappears and buttons are deactivated, thereby requiring a new search.

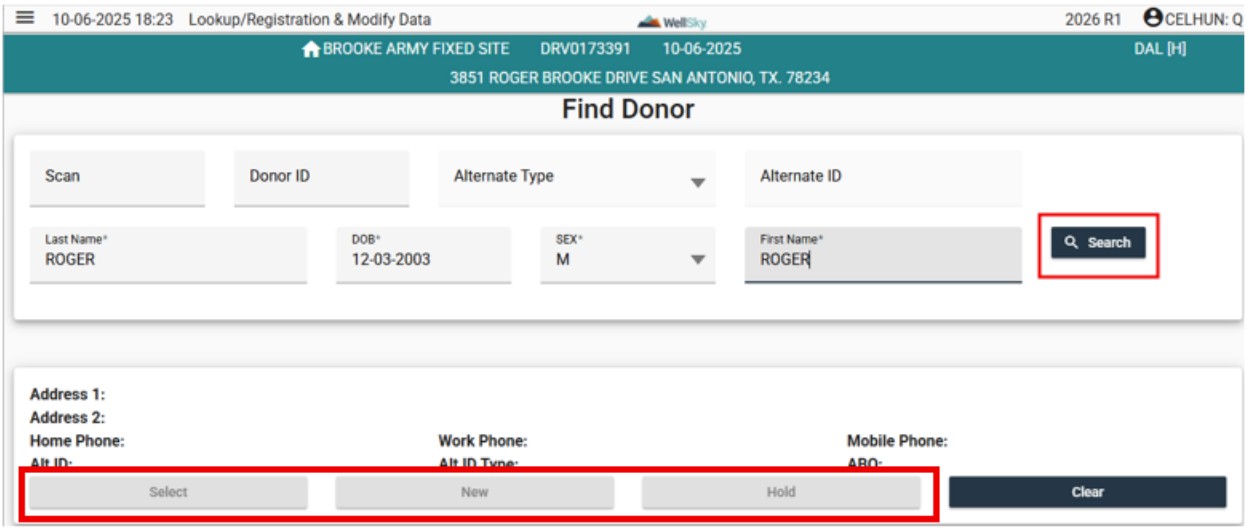


If the donor selected has been registered to another drive on the same day, the user will be warned.

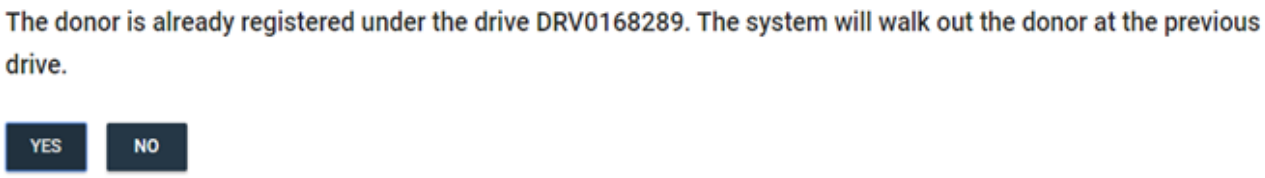


- Click Yes to allow the donor to be registered at the current drive and place a DNWLK on the donor at the prior drive.
- Click No to close the message and return to the Find Donor Block.

If a unit number has been linked to the donation at the first drive, the user will be warned, as shown below:

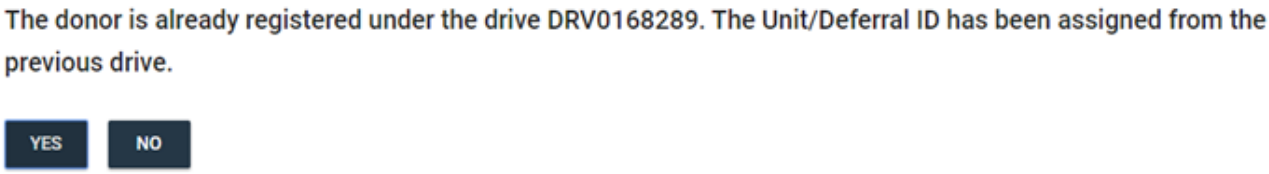


- Click Yes to register the donor with a duplicate donation on the same day.
- Click No to return to the Find Donor Block.

## Electronic Donor Registration Using a Government-issued ID

Use the OnSite Search Donor window to electronically register a donor by scanning a government-issued identification card. Use this electronic scan to positively identify an existing donor and return the data record for that donor, or to initiate the process of adding a new donor.

Scan the barcode on a Donor's Driver's License, State ID, or Common Access Card (CAC). Then, the Blood Centers system will identify the scanned data and retrieve the associated donor information from the database for an existing donor or populate a new donor record with information stored in the ID. The system can read 2D and 3D barcodes.

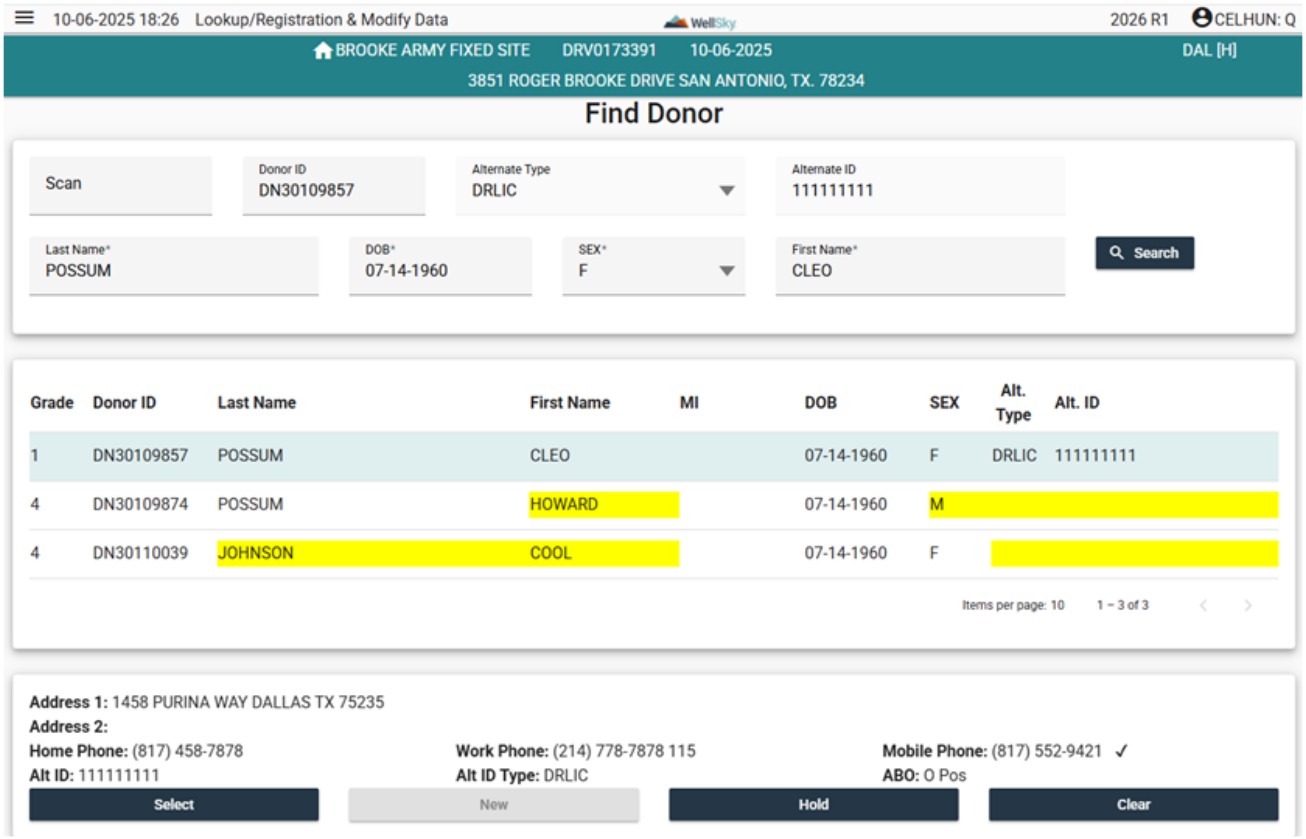


# Control Block Fields and Definitions

The following data can be populated automatically by scanning the donor's government-issued ID or by manual entry.

**NOTE –** Entry fields in the control block are configured in the Configure Find Donor Block for Program (DONBLOCK).

## Scan ID

The actual scan of the government ID.

**NOTE –** Updating the scan ID is allowed. The previous scan ID will no longer be associated to the donor. The scan ID will only be navigable if the system parameter BC_SCAN_RE is set to **Y**.

## Donor ID

The unique identifier of the donor. This ID populates the field automatically if the donor has been registered previously.

## Last Name

The donor's last name populates automatically from the scanned ID, if available, or enter the donor's last name manually.

## DOB

The donor's date of birth populates automatically from the scanned ID, if available, or enter the date of birth manually.

## Sex

The donor's sex populates automatically from the scanned ID, if available, or enter the sex manually.

**NOTE –** When the scanned ID is a CAC and the donor is a first-time donor, the donor's sex will not populate the Sex field. The donor's sex must be entered manually. For returning donors, the system will retrieve the donor's sex from the existing donor record and automatically populate the Sex field.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor when the Sex field is populated: `F` in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; `M` in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

Once the donor has been selected, the user will need to enter verification of their user ID and password. This (user) verification will be inserted for the person registering the donor.

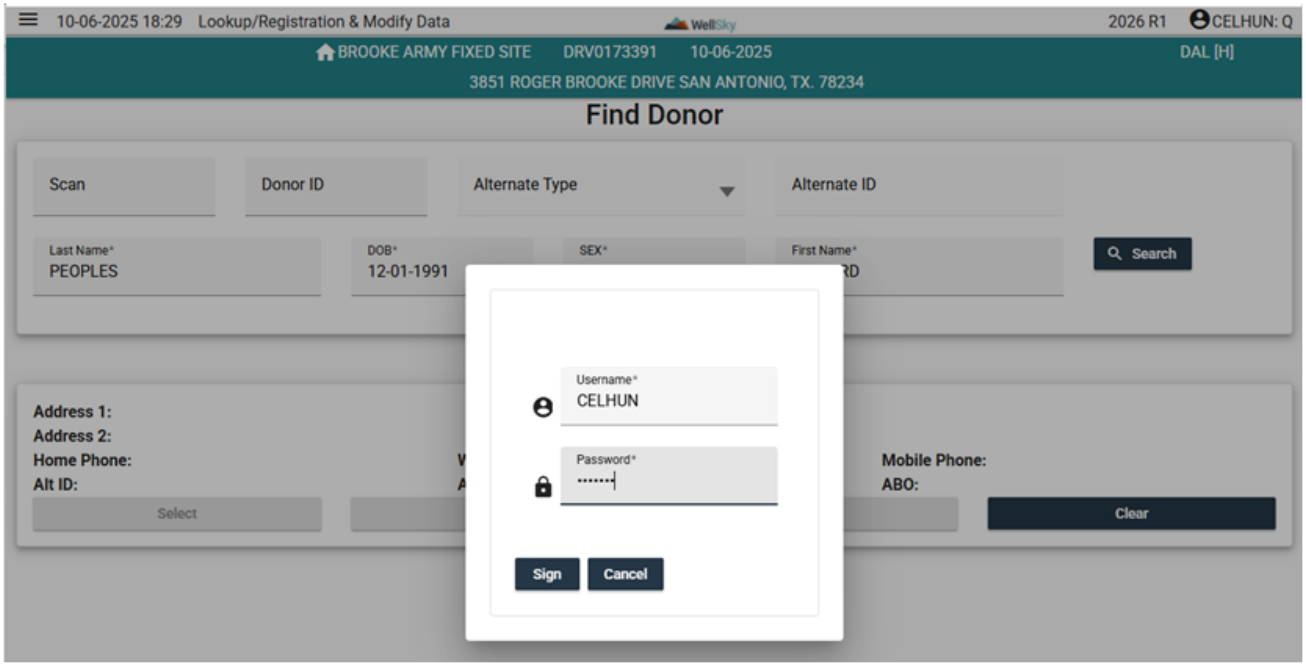


## First Name – changed order

The donor's first name populates automatically from the scanned ID, if available, or enter the first name manually.

Once the donor has been selected, the user will need to enter verification of their user ID and password. This (user) verification will be inserted for the person registering the donor.

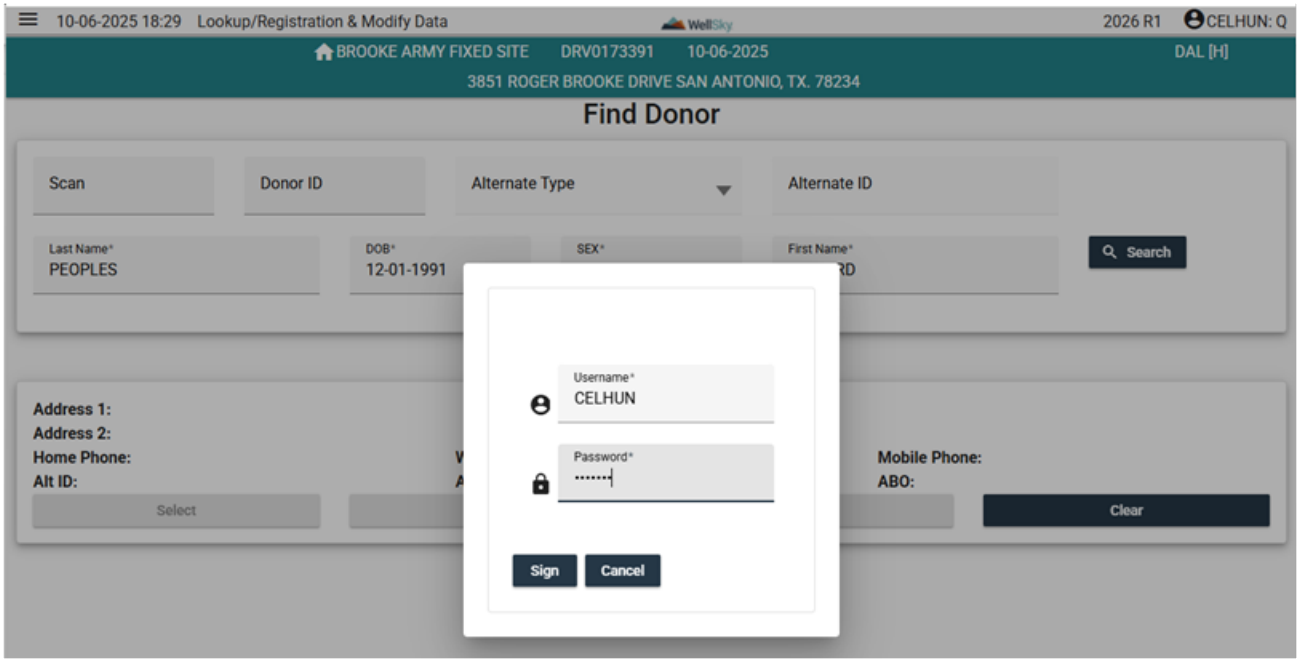


## Access to Main Registration Form

After entering criteria and the search process begins, the user will be required to enter their verification. This user ID will be inserted for the registration of the donor.

### User ID

Enter the user ID of the person who will be performing the registration.

### Password

Enter your password. Once the password is entered, the application will proceed to the page to complete the donor's registration.

## Data Block Fields and Definitions

If the system locates donor records in the database that match the scanned ID, the following information displays for each donor record retrieved.

- GRD – The grade level of the data match. A Grade 1 match indicates an exact match.
- Donor ID – The number that identifies the donor in the database
- Last Name – The donor's last name
- First Name – The donor's first name
- MI – The donor's middle initial
- DOB – The donor's date of birth

- Sex – The donor's sex
- ABO – The donor's blood type

### Address

If one or more donor matches are found, the associated street address, city, state, and Zip Code for a U.S. address, or the international address information display for the donor highlighted in the list.

### Ph

If one or more donor matches are found, the home, work, and mobile phone numbers display for the donor selected in the list. A check mark (✓) displays next to the preferred contact phone number.

### Alt ID

The alternate ID number from the scanned ID displays.

**NOTE –** If a CAC was scanned, this is the DOD Electronic Data Interchange Personal Identifier (EDIPIN), and the system will mask the number.

If one or more donor matches are found, the type of alternate ID and the ID number display for the donor highlighted in the list.

### Ty (Type)

The system populates one of the following ID types, depending on the type of ID that was scanned:

- DOD CAC PDF417 – Department of Defense ID (2D barcode)
- DOD CAC Code 39 – Department of Defense ID (1D barcode)
- AAMVA PDF417 – Driver's License or other official State ID (2D barcode)

## The Select Button

Click Select if a donor match displays in the list of donors. The selected donor record is retrieved, and the donor information populates the Current Donor Data screen.

## The New Button

Click New if no potential donor matches display. The New Donor Data screen opens, and the system populates the fields with all scanned data.

## The Hold Button

Click Hold to place a hold on the donors in the list.

## Register a Donor by Scanning a Government-issued ID

Perform the following steps to register a donor using a government-issued ID:

1. Verify the identity of the Donor and the ID you are scanning, and then scan the barcode on the ID. The ID number of the scanned identification populates the Scan ID field. One of the following types of identification


WellSky Corporation
Proprietary and confidential

scanned populates the Ty field:

- DOD CAC PDF417 – Department of Defense ID (2D barcode)
- AAMVA PDF417 – Driver's License or other official State ID (2D barcode)

2. If the scan was:
   - Unsuccessful, an error message displays. Click OK and repeat the scan.
   - Successful, the system populates the OnSite Search Donor fields with the scanned data. The system then initiates a Donor Lookup.
3. If the system finds:
   - A Grade 1 donor match, the system retrieves the record and opens the Current Donor Data screen, populating all current data.
   - No Grade 1 donor match, but there is at least one Grade 2 potential donor match, the system displays the potential matches.
     - If one of the Grade 2 donors is a match to the scanned ID, click the donor and then click Select. The system retrieves the record and opens the Current Donor Data screen, populating all current data.
     - If none of the Grade 2 donors is a match and the donor is new, click New. The New Donor Data screen opens, and the system populates the fields on the left side of the screen with all scanned data. Go to the next step.
   - No match in the database, the potential donor will be considered New.

The new donor record is created or the new data updates existing data in the Blood Centers database. The New Donor Data screen and the OnSite Search Donor window closes. The WELCOME: Lookup and Registration screen displays.

Entry fields in the Find Donor block are configured in the Configure Find Donor Block for Program (DONBLOCK). NEW_CHECK determines which fields must be re-entered and the number of entries required.

## Drive Header

## Drive Description

Display only. Displays the drive description based on the selection of the drive ID entered during the Activate Drive.

## Drive Date

Display only. Displays the drive date based on the selection entered during the Activate Drive.

## Chapter Date/Warehouse

Display only. Displays the chapter the user is logged into and the associated warehouse.

## Donor Header

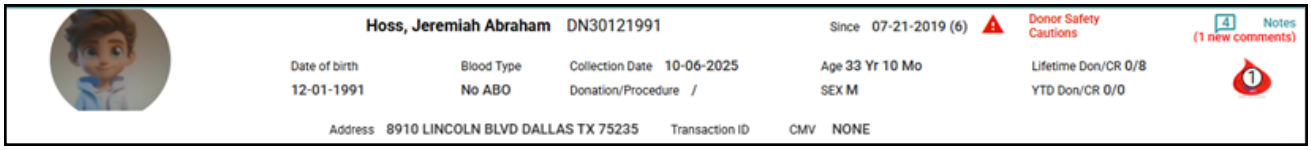


## Donor Picture

Displays the donor's picture.

## Donor Name

Displays the donor's name (Last Name, First Name, and Middle Name or Initial - depending on what was entered).

## Donor ID

Displays the donor ID if it is a returning donor. If it is a new donor, the donor ID will not appear.

## Since

Displays the date the donor first gave a donation. If it is a new donor, the field will be empty.

## Donor Cautions

If donor cautions are associated to the donor, the "Donor Cautions" will display in red and will flash until the user views them.

## Comments/Notes

Entry is optional. Enter a maximum of 100 characters. Click on the icon, and the Comment window will open.

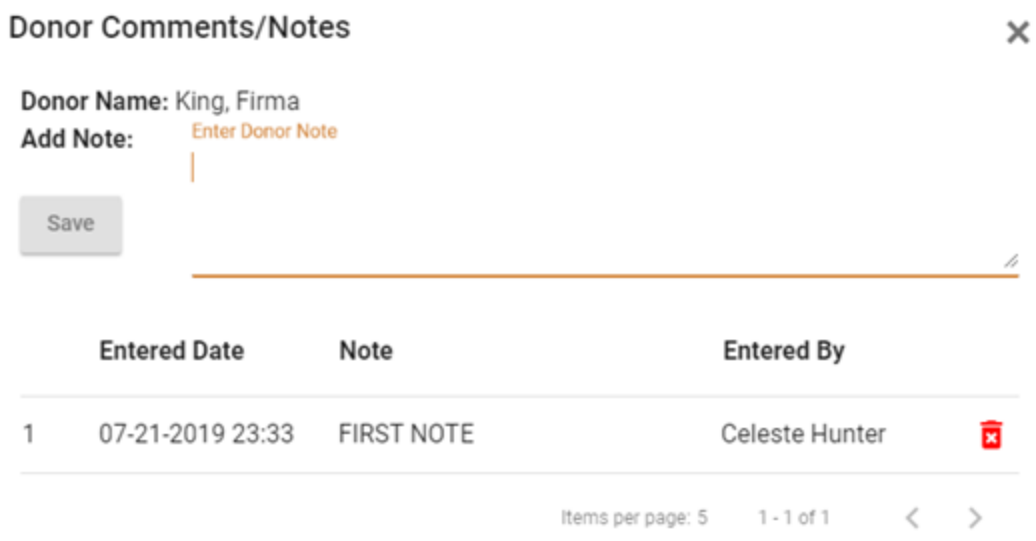


The red bar below the Donor Comments/Notes header displays a message warning the user of access limitations, if applicable, as follows:


WellSky Corporation
Proprietary and confidential

- If the user has access to UNOTE and DNOTE, the red box will be blank.
- If the user has access to UNOTE but does not have access to DNOTE, the message will state:




- If the user has access to DNOTE but does not have access to UNOTE, the message will state:




- If the user does not have access to either UNOTE or DNOTE, the message will state:




Begin entry in the Enter Donor Note. The counter at the bottom of the entry field will display the number of characters entered/allowed. Click **Save**. Once the comment is saved, the note will display at the bottom of the window. It displays as follows:

- **Entered Date** – displays the date and time the comment was entered
- **Note** – content of the note
- **Entered By** – the name of the person who entered the note
- **Counter** – be able to determine how many notes are on the donor and the number of items per page.

**NOTE –** If you have access to delete a note, you can use the icon to remove the note from the donation.

Once the user returns to the main form, the note entered for the current drive will display in red:

## DOB (Date of Birth)

Display only. The date of birth entered in Find Donor displays here in MM-DD-YYYY format.

## Blood Type

The blood type displays if the donor has had testing performed. New donors will not have a blood type to display.

## Collection Date

The date that was selected in the Activate Drive displays here.

## Donation/Procedure Code

Displays the donation/procedure code that the donor is registered to donate. During the registration process, this field will be null until the donation and procedure are selected.

## Age

Displays the donor's age in years and months. The age is determined by the donor's birth date and the current date.

## Sex

Displays the sex selected during the Find Donor process.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified. An 'F' in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; an 'M' in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

## Lifetime Don/CR

Displays the donor's number of lifetime donations and credits. This field cannot be updated.

## YTD Don/CR

Displays the donor's number of year-to-date donations at the current facility and the donor's number of credits with the facility. This field cannot be updated.

## Gallon Donor Logo and Number

If the donor is a gallon donor, the specified logo used at the facility will display with the number of gallons in the logo, as shown below.

**NOTE –** The logo for the gallon donor is stored in a location on the server that can be updated by your system administrator. Refer to the Installation Guide for the location in which to store the picture file.

# Donor Details

## Middle Name

Entry is optional. Enter up to 20 characters for the middle name.

## Sfx

Entry is optional. You may enter a suffix (Sr., Jr., III, etc.) to further identify the donor.

## Nick Name

Entry is optional. Enter up to 20 characters.


WellSky Corporation
Proprietary and confidential

## Height

Use the up and down arrow to select the appropriate height. Height values displayed are associated to the Master Code HGHT.

**NOTE –** The *Height* field is required when using the Vista interface, but not enforced by the application. If you do not populate the *Height* field, the current and subsequent procedures will not go across the interface.

**NOTE –** The *Height* field is required to calculate the total blood volume (TBV) for the donor. Set the system parameter TBVH to **Y** to require entry in the field before the donor can be registered.

## Weight

Enter the donor's weight (in pounds) in this field. Entry of a whole number only is allowed. If any other type of number is entered (for example, decimal, negative, or alphanumeric), the following pop-up message will display:

The cursor will remain in the Weight field until a whole number is entered.

**NOTE –** The Weight field entry should be a whole number, and the physical findings for weight should be set to whole number (numeric).

## Ethnicity

Entry is required if System Parameter ETHNIC is set to 'Y'; entry is optional if System Parameter ETHNIC is set to 'N' or is blank. Select a valid ethnic group code by typing in a first character, and the list will automatically display. Select from the list, and tab out of the field.

## Alt ID

Entry is optional if the Social Security number is being used in the Find Donor block. If using the system parameter FKSSN, the field becomes mandatory, and you can enter up to 20 characters.

## Alt Type

Entry is optional. Manually enter or select from LOV. Field is required if the Alt ID field is populated.

## Address

Enter up to 50 characters in this required field.

## Apt No.

Entry is optional. Enter up to 10 characters.

## City-St and Zip

The system validates your entry of city and ZIP Code. If they disagree, the system does not accept the entry. Begin typing the city, and a list appears. Select the city from the list, and press **Tab**. Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the list of cities matching your partial entry. The list for the Zip field contains only ZIP Code entries for the specified city.

## ID Verified?

This field is used to verify the address entered for a new donor, or to verify the address for the returning donor. Once the user has verified the address, place a check mark in the box. The user will receive a message that is configured in System Parameters for ID_VERIFY.

**NOTE –** The system parameter ID_VERIFY will be configured for the number of weeks. The description of the system parameter will display in the popup:

## Preferred Flag

Entry is optional, but once a phone number is entered, at least one phone number needs to be marked as preferred. Place a check mark in the box next to the phone number at which the donor would like to be contacted.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Business Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated to a phone number by adding it to the end of the business phone.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. Up to 128 characters are accepted. When you press **Enter** to exit the E-mail field, the cursor advances to the Employer Block and checks for the required characters in the e-mail address.


WellSky Corporation
Proprietary and confidential

## Alt Addr (button)

See Section H.3.16, Alternate Address, for detailed information.

## Intl Addr (button)

See Section H.3.17, International Address, for detailed information on the International Address screen.

## Employer Name

Entry is optional. If an existing employer is displayed, you can select another employer for the donor. Type a partial employer name, and the list will automatically display if there is a match in the database.

If you enter an employer name in this field that does not match an employer in the database, a window opens and asks if you want to create a new employer.

- Click **Yes** to create a new employer.
- Click **No** to return the cursor to the Employer Name field and correct your entry.
- Press **Enter** to activate the Stop button; a pop-up remains until you click **Yes** or **No**.

## City- St/Zip

Entry is required if a new employer is being created. ZIP Code and city entries will be validated and must agree. If an existing employer is selected, the data for that employer cannot be modified.

## Alternate Sponsor

Entry is optional. Select a valid alternate sponsor code from the list. If an alternate sponsor is entered, the donation credit is given to the alternate sponsor. The list will automatically appear once you begin typing. The list will narrow as more letters are entered.

## ID Queue

Enter `Y` to allow the Donor ID card to be printed at a later date. A `Y` in this field allows the donor ID to be placed automatically in the Donor Communications Query (DCOMQ) screen using the donor communication code and type of DRQST for later printing of the Donor ID card.

**NOTE –** The Donor ID card is a wallet-sized card that shows the donor's name, address, blood type, and so on. It is generally mailed to a donor after a donation.

# Eligibility Block

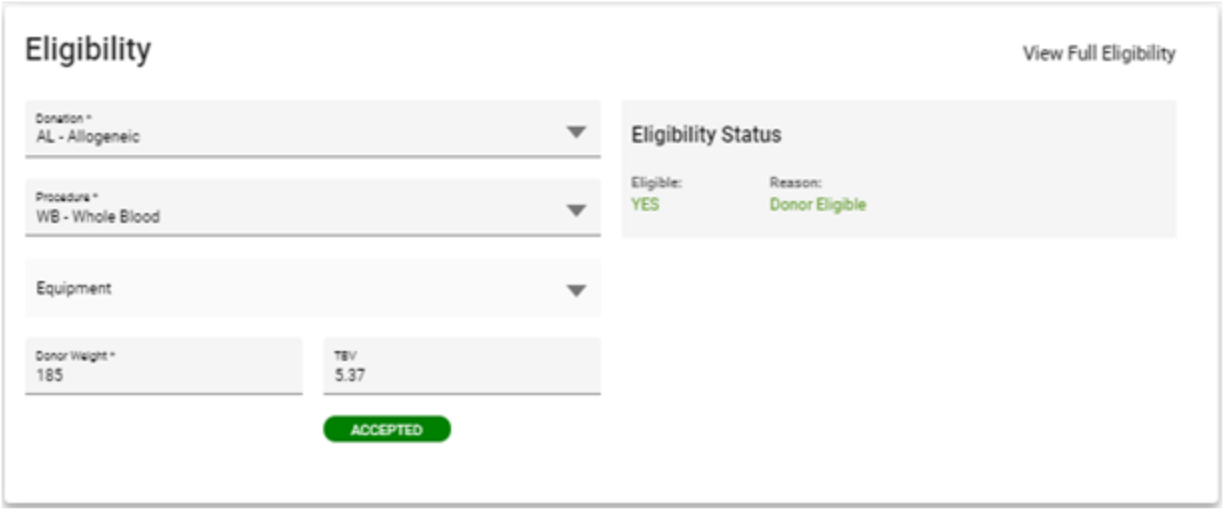


## Donation

Entry is required. Enter a valid donation type code or select from the list. Once you begin to type, the list will automatically appear, and you can select the value.

## Procedure

Entry is required. Enter a valid procedure code or select from the list. Once you begin to type, the list will automatically appear, and you can select the value.

## Equipment

Entry is optional. Enter a valid equipment type or select it from the list. Once you begin to type, the list will automatically appear, and you can select the value.

## Weight

The weight entered in Donor Details displays here. This field can be updated. Entry of a whole number only is allowed. If any other type of number is entered (for example, decimal, negative, or alphanumeric), the following pop-up message will display:

The cursor will remain in the Weight field until a whole number is entered.


WellSky Corporation
Proprietary and confidential

## TBV

Display only for total blood volume. For the total blood volume to be calculated, the user has to have entered the donor's height and weight. The system will perform this calculation, and it cannot be updated unless you change the donor's height or weight.

## Eligibility Status

Display only. Displays the eligibility for the specific donation and procedure entered. To view the entire eligibility of the donor, click **Full Eligibility**.

# View Full Eligibility

The donor's eligibility for each procedure type displays in the Eligibility Block. If the donor is currently ineligible for a procedure, the date that the donor will become eligible for that procedure displays in the Elig Date column. A status of **No** (displayed with a red background) means the donor is not eligible to donate. A status of **Yes** (displayed with a green background) means the donor is eligible for that procedure. If the donor is not eligible to donate for a listed procedure, the reason displays in the Reason column.

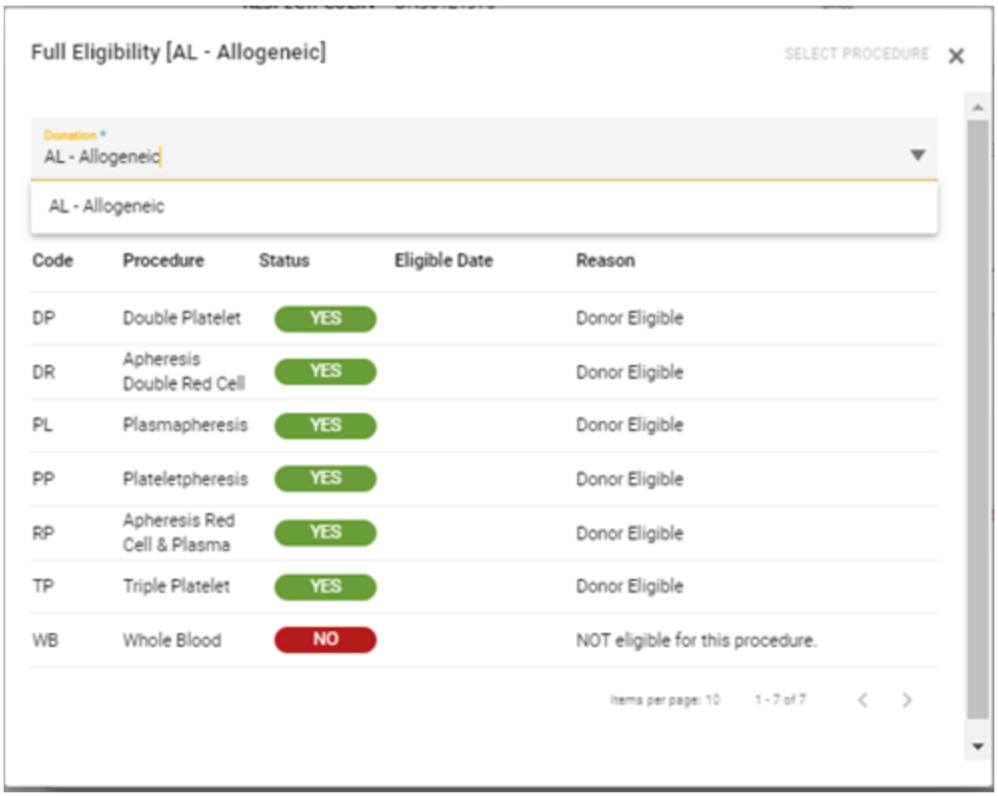


Possible messages in the Reason column include:

- Donor is indefinitely deferred
- Attempting to donate too soon
- Donor is temporarily deferred
- Too many times for this procedure

- Donor is on hold
- NOT eligible for this procedure

## Attributes Tab

Any attributes associated with the donor display in the Attributes tab. You will only see those attributes for which you have been granted viewing privileges.

## RBC/Plasma Loss Tab

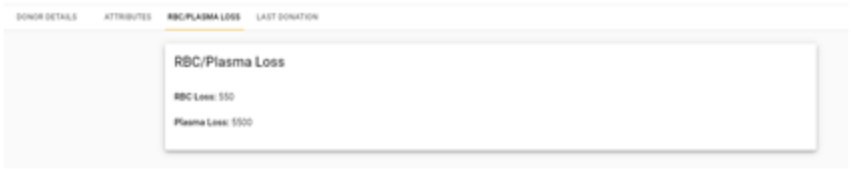


Click the **RBC/Plasma Loss** tab to display the cumulative red cell and plasma loss amounts for a rolling calendar year (the period from 365 days prior to the current date to the current date).

## Last Donation Tab

Click the **Last Donation** tab to display the information pertaining to the donor's last donation. The tab displays the unit number, post count (this has to be entered in BLEED for it to display here), date of the donor's last donation, donation type, and procedure code.

## The Register Button

Click **Register** to register the donor. If the donor was registered with a response through INQUIRY that placed an interdiction, the user can override or link a deferral at time of registration. The following pop-up appears:

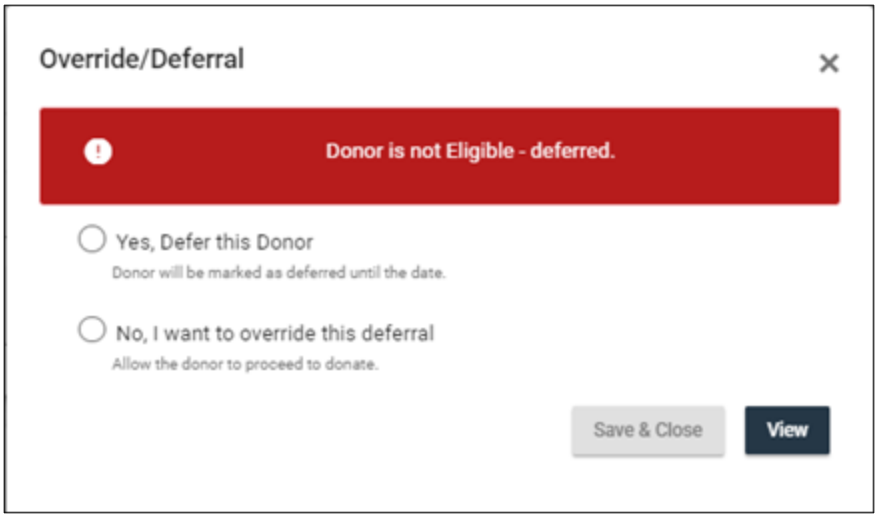


## Data Entry:

### Defer or Override?

Select either **Yes, Defer this Donor** or **No, I want to override this deferral**.

### Yes, Defer this Donor

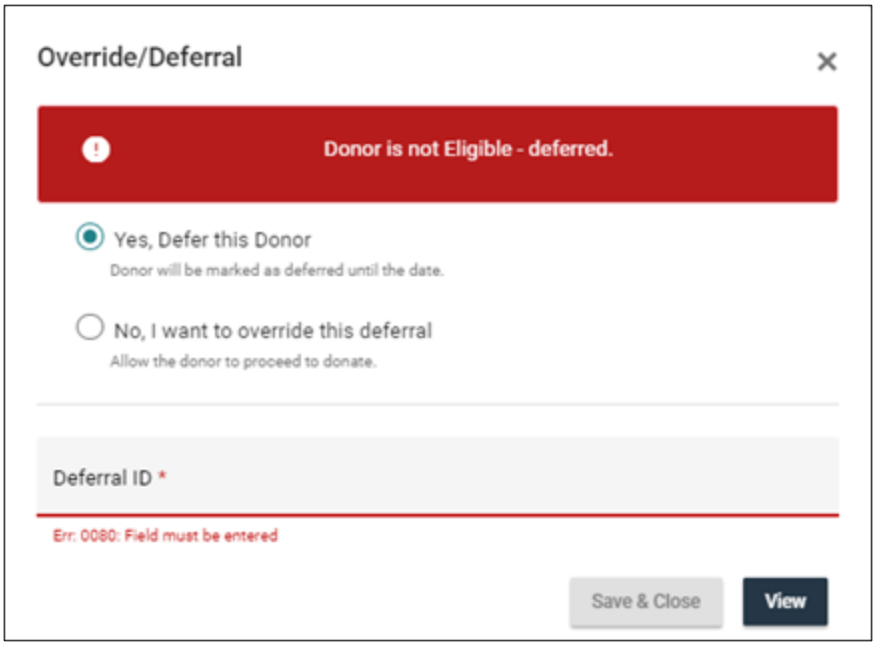


### Deferral ID

Manually enter or scan a deferral ID, and then click **Save & Close**.

## No, I want to override this deferral

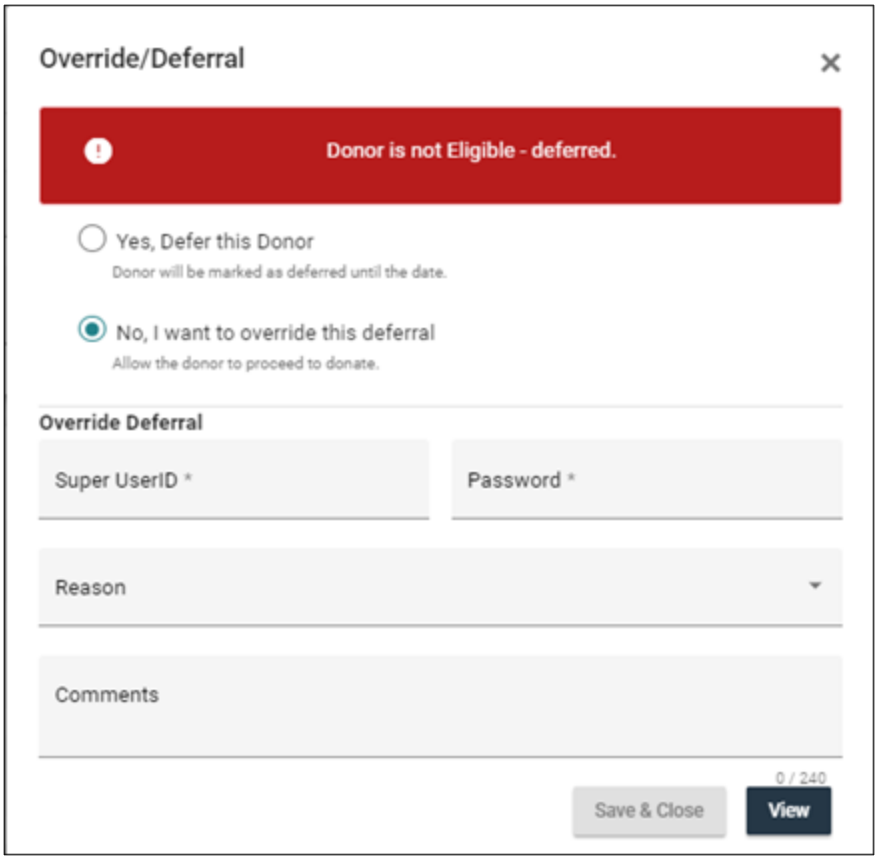


## Super User

Enter the user ID. If the user does not have access to OVRSN, the system will not allow the donation to be overridden.

## Password

Enter the password that is associated to the user ID.

## Reason

Enter a reason code or select from the LOV.

## Comment

Entry is optional. Enter up to 240 characters.

- Click **Save & Close** to save your entries to the database.


WellSky Corporation
Proprietary and confidential

## View

- Click **View** to see the reason for the deferral.

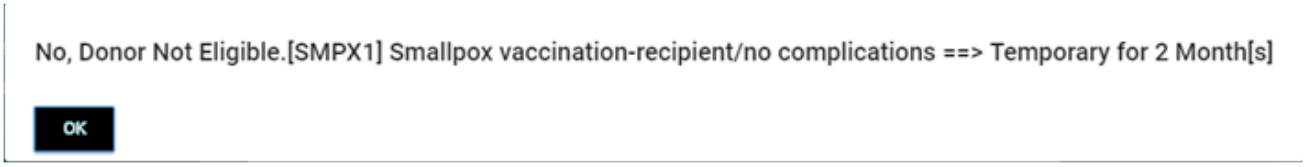


- Click **X** to cancel the process; any information entered in the Donor Deferral Status window is not saved.
- The character counter is located in the lower right corner of the screen to view the number of characters against the total allowed.

# The Inquiry Button

Click **Inquiry** to open the Deferral Window and retrieve possible deferral information for the donor.

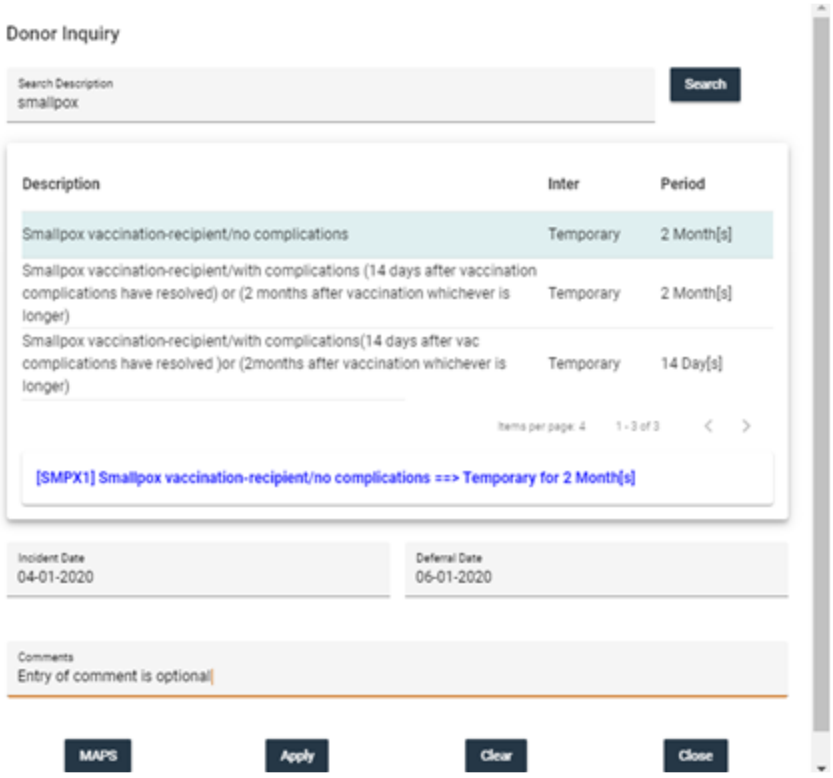


**NOTE –** The responses retrieved for the donor inquiry are pulled from health history questions in current templates only, rather than from the table of all responses.

## Data Entry:

## Donor Inquiry

### Search Description

Enter up to 100 characters and click **Retrieve**. Use this to query on specific information, such as medications, illnesses, and vaccinations. After entering the search description, click **Search**.

**NOTE –** This field does not have Soundex capabilities.

### Description

This is the description of the answer which is defined in the Health History Response (HHR) table. This field is display only and cannot be updated.

### Inter

Based on the answer, and if an interdiction is linked to the answer, 'Temporary', 'Indefinite', or 'No Deferral' will display. This field is display only and cannot be updated.

**NOTE –** If a temporary deferral interdiction is defined without a period type in the Valid Interdictions table, the INTER field will display 'Indefinite', and the Period will display the time frame from the Health History Response (HHR) table. It is important that the interdiction table is defined correctly along with Health History Response.

### Period

Based on the definition in Health History Response (HHR) or the Interdiction Codes for Donor (INTER). If it is a temporary deferral, the number of Days, Months, or Years will display. If it is an indefinite or 'No Deferral', no period will be listed. This field is display only and cannot be updated.

### Selection

Highlight the row that corresponds to the answer.

### Incident Date

Date required when selecting an answer. Enter a date using MMDDYYYY format. Cannot enter date in the future.

### Def Thru

The system calculates the deferred through date based on the deferral period for the answer and the incident date. To enter a date, clear the field and enter a date in MMDDYYYY format. The deferred through date is calculated based on the definition in the Health History Response (HHR) table. If there is no period defined in HHR, it will check the Interdiction Codes (INTER) to calculate the deferred through date.

**NOTE –** If you try to enter a shorter deferred through date than what the system has calculated, an error message will display. The configuration of the interdiction will determine if the deferred through


WellSky Corporation
Proprietary and confidential

date will be accepted. If the interdiction has a Fixed Period of 'Y', the deferred through date will not be accepted if changed.

## Comment

This is an optional field. Enter up to 100 characters.

The Inquiry is used to check answers to possibly defer the donor or not defer the donor. Once the answer is selected and **Apply** is clicked, it closes the Inquiry window and moves back to the main registration page. The eligibility status is updated based on the answer selected.

**NOTE –** The Eligibility window fields become disabled when the inquiry is completed since the eligibility of the donor has been determined. If you want to change procedures or donation types, or update equipment, you will need to clear the page and re-enter the donor.

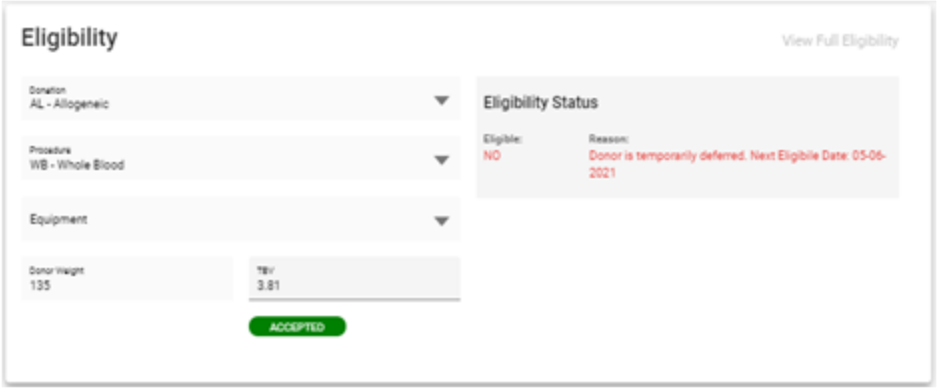


## Maps (Button)

Click this button to open up the maps that have been linked in the database. These documents are linked through master code LDOCS under COMMON:MAPS.

**NOTE –** Any map documents must be in PDF format in order to be viewed.

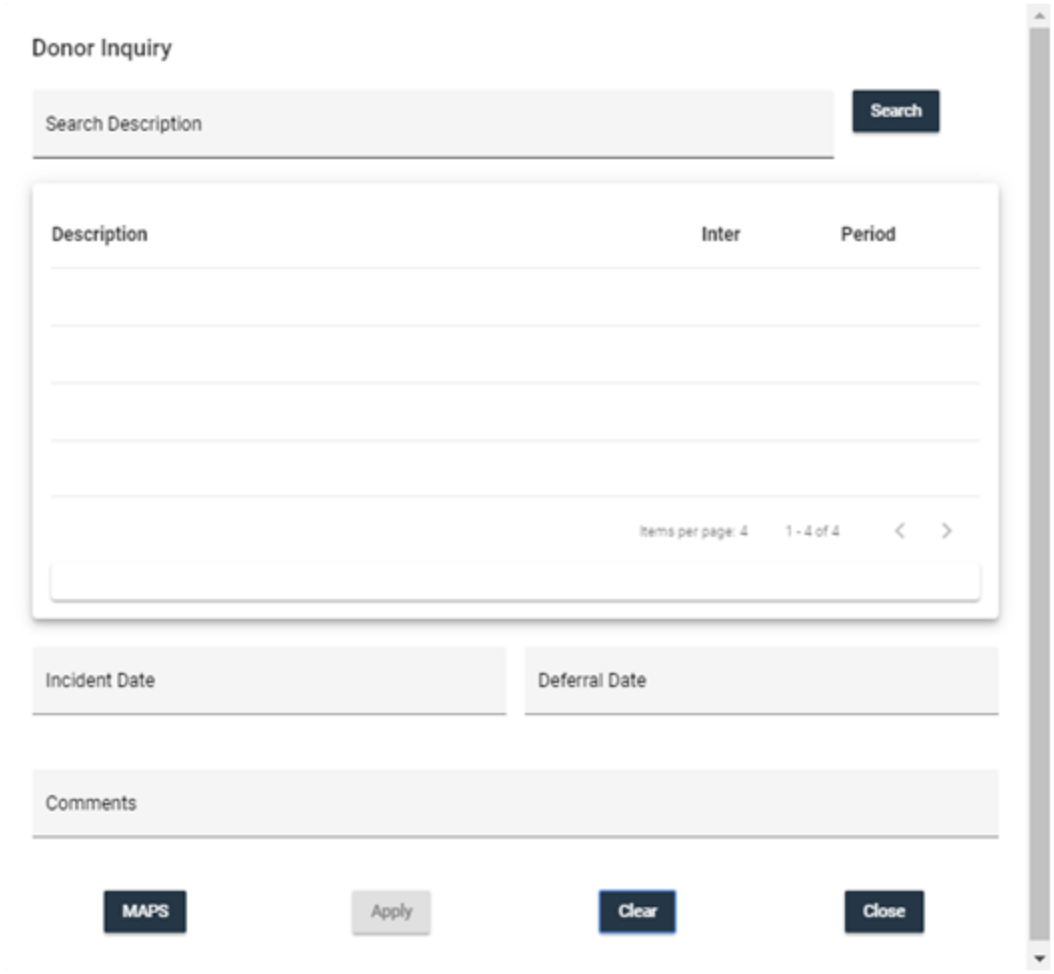


When **Maps** is clicked, the LOV of maps displays:

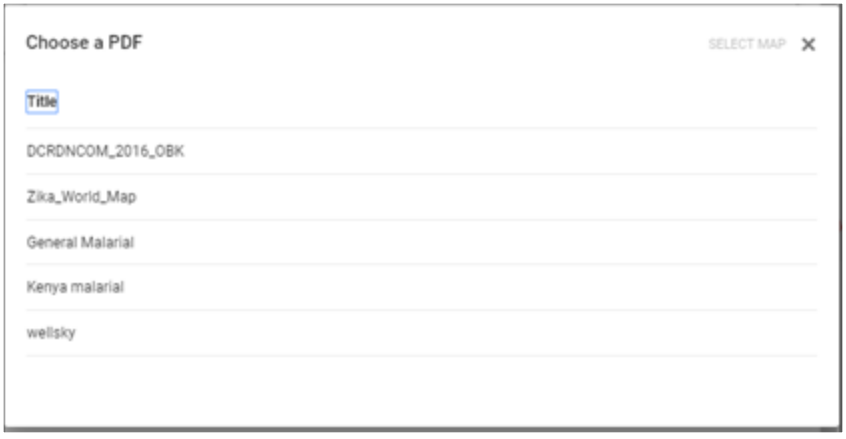


Click on a map, and the map document will open and display to the user. If the facility wants to use interactive maps, the URL will need to be put into the document, and then the URL can be activated after the document opens. The user will see a progress bar open, and then the document displays.

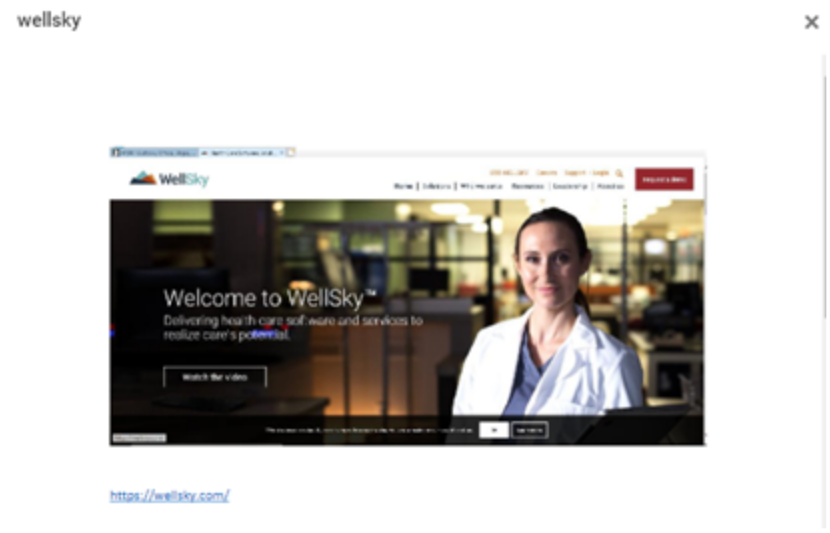


Highlight the URL, and then right-click to open the URL.

## The HH/PHY Button

Click **HH/PHY** to open the Health History and Physical Findings (HHPF) screen. For more information on this window, refer to "Health History and Physical Findings " on page 523.

**NOTE –** The System Parameter for ONACCESS must be set to **Y** to enable the HH/PHY button.

## Print Card/RePrint Card Button

Click **Print Card** to print the donor card. Only the demographics will print from the registration or lookup page. The donor card will print as a PDF.

**NOTE –** The system parameter DONORCARD must be defined with the correct program name for the facility's donor card to be printed from the .net application.

If the system parameter DONORCARD is not defined in the System Parameters table, the PRINT CARD will not appear on the page.

If an invalid value is entered for the parameter, when **Print Card** is clicked, a blank page will display.

The Print Card button will be relabeled if you bring the donor back into the registration page and the donor card was previously printed. The button will be relabeled as "RePrint Card".

**NOTE –** If the system parameter AUTO_PRINT is set to Y, the donor card will automatically display after clicking **Register**. If the parameter is set to N, the Print Card button will be available for you to click, if it is configured.

## The Search Donor Button

Click **Search Donor** to access the Find Donor window to query for another donor in the system. For more information on this window, refer to Section 15.2.29 Find Donor (FIND DONOR).

**NOTE –** To determine if the Search Donor button is enabled is based on the System Parameter REGNXT. If REGNXT is set to **F**, the Search Donor button is disabled and the Find Donor window displays automatically. If REGNXT is set to **N**, the Search Donor button is enabled and the OnSite Search Donor window does not appear automatically.

## The Camera Button

1. Click the **Camera** button to open the camera window and take a picture of the donor to load to the donor's header.

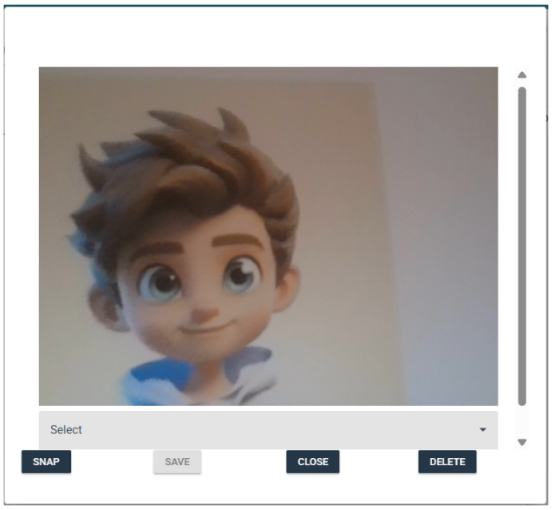


2. Click **SNAP** to take a picture that you can then view.
3. If you want to retake the photo, click **DISCARD**, and the SNAP button will reappear for you to retake the photo.


WellSky Corporation
Proprietary and confidential

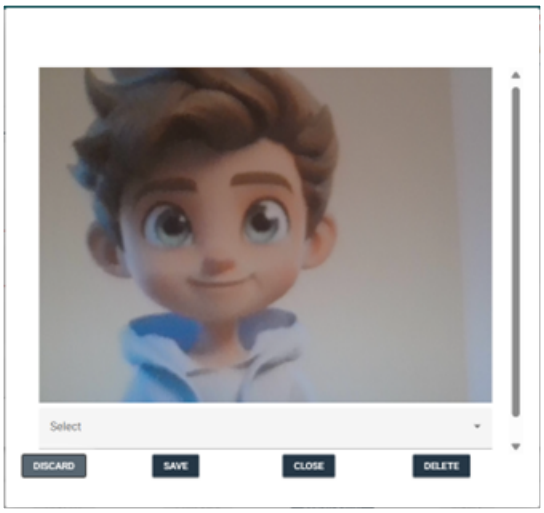


4. When you have the photo that you want to use in the donor header, click SAVE to load the photo to the donor header.

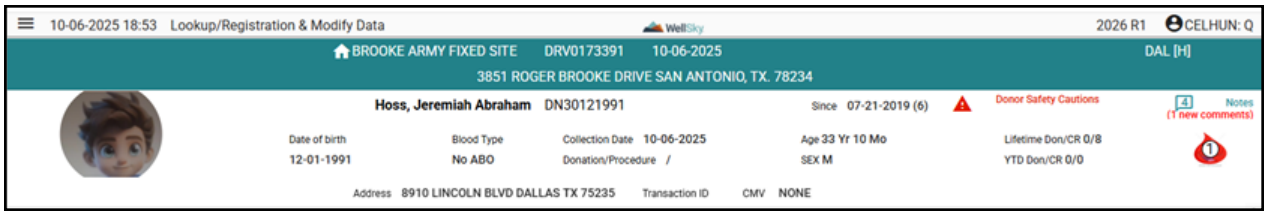


5. To re-take the photo after it has been saved to the donor header, click the Camera button again, and then click DELETE to remove it.
6. Repeat steps 2-4 to add another photo to the donor header.

## Possible Duplicate Donor

Upon screen entry, the Find Donor Block appears. Enter the donor information based on how the facility has configured the Find Donor block.

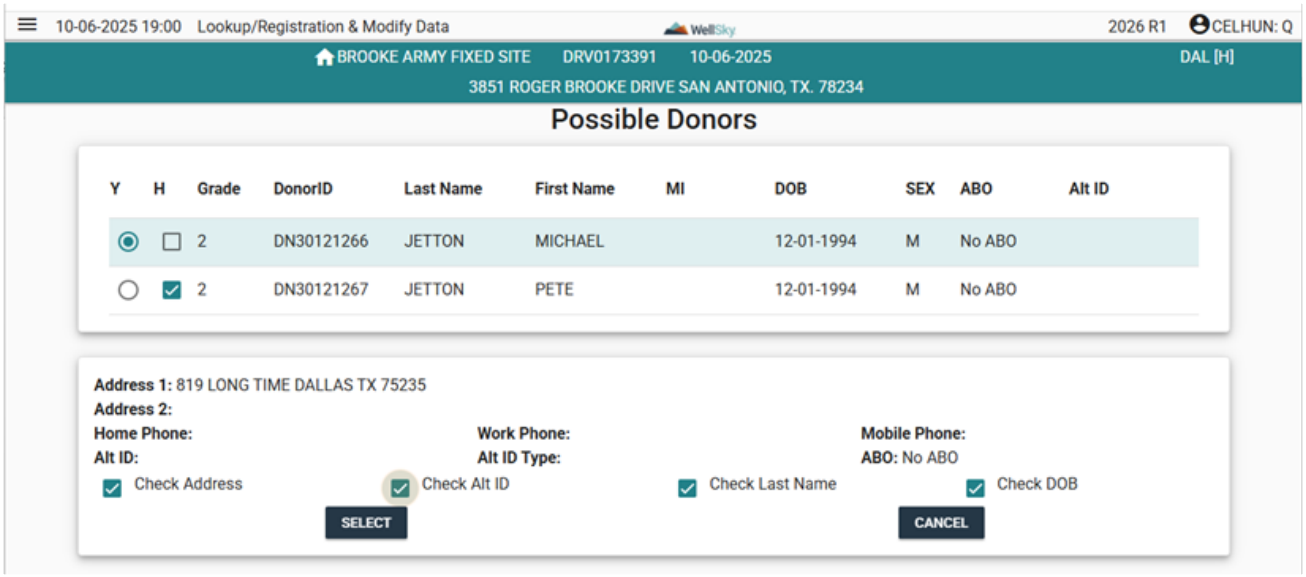


When possible duplicate donors are found, you place the donation on HOLD, and the Graded Donor List window will appear.

**NOTE –** If a single donor is brought into the possible donors, the user must select the Y option or cancel the possible donors. Single donors cannot be selected and placed on HOLD in the possible donors block. Single donor batches will not create a duplicate donor batch to be investigated.

Once at least two potential duplicate donors are retrieved, you should investigate them to determine if the donors are the same or different. Compare the address, Alt ID, last name, and date of birth for each donor, following the department's SOP.

In the Donor List Block, click one of the retrieved donors. That donor's address, phone number, alternate ID, and type display. Check each of the boxes to complete the investigation. Each donor must go through the same investigation. Once the investigation is complete, select the donor that is the true donor by selecting the **Y** option for that donor, and selecting the **H** option for the other donors that could be possible duplicates. Leave the H option blank if the donor is not a possible duplicate.

Once all the donors have been reviewed, place the cursor on the selected donor (Y) to activate the Select button, and then click Select. That donor will have a NODON hold placed, and a duplicate batch ID is generated by the system, which will be reviewed later. The donors with (H) will have a NODON placed and will be placed in the duplicate batch ID generated with donor selected with (Y). If the donor does not have anything selected, the NODON will not be placed on the donor, and the donor will not be placed in the duplicate donor batch.

## Update Mode

If a unit ID has already been linked to the donor and update of demographic data is needed, query the donor in the Register Donor/Modify Data form.

You will receive a popup message that the unit ID has been linked.

When entering a donor that has already been registered, you can update donor demographics, donation, and procedure codes. If the physical findings has already been completed, then a message will display:


WellSky Corporation
Proprietary and confidential

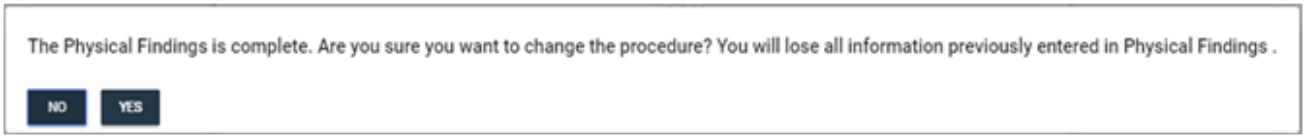


You will lose the physical findings if you click **Yes**, and it will have to be repeated.

The Register button will not display as REGISTER. Instead, it will display as UPDATE.

## At Commit

All data is immediately committed to the database when the **Register** button is clicked.

**NOTE –** A batch ID is saved to the database immediately as it is generated. All OnSite registrations will be associated to a batch ID of ONSITE.

## What to Do Next

Perform Health History and Physical Findings using Health History and Physical Findings.

To query the status of a registration, use OnSite Status Query.

# 7.7.3 Health History and Physical Findings

## Intended Use

Use this screen to perform an audit of registered donations. Unexpected answers to health history questions and physical findings recorded on the Donation Record at the time of donation are entered in this screen. A hold can be manually placed on a donation at any point during the audit process after the unit ID has been specified and before the audit is committed to the database.

In addition, use this screen to allow the donor to view and electronically sign the donor consent form.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

## Limitations

- A donation cannot be audited if no donor is associated with the donation.
- Comment requirement will only be enforced when the screener views the question individually in the Health History Responses or Physical Findings page.
- If copying the incident date from previous answers, it is your responsibility to update the incident date to defer the donor for the correct period.
- When using the Vista interface, if the file contains both hematocrit and hemoglobin, the hematocrit is primary and the hemoglobin is secondary.

- Web responses will not be available if using mobile upload/download and the donor entered responses after the download of data to mobile laptop has occurred.
- This screen does not determine if a new question has been entered in the template and should be included in the abbreviated questionnaire. The facility's SOP should define this.
- If the system parameter is set for consent (OL_CON_RE=Y) to be performed, then the user cannot move forward to link a unit number or start the bleed process. Consent must be signed and completed in order to allow the bleed process to occur.

## Prerequisites

- The donor must have been registered using the Donor Registration/Modify Data screen.
- A donor must be associated with the donation.
- OSUPR must be defined in user access to override a deferral, or update health history or physical findings once the data has been entered.
- In the System Parameters table, your facility must define the following:
  - COPY_DAYS – to designate the number of days the system will check for previous answers in the health history questions.
  - DELAY – enter the number of seconds to delay the cursor movement in the Health History View/Signoff.
  - OL_CON_RE – if the signing of the consent will be maintained electronically (Y), or on paper (N).
  - EQUIPQC_RQ – if equipment QC will be performed for physical findings, enter Y to enter supplies and equipment used during physical findings. Enter N if not using the equipment QC in Donor.
  - HH_SUMMARY – if the facility does not want to review the final summary for health history, then the system parameter should be set to N; if set to Y, then final summary review will be required to complete health history.
- Security access must be set to call the sub-programs from this program (ONPHHSPF).
  - Health History Card – (ONPHLTHS)
  - Physical Findings Card – (ONPPHYFN)
  - Donor Response Card – (ONPDNRES)
  - Donor Consent – (ONPDNCON)
- INC_DATE determines if the incident date for previous answers will be copied.
- The re-entry of data in the detail block is determined by DON_VERIFY in the Configure Find Donor Block for Program table (DONBLOCK).
- All donor consent forms must be defined in the Define Communication Letters (COMLET) screen.
- The following Master Codes must be set:
  - EQBRQ – defined for procedures that require equipment and bags.
  - HHPFD – configure the order of the cards on the Health History parent form.
  - PFCOM – physical findings comments.


WellSky Corporation
Proprietary and confidential

- The Health History questions, responses, and template have to be defined for each donation type to be registered. See Chapter 6, Registration Administration, in the *WellSky® Blood Centers Administration Guide*.
- The physical findings values and templates need to be defined for each donation/procedure. See Chapter 6, Registration Administration, in the *WellSky® Blood Centers Administration Guide*.

## Accessing the Screen

Access this screen from the OnSite Module menu by clicking on **Health History & Physical Findings**.

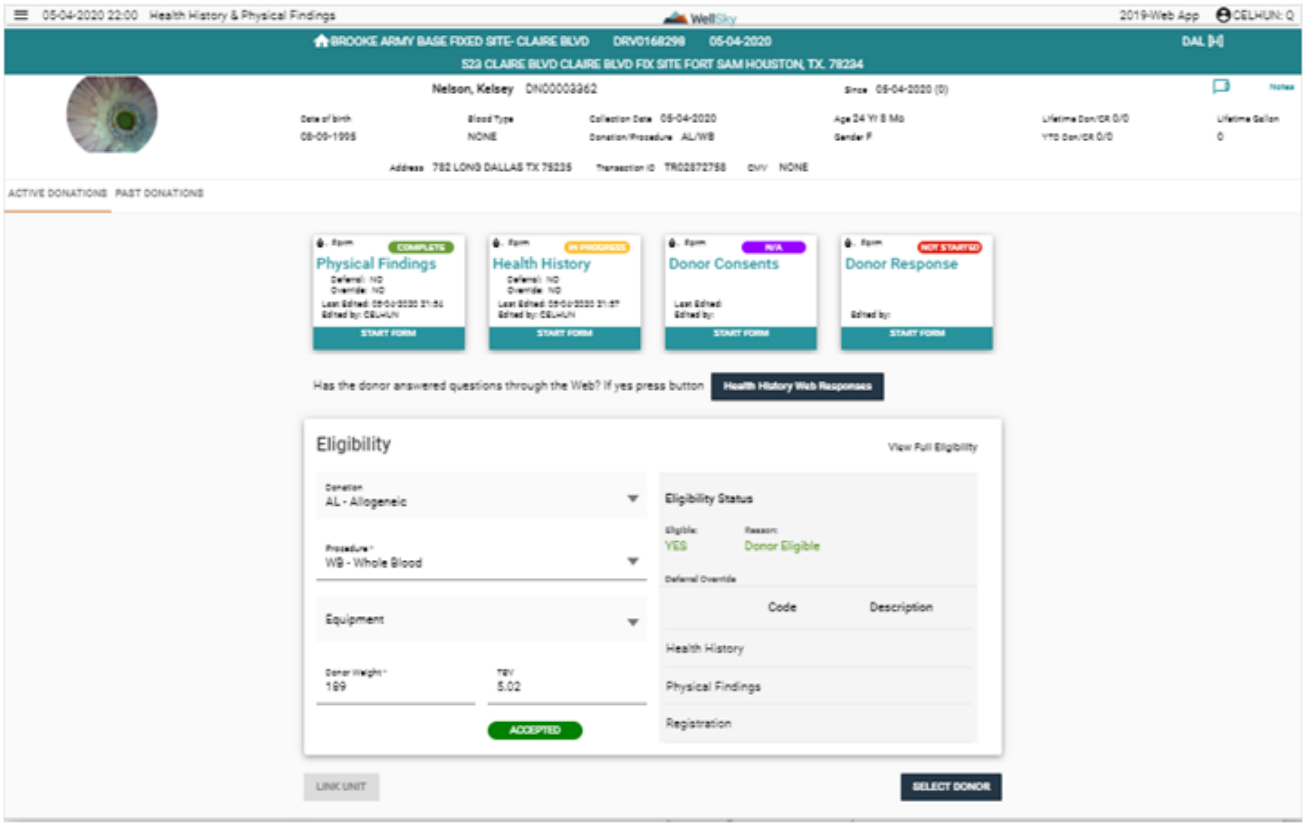


## Selection of Donor

When entering the page, the list of donors ready for health history and physical findings will display.

The donors will appear with the oldest at the bottom of the queue, and the newest registered donors at the top of the queue. Highlight the donor, and then click SELECT DONOR to bring the donor into the main page.

**NOTE –** To narrow down the donor selection, enter a last name, first name, or even a partial last name or first name, and the list will be narrowed based on the filter.

## Filter the List of Donors

The filter can be used to enter the last name, first name, date of birth, and/or donor ID to narrow the donors in the list. Entry of partial names or even single letters will narrow the list to easily find the donor.

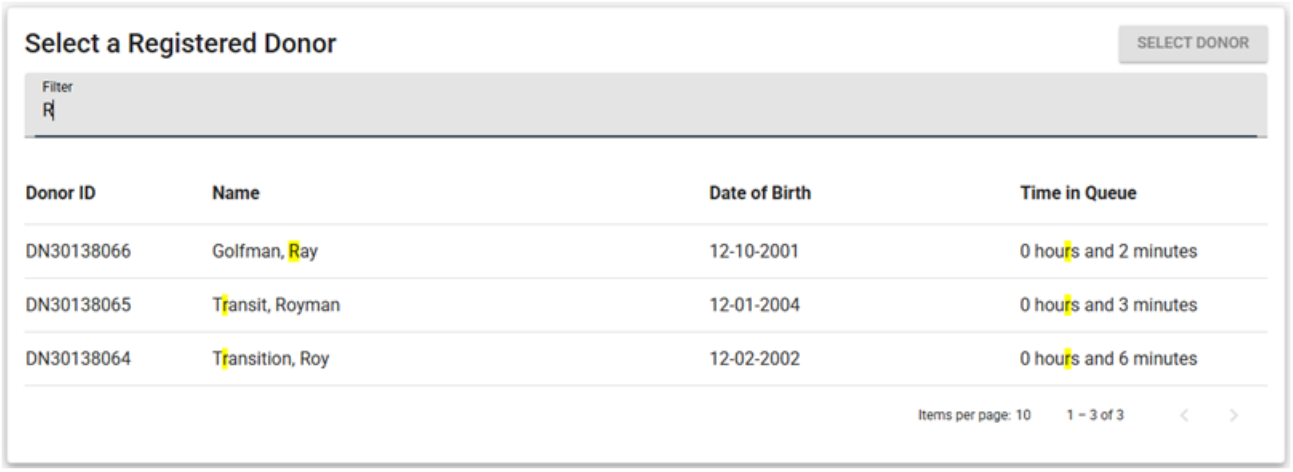


The re-entry of the fields to confirm the donor is determined by the setup of the facility in the Configure Find Donor Block for a Program (DONBLOCK), and using the program DON_VERIFY. The fields listed in DON_VERIFY determine what fields will be re-entered.

Once the donor record is successfully accessed, the donor record is locked, preventing other users from accessing the same donor record at the same time.

If you attempt to access a donor record that is locked, the following window displays:

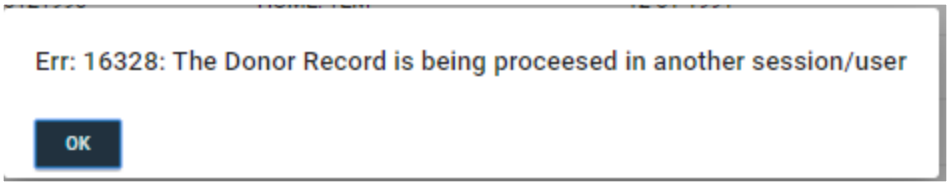


Click OK to close the screen.

In some circumstances, including temporary loss of the network connection or because of certain system settings, a donor record may remain locked; thus, the donor record cannot be accessed or modified. If this happens, you will need to manually unlock the donor record. Refer to the OnSite Status Query (OSTATUSQ) section for information on manually unlocking a donor record.

## Last

Enter the last name of the donor. If the name does not match the Donor ID, an error message will display.


WellSky Corporation
Proprietary and confidential

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### DOB

Enter the date of birth using the MMDDYYYY format. If the entry does not match the donor ID, an error message will display.

### Sex

Enter the sex of the donor. If the entry does not match the donor ID, an error message will display.

### First

Enter the first name of the donor. If the entry does not match the donor ID, an error message will display.

**NOTE –** The drive header displays based on the drive selected in the Set Drive page. The donor header is populated based on the donor selected from the list.

Once the donor record is successfully accessed, the donor record is locked, preventing other users from accessing the same donor record at the same time.

## Eligibility Block

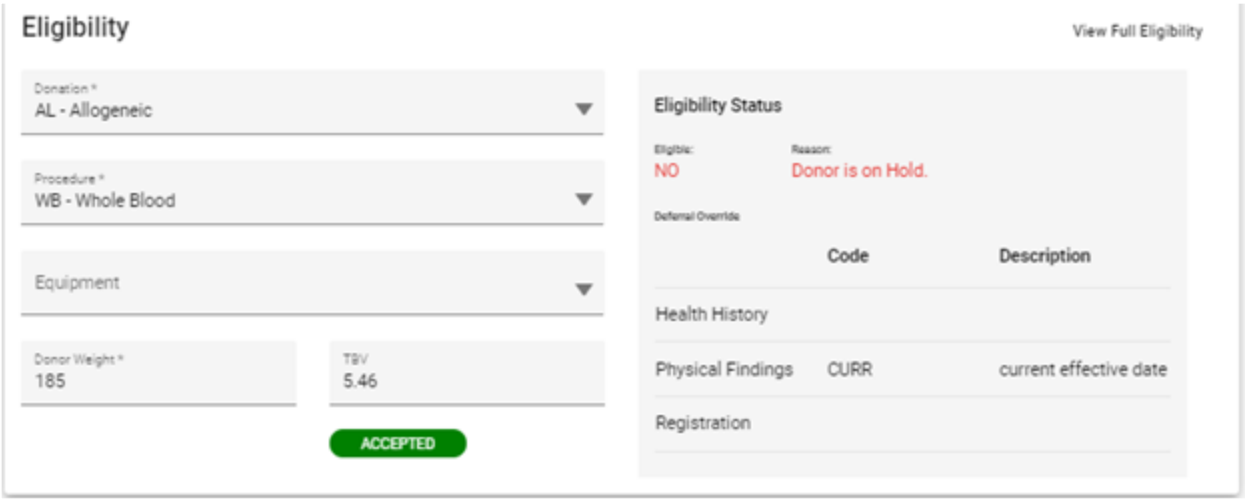


### Donation

Entry is required. Enter the donation type code from the Donation Record or select from the LOV. Displays the donation type entered during lookup and registration.

### Procedure

Entry is required. Enter the procedure code from the Donation Record or select from the LOV. Displays the procedure code entered during look-up and registration.

**NOTE –** If the procedure is changed after the physical findings has been completed, the user will receive a message alerting them that physical findings will be removed and will have to be re-entered.

## Equipment

Entry is optional. Enter a valid equipment type or select one from the list. Once you begin to type, the list will automatically appear, and you can select a value.

## Weight

The donor's weight entered in Donor Details during registrations displays here. This field can be updated. Entry of a whole number only is allowed. If any other type of number is entered (for example, decimal, negative, or alphanumeric), the following pop-up message will display:

The cursor will remain in the Weight field until a whole number is entered.

## TBV

Display only for total blood volume. For the total blood volume to be calculated, the user has to have entered the donor's height and weight. The system will perform this calculation, and it cannot be updated unless you change the donor's height and/or weight. If the physical findings template contains the TBV parameter, it will list if the equipment and TBV is within range (Acceptable) or out of range.

## Eligibility Status

Display only. The eligibility for the specific donation and procedure entered appears here. To view the donor's entire eligibility, click **Full Eligibility**.

## Override Block

Display only. It will list if the donor was overridden in the Registration process, Health History, or Physical Findings. It will display the override reason and description beside the function.


WellSky Corporation
Proprietary and confidential

| | Code | Description |
|---|---|---|
| Health History | | |
| Physical Findings | CURR | current effective date |
| Registration | | |

## Full Eligibility Button

To view the complete eligibility for a donor, click **Full Eligibility** and the Donor Eligibility page will display.

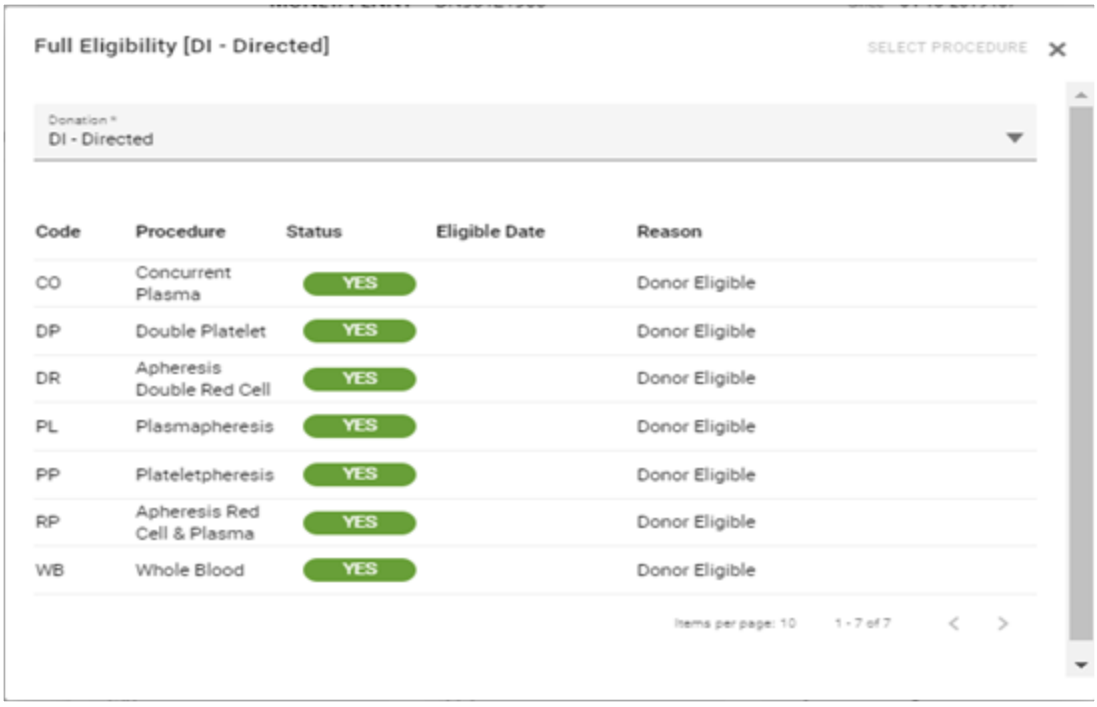


This window displays each procedure and the eligibility based on donation type and procedure. All eligible procedures display in green. All ineligible procedures display in red.

## Past Donation Tab

To view past donations on the donor, click on the **Past Donations** tab.

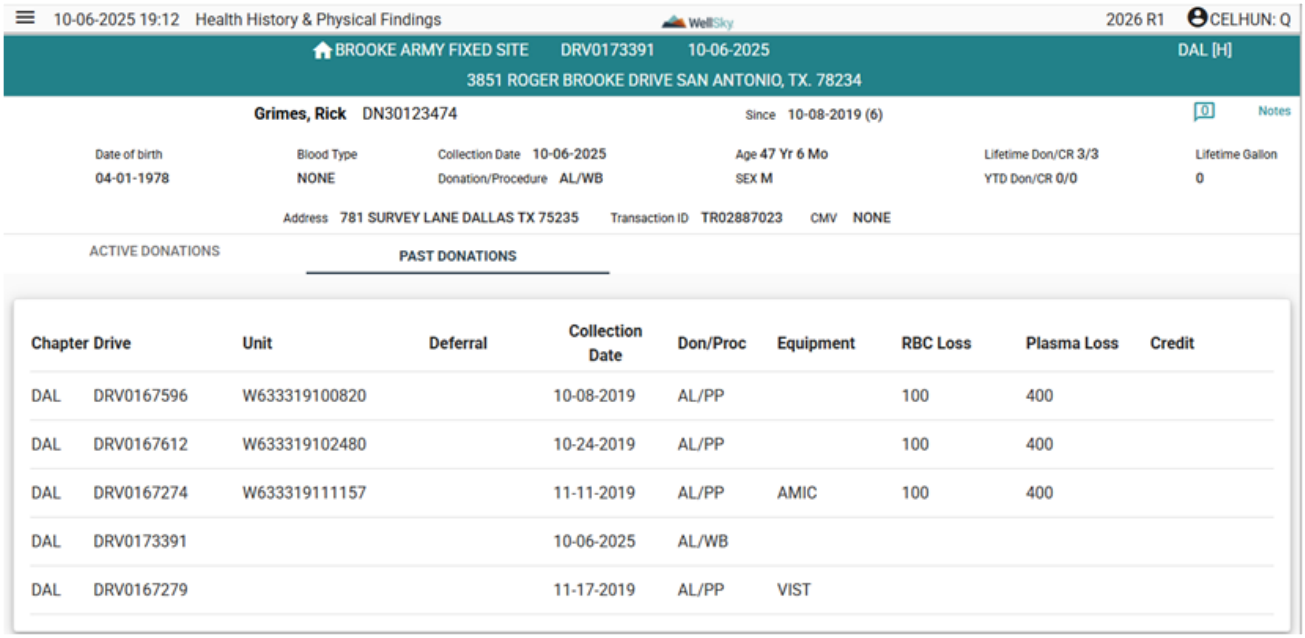


The following information displays for the donor:

- Chapter in which the donation was collected
- Drive ID of the drive where the donation was collected
- Unit ID
- Deferral ID – deferred for a donation
- Collection date of the donation
- Donation and procedure collected (Don/Proc)
- Equipment used in the collection of the donation, if it was captured
- RBC and Plasma loss, if captured
- Credit, if linked

The last donation to display will be the current donation being collected.

## Print Card/RePrint Card Button

Click **Print Card** to print the donor card. The donor card will print as a PDF. The donor demographics will print, but if the health history and/or physical findings have been completed, that will print on the card.

**NOTE –** The system parameter DONORCARD must be defined with the correct program name for the facility's donor card to be printed from the .net application.

If the system parameter DONORCARD is not defined in the System Parameters table, the Print Card button will not appear on the page.


WellSky Corporation
Proprietary and confidential

If an invalid value is entered for the parameter, when **Print Card** is clicked, a blank page will display.

The Print Card button will be relabeled if the donor card was previously printed. The button will be relabeled as "RePrint Card".




# Access to Each Card

## User ID

Enter the user ID of the person who will be performing functions.

## Password

Enter your password.  Once the password is entered, it activates the card if the user has access to the page.

# Progress Statistics

The Progress Statistics displays the following information for health history (Health), physical findings (Physical), donor response, and consent cards:

- Status
- Deferral
- Override
- Last edited - date/time
- Last edited by (user ID)

# Donor Responses Button

Click **Donor Responses** to begin the process of opening the Donor Responses window and answering Health History questions. See the Donor Responses (RESP) section of this guide.

# Abbreviated Questionnaire

Donors are eligible for an abbreviated questionnaire based on system administrator settings. If they are eligible, the specific questions asked are also set by your system administrator.

If the health history template has changed since the last qualification of abbreviated questionnaire, the donor must start the qualification process again.

# Health History Web Responses Button

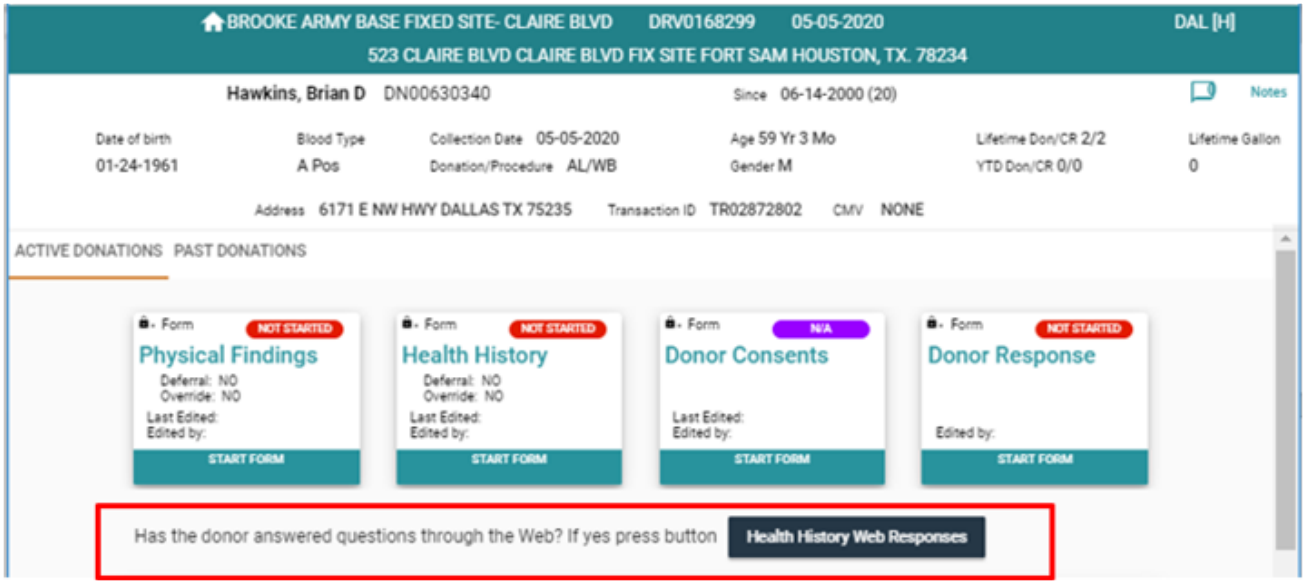


Click **Health History Web Responses** if the user has answered the questions through the FastTrak application. The prompt to verify that the user has the ability to access the health history card displays.

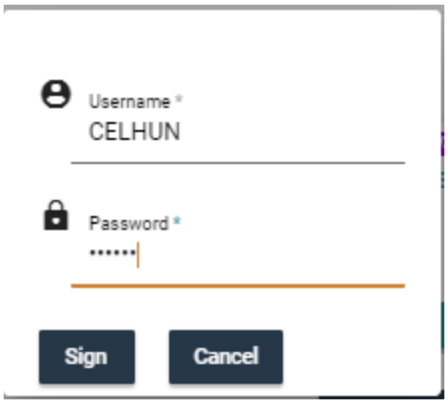


After verification has been entered, the system will prompt for the scanning of the online ID that was generated and either printed or sent to an email account.

WellSky Corporation
Proprietary and confidential

### Online ID

Scan or manually enter the online ID of the donor. To manually enter the ID, type **M** and press ENTER. If the wrong online ID is entered, Err:21203: Invalid Online ID will display after confirming. Click DOWNLOAD.

### Confirm

Enter **YES** to confirm the entry of the online ID. Once the confirmation has been entered, the DOWNLOAD button will be enabled.

- Click DOWNLOAD. The system will check if the Online ID belongs to the donor. Once confirmed, the questions and responses will populate the health history, and the system will display any questions that were not answered, unexpected responses, and questions that were not asked during FastTrak.
- Click CLOSE if you are not going to use the online responses from the donor, and the system will close the window.

## Health History Card

Click Health History Card to start the process of answering the health history questions. The user will have to sign into the card, and the system will determine if the user has access to the function.

### User ID

Enter the user ID and press **Tab**. This is a required field.

### Password

Enter the password and press **Tab**. This is a required field.

If the user does not have access to the form, a message will appear.

Once the screen opens, the language option will display, where you can pick from the list or leave the default language selected.

### Language

The default language is set in master code MLANG. The user is able to select from the list if they wish to view the questions in a different language.

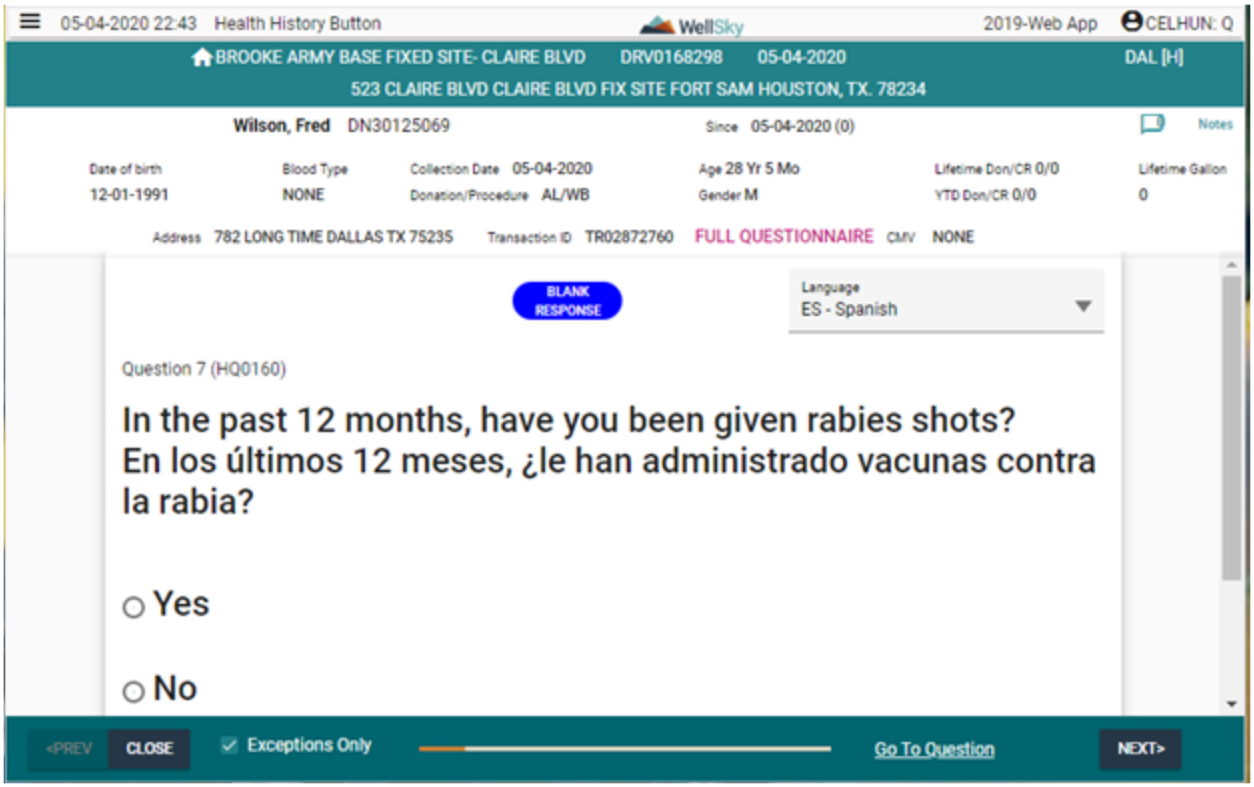


The system displays the question first in English and then in the chosen language.

**NOTE –** If the Donor Responses window has been opened, the donor cannot be retrieved in Health History Responses until the donor responses are signed off.

**NOTE –** If the donor changed a response in the Donor Response screen, the word Changed will appear at the top of the question in the middle of the page.

## Question

Displays the sequence number in which it should display, and it contains the question number in parentheses.

**NOTE –** If the displayed question has been added within the last year (365 days), the word NEW displays in red in the middle of the question block.

## Response

Entry is required. Select Yes or No to enter the donor's response to the question.

- If the question does not require further explanation, click NEXT to move to the next question.
- If the question requires further explanation, click Add Answer.


WellSky Corporation
Proprietary and confidential

# Answer Details Fields and Definitions

## Answer

Enter a valid answer code or select from the list. The description for the answer code automatically displays.

**NOTE –** This field calls for an explanation of the yes or no response recorded in the Response field.

If the answers have been grouped in the Health History Response table, the list will appear with groups listed and answers not associated to a group list underneath the groups.

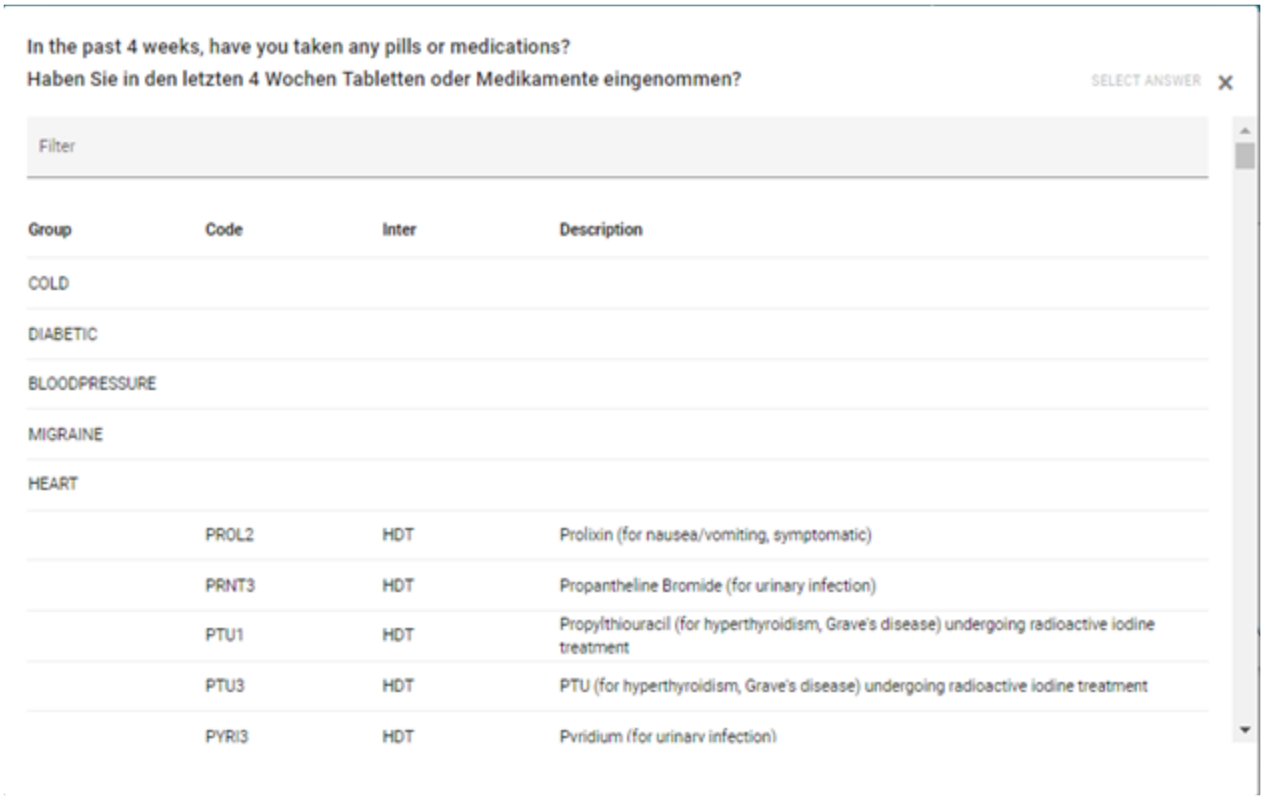


Click on the group to open the list associated to the group.

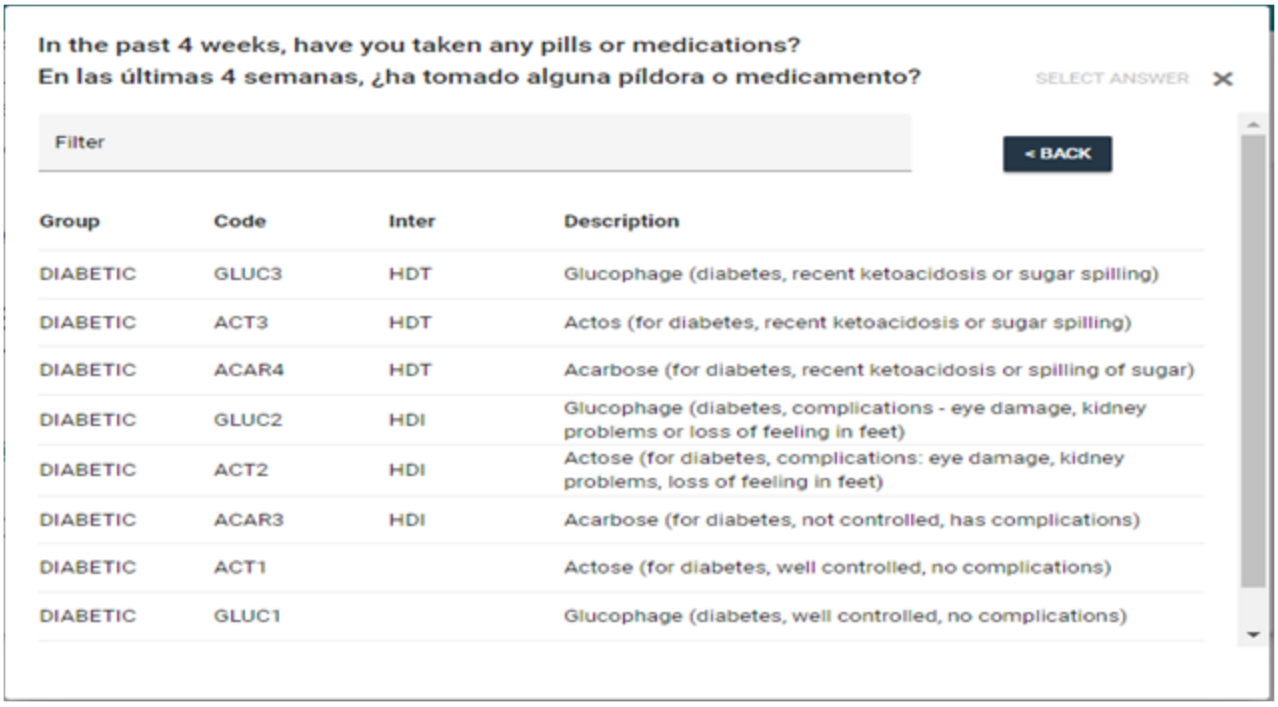


Highlight the answer, and click SELECT ANSWER to open the response page. If the answer requires additional dates to be captured, the fields will display. Additional dates are start and end dates.

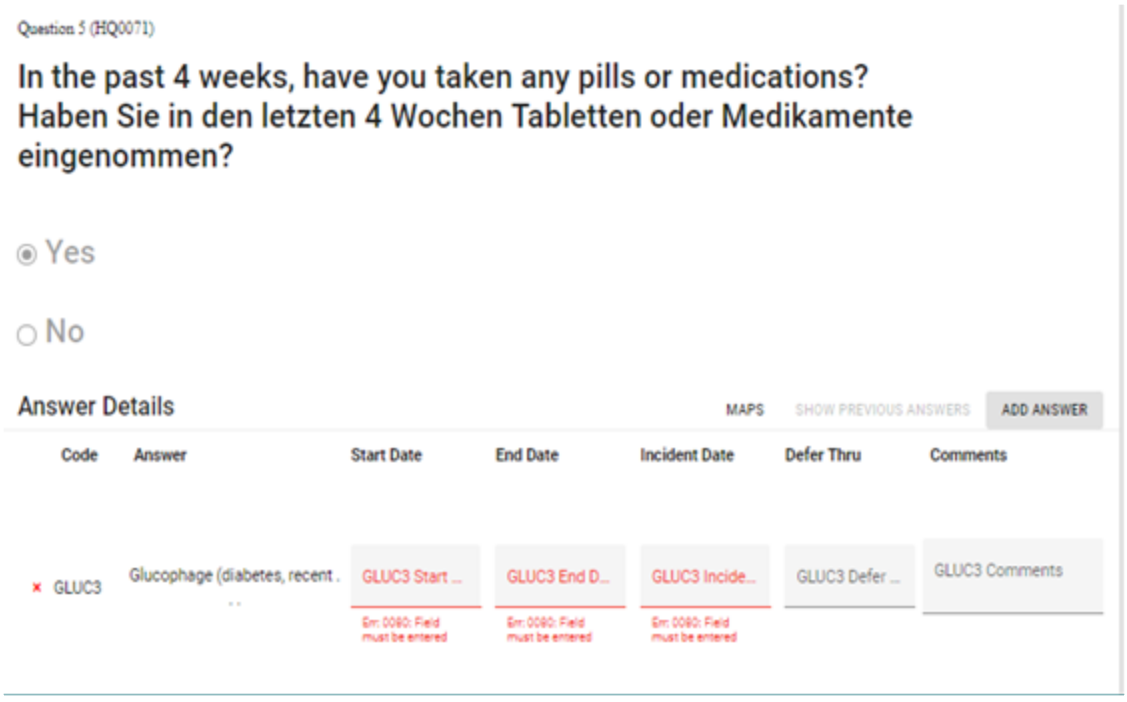


## Start Date

If an answer has been configured for additional start and end dates, the dates will appear on the screen. If the answer does not require the additional dates, the cursor will skip the field, or if it is the only answer, the start and end dates

will not appear. Enter the date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY.

### End Date

The end date is an optional field, since some maintenance drugs do not have an end date. Enter the date in MMDDYYYY format, and the system will reformat to MM-DD-YYYY.

### Incident

If the answer to a health history question causes an automatic interdiction to be placed, the Incident field is required. Enter the incident date using the MMDDYYYY format.

### Def Thru

Entry is optional. Enter the date the deferral ends, if applicable. In some instances, the system automatically makes the entry. A system entry here can be modified by the user. Entry format is MMDDYYYY. If the deferral is indefinite, the Def Thru will appear in red.

### Comments

Entry is required for all changed donor answers, or if the answer code has been defined with require comment.

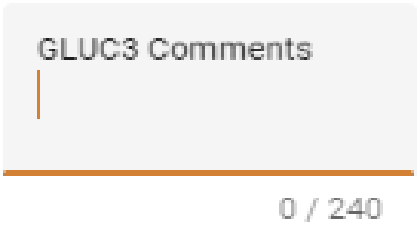


Double-click in the comment, and canned comments for the answer will displays. The Comment field allows canned comments and free-format comments up to 240 characters. In the bottom right corner, the number of characters/total number of characters will be listed.

**NOTE –** If the donor enters an adverse response that results in an interdiction, the donor will be ineligible to donate until the interdiction's deferred thru period has elapsed. This is true even if the interdiction is released prior to the deferred thru period. This is because the system places both the interdiction and an eligibility status of 'N' with a reason of HHDTD (Health History Deferred Thru Date).

### Exceptions Only (Box)

Selecting the Exceptions Only box filters the questions that display. Only the questions that have unexpected answers, were not answered by the donor, were changed by the donor, or repeat questions display when this box is selected.

**NOTE –** The Exceptions Only check box is selected by default.

## Maps Buttons

To view maps, click Maps. The list of maps displays.

## Maps (Button)

Click this button to open up the maps that have been linked in the database. These documents are linked through master code LDOCS under COMMON:MAPS.

**NOTE –** All map documents must be in PDF format to view.

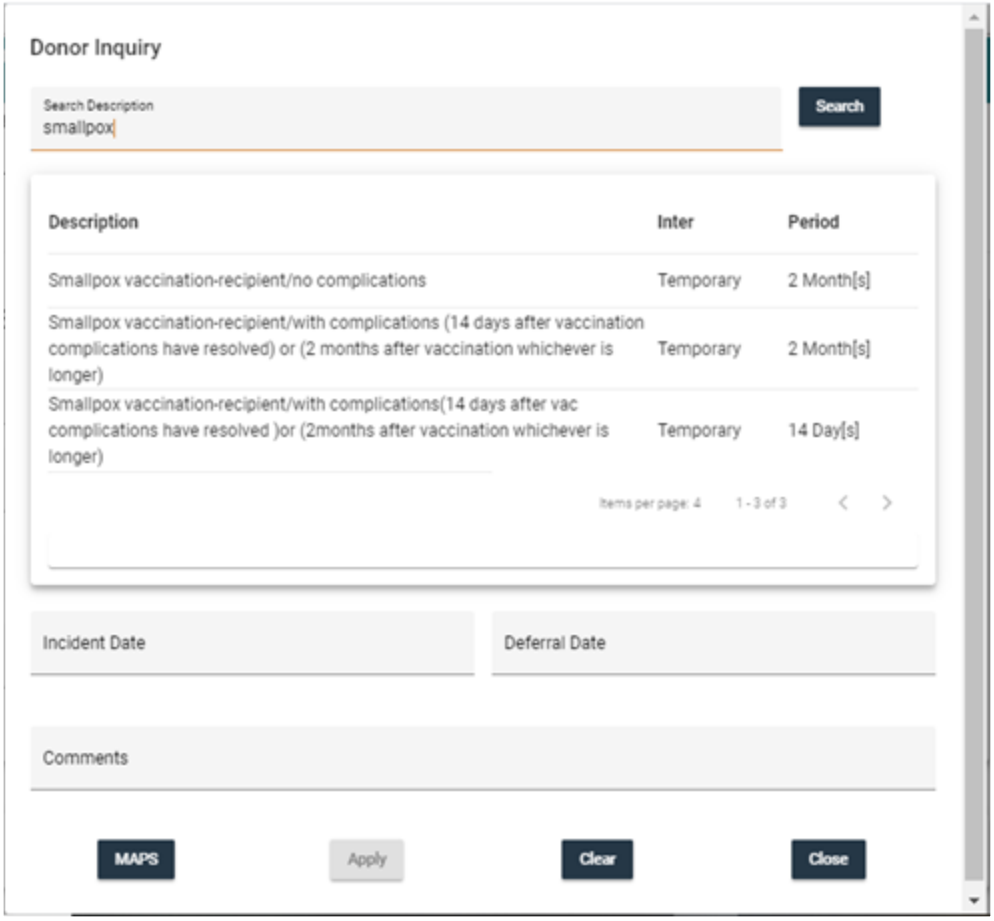


When **Maps** is clicked, the LOV of maps displays:

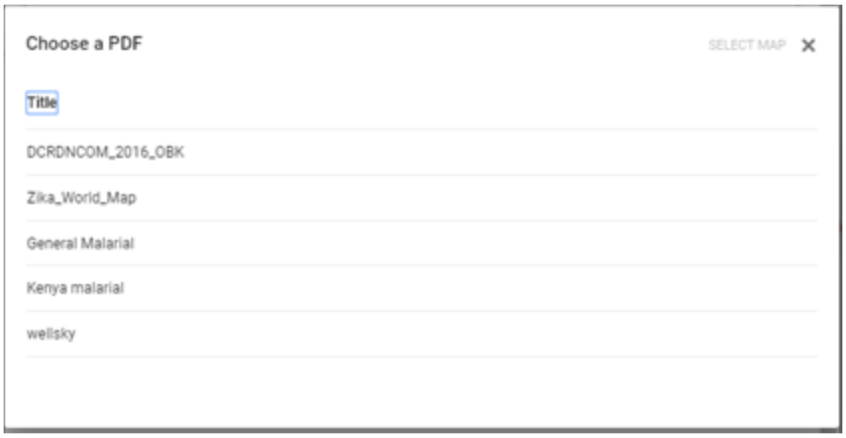

Click on a map, and the map document will open and display to the user. If the facility wants to use interactive maps, the URL will need to be put into the document, and then the URL can be activated after the document opens. The user will see a progress bar open, and then the document displays.

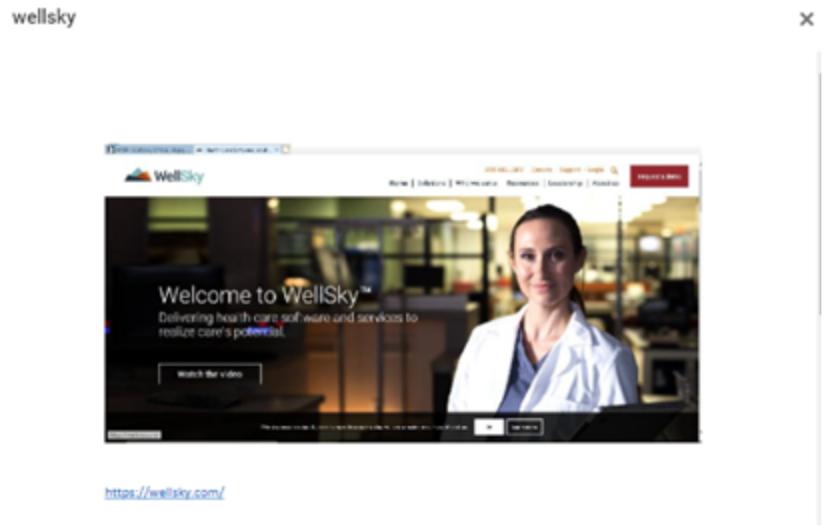


Highlight the URL, and then right-click to open the URL.

- To advance to the next question, click **Next**.
- To go back to the previous question, click **Prev**.
- To delete the highlighted answer, click the red X by the answer to remove the answer.
- To view previous answers to the question from the last donation, click **Show Previous Answers**. Based on the system parameter setting COPY_DAYS, the previous answers will display. If the last donation is outside the number of days, the answers will not display.

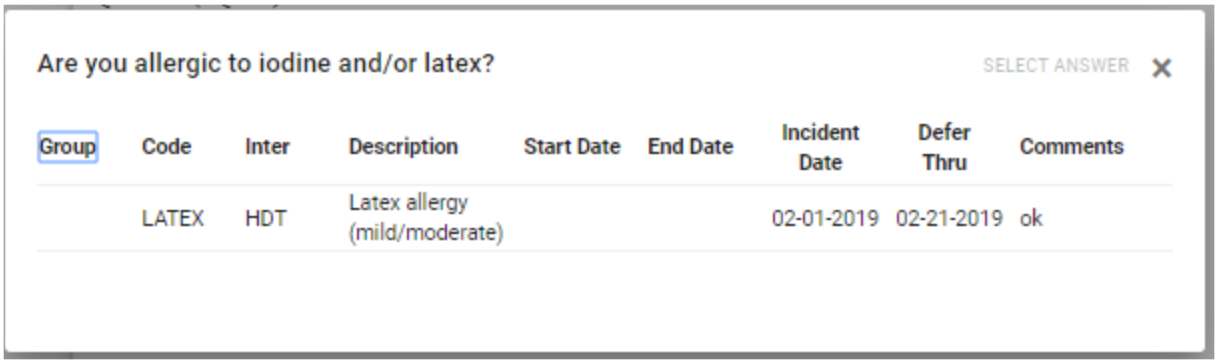


Select the answer by highlighting the row, and click **SELECT ANSWER**. The incident date and deferred through date will automatically populate. The user can update the incident date, if needed, and the deferred through date will recalculate.

To be able to copy incident dates to previous answers, the system parameter INC_DATE must be set to **Y**.

- To move directly to a specific question, click **Go To Question**, and enter the question number.
- To complete the health history block, click **Summary** (if the system parameter HH_SUMMARY is set to Y). All of the health history questions display.

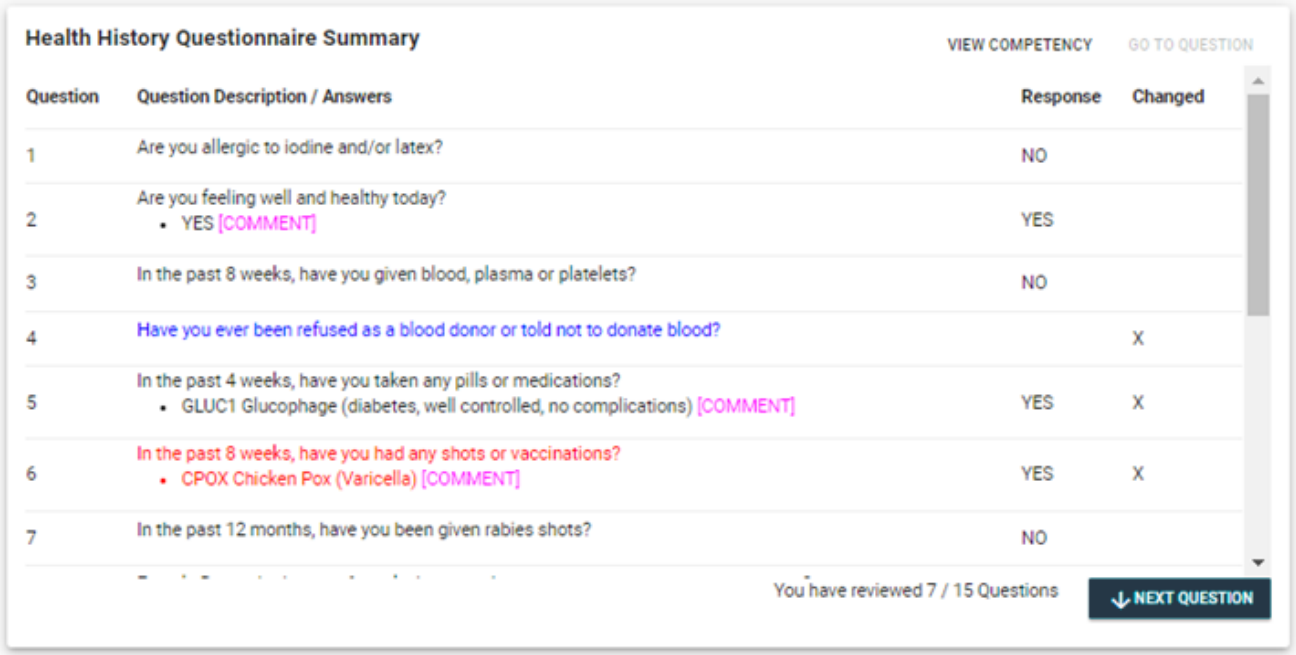


- All questions that have been completed will display in black.
- All questions with a deferral will display in red.
- All questions that have not been completed will display in blue.

Each question is displayed with the response (Yes or No). If the donor changed the answer, there will be an X in the Changed column.

If a comment has been entered for an answer, there will be [COMMENT] displayed in magenta. To view the comment, highlight the question, and click **GO TO QUESTION** at the top right of the summary block.

If the system parameter HH_SUMMARY is set to N, the summary page is not called when all of the questions have been completed. If you have not completed all of the questions, or questions have responses that require further explanation, when you click **COMPLETE FORM**, the summary page will appear with the questions that have not met the completed criteria.


WellSky Corporation
Proprietary and confidential

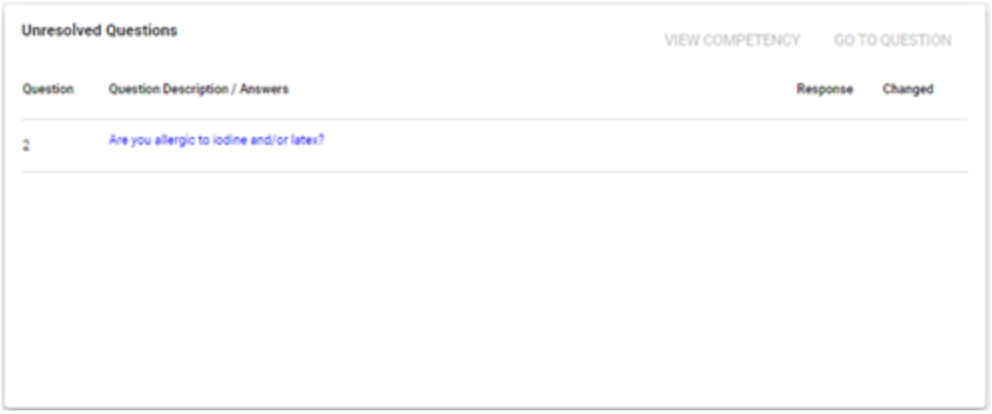


To move directly to a specific question, click **GO TO QUESTION**, and enter the question number. This will take you back to the question so you can answer the question and complete the form.

## View Competency

To review the question that is asked of the donor prior to entering answers, click **View Competency**.

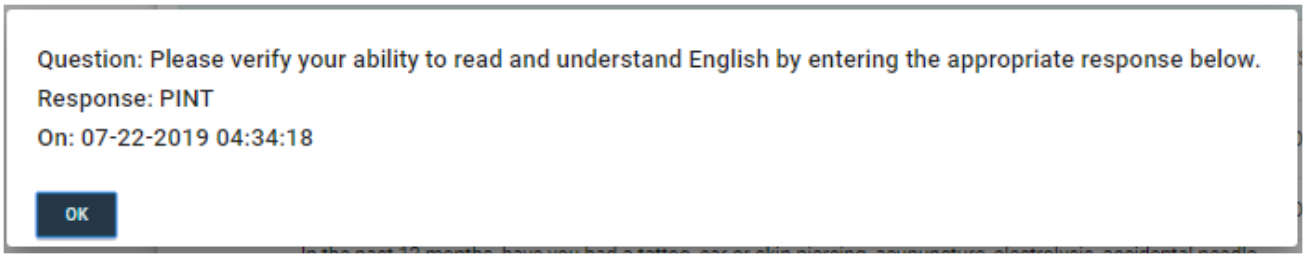


## Sign Off

After reviewing all the questions (use **NEXT QUESTION**), click **COMPLETE FORM** to initiate the sign-off process.

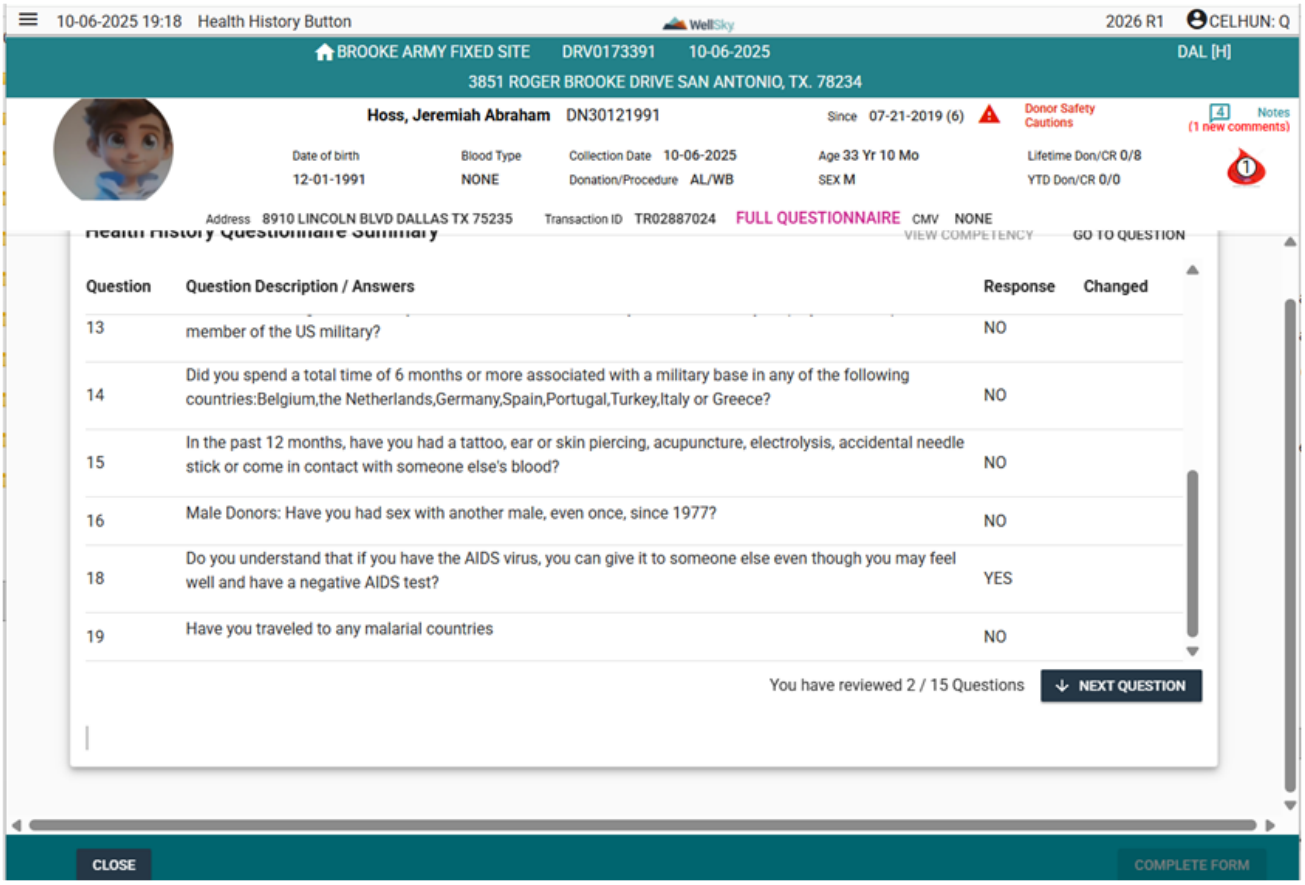


After clicking **COMPLETE FORM**, the user will need to sign off.

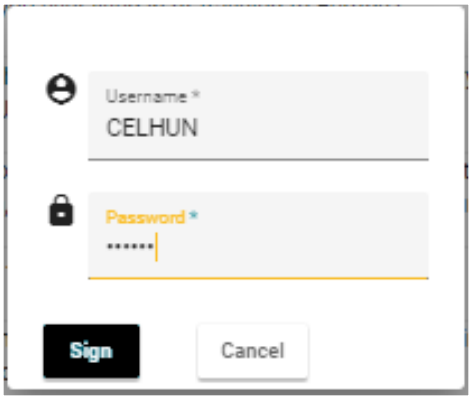


To complete the Sign off process, enter your user ID and password, and click **OK**.

**NOTE –** After sign-off of Health History or Physical Findings, if re-entry is attempted you will be prompted for a supervisor authorization to view or make any changes to the Health History or Physical Findings. The credentials entered for the supervisor authorization must have the OSUPER access class assigned in order to authorize re-entry into this section.

## Using the Buttons

- Dn/Up buttons: Used to move up and down to view the answers to the questions. The speed in which the cursor moves is determined by system parameter DELAY.
- Select Question Button: Cannot sign off on the health history questions until all questions have been completed. Highlight a question that is in blue, and click **Select Question**. This will return you back to the health history response form.

## In the Physical Findings Card

To activate the physical finding block, the user ID and password must be re-entered. Each required physical procedure automatically displays. Only the value needs to be entered for each physical finding if the physical code is not linked to equipment type. The physical procedures listed cannot be modified or deleted.

If the facility has decided not to use the equipment and supplies, the system parameter EQUIPQC_RQ will be set to 'N', and the Supply tab will not be visible.

If the facility has decided to use the equipment and supplies, the focus will be placed on the Supply tab when entering the page.

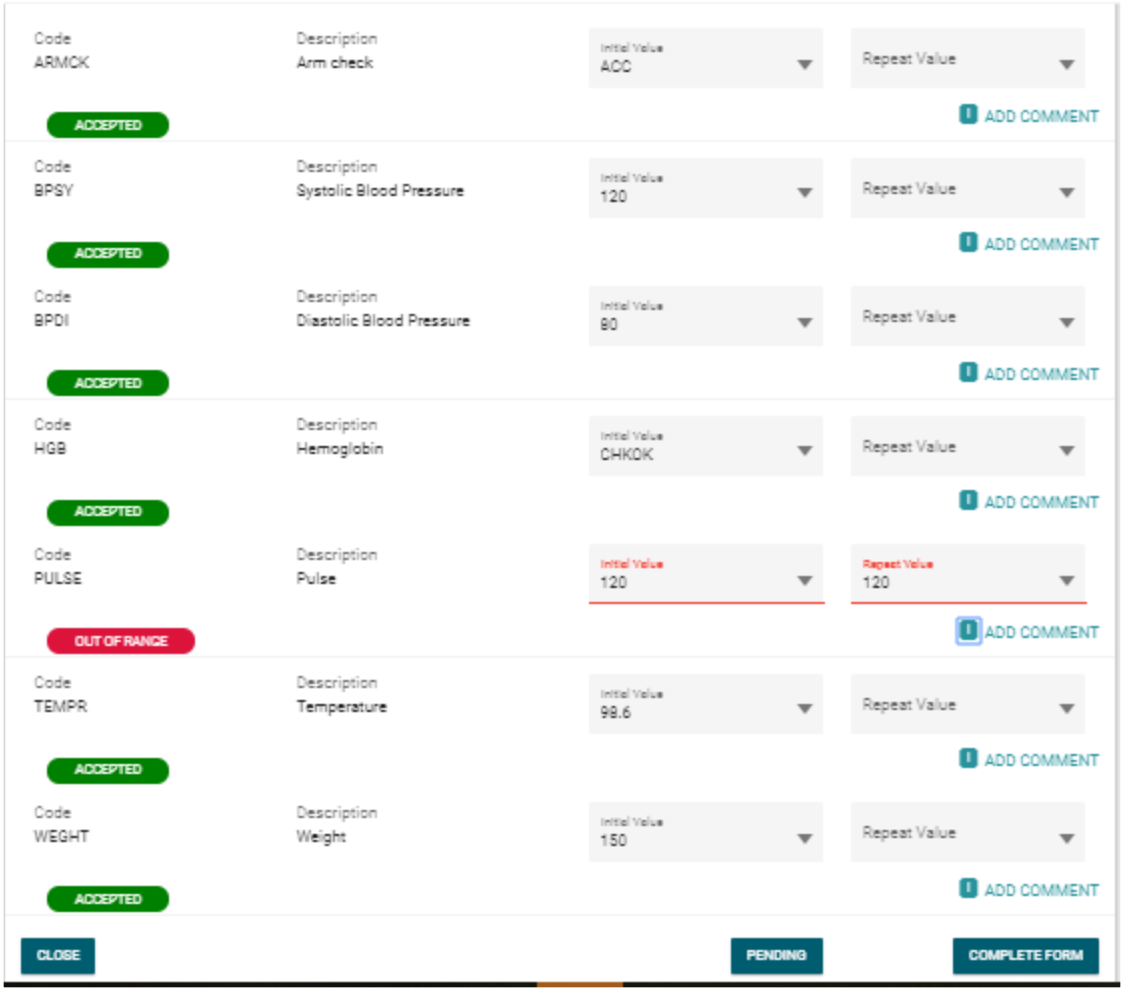

## In the Physical Findings Card with Equipment Linked

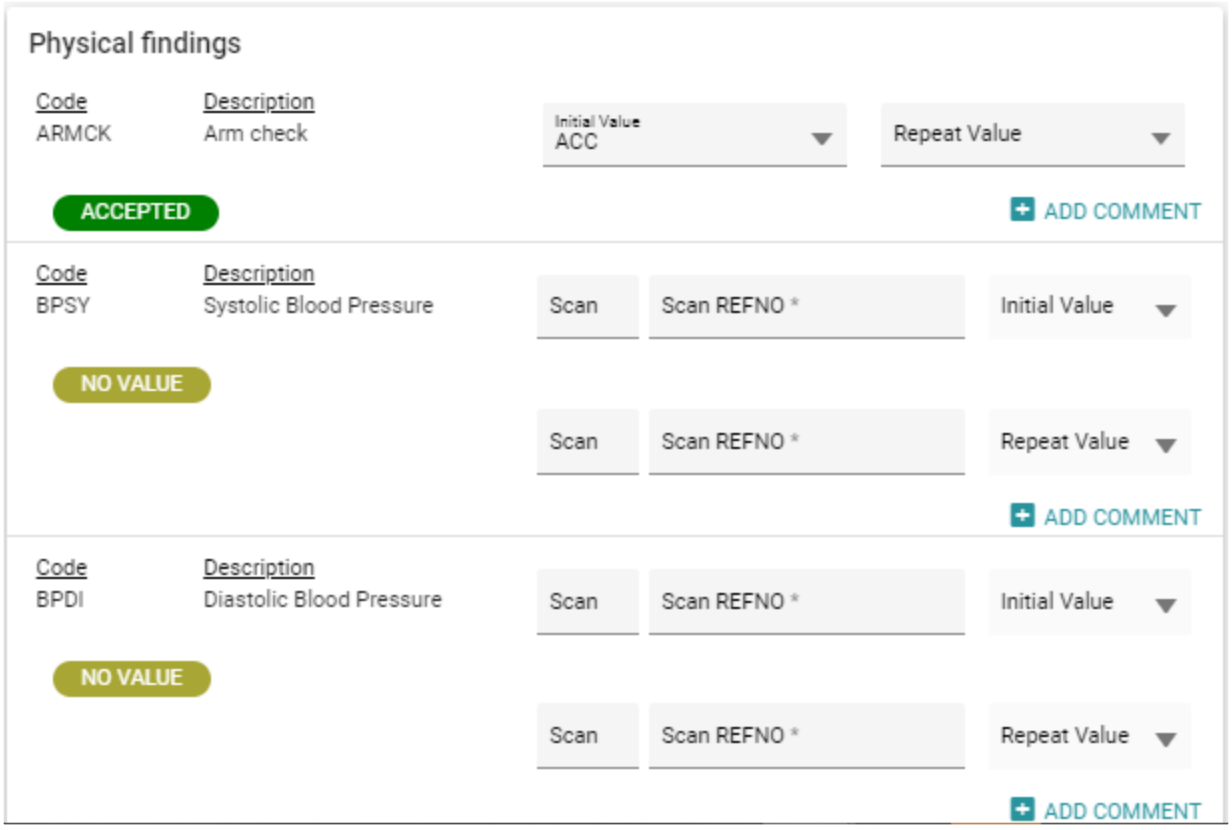


When a physical code is linked to equipment type, the Scan REFNO field is present by the value fields. This will require entry of the equipment reference number to allow entry in the initial or repeat value field. The initial and repeat value fields are not active until the reference equipment has been entered.

**NOTE –** If the physical code also has the MANCK equipment type defined, it will allow manual entry of the initial or repeat value without equipment linked.

Entry of the equipment will validate if the equipment has been QC'd. If the equipment has been QC'd and failed, or if it has not been QC'd at all, the system will notify the user the equipment fails when the reference number is entered.

Scan the reference number of the piece of equipment. Once the reference number has been selected, it will display the reference number of the equipment and determine if the equipment has passed QC.

**NOTE –** If a piece of equipment does not require QC to be completed, but the QC process has been started, the QC will have to be completed in order to select the piece of equipment.

WellSky recommends that if the equipment and/or supplies do not require QC to be completed, do not define QC parameters for the equipment/supplies.


WellSky Corporation
Proprietary and confidential

### Initial Value

Entry is required for each physical procedure. A list is available for each physical code for which the value to enter is not numerical.

**NOTE –** Weight value will populate from the registration of the donor in OnSite. Height value will populate from the registration page if the system parameter PF_HEIGHT has the same physical code as defined in the PHYRULE table.

### Repeat

Entry is optional. Enter the repeat physical findings value if the donor was retested. This will be the value that the system will use to calculate eligibility.

### Comments

The comment is optional, unless it is configured in the Physical Rules (PHYRULE) to require a comment entry. Double-click in the Comment field to display the canned comments.

## Using the Buttons

- After entering values for all physical procedures, click **Complete Form**.
- To place the physical findings as pending and save your entries, click **Pending**.
- To close the window without saving any entries , click **Close**.

## Supply

Click the **Supply** tab to enter the supplies that will be used during the bleed process.

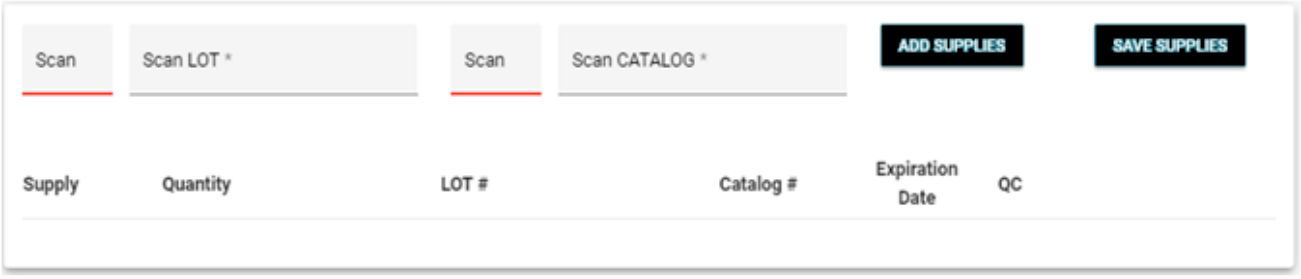


Entering a supply that has a scannable lot or catalog, you are able to scan either the catalog or lot number, and it will display details in the bottom of the screen.

To manually enter a lot number or catalog number, enter "**M**" to move over into the lot or catalog field, and enter the lot or catalog number. Once the supply is entered, it will display data in the bottom block.

To add supplies that are not associated to a scannable lot number or catalog, click **Add Supplies**.

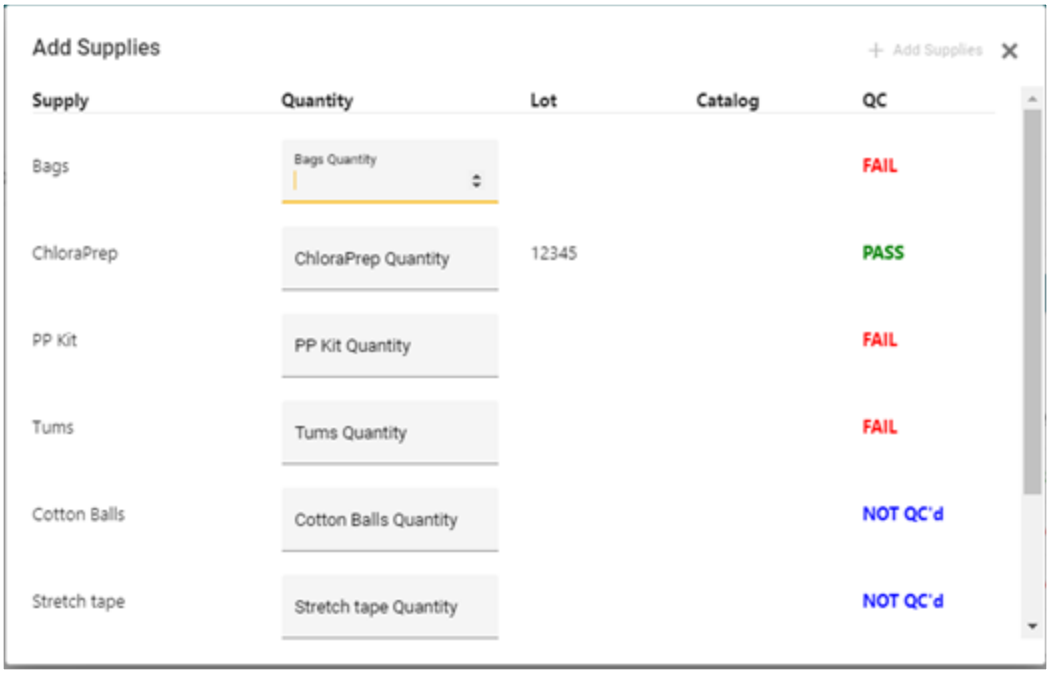


Enter the number of each type of supply used during the bleed process.

**NOTE –** Supplies QC will list one of four values: PASS, FAIL, NOT QC'd, NA (does not require QC).

**NOTE –** Supplies QC will list one of four values: PASS, FAIL, NOT QC'd, NA (does not require QC). If Supplies selected requires QC and not performed or has Failed QC the donation will be placed on Hold with Interdiction EQQC. The interdiction is defined in Registration Holds Mapping (RHOLDS).

## Donor Consents Button

The Donor Consents button is used to electronically display the donor consent form to the donor. Refer to the Donor Consents (CONST) section for details on using this button.


WellSky Corporation
Proprietary and confidential

If the donor consent is not going to be captured electronically, turn off the button by setting system parameter OL_CON_RE to N. The card has status set to NA and a purple background.

## Changing Procedure or Equipment after Physical Findings or Consent is Completed

If the physical finding and/or consent has been completed for the current procedure, and then the procedure or equipment is changed, the following message displays when moving out of the Equipment field:

If the user clicks **NO**, the procedure will change back to the previous procedure, and the equipment, if it has been changed, will change back to the previous equipment as well. If the user clicks **YES**, the user will be redirected back to the Physical Findings page for review.

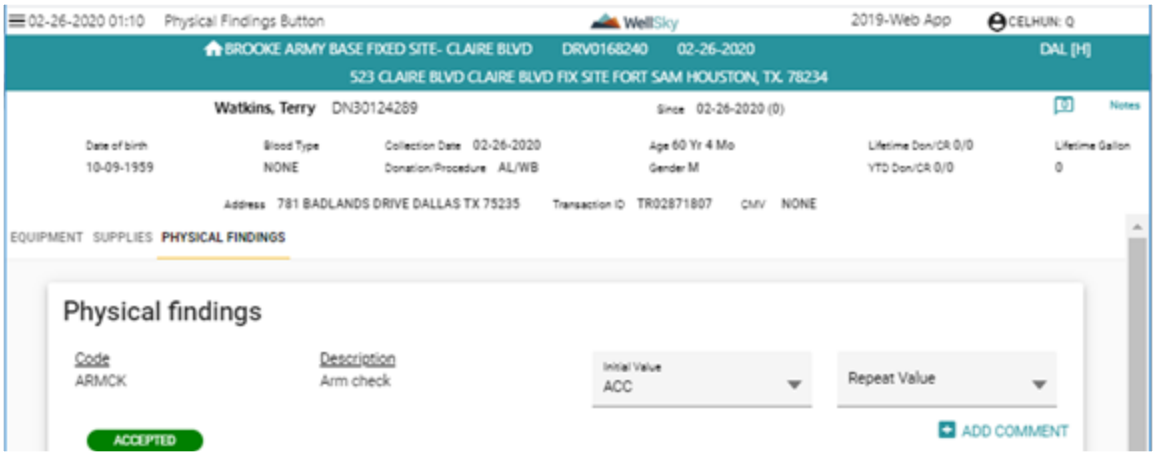


The user will be required to go back through the physical findings and COMPLETE the form. Once the form is completed, if the consent has been signed, the system automatically directs the user to the Consent form.

If consent is required to be signed in the system, the donor will have to re-sign the consent form.

## At Commit

All data is immediately committed to the database after clicking **Save**. If donor is deferred during the health history or physical findings section, the Donor Deferral Status window appears.

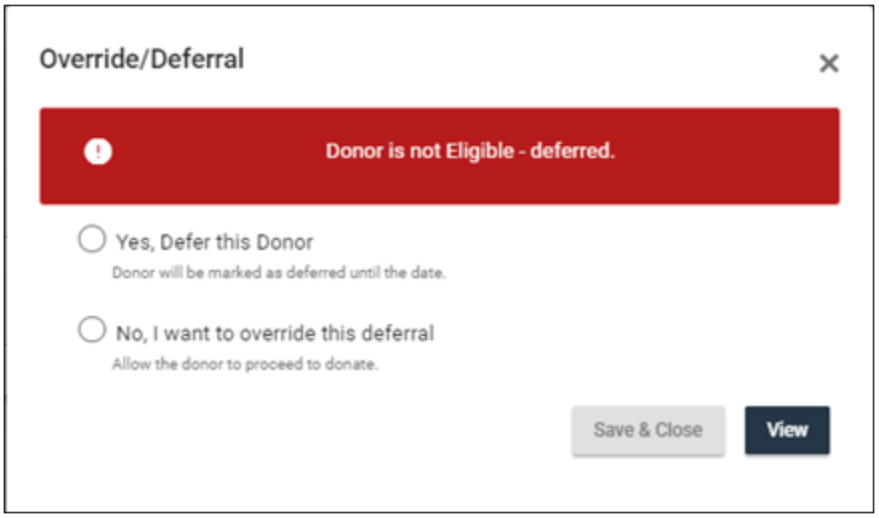


## Data Entry:

### Defer or Override?

Select either **Yes, Defer this Donor** or **No, I want to override this deferral**.

### Yes, Defer this Donor

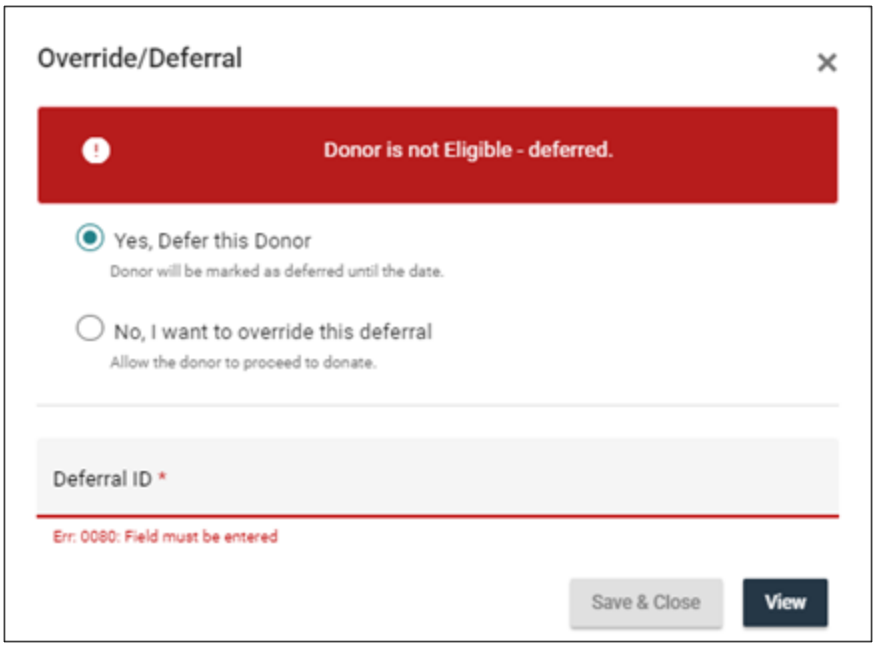



WellSky Corporation
Proprietary and confidential

## Deferral ID

Manually enter or scan a deferral ID, and then click **Save & Close**.

## No, I want to override this deferral

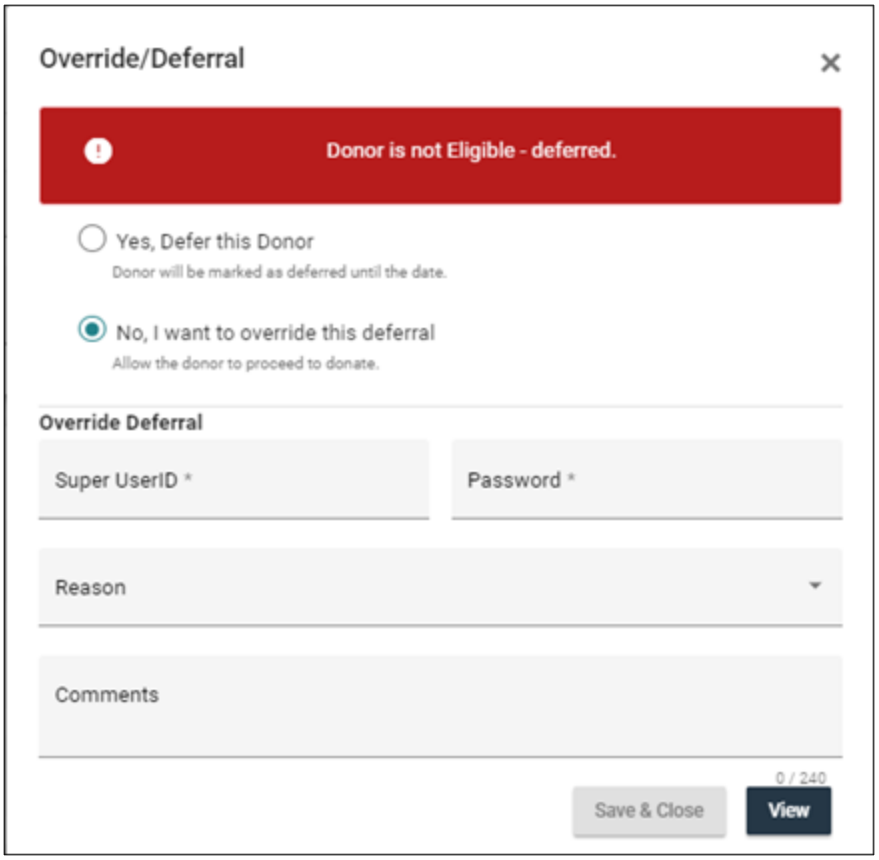


## Super UserID

Enter the user ID. If the user does not have access to OVRSN, the system will not allow the donation to be overridden.

## Password

Enter the password that is associated to the user ID.

## Reason

Enter a reason code or select from the LOV.

## Comment

Entry is optional. Enter up to 240 characters.

- Click **Save & Close** to save your entries to the database.

### View

- Click **View** to see the reason for the deferral.

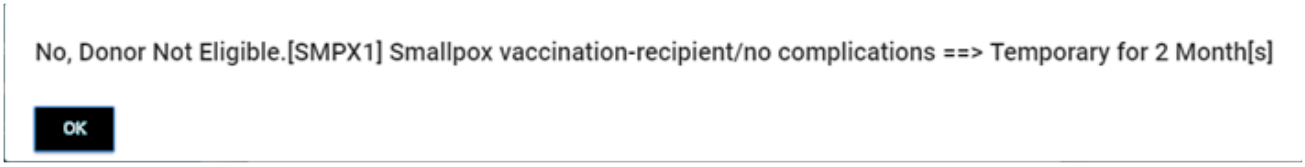


- Click **X** to cancel the process; any information entered in the Donor Deferral Status window is not saved.
- The character counter is located in the lower right corner of the screen to view the number of characters against the total allowed.

## What to Do Next

There is no next step.

## Donor Responses

### Intended Use

Use this screen to allow the donor to answer health history questions.

First-time and occasional donors are required to answer all questions that are specified for your donor center. Regular donors may be eligible to answer an abbreviated questionnaire, depending on the configuration set up by your system administrator.

### Limitations

- Only questions that were set with the Ask flag as D in the Create Health History Template (HHQTEMP) will appear in this screen.
- This screen can only be accessed through the Health History and Physical Findings (HHPF) screen.

### Prerequisites

- An Active health history template must exist.
- The donor must be registered and the health history has not been started.
- In the system parameters table, the facility must define the following:
  - RESP_DELAY: enter the number of seconds to delay the presentation of the next question to the donor, if the donor has seen the question in the past.
  - RESP DELAY_NW: enter the number of seconds to delay the presentation of the next question to the donor, if the donor has never seen the question.
  - DNR_HINT: Hint line that displays in the bottom of the welcome screen for donor response. (Description displays in the Donor Response page.)
  - DNR_RES: Response the donor will enter to declare they understand English.
- If the READ_MORE system parameter is set to N, the Read More button is disabled, regardless of what is in the Health History Question Bank table.


WellSky Corporation
Proprietary and confidential

- To require the question to have additional information automatically presented to the user, the Health History Question must be defined with the RMF flag set to Y in the validation table Health History Question Bank.
- To set the questions to be randomly presented to the donor, the randomize flag must be set to Y in the validation table Create Health History Template for the donation type.
- Master Code MLANG to populate the list of languages that are available.
- The Understanding English statement that appears when the form initially opens can be updated or modified. To modify this statement, contact WellSky Customer Support or your Implementation Consultant.

## Accessing the Screen

Access this screen through the Health History and Physical Findings screen by clicking **Donor Responses**.

The screen will indicate whether the donor is using the full length or abbreviated questionnaire.

## Language Selection

After the user has signed into the Donor Response card, the user will select the language in which the donor will have the questions presented. The Default language will be determined in master code MLANG, where the default language has the numerical value of 1. The list populates from master code MLANG.

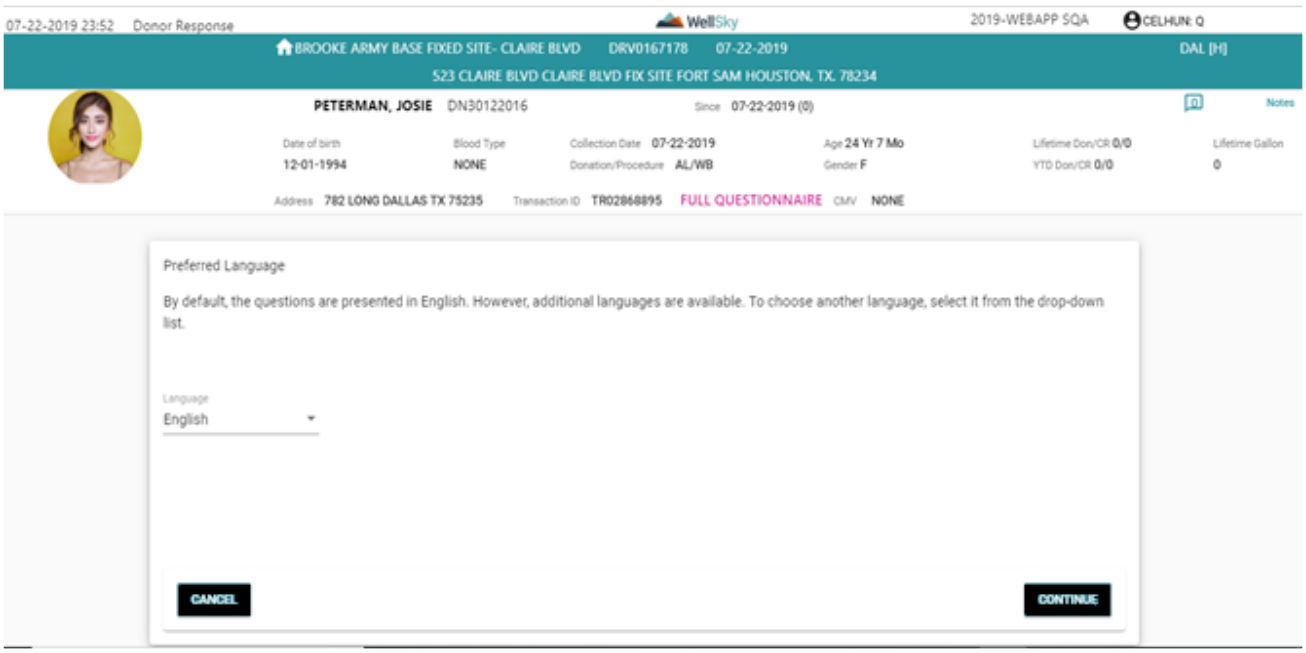


## Data Entry

After the preferred language is selected, a Welcome canvas will appear to allow the donor to verify their ability to read English. The donor will be required to type the response in the field and then press **ENTER** to gain access to the Donor Responses window. The response to be entered is configured in the system parameters table (DNR_RES). The hint line at the bottom of the screen is configured in the system parameters table (DNR_HINT).

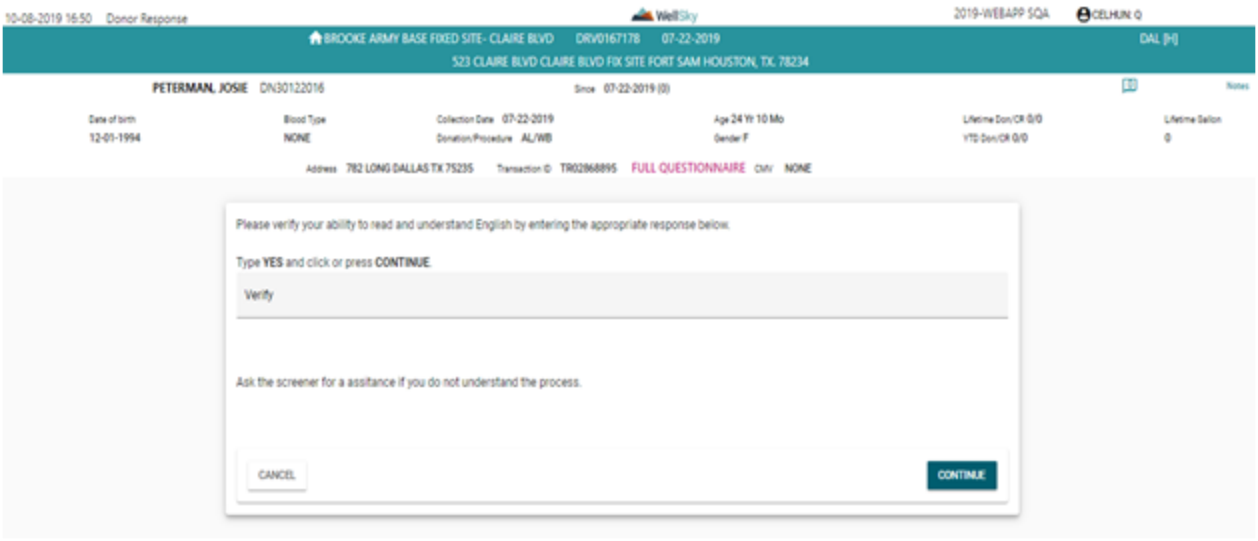


Click CONTINUE to move forward to the communication page, or click CANCEL to move back to the selected language.

If the facility has defined and configured the READ_LTR, the donor will receive the letter for them to read. The letter is configured in Define Notification Letters (DEFLET) for the code WEB_CONTNT.

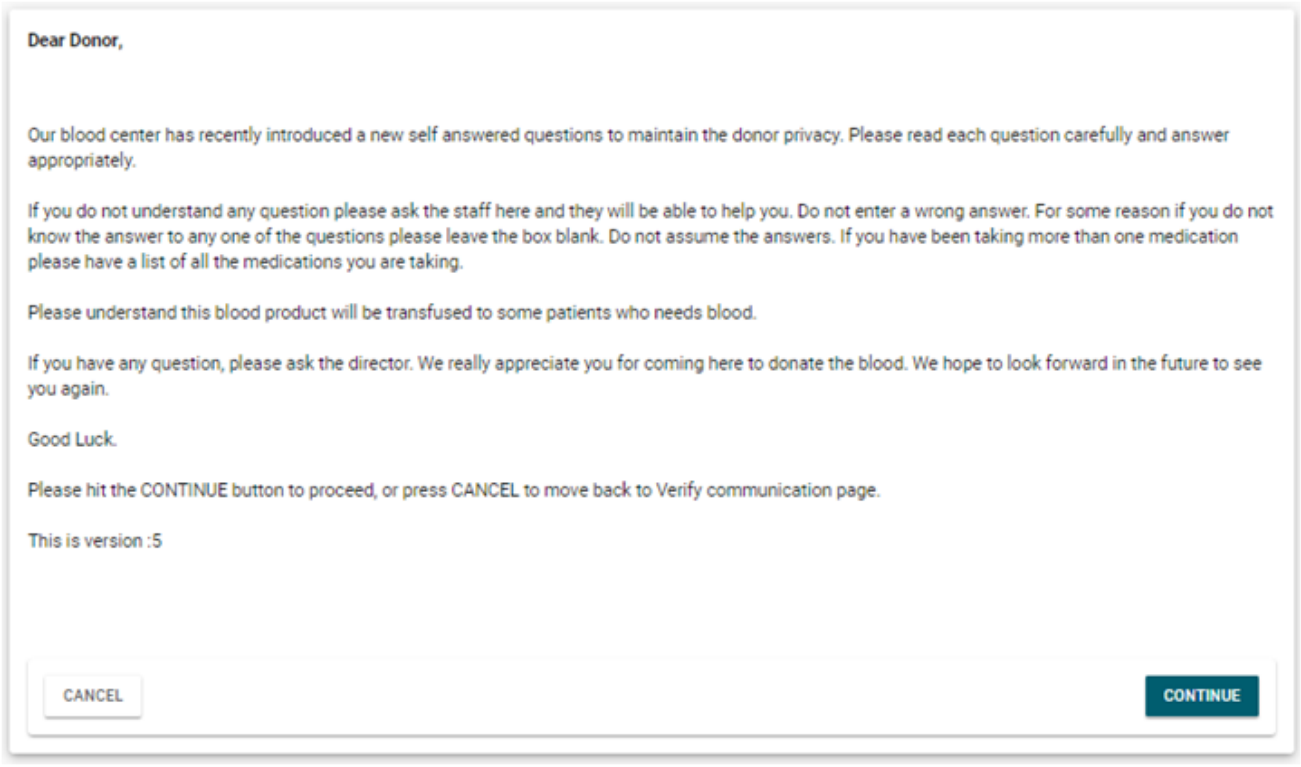


The donor clicks CONTINUE to move to the Health History questions. Clicking CANCEL will take the donor back to the Communication response page.

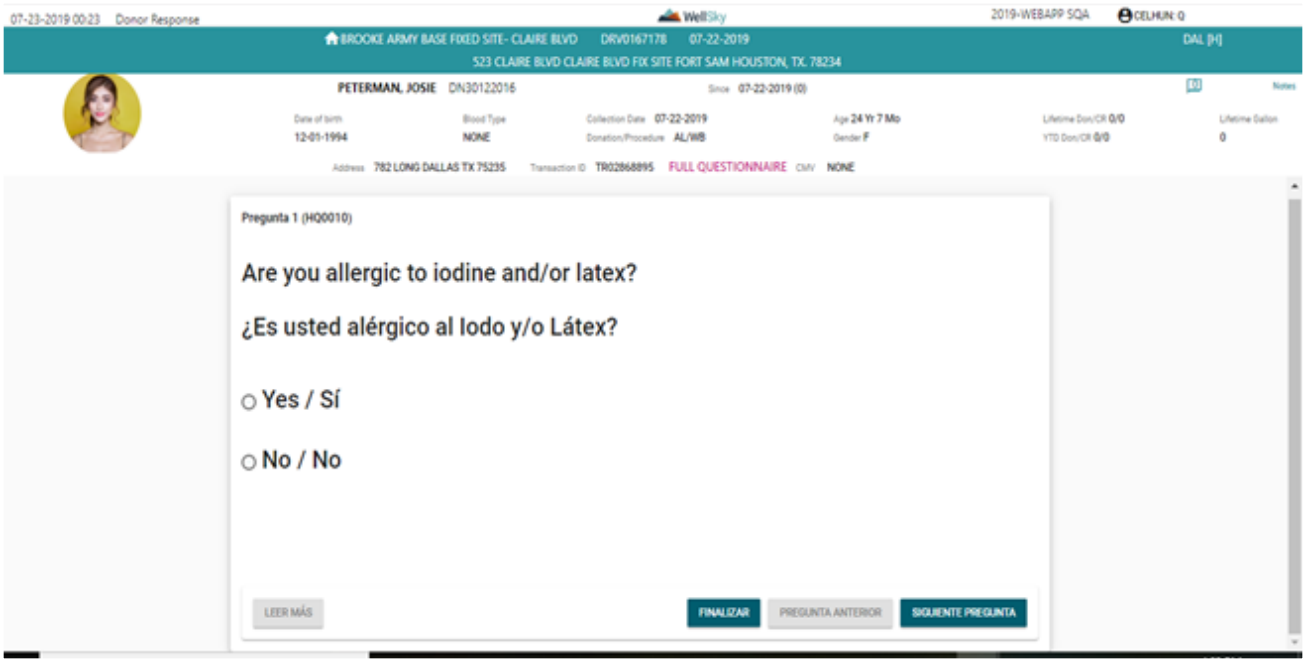


## Donor Header

Donor Header displays if the donor has qualified for Abbreviated questionnaire or Full questionnaire. Donors are eligible for an abbreviated questionnaire based on system administrator settings. If they are eligible, the specific questions asked are also set by your system administrator.

**NOTE –** If a donor has comments or donor cautions listed, these will not be active for the donor to open during the donor response process.

If the health history template has changed since the last qualification of the abbreviated questionnaire, the donor must start the qualification process again, and the Donor Response will be listed as FULL.

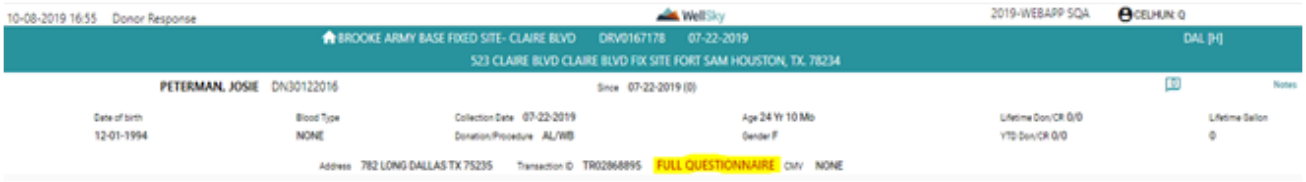


## Sq # (Ques Code)

Display only field. Displays the sequence number (question code) as entered in the VDIHHTP program.

## Question

Display only field. Displays the health history question for the donor to answer.

**NOTE –** If the donor selected a language other than English, the question will display first in English and then underneath in the language the donor selected. The question and buttons will display in the preferred language selected.

## Yes Button

Click **Yes** to populate the response field with the answer of yes.

## No Button

Click **No** to populate the response field with the answer of no.

## Previous Question Button

Click **Previous Question** to return to the question prior to the current question on the screen.

## Next Question Button

Click **Next Question** to advance to the next question from the current question on the screen.

## Read More Button

The Read More button will be active if the question has been defined in the Health History Question bank to present additional information. Click **Read More** to display additional information about the question. If the question is defined for automatic presentation, or the Read More button is active, the following will display:

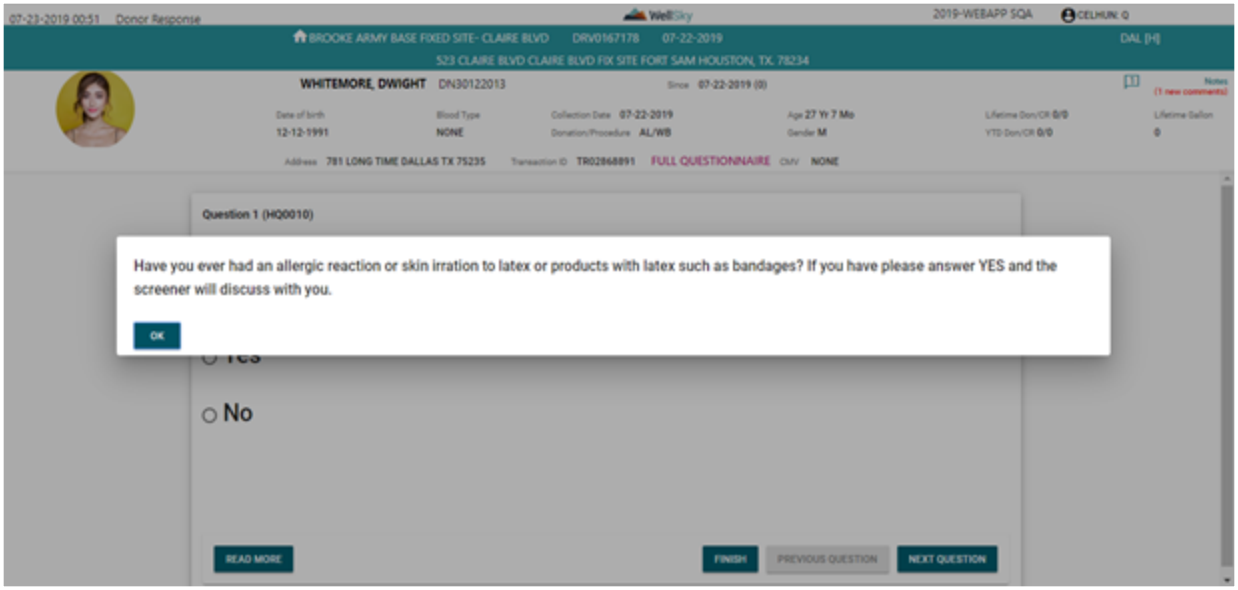


## Finished Window

When the donor has completed all of the health history questions, click **FINISH**, and the finished window will appear and give the donor the option to either click **Finish** to complete the questionnaire, or to click **Back to questions** to return to the questions.


WellSky Corporation
Proprietary and confidential

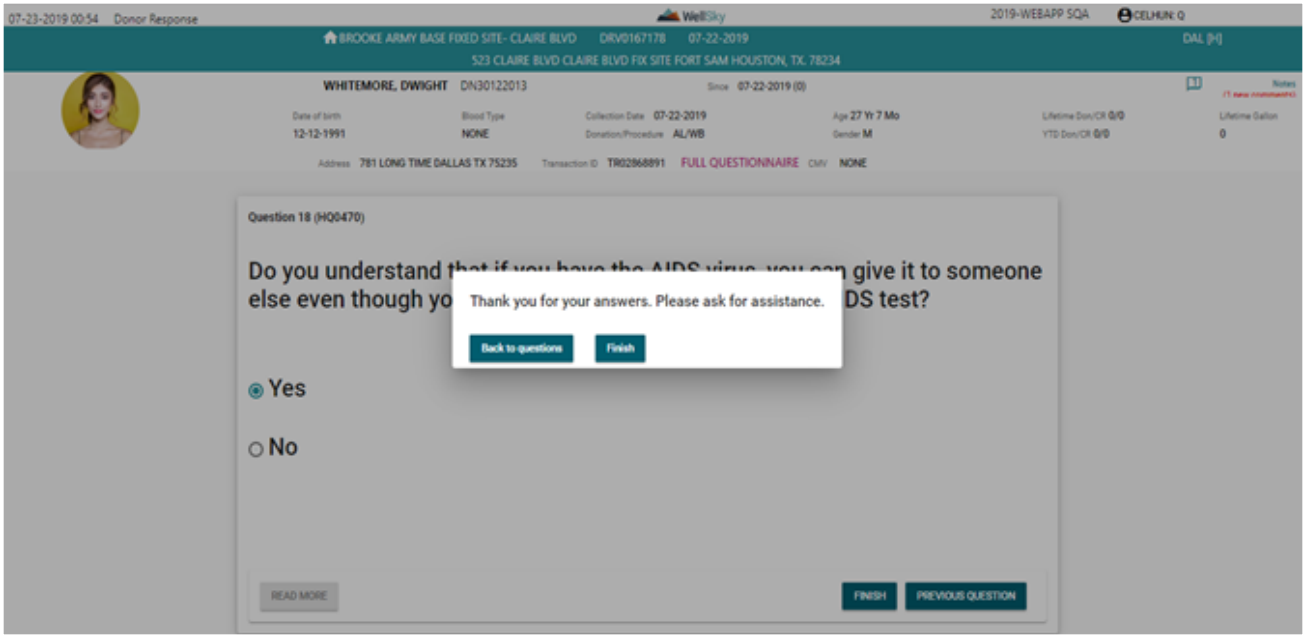


**NOTE –** Once the donor has finished the responses and has clicked **Finish**, the screener will be required to enter his or her user ID and password before the donor can exit this screen.

## In Case of a Lost Network Connection

If Donor loses its network connection while donor responses are in progress, the donor will not be able to complete the responses until the network connection is restored. Use the following steps to restore the network connection and allow the donor to complete the donor responses.

1. Re-connect to the network or mobile laptop server.
2. Restart the Blood Centers application.
3. Open the Health History and Physical Findings (HHPF) screen.
4. The following window appears:

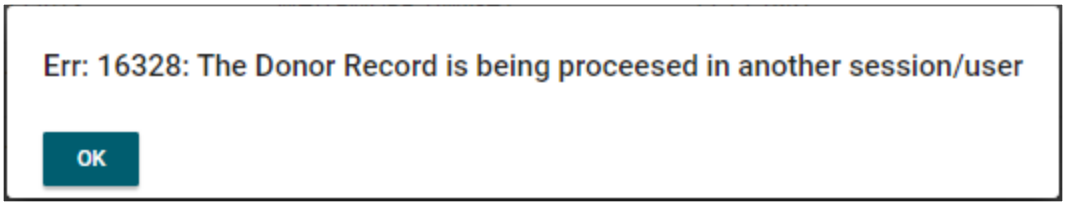


Click **OK**.

5. Go to Online Status Query to unlock the donor record:

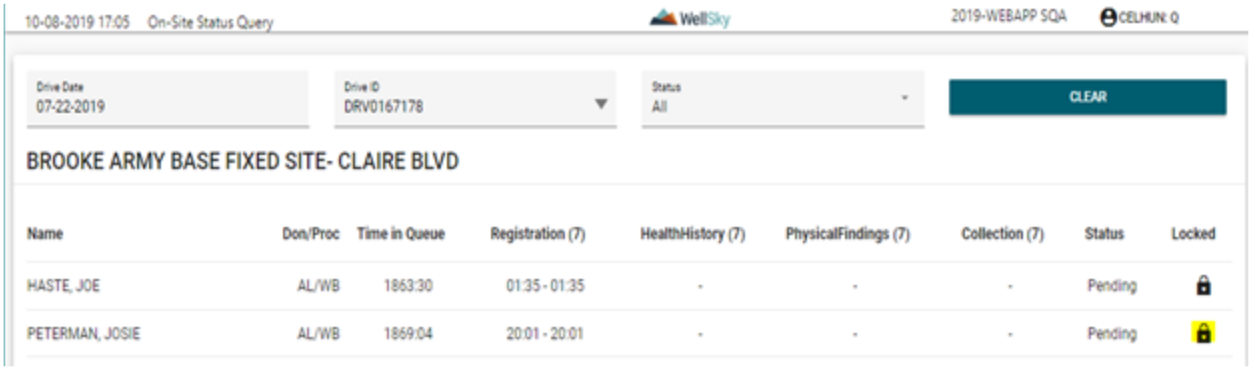


**NOTE –** You must have access to unlock the donor record.

6. Click on the lock next to the record you want to unlock. If you have access to unlock, you will receive the following message:

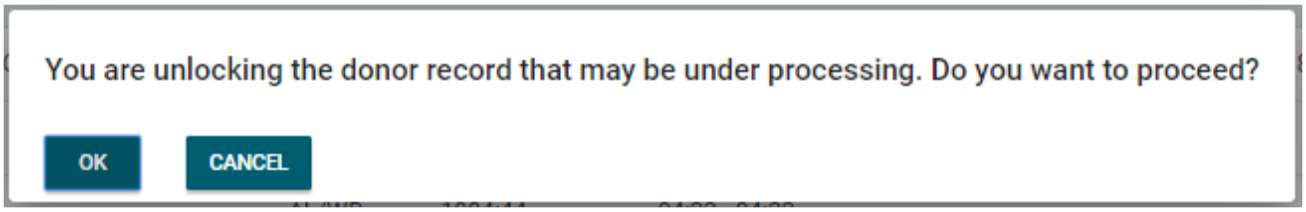


7. Click **OK** to unlock the donor and return back to the Health History and Physical Findings page.
8. Click **Donor Response**.
9. The Donor Response session begins with the first question. If this question has already been answered by the donor, the selected answer will appear on the screen, as shown in the following example.

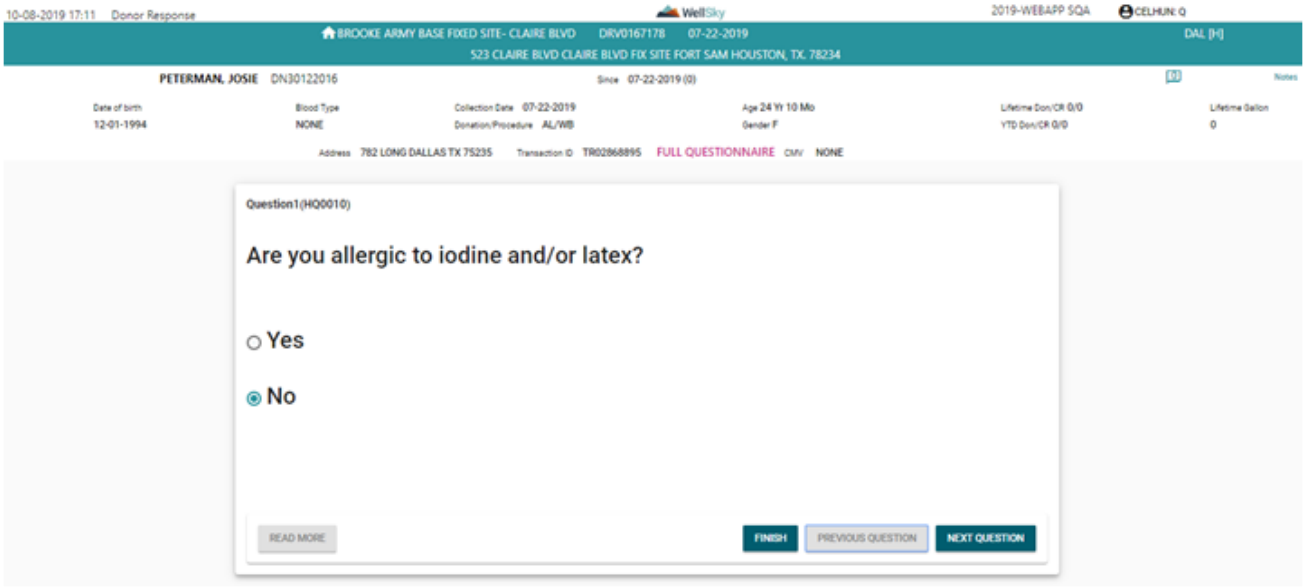


Ask the donor to forward through all previously answered questions until the first unanswered question is

reached.

10. Ask the donor to complete the remaining donor responses as normal.
11. Once the donor has completed all of the questions and clicked FINISH, the following message displays:

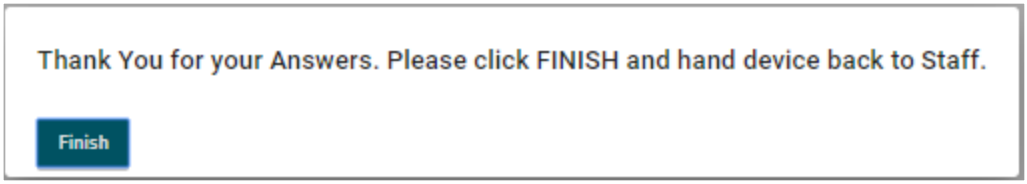


Click FINISH to close the message, and the verification box will display on top of an empty page to prevent the donor from going back into the Donor Response page.

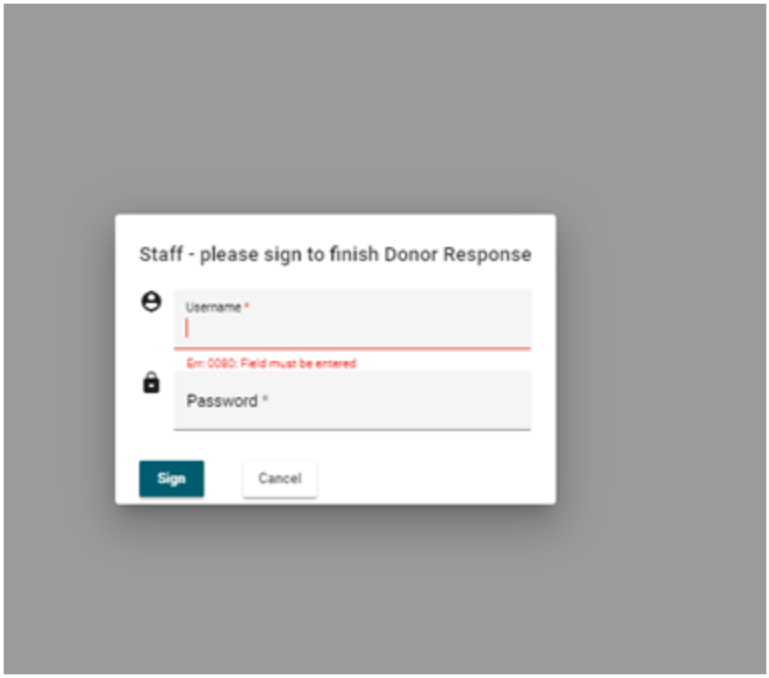


12. The staff will then sign off on the donor response, as usual.

## User Verification Block

### User ID

Enter valid user ID.

### Password

Enter the valid password that corresponds to the user ID that was entered.

## What to Do Next

There is no next step.

# Donor Consents

## Intended Use

Use this screen to electronically display the donor consent form to the donor. Once it is displayed, the donor can do one of the following:

- sign the donor consent form electronically
- sign the donor consent form manually (on paper)
- decline to sign the form

Separate procedures are provided for these scenarios.

## Limitations

None

## Prerequisites

- System parameter OL_CON_RE must be set to `Y` to require consents to be performed in the system. If OL_CON_RE is set to `N`, consents do not have to be captured in the system to link a unit number. The status on the consent card will display with 'NA' in purple.
- Consents must have been defined in the Define Communication Letters (COMLET) screen with a letter code beginning with DCON. Multiple consent letters are allowed.
- Master code MLANG needs to be defined for the languages the consents will display in.
- JSON files need to be created for each language for all of the consents.
- Don/Proc Consent Definition must be defined to display consents based on the donation/procedure.

## Accessing the Screen

Access this screen through the Health History and Physical Findings screen by clicking **Donor Consents**.


WellSky Corporation
Proprietary and confidential

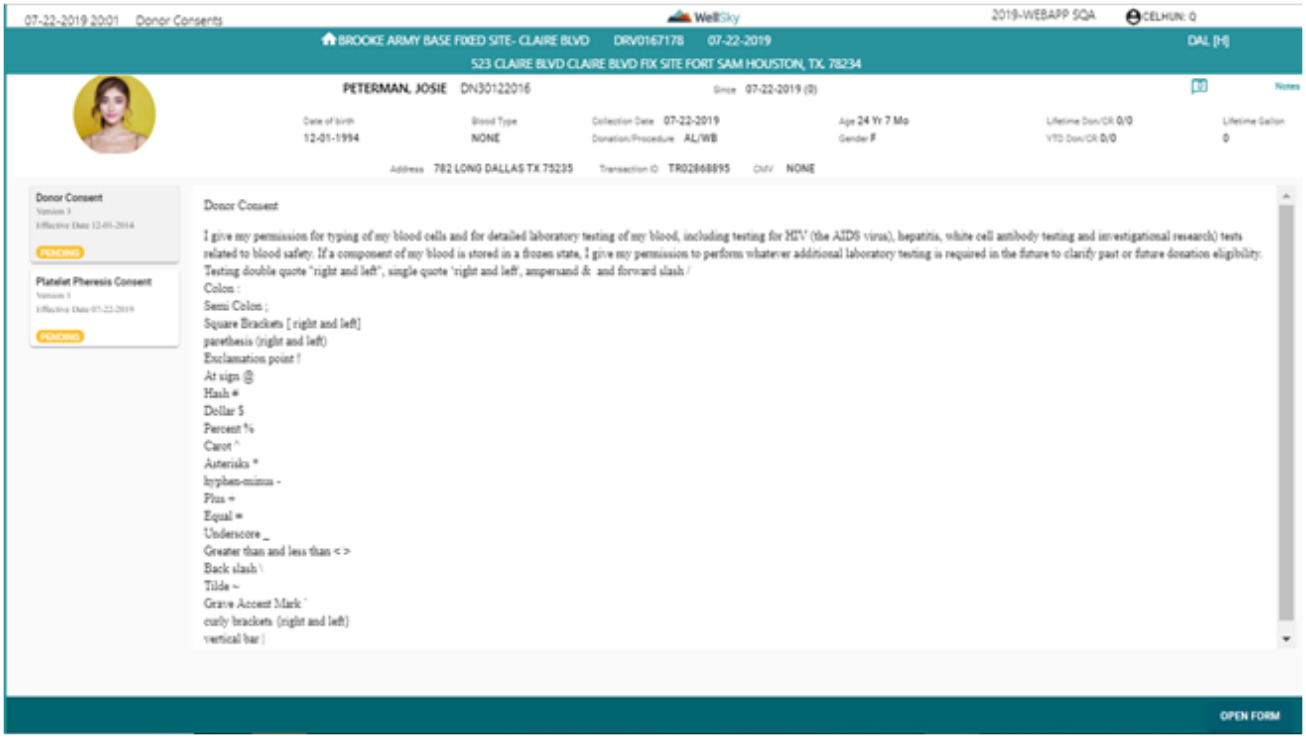


The Donor Head will display donor information, such as:

- Donor name
- Donation/procedure code
- Date of birth
- Blood type
- Address
- Transaction ID
- CMV status

## Displaying the Donor Consent Form

1. From the HHPF main screen, click **Donor Consents**. The HHPF Donor Consent screen opens, as shown:

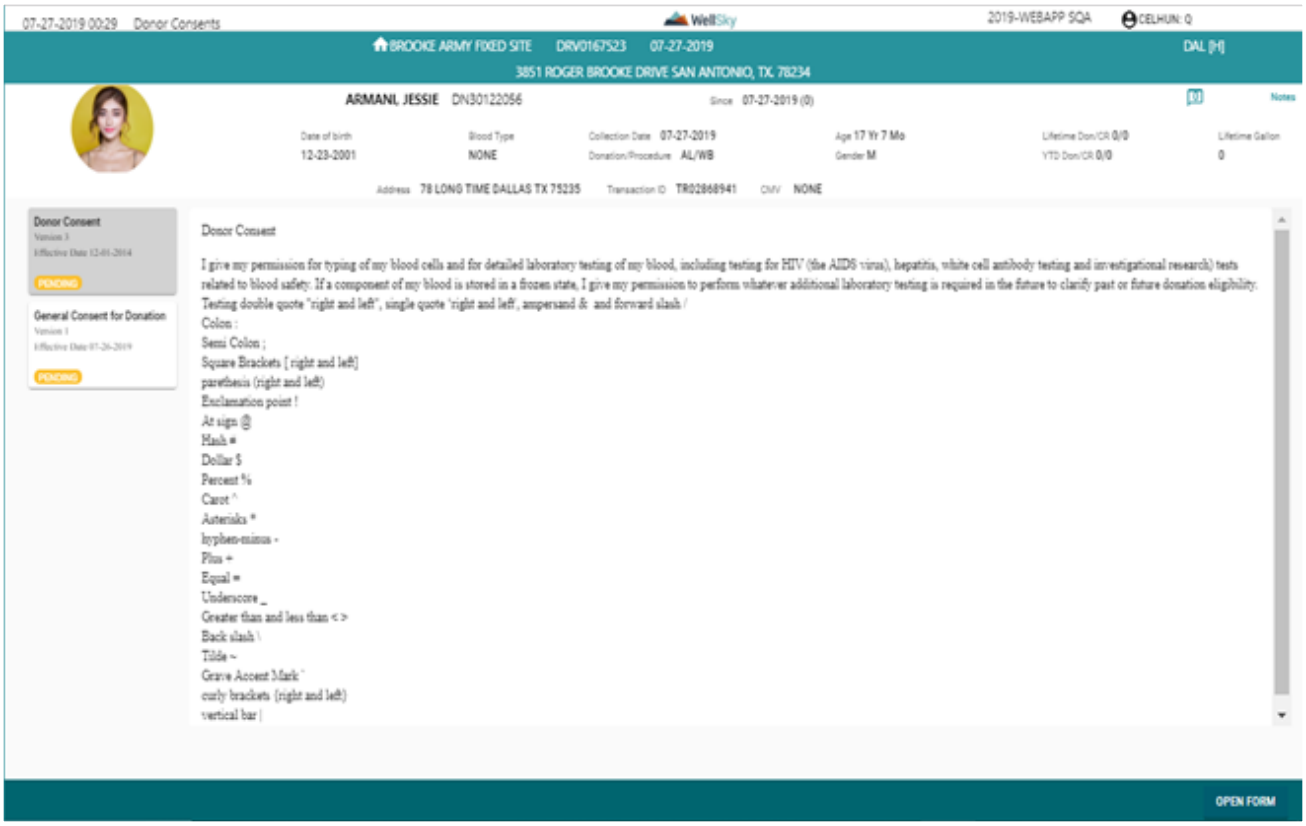


2. Click on the consent card on the left. Any consent card not signed displays a status of PENDING.

> **NOTE –** Active consents that are defined in the COMLET screen and have been linked to the donation and procedure code in the Don/Proc Consents Definition table will display to the left of the page. All consents that display must be completed for the system to consider that the consents are set to complete status. If multiple consents are defined, consents that need to be completed will display so the user can select the next consent that needs to be reviewed.

3. Select the consent, and click **OPEN FORM**. The selected donor consent form text opens, as shown:

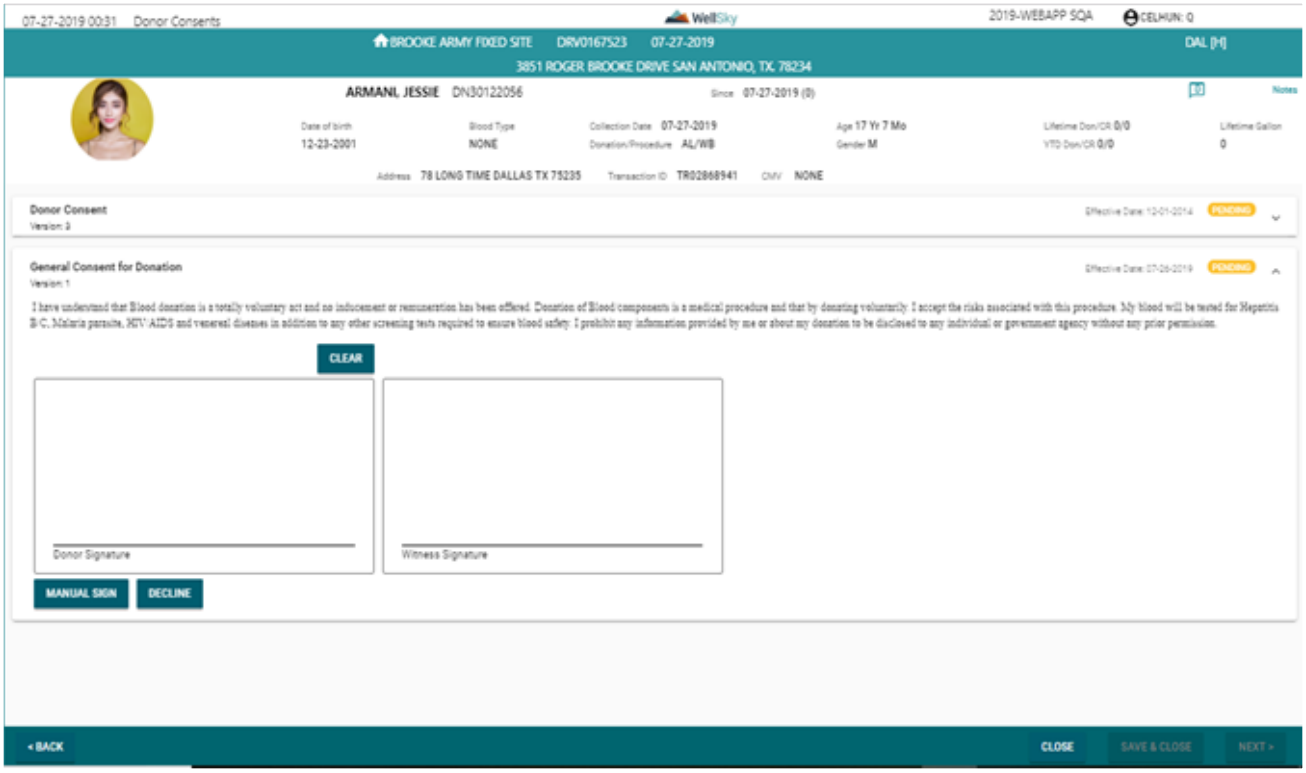


4. Ask the donor to read the donor consent and determine if he or she wants to accept or decline the consent. The donor can use the BACK button to move back to the page that has all consents present.

## Signing the Donor Consent Form Electronically

If the donor wants to accept the donor consent, the donor can use either the mouse pad on the notebook or the attached mouse to sign the consent.

1. Ask the donor to sign in the box. They can use a finger or a mouse.

> **NOTE –** If the donor signature is unacceptable, click **Clear** at the top of the Donor Signature box. Repeat as needed until an acceptable signature displays.

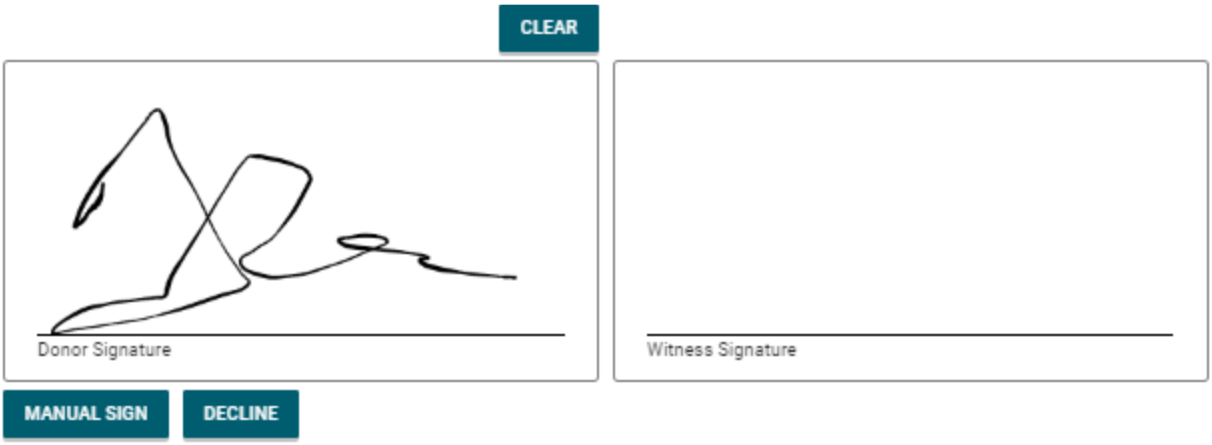


2. If there are multiple consents to sign, click **NEXT** after signing to view the next consent.

## Signing the Donor Consent Form Manually

If the donor wants to accept the donor consent and a paper consent is going to be used, do the following:

1. Click **Manual Sign**. The following window opens:

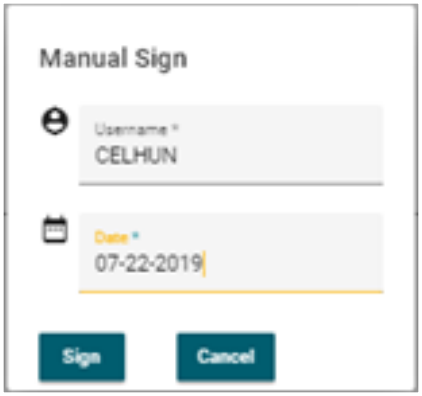


2. As a witness, enter your user ID in the *User ID* field.
3. Enter the system date in the *Date* field.
4. Click **Sign to Accept**, or click **Cancel** to cancel the operation.

   After accepting the manual signature, MANUAL will be placed in the donor signature block.

## Donor Declines Donor Consent

If the donor wants to decline the donor consent, do the following. An interdiction defined in Registration Holds Mapping (RHOLDS) is placed on the donor, and the donor will not be able to donate at this time.

1. Ask the donor to click **Decline**. The following window opens:

2. Ask the donor to click **OK** to decline the donor consent and end the donation process without donating. DECLINED will be placed in the Donor Signature block.

> **NOTE –** An interdiction is placed based on the RHOLDS table and DECCONST inter reason.

If the donor wants to accept the donor consent, ask the donor to click **CANCEL**. The system will then allow the donor consent process to continue by taking the donor back to the signature page.

Once all the consents are signed, the donor will receive a message:

3. Click **OK** to accept the signatures and complete the consents/declinations. Click **CANCEL** to return back to the signature page.

## At Commit

All data is committed to the database.

## What to Do Next

There is no next step.

# 7.7.4 Link/Unlink Unit or Deferral

## Intended Use

Use this screen to link, unlink, or void units in association with the donor, or unlink a deferral associated at health history, physical findings, or inquiry.

**NOTE –** A DDI interdiction is automatically placed when a deferral is linked in this screen. This interdiction is indefinite, and must be removed manually.

## Limitations

- In order to use this screen, donors must have been registered through the Lookup, Registration and Modify Data screen.
- Duplicate unit IDs are not allowed.
- If you are using the Vista interface, the unit must be linked in the Link/Unlink Unit or Deferral screen. If the unit is linked in the Bleed screen, the file is not generated.

## Prerequisites

- Drive must be defined.
- Health history and physical findings must be completed.
- You must have access to Unlink Deferral button by setting UNLDF.
- You must have access to unlink a unit ID by setting UNLUT in Define User Access program (UACCESS).
- The re-entry of donor data is determined by the DON_VERIFY in the Configure Find Donor Block for Program table (DONBLOCK).
- The following System Parameter must be set:
  - OL_CON_RE – to designate whether or not the consent check is required.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Link/Unlink Unit or Deferral**.


WellSky Corporation
Proprietary and confidential

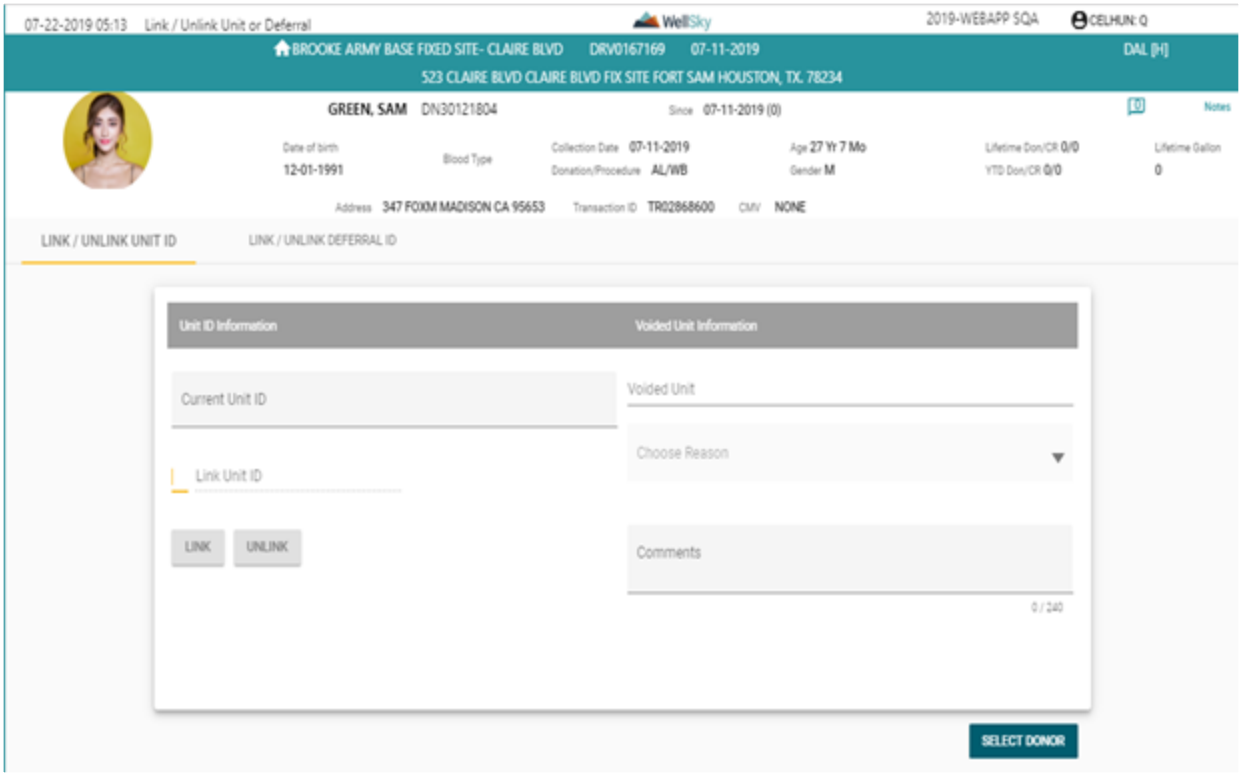


# Select Donor

The re-entry of the fields to verify donor is set up by the facility in the program Configure Find Donor Block for a Program (DONBLOCK) and using the program DON_VERIFY. The fields listed in DON_VERIFY determine what fields will be re-entered.

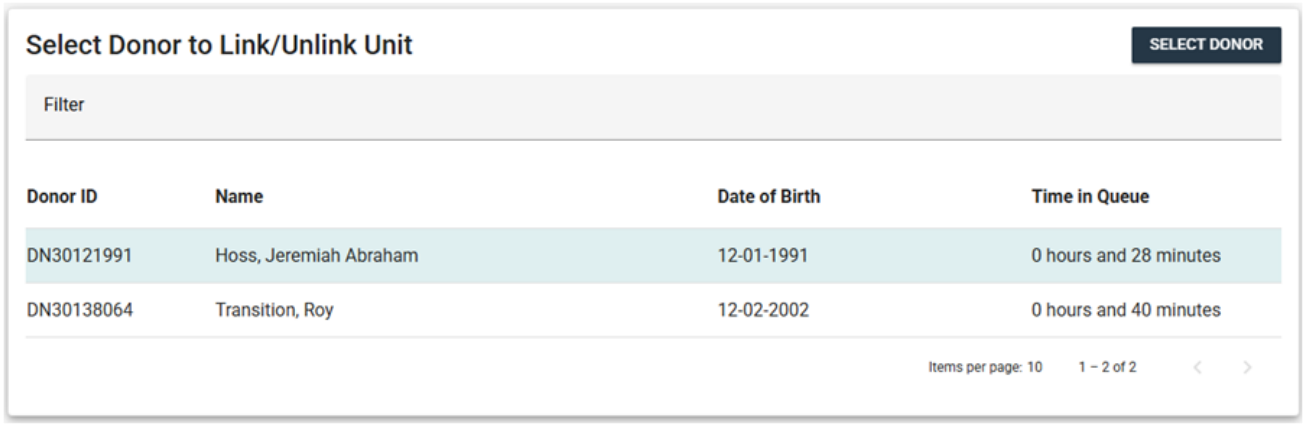


Filter the list by entering any part of the name, date of birth, or donor ID.

## Last Name

Enter the last name of the donor. If the name does not match the Donor ID, an error message will display.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### DOB

Enter the date of birth using the MMDDYYYY format. If the entry does not match the donor ID, an error message will display.

### Sex

Enter the sex of the donor. If the entry does not match the donor ID, an error message will display.

### First

Enter the first name of the donor. If the entry does not match the donor ID, an error message will display.

## Link a Unit ID

### Current Unit ID

Displays a unit ID if the link has already occurred.

### Link Unit ID

Entry is required. Scan the bar code or enter the unit ID using double blind entry. Click LINK after entry of the unit number. After entering the unit ID a message will display.

Click NO to return to the unit ID field. Click YES to prompt the user to sign off on linking the unit.

## Unlink a Unit ID

The user must have access to UNLUT in order to be able to unlink a unit number.

### Current Unit ID

Displays the unit ID that is currently linked.

### Link Unit ID

Entry is required. Scan the bar code or enter the unit ID using double blind entry. Click UNLINK after entry of the unit number. The same unit number that is currently linked should be manually entered or scanned. After entering the unit ID, a message will display.


WellSky Corporation
Proprietary and confidential

Click NO, and the cursor will return to the unit ID field. Click YES, and the user will be prompted to enter their user ID and password to complete the process.

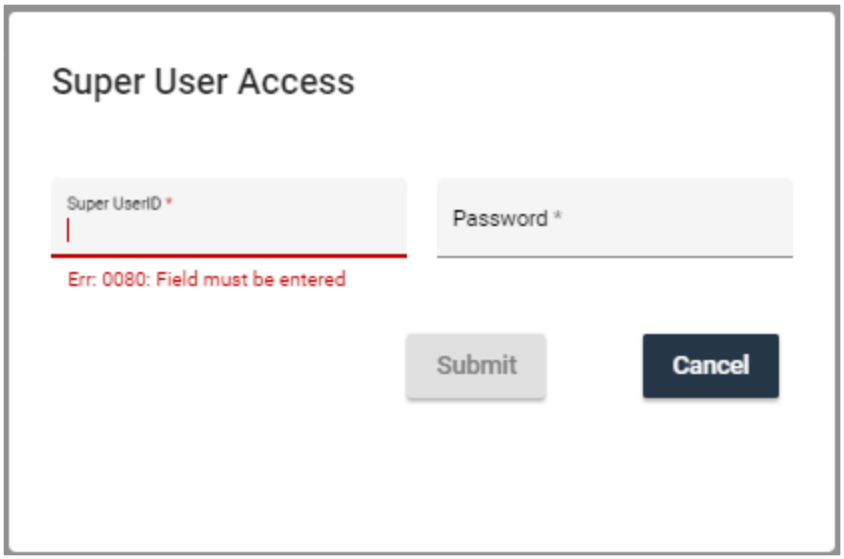


Enter the Super UserID and Password, and click Submit. The system will check the user's permissions to see if they are allowed to unlink a unit ID. If the user has permission, the following message will display:

If the user does not have permission to unlink the unit number, the following message will display:

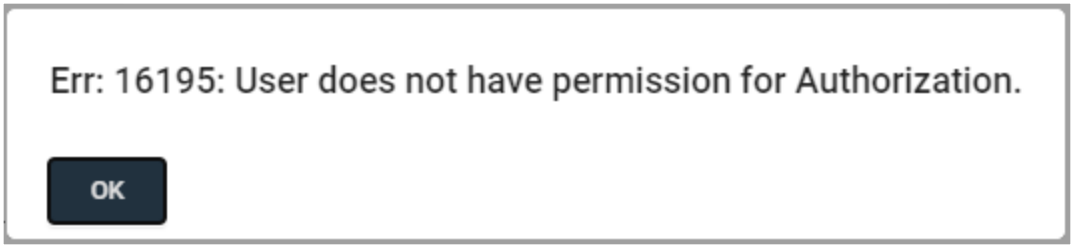

# Void a Unit ID

This allows a user to void a unit number and link a new unit number to the donor.

## Current Unit ID

Displays the unit ID that is currently linked.

## Link Unit ID

Entry is required. Scan the bar code or enter the unit ID using double blind entry. Click **LINK** after entry of the unit number. After entering the unit ID, a message will display with the unit currently being linked and the unit number being voided.

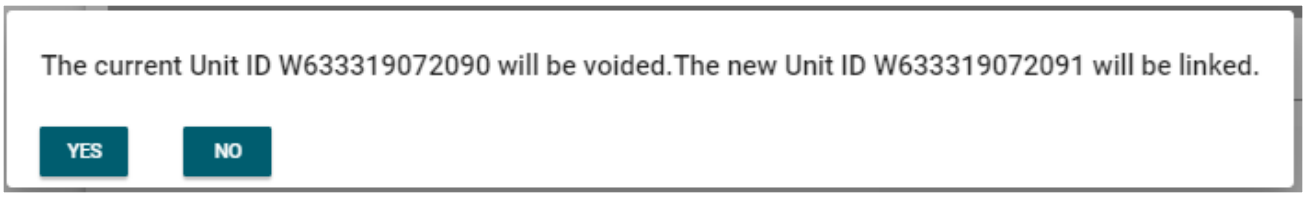


## Voided Unit ID

Displays the unit ID that was linked. This field is display only.

## Choose Reason

This is a required field. The list contains entries in master code VDRSN. Entering a partial entry in the field will narrow down the list of values.

## Comment

This is an optional field. The Comment field accepts a maximum of 240 characters. In the lower right corner, the number of characters/total number allowed displays.

After entering the comment, the user will be required to enter their user ID and password.

# Link/Unlink a Deferral ID

To link/unlink a deferral, click the **Link/Unlink Deferral ID** tab to open the list of donors. The user must have access to UNDLF to perform this process.


WellSky Corporation
Proprietary and confidential

## Selection of the Donor

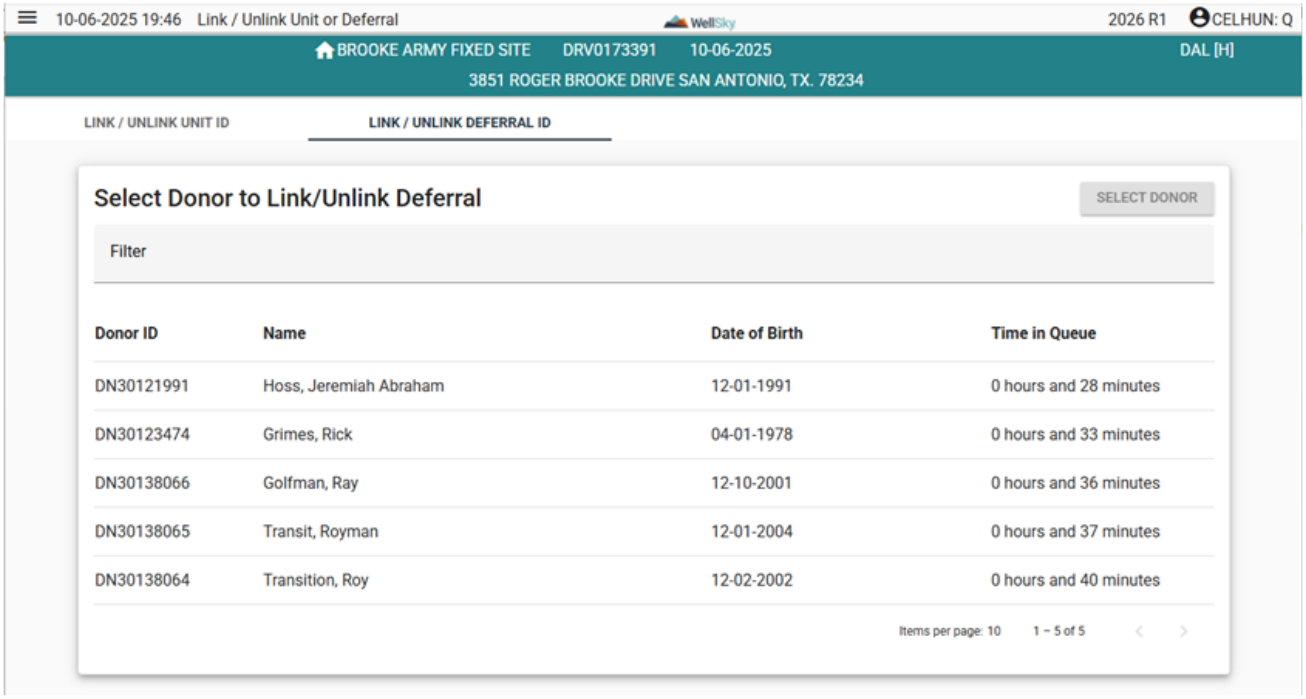


Highlight the donor and click SELECT DONOR.

## Link a Deferral

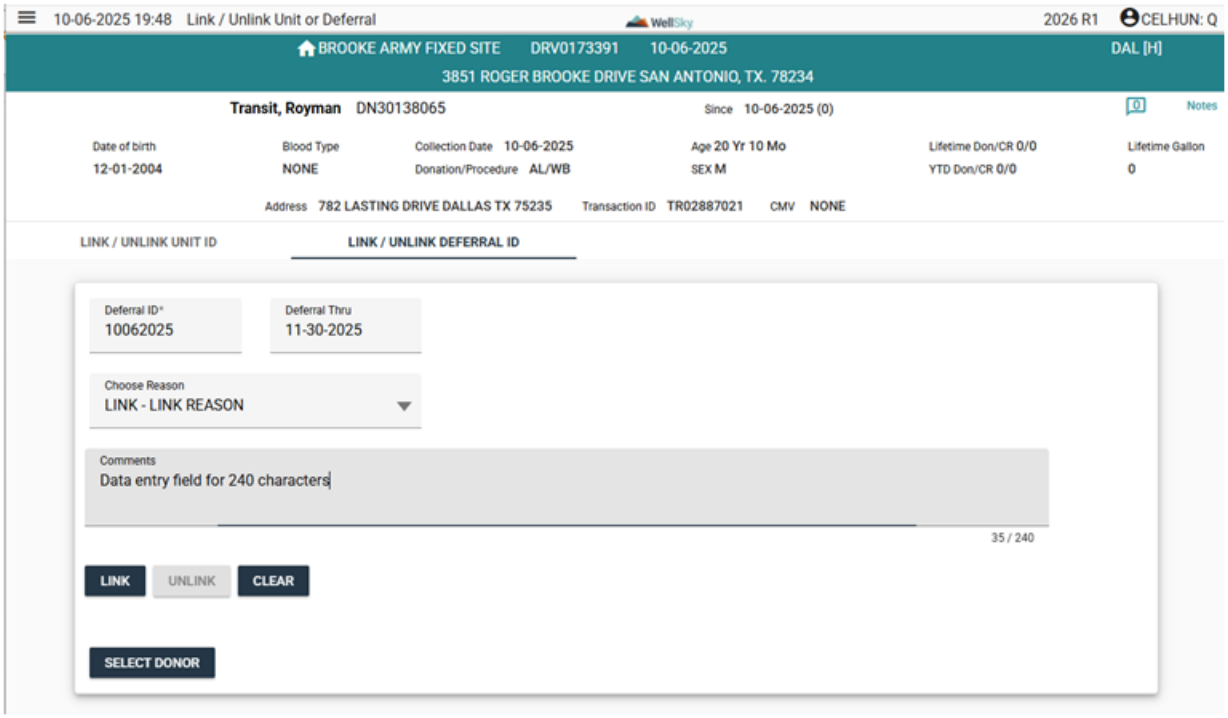

### Deferral ID

Scan or manually enter the deferral ID.

### Deferral Thru

To temporarily defer the donor, enter a date to defer the donor in MMDDYYYY format, and the system will place a DDT interdiction. To indefinitely defer the donor, leave the field blank, and the system will place a DDI interdiction.

### Reason

This field is required. Enter a reason code for linking the deferral. The list contains codes from master code UNLDF, which has a number value of 1.

### Comment

This is an optional field. The Comment field accepts a maximum of 240 characters. In the lower right corner, the number of characters/total number allowed displays.

When you are finished, the following message appears:

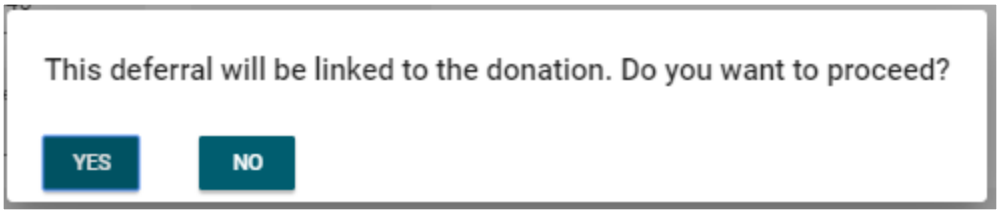


Click NO to go back to the Link/Unlink Deferral ID screen; click YES to move forward.

To complete the process, the user must enter their user ID and password. The following message displays:

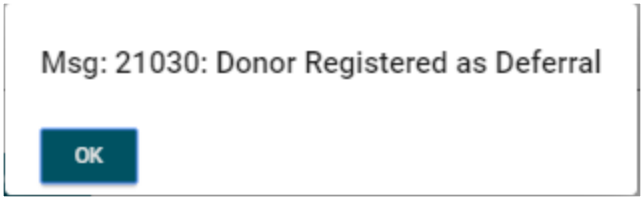


## Unlink Deferral Button

To unlink a deferral that was placed in the OnSite module, select the donor.


WellSky Corporation
Proprietary and confidential

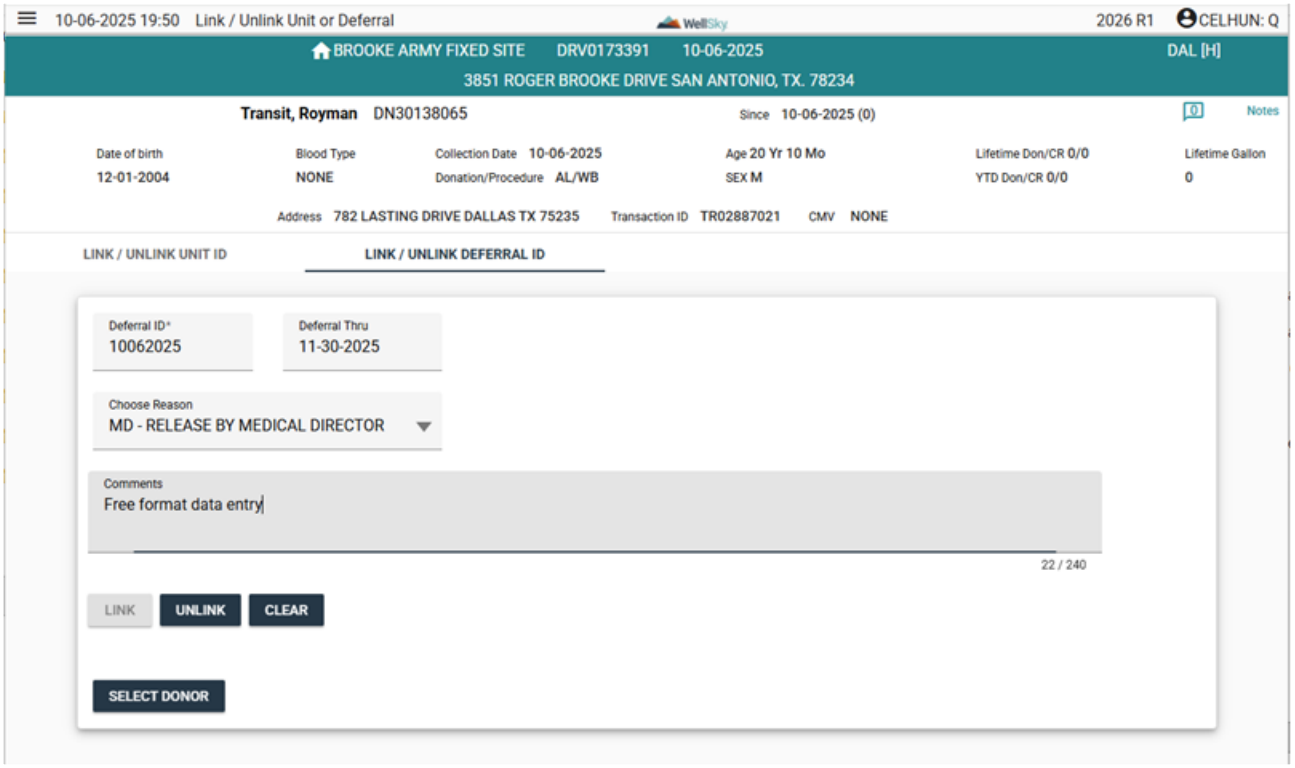


## Selection of the Donor

The entry of the fields to verify the donor is set up by the facility in the Configure Find Donor Block for a Program (DONBLOCK) program and using the program DON_VERIFY. The fields listed in DON_VERIFY determines which fields will be re-entered.

## Last

Enter the last name of the donor. If the name does not match the Donor ID, an error message will display.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

## DOB

Enter the date of birth using the MMDDYYYY format. If the entry does not match the donor ID, an error message will display.

## Sex

Enter the sex of the donor. If the entry does not match the donor ID, an error message will display.

## First

Enter the first name of the donor. If the entry does not match the donor ID, an error message will display.

You can unlink a deferral that was placed during INQUIRY, health history, or physical findings. Interdictions placed during these processes are not removed. When unlinking a deferral, the following message appears:

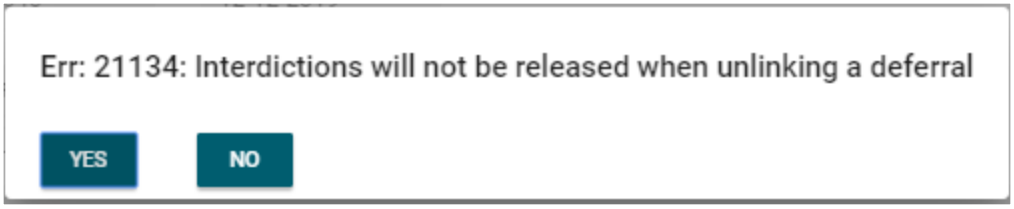


Click YES to continue with the operation. Click NO to cancel the operation.

## Reason for Unlinking the Deferral

### Deferral ID

Display only. Displays the deferral ID linked to the donor during registration.

### Reason

This field is required. Enter the reason code for linking the deferral. The list contains codes from master code UNLDF, which has a number value of 0.

### Comment

This is an optional field. The Comment field accepts a maximum of 240 characters. The number of characters/total number allowed displays in the lower right corner.

## To Commit

Enter your user ID and password to complete the process. At commit the donor will have a hold placed. The HOLD that is placed will be defined in Registration Holds Mapping (RHOLDS).

## What to Do Next

Perform Bleed Time entry using Bleed Time/Phlebotomy Data.

# 7.7.5 Bleed Time / Phlebotomy Data

## Intended Use

This screen is used to enter bleed time and phlebotomy details for a donation. It allows for a final check on eligibility if the procedure code is modified from the original procedure entered at registration.

**NOTE –** Refer to Appendix A - REGMAINT Guidelines for details on the order in which screens must be completed in order to update certain fields.

## Limitations

- Bleed times can only be entered on a donor that has been registered to the displayed drive.
- To use the Back office mode, the unit ID must be linked to the donor to enter bleed times.
- The collection date and drive ID will not populate until the unit ID is entered when using the back office mode.


WellSky Corporation
Proprietary and confidential

- If the interface to Lab is complete and updates are made in the Back office mode, the user is responsible for updates in Lab.
- If you are using the Vista interface, the unit must be linked in the Link/Unlink Unit or Deferral screen. If the unit is linked in the Bleed screen, the file is not generated.

## Prerequisites

- Drive must be defined.
- Physical findings and health history must be completed before a unit can be associated to the donor.
- Find Donor Block for DON_VERIFY must be defined for the required field entry.
- Menu item must be defined for back office versus online.
- The following System Parameters must be defined:
  - EQUIPQC_RQ – enter **Y** to have focus on the Equipment tab when entering the page; enter **N** to have focus on the Bleed tab when entering the page.
  - CUEYN – If the facility sets CUEYN to Y, then the CUE field is required. If CUEYN is set to N, then the CUE field does not appear.
  - OL_CON_RE – to designate whether or not the consent check is required. If set to Y, the consent must be completed in order to allow bleed to start.
  - BDRLOC – location where the BDR reports will be saved after generation.
  - GENBDR – configure with either **Y** (will generate the BDR report) or **N** (will not generate the report).
- The following Master Codes must be defined:
  - EQUIP – list the equipment codes from Lab that are linked to apheresis machines.
  - APHER – designate the procedure groups that will require equipment to be entered for the procedure.
  - EQBRQ – master code must be defined for every procedure to determine if equipment and bag linkage is required to complete the donation and determine the number of tubes required in collection for the procedure.

**NOTE –** If the procedure does not require a bag to be checked into the system, and material verification is turned on, the Bag tab will not appear in the Material Verification tab.

  - TABB – master code must be defined to configure the order of the tabs in the bleed page.
  - MATVE – must be defined to configure if material verification will be used by the facility.
    - ONPMV – turning on material verification so that the tab displays. If material verification is turned off (N), then FINMV should also be set to N.
    - HOLD – interdiction placed if the material verification fails.
    - FINMV – checking material verification against the tube checkin.
    - TUBE – defaults the number of tubes to be collected. If multi-chapter, may need to set tube count for each chapter, and set TUBE to ALL.

**NOTE –** If using FINMV, the tube checkin should be configured to the maximum number defined in TUBE or defined in EQBRQ.

- Registration Holds (RHOLDS) – define the HOLD to be placed for procedure code and phlebotomist code if `99` is entered, Equipment QC failure HOLD (EQQC).
- Defining URLs to allow the entry of bleed times at the donation facility or BACK to allow entry of bleed times after the process is complete.
- The re-entry of data in the detail block is determined by the DON_VERIFY in the Configure Find Donor Block for Program table (DONBLOCK).

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Bleed Time/Phlebotomy Data**.

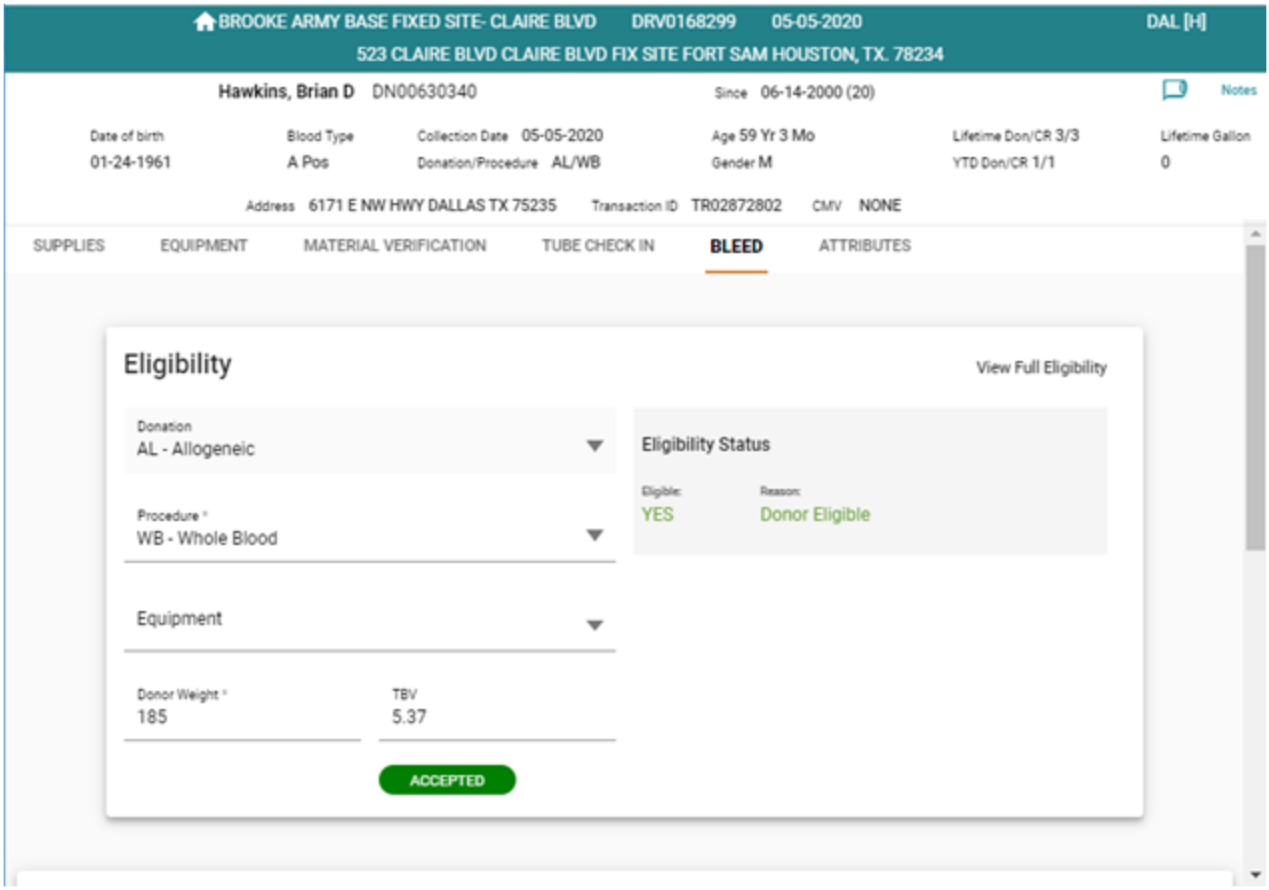


## Display of Tabs

The configuration order for the tabs is defined in master code TABB. A recommendation for configuration if the facility is using Material Verification is to put the Supply Tab as the first tab on the page.

**NOTE –** If master code MATVE is defined not to use Material Verification, the Supply Tab will not display at all on the page.

## Fields and Definitions

Prior to accessing the screen, the user will have to log in with his/her credentials. The system will check access to verify the user has permission to access the page.

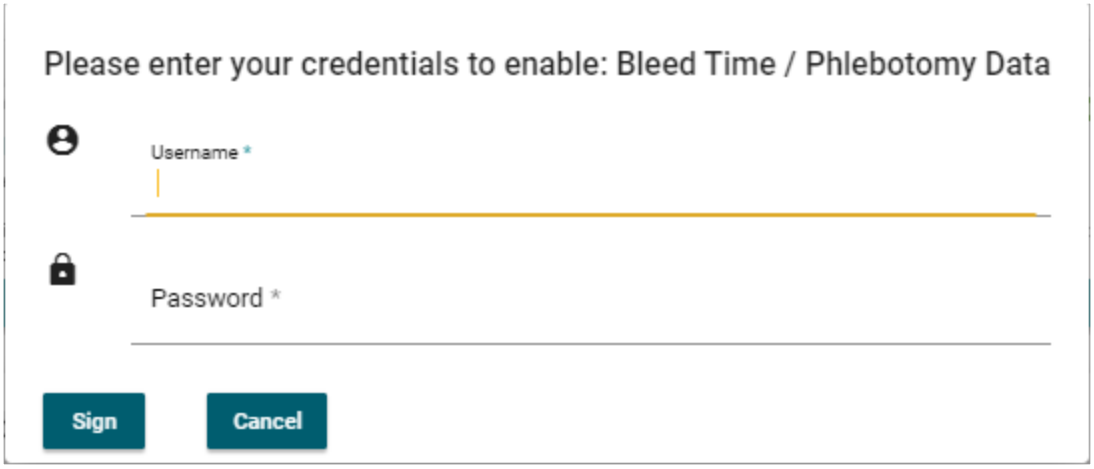


### Unit ID

Entry is required. Scan the unit ID bar code or manually enter the unit ID of the donation to be registered.

**NOTE –** If the OL_CON_RE system parameter is set to Y, the consent form for the donor must have already been signed in the Health History and Physical Findings (HHPF) screen before you can select a donor.

If the unit ID has not been linked to the donor, a message will display, and a LINK button will display for linking the donor.

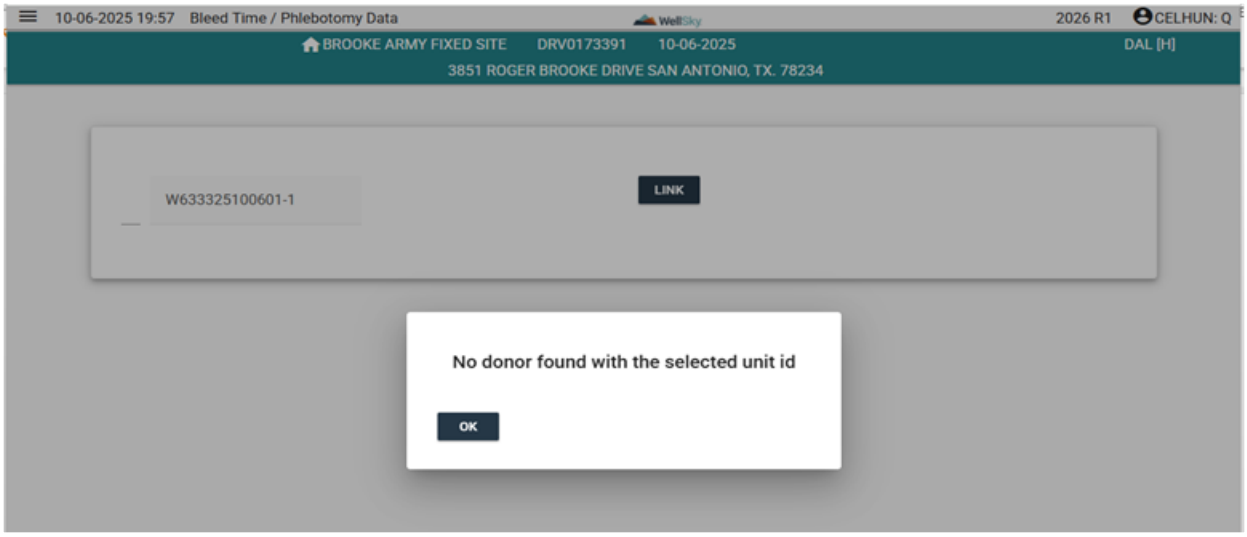


Acknowledge the message, and click LINK. When clicking LINK, the donors available to be linked will display.

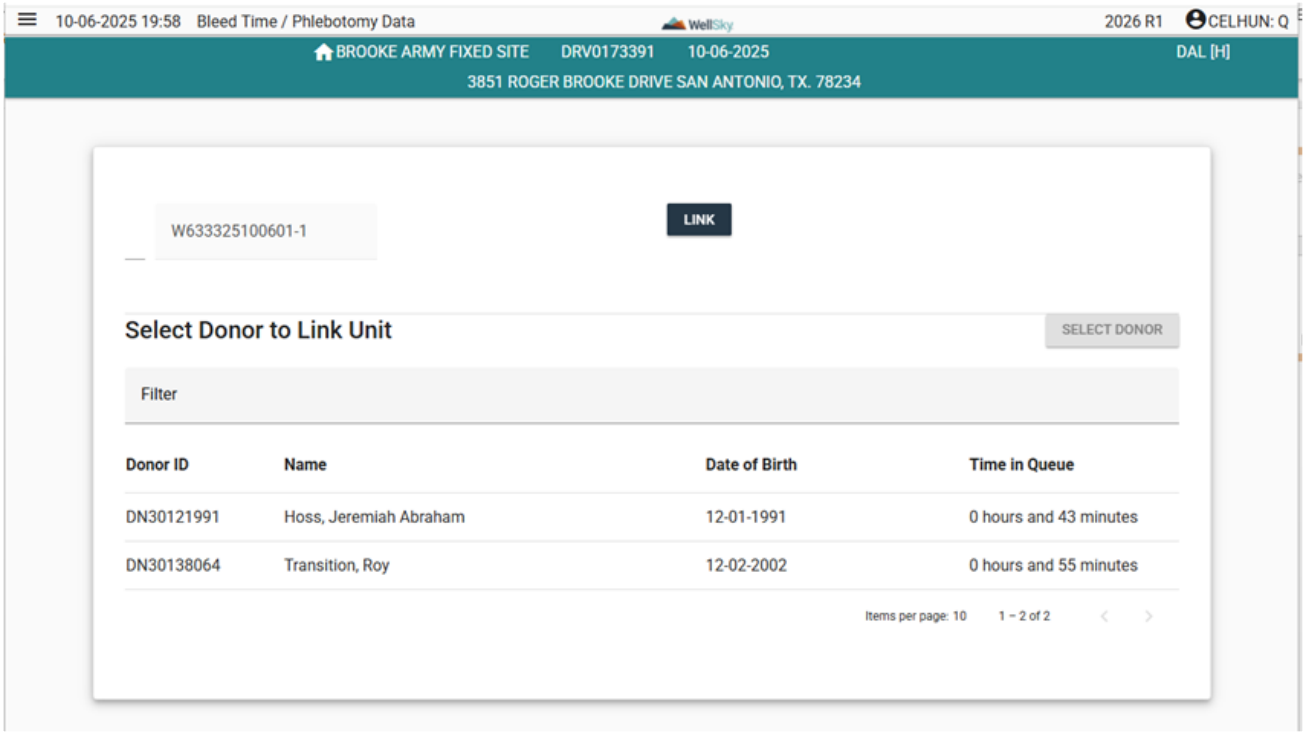


Highlight the donor row, and click SELECT DONOR in the upper right corner. The following message displays:

WellSky Corporation
Proprietary and confidential

If you click **No**, you will return to the Select Donor to Link Unit screen. If you click **Yes**, the following message displays:

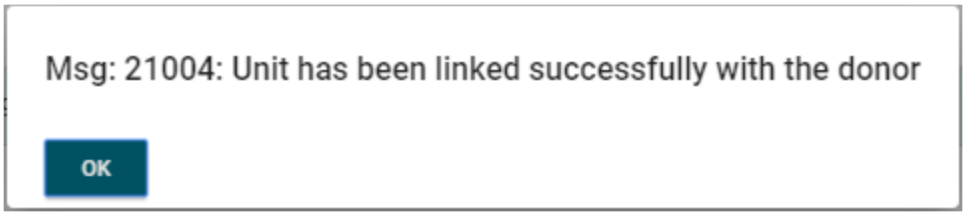


Click **OK**, and proceed to the Bleed screen.

### Last

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the donor's last name twice and the entries must match.

> **NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

### DOB (Date of Birth)

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the DOB twice and the entries must match.

> **NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

### Sex

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the donor's sex twice and the entries must match.

> **NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

### First

Entry is determined by DON_VERIFY in the (DONBLOCK). If configured to be entered twice, you must enter the donor's first name twice and the entries must match.

> **NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

## Eligibility Block

### Donation

This is a display-only field and cannot be updated.

## Procedure

This field displays the procedure on which the health history and physical findings were based. If the procedure is modified, enter the procedure or select from the list. When the user leaves the field, the following message will display:

If the user clicks NO, the cursor goes back to the Eligibility Block and the Procedure field. If the user clicks YES, the user is redirected to Physical Findings so they can be re-entered. Once physical findings is completed, the system will direct the user to consent to signing a new consent for the new procedure.

**NOTE –** If the donor is not eligible to donate for that procedure, the donor will have a HOLD interdiction (DNELG) placed.

If a 99 procedure code is recorded on the donor record, a hold is placed on the donation; you may continue with the registration. A facility-defined interdiction is placed when a 99 procedure code is entered.

**NOTE –** If the procedure needs to be updated after bleed times have been entered, the update should occur in "Update Donation (REGMAINT)".

## Donor Weight

This field displays the donor weight entered during the registration and physical findings process. The field can be updated, and the TBV will be recalculated. Entry of a whole number only is allowed. If any other type of number is entered (for example, decimal, negative, or alphanumeric), the following pop-up message will display:

The cursor will remain in the Weight field until a whole number is entered.

## TBV

This field displays the total blood volume.

# In the Bleed Time and Phlebotomy Block

## Arm Code

Enter an arm code or select from the list.


WellSky Corporation
Proprietary and confidential

Enter the following information about the blood draw, if available:

- Start Date – defaults the date automatically to the drive date. If you press F2, it will populate both the start date and start time with the current date and time.
- Start Time – the time the blood draw began (using the HH:MI format). Press F2 to populate the current time.
- Phleb – the employee ID of the person who made the stick. Enter the ID or select it from the list.

**NOTE –** If a phlebotomist is entered, and the name is different from the person logged into the screen, the password for the new phlebotomist must be entered.

- End Date – defaults the date automatically to the drive date. If you press F2, it will populate both the end date and end time with the current date and time.
- End Time – the time the draw ended (using the HH:MI format). Press F2 to populate the current time.
- Phleb – the employee ID of the person who completed the draw. Enter the ID or select it from the list.

**NOTE –** If a phlebotomist is entered, and the name is different from the person logged into the screen, the password for the new phlebotomist must be entered.

If an entry is made by mistake, click "X" by the bleed entry, and the entry will be removed.

| Arm Code | Start | S Phleb | End | E Phleb | |
|---|---|---|---|---|---|
| R1 | 10-08-2019 12:00 | CELHUN | 10-08-2019 14:00 | CELHUN | X |

If a double stick is indicated, place the cursor in the arm code field for the next entry.

**NOTE –** Entry of bleed times is not mandatory. If bleed times are not available, press ENTER a sufficient number of times to move through all applicable fields.
If a 99 phlebotomist code is recorded on the Donor Record, a hold is placed on the donation; you may continue with the registration. A facility-defined interdiction is placed when a 99 phlebotomist code is entered.

## Saving in the Bleed Time and Phlebotomy Block

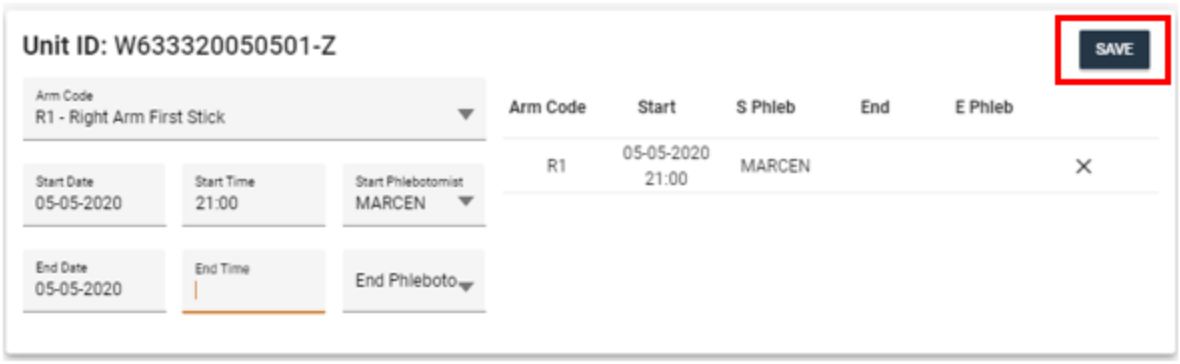


Clicking Save will commit the bleed times entered, but the donation will still be pending until the final Submit is clicked and verification is completed.

Once Save is clicked, the system will present the verification for the user to scan the unit ID. The scanned unit ID must match the unit ID displaying in the bleed entry time block.

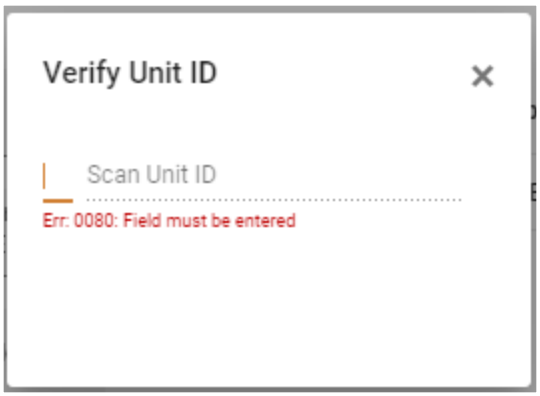


When the scanned unit ID matches, the system takes the user back to the *Scan Unit ID* field to enter the next unit.

### Pre count

Entry is optional. Enter a numerical value; this is information only. By default, this field displays the value that was entered in physical findings.

## Post count

Entry is optional. Enter a numerical value; this is information only. If post count is entered, when the donor returns it will display in the registration screen under the Last Donation tab.

## RBC Loss

Entry is optional. Enter the RBC loss for that donation, or use the default value (the default value will not display). If a value is not entered, the default value will be used for red cell loss. The default is the value entered for the standard red cell loss defined in the procedure code table when determining eligibility.

## Plasma Loss

Entry is optional. Enter the PLASMA loss for that donation, or use the default value (the default value will not display). If a value is not entered, the default value will be used for plasma loss. The default value entered for the standard plasma loss is defined in the procedure code table when determining eligibility.

## Veni

Entry is optional. If the Donation Record indicates venipuncture codes, enter them or select from the list. Once the venipuncture code has been selected, it displays under the field:




To remove the venipuncture code, just click on the code and it will be removed.

## Reaction

Entry is optional. If a reaction code is indicated on the Donor Record, enter it or select it from the list.

## Reviewer ID

Entry is required. Enter the reviewer ID or select it from the list. The list contains only fixed site staff, but any staff member can be entered manually.

## CUE

Scan the donor Confidential Unit Exclusion (CUE) sticker. If no CUE sticker is present on the Donor Record or if the CUE sticker is not scannable, scan a generic NO CUE or AMBIGUOUS CUE bar code.

**NOTE –** The CUE field is only required if the facility has defined that the use of CUE is required. If the facility is not using CUE, the field will not be present on the form.

## Verify Unit

Entry is required. Rescan the bar code or reenter the unit ID. Your entry must match the original scan or entry. If the two do not match, an error message will display.

## User ID

Entry is required. Enter your user ID to validate your entries before the data is saved to the database.

## Password

Entry is required. Enter the password that is associated to the user ID.

# Equipment Tab

If the system parameter EQUIPQC_RQ was set to "Y", then the focus of the page starts at the Equipment tab; if the parameter was set to "N", the focus is set on the Bleed tab, but the user can navigate to equipment and supplies to enter the pheresis machine and bag used for the collection.

Click the Equipment tab to enter equipment used in the bleed process.

Scan the reference number of the piece of equipment. Once the reference number has been scanned, the system will display the reference number and serial number of the equipment and indicate whether or not it has passed the QC process.

If the apheresis equipment entered is different from the equipment in the eligibility block, a message will display:




If the entered equipment matches what is in the eligibility block, the system will populate all of the data for the entered equipment in the tab:

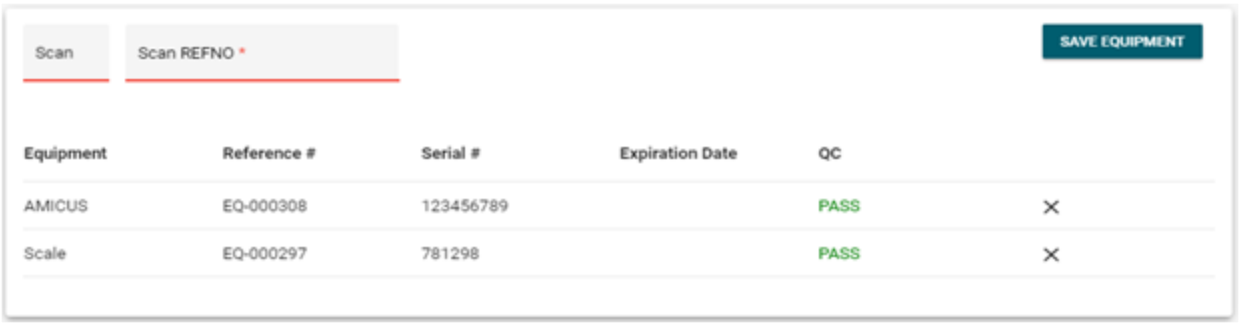


**NOTE –** If a piece of equipment does not require QC to be completed, but the QC process has been started, the status of the equipment will show NOT QC'd. You can select the equipment, and the system will not place the equipment hold on the donation.

WellSky recommends that if the equipment and/or supplies do not require QC to be completed, do not define QC parameters for the equipment/supplies.


WellSky Corporation
Proprietary and confidential

If equipment selected has failed QC, or requires QC and not performed the donation will be placed on hold with EQQC interdiction. The interdiction is configured in the Registration Holds Mapping table (RHOLDS).

## Supply Tab

Click the **Supply** tab to enter the supplies that will be used during the bleed process.

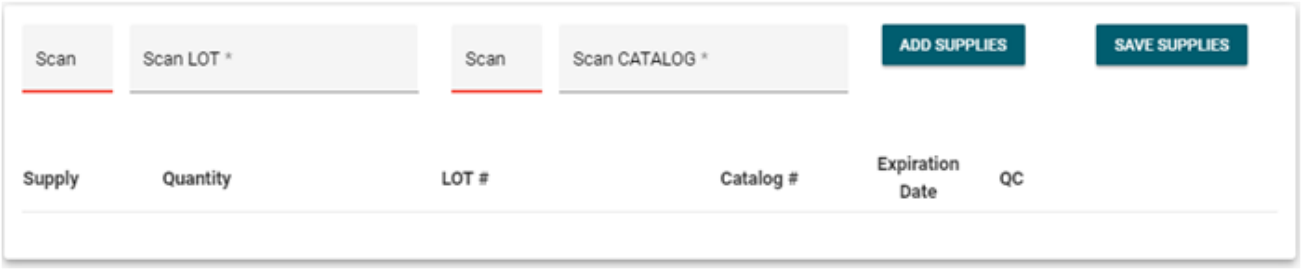


Entering a supply that has a scannable lot or catalog number, you can scan either the lot or catalog number, and the associated details will display in the bottom of the screen.

To manually enter a lot number or catalog number, enter "**M**" to move over into the Lot or Catalog field, and enter the lot number or catalog number in the respective field. Once the supply is entered, the system will display the associated data in the bottom block.

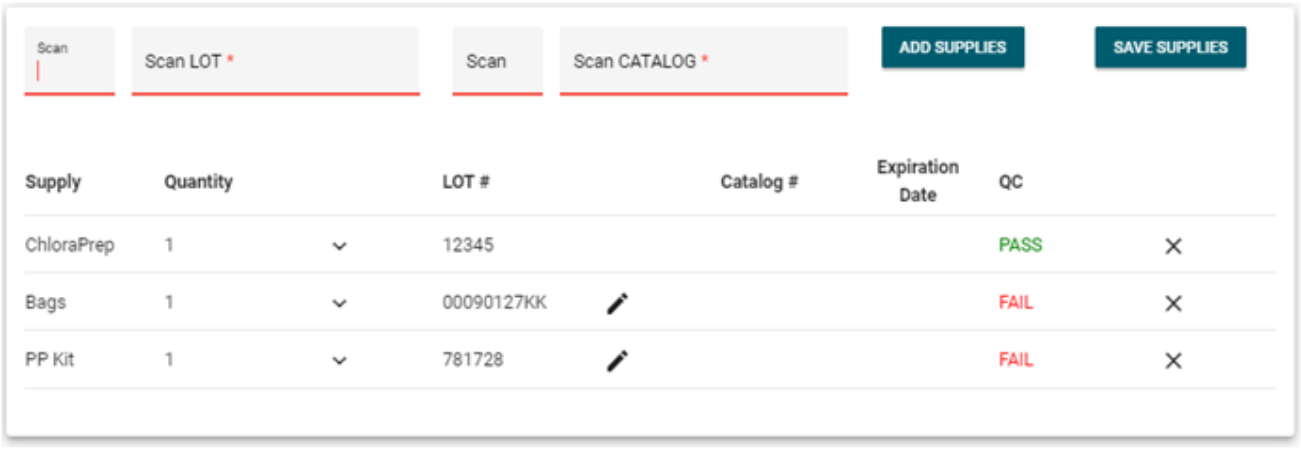


To add supplies that are not associated to a scannable lot number or catalog number, click **ADD SUPPLIES**.

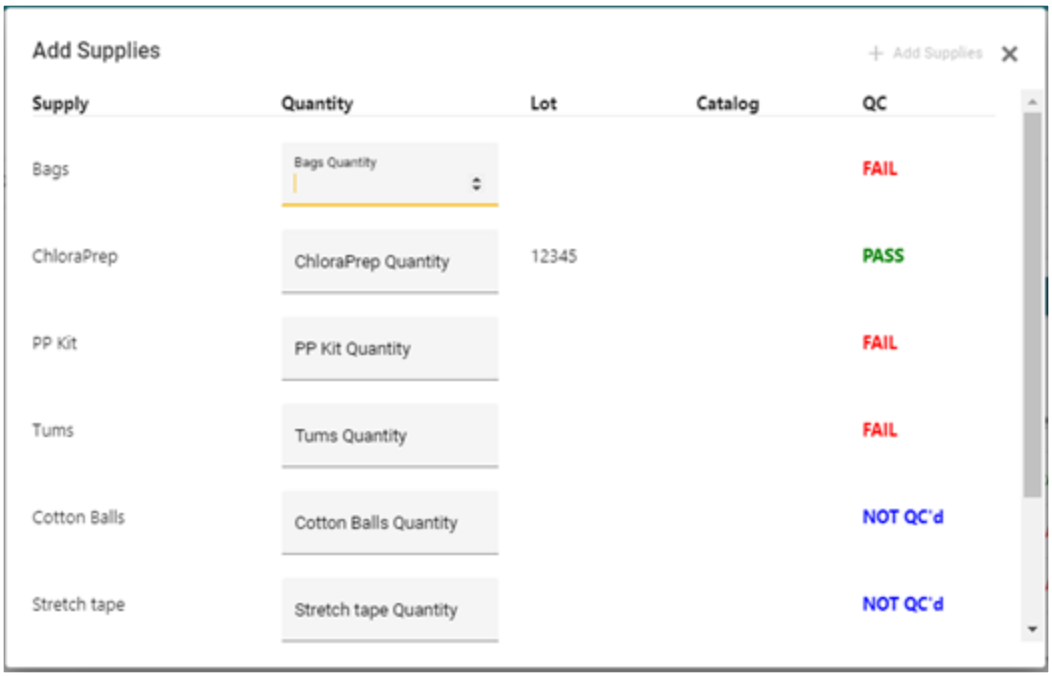


Enter the number of each type of supply to be used during the bleed process.

**NOTE –** If a supply does not require QC to be completed, but the QC process has been started, the status of the supply will show NOT QC'd. You can select the supply, and the system will not place the hold on the donation.

WellSky recommends that if the supplies do not require QC to be completed, do not define QC parameters for the equipment/supplies, which will prevent QC from being incomplete.

If supplies selected has failed QC, or requires QC and not performed the donation will be placed on hold with EQQC interdiction. The interdiction is configured in the Registration Holds Mapping Table (RHOLDS).

## Catalog with Multiple Lot Numbers

If the catalog scanned is linked to multiple lot numbers in Lot Details for Bags (LOTS) in the Lab application, the user will be prompted to scan or manually enter the lot number.

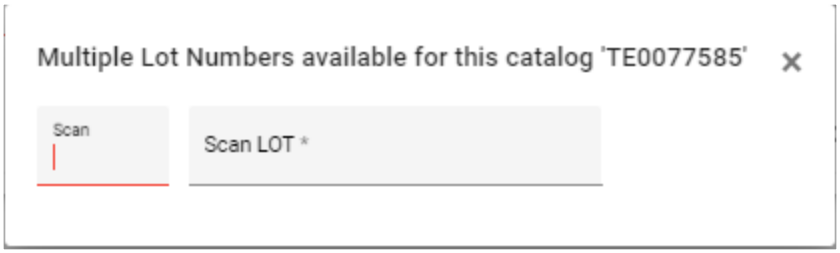

The lot number can be scanned or manually entered. Enter **M**, and the cursor moves to the *Scan LOT* field to allow manual entry of the lot number. Once the lot number is entered, the message box will close and populate the detail section for supplies.

## Attributes Tab

Any attributes associated with the donor display in the Attributes Block. You will only see those attributes for which you have been granted viewing privileges.

## Tube Checkin

To enter the tubes that were collected during the bleed process, click the **Tube Checkin** tab.

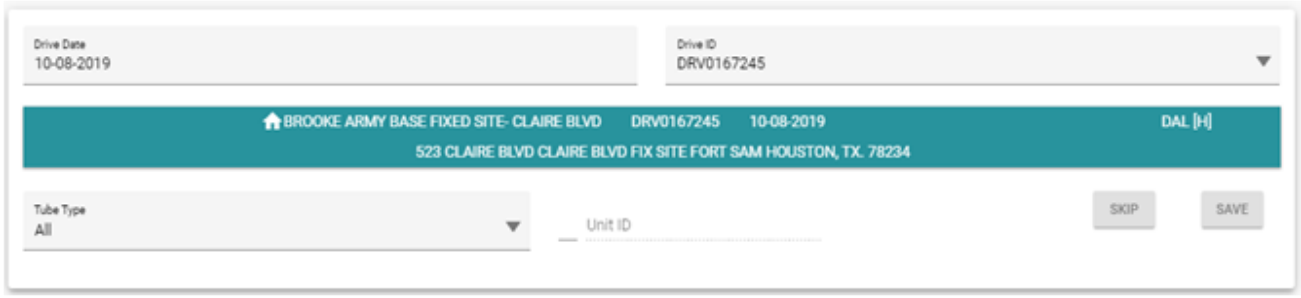


### Drive Date

Entry is required. The date will default based on the Set Drive screen, but it can be updated. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

### Drive ID

Entry is required. The drive ID will default based on the Set Drive screen, but it can be updated. Enter the drive ID or select it from the list.

### Tube Type

Entry is required. Enter the tube type or select it from the list. The list is populated through the master code TUBE.

### Unit ID

Scan or manually enter the unit number, and the system will display the detail information in the bottom detail area:

Scan or manually enter the unit ID for each type of tube being entered, and a check mark (✓) will appear under each tube type.

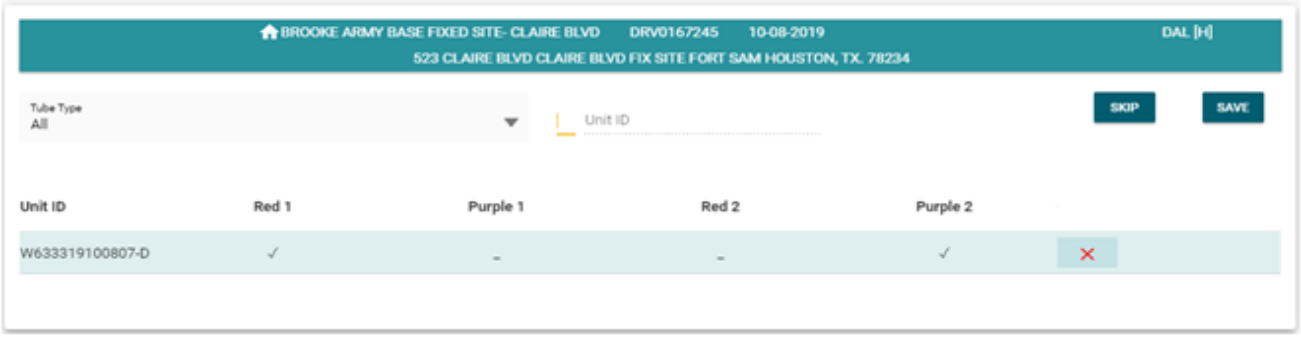


Click **SKIP** to skip the tube that is not being collected.

Click **SAVE** to commit the data to the database.

## Material Verification Tab

If material verification has been configured, the tab will display in the bleed page. Click the **Material Verification** tab to display it. Configuration of the tab is done in master code MATVE.

**NOTE –** If the bag has not been linked in the Supply Tab, the user will receive the following message:

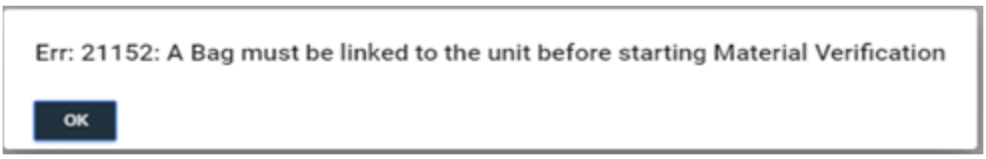



WellSky Corporation
Proprietary and confidential

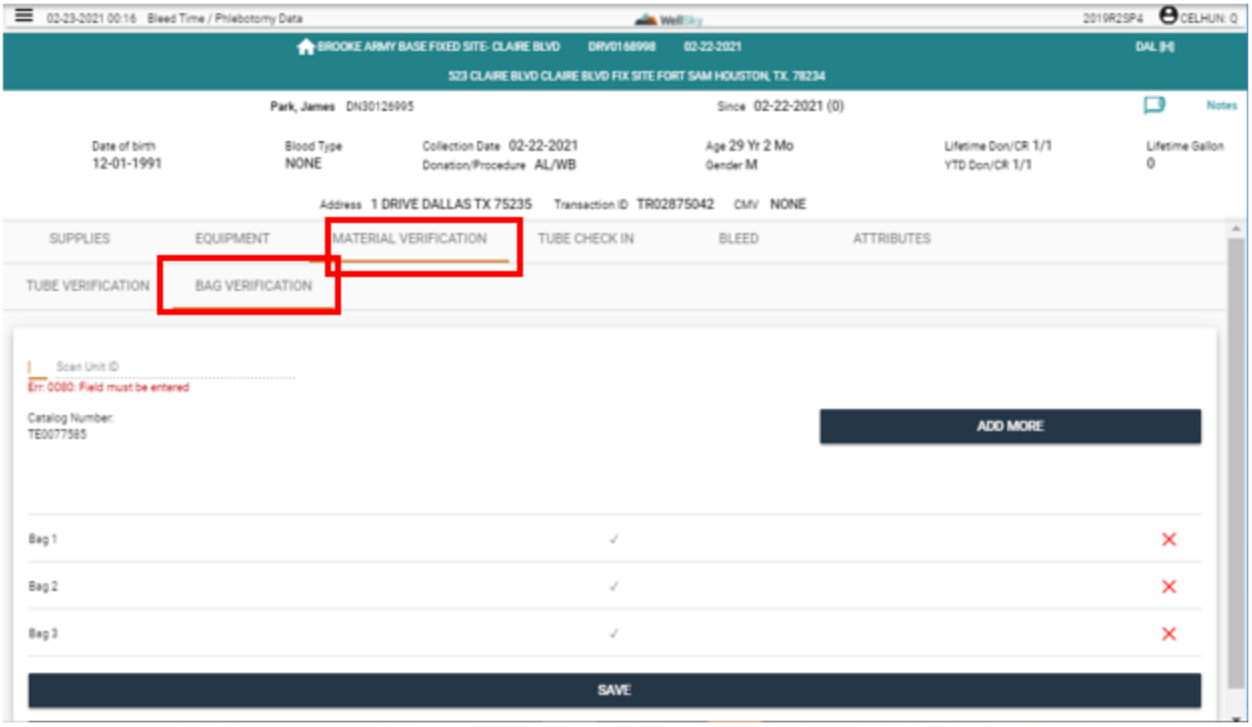


## Bag Verification

The catalog number that is linked to the donation will display under the *Scan Unit ID* field.

**NOTE –** If the procedure is not required to have a bag checked in (configured in master code EQBRQ), the Bag tab will not appear in Material Verification.

## Scan Unit ID

Scan or manually enter the unit number for each bag the unit number is applied to. After scan or manual entry, a check mark (✓) will appear by each bag. The bags display based on the number of bags configured in the Catalog table in the Lab application.

Click the ✕ icon to remove the check mark by a bag.

If the configuration of the Catalog table was incorrect, additional bags can be added by clicking ADD MORE. Click ADD MORE as many times as you need to add bags.

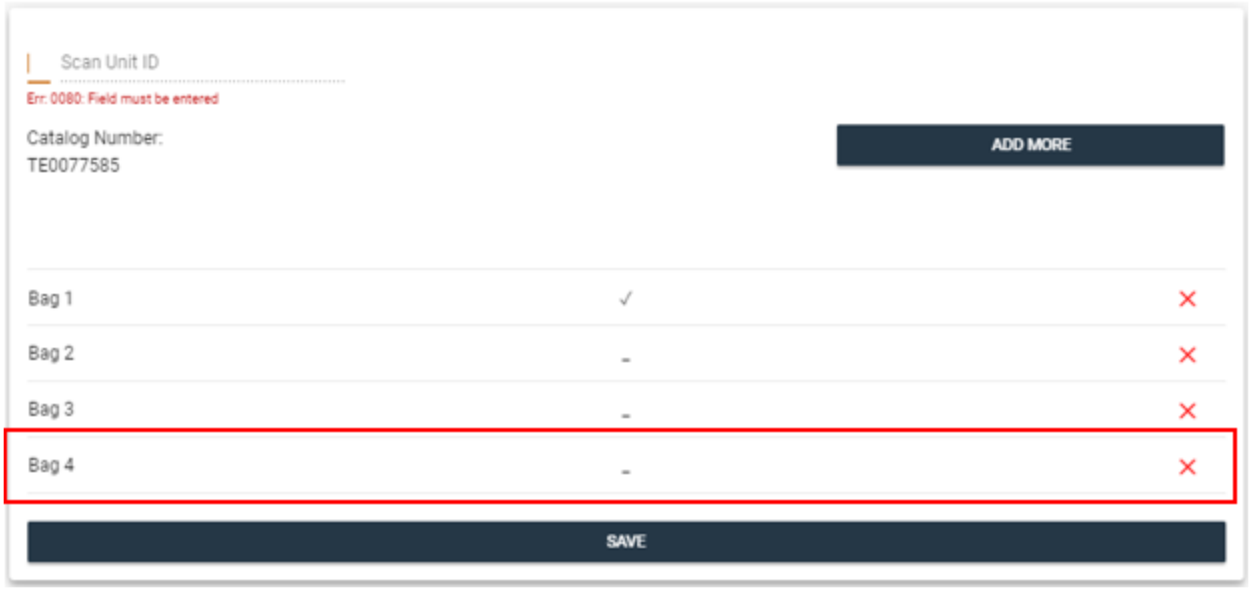


If less or more bags are verified, you will receive a message alerting you that the verification is not matching.

If you click YES, the system saves the entries, moves to the tube verification, and places the Hold interdiction configured in master code MATVE with a reason of BAGS. If you click NO, the cursor moves back to the *Scan Unit ID* field to allow you to correct the verification.


WellSky Corporation
Proprietary and confidential

## Tube Verification

The procedure will display under the *Scan Unit ID* field that is associated to the unit.

## Scan Unit ID

Scan or manually enter the unit number for each tube the unit number is applied to. After scan or manual entry, a check mark (✓) will appear by each tube. The tubes display based on the number of tubes configured in the master code EQBRQ. If the EQBRQ is not defined, then the tubes displayed will automatically default to the number based on master code MATVE (TUBE) for ALL chapters. If the facility is multi-chapter, then each chapter can have a different configuration for tubes, if desired.

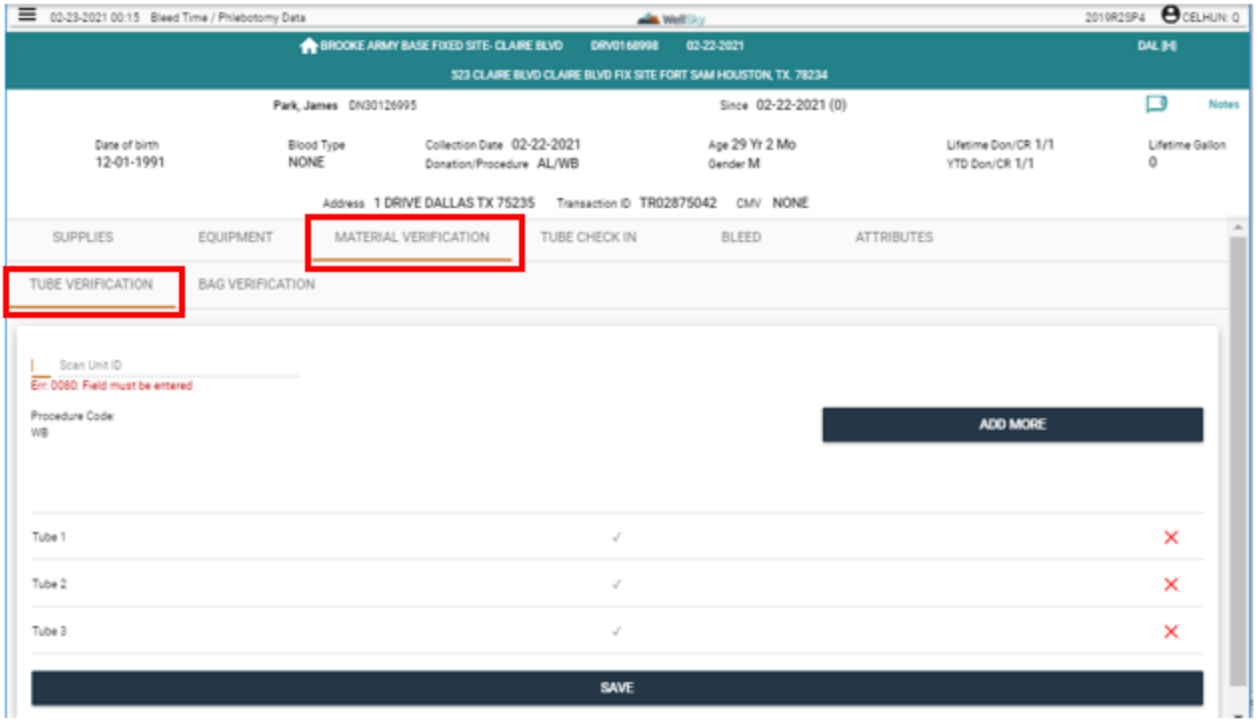


Click the ✕ icon to remove the check mark by a tube.

If more tubes need to be drawn than what displays, click ADD MORE. Click ADD MORE as many time as you need to add additional tubes.

If less or more tubes are verified, you will receive a message alerting you that the verification is not matching.

If you click YES, the system saves the entries, and moves to the Bleed Tab. If you click NO, the cursor moves back to the *Scan Unit ID* field to allow you to correct the verification.

## CUE

Scan the donor **Confidential Unit Exclusion** (**CUE**) sticker. If no CUE sticker is present on the Donor Record or if the CUE sticker is not scannable, scan a generic **NO CUE** or **AMBIGUOUS CUE** bar code.

**NOTE –** The CUE field is present only if the Chapter has defined that the CUE is to be scanned. In the Chapters table there is a field Donor CUE Scanned? and it should be set to Y if the cue is to be scanned, or N if the cue will not be used and the field will not display.

# At SUBMIT

There will be a check when **SUBMIT** is clicked to determine if the donation requires equipment linkage or a bag(s) needs to be linked to the donation. If the requirement is not met, the following message will display:

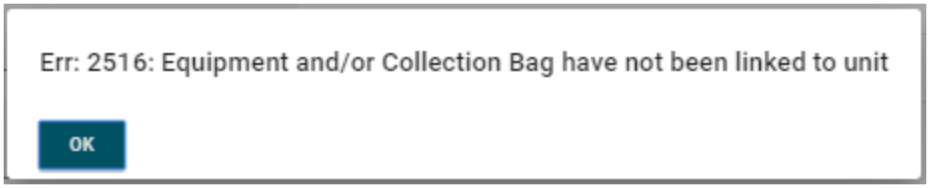


The user will need to go and link the bag and/or equipment, if required by the procedure.

There will be a check if material verification has been configured for the tubes. If the master code MATVE (FINMV) is set to Y, then it will check the number of tubes entered during material verification against the count entered in Tube Check-In, and if the two do not match, you will receive the following message:

If you click **YES**, the hold interdiction will be placed with a reason code of RTUBE. If you click **NO**, you can go back and correct the verification mismatch.

**NOTE –** As long as the tube count in material verification matches the tube check-in, the hold interdiction will not be placed. So, if you check in more/less tubes in material verification, and the same number is checked in at tube check-in, the hold is not placed.

# Change a Procedure

If the procedure is modified, enter the procedure or select it from the list. When the user leaves the field, the following message will display:

WellSky Corporation
Proprietary and confidential

Click YES to be redirected to Physical Findings so they can be re-entered. If you back out of the physical without completing it, a DNELG will be placed on the donation. To release the DNELG, go back to the Bleed Time / Phlebotomy Data page, which will re-direct you back to Physical Findings and Consent. Complete these two pages, and the DNELG will be released.

## At Commit

The data for the bleed time entry is saved to the database, and the OnSite Status Query for the Collection Block is updated.

If the configuration for the BDR report is set up, it will generate the BDR report in the designated directory.

## What to Do Next

There is no next step.

# 7.7.6 Donor Survey

## Intended Use

Donor survey has defined templates based on type. The user will define the type and configure a template that will be linked based on certain criteria. Donor Survey can be called within the OnSite Module or by using the Menu toolbar on the left side of the screen.

## Limitations

- If a donor survey question is classified as a rank answer, and the donor does not update the order, the answer will be captured in the default ranking order in the table. This also means that, if the donor skips the question, the question will be captured using the default ranking order.
- The donor must have been registered in the active drive.
- If the regular donor is linked to ONPLKREG (lookup/Registration & Modify Data), the survey will be called for all donors registered, including the donors using FastTrak. FastTrak donors are not configured until their responses are downloaded to the system.

## Prerequisites

System Parameters defined:

- DSFINISH
  - Y – Finish button available in survey questions
  - N – Finish button disabled (does not appear) in survey questions

Master Codes to be defined:

- SUTYPE – survey types
- MLANG – languages
- SUCAT – survey category codes

Survey Manager (SURVEYM):

- Define Survey Questions
- Define Survey Answers
- Define Survey Templates
- Define Survey Access
- View Survey
- Link Template

Add Function (ADDFCN) should be defined with parameter for the page that can call the survey application.

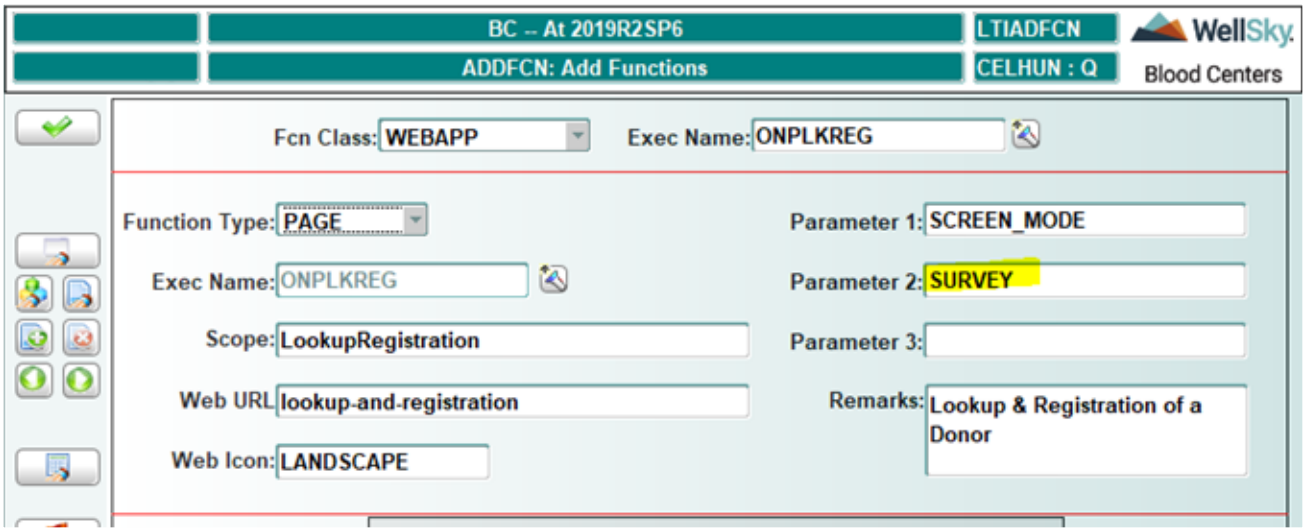


The pages should have the Parameter 2 defined with SURVEY. The following pages should be defined with the SURVEY parameter:

- ONPLKREG - Lookup / Registration & Modify Data
- ONPHLTHS - Health History Card
- ONPPHYFN - Physical Findings Card
- ONPDNRES - Donor Responses
- ONPDNCON - Donor Consent
- ONPBLEED - Bleed & Phlebotomy Data

These are the only pages in which the survey can be called from within the OnSite Module.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking Donor Survey.

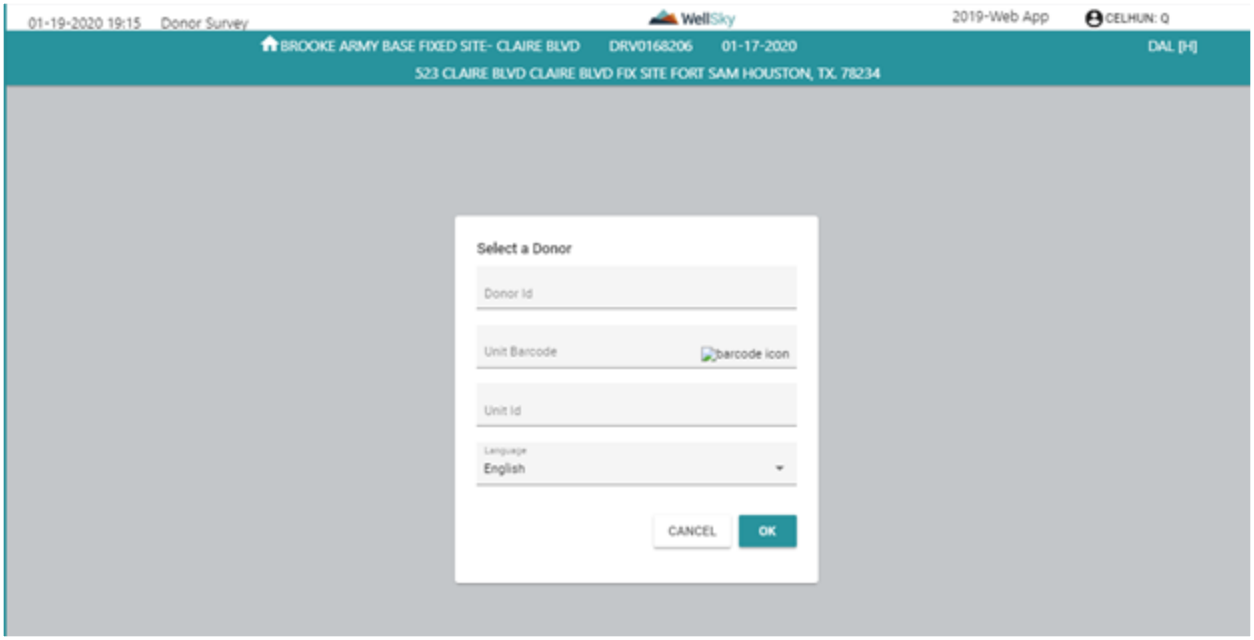


Alternatively, the Donor Survey can automatically be called if configured in Survey Manager – Define Survey Access.

# Select Donor

## Donor ID

This is an optional field.

**NOTE –** If a donor ID is entered, it must be registered to the drive.

## Unit Barcode

Scan a unit ID. After the scan is accepted, the unit number will display in the Unit ID field. To manually enter the unit ID, skip Unit Barcode and enter the unit ID in the Unit ID field.

**NOTE –** If a unit number is entered and it is not associated to a donor and drive, an error will display.
Err: 9879: Donor and/or unit is not associated to the drive

## Unit ID

Manually enter the unit ID with the check digit.

**NOTE –** The Unit ID must be linked to the entered Donor ID. If it is not, the following error will display:
Err: 9879: Donor and/or unit is not associated to the drive

## Language

Defaults to the main language. Update the language by selecting a language from the list.

**NOTE –** The list of languages comes from the master code MLANG. The default code is determined by the Num Value set to 1.

### Cancel Button

Click **Cancel** to close out of the donor survey.

### OK Button

Click **OK** to proceed to the donor survey questions.

### FINISH Button

Click **FINISH** to exit out of the donor survey. If the donor does not want to take the survey after getting the first question, then the donor can click **FINISH** to close out of the survey.

## Display Survey Questions

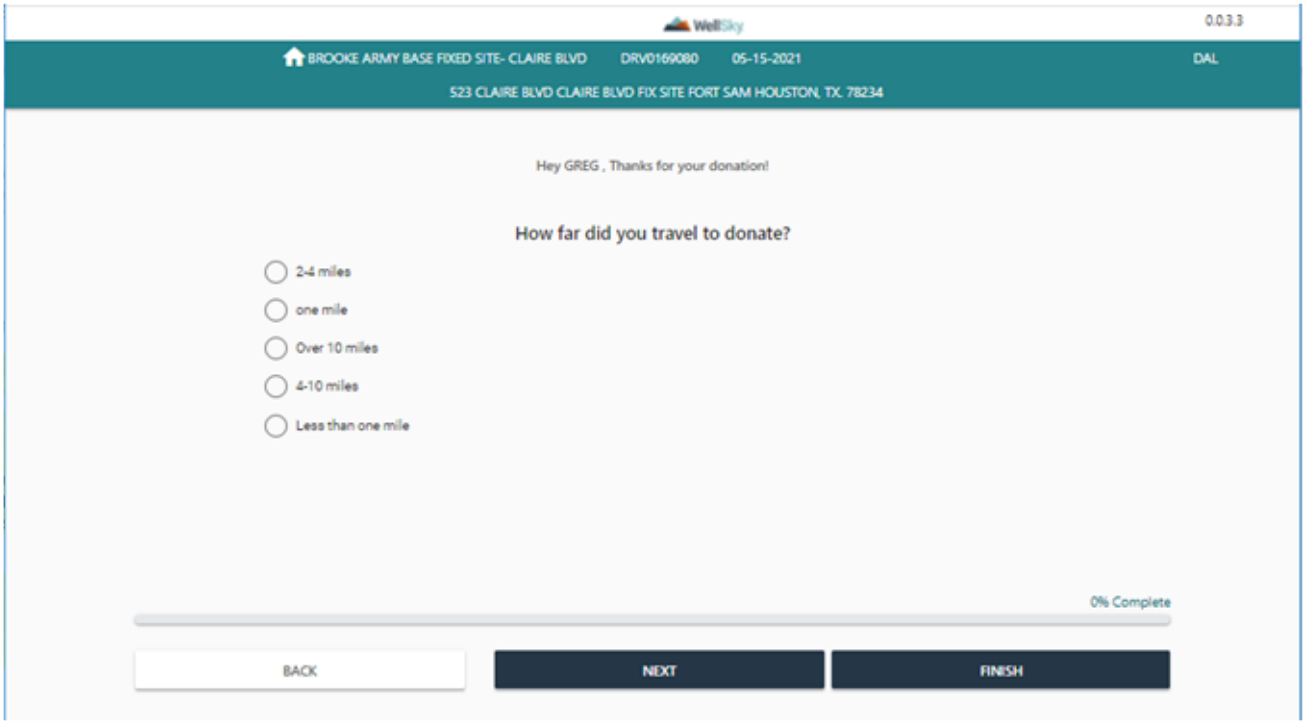


### Display of Questions

The questions will display to the donor based on the criteria met and the templates linked to the criteria. Templates are linked in Donor Survey Manager (Link Templates).

Questions can be defined on how the question will be answered. The questions can be responded to based on:

- Single answer

Click an option to select an answer.

- Multiple answers

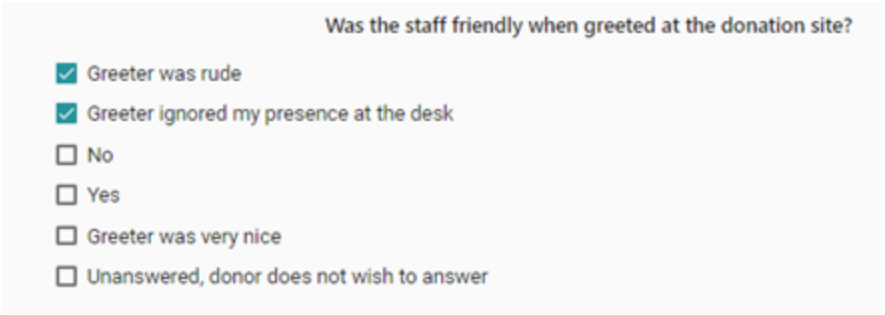


Select each option that represents your answer.

- Comment type answer (free format entry)

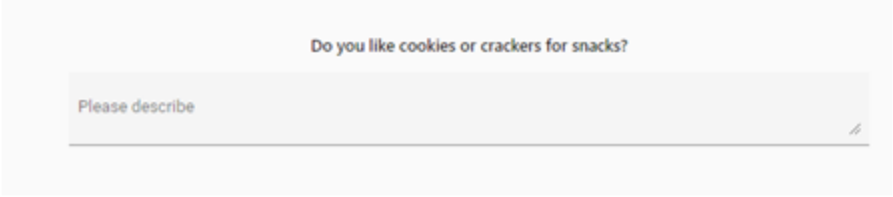


Free format entry of the answer.

- Ranking (rank answers from best to worse, numerical, etc.)

Use the arrows to move the answers up and down to rank them from first to last.

## Status Bar

The status bar displays progress as the donor answers the questions. The donor will see the progress change as questions are answered.

## Completion of the Survey

When all of the questions have been answered, the donor will receive the following message:

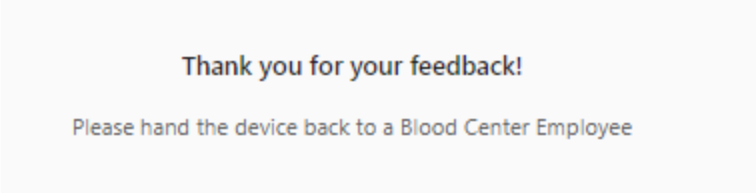


## Configuration of Survey Within the OnSite Module

To have the survey present directly to the donor during the OnSite process, the access to the function needs to be defined in Donor Survey Manager under Define Survey Access. Access is defined based on a regular donor (answering a questionnaire through the application at the donor center), and a FastTrak donor (used the FastTrak application to answer the questionnaire prior to coming to the donor center).

## Configure Access Through ONPLKREG (Lookup/Registration & Modify Data)

If configuring regular donors at the time of registration, the system cannot distinguish between regular and FastTrak donors, so all donors will have the survey called at registration.

Once the donor is registered and **REGISTER** is clicked, the user will be presented with an alert message if the system is configured to present it. If the system is not configured to present an alert message, the language window will display for the donor to select either the default language or a different language.

If the system is configured to display the alert message, the donor will see this:

If the donor clicks NO, the system will close the message and move to the function. If the donor clicks YES, the system will display the language window.

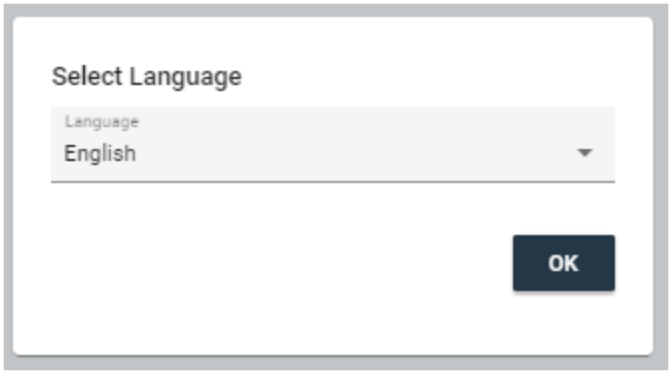


The donor can select the default language displays or select a different language from the drop-down menu. Once the donor selects a language and clicks OK, the donor survey will automatically display.

## Configure Access Through ONPHLTHS or ONPPHYN or Donor Consent (Health History Physical Findings or Donor Consent)

FastTrak donors are donors that bring their responses to the drive. The donor responses have to be downloaded and accepted before accessing these functions. If the responses are not downloaded prior to accessing these functions, then the survey module will not be called for the donor.

## Configure Access Through ONPDNRES (Donor Response)

Fast Trak donors should not be linked to Donor Response because FastTrak donors do not use this function. When the donor responses are downloaded, the system takes the user to the Health History page to review the downloaded responses; the system does not move through Donor Response.

## Configure Access Through ONPDNCON (Donor Consent)

When the survey is configured to display after Donor Consent, the survey will present to the donor after the donor signs the consent, and prior to the witness signing for the consent.

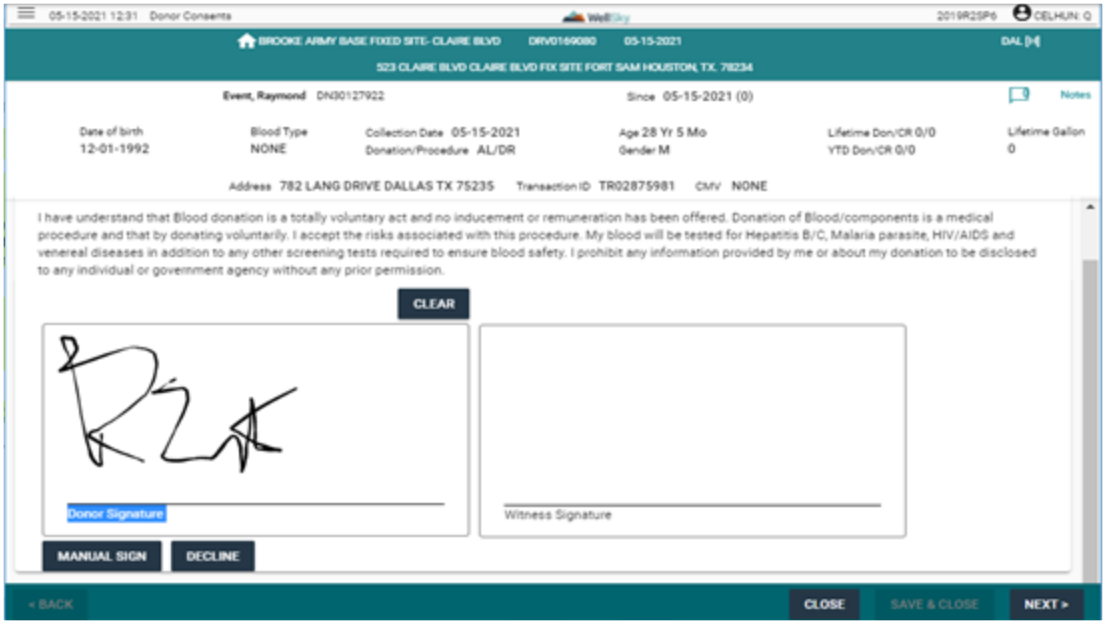


After the donor signs and clicks NEXT, the system will present the alert message (if configured) and the language window. When the donor selects the language and clicks OK, the survey presents to the donor.

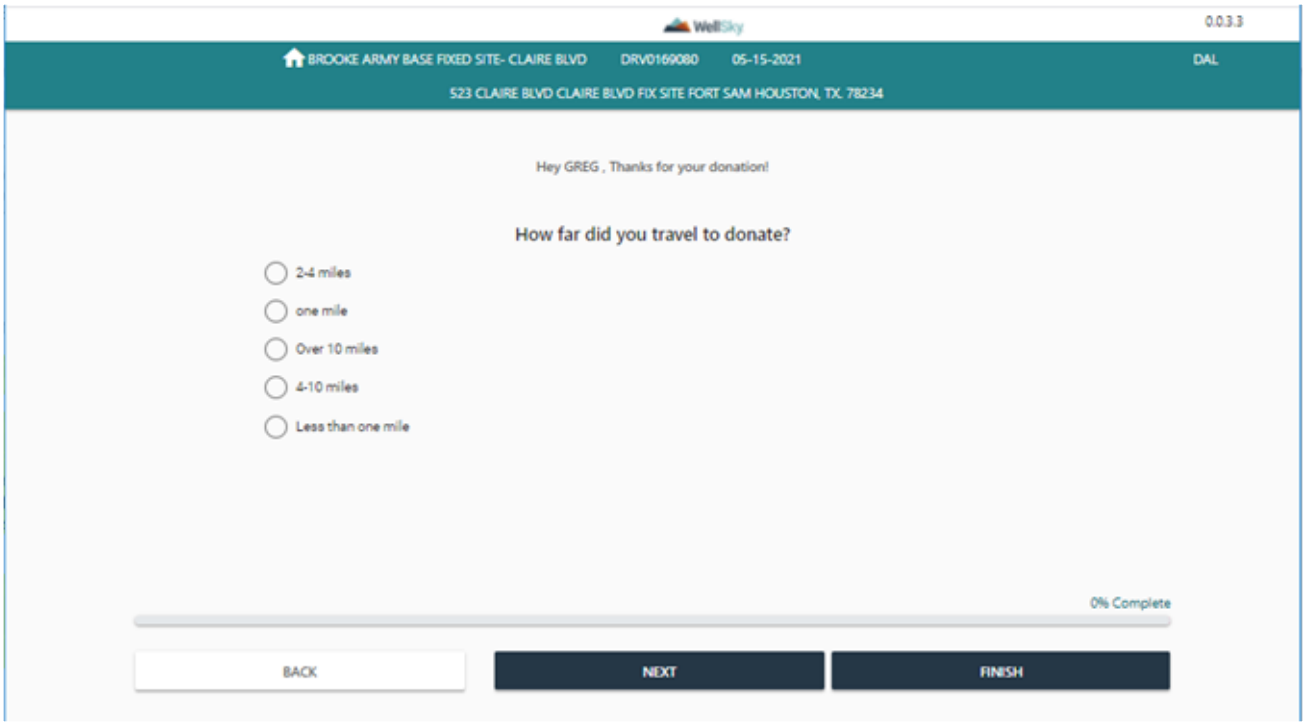


The donor can answer all the questions or click FINISH to exit out of the donor survey at any time while taking it.

The donor will then be presented with the Thank You screen.


WellSky Corporation
Proprietary and confidential

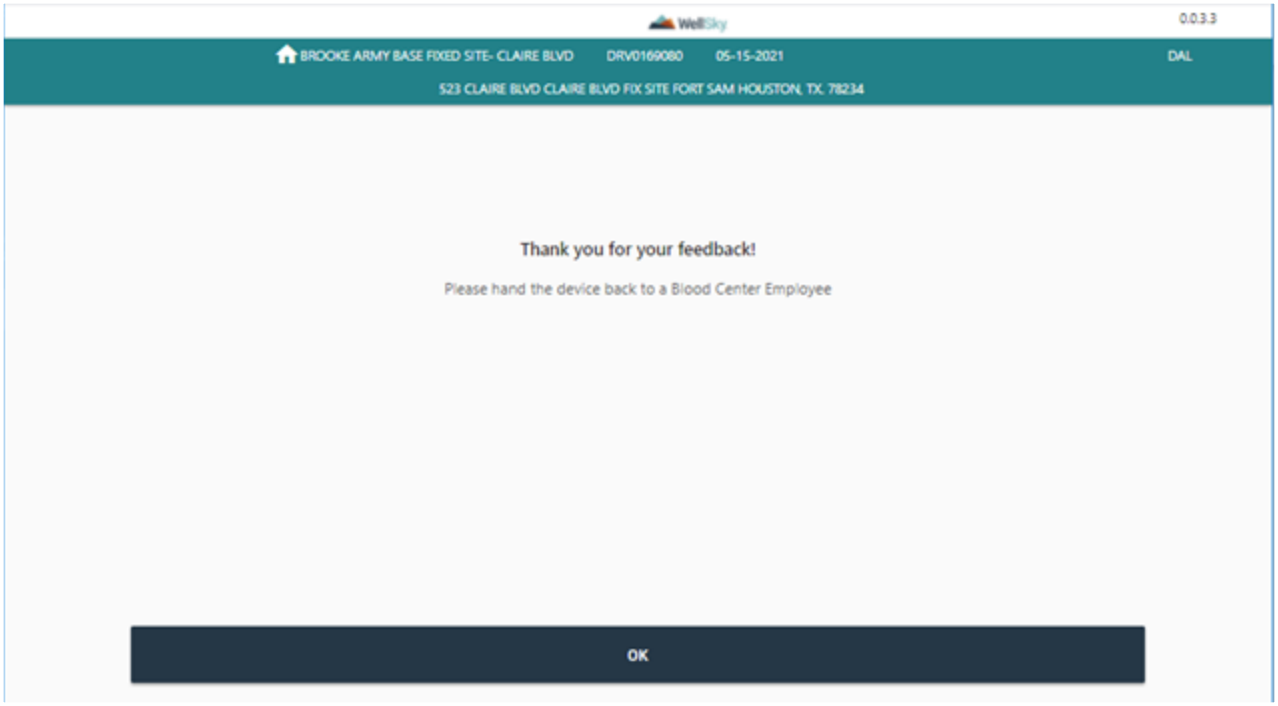


When the donor clicks OK, the User Credentials window displays. The blood center user must enter a user ID and password to get back into the OnSite application.

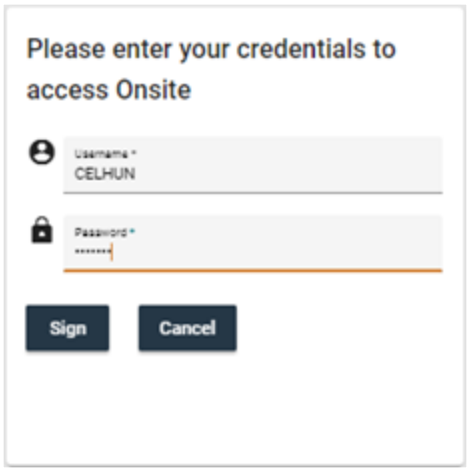


The system will check the user's ID and password to determine if the user has access to the page it will return to. For Donor Consent, the system will check to see if the user has access to Consent. If the user does, the cursor will display in Donor Consent to have the witness sign for consent.

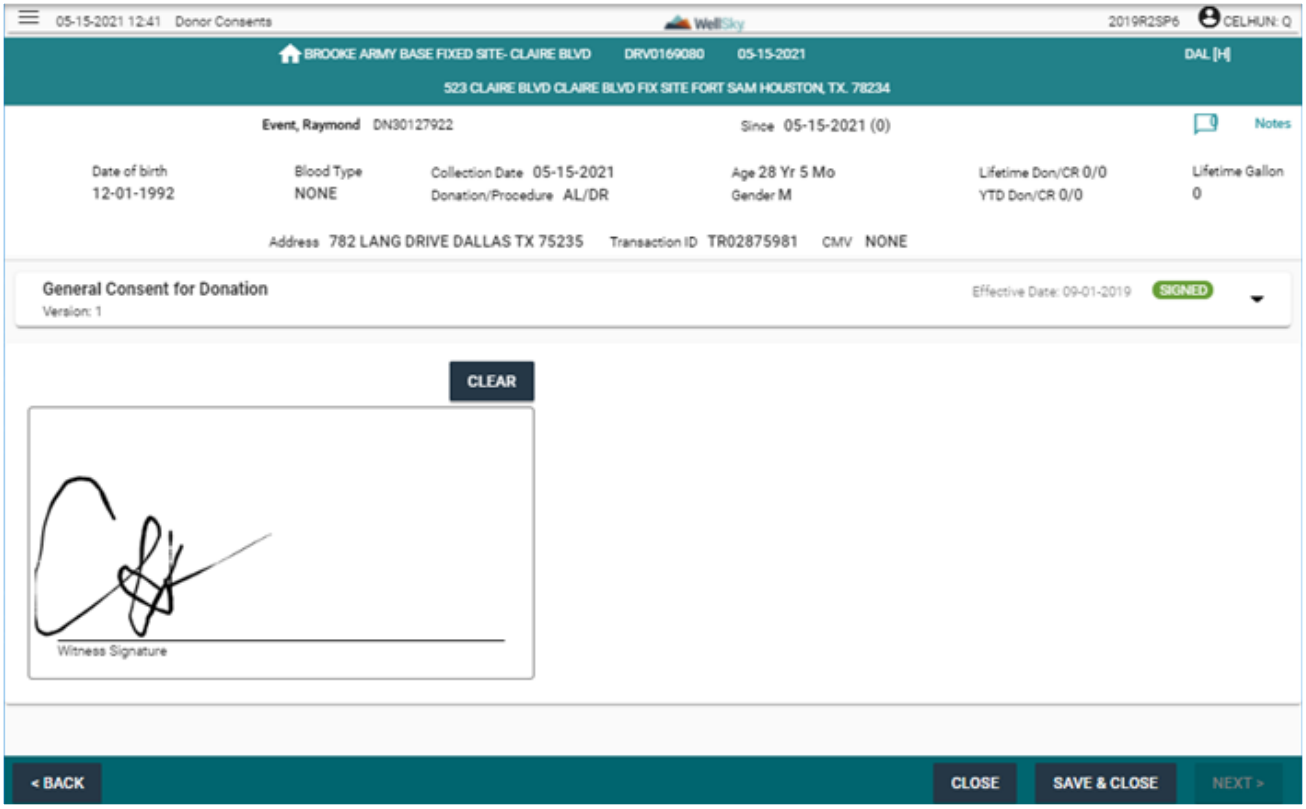


Once the witness signature is completed, the user can click SAVE & CLOSE to go back to the Health History and Physical Findings Parent page.

### Changing a Procedure when Survey is Linked to Donor Consent or Physical Findings

If the survey is linked in Donor Consent or Physical Findings and the procedure is updated, the donor survey will not be called again for the donor to answer the questions.

## At Commit

The system commits the data to the database.

## What to Do Next

There is no next step.

# 7.7.7 Pack/Ship Shippers to Lab

## Intended Use

Use Pack/Ship Shippers to Lab to pack units and tubes at the drive to deliver the shippers back to the blood center for check-in. Check-in will cause the units and tubes to be checked into the system to generate a check-in batch.

## Limitations

- To pack a unit, the bleed process has to be completed.
- To pack a tube, the bleed process has to have been started.
- Special characters should not be used in the shipper number.
- Deferrals and walkouts are not included in the auto-extract process. You must use the manual method of extract for these.
- Auto-extract only works for shipments of only units or unit/tube combinations. Tube shipments must be extracted using the manual method.
- If auto-extract has been set up and only tube shipments are being shipped, manual extract must be used if tube shipments are to be extracted.

## Prerequisites

- Catalog/Lot numbers need to be defined in Lab.
- Equipment must be defined in Lab.
- Valid Donation Types / Procedure codes need to be defined for conversion information into Lab.
- System parameter SHIP_EXT needs to be set if auto-extract will occur at the time of shipment closure on the mobile server. If performing auto-extract, you must finish the day with the manual Extract (script) to close out the deferrals, walkouts, and any other completions.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking on the **Pack/Ship Shippers to Lab** option.

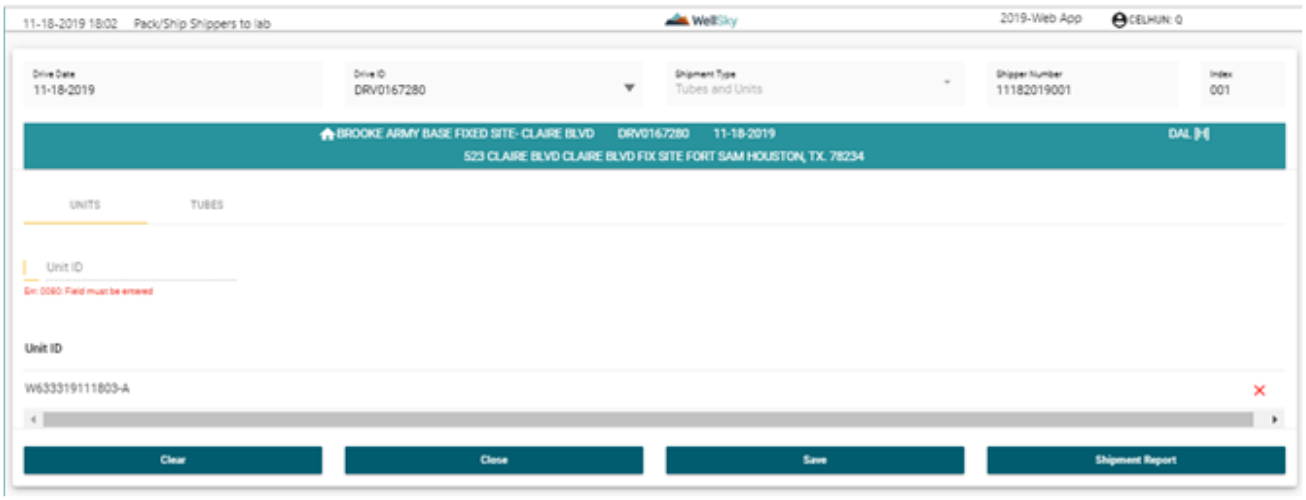

# Control Block Fields and Definitions

## Drive Date

This field defaults to the current drive date selected in Set Drive. The date can be modified. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

## Drive ID

The Drive ID displays based on the drive selected in the Set Drive page. Enter a drive ID or select it from the LOV. The drive IDs displaying in the LOV are equal to the collection date +/- 1 day.

## Shipment Type

This is a required entry. The field defaults to Tubes and Units, but it can be updated.

- Tubes Only
- Units Only
- Tubes and Units

## Shipper Number

Scan or manually enter the shipper number. To manually enter, press **M** and the cursor moves to allow manual entry of the 10-digit shipper number. The shipper number format is a ten-digit number appending on sequence number.

**NOTE –** Special characters should not be used in the shipper number.

If you want to add more units or tubes to an existing shipper number, scan or manually enter the shipper number, or select from the list by using the list icon (highlighted below).




Shipper numbers that were packed for that drive appear in the list. Select a shipper number to display data that was packed in the shipper, or select a shipper to add more units or tubes.

If the shipper number scanned has already had one shipment placed and shipped, you will be prompted to choose the shipper number index:

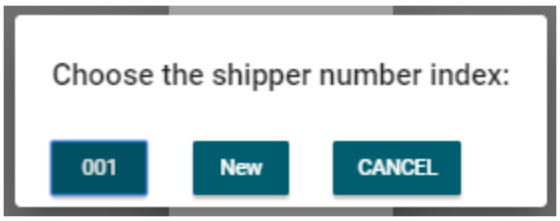


Click the number to add more units to the shipper if it is not closed, or click **New** to pack a brand new shipment.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions for UNITS Tab

## Unit ID

Scan or manually enter the unit ID. If the donor has been registered in OnSite, all data present will automatically display on the screen. The user is notified if the collection date and/or drive ID does not match the data from the drive.

**NOTE –** The bleed time entry has to have been entered in order to check in a unit.

If you scan a unit number that is already in the shipper, the user will receive the following message:




Once the unit number has been scanned into the shipment, the unit number displays:

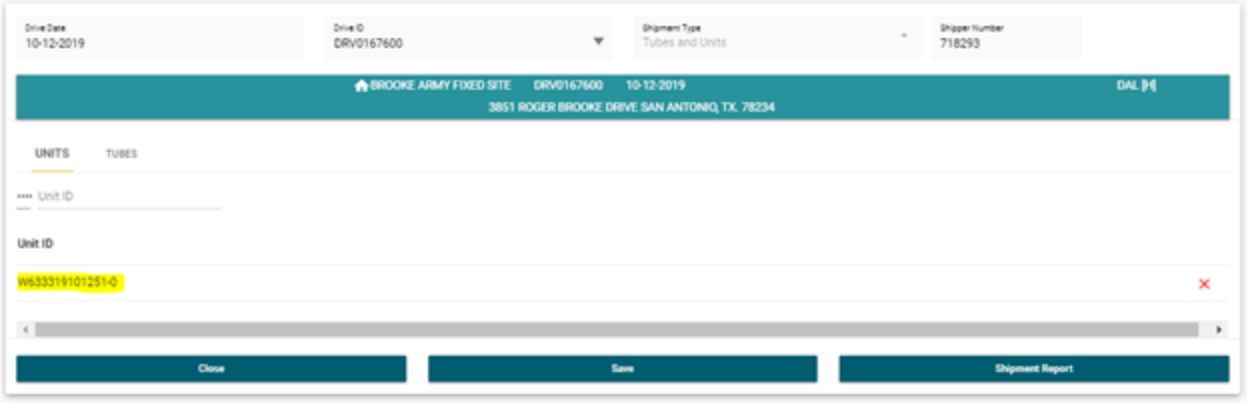

# Detail Block Fields and Definitions for TUBES Tab

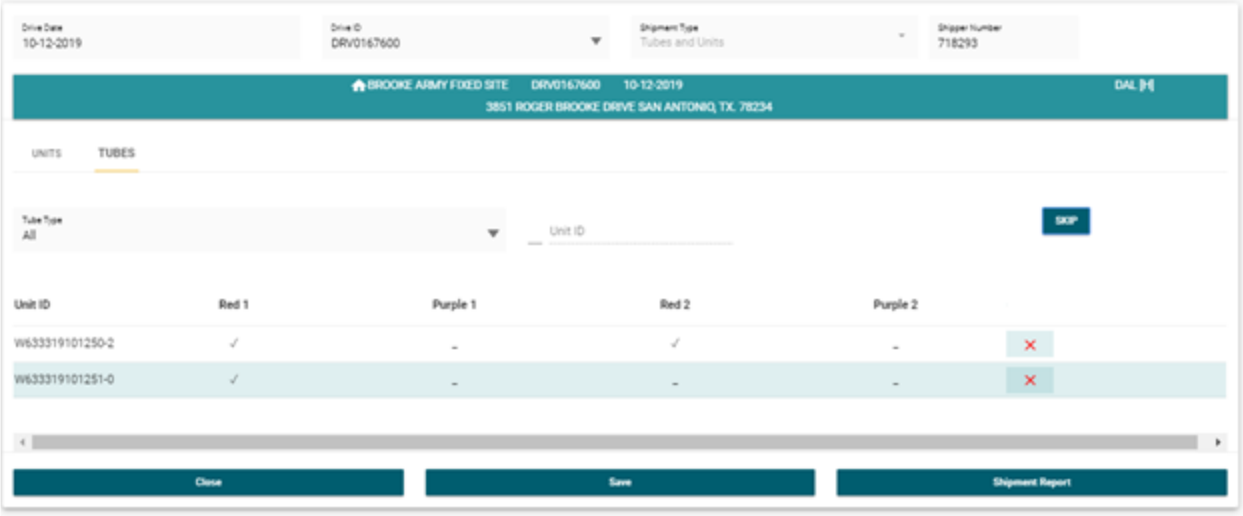


## Tube Type

Entry is required. Enter the tube type or select it from the list. The list is populated through the master code TUBE.

## Unit ID

Scan or manually enter the unit ID. If tubes have not been checked in for the unit in Tubes Check-In, the user will receive the following message:

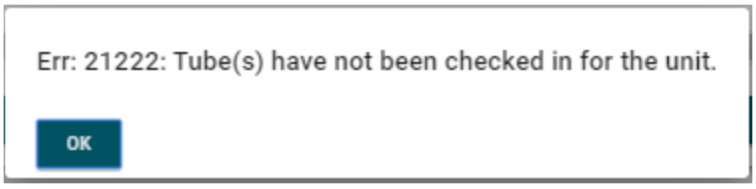


The user is notified if the collection date and/or drive ID does not match the unit that is scanned into the page.

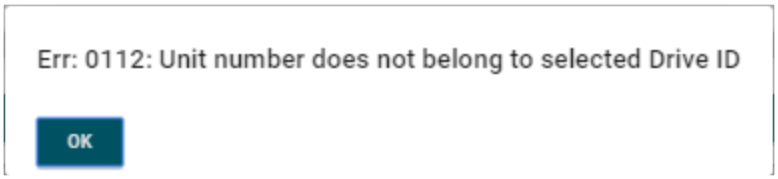


If the unit was entered by mistake, click the red X at the end of the row to remove the unit from the shipment.

The display of tube types is based on master code TUBE. To set the sequence of the headers define the Num Value in the master code with the correct numerical sequence. The sequence will determine how the tube types display in the screen.

## Save Button

Click Save to save the information into the shipper. When you acknowledge the message, it will ask if you would like to close the shipper.


WellSky Corporation
Proprietary and confidential

- Click **No** to leave the shipment open, which will allow you to add more units or tubes to the shipper number.
- Click **Yes** to close the shipment. You will not be able to enter any more units or tubes to the shipper number.

**NOTE –** If the system parameter SHIP_EXT is set to Y, when the box is closed, the extract process automatically begins and will contain only those units that are completed through BLEED.

Auto-extract will not occur for tube shipment only; a unit must be checked in the shipment for auto extract to process. Only shipment types of Units or Unit and tubes will go through the auto-extract process; when the box is closed, the extract process automatically begins and will contain only those units that are completed through BLEED.

A manual extract should be done at the end of the drive, even if the auto-extract has been set. See Section H.3.15.

## Close Button

The Close button is used to close the form without committing any data entered into the form.

## Shipment Report Button

The Shipment Report button is used to generate a report after the units/tubes have been saved (committed). The system displays the report and allows the user to print it to a printer or save it as a PDF file.

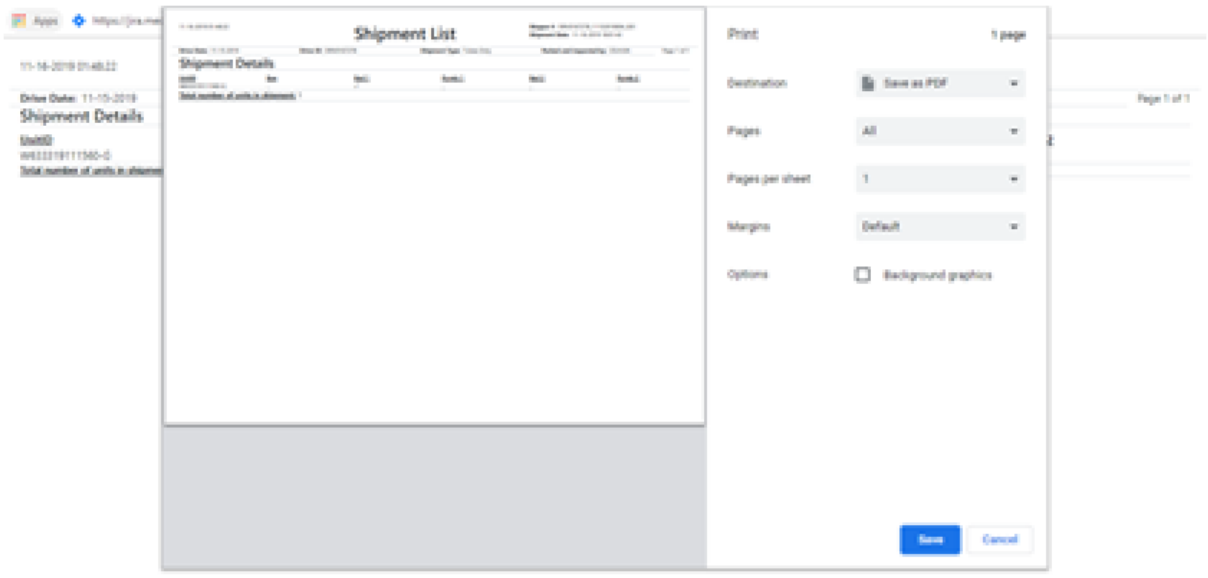


The report can be saved to a specified location and viewed as a PDF.

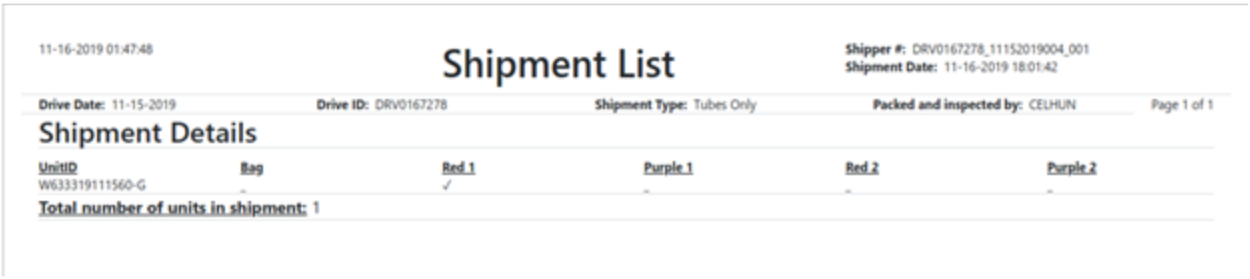

11-16-2019 01:47:48

## Shipment List

**Shipper #:** DRV0167278_11152019004_001
**Shipment Date:** 11-16-2019 18:01:42

**Drive Date:** 11-15-2019 **Drive ID:** DRV0167278 **Shipment Type:** Tubes Only **Packed and inspected by:** CELHUN Page 1 of 1

### Shipment Details

| UnitID | Bag | Red 1 | Purple 1 | Red 2 | Purple 2 |
|---|---|---|---|---|---|
| W033319111560-G | - | ✓ | - | - | - |

**Total number of units in shipment:** 1

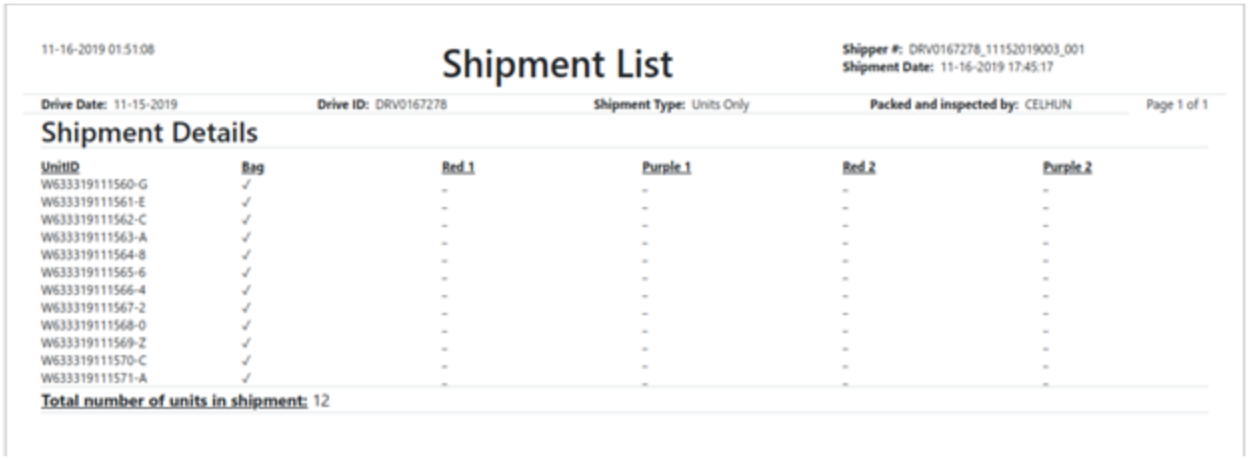

11-16-2019 01:51:08

## Shipment List

**Shipper #:** DRV0167278_11152019003_001
**Shipment Date:** 11-16-2019 17:45:17

**Drive Date:** 11-15-2019 **Drive ID:** DRV0167278 **Shipment Type:** Units Only **Packed and inspected by:** CELHUN Page 1 of 1

### Shipment Details

| UnitID | Bag | Red 1 | Purple 1 | Red 2 | Purple 2 |
|---|---|---|---|---|---|
| W033319111560-G | ✓ | - | - | - | - |
| W033319111561-E | ✓ | - | - | - | - |
| W033319111562-C | ✓ | - | - | - | - |
| W033319111563-A | ✓ | - | - | - | - |
| W033319111564-8 | ✓ | - | - | - | - |
| W033319111565-6 | ✓ | - | - | - | - |
| W033319111566-4 | ✓ | - | - | - | - |
| W033319111567-2 | ✓ | - | - | - | - |
| W033319111568-0 | ✓ | - | - | - | - |
| W033319111569-Z | ✓ | - | - | - | - |
| W033319111570-C | ✓ | - | - | - | - |
| W033319111571-A | ✓ | - | - | - | - |

**Total number of units in shipment:** 12

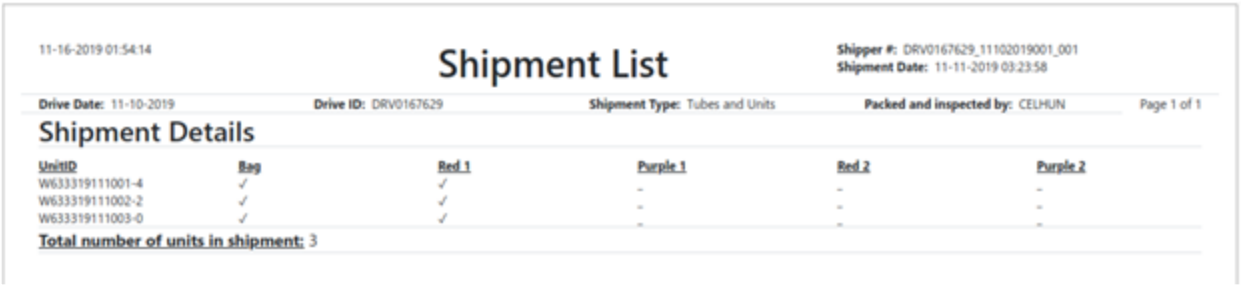

11-16-2019 01:54:14

## Shipment List

**Shipper #:** DRV0167629_11102019001_001
**Shipment Date:** 11-11-2019 03:23:58

**Drive Date:** 11-10-2019 **Drive ID:** DRV0167629 **Shipment Type:** Tubes and Units **Packed and inspected by:** CELHUN Page 1 of 1

### Shipment Details

| UnitID | Bag | Red 1 | Purple 1 | Red 2 | Purple 2 |
|---|---|---|---|---|---|
| W033319111001-4 | ✓ | ✓ | - | - | - |
| W033319111002-2 | ✓ | ✓ | - | - | - |
| W033319111003-0 | ✓ | ✓ | - | - | - |

**Total number of units in shipment:** 3


WellSky Corporation
Proprietary and confidential

## To Query

Enter the date, drive, and type of shipment. Select the shipper number, and the data will display. Updates cannot be made in query mode; it is view-only.

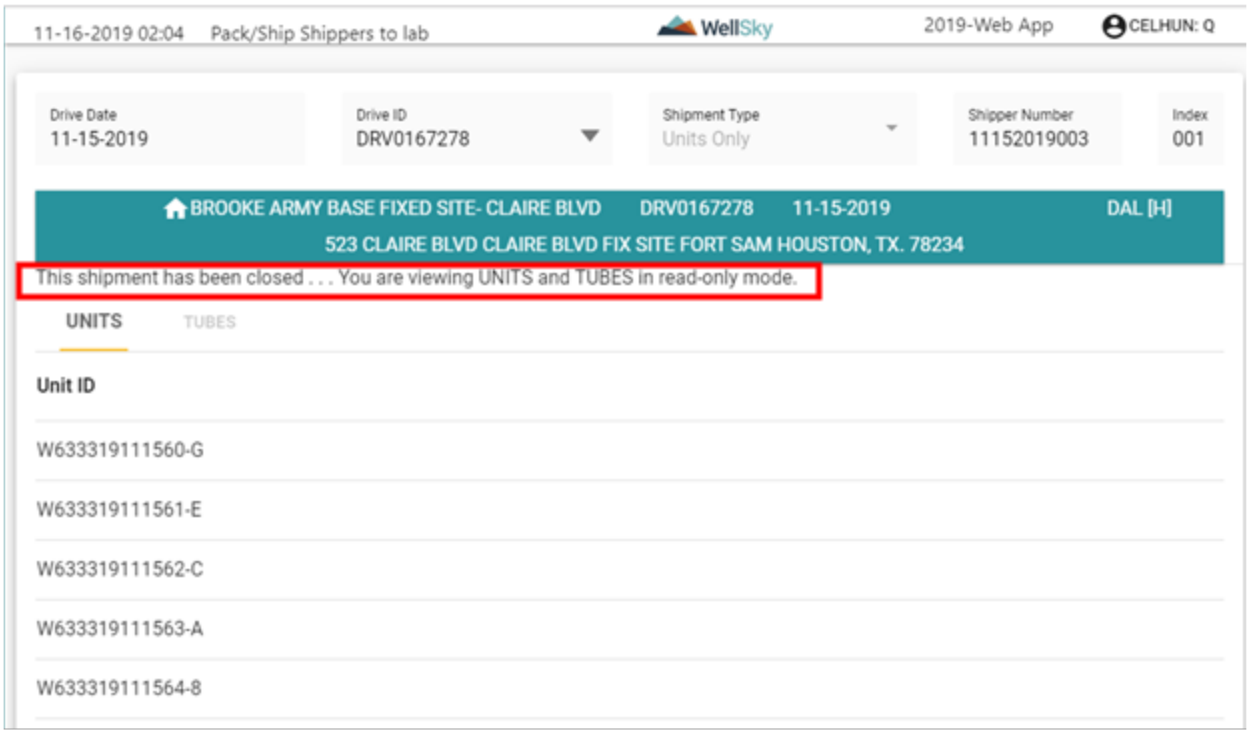


## At Commit

- Data is committed to the database.
- If auto-extract is set to occur at the time the shipment is closed, extract will occur for all units that have a 'Completed' status and a linked donation. Auto-extract will only occur if the shipment contains units; it will not auto-extract for tube shipment only.

## What to Do Next

For normal processing, press **F8** (Exit Screen).

# 7.7.8 OnSite Status Query

## Intended Use

Use this screen to query the status of donors at the selected drive.

## Limitations

Only drives using OnSite Registration can be viewed using this query.

# Prerequisites

At least one criterion must be entered.

# Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **OnSite Status Query**.

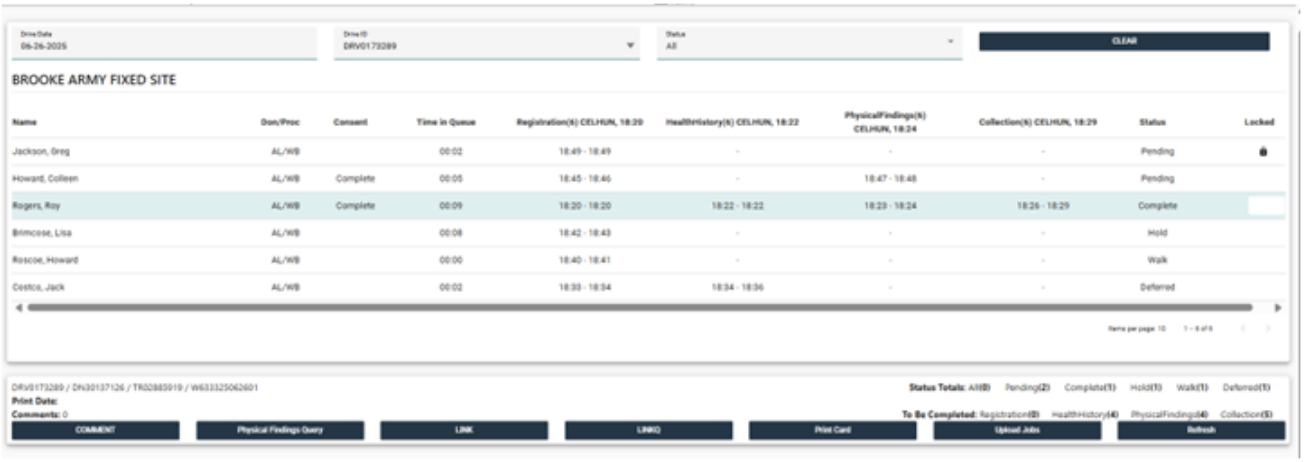


## Drive Date

Will default to the drive date that was entered during set-up. To change, enter a drive date using the MMDDYYYY format.

## Drive ID

Enter a valid drive ID or select from the LOV. If a drive date is entered, the LOV is restricted to drives within the specified date.

## Status

Will default with the status of ALL. Enter a status or select from the LOV. Statuses are ALL, Pending, Completed, Deferral, Hold and Walkout.

# Retrieving Data

After defining the query, donation records display according to the specified parameters.

Beside each header will be the expected totals for each column.

The following data displays for each donor record:

- Donor Name
- Don/Proc – donation type and procedure code


WellSky Corporation
Proprietary and confidential

- Registration Start and End Time, and override reason code, if applicable, will appear in red in parentheses

**NOTE –** Once you highlight a donor, it will update the headers with the user ID and end time for each function.

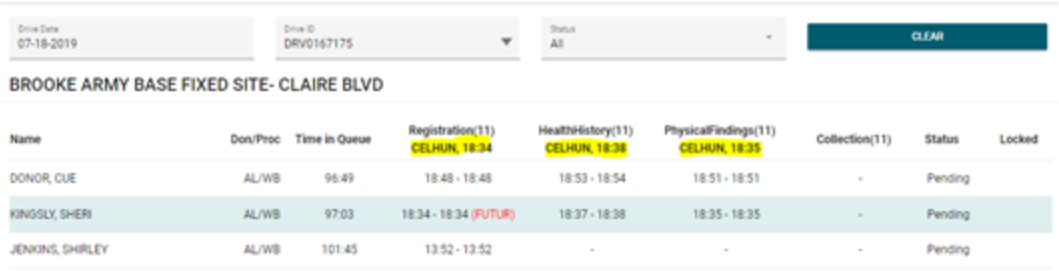


- Health history start and end time, and override reason code, if applicable, will appear in red in parentheses
- Physical findings start and end time, and override reason code, if applicable, will appear in red in parentheses
- Collection bleed start time and bleed end time
- Status of donor at the drive
- Locked if the donor is locked at the time. (A lock symbol will appear in the column.)
- Donor ID/Transaction ID appears in the bottom of the screen
- Unit ID or Deferral ID will appear under the Transaction ID
- Last updated - displays user ID and time of the update
- Print date/time for when the donor card was printed
- Comments - if the donor has comments associated, and any new comments will be in (red) beside the number of comments on the donor

The following is the statistical data for the drive selected:

- Totals pending, completed, and deferred based on the information entered in the control block (by drive, by date or combination).
- The number of health histories, physical findings and collection information that still needs to be completed.

## Check Comments Button

Once you select the donor, the Check Comments button will be enabled for you to click and enter a comment.

## Physical Findings Query

Select a unit that has had physical findings completed, and click the button to open a view of the physical findings on the donor.

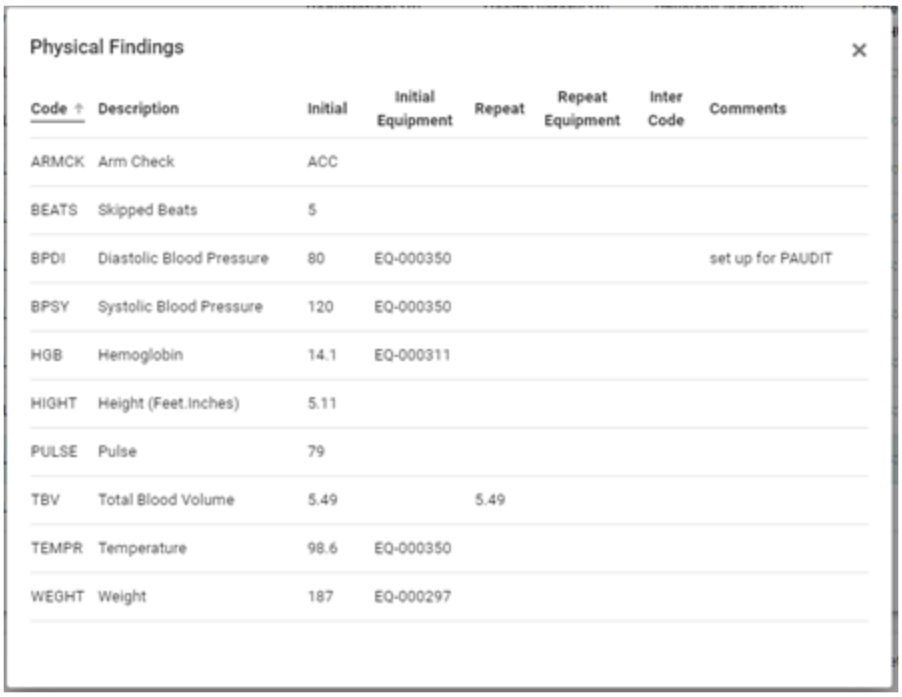


## Link Button

Once a unit or a deferral has been linked to the donor, this button is enabled. When it is clicked, it takes you back to the Link Unit/Deferral page to perform the next functions.

## LINKQ Button

Click this button to go to the Unit Deferral Link Query page to view all unit IDs and deferral IDs that have been linked to donors.

## Print Card/RePrint Card Button

Click **Print Card** to print the donor card. The donor card can contain the donor demographics, health history, and physical findings, if the processes have been completed. The very least amount of data that will be present on the card is the donor demographics.

**NOTE –** The system parameter DONORCARD must be defined with the correct program name for the facility's donor card to be printed from the .net application.

If the system parameter DONORCARD is not defined in the System Parameters table, the Print Card button will not appear on the page.

If an invalid value is entered for the parameter, when **Print Card** is clicked, a blank page will display.

The Print Card button will be relabeled if the donor card was previously printed. The button will be relabeled as "RePrint Card".




## Upload Jobs

Displays all uploads for the drive. Statuses to display are: In Queue, Processing, Error, and Completed. This is only used for mobile server uploads.

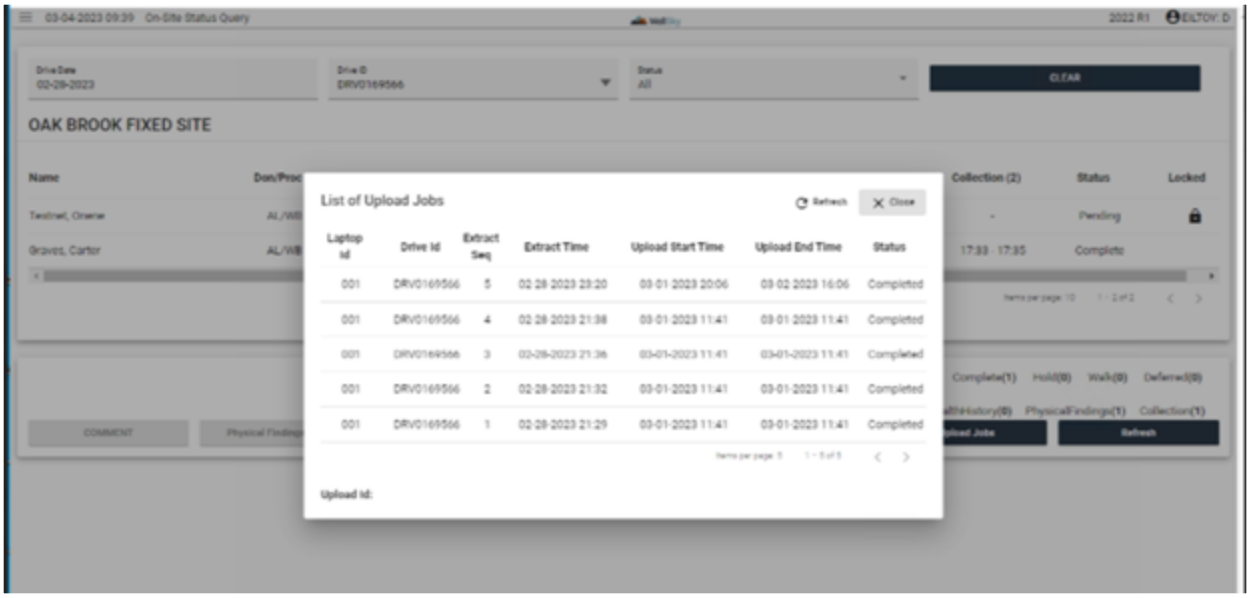


## Mobile Server Extract Status Button

Displays all uploads for the drive. Statuses to display are: In Queue, Processing, Error, and Completed. This is only used for mobile server uploads.

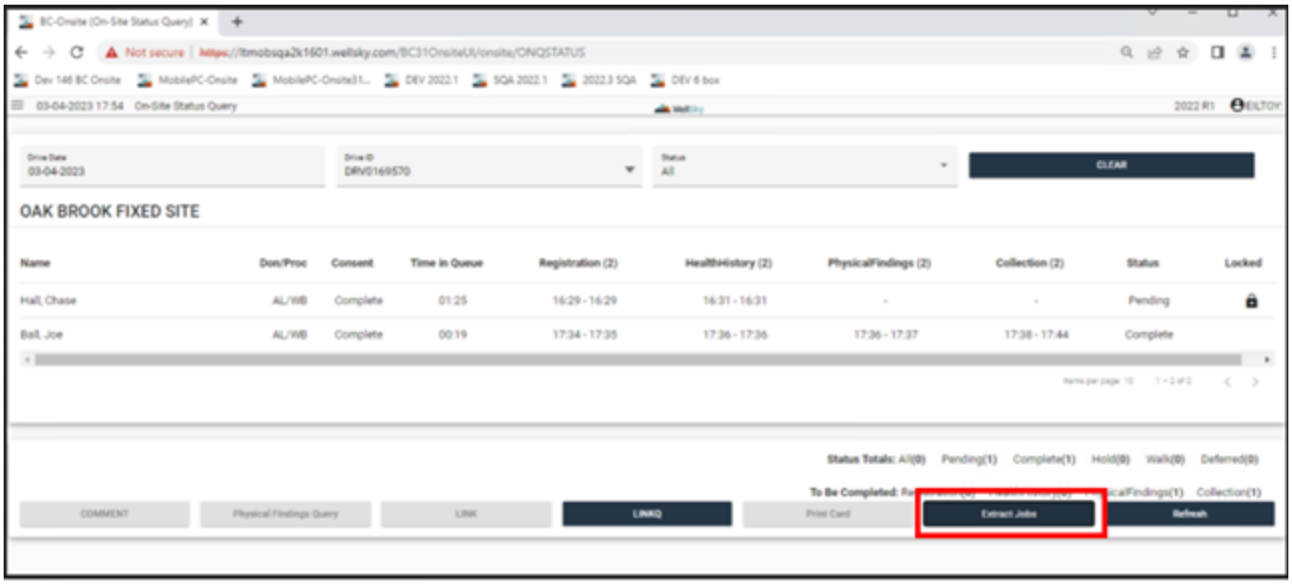


When you click **Extract Jobs**, the following window displays with the status of the extract job.

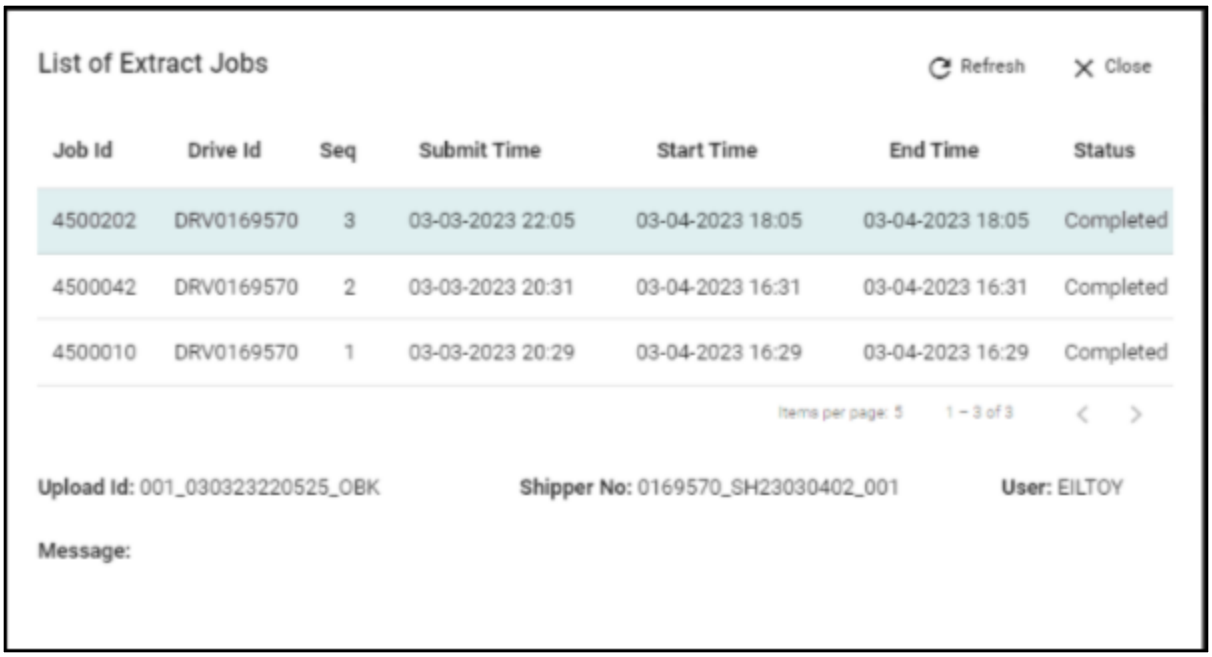


## Unlock a Donor

**NOTE –** You must have access to unlock the donor: UACCESS must have been defined for ULOCK. If you do not have access, the following window opens:

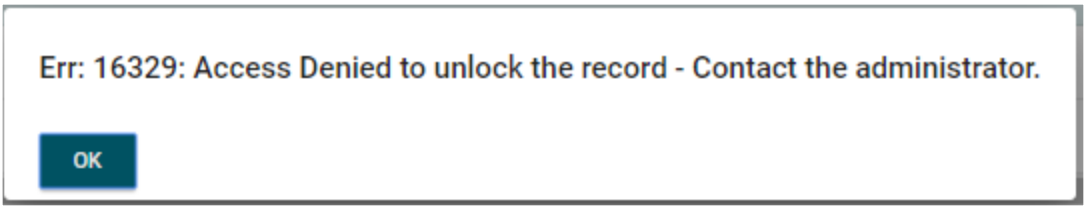


Use this button to unlock the donor. To do this, do the following:

1. Highlight the donor you want to unlock. The donor will have a lock symbol in the *Locked* field.
2. Click **Unlock**. The following window opens:

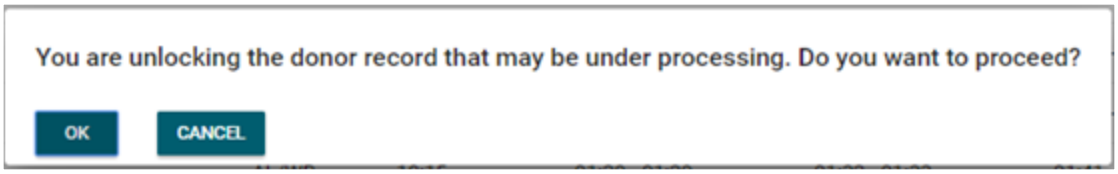


3. Click **OK** to unlock the donor, or click **Cancel** to cancel the unlock and keep the donor locked.

**Important!** Make sure that you select the correct donor to unlock. If you unlock the wrong donor, the donor's data could be corrupted.


WellSky Corporation
Proprietary and confidential

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.7.9 Unit/Deferral Link Status Query

## Intended Use

Use this screen to query donors who have or have not had a deferral or a unit ID linked to them.

## Limitations

None

## Prerequisites

At least one criterion must be selected.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Unit/Deferral Link Status Query**.

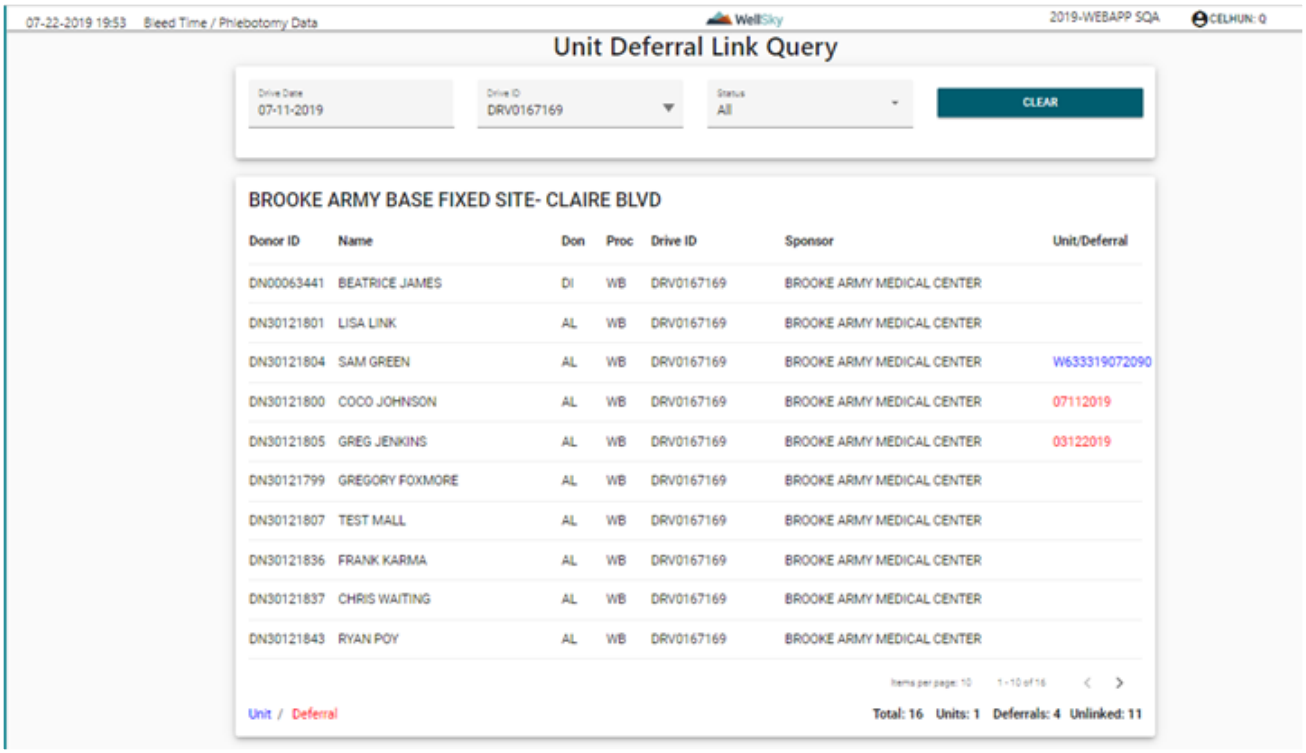

**NOTE –** At least Drive Date or Drive ID must be entered in order to query data.

### Drive Date

Entry is optional. Enter the date of the drive ID in which you would like to query.

### Drive ID

Entry is optional. Enter a valid drive ID or select from the LOV.

### Status

Entry is required. Select from the drop-down menu or use the default status of ALL. This will restrict the donors that are queried to the status that you select.

## Retrieving Data

After defining the query, click **Retrieve** to execute the query. Donation records display according to the specified parameters.

The following data displays for each record:

- Donor ID
- Donor Name
- Donation Type
- Procedure Code
- Drive ID
- Sponsor Name
- Linked unit ID or deferral ID
- Total number in drive for unit linked, deferrals linked, donors that have not been attached to unit or deferral

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.7.10 Donor Walkout

## Intended Use

Use this screen to end the donation process when the donor walks out.


WellSky Corporation
Proprietary and confidential

## Limitations

- Donor cannot have a unit linked to the donation.
- Donor cannot have a deferral placed through any screen in the OnSite Registration module.

## Prerequisites

- Donor must be registered using Look-up/Registration & Modify Data.
- The number of times data must be entered in the detail block is determined by the DON_VERIFY in the Configure Find Donor Block for Program table (DONBLOCK).

## Accessing the Screen

Access this screen from the OnSite Module menu by clicking **Donor Walkout**.

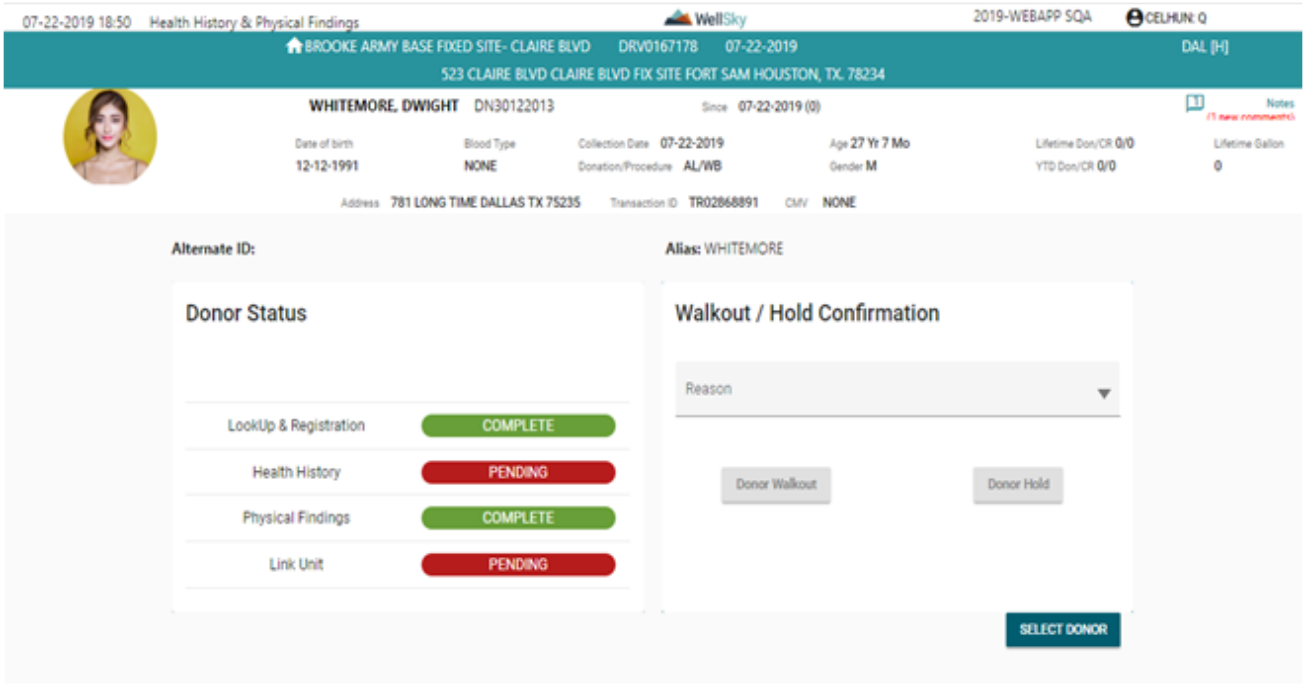

# Donor Selection

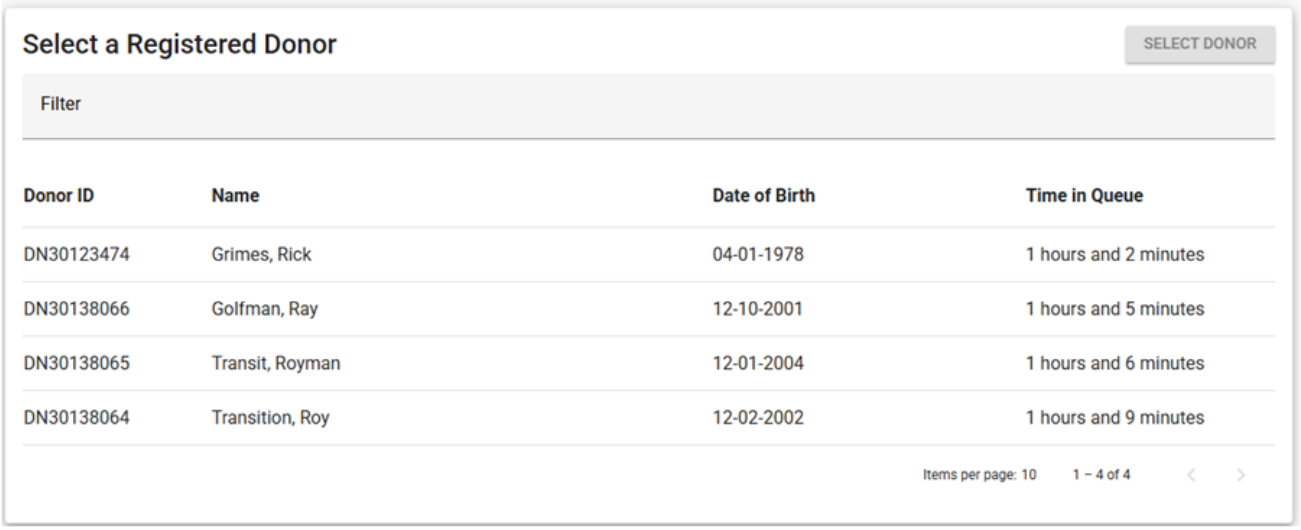


Highlight a row for the donor to be selected, and then click SELECT DONOR to bring the donor to the Donor Walkout page. If the DON_VERIFY in the DONBLOCK has been configured for specific field(s), then those field(s) will have to be re-entered.

## Donor ID

This field is display only. Updates are not allowed.

## Last

Entry is determined by DON_VERIFY in the DONBLOCK. If configured to be entered twice, you must enter the name twice and the entries must match.

## DOB (Date of Birth)

Entry is determined by DON_VERIFY in the DONBLOCK. If configured to be entered twice, you must enter the DOB twice and the entries must match.

## Sex

Entry is determined by DON_VERIFY in the DONBLOCK. If configured to be entered twice, you must enter the sex twice and the entries must match.

## First

Entry is determined by DON_VERIFY in the DONBLOCK. If configured to be entered twice, you must enter the first name twice and the entries must match.

# Status Block Fields and Definitions

Status will be Complete (Green) or Pending (Red).

## LookUp & Registration

Display only. Displays the status of the LookUp/Registration process.


WellSky Corporation
Proprietary and confidential

### Health History
Display only. Displays the status of Health History.

### Physical Findings
Display only. Displays the status of Physical Findings.

### Link Unit
Display only. Displays the status of Unit Link.

## Walkout/Hold Confirmation Block Fields and Definitions

### Reason
Enter reason code or select from a list. The list comes from master code WKRSN. To narrow the list, begin typing the reason in the field, and the list will automatically display and narrow as you type.

## Donor Walkout Button
Click **Donor Walkout** to place the DNWLK attribute. Once the donor returns, it will require the donor to repeat the entire process, including registration. Once the donor is registered, the DNWLK attribute is removed.

## Donor Hold Button
Click **Donor Hold** to temporarily hold the donor record until the donor returns. It will not require the donor to be registered again. It will require only the questions marked for repeat in Create Health History Template (VDIHHTP) to be asked and the physical findings to be reviewed again.

## At Commit
The status of the donor is updated to W for walkout or H for Hold.

## What to Do Next
There is no next step.

# 7.7.11 Bleed Time Entry - Back Office

## Intended Use
This screen is used in a back office mode to enter bleed time and phlebotomy details for a donation after the process is completed. It allows for a final check on eligibility if the procedure code is modified from the original procedure entered at registration.

## Limitations
- Bleed times can only be entered on a donor that has been registered to the displayed drive.
- To use the Back office mode, the unit ID must be linked to the donor to enter bleed times.
- The collection date and drive ID will not populate until the unit ID is entered when using the back office mode.

- If the interface to Lab is complete and updates are made in the Back office mode, the user is responsible for updates in Lab.

## Prerequisites

- Drive must be defined.
- Physical findings and health history must be completed before a unit can be associated to the donor.
- Find Donor Block for DON_VERIFY must be defined for the required field entry.
- Menu item must be defined for back office versus online.
- The following System Parameters must be defined:
  - EQUIPQC_RQ – enter "Y" to have focus on the Equipment tab when entering the page; enter "N" to have focus on the Bleed tab when entering the page.
  - CUEYN – If the facility sets CUEYN to Y, then the CUE field is required. If CUEYN is set to N, then the CUE field does not appear.
  - OL_CON_RE – to designate whether or not the consent check is required.
  - BDRLOC – location where the BDR reports will be saved after generation.
  - GENBDR – configure with either **Y** (will generate the BDR report) or **N** (will not generate the report).
- The following Master Codes must be defined:
  - EQUIP – list the equipment codes from Lab that are linked to apheresis machines.
  - APHER – designate the procedure groups that will require equipment to be entered for the procedure.
  - EQBRQ – master code must be defined for every procedure to determine if equipment and bag linkage is required to complete the donation and determine the number of tubes required in collection for the procedure.
  - TABB – master code must be defined to configure the order of the tabs in the bleed page.
  - MATVE – must be defined to configure if material verification will be used by the facility.
    - ONPMV – turning on material verification so that the tab displays.
    - HOLD – interdiction placed if the material verification fails.
    - FINMV – checking material verification against the tube check-in.
    - TUBE – defaults the number of tubes to be collected.

**NOTE –** If using FINMV, the tube check-in should be configured to the maximum number defined in TUBE (or defined for any specific chapter) or defined in EQBRQ.

- Registration Holds (RHOLDS) – define the HOLD to be placed for procedure code and phlebotomist code if `99` is entered.
- Defining URLs to allow the entry of bleed times at the donation facility or BACK to allow entry of bleed times after the process is complete.
- The re-entry of data in the detail block is determined by the DON_VERIFY in the Configure Find Donor Block for Program table (DONBLOCK).


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the OnSite Module menu or by clicking on **Bleed Time Entry – Back Office**.

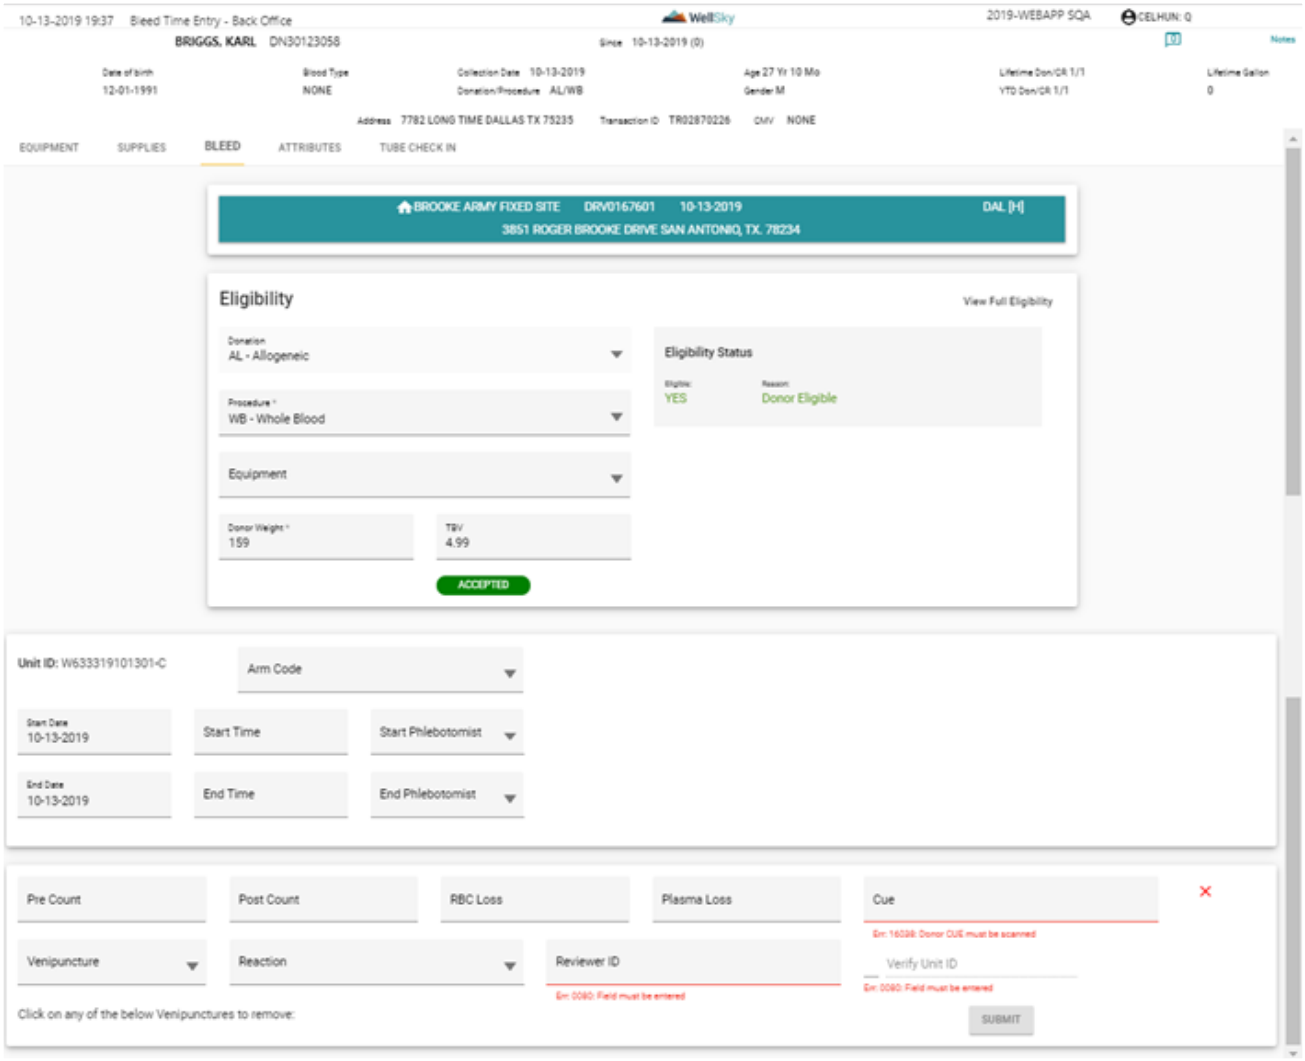


# Display of Tabs

The configuration order for the tabs is defined in master code TABB. A recommendation for configuration if the facility is using Material Verification is to put the Supply Tab as the first tab on the page.

**NOTE –** If master code MATVE is defined not to use Material Verification, the Supply Tab will not display at all on the page. Refer to the above screenshot for an example.

# Fields and Definitions

## Drive Date

Entry is required. Enter the drive date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

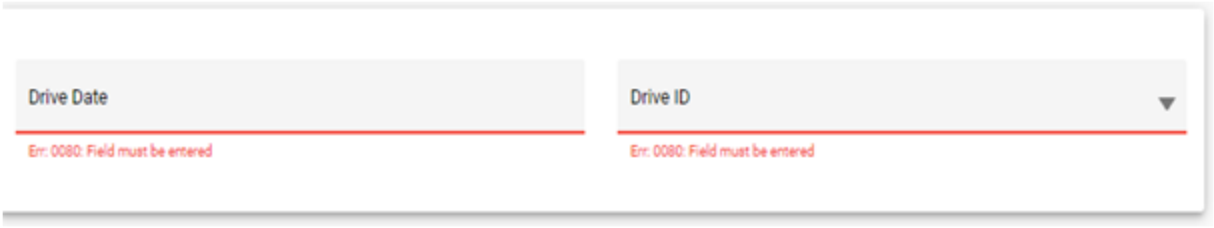


## Drive ID

Entry is required. Enter the drive ID or select it from the list.

After entry of the drive date and drive ID, the Unit ID field displays to allow scanning.

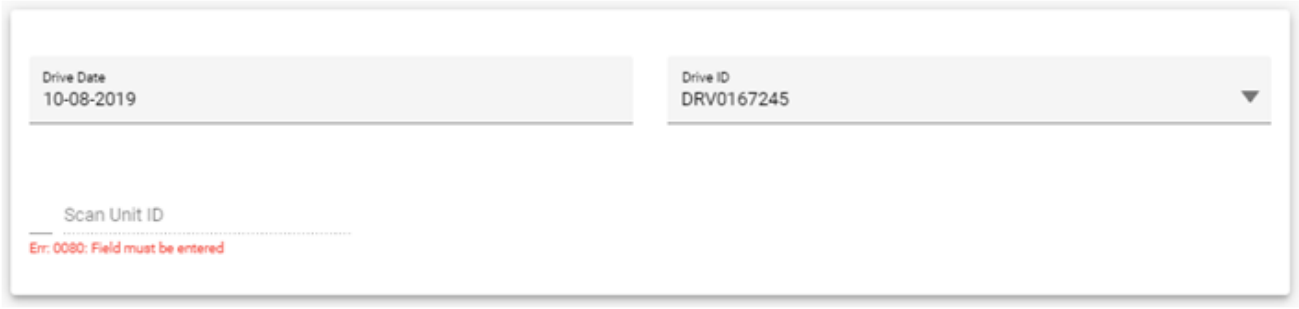


## Unit ID

Entry is required. Scan the unit ID bar code or manually enter the unit ID of the donation to be registered.

## Last

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the donor's last name twice and the entries must match.

**NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

## DOB (Date of Birth)

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the DOB twice and the entries must match.

**NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

## Sex

Entry is determined by DON_VERIFY in the (DONBLOCK). If this field is configured to be entered twice, you must enter the donor's sex twice and the entries must match.

**NOTE –** The first entry is the selection through the list, and the second entry will be within the field.


WellSky Corporation
Proprietary and confidential

### First

Entry is determined by DON_VERIFY in the (DONBLOCK). If configured to be entered twice, you must enter the donor's first name twice and the entries must match.

**NOTE –** The first entry is the selection through the list, and the second entry will be within the field.

## Eligibility Block

### Donation

This is a display-only field and cannot be updated.

### Procedure

This field displays the procedure that had the health history and physical findings based on it. If the procedure is modified, enter the procedure or select it from the list. When you move out of the field, a message will display:

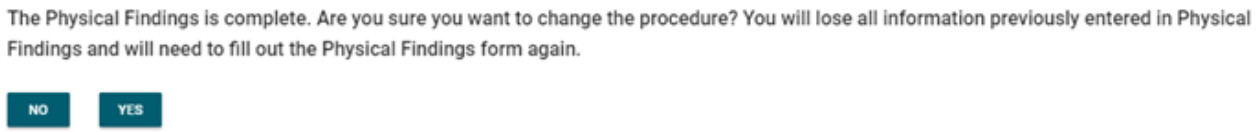


If you click NO, the cursor goes back to the Eligibility Block and the Procedure field. If you click YES, it redirects you to Physical Findings for it to be re-entered. Once physical findings is complete, the system directs you to sign a new consent form for the new procedure.

**NOTE –** If the donor is not eligible to donate for that procedure, the donor will have a HOLD interdiction (DNELG) placed.

If a 99 procedure code is recorded on the donor record, a hold is placed on the donation; you may continue the registration. A facility-defined interdiction is placed when a 99 procedure code is entered.

**NOTE –** If the procedure needs to be updated after bleed times have been entered, the update should occur in "Update Donation (REGMAINT)".

### Donor Weight

This field displays the donor weight entered during the registration and physical findings process. The field can be updated, and the TBV will be recalculated.

### TBV

This field displays the total blood volume.

# In the Bleed Time and Phlebotomy Block

## Arm Code

Enter an arm code or select from the list.

Enter the following information about the blood draw, if available:

- Start Date – defaults the date automatically to the drive date. If you press F2, it will populate both the start date and start time with the current date and time.
- Start Time – the time the blood draw began (using the HH:MI format). Press F2 to populate the current time.
- Phleb – the employee ID of the person who made the stick. Enter the ID or select from the list.
- End Date – defaults the date automatically to the drive date. If you press F2, it will populate both the end date and the end time with the current date and time.
- End Time – the time the draw ended (using the HH:MI format). Press F2 to populate the current time.
- Phleb – the employee ID of the person who completed the draw. Enter the ID or select from the list.

If an entry is entered by mistake, press the "X" next to the bleed entry to remove it.

| Arm Code | Start | S Phleb | End | E Phleb | |
|---|---|---|---|---|---|
| R1 | 10-08-2019 12:00 | CELHUN | 10-08-2019 14:00 | CELHUN | X |

If a double stick is indicated, place the cursor in the arm code field for the next entry.

**NOTE –** Entry of bleed times is not mandatory. If bleed times are not available, press ENTER a sufficient number of times to move through all applicable fields.

If a 99 phlebotomist code is recorded on the Donor Record, a hold is placed on the donation; you may continue with the registration. A facility-defined interdiction is placed when a 99 phlebotomist code is entered.


WellSky Corporation
Proprietary and confidential

## Saving in the Bleed Time and Phlebotomy Block

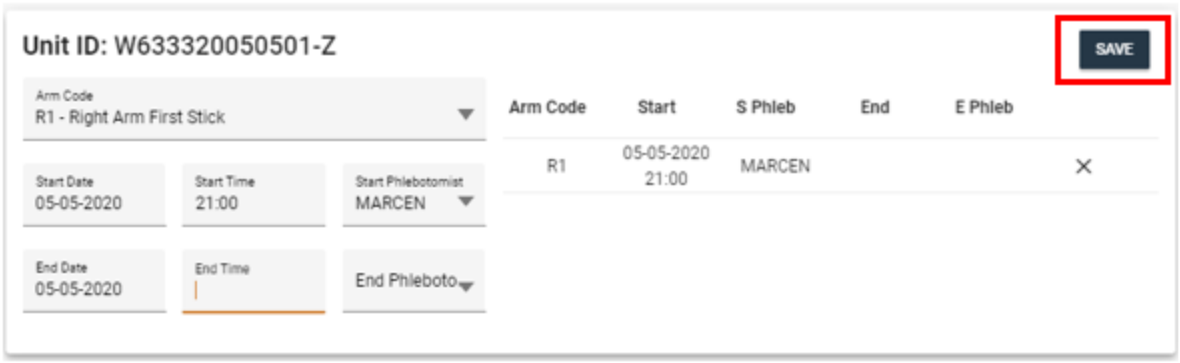


Clicking **Save** will commit the bleed times entered, but the donation will still be pending until the final **Submit** is clicked and verification is completed.

Once **Save** is clicked, the system will present the verification for the user to scan the unit ID. The scanned unit ID must match the unit ID displaying in the bleed entry time block.

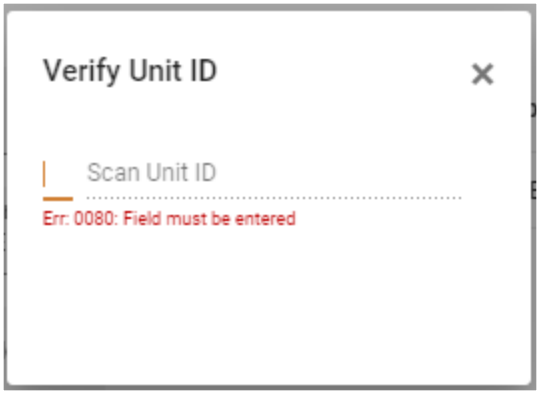


When the scanned unit ID matches, the system takes the user back to the *Scan Unit ID* field to enter the next unit.

### Pre count

Entry is optional. Enter a numerical value; this is information only. The field displays the value that was entered in the physical findings.

### Post count

Entry is optional. Enter a numerical value; this is information only. If the post count is entered, when the donor returns it will display in the registration screen under the Last Donation tab.

### RBC Loss

Entry is optional. Enter the RBC loss for that donation.  If a value is not entered, the default value displays. The default is the value entered for the standard red cell loss defined in the procedure code table when determining eligibility.

## Plasma Loss

Entry is optional. Enter the PLASMA loss for that donation. If a value is not entered, the default value displays. The default is the value entered for the standard plasma loss defined in the procedure code table when determining eligibility.

## Veni

Entry is optional. If the Donation Record indicates venipuncture codes, enter them or select from the list. Once the venipuncture code has been selected, it displays under the field.

Click on any of the below Venipunctures to remove:
**01 - Diff. Stick**, and **02 - Dbl. Stick**

To remove the venipuncture code, just click on the code and it will be removed.

## Reaction

Entry is optional. If a reaction code is indicated on the Donor Record, enter it or select from the list.

## Reviewer ID

Entry is required. Enter the reviewer ID or select from the list. The list contains only fixed site staff, but any staff member can be entered manually.

## CUE

Scan the donor Confidential Unit Exclusion (CUE) sticker. If no CUE sticker is present on the Donor Record or if the CUE sticker is not scannable, scan a generic NO CUE or AMBIGUOUS CUE bar code.

**NOTE –** The CUE field is only required if the facility has defined that the use of CUE is required. If the facility is not using CUE, the field will not be present on the form.

## Verify Unit

Entry is required. Rescan the bar code or reenter the unit ID. Your entry must match the original scan or entry. If the two do not match, an error message will display.

# Equipment Tab

Click on the Equipment tab to enter equipment used in the bleed process.

WellSky Corporation
Proprietary and confidential

Scan the reference number of the piece of equipment. Once the reference number has been scanned, the system will display the reference number and serial number of the equipment and indicate whether or not it has passed the QC process.

If the apheresis equipment entered is different from the equipment in the Eligibility Block, a message will display.

If the equipment entered matches what is in the Eligibility Block, all of the data will populate on the screen.

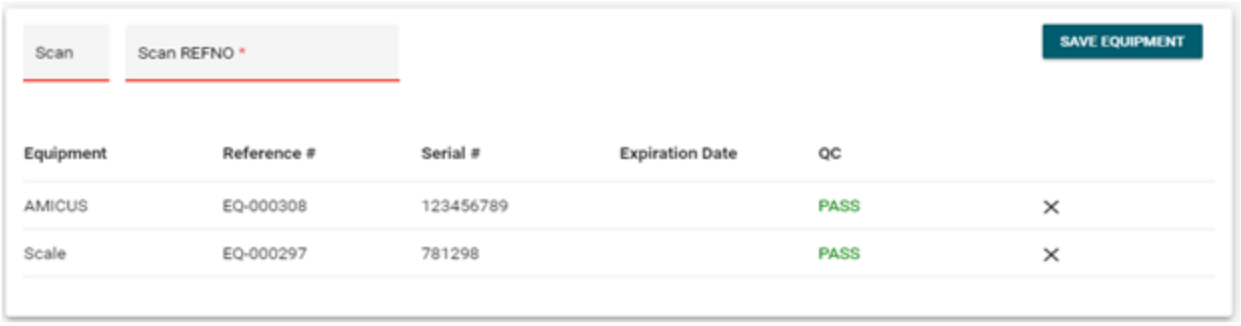


## Supply Tab

Click on the **Supply** tab to enter the supplies that will be used during the bleed process.

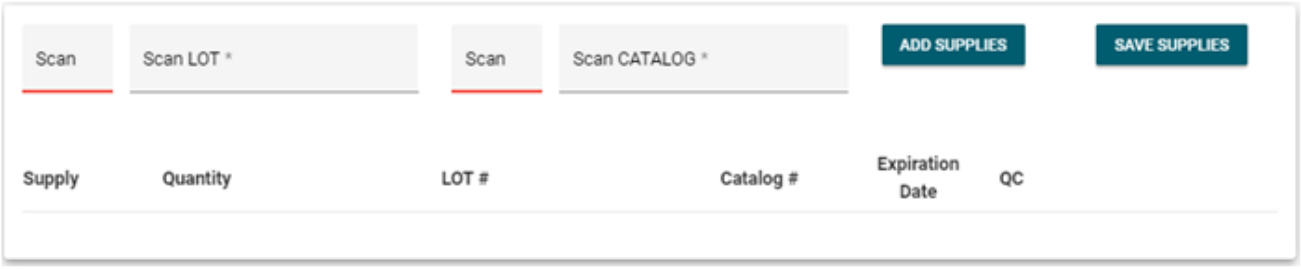


Entering a supply that has a scannable lot or catalog number, you are able to scan either the lot number or catalog number, and the system will display details in the bottom of the screen.

To manually enter a lot number or catalog number, enter "**M**" to move the cursor over into the Lot field or the Catalog field, and enter the lot number or catalog number, respectively. Once the supply is entered, the system will display data in the bottom block of the screen.

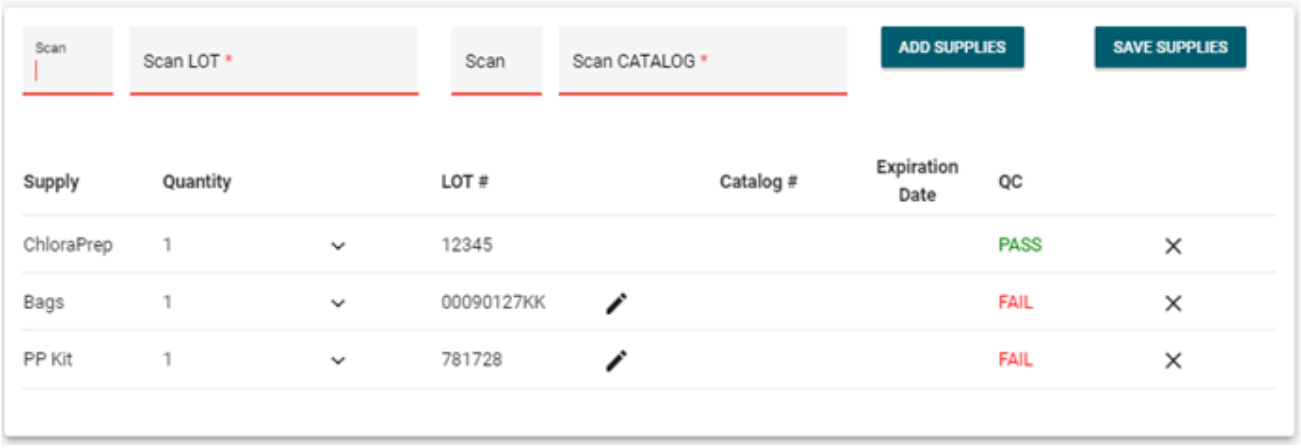

To add supplies that are not associated to a scannable lot number or catalog number, click ADD SUPPLIES.

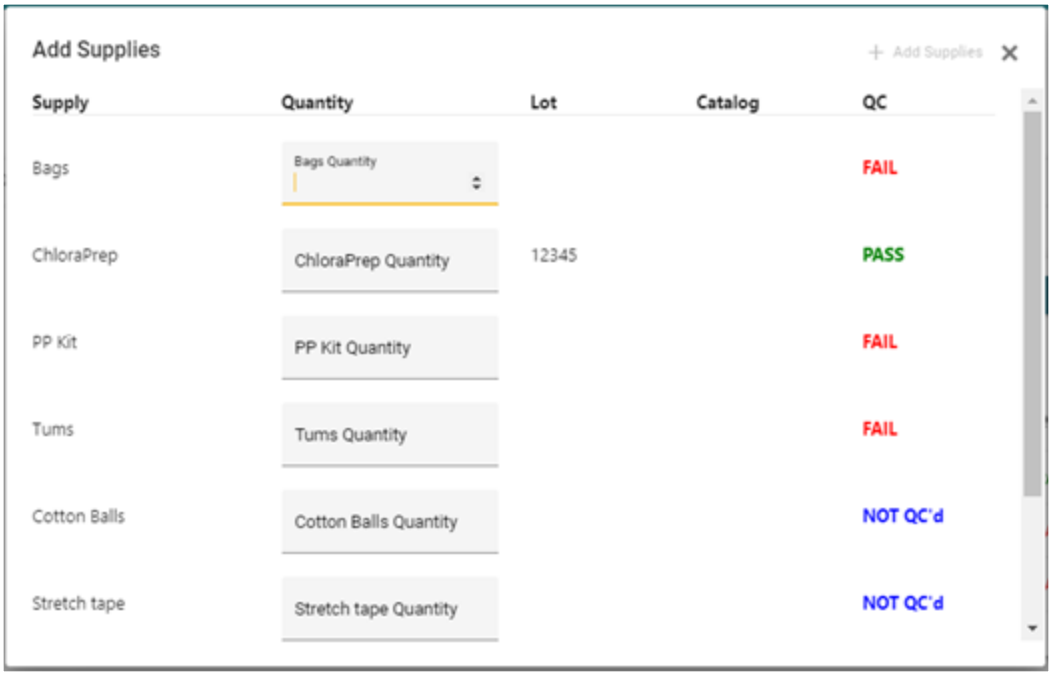


Enter the number of each type of supply used during the bleed process.

## Attributes Tab

Any attributes associated with the donor display in the Attributes Block. You will only see those attributes for which you have been granted viewing privileges.

## Tube Checkin Tab

To enter the tubes that were collected during the bleed process, click on the Tube Checkin tab.

WellSky Corporation
Proprietary and confidential

## Drive Date

Entry is required. The date will default based on the Set Drive screen, but it can be updated. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

## Drive ID

Entry is required. The drive ID will default based on the Set Drive screen, but it can be updated. Enter the drive ID or select from the list.

## Tube Type

Entry is required. Enter the tube type or select from the list. The list is populated through the master code TUBE.

## Unit ID

Scan or manually enter the unit number, and the system will display the detail information in the bottom detail area of the screen:

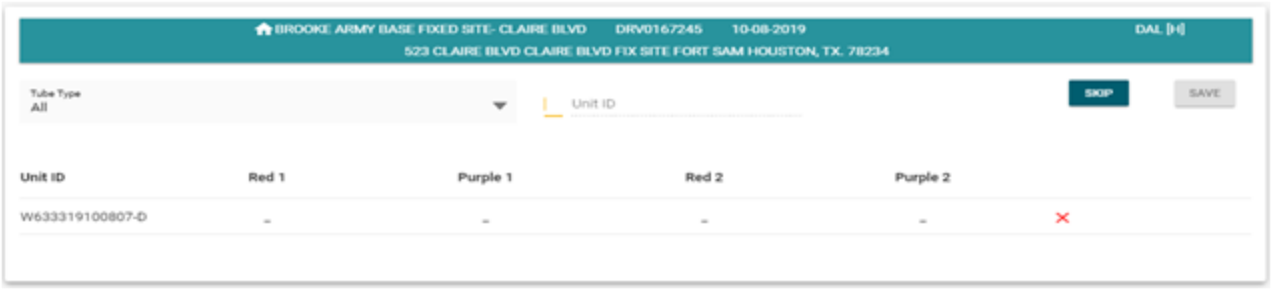


Scan or manually enter the unit ID for each type of tube being entered, and a check mark (✓) will display under each tube type.

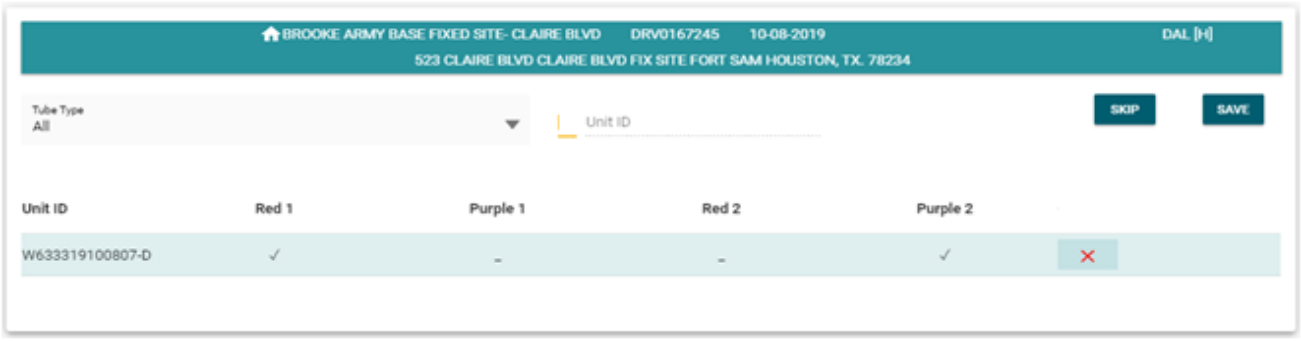


Click **SKIP** to skip the tube that is not being collected.

Click **SAVE** to commit the data to the database.

# Material Verification Tab

If material verification has been configured, the tab will display in the bleed page. Click the **Material Verification** tab to display it.

**NOTE –** If the bag has not been linked in the Supply Tab, the user will receive the following message:

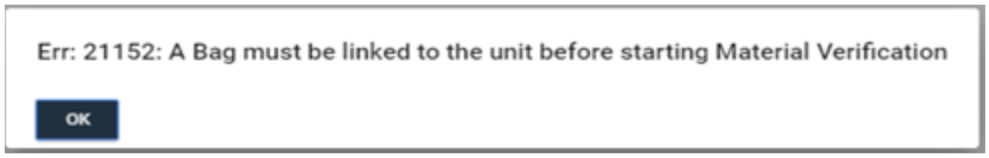


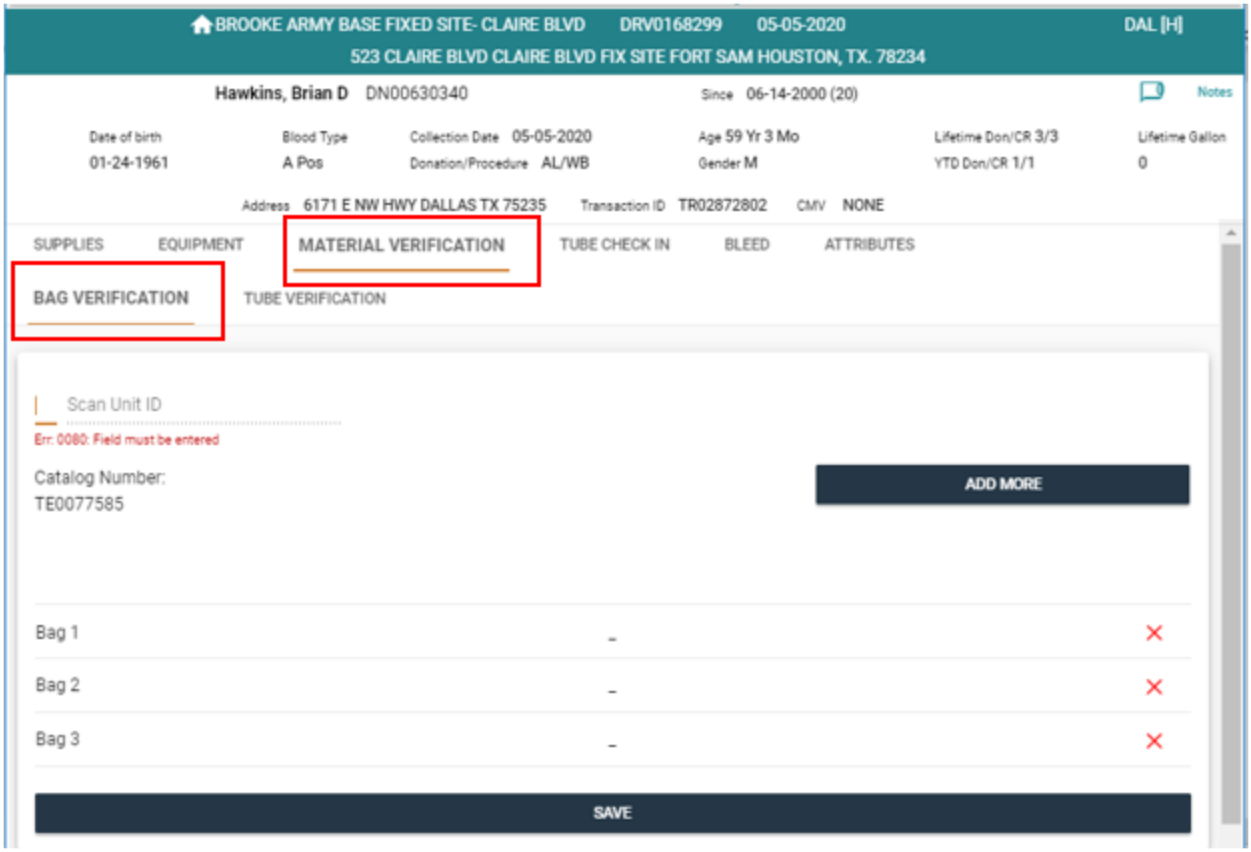


## Bag Verification

The catalog number that is linked to the donation will display under the *Scan Unit ID* field.

## Scan Unit ID

Scan or manually enter the unit number for each bag the unit number is applied to. After scan or manual entry, a check mark (✓) will appear by each bag. The bags display based on the number of bags configured in the Catalog table in the Lab application.


WellSky Corporation
Proprietary and confidential

Click the ✕ icon to remove the check mark by a bag.

If the configuration of the Catalog table was incorrect, additional bags can be added by clicking ADD MORE. Click ADD MORE as many time as you need to add bags.

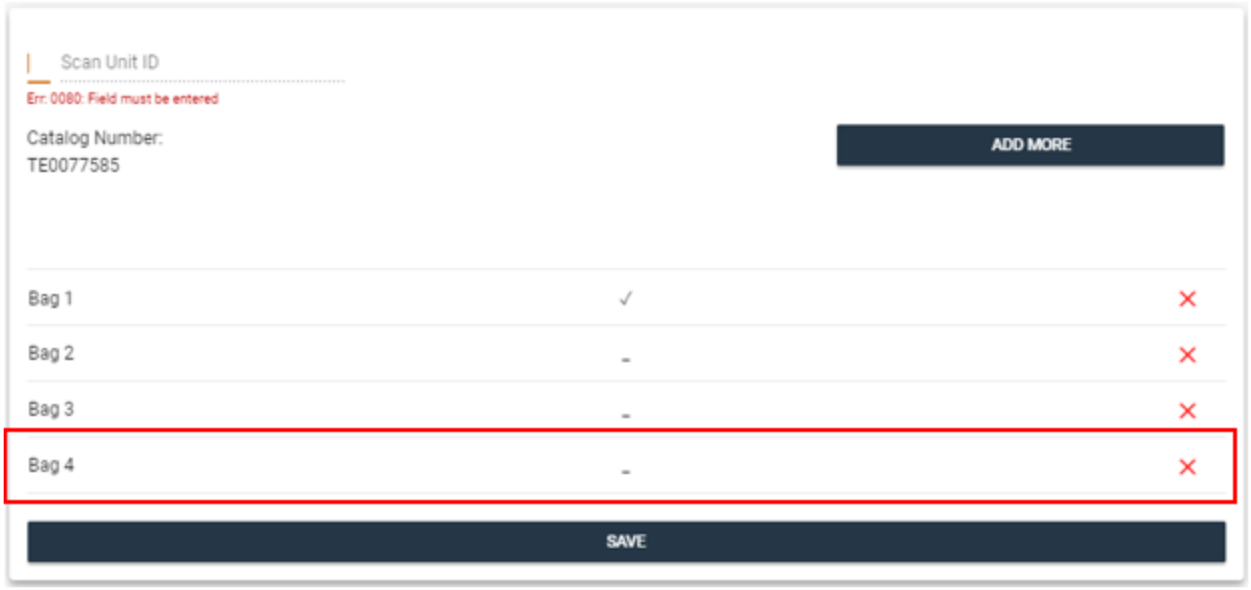


If less or more bags are verified, you will receive a message alerting you that the verification is not matching.

If you click YES, the system saves the entries, moves to the tube verification, and places the Hold interdiction configured in master code MATVE with a reason of BAGS. If you click NO, the cursor moves back to the *Scan Unit ID* field to allow you to correct the verification.

## Tube Verification

The procedure will display under the *Scan Unit ID* field that is associated to the unit.

## Scan Unit ID

Scan or manually enter the unit number for each tube the unit number is applied to. After scan or manual entry, a check mark (✓) will appear by each tube. The tubes display based on the number of tubes configured in the master code EQBRQ. If the EQBRQ is not defined, then the tubes displayed will automatically default to the number based on master code MATVE (TUBE) or code defined for a specific chapter.

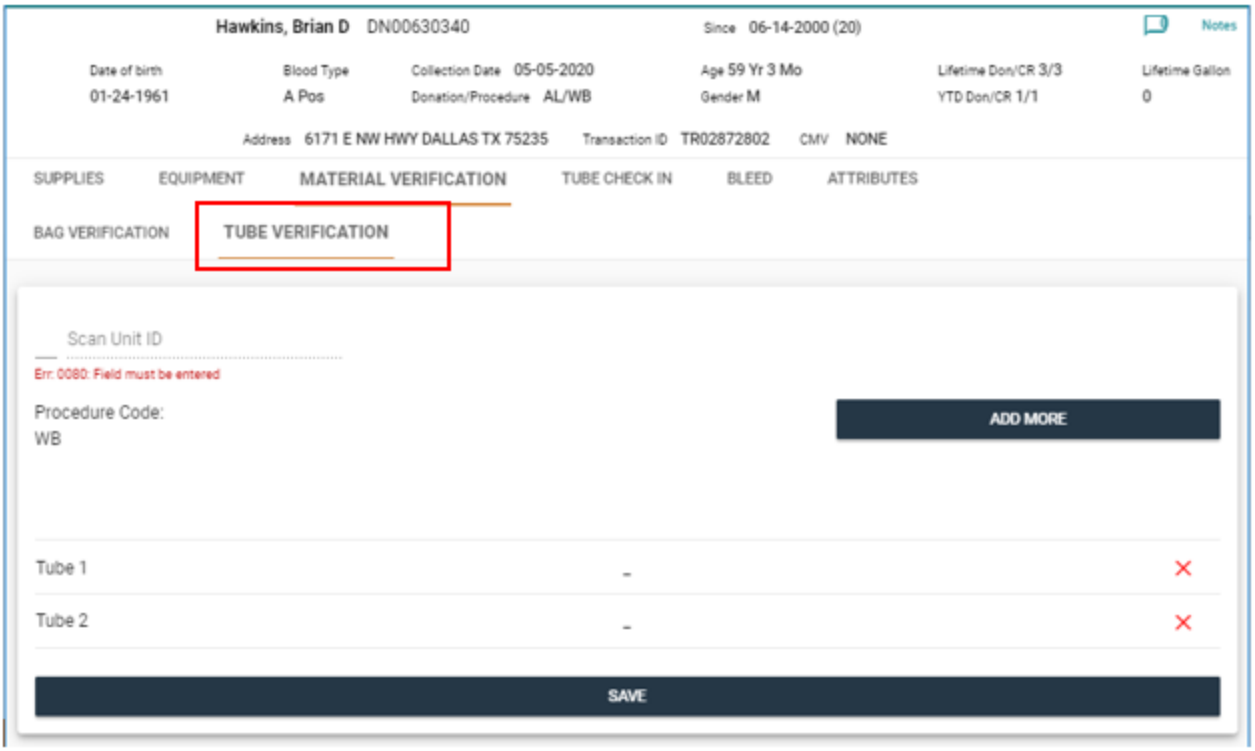


Click the ✕ icon to remove the check mark by a tube.

If more tubes need to be drawn than what displays, click ADD MORE. Click ADD MORE as many time as you need to add additional tubes.

If less or more tubes are verified, you will receive a message alerting you that the verification is not matching.

If you click YES, the system saves the entries, moves to the Bleed Tab, and places the Hold interdiction configured in master code MATVE with a reason of MTUBE. If you click NO, the cursor moves back to the *Scan Unit ID* field to allow you to correct the verification.

## At SUBMIT

There will be a check when SUBMIT is clicked to determine if the donation requires equipment linkage or a bag(s) needs to be linked to the donation. If the requirement is not met, the following message will display:

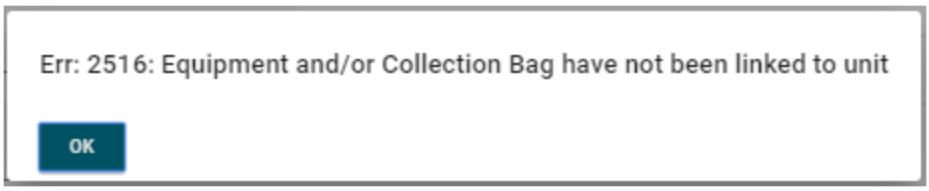


The user will need to go and link the bag and/or equipment, if required by the procedure.

There will be an additional check if material verification has been configured. If the master code MATVE (FINMV) is set to Y, then it will check the number of tubes entered during material verification against the count entered in Tube Check-In, and if the two do not match, you will receive the following message:

If you click YES, the hold interdiction will be placed with a reason code of RTUBE. If you click NO, you can go back and correct the verification mismatch in either Tube Material Verification or Tube Check-In.

## At Commit

The data for the bleed time entry is saved to the database and the OnSite Status Query for the Collection Block is updated.

If the configuration for the BDR report is set up, it will generate the BDR report in the designated directory.

## What to Do Next

There is no next step.

# 7.7.12 Tube Check-In

## Intended Use

Use this screen to check-in tubes that were collected on the donor during the bleed process.

## Limitations

None.

## Prerequisites

Master Code:

- TUBE – must be defined for the tube types. Only 4 tubes can be defined, and they must be red 1, red 2, purple 1, and purple 2. Define the number value for the order in which the tubes will display.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Tube Check-In**.

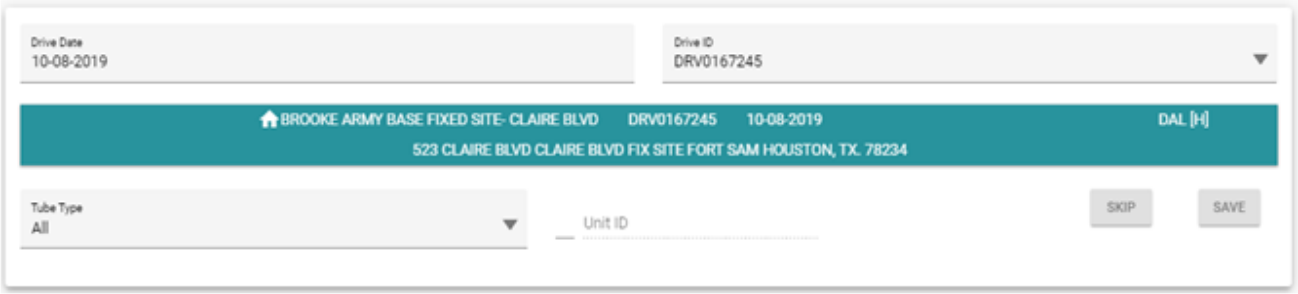


### Drive Date

Entry is required. The date will default based on the Set Drive screen, but it can be updated. Enter the date in MMDDYYYY format, and the system will reformat it to MM-DD-YYYY.

### Drive ID

Entry is required. The drive ID will default based on the Set Drive screen, but it can be updated. Enter the drive ID or select it from the list.

### Tube Type

Entry is required. Enter the tube type or select it from the list. The list is populated through the master code TUBE.

### Unit ID

Scan or manually enter the unit number, and the system will display the detail information in the bottom detail area of the screen:

Scan or manually enter the unit ID for each type of tube being entered, and a check mark (✓) will appear under each tube type.


WellSky Corporation
Proprietary and confidential

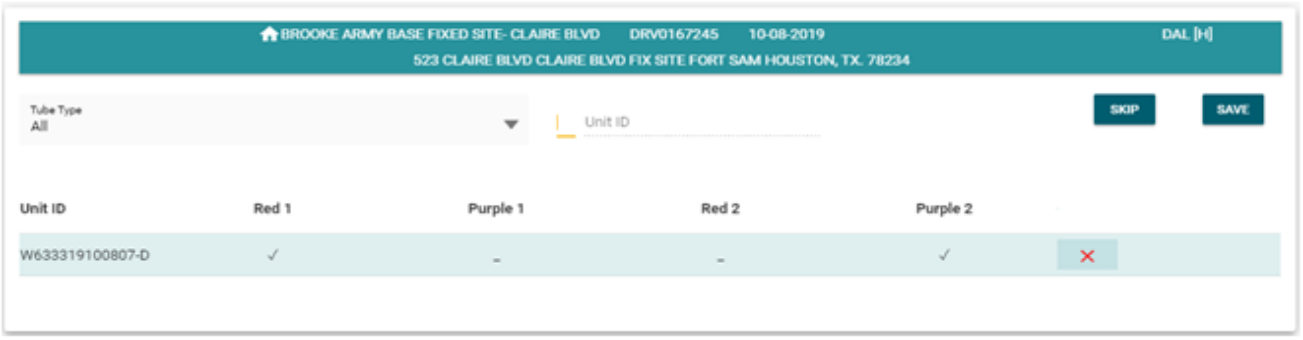


Click SKIP to skip the tube that is not being collected.

Click SAVE to commit the data to the database.

# 7.7.13 Extract Mobile Server Data

## Intended Use

Use this screen to perform the data extraction from the Mobile laptop database. This process can be initiated as often as needed as a new file is created each time. The screen has a button to initiate the task. If there are no errors, the routine returns the success message; otherwise, the screen displays an error message.

## Limitations

- A manual extract MUST occur at the end of the drive if auto-extract is set up (SHIP_EXT).
- If auto extract has been set up and only tube shipments are being shipped, manual extract must be used if tube shipments are to be extracted.
- Deferrals and walkouts are not part of the auto-extract process. To extract these donors, the manual extract must be used.

## Prerequisites

- The APIDR master code must be populated to specify the directory to which the data tables are extracted.
- The EXTDLT system parameter must be set to provide the delimiter used in the extract file for Mobile PC Donor Registration.
- The ENCRPT_REQ system parameter must be set to 'Y' to encrypt the data in the extract file; otherwise, the data in the extract file will not be encrypted.
- Set the WEBITM for the program MODE = MOBILE. This program is only used on the mobile server, and it should not display at a fixed site or main donor center.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking Extract Mobile Server Data.

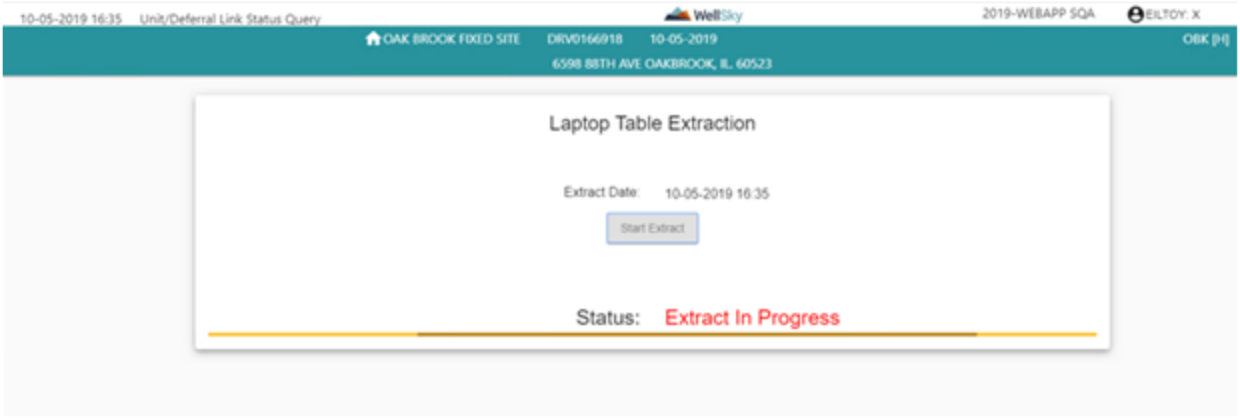


## Control Block Fields and Definitions

### Extract Date

The date and time the extraction was started displays here. The field is not navigable.

### Status

The status of the data extract displays here. The field is populated at extract completion with the result of the extract process. The field is not navigable.

### Start Extract Button

Click **Start Extract** to begin the extraction.

## At Commit

No changes are committed to the database from this screen.

## What to Do Next

There is no next step.

# 7.7.14 Mobile PC Upload/Download Utility

## Intended Use

Use this screen to download and upload donor data so that mobile blood drives can access donor data without a network connection to the Blood Centers application. Specifically, you can:

- Download donor data from the Blood Centers application server to a mobile site master laptop.
- Upload donor data from a mobile site master laptop to the Blood Centers application server.

Donor data can be downloaded from the Blood Centers application server to a mobile site master laptop. This data contains complete donor information to identify uniqueness of donor, eligibility, deferrals (interdictions), and historical donation/deferral data, including previous answers to health history questions. With this downloaded data, the OnSite Registration module is fully functional at the mobile site, and can perform all the registration and donation (or deferral) donor activities offline.

The donor data collected offline at the mobile site can then be uploaded from the mobile site master laptop to the Blood Centers application server. The upload from the mobile master laptop to the Blood Centers application server will contain registration and donation (or deferral) data, and provides complete documentation of the donation and deferral processes managed within the OnSite Registration Module.

Up to a maximum of six laptops can be connected to a master laptop, which functions as a server. The master laptop synchronizes data flow among laptops and enables the data update to the Blood Centers application server.

## Limitations

- Only data committed to the database can be downloaded to the laptop server.
- The user may leave the screen while the host server executes the database upload. The status will continue to display as long as the user remains on the screen, but it will not display once the user logs out.

## Prerequisites

- A master laptop, which meets the minimum requirements for data download as established by WellSky, must be identified for downloads and uploads.
- To maintain security and data integrity, all uploads and downloads should be performed via a secure and wired connection.
- You must have sufficient administrative permissions to access the download and upload functionality. If you do not have sufficient permission, the option will not appear on the Blood Centers API menu.
- Designate the directory on the hard drive of the master laptop where extracted donor data is stored by setting the master code APIDR.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Mobile PC Upload/Download**.

## The Download Data from Main Database to Mobile Server Box

**Important!** Downloading data to the Mobile laptop overwrites all information in the local database on the Mobile laptop. It is recommended that you perform a data extraction on the Mobile laptop before performing the download.

The Donor application server runs a Cron job at established intervals (WellSky recommends once per day) to create a current database file that can be exported to the mobile site master laptop.

Perform the following steps to download the data from the Blood Centers application server to your mobile laptop:

**NOTE –** These directions are completed on the Mobile laptop that is accessing the production application.

1. On the Mobile PC Upload Download Utility screen, click **START** in the *Download Data from Main Database to Mobile Server* box to initiate the download of donor data from the Blood Centers application server to the mobile site master laptop.


WellSky Corporation
Proprietary and confidential

The first time the download process is performed on the machine, the following message displays:

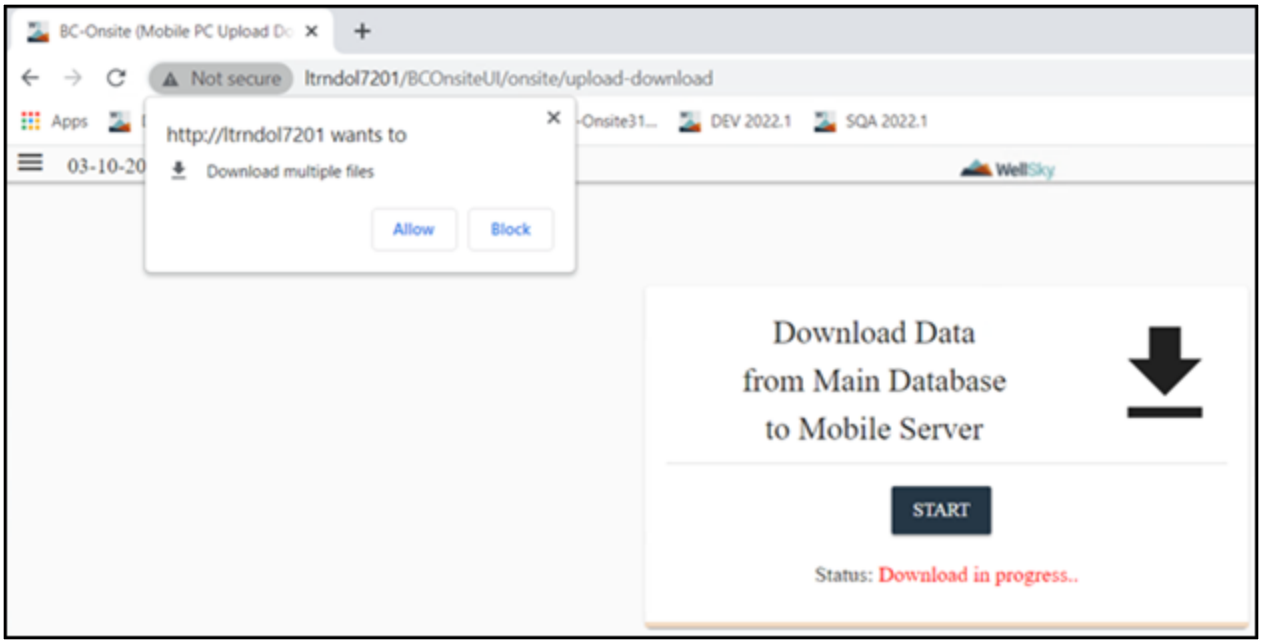


2. Click **Allow** to continue the mobile download process.

   The following message displays while the mobile download is in progress:

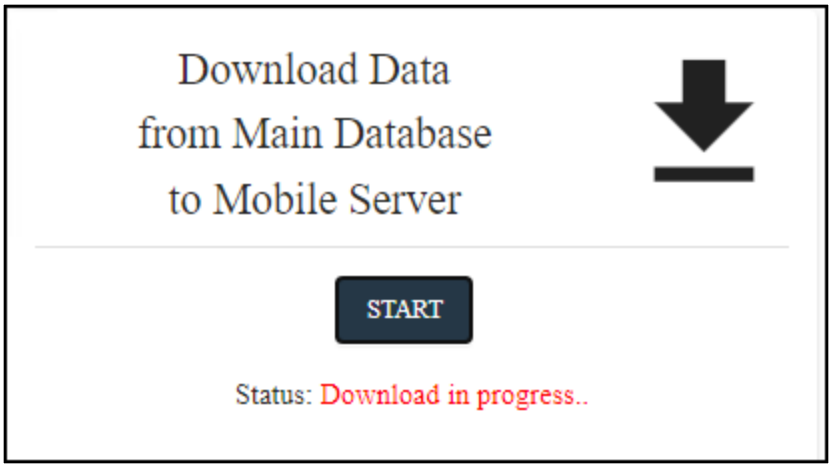


**NOTE –** Download time depends on your network bandwidth and the size of the files you are downloading.

3. When the download is complete, the following message displays, indicating the download completed successfully.

4. Close the application and check the log files located at D:\lifetrak\replication\log directory to make sure that no errors occurred.

**NOTE –** The download is complete when all log files are updated with the current system time. The Import_error.log file should be opened to verify there were no errors during download.

## The Upload Data from Mobile Server to Main Database Box

**NOTE –** These directions are completed on the mobile laptop that is accessing the production application.

After collecting donor data during the mobile drive, you must use the offline menu function to generate the files and extract the data that is then stored on the hard drive of the mobile laptop.

**NOTE –** For more information on extracting the donor data, see the Extract Data to File (EXTRACT) section.

The extracted data files are portable and can be copied to the extract directory on another mobile master laptop prior to upload, if needed. The size of the data file will vary, depending on the amount of donor information collected during the mobile drive.

1. On the Mobile PC Upload Download screen, click START in the *Upload Data from Mobile Server to Main Database* box to initiate the upload of donor data from the mobile site master laptop to the Blood Centers application server.

2. The Open screen displays. Select the .zip file that was extracted during the extract process. The extract occurs when you click Extract Mobile Server Data; the .zip file is generated.

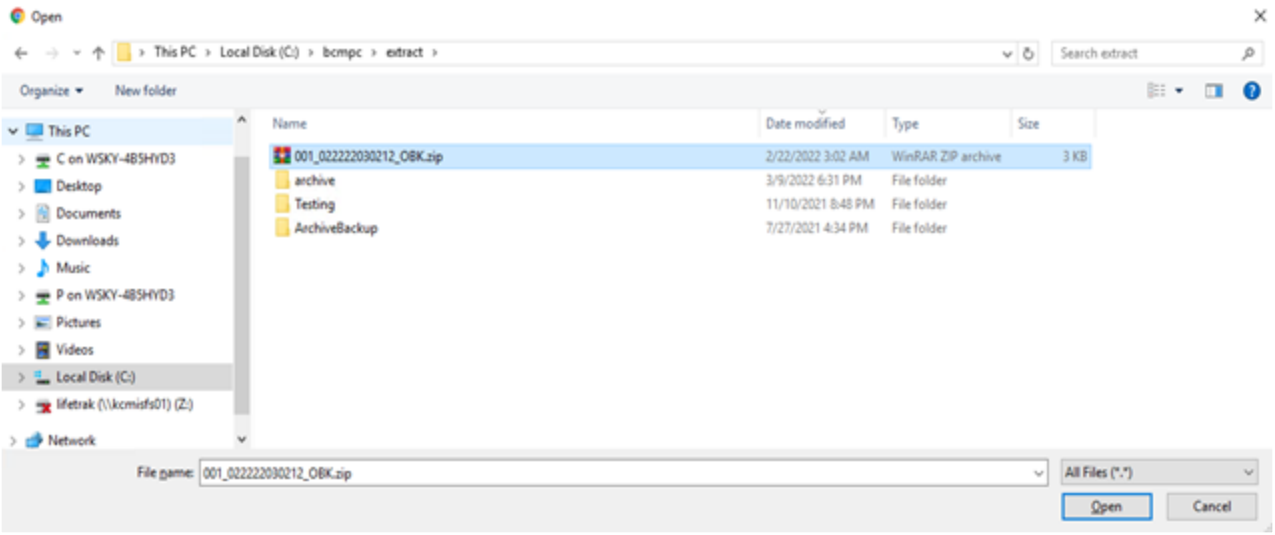


3. Click **Open** on the Open screen.

   When the upload is complete, the following message displays, indicating the upload process completed successfully.

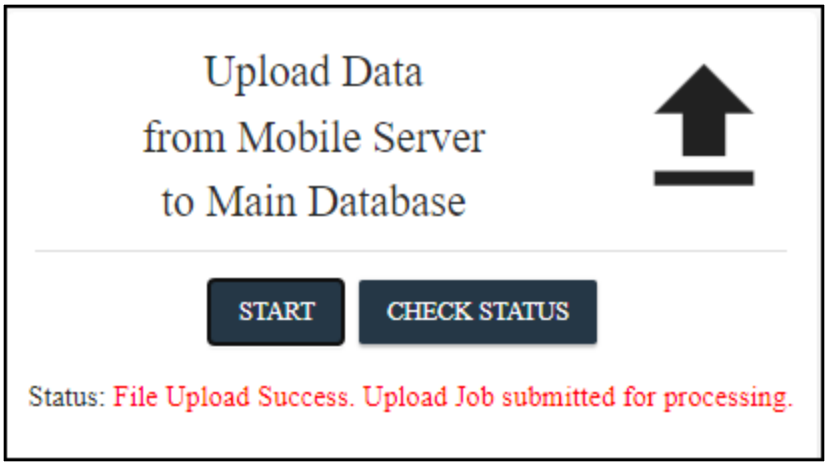


   The Donor application server runs a Cron job at established intervals to upload the data from the mobile database to the master laptop.

> **NOTE –** An error message displays if the system cannot complete the upload.

> **NOTE –** Perform an API Log Query to verify if the upload was complete or if there were errors. See Blood Centers API Log Query (APILOG) for more information.

## The Check Status Button

The Check Status button in the *Upload Data from Mobile Server to Main Database* box displays the status of the uploads for the current day and the day prior. The upload job is displayed in the status list after the .zip file is selected and uploaded successfully.

- In Queue Status – The extract file is displayed with a status of 'In Queue' after the .zip file is uploaded, but before the Cron job is completed for the file.

| Laptop Id | Drive Id | Extract Seq | Extract Time | Upload Start Time | Upload End Time | Status |
|---|---|---|---|---|---|---|
| 001 | DRV0170103 | 3 | 03-10-2022 14:18 | 03-10-2022 14:31 | | In Queue |
| 001 | DRV0170103 | 2 | 03-10-2022 14:07 | 03-10-2022 14:28 | 03-10-2022 14:31 | Completed |
| 001 | DRV0170103 | 1 | 03-10-2022 13:55 | 03-10-2022 14:30 | 03-10-2022 14:31 | Completed |
| 001 | DRV0169800 | 2 | 03-08-2022 11:50 | 03-08-2022 11:50 | 03-08-2022 12:01 | Completed |
| 001 | DRV0169800 | 1 | 03-08-2022 11:45 | 03-08-2022 11:45 | 03-08-2022 11:56 | Completed |

**Upload Id:** 001_030922181822_OBK

- Completed Status – The extract file is displayed with a status of 'Completed' after the .zip file is uploaded, and the data is in the main database after the mobile upload Cron job is completed.

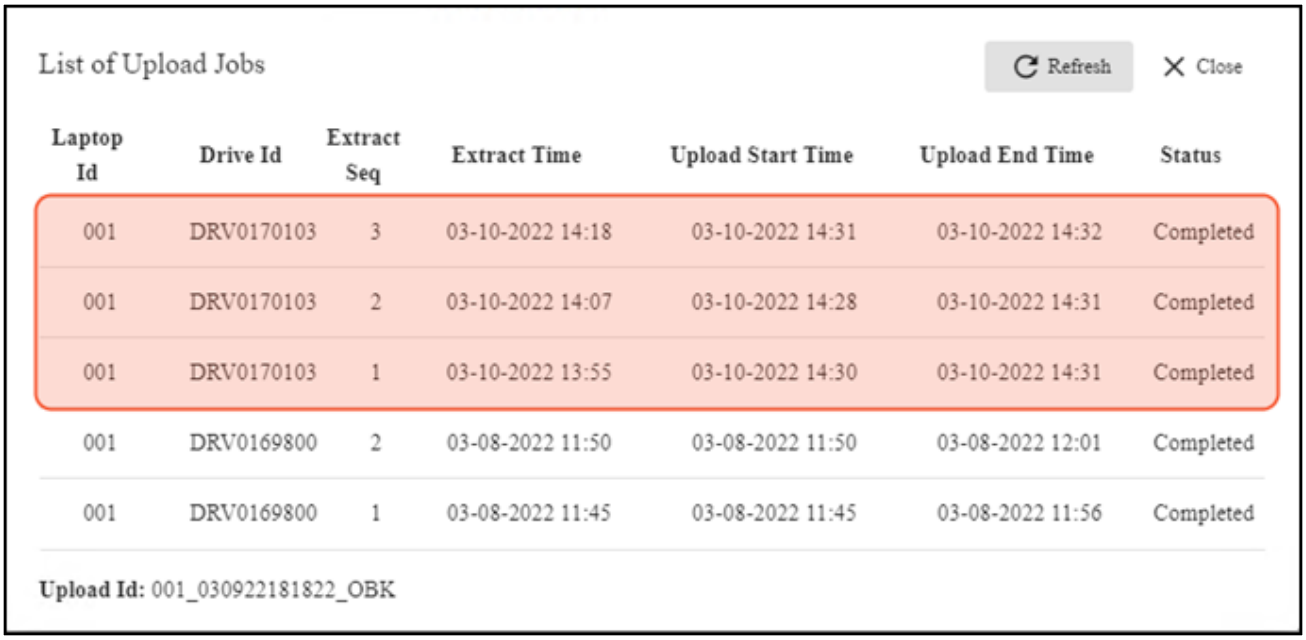


| Laptop Id | Drive Id | Extract Seq | Extract Time | Upload Start Time | Upload End Time | Status |
|---|---|---|---|---|---|---|
| 001 | DRV0170103 | 3 | 03-10-2022 14:18 | 03-10-2022 14:31 | 03-10-2022 14:32 | Completed |
| 001 | DRV0170103 | 2 | 03-10-2022 14:07 | 03-10-2022 14:28 | 03-10-2022 14:31 | Completed |
| 001 | DRV0170103 | 1 | 03-10-2022 13:55 | 03-10-2022 14:30 | 03-10-2022 14:31 | Completed |
| 001 | DRV0169800 | 2 | 03-08-2022 11:50 | 03-08-2022 11:50 | 03-08-2022 12:01 | Completed |
| 001 | DRV0169800 | 1 | 03-08-2022 11:45 | 03-08-2022 11:45 | 03-08-2022 11:56 | Completed |

**Upload Id:** 001_030922181822_OBK

## Recommendations

The following are recommended:

- Downloads from the application server to laptops should be performed during non-peak times.
- To ensure that all current data are included in the Cron job data file, make sure that all daily collections/deferral updates are committed to the database before the Cron job's scheduled run time.
- To make sure that the information available at your mobile site is most current, perform the download at the latest possible time before a drive. If you are uncertain whether or not current data has been downloaded, perform a download.
- If you are uncertain whether or not data has been uploaded from the mobile laptop server to the Blood Centers application server, check to see if there are any .zip files that were extracted in the extract folder. Upload any .zip files not already uploaded to the main database.

## Additional Browser Information

**Scenario 1: The client has no browser restrictions to download files.**

Application URL: app1.com

In this scenario, a user gets a popup to 'Allow multiple files to download'.

**Allow:** The Chrome browser will remember this option for the application URL, and it will not ask again the next time the user tries to download from the same application URL.

**Block:** Only one file will be downloaded, and the rest of the files will be skipped. This results in a failure to set up a mobile PC database.

The user has to click **Allow** in order to proceed with the download of multiple files.

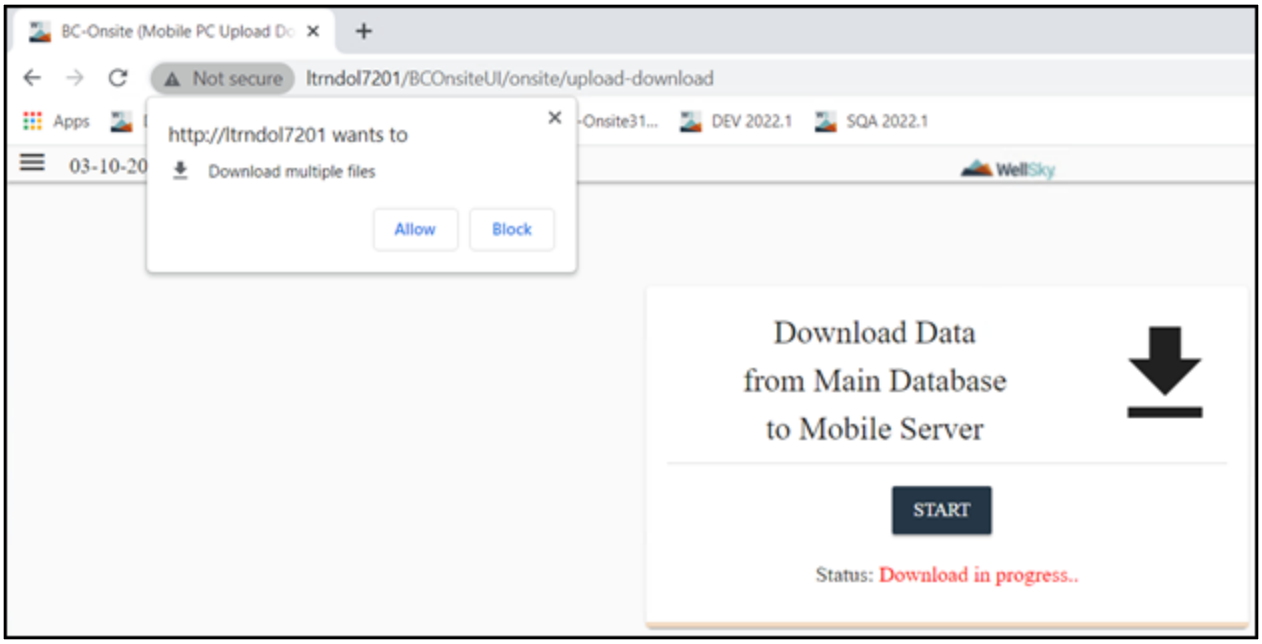

Scenario 2: The client has default browser restrictions to not download the files, similar to the following screenshot.

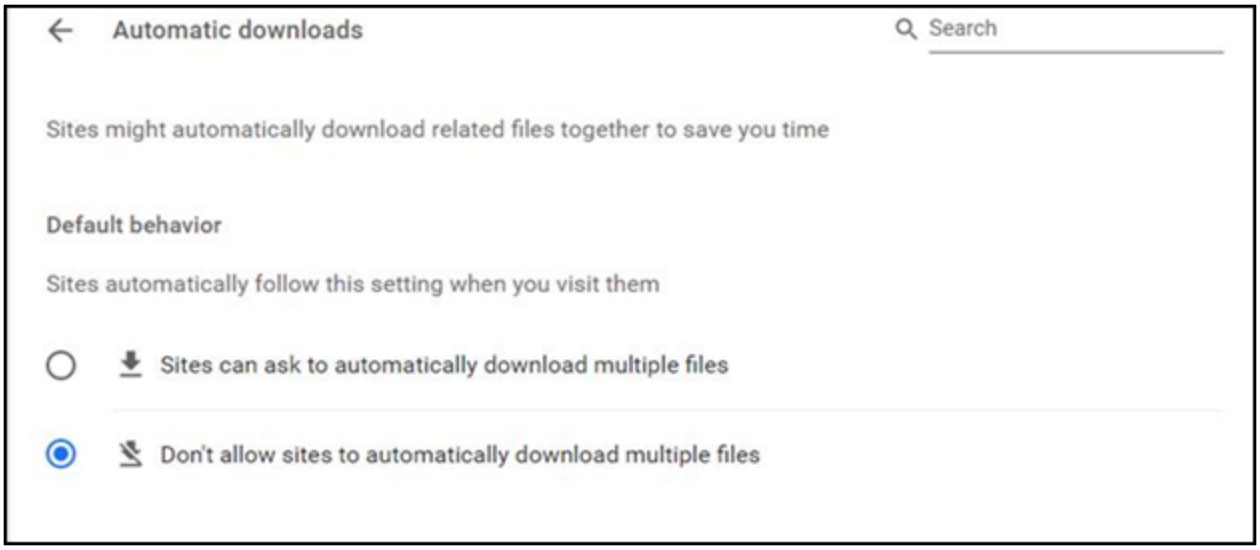


In this scenario, when a user attempts to download multiple files, the user gets a 'download blocked' alert in the URL bar. Click on the icon and select **Always allow to download multiple files** to continue with the download process. Click **START** from the *Download* box again.

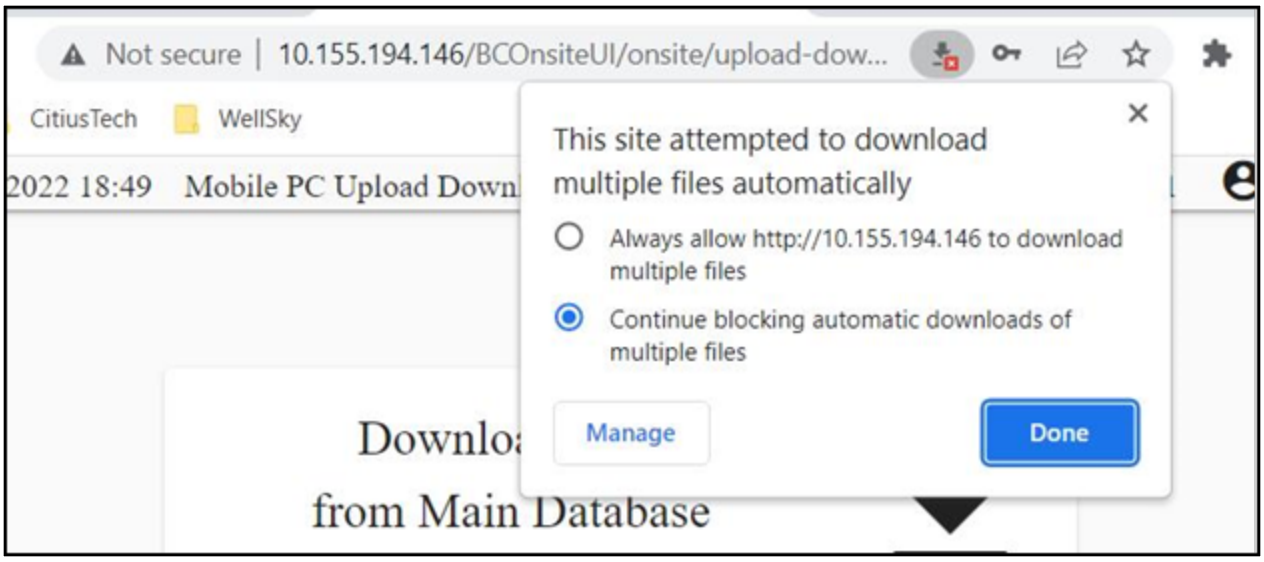


**NOTE –** These settings in the browser are specific to the application URL.

Chrome browser settings look like the following if you click **Allow** in the popup message:

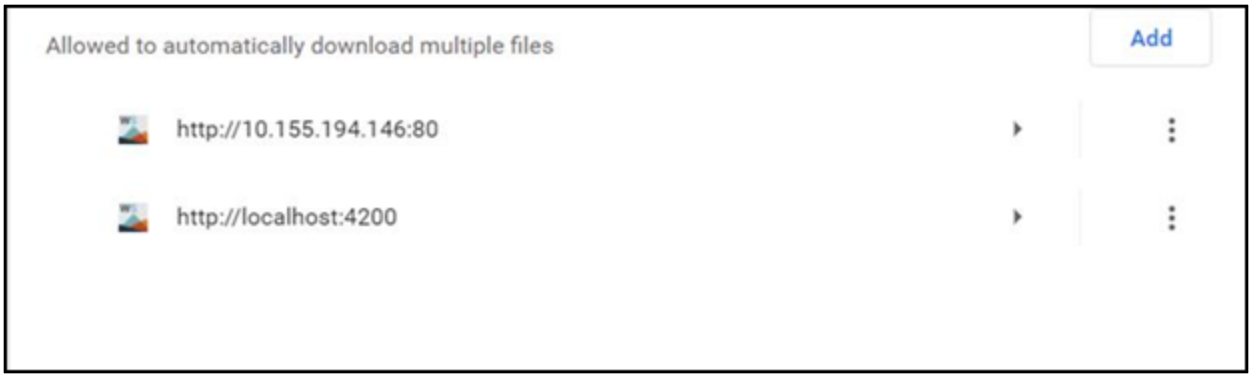


## At Commit

- At download, a current copy of the Donor database is placed on a laptop server, enabling mobile drive staff to use existing and collect new donor data for a drive without accessing the network. The download is date and time stamped in the Donor database.
- At upload, a copy of the data collected by staff during a mobile drive is uploaded to the Blood Centers application server, updating the Donor database.

## What to Do Next

There is no next step.

# 7.7.15 Alternate Address

## Intended Use

Use this window to view and change a donor's alternate demographics. Alternate demographics allow a donor to have more than one address or phone number stored in the database. This window allows you to identify and change the primary address and phone number for the specified donor.

## Limitations

N/A.

## Prerequisites

N/A.

## Accessing the Screen

This window is not a standalone page. It can only be accessed through Lookup/Registration and Modify Data.

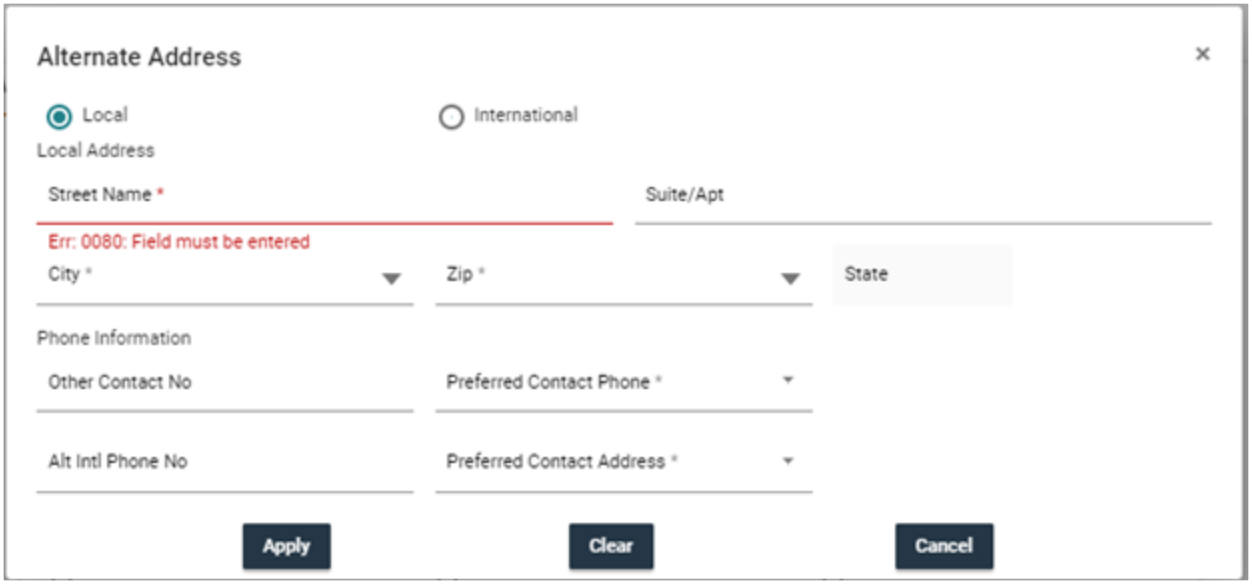


# Control Block Fields and Definitions

## Alternate Address Option

Select the appropriate alternate address option (Local or International). Once selected, the cursor will automatically be placed in the first field of the selected address block.

**NOTE –** If you change the alternate address type after entering information, all information previously entered will be deleted.

# Local Address Block

## Street Name

Enter the building number and street name (address). Entry is limited to a maximum of 40 characters.

## Suite/Apt

Enter the suite or apartment number, if applicable. Entry is limited to a maximum of 10 characters.

## City

Enter the city. Entry is limited to a maximum of 40 characters.

## State

This field automatically populates based on the zip code entered. The field is not navigable.

## Zip Code

Enter the five-digit zip code.

# International Address Block

## Addr 1, Addr 2, Addr 3, Addr 4

Use these fields for international address information. Each field is limited to a maximum of 50 characters.

**NOTE –** Each field is limited to a maximum of 50 single-byte characters or 25 two-byte characters. For example: 1-chōme-13 Jingūmae (the ō and ū are considered two characters).

## City

Enter the city. A maximum of 50 characters is allowed.

## Country

Select the country from the LOV. The LOV populates from master code CNTRY.

## Zip Code

Enter the postal code. Entry is limited to a maximum of 15 characters.

# Phone Information Block

## Other Contact No

Enter another phone number, if applicable. Entry is limited to a maximum of 20 characters.

## Preferred Contact No

Select the donor's preferred contact phone number from the LOV, as follows:

- Alt Phone – alternate phone number from the donor's demographics.
- Other – other contact number from the Alternate Address window.

## Alt Intl Phone No

Enter an alternate international phone number. Entry is limited to a maximum of 20 characters.

## Preferred Contact Address

Select the donor's preferred contact address from the LOV, as follows:

- Home address – the home address from the donor's demographics.
- Alternate address – the alternate address from the Alternate Address window.

# The Apply Button

Click **Apply** to commit new entries and changes to the donor database.

# The Clear Button

Click **Clear** to clear the content in all of the fields.


WellSky Corporation
Proprietary and confidential

## The Cancel Button

Click **Cancel** to cancel all changes, additions, or deletions.

## At Commit

The system commits the data to the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Donor Survey manager menu.

# 7.7.16 International Address

## Intended Use

Use this window to add international address information.

## Limitation

Each Address field is limited to a maximum of 50 single-byte characters or 25 two-byte characters.
For example: 1-chōme-13 Jingūmae (the ō and ū are considered two characters).

## Accessing the Window

This window is a not a standalone program. It can only be accessed through certain screens within Donor.

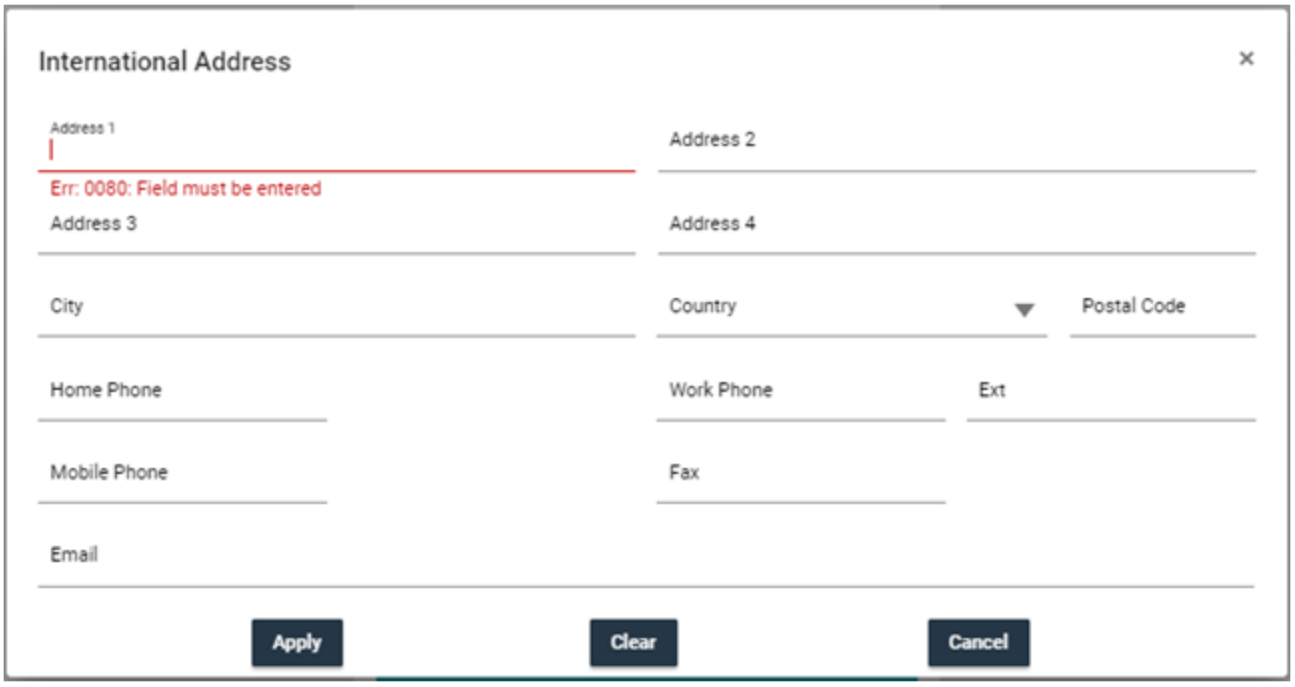


### Address 1

Entry is required. Enter the first line of the international address. Entry is limited to a maximum of 50 characters.

**NOTE –** The field is limited to a maximum of 50 single-byte characters or 25 two-byte characters. For example: 1-chōme-13 Jingūmae (the ō and ū are considered two characters).

## Address 2, Address 3, Address 4

Entry is optional. Enter additional international address information as needed. Entry is limited to a maximum of 50 characters in each field.

**NOTE –** Each Address field is limited to a maximum of 50 single-byte characters or 25 two-byte characters.
For example: 1-chōme-13 Jingūmae (the ō and ū are considered two characters).

## City

Enter the city. Entry is required, and it is limited to a maximum of 50 characters.

## Country

Enter the country or select it from the LOV. Entry is required, and it is limited to a maximum of 50 characters. The LOV is populated through master code CNTRY.

## Postal Code

Enter the international postal code. Entry is optional, and it is limited to a maximum of 14 characters.

## Home Phone

Enter the international home phone number. Entry is optional, and it is limited to a maximum of 20 characters.

## Work Phone

Enter the international work phone number. Entry is optional, and it is limited to a maximum of 20 characters.

## Ext

Enter the extension number, if applicable. Entry is optional, and it is limited to a maximum of 8 characters.

## Mobile Phone

Enter the international mobile phone number. Entry is optional, and it is limited to a maximum of 20 characters.

## Fax

Enter the international fax number. Entry is optional, and it is limited to a maximum of 20 characters.

## Email

Enter a valid email address. Entry is optional, and it is limited to a maximum of 128 characters.

After all address information is entered, click one of the following:

Apply – commit the international address information. The International Address window will close.


WellSky Corporation
Proprietary and confidential

**Clear** – clear the contents of all fields. Re-enter information.

**Cancel** – close the International Address window without committing the information.

# 7.7.17 Lock/Unlock Mobile Users

## Intended Use

Use this function to unlock a user on a mobile drive.

## Limitations

- This screen is only available on the mobile server.
- This screen does not reset the user's password. The user will need to reset their password when logging in to the OnSite Module, if needed. If the user resets the password on the mobile server, they will need to reset their password on the main database as well. Reset passwords are not extracted.

## Prerequisites

- In the Web menu, the program has a Mode set of MOBILE so that it cannot be viewed on fixed site and main donor center menus.
- Access to this program is strictly controlled by the menu.

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Lock/Unlock Mobile Users**.

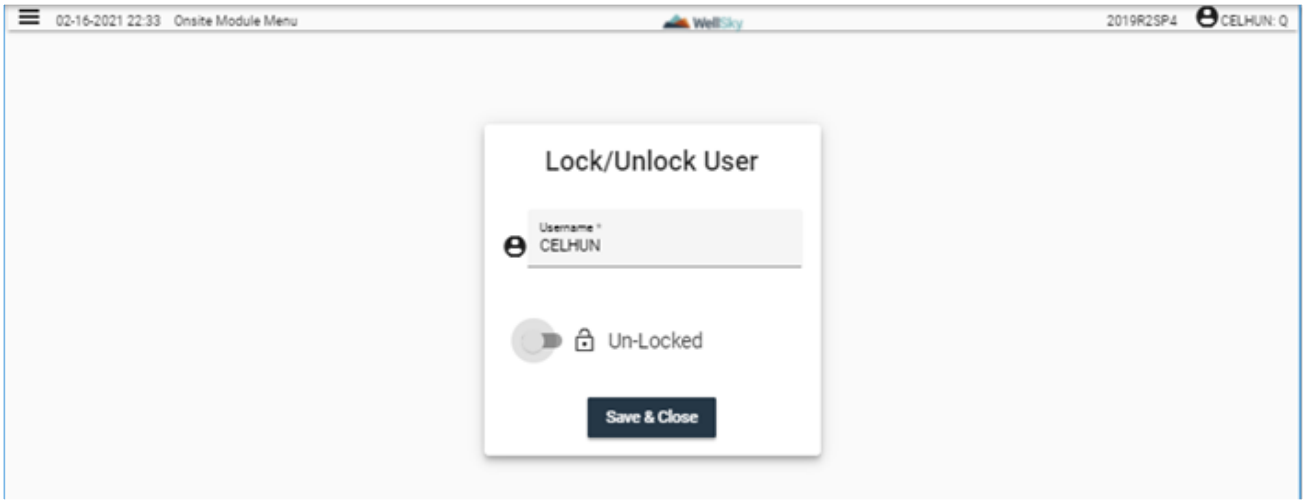


### User ID

Entry is required. Enter the user ID of the account that is locked or that you want to lock.

### Lock/Unlock Option

The option is activated based on the user ID entered.

- If the user account is locked, the Locked option will display, and you can move the button to **Un-Locked**. Click **Save & Close** to save your change.

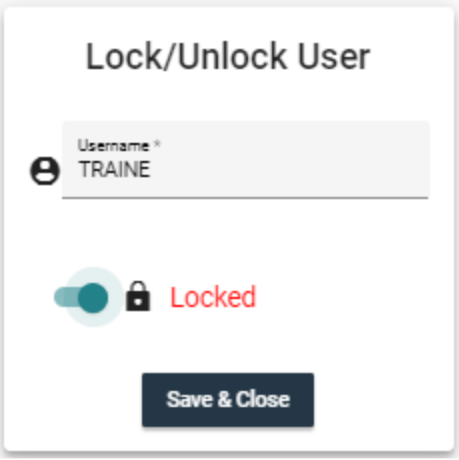


- If the user account is not locked, the Un-Locked option will display, and you can move the button to **Locked**. Click **Save & Close** to save your change.

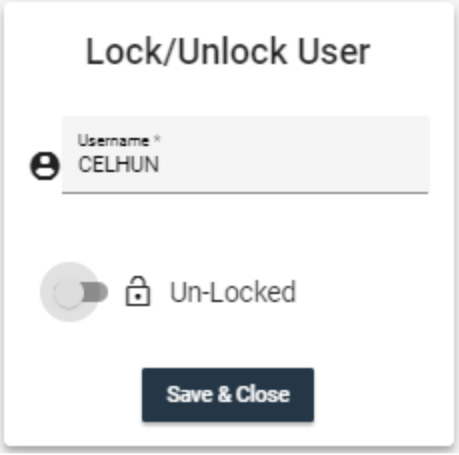


This option will lock or unlock a user on the mobile server. It does not do anything on the main database.

# 7.7.18 Reset User Password

## Intended Use

Use this function to reset the user password on a mobile drive.

## Limitations

Resetting the user password on the mobile server does not update it in the main database. The user will need to log in to the main database and reset the user password a second time so they will be in sync.

## Prerequisites

Not applicable.


WellSky Corporation
Proprietary and confidential

## Accessing the Screen

Access this screen from the OnSite Module menu or by clicking **Reset User Password**.

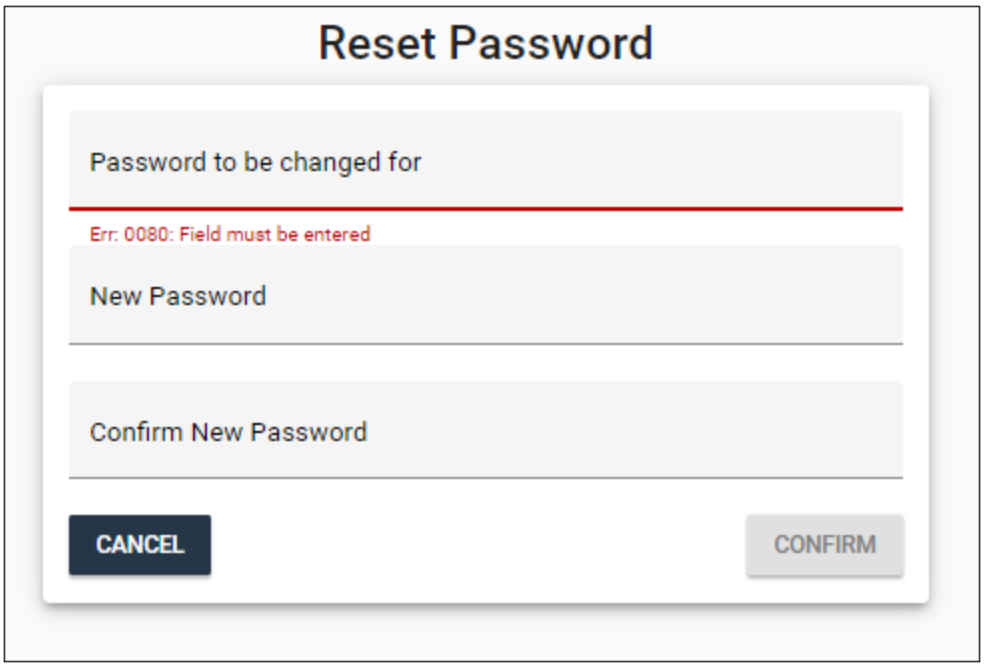


### Password to be changed for

Entry is required in this field. Enter the user ID of the account that needs to have the password reset.

### New Password

Enter the new password for the user to use for the mobile drive.

### Confirm New Password

Re-enter the password for the user to use for the mobile drive. The entries in the New Password and Confirm New Password fields must match. If they do not, the user will receive an error message:

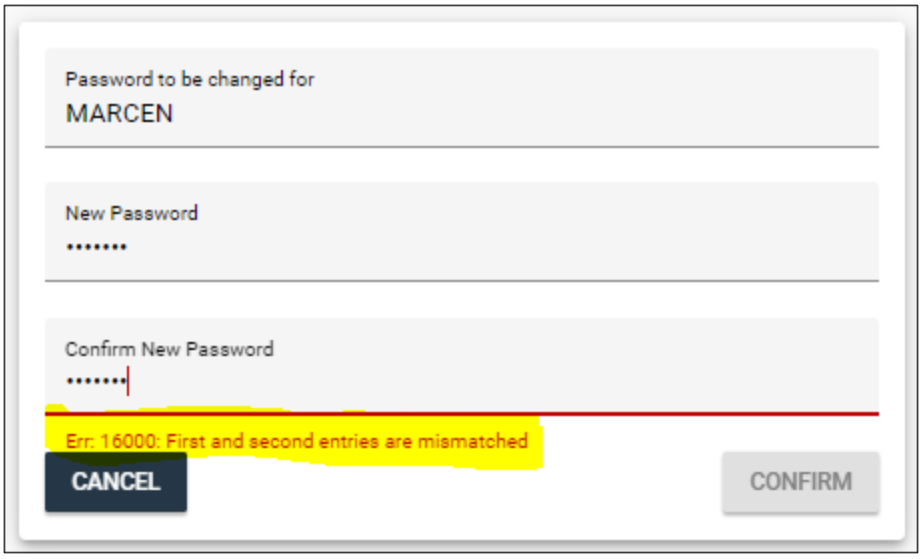


If the password entries match, the CONFIRM button will be enabled to save the password.

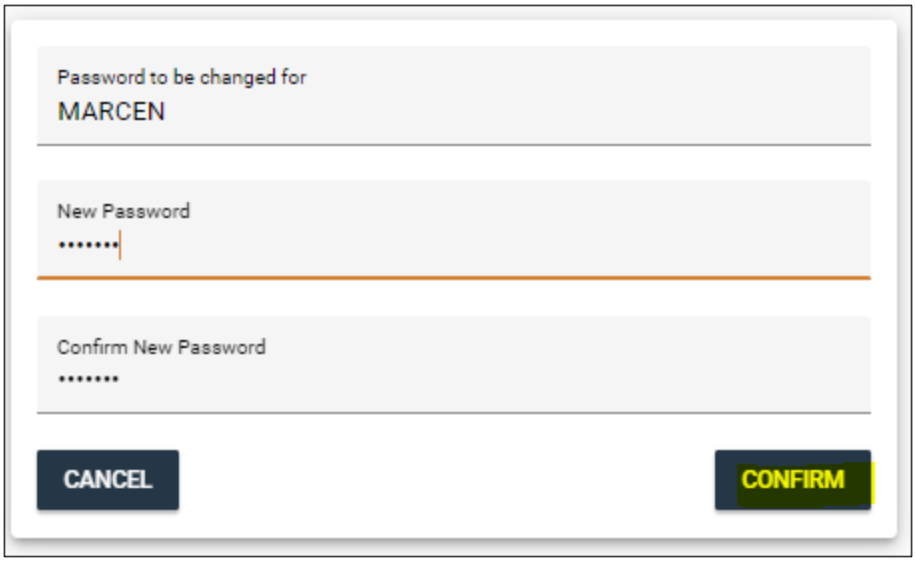


If the password does not meet the requirements for a new password at CONFIRM, the user receives a message, similar to the following:

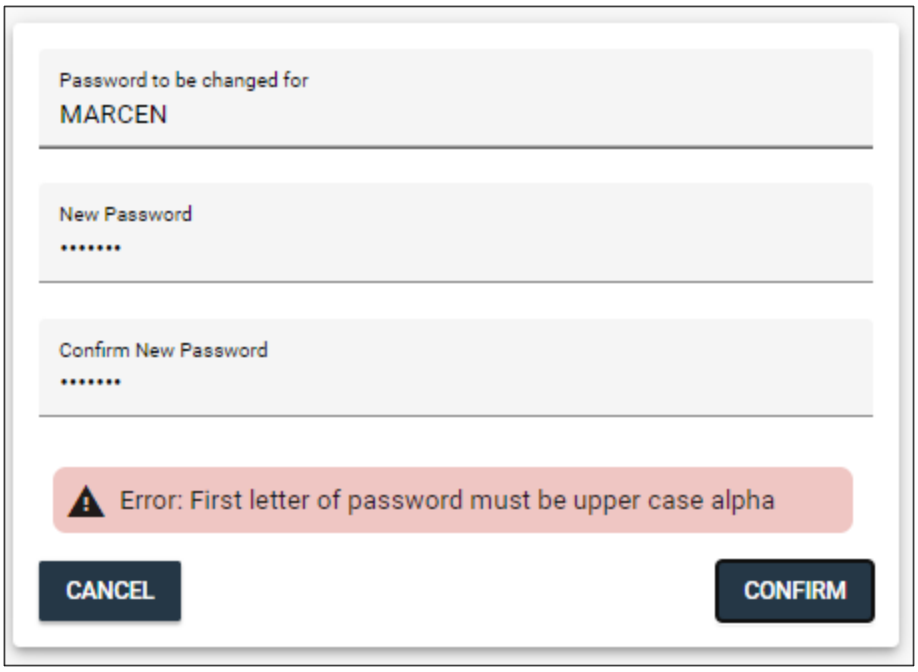


## The CANCEL Button

Click **CANCEL** to cancel all changes.

## The CONFIRM Button

Click **CONFIRM** to save the new password.

If the password entries match, the CONFIRM button will be enabled to save the password.

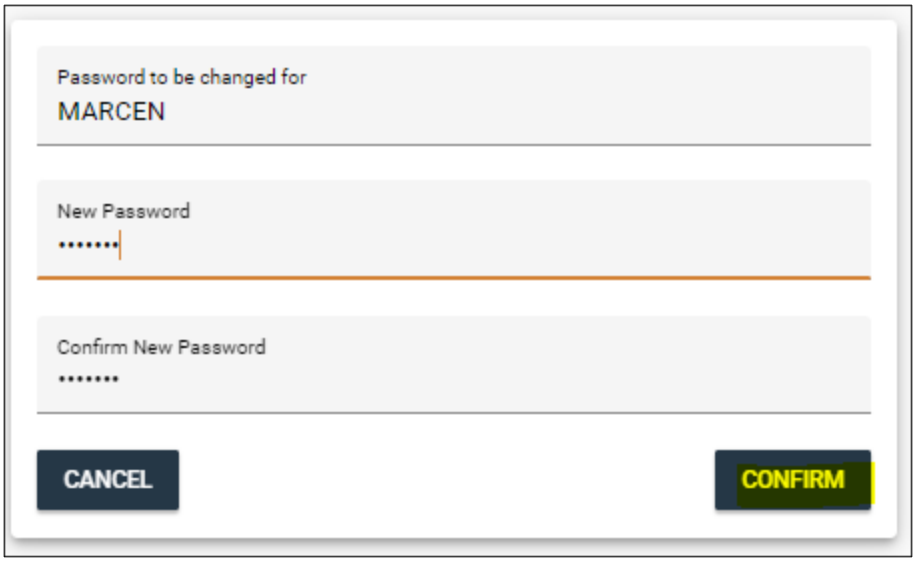


If the password does not meet the requirements for a new password at CONFIRM, the user receives a message, similar to the following:

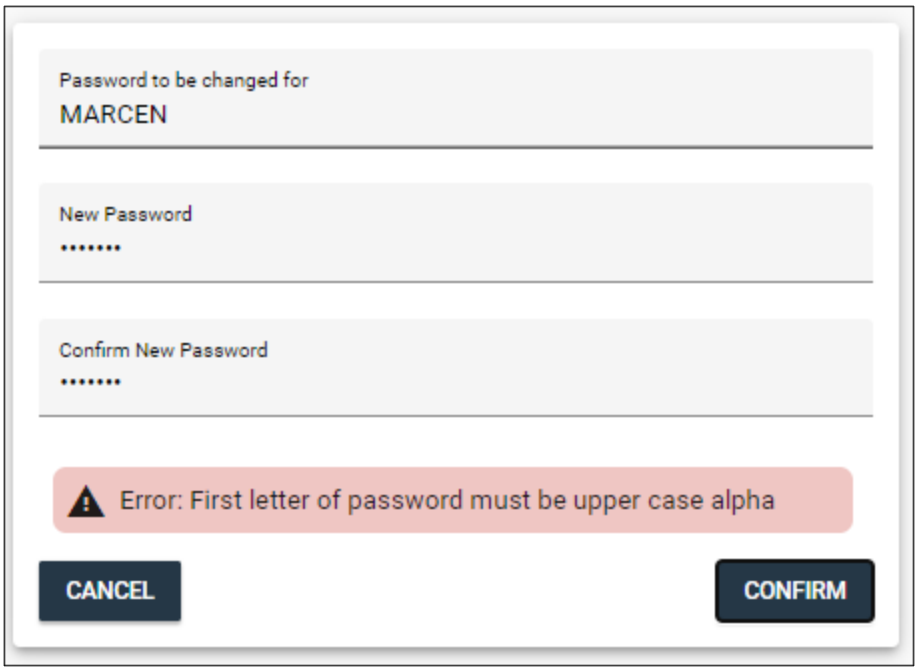


At confirm, if the password meets all requires, the user receives a final message:

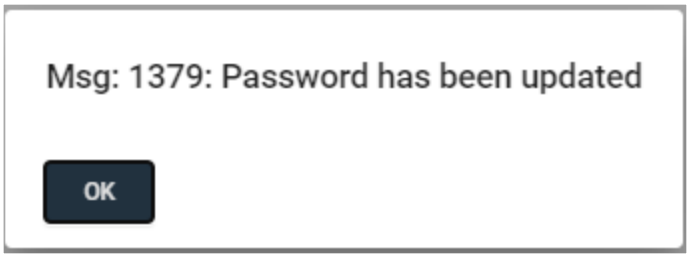


## Logging into the Application After the Password has been Reset

When the user logs into the application with the reset password, the user will be required to reset the password and follow all the conditions needed to set the password.

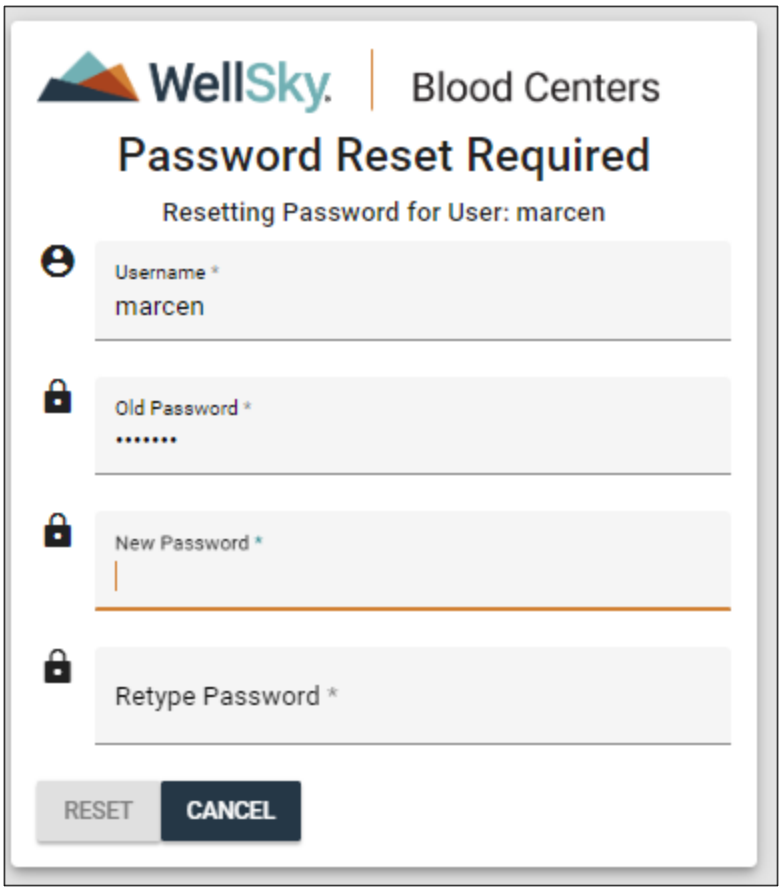
WellSky.
Blood Centers
Password Reset Required
Resetting Password for User: marcen
Username *
marcen
Old Password *
•••••••
New Password *
Retype Password *
RESET
CANCEL

# 7.8 FastTrak Donor Response

## Intended Use

This page is used by the donor to enter health history questionnaire responses prior to going to the donor center or mobile drive.

## Limitations

- If the JSON files are not loaded into the directory (refer to the Installation Guide), the donor will not be able to select a language and view the questions in the expected language selected.
- Check boxes will never show on specific questions, only on the WELCOME page.
- Printing Not Supported on Android, Firefox, and iPad/iPhone
- Printing Not Directly Supported, but you can use the browser menu to print on iPad/iPhone and Firefox
- Saving Not Directly Supported on iPad/iPhone, Firefox, and Chrome
- Fonts cannot be modified. The only theme that can be modified is the color scheme.

## Prerequisites

The Welcome window is customizable, as follows:

- The logo image is maintained in a specified directory. The System Administrator will be maintaining this location.
- The welcome text is set in the Define Notification Letters (DEFLET) screen, using letter code WEB_WELCME.
- The content text is set in the DEFLET screen, using letter code WEB_CONTNT.
- The Thank You message is set in the DEFLET screen, using the letter code WEB_THANQU.
- The title of the FastTrak page is set in the DEFLET screen using the letter code WEB_TITLE.
- The end message to the user about the barcode printing is configured in the DEFLET screen using the letter code WEB_LOGOUT.
- The message on the Barcode page is maintained in the DEFLET screen, using the letter code WEB_BARMSG.
- The content of the HELP button is maintained in the DEFLET screen, using the letter code WEB_HELP. The title of the letter will display as the title of the HELP page.
- The content of the EXIT button is maintained in the DEFLET screen, using the letter code WEB_EXIT. The title of the letter will display as the title of the EXIT page.
- JSON files must be created for each language in order for the donors to be able to view questions in the requested language.
- System Parameter BC_WIDTH should be set to determine the size of the QR barcode. Currently, the value should be set to 30 in order to receive the barcode in the correct size in email and for viewing on the phone.


WellSky Corporation
Proprietary and confidential

- The color scheme is maintained in the config.json file. The "PrimaryColor", "accentColor", and "warnColor" must be defined in order to change the color for the facility.
- PDF files can be hosted anywhere on the internet, but the recommended location would be alongside the FastTrak UI in the /BC-FastTrak-UI/assets/pdfs/ folder. If a PDF is hosted in that folder with the name "sample.pdf", then the RESOURCE_LINK in the database for the associated VALID_HH_RESOURCES record should be set to "/assets/pdfs/sample.pdf".
- Logo requirements:
  - Must be a png file type.
  - Logo must have a file name of "MainLogo.png".
  - The size of the logo does not matter. It will be compressed when loaded into the application.

## Accessing the Screen

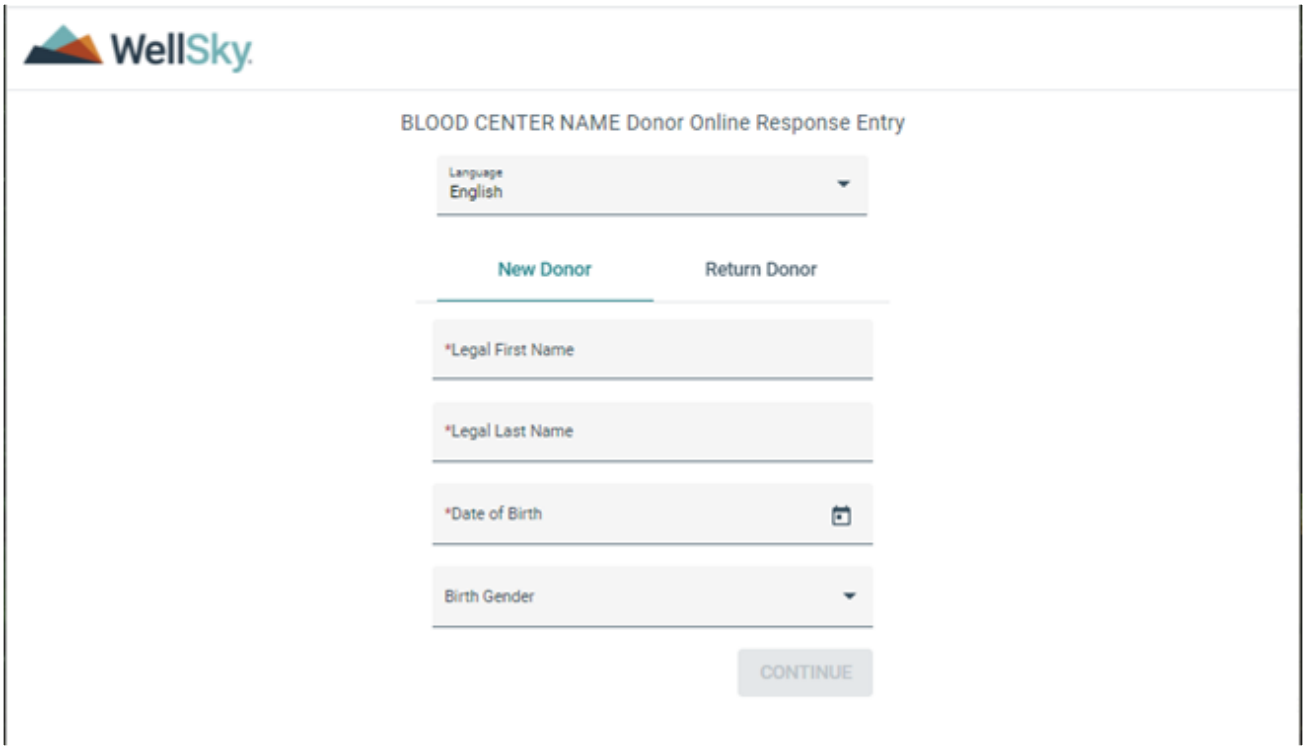

# Fields and Definitions

## New Donor

Under the New Donor tab:

1. Select the language you would like the questions to be presented in from the **Language** drop-down list. Once the language is selected, the headers of each field will change to the expected language.

   **NOTE –** The available languages in this drop-down list are maintained in Master Code MLANG. The default language will automatically appear in this field. The default language is determined in the Master Code MLANG by entering **1** in the NUM VALUE column.

2. Enter your legal first name and last name in the appropriate fields.
3. Either enter your date of birth in MMDDYYYY format, and the system will reformat it, or click the calendar icon ( ) to open the calendar and select the date.

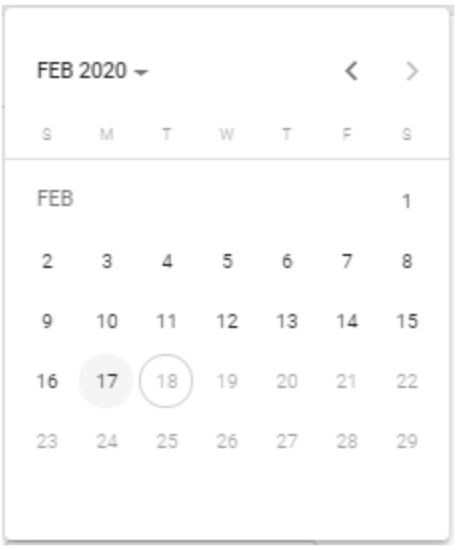


4. Select your birth sex by clicking on the appropriate option.

## Return Donor

Under the Return Donor tab:

1. Select the language you would like the questions to be presented in from the Language drop-down list. The default language will automatically appear in the field. The default language is determined in the Master Code MLANG by entering **1** in the NUM VALUE column.

   **NOTE –** The available languages in the drop-down list are maintained in a JSON file that is located in a specified directory, which is maintained by the System Administrator.

2. Select the ID type from the drop-down list. The type will be either donor ID or driver's license.

   **NOTE –** The list is maintained in Master Code IDTYP. Entry of **1** in the Num Value field will make that ID type the default. That type will automatically display when the donor opens the page.

   Once the ID type is selected, the header to the ID changes to represent the specific ID type.


WellSky Corporation
Proprietary and confidential

3. Enter the ID number in the *ID* field.
4. Either enter your date of birth in MMDDYYYY format, and the system will reformat it, or click the calendar icon ( ) to open the calendar and select the date.

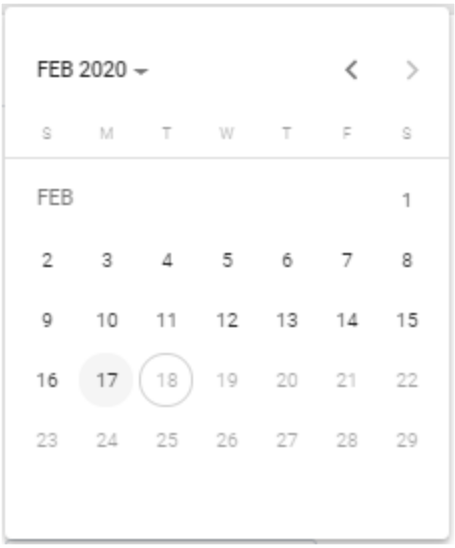


## FORGOT ID?

If the donor is a returning donor and does not know their donor ID or driver's license number, the donor can click **FORGOT ID?** to enable all of the fields as if the donor were a new donor.

**Fields to Enter:**

1. Select the language you would like the questions to be presented in from the **Language** drop-down list. Once the language is selected, the headers of each field will change to the expected language.

> **NOTE –** The available languages in this drop-down list are maintained in Master Code MLANG. The default language will automatically appear in this field. The default language is determined in the Master Code MLANG by entering **1** in the NUM VALUE column.

2. Enter your legal first name and last name in the appropriate fields.
3. Either enter your date of birth in MMDDYYYY format, and the system will reformat it, or click the calendar icon ( ) to open the calendar and select the date.

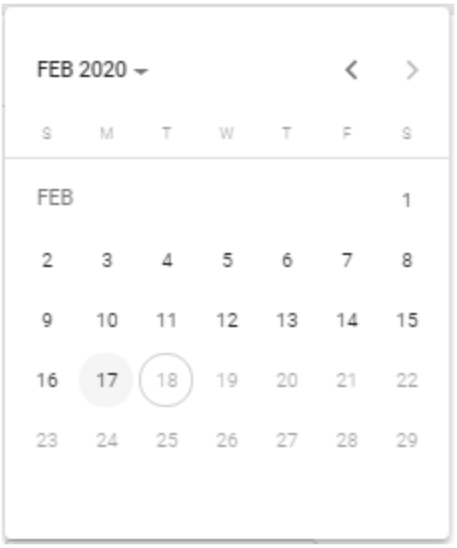


4. Select your sex by clicking on the appropriate option.

## CONTINUE

The CONTINUE button becomes active when all required fields have been entered.

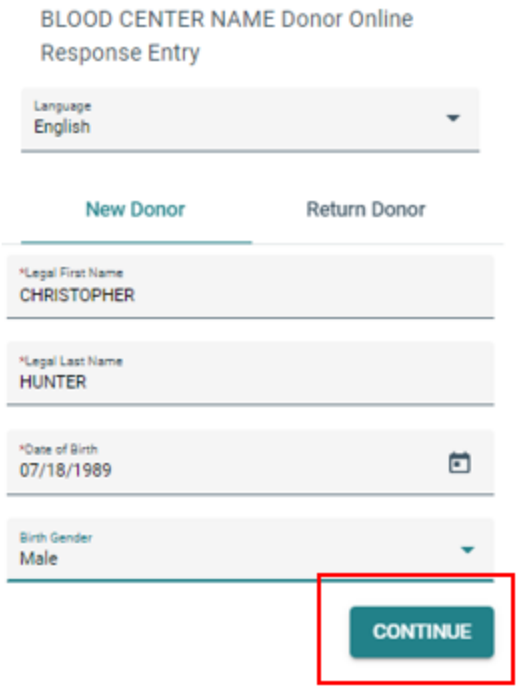


## Verify Information Page for New Donor

Once all the information is entered on the initial page and CONTINUE is clicked, the system will display the Verify Information page to the donor.


WellSky Corporation
Proprietary and confidential

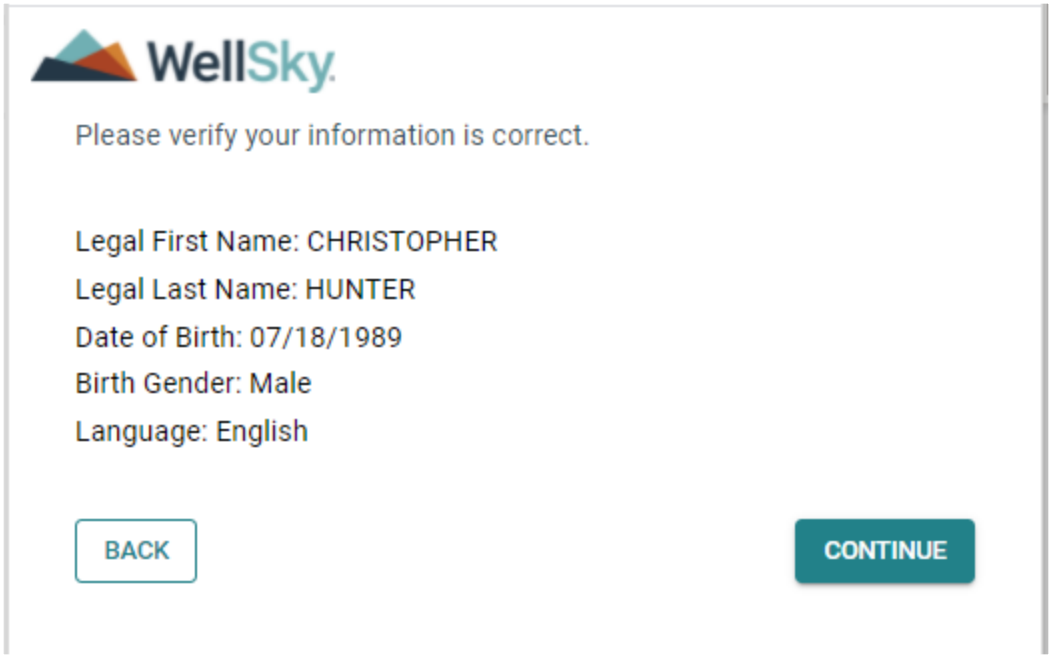


This page allows the donor to review the entered information, and if needed, click BACK to go back and correct name, birth date, language, and so on. Click CONTINUE to proceed to the WELCOME page.

## Verify Information Page for Returning Donor

When a returning donor enters their information, the Verification Page has a welcome message that contains the donor's name.

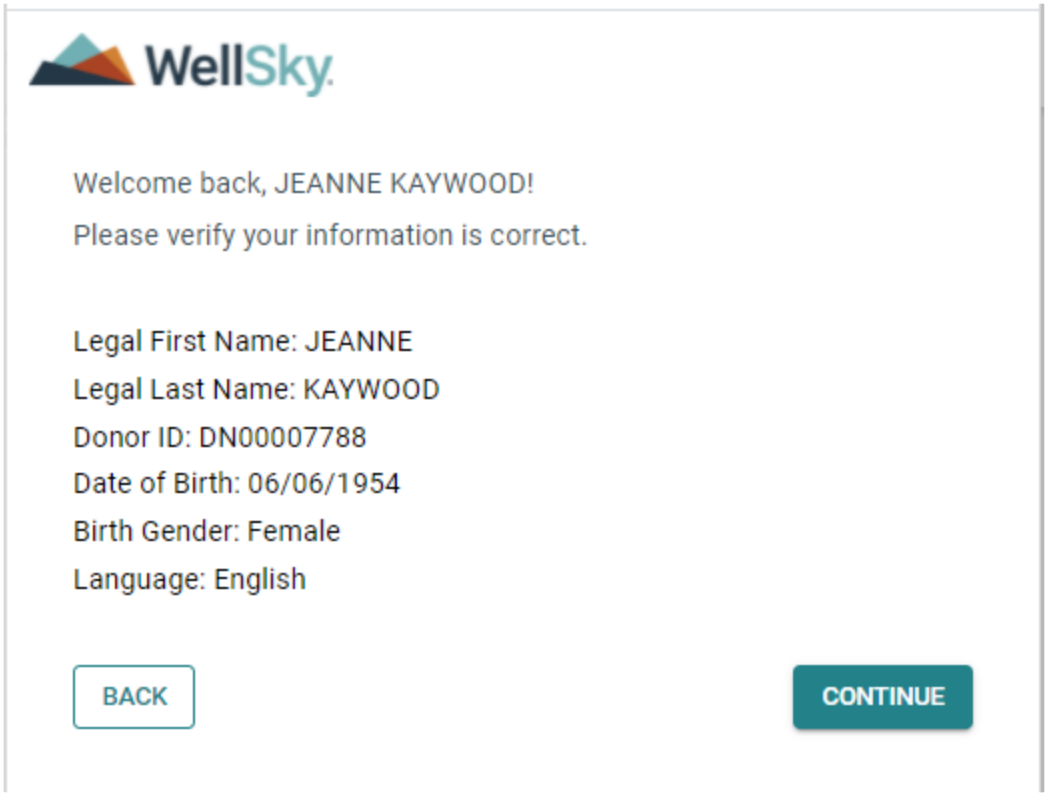


This page allows the donor to review the entered information, and if needed, click **BACK** to go back and correct name, birth date, language, and so on. Click **CONTINUE** to proceed to the WELCOME page.

## WELCOME Page

The WELCOME page is configured in Define Notification Letters (DEFLET) with the following letter codes:

- WEB_WELCME – Controls the header on the page.
- WEB_CONTNT – Controls the content on the page.

If the facility would like to link reading material or a URL to the WELCOME page, it can be configured in the validation table FastTrak Web Configuration (OnSite) (WEBCFG). See the *WellSky® Blood Centers Administration Guide* for input.


WellSky Corporation
Proprietary and confidential

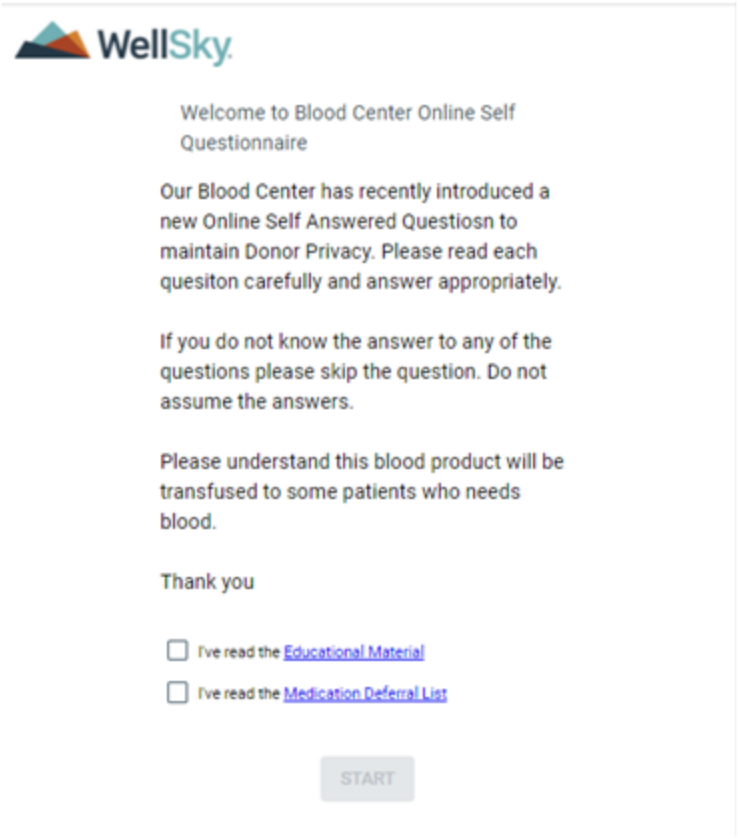


If reading material is linked in the WELCOME page, the START button will not be active until all the reading material has been selected (by clicking the check box next to each document or URL).

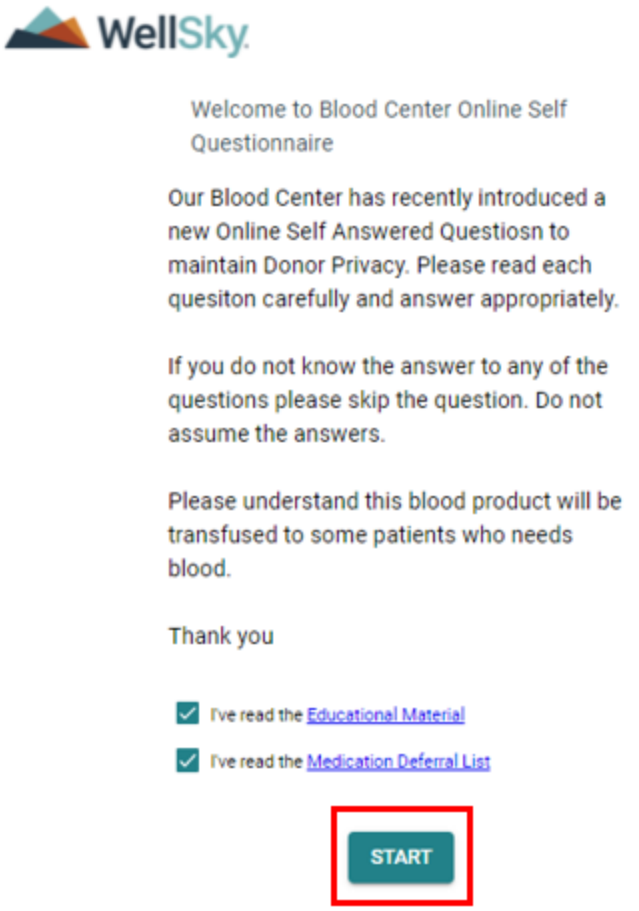


Click START to move to the questionnaire.

## Answering Questions

1. Answer the questions by selecting either the YES, NO, or SKIP option.

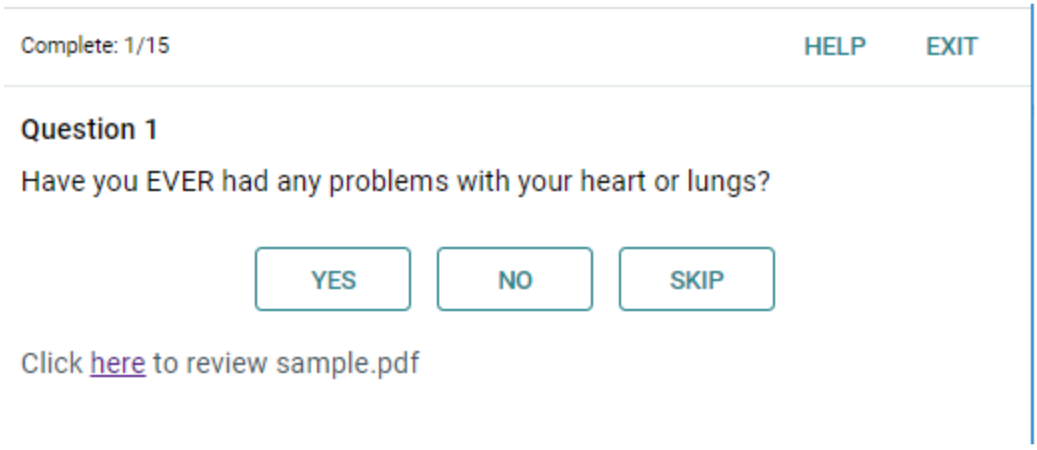



WellSky Corporation
Proprietary and confidential

2. Reading material can be linked to any question within the questionnaire. The link can be to an internal document or an external URL. The linkage is configured in Define Notification Letters (DEFLET). When you click on "here", you will be taken to the linked document or URL.

3. To go back to the questionnaire and continue, click **BACK TO QUESTIONNAIRE**. You will return to the question you were at when you clicked the "here" link.

   While going through the questionnaire, if there is a READ MORE question, the information will display under the YES, NO, and SKIP buttons.

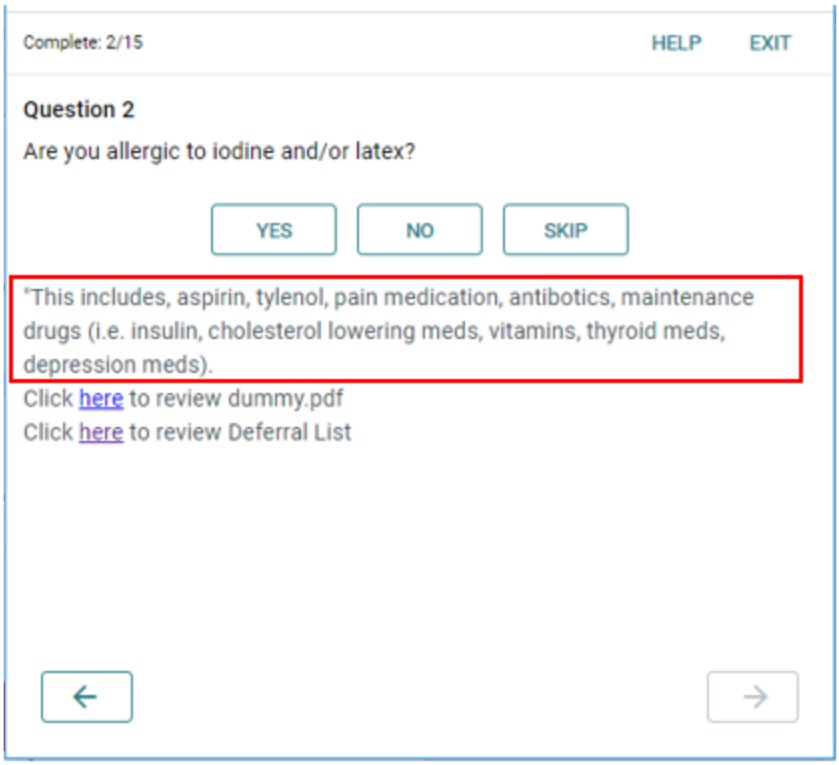

The above example shows the READ MORE question and documents linked to the question.

4. As you answer the questions, the next question will automatically display. Alternatively, you can click to move to the previous question, or to move to the next question.

   When going back to a previous question, the response previously selected will display with a check mark by the response.

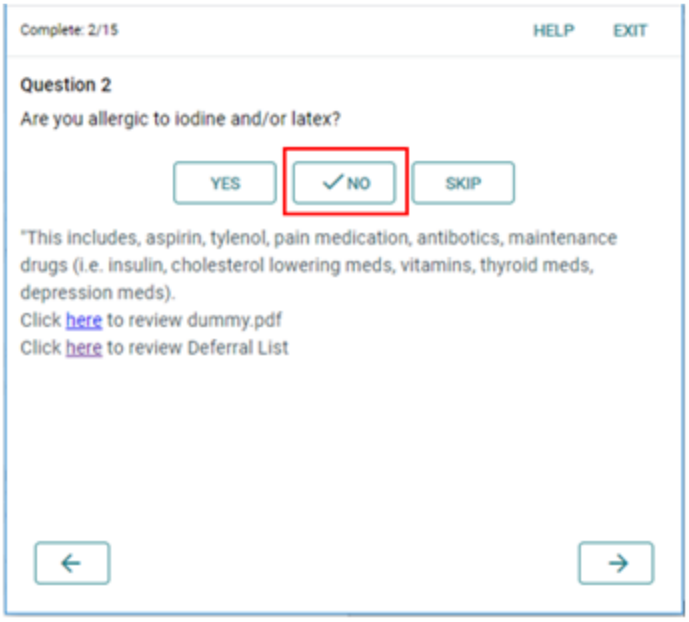


5. Click to move forward to the next question.

## Questionnaire Header

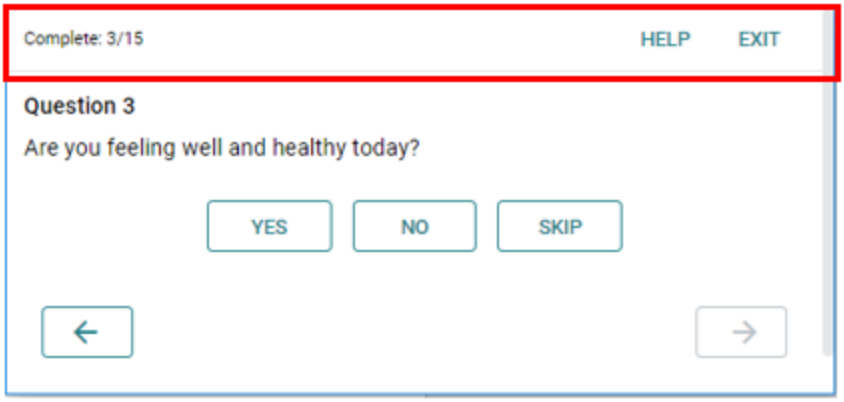


- **Status:** List the "Complete" status of questions. It will display the number of questions completed / total number of questions to answer.
- **HELP:** The HELP link is configured in Define Notification Letters (DEFLET) under the code WEB_HELP.


WellSky Corporation
Proprietary and confidential

1. Click **HELP** to get general information about FastTrak.

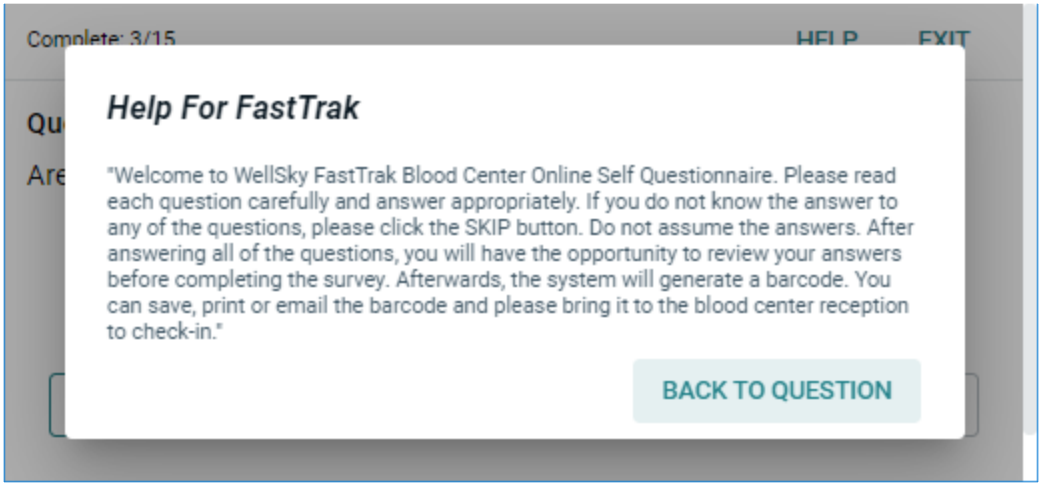


2. Click **BACK TO QUESTION** to return to the questionnaire.

- **EXIT:** The EXIT link is configured in Define Notification Letters (DEFLET) under the code WEB_EXIT.

  Click **EXIT**, and the following message displays:

  - **EXIT –** click to leave the application and go to the configured URL defined in the config.json file for "exiturl".
  - **BACK TO QUESTION –** click to remain in the application and return to the questionnaire.

When you have completed the last question, the system will automatically take you to the Thank You Page.

## Thank You Page

The Thank You page is configured in Define Notification Letters (DEFLET) under the code WEB_THANQU.

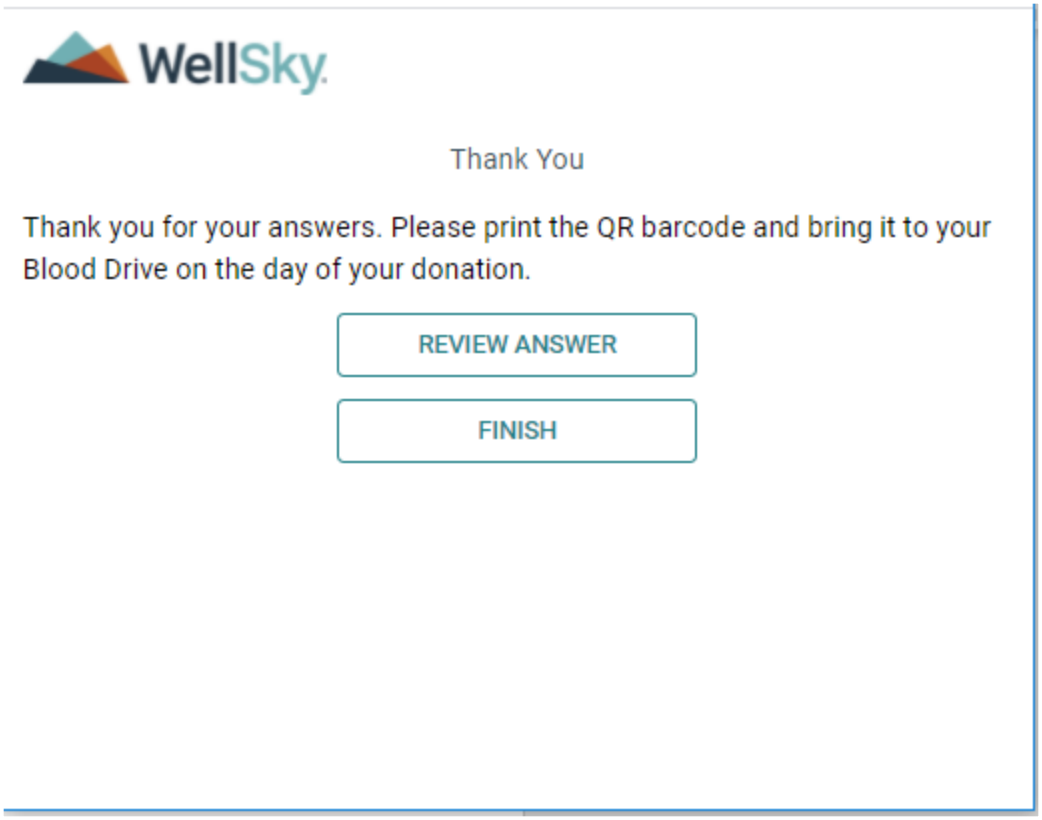


The donor can either review answers or finish the questionnaire.

- REVIEW ANSWER button: Click REVIEW ANSWER to go to a summary page to review all the questions and your responses. Use the scroll bar to view all the questions and responses.
- FINISH button: Click FINISH to go to the final page, which contains the barcode.


WellSky Corporation
Proprietary and confidential

## Reviewing Answers

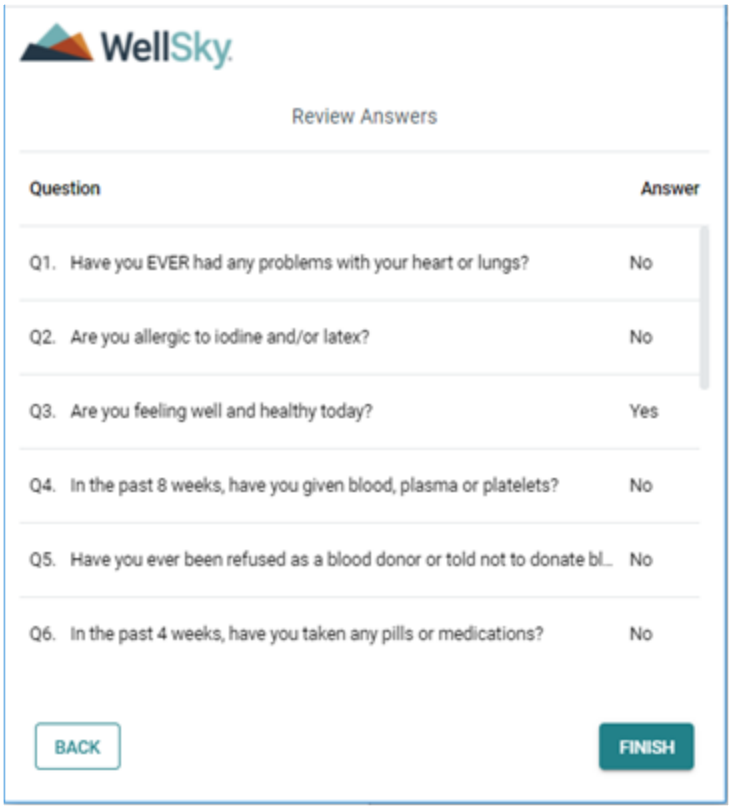


The donor can click on a question to view that specific question and the related response.

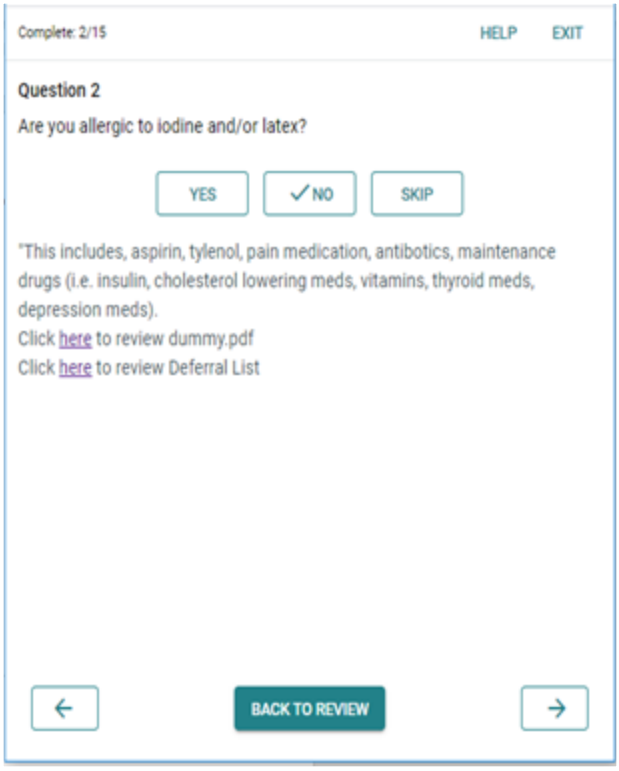


Click ← or → to review the previous or next question (respectively). If the review is complete, click BACK TO REVIEW to return to the summary Review Page.

On the Summary Review Page, click BACK to go back to the Thank You Page, or click FINISH to go to the Barcode Page.

## BARCODE Page

The BARCODE page is configured in Define Notification Letters (DEFLET) under the code WEB_BARMSG.


WellSky Corporation
Proprietary and confidential

Do one of the following:

- Click SAVE to save the barcode to your DOWNLOADS folder on your device. If you try to save on a device/browser where saving is not supported, the following message will display:

- Click PRINT to print the barcode to a configured printer as a hard copy.

**NOTE –** The Firefox browser on an Android device cannot print hard copies.

If you try to print directly from an iPad (Chrome or Firefox browser), the following message will display:

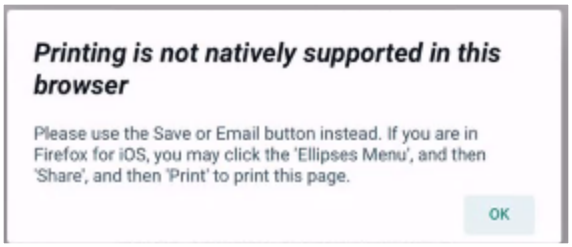


- Click EMAIL to send the barcode to your email address. You will receive the following prompt to enter your email address:

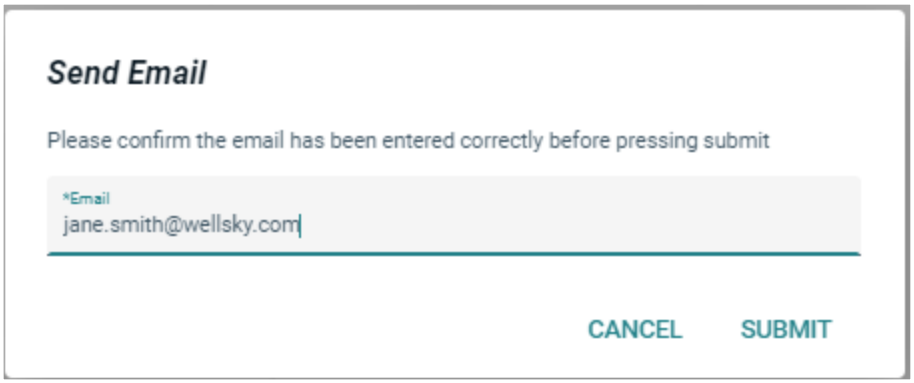


Enter your email address in the field, and click SUBMIT. Click CANCEL to close the email window.

**NOTE –** If your email is linked to your smart phone, then the barcode can be read from your email at the donation site. Otherwise, you will need to print the barcode.

Once an action has been selected, the EXIT button and message will display to allow the donor to close the application and navigate to the URL defined in the config.json file, "exiturl".

The Exit message is configured in DEFLET under the code WEB_LOGOUT.

## Selection of a Language other than English

**NOTE –** If you select a language other than English, the questions and button captions will also display in the selected language, as shown in the following example.

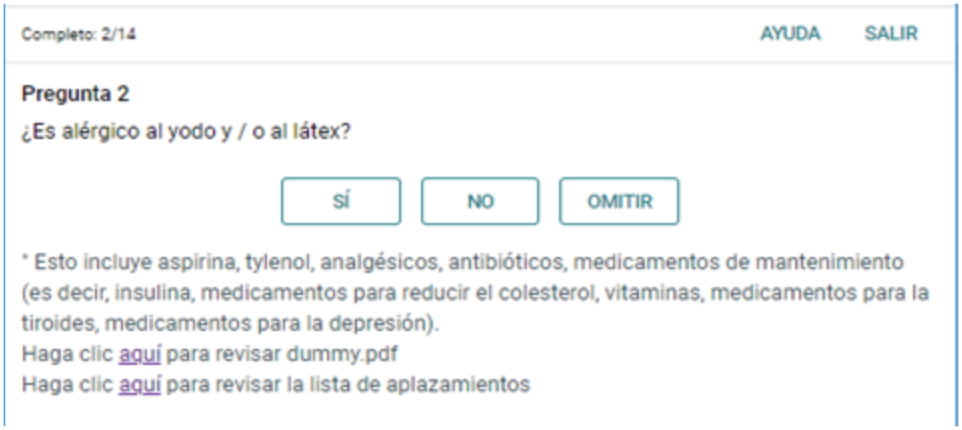

## At Commit

Donor responses are saved off to an encrypted barcode, which the donor either prints, sends to email, or saves.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# Chapter 8 - Donor Profile


8.1 Introduction ..... 678
8.1.1 Donor Profile - Process Flow ..... 678
8.2 Donor Profile General Functions ..... 682
8.2.1 Add Donor (ADDDONOR) ..... 682
8.2.2 Modify Donor Data (MODKYDAT) ..... 689
8.2.3 Place Donor Attribute (DONPATT) ..... 693
8.2.4 Remove Donor Attribute (DONRATT) ..... 696
8.2.5 Place Donor Interdiction (DONPINT) ..... 699
8.2.6 Remove Donor Interdiction (DONRINT) ..... 703
8.2.7 Place Unit Interdiction (UNITPINT) ..... 707
8.2.8 Remove Unit Interdiction (UNITRINT) ..... 710
8.3 Donor Profile Maintenance Functions ..... 715
8.3.1 Investigate Duplicate Donor Records (INVEST) ..... 715
8.3.2 Merge/Resolve Duplicate Donor Records (MERGDON) ..... 720
8.3.3 Place Group Interdiction on Donors (GPPDON) ..... 725
8.3.4 Remove Group Interdiction from Donors (GPRDON) ..... 728
8.3.5 Place Group Interdiction on Units (GPPUNIT) ..... 731
8.3.6 Remove Group Interdiction from Units (GPRUNIT) ..... 734
8.3.7 Donor Detail Query (SDONQ) ..... 737
8.3.8 Multiple Donors Query (MDONQ) ..... 745
8.3.9 Interdictions Query (INTQ) ..... 750
8.3.10 Unit by Hold Code Query (UNITHQ) ..... 752
8.3.11 Donor by Interdiction Query (DONIQ) ..... 755
8.3.12 Unit Test Results Query (RESULQ) ..... 760
8.3.13 Donor Antigens Query (ANTQ2) ..... 761
8.3.14 Potential Duplicate Batch Query (DUPQ) ..... 761
8.3.15 Graded Donors Query (GRADEQ) ..... 764
8.3.16 Donor Profile Audit Query (DPAQ) ..... 767

# 8.1 Introduction

The Donor Profile Module is that portion of Donor designed to:

- Add donors to the database
- Place and remove attributes
- Place and remove interdictions
- Investigate potential duplicate donor records
- Merge or resolve duplicate donor records
- Perform Queries

## 8.1.1 Donor Profile - Process Flow

The following diagram illustrates the basic process flow relative to the Donor Profile module.


WellSky Corporation
Proprietary and confidential

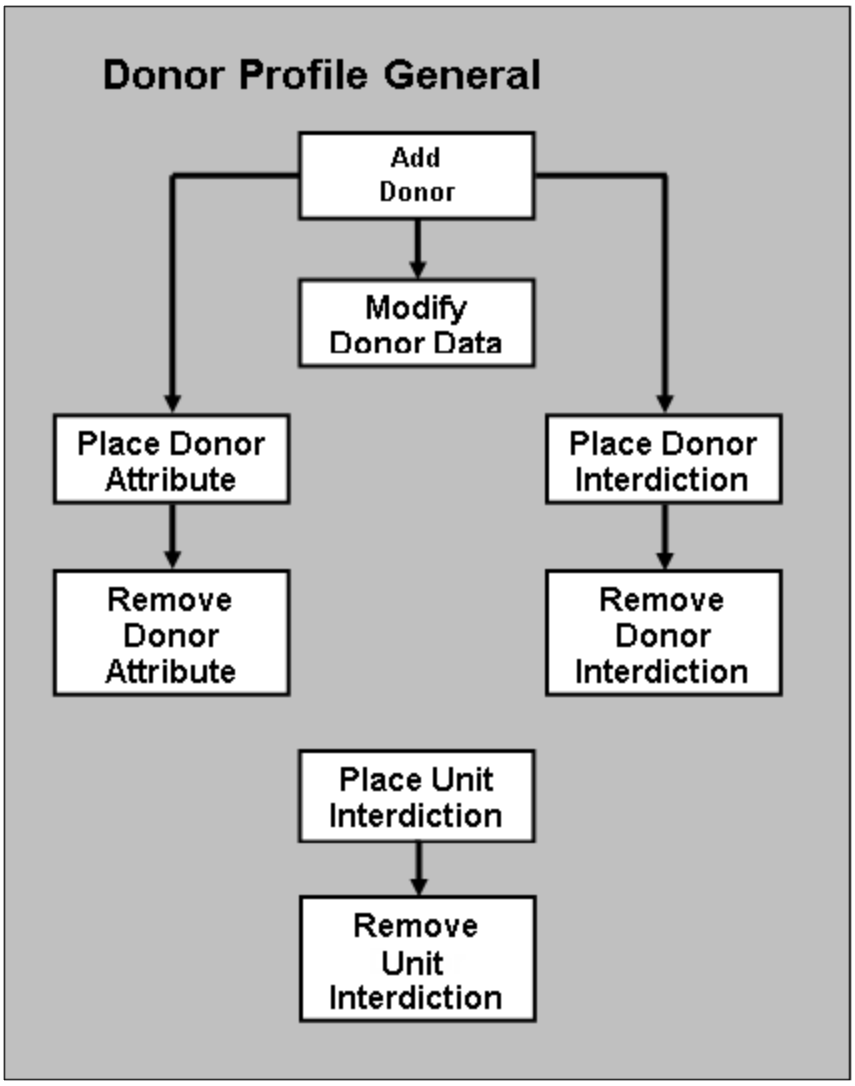
Donor Profile General
Add Donor
Modify Donor Data
Place Donor Attribute
Place Donor Interdiction
Remove Donor Attribute
Remove Donor Interdiction
Place Unit Interdiction
Remove Unit Interdiction

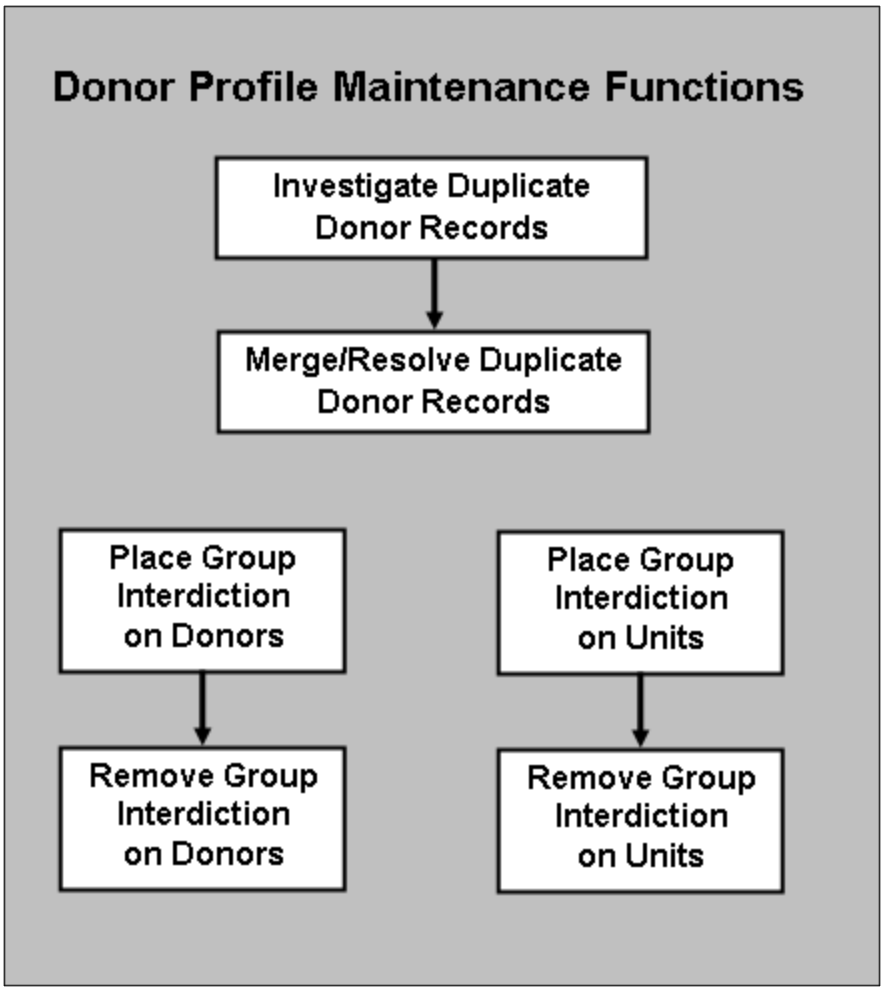



WellSky Corporation
Proprietary and confidential

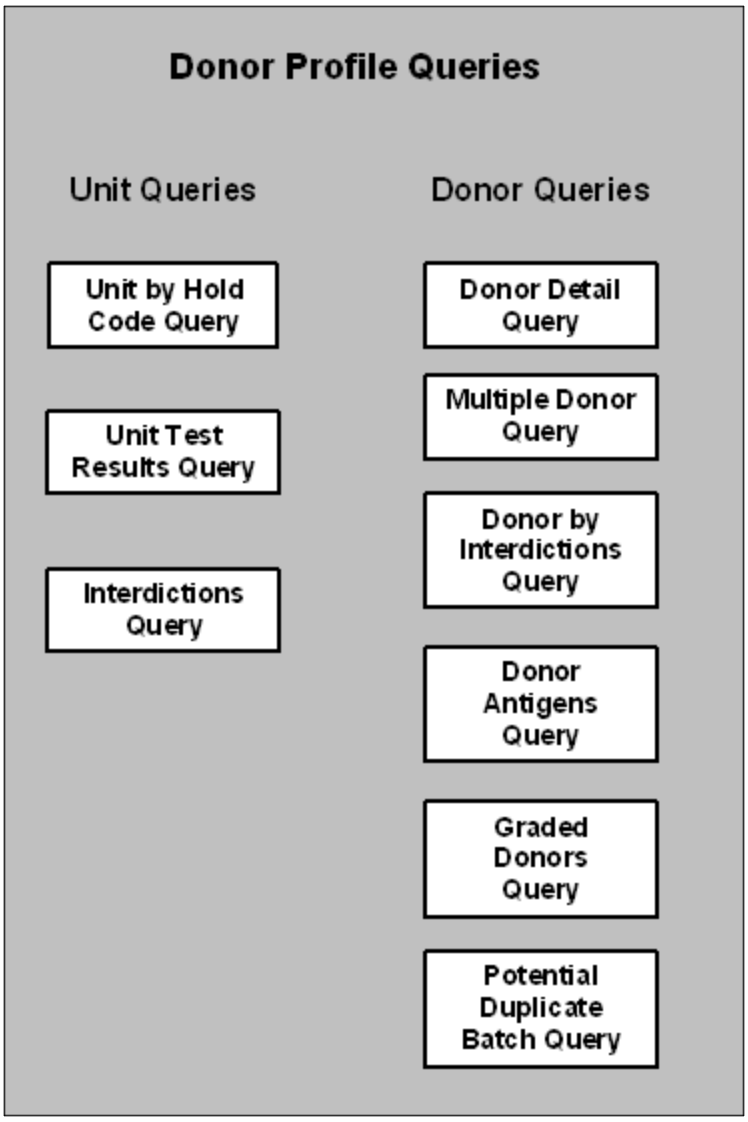
Donor Profile Queries
Unit Queries
Donor Queries
Unit by Hold Code Query
Unit Test Results Query
Interdictions Query
Donor Detail Query
Multiple Donor Query
Donor by Interdictions Query
Donor Antigens Query
Graded Donors Query
Potential Duplicate Batch Query

# 8.2 Donor Profile General Functions

These functions are accessed from the following menu:

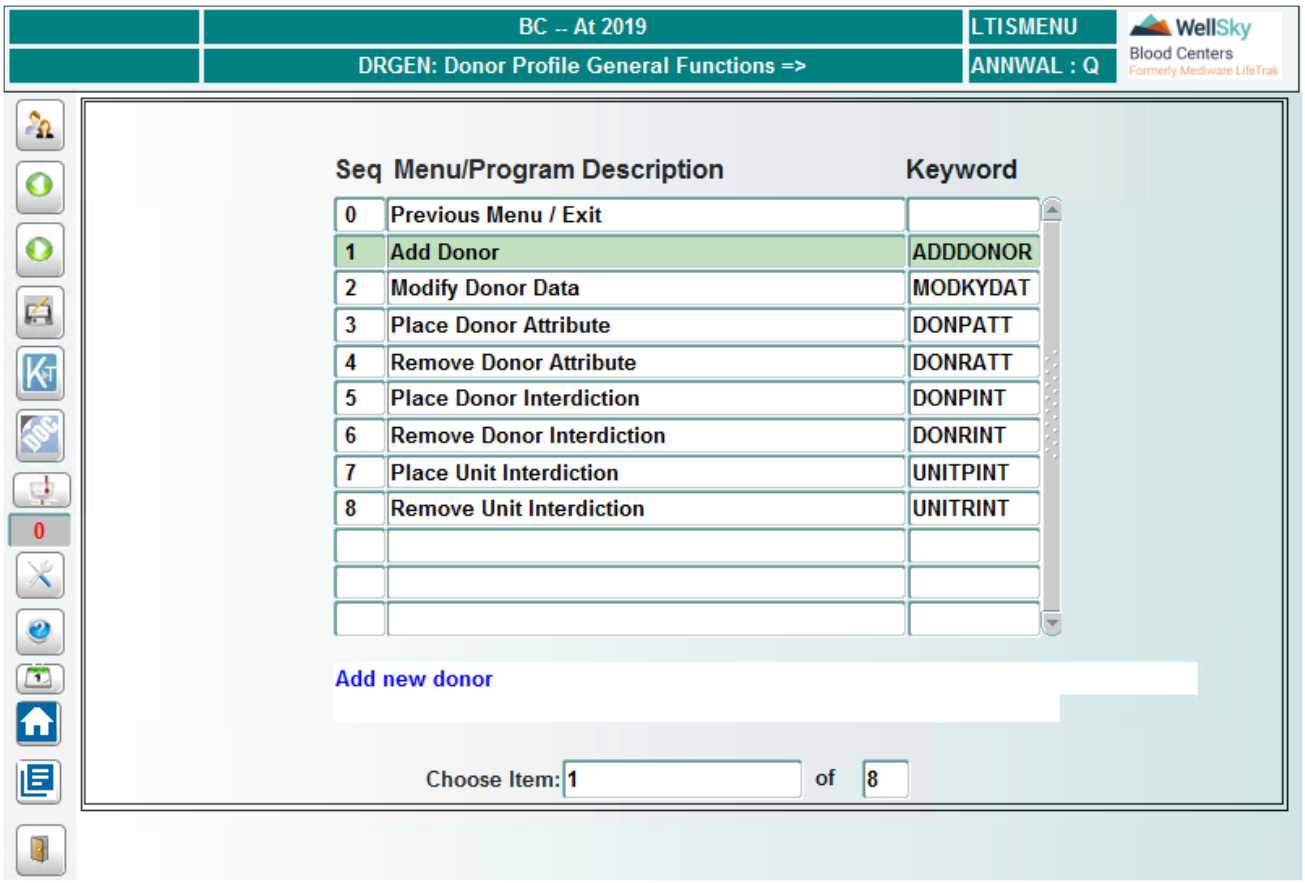


## 8.2.1 Add Donor (ADDDONOR)

### Intended Use

Use this screen to add a new donor to the database. The Find Donor routine is called to prevent entry of a duplicate donor record into the system.

### Limitations

- Entry of key donor data in the Find Donor window and Add Donor screen must match exactly.
- Program will not allow the addition of a donor if the donor is found when querying donor database.

### Prerequisites

Before adding a new donor, the user should make sure the donor is not already in the database. The Find Donor routine is used for this purpose. Before using this screen, the facility must configure the Find Donor screen to determine the required fields and how many times each field must be entered when performing Add Donor.


WellSky Corporation
Proprietary and confidential

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword ADDDONOR.

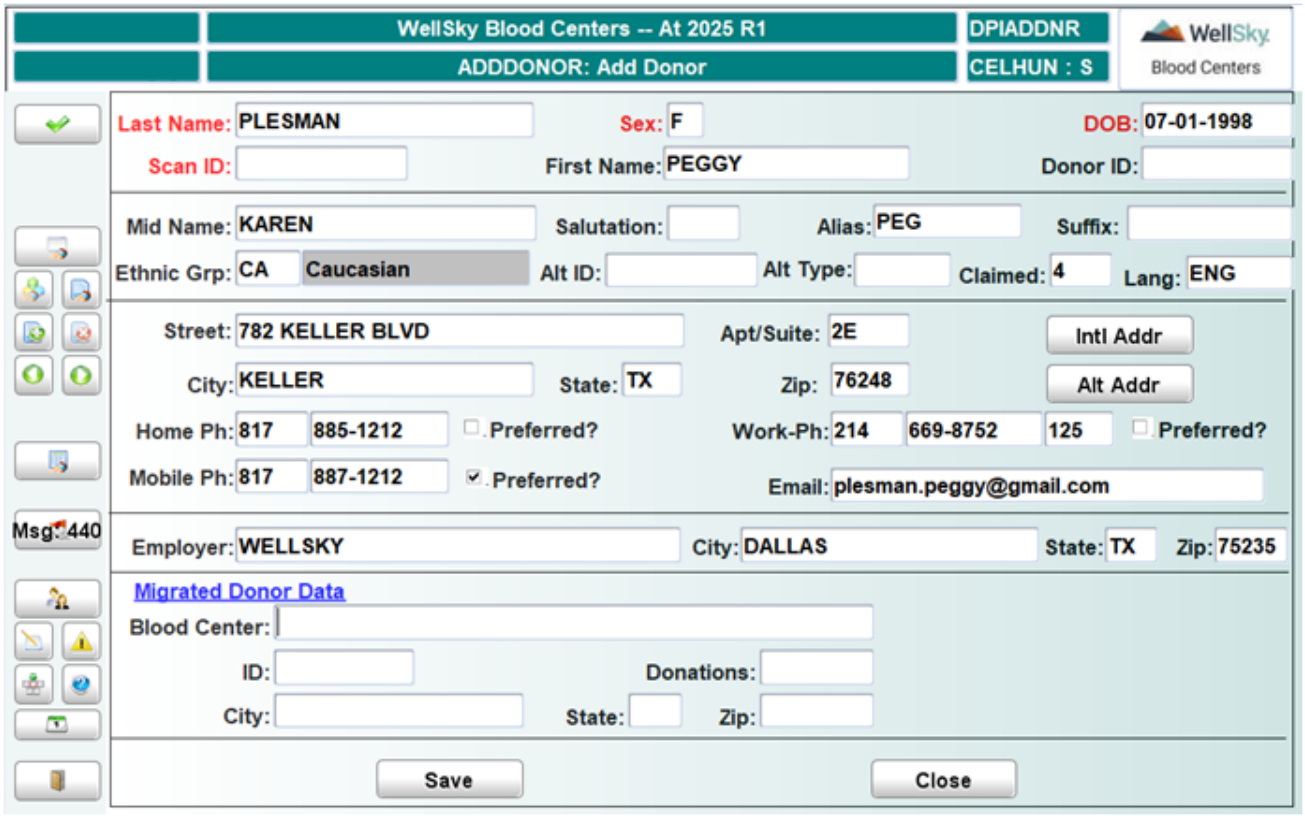


This screen appears with the Find Donor window open on top. Before adding a new donor to the database, the user must first confirm that the donor to be added does not already exist in the database. This is accomplished by searching the database using the Find Donor program. See Chapter 14 Called Windows and Routines for instructions on using this screen.

## The New Button

If no matching donor is found, the New button is enabled. Click **New** to begin the process of adding a new donor to the database. The Create new donor? pop-up appears:

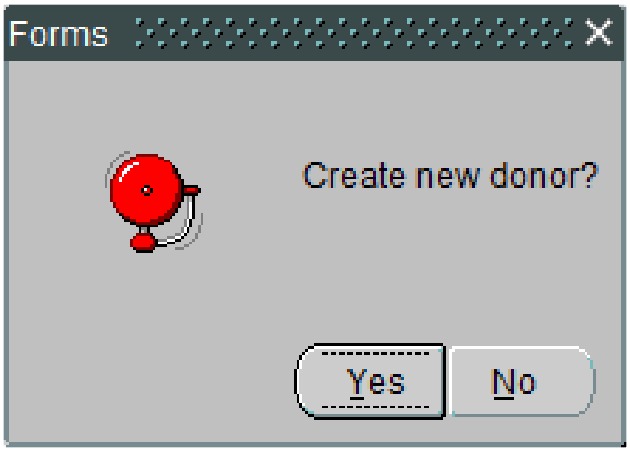


- Click **Yes** to go to the Add Donor screen:
- Click **No** to return to the Find Donor window.

## Key Data Block Fields and Definitions

Entry in each field is required. Press **ENTER** to move to the next field.

### Last Name

Enter the donor's last name. The name must match the name entered in the Find Donor window.

> **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### DOB

Enter the donor's date of birth, using the MMDDYYYY format. It must match the birth date entered in the Find Donor window.

### Sex

Enter the donor's sex. It must match the sex entered in the Find Donor window.

> **NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified: an F in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; an M in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

### First Name

Enter the donor's first name.

## Non-Key Data Block Fields and Definitions

Entry in each field is optional. Press **ENTER** to move to the next field.


WellSky Corporation
Proprietary and confidential

### Mid Name
Enter the donor's middle name.

### Salutation
Enter a salutation or select from the LOV.

### Alias
Enter any other name by which the donor may be known.

### Suffix
Enter a suffix, such as Jr., II, etc.

### Ethnic Grp
Entry is required if System Parameter ETHNIC is set to Y; entry is optional if System Parameter ETHNIC is set to N or is blank. Select a valid ethnic group code from the LOV. The LOV is populated from the Master Code ETHGP.

### Alt ID
Enter an alternate ID number such as passport or driver's license number.

### Claimed
Enter the number of donations claimed by the donor.

### Lang
Enter the donor's preferred language.

## Address Block Fields and Definitions
Entry in some fields is required. Press **ENTER** to move to the next field.

### Street
Entry is required. Enter the donor's street address.

### Apt/Suite
Entry is optional. Enter the donor's apartment or suite number.

### City
Entry is required. Enter the donor's city of residence.

### State
Display only. Automatically populates after the ZIP Code is entered.

### Zip
Entry is required. Enter the donor's five-digit ZIP Code.

## Home Ph

Entry is optional. Enter the donor's home phone number. Fields are provided for area code, prefix, and number. Do not enter hyphens; the system automatically inserts them.

## Preferred?

Entry is not required. Only one phone number can be designated as preferred. Press the space bar or use the mouse to select the check box to designate the home phone number as the preferred contact number.

## Work-Ph

Entry is optional. Enter the donor's business phone number. Fields are provided for area code, prefix, number, and extension. Do not enter hyphens; the system automatically inserts them.

## Preferred?

Entry is not required. Only one phone number can be designated as preferred. Press the space bar or use the mouse to select the check box to designate the work phone number as the preferred contact number.

## Mobile Ph

Entry is optional. Enter the donor's mobile phone number. Fields are provided for area code, prefix, and number. Do not enter hyphens; the system automatically inserts them.

## Preferred?

Entry is not required. Only one phone number can be designated as preferred. Press the space bar or use the mouse to select the check box to designate the mobile phone number as the preferred contact number.

## E-mail

Entry is optional. Enter the donor's e-mail address using free form format. Entry is limited to a maximum of 128 characters.

## Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

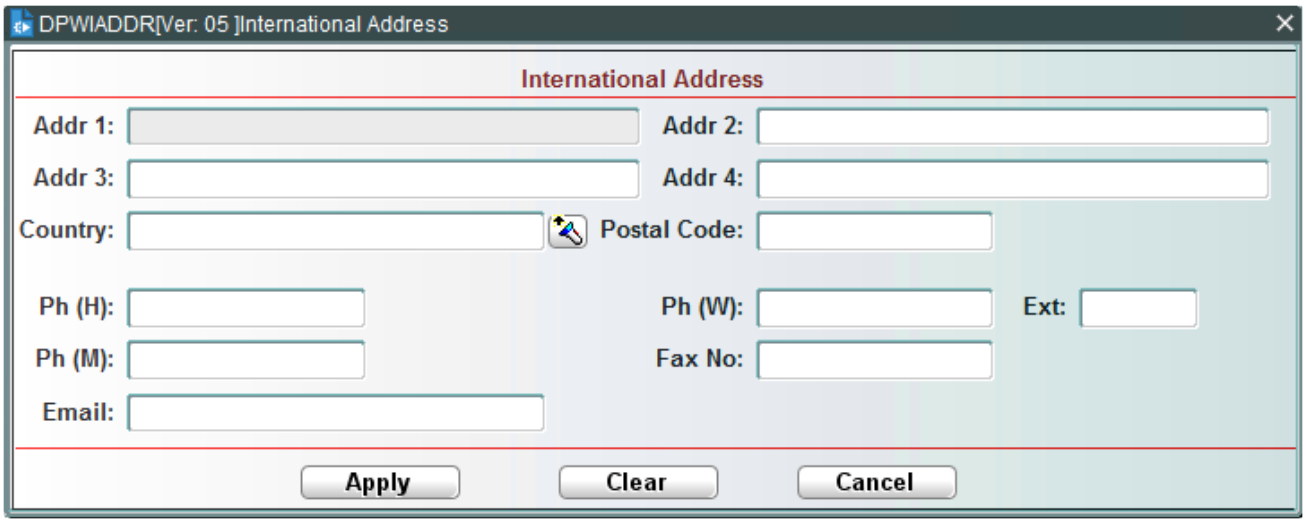



WellSky Corporation
Proprietary and confidential

Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

### Alt Addr (button)

Click **Alt Addr** to open the Alternate Demographics window, as follows:

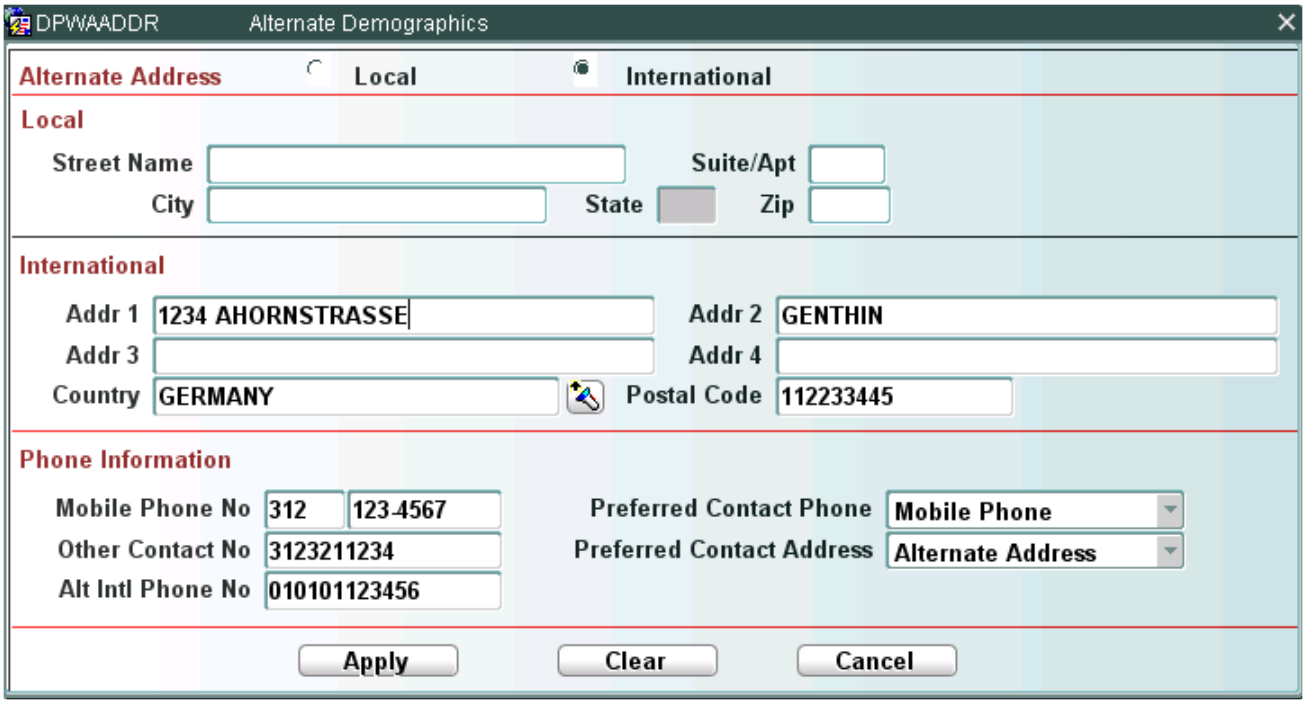


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Employer Block Fields and Definitions

Entry in each field is optional. Press **ENTER** to move to the next field.

### Employer

Enter the donor's employer name or select from the LOV. If a partial employer name is entered, a LOV displays that includes all employers in the database that match the partial entry.

### City

Enter the city where the donor's employer is located.

### State

This field automatically populates after the ZIP Code is entered.

### Zip

Entry is required if an entry has been made in the City field. Enter the employer's ZIP Code.

# Migrated Donor Data Block Fields and Definitions

Entry in each field is optional. Press **ENTER** to move to the next field.

## Blood Center

Enter the name of the blood center where the donor previously donated.

## ID

Enter the donor's ID number from the previous blood center.

## Donations

Enter the number of donations the donor made at the previous blood center.

## City

Enter the city where the previous blood center is located.

## State

Display only. This field automatically populates after the ZIP Code is entered.

## Zip

Entry is required if an entry has been made in the City field. Enter the ZIP Code of the previous blood center.

# The Save Button

After entering all known donor data, click **Save** to add the donor to the database. A Donor ID is generated and displays in the Donor ID field. A message appears to confirm donor creation:

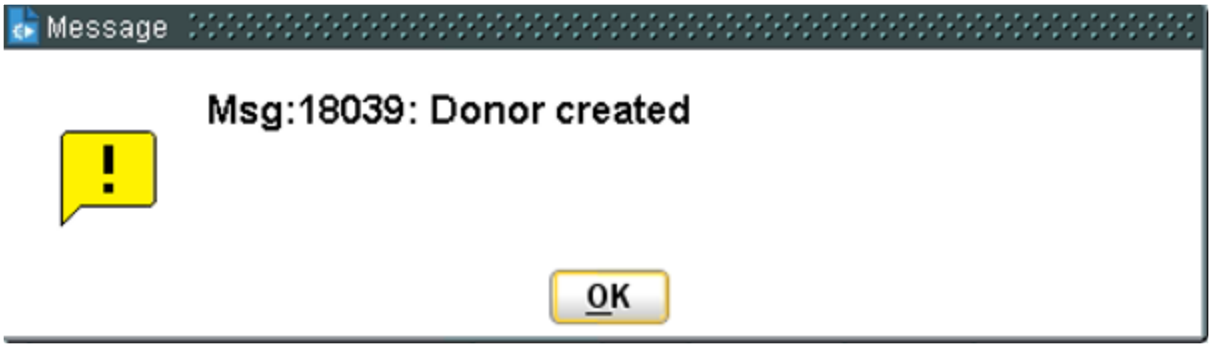


All data entered for the new donor is committed to the database. The Add Donor screen clears and the Find Donor window displays. Click **Cancel** to close both windows and return to the main menu.

# What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 8.2.2 Modify Donor Data (MODKYDAT)

## Intended Use

Use this screen to modify key data and demographics on an existing donor.

## Limitations

Depending on the parameters set for the Find Donor routine, the screen allows modification of donor data at the grade level to which it is set.

## Prerequisites

The donor must exist in the donor database in order to modify data about that donor. Before using this screen, the facility must configure the Find Donor screen to determine the required fields and how many times each field must be entered.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `MODKYDAT`.

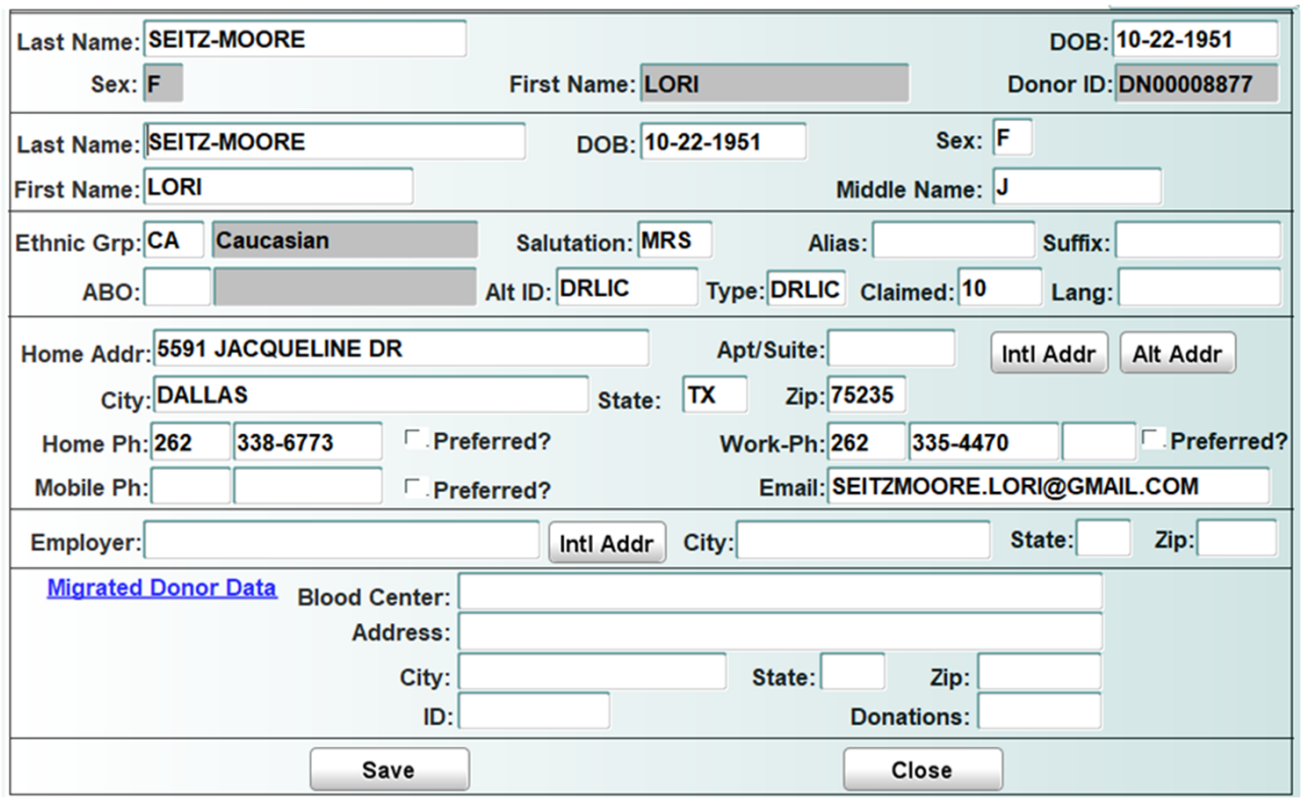


This screen appears with the Find Donor window open on top. Before modifying key donor data, you must first search for the donor in the database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found with the grade level as defined in the configuration of the Find Donor block, the Select button is enabled. Click **Select** to go to the Modify Donor Data screen. Existing donor data displays:

## In the Key Data Block

This block displays the key donor data. Data in this block cannot be modified.

## In the Modifiable Key Data Block

This block displays the same data as the Key Data Block, except that the Middle Name field replaces the Donor ID field. All data in this block can be modified. Click in the field and make changes by direct entry.

## Home Address Intl Addr Button

If the home address is an international address, do the following:

- Clear all domestic address information.
- Click **Intl Addr**.

The DPWIADDR window opens. See Chapter 14 Called Windows and Routines for instructions on using this window.

## Home Address Alt Addr Button

Click **Alt Addr** to open the Alternate Demographics window, as follows:

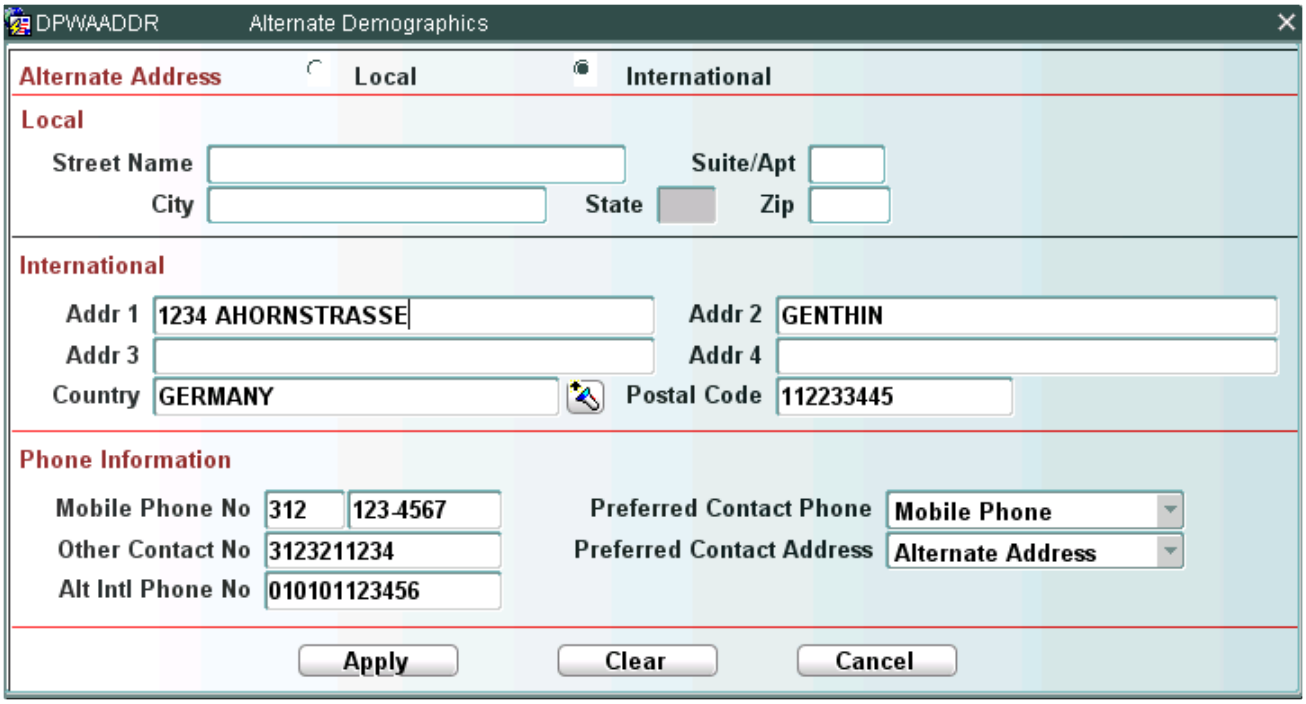


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.


WellSky Corporation
Proprietary and confidential

## Home Address

Entry is required. The Address field will accept a maximum of 50 characters.

## Apt No

Entry is optional. If an apartment number is entered, a maximum of 10 characters is allowed.

## City-St and Zip

The system validates your city and ZIP Code entries. If they disagree, the system does not accept the entries. An LOV is available in both fields. Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contains only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the home phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Work-Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated with the phone number.

## Preferred?

Entry is optional. If the work phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Mobile Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Preferred?

Entry is optional. If the mobile phone is the preferred contact number, then select the check box.

**NOTE –** Only one phone number can have the preferred flag selected.

## Email

Entry is optional. Make a free-form entry of the donor's e-mail address. A maximum of 128 characters is accepted.

## Employer Intl Addr Button

If the employer address is an international address, do the following:

- Clear all domestic address information.
- Click **Intl Addr**.

The following window opens:

### Intl City

Enter city.

### Intl State

Enter state, if desired.

### Intl Postal Code

Enter postal code.

### Intl Country

Enter country, or select from LOV.

Click **Apply** to save address information. Click **Clear** to clear all fields. Click **Cancel** to close the window without saving data and return to the MODKYDAT screen.

## In the Modifiable Non-Key Data Blocks

Any information associated with the donor when the donor was added to the database displays. All data in these blocks can be modified. Click in the field and make changes by direct entry. Data not previously associated with a donor can be added here.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified: Enter `F` in the Sex field to place an interdiction that is defined for the INTRFEMALE Inter Reason; enter `M` in the Sex field to place an interdiction that is defined for the INTRMALE Inter reason.

## The Close Button

Click **Close** to return to the main menu.

## The Save Button

After making modifications and additions, click **Save** to commit the changes to the donor database.

## What to Do Next

There is no next step.

# 8.2.3 Place Donor Attribute (DONPATT)

## Intended Use

Use this screen to place one or more attributes on a donor.

## Limitations

You can place and view only those attributes to which you have access.

## Prerequisites

- The donor must exist in the database.
- You must know the donor identification number or sufficient key data (last name, date of birth, etc).
- To place a termination date on an attribute, the attribute must be configured in one of the following ways in the Interdiction Codes (INTER) screen:
  - The Fixed Deferral Period (FP) field is null, and the minimum and maximum values are *not* defined.
  - The FP field is set to N, and the minimum and maximum values *are* defined.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `DONPATT`.

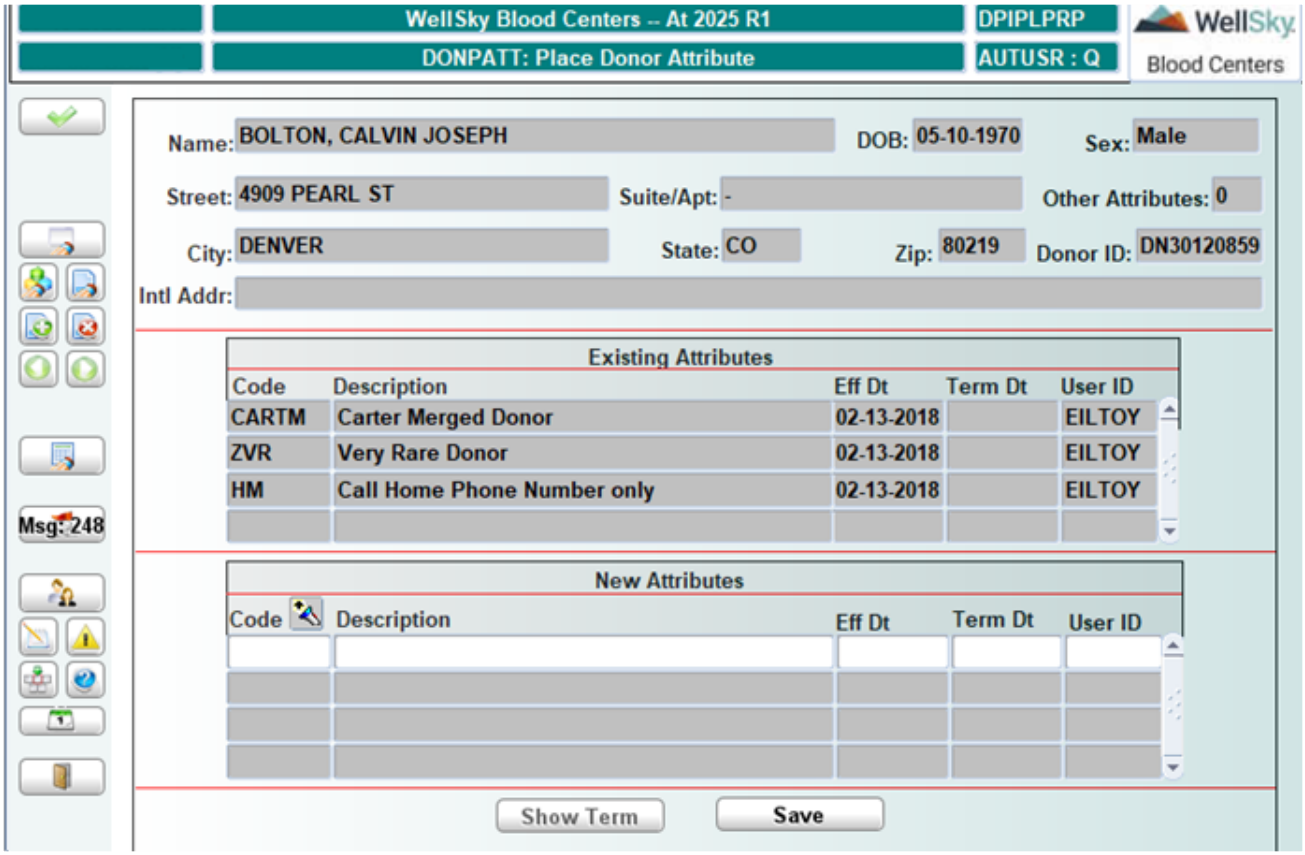


This screen appears with the Search for Donor window open. Before placing an attribute, you must first search for the donor in the database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found, the **Select** button is enabled. Click **Select** to go to the Place Donor Attribute screen. The donor data from the selected donor in the Search for Donor window displays.

## In the Donor Data Block

Data in this block cannot be modified from this screen. The following information display if it exists in the database:

- Donor name
- Date of birth
- Sex
- Street address
- Suite/apartment number
- Number of other attributes attached to donor
- City and state of residence
- ZIP Code


WellSky Corporation
Proprietary and confidential

- Donor ID number
- International address

## In the Existing Attributes Block

Data in this block cannot be modified. All attributes currently associated with the donor display with the following information:

- Attribute code
- Description of the attribute
- Date attribute became effective
- Date attribute will be terminated, if applicable
- ID of user who placed the attribute

## New Attributes Block Fields and Definitions

### Code

Entry is required. Enter attribute code or select from the LOV. The LOV contains only those attributes that the user has access to place.

### Description

Display only. Automatically populates depending on the attribute code selected.

### Eff Dt

Entry is required. Automatically populates with the system date. This can be changed to a future date in MMDDYYYY format.

### Term Dt

Entry is optional. Enter the date to terminate the attribute in MMDDYYYY format. The system does not accept termination dates for permanent attributes.

### User ID

Display only. Automatically displays the User ID of the logged-on employee.

## The Save Button

After defining a new attribute, click **Save** to commit the action and attach the attribute to the donor. After clicking **Save**, the new attribute displays in the Existing Attributes block.

## The Show Term Button

If the donor has had attributes that are now terminated, the Show Term button is enabled. Click **Show Term** to open the Terminated Attributes window and view the donor's terminated attributes:

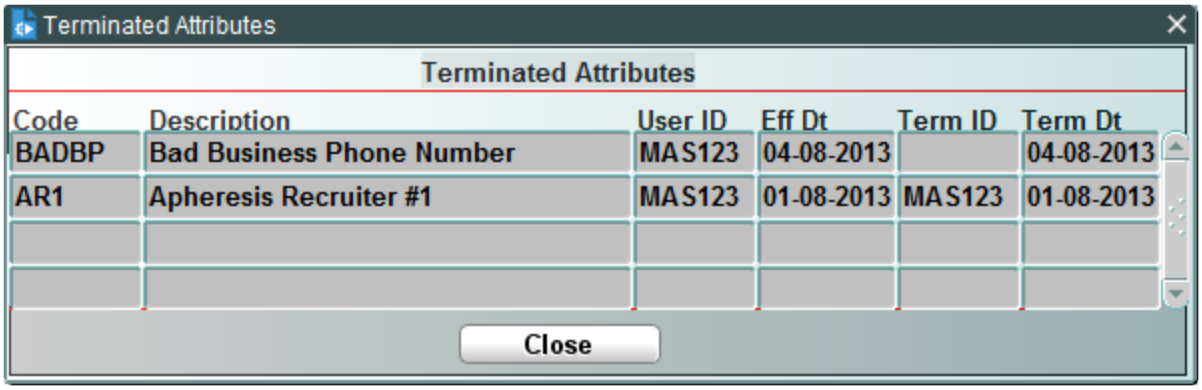


## What to Do Next

To remove an attribute, use Remove Donor Attribute (DONRATT).

# 8.2.4 Remove Donor Attribute (DONRATT)

## Intended Use

Use this screen to terminate attributes associated with a donor.

## Limitations

The screen displays only those attributes the user has access to remove.

## Prerequisites

- At least one attribute must have previously been placed on the donor and the donor must exist in the donor database.
- The user must know the donor identification number or sufficient key data (last name, date of birth, etc).

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `DONRATT`.


WellSky Corporation
Proprietary and confidential

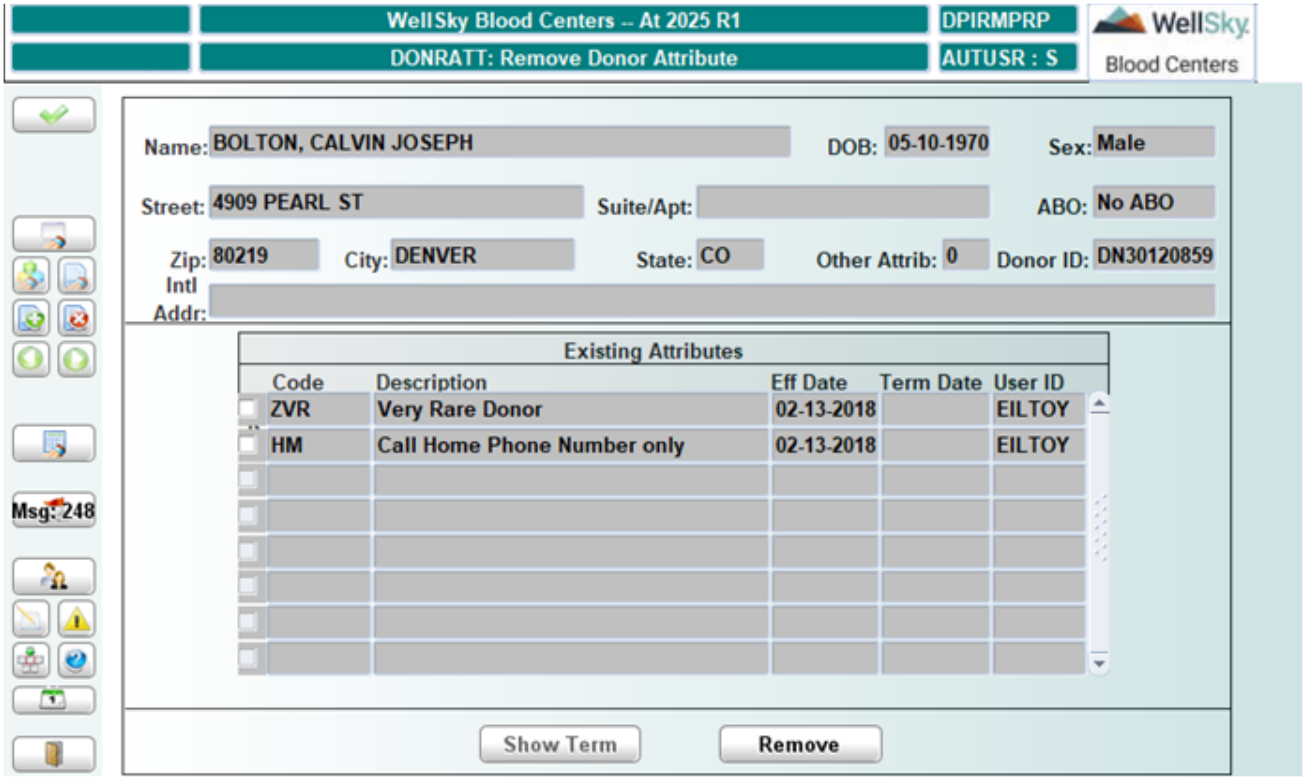


This screen appears with the Search for Donor window open. Before removing an attribute, the user must first search for the donor in the database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found, the Select button is enabled. Click **Select** to go to the Remove Donor Attributes screen. The donor data from the selected donor in the Search for Donor window displays.

## In the Donor Data Block

Data in this block cannot be modified from this screen. The following information displays, if it exists in the database:

- Name
- Date of birth
- Sex
- Street address
- Suite/apartment number
- ABO type
- ZIP Code
- City of residence
- State of residence
- Number of other attributes placed on the donor

- Donor's ID number
- International address

## In the Existing Attributes Block

The following information displays:

- Attribute code
- Attribute description
- Date attribute became effective
- Termination date of attribute, if any
- ID of user who placed attribute

**NOTE –** Only those attributes for which the user has removal access are displayed.

## Removing an Attribute

Click in the box next to the attribute to remove. More than one attribute can be selected at one time. When all attributes to remove are selected, click **Remove**. The attributes are terminated and the change is committed to the database.

## Viewing Terminated Attributes

If the donor has had attributes that are now terminated, the Show Term button is enabled. Click **Show Term** to open the Terminated Attributes window and view the donor's terminated attributes:

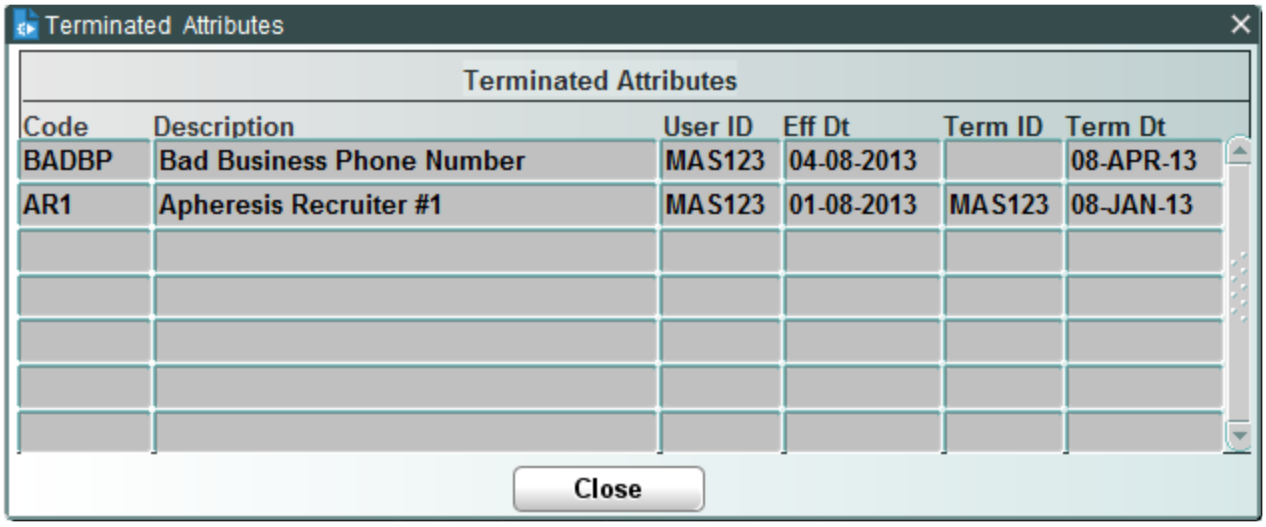


Any attributes just removed display along with previously terminated attributes. The ID of the user that terminated the attribute displays in the Term ID column.

Click **Close** to return to the main screen.

## What to Do Next

There is no next step.

# 8.2.5 Place Donor Interdiction (DONPINT)

## Intended Use

Use this screen to place one or more interdictions on a donor.

## Limitations

- The user can view and place only those donor interdictions to which he or she has access. This screen allows the user to interdict a donor and not a unit associated with a donor.
- The user can only place interdiction types classified as Donor or Both.

## Prerequisites

The user must know the last name, date of birth and sex of the donor to be interdicted. Before using this screen, the facility must configure the Find Donor screen to determine the required fields and how many times each field must be entered.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `DONPINT`.

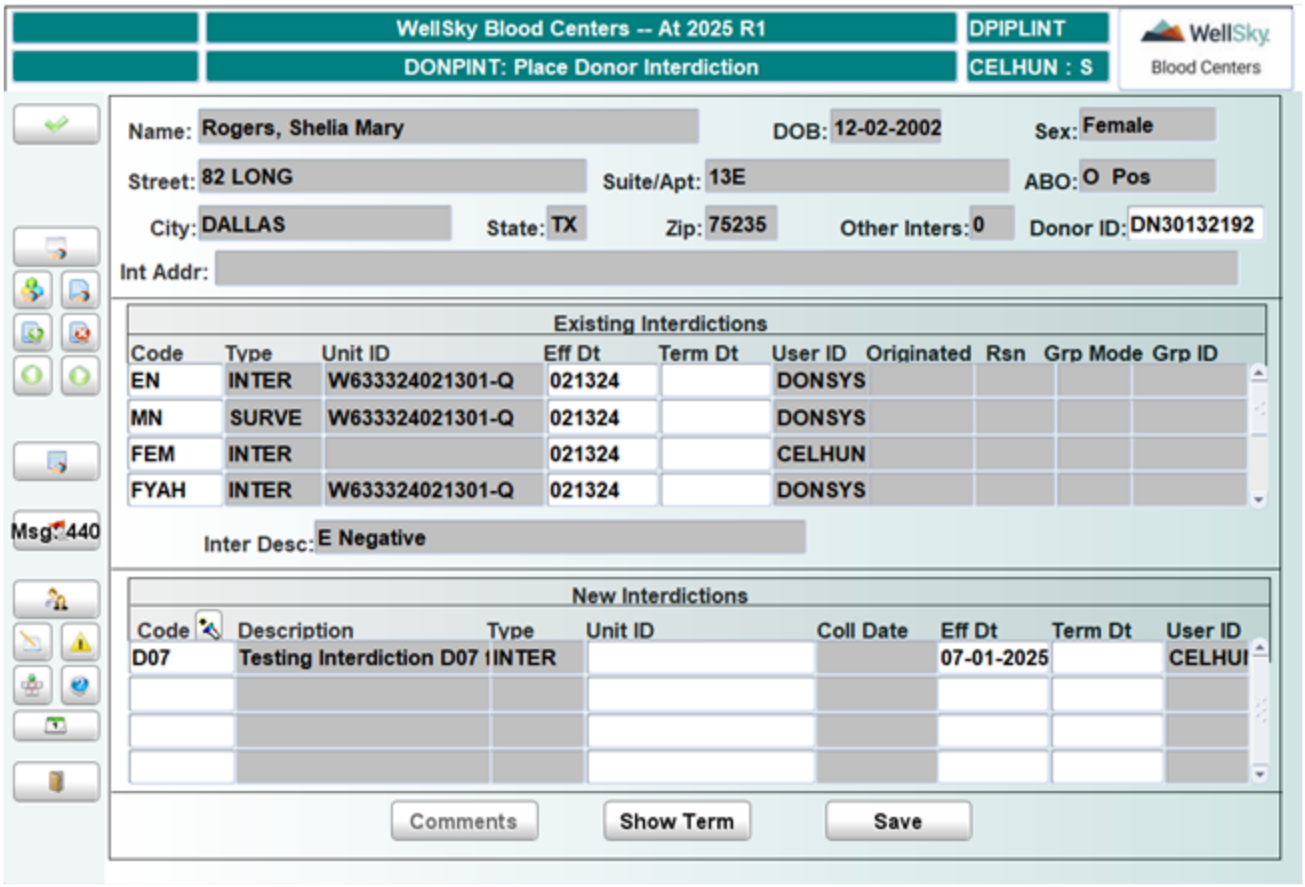


This screen appears with the Find Donor window open on top. Before placing an interdiction, the user must first search for the donor in the database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found with the grade level as defined in the configuration of the Find Donor block, the Select button is enabled. Click the Select button to go to the Place Donor Interdiction screen. The donor data entered in the Find Donor window displays:

## In the Donor Data Block

Data in this block cannot be modified from this screen. The following information displays, if it exists in the database:

- Name
- Date of birth
- Sex
- Street address
- Suite/apartment number
- ABO type
- City of residence


WellSky Corporation
Proprietary and confidential

- State of residence
- ZIP Code
- Number of other interdictions
- Donor's ID number
- International address

## In the Existing Interdictions Block

Data in this block cannot be modified from this screen. The following information displays:

- Interdiction code
- Type of interdiction
- Unit ID if a unit is associated with the donor interdiction
- Effective date of the interdiction
- Termination date of the interdiction, if any
- ID of the user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode if associated with a group interdiction
- ID number of group if associated with a group interdiction

## New Interdictions Block Fields and Definitions

### Code

Entry is required. Enter interdiction code or select from the LOV. Only those interdictions for which the user has access will appear.

### Description

Display only. Automatically populates based on the interdiction code selected.

### Type

Display only. Automatically populates based on the interdiction code selected.

### Unit ID

Entry is optional. Enter the ID number of the unit if associated with the donor interdiction. This does not place an interdiction on the unit.

### Coll Date

Display only. Automatically populates if a unit ID was entered.

### Eff Dt

Entry is required. Automatically populates with the system date. This can be changed to a future date in MMDDYYYY format.

### Term Dt

Entry is optional. Enter a date to terminate the interdiction, if applicable in MMDDYYYY format. The system does not accept termination dates for permanent interdictions.

### User ID

Display only. Displays the User ID of the logged-on employee and cannot be changed.

## The Comments Button

After an interdiction is entered for placement, click **ENTER** on the keyboard. The Comments button will become enabled. Click **Comments** to open the window. Enter comments to be associated with the interdiction here. The selected interdiction code automatically populates in the Code field.

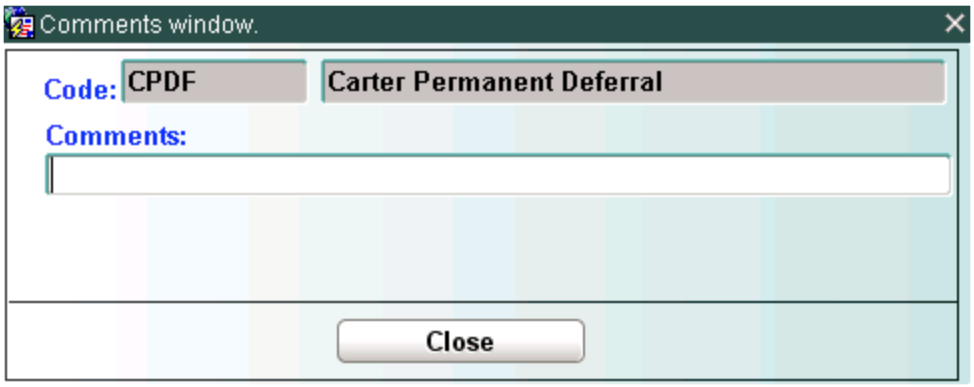


## The Show Term Button

If the donor has had interdictions that are now terminated, the Show Term button is enabled. Click **Show Term** to open the Terminated Interdictions window and view the donor's terminated interdictions. The following information displays:

- Interdiction code
- Type of interdiction
- Unit ID if a unit is associated with the donor interdiction
- Effective date of the interdiction
- Termination date of the interdiction, if any
- ID of the user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode if associated with a group interdiction


WellSky Corporation
Proprietary and confidential

- ID number of group if associated with a group interdiction

## The Save Button

After defining a new interdiction, click **Save** to place the new interdiction on the donor. After clicking Save, the new interdiction displays in the Existing Interdictions block.

## What to Do Next

To remove an interdiction, use Remove Donor Interdiction (DONRINT).

# 8.2.6 Remove Donor Interdiction (DONRINT)

## Intended Use

Use this screen to release temporary donor interdictions or terminate permanent donor interdictions from a donor.

## Limitations

- The user can view and terminate only those interdictions for which he or she has access.
  - Ability to remove an interdiction requires the appropriate access level.
  - There may be a donor interdiction that the user does not have the appropriate access level to remove.
  - There may not be a donor interdiction.
  - There could be a unit level interdiction, rather than a donor interdiction or both.
- Only one interdiction can be released at a time.
- Can only remove interdictions associated to a donor.
- Interdictions placed by the upgrade matrix cannot be directly released by users; upgrade interdictions can only be released by removing one or both of the interdictions causing the upgrade placement.

## Prerequisites

- The user must know the last name, date of birth and sex of the donor. Before using this screen, the facility must configure the Find Donor screen to determine the required fields and how many times each field must be entered.
- An interdiction must have been placed on the donor. If interdictions have not been placed, an error message displays.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `DONRINT`.

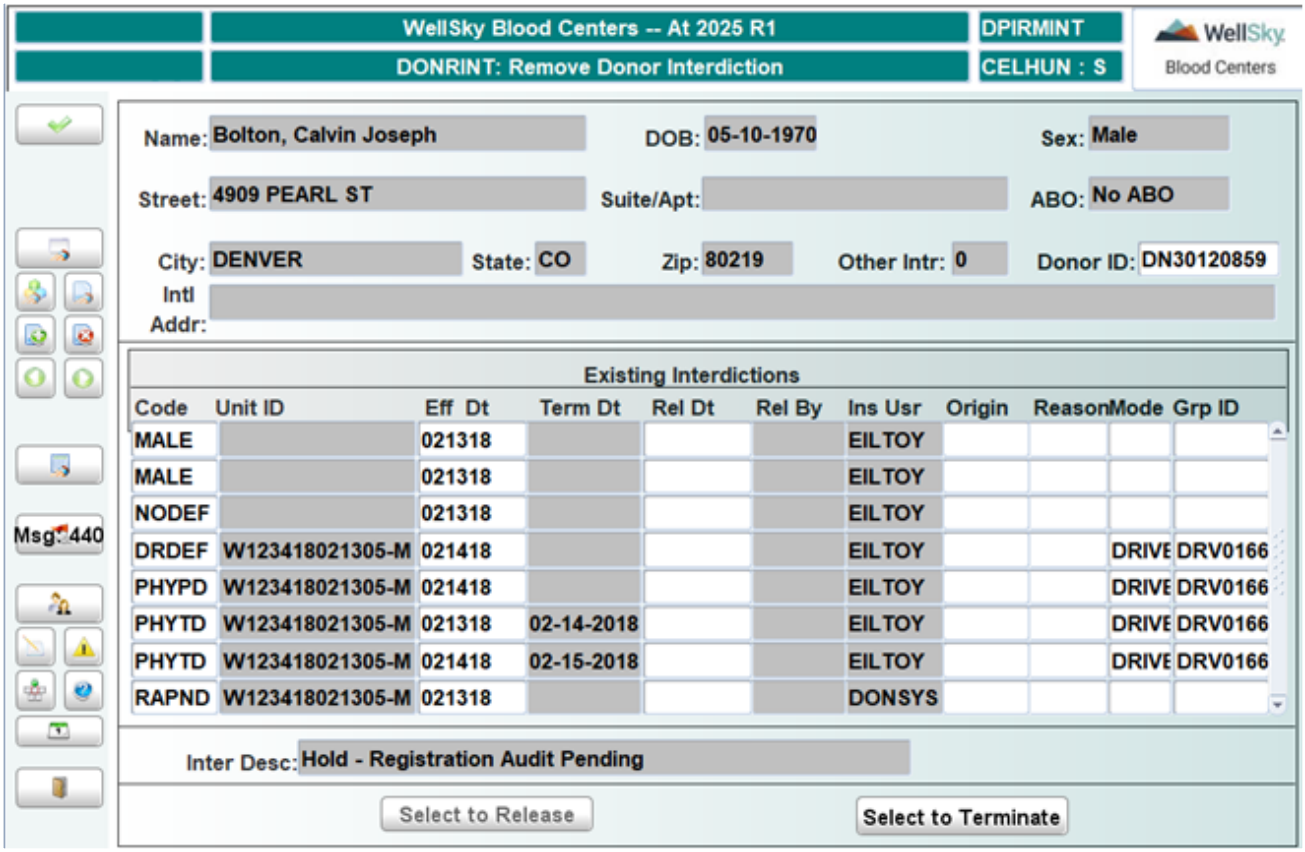


This screen appears with the Find Donor window open on top. Before removing a donor interdiction, the user must first search for the donor in the database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found with the grade level as defined in the configuration of the Find Donor block, the Select button will become enabled. Click Select to go to the Remove Donor Interdiction screen. The donor data entered in the Find Donor window displays:

## In the Donor Data Block

Data in this block cannot be modified from this screen. The following information displays, if it exists in the database:

- Name
- Date of birth
- Sex
- Street address
- Suite/apartment number
- ABO type
- City of residence
- State of residence

- ZIP Code
- Number of other interdictions that the user cannot view
- Donor ID number
- International address

## In the Existing Interdictions Block

Data in this block cannot be modified. The following information displays for each interdiction placed on the donor for which user has removal access:

- Interdiction code
- Unit ID if associated with the donor interdiction
- Effective date of the interdiction
- Termination date of the interdiction
- Release date of the interdiction
- ID of user who released the interdiction
- ID of user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode if associated with a group interdiction
- ID number of group if associated with a group interdiction

## The Select to Release Button

Only interdictions that have a future termination date and/or a null release date can be released. In the Existing Interdictions block, click the interdiction to release. Then click **Select to Release**. The following pop-up appears:

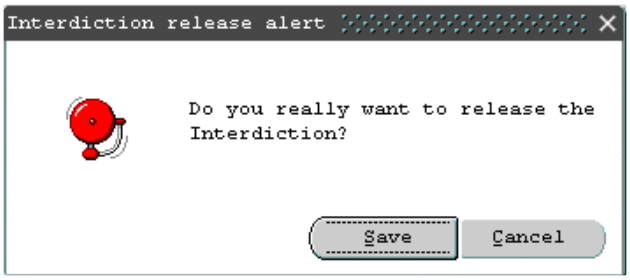


Click **Save** to release the interdiction and return to the main screen.

Click **Cancel** to return to the main screen without releasing the interdiction.

### Rules for the Release Button to be Active:

The Release button is **enabled** for the following condition:

- If a record is terminated and it is not released.

The Release button is **disabled** for any one of the following conditions:

- If the record is not terminated.
- If the record is already released.

## The Select to Terminate Button

In the Existing Interdictions block, click the interdiction to terminate. The Select to Release button is disabled. Click **Select to Terminate** to open the Terminate Interdiction window:

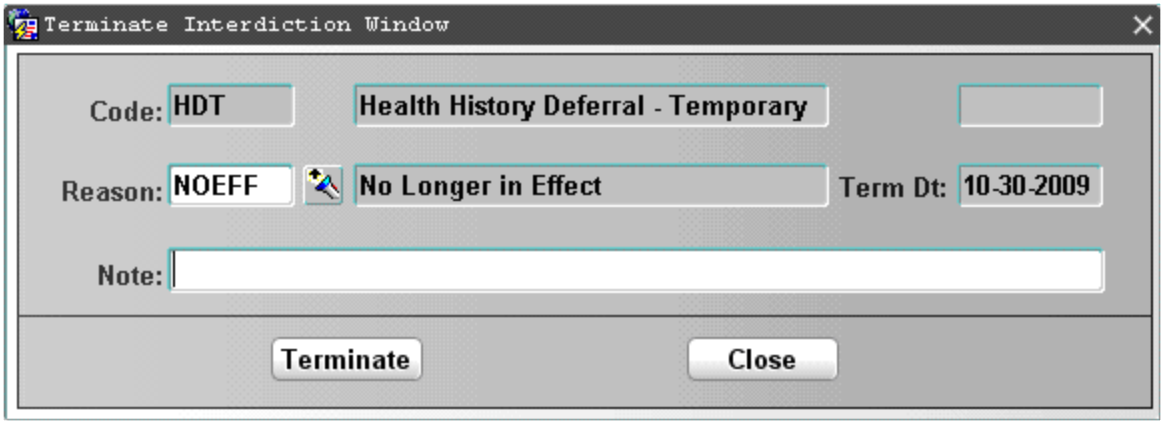


The interdiction code and description and the length of the interdiction display, if applicable.

### Reason

Entry is required. Enter the reason for the removal or select from the LOV.

### Term Dt

Display only. Automatically populates with the system date and cannot be changed.

### Notes

Entry is optional. Type any notes to attach to the interdiction removal.

Click **Terminate** to remove the interdiction. The following pop-up message appears:

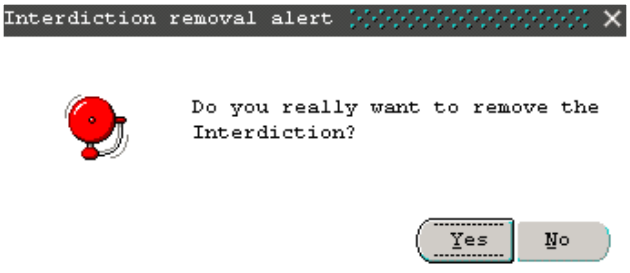


Click **Yes** to remove the interdiction. The screen clears and the Term Dt field in the Existing Interdictions block populates with the system termination date.

Click **No** to close the alert message and return to the main screen without terminating the interdiction.


WellSky Corporation
Proprietary and confidential

Click **Close** in the Terminate Interdiction window to cancel the termination process and return to the main screen.

### Rules for the Terminate Button to be Active:

The Terminate button is **disabled** for any one of the following conditions:

- The term date is less than or equal to the current local date.
- The interdiction is already released.

The Release button is **enabled** for any one of the following conditions:

- The term date is greater than the current local date.
- The interdiction is not released.

## What to Do Next

There is no next step.

# 8.2.7 Place Unit Interdiction (UNITPINT)

## Intended Use

Use this screen to place one or more interdictions on a unit.

## Limitations

- You may place only those interdictions for which you have access.
- You can only place those interdiction types classified as Unit or Both.

## Prerequisites

- You must know the unit ID or deferral ID of the unit on which he or she wants to place an interdiction.
- A unit must be attached to a donor before interdictions can be added to the unit.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `UNITPINT`.

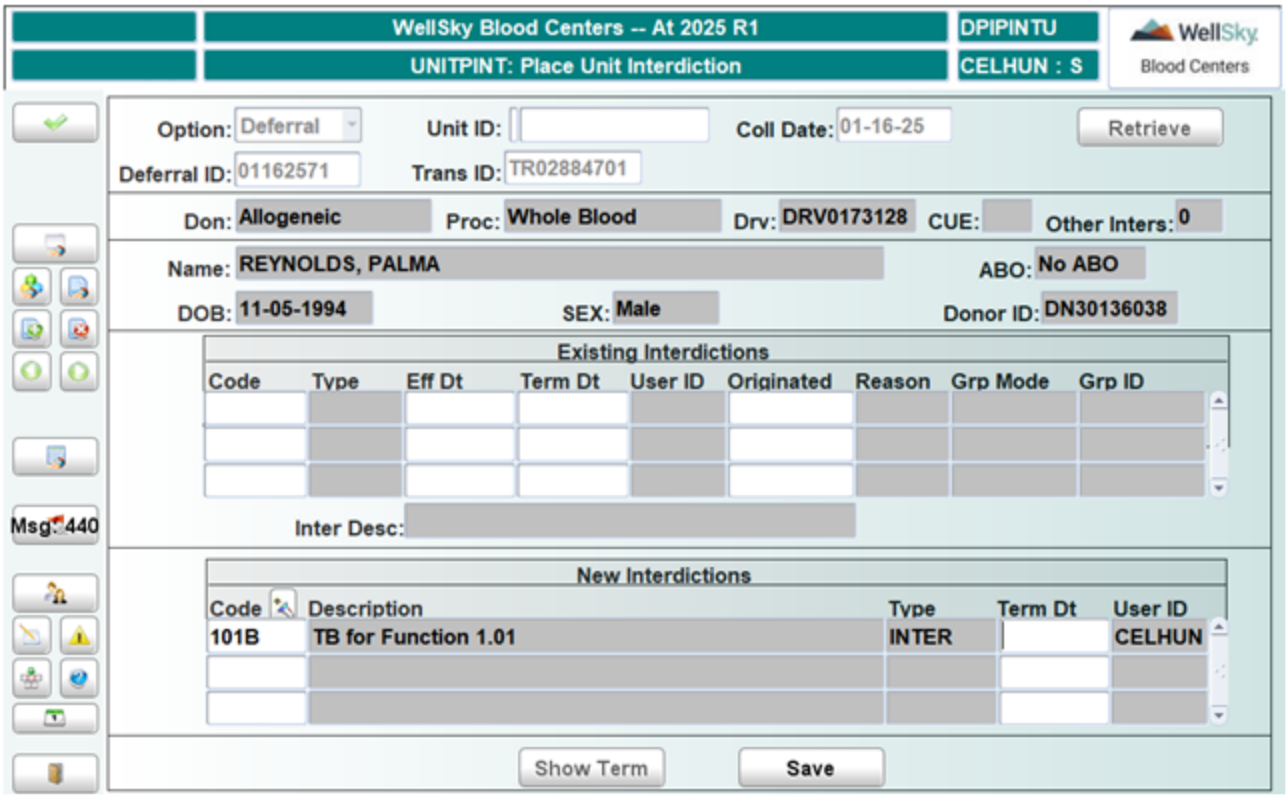


# Control Block Fields and Definitions

## Option

Entry is required. Select **Donation** or **Deferral** from the drop-down list.

## Unit ID

Entry is required if the donation option is selected. Scan the unit number or enter manually. If entering manually, a double blind entry is required.

## Coll Date

Entry is required if the donation option is selected. If the unit ID number is unique, the collection date automatically populates. If the unit ID number is not unique, an LOV appears. Select the correct collection date from the LOV.

## Deferral ID

Entry is optional. The cursor moves to this field if the deferral option is selected. Enter the deferral ID number manually or scan it.

## Trans ID

Entry is required if no deferral ID was entered, or if the deferral ID is not unique. If the deferral ID is unique, the transaction ID automatically populates.


WellSky Corporation
Proprietary and confidential

## Retrieving Data

After entering the data, click **Retrieve** to display all associated data.

## In the Donation and Donor Data Blocks

Data in this block cannot be modified from this screen. The following information displays:

- Donation type
- Procedure type
- Drive ID
- Donor CUE (Y or N)
- Number of other interdictions
- Name
- ABO type
- Date of birth
- Sex
- Donor ID number

## In the Existing Interdictions Block

Data in this block cannot be modified. The following information displays:

- Interdiction code
- Type of interdiction
- Effective date of the interdiction
- Termination date of the interdiction, if any
- ID of user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode describes how group interdiction was placed
- ID number of group if associated with a group interdiction

## New Interdictions Block Fields and Definitions

### Code

Entry is required. Enter the interdiction code or select from the LOV. The LOV contains only the codes for which you have access.

### Description
Display only. The description automatically populates after the code is selected.

### Type
Display only. The type automatically populates after the code is selected.

### Term Dt
Entry is optional. Enter the date to terminate the interdiction, using the MMDDYYYY format. The current date can be entered. If a termination date is entered, the interdiction terminates at midnight of the entered date. The system does not accept termination dates for permanent interdictions.

### User ID
Display only. The user ID of the logged-on employee automatically displays and cannot be modified.

## The Save Button
After defining a new interdiction, click **Save** to commit the action and attach the new interdiction to the unit or deferral. The new interdiction displays in the Existing Interdictions block.

## The Show Term Button
If the unit or deferral has had interdictions that are now terminated, the Show Term button is enabled. Click **Show Term** to open the Terminated Interdictions window. The following information displays:

- Interdiction code
- Type of interdiction
- Effective date of the interdiction
- Termination date of the interdiction, if any
- ID of user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode describes how group interdiction was placed
- ID number of group if associated with a group interdiction

## What to Do Next
To terminate a unit interdiction, use Remove Unit Interdiction (UNITRINT).

# 8.2.8 Remove Unit Interdiction (UNITRINT)

## Intended Use
Use this screen to remove an interdiction from a unit.


WellSky Corporation
Proprietary and confidential

## Limitations

- The user may view and remove only those interdictions for which he or she has access.
  - Ability to remove an interdiction requires the appropriate access level.
  - There may be a unit interdiction that the user does not have the appropriate access level to remove.
  - There may not be a donor interdiction.
  - There could be a donor level interdiction, rather than a unit interdiction or both.
- Only interdictions that are classified as Unit or Both can be removed.

## Prerequisites

The user must know the unit ID or deferral ID of the unit on which he wants to remove an interdiction.

## Accessing the Screen

Access this screen from the Donor Profile General Functions menu or by entering the keyword `UNITRINT`.

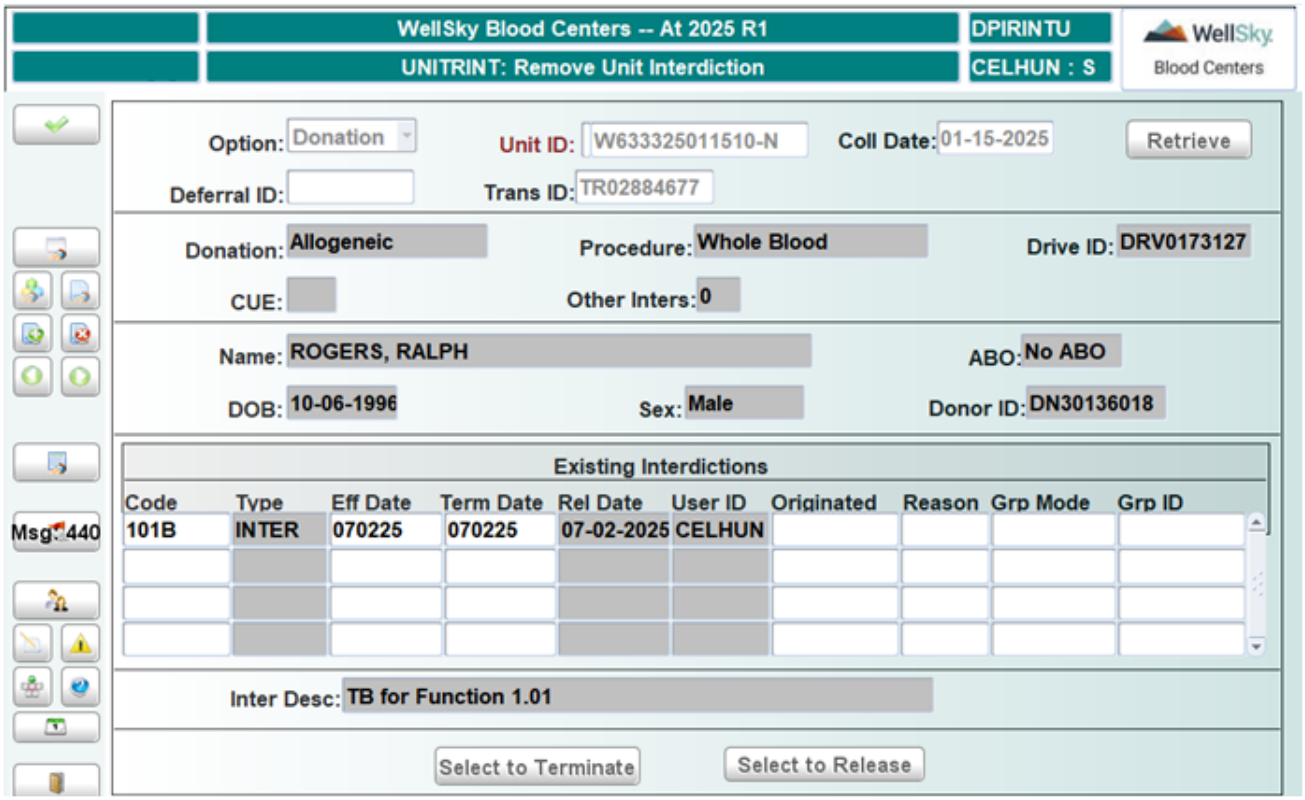


## Control Block Fields and Definitions

### Option

Entry is required. Select the Donation or Deferral option from the drop-down list.

### Unit ID

Entry is required if the donation option is selected. Scan the unit number or enter manually. If entering manually, a double blind entry is required.

### Coll Date

Entry is required if the donation option is selected. If the unit ID number is unique, the collection date automatically populates. If the unit ID number is not unique, an LOV appears. Choose the correct collection date from the LOV.

### Deferral ID

Entry is optional. Cursor moves to this field if the deferral option is selected. Enter the deferral ID number or scan.

### Trans ID

Entry is required if no deferral ID was entered, or if the deferral ID is not unique. If the deferral ID is unique, the transaction ID automatically populates.

## Retrieving Data

After entering the data, click **Retrieve** to display all associated data.

## In the Donation Block

Data in this block cannot be modified from this screen. The following information displays:

- Donation type
- Procedure type
- Drive ID
- Donor CUE (Y or N)
- Number of other interdictions
- Name
- ABO type
- Date of birth
- Sex
- Donor ID number

## In the Existing Interdictions Block

The following information displays:

- Interdiction code
- Type of interdiction
- Effective date of the interdiction
- Termination date of the interdiction


WellSky Corporation
Proprietary and confidential

- Release date of the interdiction
- ID of user who placed the interdiction
- Physical findings question code that originated the interdiction
- Answer code that is reason for the interdiction
- Group mode if associated with a group interdiction
- ID number of group if associated with a group interdiction

## The Select to Terminate Button

Only interdictions that do not have a termination date can be selected to terminate. In the Existing Interdictions window, click on the interdiction to remove. Click **Select to Terminate** to open the Remove Interdiction window. The interdiction code and description and length of the interdiction displays:

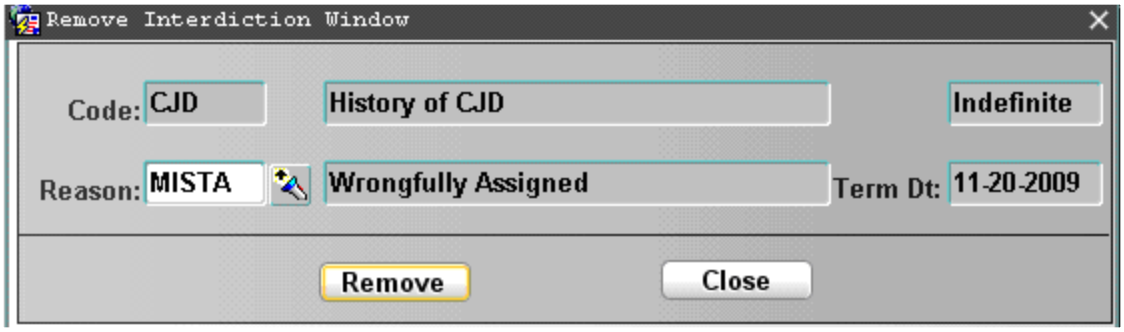


### Reason

Entry is required. Enter the reason for the removal or select from the LOV.

### Term Dt

Display only. Automatically populates with the system date. The interdiction terminates at midnight of the termination date.

Click **Close** to cancel the removal and return to the main screen.

Click **Remove** to remove the interdiction. A pop-up appears asking you to verify if you want to remove the interdiction:

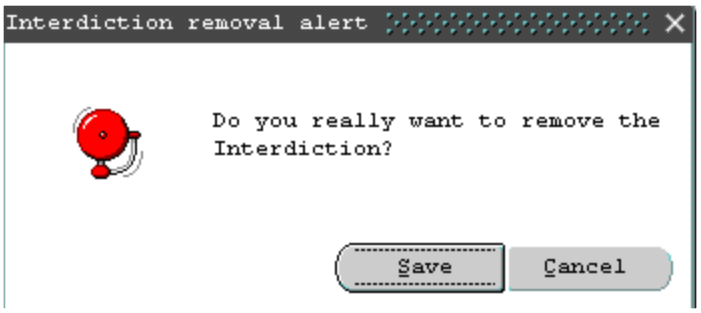


Click **Save** to remove the interdiction and return to the main screen. The change is committed to the database. The Term Date field in the Existing Interdictions block is populated with the entered termination date.

Click **Cancel** to return to the main screen without removing the interdiction.

## The Select to Release Button

Only interdictions with a termination date in the future can be selected to be released. In the Existing Interdictions window, click on the interdiction to release. Click **Select to Release**. The following pop-up appears:

Click **Save** to release the interdiction and return to the main screen. The change is committed to the database. The Rel Date field in the Existing Interdictions block is populated with the entered release date.

Click **Cancel** to return to the main screen without releasing the interdiction.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 8.3 Donor Profile Maintenance Functions

These functions are accessed from the following menu:

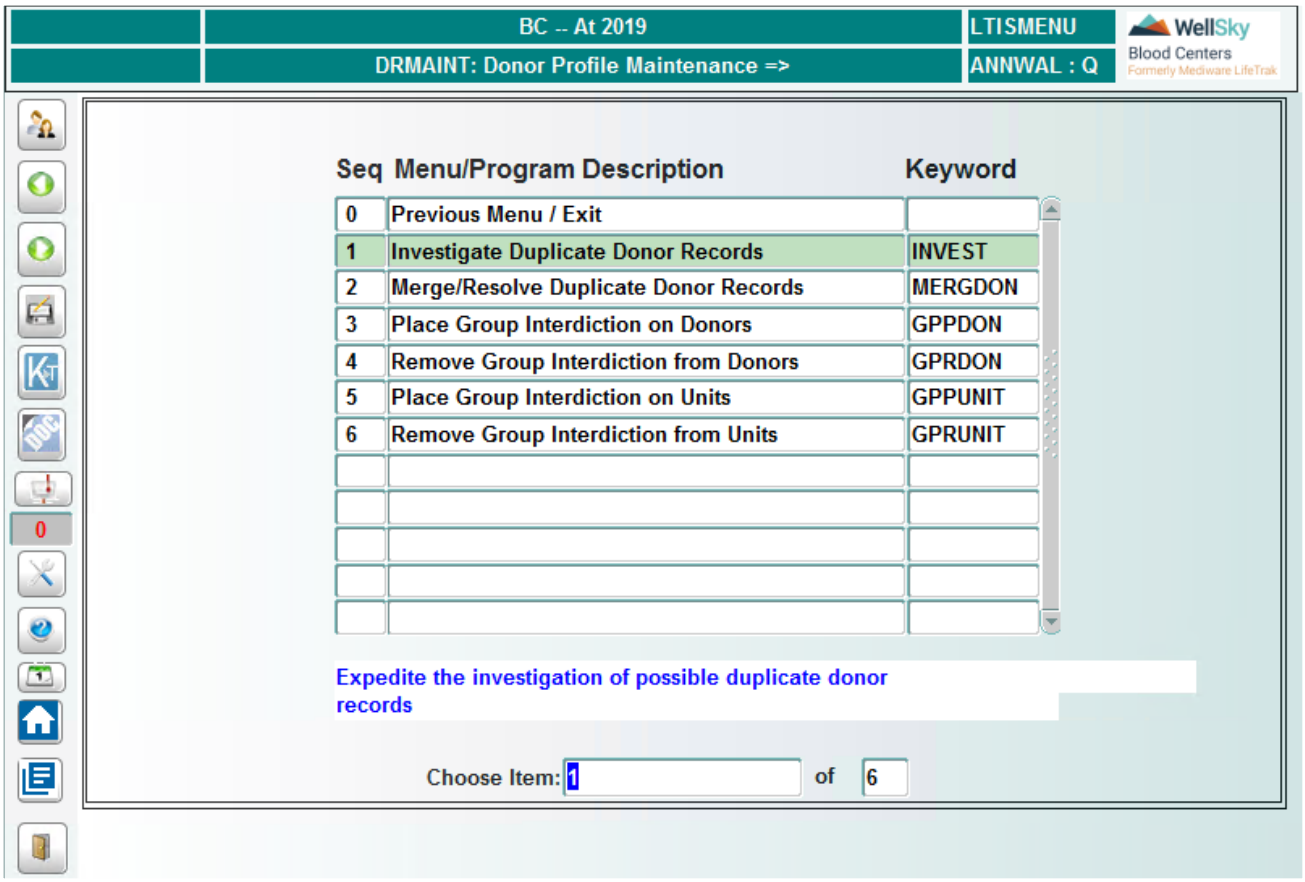


## 8.3.1 Investigate Duplicate Donor Records (INVEST)

### Intended Use

Use this screen to investigate possible duplicate donors.

### Limitations

- Duplicate donor records cannot be resolved or merged from this screen.
- Only one batch can be investigated at a time.
- Only two donors can be investigated at a time.

**Important!** WARNING! This screen is used to document the investigation process. Users should follow their SOPs to conduct the investigation.

## Prerequisites

- At least two donor records must be identified as possible duplicates.
- Definition of DP in the Define All Donor IDs Sequences (ALLIDS).

## Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `INVEST`.

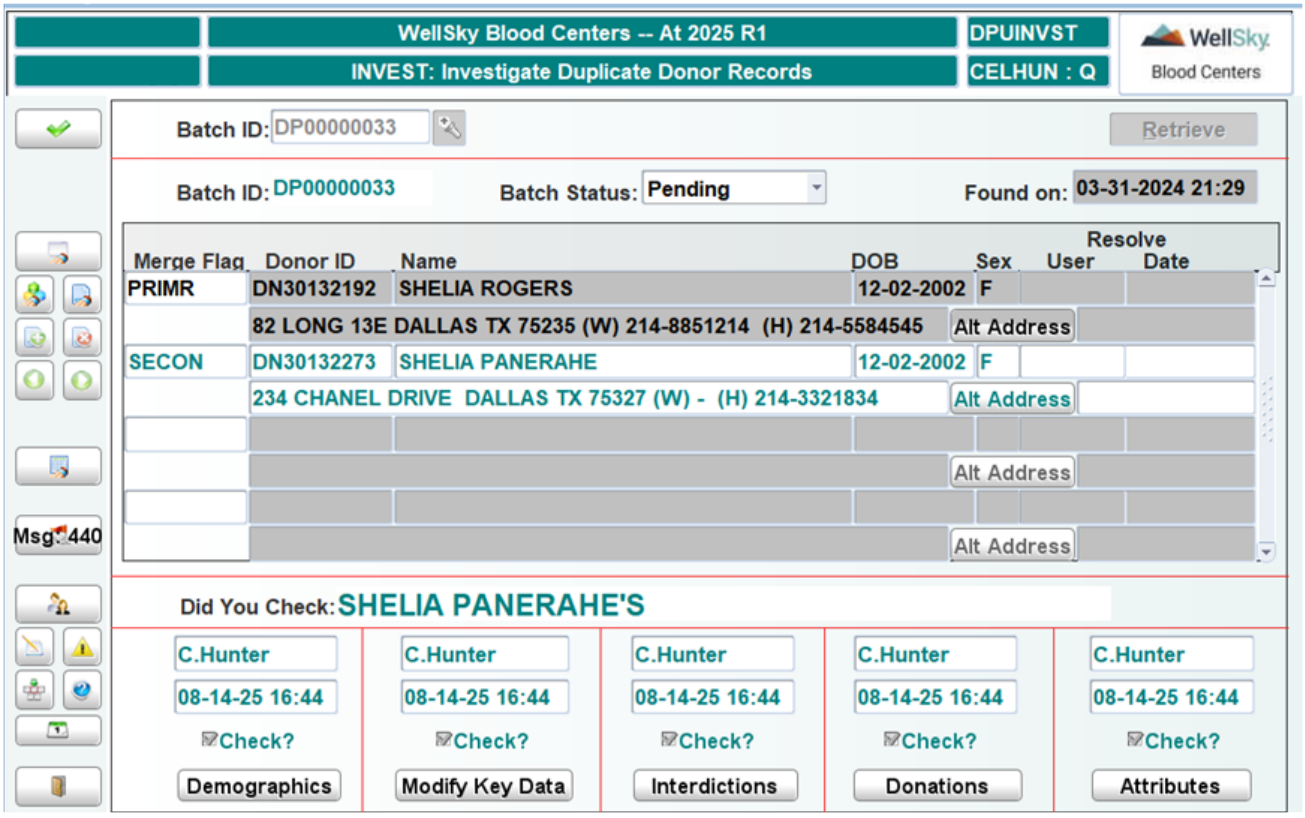


## Control Block Fields and Definitions

### Batch ID

Entry is required. Enter batch ID or select from the LOV to retrieve donors already flagged for investigation. Enter New to investigate donors not already flagged for investigation.

**NOTE –** When creating a new batch ID, the batch ID will be created with 'DP' appended to the 8-digit number based on the sequence in the ALLIDS table.

## Searching by Batch ID

If searching by a batch ID, click the Retrieve button. The donors in that batch are displayed:

The following information displays in the Donor List block:


WellSky Corporation
Proprietary and confidential

- Batch ID
- Batch Status
- Date and time donors were found and flagged
- Merge flag
- Donor ID
- Name
- Date of birth
- Sex
- If resolved, ID of user who resolved the potential duplicates and date it was resolved

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

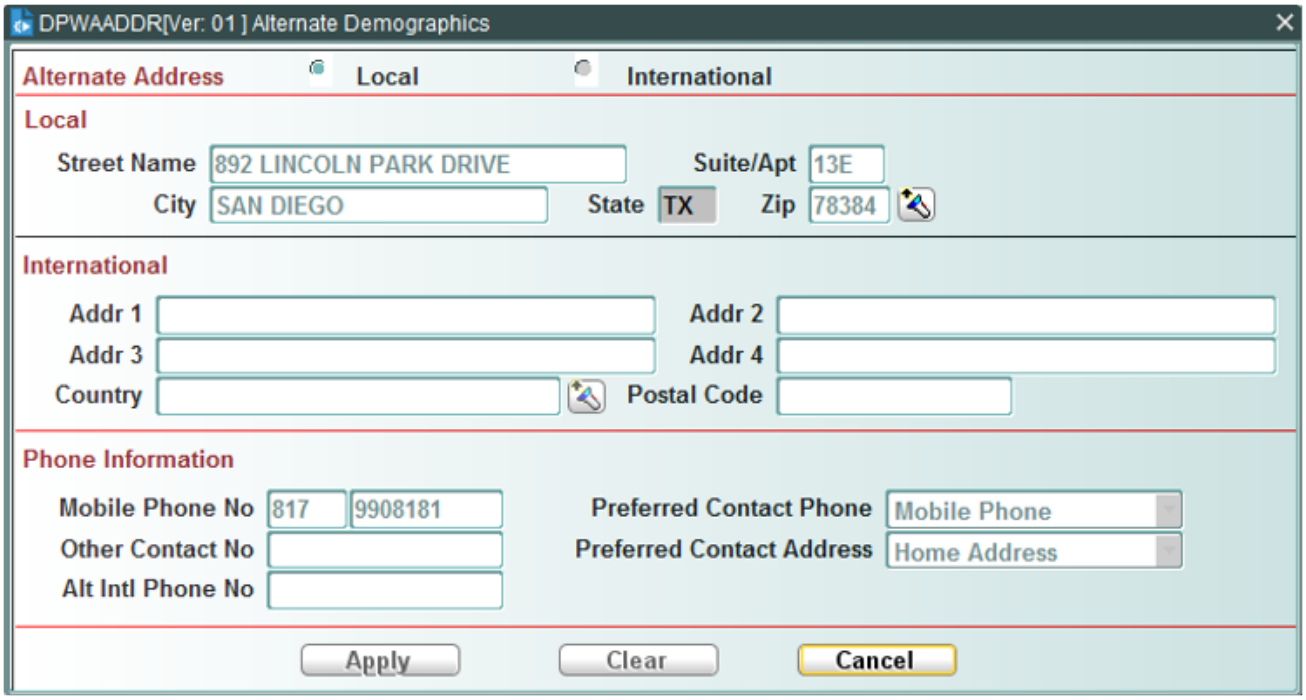


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

## Investigating New Donors

If New was entered, press **ENTER** on the keyboard. The cursor moves to the Donor List block in the Merge Flag column. Enter the following information:

### Batch ID

Display only. Automatically assigned by the system.

### Batch Status

Entry is required. Automatically populates with Pending. To change, select **Invalid** from the drop-down list.

### Merge Flag

Do not enter yet. Press **ENTER** on the keyboard and the cursor moves to the Donor ID field. The Merge Flag field automatically populates with NOMER. The Merge Flag field should not be changed until the investigation is complete.

### Donor ID

Entry is required. Enter ID of donor to investigate.

After the donor ID is entered, the following information displays, if it exists in the database:

- Name
- Date of birth
- Sex
- Address
- Phone numbers

At least two donors must be retrieved for investigation.

## Investigating Donors

Once at least two potential duplicate donors are retrieved, the user should investigate them to determine if the donors are the same or different. Compare the demographics, key data, interdictions, donations and attributes of each donor, following the department's SOP.

In the Donor List Block, click on one of the retrieved donors. That donor's name appears in the *Did You Check?* field in the Investigation Block.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. Demographics can be changed and saved from this program. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Modify Key Data Button

Click **Modify Key Data** to open the Modify Key Donor Data (MODKYDAT) screen. Use this screen to view and modify key donor data. See that section of this guide for more information on using this screen.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions placed on a donor. User can view only those interdictions for which he has clearance. See Chapter 14 Called Windows and Routines for instructions on using this program.


WellSky Corporation
Proprietary and confidential

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Attributes

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes on a donor or to place new attributes. See Chapter 14 Called Windows and Routines for instructions on using this program.

**NOTE –** Any changes made to a donor's demographics or key data display in the Donor List Block.

After checking demographics, key data, interdictions, donations and attributes of each donor being investigated, click the Check? box above each of those buttons in the Investigation block. The logged-on user's last name and system date and time appear in the boxes above the Check? Box:

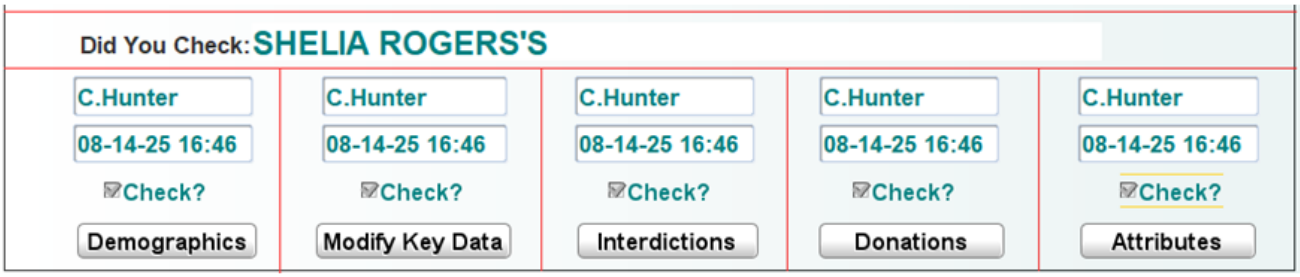


## Flagging Donors

After investigating each donor and determining if the donors are the same donor or different donors, using criteria defined in your SOP, the donors must be flagged so that they can be merged or resolved.

### To flag donors to be merged into a single record:

1. In the Donor List block, click in the Merge Flag column on the donor into which the other donor will be merged.
2. From the list of values select PRIMR. This donor will be flagged as the primary donor.
3. Click on the second donor in the Donor List block. This is the donor that will be merged into the primary donor.
4. From the list of values select SECON. This donor will be flagged as the secondary donor.

### To flag donors to be resolved as being separate donors:

1. In the Donor List block, click in the Merge Flag column on one of the donors.
2. From the list of values select **FALSE**.
3. Do this for the second donor also. The batch status remains as Pending until the batch is resolved and committed.

### To flag a batch ID that was created in error:

If a batch ID was created in error, the batch ID should be flagged as Invalid. In the Batch Status drop-down list in the Donor List block, select **Invalid**.

## At Commit

Donors flagged as duplicates or as false duplicates are committed to the database. Only one commit is required in order to commit both flagged donors.

If batch status is Pending, a partial commit can be performed, allowing the investigator to return to the screen to finish the investigation.

If batch status is Invalid, at commit the batch is deleted and no further action can be taken on the batch.

## What to Do Next

When possible duplicate donor records have been investigated and identified as duplicates or false duplicates, the records must be merged or resolved using the Merge/Resolve Duplicate Donor Records (MERGDON) screen. This action must be performed by a user different than the one who performed the investigation.

# 8.3.2 Merge/Resolve Duplicate Donor Records (MERGDON)

## Intended Use

Use this screen to merge duplicate donor records into a single donor record or resolve possible duplicate donors as being separate donors.

## Limitations

Only two donor records can be merged or resolved at a time. The employee who investigated the possible duplicate donors cannot merge or resolve the records.

**Important!** The user must follow their department's SOPs for merging donors. This program is only a tool to facilitate and document the merge process.

## Prerequisites

Two donor records must be investigated and identified as possible duplicate donors using Investigate Duplicate Donor Records (INVEST).

## Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `MERGDON`.


WellSky Corporation
Proprietary and confidential

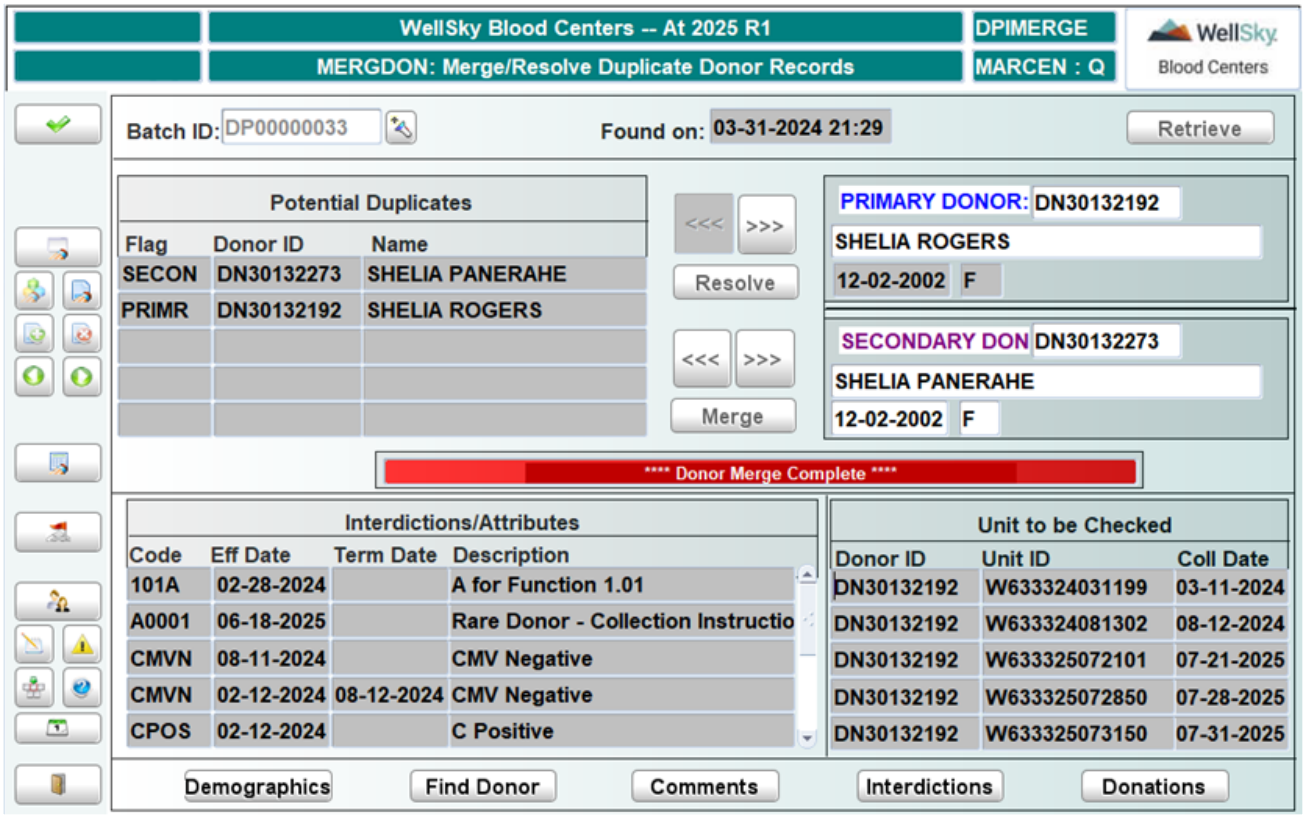


# Control Block Fields and Definitions

## Batch ID

Entry is required. Enter the Batch ID or select from the LOV.

After choosing a Batch ID, click **Retrieve**. The donors display in the Potential Duplicates block:

The Found On field displays the date and time that the batch was defined.

# In the Potential Duplicates Block

The following information displays:

- Merge flag
  - PRIMR for primary donor to merge
  - SECON for secondary donor to merge
  - FALSE for donor to resolve as false duplicate
  - NOMER for a third possible duplicate donor to be merged or resolved
- Donor ID number
- Name of Donor

## To Merge Donors

If the retrieved donors are flagged PRIMR and SECON, they are to be merged. The arrow buttons above the Merge button are enabled and the donor fields are labeled Primary Donor and Secondary Donor.

1. In the Potential Duplicates block, select the donor flagged as PRIMR. Click the right Merge arrow. The donor data appears in the Primary Donor block.
2. Click on the donor flagged as SECON. Click the right Merge arrow. The donor data appears in the Secondary Donor block. When the Primary Donor and Secondary Donor fields are populated, the Merge button is enabled:

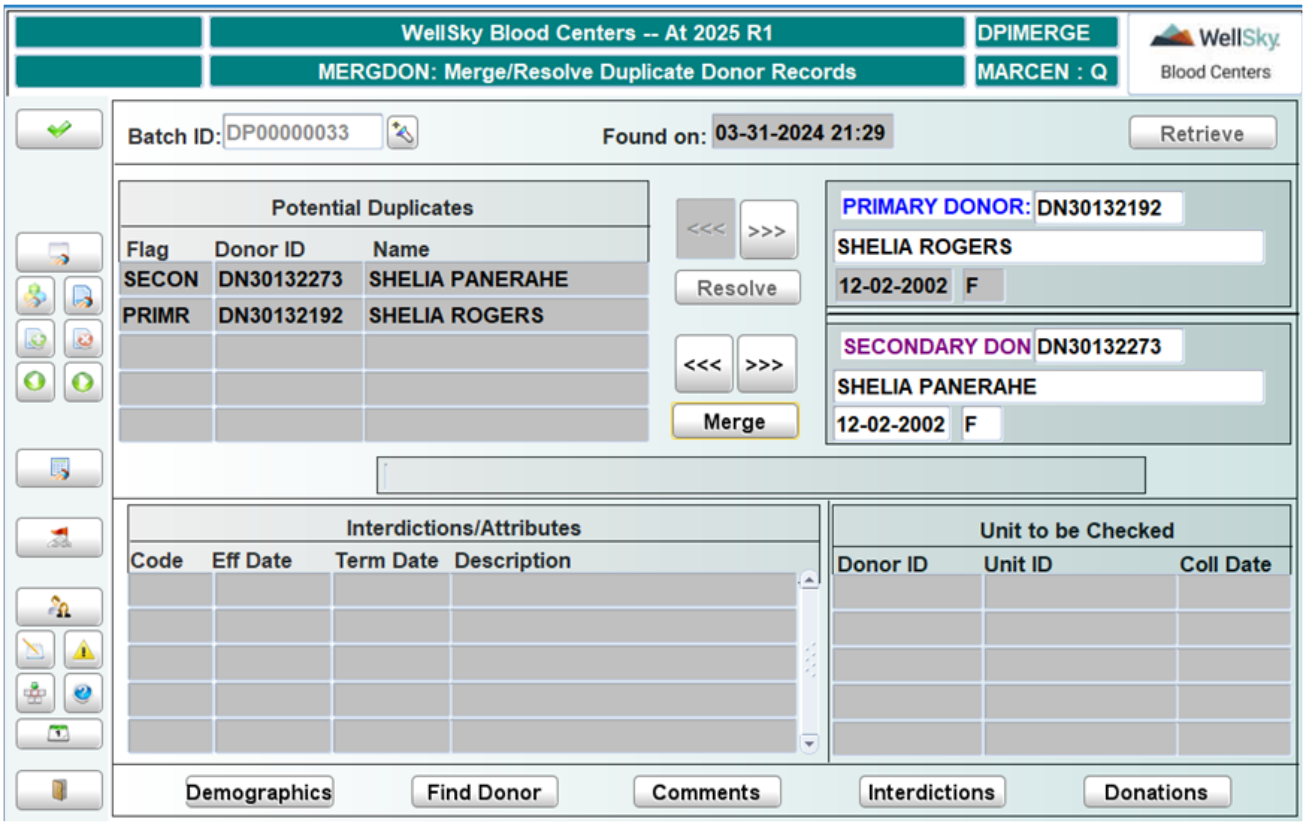


3. Click **Merge** to merge the donors into one donor record. The following pop-up appears:

4. Click **Yes** to merge the donors. Click **No** to return to the main screen. If Yes is clicked, the secondary donor record is merged into the primary donor record.


WellSky Corporation
Proprietary and confidential

## Interdictions/Attributes Block

If one or both of the merged donors have interdictions/attributes associated with them, the merge causes those interdictions/attributes to be reviewed in the Interdiction Core Routine. This routine rebuilds the interdiction records according to when they were placed so that the interdiction upgrade can occur.

**Important!** It is the user's sole responsibility to ensure that all interdictions and attributes transferred to the merged donor are correct and accurate. The Interdiction Core Routine merges interdictions and attributes in accordance with general guidelines. The user must ensure that the merged interdictions and attributes are appropriate in each instance of a donor merge.

## Unit to be Checked Block

When two donor records are merged, it may be necessary for one or more donations to be checked. The units in question display in the Unit to be Checked block. Follow your facility's SOPs to ensure completeness and accuracy.

## To Resolve FALSE Flagged Donors

If the retrieved donors are flagged FALSE, they are to be resolved as being different donors. The arrow buttons above the Resolve button are enabled and the donor fields are labeled Donor 1 and Donor 2.

1. In the Potential Duplicates block, click on one of the donors flagged as FALSE, then click the right Resolve arrow. The donor data appears in the Donor 1 block.
2. Click on the second donor flagged as FALSE, then again click the right Resolve arrow. The donor data appears in the Donor 2 block.
3. When the Donor 1 and Donor 2 fields are populated, the Resolve button is enabled. Click **Resolve** to resolve the donors as being two separate donors. The following pop-up appears.

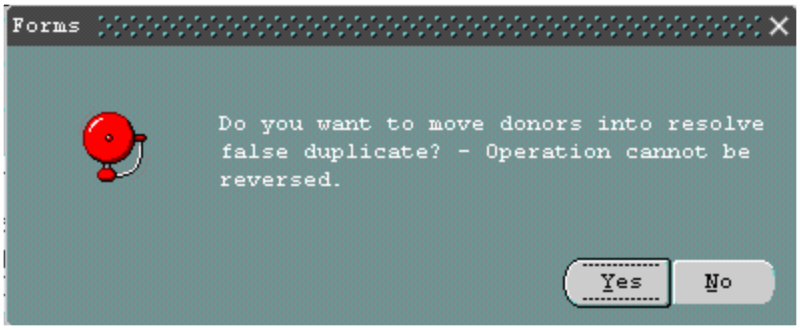


4. Click **Yes** to resolve the false duplicates. Click **No** to return to the main screen. If Yes is clicked, the donors are moved into Resolve False Duplicate so that they will not be flagged as potential duplicates again.

## To Resolve NOMER Flagged Donors

Occasionally, a Batch ID retrieves a donor flagged as NOMER. Because only two donors can be merged or resolved at a time, donors with the NOMER flag cannot be merged or resolved. After the other two flagged donors in a batch have been merged or resolved, the NOMER donor can then be re-flagged as PRIMR, SECON or FALSE in order to be merged or resolved. The donor must be re-flagged in the Investigate Duplicate Donor Records (INVEST) screen.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. Demographics can be changed and saved from this program. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Find Donor Button

The Find Donor button is active only when merging donors. Click **Find Donor** to open the Find Donor window. Use this window to search for a donor. This is for viewing purposes only. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Comments Button

Click **Comments** to open the Comments window. Use this window to attach comments to a merge or resolve operation.

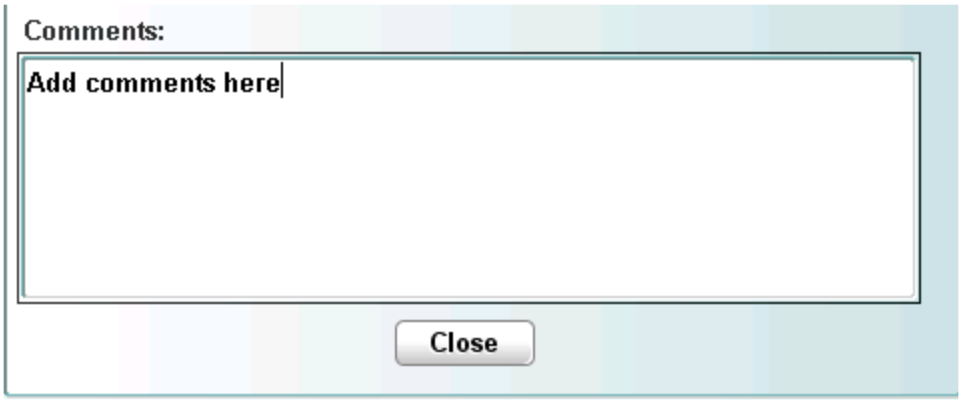


## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. This window can be used only for viewing previously placed interdictions. No updates or changes can be made from this screen. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

The merged or resolved donor records are committed to the database.

## What to Do Next

When the transaction is committed, a report automatically prints that details pre-merge and post-merge data. The report should be carefully reviewed for accuracy.


WellSky Corporation
Proprietary and confidential

# 8.3.3 Place Group Interdiction on Donors (GPPDON)

## Intended Use

Use this screen to place interdictions on a group of donors.

## Limitations

- The user can place only those interdictions to which he or she has access. This function further excludes placement of interdictions which are considered upgradeable or can be associated to a donor multiple times. Interdictions classified as Unit cannot be placed in this screen.
- Interdictions cannot be placed on a unit.

## Prerequisites

All donors on which an interdiction is to be placed must be in the database.

## Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `GPPDON`.

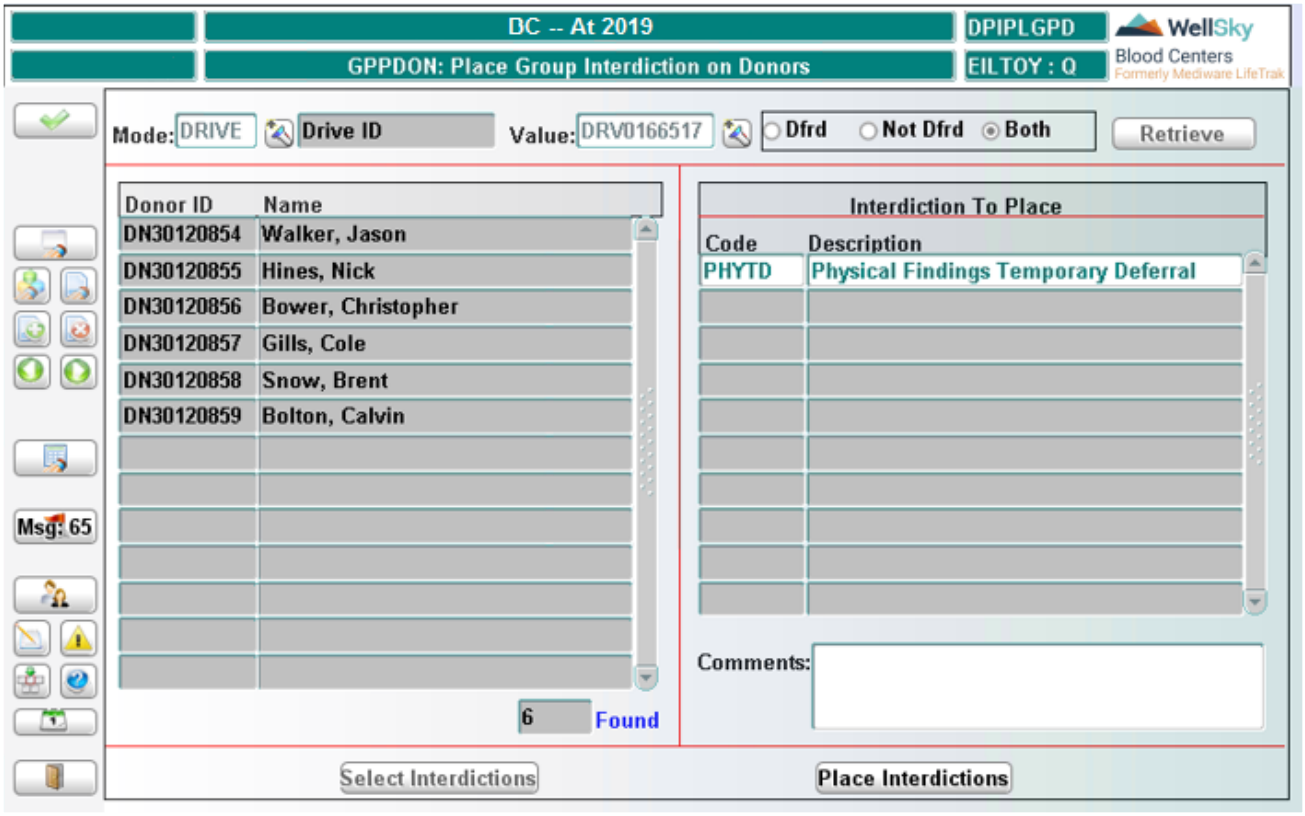

# Control Block Fields and Definitions

## Mode

Entry is required. Enter a group mode code or select from the LOV.

## Value

Entry is required. Enter a value or select from the LOV if drive ID or batch ID mode were selected. If collection date was entered as the mode, enter a date using the MMDDYYYY format.

## Dfrd/Not Dfrd/Both

Entry is required. Select to retrieve donors who are deferred, not deferred, or both.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donors matching the criteria:

# In the Donor List Block

The following information displays:

- Donor ID number
- Donor name
- Number of donors found

# The Select Interdictions Button

After retrieving a list of donors, the Select Interdictions button becomes enabled. Click **Select Interdictions** to open this window.

Enter the following information:

## Interdiction Type

Entry is optional. Enter interdiction type or select from the LOV. Only those interdictions the user has access to view will display.

Click **Retrieve** to list the interdiction codes available under the chosen interdiction type. If an Interdiction Type is not entered, all interdictions that the user has access to display.


WellSky Corporation
Proprietary and confidential

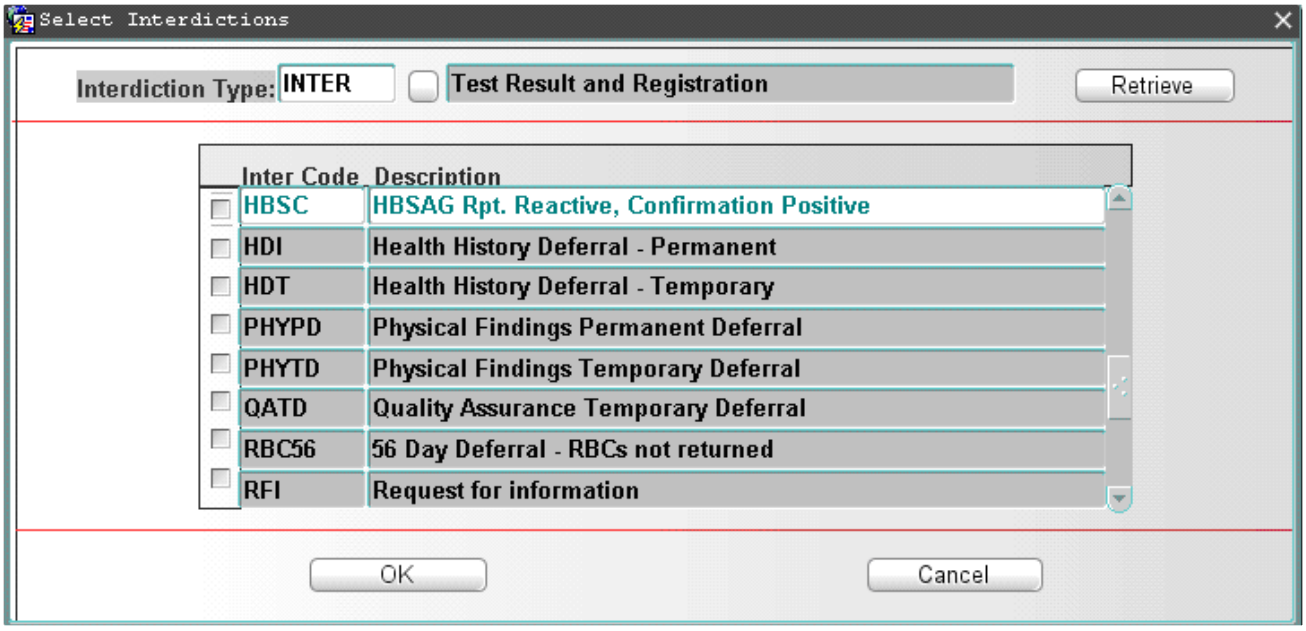


The following information displays:

- Interdiction code
- Interdiction description

Click **Cancel** to return to the main screen without selecting an interdiction.

To select one or more interdictions, click in the boxes to the left of the interdiction codes to select. Click **OK** to select the interdictions and return to the main screen. The selected interdictions display in the Interdiction to Place block.

The following information displays:

- Interdiction code
- Interdiction description

Enter the following information:

### Comments

Entry is optional. Enter comments about the placing of the interdiction.

## The Place Interdictions Button

Click **Place Interdictions** to place the interdictions on the group of donors. The following pop-up appears:

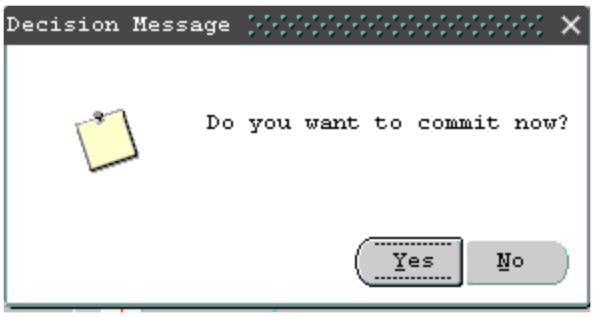


Click Yes to commit the interdictions to the database. All data is cleared from the screen.

Click No to return to the main screen. All retrieved data is cleared from the screen.

## What to Do Next

To remove group interdictions from donors, use Remove Group Interdiction from Donors (GPRDON).

# 8.3.4 Remove Group Interdiction from Donors (GPRDON)

## Intended Use

Use this screen to remove interdictions placed on a group of donors.

## Limitations

- The user can view and remove only those interdictions to which he or she has access.
- Interdictions must be classified as a donor interdiction or donor/unit interdiction to display.

## Prerequisites

Group interdictions must have been placed on registered donors using Place Group Interdiction on Donors (GPPDON).

## Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `GPRDON`.


WellSky Corporation
Proprietary and confidential

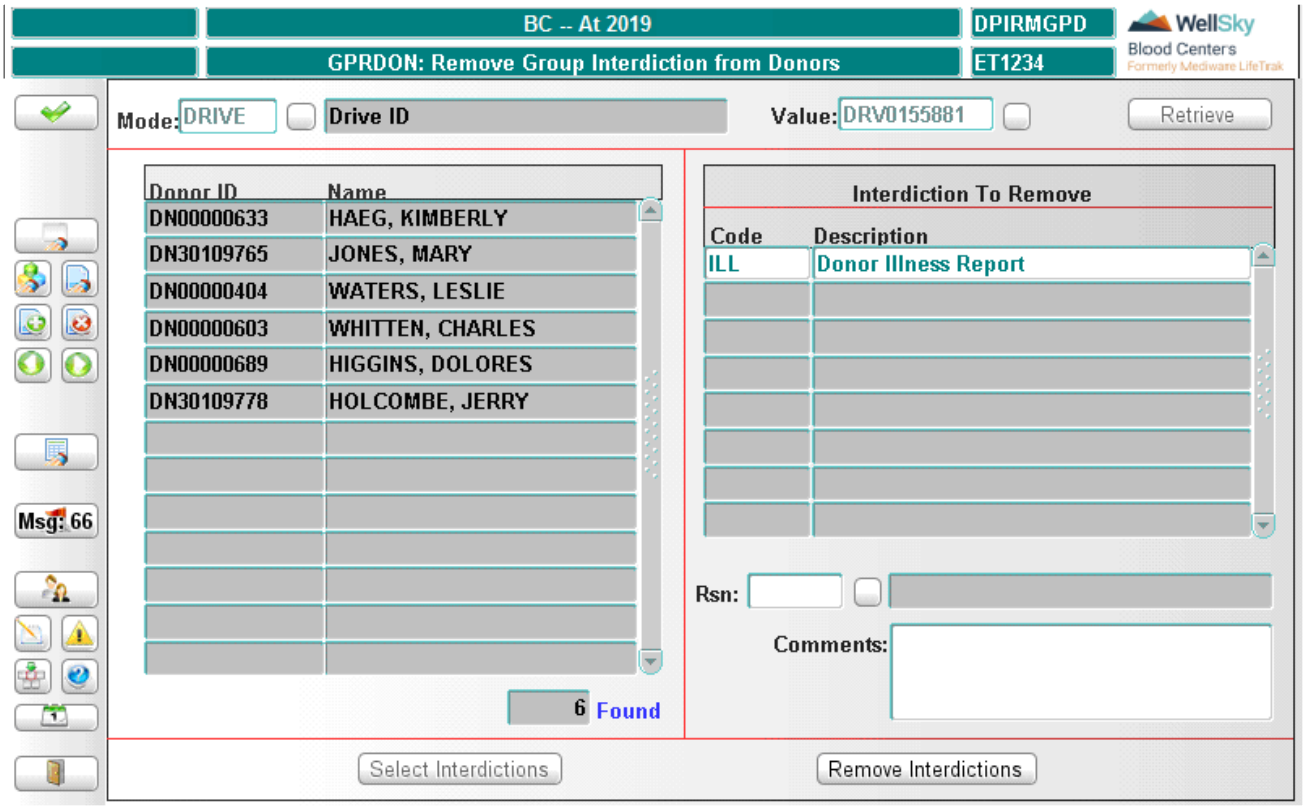


# Control Block Fields and Definitions

## Mode

Entry is required. Enter group mode code or select from LOV.

## Value

Entry is required. Enter a value or select from the LOV if drive ID or batch ID mode were selected. If collection date was entered as the mode, enter a date using the MMDDYYYY format.

# Retrieving Data

Click **Retrieve** to display the group of donors matching the data entered in the Control Block:

# In the Donor List Block

The following information displays:

- Donor ID
- Name
- Number of donors in the list

## The Select Interdictions Button

After a list of donors is retrieved, the Select Interdictions button is enabled. Click **Select Interdictions** to open this window:

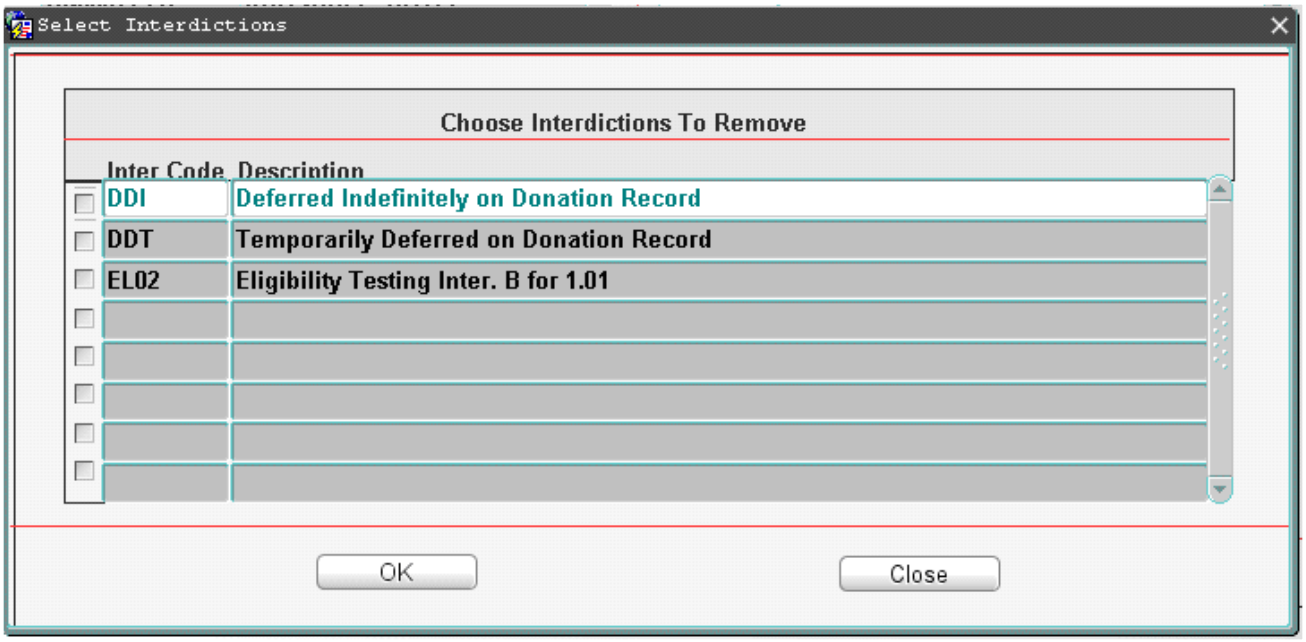


The following information displays for each interdiction placed on the group of donors and which the user has access to remove:

- Interdiction code
- Description of the interdiction

To select the interdictions to remove, click in the boxes to the left of the interdiction codes. More than one interdiction can be selected at a time.

Click **Close** to return to the main screen without selecting an interdiction.

Click **OK** to select the interdictions and return to the main screen. The selected interdiction display in the Interdiction to Remove block:

## Interdiction To Remove Block

The following information displays:

- Interdiction code
- Description of the interdiction

Enter the following:

### Rsn

Entry in this field may or may not be required depending on the interdiction being removed. Enter the reason code or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Comments

Entry is optional. Enter comments about the interdiction removal in the Comments section.

### The Remove Interdictions Button

Click **Remove Interdictions** to remove the selected interdictions from the group of donors. The following pop-up appears:

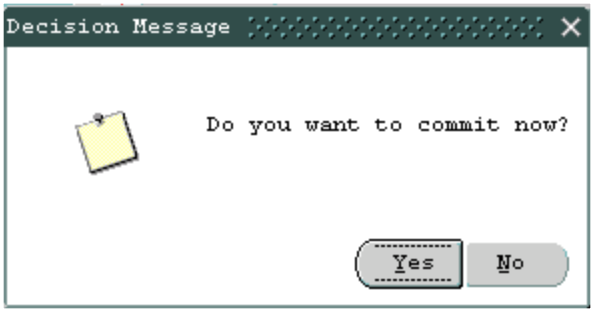


Click **Yes** to commit the removal to the database. All data is cleared from the screen.

Click **No** to return to the main screen.

### What to Do Next

There is no next step.

## 8.3.5 Place Group Interdiction on Units (GPPUNIT)

### Intended Use

Use this screen to place an interdiction on a group of units.

### Limitations

The user can place only those interdictions for which he or she has access.

Only interdictions classified as Unit or Both may be placed.

### Prerequisites

All units on which an interdiction is being placed must be registered units.

### Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `GPPUNIT`.

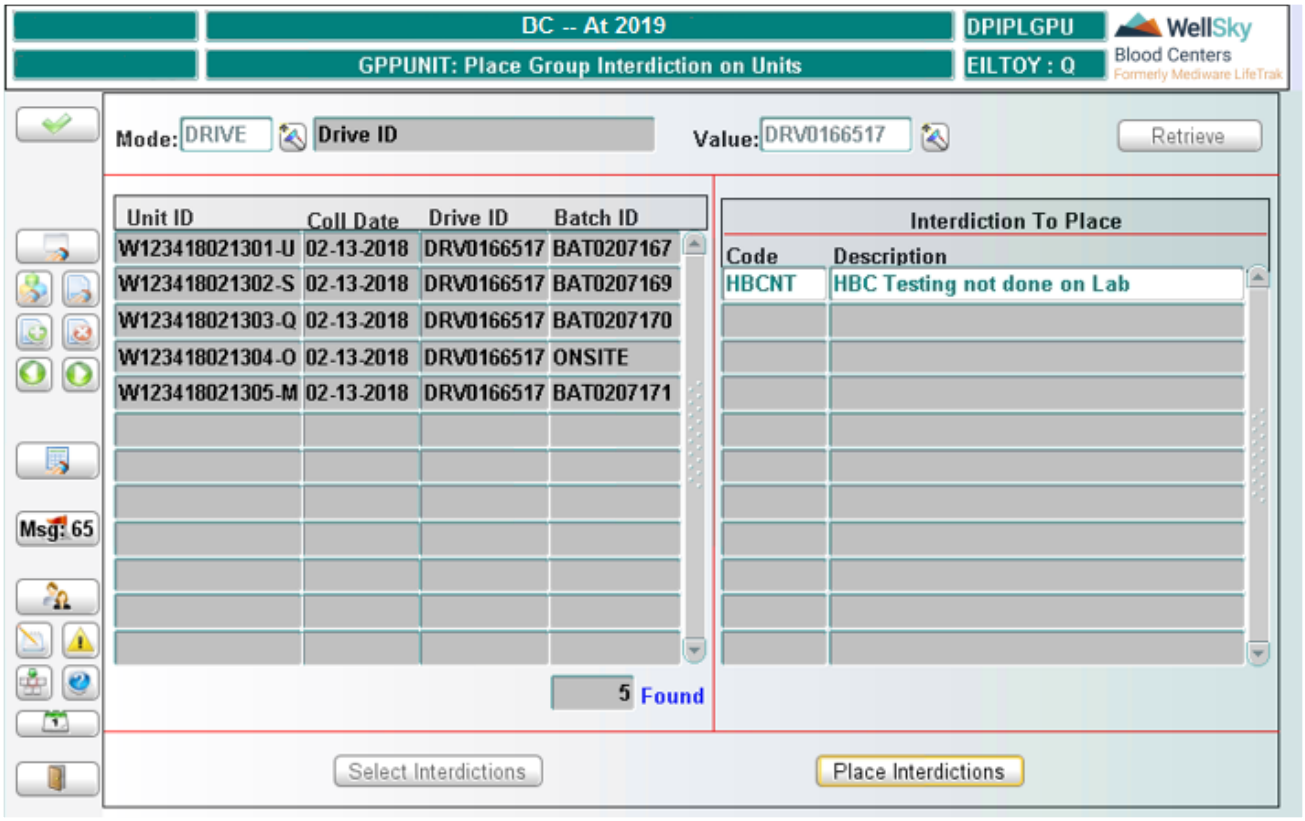


# Control Block Fields and Definitions

## Mode

Entry is required. Enter a group mode code or select from the LOV.

## Value

Entry is required. Enter a value or select from the LOV if drive ID or batch ID mode were selected. If collection date was entered as the mode, enter a date using the MMDDYYYY format.

# Retrieving Data

Click **Retrieve** to display the group of units matching the data entered in the Control Block.

# In the Unit List Block

The following information displays:

- Unit ID
- Collection date
- Drive ID
- Batch ID
- Number of units found


WellSky Corporation
Proprietary and confidential

# The Select Interdictions Button

After a list of units is retrieved, the Select Interdictions button is enabled. Click **Select Interdictions** to open this window:

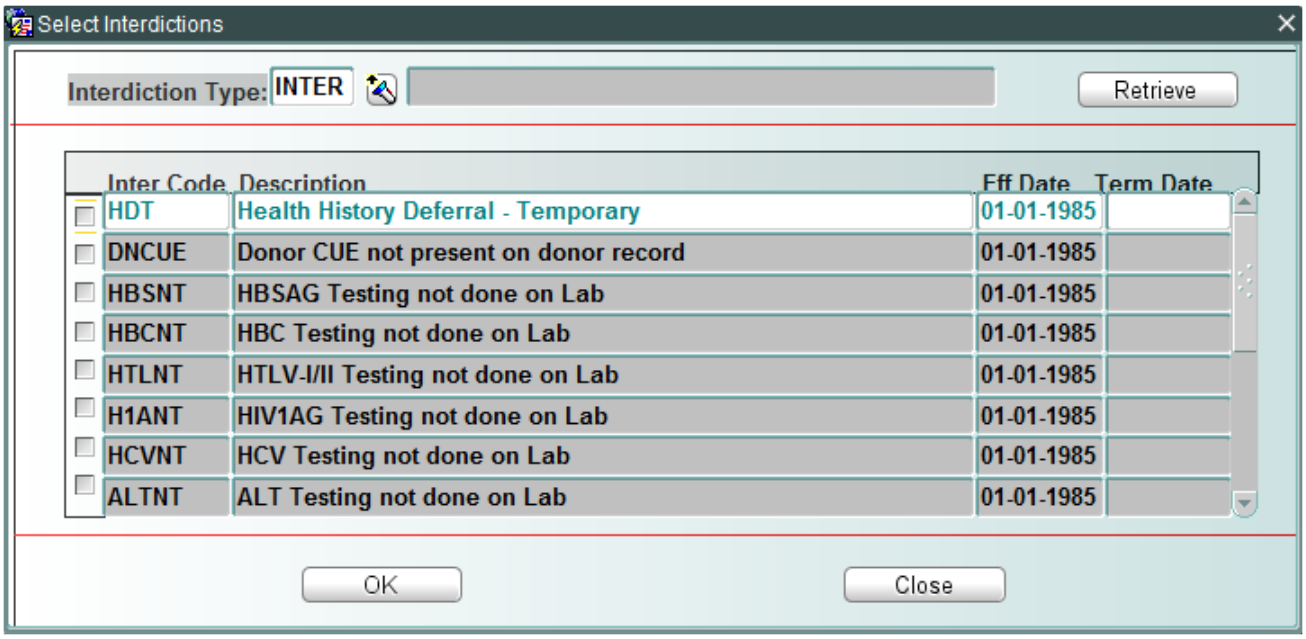


## Interdiction Type

Entry is optional. Enter interdiction type or select from the LOV. Only those interdictions which the user has access to place will display.

Click **Retrieve** to display a list of interdictions available under the chosen interdiction type. If an Interdiction Type is not entered, all interdictions that the user has access to place will display:

The following information displays:

- Interdiction Code
- Description of the interdiction
- Effective date of the interdiction
- Termination date of the interdiction

Click **Close** to return to the main screen without selecting an interdiction.

To select one or more interdictions to place, click in the boxes to the left of the interdiction codes. Click **OK** to select the interdictions and return to the main screen. The selected interdictions display in the Interdiction to Place block.

# In the Interdiction to Place Block

The following information displays:

- Interdiction code
- Description of the interdiction

## The Place Interdictions Button

Click **Place Interdictions** to place the interdictions on the group of units. The following pop-up appears:

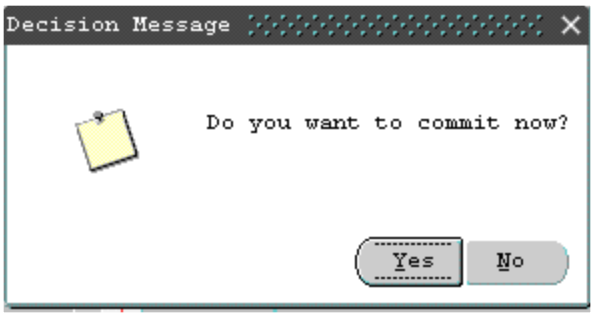


Click **Yes** to commit the interdictions to the database. All data is cleared from the screen.

Click **No** to return to the main screen. All data is cleared from the screen.

## What to Do Next

To release group interdictions from units, use Remove Group Interdiction from Units (GPRUNIT).

# 8.3.6 Remove Group Interdiction from Units (GPRUNIT)

## Intended Use

Use this screen to remove interdictions placed on a group of units.

## Limitations

The screen displays only those group interdictions which the user has access to remove. Only interdictions classified as Unit or Both can be removed.

## Prerequisites

Group interdictions must have previously been placed on registered units using the Place Group Interdiction on Units (GPRUNIT) screen.

## Accessing the Screen

Access this screen from the Donor Profile Maintenance menu or by entering the keyword `GPRUNIT`.


WellSky Corporation
Proprietary and confidential

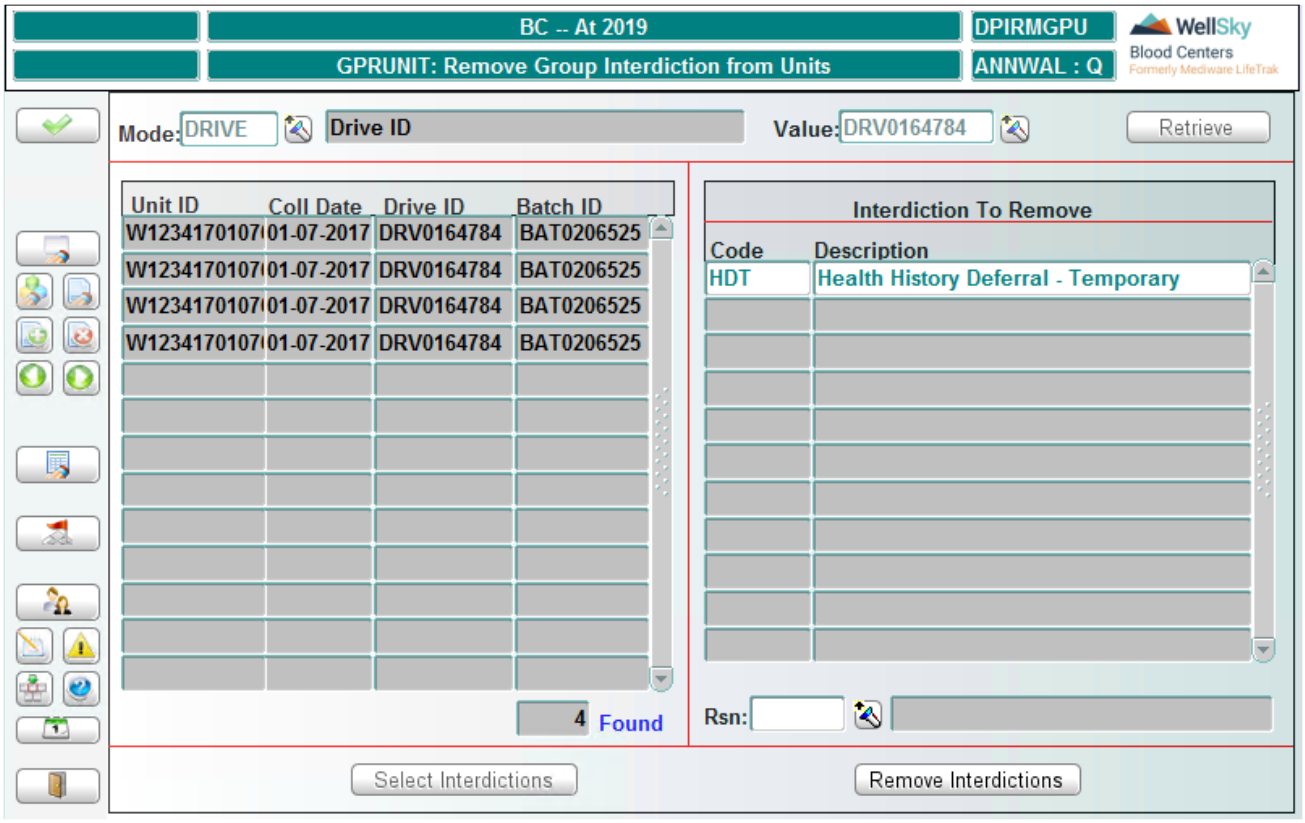


# Control Block Fields and Definitions

## Mode

Entry is required. Enter a group mode code or select from the LOV.

## Value

Entry is required. Enter a value or select from the LOV if drive ID or batch ID mode were selected. If collection date was entered as the mode, enter a date using the MMDDYYYY format.

# Retrieving Data

Click **Retrieve** to display the group of units matching the data entered in the Control Block:

# In the Unit List Block

The following information displays:

- Unit ID
- Collection date
- Drive ID
- Batch ID

## The Select Interdictions Button

After a list of units is retrieved, the Select Interdictions button is enabled. Click **Select Interdictions** to open this window:

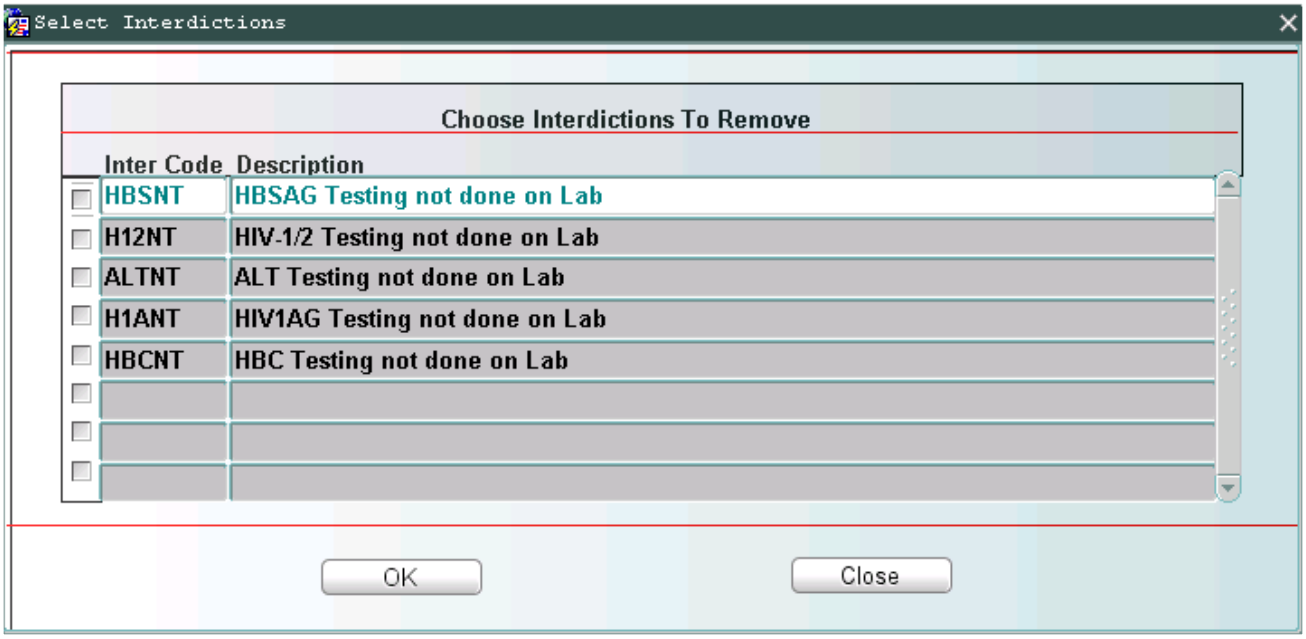


The following information displays for each interdiction placed on the group of units and which the user has access to remove:

- Interdiction code
- Description of the interdiction

To select the interdictions to remove, click in the boxes to the left of the interdiction codes. More than one interdiction may be selected.

Click **OK** to select the interdictions and return to the main screen. The selected interdictions display in the Interdiction to Remove block:

Click **Close** to return to the main screen without selecting an interdiction.

## In the Interdiction to Remove Block

The following information displays:

- Interdiction code
- Interdiction description

Enter the following:

### Rsn

Entry in this field may or may not be required depending on interdiction being removed. Enter the reason code or select from the LOV.


WellSky Corporation
Proprietary and confidential

## The Remove Interdictions Button

Click **Remove Interdictions** to remove the interdictions from the group of donors. The following pop-up appears:

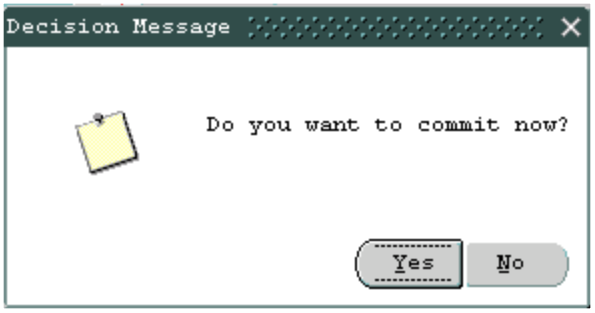


Click **Yes** to commit the removal to the database. All retrieved data is cleared from the screen.

Click **No** to return to the main screen. All retrieved data is cleared from the screen.

## What to Do Next

There is no next step.

# 8.3.7 Donor Detail Query (SDONQ)

## Intended Use

Use this screen to view extensive details about a donor.

## Limitations

- You can only view interdictions and attributes for which you have access.
- If you scan a Codabar unit number that has multiple collection dates, you will receive a message that requires additional criteria to be entered to find the donor.

## Prerequisites

One or more of the following key donor details must be known: last name, first name, date of birth, phone number, address, or donor ID of the donor.

## Accessing the Screen

Access this screen from the Donor Profile Queries screen or by entering the keyword SDONQ.

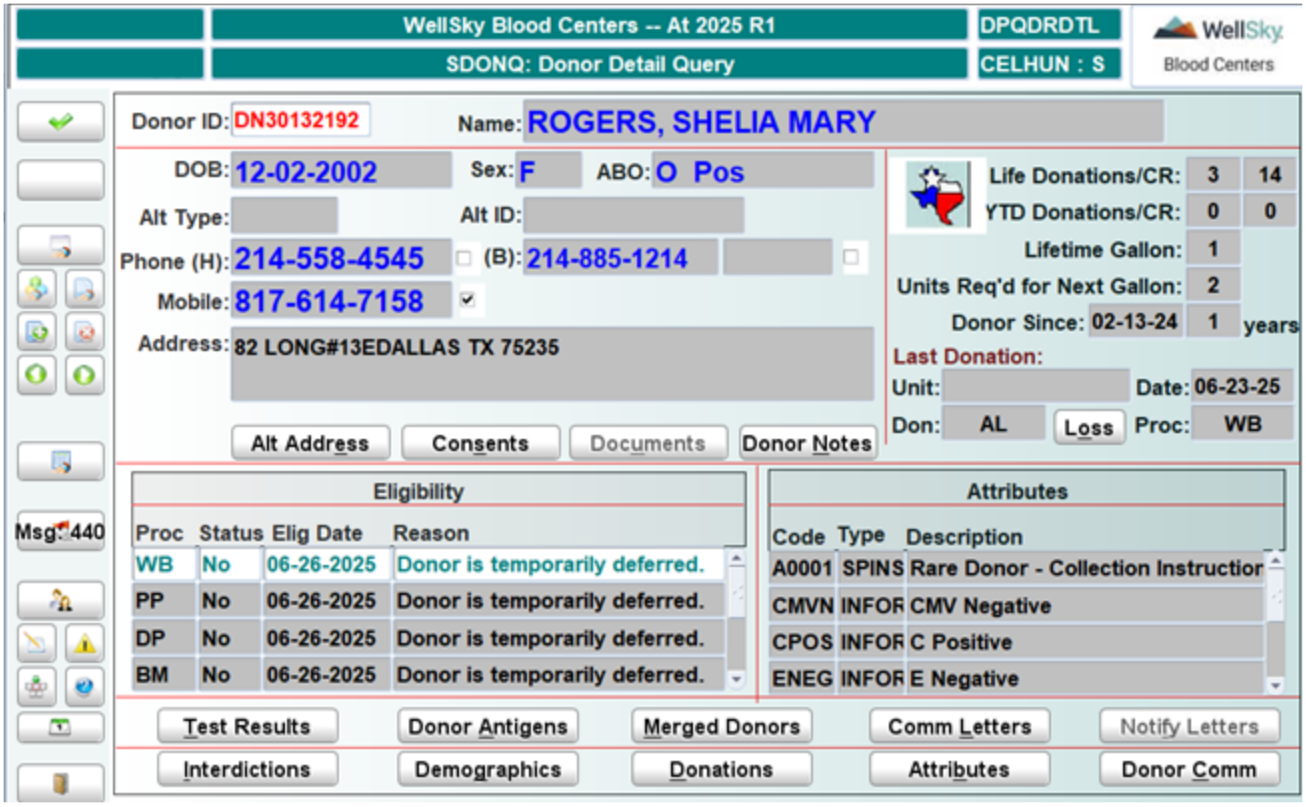


This screen appears with the Search for Donor window open on top. Before viewing a donor's details, you must first search for the donor in the donor database. See Chapter 14 Called Windows and Routines for instructions on using this window.

If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click the desired donor. Click **Select** to go to the Donor Detail Query screen and populate the screen with the information for the selected donor.

## In the Donor Details Block

The following information displays, if it exists in the database:

- Donor ID
- Name
- ABO type
- Date of birth
- Sex
- Alternate ID type
- Alternate ID
- Home phone number – If the home phone is the preferred contact, there will be a check mark by the number.


WellSky Corporation
Proprietary and confidential

- Business phone number – If the business phone is the preferred contact, there will be a check mark by the number.
- Mobile phone number – If the mobile phone is the preferred contact, there will be a check mark by the number.
- Address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

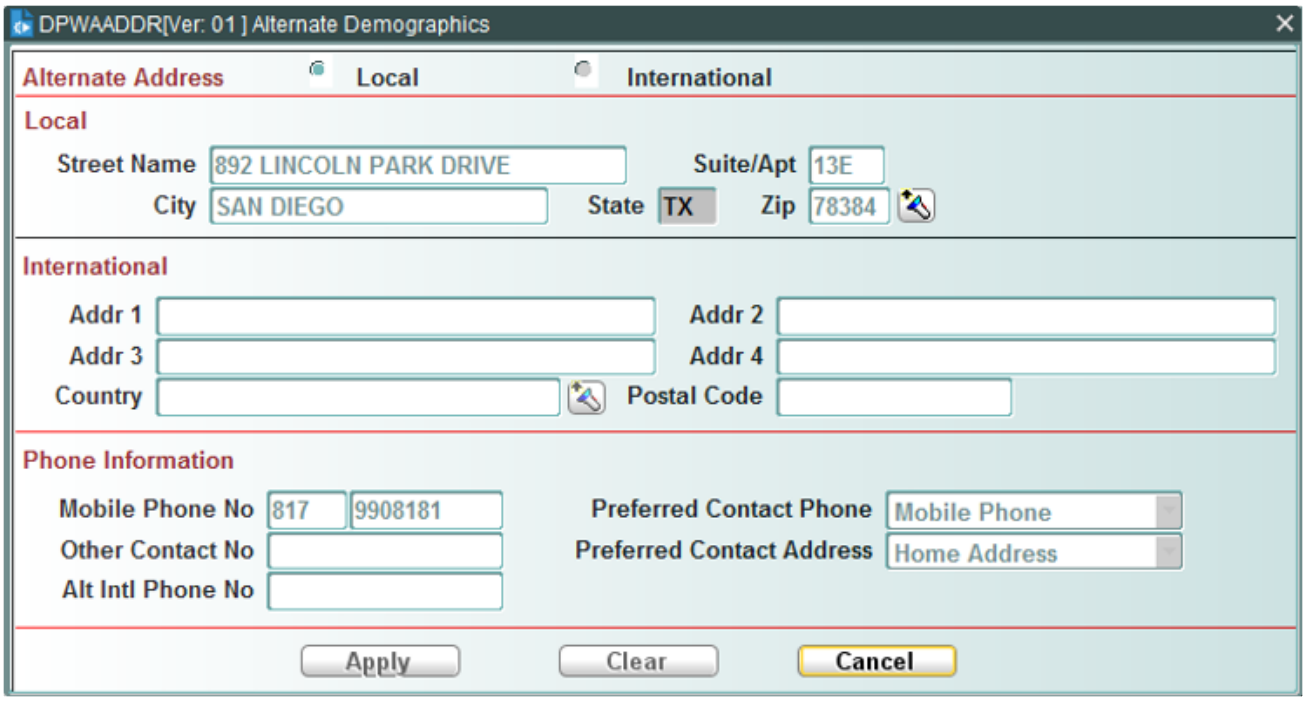


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

You can update alternate demographics information by doing the following:

- Click **Demographics** at the bottom of the screen, which opens the Donor Demographics window.
- Click **Alt Addr** in the Donor Demographics window, which opens the Alternate Demographics window in update mode.
- Make any necessary changes to alternate demographics information.
- Click **Apply** to save any changes made to the donor's alternate demographics.

## Consents Button

Use this button to view donor consents associated with the donor.

To view a donor consent, do the following:

1. From the SDONQ screen, click **Consents**. The Consent History window opens, as shown in the following example:

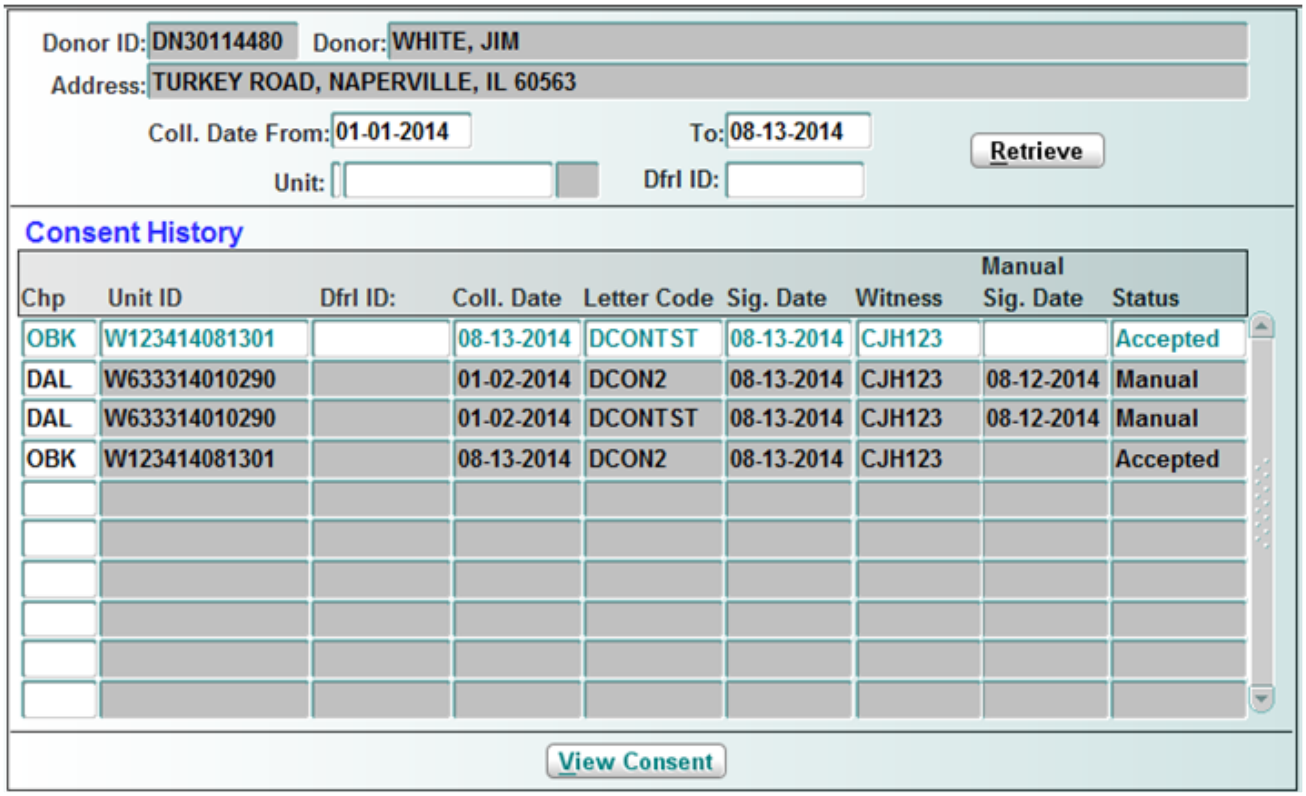


**NOTE –** If there are no consents associated with the donor, the following window opens, and no consents are displayed:

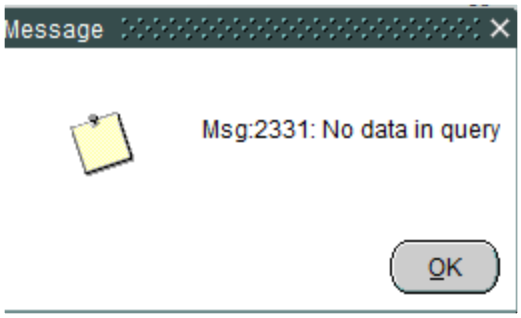


Click **OK** to close the window.

2. If needed, search for the consent you want to view by doing the following:
   a. Enter a from and to date in the *Coll. Date From* and *Coll. Date To* fields, using the MMDDYY format, or
   b. Enter or scan the unit ID in the *Unit* field, or
   c. Enter the deferral ID in the *Dfrl ID* field.
   d. Click **Retrieve**. Only the consents matching the search criteria display.


WellSky Corporation
Proprietary and confidential

3. Select the consent you want to view and click View Consent. The consent form displays, as shown in the following example:

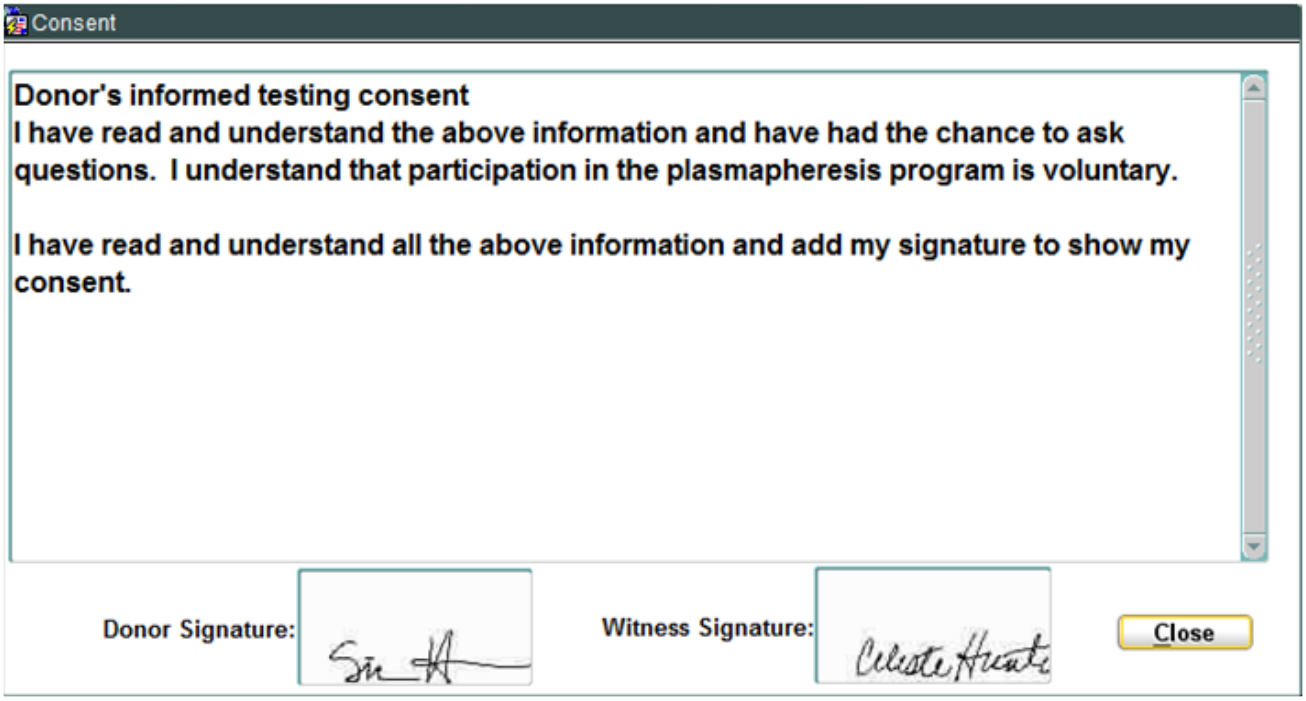


4. Click Close to close the consent window.

## The Documents Button

Click this button to view or delete documents associated with the donor. The Document Library form opens to view or delete documents. To delete a document, the user must have access to UDOC, otherwise the user can view or add a document.

**NOTE –** The button will only be active if there are external documents linked to the unit.

Refer to section 2.2.5, Document Library, for information on how to use the screen.

## The Donor Notes Button

Click this button to view notes placed on the donor through the OnSite (.net) application. Either use the mouse to click the button or use the hot key **`ALT + N`** to access the Donor Notes/Comments screen. Notes display in ascending order based on entry of the note, and a maximum of 240 characters displays.

**NOTE –** The button is active regardless of whether or not there are notes present.

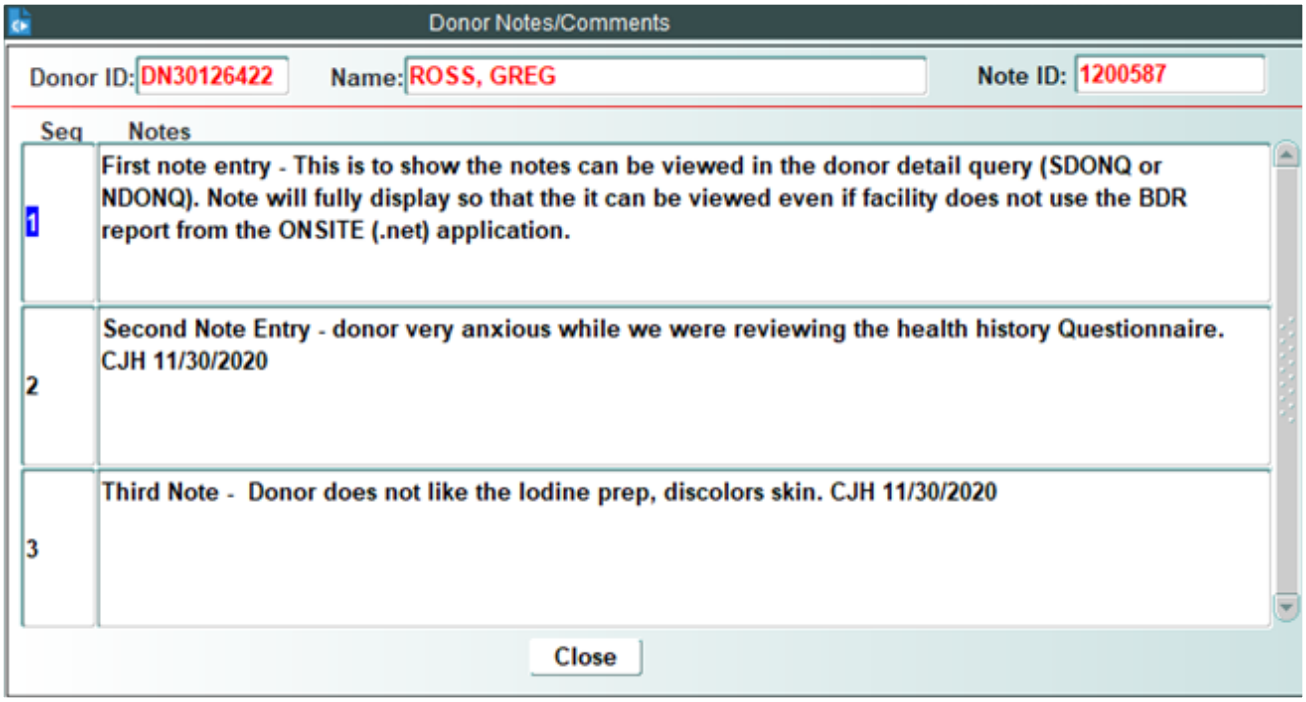


## In the Donation Details Block

The following information displays, if it exists in the database:

- Lifetime donations
- Year-to-date donations
- Lifetime gallons donated
- Units required for next gallon
- When donor began donating
- Unit ID of last unit donated

> **NOTE –** If the last donation was a walkout of the donor, WALK will display in the *Unit ID* field to represent that the donor walked out.

- Date of last donation
- Donation type
- Donation procedure

## Loss Button

Click Loss to display the cumulative red cell and plasma loss amounts for a rolling calendar year (the period from 365 days prior to the current date to the current date). The Blood Loss values window opens:


WellSky Corporation
Proprietary and confidential

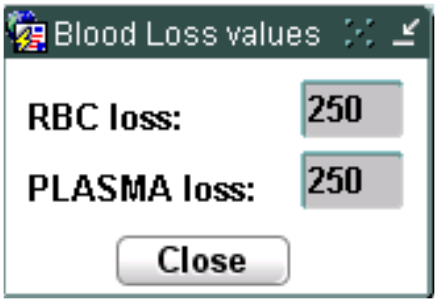


## In the Eligibility Block

The following information displays, if it exists in the database:

- Procedure type
- Eligibility status for that procedure type
- Date donor becomes eligible for that procedure if currently ineligible
- Reason the donor is ineligible for that procedure

## In the Attributes Block

The following information displays, if it exists in the database:

- Attribute code
- Attribute type
- Attribute description

More details about information that can be viewed by using the buttons at the bottom of the screen.

## The Test Results Button

Click **Test Results** to open the Donation History Test Results window. Use this program to view a history of test results for past donations. See Chapter 14 Called Windows and Routines for instructions on using this program. This button may be disabled if user does not have access to view test results.

## The Donor Antigens Button

Click **Donor Antigens** to open the Donor Antigens Query (ANTQ) screen. Use this screen to view a donor's RBC and HLA antigens. See that section of this guide for instructions on using this screen.

## The Merged Donors Button

Click **Merged Donors** to open the Merged Information window. Use this program to view the details of a donor merge:

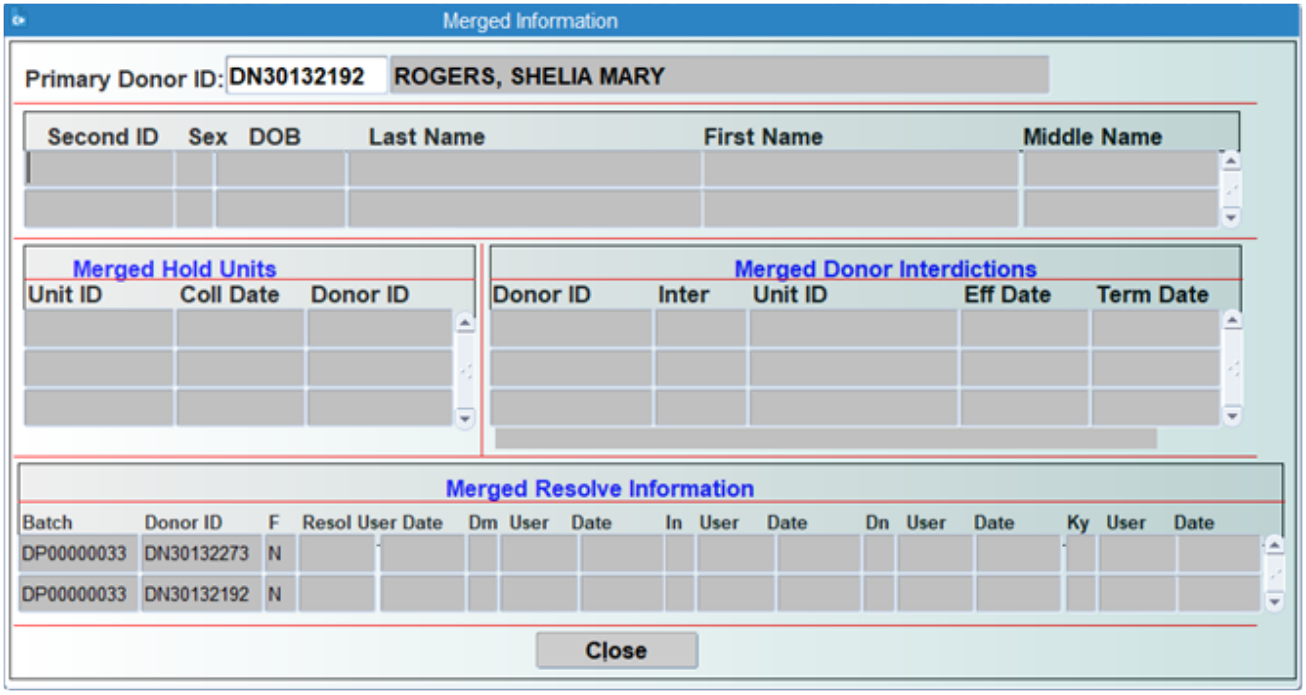


## The Comm Letters Button

Click **Comm Letters** to open the Communication Letters window. Use this program to view letters that have been sent to the donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Notify Letters Button

The Notify Letters button is disabled in this module.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. Demographics can be changed and saved from this program. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.


WellSky Corporation
Proprietary and confidential

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes placed on a donor or to place new attributes on a donor. A user can view and place only those attributes for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donor Comm Button

Click **Donor Comm** to open the Communication Log window. Use this program to view a history of communications with a selected donor or to send a letter to a donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen. Changes made through any of the called window programs are committed to the database.

## What to Do Next

There is no next step.

# 8.3.8 Multiple Donors Query (MDONQ)

## Intended Use

Use this screen to query donors by using key donor data as search criteria.

## Limitations

There are no limitations for use of this screen.

## Prerequisites

One or more of the following key donor details must be known: last name, date of birth, first name, phone, donor ID, previous donor ID, collection date, or unit ID.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `MDONQ`.

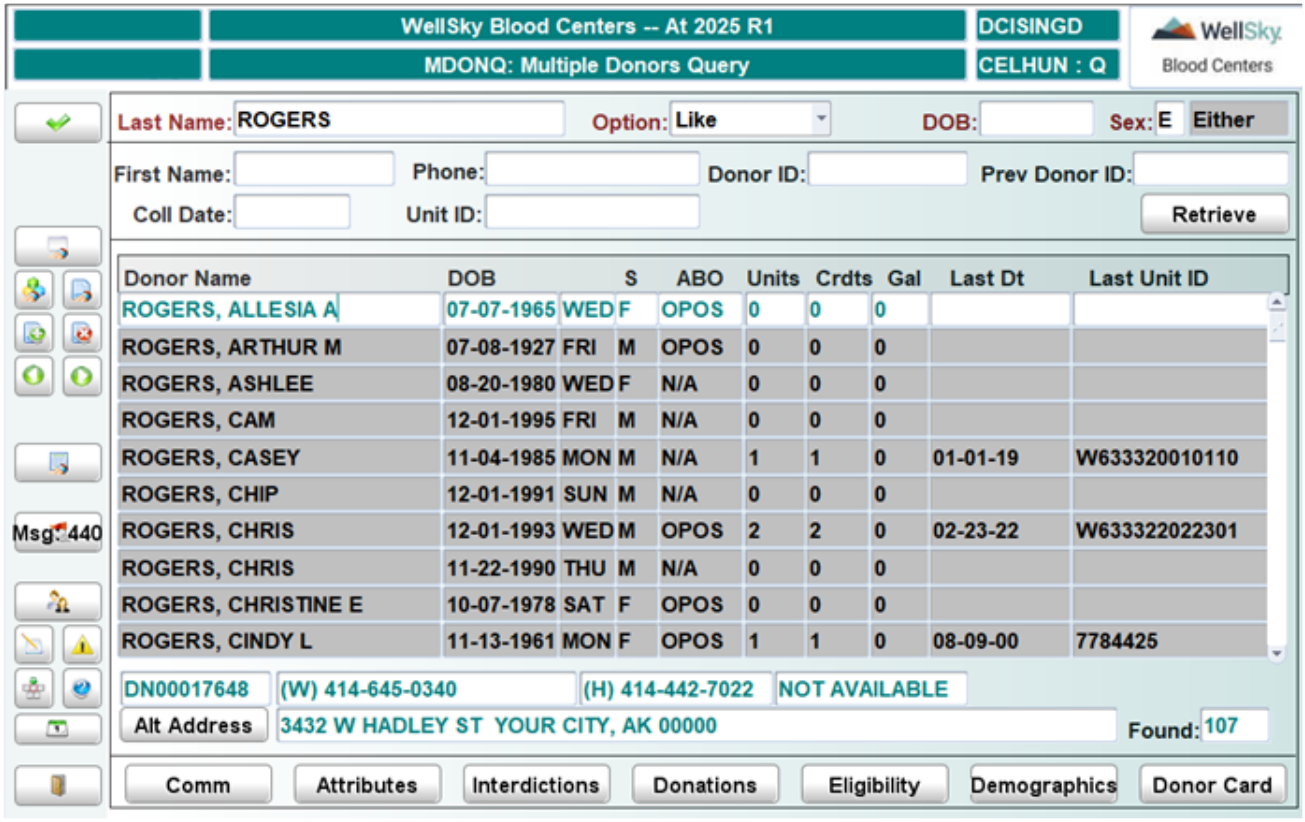


# Control Block Fields and Definitions

One or more of the following criteria must be entered.

## Last Name

Entry is optional. Enter the donor's last name.

> **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

## Option

Entry is required if a last name was entered as search criteria. Choose an option from the drop down list.

- Like – retrieves donors with the same combination of letters in their last names. Like is the system default.
- Soundex – retrieves donors whose last name is phonetically similar.
- Exact– retrieves donors with the exact same last name.

## DOB

Entry is optional. Enter the donor's date of birth, using the MMDDYYYY format.

### Sex
Entry is required. Enter `M` to search for males only, `F` to search for females only, or `E` to search for either. The default is either.

### First Name
Entry is optional. Enter donor's first name.

### Phone
Entry is optional. Enter donor's phone number. Do not include dashes, the system automatically inserts them.

### Donor ID
Entry is optional. Enter donor's ID number.

### Prev Donor ID
Entry is optional. Enter the donor's previous ID number.

### Coll Date
Entry is optional. Enter a collection date in MMDDYYYY format.

### Unit ID
Entry is optional. Enter the unit ID number.

## Retrieving Data
After entering the search criteria, click **Retrieve** to display all registered donors who match the criteria.

**NOTE –** Blood Centers prompts you to narrow the search criteria if more registered donors than the number specified in the system parameter MXROW are found. If no value is entered for the MXROW parameter, the system will default to 200.

## In the Donor List Block
The following information displays:

- Name
- Date and day of birth
- Sex
- ABO type
- Number of units donated
- Number of donation credits
- Gallons donated
- Date of last donation

- Unit ID of last unit donated

At the bottom of the block, the following information displays for the selected donor:

- Donor ID number
- Business phone number
- Home phone number
- Address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

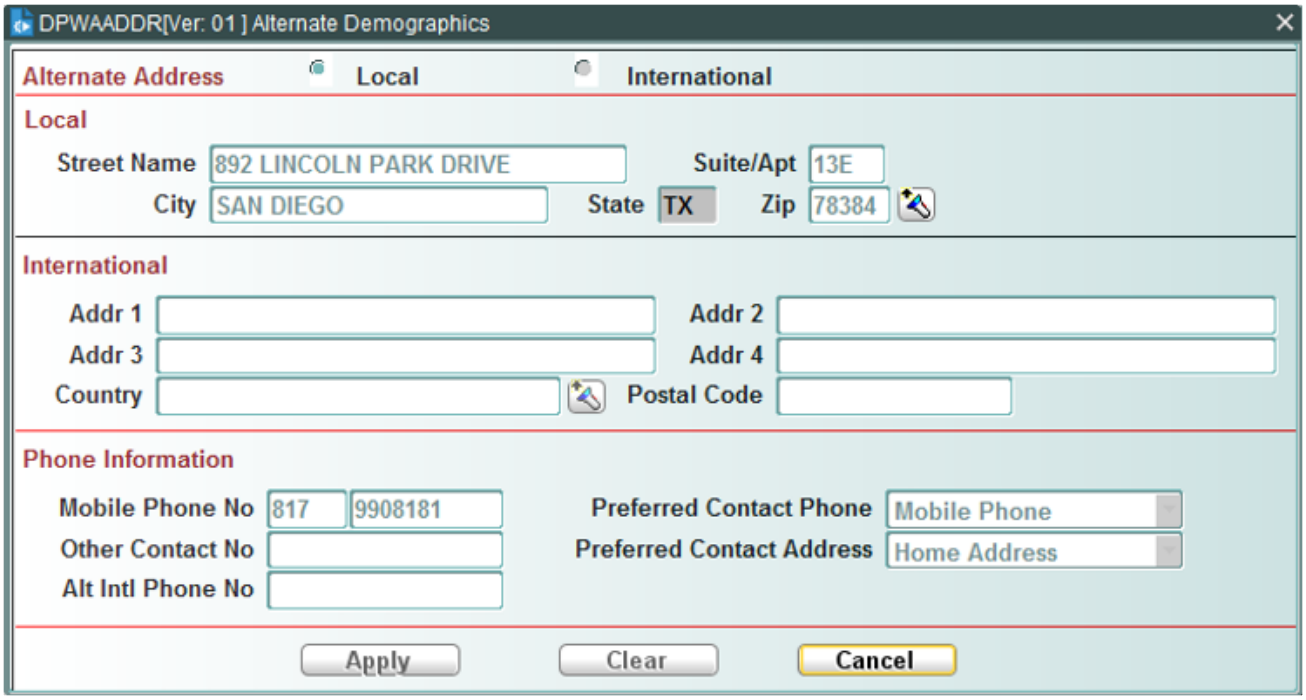


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

You can update alternate demographics information by doing the following:

- Click **Demographics** at the bottom of the screen, which opens the Donor Demographics window.
- Click **Alt Addr** in the Donor Demographics window, which opens the Alternate Demographics window in update mode.
- Make any necessary changes to alternate demographics information.
- Click **Apply** to save any changes made to the donor's alternate demographics.


WellSky Corporation
Proprietary and confidential

## The Comm Button

Click **Comm** to open the Communication Log window. Use this program to view a history of communications with a selected donor, log new communications with a donor, or to send a letter to a donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes placed on a donor or to place new attributes on a donor. A user can view and place only those attributes for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Eligibility Button

Click **Eligibility** to open the Donor Eligibility window. Use this program to view the current donation eligibility of a donor for all donation procedures. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. Demographics can be changed and saved from this program. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donor Card Button

Click **Donor Card** to open the Donor History window. Use this program to view the donation history. A donor card can be printed from this window. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen. Changes made through any of the called window programs are committed to the database.

## What to Do Next

There is no next step.

# 8.3.9 Interdictions Query (INTQ)

## Intended Use

Use this screen to query units with interdictions on them.

## Limitations

- Only one type of interdiction can be queried at a time, but multiple interdictions within that type can be selected.
- Interdictions can only be viewed if user has access.

## Prerequisites

Interdictions must have previously been placed on unit.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `INTQ`.

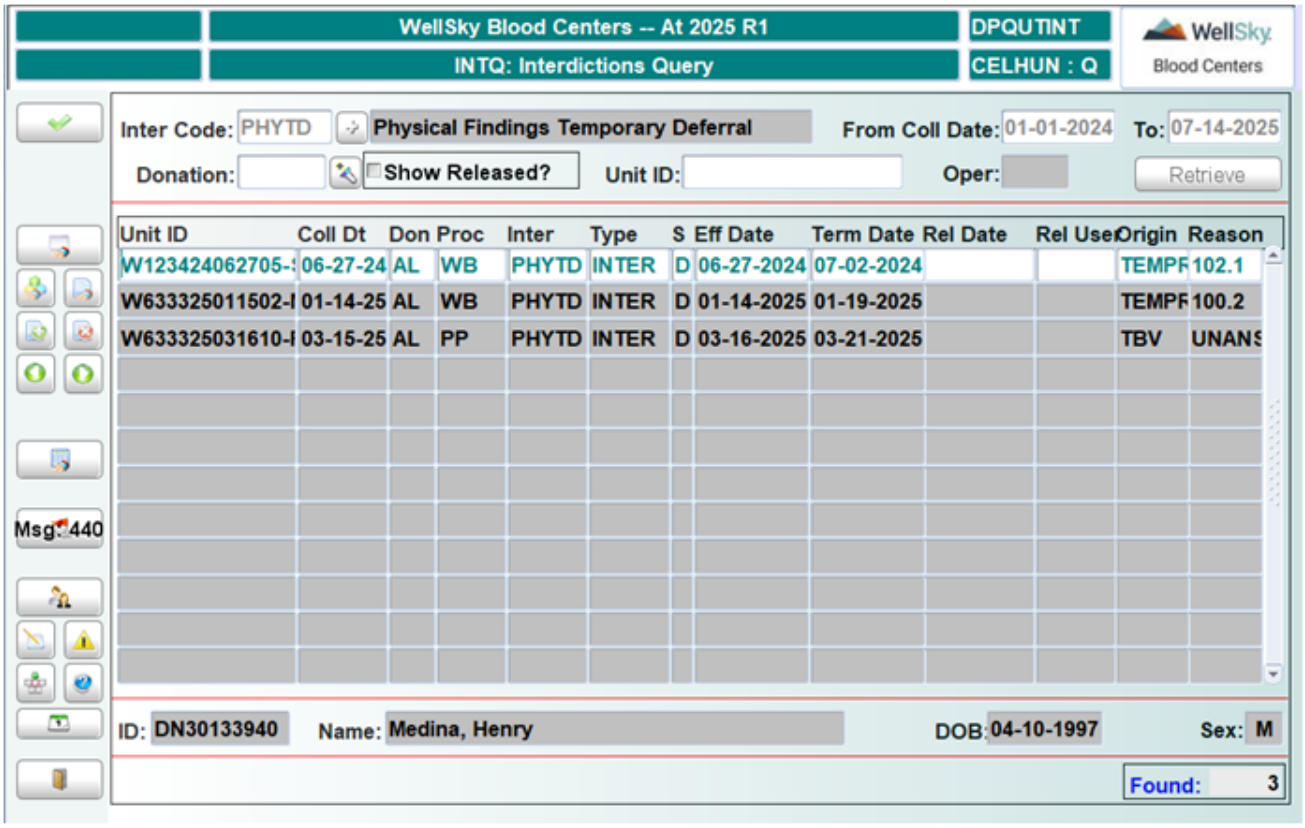

# Control Block Fields and Definitions

## Inter Code

Entry is optional. Enter the interdiction code to query or select from the LOV. To choose more than one interdiction code to query, click the checkmark button to open the Select Interdictions window. Use this window to select more than one interdiction to query.

## From Coll Date

Entry is optional. Enter the beginning date of date range to query, using the MMDDYYYY format. Date cannot be greater than system date.

## To

Entry is optional. Enter the ending date of date range to query, using the MMDDYYYY format. Date cannot be greater than system date.

## Donation

Entry is optional. Enter donation type or select from the LOV.

## Show Released

Entry is optional. Check the box to retrieve released interdictions.

## Unit ID

Entry is optional. Enter the unit ID to retrieve a specific unit ID. Leave blank to retrieve all units that match the entered criteria.

## Oper

Display only. This field populates with the selected Logical Operation from the Select Interdictions window if multiple interdictions were searched.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display all units that match the entered criteria. The following information displays:

- Unit ID
- Collection date
- Donation type
- Donation procedure
- Interdiction code
- Interdiction type
- Interdiction custody flag S (D = Donor, U = Unit, B = Both)
- Effective date of interdiction

- Termination date of interdiction
- Release date of interdiction
- User who released interdiction
- Origin of interdiction
- Reason for interdiction

The following displays for the selected unit ID:

- Donor ID number
- Name
- Date of birth
- Sex

At the bottom of the screen, on the right side, the number of records found and retrieved displays.

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 8.3.10 Unit by Hold Code Query (UNITHQ)

## Intended Use

Use this screen to view a list of units placed on hold by specific hold code.

## Limitations

You can view only those Hold Codes for which he/she has access.

## Prerequisites

User access must be set to view Holds.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `UNITHQ`.


WellSky Corporation
Proprietary and confidential

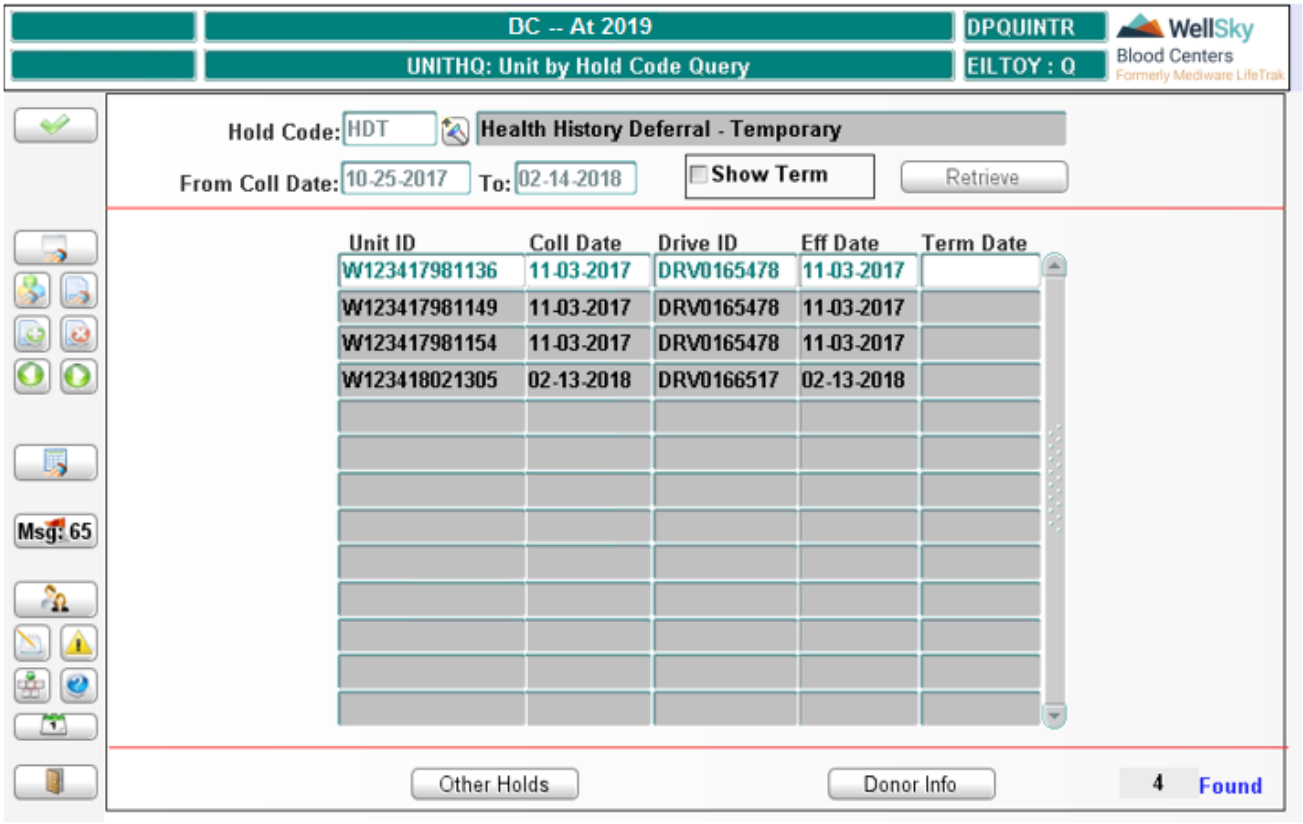


# Control Block Fields and Definitions

## Hold Code

Entry is required. Enter the hold code or select from LOV.

## From Coll Date

Entry is optional. Enter the beginning date of the search range in MMDDYYYY format. Date cannot be greater than the system date.

## To

Entry is optional. Enter the ending date of the search range in MMDDYYYY format. Date cannot be greater than the system date.

## Show Term

Place a check in the checkbox to retrieve terminated interdictions in addition to active interdictions.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display all units that match the search criteria.

# In the Unit List Block

The following information displays:

- Unit ID number
- Date unit was collected
- ID number of drive where unit was collected
- Effective date of the hold
- Termination date of the hold

The Found field in the lower right-hand corner of the screen displays the total number of units retrieved.

More details about the unit can be viewed by using the buttons at the bottom of the screen. In the Unit List Block select the desired unit, and then click one of the following:

- Other Holds to view holds
- Donor Info to view donor demographic information

## The Other Holds Button

Click Other Holds to open the Other Holds window. Use this window to view other holds placed on the unit. Only Hold Codes for which user has access will display.

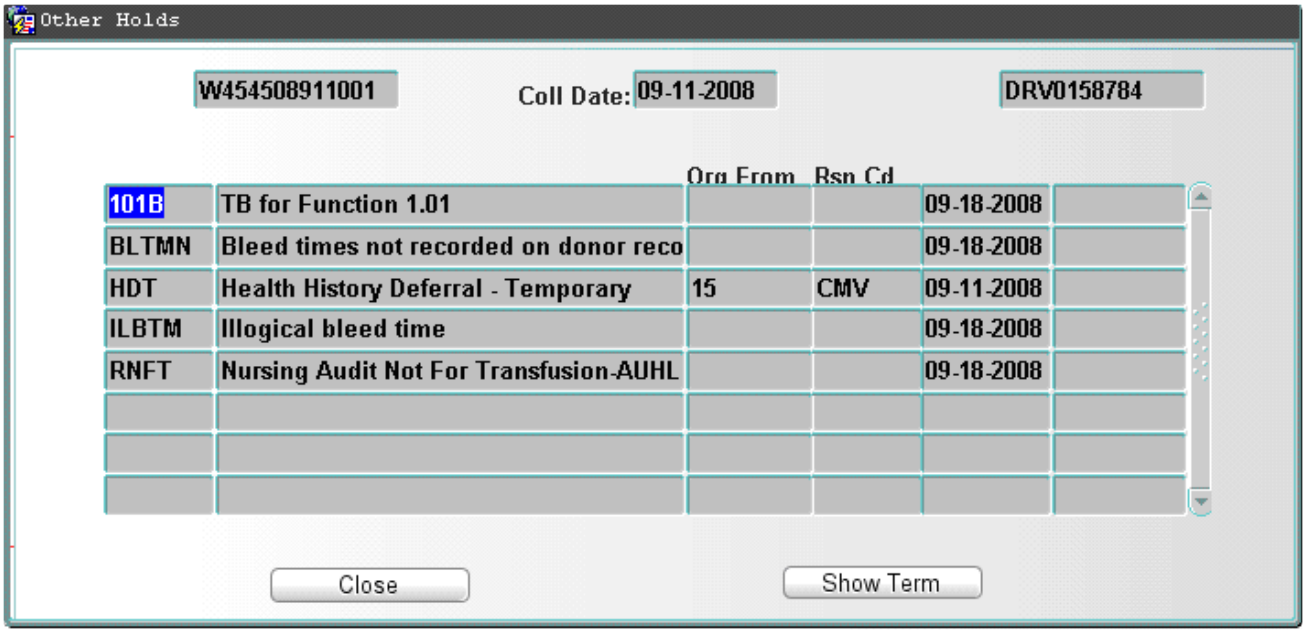


The following information displays:

- Unit ID number
- Date unit was collected
- ID of drive where unit was collected
- Hold code
- Description of hold code
- Health history question or physical finding code from which Hold Code originated


WellSky Corporation
Proprietary and confidential

- Reason code for hold code
- Effective date of the hold
- Termination date of the hold

Click **Show Term** to include terminated holds on the unit:

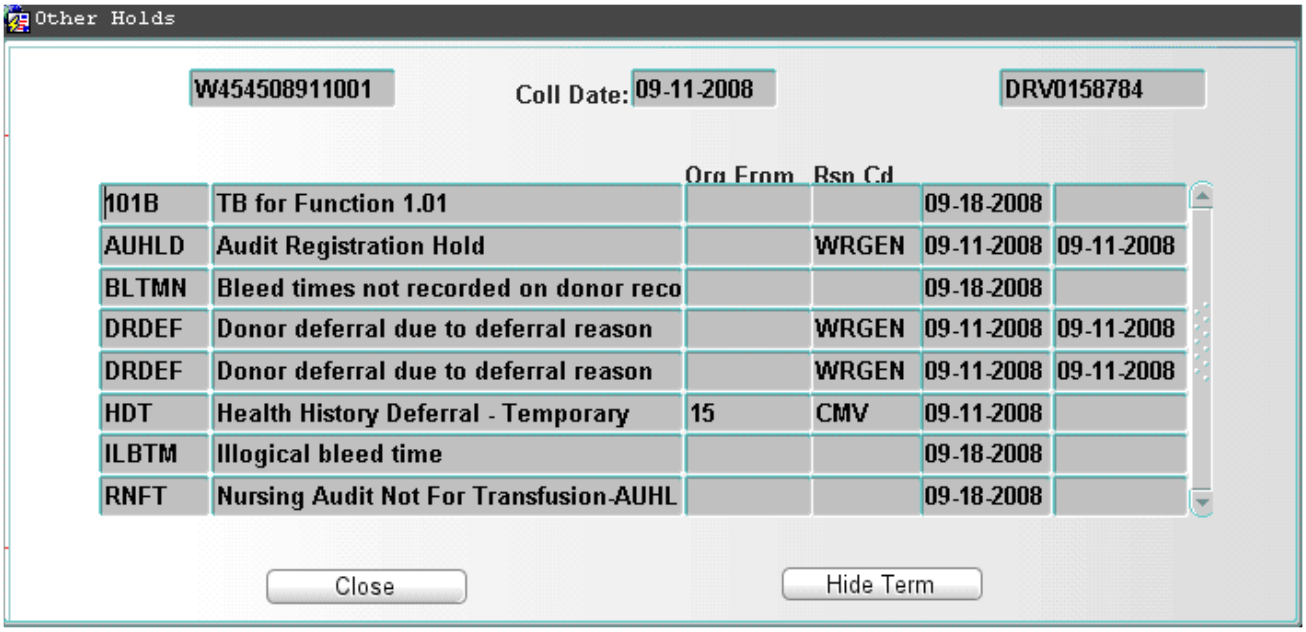


The Show Term button changes to Hide Term when activated. Click **Hide Term** to remove the terminated holds from the screen view.

Click **Close** to close the Other Holds window and return to the main screen.

## The Donor Info Button

Click **Donor Info** to open the Donor Demographics window. Use this program to view demographics about the donor of the unit. See Chapter 14 Called Windows and Routines for instructions on using this program

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 8.3.11 Donor by Interdiction Query (DONIQ)

## Intended Use

Use this screen to view a list of donors by interdiction code.

## Limitations

Can only view interdictions with category type of Donor or Both.

## Prerequisites

User access must have been set to view interdictions.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `DONIQ`.

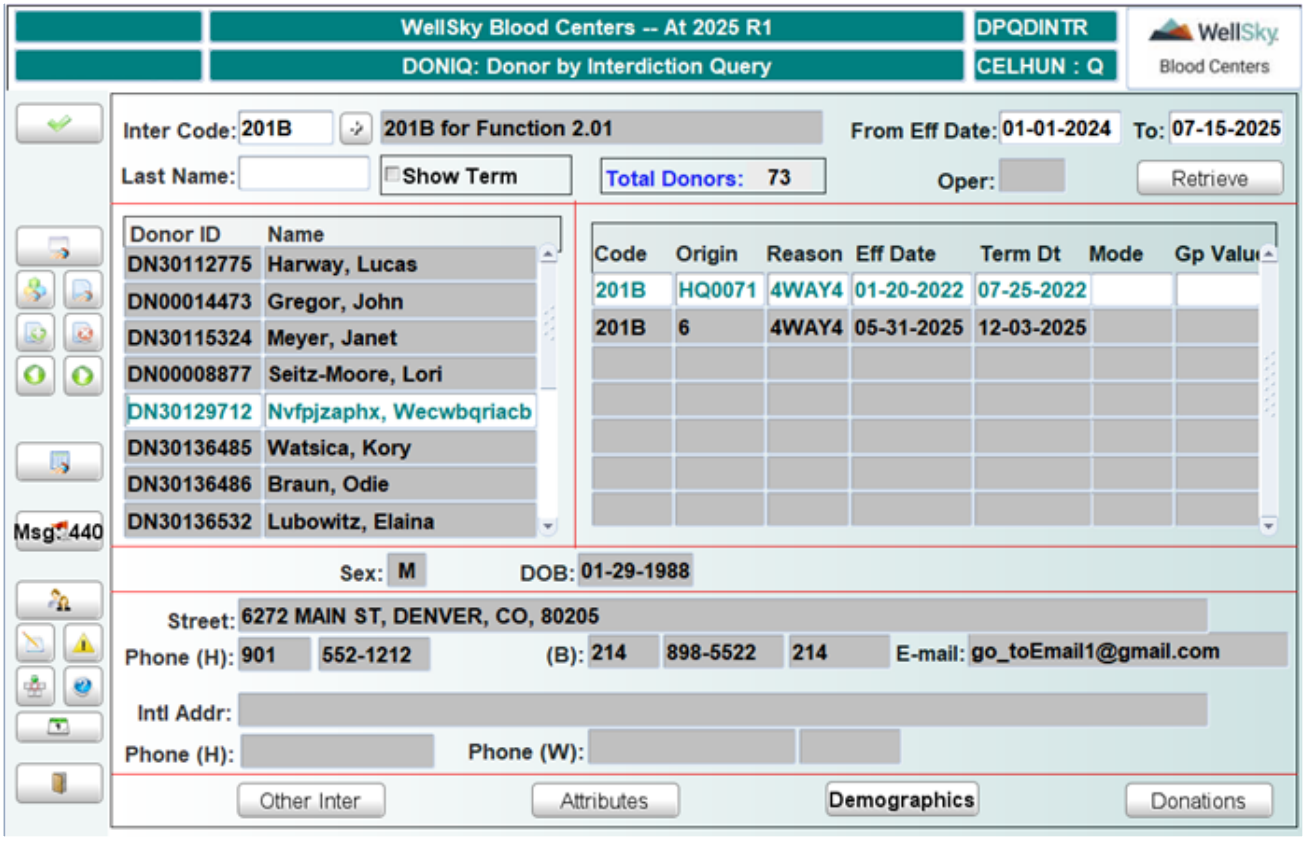


## Control Block Fields and Definitions

### To Search By a Single Interdiction Code:

#### Inter Code

Entry is required. Enter the interdiction code or select from the LOV.

#### From Eff Date

Entry is optional. Enter the beginning date of the search range in MMDDYYYY format. Date cannot be later than the system date.


WellSky Corporation
Proprietary and confidential

### To

Entry is optional. Enter ending date of search range in MMDDYYYY format. Date cannot be later than the system date.

### Last Name

Entry is optional. Enter full or partial last name of donor.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### Show Term

Click to retrieve donors with terminated interdictions.

### Oper

Display only. See explanation under the To Search by Multi Interdiction Codes heading.

## To Search by Multi Interdiction Codes:

### Inter Code

Entry is required. Click the checkmark box to the right of the Inter Code field. This opens the Select Interdictions selection window:

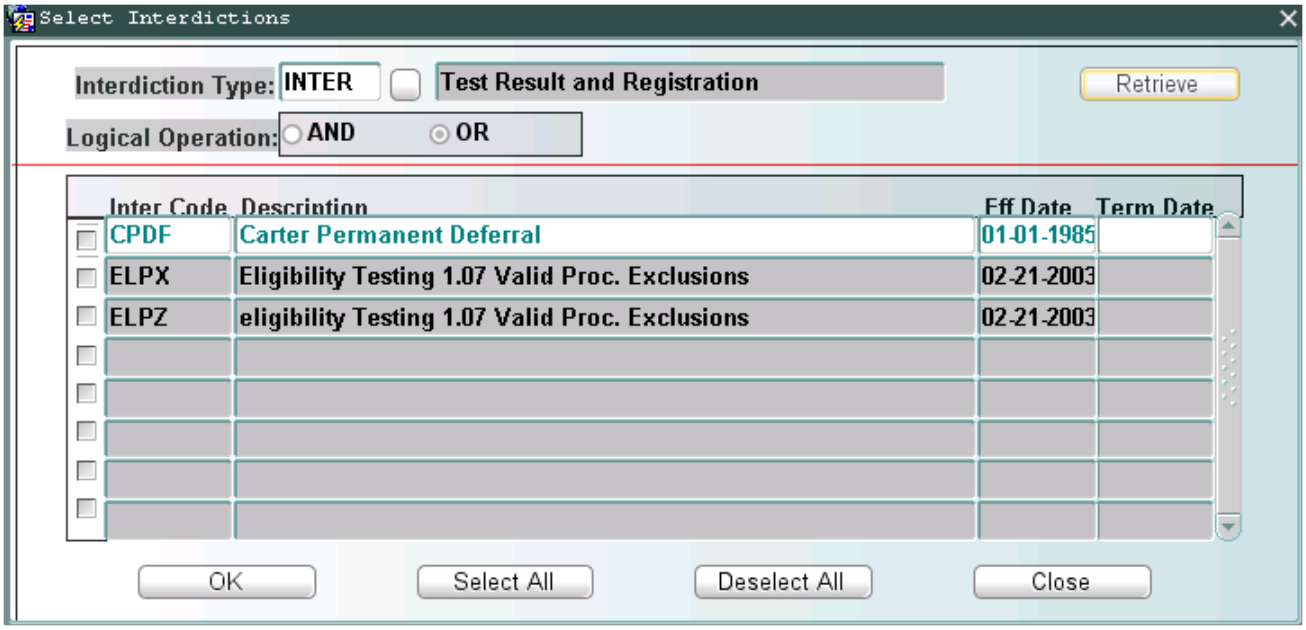


## In the Select Interdictions window:

### Interdiction Type

Entry is optional. Enter interdiction type or select from the LOV.

### Logical Operation

Click **And** to search for donors with all selected interdictions. Click **Or** to search for donors with at least one of the selected interdictions.

The selected logical operation automatically displays in the Oper field on the Donor by Interdiction Query screen.

Click **Retrieve** to display a list of interdictions available under the selected interdiction type. The following information displays:

- Interdiction code
- Description of interdiction
- Effective date of the interdiction
- Termination date of the interdiction

To select the interdictions to search for, click in the boxes to the left of the interdiction codes.

Click **Select All** to select all listed interdictions. Click **Deselect All** to deselect all previously selected interdictions.

After selecting the desired interdictions, click **OK** to return to the main screen. Multi displays in the Inter Code entry field. The selected interdictions display in the Inter Code description field.

After returning to the main screen, continue entering search criteria if desired. Entry in the remaining fields is optional. See field descriptions under the To Search By a Single Interdiction Code heading.

## Retrieving Donors

After entering the search criteria, click **Retrieve** button. Donors that match the entered search criteria are retrieved. The number of donors found displays in the Total Donors field in the Control Block.

## In the Donor List Block

The following information displays:

- Donor ID number
- Name

## In the Interdiction Details Block

The following information displays:

- Interdiction code
- Origin of the interdiction
- Reason code for the interdiction
- Effective date of the interdiction
- Termination date of the interdiction
- Interdiction mode


WellSky Corporation
Proprietary and confidential

- Group value of interdiction

## In the Donor Details Block

The following information displays:

- Sex
- Date of birth
- Address
- Home and business phone numbers
- E-mail address
- International address
- International home and business phone numbers

More details about the donor can be viewed using the buttons at the bottom of the screen. Select a donor from the Donor List Block, then click one of the buttons.

## The Other Inter Button

Click **Other Inter** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes placed on a donor. A user can view and place only those attributes for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view a donor's demographics. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 8.3.12 Unit Test Results Query (RESULQ)

## Intended Use

Use this screen to display tests and results on a unit that was interfaced with Lab/Distribution. Donor interdictions can be viewed from this screen.

## Limitations

None

## Prerequisites

- Tests results must be accessible in the database.
- User access must have been defined to review test results.
- Antigen group must be defined in G column in Define Tests (TESTS) in order to show antigens and results in this screen.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `RESULQ`.

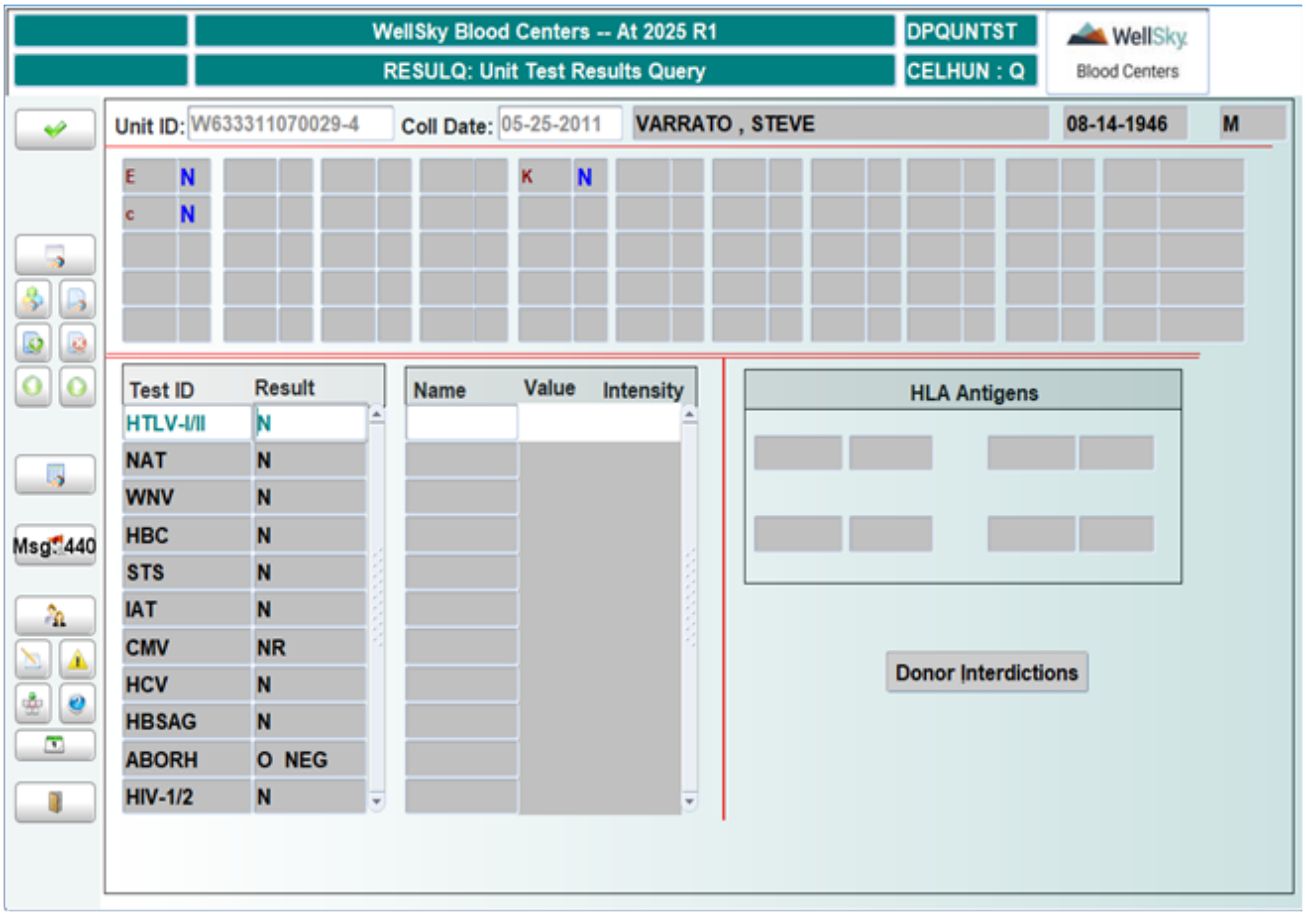



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

### Unit ID

Entry is required. Enter the ID number of unit to be queried. When unit ID is entered, press **ENTER** on the keyboard.

### Coll Date

Entry is required if the unit number is not unique. Enter the collection date in MMDDYYYY format.

The donor's name, date of birth, and sex automatically display at the top of the screen. All tests that have been performed and their results also display.

## The Donor Interdictions Button

Click **Donor Interdictions** to open the Donor Interdictions window. Use this window to view interdictions that have been placed on a donor. The user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 8.3.13 Donor Antigens Query (ANTQ2)

Refer Donor Antigens Query in Chapter 9 HLA/RBC for instructions on using this screen.

# 8.3.14 Potential Duplicate Batch Query (DUPQ)

## Intended Use

Use this screen to query potential duplicate batch details by status.

## Limitations

Potential duplicate donor records cannot be resolved or merged from this screen.

## Prerequisites

At least two donor records must be identified as possible duplicates.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword `DUPQ`.

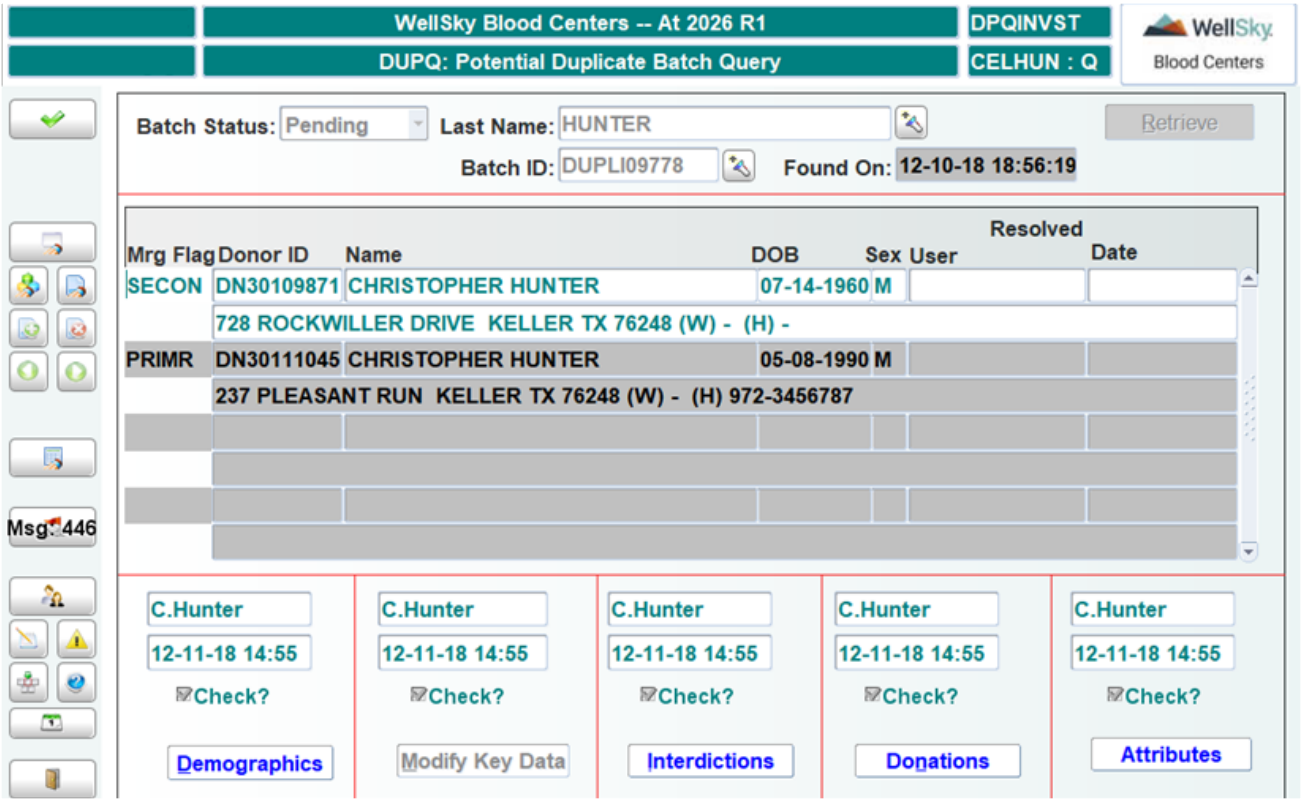


# Control Block Fields and Definitions

## Batch Status

Entry is required. Choose Pending, Invalid or Resolved from the drop-down list.

## Last Name

Entry is optional. Enter last name or select from the LOV.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

## Batch ID

Entry is required. Enter the batch ID or select from the LOV.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donors matching the search criteria.

The date and time that the potential duplicates were found displays in the Found On field.

# In the Donor List Block

The following information displays:


WellSky Corporation
Proprietary and confidential

- Merge Flag
- Donor ID
- Name
- Date of birth
- Sex
- If resolved, ID of user who resolved the potential duplicates and date it was resolved
- Address and telephone numbers

Once donors have been retrieved, the user can view more information about each donor. In the Donor List Block, click on one of the retrieved donors. Information about that donor is displayed when the following buttons are clicked.

Because this is a query screen, the fields in the Investigation Block are inactive and protected against update.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view donor demographics. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Modify Key Data Button

The **Modify Key Data** is disabled because this is a query screen and key data cannot be modified.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on the donor. The user can view only those interdictions for which he/she has clearance. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this window.

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes that have been placed on a donor. See Chapter 14 Called Windows and Routines for instructions on using this window.

## At Commit

No changes can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 8.3.15 Graded Donors Query (GRADEQ)

## Intended Use

Use this screen to investigate a donor match from entry of key data.

## Limitations

Only problem matches will be presented for query.

## Prerequisites

Donors must have been placed on hold in the Find Donor program.

## Accessing the Screen

Access this screen from the Donor Profile Queries menu or by entering the keyword GRADEQ.

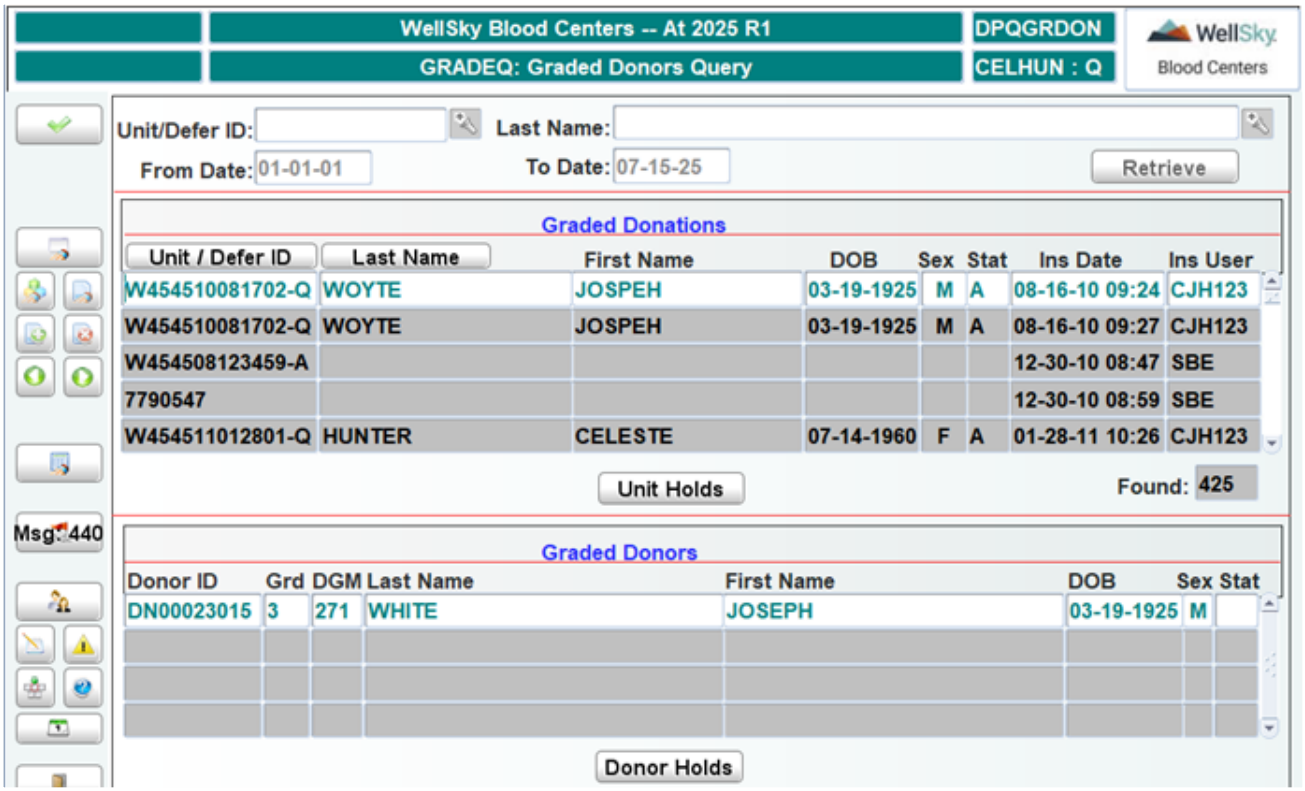


## Control Block Fields and Definitions

### Unit/Defer ID

Entry is optional. Enter the unit or deferral ID number or select from the LOV.

### Last Name

Entry is optional. Enter the donor's last name or select from the LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### From Date

Entry is optional. Enter the starting date for the search, using the MMDDYY format.

### To Date

Entry is optional. Enter the ending date for the search, using the MMDDYY format.

## Retrieving Data

After entering the search criteria, click **Retrieve** to view a list of all graded donations and graded donors who match the search criteria:

## In the Graded Donations Block

The following information displays:

- Unit or deferral ID number
- Last and first names
- Date of birth
- Sex
- Status of pending donor record merge
- Insert date and time
- Insert user

## In the Graded Donors Block

The following information displays:

- Donor ID number
- Match grade
- Donor Grading Matrix line location
- Last name
- First name
- Date of birth
- Sex
- Merge flag

## The Unit Holds Button

Click **Unit Holds** to open the Unit Holds window:

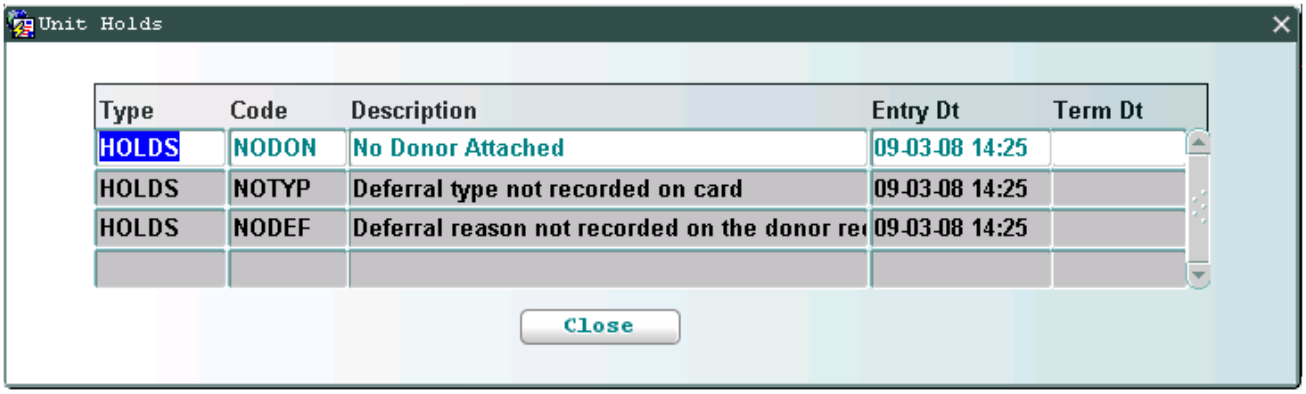


Use this window to view the holds placed on the selected unit. The following information displays:

- Type of hold
- Hold code
- Description of hold
- Date and time hold code was entered
- Termination date of hold code

Click **Close** to return to the main screen.

## The Donor Holds Button

Click **Donor Holds** to open the Donor Holds window:

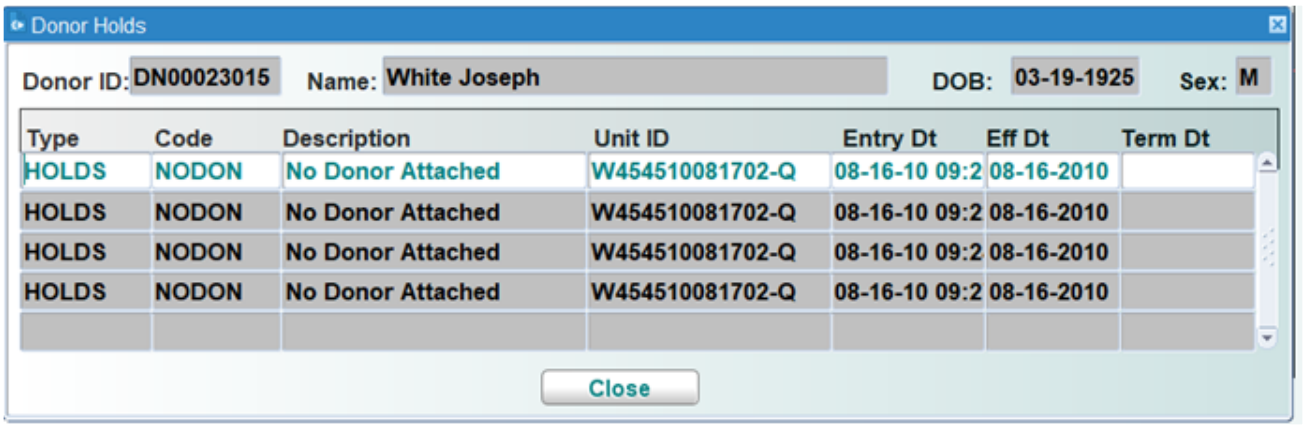


Use this window to view the holds placed on the selected donor. The following information displays:

- Type of hold
- Hold code
- Description of hold
- Unit ID hold is attached to
- Date and time hold code was entered


WellSky Corporation
Proprietary and confidential

- Date hold become effective
- Termination date of hold code

Click **Close** to return to the main screen.

## At Commit

No changes can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 8.3.16 Donor Profile Audit Query (DPAQ)

## Intended Use

Use this screen to view the donor profile information as a summary, a detail, or a combination of both. You can also use this screen to display the selected rows in a report.

You can limit the profile information that displays by using the following search criteria:

- From Date and To Date
- Unit ID or Deferral ID (one or the other, but not both)
- Collection Date (if the Codabar Unit ID ihas more than one collection date)

## Limitations

- Codabar unit numbers that have multiple collection dates must be investigated outside the query to determine which donor belongs to the specific unit number and collection date combination.
- No information from Lab will be returned unless a specific unit ID is entered.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Donor Profile Queries screen or by entering the keyword `DPAQ`.

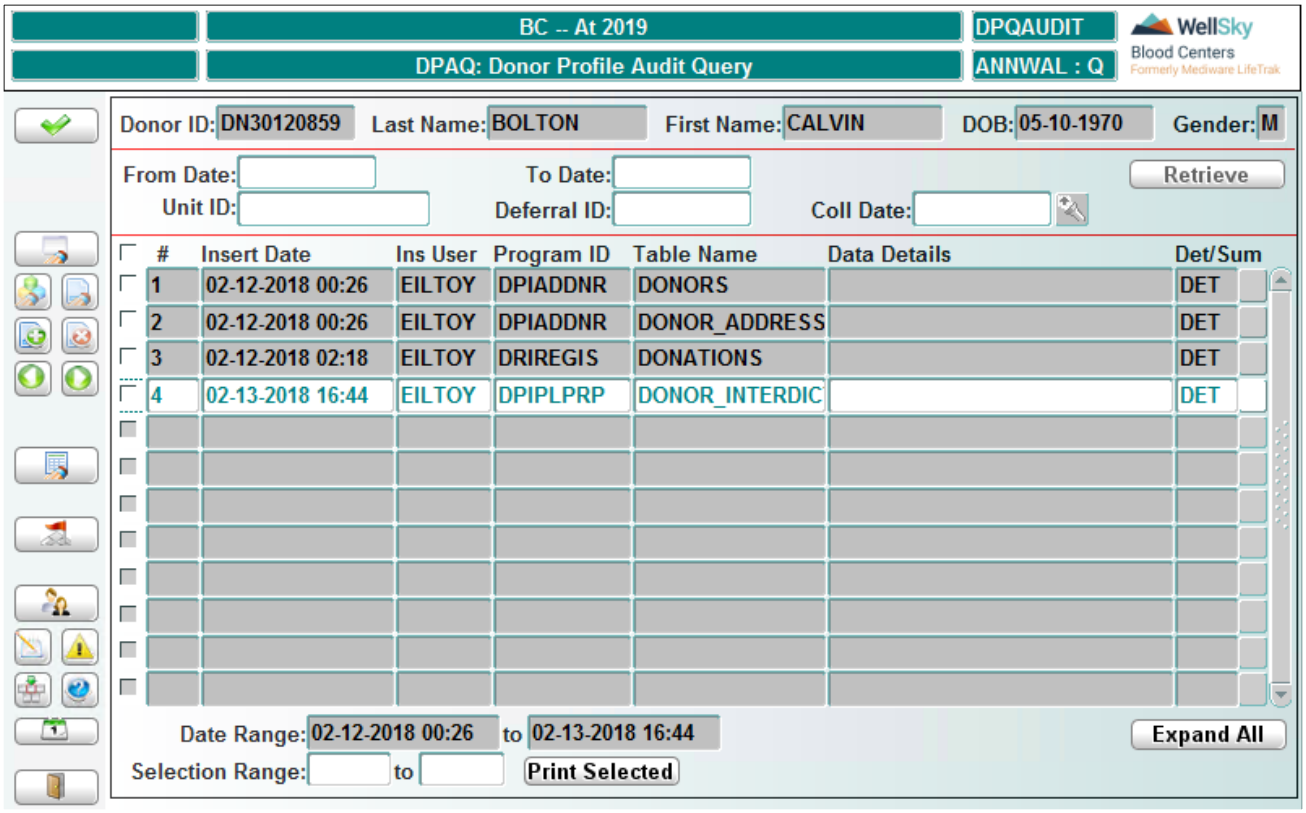


This screen appears with the Search for Donor window open on top. Before viewing a donor's details, you must first search for the donor in the donor database. See Chapter 14 Called Windows and Routines for instructions on using this window.

If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click the desired donor. Click **Select** to go to the Donor Profile Audit Query screen and populate the screen with the information for the selected donor.

## Control Block Fields and Definitions

The following information populates, if it exists in the database:

- Donor ID
- Last name
- First Name
- Date of Birth
- Sex

### From Date

Entry is optional. Enter the starting date for the search, using the MMDDYY format.

### To Date

Entry is optional. Enter the ending date for the search, using the MMDDYY format.


WellSky Corporation
Proprietary and confidential

### Unit ID

Scan or enter the Unit ID, or leave the field blank.

**NOTE –** If you enter a Unit ID, you cannot also enter a Deferral ID.

**NOTE –** If you leave the field blank, no information from Lab will be retrieved.

### Deferral ID

Enter a deferral ID, or leave the field blank.

**NOTE –** If you enter a Deferral ID, you cannot also enter a Unit ID.

### Coll Date

Enter a collection date in MMDDYYYY format, or select from LOV.

**NOTE –** This field is valid only if a Codabar Unit number with more than one collection date was entered in the *Unit ID* field.

## Viewing Donor Profile Information

Click **Retrieve** to view the donor profile information that matches your search criteria. If no search criteria is entered, all profile information associated with the donor is displayed.

The following fields display:

### #

The line number of the record. This field is used when selecting a range for printing.

### Insert Date

Date record was inserted into the database.

### Ins User

The insert user of the retrieved record.

**NOTE –** ****** is displayed if there is no value present in the database for that record.

### Program ID

The Donor program used to insert the record.

**NOTE –** ****** is displayed if there is no value present in the database for that record.

### Table Name
The name of the table where the record was retrieved.

### Data Details
The data details. This field displays the column name followed by the value in that column.

> **NOTE –** If a summary record is displayed, this field is blank.

### Det/Sum
The view that will appear when the Details/Summary box is selected.

## Changing the View
When data initially displays, it displays in the summary view. You can toggle between the summary view and a detail view for any individual record that displays. You can also toggle between the summary view and the detail view for all records that are currently displaying.

To toggle between summary view and detail view for an individual record, click the toggle box to the right of the *Det/Sum* field of the record whose view you want to change.

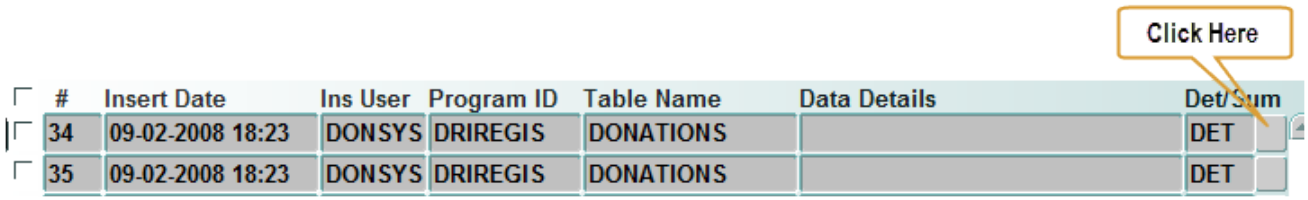


The view toggles between detail and summary.

> **NOTE –** If DET is currently displaying in the *Det/Sum* field, then the summary view is currently displaying. When you click the toggle box, the vies changes to detail, and all detail fields display SUM in the *Sum/Det* field.

To display details for all records that are currently displaying, click **Expand All**. The details are displayed and the *Det/Sum* field changes from DET to SUM for all records that are currently displaying. Also, the button changes from Expand All to Collapse All. To toggle back to the summary view, click **Collapse All**.

## Printing the Report

> **NOTE –** The *Date Range* fields at the bottom of the screen automatically populate with the insert date of the earliest record displayed and the insert date of the latest record displayed.

You can print any or all of the records that are displayed on the screen.

To print all records, do the following:

1. Select the checkbox to the left of the # column heading. This will automatically select all records that are currently displaying.
2. Click **Print Selected**. The report will display as a pdf file in a new window.

To print selected records, do one of the following in step 1, and do step 2:

1. Individually select the checkbox next to the records or records you want to print,
   or
   in the *Selection Range* boxes, enter the first and last numbers associated with the records you want to print.
2. Click **Print Selected**. The report will display as a pdf file in a new window.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

This Page Intentionally Left Blank

# Chapter 9 - HLA/RBC


9.1 Introduction ..... 774
9.1.1 Structure ..... 774
9.1.2 Terminology Applicable to the HLA/RBC Module ..... 774
9.1.3 Process Flow - HLA/RBC Search Operations ..... 775
9.2 HLA/RBC General Functions ..... 776
9.2.1 Enter HLA/RBC Request (REQUEST) ..... 776
9.2.2 Enter HLA Results (HLARESUL) ..... 784
9.2.3 HLA/RBC Request Query (REQUESTQ) ..... 786
9.2.4 Donor Antigens Query (ANTQ) ..... 791
9.3 HLA/RBC Maintenance Functions ..... 794
9.3.1 Define HLA Antigens (HLANTI) ..... 794
9.3.2 Define HLA Cross Reactive Groups (HLAEPI) ..... 796
9.3.3 Define HLA Matching Grades (HLAGRAD) ..... 798
9.3.4 Associate Strong Reactivity (HLAXX) ..... 801
9.3.5 Define HLA Interim Output (HLAINT) ..... 803
9.4 RBC Antigen Manager ..... 807
9.4.1 RBC Antigen Manager Configuration ..... 807
9.4.2 Donor RBC Ag Query (AGQ) ..... 825
9.4.3 Donor Antigen Discrepancy Report (AGRDISCR) ..... 836

# 9.1 Introduction

The HLA/RBC Module is that portion of Donor designed for reference operations, and supports:

- Entry and definition of HLA antigens, HLA cross-reactive groups, HLA matching grades, and RBC antigen groups
- Entry of HLA and RBC search criteria
- HLA and RBC searches

## 9.1.1 Structure

The following screens provide the capability to enter, modify, and query data relating to reference operations. Screens are grouped by their functional purposes:

- General Functions
- Maintenance Functions

## 9.1.2 Terminology Applicable to the HLA/RBC Module

| Term | Definition |
|---|---|
| Call List | A list generated within Donor that is acted upon by Donor Enlistment personnel to solicit donations by matching donors. |
| Match Level | A quality of match designation associated with each HLA match retrieved by the system for the purpose of making a selection recommendation. |
| Matching Grades | An industry-standard assigned grade. |
| Pattern | A representation of match between the recipient and donor, resulting in an assigned grade. |


WellSky Corporation
Proprietary and confidential

## 9.1.3 Process Flow - HLA/RBC Search Operations

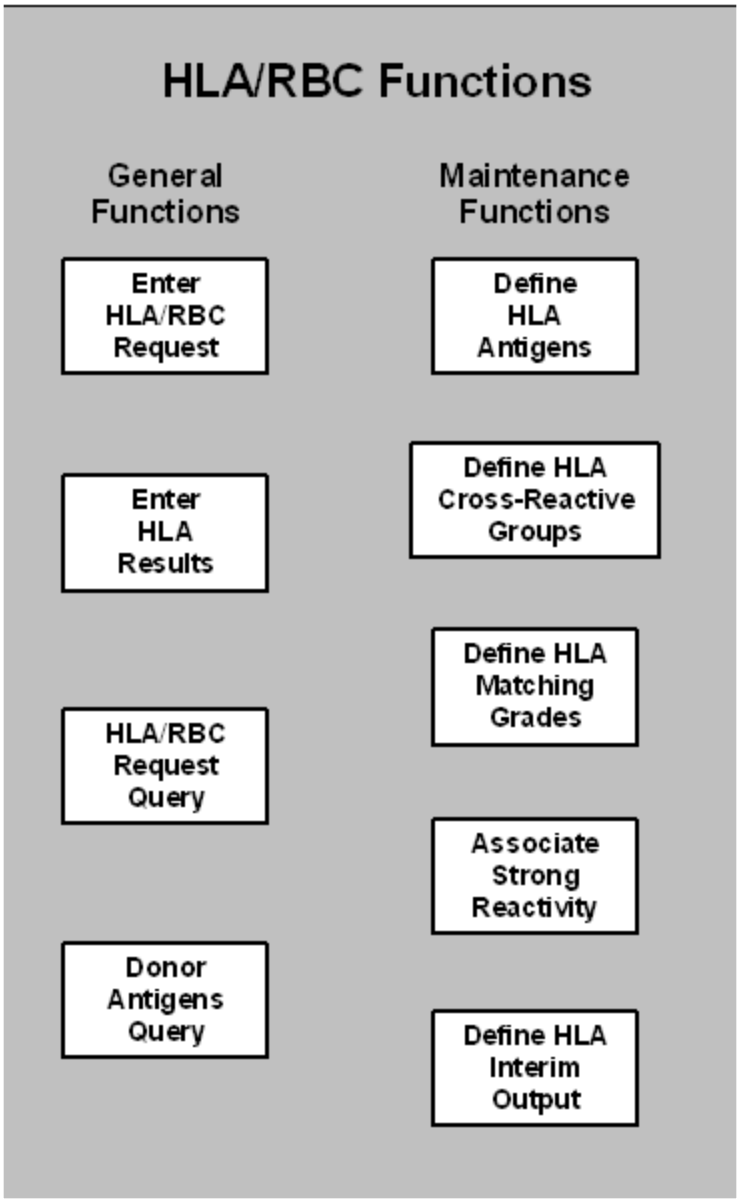

# 9.2 HLA/RBC General Functions

These functions are accessed from the following menu:

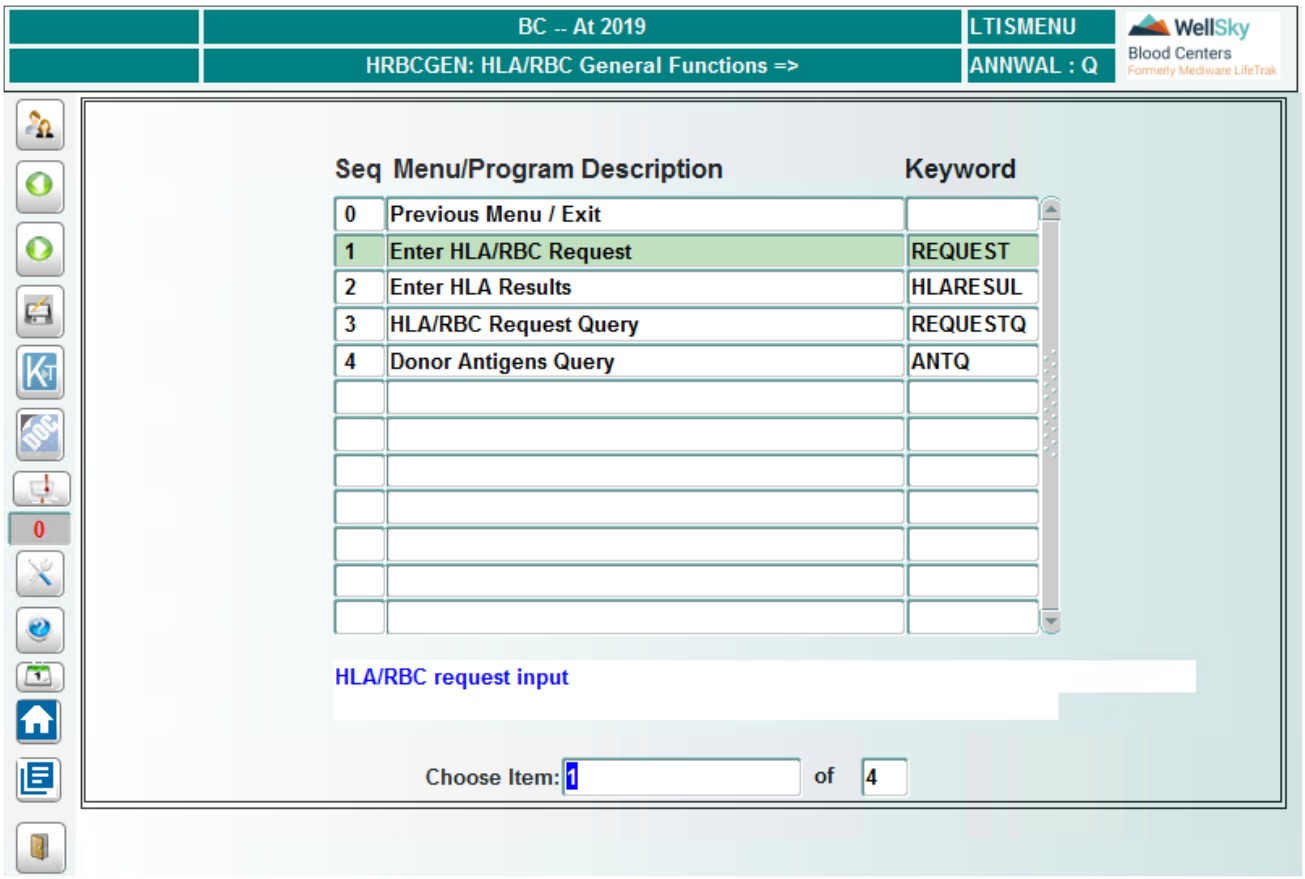


## 9.2.1 Enter HLA/RBC Request (REQUEST)

### Intended Use

Use this screen to search for an HLA or RBC product match for a specific recipient.

**NOTE –** While this screen will return matching data, the Donor system will not select or recommend the use of a specific donor or unit.

### Limitations

None

### Prerequisites

None


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the HLA/RBC General Functions menu or by entering the keyword `REQUEST`.

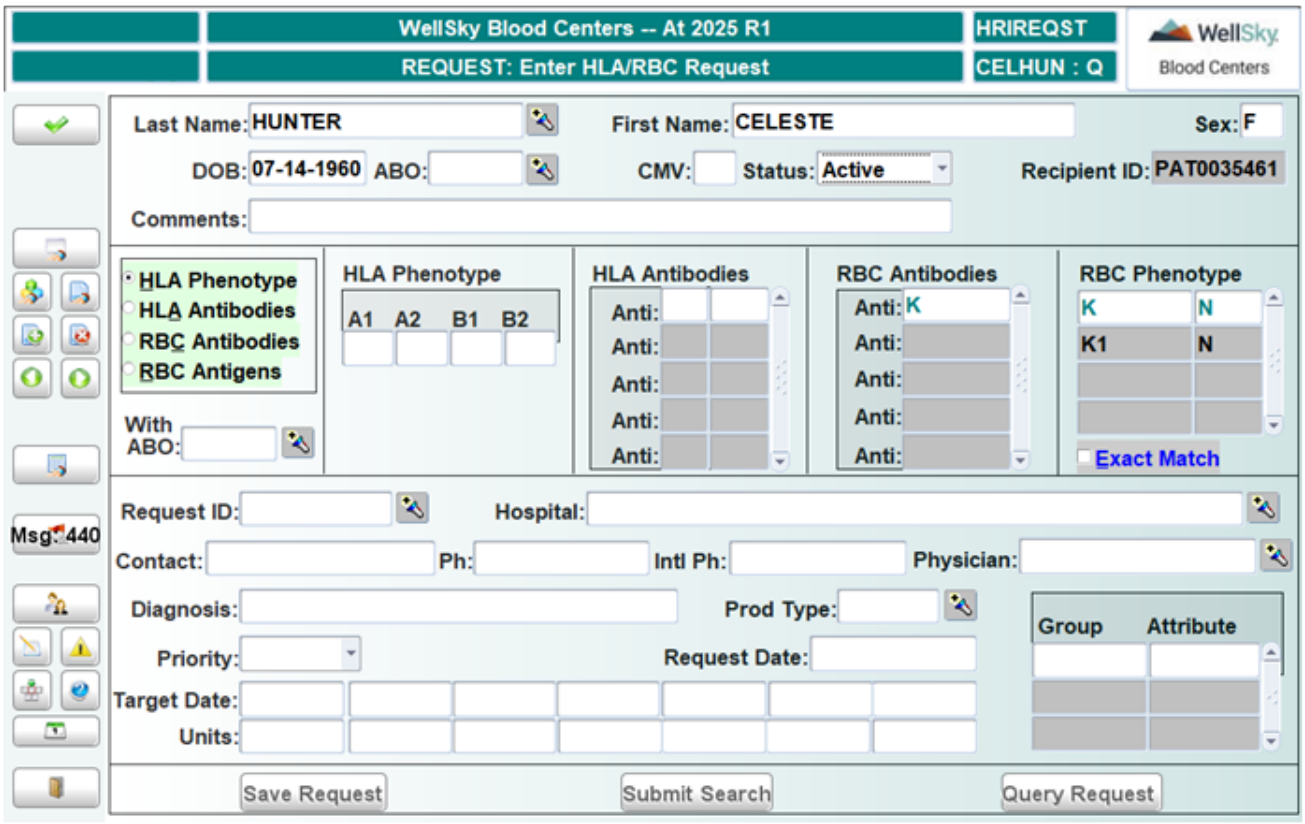


# Control Block Fields and Definitions

## Last Name

Entry is required. Enter the recipient's last name or select from the LOV. If a recipient name is entered that does not exist in the donor system, a pop-up appears asking you to confirm creation of a new recipient. If the name you have entered matches more than one existing recipient, the list contains only recipients that match.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

**NOTE –** Enter a partial patient last name to limit the list of values to only names that match your partial entry.

If you do not want to select any displayed recipient from the LOV, click **Cancel**. A message appears that asks whether you want to create a new recipient:

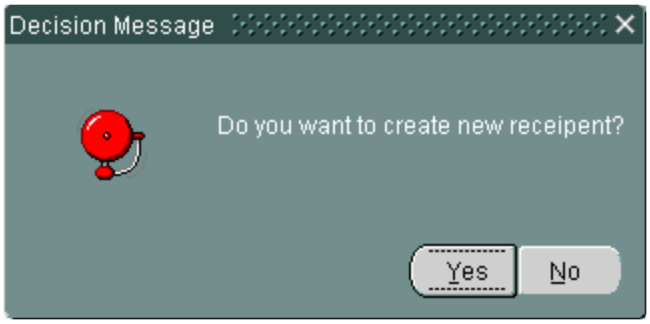


If no matches are found, a message appears that asks you to confirm that you want to create a new recipient:

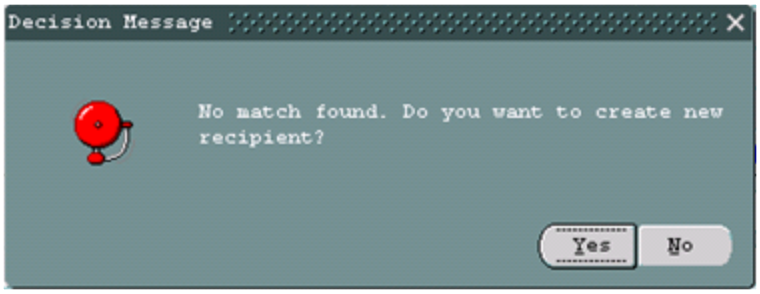


**NOTE –** If an existing recipient is selected, all fields in the Control Block automatically populate with data that exists for the selected recipient. Data can be modified in all fields except Recipient ID.

## To Create a New Recipient

### First Name

Entry is optional. Enter the recipient's first name.

### Sex

Entry is optional. Enter the recipient's sex (`M` or `F`).

### DOB

Entry is optional. Enter the recipient's date of birth, using the MMDDYYYY format.

### ABO

Entry is optional. Enter the recipient's blood type or select from the LOV.

### CMV

Entry is optional. Enter the recipient's CMV status: `N` for negative or `P` for positive.

### Status

Entry is required. Use the drop-down list to select the recipient's status. Default is Active.


WellSky Corporation
Proprietary and confidential

### Recipient ID
Display only. This field automatically populates when you confirm creation of a new recipient.

### Comments
Entry is optional. Enter any comments for the recipient in free form format. A maximum of 240 characters is allowed.

## In the Search Details Block
If an existing recipient is selected and data exists for past match searches, data for the past search populates in this block.

If a new recipient is created or if new search criteria is required, data in this block can be modified.

## Specify Basis of the Search
Specify the basis of the search by clicking on one of the four check boxes. Only one check box may be checked. Identify the required blood type. If no blood type is specified, all blood types will be considered acceptable.




**NOTE –** Do not select the All ABO option in the With ABO field, or the search will not generate any units or donors.

## Specify the Recipient's HLA Phenotype
A search based upon the recipient's HLA phenotype can be defined here. An LOV is available in each field and contains valid HLA antigen identifiers for that field. Make an entry in each field that corresponds with the recipient's HLA phenotype.

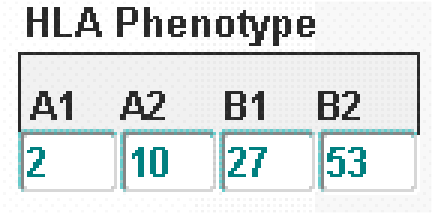


## Specify the Recipient's HLA Antibodies
A search based upon the recipient's HLA antibodies can be defined here. An LOV is available in each field and contains valid HLA antibody identifiers.

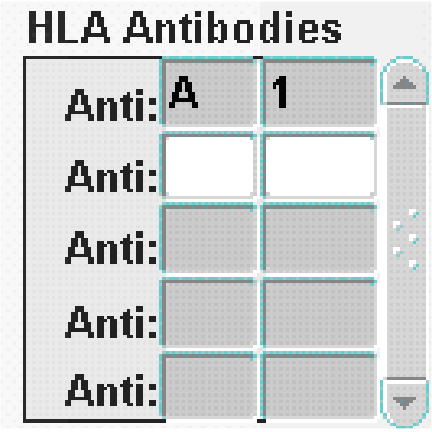


## Specify the Recipient's RBC Antibodies

If the search is to be based upon the recipient's RBC antibodies, define those antibodies here. An LOV is available and contains valid RBC antibody identifiers.

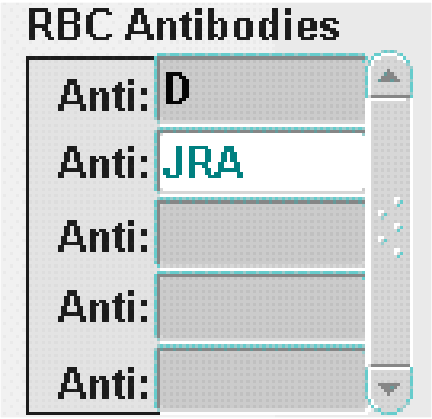


## Specify the Recipient's RBC Phenotype

If the search is to be based upon the recipient's RBC phenotype, define that phenotype here. An LOV is available in each field that contains valid RBC antigen identifiers. Enter all antigens followed by the test result (`P` for Positive or `N` for Negative) until the recipient's RBC phenotype is defined. Click **Exact Match** for only exact match phenotypes.

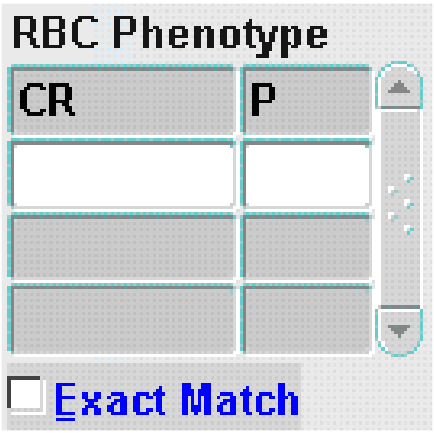


## Request Details Block Fields and Definitions

If an existing request ID is specified, data in this block populates with previously submitted search request data.

### Request ID

Enter a valid request ID or select from the LOV. If entering a new request, type `NEW` in this field.

If NEW is entered, a pop-up appears asking you to confirm creation of a new request ID:

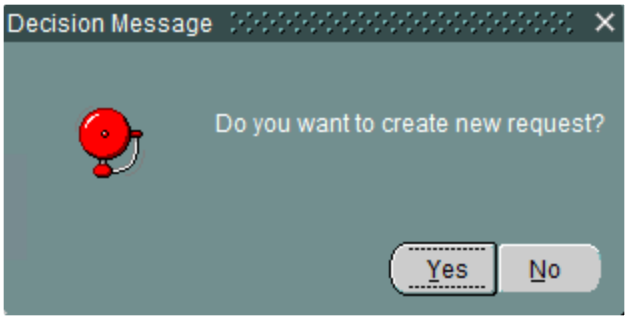


Click **Yes** to generate a new request ID, or **No** to return to the field for entry or selection of an existing request ID.

### Hospital

Entry is required. Enter the ID of the requesting hospital or select from the LOV.

> **NOTE –** A new hospital cannot be entered in this screen.

### Contact

Entry is optional. Enter the hospital contact. A displayed entry can be modified.

### Ph

Entry is optional. Enter the hospital phone number. A displayed entry can be modified.

### Intl Ph
Entry is optional. Enter the hospital international phone number. A displayed entry can be modified.

### Physician
Entry is optional. Enter the physician's name or select from the LOV. A displayed entry can be modified or a new physician can be selected.

### Diagnosis
Entry is optional. Use free-form entry format to enter the diagnosis. A maximum of 250 characters is allowed.

You have the option of specifying a specific product type, attribute group, and attribute code for the product.

### Prod Type
Enter the product type required or select from the LOV. If performing an inventory search, the product type must be entered.

### Group
Enter a valid attribute group code or select from the LOV.

### Attribute
Enter a valid attribute code or select from the LOV.

### Priority
Select a valid priority code for the request from the drop-down list.

### Request Date
This field defaults to the system date and time. You may modify the displayed date and time in MMDDYY HHMI (24-hour clock) format.

### Target Date/Units
Enter the target date that the product is to be shipped, using the MMDDYY format. Default is the next date. To enter multiple dates, place a date in each column. For each date entered, enter the number of products that are required on that date. Only whole numbers are accepted.

## The Save Request Button
Click **Save Request** to save the search criteria you have entered. The following window appears:


WellSky Corporation
Proprietary and confidential

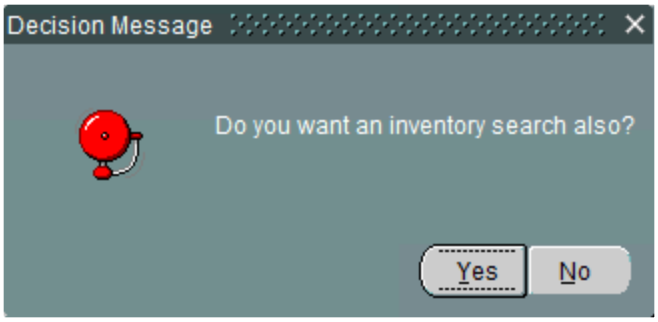


Click **Yes** to do an inventory search or click **No** to just search the donor database. A pop-up confirms the commitment to the database.

## The Submit Search Button

After saving the request criteria, click **Submit Search** to submit the search. A window requests confirmation:

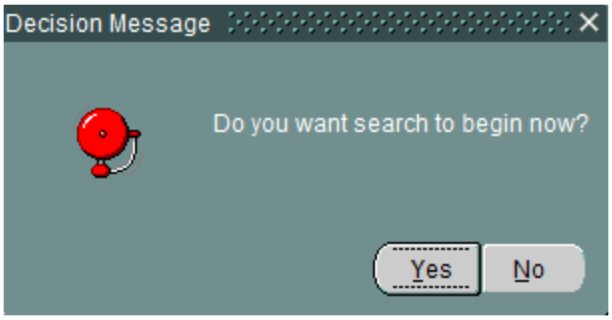


Click **Yes** to submit the search or **No** to not submit the search. A window confirms the search request:

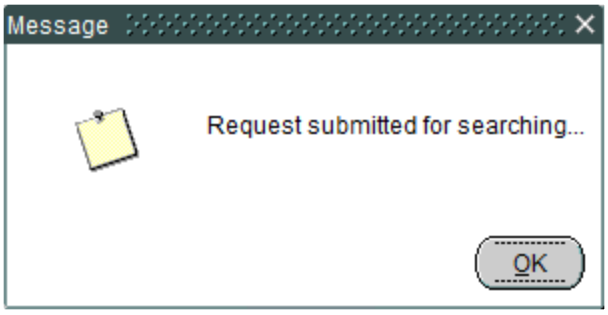


Click **OK**.

## The Query Request Button

Click **Query Request** to directly access the HLA/RBC Request Query (REQUESTQ) screen. See that portion of this chapter for a detailed description of the query screen.

## At Commit

The search is made and results of the search are committed to the database via the use of buttons at the bottom of the screen. To save modifications to search criteria without performing the search:

1. Retrieve existing search criteria.
2. Make modifications.
3. Click COMMIT to save the modifications to the database.

## What to Do Next

There is no next step.

# 9.2.2 Enter HLA Results (HLARESUL)

## Intended Use

Use this screen to enter HLA test results for a specified unit ID or donor.

## Limitations

This program does not compare current results on file for the donor against new results. The new results become the result of record for the donor.

## Prerequisites

The donor or unit ID must exist in the system.

## Accessing the Screen

Access this screen from the HLA/RBC General Functions menu or by entering the keyword `HLARESUL`.

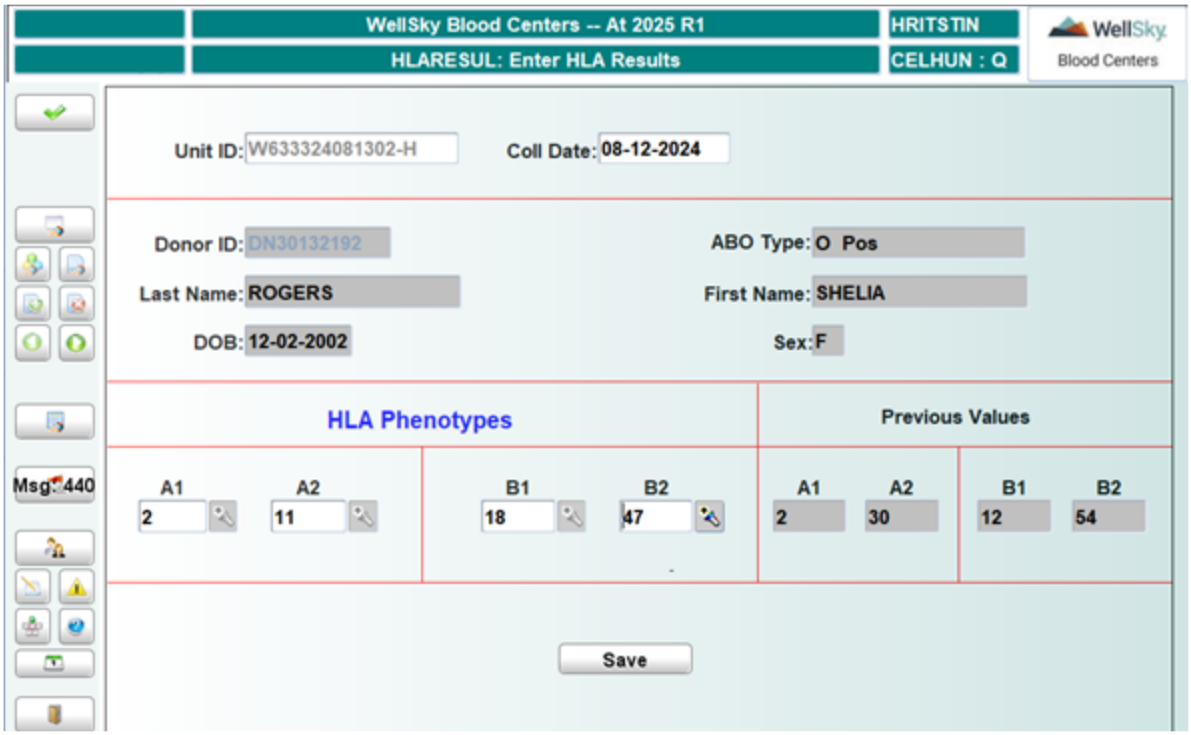



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unit ID

Entry is required to search by unit ID. Enter a valid unit ID, including the check digit. Press **ENTER** to perform a donor search.

## Coll Date

Field automatically populates with the collection date for the entered unit ID. If no unit ID was entered, press **ENTER** to perform a donor search.

Once the unit ID is entered, the screen populates with donor data for that unit.

If the unit ID is not available, press **ENTER** to retrieve the Search for Donor window. Enter appropriate data to retrieve the donor record. See Chapter 14 Called Windows and Routines for instructions on using this screen.

# Entering HLA Phenotypes

## A1

Entry is required. Enter a valid value or select from the LOV. Whether entered or selected from the LOV, the value must be re-entered for confirmation. Entries that do not match will prompt an error message.

## A2

Entry is optional. Enter a valid value or select from the LOV. Whether entered or selected from the LOV, the value must be re-entered for confirmation. Entries that do not match will prompt an error message, as will an invalid entry in consideration of the A1 value entered.

## B1

Entry is required. Enter a valid value or select from the LOV. Whether entered or selected from the LOV, the value must be re-entered for confirmation. Entries that do not match will prompt an error message.

## B2

Entry is optional. Enter a valid value or select from the LOV. Whether entered or selected from the LOV, the value must be re-entered for confirmation. Entries that do not match will prompt an error message, as will an invalid entry in consideration of the B1 value entered.

# The Save Button

Once HLA values are entered, click **Save** button to commit the transaction to the database.

# At Commit

HLA values entered in this screen are committed to the database, and the screen clears.

# What to Do Next

There is no next step.

# 9.2.3 HLA/RBC Request Query (REQUESTQ)

## Intended Use

Use this screen to:

- View query criteria for an HLA/RBC donor search
- View donor matches returned from the search
- View unit ID matches in inventory
- Include some or all of those matches on a call list that can be generated from this screen

## Limitations

- Product type RBC is hard coded to check for units that have expiration date of 42 days or less. Search will not find frozen red cells
- Product type PLT is hard coded to look for expiration date of 5 days or less.

## Prerequisites

A search must have been conducted using the Enter HLA/RBC Request (REQUEST) screen.

## Accessing the Screen

Access this screen from the HLA/RBC General Functions menu or by entering the keyword `REQUESTQ`.


WellSky Corporation
Proprietary and confidential

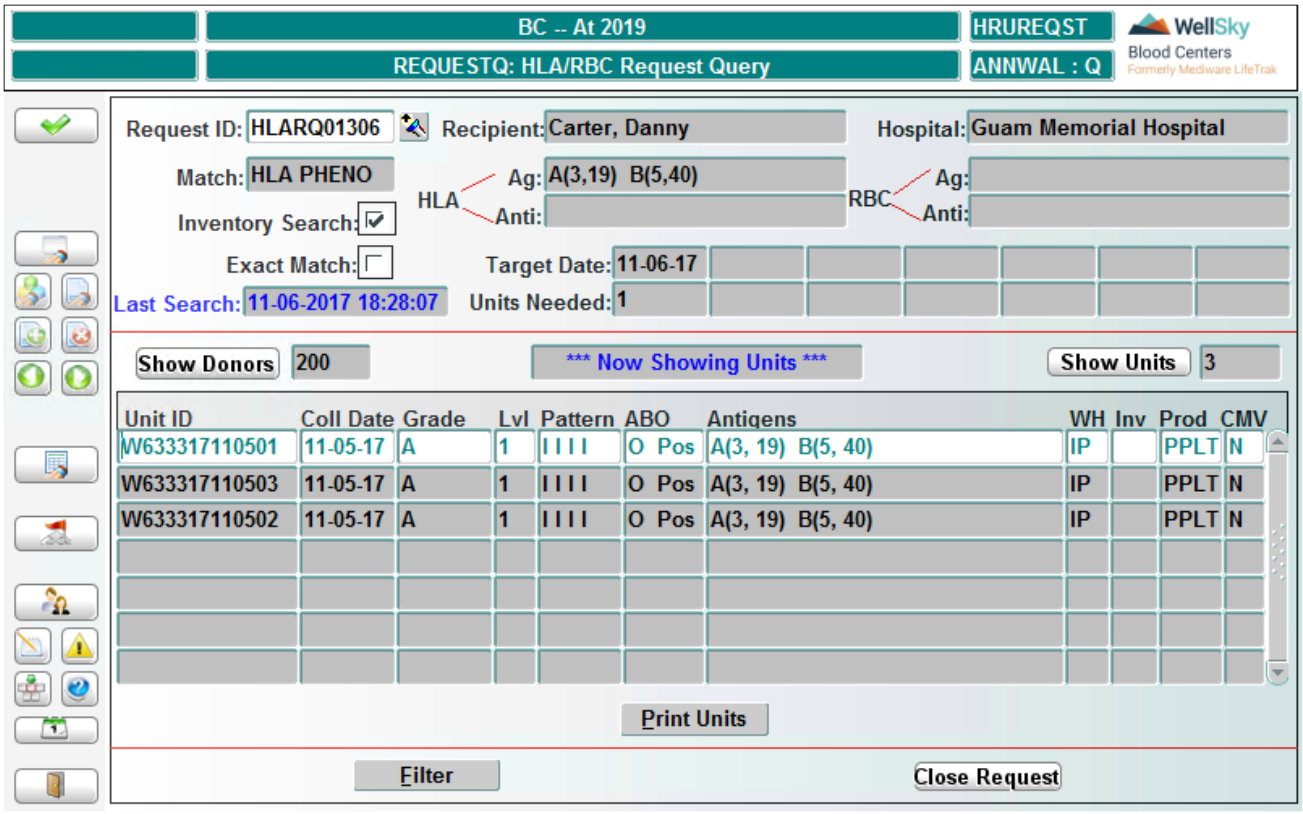


# Control Block Fields and Definitions

## Request ID

Entry is required. Enter a valid request ID or select from the LOV. Press the **ENTER** key.

The name of the recipient, search criteria for the specified request ID, and qualifying units in inventory, if any, display. Qualifying units display only when an inventory search is requested.

# Displaying Units and Donors

The screen initially displays qualifying units that are in inventory when an inventory search is requested. Click **Show Donors** to display matching donors. Click **Show Units** to display units in inventory.

> **NOTE –** The active display is identified in blue text at all times for convenient reference.

The total number of matching donors found displays to the right of the Show Donors button, and the total number of qualifying units in inventory will display to the right of the Show Units button.

# The Units Display

Each qualifying unit in inventory displays along with the following data:

- Unit ID
- Collection date
- Matching Grade: This is an industry-standard grading reference
- System-Assigned Match Level: This is a configurable grading function designed to assist with a recommended selection
- Donor-to-Recipient Antigen Match Pattern
- Blood type
- Phenotype (Antigens)
- Inventory warehouse
- Inventory class
- Product type
- CMV status

Click **Print Units** to print a report of displayed units in inventory.

## The Donors Display

Click **Show Donors** to replace the units display with a display of matching donors retrieved by the search.

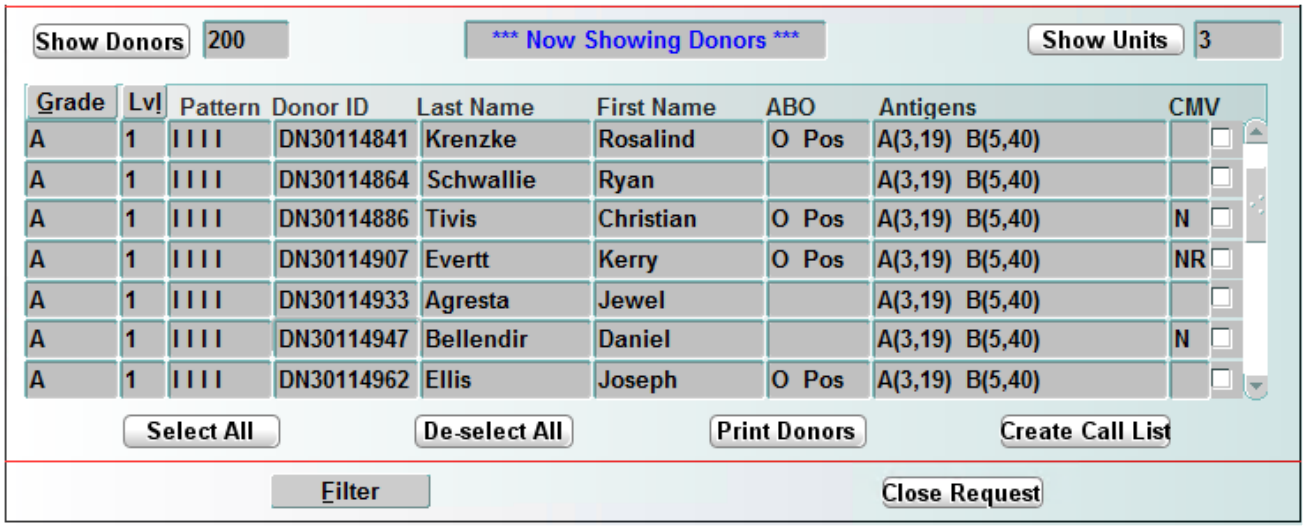


## Qualifying Donor Records Display

- Matching Grade: This is an industry-standard grading reference. Click on the column header to sort all displayed donors by matching grade. Click the header again to reverse the sort order.
- System-Assigned Match Level: This is a configurable grading function designed to assist with a recommended selection. Click the column header to sort all displayed donors by match level. Click the header again to reverse the sort order.
- Donor-to-Recipient Antigen Match Pattern

- Donor ID
- Last name
- First name
- Blood type
- Phenotype (Antigens)
- CMV status

## Filtering Displayed Donors and Units

Displayed donors and units may be filtered by matching grade. Click **Filter** to define the filter.

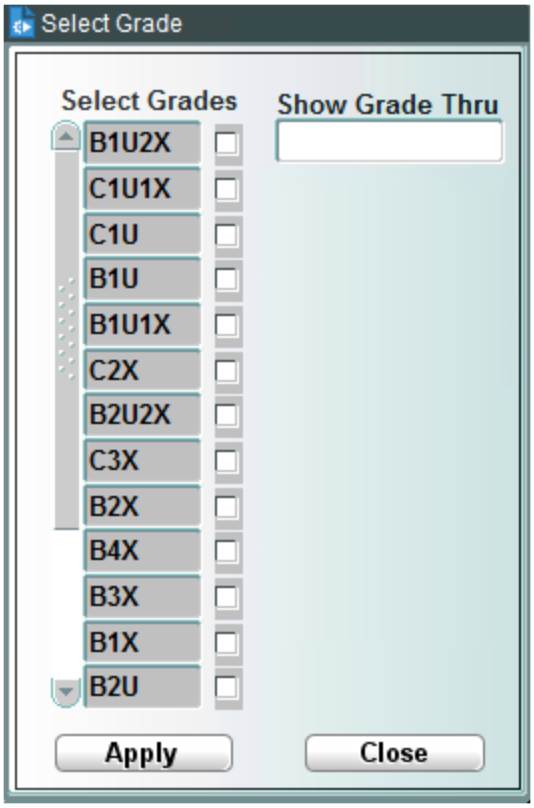


You may select individual matching grades by clicking on the check boxes to the right of each matching grade listed.

Use the scroll bar to view matching grades not visible in the window.

As an alternative to selecting individual matching grades, you may identify a Show Grade Thru filter by clicking in that field and entering the lowest grade to be displayed.

Once the filter is defined, click **Apply** to apply the filter and modify the display of units and donors.

Click **Close** to close the filter window without applying a filter. The displays remains unchanged.

## Creating a Call List and Printing the Donor List

Click **Select All** to select all displayed donor records. As an alternative to selecting all records, one or more records can be manually selected by highlighting the desired record and clicking on the check box in the rightmost column.

Click **De-select All** to deselect all selected donor records.

Click **Print Donors** to print the list of selected matching donors.

Click **Create Call List** to submit and generate the call list for all selected donor records. A pop-up opens for list generation:

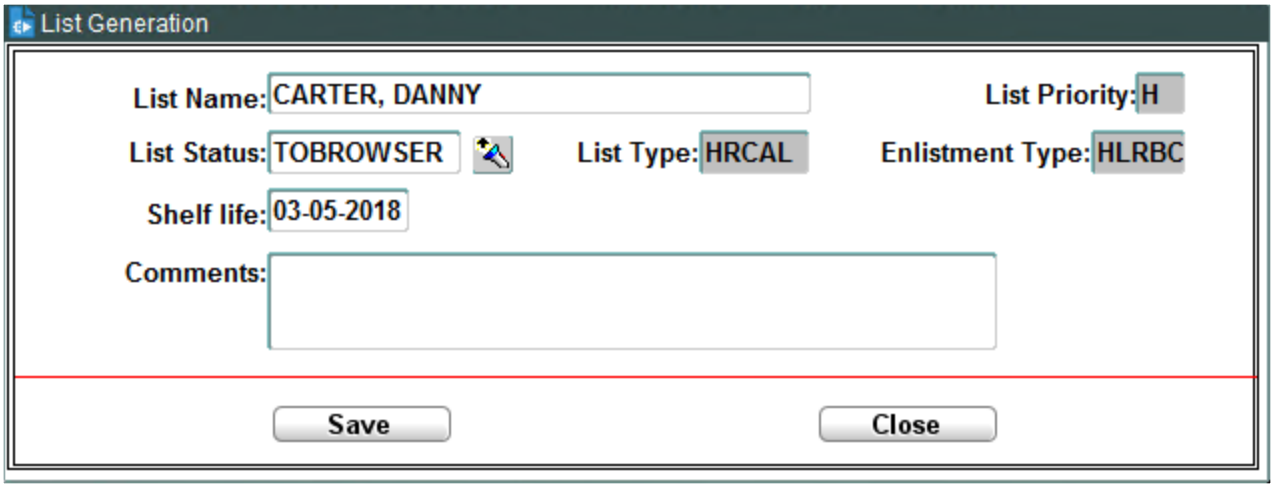


The list name, list priority, list status, list type, enlistment type, and shelf life automatically populate. Entering comments is optional, this field allows a maximum of 250 characters.

Click **Close** to return to the main query screen. Click **Save** to send the call list to the list browser. A pop-up confirms the call list is committed to the database:

## Closing the Request

Click **Close Request** to terminate the displayed request ID. Once terminated (or closed), the request ID will not be available for future searches.

A pop-up will ask you to confirm that the request is to be closed:

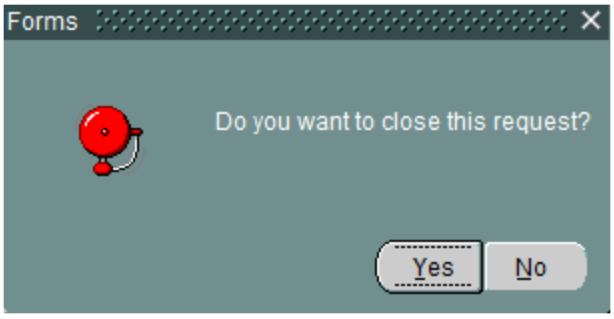


Click **Yes** to close the request ID or **No** to retain the request for future use. The transaction is immediately committed to the database when you click Yes.


WellSky Corporation
Proprietary and confidential

### At Commit

The screen clears and another request ID may be retrieved.

### What to Do Next

A call list generated in this screen is immediately available for action by telerecruitment personnel.

## 9.2.4 Donor Antigens Query (ANTQ)

### Intended Use

Use this screen to query a donor's RBC and HLA antigen test results.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the HLA/RBC General Functions menu or by entering the keyword `ANTQ`.

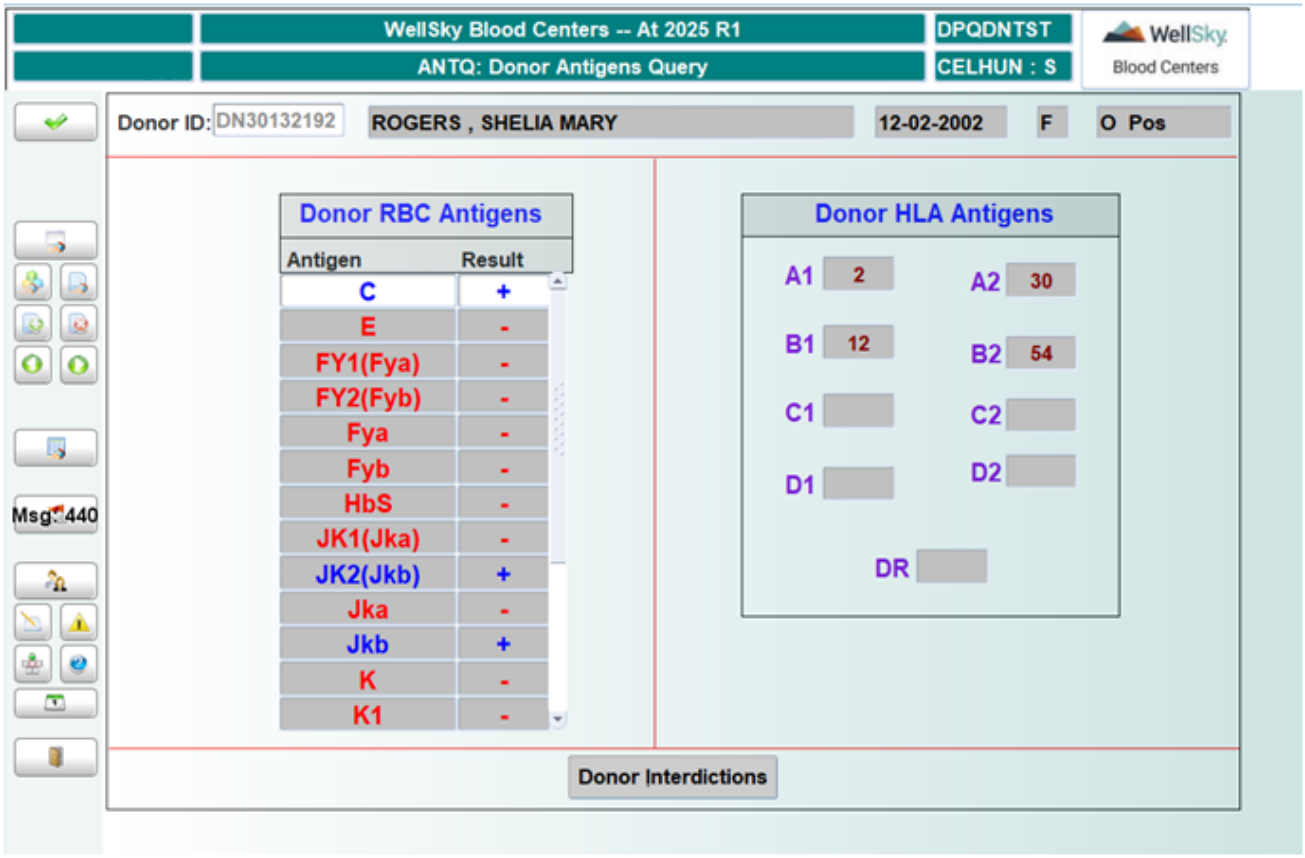


This screen appears with the Search for Donor window open on top. Before viewing a donor's antigens, the user must first search for the donor in the donor database. See Chapter 14 Called Windows and Routines for directions on using this screen.

If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click on the desired donor. Click **Select** to go to the Donor Antigens Query screen. The donor data from the selected donor in the Search for Donor window automatically displays.

## In the Donor Data Block

The following information displays:

- Donor ID
- Name
- Date of birth
- Sex
- ABO type

## In the RBC Antigens Block

The following information displays, if it exists in the database:

- All RBC phenotyping known to date on the donor
- Positive results are displayed in blue
- Negative results are displayed in red

## In the HLA Antigens Block

The following information displays, if it exists in the database:

- All HLA phenotyping known to date on the donor.

## The Donor Interdictions Button

Click **Donor Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor.

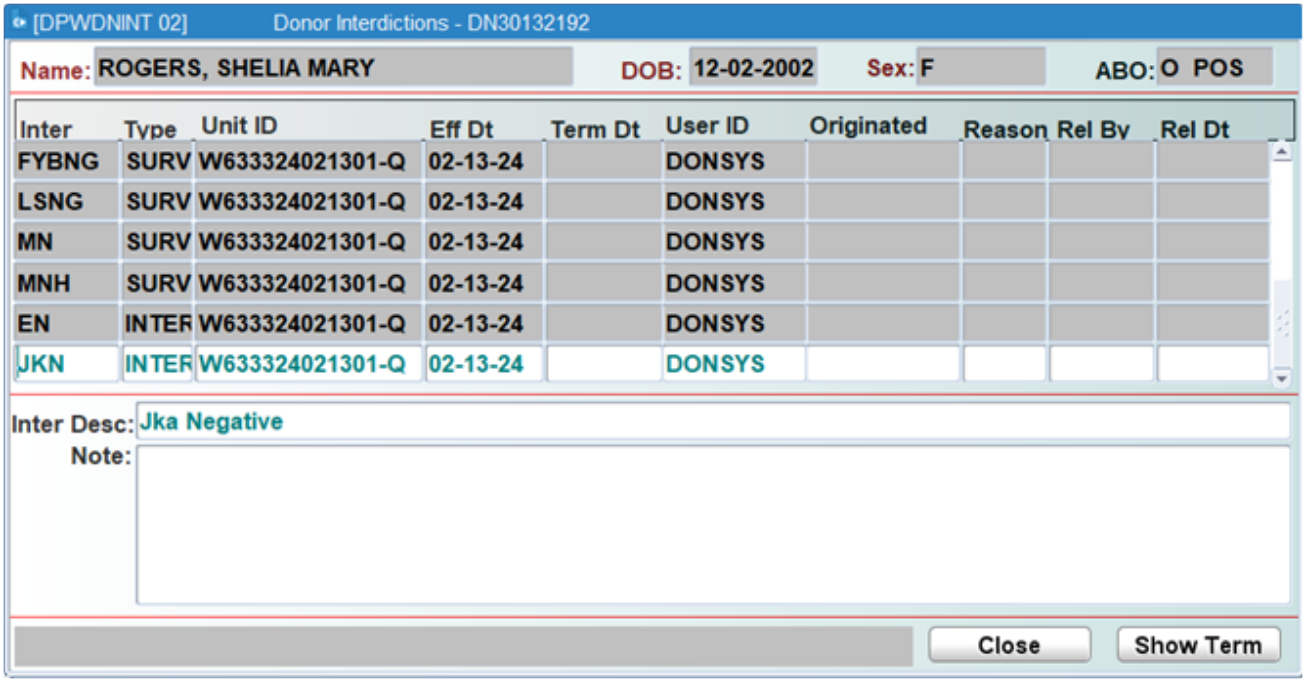


A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 9.3 HLA/RBC Maintenance Functions

Access the HLA/RBC Maintenance Functions using the following menu.

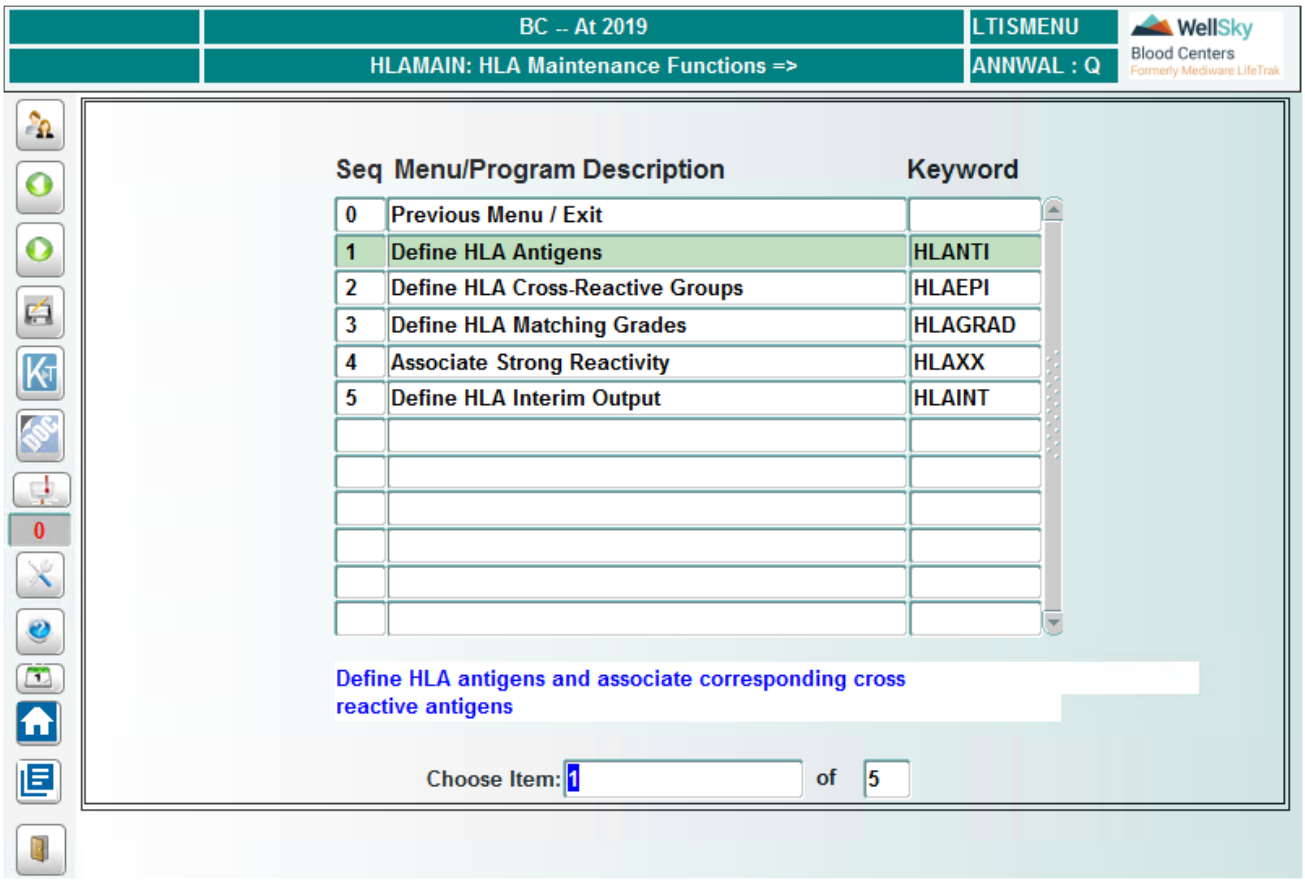


## 9.3.1 Define HLA Antigens (HLANTI)

### Intended Use

Use this screen to define valid HLA antigens by locus.

### Limitations

None

### Prerequisites

HLA Loci must be defined in Master Code LOCUS.

### Accessing the Screen

Access this screen from the HLA Maintenance Functions menu or by entering the keyword `HLANTI`.


WellSky Corporation
Proprietary and confidential

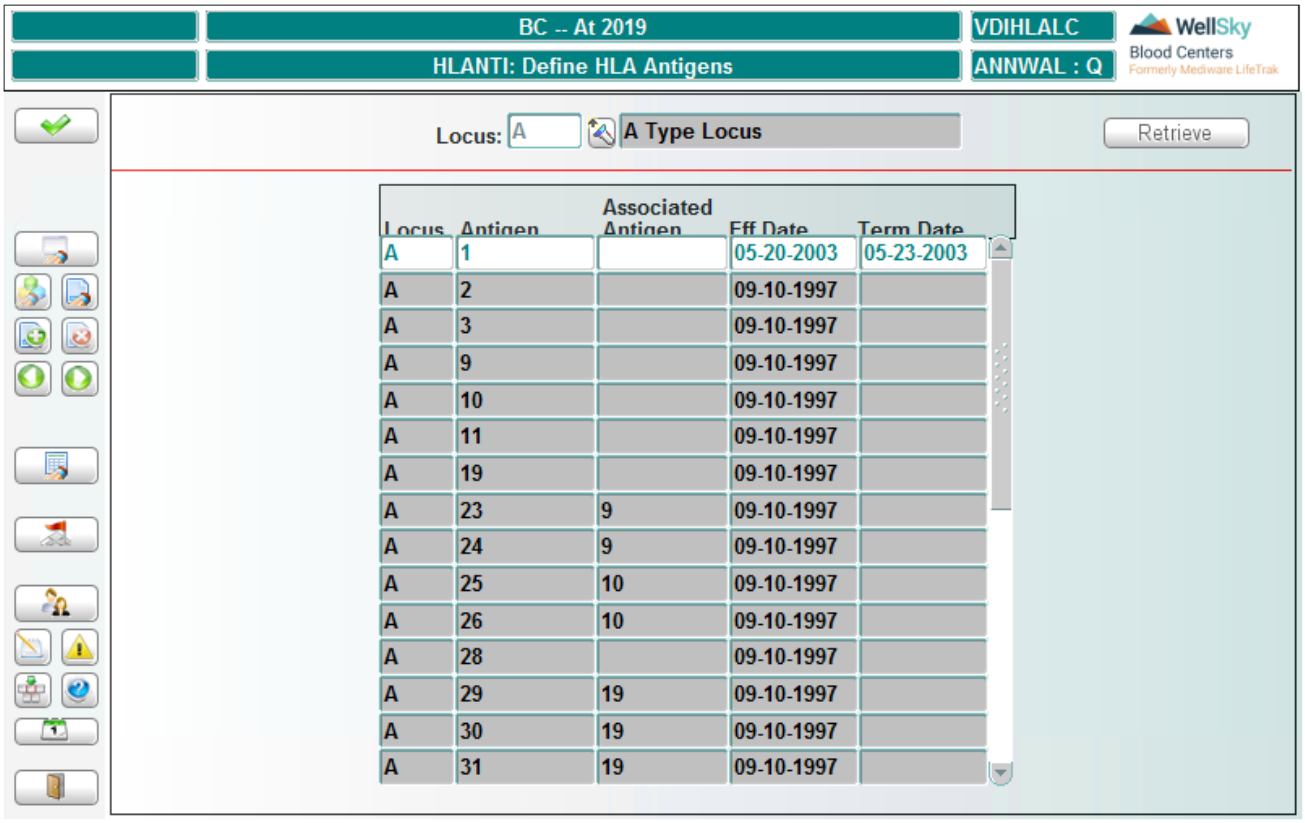


# Control Block Fields and Definitions

## Locus

Entry is optional. Enter a valid locus or select from the LOV. Once the locus identifier is entered, the locus description automatically displays. Leave field empty to query all loci.

Click **Retrieve** to display all antigens identified in the database as being within that locus.

# Entering a New Antigen

Use the **UP** and **DOWN** arrow keys on the keyboard to navigate to the desired location and click **INSERT** on the tool bar. A blank record will be inserted at the highlighted position.

Enter the following data:

## Locus

Entry is required. Enter Locus type or select from the LOV.

## Antigen

Entry is required. Enter a numerical antigen identifier. Only a whole number is acceptable.

## Associated Antigen

Entry is required. Enter the numerical antigen identifier for the associated antigen.

### Eff Date

Entry is required. Enter the effective date of the newly-defined antigen, using the MMDDYYYY format. The effective date cannot be earlier than the system date.

### Term Date

Entry is optional. Enter the termination date in MMDDYYYY format. The termination date must be equal to or later than both the system date and the effective date entered.

Add multiple records by repeating the above process. All entries can be saved at once by clicking COMMIT .

## At Commit

All defined antigens are saved to the database and will be available for use on and after the effective date entered. The screen remains populated. Click CLEAR FORM or EXIT FORM to clear or exit the screen.

## What to Do Next

There is no next step.

# 9.3.2 Define HLA Cross Reactive Groups (HLAEPI)

## Intended Use

Use this screen to enter valid HLA epitopes into the Donor system.

## Limitations

None

## Prerequisites

Public epitopes must be defined in Master Code PBLEP. References must be defined in Master Code HLSTD. HLA Loci must be defined in Master Code LOCUS. HLA antigens must be defined in the Define HLA Antigens (HLANTI) screen.

## Accessing the Screen

Access this screen from the HLA Maintenance Functions menu or by entering the keyword `HLAEPI`.


WellSky Corporation
Proprietary and confidential

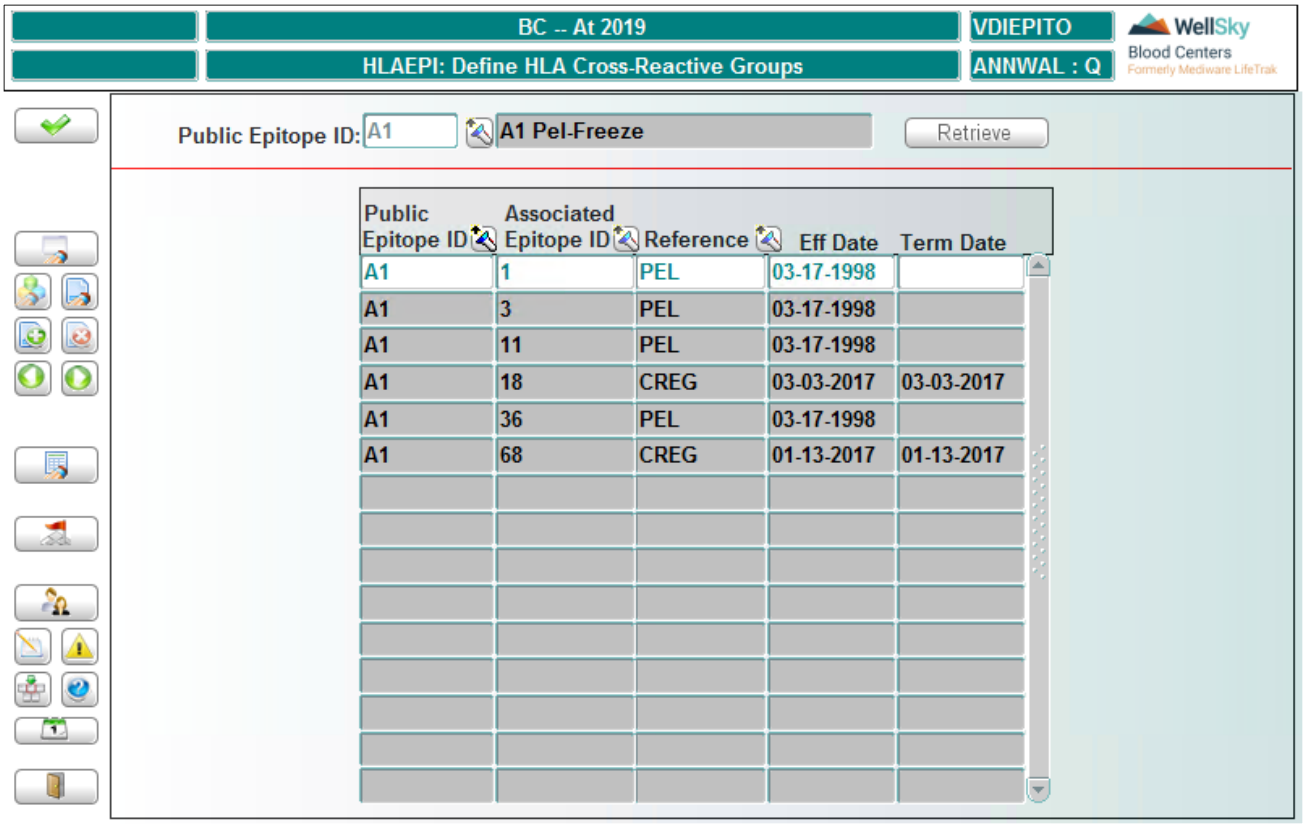


# Control Block Fields and Definitions

## Public Epitope ID

Entry is optional. Enter a valid epitope ID or select from the LOV. Once a valid ID is entered, the epitope description automatically displays.

Click **Retrieve** to display cross-reactive groups for the specified public epitope.

# Modifying Existing Cross Reactive Groups

You may modify any displayed record by highlighting the displayed record and clicking in the column to be modified for that record.

# Adding New Cross-Reactive Groups

Use the **UP** and **DOWN** arrow keys on the keyboard or click with the mouse to highlight the first blank record row.

Enter the following:

## Public Epitope ID

Entry is required. Enter a valid epitope ID or select from the LOV.

### Associated Epitope ID

Entry is required. Enter the epitope ID to be associated as cross reactive with the specified public epitope ID.

### Reference

Entry is required. Enter a valid reference code or select from the LOV.

### Eff Date

Entry is required. Enter an effective date for the new record, using the MMDDYYYY format. The effective date must be equal to or later than the current date.

### Term Date

Entry is optional. Enter a termination date for the new record, using the MMDDYYYY format. The termination date must be equal to or later than both the effective date and the current date.

## Committing the Transaction

Click **COMMIT** on the tool bar to commit the transaction to the database. All modifications and additions are committed at once. An advisory message confirms that the transaction is committed. The screen remains populated.

## What to Do Next

There is no next step.

# 9.3.3 Define HLA Matching Grades (HLAGRAD)

## Intended Use

Use this screen to enter universal HLA matching grades into Donor.

## Limitations

None

## Prerequisites

Define HLA Output (HLAINT) must be set-up prior to populating this screen.

Master codes must be defined:

- HLAGR – grade LOV
- HLAC – comparison codes LOV

## Accessing the Screen

Access this screen from the HLA Maintenance Functions menu or by entering the keyword `HLAGRAD`.


WellSky Corporation
Proprietary and confidential

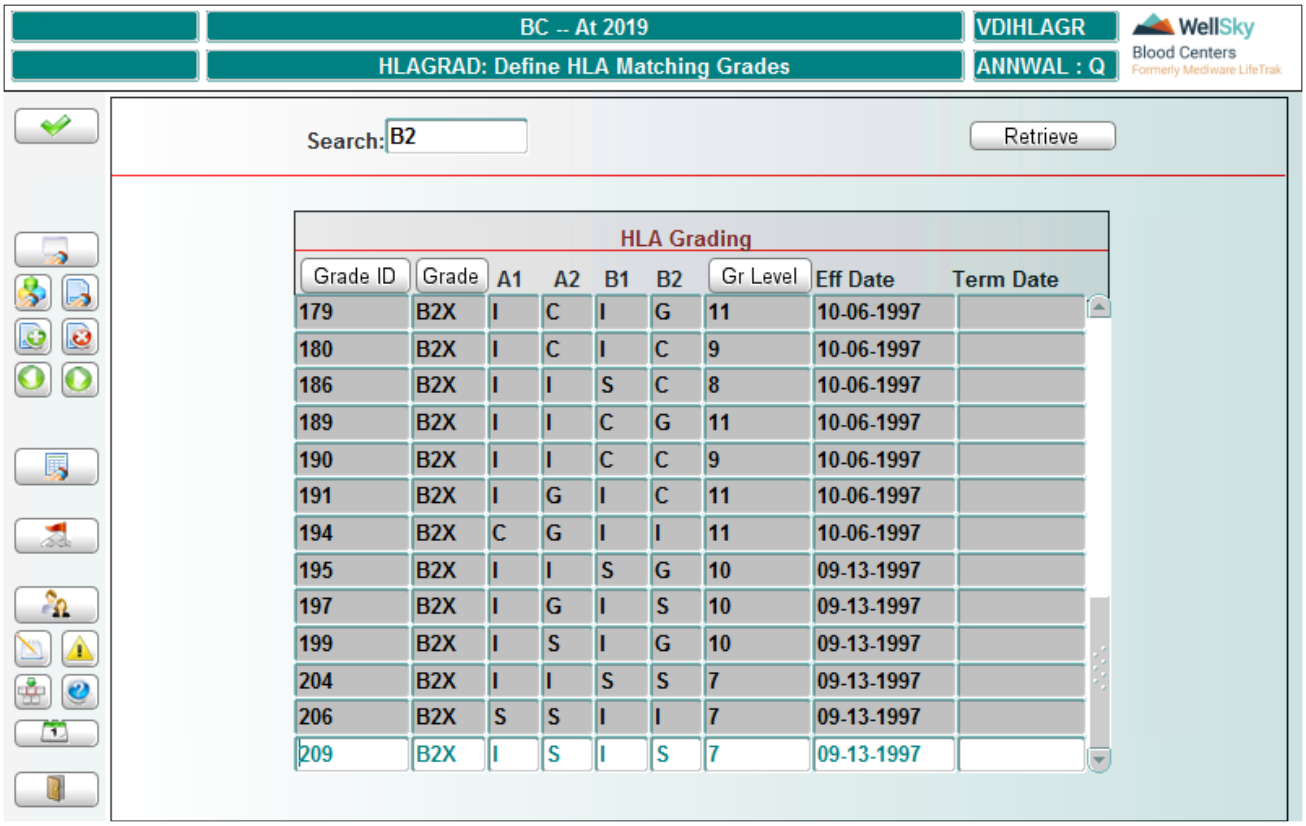


# Control Block Fields and Definitions

## Search

Entry is optional. Enter the desired grade.

Click **Retrieve** to display all existing records that match the specified grade.

**NOTE –** If no search criterion is entered, all matching grades are displayed when the Retrieve button is clicked.

# Sorting Displayed Data

Displayed records can be sorted by the following three columns:

- Grade ID
- Grade
- Gr Level (Grade Level)

Click the column header to sort the display by data in that column. Click the same column header again to reverse the sort order (ascending or descending).

## Modify Existing Grades

Data for one or more displayed grade IDs may be modified by highlighting the desired record, clicking in the column to be modified for that record, deleting existing data, and entering new data. Multiple records may be modified and all modifications committed to the database at once.

## Enter New Matching Grades

Use the **UP** and **DOWN** arrows on the keyboard or click with the mouse to highlight the first blank record row.

### Grade ID

Entry is required. Enter the new Grade ID. The default is the next sequential number.

### Grade

Entry is required. Enter the grade or select from LOV. ( LOV populated from Master Code HLAGR.)

### A1

Entry is required. Enter one of the following or select from LOV: (LOV is populated from Master Code HLAC).

- C – Cross-reactive
- G – Group reactive
- U – Unknown
- D – Different
- S – Strong cross-reactive
- I – Identical

### A2

Entry is required. Follow the same procedure as described for the *A1* field.

### B1

Entry is required. Follow the same procedure as described for the *A1* field.

### B2

Entry is required. Follow the same procedure as described for the *A1* field.

### Gr Level

Entry is required. Enter the grade level. The grade level is used to determine the display order of the retrieved matches.

### Eff Date

Entry is required. Enter an effective date for the new record using MMDDYYYY format. The effective date must be equal to or later than the current date. The default is the system date.


WellSky Corporation
Proprietary and confidential

### Term Date

Entry is optional. Enter a termination date for the new record, using MMDDYYYY format.

## Terminating Existing Matching Grades

Use the **UP** and **DOWN** arrows on the keyboard or click with the mouse to highlight the desired record. Enter a termination date in the Term Date column for that record, using the MMDDYYYY format. The termination date must be equal to or later than both the effective date and the current date.

## Committing the Transaction

Click **COMMIT** on the tool bar to commit the transaction to the database. All entries and modifications can be committed to the database at once. An advisory message confirms that the transaction is committed, and the screen remains populated.

## What to Do Next

There is no next step.

# 9.3.4 Associate Strong Reactivity (HLAXX)

## Intended Use

Use this screen to associate reactivity of HLA antigens.

## Limitations

None

## Prerequisites

Antigens must be defined in the Define HLA Antigens (HLANTI) screen.

## Accessing the Screen

Access this screen from the HLA Maintenance Functions menu or by entering the keyword `HLAXX`.

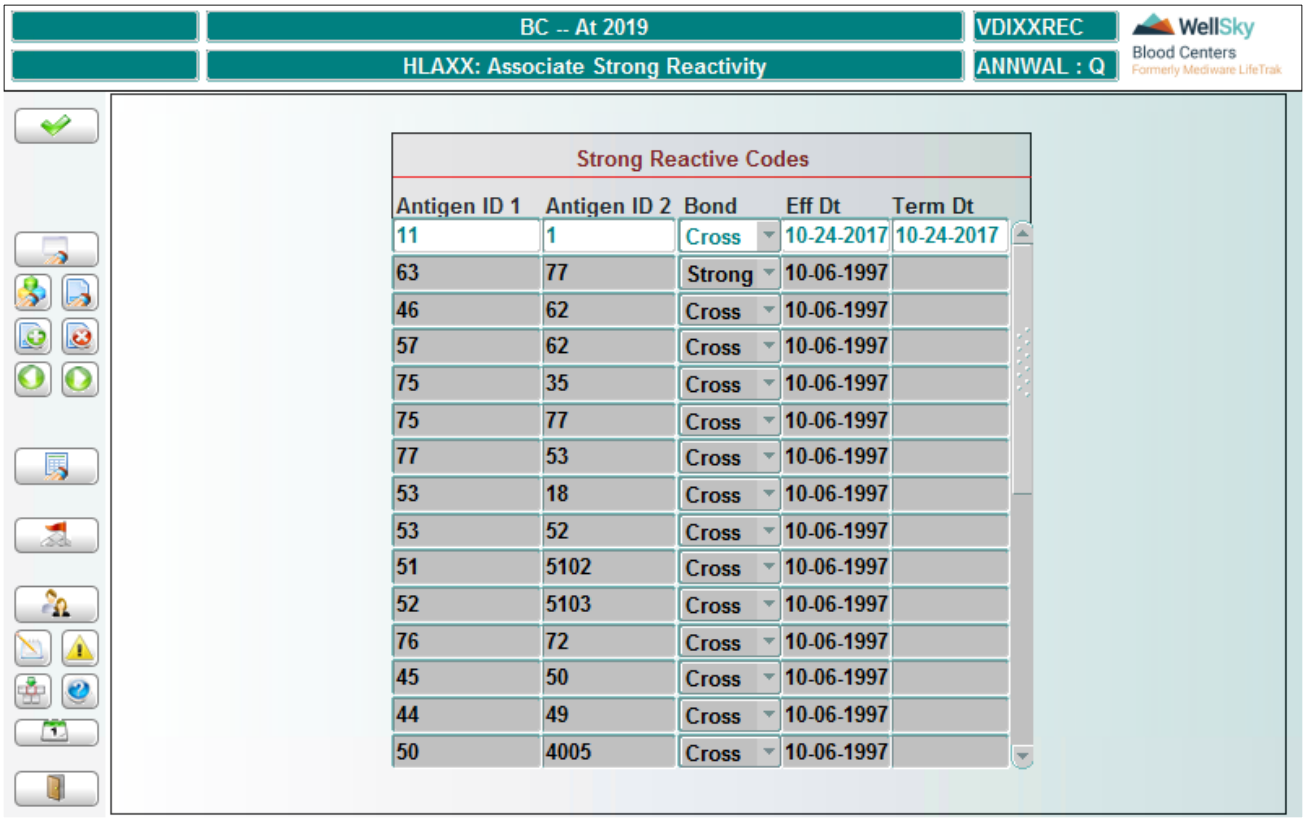


## Viewing Existing Strong Reactivity Codes

Use the **UP** and **DOWN** arrow keys on the keyboard, click with the mouse, or use the vertical scroll bar to view existing codes.

## Entering a New Strong Reactivity Code

Navigate to the last existing record and click the down arrow key on the keyboard. A blank record appears, and the cursor rests in the Antigen ID 1 column.

Enter the following data:

### Antigen ID 1

Entry is required. Enter a valid antigen code.

### Antigen ID 2

Entry is required. Enter a valid antigen code.

### Bond

Entry is required. Select a bond definition (**Strong** or **Cross**) from the drop-down list available in this column.


WellSky Corporation
Proprietary and confidential

### Eff Dt

Entry is required. Enter the effective date using the MMDDYYYY format. The effective date must be equal to or later than the current date. The default is the system date.

### Term Dt

Entry is optional. Enter a termination date, if applicable in MMDDYYYY format. Termination date must be equal to or later than both the current date and the effective date.

## Committing the Transaction

Click COMMIT on the tool bar to commit the transaction to the database. An advisory message confirms that the transaction is committed. The screen remains populated.

## What to Do Next

There is no next step.

# 9.3.5 Define HLA Interim Output (HLAINT)

## Intended Use

Use this screen to enter HLA interim output of HLA matches.

## Limitations

None

## Prerequisites

The following screens must be processed first:

- Associate Strong Reactivity (HLAXX)
- Define HLA Cross-Reactive Groups (HLAEPI)
- Define HLA Antigens (HLANTI)

## Accessing the Screen

Access this screen from the HLA Maintenance Functions menu or by entering the keyword `HLAINT`.

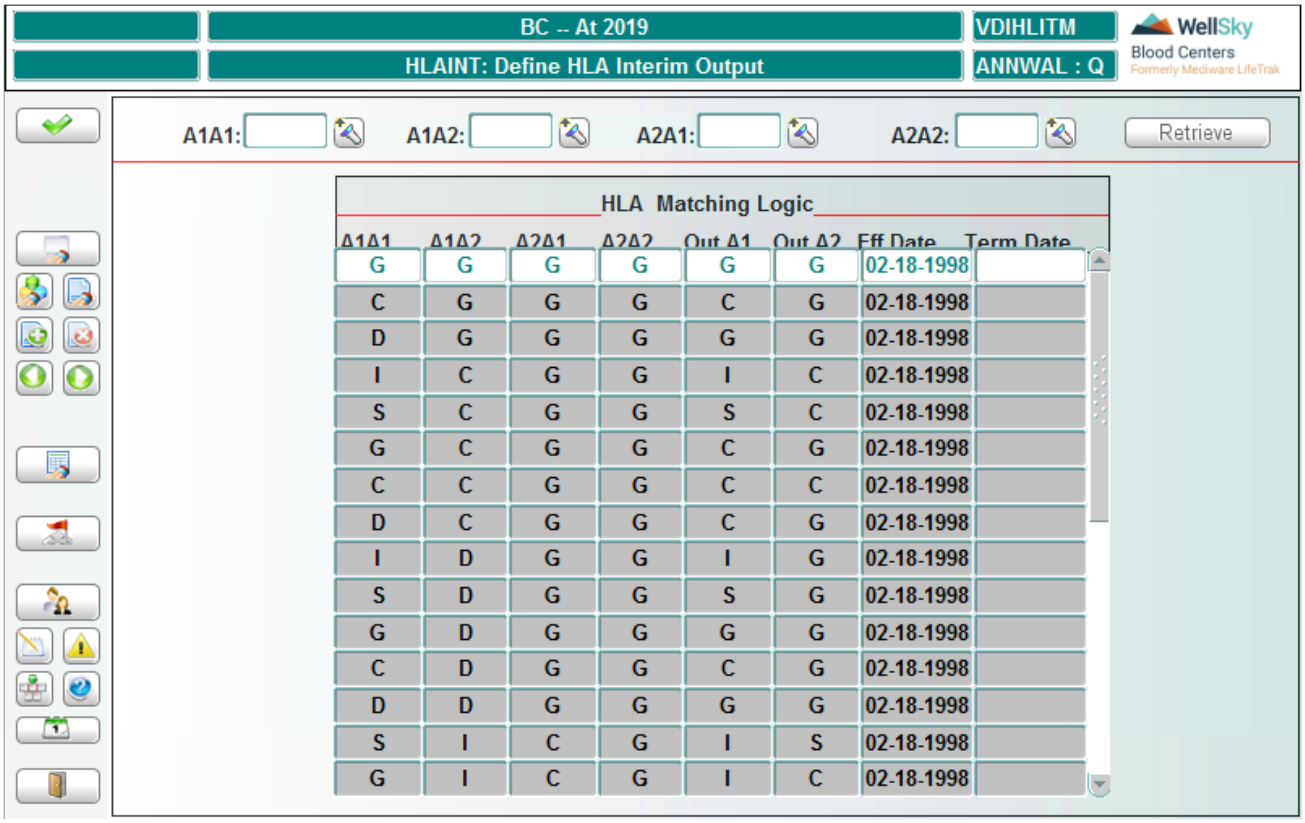


## Control Block Fields and Definitions

In this screen, you may either retrieve all interim output combinations or specify one or more combinations for retrieving matching records.

To retrieve all combinations, click **Retrieve** without entering any match criteria.

To retrieve records that match a given value, enter that value as described below and click **Retrieve**.

### A1A1

Entry is optional. Enter a valid match code or select from the LOV.

- C – Cross-reactive
- G – Group reactive
- U – Unknown
- D – Different
- S – Strong cross-reactive
- I – Identical

### A1A2

Entry is optional. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.


WellSky Corporation
Proprietary and confidential

### A2A1
Entry is optional. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.

### A2A2
Entry is optional. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.

## Entering New Records

Use the **UP** and **DOWN** arrow keys on the keyboard or click with the mouse to highlight the first blank record. Enter the following data to define the combination:

### A1A1
Entry is required. Enter a valid match code or select from the LOV.

- `C` – Cross-reactive
- `G` – Group reactive
- `U` – Unknown
- `D` – Different
- `S` – Strong cross-reactive
- `I` – Identical

### A1A2
Entry is required. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.

### A2A1
Entry is required. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.

### A2A2
Entry is required. Enter a valid match code or select from the LOV. Refer to the *A1A1* field description for a list of valid match codes.

### OutA1
Entry is required. Enter the outcome of the A1A1-A1A2 results.

### OutA2
Entry is required. Enter the outcome of the A2A1-A2A2 results.

### Eff Date
Entry is required. Enter the effective date in MMDDYYYY format.

### Term Date

Entry is optional. Enter the termination date in MMDDYYYY format.

## Modify an Existing Combination

Use the **UP** and **DOWN** arrow keys on the keyboard or click with the mouse to highlight the desired record. Click on data to be modified and replace existing data.

## Terminating Displayed Combinations

Enter a termination date in the Term Date column for the desired record. The termination date must be equal to or later than both the effective date and the current date. Use the MMDDYYYY format.

## Committing the Transaction

Click **COMMIT** on the tool bar to commit the transaction to the database. All additions, terminations, and modifications can be committed to the database at once. An advisory message confirms that the transaction is committed, and the screen clears.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 9.4 RBC Antigen Manager

**Important!** RBC Antigen Manager is a separate purchase from WellSky Blood Centers. If you did not purchase RBC Antigen Manager, the screens will be present, but they will not function since the package and antigen manager schema is not present.

These functions are accessed from the following menu:

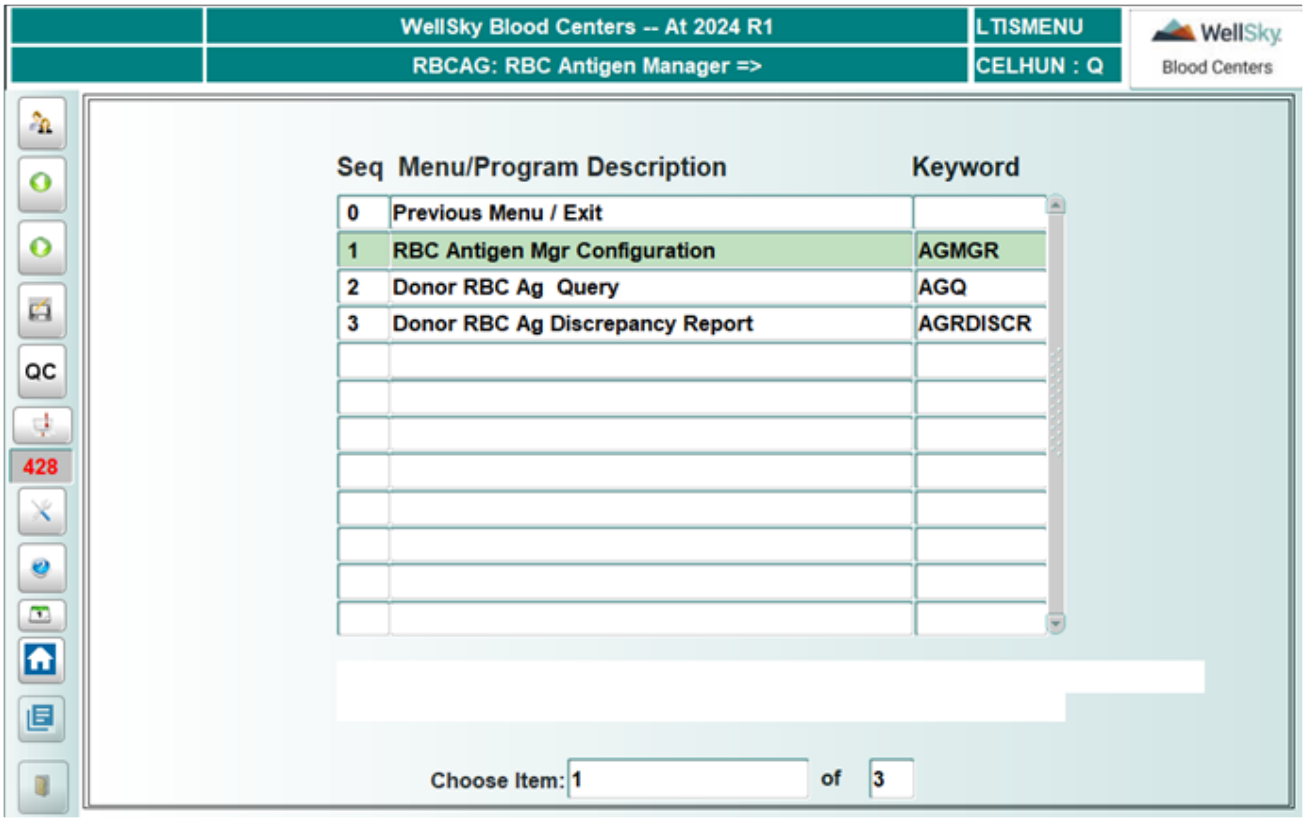


## 9.4.1 RBC Antigen Manager Configuration

### Intended Use

RBC Antigen Manager controls multiple processes. The antigen manager process is designed to determine if the antigen testing can be listed and maintained in the system as confirmed and not require further testing.

### Limitations

Test IDs need to be the same as what will be labeled on the 4x4 and Tie Tag labels in the Lab system.

## Prerequisites

- Tests have to be defined in Defined Tests (TESTS) in Donor.
- Test results need to be defined in Define Test Result (RESULT) in Donor.
- Donor Master codes need to be updated:
  - TSTGRP – should have MAG added for molecular antigens.
- Lab Master codes need to be updated:
  - TEGRP – should have MAG added for molecular antigens.
  - AGMGR – needs to have code ENBLE set to 'Y' to use the RBC Antigen Manager.
- User access must be defined in Define User Access (UACCESS):
  - AGXCL – access to exclude a test in confirmation of an antigen.
  - AGDNQ – access to the button for Donor RBC Antigen Query
  - AGGRP – access to the button for Define RBC Antigen Group
  - AGLOG – access to the button for WellSky Transfusion Status Log
  - AGRUL – access to the button for Define Ser/Mol Confirmatory Rule
  - AGEXF – access to the button for Define External File Mapping

## Accessing the Screen

Access this screen from the RBC Antigen Manager Configuration Function Menu using the keyword AGMGR.

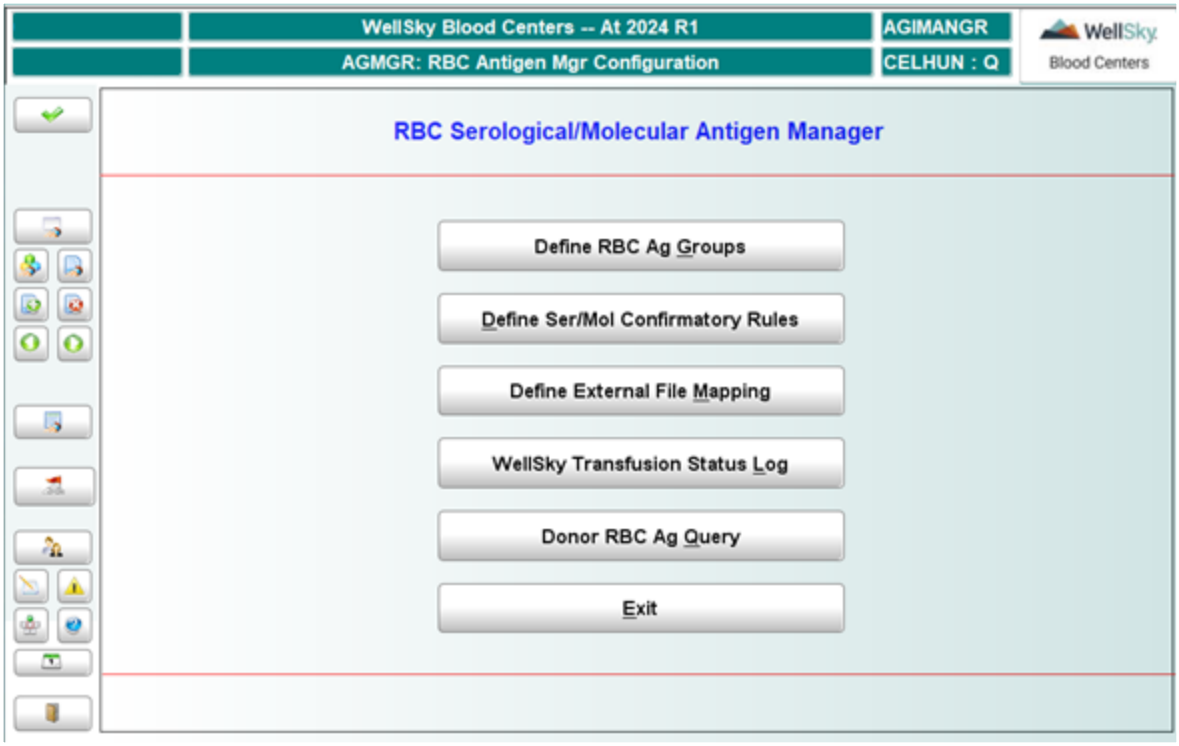


The main screen has six buttons on the form:

- Define RBC Ag Groups – this button is used to define what antigens belong to what antigen group.

> **EXAMPLE –** Kell antigen group and antigens K, k, Jsa, Jsb, Kpa, Kpb, and molecular antigens K1, K2, K3, K4, K5, and K6.

- Define Ser/Mol Confirmatory Rules – this button is used to configure the antigens based on licensed/unlicensed antisera, approved/unapproved testing method, number of times to be confirmed, and type of tests performed.
- Define External File Mapping – this is for external testing files to configure antigens and method of testing.
- WellSky Transfusion Status Log – this will display errors that occurred when transferring antigen results from WellSky Transfusion to Blood Centers.
- Donor RBC Ag Query– this is a query where the user can look at the donor's antigens and see in detail how the antigens were tested and whether or not they were confirmed.
- Exit – close the form.

# Define RBC Ag Groups

## Intended Use

The Define RBC Ag Groups screen is used to configure the antigens that are linked to a single group and the sequence to display.

## Limitations

An antigen within the same group cannot have the same sequence number.

## Prerequisites

- Tests have to be defined in Defined Tests (TESTS).
- User access needs to be defined in Define User Access (UACCESS) – user must have access to AGGRP to have access to the button in RBC Antigen Manager Configuration.

## Accessing the Screen

Access this screen by clicking Define RBC Ag Groups or using the hot key **`ALT + G`** from the RBC Antigen Manager Configuration screen to open the Define RBC Ag Groups screen.

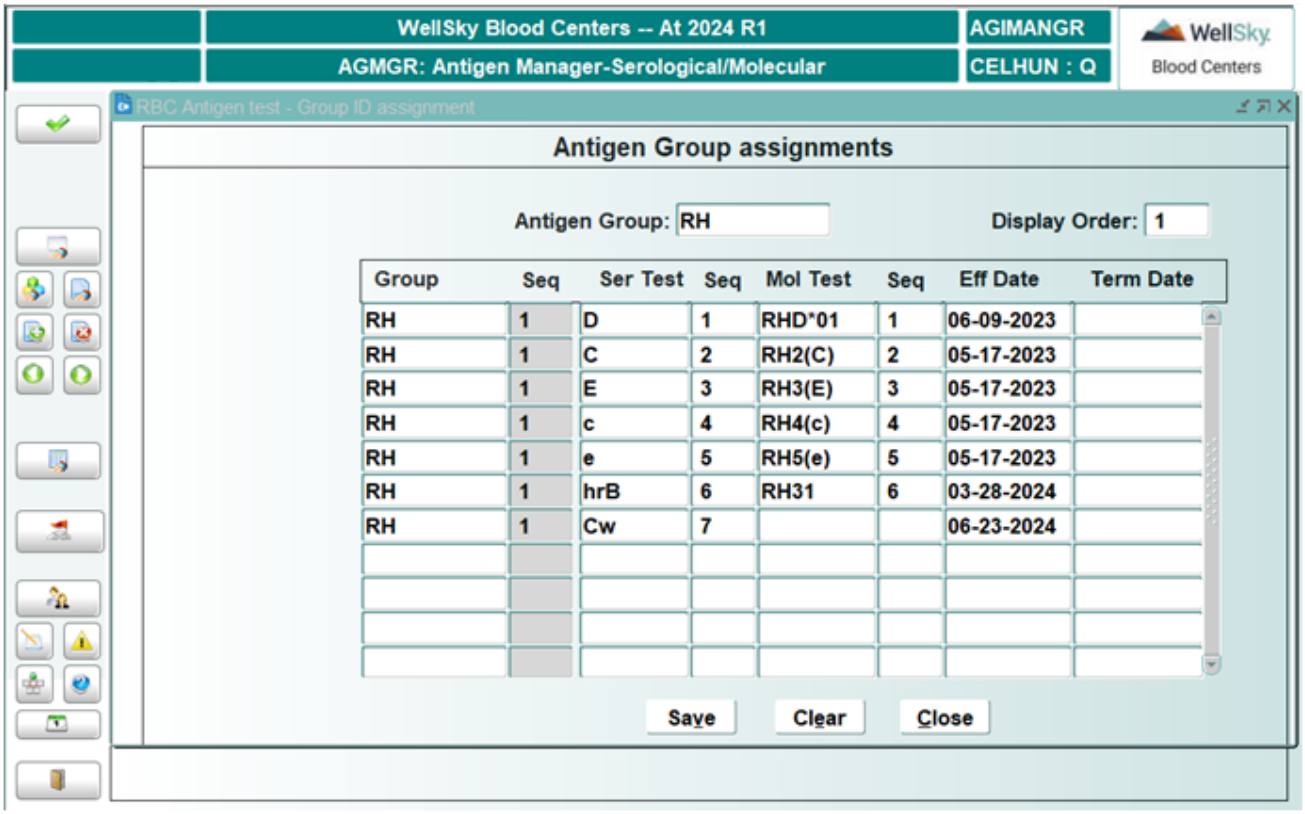


## Control Block Fields and Definitions

### Antigen Group

Enter the antigen group or select it from the list of values (LOV). The LOV is populated from the table defined in Maintain Antigen Groups under Antigen Manager. The antigen codes must be defined prior to entry in this screen.

**NOTE –** Entry is required in this field if defining the antigen group for the first time.

### Display Order

Manually enter the sequence number for the antigen group to display in labeling and the donor antigen query. The field will accept a double-digit entry. The same number cannot be used for multiple groups.

## Detail Block Fields and Definitions

### Group

Manually enter the antigen group that matches the Control Block. Entry is required in this field.

This field is required when defining antigens in the antigen group and will not be entered during query mode.

### Seq

This is a display field only and is populated based on the entry in the Control Block for display order.

Ser Test


WellSky Corporation
Proprietary and confidential

Manually enter or select from the LOV. Entry in this field is optional.

Only those antigens that are listed in Donor Define Tests (TESTS) with group of AG will display in the LOV.

## Seq

Manually enter the numerical order in which the serological antigen will appear in the labeling window and in the donor antigen query. This field will accept double digits.

**NOTE –** The same number cannot be used for multiple serological antigens in the same group.

Mol Test

Manually enter or select from the LOV. Entry in this field is optional.

Only those antigens that are listed in Donor Define Tests (TESTS) with group of MAG will display in the LOV.

## Seq

Manually enter the numerical order in which the molecular antigen will appear in the labeling window and in the donor antigen query. This field will accept double digits.

**NOTE –** The same number cannot be used on different molecular antigens within the same group, but the same number can be used for serological and molecular antigens.

Eff Date

Enter the effective date in MMDDYYYY format, and the system will reformat it to insert hyphens. Entry is required in this field.

The effective date cannot be prior to the chapter date, but it can be placed in the future.

Term Date

Enter the termination date in MMDDYYYY format, and the system will reformat it to insert hyphens. Entry is optional in this field.

The termination date cannot be prior to the effective date, but it can be placed in the future.

## Save Button

Click Save or use **ALT + S** to save the information to the database.

## Close Button

Click Close or use **ALT + C** to close the form without saving any entered data.

## Clear Button

Click Clear or use **ALT + E** to clear the form and not commit any entered data.

## To Query

Entry is optional in the fields when querying data.

- If the fields are not entered in the Control Block, all configurations will display in the Detail Block.
- If only the antigen group is entered, it will display all configurations for the specified antigen group.

### At Commit
Data is committed to the database.

### What to Do Next
For normal processing, press **F8** (Exit Screen).

## Define Ser/Mol Confirmatory Rules

### Intended Use
The Define Ser/Mol Confirmatory Rules screen is used to configure the antigens for confirmation based on test type, number of units, and the number of tests.

### Limitations
The test ID should match the antigen code that will be printed on the 4x4 label or tie tag.

> **EXAMPLE –** Antigen Code = Fya, print on the 4x4 and tie tag = Fya.
> Molecular test code FY1 will print FY1 on the tie tag.

### Prerequisites
- Tests have to be defined in Defined Tests (TESTS).
- Test results need to be defined in Define Test Result (RESULT).
- Donor Master Codes need to be updated:
  - TSTGRP – should have MAG added for molecular antigens.
- Lab Master Codes need to be updated:
  - TEGRP – should have MAG added for molecular antigens.
  - AGMGR – code ENBLE should be set to 'Y' to use the RBC Antigen Manager.
- Antigen Groups must be defined under the Antigen Manager screen. This table links all the antigens under the specified group.
- The tests need to be defined for the Lab application, and the test IDs must be the same as those defined in Test for Donor.
- User access must be defined in Define User Access (UACCESS) – AGRUL to have access to the button in RBC Antigen Manager Configuration.

### Accessing the Screen
Access this screen by clicking **Define Ser/Mol Confirmatory** or using the hot key **`ALT + D`** from the Antigen Manager - Serological/Molecular screen.


WellSky Corporation
Proprietary and confidential

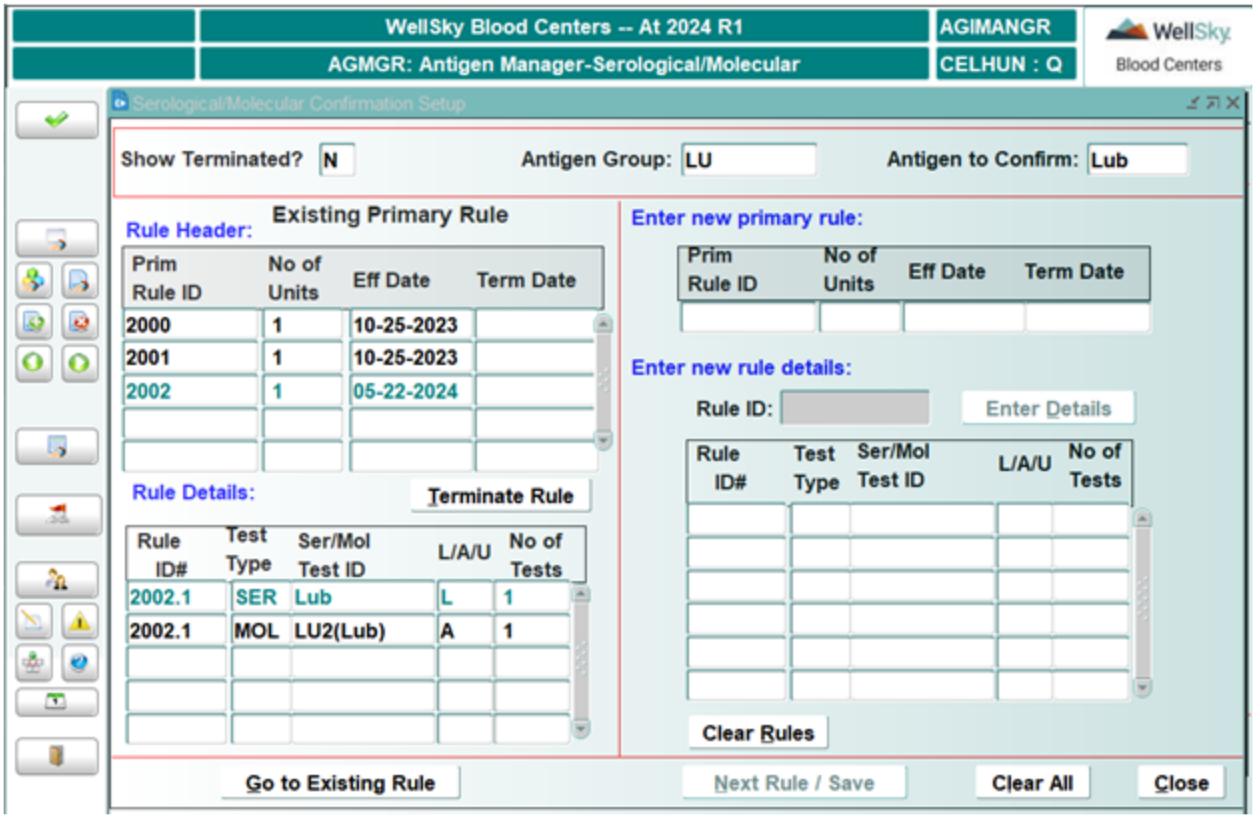


## Control Block Fields and Definitions

### Show Terminated? [Y/N]

The Show Terminated? field automatically defaults to 'N'. When the value is 'N', the terminated internal ID will not display in the Detail Block. Enter 'Y' to display both active and terminated internal IDs in the Detail Block.

### Antigen Group

Enter the antigen group or select it from the list of values (LOV). The LOV is populated from the table defined in Define RBC Antigen Groups under the Antigen Manager - Serological/Molecular screen. The antigens must be defined prior to entry in this screen.

**NOTE –** This field must be populated if defining the antigen for the first time.

### Antigen to Confirm

Enter the antigen code or select it from the LOV. The LOV is populated from the table defined in Define RBC Antigen Groups under the Antigen Manager - Serological/Molecular screen.

**NOTE –** This field must be populated if defining the antigen for the first time. The codes are coming from the test IDs for the specific antigen.

# Detail Block Fields and Definitions

## Enter New Primary Rule Block:

### Primary Rule ID #

Manually enter the primary rule ID containing four numbers. Entry is required in this field.

The same primary rule number can be used for different rows, but with different antigen tests if you want to group the two rows together.

The same primary rule number cannot be used for same tests (such as serological or molecular).

### No of Units

Enter the number of units to be tested with the primary rule. Entry is required in this field.

### Eff Date

Enter the effective date in MMDDYYYY format, and the system will reformat it to insert hyphens. Entry is required in this field.

The effective date cannot be prior to the chapter date, but it can be placed in the future.

### Term Date

Enter the termination date in MMDDYYYY format, and the system will reformat it to insert hyphens. Entry is required in this field.

The termination date cannot be prior to the effective date, but it can be placed in the future.

## Enter Rule Details:

### Rule ID

The rule ID populated from the Enter Primary Rule ID block displays here. This field is display-only and it cannot be updated.

Click **Enter Details** to begin defining the rule details.

### Rule ID#

The rule ID number should be with the primary rule ID followed by the unit to be tested. The following is an example.

**EXAMPLE –** For a single unit:
Primary rule # plus append the number for the unit.
1001.1 since it is a single unit, the appended number will be ".1".

For two units to be tested:
1001.1 is the first unit to be tested.
1001.2 is the second unit to be tested.


WellSky Corporation
Proprietary and confidential

## Type of Test

Enter the type of test to be performed: **SER** for serological, **MOL** for molecular. These test types are hard-coded and cannot be changed.

## SER Test ID

Manually enter or select from the LOV. Entry is required in this field.

The LOV is populated from the Define RBC Antigen Groups under the Antigen Manager - Serological/Molecular screen. Only those antigens that are defined here and are listed in Donor Define Tests (TESTS) with group of AG will display.

## L/U

Enter **L** or **U**. Entry is required in this field.

- L = Licensed
- U = Unlicensed

## MOL Test ID

Manually enter or select from the LOV. Entry is required in this field.

The LOV is populated from the Define RBC Antigen Groups under the Antigen Manager - Serological/Molecular screen. Only those antigens that are defined here and are listed in Donor Define Tests (TESTS) with group of MAG will display.

## A/U

Enter **A** or U. Entry is required in this field.

- A = Approved
- U = Unapproved

## No of Tests

Manually enter the number of times the test should be performed. Entry is required in this field.

**NOTE –** The field accepts a maximum of two digits.

## Next Rule/Save Button

Click Save or use **ALT + N** to save the information to the database and move back to the Enter Primary Rule block to define the next rule.

## Close Button

Click Close or use **ALT + C** to close the form and not commit any entered data.

## Clear Button

Click Clear or use **ALT + L** to clear the form and not commit any entered data.

## Clear Rules

Click **Clear** or use **ALT + R** to clear the primary rule and details defined before saving.

## To Query

Entry is optional in the fields when querying data.

- The antigen group is optional in the Control Block, but the antigen code is required to query the antigen.
- When querying an antigen, the details will display on the left side of the screen.

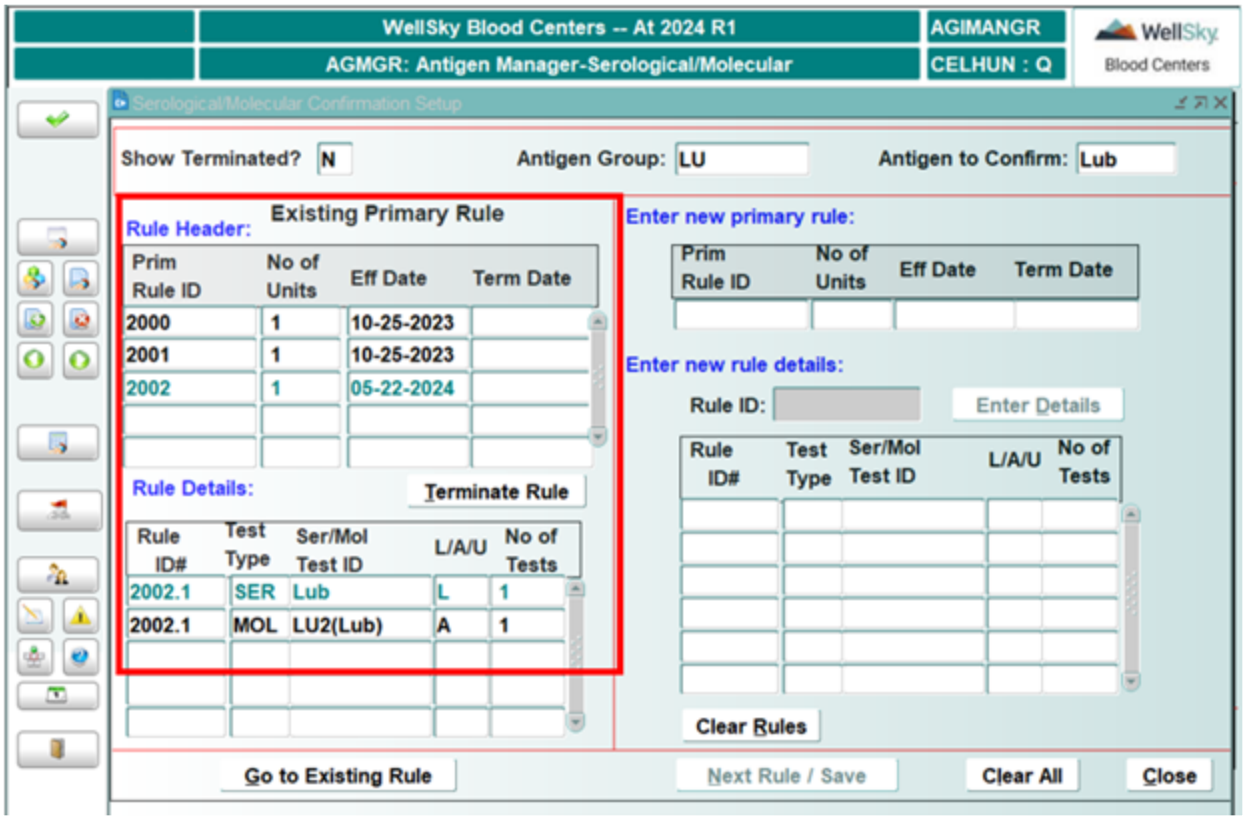


Scroll down or use the mouse to click on the row to be viewed. You can also click **Go To Existing Rule** to move the cursor to the Existing Rule Block.

## Existing Rule Block

The Existing Rule block displays the following:

- **Prim Rule ID** – primary rule ID
- **No of Units**
- **Eff Date** – effective date, the date the rule was defined
- **Term Date** – termination date. These rules will only display if you selected to view the terminated rules in the Control Block.

## Rule Details

- **Rule ID #** – determines the number for the unit being tested.
- **Test Type** – SER or MOL
- **Ser/Mol Test ID** – the serological or molecular antigen ID
- **L/A/U** – specify if the testing method is licensed, unlicensed, approved, or unapproved.
- **No of Tests** – enter the number of times the test should be tested in order to complete the row for the rule.

## Termination of a Rule

1. To terminate a rule, query the rule to bring the details to the left side of the screen.
2. Place the cursor in the row you want to terminate.
3. Either click Terminate Rule or use the hot key ALT + T.

This will populate the rule in the Primary Rule block on the right side of the screen, which will allow you to enter the termination date.

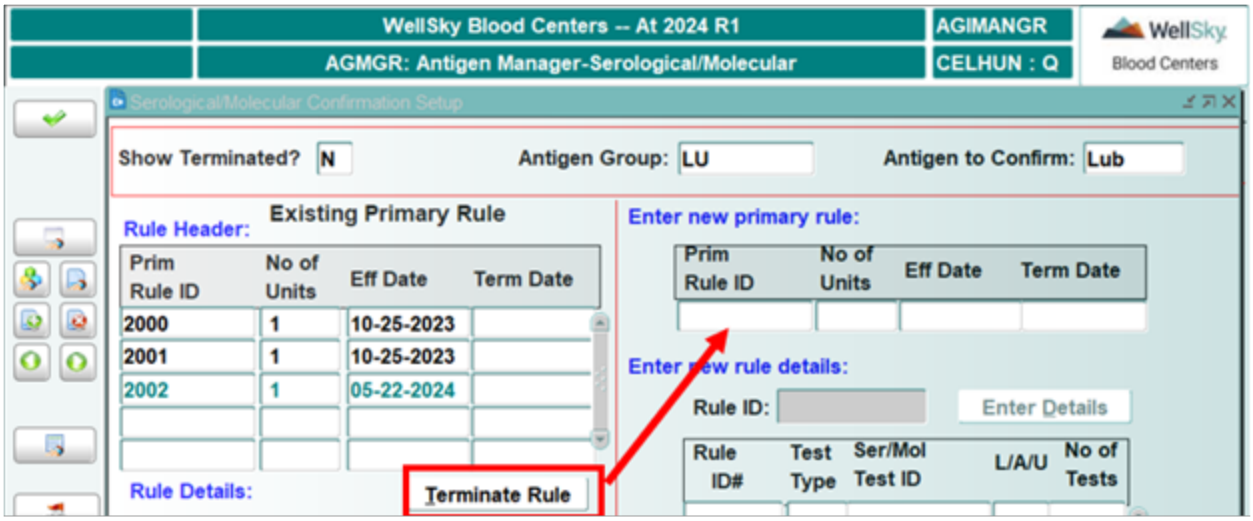

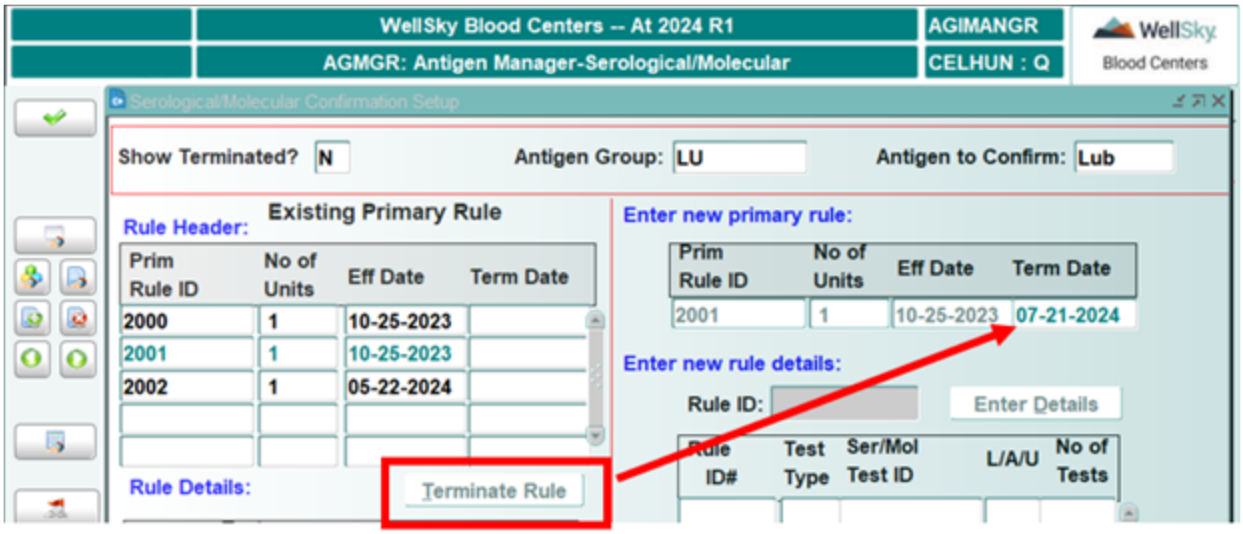


## Term Date

Enter the termination date in MMDDYYYY format, and the system will reformat it to insert hyphens. Entry is required in this field.

The termination date cannot be prior to the effective date, but it can be placed in the future.

## At Commit

Data is committed to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen).

# Define External File Mapping

## Intended Use

The Define External File Mapping screen is used to configure an external testing file for antigens and to determine if they should be set to the Licensed/Unlicensed/Approved/Unapproved method of testing.

## Limitations

- If a test is received and not defined in the table, it will be set to Unlicensed/Unapproved for that antigen.
- Currently, Blood Centers only recognizes the "RT" and "TF" file types. These file types are how the test batch is formatted and uploaded to the database.

## Prerequisites

- Tests have to be defined in Define Tests (TESTS).
- Need to know the testing file format in order to be able to show how the tests will be uploaded into the database.


WellSky Corporation
Proprietary and confidential

- User access must be defined in Define User Access (UACCESS) for AGEXF to have access to the button in the RBC Antigen Manager Configuration screen.

## Accessing the Screen

Access this screen by clicking **Define External File Mapping** or using the hot key **ALT + M** from the Antigen Manager - Serological/Molecular screen.

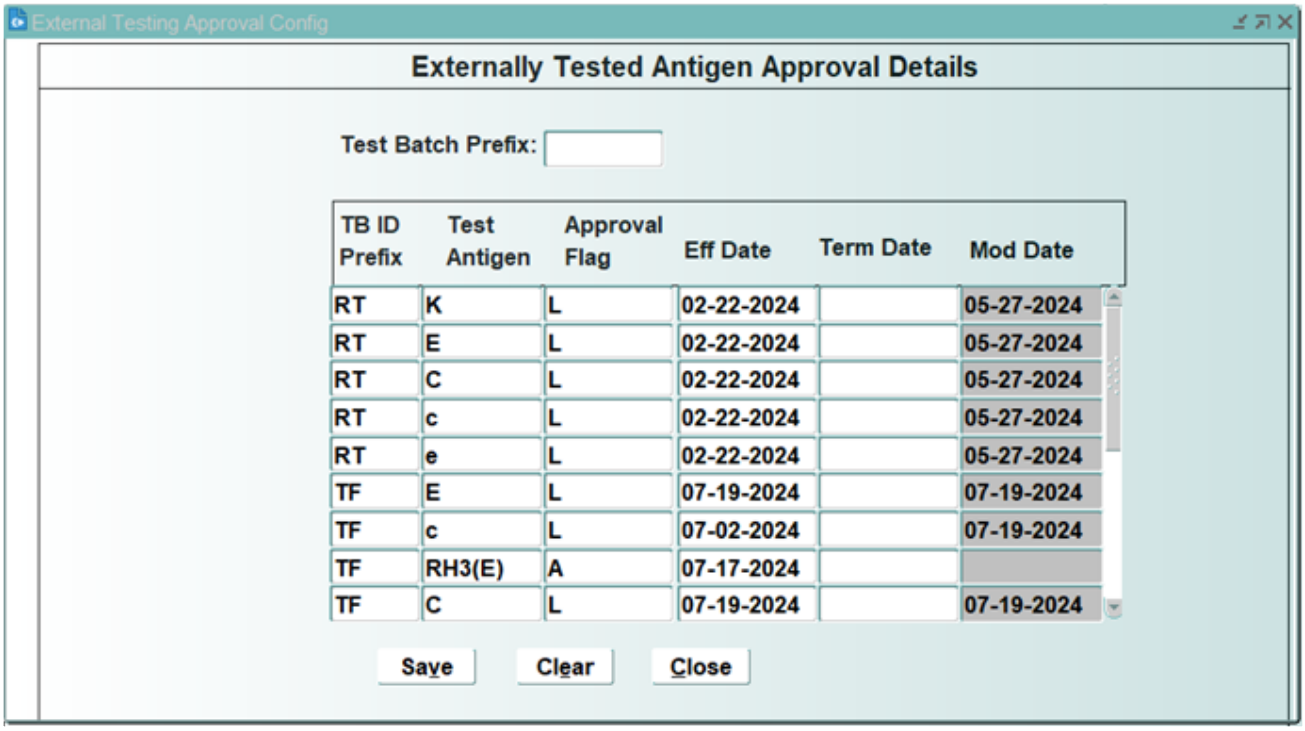


## Control Block Fields and Definitions

### Test Batch Prefix

Enter the 2-character test batch prefix that will be in the batch ID for the upload of test results. If the prefix has not been defined, the user will receive a message:

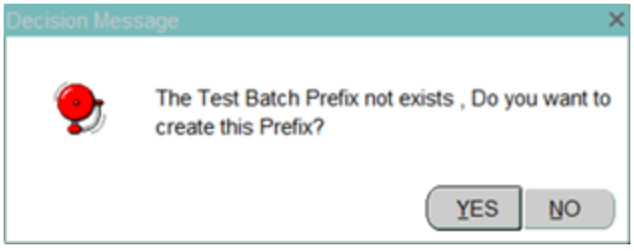


Click **YES** to accept the prefix and move to the Detail Block, or click **No** to stop the entry and remain in the Prefix field.

# Detail Block Fields and Definitions

## TB ID Prefix

The prefix ID should match the same prefix entered in the Control Block. If the prefix is different, the user will receive an error:

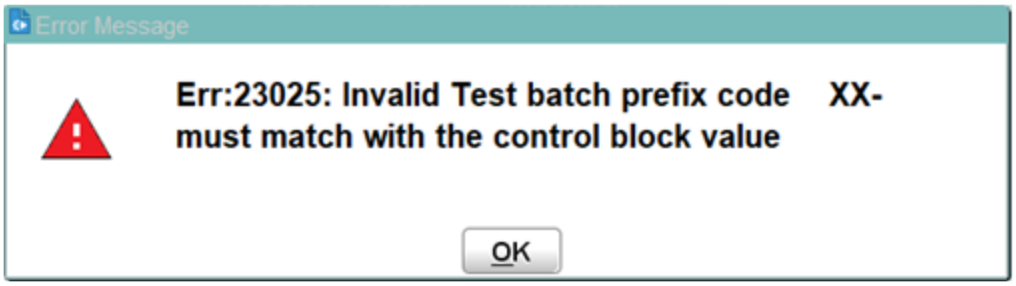


Click OK and enter the matching test batch prefix. The cursor will move to the next field.

## Test Antigen

Manually enter the test antigen or select it from the list of values (LOV). The LOV contains all serological and molecular antigen tests based on the test type of AG (serological) and MAG (molecular).

## Approval Flag

Enter the approval flag based on the type of test, serological or molecular. This field represents how the antigen test was performed.

- L = Licensed antisera (serological)
- U = Unlicensed antisera (serological) or Unapproved molecular method
- A = Approved molecular method

Serological antigens use the following flags:

- L = Licensed
- U = Unlicensed

Molecular antigens use the following flags:

- A = Approved
- U = Unapproved

## Eff Date:

Entry is required in this field. Enter the effective date in MMDDYYYY format, and the system will reformat it to insert hyphens. The effective date cannot be prior to the chapter date, but it can be placed in the future.

## Term Date:

Entry is optional in this field. Enter the termination date in MMDDYYYY format, and the system will reformat it to insert hyphens. The termination date cannot be prior to the effective date, but it can be placed in the future.


WellSky Corporation
Proprietary and confidential

### Save Button
Click Save or use **ALT + V** to save the information to the database.

### Close Button
Click Close or use **ALT + C** to close the form without committing any entered data.

### Clear Button
Click Clear or use **ALT + E** to clear the form and not commit any entered data.

### To Query
To query the data already entered:

- Leave the test batch prefix null and press **Enter**. It will bring all test batch configurations. If a test batch ID was not entered in the Control Block, it will not allow any additional rows to be configured.
- If you are wanting to view a single test batch configuration, then enter the prefix and press **Enter**. It will display the antigens configured.

### At Commit
Data is committed to the database.

### What to Do Next
For normal processing, press F8 (Exit Screen).

## WellSky Transfusion Status Log

### Intended Use
The WellSky Transfusion Status Log screen is used to display the jobs status as the records are being uploaded to the API table and finally to the UTRS table from WellSky Transfusion.

### Limitation
This is only used with the WellSky Transfusion application.

### Prerequisites
- View must be established to the WellSky Transfusion database.
- External to Blood Center Data Translate needs to be defined for any test or result that is different in Blood Centers.
- Cron scripts need to be defined – extract_tf_data.sql and extract_tf_data.sh.
- Interface package AG_TF_INTERFACE.pkg should be present.
- Lab Master Code AGMGR – should have the RBC Antigen Manager enabled – Code AGMGR, ENABL set to Y.
- Define Ser/Mol Confirmatory Rule table should be completed.
- Define RBC Ag Groups should be completed.

- Define External File Mapping should be completed for file type TF.
- User access must be defined in Define User Access (UACCESS) for AGLOG to have access to the button in the RBC Antigen Manager Configuration screen.

## Accessing the Screen

Access this screen by clicking **WellSky Transfusion Status Log** or using the hot key **`ALT + L`** from the RBC Serological/Molecular Antigen Manager screen.

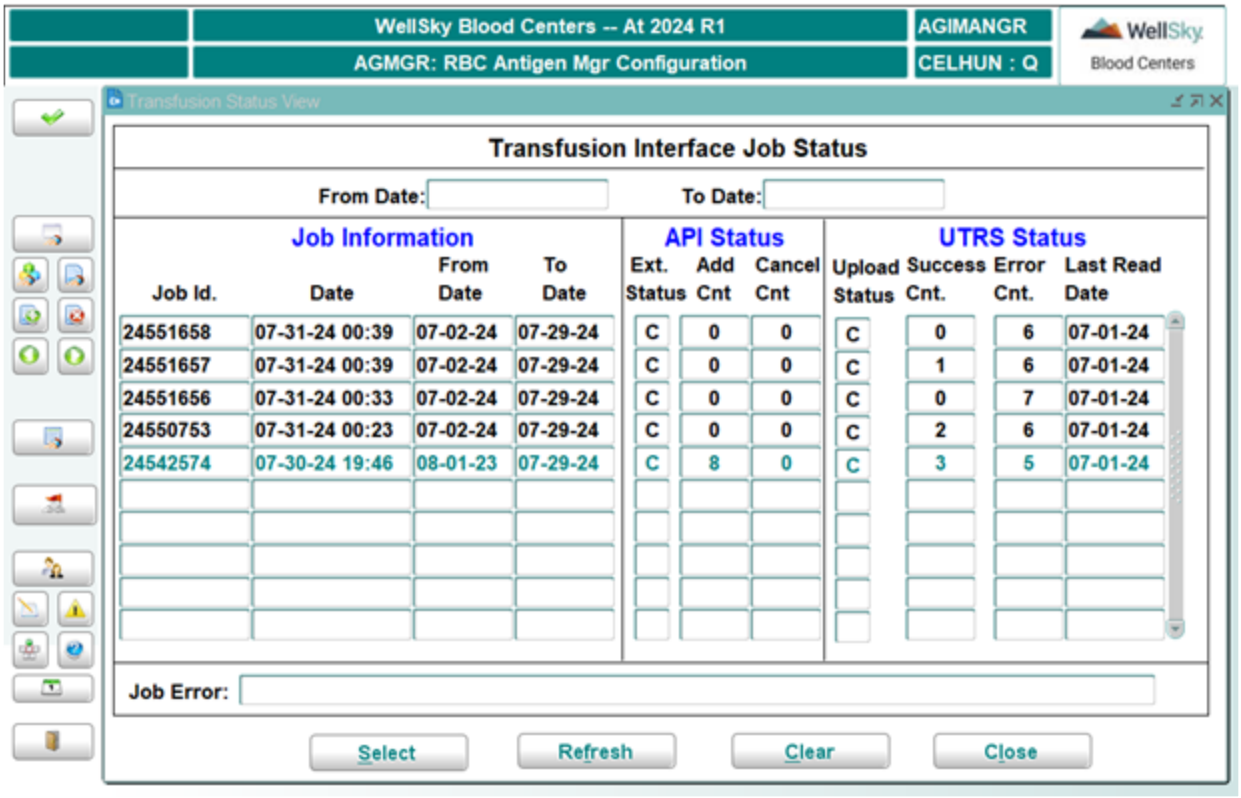


## Control Block Fields and Definitions

### From Date

Enter a date in MMDDYYYY format, or leave the field blank to pull all records.

### To Date

Enter a date in MMDDYY format, or leave the field blank to pull all records.

## Job ID Information Fields and Definitions

**NOTE –** All information in this block is display-only and cannot be updated.

### Job ID

The system generates this ID when the view occurs in Transfusion and populates the API table.

### Date

This is the date in which the view into Transfusion occurred and populates the API table.

### From Date

This is the oldest date from the Transfusion table since the last extract.

### To Date

This date is the current system date minus 2 days.

## API Table Status Fields and Definitions

**NOTE –** This information is display-only and cannot be updated.

### Ext. Status

This status is based on the extract of records based on the view into the Transfusion database.

### Add Cnt

This is the number of records found when performing the extract.

### Cancel Cnt

This is the number of records that have a cancel date or invalidate date present.

**NOTE –** If the record has a cancel date or invalidate date, and it is the first time in the extract, Blood Centers will not pull this record to the temporary table.

## UTRS Table Status Fields and Definitions

**NOTE –** This information is display-only and cannot be updated.

### Upload Status

This is the status when the records are moved from the temporary table into the UTRS table.

### Success Cnt

The number of records that were successfully inserted into the UTRS table displays here.

### Error Cnt

The number of records that were not successfully uploaded displays here. The specified reason for the failed upload is displayed in the comments.

### Last Read Date

This is the date where the record was inserted into the Transfusion database.

# Buttons

## Select

Click to select the job to view detailed information for each unit. A new Transfusion Error View window will open.

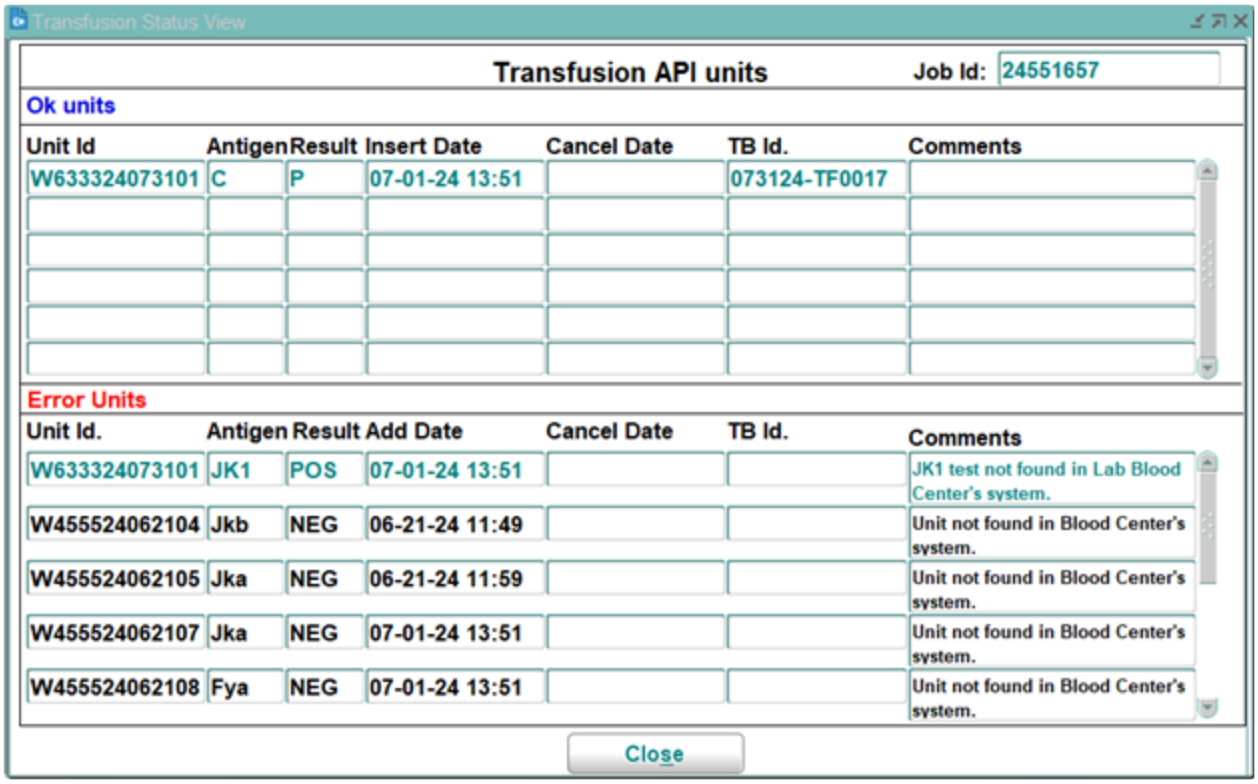


## OK Units Block

Displays all the units that were successfully uploaded, including the following information:

- Unit ID
- Antigen Code
- Antigen Result
- Insert Date
- Cancel Date, if present
- Test batch ID generated from Blood Centers
- Any comments present on the record

## Error Units Block

Displays all the units that were not successful in the upload to the UTRS table. The following information is included:

- Unit ID
- Antigen Code


WellSky Corporation
Proprietary and confidential

- Antigen Result
- Add Date
- Cancel Date
- Test batch ID
- Comments – explanation of why the record failed - error condition.

### Close

This button is used to close the Transfusion Error View window.

### Refresh

Click this button to refresh the current screen for any new data.

### Clear

Click this button to clear all data from the screen.

### Close

Click this button to close the log screen and return the cursor back to the main parent form.

### At Commit

Nothing is committed in the log.

### What to Do Next

For normal processing, press **F8** (Exit Screen).

## Donor RBC Ag Query

Refer to the "Donor RBC Ag Query (AGQ)" below for details on the query.

# 9.4.2 Donor RBC Ag Query (AGQ)

## Intended Use

Use the Donor RBC Ag Query to view a donor's antigen and HLA information. This query will display antigen testing by unit number. Additional information that displays:

- Donor demographic information
  - Name, sex, date of birth (DOB)
  - CMV
  - HbS – hemoglobin S
  - Blood type
- If the antigen test has been confirmed, what rules were used to confirm the antigen testing, and the unit numbers along with the test results
- Discrepant results to allow exclusion when confirming the antigen

- Donor interdictions
- Attributes

## Limitation

This query is only used if the antigen confirmation process is used in the facility.

## Prerequisites

- Antigen Manager - Serological/Molecular (AGMGR) must be defined for the antigen and antigen group.
- If testing molecular antigens, the test must be in testing group MAG.
- Reagent kits used in testing must have a license flag set, otherwise the test will be set as unlicensed antisera or method.
- User access must be defined in Define User Access (UACCESS) with the code AGXCL in order to be able to exclude a test in confirmation of an antigen.
- User access must be defined in Define User Access (UACCESS) for AGDNQ to have access to the button in the RBC Antigen Manager Configuration screen.
- System parameter will list the test ID that is used for Hemoglobin S. HBS is the parameter code. Enter the test ID in the Value field.

## Accessing the Screen

Access this screen by clicking WellSky Transfusion Status Log or by using the hot key **ALT + L** from the RBC Serological/Molecular Antigen Manager screen.

- OR -

Access this screen from the RBC Antigen Manager menu or by entering the keyword **AGQ**.

This screen appears with the Search for Donor window open on top. Before viewing a donor's details, you must first search for the donor in the donor database. See Chapter 15, Called Windows, for instructions on using this window.


WellSky Corporation
Proprietary and confidential

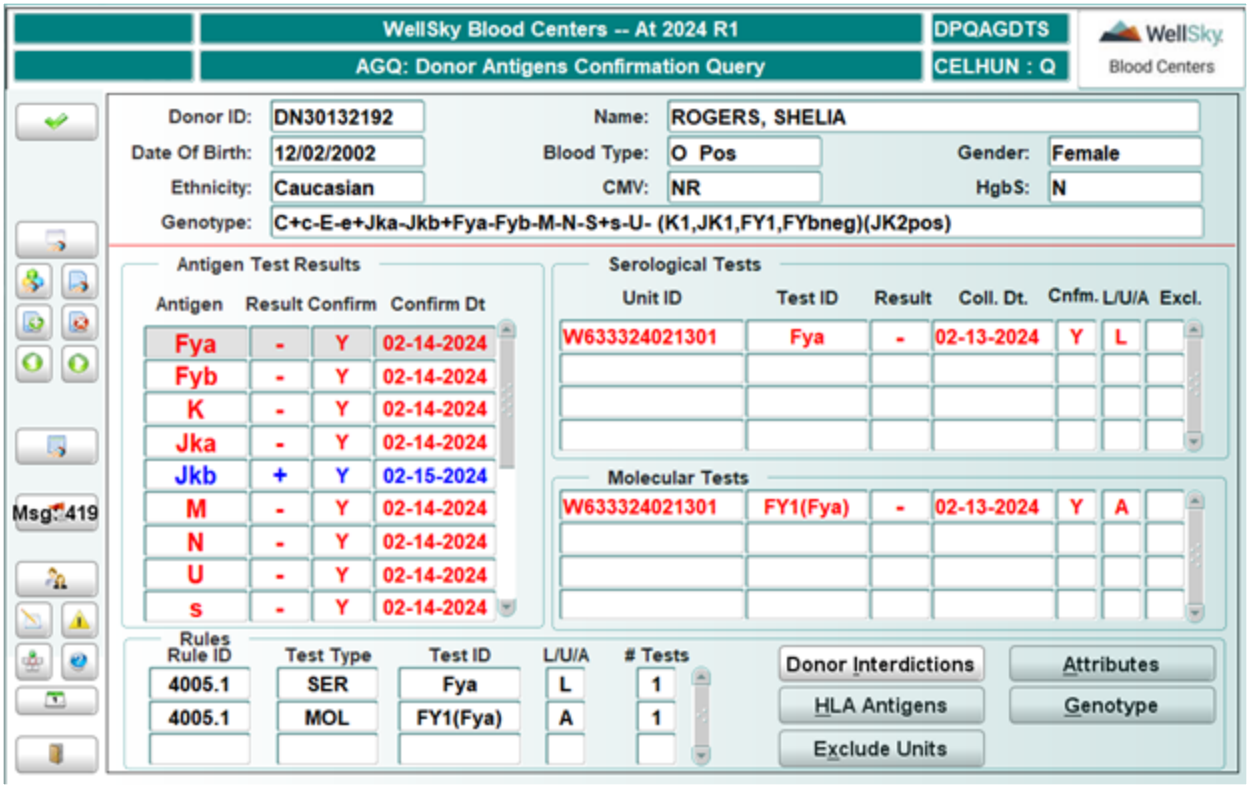
WellSky Blood Centers -- At 2024 R1
DPQAGDTS
AGQ: Donor Antigens Confirmation Query
CELHUN : Q
WellSky Blood Centers
Donor ID: DN30132192
Name: ROGERS, SHELIA
Date Of Birth: 12/02/2002
Blood Type: O Pos
Gender: Female
Ethnicity: Caucasian
CMV: NR
HgbS: N
Genotype: C+c-E-e+Jka-Jkb+Fya-Fyb-M-N-S+s-U- (K1,JK1,FY1,FYbneg)(JK2pos)
Antigen Test Results
Antigen Result Confirm Confirm Dt
Fya - Y 02-14-2024
Fyb - Y 02-14-2024
K - Y 02-14-2024
Jka - Y 02-14-2024
Jkb + Y 02-15-2024
M - Y 02-14-2024
N - Y 02-14-2024
U - Y 02-14-2024
s - Y 02-14-2024
Serological Tests
Unit ID Test ID Result Coll. Dt. Cnfm. L/U/A Excl.
W633324021301 Fya - 02-13-2024 Y L
Molecular Tests
W633324021301 FY1(Fya) - 02-13-2024 Y A
Rules
Rule ID Test Type Test ID L/U/A # Tests
4005.1 SER Fya L 1
4005.1 MOL FY1(Fya) A 1
Donor Interdictions
Attributes
HLA Antigens
Genotype
Exclude Units
Msg: 419

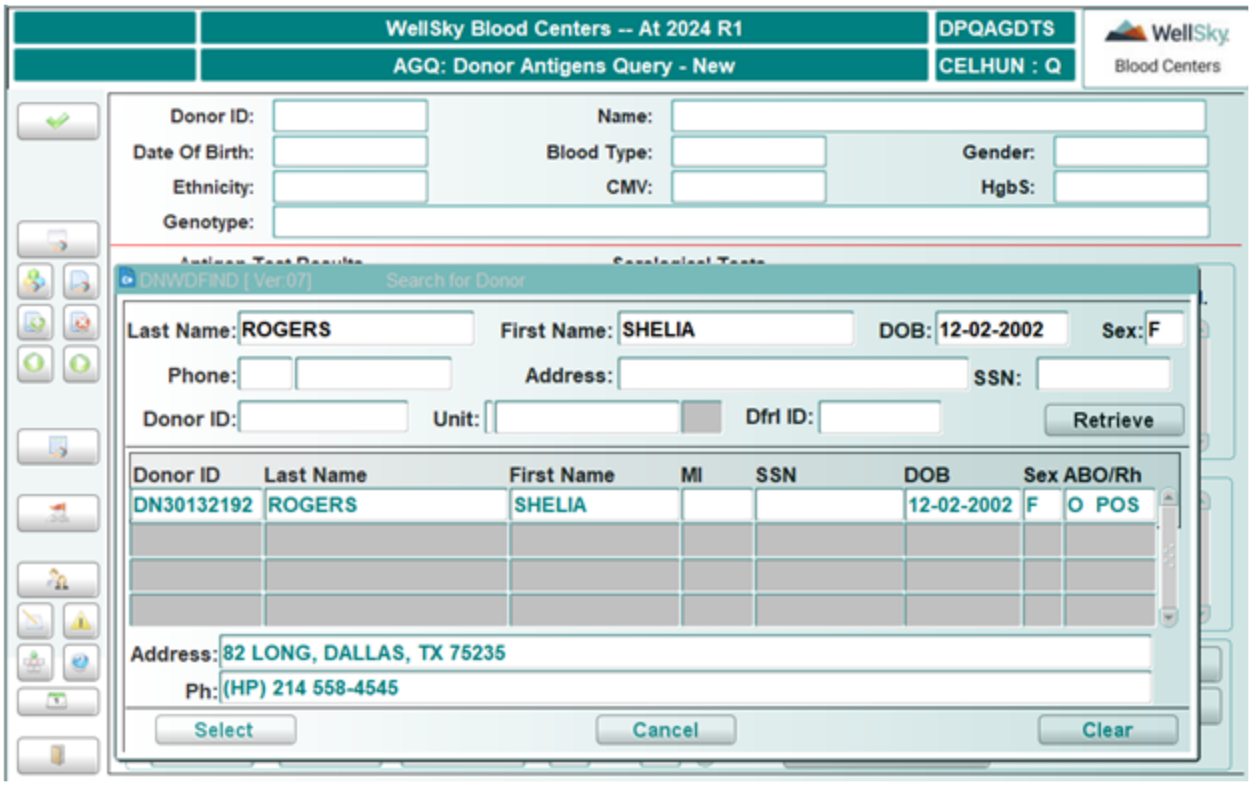
WellSky Blood Centers -- At 2024 R1
DPQAGDTS
AGQ: Donor Antigens Query - New
CELHUN : Q
WellSky Blood Centers
Donor ID:
Name:
Date Of Birth:
Blood Type:
Gender:
Ethnicity:
CMV:
HgbS:
Genotype:
DNWDFIND [ Ver:07] Search for Donor
Last Name: ROGERS
First Name: SHELIA
DOB: 12-02-2002
Sex: F
Phone:
Address:
SSN:
Donor ID:
Unit:
Dfrl ID:
Retrieve
Donor ID Last Name First Name MI SSN DOB Sex ABO/Rh
DN30132192 ROGERS SHELIA 12-02-2002 F O POS
Address: 82 LONG, DALLAS, TX 75235
Ph: (HP) 214 558-4545
Select
Cancel
Clear

If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click on the desired donor. Click **Select** to go to the Donor Detail Query screen and populate the screen with the information for the selected donor.

## In the Donor Details Block

The following information displays if it exists in the database:

- Donor ID
- Name
- ABO type
- Date of birth
- Sex
- Alternate ID type
- Alternate ID
- Home phone number – if the home phone is the preferred contact, there will be a check mark next to the number.

## Control Block Fields and Definitions

Once the donor or unit is entered in the Find Donor Window and selected, the Control Block and Details Block will populate on the main parent form.

### Donor ID

This defaults to the donor ID that is linked to the donor entered in the Find Donor window. This field cannot be modified.

### Name

Defaults to the donor's last name, first name, and middle name based on donor selection.

### Date of Birth

Displays based on donor selection in MM/DD/YYYY format. The field cannot be updated.

### Blood Type

Displays the donor's blood type if the donor has been tested with a valid ABORH value. This field cannot be updated.

### Sex

Displays the sex of the donor. This field cannot be updated.

### Ethnicity

Displays the ethnicity of the donor. This field will only be populated if the donor's ethnicity was entered. If not, the field will be blank. This field cannot be updated.


WellSky Corporation
Proprietary and confidential

## CMV

Displays the last CMV result interfaced over to Donor. This field cannot be updated.

## HgbS

Displays the hemoglobin S test result for the last test interfaced to Donor. The result will display based on the results definition for the test in Donor.

## Genotype

This is a free-text field that will accept a maximum of 500 characters. This field is informational only, and it is not used to determine antigen phenotype or results in the system. It does not validate entry for antigen results in the actual testing for antigens. This field cannot be updated. If updates need to be made, use the GENOTYPE button to update.

# Antigen Test Result Block Fields and Definitions

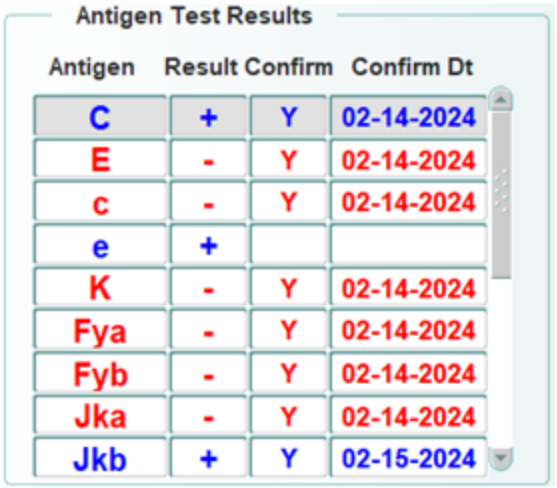


## Antigen

Displays the common antigen test ID that is linked in the Antigen Confirmation form.

**NOTE –** If the antigen has serological and molecular tests performed, they will display under the respective block based on test group: serological (AG) and molecular (MAG).

## Result

Displays the result of the antigen based on testing. If test results are discrepant, either between serological tests or serological and molecular tests, the test result will display with 'D' on a red background.

- + represents positive test results and will display in Blue
- - represents negative test results and will display in Red
- D represents discrepancy in testing, and the background will be in RED.

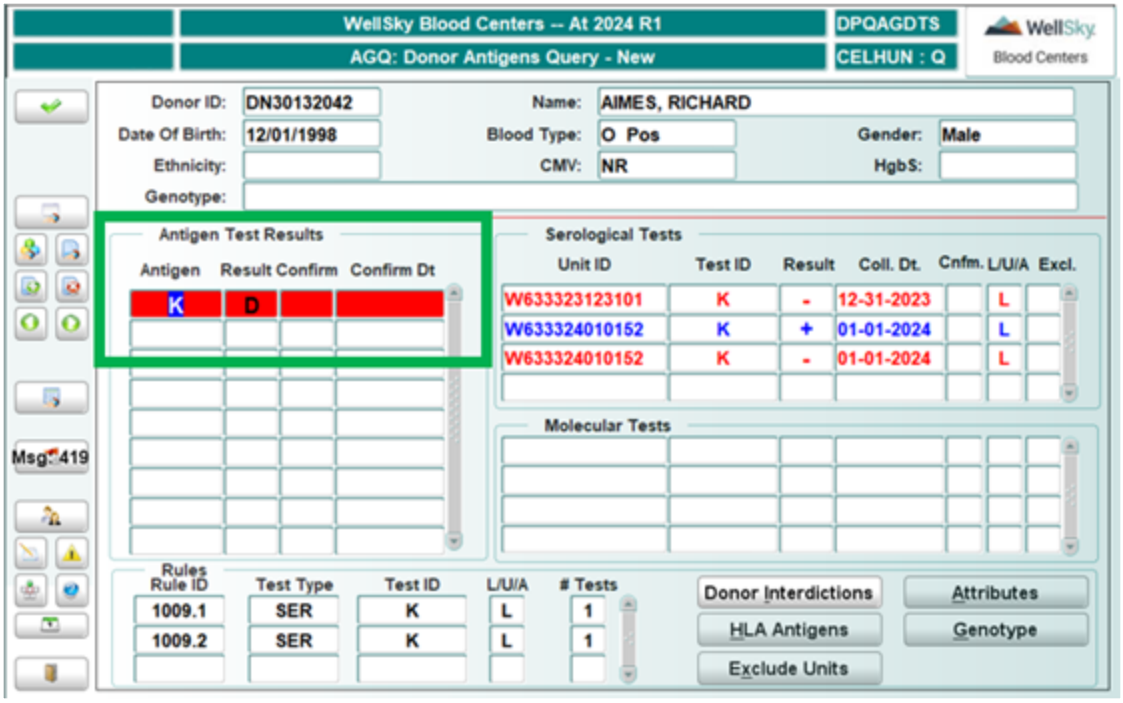


The result will display as discrepant until the results that are discrepant are excluded from the confirmation process.

### Confirm

Displays a 'Y' if the antigen has met a rule in the Antigen Manager Confirmation table. If the antigen has not met a rule in the table, it will display as blank.

### Confirm Dt

Displays the date on which the confirmation rule was met. If the antigen is not confirmed, the field will be blank.

## Serological Tests Block Fields and Definitions

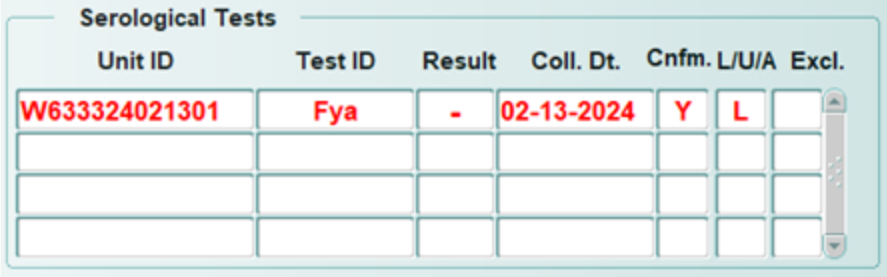


This block displays based on the row the cursor is in on the left side of the form in the Antigen Test Results block.

### Unit ID

Displays the unit number on which the antigen test was performed. Unit IDs are not restricted to a single chapter, so if multiple chapters are used in the facility, all unit numbers from all chapters will display for that antigen test.

### Test ID
Displays the antigen test code of the test performed on the unit.

### Result
Displays the result that was entered for the antigen. These results are displayed based on the scheduled test results from the Lab side.

### Coll. Dt.
Displays the collection date of the unit.

### Cnfm.
Displays the confirmation flag for the antigen.

### L/U/A
This field indicates how the antigen test was performed.

- L = Licensed antisera
- U = Unlicensed antisera or unapproved molecular method
- A = Approved molecular method

### Excl.
If a test needs to be excluded from being used in antigen confirmation, this field will display a 'Y' to exclude the test. Otherwise, the field will be blank, and the test will be used in confirmation.

## Molecular Tests Block Fields and Definitions

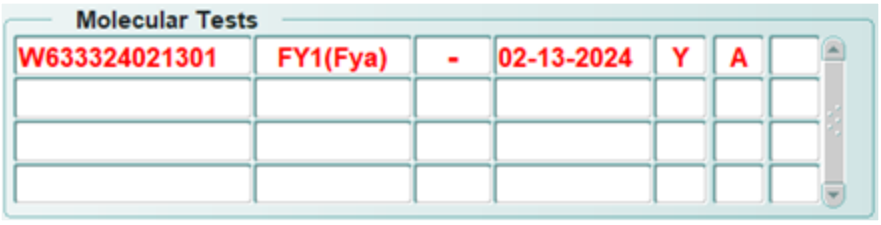


This block displays based on the row the cursor is in on the left side of the form in the Antigen Test Results block. This block displays antigen tests that are part of the test group MAG (molecular antigens).

### Unit ID
Displays the unit number on which the antigen test was performed. Unit IDs are not restricted to a single chapter, so if multiple chapters are used in the facility, all unit numbers from all chapters will display for that antigen test.

### Test ID
Displays the antigen test code of the test performed on the unit.

### Result
Displays the result that was entered for the antigen. These results are displayed based on the scheduled test results from the Lab side.

### Coll. Dt.
Displays the collection date of the unit.

### Cnfm.
Displays the confirmation flag for the antigen.

### L/U/A
This field indicates how the antigen test was performed.

- L = Licensed antisera
- U = Unlicensed antisera or unapproved molecular method
- A = Approved molecular method

### Excl.
If a test needs to be excluded from being used in antigen confirmation, this field will display a 'Y' to exclude the test. Otherwise, the field will be blank, and the test will be used in confirmation.

## Rules Block Fields and Definitions

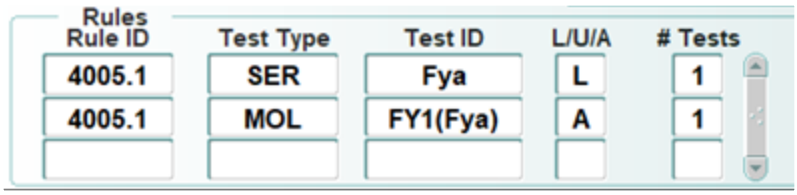


The Rules Block displays according to the rule used from the Define Ser/Mol Confirmatory screen for the antigen to confirm. Rules are defined based on test type, test ID, and how the test was performed. This block is display-only and cannot be updated.

### Rule ID
The rule ID is defined by the user in the Define Ser/Mol Confirmatory screen. This field cannot be updated.

### Test Type
The test type is either serological or molecular.

- SER = Serological
- MOL = Molecular

### Test ID
This field displays the test ID defined in the Define Ser/Mol Confirmatory screen. This field is display-only.


WellSky Corporation
Proprietary and confidential

### Method of Testing

This field indicates how the antigen test was performed.

- L = Licensed antisera
- U = Unlicensed antisera or unapproved molecular method
- A = Approved molecular method

### # Tests

This field indicates how many times the antigen needs to be tested.

## Donor Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. Users can view only those interdictions to which they have access. See Chapter 15, Called Windows, for instructions on using this program.

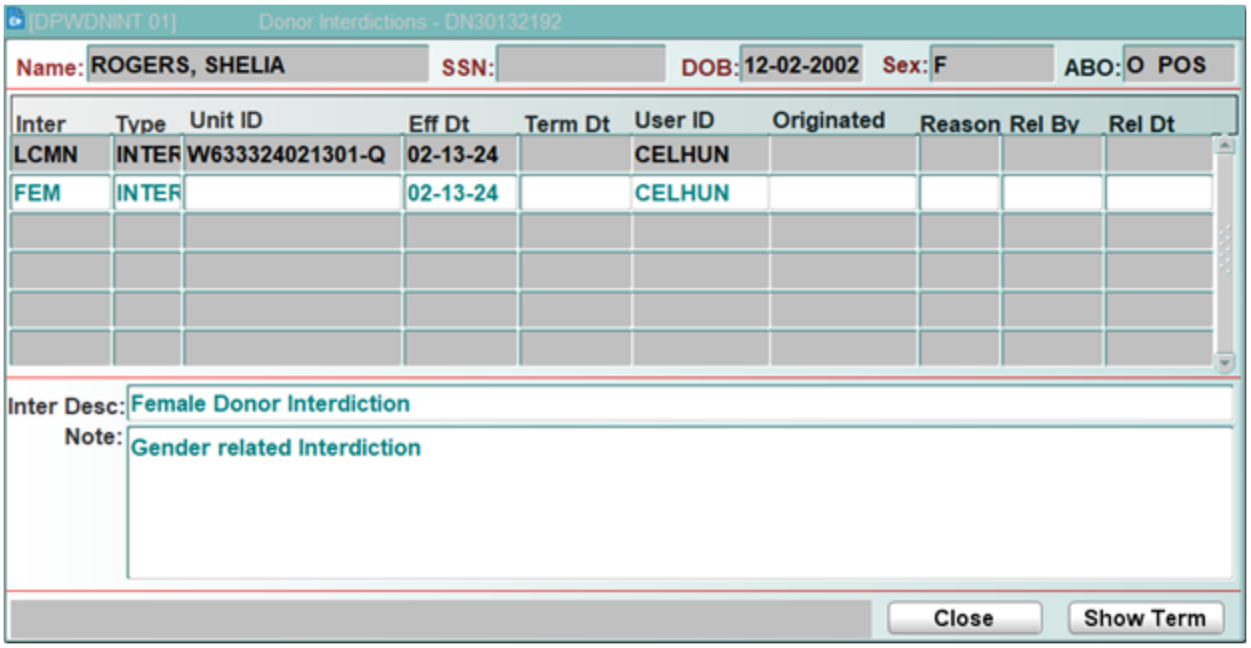


## Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes placed on a donor or to place new attributes on a donor. Users can view and place only those attributes to which they have access. See Chapter 15, Called Windows, for instructions on using this program.

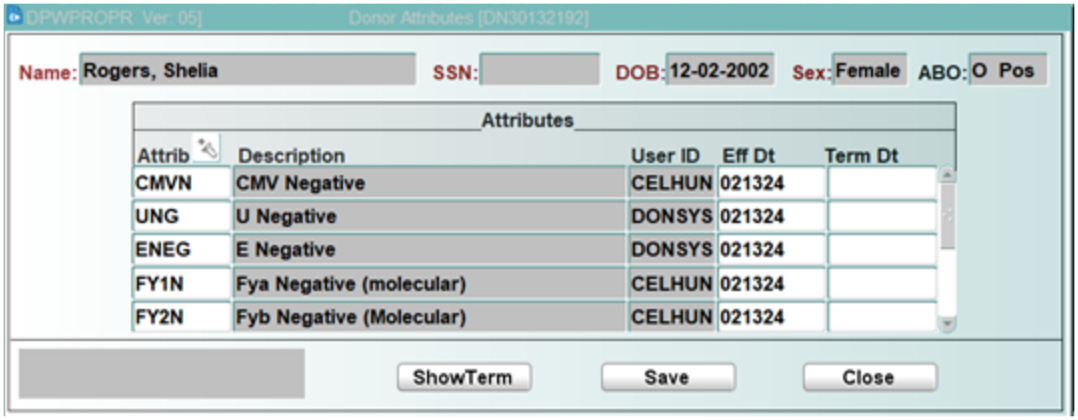


## HLA Antigens Button

All HLA phenotyping known to date on the donor displays if it exists in the database.

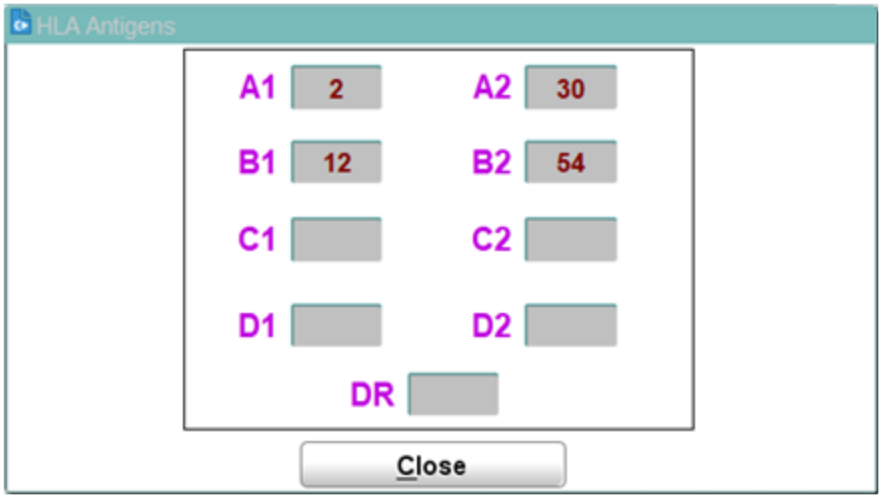


## Genotype Button

This field allows a maximum of 500 characters. This is an information-only field that does not have user access restrictions. Any entry in the Genotype block will display in the Control block of the parent form.

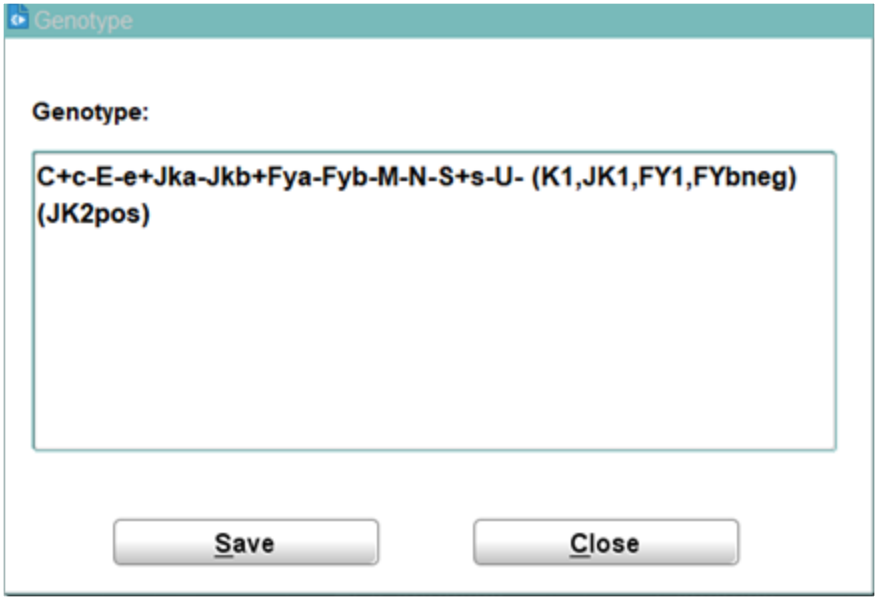


Click **Save** to commit the entry to the database, or click **Close** to close the window without saving.

## Exclude Units Button

Place the cursor on the antigen test on the left side of the parent page. View the serological and molecular testing on the right side of the parent page. Click **Exclude Units** to select which test will be excluded from the confirmation process.

**NOTE –** The user must have access to AGXCL in order to have access to the Exclude Units button. If the user does not have access to exclude, the button will be disabled.

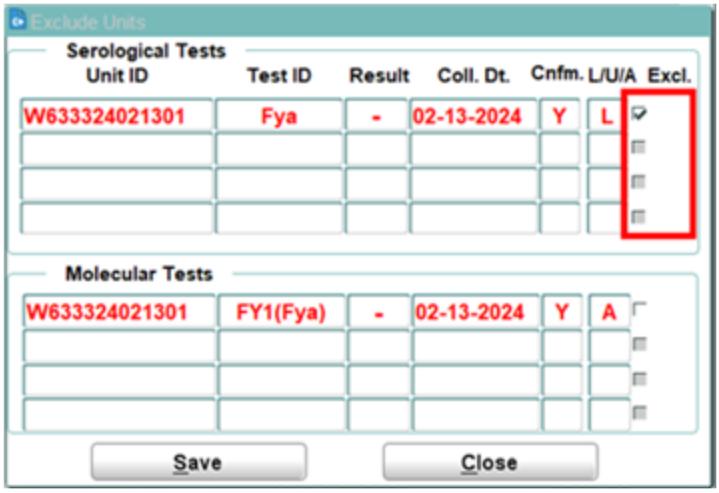


To exclude a test result, select the **Excl.** check box next to the test to place a checkmark in it. Click **Save** to exclude the test, and then click **Close** to close the window. If the wrong test is selected, open the window again, clear the check box and click **Save**.

## Movement Through the Query

As the user scrolls down the antigen tests on the left side of the screen, the data dynamically updates on the right side of the screen for Serological and Molecular Test results and the Rules block.

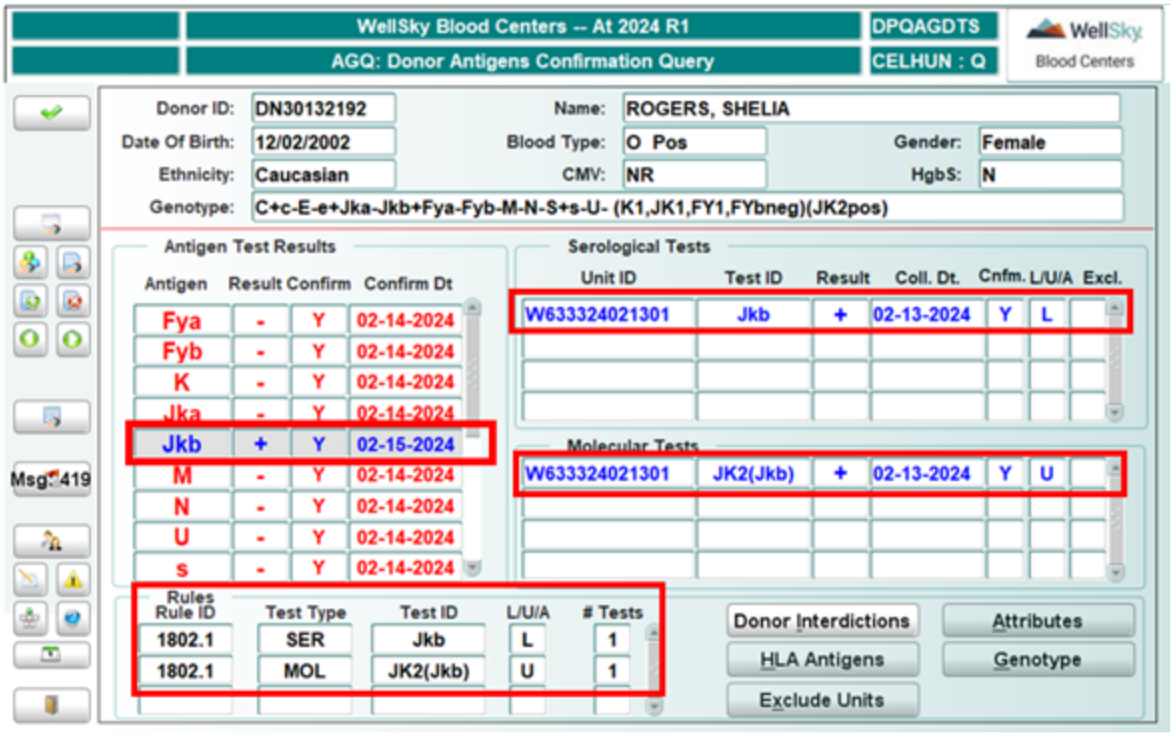


## At Commit

Data is committed to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen).

# 9.4.3 Donor Antigen Discrepancy Report (AGRDISCR)

## Intended Use

Use this screen to generate a report that lists units that have discrepant results for a specific antigen.

## Accessing the Screen

Access this screen from the Antigen Confirmation Functions menu or by entering the keyword `AGRDISCR`.

## Generating the Report

| Parameter Value | Multiple Entries Allowed? | LOV Available? | Other Information |
|---|---|---|---|
| Enter Chapter ID | Yes | No | Enter your 3-character Chapter ID, or use `ALL`. |
| Enter From Collection Date | No | No | Default is the current date; to change, use the MM-DD-YY format. |
| Enter To Collection Date | No | No | Default is the current date; to change, use the MM-DD-YY format. |

- If you are testing antigens across chapters, to be able to capture all units, the ALL chapter should be used.
- If the unit used in the discrepancy is outside the collection date range, then it will not appear on the report, but the unit with the discrepancy flag will appear. Go to the Donor Antigens Confirmation Query (AGQ) to view all the units that are linked to the donor.

The information contained in the report:

- Donor ID
- Unit numbers/Collection date
- Serological Test ID and result
- Molecular Test ID and result
- Exclusion flag – Y indicates the test has been excluded from antigen confirmation.

# Sample Report

04-22-24 00:15 Antigen Discrepancy Report CELHUN : Q
AGRDISCR Rel:01 Page 1 of 1
DAL-Chapter Behind Server

Period: 01-01-24 to 04-22-24

| Donor Id | Unit Id | Coll. Date | Ser. Test | Ser. Result | Mol. Test | Mol. Result | Exc. Flag |
|---|---|---|---|---|---|---|---|
| **DN30132042** | W633324010152 | 01-JAN-24 | K | - | | | |
| | W633324010152 | 01-JAN-24 | K | + | | | |
| **DN30132090** | W123424011001 | 10-JAN-24 | K | + | | | |
| **DN30132092** | W123424011002 | 10-JAN-24 | K | - | | | |
| **DN30132368** | W633324032601 | 26-MAR-24 | E | - | | | |
| | W633324032601 | 26-MAR-24 | | | RH3(E) | + | Y |
| **DN30132369** | W633324032602 | 26-MAR-24 | | | RH3(E) | + | |
| | W633324010161 | 01-JAN-24 | E | - | | | |
| **DN30132370** | W633324032603 | 26-MAR-24 | | | RH3(E) | + | |
| | W123424010165 | 15-JAN-24 | E | - | | | |
| **DN30132371** | W633324032604 | 26-MAR-24 | Jka | + | | | |
| | W633324032604 | 26-MAR-24 | Jka | - | | | |
| **DN30132375** | W123424032801 | 28-MAR-24 | K | - | | | |
| | W123424032801 | 28-MAR-24 | | | K1 | + | |


WellSky Corporation
Proprietary and confidential

10

# Chapter 10 - Donor Notification


10.1 Notification Functions ..... 840
10.1.1 Prepare Donor Notification (DONNOTE) ..... 840
10.1.2 Authorize Donor Notification (AUTHLET) ..... 844
10.1.3 Donor Details Query (NDONQ) ..... 848
10.1.4 View Donor Letters (LETQ) ..... 854

# 10.1 Notification Functions

These functions are accessed from the following menu:

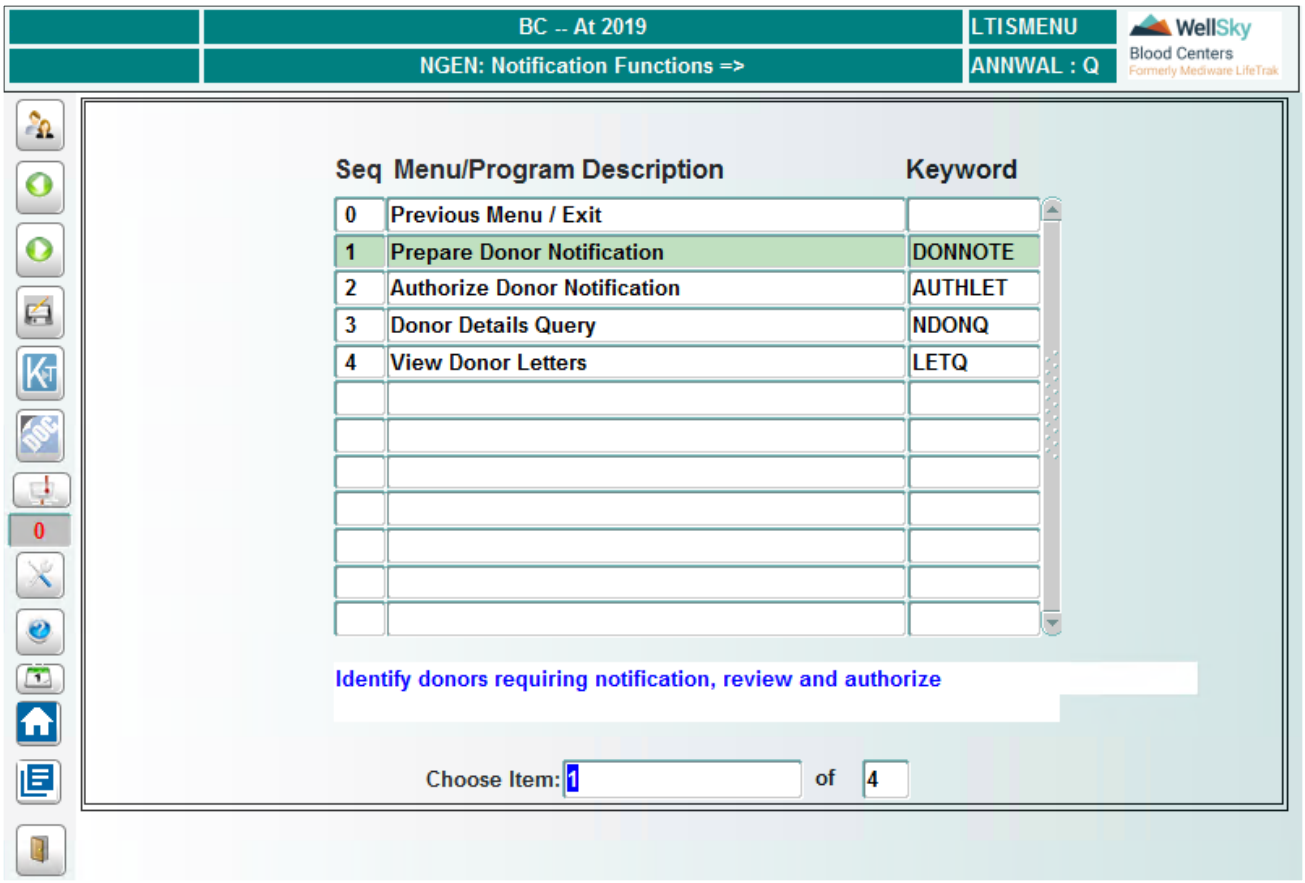


## 10.1.1 Prepare Donor Notification (DONNOTE)

### Intended Use

Use this screen to generate notification letters to donors deferred due to test results or other matters that have resulted in a specific temporary or indefinite deferral. This screen can access a library of approved letters that can be personalized for a specific donor.

### Limitations

- The system will only suggest an appropriate notification letter based on the interdiction code placed on the donor. The user must decide which letter to use.
- Only one notification letter can be sent to the donor. If multiple interdictions exist that require notification, the user must either select a combination letter of the two interdictions, or modify the letter to reflect the multiple interdictions.


WellSky Corporation
Proprietary and confidential

**Important!** It is the user's responsibility to ensure that the appropriate letter is chosen and that all donor data is correct and accurate. User should refer to and follow department SOPs prior to generating letters.

- Donor Notification will display all donors across chapters. Donors are set to be available at an enterprise level. If the donor is linked to a unit number, the unit number will display in the donor record. If the interdiction is placed manually and a unit ID is not associated, the unit number will be blank.

## Prerequisites

Interdiction-code to letter-code relationships must be available for letter recommendation.

## Accessing the Screen

Access this screen from the Donor Notification Functions menu or by entering the keyword DONNOTE.

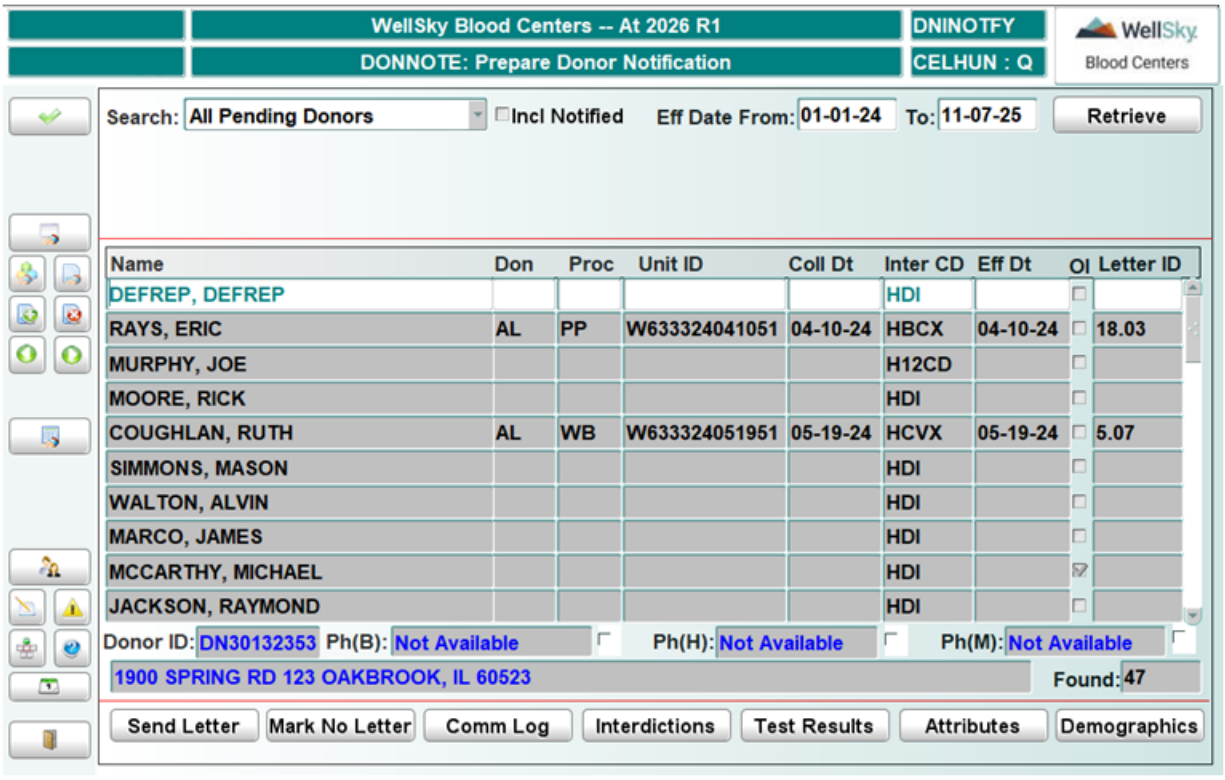


## Control Block Fields and Definitions

### Search

Entry is required. Click the drop-down arrow to choose from a list of search types.

### Incl Notified

Entry is optional. Active when searching by Interdiction Code, by Letter ID, or by Donor ID. Select to include donors who have already been notified.

### Eff Date From/To

Entry is optional. Active when searching by Interdiction Code, Letter ID, All Pending Donors or Donor Reinstatement. Enter date range to search, using the MMDDYY format.

The following fields appear depending on the selection made in the Search field:

### Inter Code

Entry is required if user chooses to search by Interdiction Code or Donor Reinstatement. Enter the code or choose from LOV.

### Letter ID

Entry is required if user chooses to search by Letter ID. Enter ID or select from LOV.

### Donor ID

Entry is required if user chooses to search by Donor ID. Enter donor ID.

### Unit ID

Entry is required if user chooses to search by Donation/Unit ID. Enter unit ID.

### Exclusive?

Entry is optional. Appears only if user chooses to search by Donor Reinstatement. Click to perform a search for donors with only the selected interdiction, and no others.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donors who match the criteria.

The following information displays, if it exists in the database:

- Donor name
- Donation type
- Donation procedure code
- Unit ID
- Collection date
- Interdiction code
- Effective date of interdiction
- Indication of other interdictions on donor
- Notification letter ID
- Donor ID
- Business (B) Telephone Number – if there is a check mark beside the number, it is designated as the preferred contact number.


WellSky Corporation
Proprietary and confidential

**NOTE –** To view the full work extension, place cursor in the Business (B) telephone field and scroll through the field using the LEFT and RIGHT arrow keys.

- Home (H) Telephone Number – if there is a check mark beside the number, it is designated as the preferred contact number.
- Mobile (M) Telephone Number – if there is a check mark beside the number, it is designated as the preferred contact number.
- Address

## The Send Letter Button

Click **Send Letter** to open the Generate Notification Letter window. Use this program to choose a notification letter to send to a donor based on interdiction code or codes. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Mark No Letter Button

Click **Mark No Letter** to open the Mark for No Letter window. Use this window to mark an interdicted donor to not receive a notification letter for a specific interdiction. This may be used if a donor has more than one interdiction. The user can include more than one interdiction to be covered in a single notification letter and mark the other interdictions to not receive a separate letter.

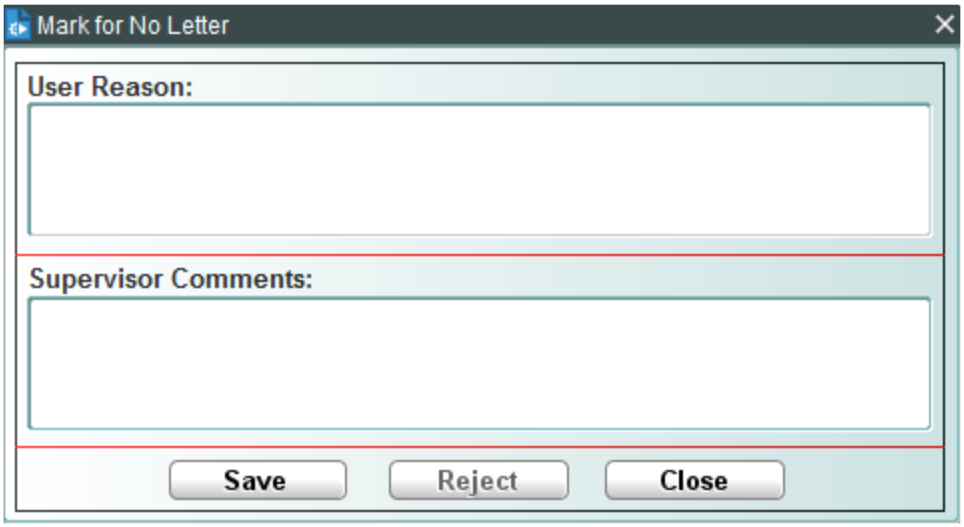


Enter reason into the User Reason field. A maximum of 120 characters can be entered. Entry in the Supervisor Comments field can only be made by a user with appropriate access in Authorize Donor Notification (AUTHLET).

## Viewing Communications Log

Click **Comm Log** to open the Communication Log window. Use this program to view a history of communications with a selected donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Interdictions

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Test Results

Click **Test Results** to open the Donation History window. Use this program to view a history of donations and test results for each donation by a donor. Test results that display in blue indicate abnormal test results. User must have access to view test results in order to access this feature. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Attributes

Click **Attributes** to open the Donor Attributes window. Use this program to place attributes on a donor or to view previously placed attributes. A user can view only those attributes for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Demographics

Click **Demographics** to open the Donor Demographics window. Use this program to view and change a donor's demographics. User must have access to the Donor Demographics window in order to update data. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

The notification letter is generated and the donor is marked as AUTHZ pending authorization by a user with appropriate access before the letter is sent. All data entered is saved to the donor database.

## What to Do Next

Once the notification letter is prepared, it must be authorized to be sent. To authorize the letter, use Authorize Donor Notification (AUTHLET) in Supervisor mode.

# 10.1.2 Authorize Donor Notification (AUTHLET)

## Intended Use

Use this screen to authorize previously generated notification letters to be sent to donors.

## Limitations

The system will only suggest an appropriate notification letter based on the interdiction code placed on the donor. The user must decide which letter to use.


WellSky Corporation
Proprietary and confidential

**Important!** Warning! It is the users' responsibility to ensure that the appropriate letter is chosen and that all donor data is correct and accurate. User should refer to and follow department SOPs prior to authorizing letters.

## Prerequisites

To authorize a letter to be sent, the letter must have previously been generated in Prepare Donor Notification (DONNOTE).

## Accessing the Screen

Access this screen from the Donor Notification Functions menu or by entering the keyword `AUTHLET`.

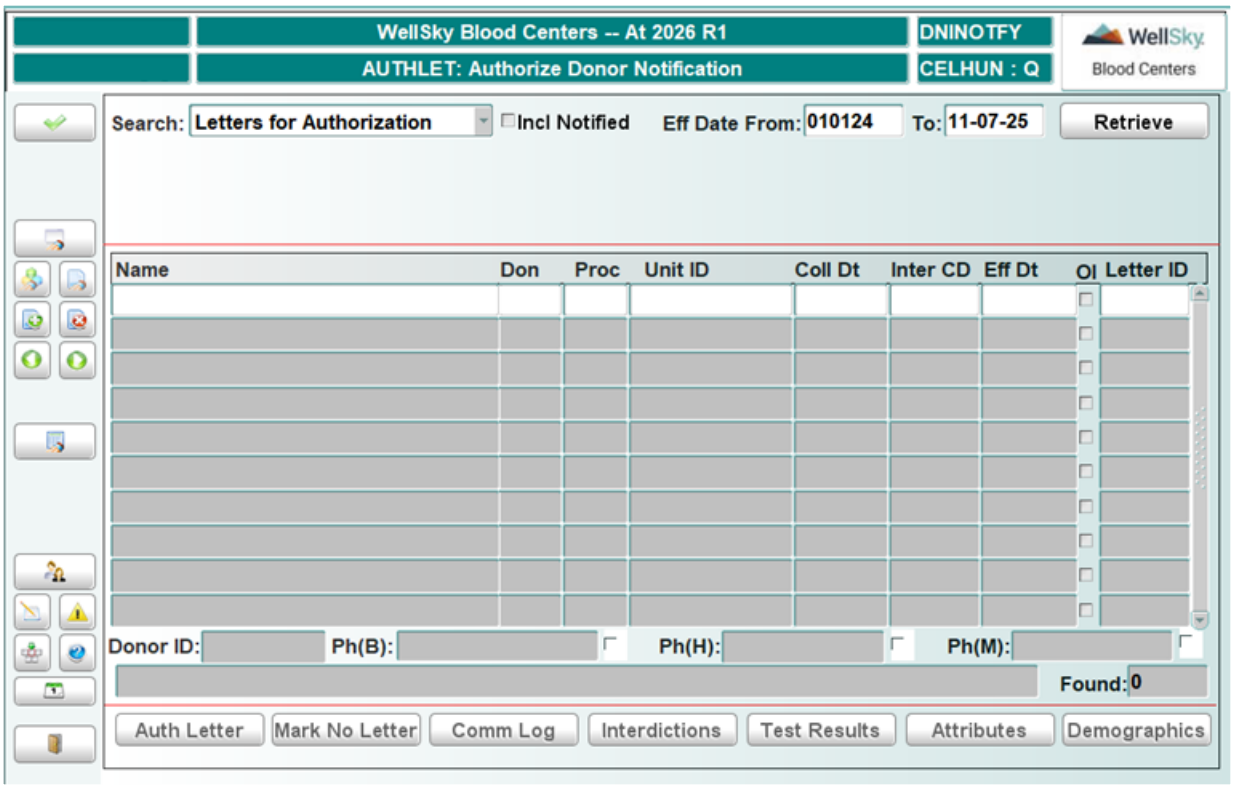


## Control Block Fields and Definitions

### Search

Entry is required. Click the drop-down arrow to choose from a list of search types.

### Incl Notified

Entry is optional. Active when searching by Interdiction Code, by Letter ID, or by Donor ID. Select to include donors who have already been notified.

### Eff Date From/To

Entry is optional. Active when searching by Interdiction Code, by Letter ID, by All Pending Donors or by Donor Reinstatement. Enter date range to search, using the MMDDYY format.

The following fields appear depending on selection made in the Search field:

### Inter Code

Entry is required if user chooses to search by Interdiction Code or Donor Reinstatement. Enter the code or choose from LOV.

### Letter ID

Entry is required if user chooses to search by Letter ID. Enter ID or select from LOV.

### Donor ID

Entry is required if user chooses to search by Donor ID. Enter donor ID.

### Unit ID

Entry is required if user chooses to search by Donation/Unit ID. Enter unit ID.

### Exclusive?

Entry is optional. Appears only if the user chooses to search by Donor Reinstatement. Click to perform a search for donors with only the selected interdiction, and no others.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donors who match the criteria.

The following information displays if it exists in the database:

- Donor name
- Donation type
- Donation procedure code
- Unit ID
- Collection date
- Interdiction code
- Effective date of interdiction
- Indication of other interdictions on donor
- Notification letter ID
- Donor ID
- Phone numbers (work, home, and mobile). A check mark beside the phone number designates the phone


WellSky Corporation
Proprietary and confidential

number as the preferred contact number.

- Address

## The Auth Letter Button

Click **Auth Letter** to open the Authorize Notification Letter window. Use this program to authorize a previously generated letter to be sent to the donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Mark No Letter Button

Enabled if search type is Letters for Authorization and the Mark No Letter was selected for the donor in Prepare Donor Notification (DONNOTE). Click **Mark No Letter** to open the Mark for No Letter window:

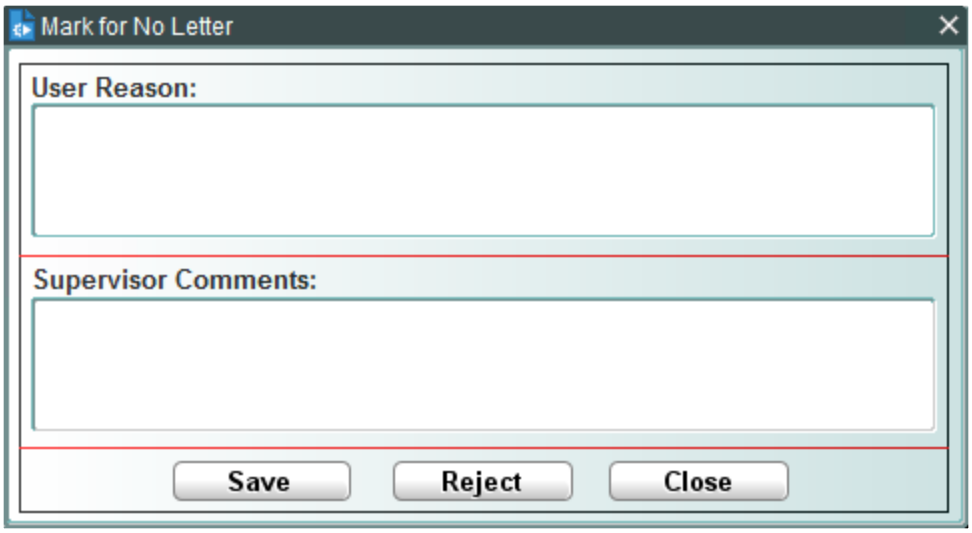


Use this window to mark an interdicted donor to not receive a notification letter for a specific interdiction. This may be used if a donor has more than one interdiction. The user can include more than one interdiction to be covered in a single notification letter and mark other interdictions so that they do not prompt separate letters.

Entry in the User Reason field can only be made in Prepare Donor Notification (DONNOTE). Entry in Supervisor Comments field can only be made by a user with appropriate access. A maximum of 110 characters is allowed.

## Viewing Communications

Click **Comm Log** to open the Communication Log window. Use this program to view a history of communications with a selected donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Interdictions

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Test Results

Click **Test Results** to open the Donation History window. Use this program to view a history of donations and test results for each donation by a donor. Test results that display in blue indicate abnormal test results. User must have access to view test results in order to access this feature. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Attributes

Click **Attributes** to open the Donor Attributes window. Use this program to place attributes on a donor or to view previously placed attributes. The user's ability to place and view some attributes is determined by the user's access level. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Demographics

Click **Demographics** to open the Donor Demographics window. Use this program to view and change demographic data for a donor. User must have access to the Donor Demographics window in order to update data. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

The notification letter is authorized to send. All data entered is saved to the donor database.

## What to Do Next

There is no next step.

# 10.1.3 Donor Details Query (NDONQ)

## Intended Use

Use this screen to view extensive details about a donor.

## Limitations

The user can view only those interdictions and attributes for which he or she has clearance.

## Prerequisites

The user must know the last name, first name, date of birth, phone number, address, Social Security number, or donor ID of the donor.

## Accessing the Screen

Access this screen from the Donor Notification Functions menu or by entering the keyword `NDONQ`.


WellSky Corporation
Proprietary and confidential

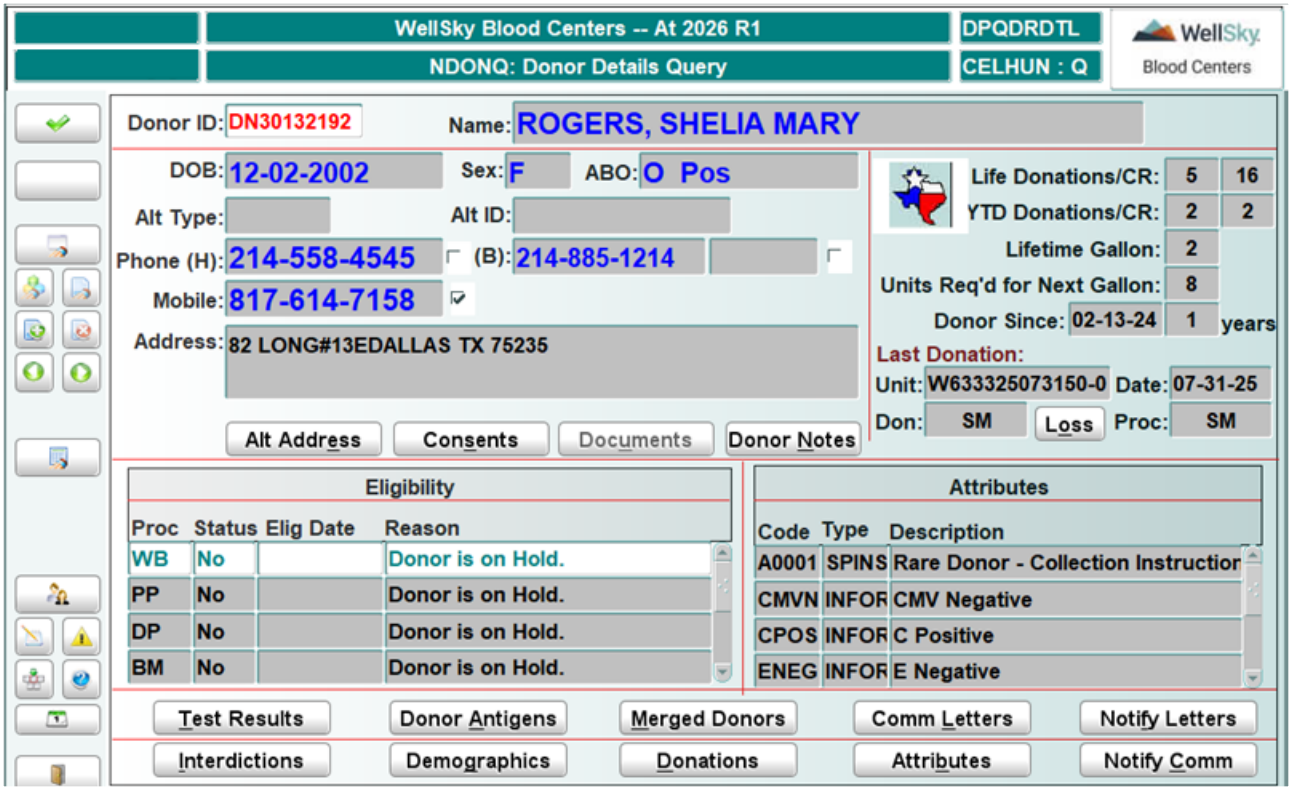


This screen appears with the Search for Donor window open. Before viewing a donor's details, the user must first search for the donor in the donor database. See Chapter 14 Called Windows and Routines for instructions on using this screen.

If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click on the desired donor. Click Select to go to the Donor Detail Query screen. The donor data from the selected donor in the Search for Donor window automatically displays.

## In the Donor Details Block

The following information displays, if it exists in the database:

- Donor ID
- Name
- ABO type
- Date of birth
- Sex
- Home phone number – If the home phone is the preferred contact number, there will be a check mark next to the number.
- Business phone number – If the business phone is the preferred contact number, there will be a check mark next to the number.

- Mobile phone number – If the mobile phone is the preferred contact number, there will be a check mark next to the number.
- Address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

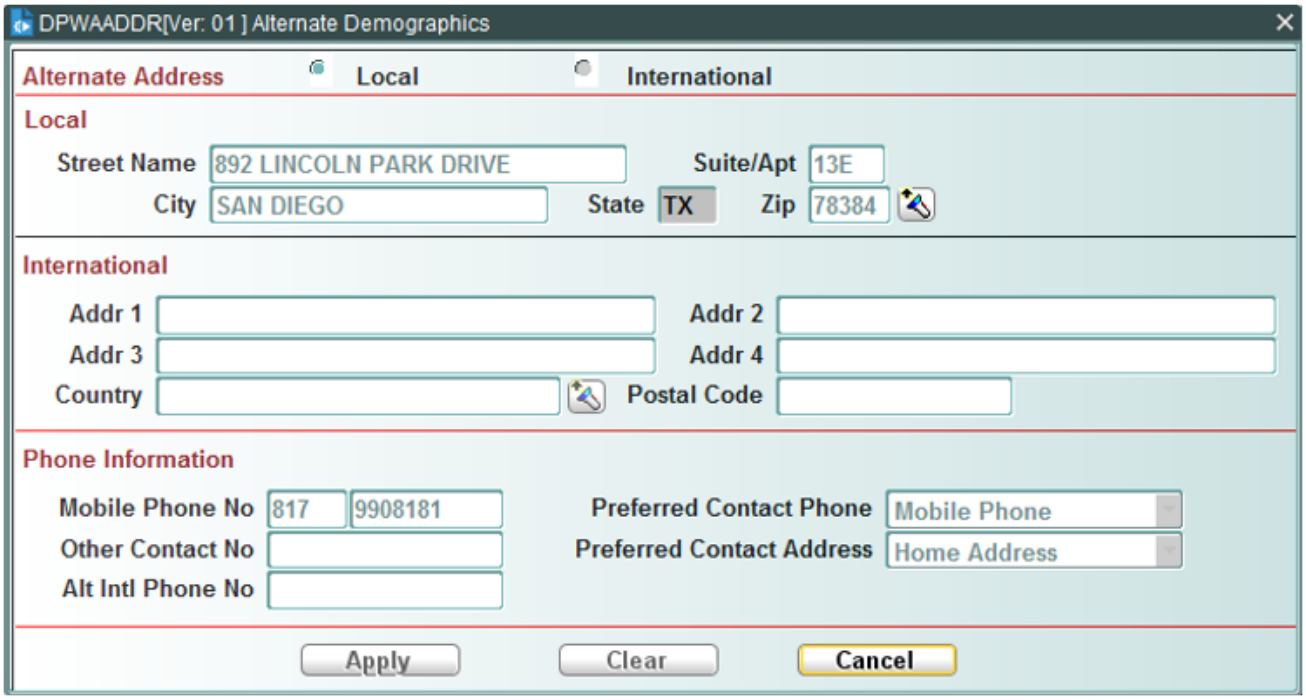


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

You can update alternate demographics information by doing the following:

- Click **Demographics** at the bottom of the screen, which opens the Donor Demographics window.
- Click **Alt Addr** in the Donor Demographics window, which opens the Alternate Demographics window in update mode.
- Make any necessary changes to alternate demographics information.
- Click **Apply** to save any changes made to the donor's alternate demographics.

## In the Donation Details Block

The following information displays, if it exists in the database:

- Lifetime donations and credits
- Year-to-date donations and credits
- Lifetime gallons donated


WellSky Corporation
Proprietary and confidential

- Units required for next gallon
- Unit ID of last unit donated
- Date of last donation
- Donation type
- Donation procedure

## In the Eligibility Block

The following information displays, if it exists in the database:

- Procedure type
- Eligibility status for that procedure type
- Date donor will become eligible for that procedure if currently ineligible
- Reason the donor is ineligible for that procedure

## In the Attributes Block

The following information displays, if it exists in the database:

- Attribute code
- Attribute type
- Attribute description

More details about a donor can be viewed by using the buttons at the bottom of the screen.

## Viewing Test Results

Click **Test Results** to open the Donation History Test Results window. Use this program to view a history of test results for past donations. User must have access to view test results in order to access this feature. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Donor Antigens

Click **Donor Antigens** to open the Donor Antigens Query (DONANTQ) screen. Use this screen to view a donor's RBC and HLA antigens. See Chapter 8 Donor Profile for instructions on using this screen.

Click **EXIT FORM** on the tool bar to return to the Donor Detail Query screen.

## Viewing Merged Donors

Click **Merged Donors** to open the Merged Information window. Use this program to view the details of a donor merge.

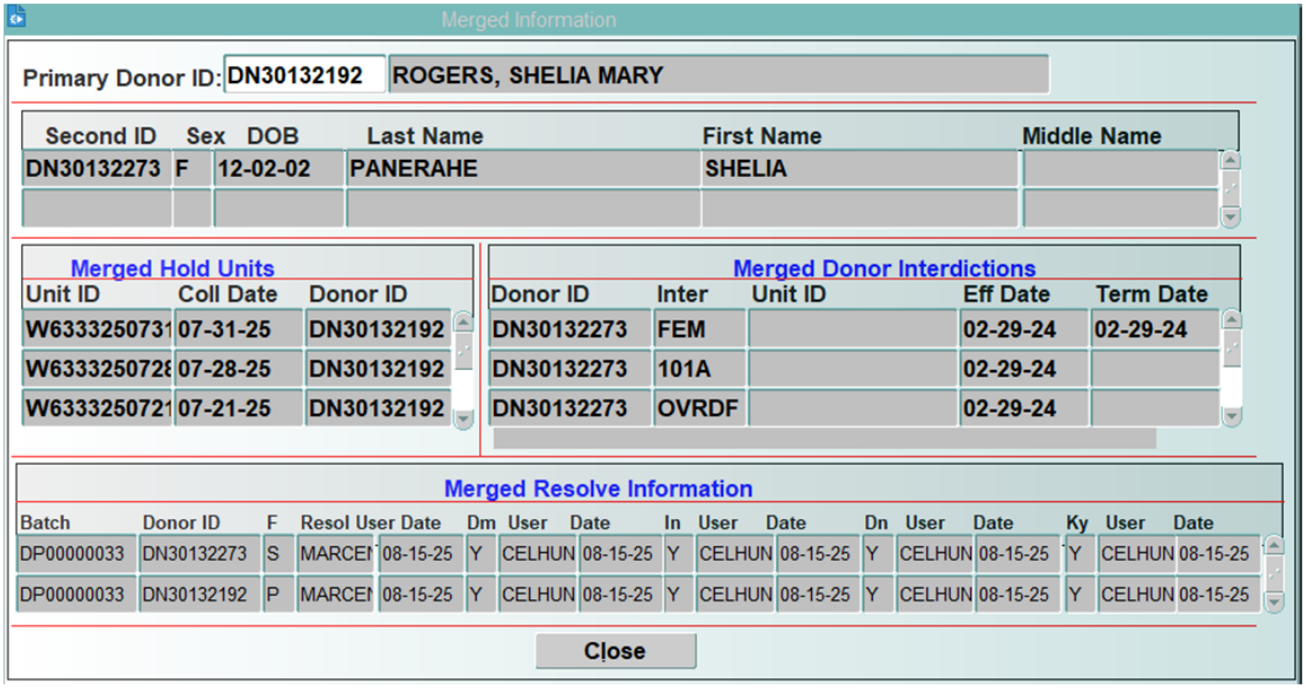


## Viewing Communication

Click **Comm Letters** to open the Communication Letters window. Use this program to view letters that have been sent to the donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Notification Letters

Click **Notify Letters** to open the Notification Letters window. Use this program to view notification letters that have been sent to a donor. User can view only those letters for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Interdictions

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view and place only those interdictions for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Demographics

Click **Demographics** to open the Donor Demographics window. Use this program to view demographics data for a donor. Demographics can be changed and saved from this program. User must have access to the Donor Demographics window in order to update data. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Donations

Click **Donations** to open the Donation History window. Use this program to view a donor's history of donations. See Chapter 14 Called Windows and Routines for instructions on using this program.


WellSky Corporation
Proprietary and confidential

## Viewing Attributes

Click **Attributes** to open the Donor Attributes window. Use this program to view attributes placed on a donor or to place new attributes on a donor. A user can view and place only those attributes for which he or she has access. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Notification Communication

Click **Notify Comm** to open the Communication Log window. Use this program to view a history of communications with a selected donor or to send a letter to a donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## Viewing Donor Consents

Click **Consents** to open the Consent Query. Use this program to view a history of Consents that have been signed or declined by the selected donor.

## Viewing Documents Attached to Donor

Click **Documents** to open the Document Library program. Use this program to view documents that have been linked to the selected donor. See Chapter 2, User Utilities, for instructions on using this program.

The button will only be active if there are external documents linked to the donor.

## The Donor Notes Button

Click this button to view notes placed on the donor through the OnSite (.net) application. Either use the mouse to click the button or use the hot key **`ALT + N`** to access the Donor Notes/Comments screen. Notes display in ascending order based on entry of the note, and a maximum of 240 characters displays.

**NOTE –** The button is active regardless of whether or not there are notes present.

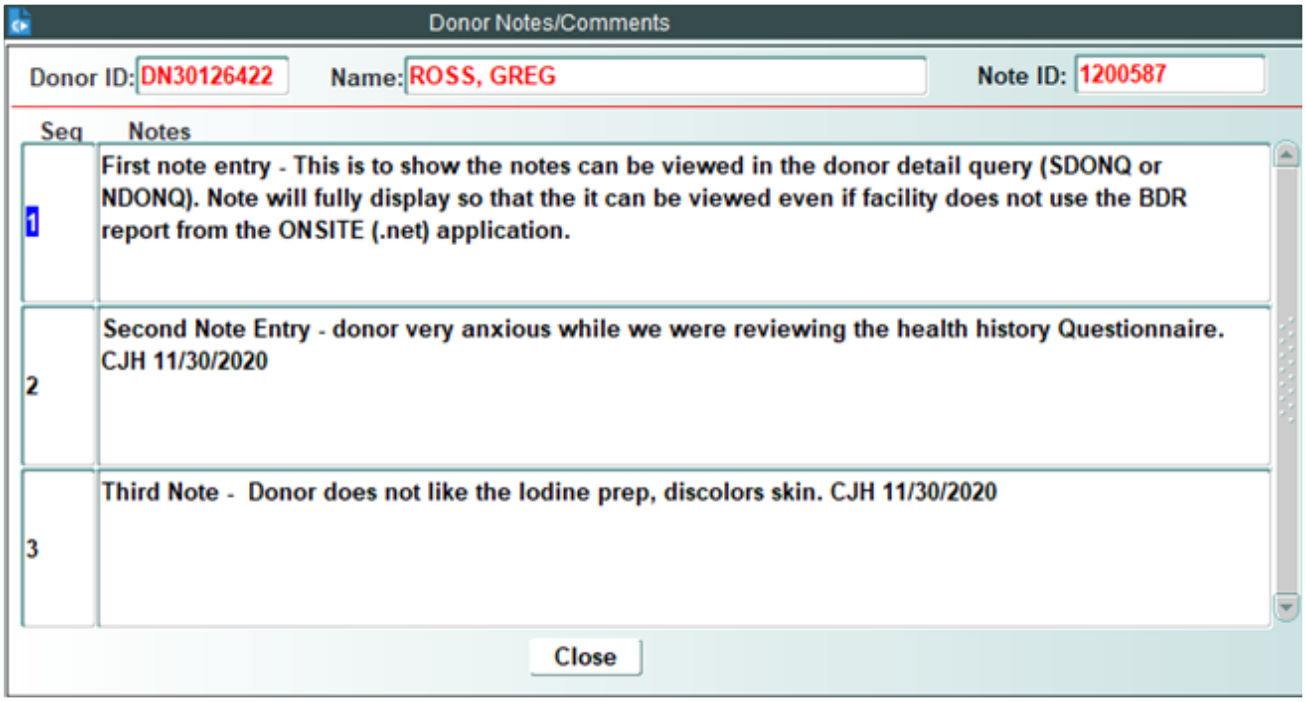


## At Commit

No data can be committed to the database from this screen. However, changes made through any of the called window programs are committed to the database.

## What to Do Next

There is no next step.

# 10.1.4 View Donor Letters (LETQ)

## Intended Use

Use this screen to view donor notification letters for a specified date range, by letter code within a date range or by donor ID within a date range.

## Limitations

A user may view only those letters for which he or she has clearance.

## Prerequisites

Letters must have previously been attached to donors.

## Accessing the Screen

Access this screen from the Donor Notification Functions menu or by entering the keyword `LETQ`.


WellSky Corporation
Proprietary and confidential

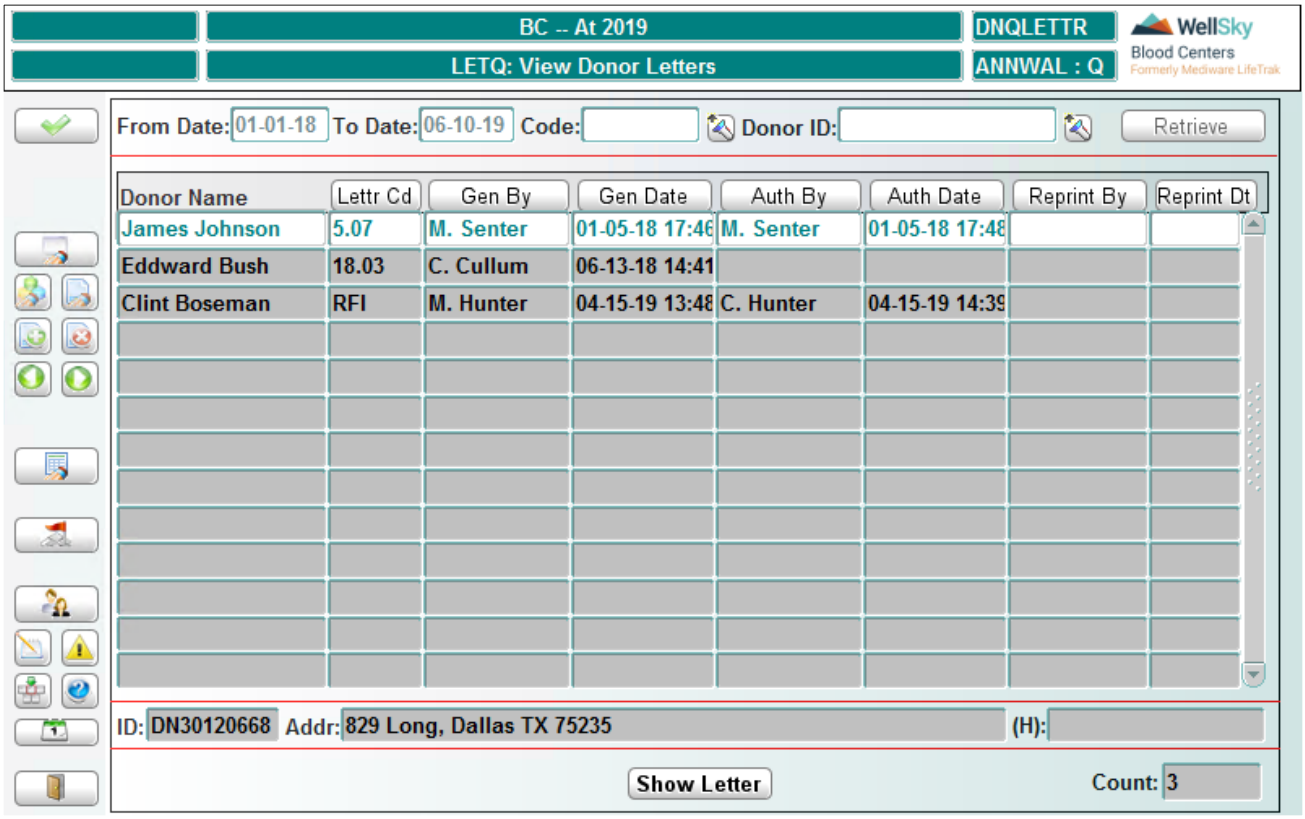


# Control Block Fields and Definitions

## From Date

Entry is required. Enter the beginning date of date range in MMDDYY format.

## To Date

Entry is required. Enter ending date of date range in MMDDYY format.

## Code

Entry is optional. Enter a letter code or select from LOV.

## Donor ID

Entry is optional. Enter a donor ID or select from LOV.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of letters matching the criteria.

The following information displays:

- Donor's name
- Letter code

- Name of user who generated the letter
- Date letter was generated
- User who authorized the letter
- Date letter was authorized
- User who reprinted the letter
- Date letter was reprinted
- Donor ID number
- Donor's address
- Donor's phone number

## The Show Letter Button

Click **Show Letter** to open a window to view the text of the letter sent to the donor.

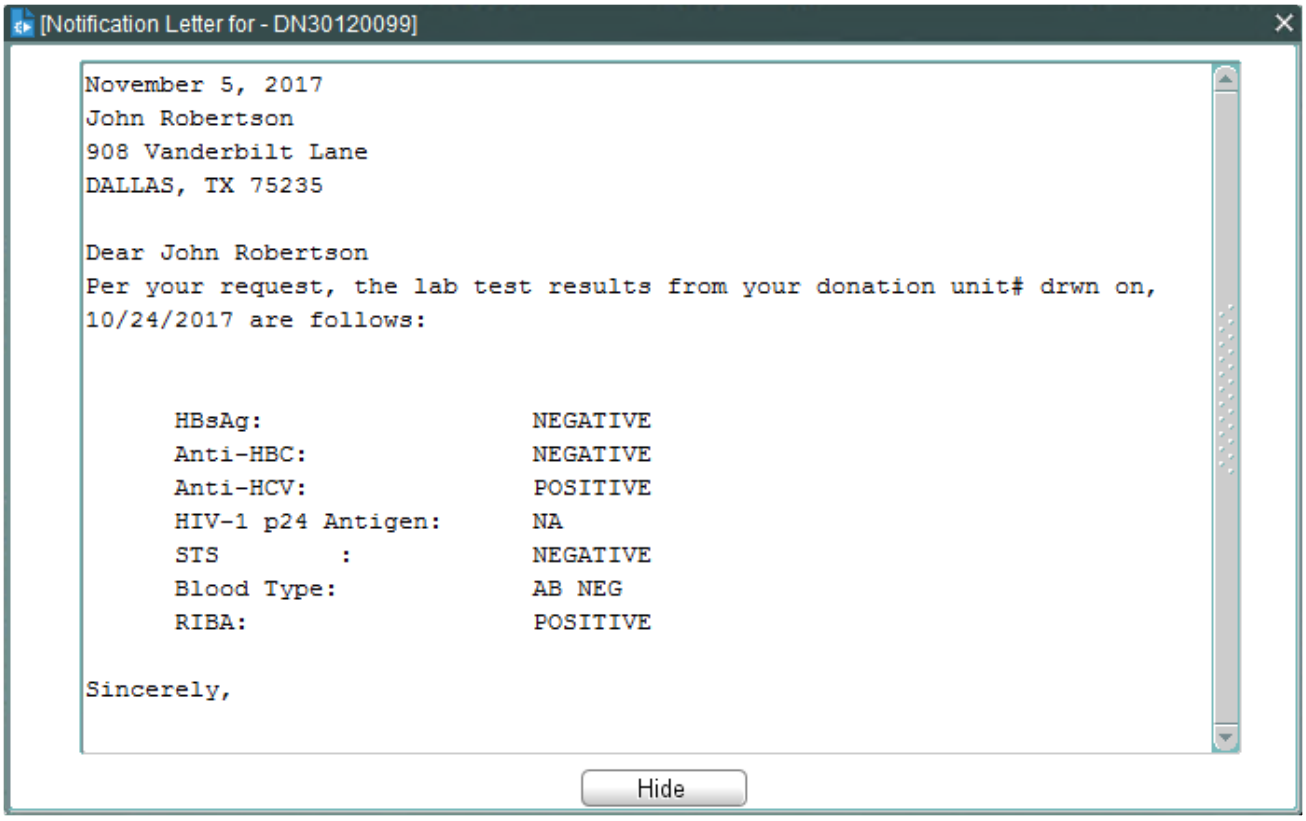


Click **Hide** to close the window and return to the main screen.

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

This Page Intentionally Left Blank

11

# Chapter 11 - Donor Communication


11.1 Introduction ..... 860
11.1.1 Screens ..... 860
11.2 Donor Communication Functions ..... 861
11.2.1 Multiple Donors Query (MDONQ2) ..... 861
11.2.2 Donors by Events Query (DEQ) ..... 861
11.2.3 Donor Communication Query (DCOMQ) ..... 865
11.2.4 First Time and Gallon Donor Labels (DLABEL) ..... 869
11.2.5 Edit Standard Donor Comm Letters (EDLET) ..... 872

# 11.1 Introduction

The Donor Communication Module is that portion of Donor designed to:

- Query multiple donors
- Query donors by events
- Query donors by communication log
- Query donors by communication date
- Generate donor address labels
- Define communication types
- Define communication letters
- View donors yet to receive cholesterol card

## 11.1.1 Screens

The following screens provide the capability to retrieve donors by various criteria and to define donor communications.


WellSky Corporation
Proprietary and confidential

# 11.2 Donor Communication Functions

These functions are accessed from the following menu:

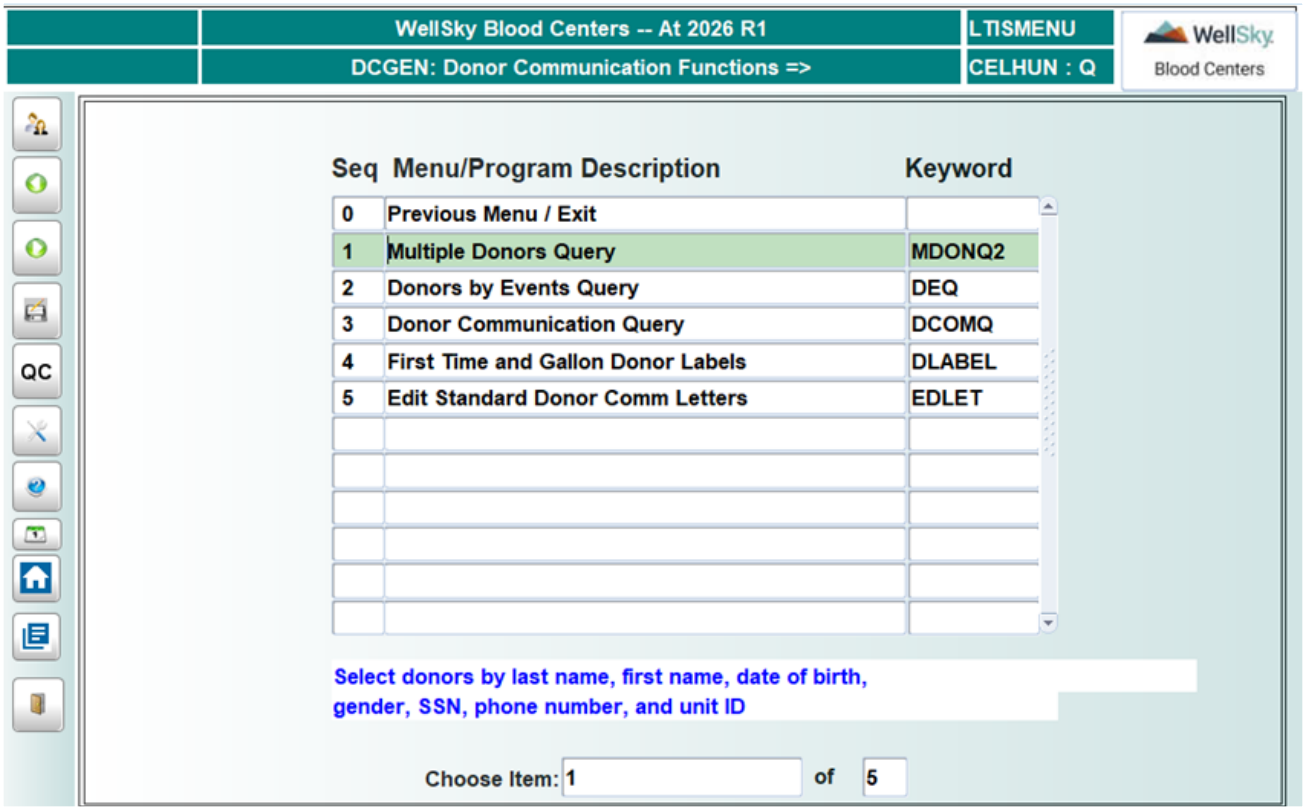


## 11.2.1 Multiple Donors Query (MDONQ2)

Refer to Multiple Donors Query in Chapter 8 Donor Profile for instructions on using this screen.

## 11.2.2 Donors by Events Query (DEQ)

### Intended Use

Use this screen to query donor details based on donation or donor events.

### Limitations

None

### Prerequisites

There are no prerequisites for the use of this screen.

# Accessing the Screen

Access this screen from the Donor Communication Functions menu or by entering the keyword DEQ.

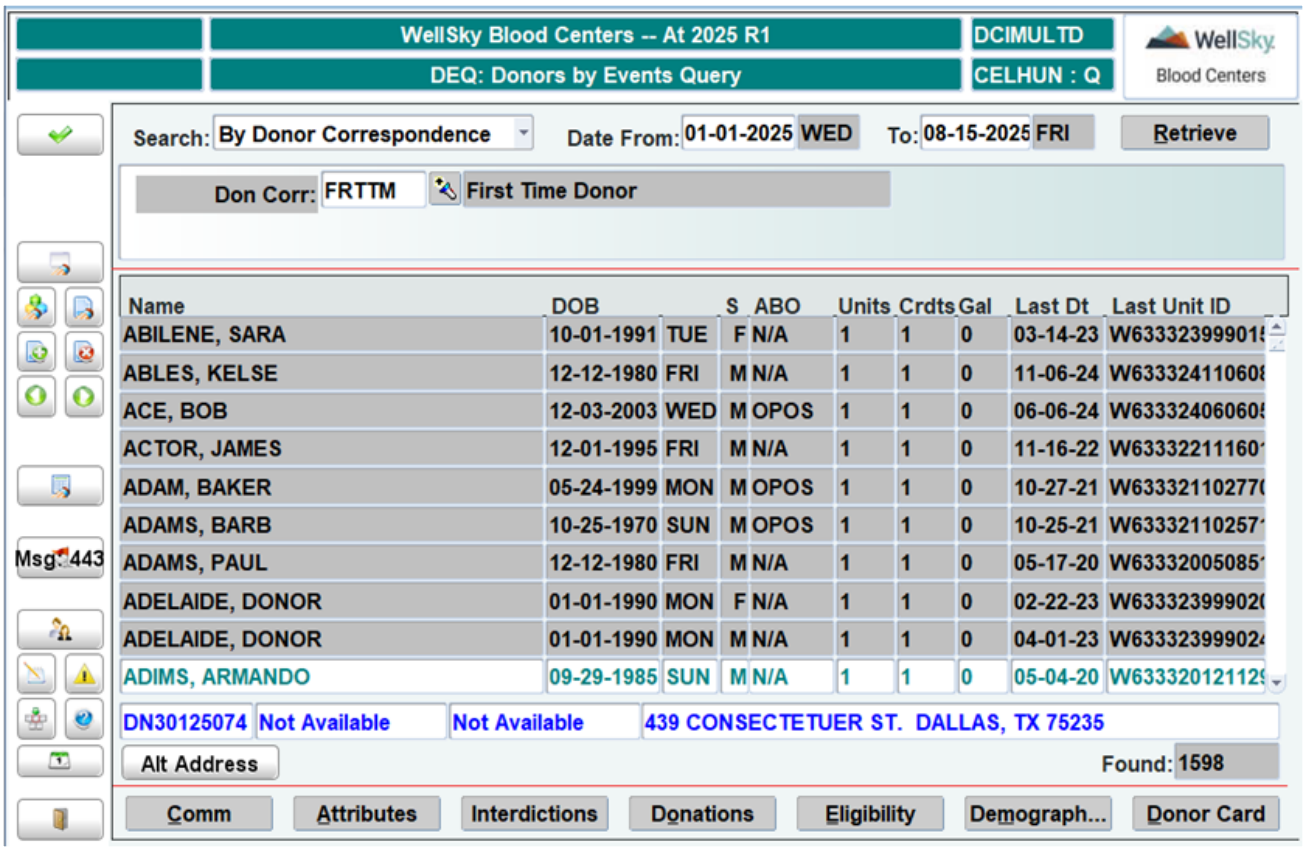


# Control Block Fields and Definitions

## Search

Click the drop-down arrow to choose from a list of search types.

## Date From

Entry is required. Enter the starting date for the date range to search, using the MMDDYYYY format. Future date not allowed.

## To

Entry is required. Enter the ending date for the date range to search, using the MMDDYYYY format. Future date not allowed.

The following fields appear depending on the selection made in the Search field:

## Action Code

Entry is optional. Appears if searching By Pending Action Code. Enter code or choose from LOV.


WellSky Corporation
Proprietary and confidential

### Complaints
Entry is optional. Appears if searching By Donor Complaint. Enter code or choose from LOV.

### Don Corr
Entry is required. Appears if searching By Donor Correspondence. Enter code or choose from LOV.

### Donor Requests
Entry is required. Appears if searching By Donor Request. Enter code or choose from LOV.

### Reactions
Entry is required. Appears if searching By Donor Reaction. Enter code or choose from LOV.

### Donation Credits
Entry is required. Appears if searching By Donation Credits. Enter number of credits for which to search.

### No. Of Donation
Entry is required. Appears if searching By Donor Donations. Enter number of donations for which to search.

**NOTE –** No extra fields appear when searching By Birthdate or by First Time Donors [Fixed].

## Retrieving Data
After entering search criteria, click **Retrieve** to display a list of donors who fit the search criteria.

## In the Donor List Block
The following donor information displays:

- Name
- Date and day of birth
- Sex
- ABO type
- Number of units donated
- Number of donation credits
- Gallons donated
- Date of last donation
- Unit ID of last unit donated

At the bottom of the Donor List Block, the following data displays for the selected donor:

- Donor ID number
- Work phone number

- Home phone number
- Address

## Alt Address (button)

Click **Alt Address** to view the donor's alternate demographics information, as follows:

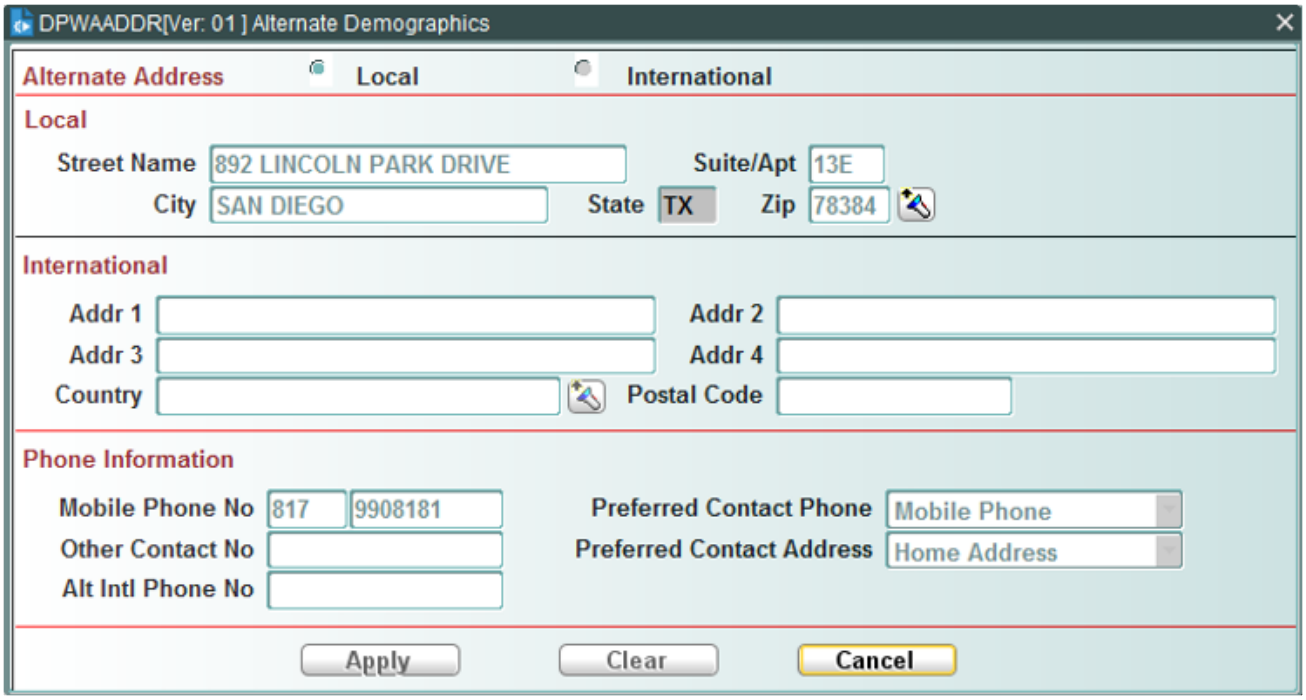


This window is read-only and cannot be updated. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for field descriptions.

You can update alternate demographics information by doing the following:

- Click **Demographics** at the bottom of the screen, which opens the Donor Demographics window.
- Click **Alt Addr** in the Donor Demographics window, which opens the Alternate Demographics window in update mode.
- Make any necessary changes to alternate demographics information.
- Click **Apply** to save any changes made to the donor's alternate demographics.

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Comm Button

Click **Comm** to open the Communication Log window. Use this program to view a history of communications with a selected donor. See Chapter 14 Called Windows and Routines for instructions on using this program.


WellSky Corporation
Proprietary and confidential

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to place attributes on a donor or to view previously placed attributes. The user's ability to place and view attributes is determined by the user's access level. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he has clearance. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a history of donations and test results for each donation by a donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Eligibility Button

Click **Eligibility** to open the Donor Eligibility window. Use this program to view the current donation eligibility of a donor for all donation procedures. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view and change donor demographics. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donor Card Button

Click **Donor** Card to open the Donation History Print Card window. Use this program to reprint or recreate the last donor card. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

No data can be committed to the database from this screen. Changes made through any of the called windows are committed to the database.

## What to Do Next

There is no next step.

# 11.2.3 Donor Communication Query (DCOMQ)

## Intended Use

Use this screen to view a log of donor communications by date range.

## Limitations

None

## Prerequisites

User must have generated the communication sent to the donor.

## Accessing the Screen

Access this screen from the Donor Communication Functions menu or by entering the keyword DCOMQ.

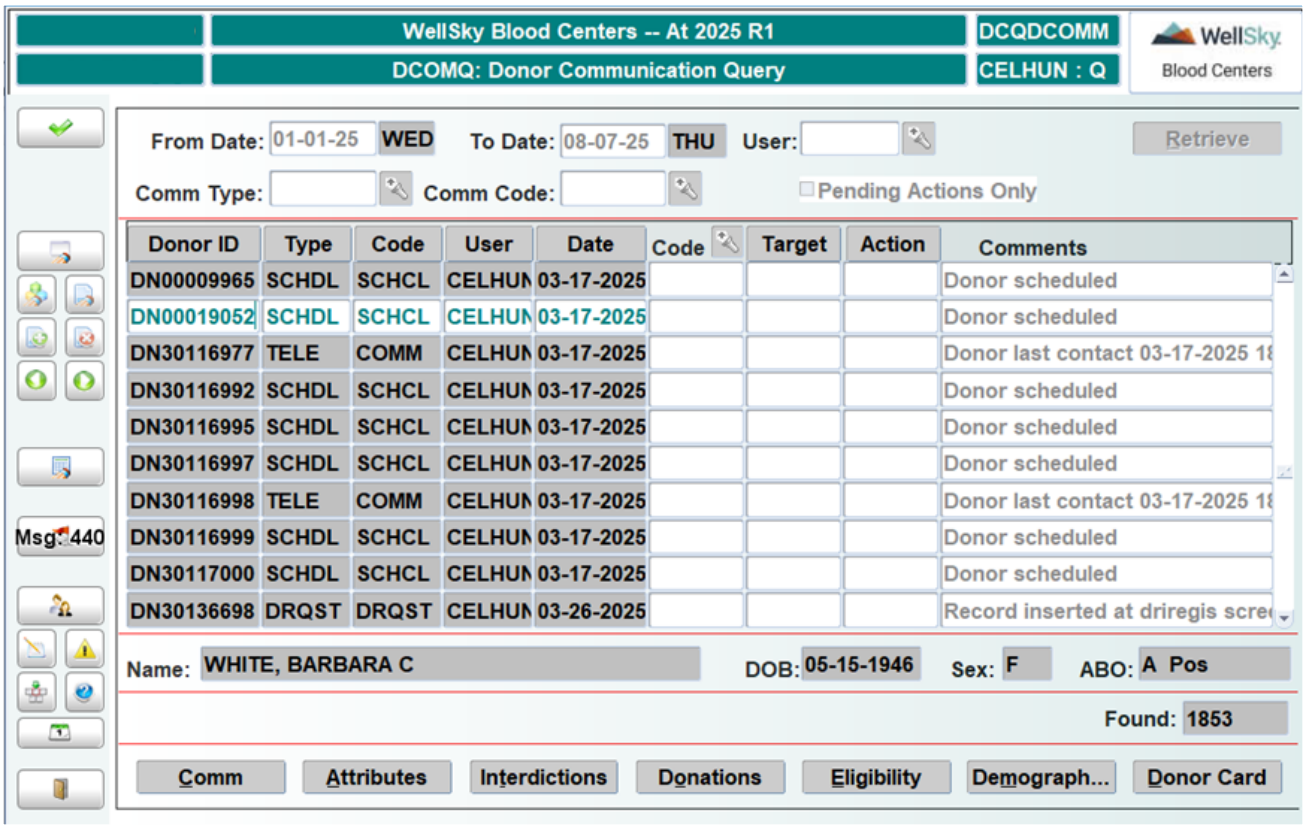


## Control Block Fields and Definitions

### From Date

Entry is required. Enter the beginning date of the search range in MMDDYY format. The system automatically displays the day of the week.

### To Date

Entry is required. Enter the ending date of the search range in MMDDYY format. The system automatically displays the day of the week.

### User

Entry is optional. Enter the user ID or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Comm Type
Entry is optional. Enter the communication type or select from the LOV.

### Comm Code
Entry is optional. Enter communication code or select from LOV.

### Pending Actions Only
Click to retrieve donor communications that have actions pending.

## Retrieving Data
After entering search criteria, click **Retrieve**. A log of all donor communications that the user created and that match the search criteria displays.

## In the Donor Records Block
The following information displays for each record, if it exists in the database:

- Donor ID number
- Communication type
- Communication code
- Employee user ID
- Date of communication
- Action code
- Target date of action
- Action date
- Comments associated with the record

The following information displays at the bottom of the donor records block for the selected donor:

- Name
- Date of birth
- Sex
- ABO type

## Controlling and Moving Within the Data Display
Click any of the column heading buttons to sort the display by data in that column. Click the same column heading again to reverse the sort order by data in that column.

**NOTE –** If you have not been granted access to a screen that is called by one of the buttons described below, you will receive an error message if you click that button. The instructions below assume that you have been granted access to all screens called by the buttons.

## The Comm Button

Click **Comm** to open the Communication Log window. Use this program to view a history of communications with a selected donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Attributes Button

Click **Attributes** to open the Donor Attributes window. Use this program to place attributes on a donor or to view previously placed attributes. The user's ability to place and view attributes is determined by the user's access level. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. Use this program to view interdictions that have been placed on a donor. A user can view only those interdictions for which he has clearance. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donations Button

Click **Donations** to open the Donation History window. Use this program to view a history of donations and test results for each donation by a donor. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Eligibility Button

Click **Eligibility** to open the Donor Eligibility window. Use this program to view the current donation eligibility of a donor for all donation procedures. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Demographics Button

Click **Demographics** to open the Donor Demographics window. Use this program to view and change donor demographics. See Chapter 14 Called Windows and Routines for instructions on using this program.

## The Donor Card Button

Click **Donor Card** to open the Donation History Print Card window. Use this program to reprint or recreate the last donor card. See Chapter 14 Called Windows and Routines for instructions on using this program.

## At Commit

All changes made in this screen are committed to the database.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 11.2.4 First Time and Gallon Donor Labels (DLABEL)

## Intended Use

Use this screen to generate and print donor address labels.

## Limitations

None

## Prerequisites

Donors must be registered, and printers must be defined.

## Accessing the Screen

Access this screen from the Donor Communication Functions menu or by entering the keyword `DLABEL`.

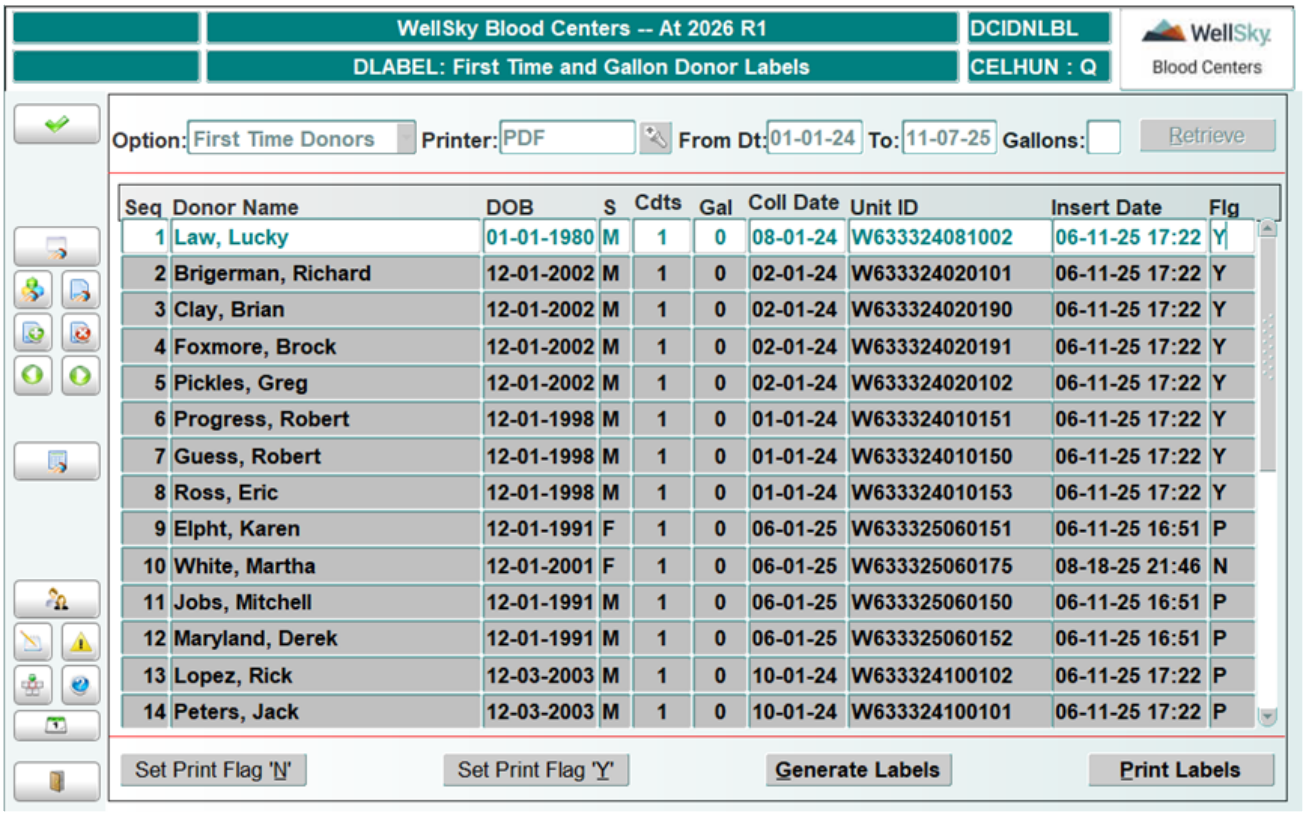


## Control Block Fields and Definitions

### Option

Entry is required. Choose First Time Donors or Gallon Donors from the drop-down list.

### Printer
Entry is required. Enter the printer name or select from the LOV.

### From Dt
Entry is required. Enter the beginning date of the date range in MMDDYY format. Future dates are not allowed.

### To
Entry is required. Enter the ending date of the date range in MMDDYY format. Future dates not allowed.

### Gallons
Entry is optional. Enter number of gallons to search.

## Retrieving Data
After entering the search criteria, click **Retrieve** to display a list of all donors that match the criteria. The following donor information displays:

- Name
- Date of birth
- Sex
- Number of donation credits
- Gallons donated
- Date of last donation
- ID of last unit donated
- Date label was inserted
- Print Flag: N = No, Y = Yes, P = Printed

## The Set Print Flag 'N' Button
Click **Set Print Flag 'N'** to set the print flags for all retrieved records to N for No. This generates communication entries. A decision message pops up requesting confirmation:

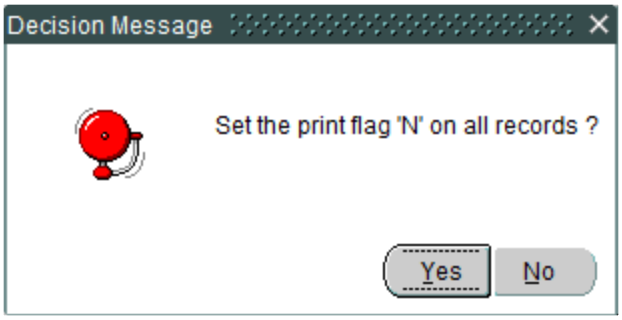

## The Set Print Flag 'Y' Button

Click **Set Print Flag 'Y'** to set the print flags for all retrieved records to Y for Yes. This flags all labels to be reprinted. A decision message pops up requesting confirmation:

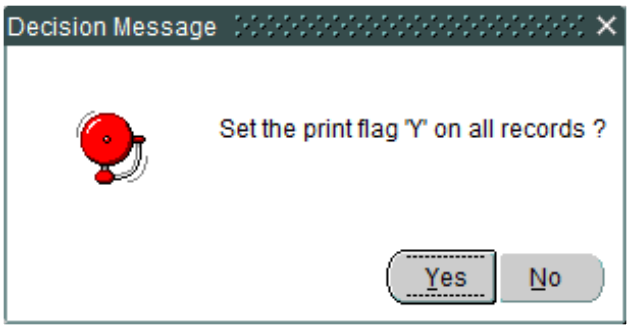


## The Generate Labels Button

Click **Generate Labels** to generate and prepare labels for printing. A decision message pops up requesting confirmation:

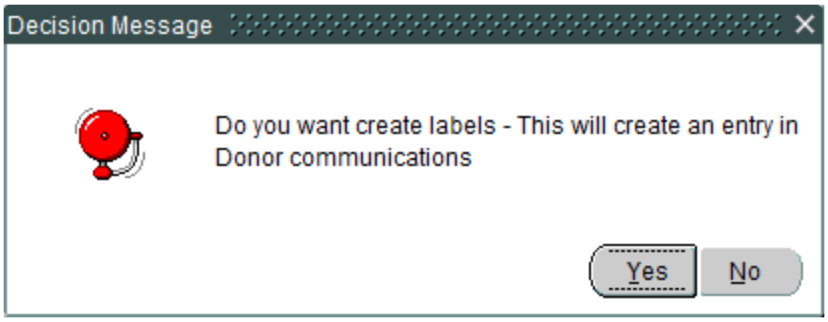


**NOTE –** An entry is created in donor communication: FRTTM for first time donors, or GAL for gallon donors.

## The Print Labels Button

Click **Print Labels** to print the generated labels on the designated printer. A decision message pops up requesting confirmation that the printer is loaded with label paper:

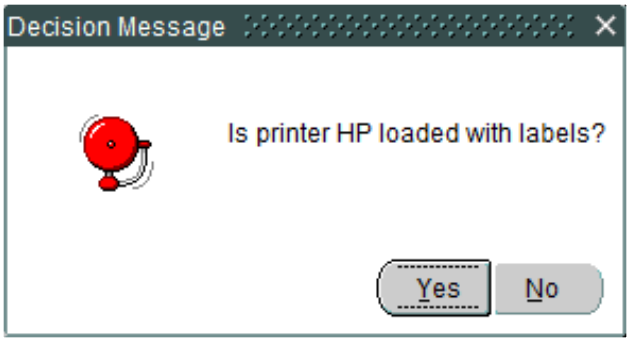

## At Commit

No data can be committed from this screen.

## What to Do Next

There is no next step.

# 11.2.5 Edit Standard Donor Comm Letters (EDLET)

## Intended Use

Use this screen to edit previously written donor communication letters.

## Limitations

Letters must have been defined.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Donor Communication Functions menu or by entering the keyword `EDLET`.

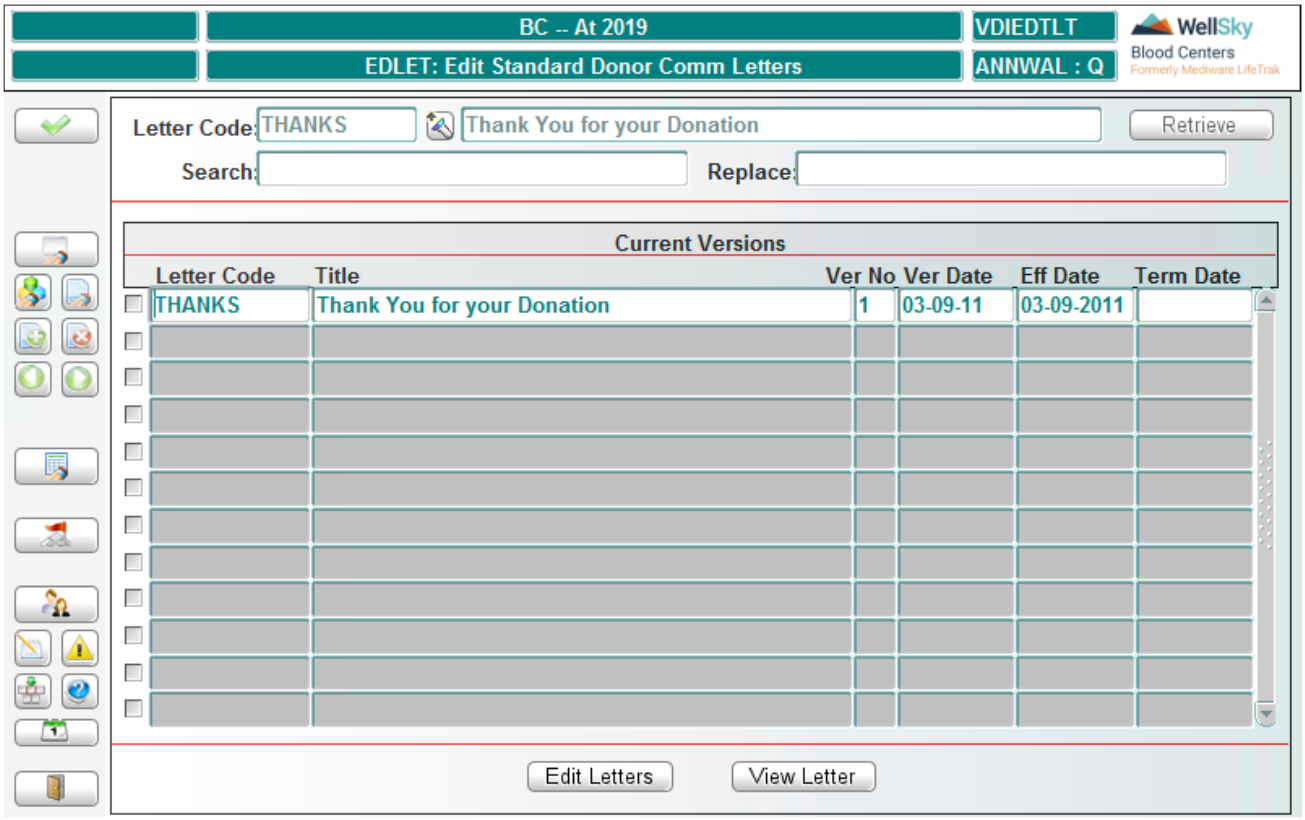



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Letter Code

Entry is optional. Enter code of letter to retrieve or select from the LOV.

## Search

Entry is optional. Enter search parameter.

## Replace

Entry is optional. Enter replacement parameter.

# Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of communication letters that match the search criteria.

The following data displays for the retrieved letters:

- Letter code
- Title of letter
- Version of letter
- Date version was written
- Date version became active
- Date version was or will be terminated

# The Edit Letters Button

Select a letter to edit by clicking in the selection box next to the letter. Enter a word or phrase in the Search and Replace fields in the Control Block. Click **Edit Letters** and the change is made and committed to the database. A confirmation pop-up displays:

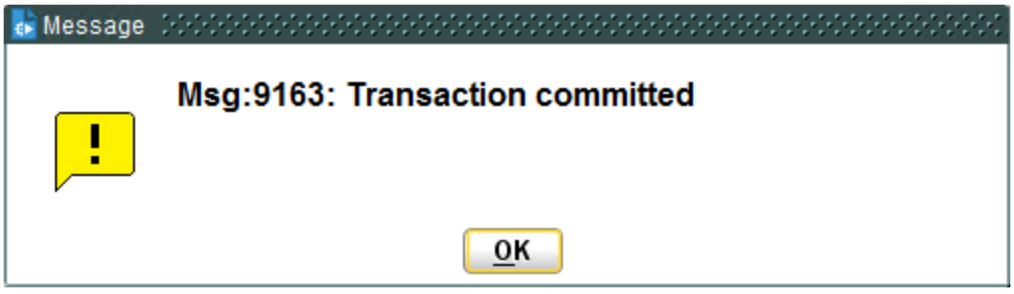


# The View Letter Button

Select a letter to view by clicking in the selection box next to the letter. Click **View Letters** and the text of the letter displays on the screen.

The View Letter button changes to Hide Letter. Click **Hide Letter** to close the window and return to the main view. You can also access the Edit Letters button from this screen.

## At Commit

All changes are committed to the database.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

12

# Chapter 12 - Special Donations


12.1 Introduction ..... 876
12.1.1 Structure ..... 876
12.2 Special Donations Functions ..... 877
12.2.1 Register Special Donation Request (SPREQ) ..... 877
12.2.2 Link Unit to Special Donation (SLINK) ..... 884
12.2.3 Special Donation Status Query (SPUNITQ) ..... 889
12.2.4 Print Auto/Directed Tie Tags (ADTT) ..... 891
12.2.5 Print Special Instructions Tie Tags (SPTT) ..... 897
12.2.6 Maintain Physician List (PHY) ..... 901
12.2.7 Maintain Special Instructions (SPIN) ..... 905

# 12.1 Introduction

The Special Donations Module is that portion of Donor designed to:

- Register a request for special donations
- Link a unit to a special donation
- Query the status of a special donation
- Print an auto or directed tie tag
- Print special instructions on a tie tag
- Maintain physician list
- Maintain special instructions

## 12.1.1 Structure

Seven screens provide the capability to register a special donation request, link a unit to a special donation, query the status of special donations, print an auto or directed tie tag, print special instructions on a tie tag, maintain a list of physicians, and maintain special instructions.


WellSky Corporation
Proprietary and confidential

# 12.2 Special Donations Functions

These functions are accessed from the following menu:

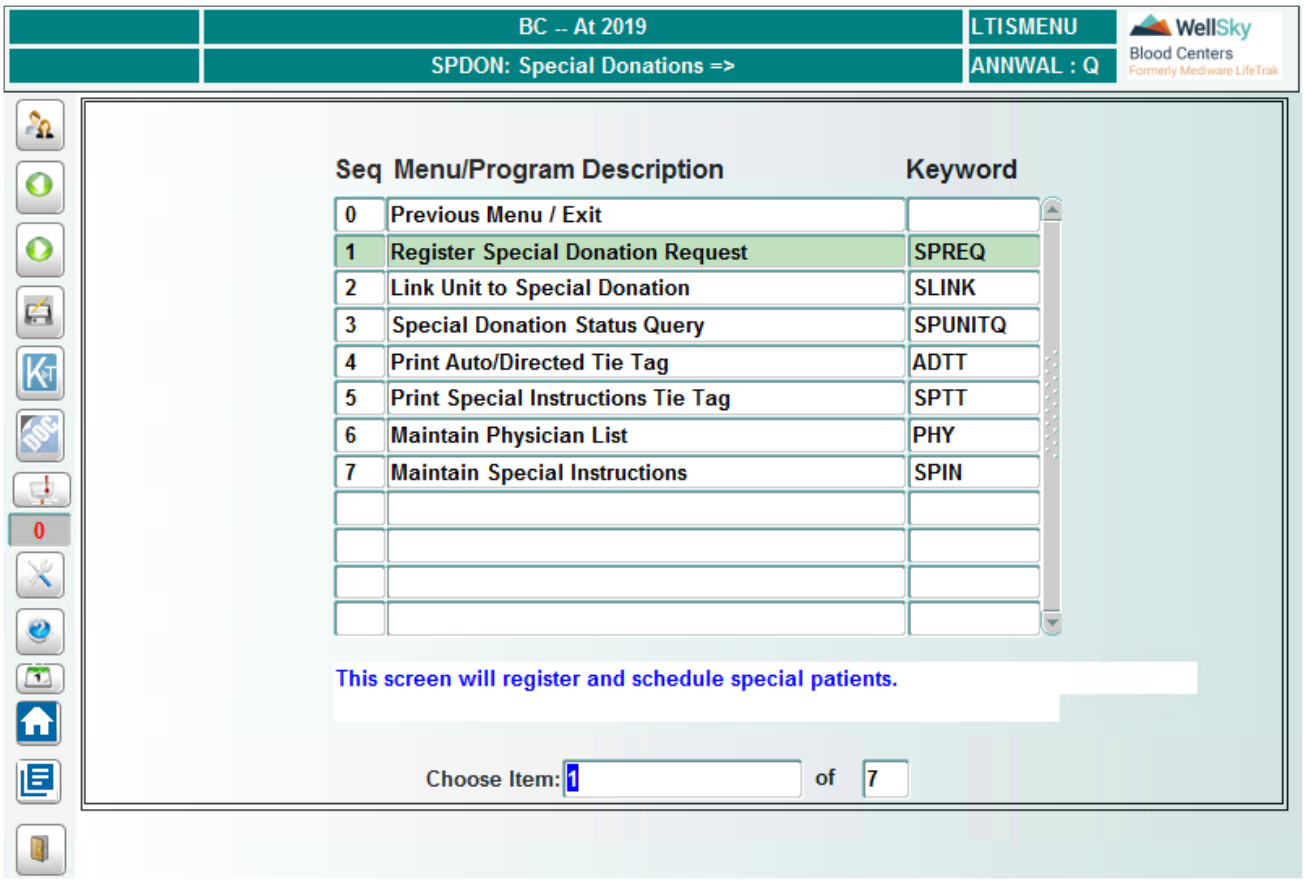


## 12.2.1 Register Special Donation Request (SPREQ)

### Intended Use

Use this screen to register a request for a special donation for a patient.

### Limitations

If Donor is not linked to Distribution, the Hospital and Ship To location will be populated with a generic location.

Data located within a field with a white background can be modified. If the field background is gray, the information cannot be updated.

### Prerequisites

None

# Accessing the Screen

Access this screen from the Special Donations menu or by entering the keyword SPREQ.

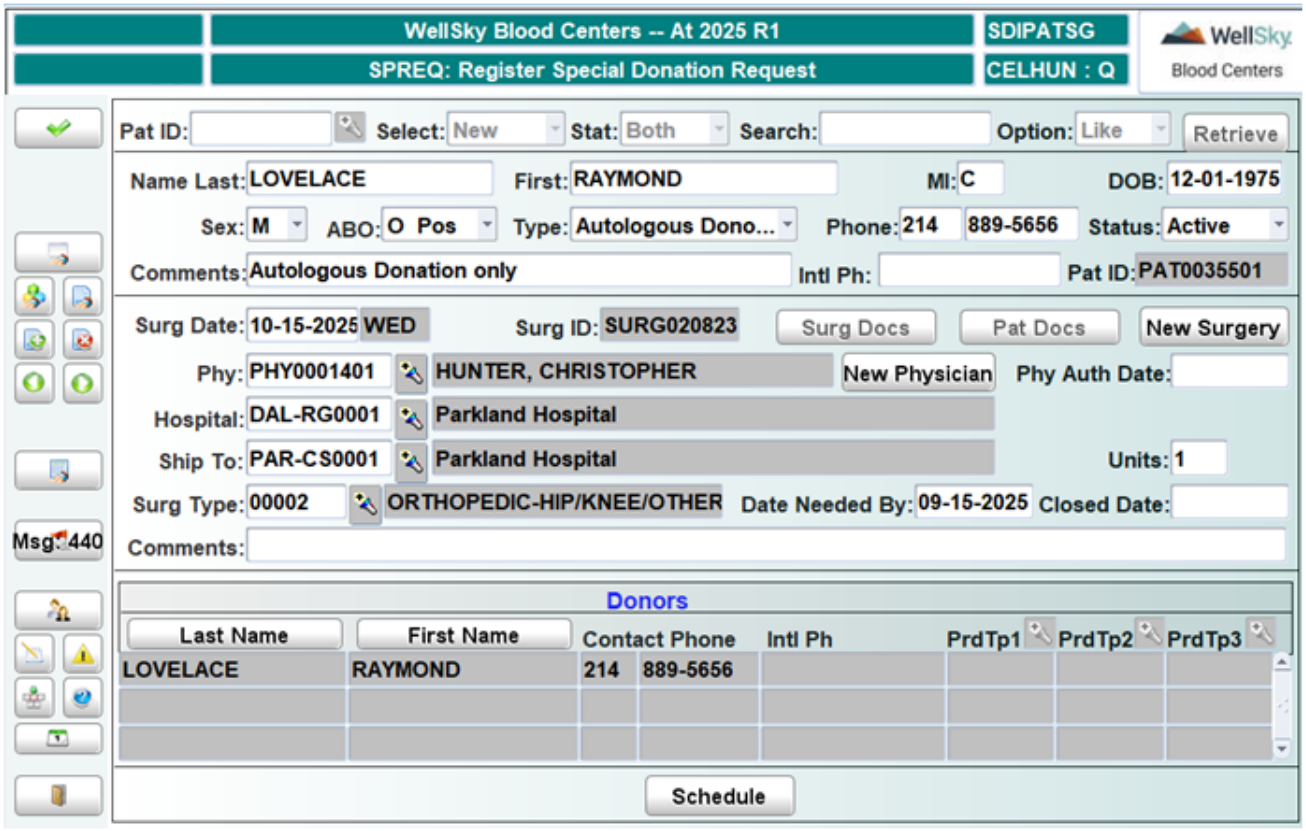


# Control Block Fields and Definitions

## Pat ID

Entry is optional. Enter patient ID or select from the LOV.

## Select

Entry is required. The system default is Existing, which is for a patient already present in the system, or select **New** from the drop-down list for a new patient.

## Stat

Entry is required. From the drop-down list, choose patient status. System default is Both, which displays active and inactive patients.

## Search

Entry is optional. Enter a partial first or last name of the patient.

### Option

Entry is required. Select the search option from the drop-down list. System default is Like, which searches for patients with a similar name. Selection of Exact searches for patients with the exact same name.

## Searching for an Existing Patient

If searching for an existing patient, click **Retrieve** to open a window with a list of donors that match the search criteria.

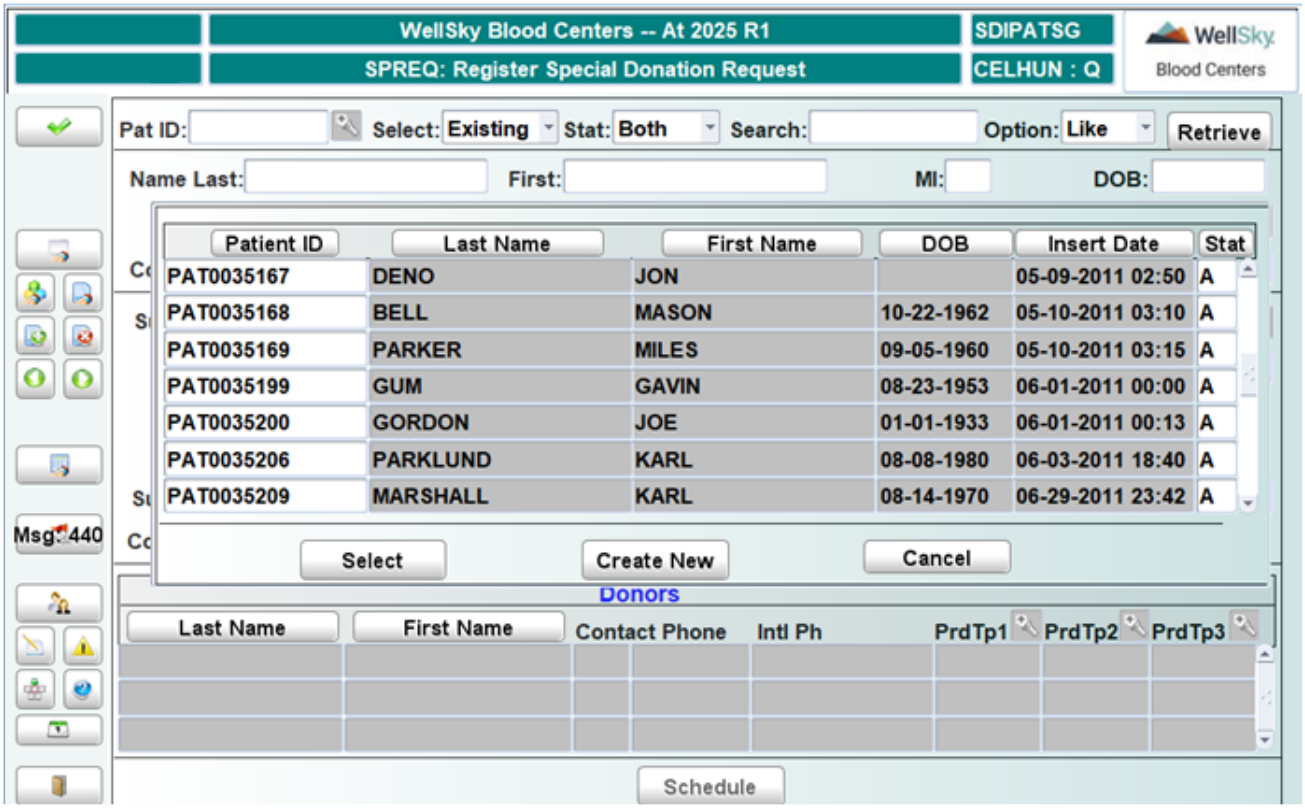


By default, the list is sorted in ascending order by Insert Date. To re-sort the list, click on one of the column headings. For example, click **DOB** to re-sort the list by date of birth, in ascending order. To re-sort in descending order, click **DOB** a second time. Use this method to re-sort the list by any of the other column headings.

Scroll through the list of names. When the desired name is found, click **Select**. If the desired name is not on the list, click **Create New**.

If the desired name is found and the Select button is clicked, the list window closes and information attached to the selected patient displays in the main form.

## In the Patient Data Block

The following patient information displays, if it exists in the database:

- Last name, first name, and middle initial
- Date of birth (DOB)

- Sex
- ABO type
- Type of donation
- Phone number
- Status
- Comments attached to the patient
- Patient ID

## In the Surgery Data Block

The following surgical information displays, if it exists in the database:

- Surgery data
- Surgery ID number
- Physician ID number
- Physician name
- Physician authorization date
- Hospital ID and description
- Shipment location ID and description
- Number of units required
- Surgery type ID and description
- Date donation needed by
- Closed date
- Comments attached to surgery data

## In the Donors Block

The following donor information displays, if it exists in the database:

- Last name
- First name
- Phone number
- Product types 1, 2 and 3 made from the donation

After scheduling the donors and retrieving the patient information again, the donors scheduled will be listed in descending order according to the day they were scheduled. Sorting on the donors is allowed by use of the Last name and First name.


WellSky Corporation
Proprietary and confidential

**NOTE –** After sorting by last name or first name to have the donors display in descending order again, the user must exit form and re-enter patient.

## Entering a New Patient

If entering a new patient, enter New in the Select field. Then click in the Name Last field in the Patient Data block. Enter the following data:

### Name Last

Entry is required. Enter the last name of the patient.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### First

Entry is required. Enter the first name of the patient.

### MI

Entry is optional. Enter the patient's middle initial.

### DOB

Entry is optional. Enter the patient's date of birth, using the MMDDYYYY format.

### Sex

Entry is required. Enter the patient's sex.

### ABO

Entry is optional. Enter the patient's ABO type or select from the drop-down list.

### Type

Entry is required. Enter a donation type or select from the drop-down list.

### Phone

Entry is optional. Enter the patient's phone number. Do not enter hyphens; the system automatically inserts the hyphens.

### Status

Entry is required. Enter status or select from drop-down list.

### Comments

Entry is optional. Enter comments using free-form format. Up to 240 characters are permitted.

### Intl Ph

Enter international phone number, if needed.

# Surgery Data Block Fields and Definitions

## Surg Date

Entry is required. Enter the date of surgery, using the MMDDYYYY format. The day of the week automatically displays.

## Phy

Entry is required. Enter a Physician ID or select from the LOV. The physician's name automatically displays.

## Phy Auth

Date Entry is optional. Enter the physician's authorization date in MMDDYYYY format.

## Hospital

Entry is optional. Enter the hospital ID or select from the LOV. The name automatically displays.

## Ship To

Entry is required. Enter the shipment location ID or select from the LOV. The location name automatically displays. If interfaced to Distribution and a hospital is not selected when entering this field, the user receives a warning message.

## Units

Entry is required. Enter the number of units required for surgery.

## Surg Type

Entry is optional. Enter the surgery type ID or select from the LOV. The description automatically displays.

## Date Needed By

Entry is optional. Enter the date that donation is needed by, using the MMDDYYYY format.

## Closed Date

Entry is optional. Enter the closed date in MMDDYYYY format.

## Comments

Entry is optional. Enter comments. Up to 240 characters are allowed.

# The New Surgery Button

Click **New Surgery** to clear all retrieved surgery data in order to enter new surgery data.

# The New Physician Button

Click **New Physician** to open the Maintain Physician List screen. Use this screen to add a new physician to the patient. See section later in this chapter for instructions on using this screen.


WellSky Corporation
Proprietary and confidential

## The Surg Docs Button

Click **Surg Docs** to open the Document Library screen. Use this screen to view documents that have been linked to the surgery ID for a patient. See Chapter 2 for instructions on using this screen.

**NOTE –** There are times when patients may have multiple surgery IDs present, and each document specific to that surgery needs to be linked accordingly. Master code LDOCS is set up to have a code defined for Surgery ID:TRANSF_DETAILS:SURG_ID. If you link to the surgery ID, you will not be seeing other documents for past surgeries.

The button will only be active if there are external documents linked to the surgery ID.

## The Pat Docs Button

Click **Pat Docs** to open the Document Library screen. Use this screen to view documents that have been linked to the patient ID for a patient. See Chapter 2 for instructions on using this screen.

**NOTE –** If you link special documents to the patient, you will see all past and present documents. Link documents that are generic to the patient here. Master code LDOCS is set up to have a code defined for Patient ID:SPECIAL_PATIENTS:PAT_ID.

The button will only be active if there are external documents linked to the patient ID.

## Donors Block Fields and Definitions

For each donor, enter the following information:

### Last Name

Entry is required. Enter the donor's last name.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### First Name

Entry is required. Enter the donor's first name.

### Contact Phone

Entry is optional. Enter the phone number, including area code.

### PrdTp1

Entry is optional. Enter the first product type or select from the LOV.

### PrdTp2

Entry is optional. Enter the second product type or select from the LOV, if applicable.

### PrdTp3

Entry is optional. Enter the third product type or select from the LOV, if applicable.

## The Schedule Button

Click **Schedule** to open the Schedule Donors screen. Use this screen to schedule the donor for a donation. See Chapter 5 Donor Center Management for instructions on using this screen.

## At Commit

All special donations requested are entered and committed.

## What to Do Next

Link unit to the special donation request using Link Unit to Special Donation (SLINK).

# 12.2.2 Link Unit to Special Donation (SLINK)

## Intended Use

Use this screen to link a unit to a special donation request.

## Limitations

None

## Prerequisites

Special Donation Request must have been entered.

## Accessing the Screen

Access this screen from the Special Donations menu or by entering the keyword `SLINK`.


WellSky Corporation
Proprietary and confidential

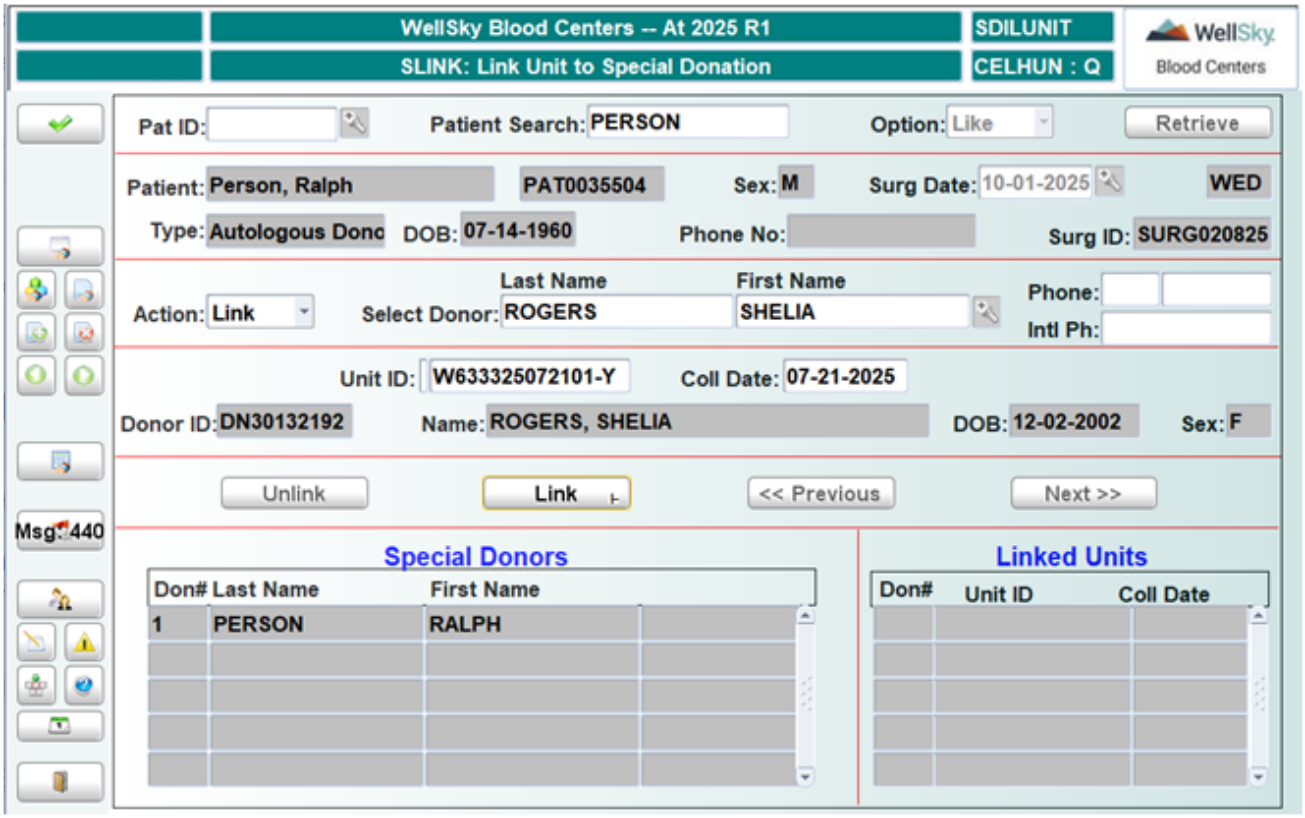


# Control Block Fields and Definitions

## Pat ID

Entry is optional. If the patient ID number is known, enter the ID number or select from the LOV.

## Patient Search

Entry is required if the *Pat ID* field is left blank. Enter a partial first or last name of the patient.

## Search Option

Entry is required. Select the search option from the drop-down list. System default is Like, which searches for patients with a similar name. Selection of Exact searches for patients with the exact same name.

# Retrieving Data

When patient name and search option has been defined, click **Retrieve** to open a window with a list of donors that match the entered search criteria.

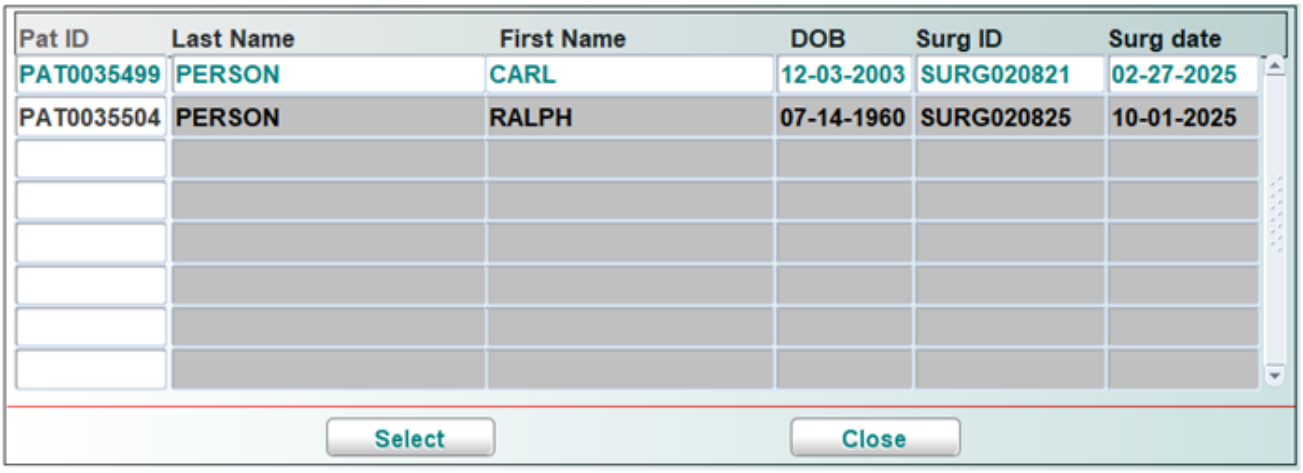


Scroll through the list of names. When the desired name is found, click **Select** . If the desired name is not found, click **Close**.

If the Select button is clicked, the list window closes and the information attached to the selected patient displays in the main form.

## In the Patient Data Block

The following information display, if it exists in the database:

- Patient name
- Patient sex
- Surgery date (select surgery date from the list of values when multiple surgery dates are listed)
- Type of donation
- Patient's date of birth (DOB)
- Patient's phone number
- Surgery ID

## Donor Data Block Fields and Definitions

### Action

Entry is required. From the drop-down list, select **Link** or **Unlink**.

### Select Donor

Entry is required. Enter donor's name or select from the LOV.

### Phone

Entry is optional. Donor's phone number displays if existing donor. Manually enter phone number if entering a new donor.


WellSky Corporation
Proprietary and confidential

## Intl Ph

Entry is optional. Donor's international phone number displays if existing donor. Manually enter international phone number if entering a new donor.

## Unit ID

Entry is required. Scan the unit ID or enter it manually. For Codabar, a double blind matching entry is required. The two entries must be identical. For ISBT, only a single entry is required. See "Double Blind Entry" in Chapter 1 for detailed information on ISBT 128.

If the unit has not been registered in Donor or checked into the Lab import module, you will receive a warning that the unit has not been registered. Acknowledge the warning to proceed.

The donor being linked and the donor registered to the unit must match or the following window opens:

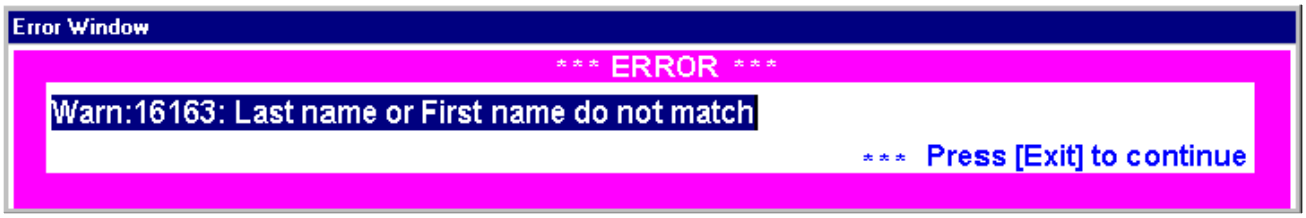


Click **EXIT FORM** .

## Coll Date

Entry is required. The Select Coll Date LOV opens if the unit ID has more than one collection date:

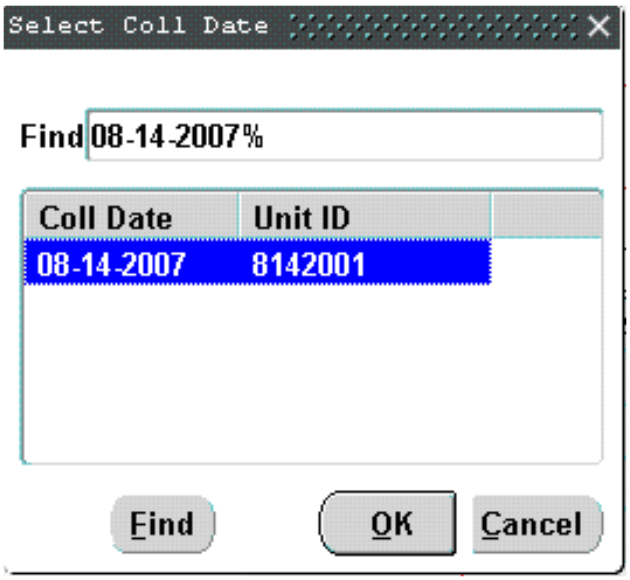


You can select the correct date and click **OK**. If the collection date is not listed, click **Cancel**. Enter the collection, using the MMDDYYYY format.

The following donor information displays:

- Date unit was collected
- Donor ID
- Name
- Date of birth
- Sex

## In the Special Donors Block

The following donor information appears, if it exists in the database:

- Donor number
- First name
- Last name
- Phone number

## In the Linked Units Block

The following information appears:

- Donor number
- Unit ID number
- Collection date of linked unit

## The Unlink Button

Click **Unlink** to remove the link between patient and donation.

## The Link Button

Click **Link** to link the unit to the patient.

## The Previous and Next Buttons

If more than one donor appears in the Special Donors block, click **Previous** and/or **Next** to navigate through the list. The selected donor's data displays in the Donor Data block.

## At Commit

The unit and donor are linked.

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 12.2.3 Special Donation Status Query (SPUNITQ)

## Intended Use

Use this screen to query the current status of a special donation.

## Limitations

Unit Shipment does not populate if Donor is not linked to Distribution.

## Prerequisites

A unit must be linked to a special donation using the Link Unit to Special Donation screen.

## Accessing the Screen

Access this screen from the Special Donations menu or by entering the keyword `SPUNITQ`.

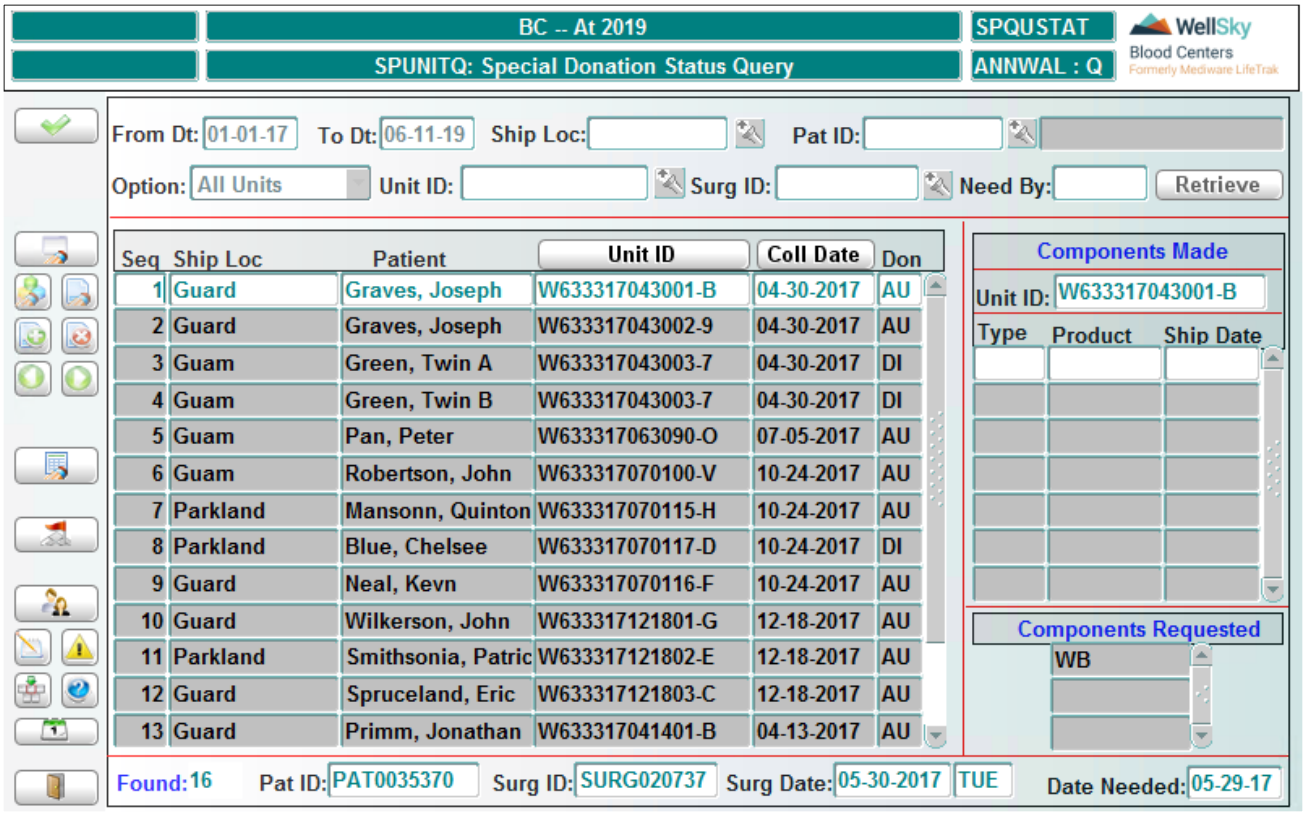


## Control Block Fields and Definitions

Entry in each field is optional, but at least one criterion must be entered.

### From Dt

Entry is optional. Enter the beginning date of the date range in MMDDYY format.

### To Dt
Entry is optional. Enter the ending date of the date range in MMDDYY format.

### Ship Loc
Entry is optional. Enter the shipping location code or select from the LOV.

### Pat ID
Entry is optional. Enter the patient ID or select from the LOV.

### Option
Entry is optional. Enter the option or select from the drop-down list.

### Unit ID
Entry is optional. Enter the unit ID or select from the LOV.

### Surg ID
Entry is optional. Enter the surgery ID or select from the LOV.

### Need By
Entry is optional. Enter date donation is needed by, using the MMDDYY format.

## Retrieving Data
After entering all known criteria, click **Retrieve** to display a list of units that match the criteria.

## In the Special Donations Block
The following information displays, if it exists in the database:

- Sequence of record in the list
- Shipping location
- Patient name
- Unit ID
- Collection date
- Donation type

Click the Unit ID or Coll Date column headings to sort the display by data in that column. Click the same column heading again to reverse the sort order.

Use the **UP** and **DOWN** arrow keys to scroll among the displayed records. When more records are retrieved than can be viewed at once, use the scroll bar on the right side of the list area to quickly scroll through the displayed records.

Below the Special Donations Block are four fields:


WellSky Corporation
Proprietary and confidential

- Found – Displays the number of records retrieved.
- Pat ID – Displays the ID number of the patient.
- Surg ID – Displays the surgery ID number for the selected record in the Special Donations block.
- Surg Date – Displays the surgery date for the selected record in the Special Donations block.

## In the Unit Details Block

Click on a record in the Special Donations block and the following information displays in the Unit Details block, if it exists in the database. This information will only populate if a link is associated to Distribution.

**NOTE –** Information will only displays for shipped units. If a unit is made but not shipped, no information will display.

- ID of the selected unit
- Type of component
- Product code
- Date unit was shipped
- Components requested

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 12.2.4 Print Auto/Directed Tie Tags (ADTT)

## Intended Use

There are multiple aspects related to the tie tag process in regards to supporting blood collection and product manufacturing by communicating "Special Donation Patient" information for the hospital and product manufacturing department.

Data for special donations tie tags is obtained from:

- Register Special Donation Request (SPREQ) and Link Unit to Special Donation (SLINK) order screens to print on a tie tag.
- Selected data from these screens are printed on the tie tags. At the time of printing the tie tag, staff determines which attributes must be present at the time of shipping in Distribution.
- At the time of check-in to Distribution, the product is checked to verify special order attributes are assigned; if not, an interdiction is assigned.
- Tie tags can be printed for a donor indicating auto/directed order information.

- The standard Blood Centers Search for Donor screen is used to identify a donor.
- Printers at multiple locations can be configured, and multiple labels can be printed at one time.

## Limitations

N/A.

## Prerequisites

- Master codes need to be defined in Donor:
  - PATTY - types of donations that are considered as special patient type donations
    - To print the HLA types, the sequence number 1 needs to be defined with a number greater than 100.
- Master codes need to be defined in Lab:
  - MISC - needs to have code defined as BCIRR with IR in the description field
  - BCRAT - listed with special attributes to be selected in the form
- Report master codes (RMASTER) - define printers for the label printer to use to print the tie tag. The code type should be LPTT or LLPTT.

## Accessing the Screen

Access this screen from the Special Patient Menu using the keyword `ADTT`.

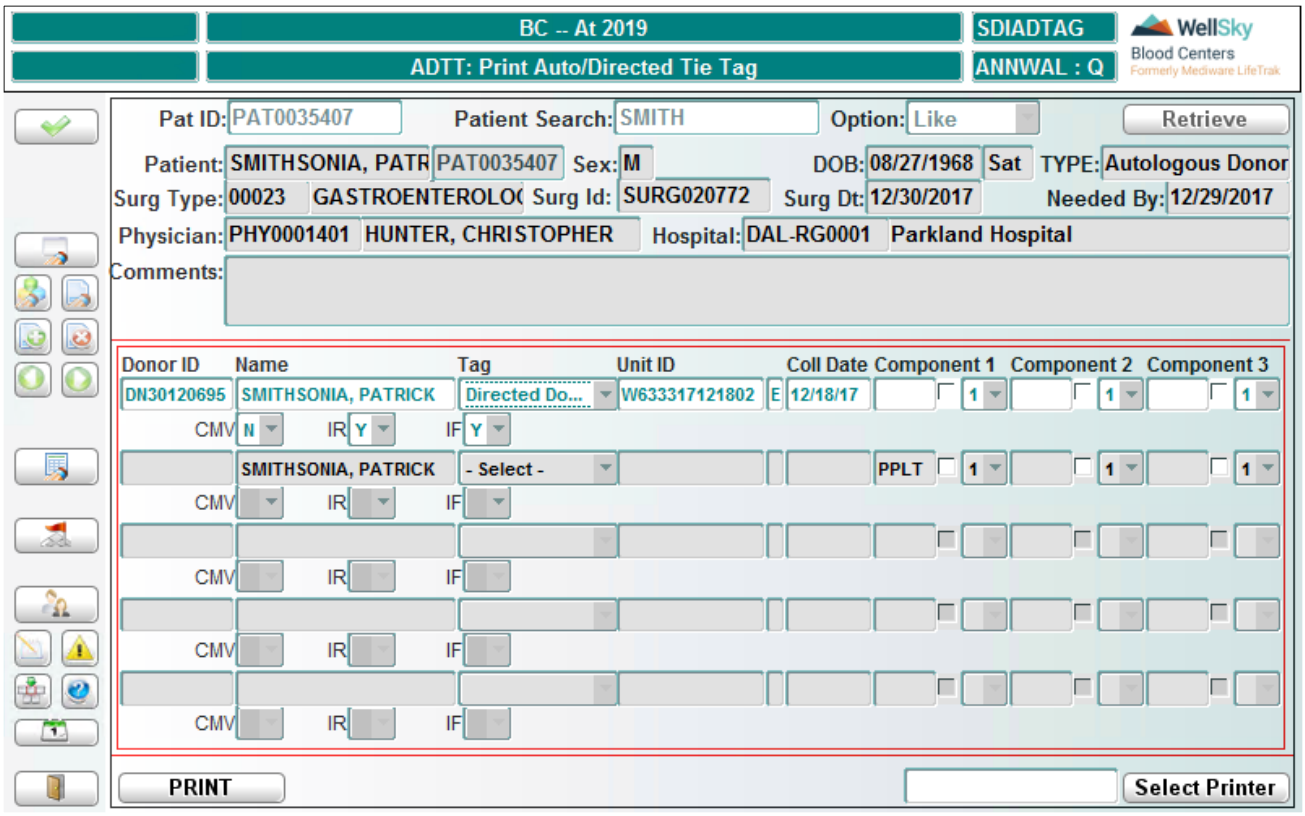



WellSky Corporation
Proprietary and confidential

# Fields and Definitions

## Pat ID

Entry is optional. Enter the patient ID or select it from the LOV.

## Patient Search

Entry is optional. Enter a partial first or last name of the patient.

## Option

Entry is required. Select the search option from the drop-down. The system default is "Like", which searches for patients with a similar name. Select "Exact" to search for patients with the exact same name.

# Searching for an Existing Patient

If you are searching for an existing patient, click **Retrieve** to open a window with a list of donors that match the entered search criteria.

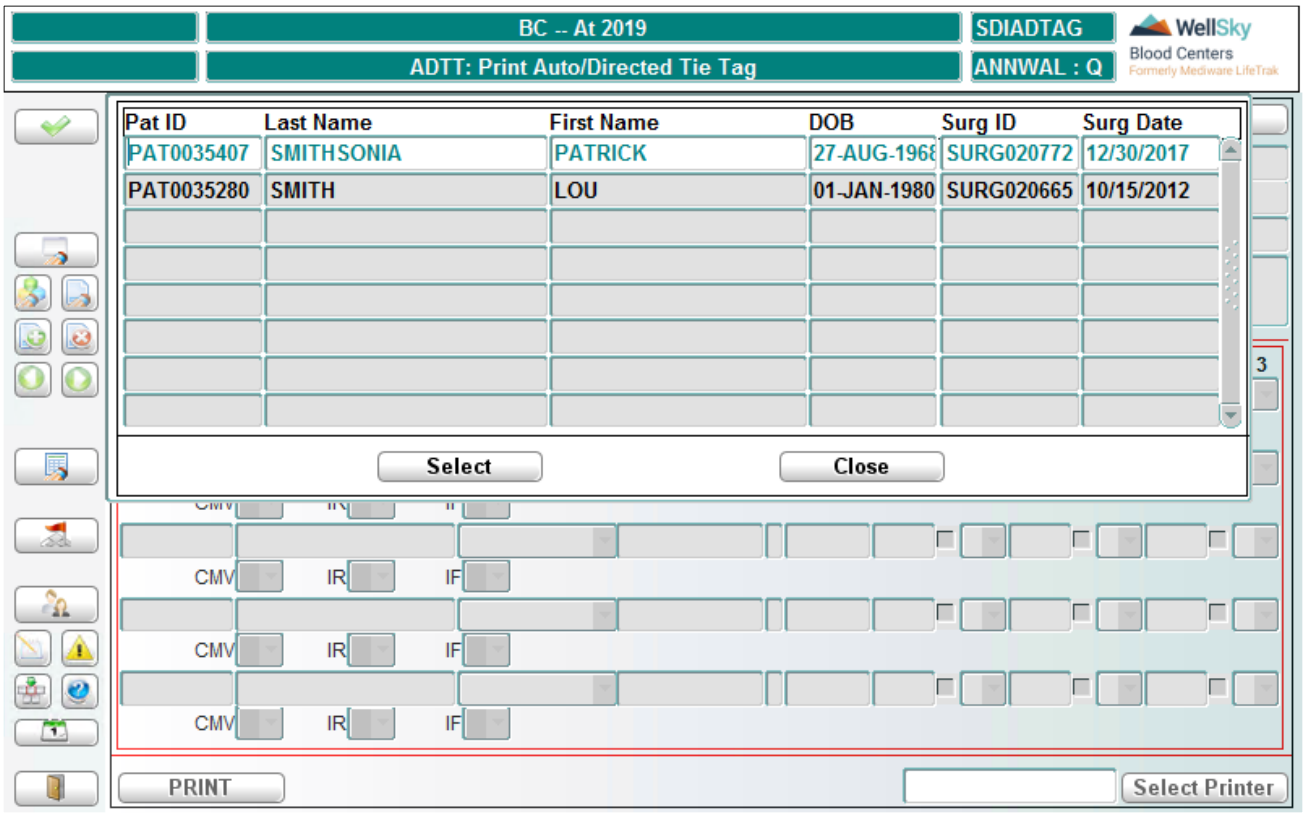


By default, the list is sorted in ascending order by Insert Date. To re-sort the list, click on one of the column headings. For example, click the **DOB** column header to re-sort the list by date of birth, in ascending order. To re-sort in descending order, click the **DOB** column header a second time. Use this method to re-sort the list by any of the other column headings.

Scroll through the list of names to find the one you are looking for, and click on it to highlight it. Click **Select**. The list window closes, and information attached to the selected patient displays in the main form.

## Patient Data Block

The following patient information displays:

- Patient Name - last, first name
- Patient ID
- Sex
- Date of birth (DOB)
- Type - type of donation (autologous, directed, matched patient, etc.)
- Surgery Type
- Surgery ID
- Surgery Date
- Needed by Date
- Physician - name of physician requesting order
- Hospital - customer number and description from Distribution
- Comments - comes from SDIPATSG - in the Request Detail section. This field is limited to 240 data characters.

## Donor/Unit Information Block

If donors and units have been linked to the special request, they will display in the detail block. The following donor information displays:

- Donor ID
- Donor Name - last name, first name
- Type of tag to be selected
- Unit ID
- Collection date of the unit
- Component 1
- Component 2
- Component 3
- Special attributes requested

## Fields and Definitions

### Donor ID

This is a display field. The Donor ID and name displays when the donor is linked to a special request.


WellSky Corporation
Proprietary and confidential

### Donor Name
This is a display field. The donor's last name and first name displays when the donor is linked to a special request.

### Tag
Entry is required. Select the tag type from the LOV. The LOV comes from the Master code PATTY.

### Unit ID
This is a display field. The unit number that is linked through the Special Donation Link screen (SDILUNIT) displays here.

### Coll Date
This is a display field. The collection date of the unit displays here.

### Component 1
Select the product type that is to be collected from the drop-down. Enter the number of tags that you want to print for that product type.

### Component 2
Select the product type that is to be collected from the drop-down. Enter the number of tags that you want to print for that product type.

### Component 3
Select the product type that is to be collected from the drop-down. Enter the number of tags that you want to print for that product type.

## Special Attributes to Select
Select the special attributes to be linked to the product from the drop-down. The selection is based on the master codes defined in Lab under BCRAT. BCRAT should be defined with number and attribute code (number places the attributes in a specific sequence).

Enter **Y** to require the attribute on the product, or enter **N** if the product does not require the attribute.

## Printing the Tie Tag
1. Select the patient.
2. Select the tie tag header, product type, the number of tags required, special attributes, and the printer.
3. Once the printer is selected, click **Print**.

## Buttons
### Select Printer
Click **Select Printer** to choose the printer. The Printer window (UTWLBPTR) opens and displays all of the label printers linked to the LPTT or LLPTT report code.

**NOTE –** LLPTT report codes will display printers linked to mobile laptops only.

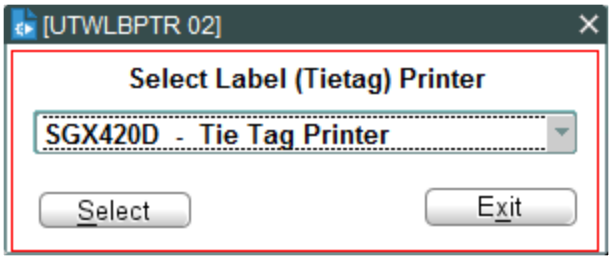


## Print

Click **Print** to send the file to the label printer. Once the file is sent, you will receive a message similar to the one below.

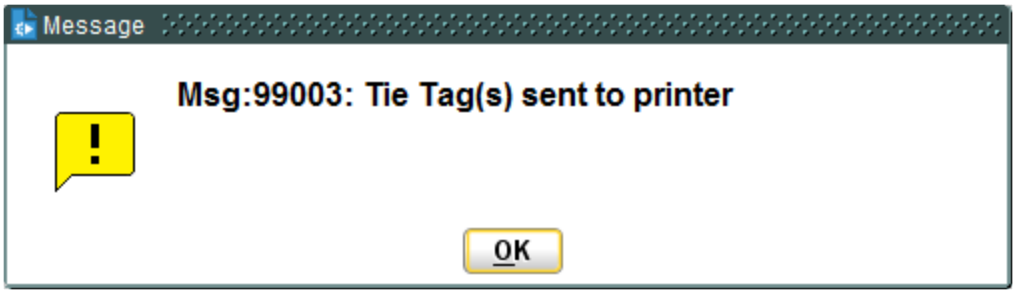


The label prints, as shown in the following example:

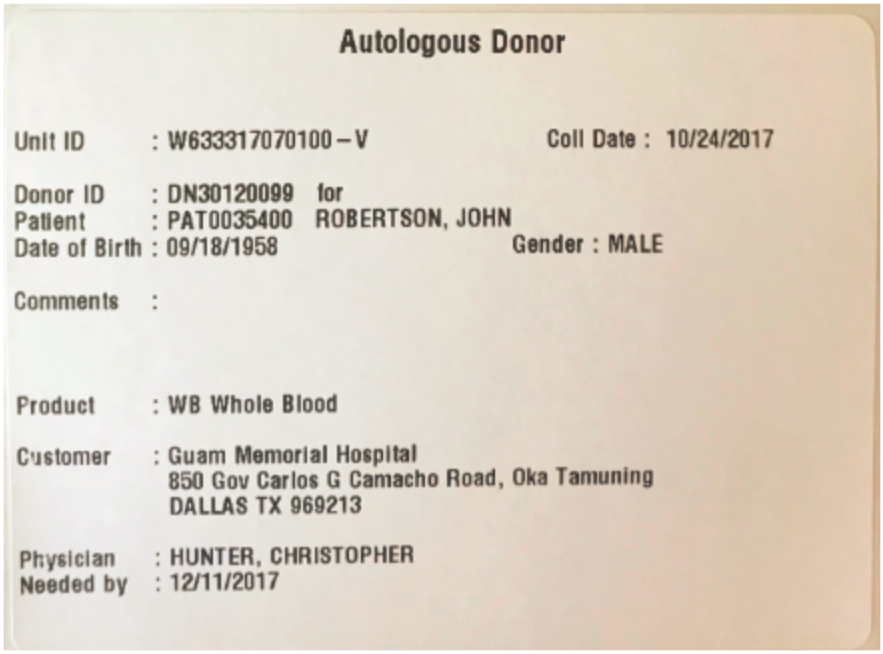



WellSky Corporation
Proprietary and confidential

## Check In Distribution

When certain interdictions are selected, the system will verify that the product attributes match the ordered attributes. This verification occurs during check-in to Distribution. If special order attributes are not assigned to the product, a hold interdiction is assigned. The interdiction is configured in Lab master codes under MISC, code BCSPA. Users can define the interdiction to be used in the description of BCSPA.

The hold interdiction will be automatically removed if the special order attribute(s) is added to the product, or if the product is removed from the autologous/directed inventory.

- Special attributes that will display in this screen are configured in the Lab Master Codes (MASTER_CODES - code type MISC - code description matches the code for the MASTER_CODE code type BCRAT code).
- If the order changes, and the patient no longer requires the units to have the special attributes verified at shipping, re-print the tie tags with the attributes set to "N" (No).

## What to Do Next

Move back to the Special Donations Menu (SPDON).

# 12.2.5 Print Special Instructions Tie Tags (SPTT)

## Intended Use

Use the Print Special Instruction Tie Tags (SPTT) screen to select a tie tag instruction and print the tie tag to be placed on the unit.

- Tie tags can be printed for a donor, indicating special handling is required for the donation and/or product manufacturing process.
- The special instructions are linked to a donor using interdiction codes (code type = SPINS). Special instruction "text" is maintained by using the Maintain Special Instructions screen.
- One interdiction code has one specific special instruction text.
- The standard Blood Centers Search for Donor screen is used to identify donors.
- Printers at multiple locations can be configured, and multiple labels can be printed at one time.

## Limitations

- Only 45 characters per line are allowed.
- The maximum number of lines allowed for a label is 9.

## Prerequisites

- The SPINS interdiction type must be defined.
- Maintain Special Instructions must be defined for all SPINS type interdictions.

## Accessing the Screen

Access the screen from the Special Patient Menu using the keyword `SPTT`.

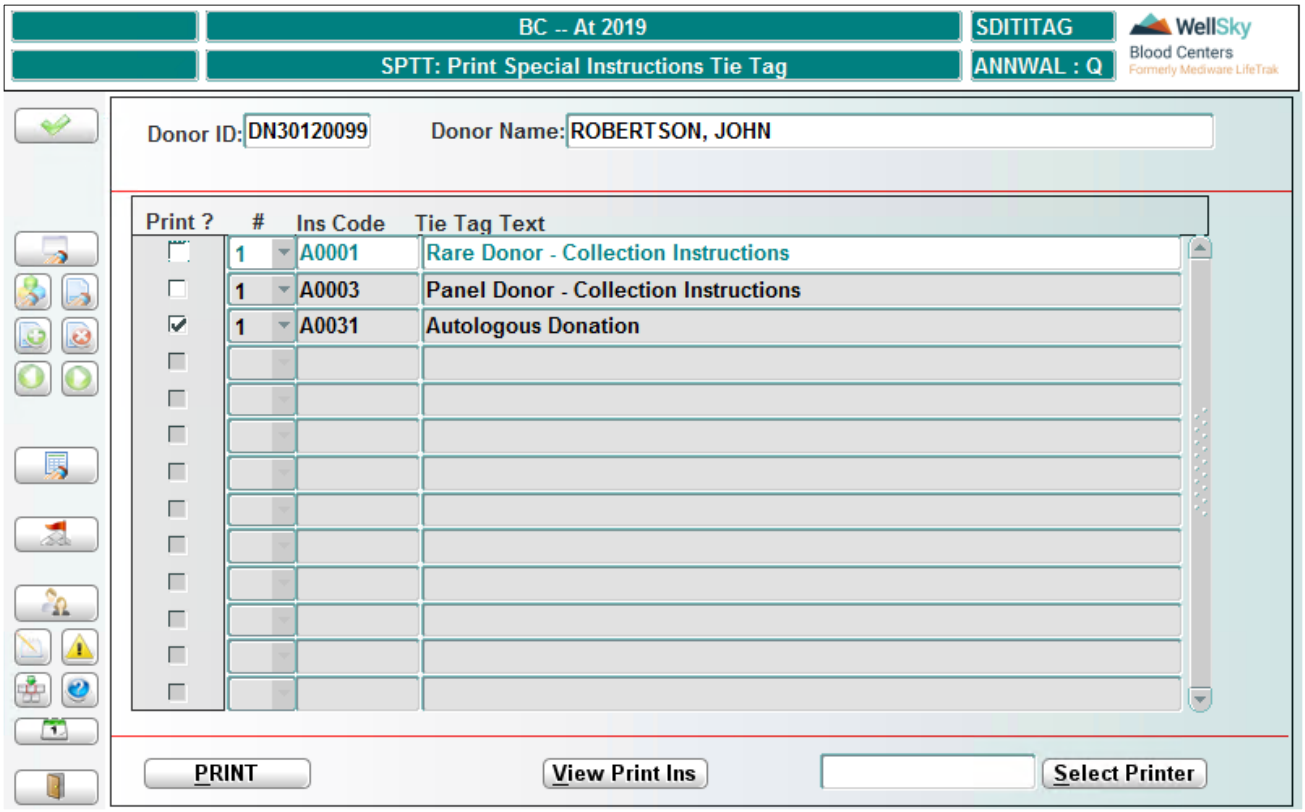


# Fields and Definitions

## Donor ID

Entry is required. Entry of donor will be by using the standard Find Donor Window to select the donor. To see how the window works, refer to Search For Donor (DNWDFIND).

When a donor is selected, any spin code that is assigned to the donor is displayed.

Each selected spin code instruction will print on a separate tie tag.

## Donor Name

The donor name displays in this field after the donor ID is selected.

# Detail Block for Printing Special Instructions

Once the donor is selected to display, the special instructions attributes have to be placed on the donor. Interdiction type SPINS is linked to special instructions. If the donor does not have any SPINS type attributes, the following message is displayed:


WellSky Corporation
Proprietary and confidential

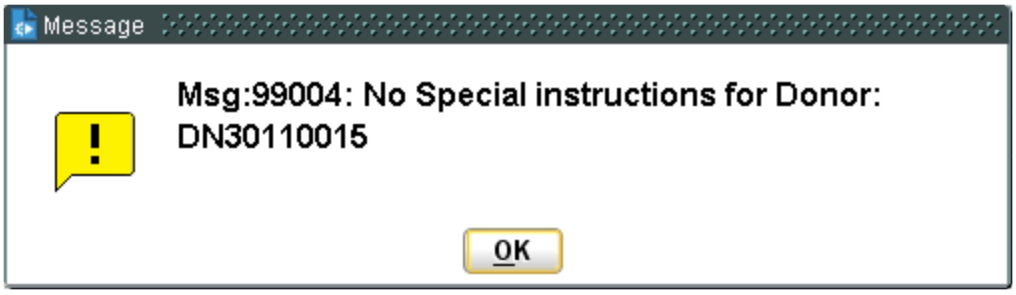


The following displays once the donor is selected:

- Number of tags to print - defaults to 1
- Instruction code - attributes with code type of SPINS
- Tie Tag Text - description that is entered in the Interdiction table for the SPIN code

### Print ?

Entry is required. Select the check box next to each special instruction to be printed.

**NOTE –** If the check box is not selected, the special instruction will not print.

### #

The value in this field defaults to 1, but you can print up to 3 labels. Use the drop-down to select the number of labels to print for the special instruction.

### Ins Code

The SPIN interdiction code types that have been placed on the donor display in this field. These codes will display under the Attributes window.

### Tie Tag Text

The description of the type of special instruction displays in this field.

## Buttons

### View Print Ins

Click this button to view instructions. It will display the text that has been defined in the Maintain Special Instructions (VDISPINS).

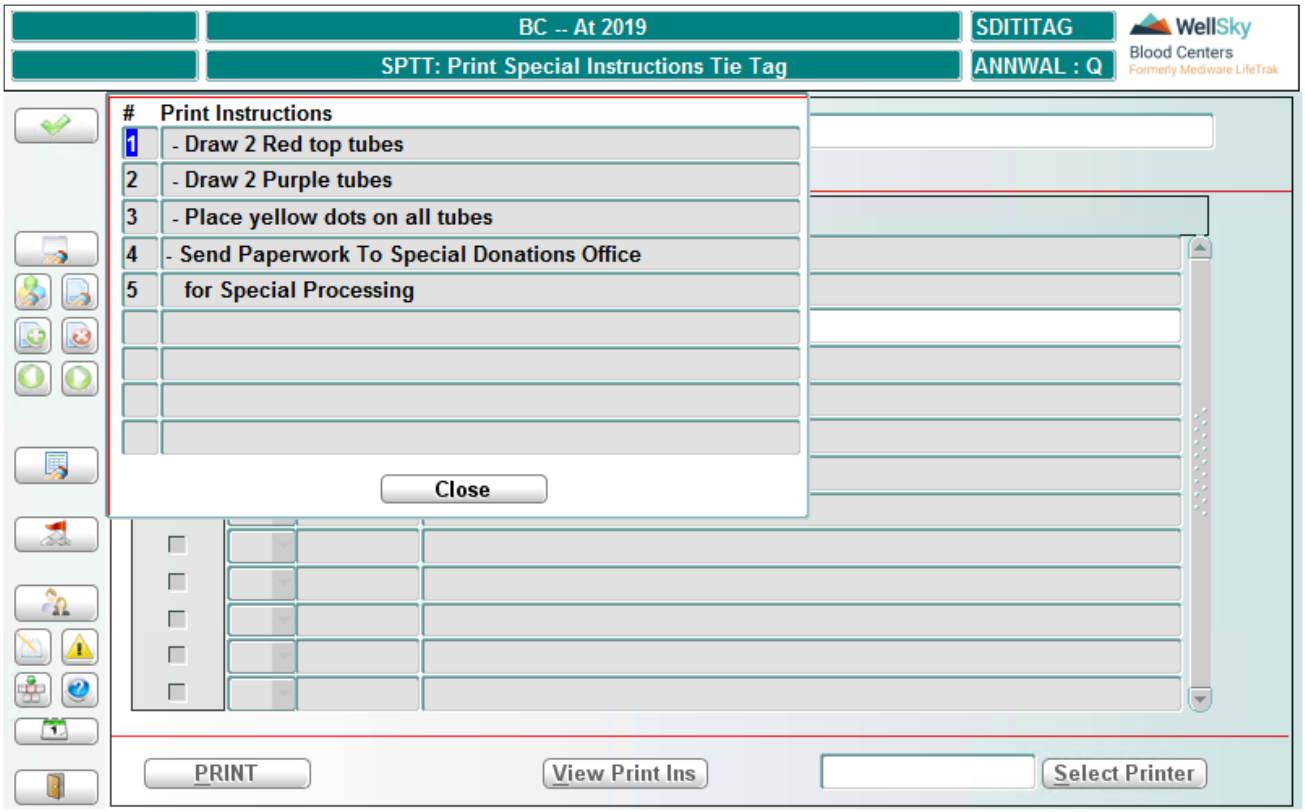


## Select Printer

Click this button to select the printer. The Printer window (UTWLBPTR) will open and display all label printers linked to the LPTT or LLPTT report code.

**NOTE –** LLPTT report codes display printers linked to mobile laptops only.

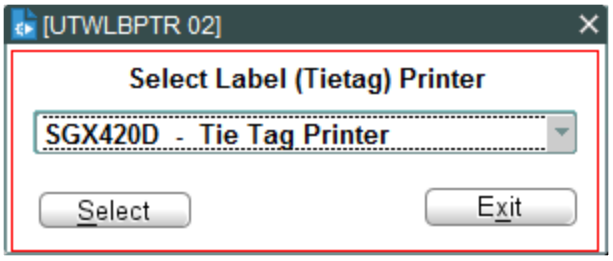


## Print

Click this button to send the file to the label printer. Once the file is sent, the following message is displayed:


WellSky Corporation
Proprietary and confidential

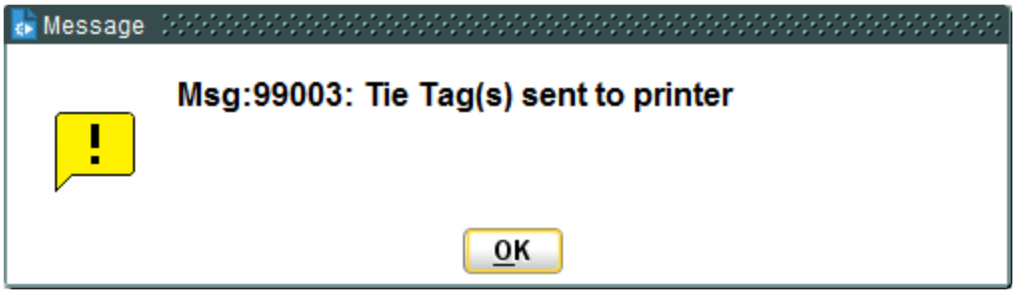


## Printing the Tie Tag

The following procedure explains how to print the tie tag.

1. Select the donor.
2. Select the instructions to be printed, the number of labels to be printed for each instruction, and the printer.
3. After selecting the printer, click **Print**. The label, similar to the one below, prints.

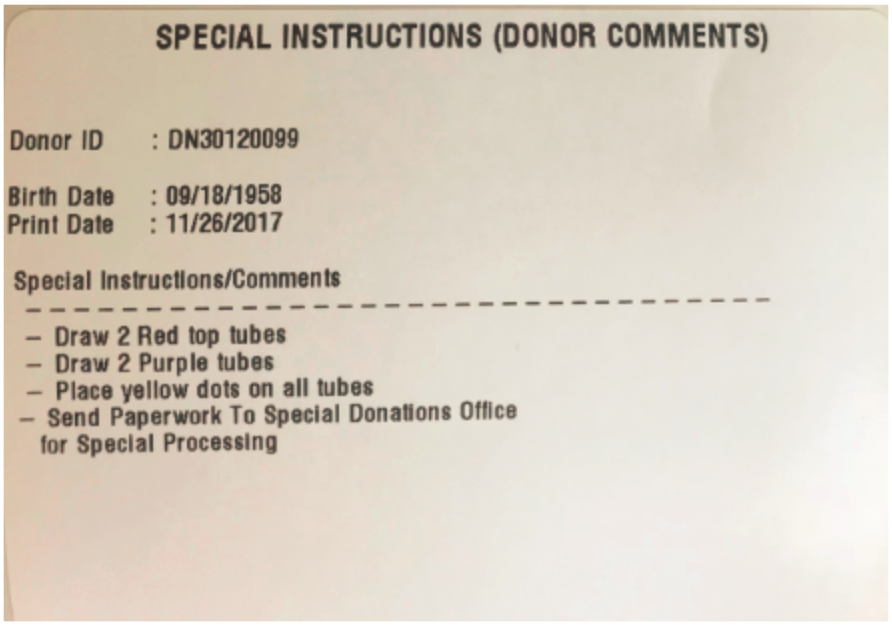
SPECIAL INSTRUCTIONS (DONOR COMMENTS)

Donor ID : DN30120099

Birth Date : 09/18/1958
Print Date : 11/26/2017

Special Instructions/Comments

- Draw 2 Red top tubes
- Draw 2 Purple tubes
- Place yellow dots on all tubes
- Send Paperwork To Special Donations Office for Special Processing

## What to Do Next

Move back to the Special Donations menu (SPDON).

# 12.2.6 Maintain Physician List (PHY)

## Intended Use

Use this screen to maintain physician's data and to enter new physicians into the database.

## Limitations

None

# Prerequisites

None

# Accessing the Screen

Access this screen from the Special Donations menu or by entering the keyword PHY.

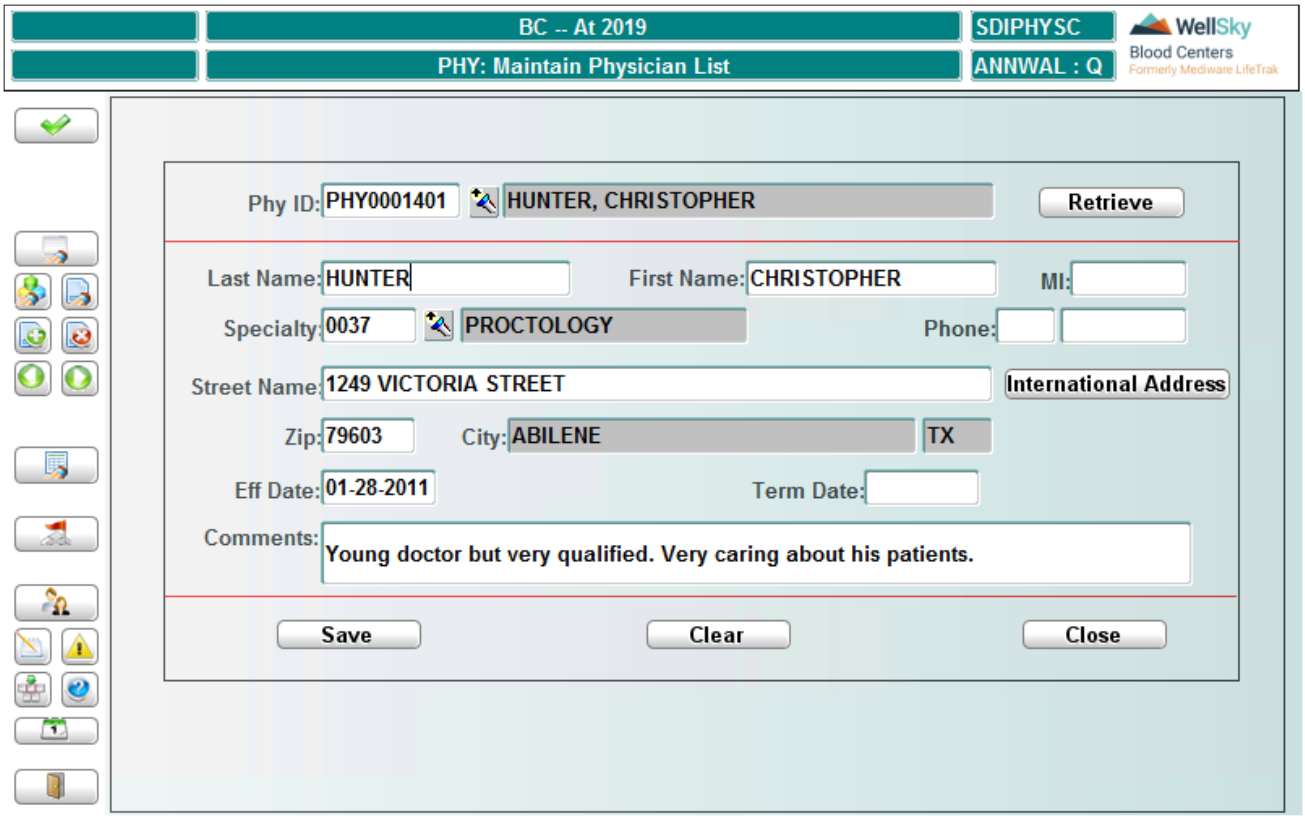


# Control Block Fields and Definitions

## Phy ID

Entry is required. To retrieve an existing physician, enter the physician ID number or select from the LOV. To enter a new physician into the list, type in New.

# To Retrieve an Existing Physician in the List

Enter a physician ID number and click **Retrieve**. The following information displays, if it exists in the database:

- Last name
- First name
- Middle initial
- Specialty


WellSky Corporation
Proprietary and confidential

- Phone number
- Street address
- ZIP Code
- City
- State
- Effective date
- Termination date
- Comments

Any data that is displayed in a white field can be modified or added.

## Adding a New Physician to the List

Enter New in the Phy ID field. Press **ENTER** on the keyboard. The cursor moves to the Last Name field. Enter the following:

### Last Name

Entry is required. Enter the physician's last name.

> **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### First Name

Entry is optional. Enter the first name.

### MI

Entry is optional. Enter the middle initial.

### Specialty

Entry is optional. Enter the physician's specialty code or select from the LOV.

### Phone

Entry is optional. Enter the physician's phone number.

### Street Name

Entry is optional. Enter the physician's street address.

### Zip

Entry is optional. Enter the ZIP Code. City and State fields automatically populate.

### Comments

Entry is optional. Type any comments to attach to the physician.

## Eff Date

Entry is required. Enter the effective date in MMDDYYYY format. The effective date must be equal to or later than the system date.

## Term Date

Entry is optional. Enter a termination date in MMDDYYYY format. The termination date must be equal to or later than both the effective date and the system date. Once a date is saved, the physician code will not be available for use in the system after that date.

## International Address (button)

Click **Intl Addr** to open the International Address window, as follows:

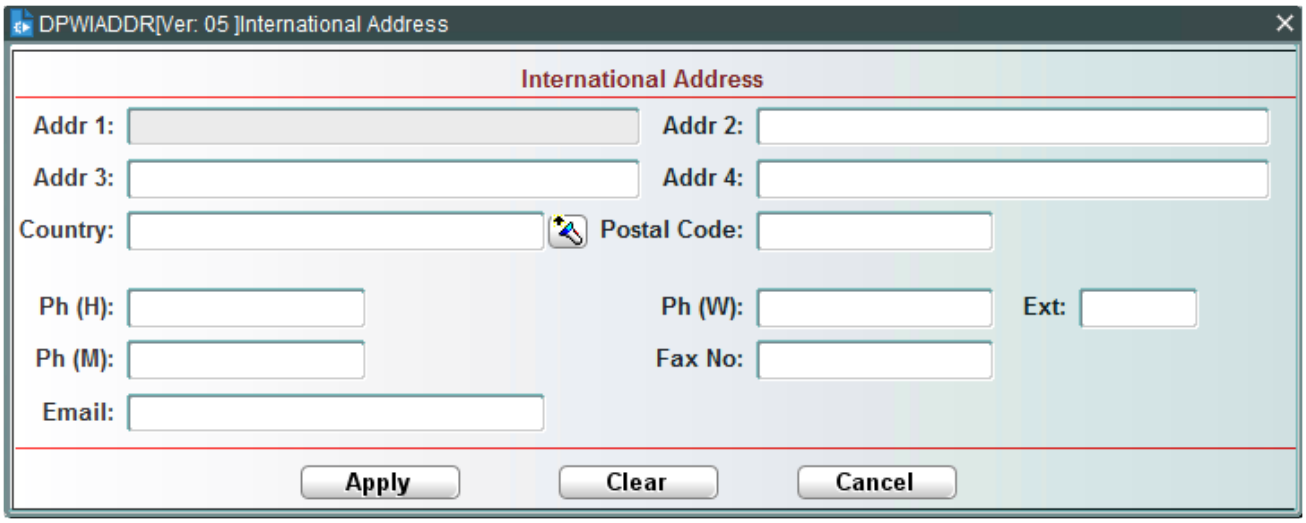


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

# The Save Button

After entering a new physician, or making changes to an existing physician's data, click **Save** to save the data. The physician ID is created and displayed.

# The Clear Button

Click **Clear** to clear the screen of all retrieved or entered data.

# The Close Button

Click the Close button to close the screen and return to the menu.

# At Commit

All data entered or modified is committed to the database.

## What to Do Next

There is no next step.

# 12.2.7 Maintain Special Instructions (SPIN)

## Intended Use

Use the Maintain Special Instructions screen to record the text that will print on the tie tag labels for specific interdictions.

## Limitations

- Only 45 characters per line allowed.
- The maximum number of lines allowed for a label is 9.

## Prerequisite

The interdiction type SPIN has to be defined.

## Accessing the Screen

Access this screen from the Special Patient Menu using the keyword `SPIN`.

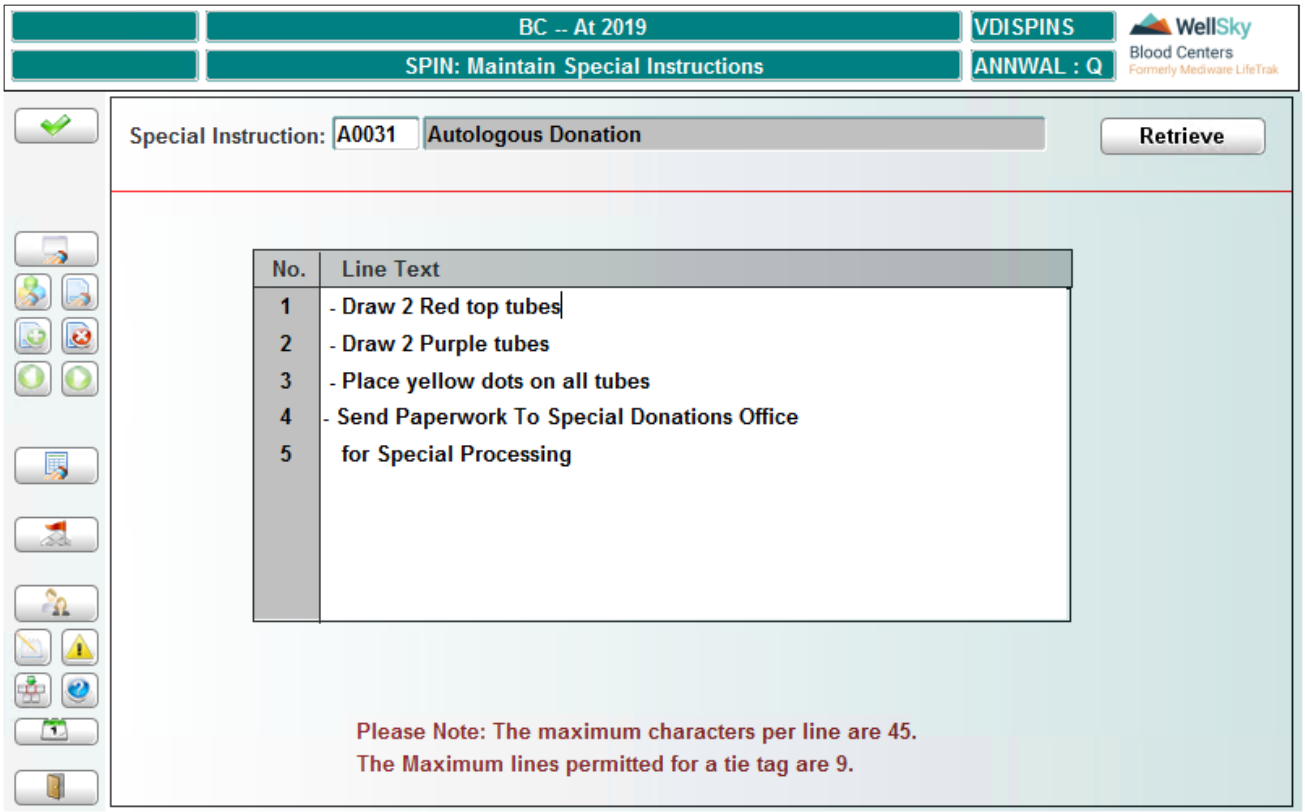

# Fields and Definitions

## Special Instruction

Entry is required. Enter a special instruction code or use LOV. The list of values is populated from the Valid Interdiction table in DONOR using Interdiction type of "SPINS".

# Entry of Special Instructions

The following rules are applied to special instructions:

- The maximum length of a line is 45 characters.
  - If the line in the instruction is over 45 characters, a line break is inserted after the last complete word before the 45th character.
- All manually entered line breaks are maintained.
- The maximum number of lines per instruction is 9.

**NOTE –** One spin code has one set of instructions for all donors who are assigned the code.

# What to Do Next

Move back to the Special Donations Menu (SPDON).


WellSky Corporation
Proprietary and confidential

13

# Chapter 13 - General Queries


13.1 Introduction ..... 908
13.2 General Queries and Functions ..... 909
13.2.1 Notes by Date Range Query (NOTEQ) ..... 909
13.2.2 City, State, and Zip Query (CITYQ) ..... 911
13.2.3 ISBT Unit Check Digit (ISBTQ) ..... 914
13.2.4 Set Drive Date and ID (SETDRV) ..... 915
13.2.5 Lookup and Print Donor Card (LOOKQ) ..... 917

# 13.1 Introduction

The General Queries and Functions module is comprised of the following queries that will be accessed by a broad spectrum of users:

- Notes by Date Range Query
- City, State, and Zip Query
- ISBT Unit Check Digit
- Set Drive Date and ID
- Lookup and Print Donor Card


WellSky Corporation
Proprietary and confidential

# 13.2 General Queries and Functions

These functions are accessed from the following menu:

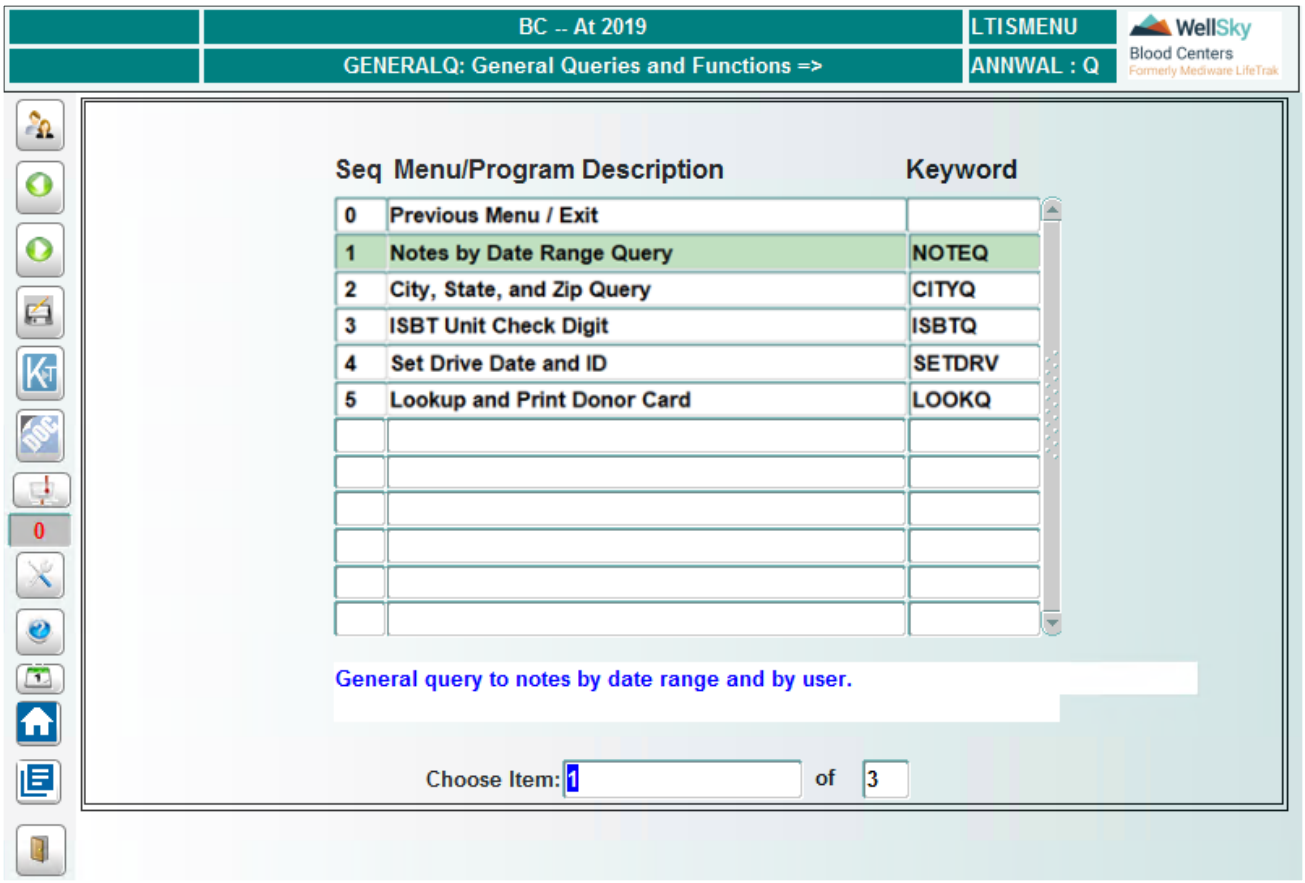


## 13.2.1 Notes by Date Range Query (NOTEQ)

### Intended Use

Use this screen to view notes entered into various screens during a specified date range. The screen operates in a user mode and a supervisor mode depending on user access. User mode permits a user to view only his or her notes. Supervisor mode permits the user to view notes by all users.

### Limitations

None

### Prerequisites

None

# Accessing the Screen

Access this screen from the General Queries and Functions menu or by entering the keyword NOTEQ.

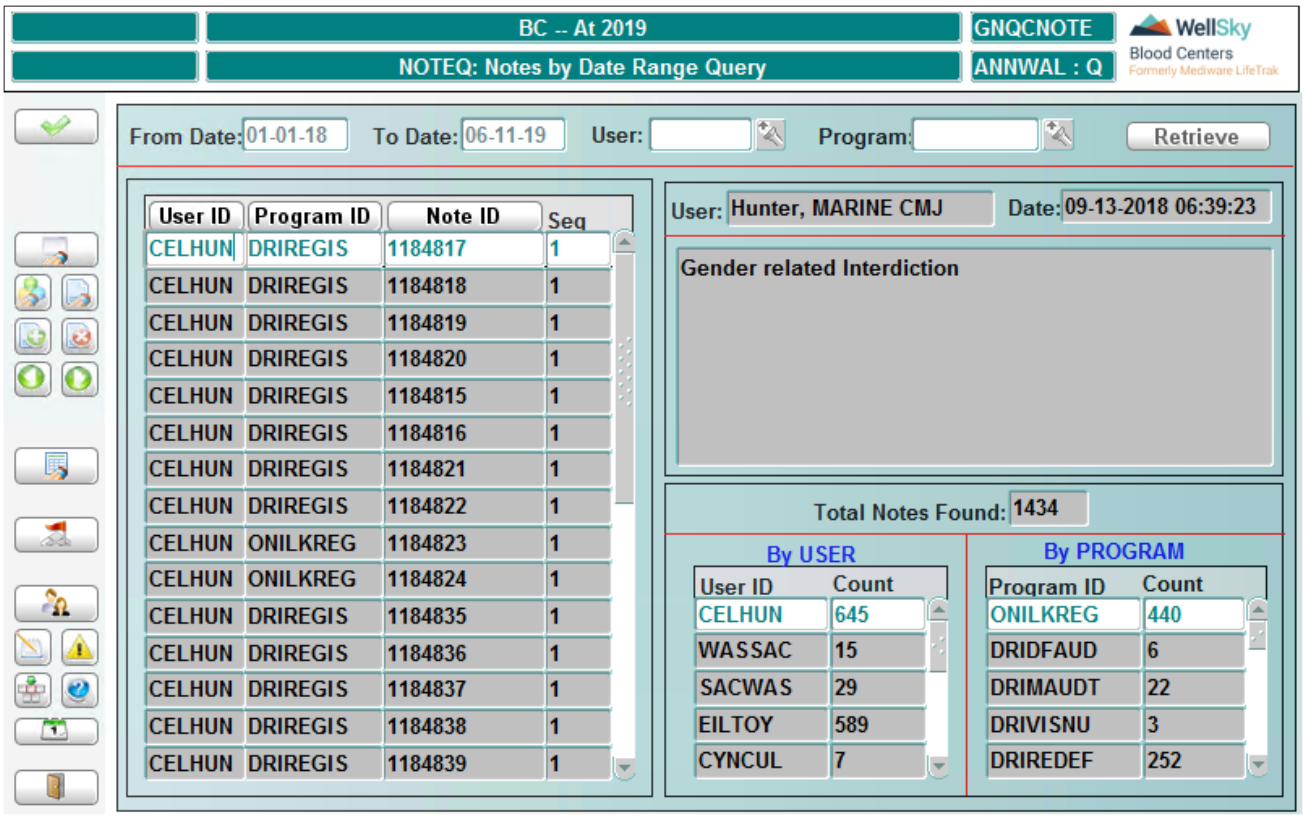


# Control Block Fields and Definitions

## From Date

Entry is required. Enter the earliest date to be considered, using the MMDDYY format.

## To Date

Entry is required. Enter the latest date to be considered, using the MMDDYY format.

## User

Entry is optional. Enter a user ID or select from the LOV. The LOV in this field is limited to the user who accessed the screen if in User Mode. The LOV includes all users that entered notes during the specified time frame if in Supervisor Mode.

## Program

Entry is optional. Enter a valid program name or select from the LOV to limit the query to notes entered in a specific screen; otherwise, leave this field blank. The LOV in this field contains only program names for which notes were entered during the specified time frame.


WellSky Corporation
Proprietary and confidential

## Retrieving Data

Click **Retrieve** to display records of notes per the entered criteria.

## In the Notes Block

For each note record retrieved, the following displays:

- User ID
- Program ID
- Note ID
- Note Sequence Number

## In the Notes Text Block

Use the **UP** and **DOWN** arrow keys on the keyboard or click with the mouse to highlight any displayed record in the Notes Block. For the highlighted note record, the following displays in the Note Text Block:

- User name
- Date and time note was entered
- Text of the note
- Total number of notes found (based upon the criteria you have entered)

## In the User Count Block

The number of notes entered by each user retrieved by the query for the date range specified displays in this block.

## In the Program Count Block

The number of notes entered by all users retrieved by the query displays by program (screen) ID in this block.

## At Commit

No data can be committed to the database via this screen.

## What to Do Next

There is no next step.

# 13.2.2 City, State, and Zip Query (CITYQ)

## Intended Use

Use this screen to view and update records of city, ZIP Code, and county combinations that exist in the Donor system.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the General Queries and Functions menu or by entering the keyword `CITYQ`.

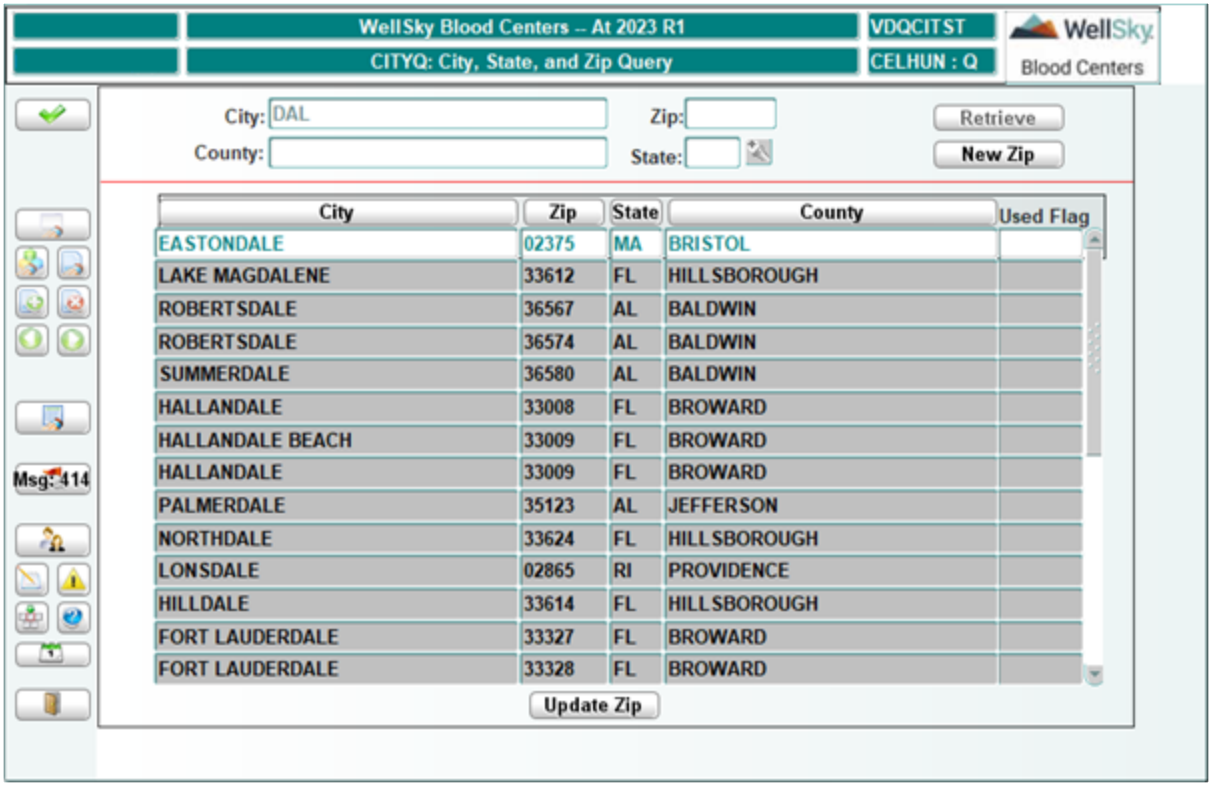


## Control Block Fields and Definitions

You may retrieve and display all city/ZIP Code/county combinations that exist in the Donor system by clicking **Retrieve** without entering any criteria in the Control Block.

Enter query criteria to limit the data to retrieve:

### City

Entry is optional. Enter a city name, partial or whole, to retrieve records of all city names that contain your entry.

> **NOTE –** An entry of Dallas retrieves all entries that include Dallas in the name. An entry of Dal retrieves Dallas, Dalworth, Woodall, etc.

### Zip
Entry is optional. Enter a valid ZIP Code to retrieve only records for which that ZIP Code applies.

### County
Entry is optional. Enter a county name to retrieve only records for counties that contain your entry.

### State
Entry is optional. Enter a state name or select from the LOV to retrieve only records for states that contain your entry.

**NOTE –** An entry of New York retrieves all entries that include New York as the state. An entry of `New` would retrieve New York, New Hampshire, New Jersey, etc.

## Retrieving Data
Click **Retrieve**to display ZIP Code/city/state/county combinations according to the specified criteria.

**NOTE –** If no data is entered in any of the search criteria fields, all entries in the system display.

## Sorting the Data Display
You may sort displayed data by clicking the column header for the City, Zip, State, or County column. Click the column header again to reverse the sort order (ascending/descending).

## Entering a New Zip Code
To enter a new ZIP Code, click **New Zip** to open the New Zip Code window. It is not necessary to enter query criteria in order to enter a new ZIP Code. See Chapter 14 Called Windows and Routines for instructions on using this window.

## Updating a Zip Code
To update a ZIP Code, enter query criteria to bring the zip code or city that you would like to update. Place the cursor on the row that you would like to update, and click **Update Zip** to open the Zip Code window.

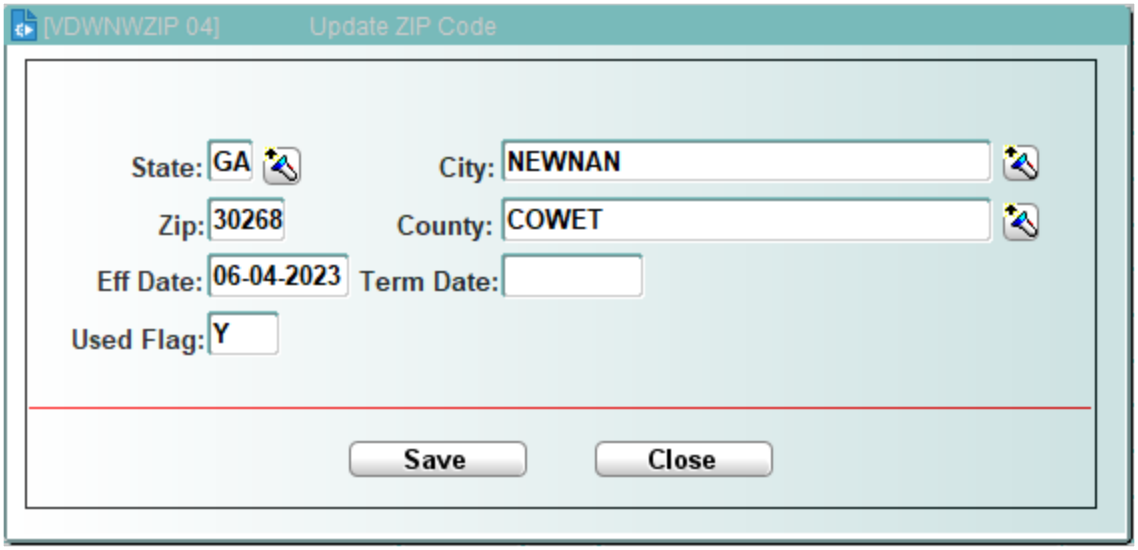


Place the cursor in the field you would like to update and make the modifications. Click **Save** to commit the updated information, or click **Close** to close the window without saving the modified information.

## At Commit

No data can be committed to the database from this screen. A new or updated ZIP Code, however, can be committed to the database from the specialized window provided for that purpose.

## What to Do Next

There is no next step.

# 13.2.3 ISBT Unit Check Digit (ISBTQ)

## Intended Use

Use this screen to view unit ID check digits.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the General Queries and Functions menu or by entering the keyword `ISBTQ`.


WellSky Corporation
Proprietary and confidential

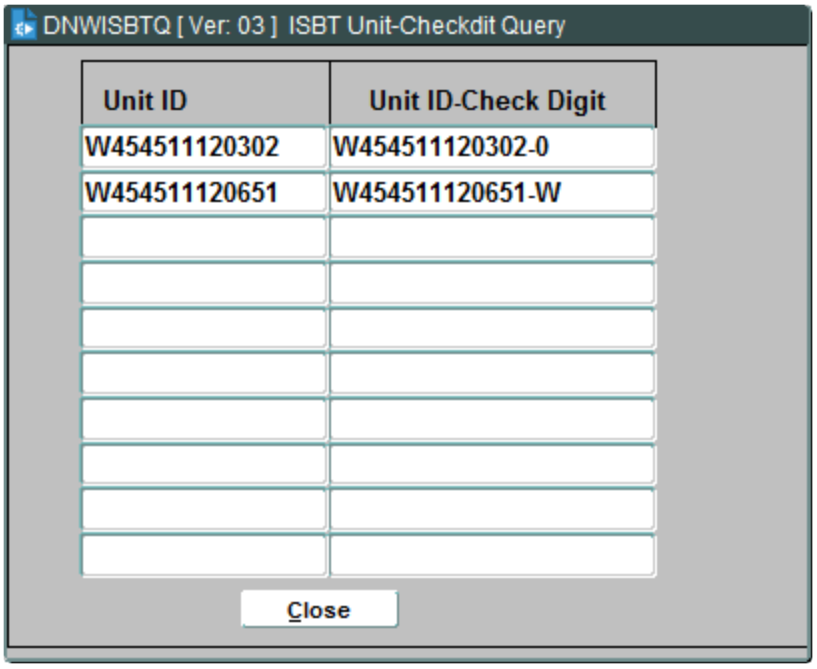


## Control Block Fields and Definitions

### Unit ID

Enter Unit ID and press **ENTER**.

### Unit ID Check Digit

Field populates with the check digit of the associated Unit ID.

Click **Close** to close the window.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 13.2.4 Set Drive Date and ID (SETDRV)

## Intended Use

Use this screen to set the drive ID and date that will automatically populate in the OnSite registration screen. The drive ID and drive date will be the automatic default for that day until the user changes it.

## Limitations

- Only allows entry of a drive date ±1 day if user does not have access to DRVBK in the Define User Access (UACESS) screen. If user does have access to DRVBK, the drive date can be entered in the past greater than one day.

## Prerequisites

Drives must have been created for the specified date.

## Accessing the Screen

Access this screen from the General Queries and Functions menu or by entering the keyword `SETDRV`.

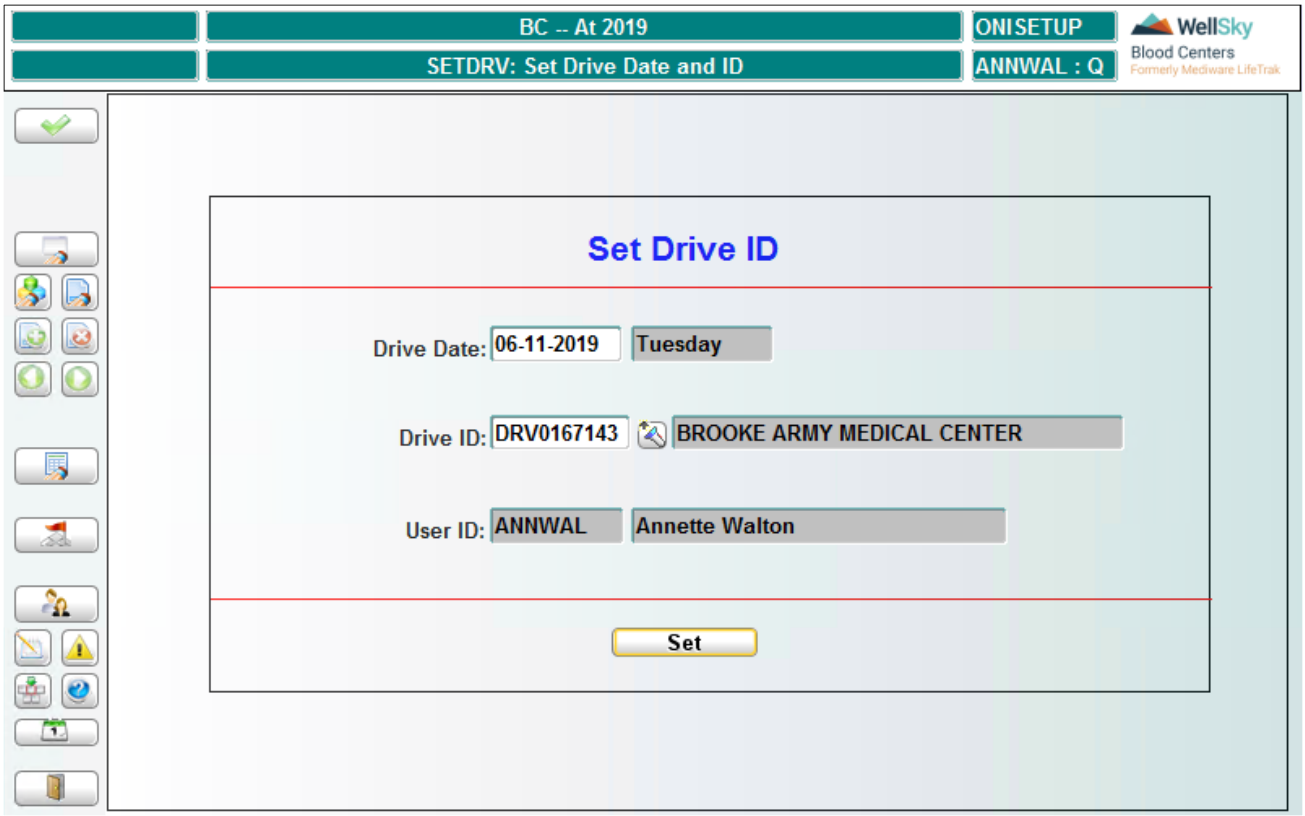


## Data Entry

### Drive Date

Entry is required. Allows entry of one day pre/post current date.

The current date is the default. Press **ENTER** to accept the default value.

To enter a date other than the current date, type the new date using the MMDDYYYY format and press **ENTER**.


WellSky Corporation
Proprietary and confidential

### Drive ID

Entry is required. Select or manually enter the drive ID from the LOV. Then enter the drive ID manually. This field requires a double entry.

**NOTE –** An error message displays if your drive ID entry does not match the list of values selection. Press **ENTER** to acknowledge the error message.

## At Commit

All data is immediately committed to the database.

## What to Do Next

Lookup donor and perform registration using Lookup and Registration (WELCOME).

# 13.2.5 Lookup and Print Donor Card (LOOKQ)

## Intended Use

Use this screen to lookup the donor to determine eligibility for the procedure and print donor card.

## Limitations

- Only allows selection of ±1 day from current date.
- For electronic donor registration:
  - If the barcode you scan is a 1D barcode, you will receive an invalid scan ID message. Some states have both 1D and 2D barcodes. If you scan repeatedly with no results, make sure you are scanning the correct barcode.
  - Only one of the following government-issued IDs can be used for electronic donor registration:
    - AAMVA-compliant Driver's License
    - AAMVA-compliant State ID
    - Department of Defense Common Access Card (CAC)
  - Data retrieved electronically from a scanned ID will be subject to the same donor search criteria currently applied to manually-entered information.
  - The scan ID entered will populate the donor information, if the ID has previously been scanned in the system. If the ID is new, you may need to enter additional information manually.

## Prerequisites

- A valid drive must exist in the database for which donations can be registered.
- In the System Parameters table, your facility must define the following:
  - CUEYN – If the facility sets CUEYN to `Y`, then the CUE field is required. If CUEYN is set to `N`, then the CUE field does not appear.

- GALLON_VAL – number of donations that defines a gallon donation. When registering if that specific donation is the defining donation for a gallon a message will display at time of registration.
- AGE_LOW – lower age limit for a donor to donate. At time of look-up a warning message will display.
- AGE_UPPER – the upper age limit for a donor to donate. At time of look-up a warning message will display.
- CNFM_FLD – when DONBLOCK has been configured as `Y` in the entry column for donor ID, this field determines what other field will be entered. This field is also used when the BC_SCAN_RE is set to `Y`. It is limited to only one field.
- AUTO_PRINT – to determine if the donor card will print automatically.
- HGHT – used to populate the list of values for the height field. Once a height value is entered, it should not be modified or terminated.
- BC_SCAN_RE – scan ID required during registration of the donation or deferral.
- ETHNIC – this is to set the ethnicity field to be required or optional entry in the system.

- Institution – facility must set the unit scheme format.
- Configure the find donor block for NEW_CHECK to determine what fields must be re-entered in the registration screen. If the NEW_CHECK flag is configured for required `N`, it will not check for number of entries.
- Define Menu Parameter (SCREEN_MODE) to one of the following:
  - MANUAL to allow only the lookup and printing of the donor card. This function is performed by entering the keyword `LOOKQ`.
- Define the following Master Codes:
  - HGHT – to enter the height of the donor.

## Accessing the Screen

Access this screen from the General Queries and Functions menu or by entering the keyword `LOOKQ`.


WellSky Corporation
Proprietary and confidential

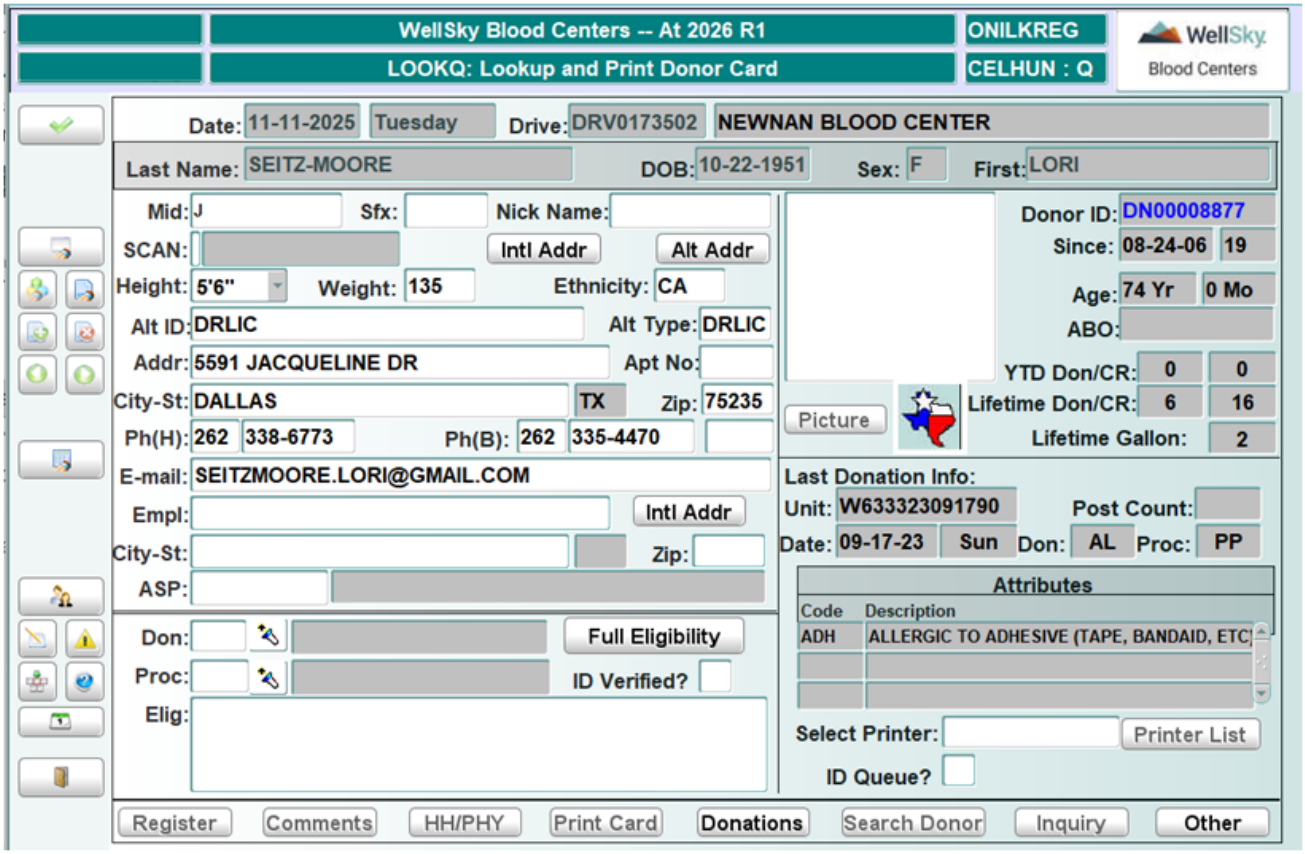


**NOTE –** If the donor is eligible for the abbreviated questionnaire, the word Abbreviated will appear in red in the lower right-hand corner of the screen.

Prior to entering the screen the user will perform a lookup and select the donor that will be registered. If the donor selected has been registered to another drive on the same day, the user will be warned.

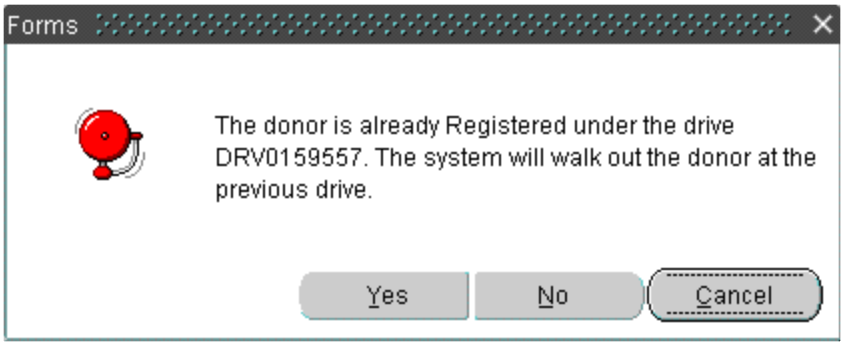


- Click Yes to allow the donor to be registered at the current drive and place a DNWLK on the donor at the prior drive.
- Click No or Cancel to close the message and return to the Find Donor Block. If a unit number has been linked

to the donation at the first drive the user will be warned, as follows:

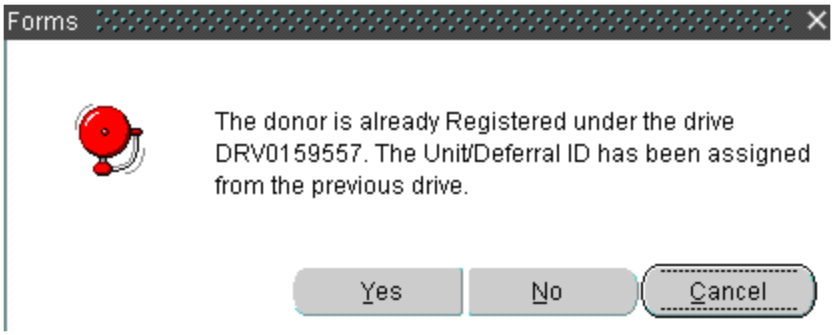


- Click **Yes** to register the donor with a duplicate donation on the same day.
- Click **No** or **Cancel** to return to the Find Donor Block.

## Electronic Donor Registration Using a Goverment-issued ID

Use the On Site Search Donor window to electronically register a donor by scanning a government-issued identification card. Use this electronic scan to positively identify an existing donor and return the data record for that donor, or to initiate the process of adding a new donor.

Scan the barcode on a Donor's Driver's License, State ID, or Common Access Card (CAC). Then, the Blood Centers system will identify the scanned data and retrieve the associated donor information from the database for an existing donor or populate a new donor record with information stored in the ID. The system can read 2D, and 3D barcodes.

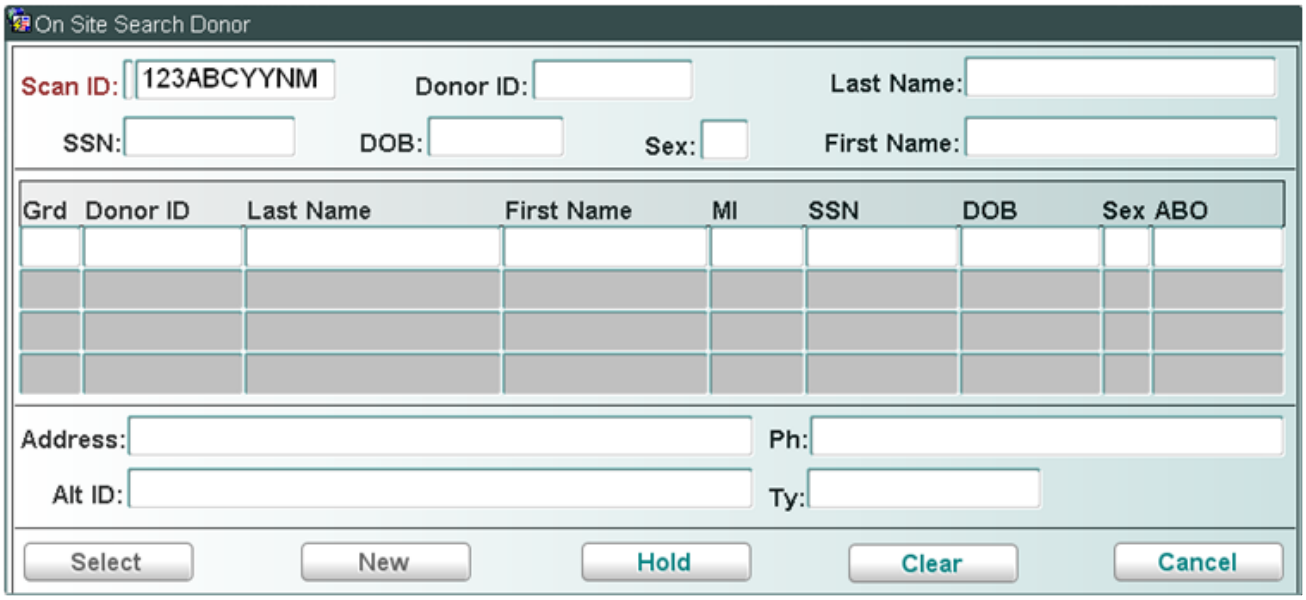


## Control Block Fields and Definitions

The following data can be populated automatically by scanning the donor's government-issued ID or by manual entry.


WellSky Corporation
Proprietary and confidential

**NOTE –** Entry fields in the control block are configured in the Configure Find Donor Block for Program (DONBLOCK).

### Scan ID

The actual scan of the government ID.

**NOTE –** Updating the scan ID is allowed. The previous scan ID will no longer be associated to the donor. The scan ID will only be navigable if the system parameter BC_SCAN_RE is set to Y.

### Donor ID

The unique identifier of the donor. This ID populates the field automatically, if the donor has been registered perviously.

### Last Name

The donor's last name populates automatically from the scanned ID, if available, or enter the donor's last name manually.

### DOB

The donor's date of birth populates automatically from the scanned ID, if available, or enter the date of birth manually.

### Sex

The donor's sex populates automatically from the scanned ID, if available, or enter the sex manually.

**NOTE –** When the scanned ID is a CAC and the donor is a first-time donor, the donor's sex will not populate the Sex field. The donor's sex must be entered manually. For returning donors, the system will retrieve the donor's sex from the existing donor record and automatically populate the Sex field.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor when the Sex field is populated: `F` in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; `M` in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

### First Name

The donor's first name populates automatically from the scanned ID, if available, or enter the first name manually.

## Data Block Fields and Definitions

If the system locates donor records in the database that match the scanned ID, the following information displays for each donor record retrieved.

- GRD – The grade level of the data match. A Grade 1 match indicates an exact match.
- Donor ID – The number that identifies the donor in the database
- Last Name – The donor's last name
- First Name – The donor's first name
- MI – The donor's middle initial
- DOB – The donor's date of birth
- Sex – The donor's sex
- ABO – The donor's blood type

### Address

If one or more donor matches are found, the associated street address, city, state, and Zip Code for a U.S. address, or the international address information display for the donor highlighted in the list.

### Ph

If one or more donor matches are found, the home and work phone numbers display for the donor selected in the list.

### Alt ID

The alternate ID number from the scanned ID displays.

> **NOTE –** If a CAC was scanned, this is the DOD Electronic Data Interchange Personal Identifier (EDIPIN), and the system will mask the number.

If one or more donor matches are found, the type of alternate ID and the ID number display for the donor highlighted in the list.

### Ty (Type)

The system populates one of the following ID types, depending on the type of ID that was scanned:

- DOD CAC PDF417 – Department of Defense ID (2D barcode)
- DOD CAC Code 39 – Department of Defense ID (1D barcode)
- AAMVA PDF417 – Driver's License or other official State ID (2D barcode)

## Register a Donor by Scanning a Government-issued ID

Perform the following steps to register a donor using a government-issued ID:

1. Verify the identity of the Donor and the ID you are scanning, and then scan the barcode on the ID. The ID number of the scanned identification populates the Scan ID field. One of the following types of identification scanned populates the Ty field:
    - DOD CAC PDF417 – Department of Defense ID (2D barcode)
    - AAMVA PDF417 – Driver's License or other official State ID (2D barcode)


WellSky Corporation
Proprietary and confidential

2. If the scan was:
    - unsuccessful, the following error message displays. Click **OK** and repeat the scan.

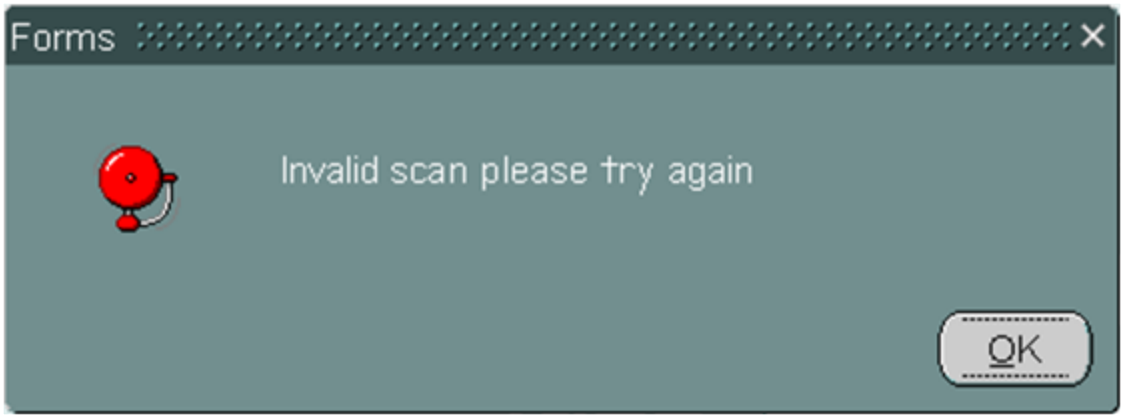


    - successful, the system populates the On Site Search Donor fields with the scanned data. The system then initiates a Donor Lookup.
3. If the system finds:
    - A Grade 1 donor match, the system retrieves the record and opens the Current Donor Data screen, populating all current data.
    - No Grade 1 donor match, but there is at least one Grade 2 potential donor match, the system displays the potential matches.
        - If one of the Grade 2 donors is a match to the scanned ID, click the donor and then click **Select**. The system retrieves the record and opens the Current Donor Data screen, populating all current data.
        - If none of the Grade 2 donors is a match and the donor is new, click **New**. The New Donor Data screen opens and the system populates the fields on the left side of the screen with all scanned data. Go to the next step.
    - No match in the database, the potential donor will be considered New.

The new donor record is created or the new data updates existing data in the Blood Centers database. The New Donor Data screen and the On Site Search Donor window closes. The WELCOME: Lookup and Registration screen displays.

## Control Block Fields and Definitions

Entry fields in the control block are configured in the Configure Find Donor Block for Program (DONBLOCK). NEW_CHECK determines which fields must be entered and the number of entries required.

### Drive Date

Display only. Displays the drive date based on the selection entered during the Set Drive Date and ID entry.

### Drive ID

Display only. Displays the drive date and drive ID and description, based on the selection entered during the Set Drive Date and ID entry.The name of the drive automatically displays.

### Last Name
Entry is determined by NEW_CHECK in the (DONBLOCK). If configured to be entered twice, you must enter the last name twice and the entries must match.

### DOB (Date of Birth)
Entry is determined by NEW_CHECK in the (DONBLOCK). If configured to be entered twice you must enter the DOB twice and the entries must match.

### Sex
Entry is determined by NEW_CHECK in the (DONBLOCK). If configured to be entered twice you must enter the Sex twice and the entries must match.

**NOTE –** If the INTRFEMALE and INTRMALE Inter Reason codes are specified in the RHOLDS table, a sex interdiction will automatically be placed on the donor if the Sex field is populated or modified: an F in the Sex field will automatically place an interdiction that is defined for the INTRFEMALE Inter Reason; an M in the Sex field will automatically place an interdiction that is defined for the INTRMALE Inter reason.

### First Name
Entry is determined by NEW_CHECK in the (DONBLOCK). If configured to be entered twice, you must enter the first name twice and the entries must match.

## Demographics Block Fields and Definitions

### Mid
Entry is optional. Enter up to 20 characters for the middle name.

### Sfx
Entry is optional. You may enter a suffix (Sr., Jr., III, etc.) to further identify the donor.

### Nick Name
Entry is optional. Enter up to 20 characters.

### Scan ID
Entry is optional. Scan the ID or enter **M** for manual entry. Entry is a single entry but must have the correct check digit.

**NOTE –** Updating the scan ID is allowed. The previous scan ID will no longer be associated to the donor. The scan ID will only be navigable if the system parameter BC_SCAN_RE is set to **Y**.

### Height
Use the up and down arrow to select the appropriate height. Height values displayed are associated to the Master Code HGHT.


WellSky Corporation
Proprietary and confidential

**NOTE –** The *Height* field is required when using the Vista interface, but not enforced by the application. If you do not populate the *Height* field, the current and subsequent procedures will not go across the interface.

## Weight

Enter the donor's weight (in pounds) in this field.

## Ethnicity

Entry is required if System Parameter ETHNIC is set to `Y`; entry is optional if System Parameter ETHNIC is set to `N` or is blank. Select a valid ethnic group code from the LOV. The LOV is populated from the Master Code ETHGP.

## Alt ID

Entry is optional if the Social Security number is being used in the Find Donor block. If using the system parameter FKSSN the field becomes mandatory and you can enter up to 20 characters.

## Alt Type

Entry is optional. Manually enter or select from LOV. Field is required if the Alt ID field is populated.

## Address

Enter up to 50 characters in this required field.

## Apt No.

Entry is optional. Enter up to 10 characters.

## City-St and Zip

The system validates your entry of city and ZIP Code. If they disagree, the system does not accept the entry. An LOV is available in both fields. Once a matching entry is made, the system automatically populates the State field.

**NOTE –** In the City field, enter at least three letters of the city name to limit the LOV to cities matching your partial entry. The LOV in the Zip field contains only ZIP Code entries for the specified city.

## Home Ph

Entry is optional. If an area code is entered, the phone number must be entered as well.

## Business Ph

Entry is optional. If an area code is entered, the phone number must be entered as well. An extension may be associated to a phone number.

## E-mail

Entry is optional. Make a free-form entry of the donor's e-mail address. Up to 128 characters are accepted. When you press **Enter** to exit the E-mail field, the cursor advances to the Employer Block and checks for the required characters in the e-mail address.

## Alt Addr (button)

Click **Alt Addr** to open the Alternate Demographics window, as follows:

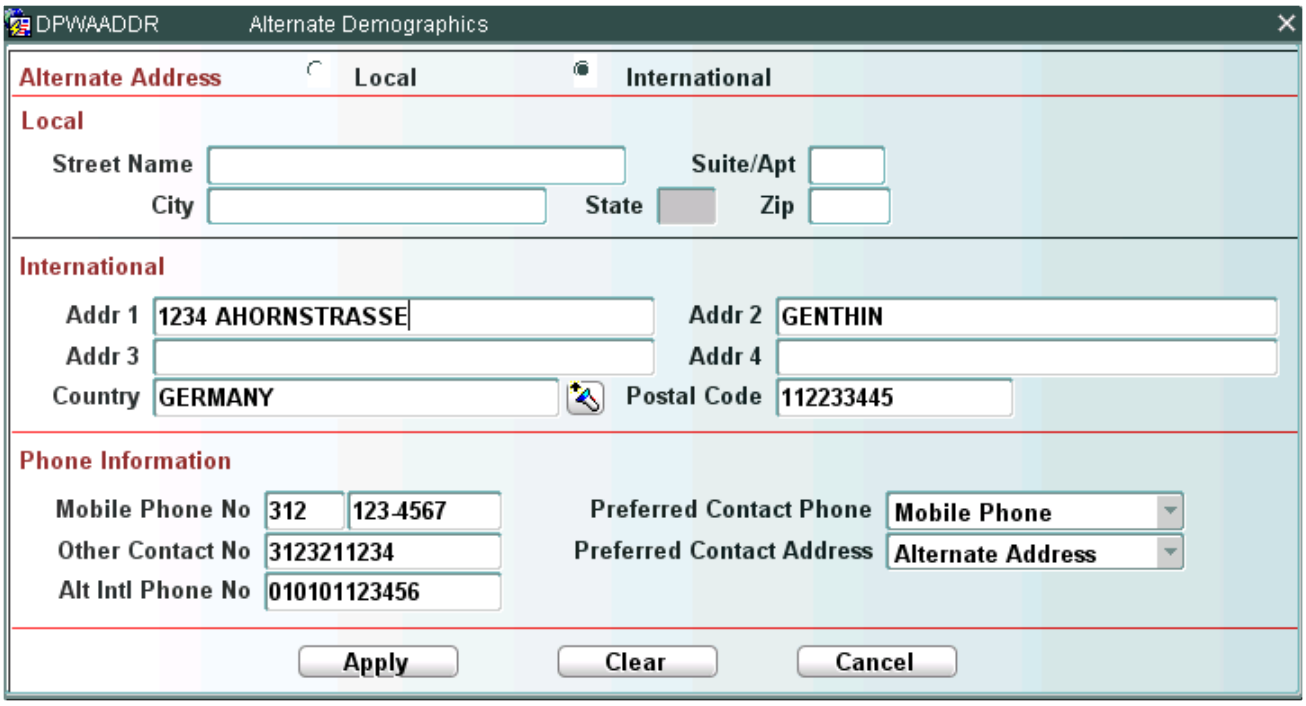


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

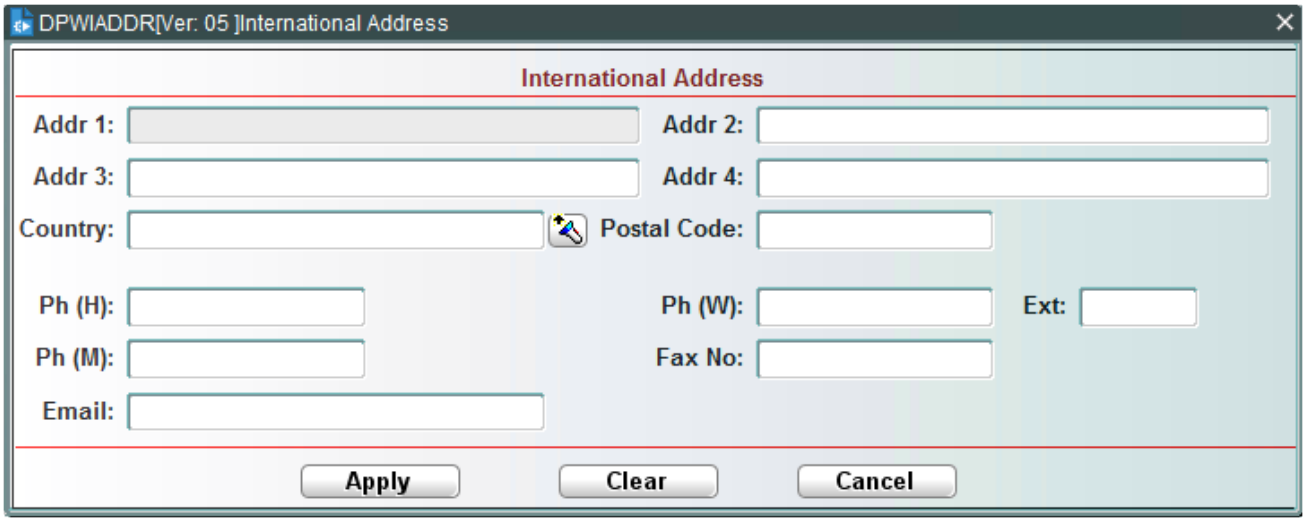

Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

## Entry in the Employer Field

You must navigate through each field in the Employer Block. If no entry is required or correction needed, press **Enter** to proceed to the next field.

### Empl

Entry is optional. If an existing employer is displayed, you can select another employer for the donor. Type a partial employer name and press **Enter** to access the LOV in this field.

If you enter an employer name in this field that does not match an employer in the database, a window opens and asks if you want to create a new employer.

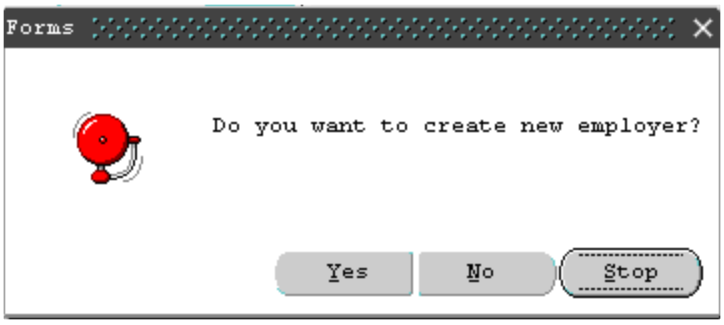


- Click **Yes** to create a new employer.
- Click **No** to return the cursor to the Empl/School field and correct your entry.
- Press **Enter** to activate the Stop button; a pop-up remains until you click **Yes** or **No**.

### City- St/Zip

Entry is required if a new employer is being created. ZIP Code and city entries will be validated and must agree. If an existing employer is selected, the data for that employer cannot be modified.

### ASP

Entry is optional. Select a valid alternate sponsor code from the LOV. If an alternate sponsor is entered, the donation credit is given to the alternate sponsor. Narrow the LOV by entering the first 3 characters of the alternate sponsor name.

### Intl Addr (button)

Click **Intl Addr** to open the International Address window, as follows:

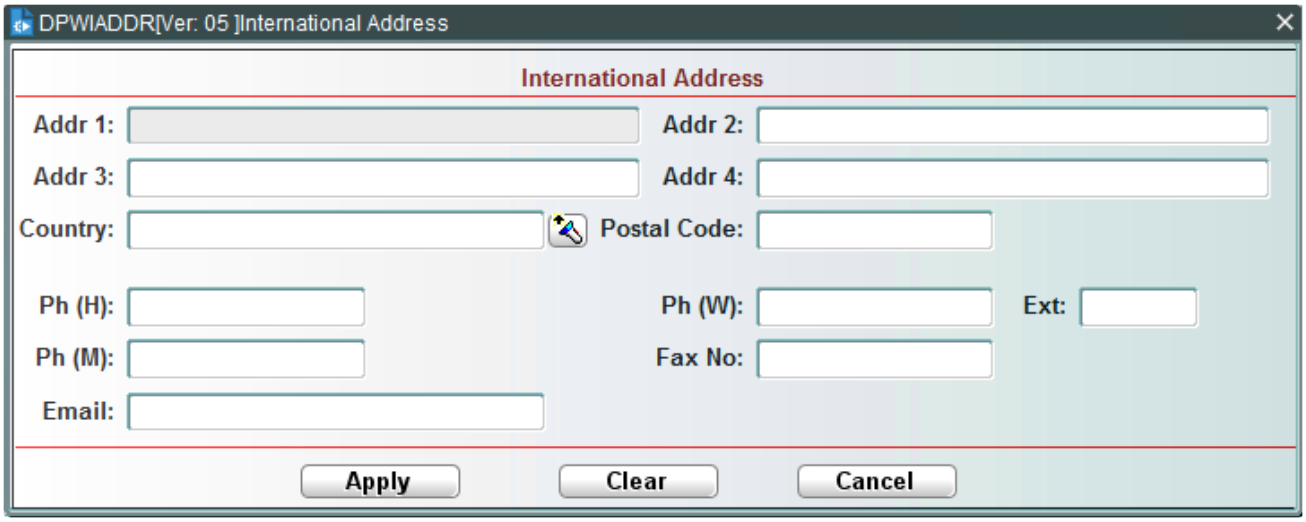


Use this window to add or update the international address, telephone, and e-mail information. See the International Address (DPWIADDR) section in Chapter 14 Called Windows and Routines for instructions on using this window.

# Entry in the Donation Details Block

## Donation

Entry is required. Enter a valid donation type code or select from the LOV.

## Procedure

Entry is required. Enter a valid procedure code or select from the LOV.

## Elig

Display only. Displays the eligibility for the specific donation and procedure entered. To view the entire eligibility of the donor, click **Full Eligibility**.

## ID Verified?

Entry is required. Enter `Y` once donor identification has been verified.

# Full Eligibility Button

The donor's eligibility for each procedure type displays in the Eligibility Block. If the donor is currently ineligible for a procedure, the date that the donor will become eligible for that procedure displays in the Elig Date column. A status of **No** (displayed with a red background) means the donor is not eligible to donate. A status of **Yes** (displayed with a green background) means the donor is eligible for that procedure. If the donor is not eligible to donate for a listed procedure, the reason displays in the Reason column.


WellSky Corporation
Proprietary and confidential

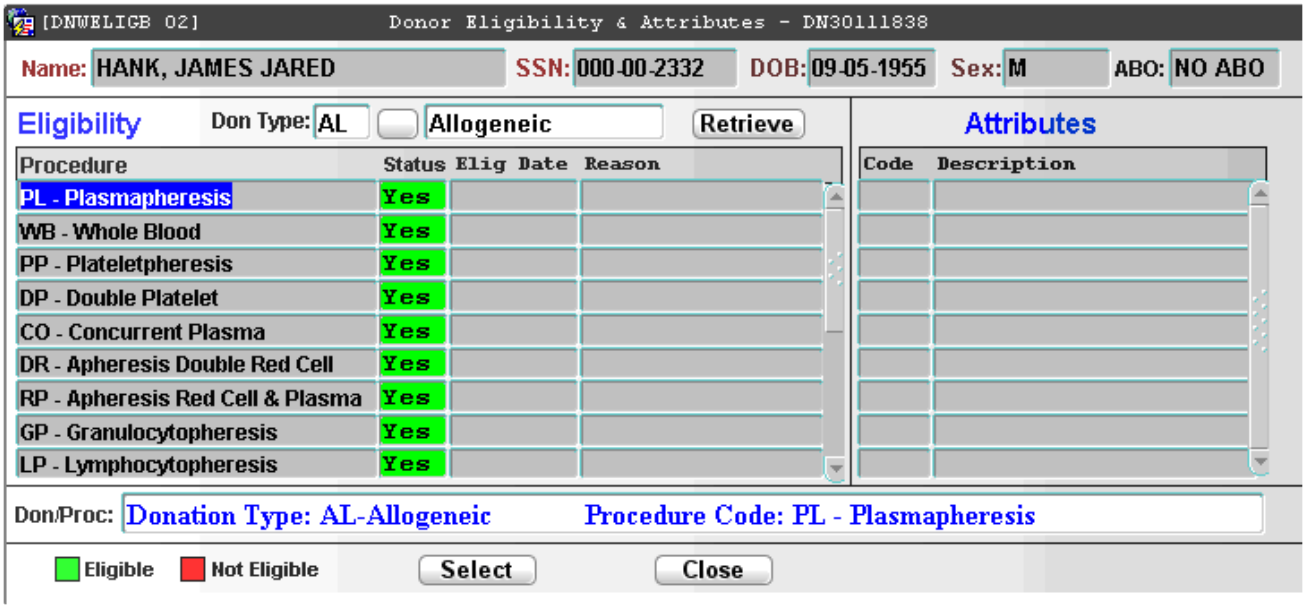


Possible messages in the Reason column include:

- Donor is indefinitely deferred
- Attempting to donate too soon
- Donor is temporarily deferred
- Too many times for this procedure
- Donor is on hold

**NOTE –** User must have access to the window for the eligibility button to be active.

## In the Donations Data Block

The following information displays:

- Lifetime donations and credits
- Year-to-date donations and credits
- Lifetime gallons donated
- Number of units required to reach the next gallon
- ID of last unit donated
- Post count
- Date of last donation
- Type of last donation
- Procedure for last donation

## In the Attributes Block

Any attributes associated with the donor display in the Attributes Block. You will only see those attributes for which you have been granted viewing privileges.

## The Register Button

Click **Register** to register the donor. If the donor was registered with a response through INQUIRY that placed an interdiction, the user can override or link a deferral at time of registration. The following pop-up appears:

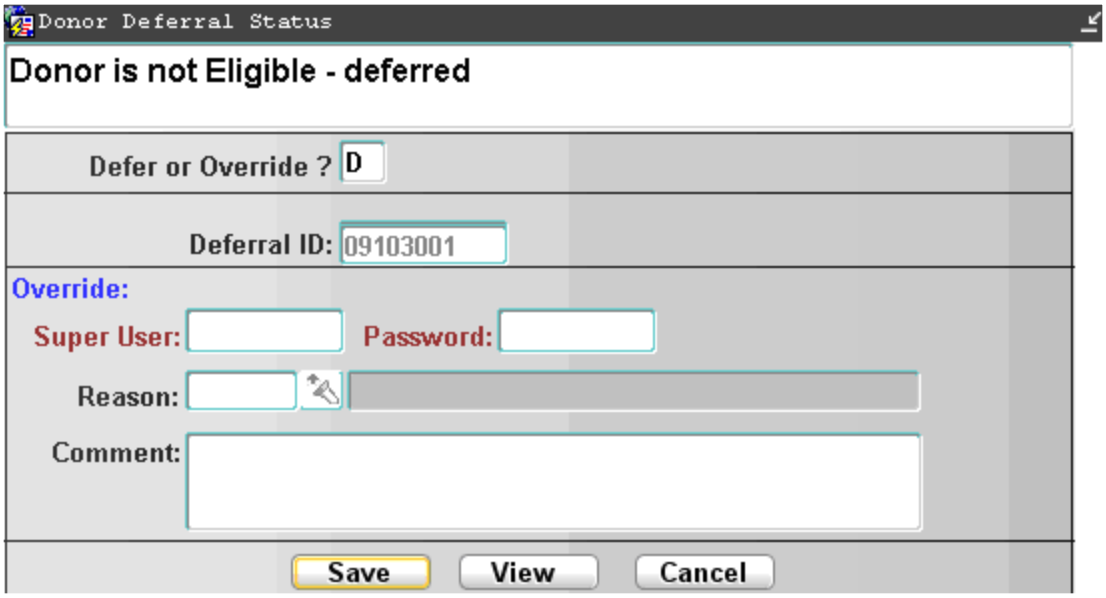


### Data Entry:

### Defer or Override?

Enter D for Deferral or O for Override.

- If you enter D, the Deferral ID field is required and all other fields are not navigable.
- If you enter O, the system skips the Deferral ID field and the cursor advances to the Super User ID field.

### Deferral ID

Manually enter or scan a deferral ID.

### Super User

Enter the user ID. If the user does not have access to OVRSN will not allow the donation to be overridden.

### Password

Enter the password that is associated to the user ID.

### Reason

Enter a reason code or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Comment

Entry is optional. Enter up to 240 characters.

- Click **Save** to save your entries to the database.
- Click **View** to see the reason for the deferral. If the View button is clicked after the user has entered O or D, when closing the view the Defer or Override decision will be removed.
- Click **Cancel** to cancel the process; any information entered in the Donor Deferral Status window is not saved.

## The Print Card Button

Click **Print Card** to print the Donor ID Card on the printer displayed in the *Printer* field. Once a card is printed, the Print button displays as the Reprint button. Click **Reprint** to reprint the donor card. You must click **Register** or **Update** to activate the Print Card button.

## The Printer List Button

Click **Printer List** to display a list of printers available to print the Donor ID Card.

## The Donations Button

Click **Donations** to open the Donation History window to view a donor's history of donations. For more information on this window, refer to Section 15.2.13.

## The Search Donor Button

Click **Search Donor** to access the On Site Search Donor Block to query for another donor in the system. For more information on this window, refer to Section 15.2.29 Find Donor (FIND DONOR).

**NOTE –** To determine if the Search Donor button is enabled is based on the System Parameter REGNXT. If REGNXT is set to **F** the Search Donor button is disabled and the Find Donor window displays automatically. If REGNXT is set to **N**, the Search Donor button is enabled and the On Site Search Donor window does not appear automatically.

## The Other Button

Click **Other** to display the cumulative red cell and plasma loss amounts for a rolling calendar year (the period from 365 days prior to the current date to the current date). The Other Window opens:

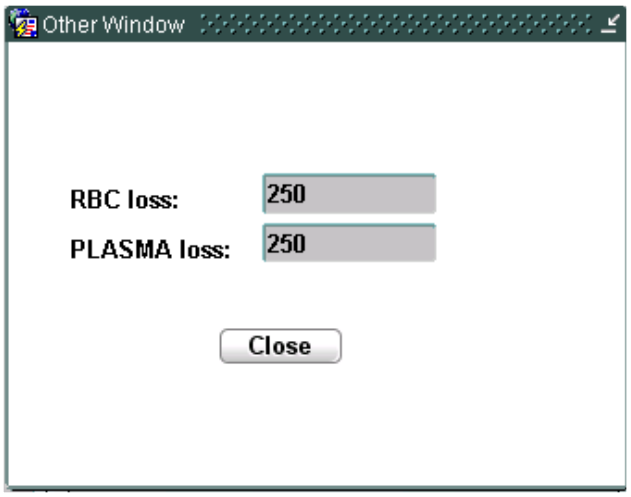


## At Commit

Query only, no commit to database.

## What to Do Next

N/A.

14

# Chapter 14 - Called Windows


14.1 Introduction ..... 935
14.1.1 Access Control ..... 935
14.2 Called Windows Descriptions ..... 936
14.2.1 ABO Breakdown for Drive (MCWABODR) ..... 936
14.2.2 ABO Breakdown for Sponsor (MCWABOSP) ..... 937
14.2.3 Alternate Demographics (DPWAADDR) ..... 938
14.2.4 Assigned Equipment Information (DSWEQUIP) ..... 940
14.2.5 Authorize Notification Letter (DNWSNDLT) ..... 942
14.2.6 Collection Statistics (DRWCSTAT) ..... 945
14.2.7 Communication Letters (DCWVWLTR) ..... 948
14.2.8 Communication Log (DCWDCOMM) ..... 950
14.2.9 Deferral Entry Details (DRWDEFRL) ..... 954
14.2.10 Display Notification Letter (DNWLTQRY) ..... 955
14.2.11 Donation Entry Details (DRWENTRY) ..... 957
14.2.12 Donation History (DPWDCARD) ..... 958
14.2.13 Donation History (DPWDNDTL) ..... 960
14.2.14 Donation History—Test Results (DPWDNTST) ..... 964
14.2.15 Donation Hold Details (DRWHOLDS) ..... 966
14.2.16 Donation Notes (DRWNOTES) ..... 968
14.2.17 Donation Sites Available for a Given Time (DSWAVSIT) ..... 970
14.2.18 Donation Slots (DSWASLOT) ..... 971
14.2.19 Donation/Deferral Audit Details (DRWAUDIT) ..... 973
14.2.20 Donor Attributes (DPWPROPR) ..... 975
14.2.21 Donor Demographics (DPWDEMGR) ..... 976
14.2.22 Donor Eligibility (DPWELGBY) ..... 979
14.2.23 Donor Eligibility & Attributes (DNWELIGB) ..... 980
14.2.24 Donor Interdictions (DPWDNINT) ..... 981
14.2.25 Donor Schedule on Donor Centers (DSWDONIS) ..... 984
14.2.26 Donor Statistics (DCWLOOKS) ..... 986
14.2.27 Drive Statistics (DPWHLDRN) ..... 988
14.2.28 Find Donor (FIND DONOR) ..... 990

14.2.29 Generate Notification Letter (DNWSNDLT) ..... 994
14.2.30 Goal Information (MRWRPERF) ..... 997
14.2.31 International Address (DPWIADDR) ..... 998
14.2.32 New ZIP Code (VDWNWZIP) ..... 1000
14.2.33 Notification Letters (DNWVWLTR) ..... 1001
14.2.34 Notification Log (DNWDCOMM) ..... 1003
14.2.35 Past Drives Sponsor (MRWPADRV) ..... 1005
14.2.36 Schedule Status (SSWSSTAT) ..... 1007
14.2.37 Search for Donor (DNWDFIND) ..... 1010
14.2.38 Send Letter (DCWSNDLT) ..... 1013
14.2.39 Site Collection Statistics (DRWSSTAT) ..... 1014
14.2.40 Sponsor Rollover Preferences (MRWROLLP) ..... 1017
14.2.41 User List Browser (DEWDONBR) ..... 1018
14.2.42 View Donors in List (DEWDONRS) ..... 1019
14.2.43 View List Criteria (DEWCRITN) ..... 1021


WellSky Corporation
Proprietary and confidential

# 14.1 Introduction

This chapter describes the use and function of a group of windows that cannot be accessed from the menu system, but that are called from within various programs throughout Donor. Some windows display information, while others permit data entry and modification to existing data.

Each of the windows described in this chapter contains its own programming logic and, in some cases, accesses one or more programming routines that are transparent to the user. Each called window is a program within itself, and its function is not dependent on the screen from which it is called.

In some instances, called windows receive information from the source screen (the screen from which it is called). Such information might be a donor ID, drive ID, unit ID, etc. The called window can then automatically retrieve additional data that relates to the data element received from the source screen. In other instances, called windows might not receive data from the source screen, but allow you to enter required data in order to access the window's functional capabilities.

## 14.1.1 Access Control

Even though a screen might contain a button designed to invoke a called window, the user who is logged into the screen must have appropriate access to view the window. If you click a button but do not have access to the button's associated window, a message will advise you "You are not authorized access to this module."

# 14.2 Called Windows Descriptions

The Called Windows are described in the following sections.

## 14.2.1 ABO Breakdown for Drive (MCWABODR)

### Intended Use

Use this program to view ABO by procedure at a drive.

### Limitations

Collected units must be registered.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

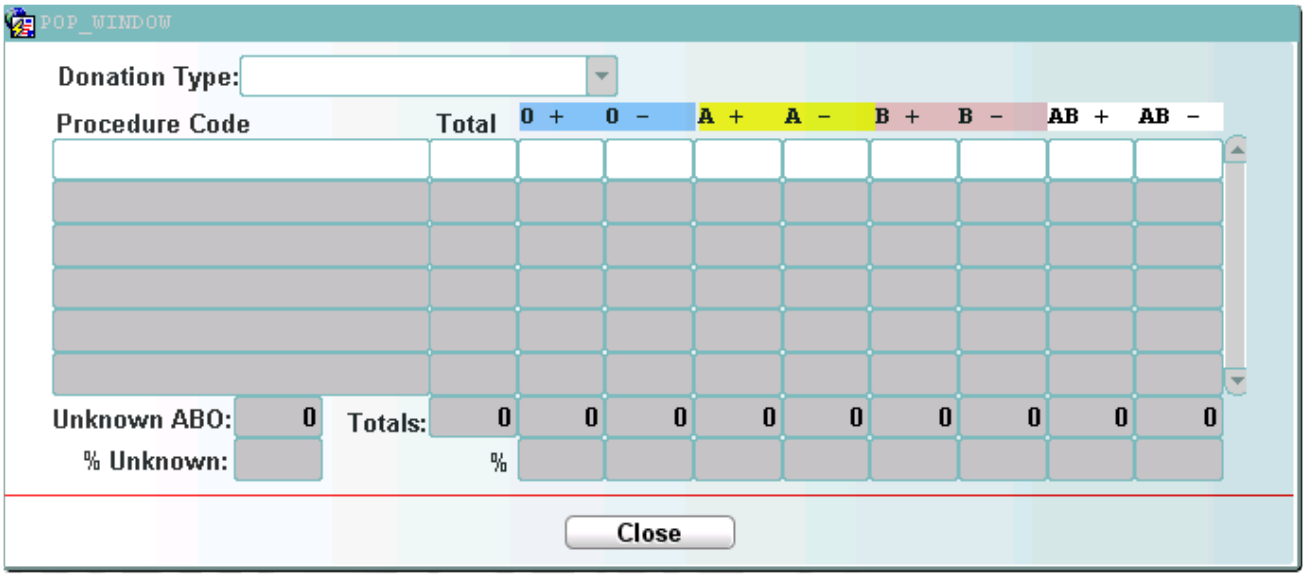


When the window opens, it automatically displays Allogeneic donations. Another donation type can be displayed by selecting from the drop-down list in the Donation Type field.

The following information displays for the selected donation type:

- Procedure code
- Total number of donations of that procedure
- Number of donations for each ABO category

The bottom of each column displays the total and percent that each ABO donation makes up of the total number of donations. The total number of unknown ABO donations and the percentage it represents of the total display to the right of the totals. The donations will have unknown ABO until the test results are transferred from the Lab system.


WellSky Corporation
Proprietary and confidential

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.2 ABO Breakdown for Sponsor (MCWABOSP)

## Intended Use

Use this program to view ABO by procedure for drive sponsor.

## Limitations

Collected units must be registered.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

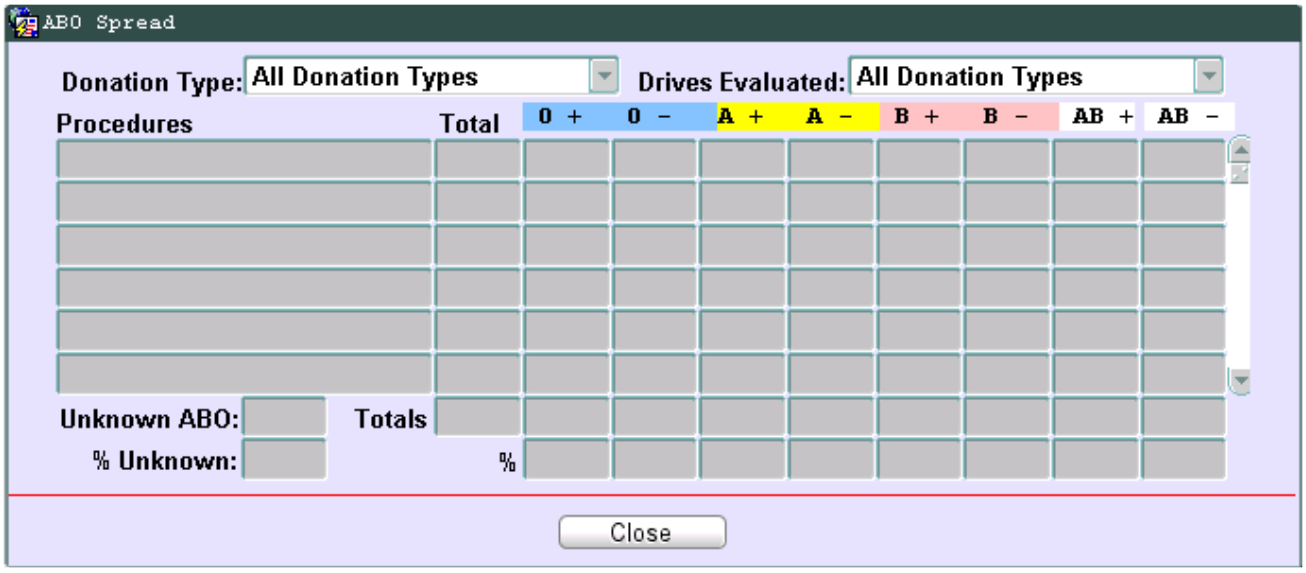


The window automatically displays Allogeneic donations for the most-recent drive. Another donation type and drive can be chosen.

### Donation Type

Choose the desired donation type from the drop-down list.

### Drives Evaluated

Choose the desired drive from the drop-down list

The following information displays for the selected type and drive:

- Procedure
- Total number of donations of that procedure

- Number of donations for each ABO category

The block also displays the total number of all ABO donations and percent that each ABO donation makes up of total number of donations. Unknown ABO donations and percent also display, if any.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.3 Alternate Demographics (DPWAADDR)

## Intended Use

Use this window to view and change a donor's alternate demographics. Alternate demographics allow a donor to have more than one address or phone number stored in the database. This window allows you to identify and change the primary address and phone number for the specified donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

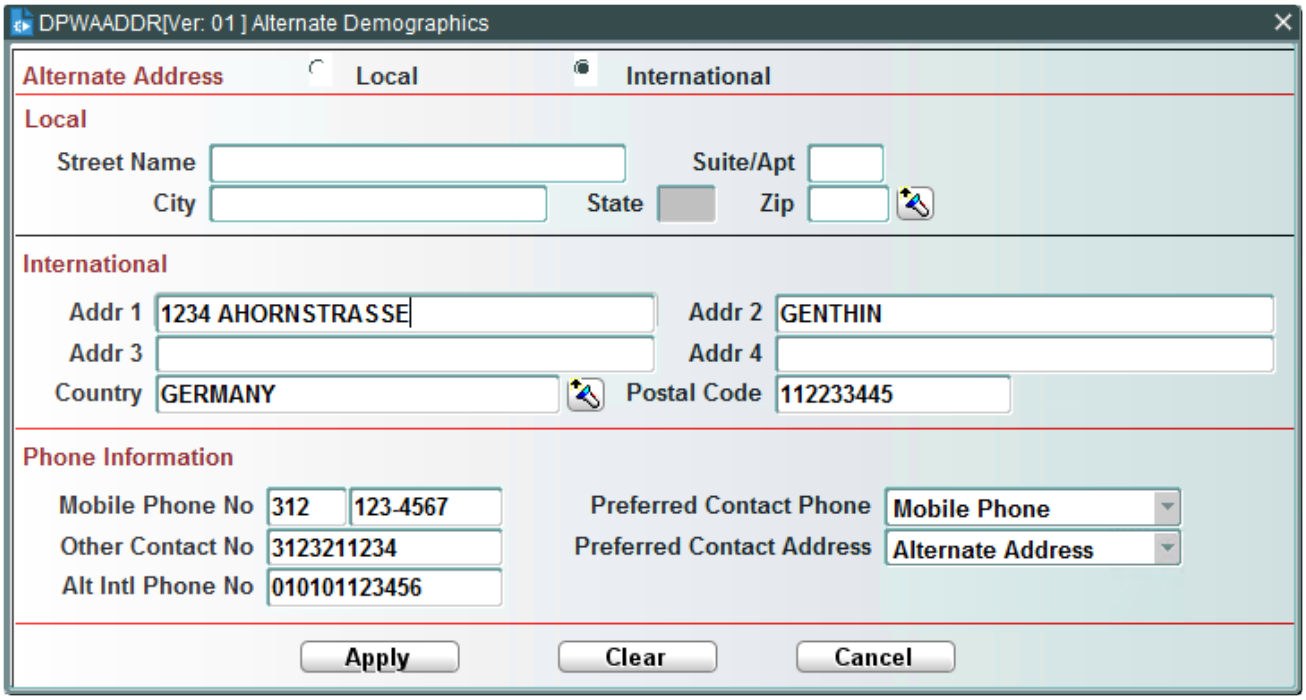


### Alternate Address Option Button

Select the desired alternate address type (Local or International). Once selected, the cursor will automatically be placed in the first field of the selected address block.

**NOTE –** If you change the alternated address type after entering information, all information entered will be deleted.

## Local Address Block

### Street Name
Enter street name and address. Entry is limited to a maximum of 40 characters.

### Suite/Apt
Enter suite or apartment. Entry is limited to a maximum of 10 characters.

### City
Enter city. Entry is limited to a maximum of 40 characters.

### State
The State fields automatically populate based on zip code entered. Field is not navigable.

### Zip
Enter 5-digit zip code.

## International Address Block

### Addr 1, Addr 2, Addr 3, Addr 4
Use these fields for international address information. Each field is limited to a maximum of 50 characters.

### Country
Select country from LOV.

### Postal Code
Enter postal code. Entry is limited to a maximum of 15 characters.

## Phone Information Block

### Mobile Phone No
Enter 10-digit mobile phone number.

### Other Contact No
Enter other phone number. Entry is limited to a maximum of 20 characters.

### Alt Intl Phone No
Enter alternate international phone number. Entry is limited to a maximum of 20 characters.

### Preferred Contact Phone
Select donor's preferred contact phone from LOV, as follows:

- Home Phone – home phone number from donor's demographics.
- Mobile Phone – mobile phone number from Alternate Demographics window.
- Work Phone – business phone number from donor's demographics.
- Other – other contact number from Alternate Demographics window.

### Preferred Contact Address

Select donor's preferred contact address from LOV, as follows:

- Home Address – home address from donor's demographics.
- Alternate Address – alternate address from Alternate Demographics window.

## The Apply Button

Click **Apply** to commit new entries and changes to the donor database.

## The Clear Button

Click **Clear** to clear the content of all fields.

## The Cancel Button

Click **Cancel** to cancel all changes, additions, or deletions.

# 14.2.4 Assigned Equipment Information (DSWEQUIP)

## Intended Use

Use this window to view equipment scheduled for a donor for a procedure.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

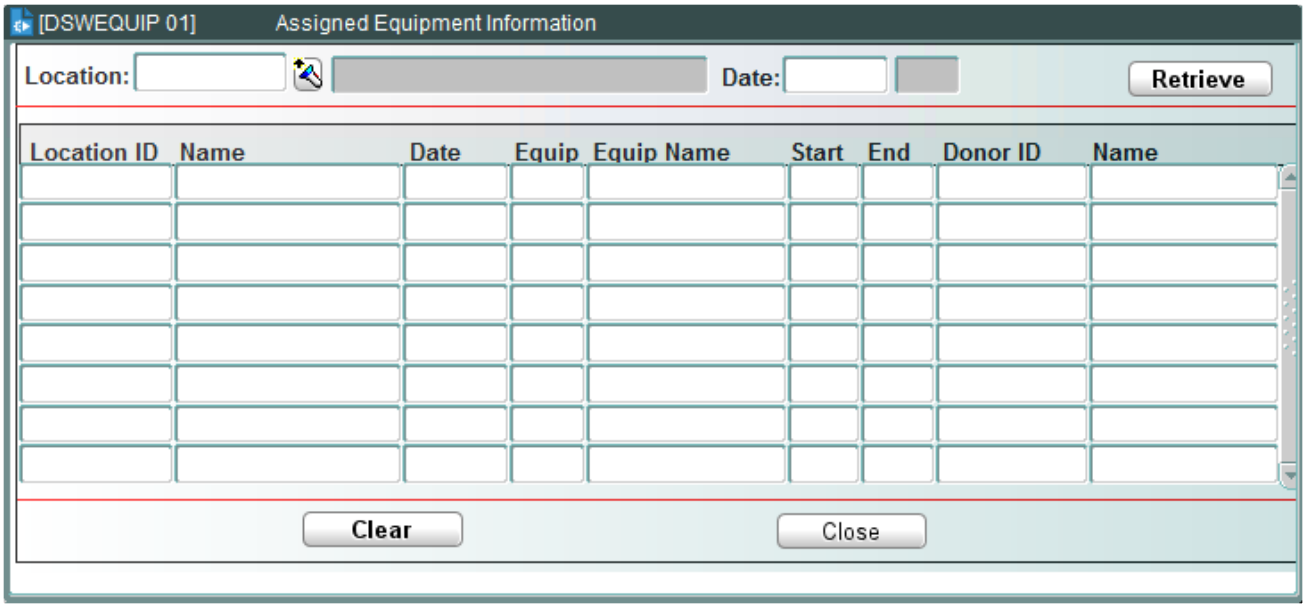


# Control Block Fields and Definitions

If a location and date are selected in the host program, that site and date automatically populate in the control block. To change, click **Clear**. Enter the following:

## Location

Entry is optional. Enter the location ID or select from the LOV.

## Date

Entry is optional. Enter date to view, using the MMDDYY format.

After entering the search criteria, click **Retrieve** to display a list of equipment details for the location.

The following data displays:

- Location ID and name
- Date of equipment assignment
- Equipment code and name
- Start and end times of assignment
- ID and name of donor to which equipment is assigned

# The Clear Button

Click **Clear** to clear the data from the screen in order to begin a new search.

# The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.5 Authorize Notification Letter (DNWSNDLT)

## Intended Use

Use this program to authorize a notification letter to send to a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

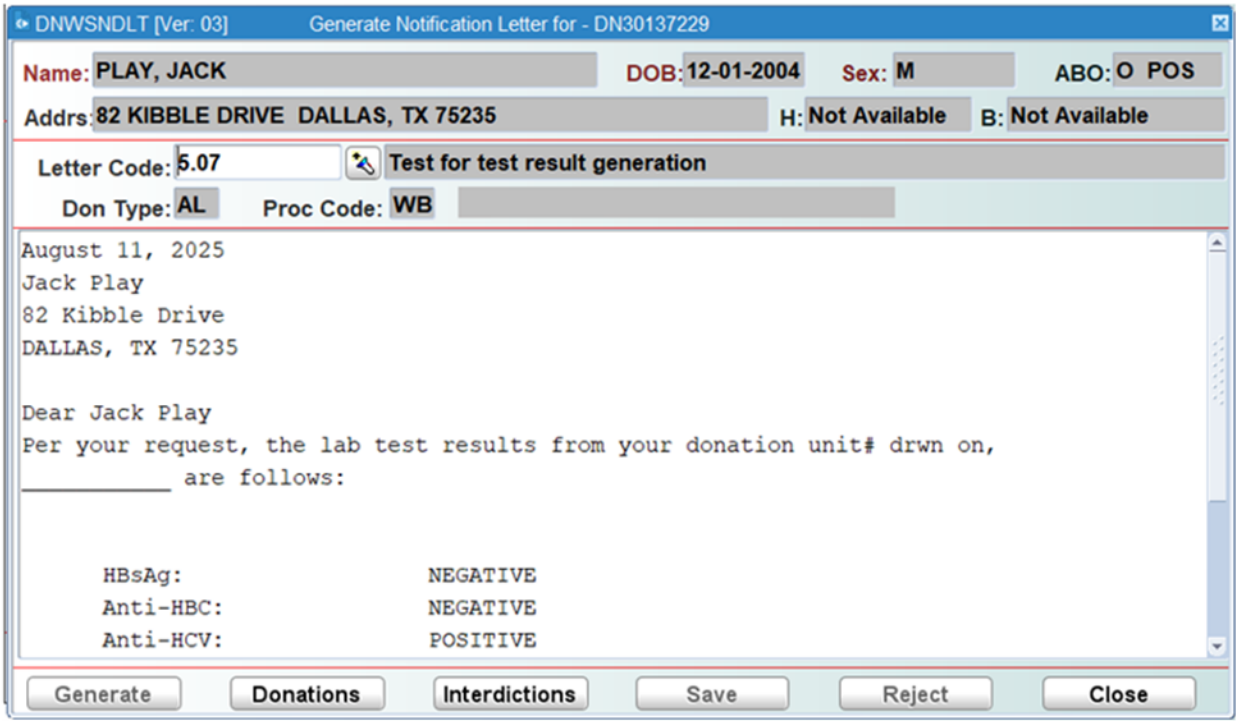


The following donor information displays:

- Name
- Date of birth
- Sex
- ABO type
- Address
- Home and business phone numbers
- Letter code and description
- Donation type
- Procedure code


WellSky Corporation
Proprietary and confidential

## The Retrieve Button

Click **Retrieve** to view the selected letter:

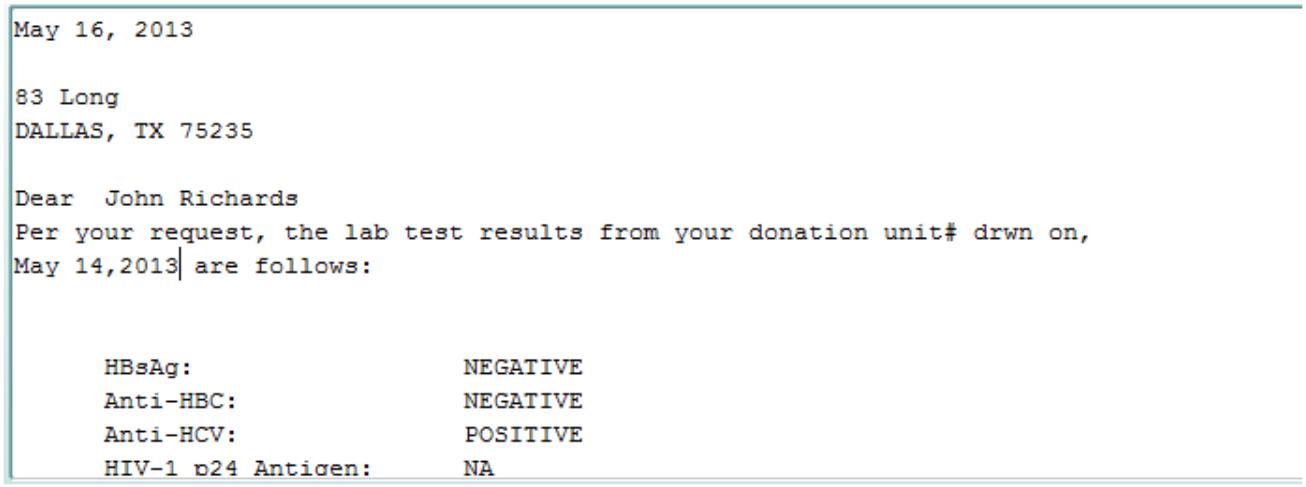

```
May 16, 2013

83 Long
DALLAS, TX 75235

Dear  John Richards
Per your request, the lab test results from your donation unit# drwn on,
May 14,2013 are follows:


      HBsAg:                  NEGATIVE
      Anti-HBC:               NEGATIVE
      Anti-HCV:               POSITIVE
      HIV-1 p24 Antigen:      NA
```

## The Donations Button

Click **Donations** to open the Donation History Test Results window. See the Donation History Test Results section of this chapter for instructions on using this program. Click **Close** to return to the Generate Notification Letter program.

## The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. See the Donor Interdictions section of this chapter for instructions on using this program. Click **Close** to return to the Generate Notification Letter program.

## The Authorize Button

You must first click **Donations** and then **Interdictions** to ensure review of donations and interdictions for this donor. Until then, the Authorize button is disabled.

Click **Authorize** to authorize a generated letter. A window allows you to enter log information, up to 1,850 characters:

Click **Search** to perform a search and replace action:

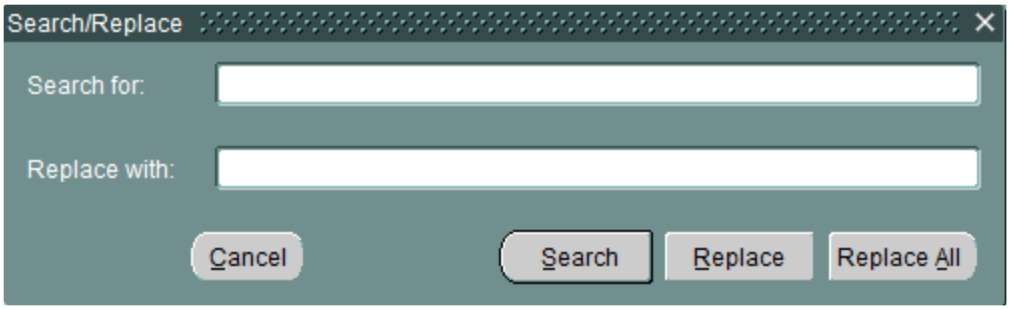


Click **OK** to continue with the authorization process. A window confirms authorization:

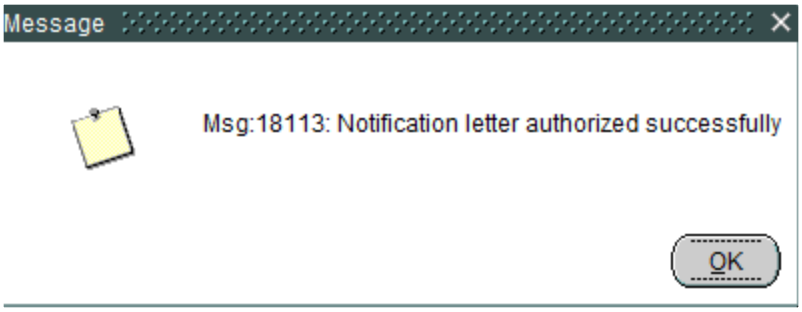


## The Reject Button

Click **Reject** to reject a generated letter. A pop-up appears to confirm rejection of the letter:

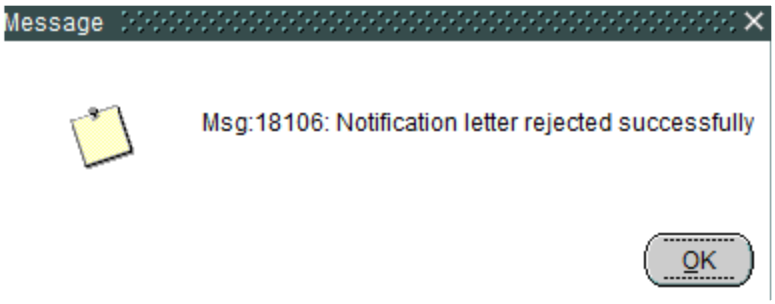


## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.6 Collection Statistics (DRWCSTAT)

## Intended Use

Use this program to view collection statistics by drive type, by date range, or by donation type and procedure.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

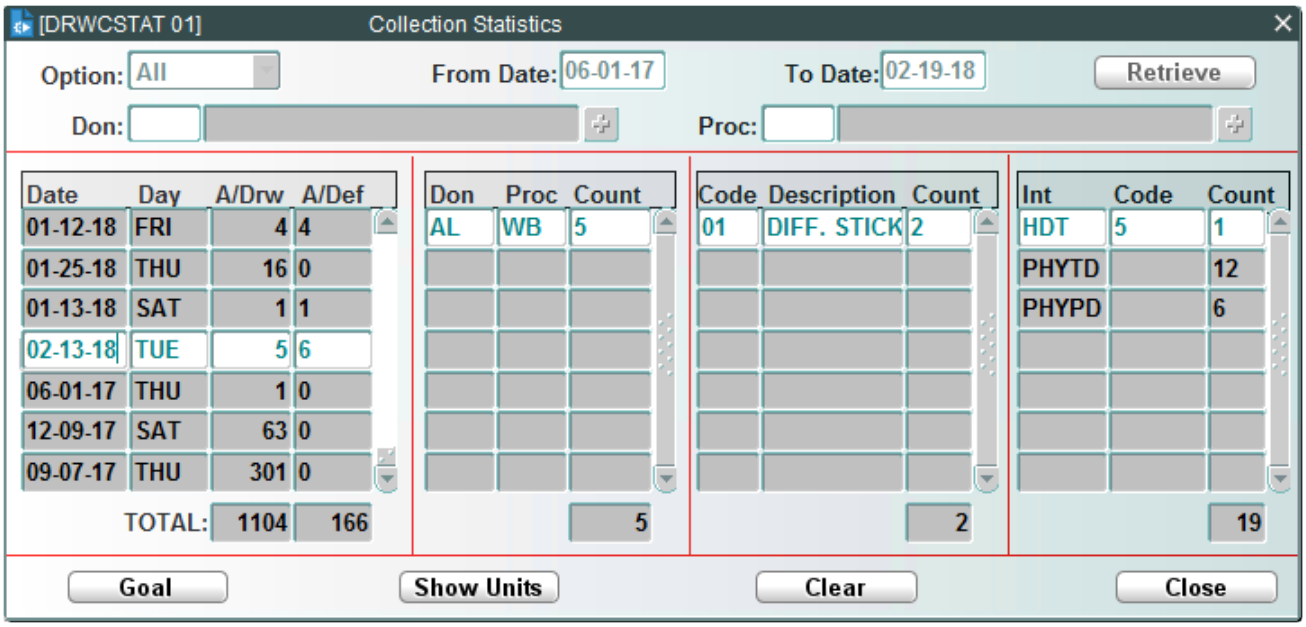


## Control Block Fields and Definitions

### Option

Entry is required. Choose all drives, fixed drives or mobile drives from drop-down list.

### From
Entry is required. Enter beginning date of date range.

### To
Entry is required. Enter ending date range.

### Day
Entry is required. Default is ALL, or select a day from the drop-down list.

### Site/Drive
Entry is optional. Enter a site or drive ID or select from the LOV.

### Don
Entry is optional. Enter the donation type or select from the multiple selection box.

### Proc
Entry is optional. Enter the donation procedure types or select from the multiple selection box.

## Retrieving Data
After entering the search criteria, click **Retrieve** to display a list of collections that match the entered criteria.

## In the Date Block
The following information displays:

- Date of date range
- Day of date range
- Actual number of draws that day
- Actual number of deferrals that day
- Deferral percentage

## In the Donation Block
The following information displays for the selected date:

- Donation type
- Donation procedure type
- Number of donations for the procedure type

## In the Venipuncture Block
The following information displays for the selected date:

- Venipuncture code


WellSky Corporation
Proprietary and confidential

- Venipuncture description
- Number of venipuncture procedures of that code type

## In the Deferral Block

The following information displays for the selected date:

- Interdiction Code
- Deferral Code
- Number of that type of deferrals that day

## The Goal Button

Click **Goal** to open the Goal block:

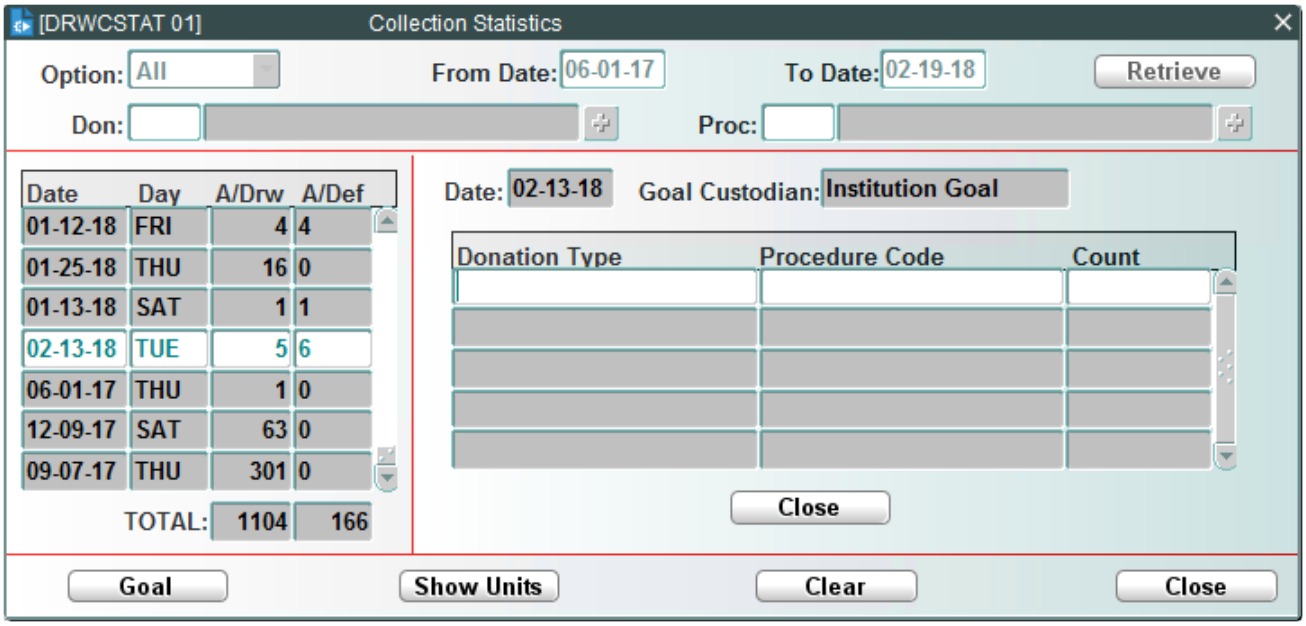


Use this block to view the collections goal for specific donation types and procedures. The following information displays:

- Date
- Goal custodian
- Donation type
- Donation procedure code
- Collections goal for that donation type and procedure

Click **Close** to close the Goal block and return to the main window.

## The Show Units Button

Click **Show Units** to open the Units block:

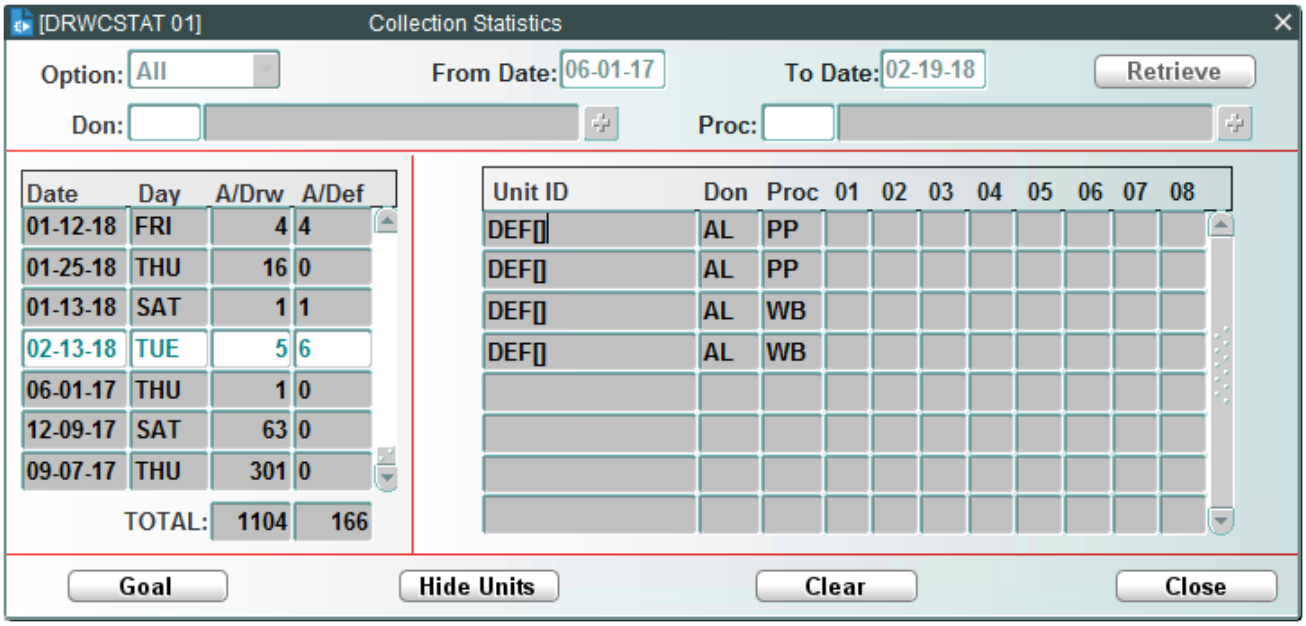


Use this block to view the unit ID, donation type and donation procedure of collected units. The following information displays:

- Unit ID
- Donation type
- Donation procedure
- Venipuncture codes 01-08 (marked Y for those that apply)

Click **Hide Units** to close the Units block and return to the main window.

## The Clear Button

Click **Clear** to clear the screen of all data in order to begin a new search.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.7 Communication Letters (DCWVWLTR)

## Intended Use

Use this program to view communication letters that have been sent to a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

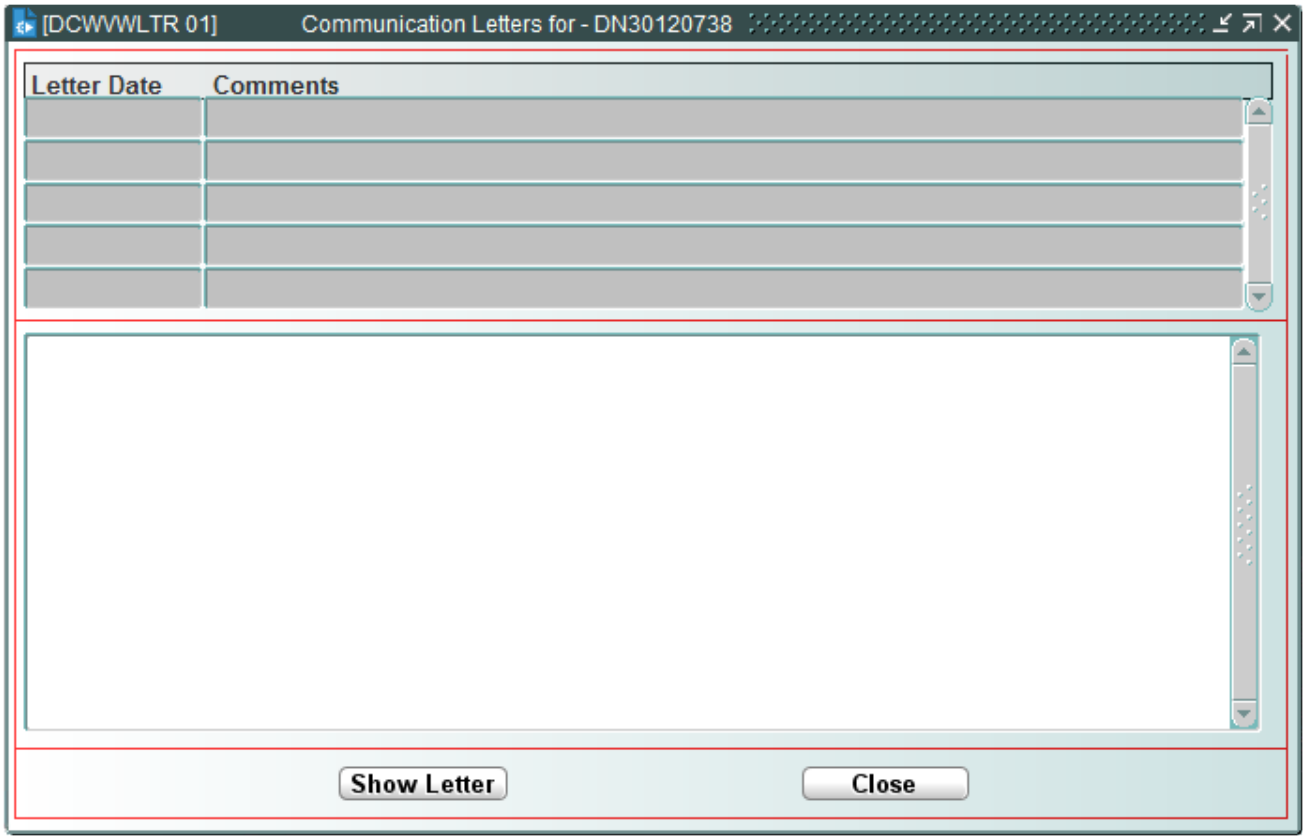


The following information displays for each letter:

- Date letter was created
- Comments attached to letter

## The Show Letter Button

Click on the desired letter to be viewed. Click **Show Letter** to view the text of the letter:

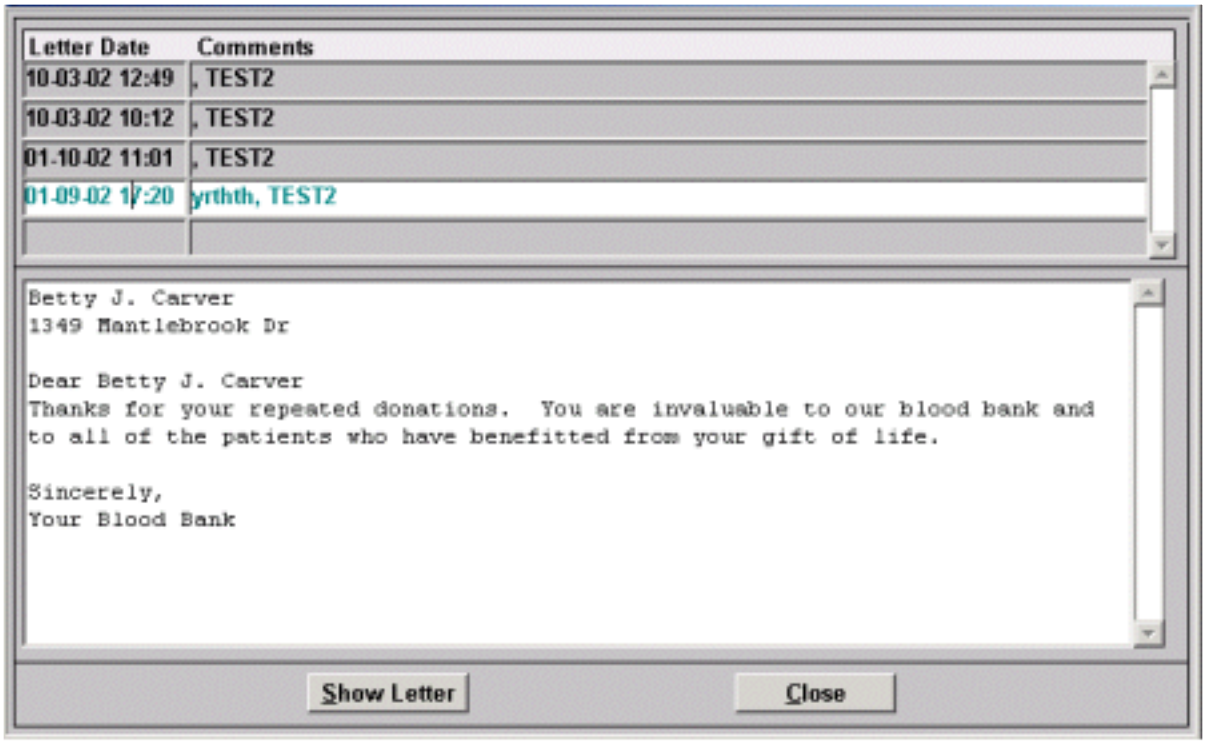


## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.8 Communication Log (DCWDCOMM)

## Intended Use

Use this window to view a history of communications with a donor and to define a new communication letter to a donor.

## Prerequisites

Master Code DLCOM must be defined to include user groups that can update a donor communication.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

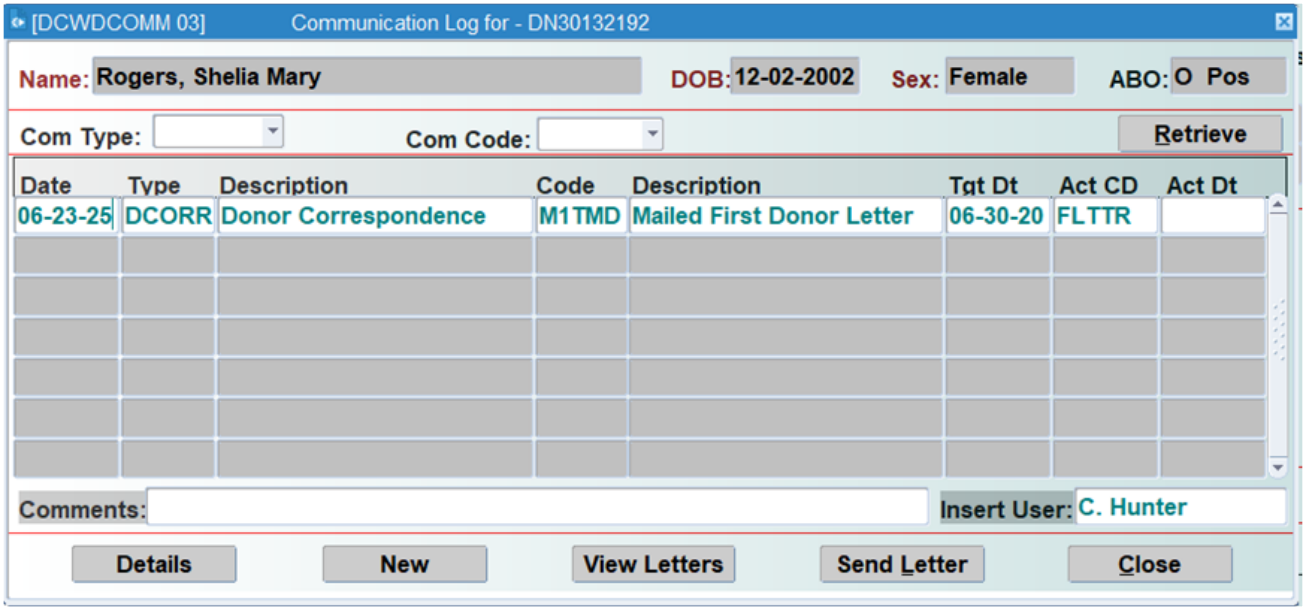


## In the Donor Data Block

The following donor information displays:

- Name
- Date of birth
- Sex
- ABO type

## In the Communication Log Block

The following information displays, if it exists in the database:

- Date communication was defined
- Communication type
- Description of communication type
- Communication code
- Description of communication code
- Target date of action to be taken
- Code to define action to be taken
- Actual date action was taken

At the bottom of the Communication Log Block, the following is listed for the selected communication:

- Comments attached to the communication
- User who generated the communication

## The Details Button

Click **Details** to open the Communication Log Details window:

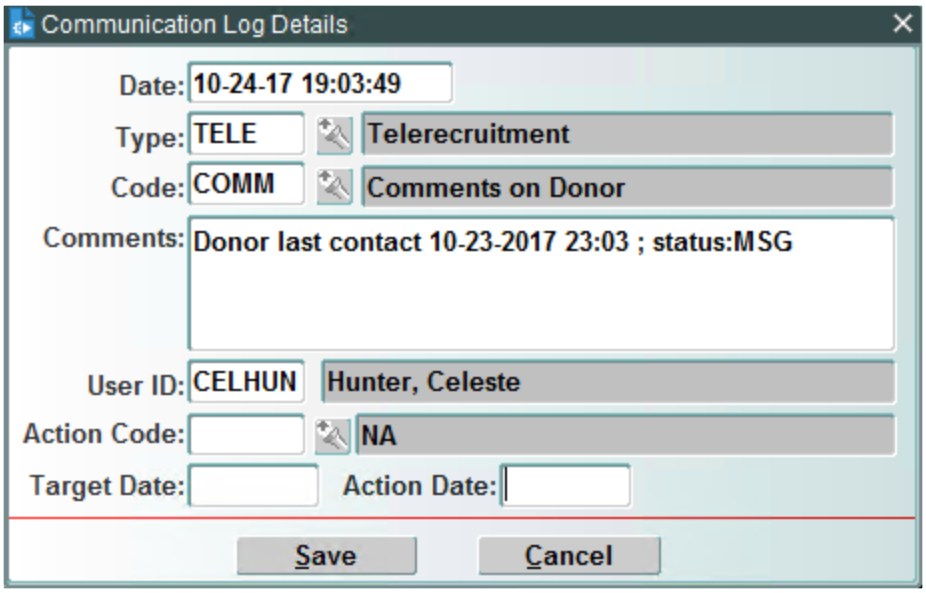


Use this window to view further details about the selected communication. The following information displays:

- Date and time of communication
- Communication type and description
- Communication code and description
- Comments attached to the communication
- ID and name of staff person responsible
- Code and description of action to be taken
- Target date of action to be taken
- Actual action date

Action date can be updated in this window.

Click **Cancel** to return to the Communication Log window.

## The New Button

Click **New** to open the Communication Log Details window in entry mode:


WellSky Corporation
Proprietary and confidential

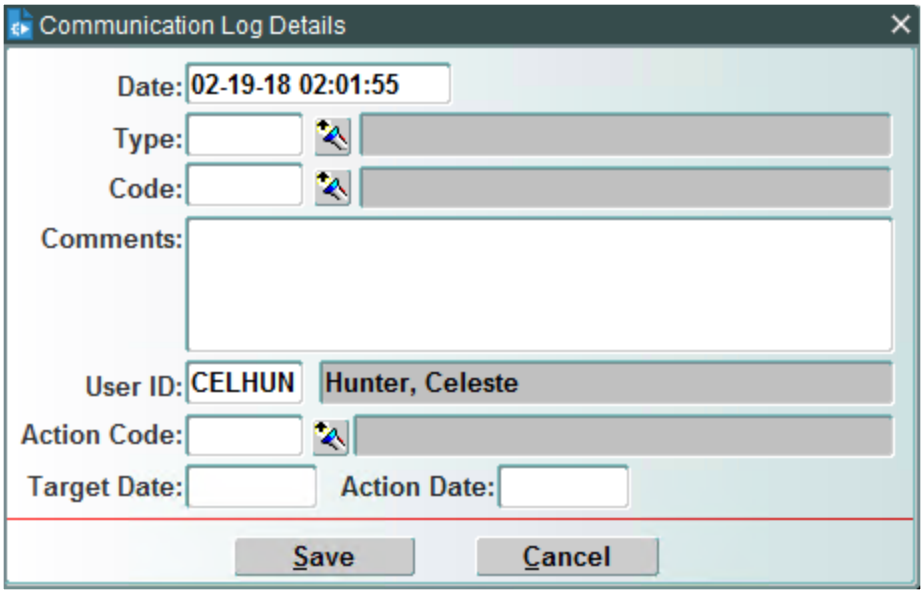


Use this window to define a communication letter to send to a donor.

## Date

Display only. Automatically populates with the system date and time and cannot be changed.

## Type

Entry is required. Enter the communication type or select from the LOV.

## Code

Entry is required. Enter the communication code or select from the LOV.

## Comments

Entry is optional. Enter any comments to attach to the communication.

## User ID

Field automatically populates with the logged in user. Field is not navigable.

## Action Code

Entry is optional. Enter the action code or select from the LOV.

## Target Date

Entry is optional. Enter the target date in MMDDYY format.

## Action Date

Entry is optional. Enter the action date in MMDDYY format.

After entering the information, click **Save** to save the communication. The Communication Log Details window closes and the saved information displays in the main Communication Log window.

## The View Letters Button

Click **View Letters** to open the Communication Letters window. Use this window to view letters that have been sent to the selected donor. See the Communication Letters section of this chapter for information on this screen. Click **Close** to return to the main Communication Log window.

## The Send Letter Button

Click **Send Letter** to open the Send Letter window. Use this window to define and send a communication letter to a donor.

See the Send Letter section of this chapter for instructions on using this program. Click **Close** to return to the Communication Log program.

## The Close Button

At the main Communication Log window, click **Close** to close the Communication Log window and return to the host program.

# 14.2.9 Deferral Entry Details (DRWDEFRL)

## Intended Use

Use this window to view details of a deferral.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

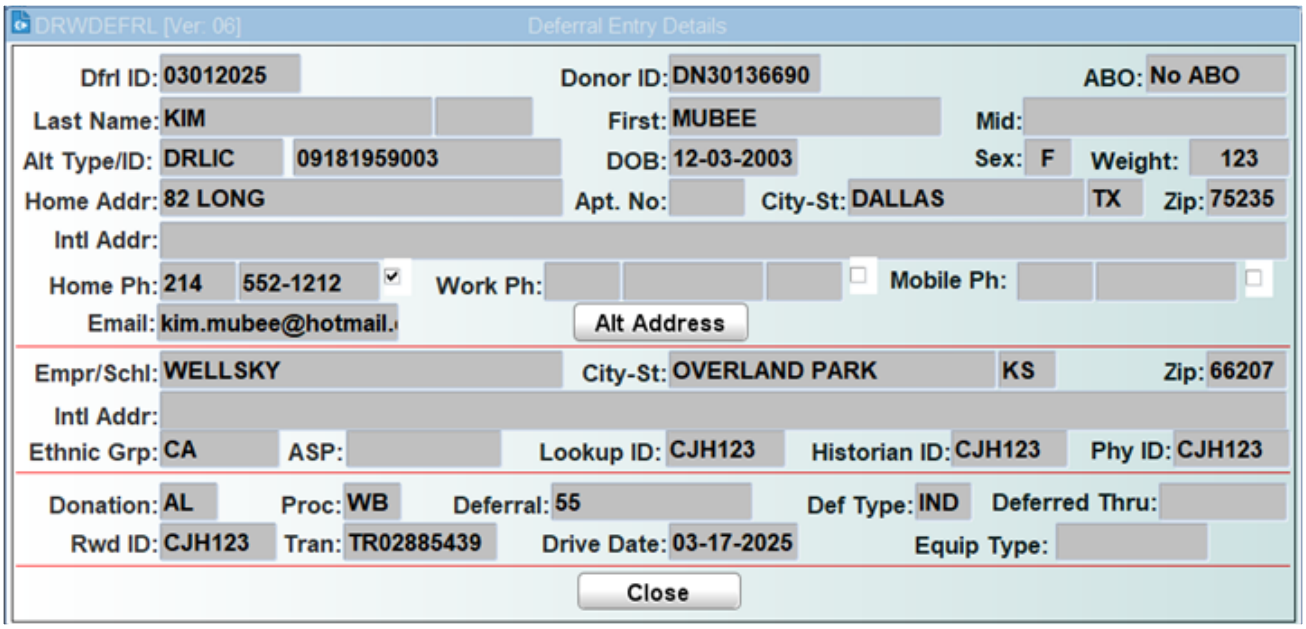


This window displays the data entered using the Register Deferral (DEFREGIS) screen for the donor ID and deferral ID selected in the host program.


WellSky Corporation
Proprietary and confidential

### Weight

The donor's weight (in pounds) displays in this field.

### Alt Address (button)

Click **Alt Address** to view the donor's alternate address and phone information, as follows:

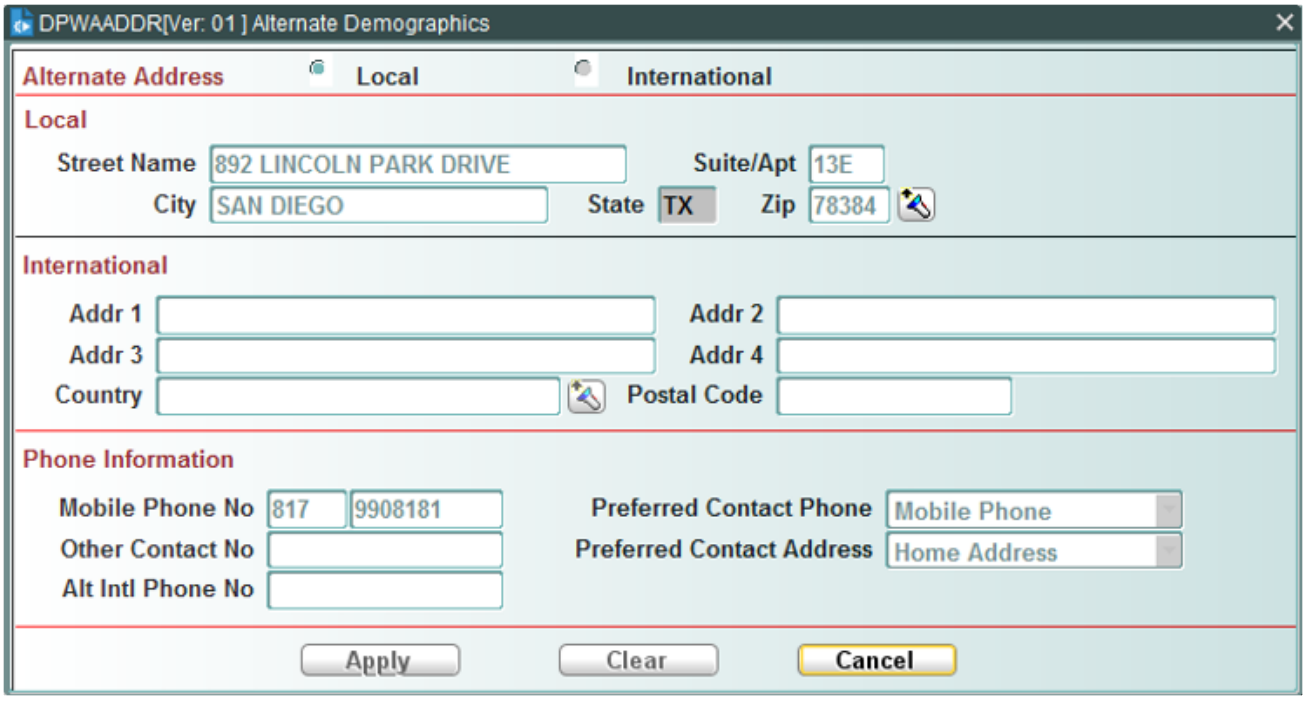


This window is read-only and can not be updated. See the Alternate Demographics (DPWAADDR) section in this chapter for field descriptions.

### The Close Button

Click **Close** at any time to close the window and return to the host program.

## 14.2.10 Display Notification Letter (DNWLTQRY)

### Intended Use

Use this program to view notification letters that have been sent to a donor.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

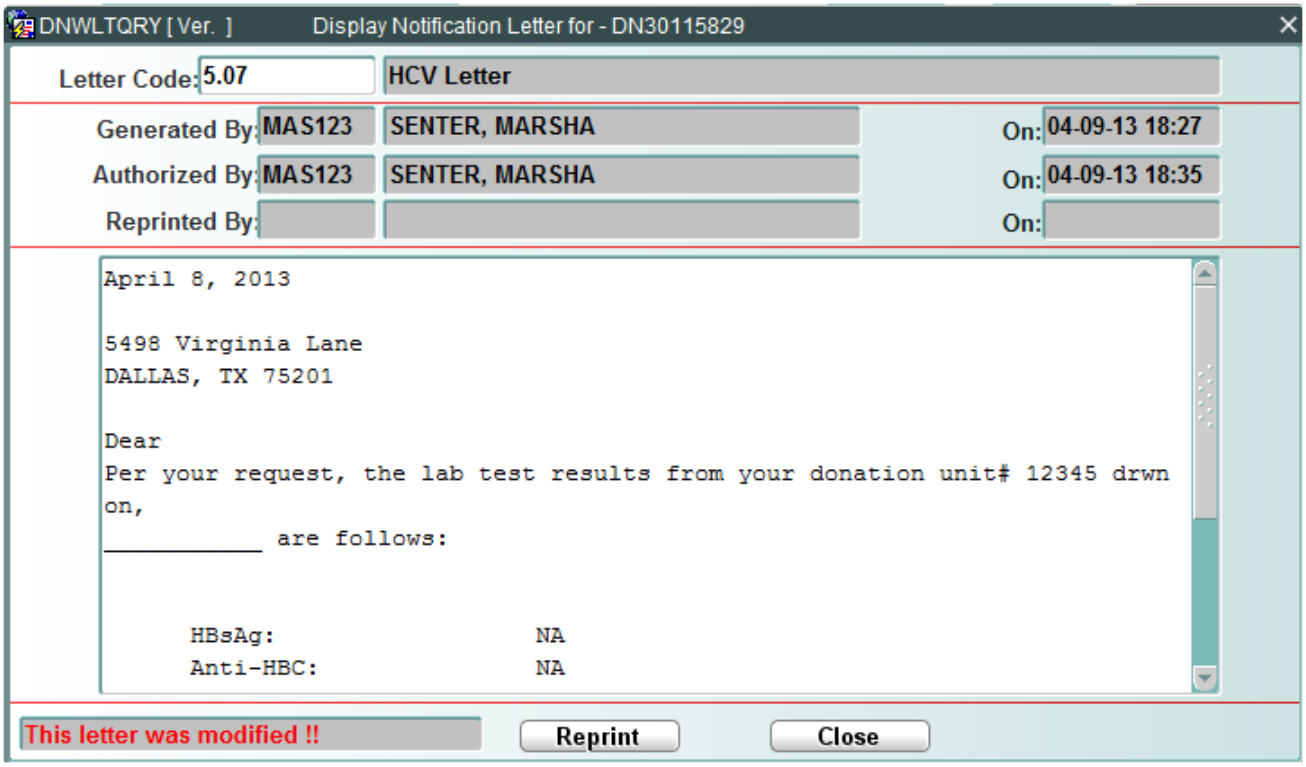


The following information displays:

- Letter code
- ID and name of employee who generated letter
- Date and time generated
- ID and name of employee who authorized letter
- Date and time authorized
- ID and name of employee who reprinted letter
- Date and time reprinted
- Text of letter

## The Reprint Button

Click **Reprint** to reprint the letter. The window closes and returns to the previous window.

## The Close Button

Click **Close** at any time to return to the host program.


WellSky Corporation
Proprietary and confidential

# 14.2.11 Donation Entry Details (DRWENTRY)

## Intended Use

Use this window to view entry details of a donation.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

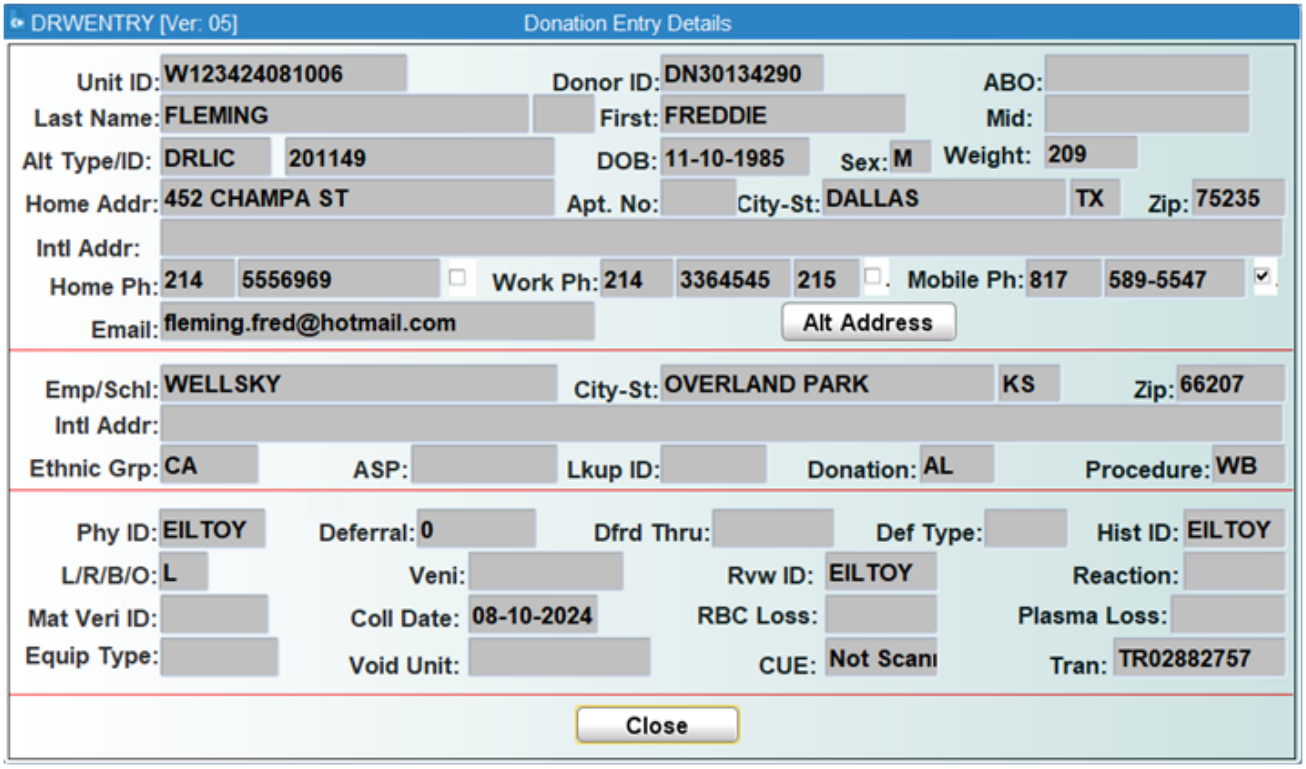


This window displays the data entered using the Register Donation (REGIS) screen for the donor ID and unit ID selected in the host program.

### Alt Address (button)

Click **Alt Address** to view the donor's alternate address and phone information, as follows:

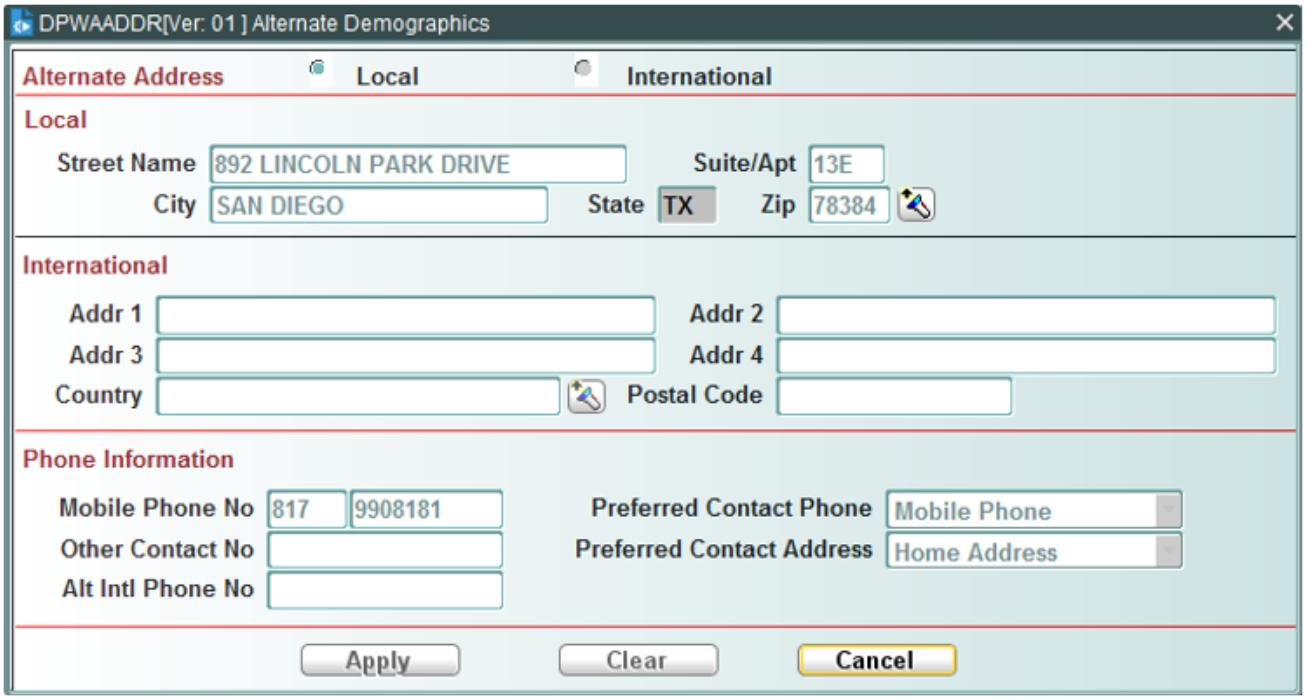


This window is read-only and can not be updated. See the Alternate Demographics (DPWAADDR) section in this chapter for field descriptions.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.12 Donation History (DPWDCARD)

## Intended Use

Use this program to view details and donation history for a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

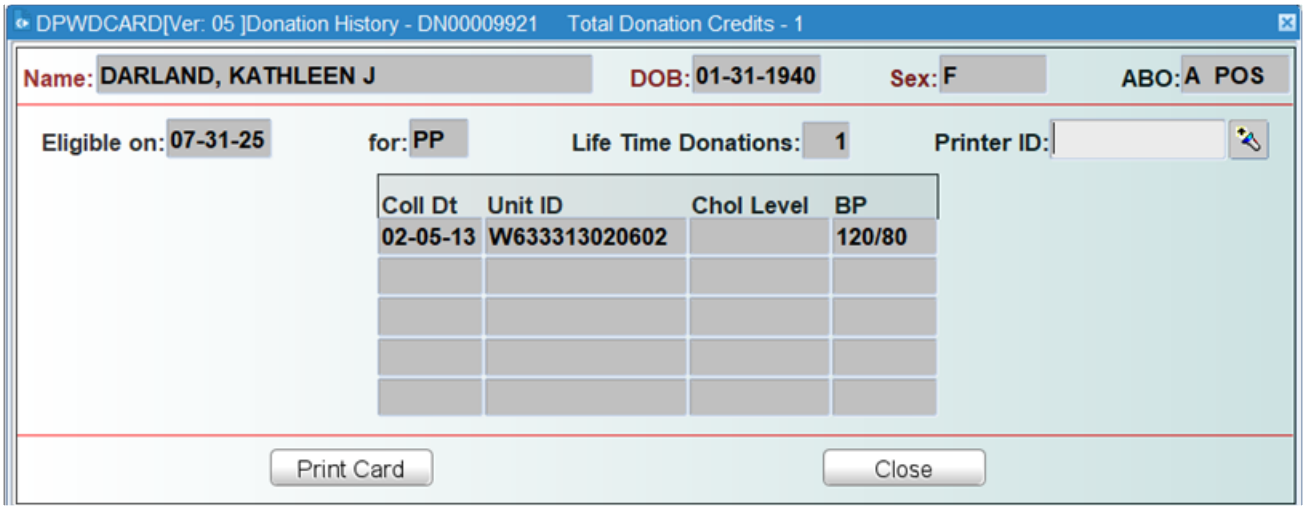


The following information displays for the selected donor:

- Date donor eligible to donate next
- Procedure eligible to donate for
- Number of lifetime donations
- Date and unit IDs of last five donations
- Cholesterol level and blood pressure of listed donations

## The Print Card Button

To print a donation history card for a donor, first enter a printer name in the Printer ID field, then click **Print Card**. The following reminder pop-up appears:

Click **Yes** to proceed with printing. Click **No** to cancel printing if you need to load the printer with a donor card.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.13 Donation History (DPWDNDTL)

## Intended Use

Use this window to view a donor's history of donations.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

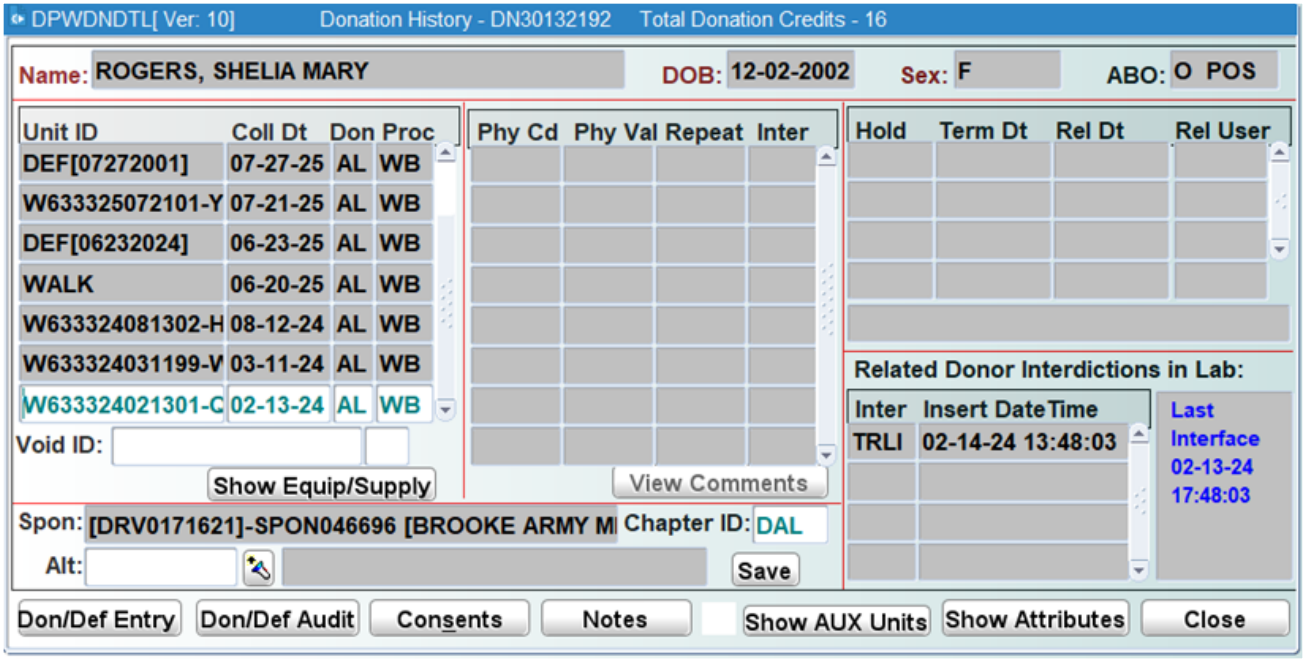


The donor's name, DOB, Sex, and ABO display at the top of the window.

## In the Donations Block

The following information displays for each donated unit for the selected donor:

- Unit ID

> **NOTE –** Unit ID will display WALK if the donor was walked out for the donation.

- Date unit was collected
- Donation type code
- Procedure code
- Void ID (unit ID that was voided during the donation)

Beneath the Donations Block, the following information displays for the selected unit:

- Sponsor and drive ID where unit was collected


WellSky Corporation
Proprietary and confidential

- Alternate sponsor of the drive where unit was collected

## In the Physical Findings Block

The following information displays for the selected unit:

- Physical finding code
- Physical finding value for the code
- Interdiction caused by physical finding

## In the Holds Block

The following information displays for the selected unit:

- Hold code
- Termination date of hold
- Release date of hold
- User who released the hold

## In the Lab Interdictions Block

The following information displays for the selected unit:

- Interdiction code
- Date and time interdiction was inserted

**NOTE –** This information displays only if Lab is linked with the Donor system.

## The Don/Def Entry Button

Click **Don/Def Entry** to open the Donation Entry Details window. See that section of this chapter for instructions on using the window.

## The Don/Def Audit Button

Click **Don/Def Audit** to open the Donation/Deferral Audit Details window. See that section of this chapter for instructions on using the window.

## The Notes Button

A red exclamation point appears if there are any notes attached to the selected unit:

Click **Notes** to open the Donation Notes window. See that section of this chapter for instructions on using the window.

## The Show AUX Units Button

Click **Show AUX Units** to open the AUX Units block in the Donation History window:

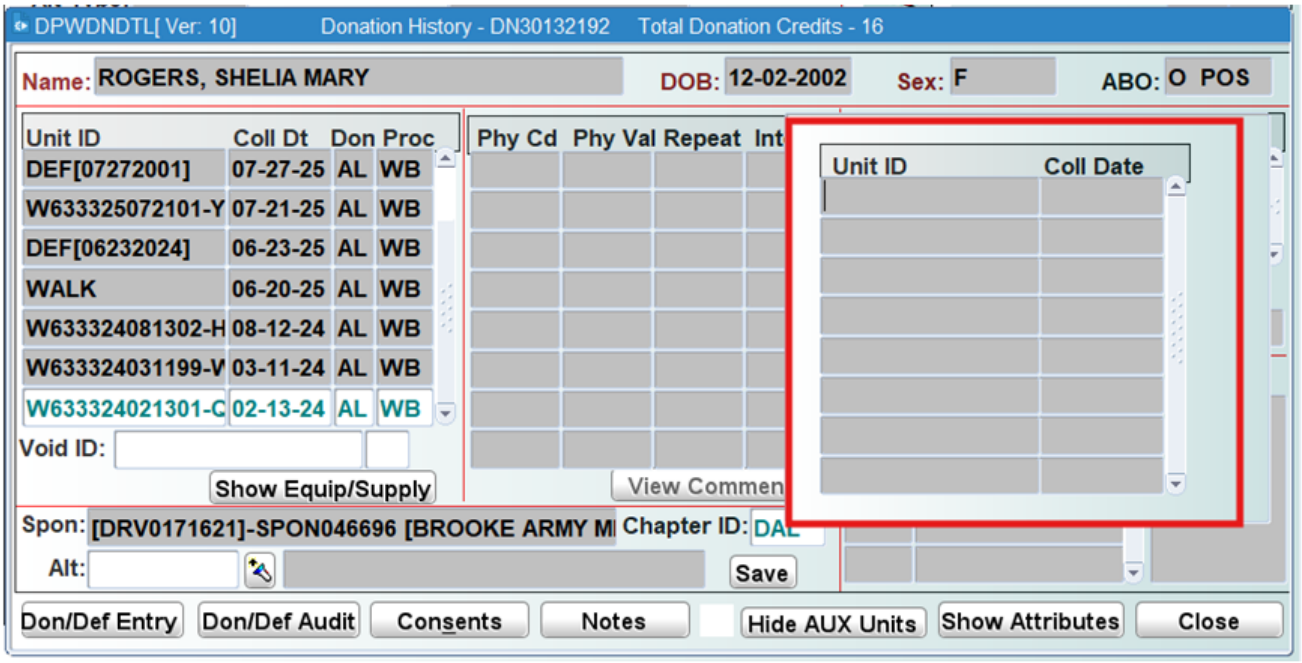


Auxiliary units are units that were collected using a prior system and converted into this system for recall purposes. The following information displays, if it exists:

- Unit ID
- Date unit was collected

Click **Hide AUX Units** to close the AUX Units block.

## The Show Attributes Button

Click **Show Attributes** to open the Donation Attributes block in the Donation History window:

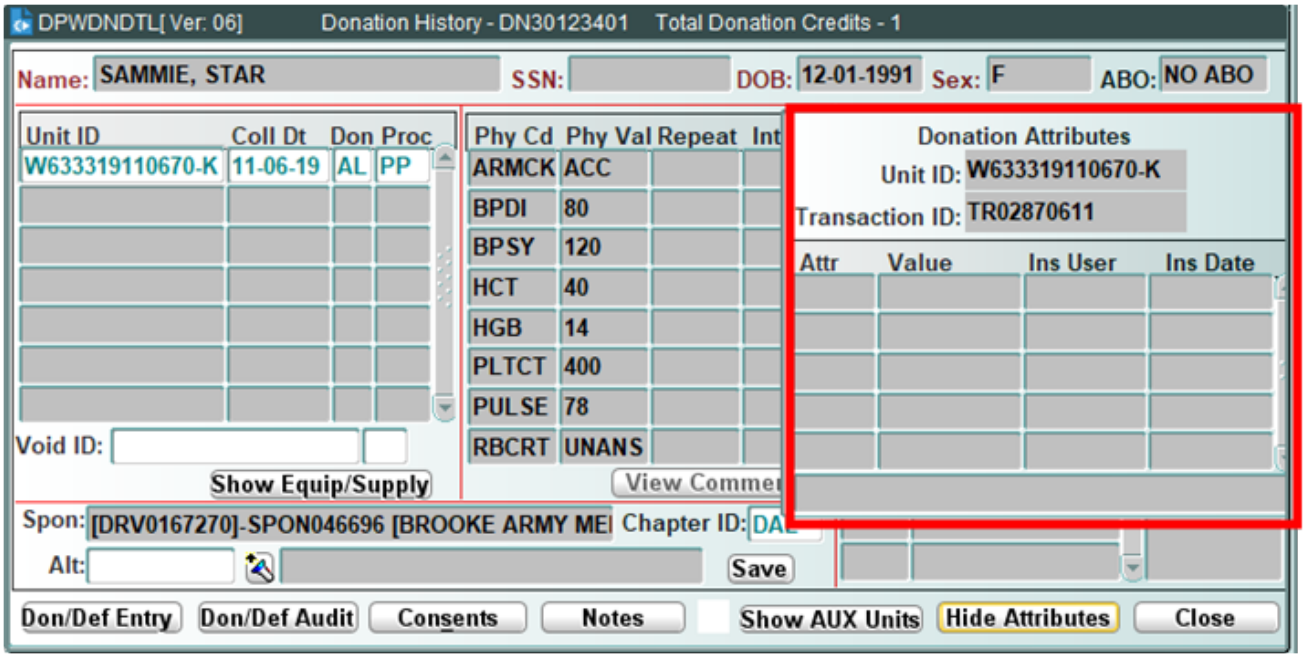


The following information displays:

- Unit ID
- Transaction ID
- Attribute code
- Attribute value
- User who inserted attribute
- Insertion date of attribute

Click **Hide Attributes** to close the Donation Attributes block.

## Physical Findings View Comments Button

Click **View Comments** to view any comments linked to a physical finding value.

## Show Equip/Supply Button

Click **Show Equip/Supply** to view the equipment and supplies used to collect the donation. Once the canvas is open, the button will change to Hide Equip/Supply. Click it to close the canvas.

**NOTE –** As you scroll through the list, if the equipment is linked to a physical code in Physical Findings, the physical code will display. This only applies if physical was entered in OnSite (.NET).

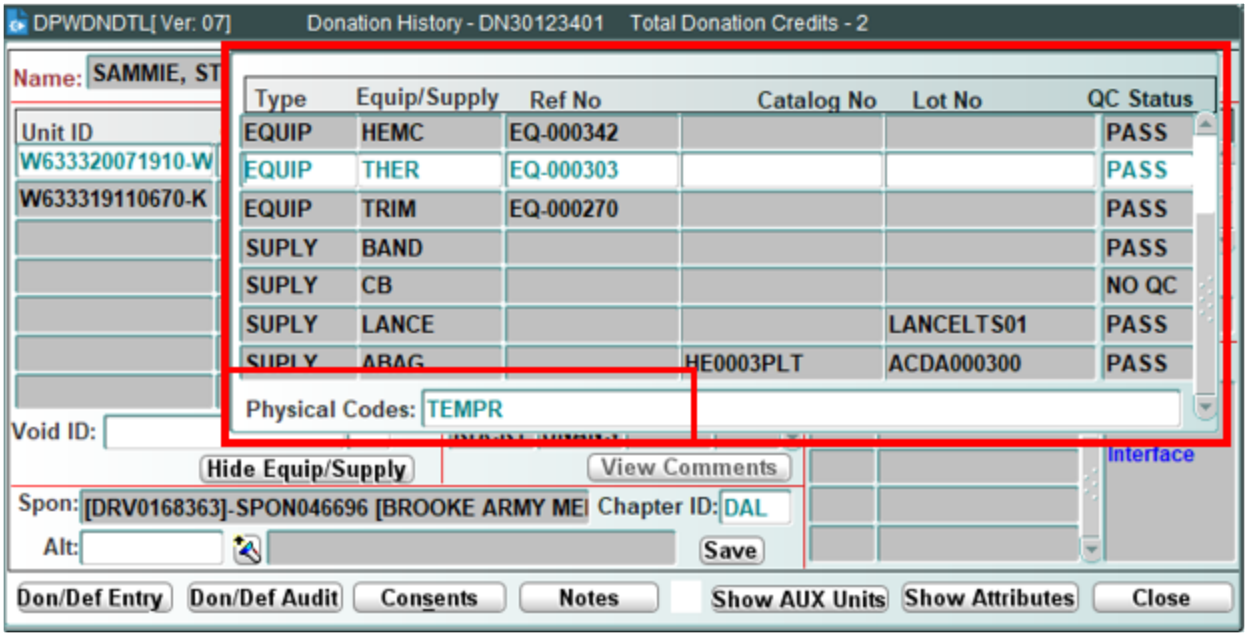


## The Close Button

Click **Close** at any time to close the Donation History window and return to the host program.

# 14.2.14 Donation History—Test Results (DPWDNTST)

## Intended Use

Use this program to view test results for a donor's past donations.

## Limitations

- Only donations that have been registered and tested will display.
- In order to view a specific Test ID and its associated Results, your TVIEW access class level [set in Define User Access (UACCESS)] must be greater than the level for the Test ID [set in Define Tests (TESTS)]. These levels are set by your system administrator.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

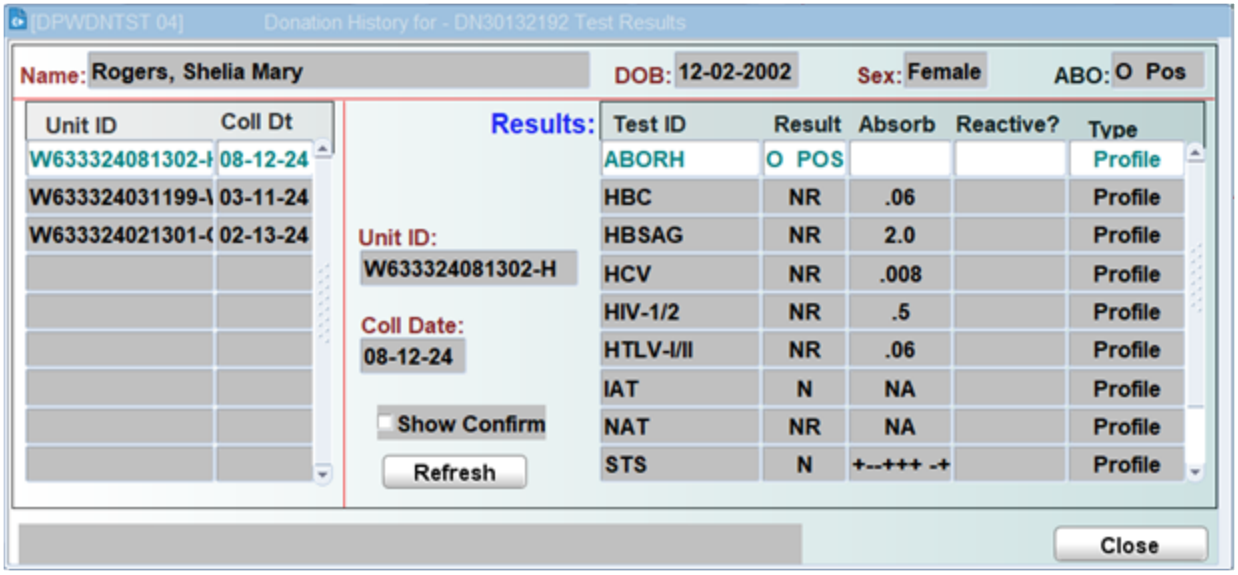


The following test result information displays for the selected donor, if applicable.

**NOTE –** In order to view a specific Test ID and its associated Results, you must have the correct test view level, as defined in the Limitations section.

- Unit ID – Unit ID
- Coll Date - Collection date
- Test ID – Test ID
- Result – Test result
- Absorb – Absorbance
- Reactive? – Yes will display in red if the test result is valid in Master Code REAC.
- Type – Test type – tests display in the following group order. Tests display alphabetically within each test type; test IDs beginning with lower case letters sort alphabetically at the end of the grouping

  Example: Antigen results would display in the following order:

  C, Fya, Jkb, K, P1, c, e, s

  - Profile displays for valid tests where the Edit flag is set to Y in Define Tests (TESTS); test must have been valid at the time of collection of the unit.
  - Antigen displays for valid tests where the Edit flag is not set to Y in Define Tests (TESTS) with a group of AG, RHBAT, ROUAG; test must have been valid at the time of collection of the unit.

- Confirmatory displays valid tests where the Edit flag is not set to Y in Define Tests (TESTS) with a group of CNFRM or SUPP. Confirmatory and supplemental test results display only when the Show Confirm box is checked.
- Other displays for:
    - Valid tests where the Edit flag is not set to Y in Define Tests (TESTS) and the group is not equal to AG, RHBAT, ROUAG, CNFRM, or SUPP.
    - Tests not effective at the collection time of the unit, regardless of Edit flag status or test group in Define Tests (TESTS).

### Viewing Confirmatory and Supplemental Test Results

To view confirmatory and supplemental test results, click in the **Show Confirm** box (box will contain a check) and click **Refresh**. They will display and sort as described above. To exclude confirmatory and supplemental test results, click in the **Show Confirm** box (check will disappear) and click **Refresh**.

### The Close Button

Click **Close** at any time to return to the host program.

## 14.2.15 Donation Hold Details (DRWHOLDS)

### Intended Use

Use this program to view details of a donation or donations that are placed on hold.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

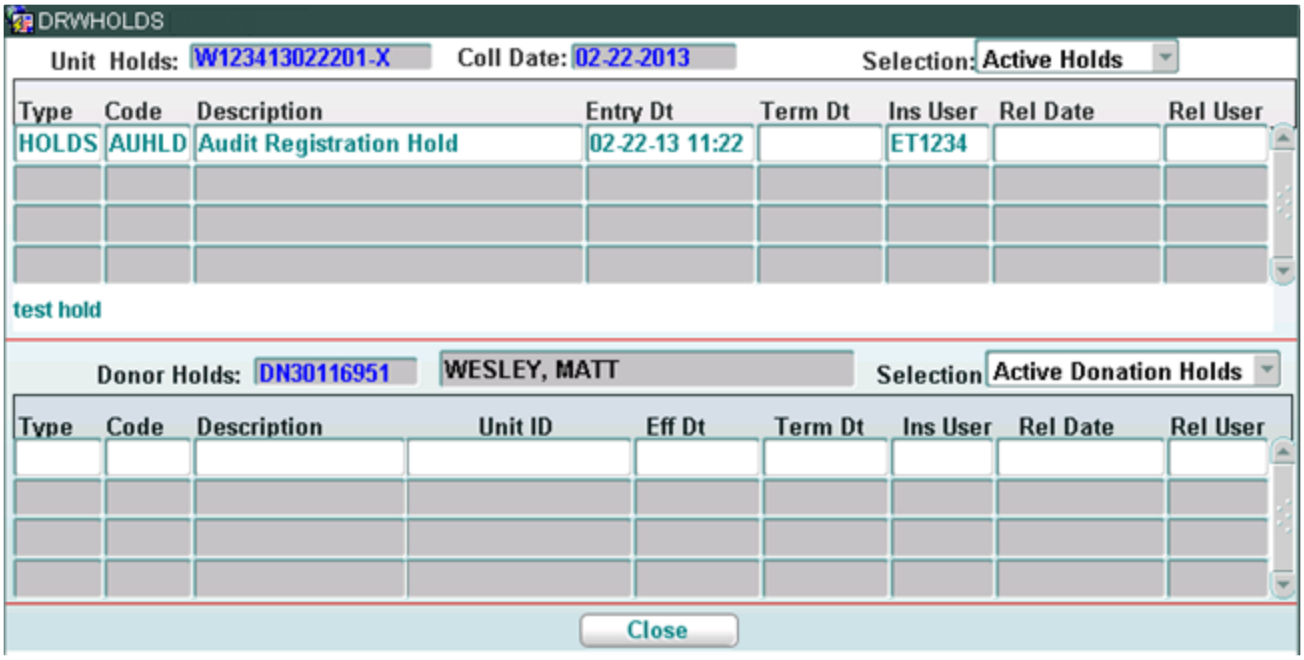


## In the Control Block 1

The unit ID and collection date automatically display for the unit selected in the host program.

### Selection

Choose **Active Holds** or **All Holds** from the drop-down list.

## In the Unit Holds Block

The following information displays:

- Hold type
- Hold code and description
- Entry date
- Termination date of hold
- ID of user who inserted hold
- Date hold released
- User who released hold

## In the Control Block 2

The donor ID and name automatically display for the unit selected in the host program.

### Selection

Choose **All Holds**, **Active Donation Holds** or **All Donation Holds** from the drop-down list.

## In the Donor Holds Block

The following data displays:

- Hold type
- Hold code and description
- Unit ID
- Effective date of hold
- Termination date of hold
- ID of user who inserted hold
- Date hold released
- User who released hold

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.16 Donation Notes (DRWNOTES)

## Intended Use

Use this window to add, delete, or view notes about a donation.

The user access level determines what actions are allowed, as follows:

- All users can view notes
- Users with DNOTE access can delete notes
- Users with UNOTE access can add notes
- Users with DNOTE and UNOTE access can add and delete notes

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

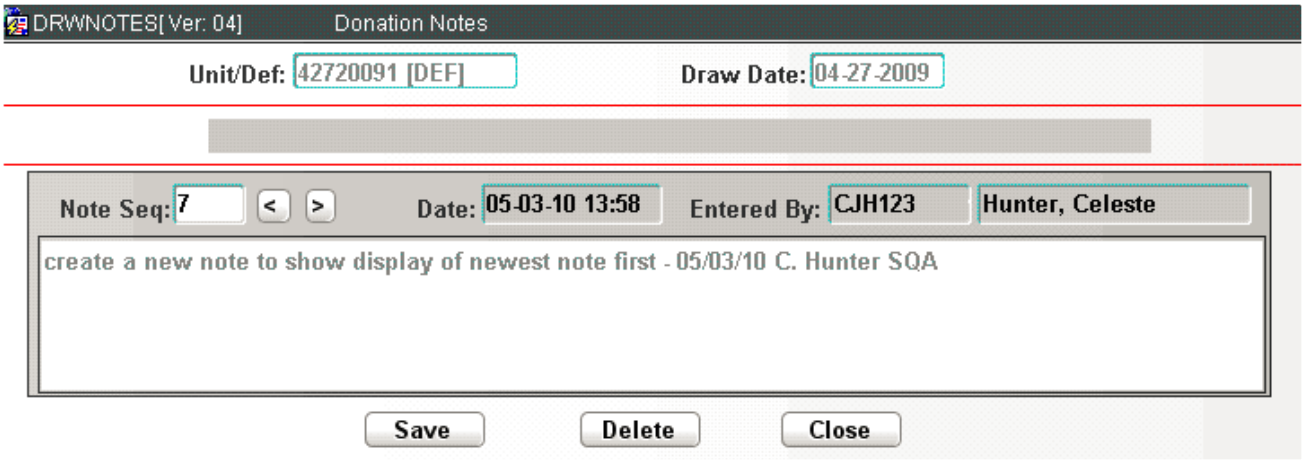


The following information displays for the selected unit or deferral ID:

- Number of the note within the sequence of notes. Notes display in descending order (newest note first)
- Date note was entered
- ID and name of user who entered note
- Note attached to the donation

The gray bar below the Unit Def and Draw Date fields displays a message warning the user of access limitations, if applicable, as follows:

- If user has access to UNOTE and DNOTE,the gray box will be blank.
- If user has access to UNOTE and does not have access DNOTE, the note will state:
  **Your access level is for viewing and adding notes. Deletion of notes is denied!!!!**
- If user has access to DNOTE and does not have access to UNOTE, the note will state:
  **Your access level is for viewing and deleting notes. Adding notes is denied!!!!**
- If user does not have access to either UNOTE or DNOTE, the note will state:
  **Your access level is for viewing notes only. Addition/Deletion is denied!!!!**

## The Save Button

Click **Save** to save the contents of the note. If you click the Close button without first clicking the Save button, the contents of the note will be lost.

## The Delete Button

Click **Delete** to delete the note from the database.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.17 Donation Sites Available for a Given Time (DSWAVSIT)

## Intended Use

Use this window to view donation sites that are open at a specific time.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

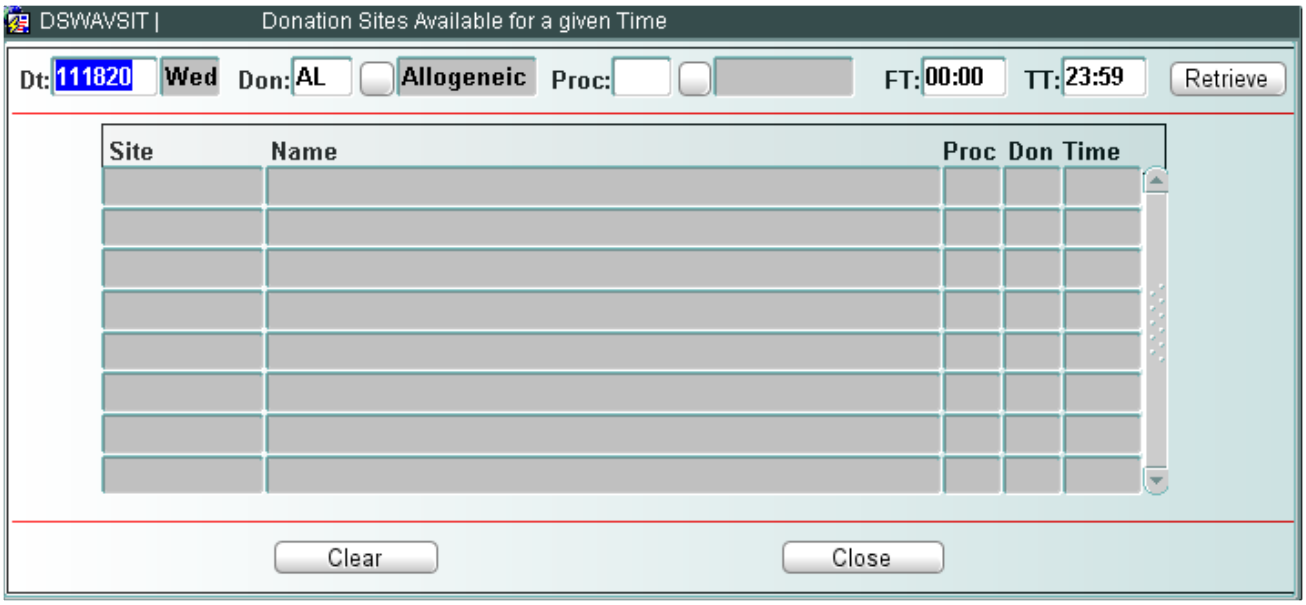


## Control Block Fields and Definitions

### Dt

Entry is required. Enter date to query, using the MMDDYY format.

### Don

Entry is optional. Enter donation type or select from the LOV.

### Proc

Entry is optional. Enter donation procedure or select from the LOV.

### FT

Entry is required. Enter a starting time, using the HHMI format.

### TT

Entry is required. Enter an ending time, using the HHMI format.


WellSky Corporation
Proprietary and confidential

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donation sites that match the criteria.

The following information displays:

- Site ID
- Site name
- Procedure type
- Donation type
- Time that procedure and donation are performed at the location

## The Clear Button

Click **Clear** to clear the list of retrieved records to start a new search.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.18 Donation Slots (DSWASLOT)

## Intended Use

Use this window to query and view donation slots available by location, donation type and procedure, and date.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

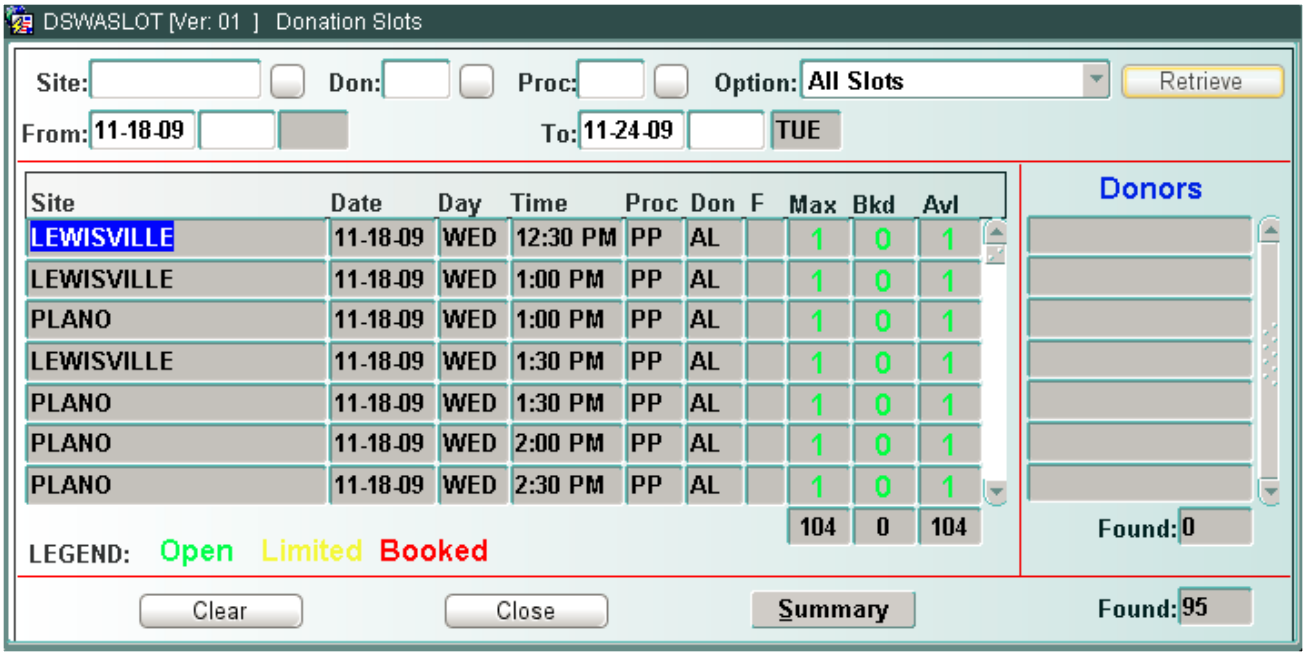

## Control Block Fields and Definitions

If a site is selected in the host program, that site's data automatically populates the Donation Slots window. To change the site, click **Clear**. Enter the following:

### Site

Entry is optional. Enter site ID or select from the LOV.

### Don

Entry is optional. Enter donation type or select from the LOV.

### Proc

Entry is optional. Enter procedure type or select from the LOV.

### Option

Entry is required. Choose donation search option from the drop-down list.

### From

Entry is required. Automatically populates with system date. Enter beginning date of date range to search, using the MMDDYY format. A time can be entered in the block next to the From date, using the HHMI format.

### To

Entry is required. Automatically populates with a date seven days after the starting date. A different date can be entered, using the MMDDYY format. A time can be entered in the block next to the To date, using the HHMI format.

## Retrieving Data

After entering the search criteria, click **Retrieve** to display a list of donation slots that match the search criteria.

The following data displays:

- Donation site
- Date
- Day of week
- Time of donations
- Procedure type
- Donation type
- Flag showing how slot was created (M = manually, A = Ad hoc)
- Maximum number of donations of that type and procedure that can be performed at that time
- Number of donations of that type and procedure booked at that time
- Number of donations of that type and procedure still available at that time (Maximum—Booked=Available)
- Names of donors scheduled for the highlighted site


WellSky Corporation
Proprietary and confidential

Totals display at the bottom of the maximum, booked, and available columns and for the number of donors scheduled for the highlighted site. The total number of rows found by the system displays in the lower-right corner of the window.

## The Clear Button

Click **Clear** to clear the retrieved records from the window to begin a new search.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

## The Summary Button

Click **Summary** to open the Summary of Scheduled Donors window:

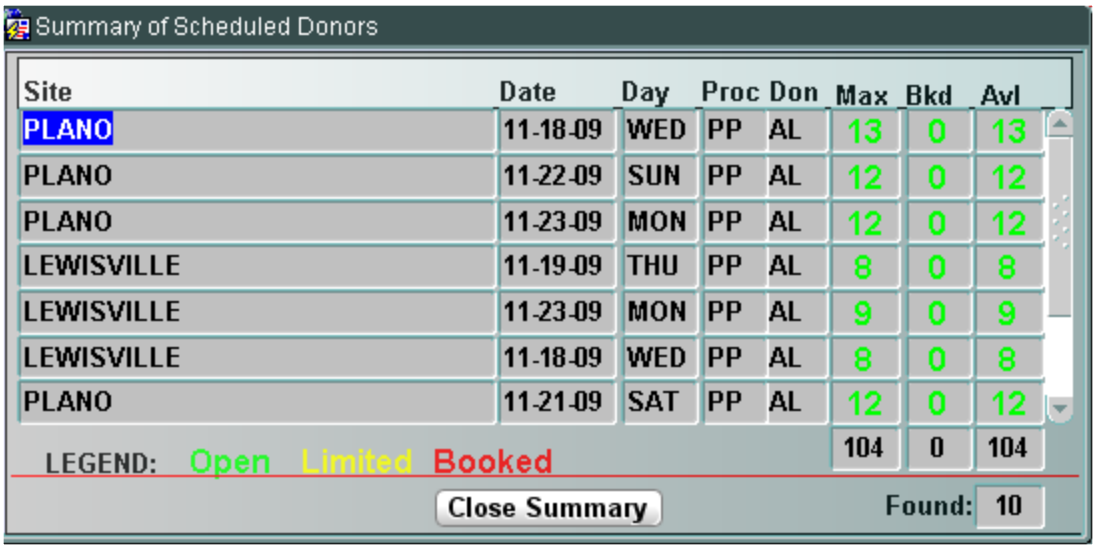


Use this window to view the type and number of donation procedures at a site by date.

Click **Close Summary** to return to the Donation Slots Window.

# 14.2.19 Donation/Deferral Audit Details (DRWAUDIT)

## Intended Use

Use this program to view details of donation and deferral audits.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

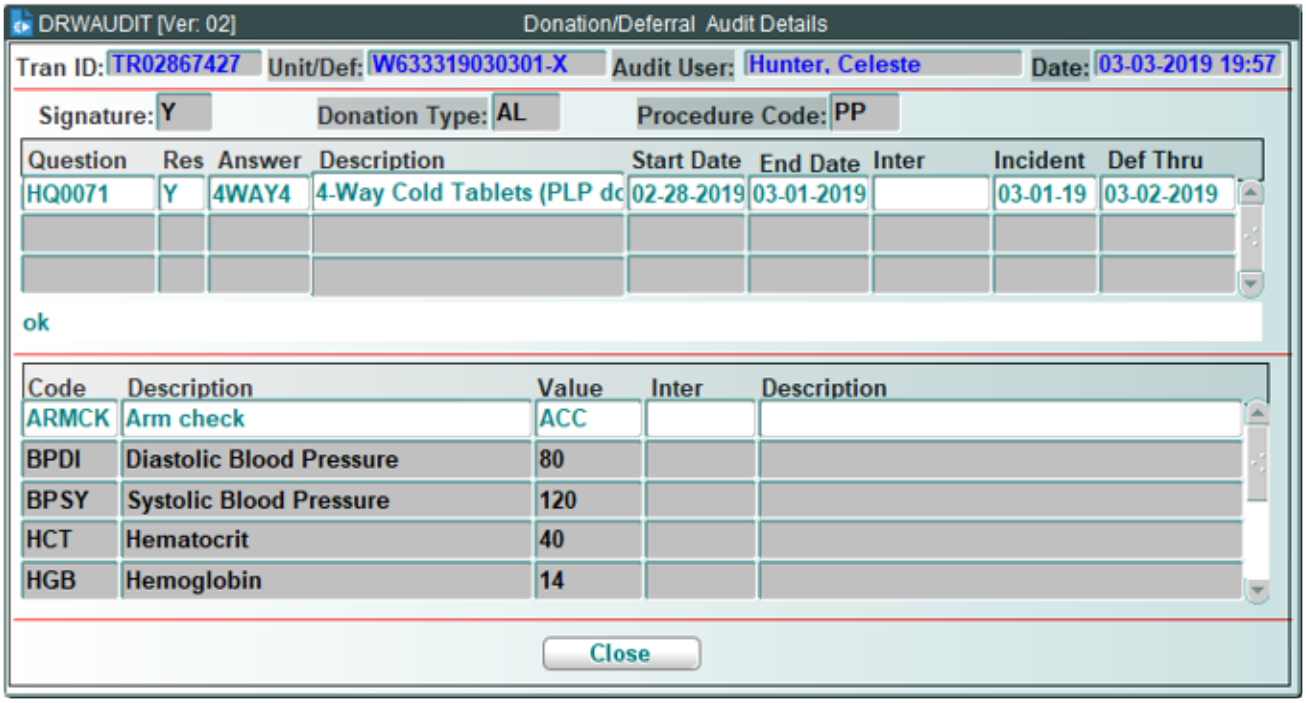


The following information displays:

- Transaction ID
- Unit or deferral number
- Name of user who audited donation
- Date
- Indication if donor card was signed
- Donation type
- Procedure code
- Question number and response
- Answer and description
- Interdiction code
- Start date – start date of when the response started
- End date – end date of when the response was finished
- Incident date
- Deferred-through date
- Physical code and description
- Value of physical feature
- Interdiction code and description


WellSky Corporation
Proprietary and confidential

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.20 Donor Attributes (DPWPROPR)

## Intended Use

Use this window to view and place attributes on a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

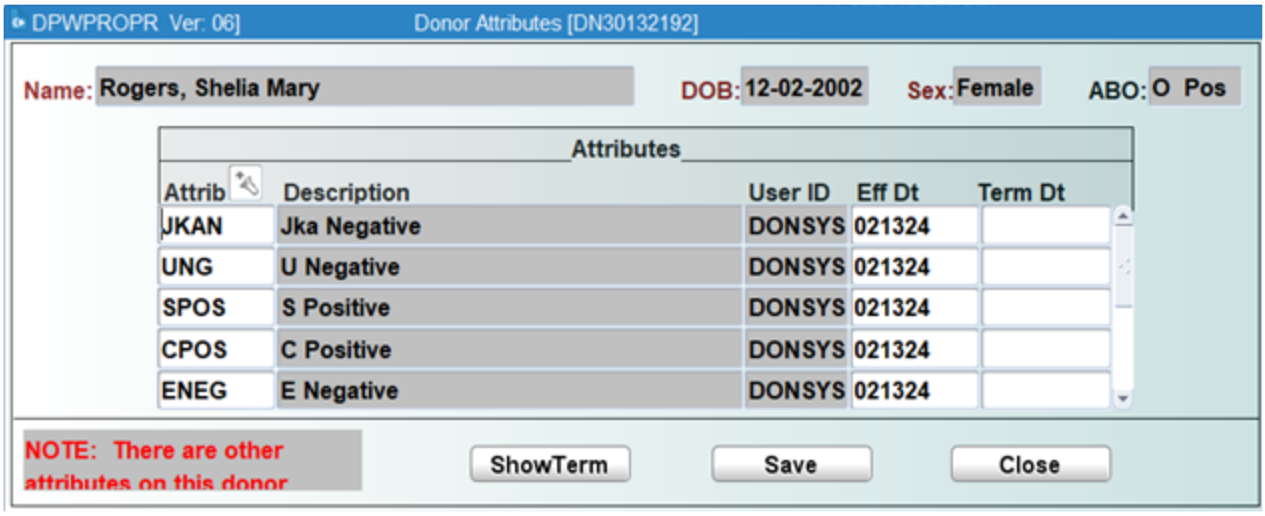


The following attributes information displays for the donor selected in the host program:

- Attribute code
- Attribute description
- ID of user who placed the attribute
- Date attribute became effective
- Termination date of attribute

## Placing an Attribute

Scroll to the bottom of the list of existing attributes and push the down arrow key on the keyboard to place the cursor on a blank line.

### Attrib

Entry is required. Enter an attribute code or select from the LOV. Description automatically displays.

### User ID

Display only. Populates with the ID of the logged-on user.

### Eff Dt

Entry is required. Populates with the system date. Can be changed to a future date in MMDDYYYY format.

### Term Dt

Entry is optional. Enter a termination date in MMDDYYYY format.

## The Save Button

After entering a new attribute or entering termination dates for existing attributes, click **Save** to commit the data.

## The Show Term Button

Click **Show Term** to view the donor's terminated attributes:

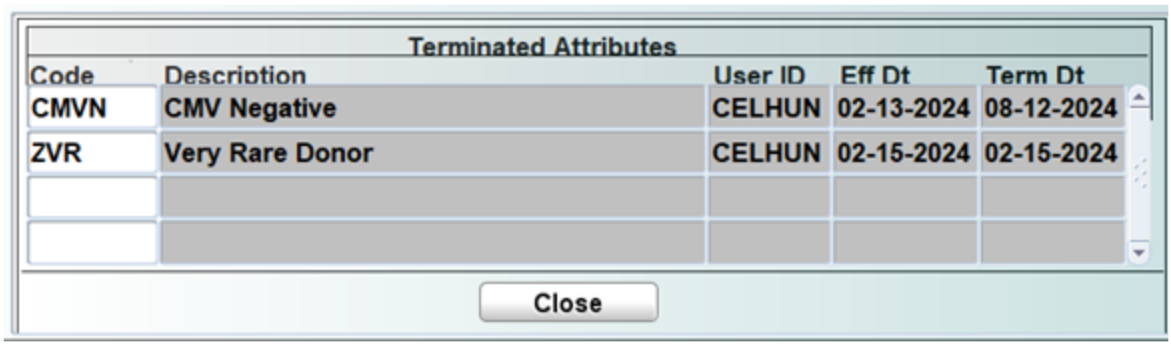


Click **Close** to close the Terminated Attributes window and return to the Donor Attributes window.

## The Close Button

At the main Donor Attributes window, click **Close** at any time to return to the host program.

## Note Field

The Note field displays when there are attributes with a higher view level present on the donor and the user does not have access to view them.

# 14.2.21 Donor Demographics (DPWDEMGR)

## Intended Use

Use this window to view and change a donor's demographics.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

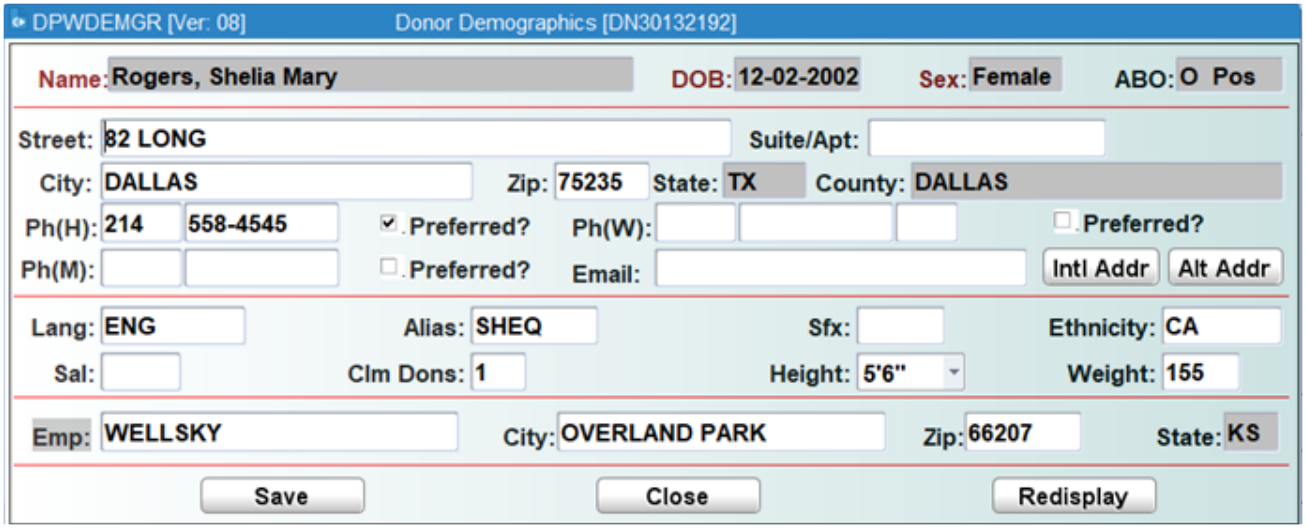


The donor's name, DOB, Sex and ABO display at the top of the window but cannot be modified.

The following demographics data displays, if it exists in the database for the donor selected in the host program:

- Donor street address and suite/apartment number
- City, zip, state, and county of residence
- Home phone (H) – Preferred? will be checked if this is the preferred contact number for the donor
- Work phone (W) – Preferred? will be checked if this is the preferred contact number for the donor
- Mobile phone (M) – Preferred? will be checked if this is the preferred contact number for the donor
- Email address
- Donor primary language
- Alias by which the donor may be known
- Donor name suffix (Jr., Sr., III, etc.)
- Ethnicity of donor
- Salutation to use when addressing donor
- Number of claimed donations for the donor
- Height – manually enter the donor's height or select it from the LOV
- Weight – manually enter the donor's weight. Only numerical values are accepted.
- Donor employer
- Employer's city, ZIP Code, and state

All white fields can be changed. If no entry has been made in a field, it can be made from this window. The State fields automatically populate depending on ZIP Code entered.

## The Save Button

If any changes or new entries are made, click **Save** to commit the changes to the donor database. A pop-up confirms that the transaction is committed to the database:

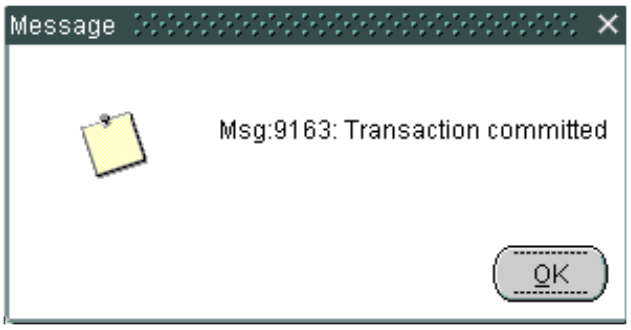


Click **OK** to continue.

## The Intl Addr Button

Click **Intl Addr** to add or update international address information. The following window opens:

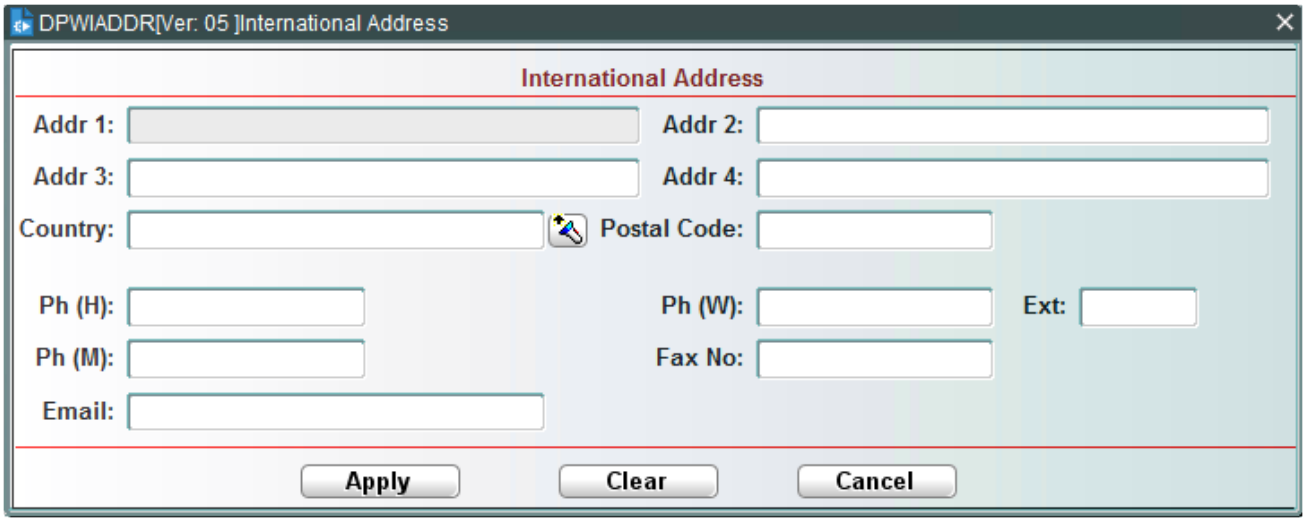


See the International Address (DPWADDR) section in this chapter for instructions on using this window.

## The Alt Addr Button

Click **Alt Addr** to open the Alternate Demographics window, as follows:


WellSky Corporation
Proprietary and confidential

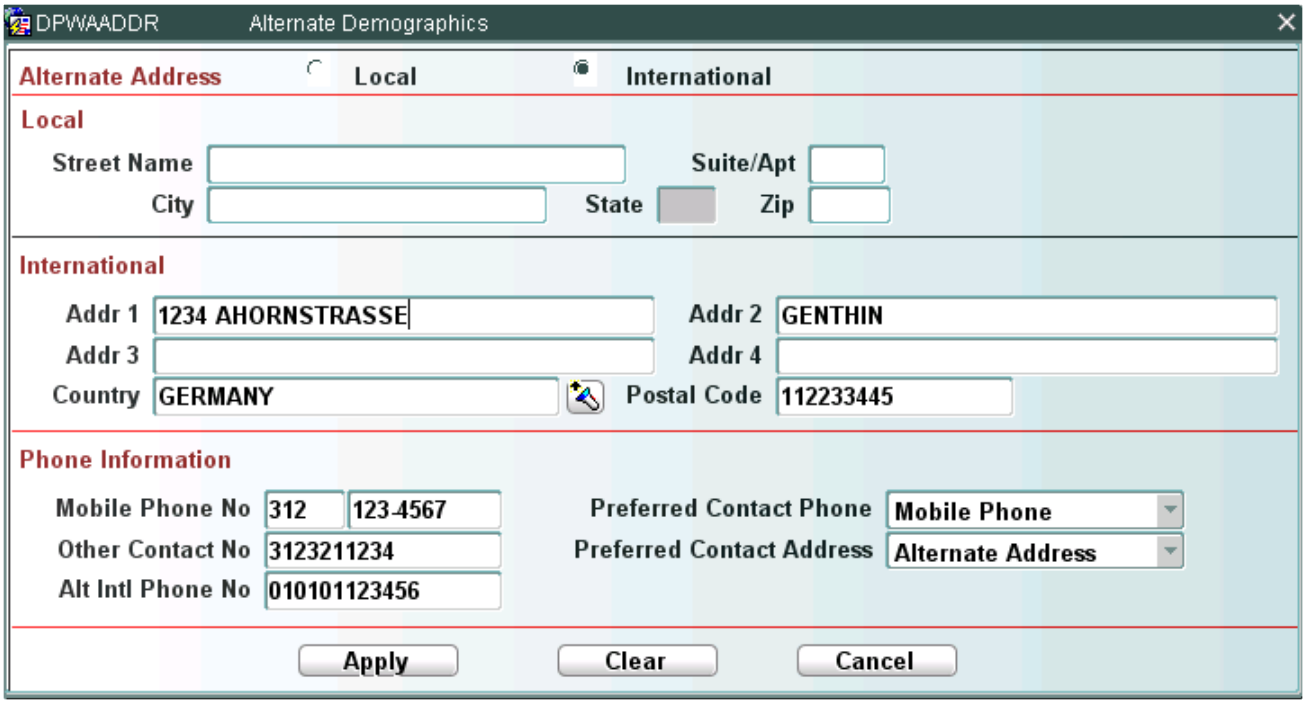


Use this window to add or update the donor's alternate address and phone information. See the Alternate Demographics (DPWAADDR) section in this chapter for instructions on using this window.

**NOTE –** Make sure you click **Apply** at the bottom of the Alternate demographics window when you are finished. If you do not click **Apply**, the alternate address information will be lost. In addition, you must click **Save** at the bottom of the Donor Demographics window in order to commit the changes.

## The Close Button

Click **Close** at any time to return to the host program.

## The Redisplay Button

Click **Redisplay** to refresh the screen.

# 14.2.22 Donor Eligibility (DPWELGBY)

## Intended Use

Use this window to view a donor's eligibility for allogeneic donation procedures.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

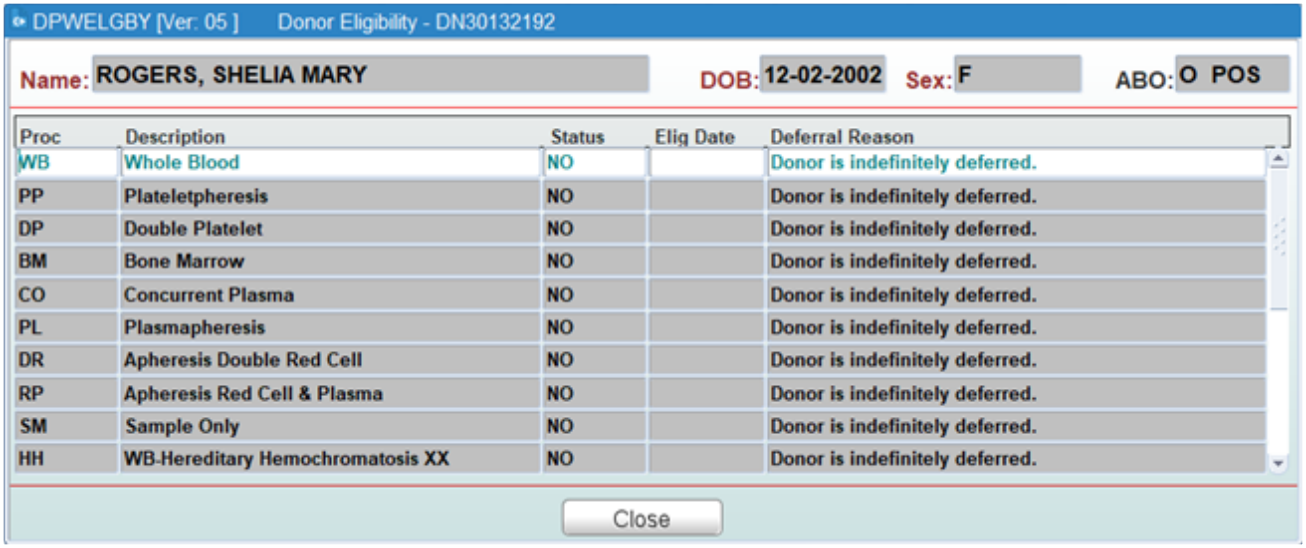


The donor's name, DOB, Sex, and ABO will display at the top of the window.

The following eligibility information displays for the donor selected in the host program:

- Procedure code
- Procedure description
- Donor's current procedure eligibility status
- Date donor will become eligible for procedure
- Reason for procedure deferral

Click **Close** at any time to return to the host program.

# 14.2.23 Donor Eligibility & Attributes (DNWELIGB)

## Intended Use

Use this window to view a donor's eligibility for any donation/procedures.

## Accessing the Window

This window is not a stand-alone program and can be accessed with the Full Eligibility button in the Lookup and Registration (LOOKQ) screen.


WellSky Corporation
Proprietary and confidential

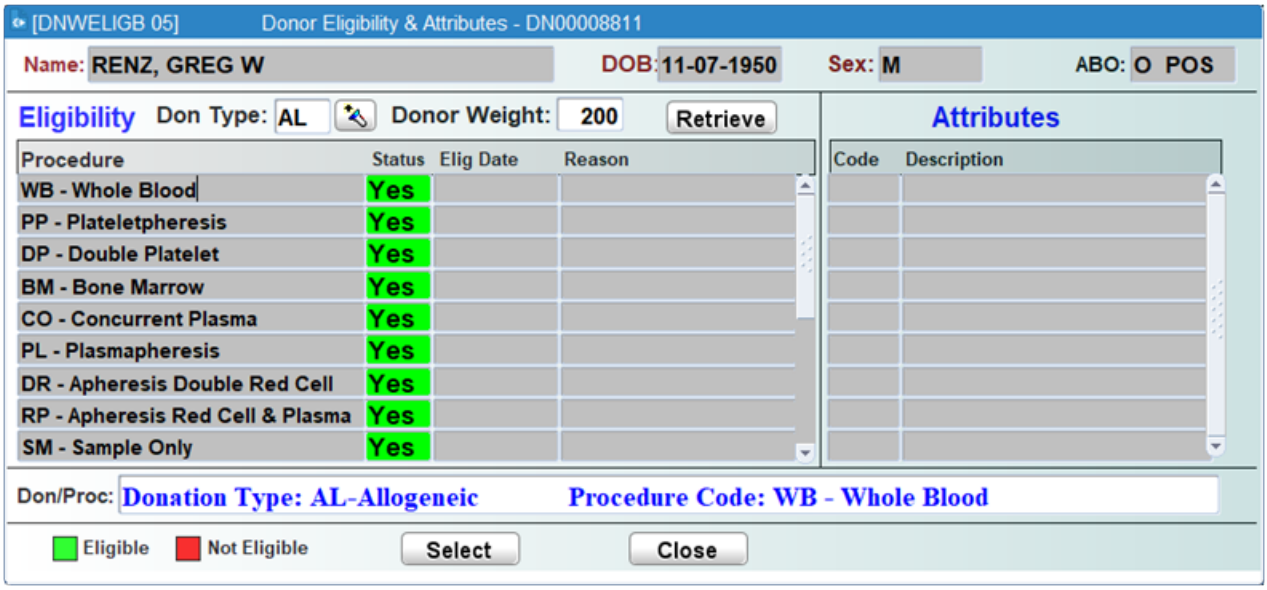


The following eligibility information displays for the donor selected in the host program:

- Donor Weight - populates from the main screen, but allows the user to update the field.

> **NOTE –** When updating the donor's weight in the eligibility window, it will not update on the parent form. You will have to update that weight field separately.

- Procedure code
- Procedure description
- Donor's current procedure eligibility status
- Date donor will become eligible for procedure
- Reason for procedure deferral
- List of active attributes that are type 'INFOR' or 'DR'

## The Select Button

Click **Select** to select the Procedure that is highlighted

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.24 Donor Interdictions (DPWDNINT)

## Intended Use

Use this window to view interdictions associated with a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

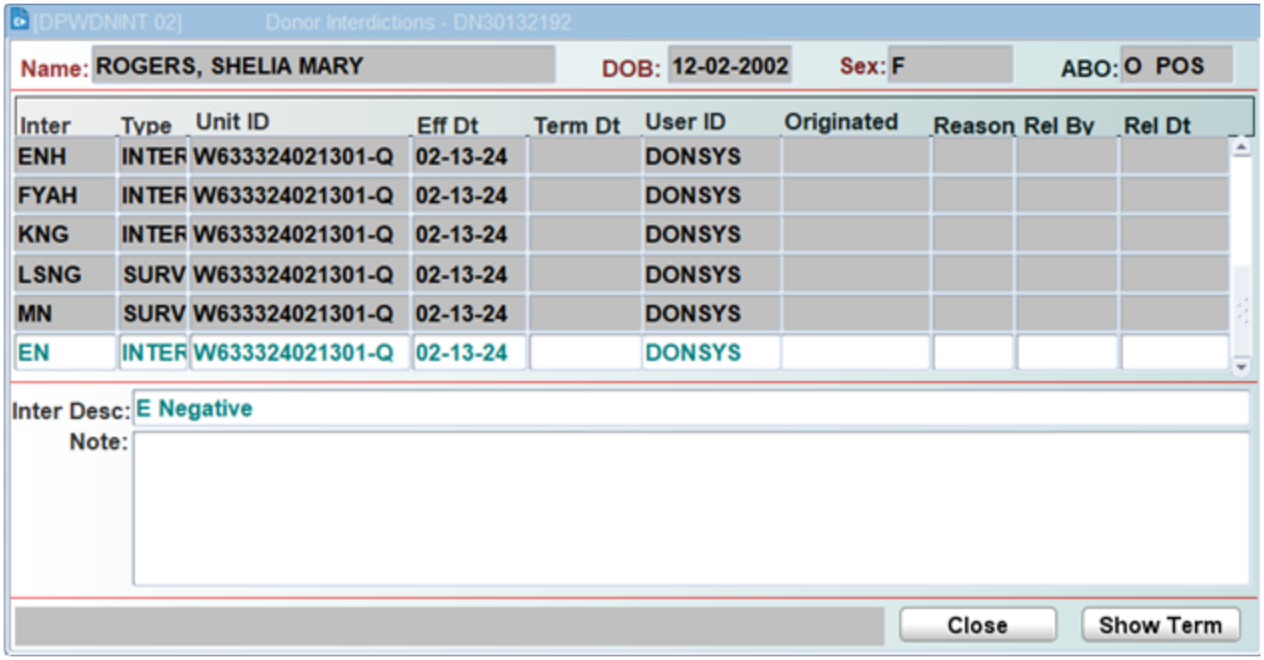


The following interdiction data displays for the donor selected in the host program:

- Interdiction code
- Type of interdiction
- Unit ID
- Date interdiction became effective
- Termination date of interdiction
- ID of user who placed the interdiction
- Health history question code that originated the interdiction
- Reason for health history interdiction
- ID of user who released interdiction
- Date that release was entered
- Interdiction description
- Interdiction note

**NOTE –** Only interdictions that the user has access to are displayed. If other interdictions exist for the donor, a message displays.


WellSky Corporation
Proprietary and confidential

## Viewing Interdictions

Users must be assigned to an Access Class. The Define Access Class (ACCESS) screen is populated with the interdictions in which the group has access to view in the window. In User Access, the user should be assigned to the access class.

- If the group does not have the interdiction defined in the Define Access Class (ACCESS), the user will not be able to view the interdiction.
- If the interdiction is present in the group, regardless of the view level, the user will be able to view the interdiction. The view level is only used in placing and removing the interdiction.
- If the user is in a group that does not have all interdictions assigned or does not have any interdictions assigned, but the user has been assigned the class of ALLin User Access (UACCESS), the user will be able to see all interdictions regardless of group or level.

## The Show Term Button

Click **Show Term** to view the donor's terminated interdictions. Terminated interdictions display along with active interdictions:

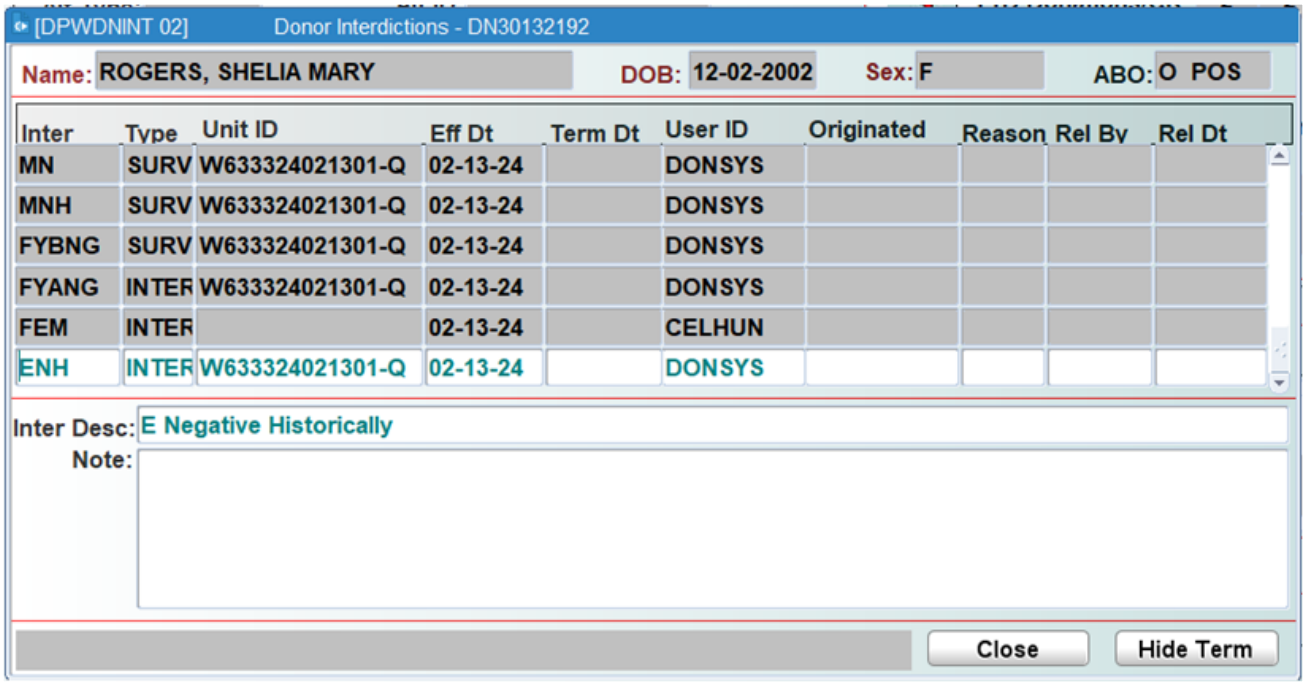


Click **Hide Term** to hide the terminated interdictions.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.25 Donor Schedule on Donor Centers (DSWDONIS)

## Intended Use

Use this program to view scheduled donors at donor centers by date, status or procedure.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

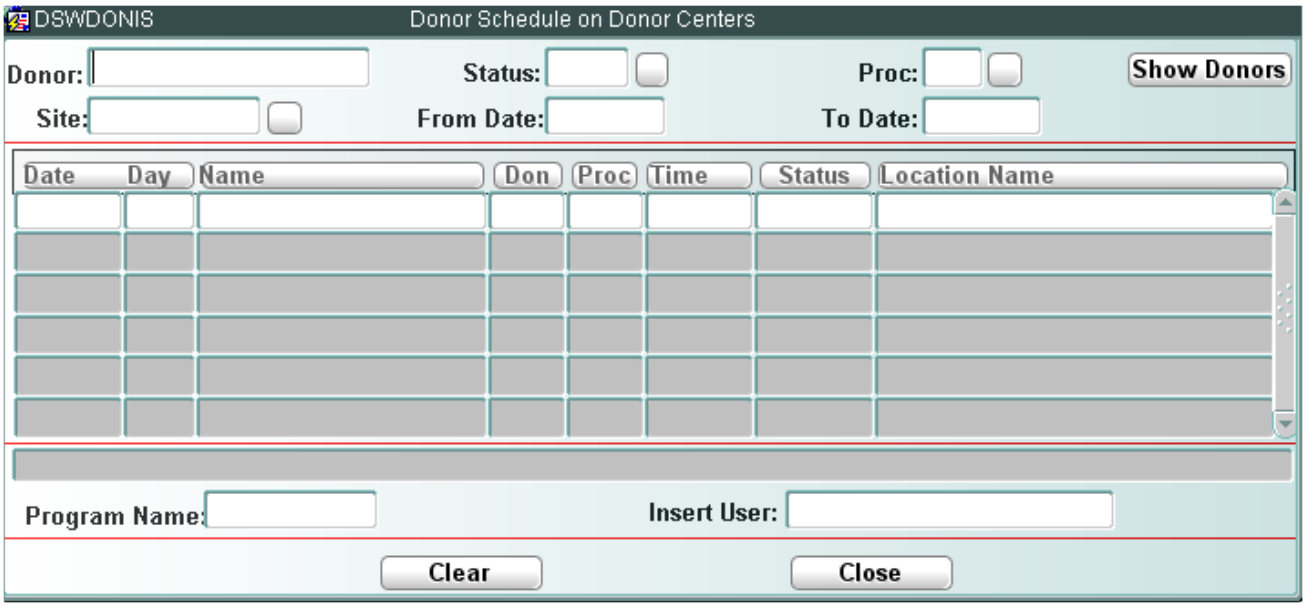


## Control Block Fields and Definitions

### Donor

Entry is optional. Enter last name of donor to search for.

**NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### Status

Entry is optional. Enter status of scheduled donation to query or select from the LOV. Values are as follows:

- CANCL – Cancelled
- CNFRM – Confirmed
- FUT – Future
- NOSHW – No Show
- REMND – Pending Reminder


WellSky Corporation
Proprietary and confidential

- WLKIN – Walk In
- WTLIST – Wait Listed

### Proc
Entry is optional. Enter the donation procedure code to query or select from the LOV.

### Site
Entry is optional. Enter the site ID to query or select from the LOV.

### From Date
Entry is optional. Enter starting date to query, using the MMDDYY format. Default is system date.

### To Date
Entry is optional. Enter ending date to query, using the MMDDYY format.

After entering the search criteria, click **Show Donors** to display a list of donors that match the entered criteria.

The following information displays for each retrieved donor:

- Date of donation
- Day of donation
- Name
- Donation type
- Donation procedure
- Beginning time of scheduled donation
- Ending time of schedule donation
- Status of donation
- Location name

The following displays for the selected donor:

- Program used to schedule donor for donation
- User who scheduled donor

## The Clear Button
Click **Clear** to clear all data from the screen in order to begin a new search.

## The Close Button
Click **Close** at any time to return to the host program.

# 14.2.26 Donor Statistics (DCWLOOKS)

## Intended Use

Use this window to view statistics about a donor scheduled for a donation at a donor center.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

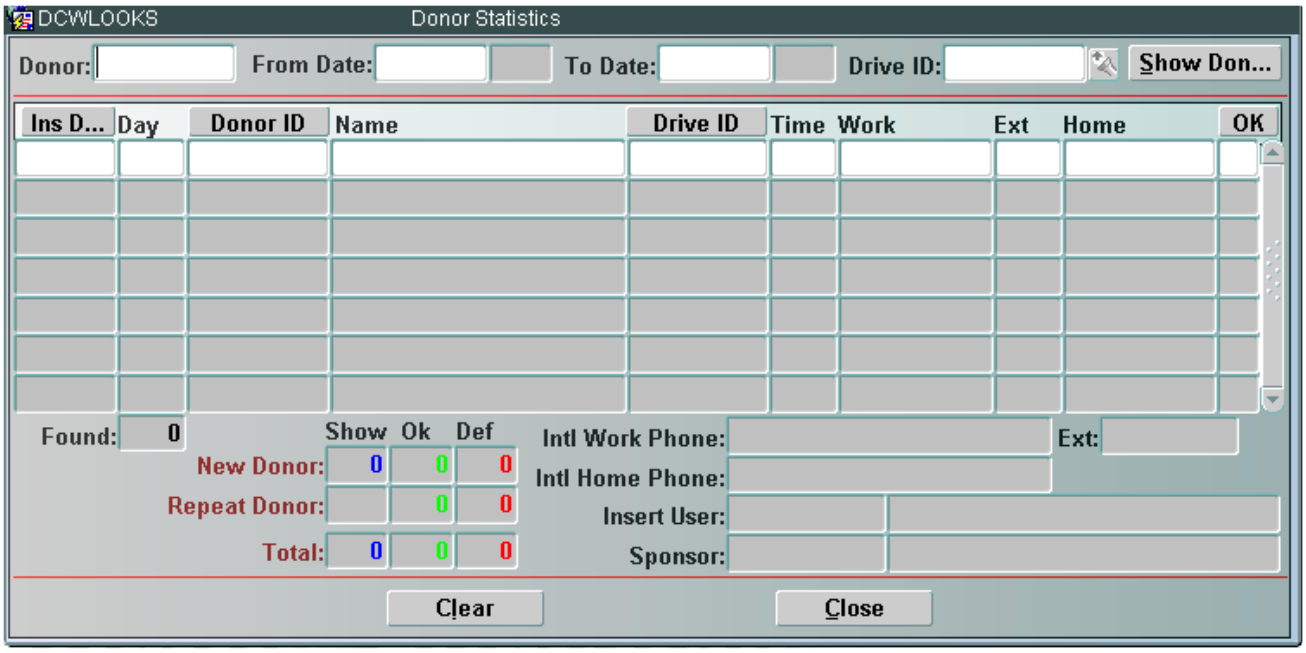


## Control Block Fields and Definitions

### Donor

Entry is optional. Enter the donor's last name.

### From Date

Entry is required. Enter beginning date of date range in MMDDYY format.

### To Date

Entry is required. Enter ending date of date range in MMDDYY format.

### Drive ID

Entry is optional. Enter drive ID number or choose from the LOV.

After entering the search criteria, click Show Donors to retrieve a list of donors that match the criteria.

The following data displays for each donor retrieved:


WellSky Corporation
Proprietary and confidential

- Date donor was inserted
- Day of week donor was inserted
- Donor ID
- Name
- Drive ID
- Time donor inserted
- Work phone number
- Work extension number
- Home phone number
- Indication if OK for donation

The following totals display for all retrieved donors:

- New donors that showed
- New donors whose donations were okay
- New donors whose donations were deferred
- Repeat donors that showed
- Repeat donors whose donations were okay
- Repeat donors whose donations were deferred
- Total donors that showed
- Total donors whose donations were okay
- Total donors whose donations were deferred

The following displays for the selected donor:

- International work phone number
- International work extension
- International home phone number
- User who inserted the donor
- Drive sponsor

## The Clear Button

Click **Clear** to clear the data from the window in order to begin a new search.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.27 Drive Statistics (DPWHLDRN)

## Intended Use

Use this program to view statistics for a drive that has taken place or for a drive scheduled for a future date.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

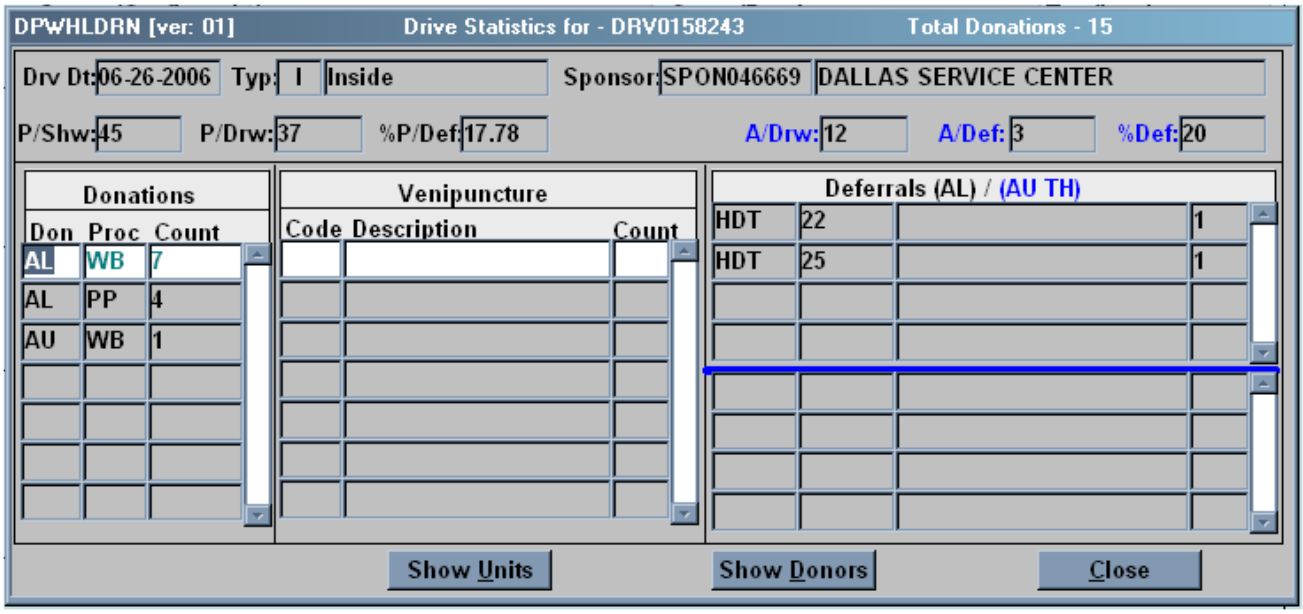


## In the Drive Details Block

The following information displays for the retrieved drive:

- Date
- Drive type
- Sponsor
- Projected show
- Projected draw
- Projected percent deferred
- Actual draw
- Actual deferred
- Actual percent deferred

## In the Donations Block

The following information displays:


WellSky Corporation
Proprietary and confidential

- Donation type
- Procedure code
- Number of donations of that type and procedure

## In the Venipuncture Block

The following information displays:

- Venipuncture code
- Description
- Number of donations of that venipuncture code

## In the Deferrals Block

The window pulls deferral information from the health history and physical findings data. The following information displays:

- Deferral code
- Origin
- Description
- Number of deferrals/donations

## The Show Units Button

Click **Show Units** to view a list of units collected at the drive:

## In the Units Block

The following information displays:

- Unit ID
- Donation type
- Procedure code
- Venipuncture code

Click **Hide Units** to close the Units block.

## The Show Donors Button

Click **Show Donors** to open the Drive Statistics window and view a list of donors who donated at the drive:

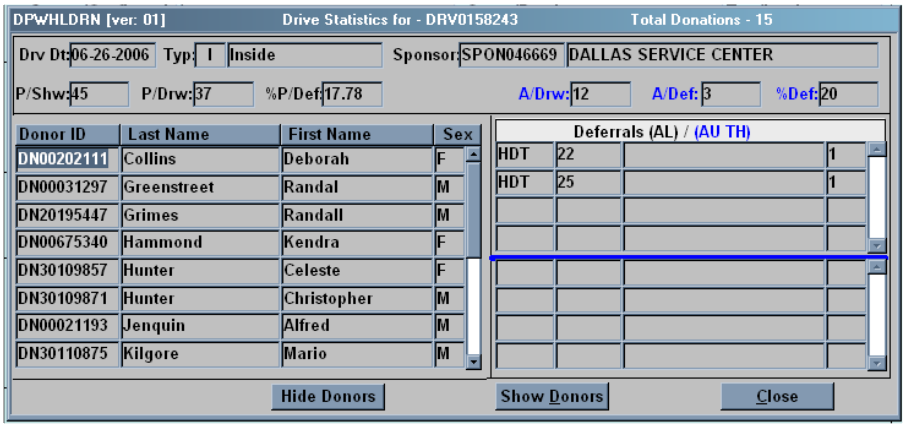


## In the Donor Block

The following donor information displays:

- Donor ID
- Last name
- First name
- Sex

Click **Hide Donors** to close the Donor Block.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.28 Find Donor (FIND DONOR)

## Intended Use

Use this program to find a donor in the database.

## Prerequisites

Your facility must configure DONBLOCK for each function that accesses the Find Donor window. The following parameters must be set:

- Which fields require data entry.
- How many times data must be entered into a field. (If configured for double-entry, the field clears and the cursor remains in that field after the user makes the entry and presses **Enter**.
- Grade match selection.

The following System Parameters must be defined:

- ALTID_MODE – designates whether alternate ID is required.

The following Master Codes must be defined:


WellSky Corporation
Proprietary and confidential

- ALTID – to designate the alternate donor ID.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

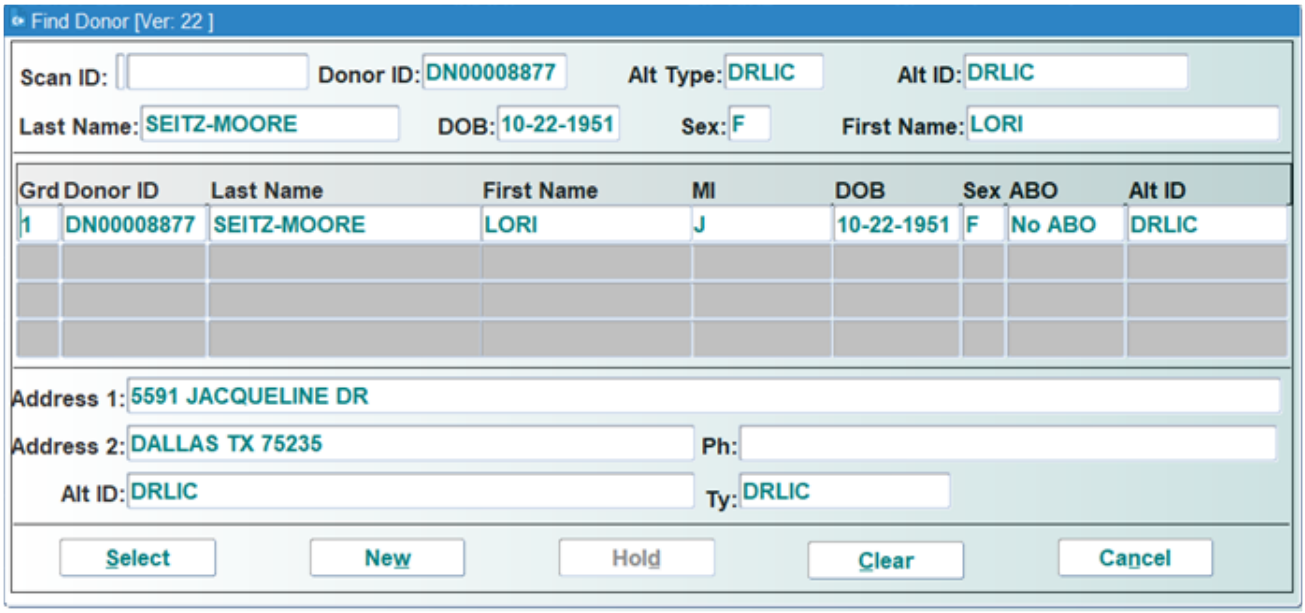


## Control Block Fields and Definitions

Enter the *Alt Type* and *ALT ID* in the respective fields. An entry is required in both fields, depending on the value of System Parameter ALTID_MODE and configuration in Configure Find Donor Block for Programs (DONBLOCK). Enter the following data:

### Scan ID

Scan or manually enter the scan ID field.

> **NOTE –** This field will only be enabled if the System Parameter BC_SCAN_RE is set to `Y`.

### Donor ID

Enter the donor ID number.

### Last Name

Enter the donor's last name.

> **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

### DOB

Enter the donor's date of birth, using the MMDDYYYY format.

### Sex
Enter the donor's sex: `M` for male or `F` for female.

### First Name
Enter the donor's first name.

### Alt ID
Enter alternate ID.

### Ty
Enter alternate ID type, or select from LOV.

## Retrieving Data
After entering the search criteria, press **Enter**. The system retrieves records that match the search criteria.

The system uses the information entered to find potential matches in the database. If one or more donor records are found that potentially match the information entered, the following displays for each donor:

- Grade
- Donor ID
- Last name
- First name
- Middle initial
- Date of birth
- Sex
- ABO/Rh
- Alt ID
- Alt Type
- Address 1 – first line of the address, which includes the street number, street name, and apartment number
- Address 2 – second line of the address, which includes the city, state, and zip code
- Ph (phone numbers) – displays all phone numbers linked to a donor: (H) Home, (W) Work, (M) Mobile. If the flag has a 'P' also, such as (MP), this indicates that the number is the donor's preferred contact number; in this example, the donor's mobile number is preferred.

**NOTE –** If the donor record retrieved in the Find Donor window differs from entered data, the information that is different is highlighted in yellow, with the exception of the First Name field; the First Name field is not highlighted, even if the data is different.

At the bottom of the list of retrieved donors, the address and phone numbers for the selected donor display.


WellSky Corporation
Proprietary and confidential

## The Clear Button

Click **Clear** to clear all data in the Find Donor window to start a new search.

## The Select Button

Click **Select** to specify the correct donor record from the list of potential donors. The data from the selected donor automatically displays in the host program.

This button is not enabled unless there is at least one donor from the list of potential donors that is an acceptable match. Your facility defines and controls how close the criteria has to match to be acceptable. This must be configured for each program that uses the Find Donor function.

## The New Button

The New button is enabled only when this window is accessed from a program that allows creation of a new donor. Click **New** to return to the host function and enter the new donor's data into the fields. A pop-up asks you to confirm that you wish to create a new donor:

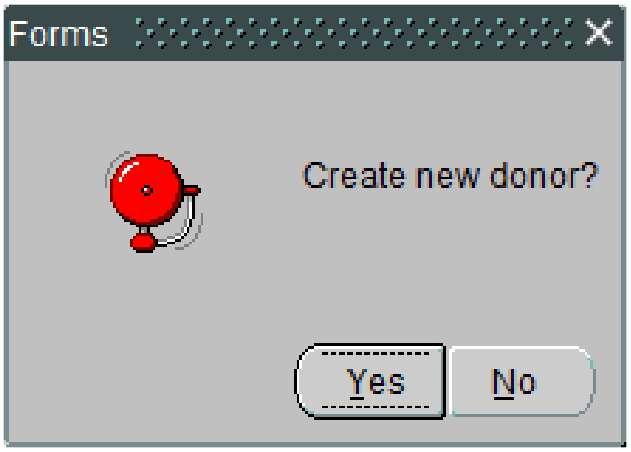


- Click **Yes** to continue and create a new donor.
- Click **No** to return to the Find Donor window.

The New button is enabled if the host program allows new donor entry, and if no donor records are retrieved that are close enough to the criteria to prevent the creation of a new donor.

## The Hold Button

The Hold button is enabled only when this window is accessed from a program that allows putting donors on hold.

## The Cancel Button

To close the Find Donor window without selecting a donor, click **Cancel**. The window closes and the system returns to the menu.

# 14.2.29 Generate Notification Letter (DNWSNDLT)

## Intended Use

Use this program to define and generate a notification letter to send to a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

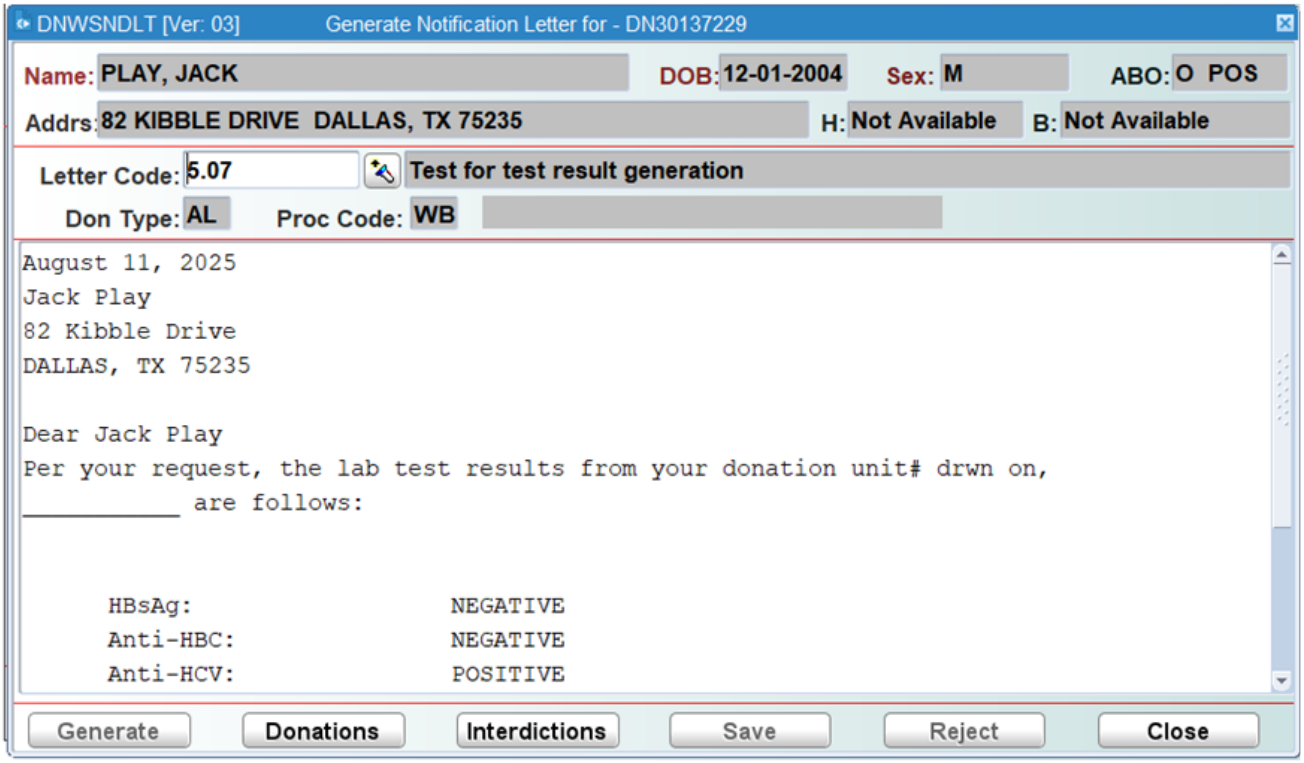


The following donor information displays:

- Name
- Date of birth
- Sex
- ABO type
- Address
- Home and business phone numbers
- Letter code and description
- Donation type
- Procedure code


WellSky Corporation
Proprietary and confidential

# To Select the Letter Code

## Letter Code

Enter the letter code or select from the LOV.

# The Generate Button

Click **Generate** to generate the selected letter. The letter displays with the donor's information.

# The Donations Button

Click **Donations** to open the Donation History Test Results window. See the Donation History Test Results section of this chapter for instructions on using this program. Click **Close** to return to the Generate Notification Letter program.

# The Interdictions Button

Click **Interdictions** to open the Donor Interdictions window. See the Donor Interdictions section of this chapter for instructions on using this program. Click **Close** to return to the Generate Notification Letter program.

# The Save Button

The Save button is enabled only after you click the Donations and the Interdictions buttons. This is to ensure review of the donations and interdictions.

Click **Save** to save a generated letter. A window asks if you modified the contents:

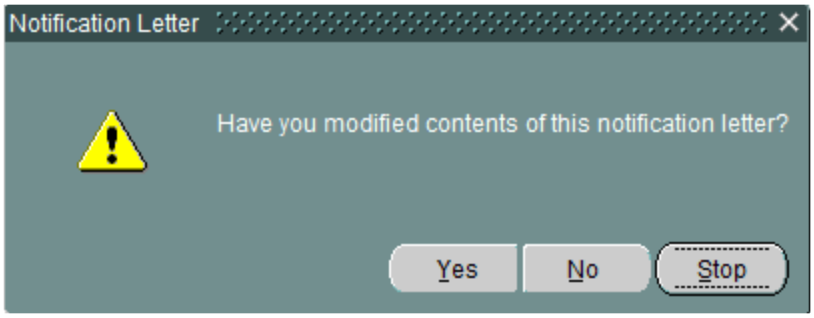


Click **No** if you have not modified the letter. The following window opens to confirm that the letter has been generated. Click **OK** to dismiss the window.

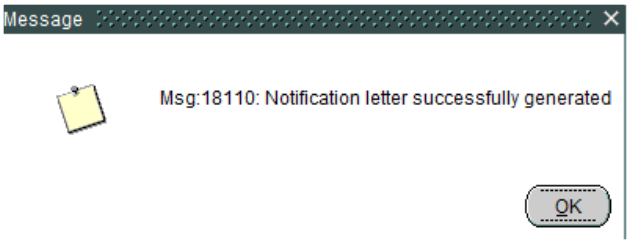


Click **Yes** if you have modified the letter. The letter cannot be generated if it has been modified. The following window opens to notify you that the letter could net be generated. Click **OK** to dismiss the window.

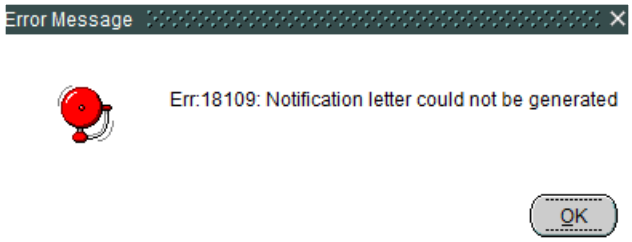


Click **Stop** to closes the message and returns to the screen without saving the generated letter.

**NOTE –** If the donor has more than one interdiction, the following window opens:

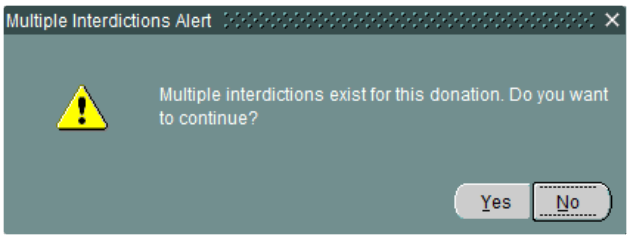


Click **No** to abort the Save without generating a letter. Click **Yes** to generate the letter.

## Multiple Interdictions Present

If the donor has multiple interdictions an additional pop-up will display.

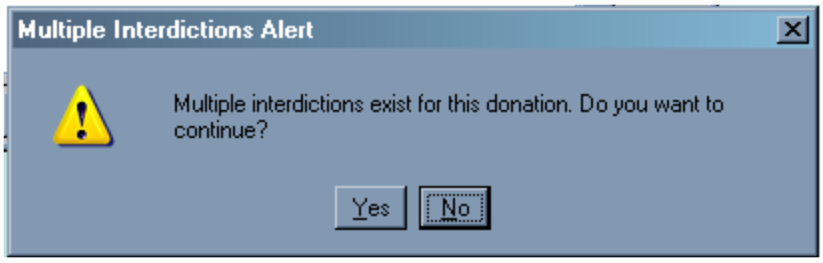


Selecting `No` will allow you to go back to the letter and make modifications.

When selecting `Yes` the system assumes that you are aware of the multiple interdictions and have either made modifications to the letter or you have selected a pre defined combination letter.

The process will complete confirming the letter.

## The Reject Button

The **Reject** button is not active in this screen.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.30 Goal Information (MRWRPERF)

## Intended Use

Use this program to view goal information for recruiters.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

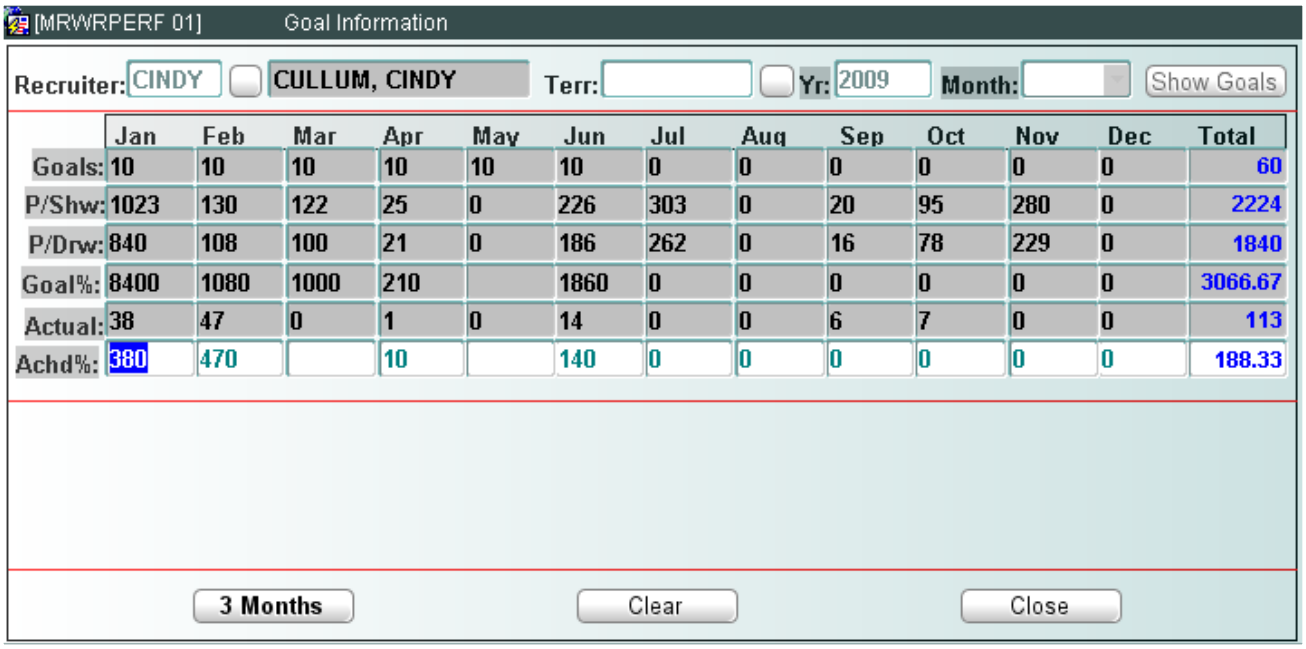


## Control Block Fields and Definitions

### Recruiter

Entry is required. Enter the recruiter ID or select from the LOV.

### Terr

Entry is optional. Enter the territory or select from the LOV.

### Yr

Entry is required. Current year automatically defaults. Press ENTER to select default year or enter 4-digit year.

### Month

Entry is optional. Enter the month to view or select from the drop-down list.

After entering the search criteria, click Show Goals to retrieve recruitment goals for the entered recruiter.

The following information displays:

- Recruitment goals by month
- Projected show by month
- Projected draw by month
- Percentage projected draw is of overall goal
- Actual draw
- Percentage actual draw is of overall goal

## The 3 Months Button

Click **3 Months** to restrict the view to three months. Enter data as described above.

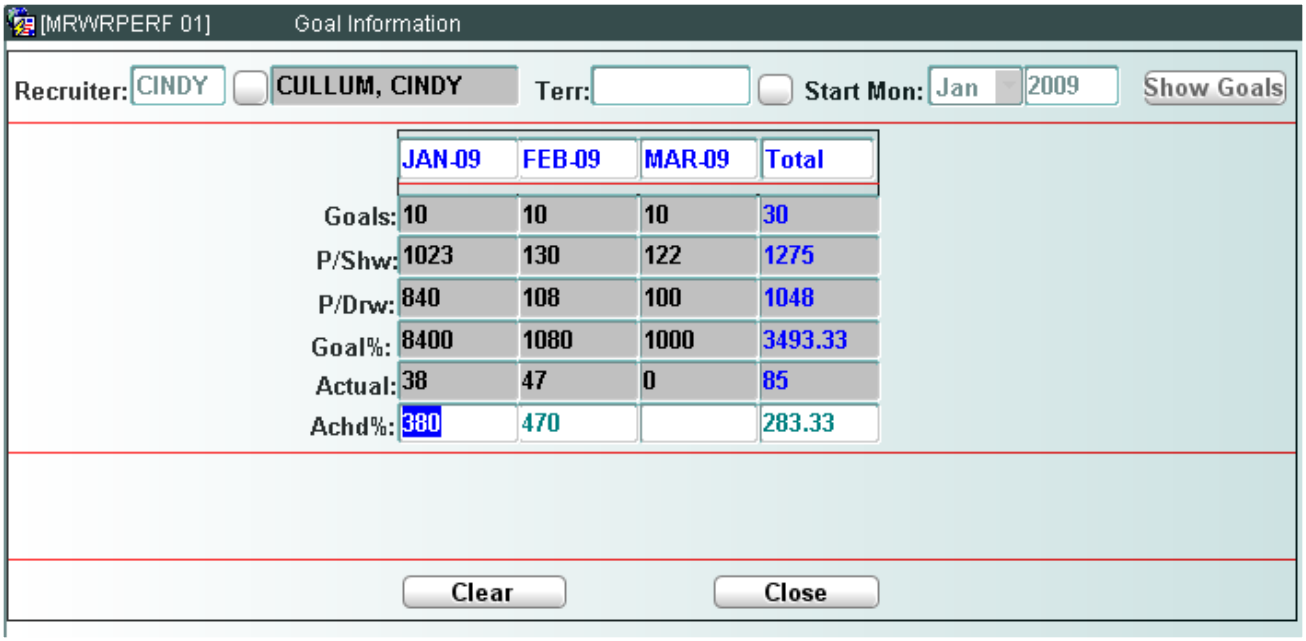


## The Clear Button

Click **Clear** to clear all data from the window in order to begin a new search.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.31 International Address (DPWIADDR)

## Intended Use

Use this window to add international address information.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

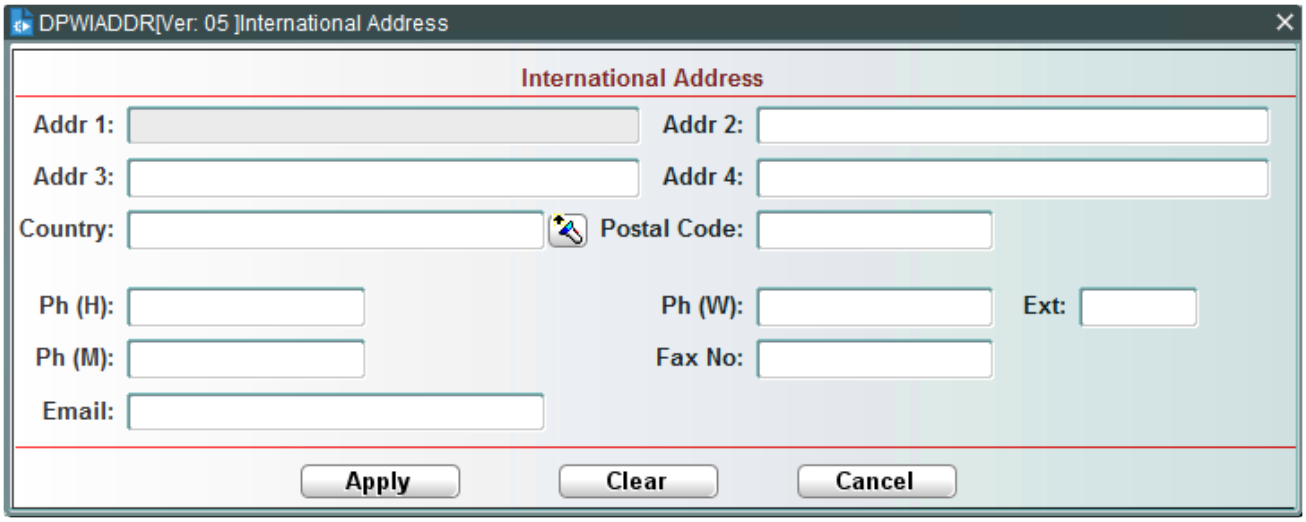


## Addr 1

Entry is required. Enter first line of international address. Entry is limited to a maximum of 50 characters.

## Addr 2, Addr 3, Addr 4

Entry is optional. Enter additional international address lines as needed. Entry is limited to a maximum of 50 characters in each field.

## Country

Entry is required. Enter country or select from LOV. Entry is limited to a maximum of 50 characters.

## Postal Code

Entry is optional. Enter the international postal code. Entry is limited to a maximum of 14 characters.

## Phone (H)

Entry is optional. Enter the international home phone number. Entry is limited to a maximum of 20 characters.

## Phone (W)

Entry is optional. Enter the international work phone number. Entry is limited to a maximum of 20 characters.

## Ext

Entry is optional. Enter the extension number. Entry is limited to a maximum of 8 characters.

## Phone (M)

Entry is optional. Enter the international mobile phone number. Entry is limited to a maximum of 20 characters.

## Fax No

Entry is optional. Enter the international Fax number. Entry is limited to a maximum of 20 characters.

### Email

Entry is optional. Enter a valid email address. Entry is limited to a maximum of 128 characters.

After all address information is entered, click one of the following:

- **Apply** – Commit the international address information. The International Address window closes.
- **Clear** – Clear the contents of all fields. Re-enter information.
- **Cancel** – Close the International Address window without committing the information.

## 14.2.32 New ZIP Code (VDWNWZIP)

### Intended Use

Use this program to enter a new ZIP code.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

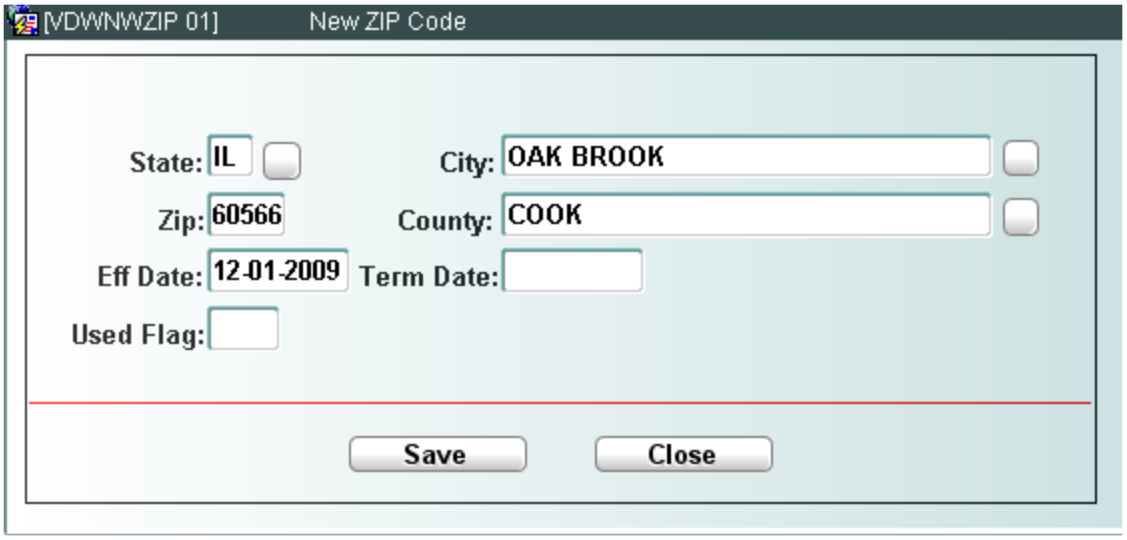


### State

Entry is required. Enter a valid state abbreviation or select from the LOV.

### City

Entry is required. Enter a valid city name or select from the LOV.

### Zip

Entry is required. Enter a five-digit ZIP Code.

### County

Entry is required. Enter a valid county name or select from the LOV.


WellSky Corporation
Proprietary and confidential

### Eff Date

Entry is required. Enter an effective date in MMDDYYYY format. The date must be equal to or later than the current date.

### Term Date

Entry is optional. If applicable, enter a termination date in MMDDYYYY format.

### Used Flag

Entry is optional. Enter `Y` if the ZIP Code being entered is commonly used, or `N` if not.

## The Save Button

After entering the new data, click **Save** to commit the new ZIP Code to the database. The window closes and returns to the host program at commit

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.33 Notification Letters (DNWVWLTR)

## Intended Use

Use this program to view notification letters that have been sent to a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

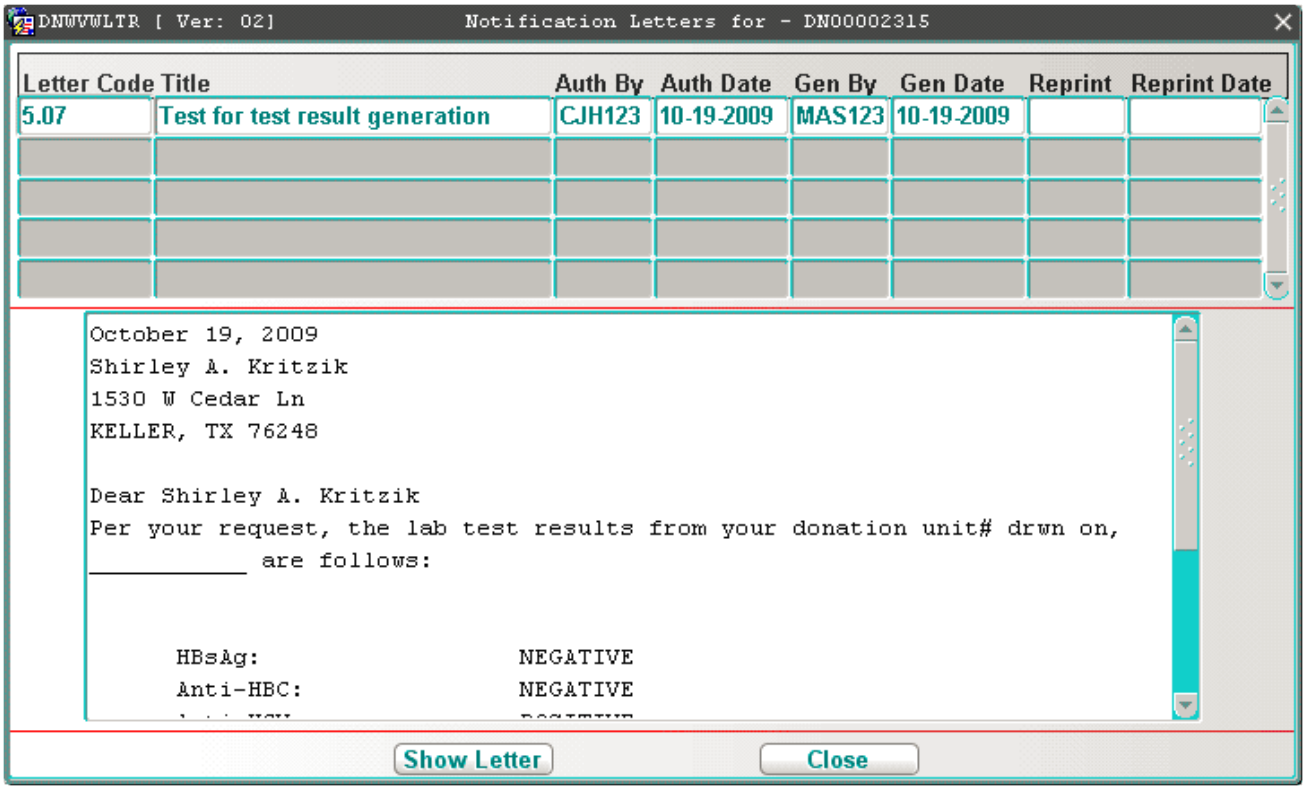


The following information will display, if it exists:

- Letter code
- Letter title
- ID of employee who authorized letter
- Date letter was authorized
- ID of employee who generated letter
- Date letter was generated
- ID of employee who reprinted letter
- Date letter was reprinted

## The Show Letter Button

Click **Show Letter** to view the text of the notification letter.

## The Close Button

Click **Close** at any time to return to the host program.


WellSky Corporation
Proprietary and confidential

# 14.2.34 Notification Log (DNWDCOMM)

## Intended Use

Use this program to view a history of donor notifications.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

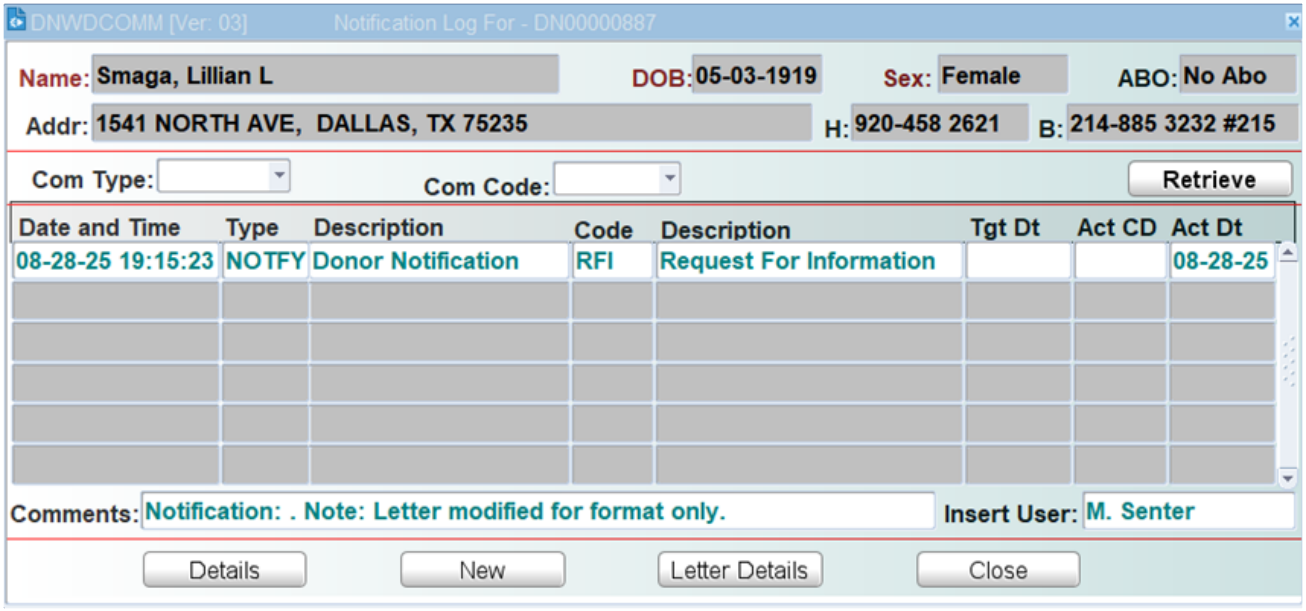


## In the Donor Data Block

The following donor information displays:

- Name
- Date of birth
- Sex
- ABO type
- Address
- Home and business phone numbers

## In the Notification Log Block

The following information displays:

- Date and time notification was defined
- Type and description of notification type
- Code and description of notification code

- Target date of action to be taken
- Code of action to be taken
- Actual date action was taken
- Comments attached to the notification
- User who generated the notification

**NOTE –** Act Dt field can be entered or modified from this location.

## The Details Button

Click **Details** to open the Notification Log Details window in view mode:

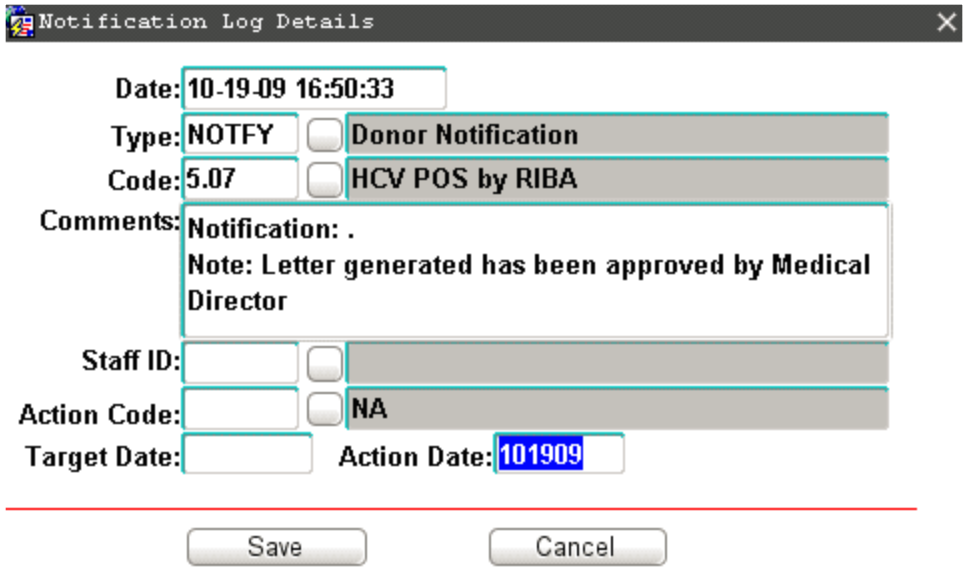


Use this window to view further details about the selected notification. The following information displays, if it exists:

- Date and time of notification
- Notification type and description
- Notification code and description
- Comments attached to the notification
- ID of staff person responsible
- Code and description of action to be taken
- Target date of action to be taken
- Actual action date

This window is for viewing purposes only. No changes can be made. The Save button is disabled. Click **Cancel** to return to the Notification Log window.


WellSky Corporation
Proprietary and confidential

## The New Button

Click **New** to open the Notification Log Details window in entry mode. Use this window to define a new notification letter to send to a donor.

### Date

Display only. Automatically populates with the system date and time and cannot be changed.

### Type

Entry is required. Enter the communication type or select from the LOV.

### Code

Entry is required. Enter the communication code or select from the LOV.

### Comments

Entry is optional. Enter any comments to attach to the communication.

### Staff ID

Entry is optional. Enter the staff ID number or select from the LOV.

### Action Code

Entry is optional. Enter the action code or select from the LOV.

### Target Date

Entry is optional. Enter the target date in MMDDYY format.

### Action Date

Entry is optional. Enter the action date in MMDDYY format.

After entering the information, click **Save** to save the notification. The Notification Log Details window closes and the user is returned to the main Notification Log window where the saved information is displayed.

## The Letter Details Button

Click **Letter Details** to open the Display Notification Letter window. Use this program to view the text of notification letters that have been sent to a donor. See the Display Notification Letter section of this chapter for information on using this program. Click **Close** to return to the Notification Log window.

## The Close Button

At the main Notification Log window, click **Close** at any time to return to the host program.

# 14.2.35 Past Drives Sponsor (MRWPADRV)

## Intended Use

Use this window to view a history of past drives for a drive sponsor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

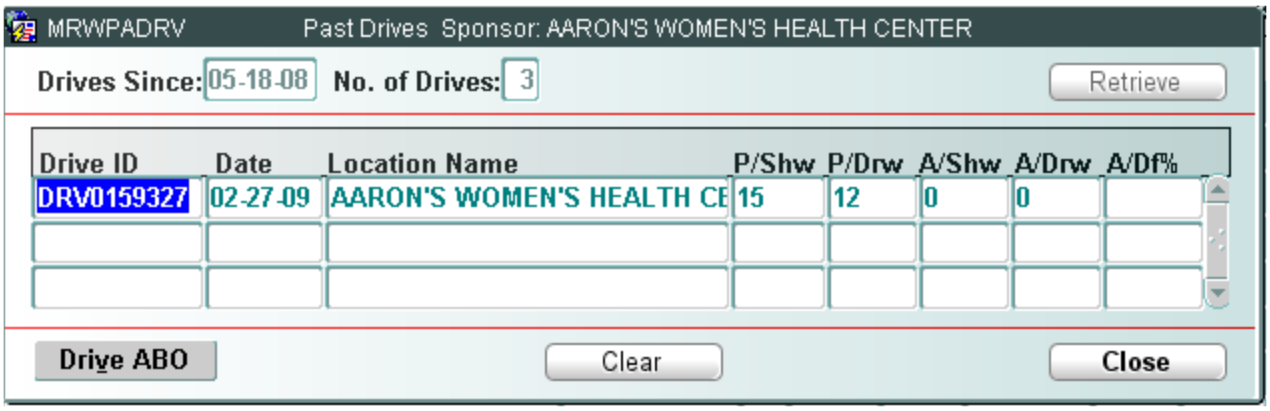


## Control Block Fields and Definitions

This window automatically displays data for the sponsor selected in the host program. To change the data, click the Clear button. Enter the following:

### Drives Since

Entry is optional. Enter the date to search from, using the MMDDYY format.

### No. of Drives

Entry is optional. Enter the maximum number of drives to display.

The following information displays for each drive retrieved:

- Drive ID
- Date
- Location name
- Projected show
- Projected draw
- Actual show
- Actual draw
- Actual percentage of deferrals

## The Drive ABO Button

Click **Drive ABO** to open the ABO Breakdown for Drive window. See the ABO Breakdown for Drive (MCWABODR) section of this chapter for instructions on using this window.

## The Clear Button

Click **Clear** to clear the window of all data in order to begin a new search.


WellSky Corporation
Proprietary and confidential

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.36 Schedule Status (SSWSSTAT)

## Intended Use

Use this window to view a list of drives in terms of staffing by date range.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

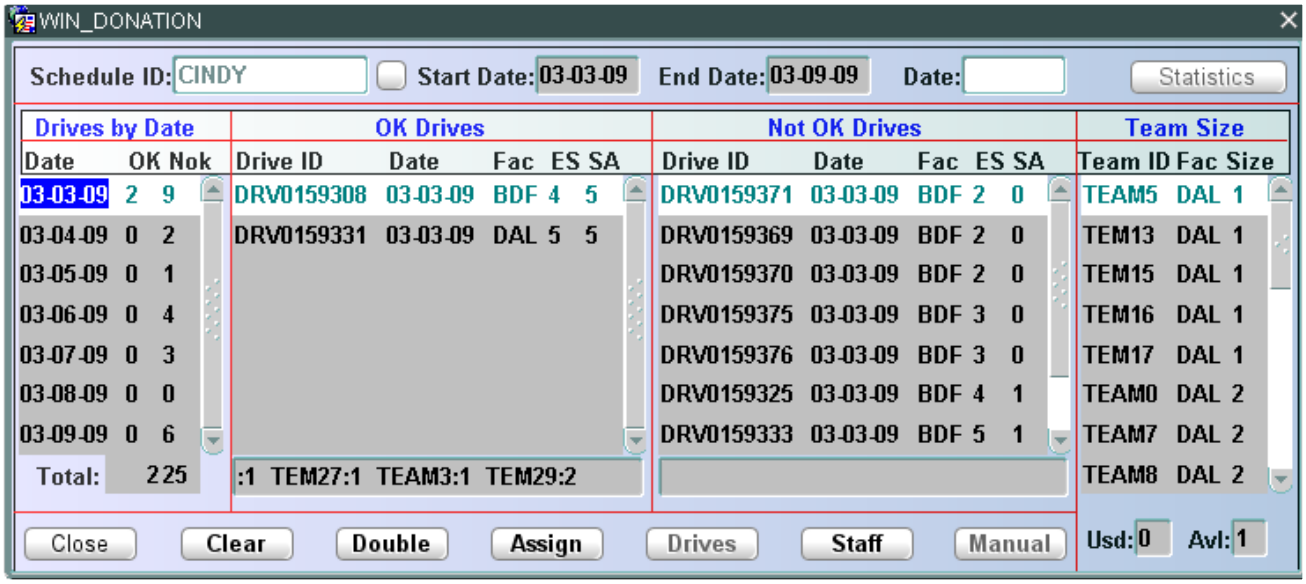


## Control Block Fields and Definitions

Window automatically populates based on the schedule selected in the host program. To view a different schedule, click **Clear**. Enter the following:

### Schedule ID

Entry is required. Enter a schedule ID or select from the LOV.

### Start Date

Display only. Automatically populates based on the schedule ID selected.

### End Date

Display only. Automatically populates based on the schedule ID selected.

### Date

Entry is optional. Enter a specific date within the schedule date range to pull only schedules for that date or leave null to pull all drives within the date range.

After entering the search criteria, click **Statistics** to retrieve schedule statistics for the entered schedule ID.

## In the Drives By Date Block

The following information displays:

- Each drive date within the date range
- Number of drives that are adequately staffed
- Number of drives that are not adequately staffed

## In the OK Drives Block

The following information displays for each adequately staffed drive for the selected date:

- Drive ID
- Date
- Facility to which team is assigned
- Estimated number of staff needed
- Staff actually assigned

## In the Not OK Drives Block

The following information displays for each drive not adequately staffed for the selected date:

- Drive ID
- Date
- Facility to which team is assigned
- Estimated number of staff needed
- Staff actually assigned

## In the Team Size Block

- Team ID
- Facility to which team is assigned
- Number of members on team

## The Close Button

Click **Close** at any time to close the window and return to the host program.


WellSky Corporation
Proprietary and confidential

## The Clear Button

Click **Clear** to clear the screen of all retrieved data to start a new search.

## The Double Button

Click **Double** to open a window that lists team members who are assigned to two drives on a single day:

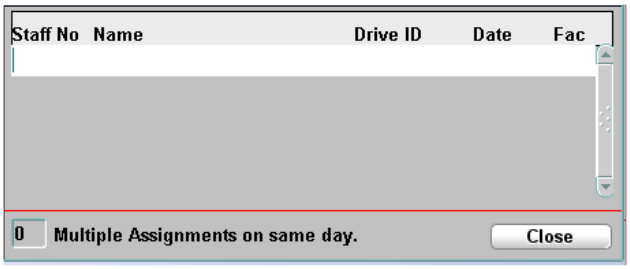


Click **Close** to return to the host window.

## The Assign Button

Click **Assign** to open a window that displays the number of staff that were assigned automatically and the number that were assigned manually:

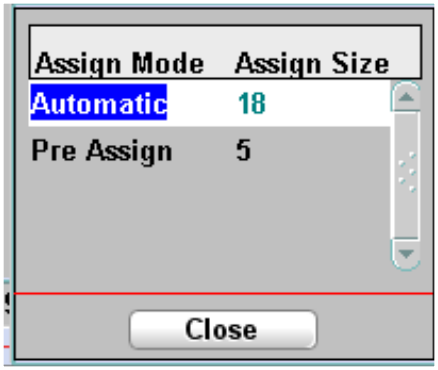


Click **Close** to return to the host window.

## The Drives Button

Click **Drives** to open the Drive Details Query screen. Use this screen to query data about the selected drive. See Chapter 2 Recruitment for instructions on using this screen.

## The Staff Button

Click **Staff** to open a window that displays the number of available staff members:

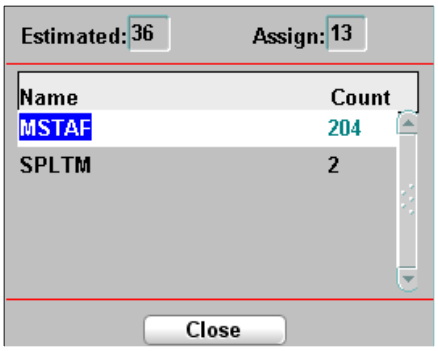


## The Manual Button

The Manual button is disabled in this window.

Click **Close** to return to the host window.

# 14.2.37 Search for Donor (DNWDFIND)

## Intended Use

Use this program to search the donor database for a donor.

## Limitations

The donor must be registered and exist in the donor database.

## Prerequisites

Access class VWSSN must be set for the user.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.


WellSky Corporation
Proprietary and confidential

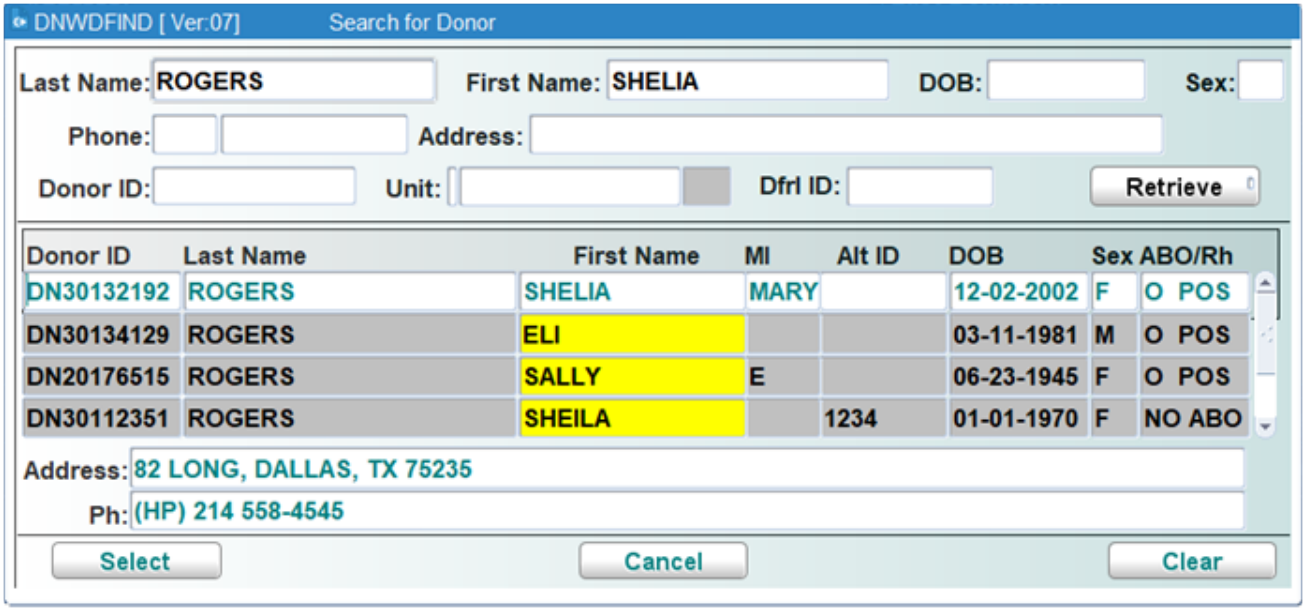


# Entering Criteria

In the Search for Donor window, enter at least one of the following criteria:

## Last Name

Enter the donor's last name.

> **NOTE –** This field can only contain alpha characters (A to Z and a-z), apostrophe (') and hyphen (-).

## First Name

Enter the donor's first name.

## DOB

Enter the donor's date of birth.

## Sex

Enter the donor's sex: `M` for male or `F` for female.

After entering donor data, click **Retrieve** to display a list of donors that match the entered donor data.

> **NOTE –** If too many donors match the entered data, the system may ask the user to enter additional data to narrow the search.

If one or more matching donors are found, the following data displays for each donor:

- Donor's ID
- Last name

- First name
- Middle initial
- Date of birth
- Sex
- ABO/Rh type

**NOTE –** If certain donor data is not an exact match of the entered donor data, that data is highlighted in yellow, with the exception of the First Name field; the First Name field is not highlighted even if the data is different.

### Phone
Enter the donor's phone number.

### Address
Enter the donor's address.

### Donor ID
Enter the donor ID number.

### Unit
Scan or manually enter unit ID.

**NOTE –** The system allows you to scan or manually enter a voided unit number. It will display the donor that is linked to the voided unit number.

### Dfrl ID
Scan or manually enter deferral ID.

## The Select Button
If a matching donor is found, the Select button is enabled. If more than one donor is retrieved, click the desired donor to highlight the row. The selected donor's address and phone number(s) display. The following phone numbers display:

- Home (H) – if the phone number is the preferred contact number, it will display as (HP)
- Work (W) – if the phone number is the preferred contact number, it will display as (WP)
- Mobile (M) – if the phone number is the preferred contact number, it will display as (MP)

Click **Select** to go to the host program. The donor data from the selected donor automatically displays.

## The Cancel Button
Click **Cancel** to close the Search for Donor window and exit the host program. The system returns to the menu.


WellSky Corporation
Proprietary and confidential

## The Clear Button

Click **Clear** to clear all entered or retrieved data from the Search for Donor window to start a new search.

# 14.2.38 Send Letter (DCWSNDLT)

## Intended Use

Use this program to define and send a communication letter to a donor.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

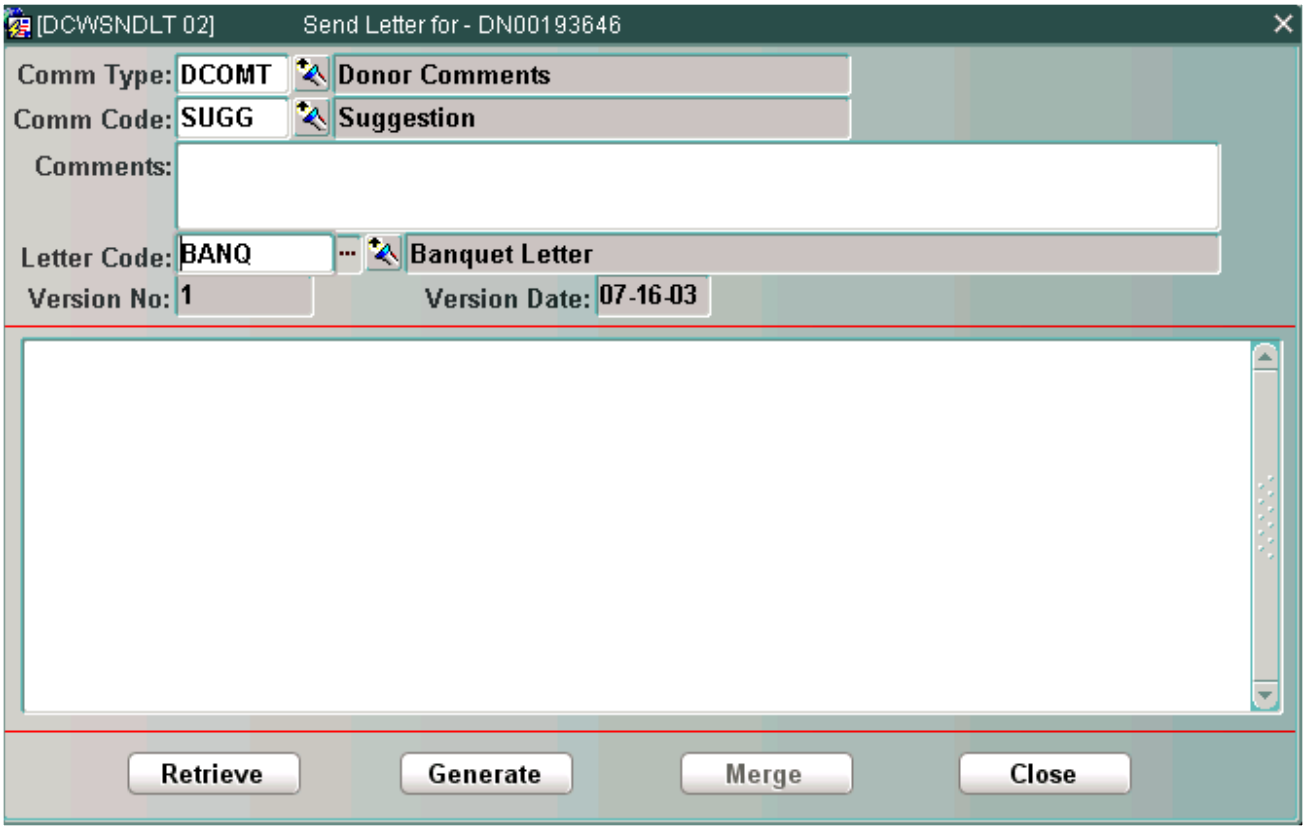


### Comm Type

Entry is required. Enter the communication type or select from the LOV.

### Comm Code

Entry is optional. Enter the communication code or select from the LOV.

### Comments

Entry is optional. Enter comments.

### Letter Code

Entry is required. Enter the letter code or select from the LOV. Version number and version date automatically display.

### The Retrieve Button

After entering the criteria, click **Retrieve** and the selected letter displays.

### The Generate Button

Click **Generate** to generate the letter. This enters the selected donor's data into the text of the letter.

### The Merge Button

After generating the letter, Merge becomes enabled. Click **Merge** to merge data into the database and prepare letter to send.

### The Close Button

Click **Close** at any time to return to the host window.

## 14.2.39 Site Collection Statistics (DRWSSTAT)

### Intended Use

Use this program to view collection statistics by site and date range.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

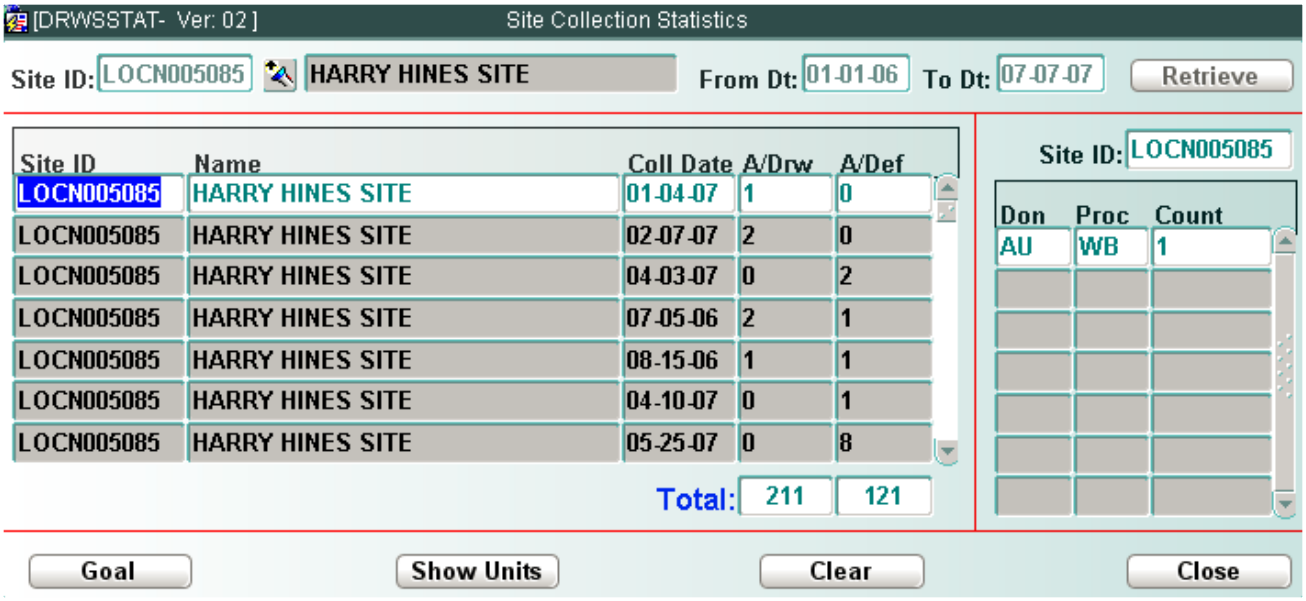



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Site ID

Entry is optional. Enter the site ID or select from the LOV.

## From Dt

Entry is required. Enter the beginning date of date range in MMDDYY format.

## To Dt

Entry is required. Enter the ending date of date range in MMDDYY format.

After entering the search criteria, click **Retrieve** to display a list of all sites that match the entered criteria.

# In the Site Block

The following information displays for each retrieved site:

- Site ID
- Site name
- Collection date
- Actual number of draws
- Actual number of deferrals

The total number of draws and number of deferrals at all sites retrieved displays at the bottom of the A/Drw and A/Def columns.

# In the Donations Block

The following information displays for the selected site:

- Site ID
- Donation type
- Procedure code
- Total number of that donation type and procedure

# The Goal Button

Click **Goal** to open the Site Goal block:

Use this block to view collection goals at the specified site. The following information displays for the selected site:

- Date
- Goal custodian
- Donation type
- Procedure code
- Number of donations of that type and procedure

Click **Close** to close the Site Goal block and return to the main window.

## The Show Units Button

Click **Show Units** to open the Units block:

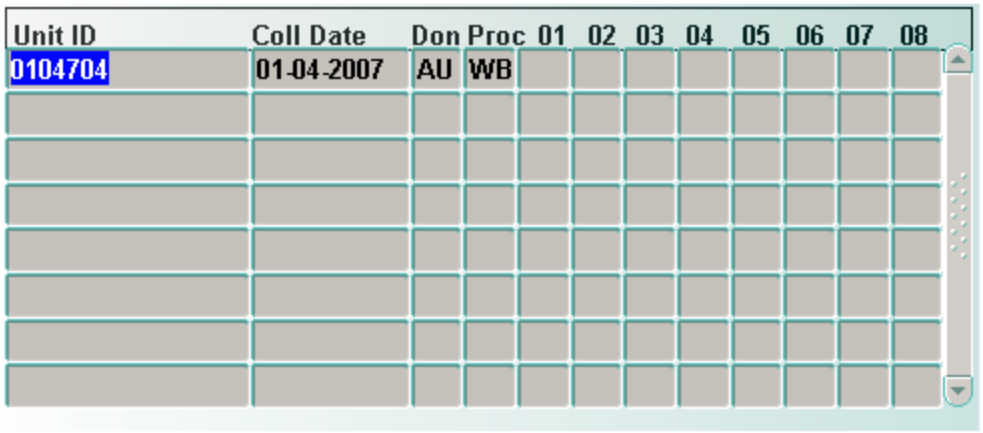


Use this block to view the unit ID, donation type, procedure and venipuncture code of collected units. The following information displays for the selected site:

- Unit ID
- Collection date
- Donation type
- Procedure code
- Venipuncture codes 01-08, (marked Y for those that apply)

Click **Hide Units** to close the Units block and return to the main window.

## The Clear Button

Click **Clear** to clear all data from the screen in order to perform a new search.

## The Close Button

Click **Close** at any time to return to the host program.

# 14.2.40 Sponsor Rollover Preferences (MRWROLLP)

## Intended Use

Use this window to view a sponsor's preferences for a rollover drive.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

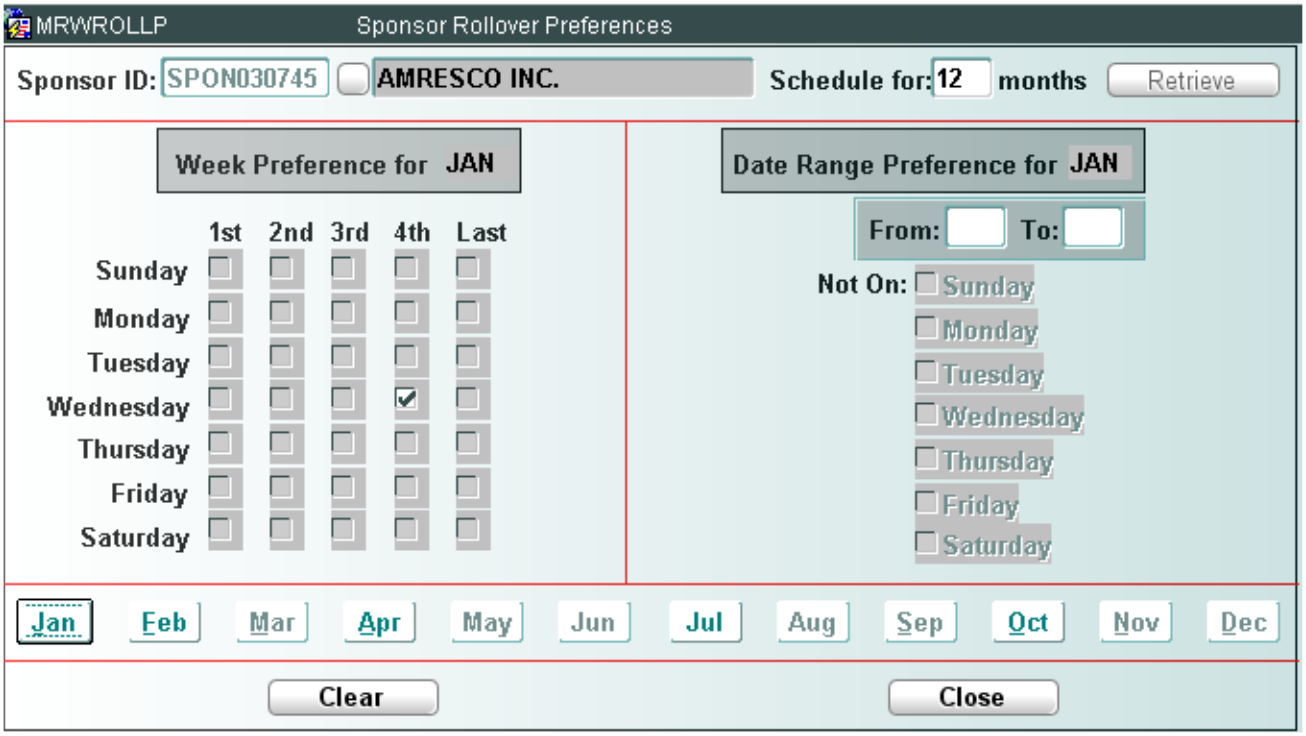


## Control Block Fields and Definitions

### Sponsor ID

Entry is required. The sponsor selected in the host program automatically displays. Accept sponsor ID number, enter a sponsor ID number or select from the LOV.

### Schedule for ... months

Entry is optional. Enter number of months to view rollover preference scheduling.

Click **Retrieve** to display a sponsor's current rollover preferences.

Click desired **month** at the bottom of the screen to choose that month to view rollover preferences.

## In the Week Preference for Block

The Week Preference block displays the day of the week and the week of the month for drive preference.

## In the Date Range Preference for Block

The Date Range Preference block displays the days of the week. Days to not have a rollover are indicated with a checkmark.

## The Clear Button

Click **Clear** to clear the screen and enter new search criteria.

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.41 User List Browser (DEWDONBR)

## Intended Use

Use this window to view browser list details by list ID

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

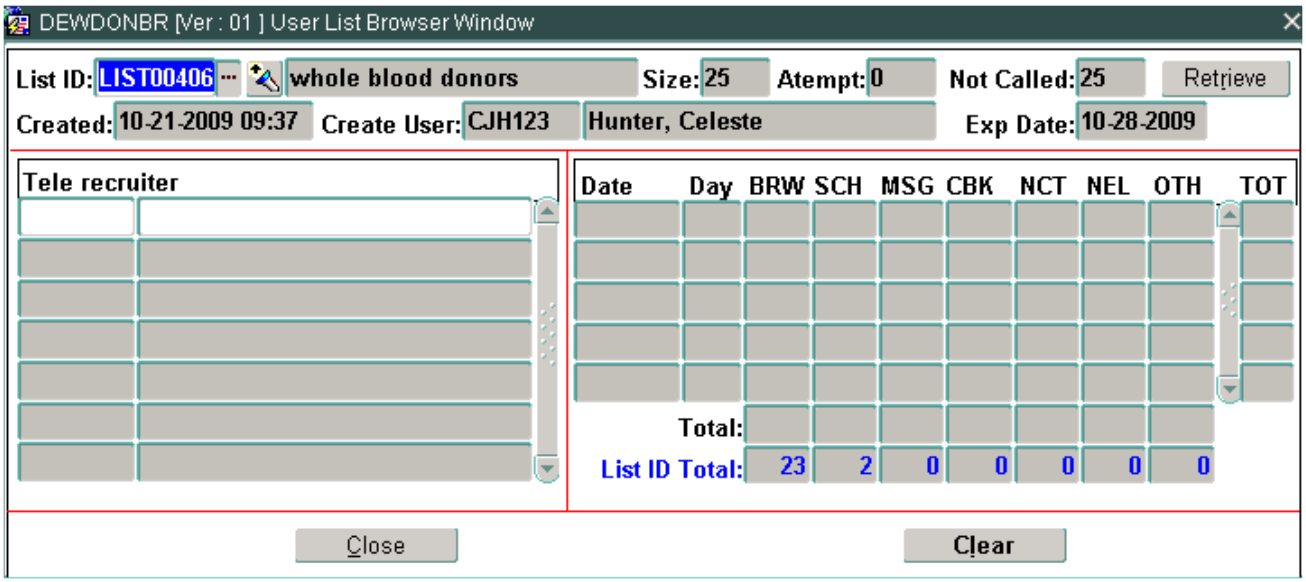


## Control Block Fields and Definitions

The window automatically populates with data from the list selected in the host program. To select a different list, click **Clear** and entering the following:

### List ID

Entry is required. Enter a list ID or select from the LOV.


WellSky Corporation
Proprietary and confidential

Click **Retrieve** and the name, size, number of contacts attempted, number not called, creation date and user, and expiration date display for the selected list.

### In the Tele-Recruiter Block

The following information displays for the selected list:

- Telerecruiter ID responsible for list
- Telerecruiter name

### In the List Details Block

The following information displays for the selected telerecruiter:

- List date
- Day
- Number of potential donors in list
- Number scheduled
- Number of messages left
- Number to be called back
- Number with no contact
- Number not eligible
- Other
- Totals

### The Clear Button

Click **Clear** to clear the screen of retrieved records.

### The Close Button

Click **Close** at any time to close the window and return to the host program.

## 14.2.42 View Donors in List (DEWDONRS)

### Intended Use

Use this window to view donors in a list.

### Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

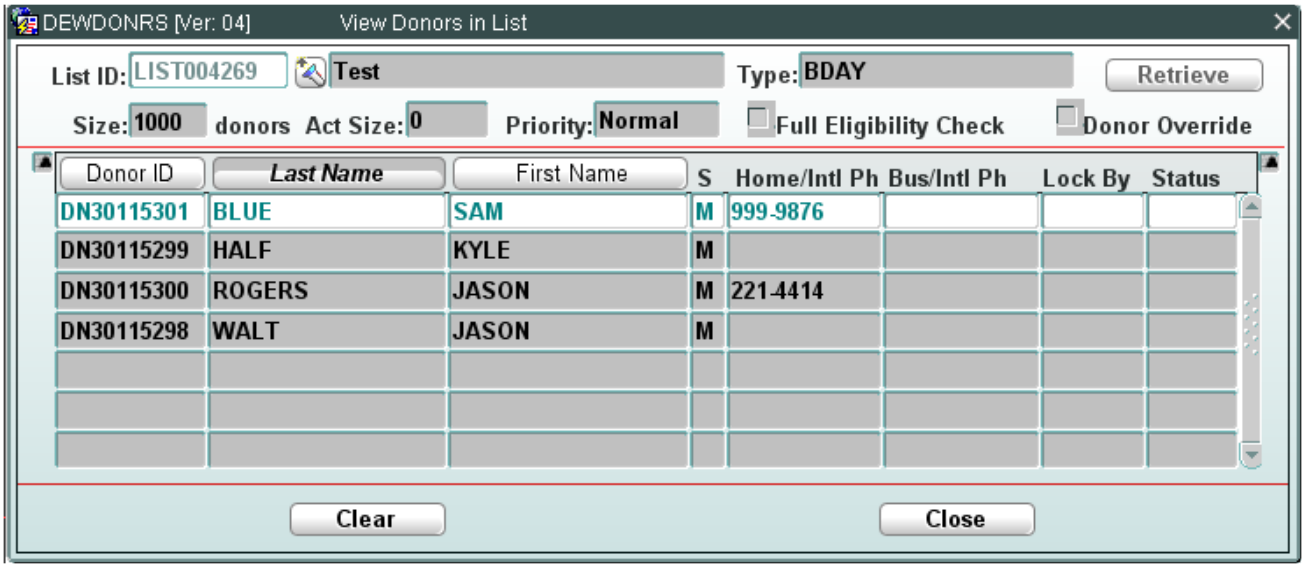


## Control Block Fields and Definitions

The window automatically populates with data from the list selected in the host program. To select a different list, click **Clear** and enter the following:

### List ID

Entry is required. Enter a list ID or select from the LOV.

Click **Retrieve** and the name, type, size, priority, and checks for full eligibility and donor override display for the selected list.

## In the Donor Block

The following donor data displays in the Donor Block:

- Donor ID
- Last name
- First name
- Sex
- Home phone (domestic or international)
- Business phone (domestic or international)
- User who locked donor
- Donor status

## The Clear Button

Click **Clear** to clear data from the window in order to begin a new search.


WellSky Corporation
Proprietary and confidential

## The Close Button

Click **Close** at any time to close the window and return to the host program.

# 14.2.43 View List Criteria (DEWCRITN)

## Intended Use

Use this program to view criteria of a donor enlistment list.

## Accessing the Window

This window is not a stand-alone program and can be accessed only through certain screens within Donor.

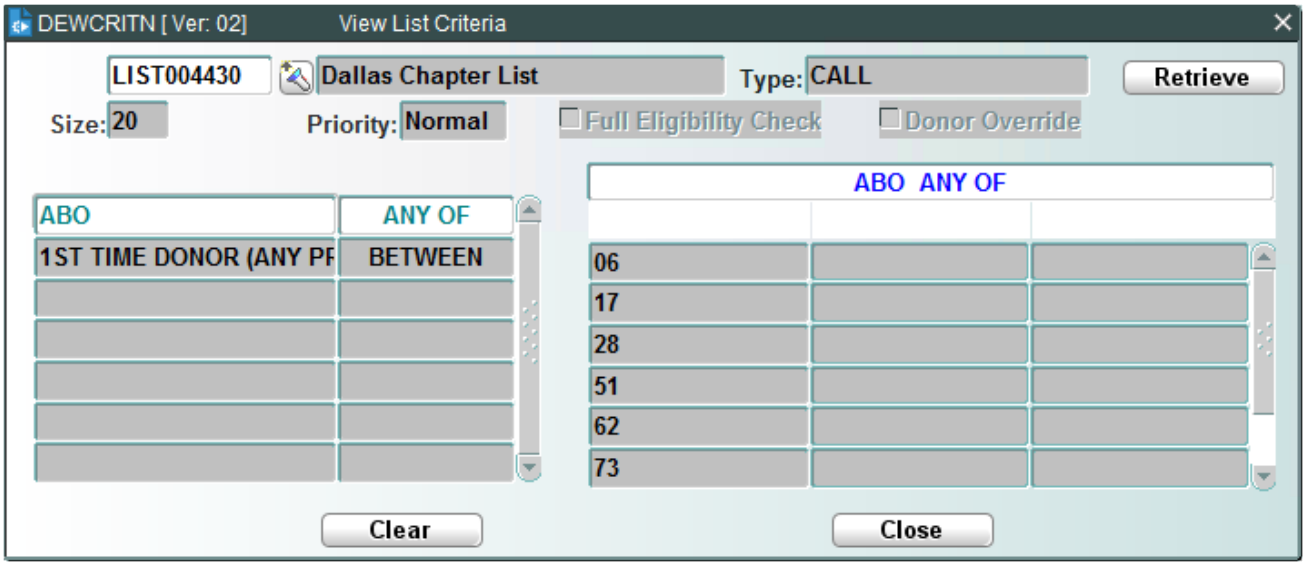


When opened, the View List Criteria program is populated with data from the host program. The following information displays:

- List ID and description
- List type
- List size
- List priority
- Indication by checkmark of full eligibility check
- Indication by checkmark of donor override
- Criterion and operator for list

## The Clear Button

Click **Clear** to clear all data from the window. This allows the user to search for and view a different list.

### List ID

Entry is required. Enter a list ID or choose from the LOV.

Click **Retrieve** to display data associated with the selected list.

## The Close Button

Click **Close** at any time to return to the host program.


WellSky Corporation
Proprietary and confidential

15

# Chapter 15 - Blood Centers API - Donor Functions


15.1 Introduction ..... 1024
15.1.1 Donor to HEMONETICS Hemasphere Interface ..... 1024
15.2 Blood Centers API Functions ..... 1032
15.2.1 API Temporary Data Query (APITDQ) ..... 1032
15.2.2 Blood Centers API Log Query (APILOG) ..... 1034
15.2.3 Extract Data to File (EXTRACTD) ..... 1036
15.2.4 External to Blood Centers Data Translation (APICONV) ..... 1038
15.2.5 Mobile PC Upload/Download Utility (MOBPCUD) ..... 1040
15.2.6 Mobile PC Laptop Register (MOBPCLR) ..... 1044

# 15.1 Introduction

The Blood Centers API (Application Program Interface) is used to upload the data into the primary Blood Centers tables on the server. The data could come from any external source; the external data is parsed and stored in the Blood Centers-provided API temporary tables. The parsing is not necessary if the external application directly store the data in the API tables.

The over-all process is as follows:

- Relevant data is populated in the corresponding API tables. For example, donor data is stored in the API_DONORS table, and donations data is stored in the HP_DONATIONS table, etc.
- The Blood Centers API reads each record from the API temp tables and validates the data if they are acceptable to the Blood Centers system.
- If the data are acceptable, the data are uploaded into the Blood Centers table. The data read from the API_DONORS table are then uploaded into the corresponding Blood Centers table DONORS.
- If the transaction mode is I, the record is inserted into the Blood Centers tables; if the transaction mode is U, the record is updated; if the transaction mode is D, the record is deleted.
- If the API finds any issues with the record, the record will not be uploaded, and the error record will be generated in the log table.
- The API converts the temporary ID assigned from the external application to the permanent Blood Centers ID.
- The upload process is completely automated by a cron job.

## 15.1.1 Donor to HEMONETICS Hemasphere Interface

Donor uses API tables to transfer donor and donation information from Donor to HEMONETICS Hemasphere and from HEMONETICS Hemasphere back to Donor. The following API tables are used for this transfer.

### HP_DONATION (Blood Centers to Hemasphere Donation Information)

| Column Name | Type | Notes |
|---|---|---|
| DONATION_ID | VARCHAR2(15) | |
| DRIVE_ID | VARCHAR2(10) | |
| DONATION_DATE | DATE | |
| DONATION_TIME | DATE | |
| DONATION_STATUS | VARCHAR2(10) | Only two values will be DONATION or DEFERRAL |
| BLOOD_TYPE | VARCHAR2(5) | See table A1 |
| PROCEDURE_CODE | VARCHAR2(5) | See table B1 |
| QNS | VARCHAR2(1) | Y or null only |


WellSky Corporation
Proprietary and confidential

| Column Name | Type | Notes |
|---|---|---|
| DOUBLE_STICK | VARCHAR2(1) | Y or null only |
| SCHEDULED_ONLINE | VARCHAR2(1) | Y or null only |
| FIRST_TIME_DONOR | VARCHAR2(1) | Y or null only |
| INSERT_DATE | DATE | |
| INTERFACE_DATE | DATE | |

## Table A1 (Blood Type)

| Code | Description |
|---|---|
| O+ | O+ |
| O- | O- |
| A+ | A+ |
| B+ | B+ |
| AB+ | AB+ |
| AB- | AB- |
| B- | B- |
| A- | A- |
| null | null |

## Table B1 (Procedure Codes)

Codes are configurable by site and must match the Blood Centers Valid Procedure Codes (PROCS) table.

| Code | Description |
|---|---|
| DP | 2 Platelet by Apheresis |
| DR | 2 RBC by Apheresis |
| L1 | 1 Platelet + 1 FFP by Apheresis |
| L2 | 2 Platelet + 1 FFP by Apheresis |
| LP | 1 Lymphocyte by Apheresis |
| MD | 2 Platelet + 1 RBC + 1 FFP by Apheresis |
| MS | 1 Platelet + 1 RBC + 1 FFP by Apheresis |
| PL | Jumbo FFP by Apheresis |
| PP | 1 Platelet by Apheresis |
| PS | Peripheral Stem Cell by Apheresis |
| R0 | 1 RBC by Apheresis |
| R1 | 1 Platelet + 1 RBC by Apheresis |

| Code | Description |
|---|---|
| R2 | 2 Platelet + 1 RBC by Apheresis |
| RP | 1 RBC, 1 FFP by Apheresis |
| TP | 3 Platelet by Apheresis |
| TT | Test Tubes for Prescreen |
| WB | Whole Blood |

## HP_DRIVE (Hemasphere to Blood Centers Drive Information)

| Column Name | Type | Notes |
|---|---|---|
| DRIVE_ID | VARCHAR2(10) | |
| DRIVE_DATE | DATE | |
| DRIVE_TYPE | VARCHAR2(5) | F, C, I only (Fixed, Coach or Inside) |
| SCHEDULE_START_TIME | DATE | |
| SCHEDULE_END_TIME | DATE | |
| RECRUITER_ID | VARCHAR2(6) | Required |
| LOCATION_ID | VARCHAR2(10) | Required |
| STATUS | VARCHAR2(5) | CNFRM, HOLD or CANCL only |
| PROJECTED_DRAW | NUMBER(6) | |
| PROJECTED_SHOW | NUMBER(6) | |
| SPONSOR_ID | VARCHAR2(10) | Required |
| SPONSOR_ID_2 | VARCHAR2(10) | |
| DRIVE_CATEGORY | VARCHAR2(5) | See Table A2 |
| FACILITY_CODE | VARCHAR2(5) | |
| INSERT_DATE | DATE | |
| LT_READ_DATE | DATE | |

### Table A2 (Drive Category)

| Code | Description |
|---|---|
| 2RBC | Double RBC Drive |
| APHER | Apheresis Product |
| CHRCH | Church |
| ELEMS | Elem School |
| GENL | General |
| HIGH | High Schools |
| HOSP | Hospital Drives |


WellSky Corporation
Proprietary and confidential

| Code | Description |
|---|---|
| JHIGH | Jr. High School |
| MEDIA | Media |
| RESRV | Reserve |
| ROUTN | Routine |
| SPPAT | Special Patient |
| STCEL | Stem Cell Collection |
| UNIV | College/University |
| VTECH | Vocational |

## HP_LOCATION (Hemasphere to Blood Centers Drive Information)

| Column Name | Type | Notes |
|---|---|---|
| LOCATION_ID | VARCHAR2(10) | |
| LOCATION_TYPE | VARCHAR2(5) | See Table A3 |
| LOCATION_NAME | VARCHAR2(50) | |
| EFF_DATE | DATE | |
| TERM_DATE | DATE | |
| STAFF_FACILITY | VARCHAR2(5) | |
| ZONE | VARCHAR2(5) | |
| STREET_NAME | VARCHAR2(50) | |
| STREET_NAME_2 | VARCHAR2(50) | |
| SUITE_APT | VARCHAR2(10) | |
| CITY | VARCHAR2(40) | |
| STATE | VARCHAR2(2) | |
| ZIP | VARCHAR2(6) | |
| E_MAIL | VARCHAR2(128) | |
| AREA_CODE | VARCHAR2(5) | |
| PHONE_NO | VARCHAR2(8) | |
| EXTENSION | NUMBER(6) | |
| INSERT_DATE | DATE | |
| LT_READ_DATE | DATE | |

## Table A3 (Location Type)

| Code | Description |
|---|---|
| FIX | Fixed Sites |
| MOB | Mobile Site |
| MOBC | Mobile Coach Only |
| MOBI | Mobile Inside Only |
| WKLY | Weekly Rotational Site (Not used routinely, set up as FIX) |

## HP_SPONSOR (Hemasphere to Blood Centers Drive Information)

| Column Name | Type | Notes |
|---|---|---|
| SPONSOR_ID | VARCHAR2(10) | |
| NAME | VARCHAR2(50) | |
| TERRITORY_ID | VARCHAR2(10) | |
| CATEGORY | VARCHAR2(5) | See Table A4 |
| STATUS | VARCHAR2(5) | |
| LOB | VARCHAR2(5) | See Table B4 |
| EMPLOYEE_BASE | NUMBER(8) | |
| PARENT_SPONSOR_ID | VARCHAR2(10) | |
| DEFAULT_LOCATION_ID | VARCHAR2(10) | |
| EFF_DATE | DATE | |
| TERM_DATE | DATE | |
| STREET_NAME | VARCHAR2(50) | |
| STREET_NAME_2 | VARCHAR2(50) | |
| SUITE_APT | VARCHAR2(10) | |
| CITY | VARCHAR2(40) | |
| STATE | VARCHAR2(2) | |
| ZIP | VARCHAR2(6) | |
| E_MAIL | VARCHAR2(128) | |
| AREA_CODE | VARCHAR2(5) | |
| PHONE_NO | VARCHAR2(8) | |
| EXTENSION | NUMBER(6) | |
| INSERT_DATE | DATE | |
| LT_READ_DATE | DATE | |


WellSky Corporation
Proprietary and confidential

## Table A4 (Sponsor Category)

| Code | Description |
|---|---|
| CIVIC | Elks,Masons,etc. |
| CLLGE | College/University |
| CMMTY | Community |
| CORP | Corporate |
| ELEMS | ElemSchool |
| FIXED | FixedSites |
| GOVT | Government |
| HISCL | HighSchool |
| HOSP | Hospital |
| JHIGH | JuniorHigh |
| MEDIA | Media |
| REG | Regular |
| RELIG | Religious |
| VTECH | Vocational |

## Table B4 (Sponsor Line of Business)

| Code | Description |
|---|---|
| BLDMG | Building Management |
| CHURC | Church |
| CIVIC | Civic/Community |
| CORPO | Corporate |
| ELEMS | ElemSchool |
| FIXED | FixedSite |
| GOVMT | Government Agency |
| HISCH | High School |
| HOSP | Hospital/Medical |
| JHIGH | Junior High |
| MEDIA | Media |
| RETAL | Retail |
| UNIV | College/University |
| VTECH | Vocational |

## HP_DRIVE_RESOURCE (Hemasphere to Blood Centers Drive Information)

| Column Name | Type | Notes |
|---|---|---|
| DRIVE_ID | VARCHAR2(10) | |
| RESOURCE_CODE | VARCHAR2(5) | See Table A5 |
| NUMBER_REQD | NUMBER(3) | |
| INSERT_DATE | DATE | |
| LT_READ_DATE | DATE | |

### Table A5 (RESOURCE_CODE)

| Code | Description |
|---|---|
| 2RBC | 2 RBC Machine |
| ALYX | Machine Name |
| BED | Bed |
| COACH | Coaches |
| STAFF | Staff |
| VAN | Van |

## HP_STAFF SCHEDULE (Hemasphere to Ceridian Payroll Data)

| Column Name | Type |
|---|---|
| SCHEDULE_ID | VARCHAR2(20) |
| DRIVE_ID | VARCHAR2(10) |
| STAFF_NO | VARCHAR2(6) |
| JOB_CODE | VARCHAR2(5) |
| SPECIAL_JOB_CODE | VARCHAR2(5) |
| IN_TIME_SCHEDULE | DATE |
| IN_TIME_ACTUAL | DATE |
| OUT_TIME_SCHEDULE | DATE |
| OUT_TIME_ACTUAL | DATE |
| FACILITY_CODE | VARCHAR2(5) |
| INSERT_DATE | DATE |
| LT_READ_DATE | DATE |


WellSky Corporation
Proprietary and confidential

## HP_DRIVE_SCHEDULE (Hemasphere to Blood Centers Drive Schedule)

| Column Name | Type | Notes |
|---|---|---|
| DRIVE_ID | VARCHAR2(10) | |
| SPONSOR_ID | VARCHAR2(10) | |
| LOCATION_ID | VARCHAR2(10) | |
| DRIVE_DATE | DATE | |
| PROC_CODE | VARCHAR2(5) | WB,DR or PP |
| TIME_OF_DAY | DATE | Military time |
| MAX_SLOTS | NUMBER(4) | |
| DONATION_TYPE_GROUP | VARCHAR2(5) | AI (allogeneic) or SP |
| INSERT_DATE | DATE | |
| LT_READ_DATE | DATE | |

# 15.2 Blood Centers API Functions

These functions are accessed from the following menu:

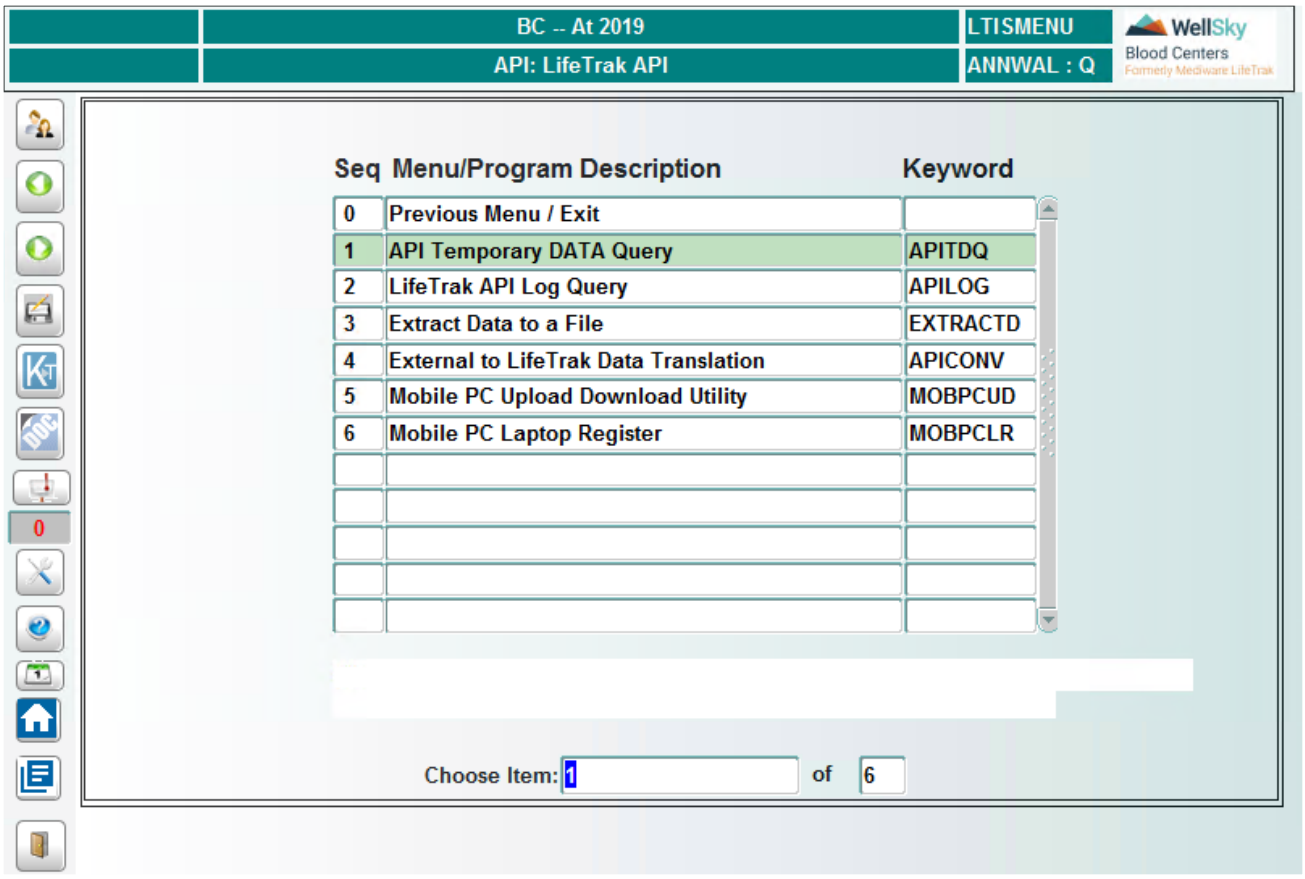


**NOTE –** The Extract Donor Information from Outside (EXTRACT) screen and the Mobile PC Laptop Register (MOBPCLR) screen should only be accessed from a laptop computer used for a mobile drive. For this reason, these screens are documented in the Donor Mobile PC Guide.

## 15.2.1 API Temporary Data Query (APITDQ)

### Intended Use

Use this screen to query on donor information that has been uploaded from the API holding tables.

### Limitations

None

### Prerequisites

Master Code APITY must be defined.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword APITDQ.

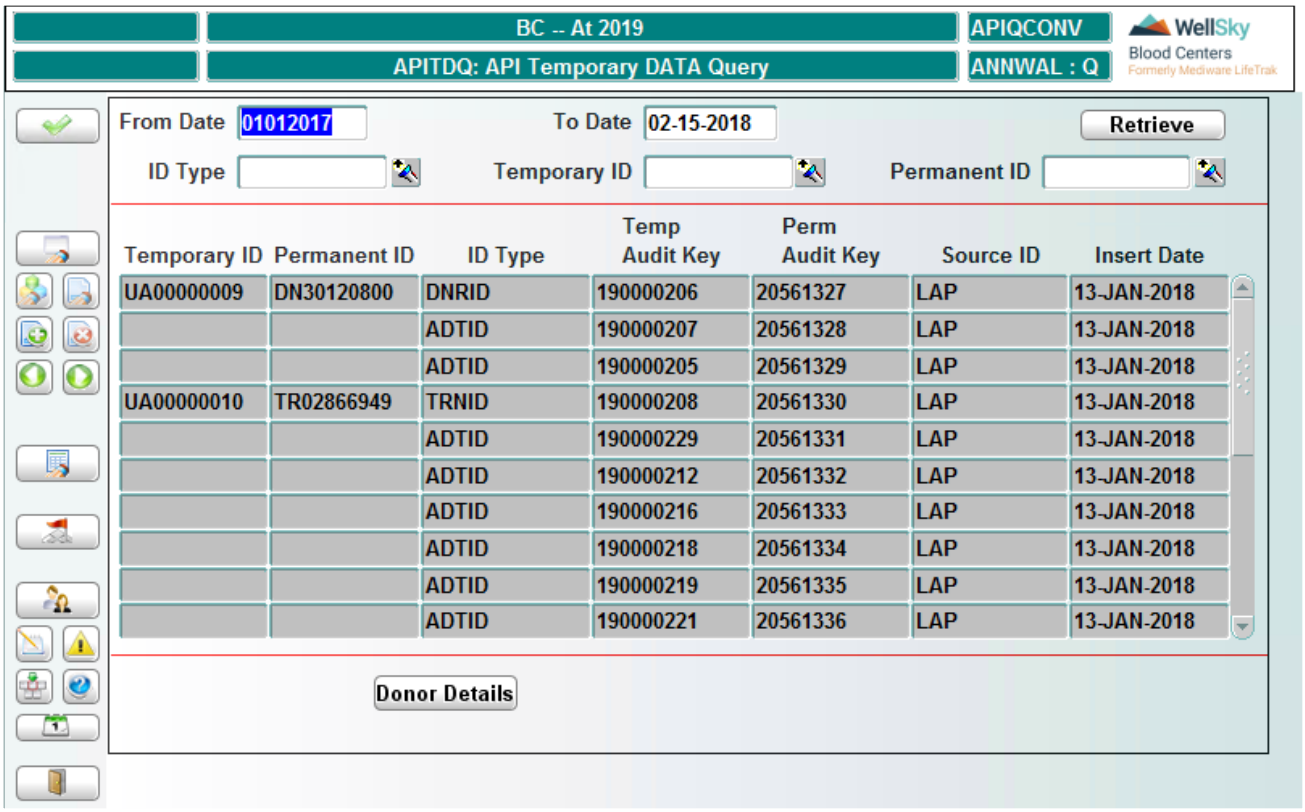


# Control Block Fields and Definitions

**NOTE –** At least one search criterion must be entered: a From Date/To Date range, ID Type, Temporary ID, or Permanent ID. More than one criterion can be entered to narrow the query.

## From Date

Enter the starting date for the search, using the MMDDYYYY format.

## To Date

Enter the ending date for the search, using the MMDDYYYY format.

## ID Type

Enter the ID type, or select from LOV.

## Temporary ID

Enter the temporary ID, or select from LOV.

### Permanent ID

Enter the permanent ID, or select from LOV.

## Retrieving Data

After entering the search criteria, click **Retrieve** to view a list of all temporary IDs that match the search criteria:

## In the Details Block

The following information displays:

- Temporary ID
- Permanent ID
- ID Type
- Temporary Audit Key
- Permanent Audit Key
- Source ID
- Insert Date

## The Donor Details Button

The Donor Details button will display donor details per SDONQ. This will allow the user to enter in the permanent donor ID, in order to query specific data about the donor.

## At Commit

No changes can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 15.2.2 Blood Centers API Log Query (APILOG)

## Intended Use

Use this screen to review all inbound data.

The system uses a unique external number associated to each transaction that is linked to a message; this is picked up from the outside source and displayed.

## Limitations

None

## Prerequisites

Master Code APISC must be defined.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword APILOG.

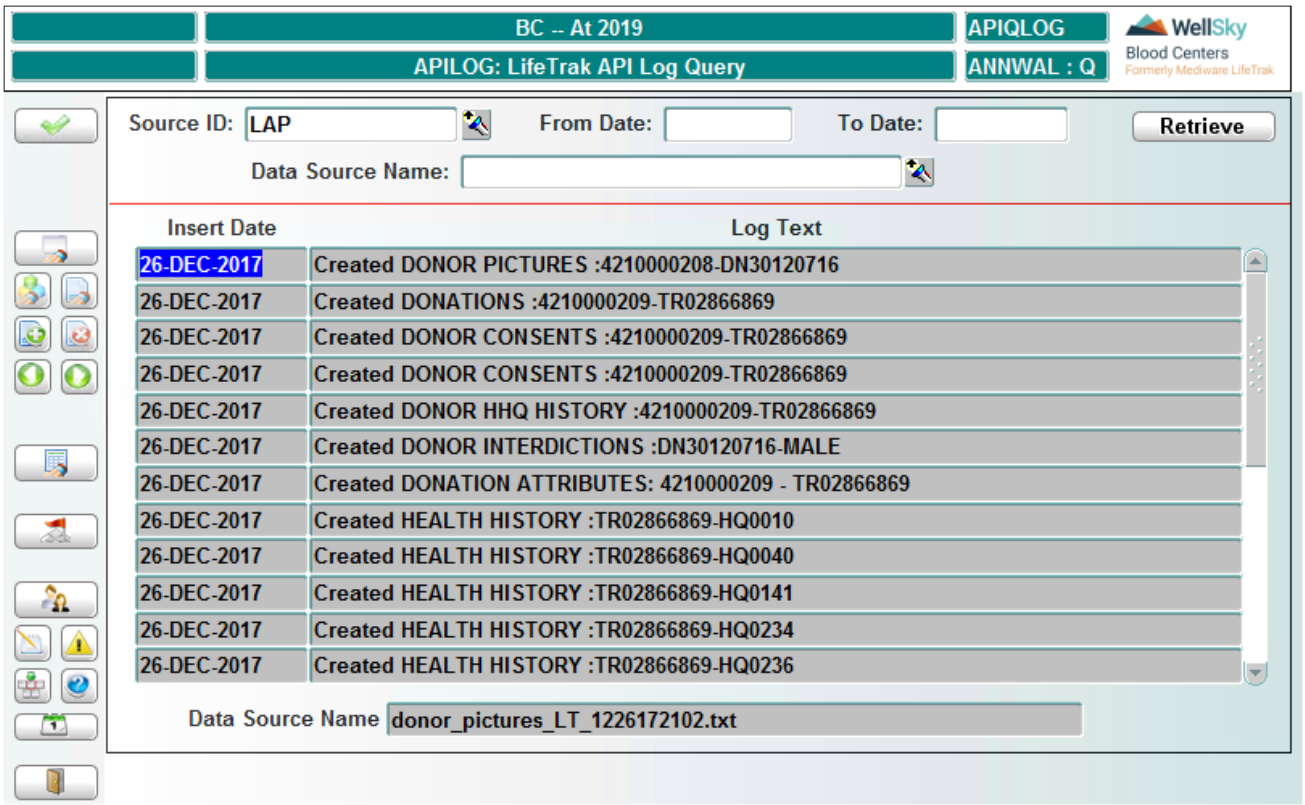


# Control Block Fields and Definitions

## Source ID

Enter source ID or select from LOV.

## From Date

Enter the starting date for the search, using the MMDDYYYY format.

## To Date

Enter the ending date for the search, using the MMDDYYYY format.

## Data Source Name

Enter data source name or select from LOV.

# Retrieving Data

After entering the search criteria, click **Retrieve** to view a list of data that match the search criteria.

## In the Details Block

The following information displays:

- Insert Date
- Log Text
- Data Source Name

## At Commit

No changes can be committed to the database from this screen.

## What to Do Next

There is no next step.

# 15.2.3 Extract Data to File (EXTRACTD)

## Intended Use

Use this screen to perform the data extraction from the Mobile laptop database. This process can be initiated as often as desired as a new file is created each time. The screen has a button to initiate the task. If there are no errors, the routine returns the success message; otherwise, the screen receives an error message.

**NOTE –** This screen is only used on the Mobile laptop when it is offline from the production database.

## Limitations

None

## Prerequisites

- The APIDR Master Code must be populated to specify the directory to which the data tables are extracted.
- The EXTDLT SYSPARM must be set to provide the delimiter used in the extract file for Mobile PC Donor Registration.
- The ENCRPT_REQ SYSPARM must be set to 'Y' to encrypt the data in the extract file; otherwise, the data in the extract file will not be encrypted.

## Accessing the Screen

Access this screen by entering the keyword `EXTRACTD`.


WellSky Corporation
Proprietary and confidential

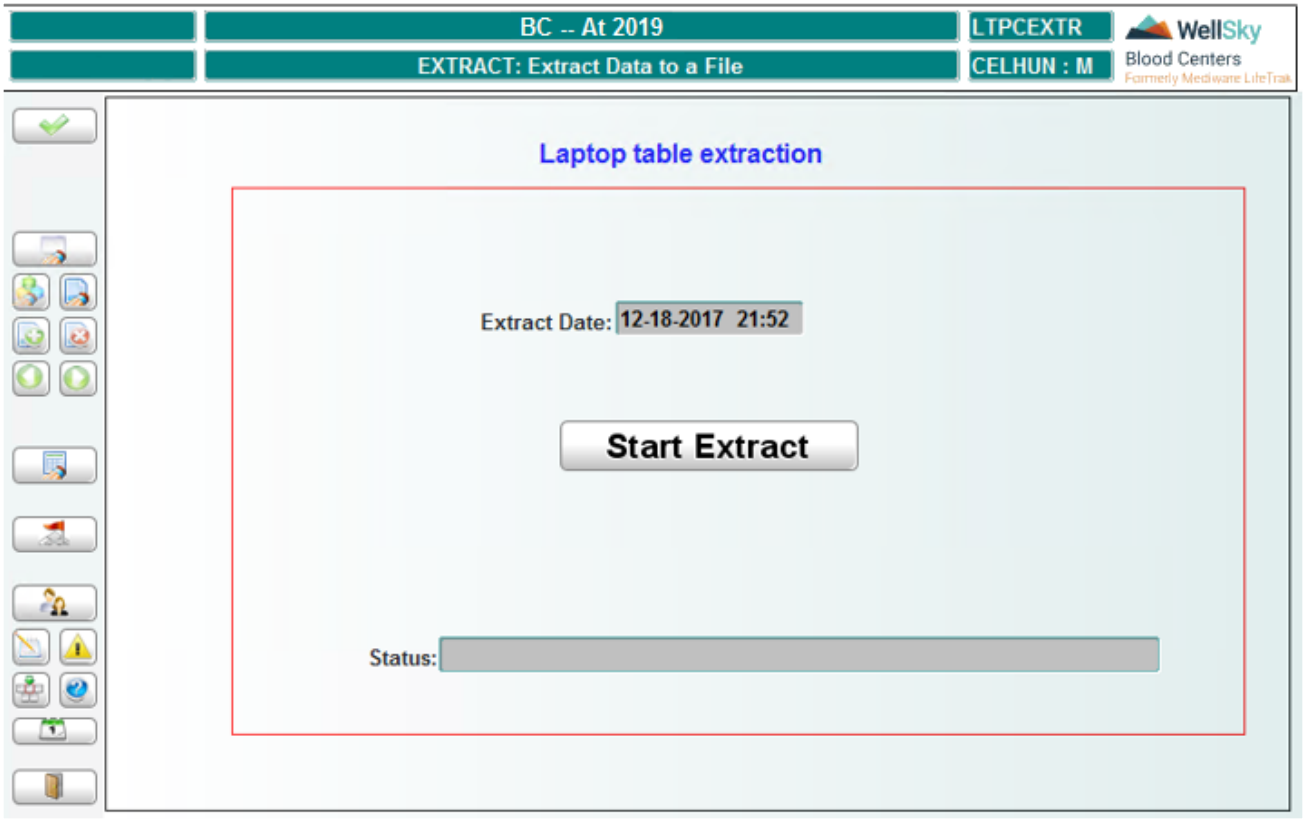


# Fields

## Extract Date

Date and time the extraction was started. Field is not navigable.

## Status

Status of the data extract. The field is populated at extract completion with the result of the extract process. Field is not navigable.

# Start Extract Button

Click **Start Extract** to begin the extraction.

# At Commit

No changes can be committed to the database from this screen.

# What to Do Next

There is no next step.

# 15.2.4 External to Blood Centers Data Translation (APICONV)

## Intended Use

Use this screen to translate external codes to codes that will be used in Blood Centers. If the external facility sends an outside ID that is not defined in the table or is not defined in Blood Centers, an error will be generated in the log.

## Limitations

You must know the source value to be entered for each source type. A list is not available.

## Prerequisites

The following master codes must be defined:

- IDPSR populates the LOV for the source ID in the control block
- IDPTR populates the LOV for the target ID in the control block
- IDPTP populates the LOV for the entry of the source type in the details block.
- IDPTV populates the LOV for the entry of the target type in the details block.

## Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword `APICONV`.

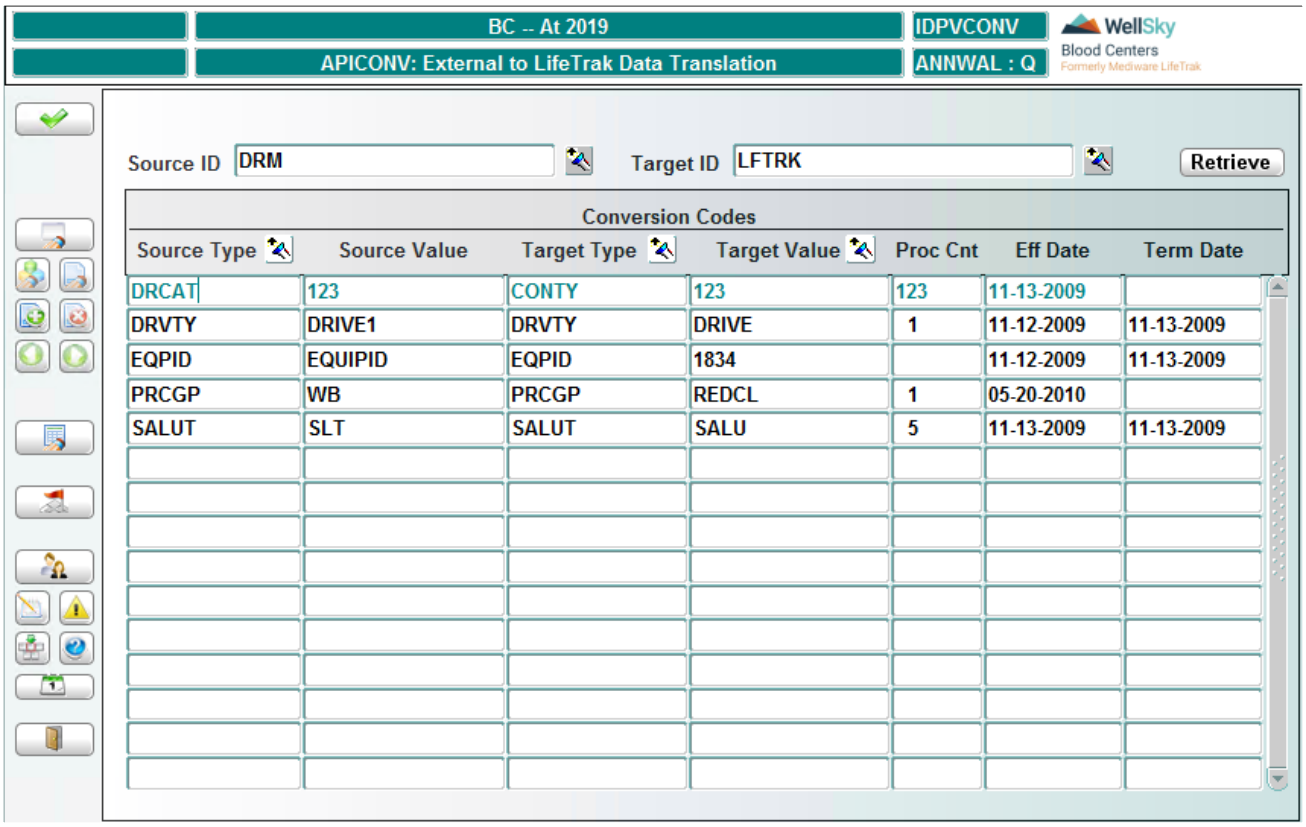



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Source ID

Enter source ID or select from the LOV.

**NOTE –** Source ID comes from the Master Code IDPSR.

## Target ID

Select LFTRK from the LOV. This is the only valid entry.

**NOTE –** Target ID comes from Master Code IDPTR.

# Detail Block Fields and Definitions

## Source Type

Enter a source code type or select from the LOV. Source code type is the code that is being sent from the outside application and will need to be translated to a value that Blood Centers can accept.

**NOTE –** Source Type comes from Master Code IDPTP.

## Source Value

Enter a code value that is used by the external application and needs to be translated to a value that will be accepted by Blood Centers.

## Target Type

Enter a target type or select from the LOV. These types are represented by various master codes.

**NOTE –** Target Type comes from Master Code IDPTV.

## Target Value

Enter a target value or select from the LOV. These values are defined in master codes in which Blood Centers will accept.

## Proc Cnt

Number of procedures this will count for eligibility when translating a procedure code.

## Eff Date

Enter the effective date in MMDDYYYY format.

## Term Date

Enter the termination date in MMDDYYYY format. This field is optional.

## At Commit

Updates the translation table used by the IDP.

## What to Do Next

There is no next step.

# 15.2.5 Mobile PC Upload/Download Utility (MOBPCUD)

## Intended Use

Use this screen to download and upload donor data so that mobile blood drives can access donor data without a network connection to the Blood Centers application. Specifically, you can:

- download donor data from the Blood Centers application server to a mobile site master laptop
- upload donor data from a mobile site master laptop to the Blood Centers application server

Donor data can be downloaded from the Blood Centers application server to a mobile site master laptop. This data contains complete donor information to identify uniqueness of donor, eligibility, deferrals (interdictions), and historical donation/deferral data including previous answers to health history questions. With this downloaded data, the OnSite Registration module is fully functional at the mobile site, and can perform all the registration and donation (or deferral) donor activities offline.

The donor data collected offline at the mobile site can then be uploaded from the mobile site master laptop to the Blood Centers application server. The upload from the mobile master laptop to the Blood Centers application server will contain registration and donation (or deferral) data, and provides complete documentation of the donation and deferral processes managed within the OnSite Registration Module.

Up to a maximum of six laptops can be connected to a master laptop, which functions as a server. The master laptop synchronizes data flow among laptops and enables the data update to the Blood Centers application server.

## Limitations

- Only data committed to the database can be downloaded to the laptop server.
- The user may leave the screen while the host server executes the database upload. The status will continue to display as long as the user remains on the screen, but it will not display once the user logs out.

## Prerequisites

- A master laptop, which meets the minimum requirements for data download as established by WellSky, must be identified for downloads and uploads.
- To maintain security and data integrity, all uploads and downloads should be performed via a secure and wired connection.
- You must have sufficient administrative permissions to access the download and upload functionality. If you do not have sufficient permission, the option will not appear on the Blood Centers API menu.
- Designate the directory on the hard drive of the master laptop where extracted donor data is stored by setting the master code APIDR.


WellSky Corporation
Proprietary and confidential

## Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword `MOBPCUD`.

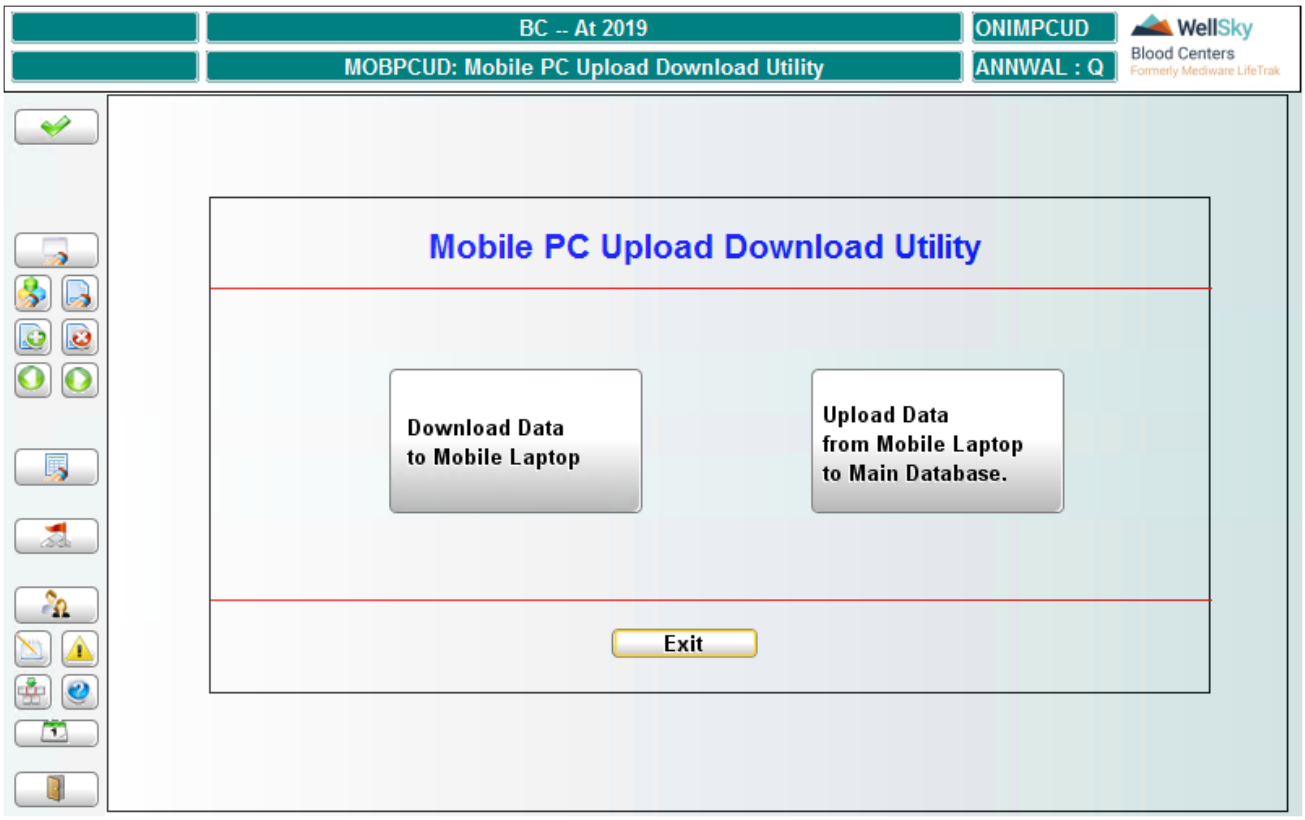


## The Download Data to Mobile Laptop Button

**Important!** Downloading data to the Mobile laptop overwrites all information in the local database on the Mobile laptop. It is recommended that you perform a data extraction on the Mobile laptop before performing the download.

The Donor application server runs a Cron job at established intervals (WellSky recommends once per day) to create a current database file that can be exported to the mobile site master laptop.

Perform the following steps to download the data from the Blood Centers application server to your mobile laptop:

**NOTE –** These directions are completed on the Mobile laptop that is accessing the production application.

1. On the Mobile PC Upload Download Utility screen, click **Download Data to Mobile Laptop** to initiate the download of donor data from the Blood Centers application server to the mobile site master laptop. The following warning displays:

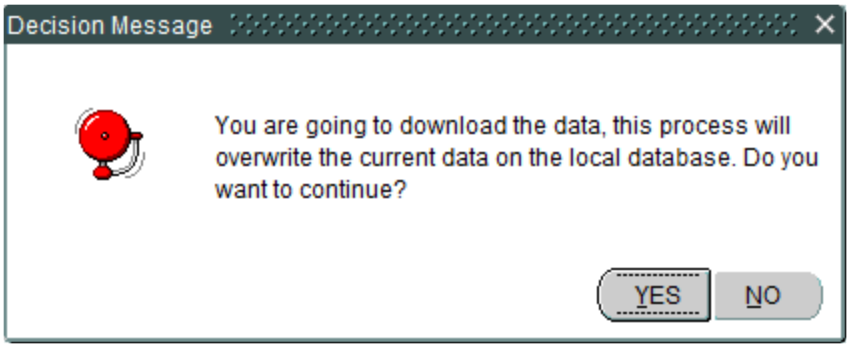


2. Click YES to continue with the download. A progress bar appears, displaying the download progress.

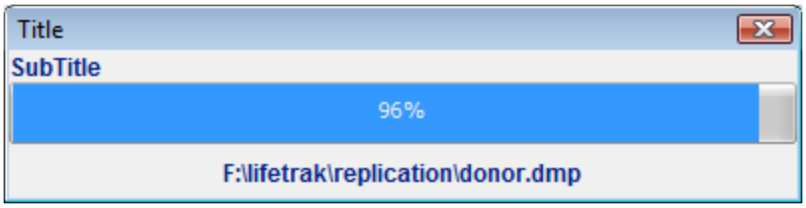


**NOTE –** Download time depends on your network bandwidth and the size of the files you are downloading.

3. When the download is complete, the following message displays indicating the number of files that were successfully downloaded. Click OK.

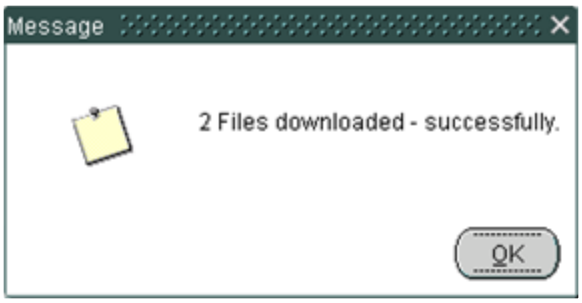


4. Close the application and check the log files located at D:\lifetrak\replication\log directory to make sure that no errors occurred.

## The Upload Data from Mobile Laptop to Blood Centers Application Button

**NOTE –** These directions are completed on the mobile laptop that is accessing the production application.


WellSky Corporation
Proprietary and confidential

After collecting donor data during the mobile drive, you must use the offline menu function to generate the files and extract the data that is then stored on the hard drive of the mobile laptop.

**NOTE –** For more information on extracting the donor data, see the Extract Data to File (EXTRACT) section.

The extracted data files are portable and can be copied to the extract directory on another mobile master laptop prior to upload, if needed. The size of the data file will vary, depending on the amount of donor information collected during the mobile drive.

On the Mobile PC Upload Download Utility screen, click Upload Data to from Mobile Laptop to Blood Centers Application to initiate the upload of donor data from the mobile site master laptop to the Blood Centers application server. A confirmation message appears when the upload is complete.

**NOTE –** An error message displays if the system cannot complete the upload.

**NOTE –** Perform an API Log Query to verify if the upload was complete or if there were errors. See Blood Centers API Log Query (APILOG) in this Chapter for more information.

## Recommendations

The following are recommended:

- Downloads from the application server to laptops should be performed during non-peak times.
- To ensure that all current data are included in the Cron job data file, make sure that all daily collections/deferral updates are committed to the database before the Cron job's scheduled run time.
- To make sure that the information available at your mobile site is most current, perform the download at the latest possible time before a drive. If you are uncertain whether or not current data has been downloaded, perform a download.
- If you are uncertain whether or not data has been uploaded from the mobile laptop server to the Blood Centers application server, perform an upload. Only new data is transferred to the Donor database during an upload. If an upload has already occurred, a second upload will not adversely affect the database.

## At Commit

- At download, a current copy of the Donor database is placed on a laptop server, enabling mobile drive staff to use existing and collect new donor data for a drive without accessing the network. The download is date and time stamped in the Donor database.
- At upload, a copy of the data collected by staff during a mobile drive is uploaded to the Blood Centers application server, updating the Donor database.

## What to Do Next

There is no next step.

# 15.2.6 Mobile PC Laptop Register (MOBPCLR)

## Intended Use

Use Mobile PC Laptop Register to identify mobile laptop servers and configure the audit key definition for the server.

## Limitation

Only used for mobile laptop servers.

## Prerequisite

Need to know all laptop servers and audit increment so it is not duplicated.

## Accessing the Screen

Access this screen from the LifeTrak API menu or by entering the keyword `MOBPCLR`.

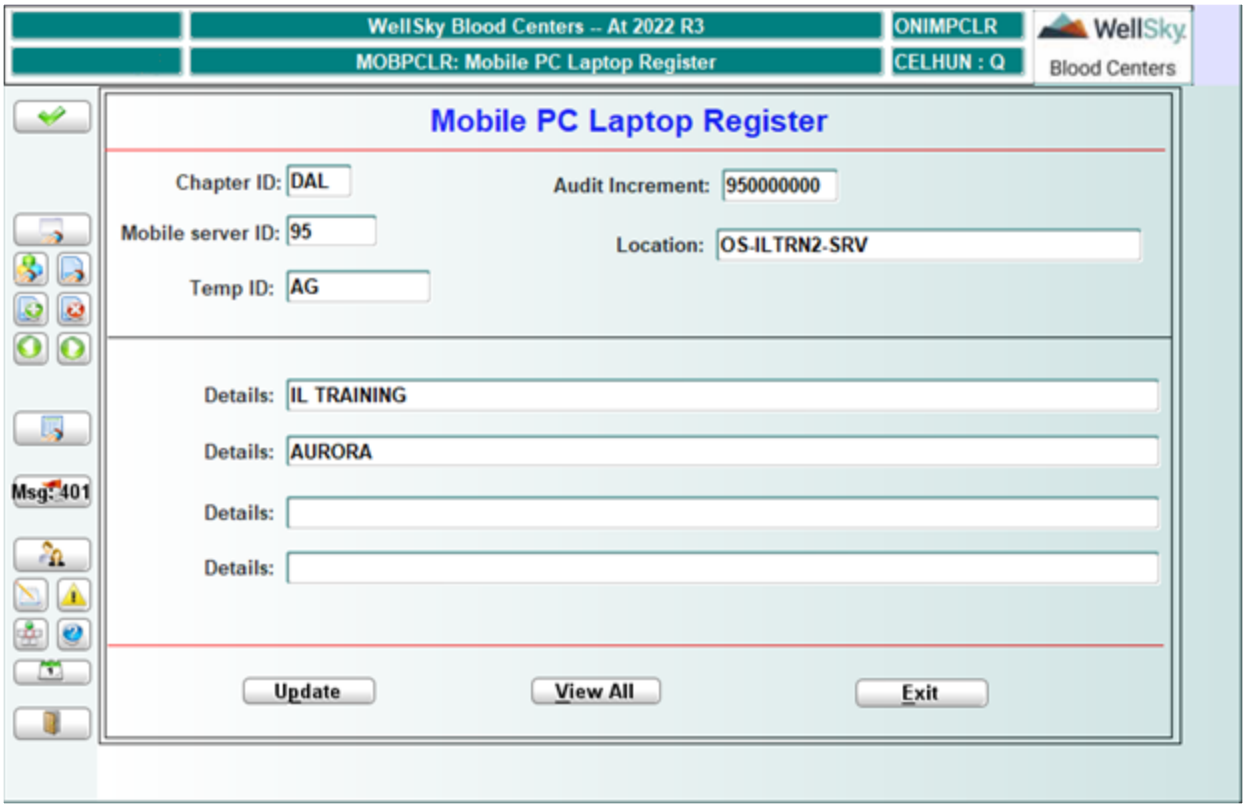


## Control Block Fields and Definitions

### Chapter ID

Enter the chapter ID with which the mobile server will be associated. Manually enter or select it from the list of values (LOV).


WellSky Corporation
Proprietary and confidential

### Mobile server ID
Entry is required in this field. Enter a mobile server ID. The field allows alphabetic and numeric values up to 6. This field entry cannot be duplicated. The user will receive an error if the entry is a duplicate.

### Temp ID
Entry is required in this field. The field allows alphanumeric values, and can be a maximum of 2 characters. This field entry cannot be duplicated from other servers. The user will receive an error if the entry is a duplicate.

### Audit Increment
Entry is required in this field. Enter the audit key used on the mobile server. This key will automatically be set on the mobile server when the download occurs. The audit increment cannot be duplicated between mobile servers; the user will receive an error if it is duplicated. The audit increment must be numeric ONLY. A maximum of 10 digits is allowed.

### Location
Entry is required in this field. Location IDs can use numbers, alphabetic characters, and special characters. Entry can be a maximum of 200 characters.

## Detail Block Fields and Definitions

### Details
This is an optional field. The field is free-format and allows a maximum of 500 characters.

### Details
This is an optional field. The field is free-format and allows a maximum of 500 characters.

### Details
This is an optional field. The field is free-format and allows a maximum of 500 characters.

### Details
This is an optional field. The field is free-format and allows a maximum of 500 characters.

## Register Button
After completing the data entry in the form fields, click Register or use **ALT+R** to commit the data to the database.

## View All Button
Click View All or use **ALT+V** to query the mobile servers that have been defined for the facility.

## Exit Button
Click Exit or use **ALT+E** to close the form and not commit any entered data.

## To EDIT

To edit data for a mobile server that has already been defined, select the row and click **Edit** or use **ALT+D** to populate the parent form. Once **Edit** is clicked, the parent form is populated with the predefined data and can be updated.

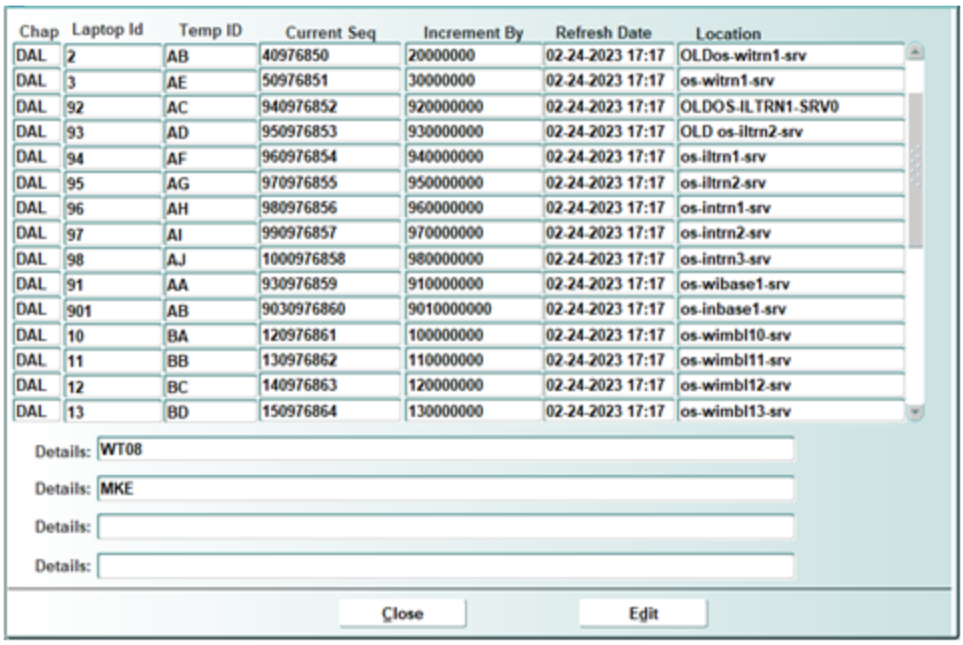


Open the parent form, update the information, and click **Update** or use **ALT+P**.

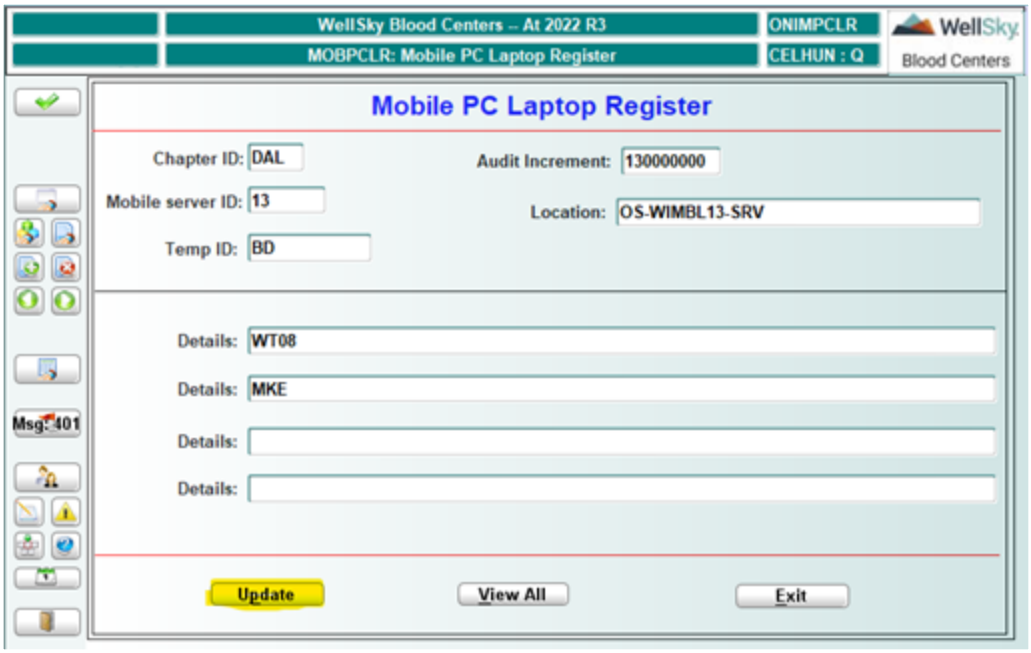


Once the data is updated and **Update** is clicked, the form is cleared.


WellSky Corporation
Proprietary and confidential

## At Commit

Data is committed to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen).

This Page Intentionally Left Blank

16

# Chapter 16 - Vista Interface

16.1 Introduction ..... 1050
16.2 Vista Interface Functions ..... 1051
16.2.1 Vista Interface Status (VSTATUS) ..... 1051
16.2.2 Vista-Blood Centers Conversion Table (VCONV) ..... 1054
16.2.3 Vista-Blood Centers Error Log (VERROR) ..... 1058

# 16.1 Introduction

The Vista Interface Module is that portion of Donor designed to provide an interface to the Donor database through which message records from external user applications, equipment, or systems can post information in the Donor database.

The following screens provide the capability to display and change the status of active Vista donations, configure Vista data and convert it to an acceptable value in Donor, and view messages that are generated during the processing and receiving of messages to and from Vista.


WellSky Corporation
Proprietary and confidential

# 16.2 Vista Interface Functions

These functions are accessed from the following menu:

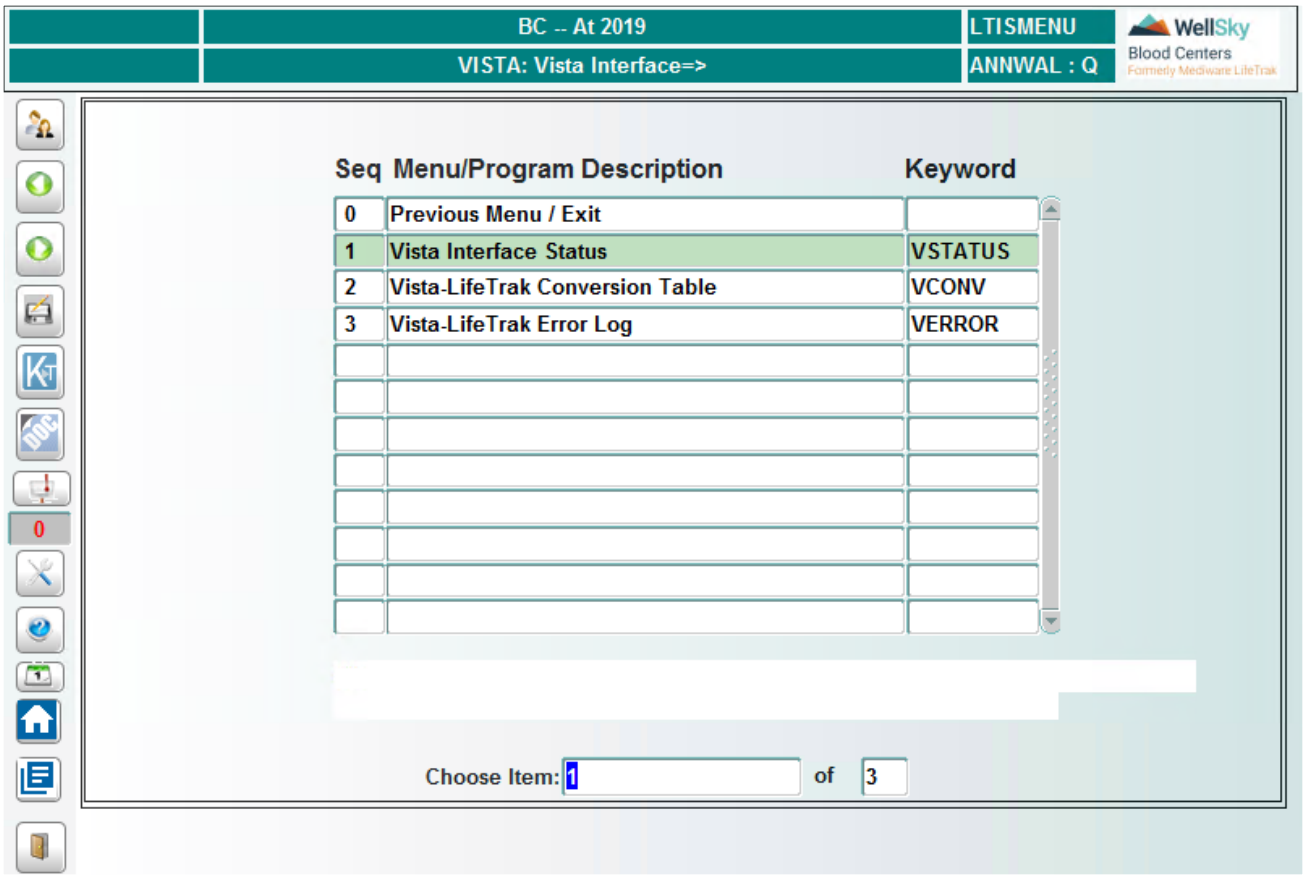


## 16.2.1 Vista Interface Status (VSTATUS)

### Intended Use

Use this screen to display active Vista donations and On-site Registration automated status. You can also use this screen to change automated donation status under certain conditions.

### Limitations

A donation with a status of Registered cannot be changed to Pending.

### Prerequisites

Donation should be registered for the Vista donations type.

### Accessing the Screen

Access this screen from the Vista Interface menu or by entering the keyword `VSTATUS`.

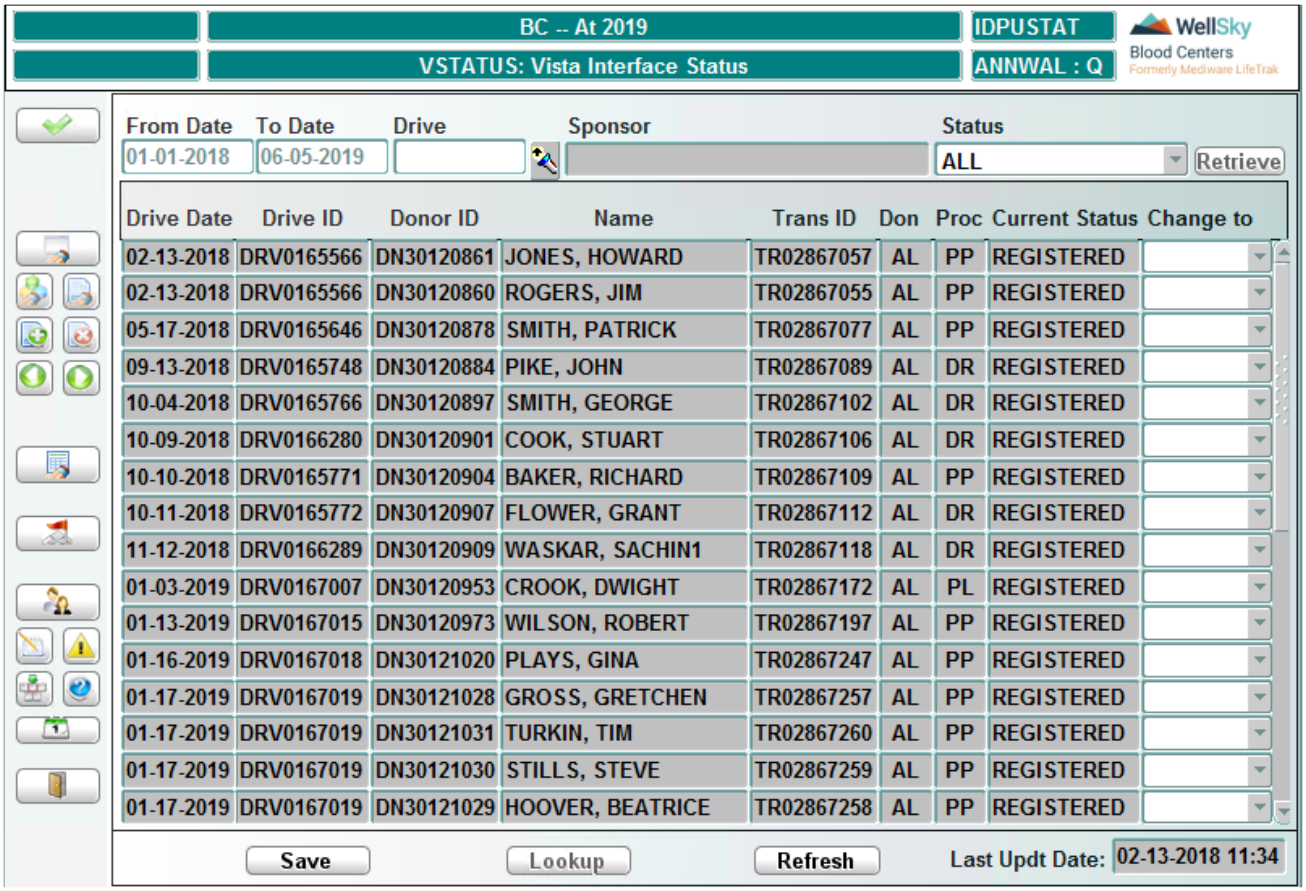


# Control Block Fields and Definitions

Use these fields to select the desired parameters for the search.

## From Date

Enter from date in MMDDYYYY format. Field is required.

## To Date

Enter to date in MMDDYYYY format. Field is required.

## Drive

Enter Drive ID or select from LOV. Leave field blank if you do not want to use the Drive ID as a search parameter.

## Sponsor

If a Drive ID is selected, the sponsor name populates. Field is not navigable.

## Status

Enter Status or select from LOV. Leave field blank if you do not want to use Status as a search parameter.

## Retrieving Data

Click **Retrieve**. All records meting the search criteria are displayed.

## Detail Block Fields and Definitions

The following information displays for each donor:

- Drive Date
- Drive ID
- Donor ID
- Donor Name
- Transaction ID
- Procedure
- Current Status
- Last Update Date

## Changing the Current Status

You can change the status of an entry by doing the following:

- Click on the *Change To* field for the entry to be changed.
- Select the desired status (Pending or Cancel).
- Click **Save** to save the change.
- Click **Refresh** to refresh the screen.

**NOTE –** You cannot change the status of an entry from Registered to Pending.

## The Lookup Button

Click **Lookup** to view uploaded data information for a donor whose current status is Completed. The following window opens.

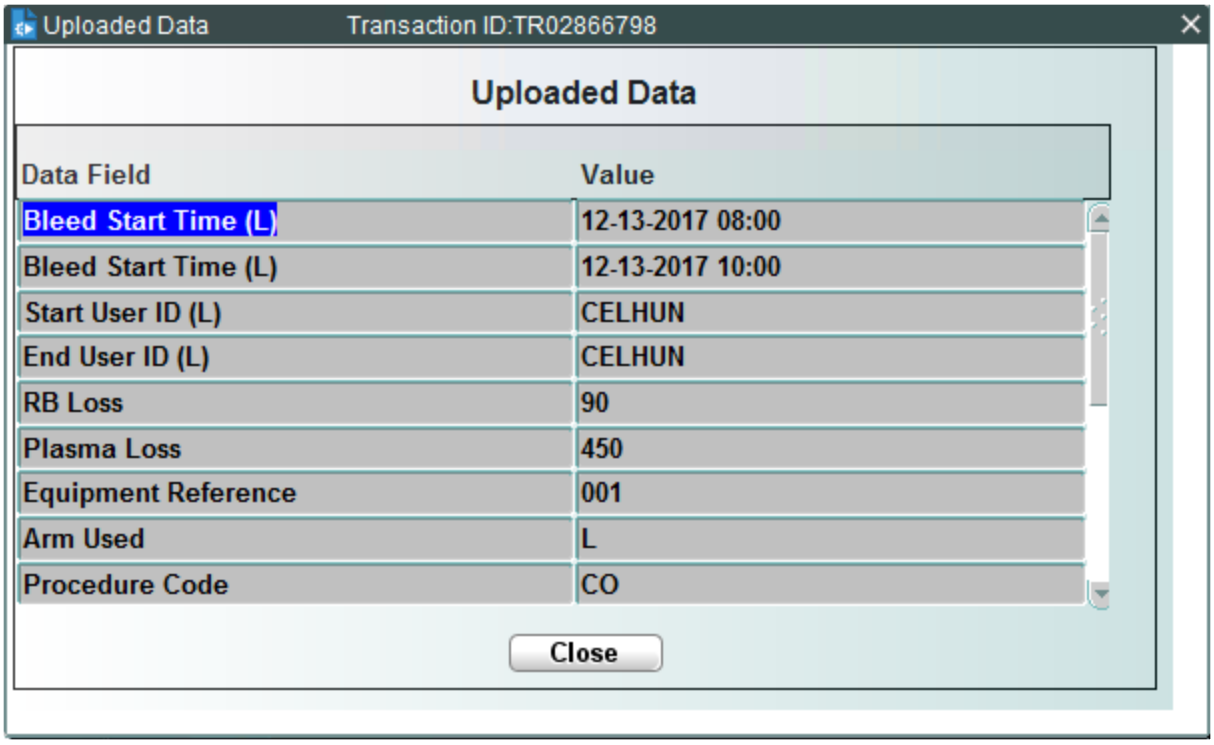


Click **Close** to close the window.

## At Commit

Any change of status is committed to the database.

## What to Do Next

There is no next step.

# 16.2.2 Vista-Blood Centers Conversion Table (VCONV)

## Intended Use

Use this screen to configure Vista data and convert it to an acceptable value in Donor. Data entry is associated to effective and termination dates to determine active configuration.

## Limitations

- You cannot enter duplicate values for the combination of same source ID, target ID, source type, source value, target type and target value.
- If the hematocrit and hemoglobin are both sent in the same file, Vista manages only one or the other and hot both. Hematocrit is the primary value, and hemoglobin is the secondary value.

## Prerequisites

The following master codes must be defined:

- IDPSR populates the LOV for the source ID in the control block.
- IDPTR populates the LOV for the target ID in the control block.
- IDPTP populates the LOV for the entry of the source type in the details block.
- IDPTV populates the LOV for the entry of the target type in the details block.

1. IDPDR – VISTA directory name (where files will be placed.)

2. IDPEP – List procedure codes that will require equipment. When message is received from Vista and contains equipment information it will upload it. Note: the Type, serial # and ID must defined in the Vista conversion table (VCONV), and the equipment must be defined in EQUIPMENT in Lab to generate the reference ID and serial number.

3. IDPEP – List procedure codes that will require equipment. When message is received from Vista and contains equipment information it will upload it. Note: the Type, serial # and ID must defined in the Vista conversion table (VCONV), and the equipment must be defined in EQUIPMENT in Lab to generate the reference ID and serial number.

4. IDPEX – Procedures that will not be collected through the VISTA interface

5. IDPSR – IDP Source Type used in the SOURCE field in program – IDPVCONV (External to Blood Centers Data Translation – APICONV) - these source types should match data that is coming from the other system.

6. IDPTP – External Interface Source Type – fields within the Vista in which data will be mapped to Blood Centers from VISTA.

7. IDPTR – Vista or IDP Target ID – this will be populated with Blood Centers. Data going out of Vista to what application.

8. IDPTV – Internal Application Target type – the fields in Blood Centers that will be configured to match in Vista. (these values cannot be added by the user these are static values)

9. ACLAS – Access Classes- need to Add in the access class of VSTAT- Vista Change To Status

10. APISC – API Source Description and Codes used in APIQLOG

11. APITY – Type of ID described using in APICONVQ

The following system parameters must be defined:

1. IDP_FCN – set to Y to turn on the VISTA function.

2. IDPNR – The status will be changed to NR after this number of hours

3. CUE_LOC – determine where the CUE field will be entered, ONIBLEED, ONUNTLNK

4. VHEMAT – hematocrit value entered here must match the value defined in physical findings values (VDIPHYRL). (HCT)

5. VHEMOG – hemoglobin value entered here must match the value defined in Donor Physical Findings values (VDIPHYRL). (HGB)

6. VPLATE – platelet code that must match the value defined in Donor Physical Findings Values (VDIPHYRL).(PLT)

7. VRBCRT – RBC Return Physical code –defined in Donor Physical Findings Values (VDIPHYRL).(RBCRT)

8. IDP_PURGE – File is purged according to days listed in system parameter

## Accessing the Screen

Access this screen from the Vista Interface menu or by entering the keyword VCONV.

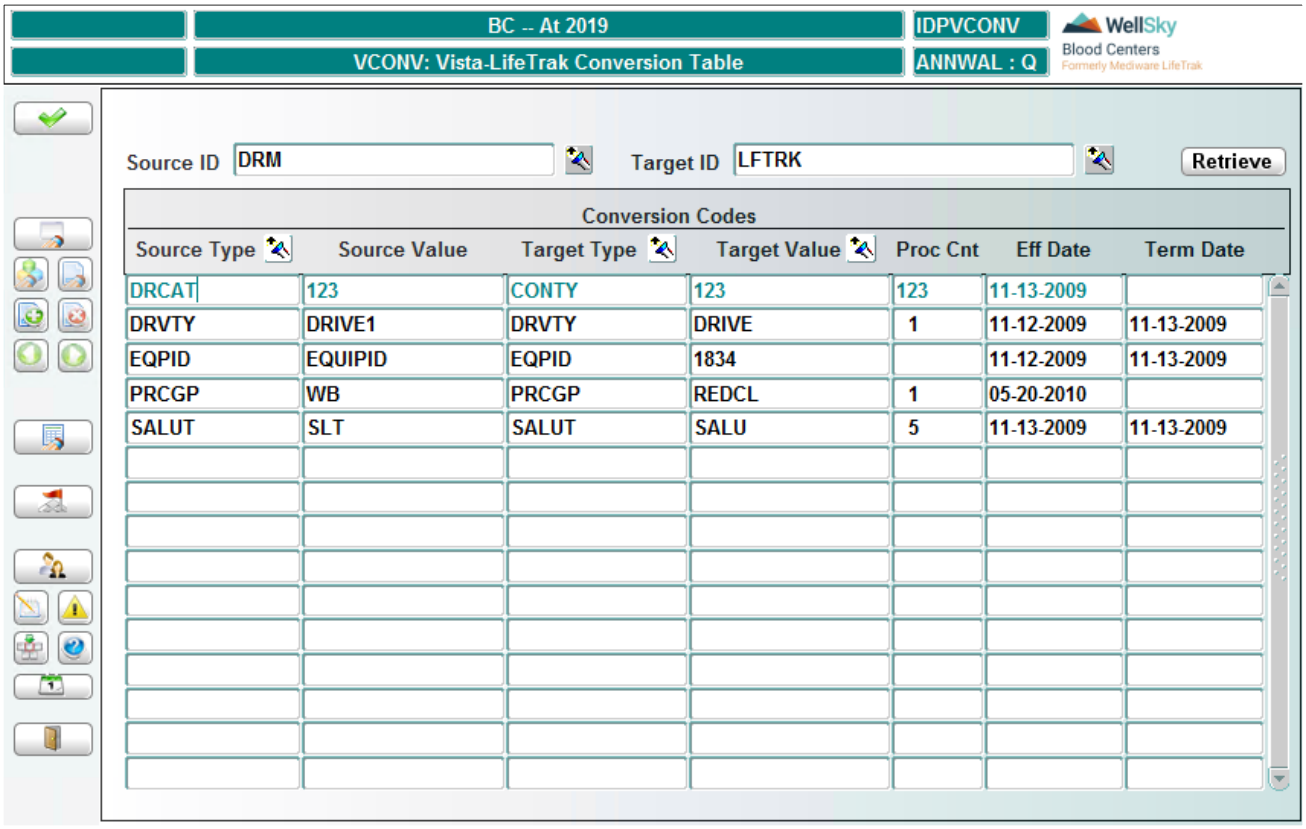


## Control Block Fields and Definitions

### Source ID

Enter source ID or select from the LOV. Entry is required.

**NOTE –** Source ID comes from the Master Code IDPSR.

### Target ID

Enter Target ID or select from the LOV. Entry is required.

**NOTE –** Target ID comes from the Master Code IDPTR.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

The system displays the following information for each existing record. To modify existing records, click in the desired field and modify as needed. To create a new record, click INSERT .

## Source Type

Enter a source code type or select from the LOV. Source code type is the code that is being sent from the outside application and will need to be translated to a value that Blood Centers can accept.

**NOTE –** Source Type comes from the Master Code IDPTP.

## Source Value

Enter a code value that is used by the external application and needs to be translated to a value that will be accepted by Blood Centers.

## Target Type

Enter a target type or select from the LOV. These types are represented by various master codes.

**NOTE –** Target Type comes from the Master Code IDPTV.

## Target Value

Enter a target value or select from the LOV. These values are defined in master codes in which Blood Centers will accept.

## Proc Cnt

Enter procedure count. Field is required if Procedure Code (PROC) is selected as the Target Type.

## Eff Date

Enter the effective date in MMDDYYYY format.

## Term Date

Enter the termination date in MMDDYYYY format. This field is optional.

# At Commit

Updates the translation table used by the IDP.

# What to Do Next

There is no next step.

# 16.2.3 Vista-Blood Centers Error Log (VERROR)

## Intended Use

Use this screen to view the messages that are generated during the processing and receiving of messages to and from Vista.

## Limitations

Messages must not have not been previously purged from file.

## Prerequisites

- IDP interface must be configured to be turned on.
- Conversion data must be defined in Vista Blood Centers Conversion (IDPVCONV).

## Accessing the Screen

Access this screen from the Vista Interface menu or by entering the keyword VERROR.

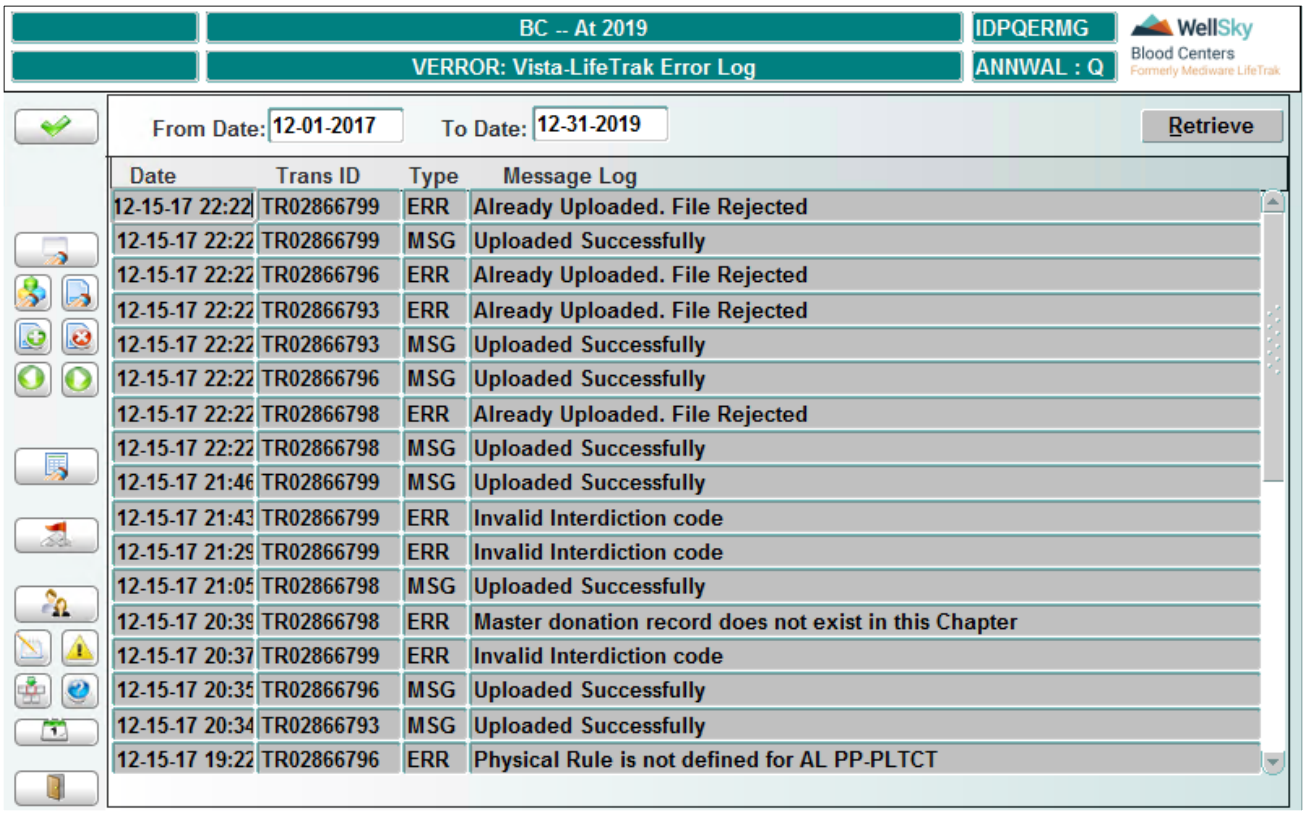



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## From Date

Entry is required. System date automatically populates. Accept system date or enter desired From date in MMDDYYYY format.

## To Date

Entry is required. System date automatically populates. Accept system date or enter desired To Date in MMDDYYYY format.

# Retrieving Data

Click **Retrieve** to display messages.

# Detail Block Fields and Definitions

The following data displays for each message:

- Date
- Transaction ID
- Type
- Message Log Information

# At Commit

No data can be committed to the database from this screen.

# What to Do Next

There is no next step.

This Page Intentionally Left Blank

# [Lab Functions (LAB)]

This Page Intentionally Left Blank

18

# Chapter 18 - Material Check-In


18.1 Introduction ..... 1064
18.1.1 Overview ..... 1064
18.1.2 Structure ..... 1064
18.2 General Check-in Functions ..... 1065
18.2.1 Check-In and Donor Source Card Entry (DSCE or DSCE2) ..... 1065
18.2.2 Bag Check-In (BAGS) ..... 1070
18.2.3 Tube Check-In (TUBES) ..... 1074
18.2.4 Tube Shipment (TSHIP) ..... 1076
18.2.5 Lab Warehouse Checkout (LBWHOUT) ..... 1079
18.2.6 Lab Warehouse Check-In (LBWHIN) ..... 1083
18.2.7 Reconcile Lab Warehouse Batch (LBWHRCL) ..... 1085
18.2.8 Auto Transfer Data from Donor to Lab (AUTOCKIN) ..... 1088
18.3 Check-in Maintenance Functions ..... 1093
18.3.1 QC of Check-In Batch (QCCHK) ..... 1093
18.3.2 Modify Donor Source Card Details (MODDSC) ..... 1097
18.3.3 Modify Check-In Batch Details (MODBATCH) ..... 1102
18.3.4 Delete Non-Unit Tubes (DTUBE) ..... 1104
18.3.5 Change Unit Collection Date (COLLDATE) ..... 1106
18.3.6 Override Donor CUE (CUEOVR) ..... 1108
18.3.7 Delete Unit from System (DELUNIT) ..... 1110
18.4 Check-in Queries ..... 1113
18.4.1 Check-In Batch Query with Unit Data (BATCHQ) ..... 1113
18.4.2 Check-In Batch Data Query (BATCHDQ) ..... 1115
18.4.3 Check-In Batch Exception Query (BATCHEXQ) ..... 1117
18.4.4 Check-In Exception Query (CHECKEXQ) ..... 1119
18.4.5 CUE Override Query (CUEQ) ..... 1121
18.4.6 Lab Warehouse Transfer Query (LBWHQ) ..... 1122

# 18.1 Introduction

## 18.1.1 Overview

Material Check-In is designed to ensure accountability of all materials associated with each unit of blood.

The data from the Donor Source Card (DSC), blood bag and tube(s) is merged in material Check-In so that all data and materials can be accounted for in later processing steps.

The data gathered from the DSC, test tubes and blood bag help meet manufacturing and component accountability guidelines set by regulatory agencies. If the data does not meet these requirements, the system places interdictions and alerts users, so that unacceptable units can be removed.

A computer record is begun for each unit including the following:

- Collection date.
- Donor Confidential Unit Exclusion (CUE).
- Receiving temperature.
- Collection bag configuration and lot number.
- Bleed times.
- Receipt of tubes.

As a unit passes through Material Check-In, data is entered and updated by technicians and supervisors whenever new information becomes available. Before the unit can be labeled, a supervisor must conduct a quality control review for Material Check-In, and either accept or reject the unit.

Unit and batch data can be queried at any time after they are committed to the system. Reports can be generated and either printed or viewed online. Reports that are generated are available online for viewing or reprinting. They can be generated again if needed.

## 18.1.2 Structure

The following sections are included in the Lab Material Check-In module:

- General Check-In Functions
- Check-In Maintenance Functions
- Check-In Queries
- Check-In Reports

Check-In Reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 18.2 General Check-in Functions

General Check-in Functions are accessed from the following menu:

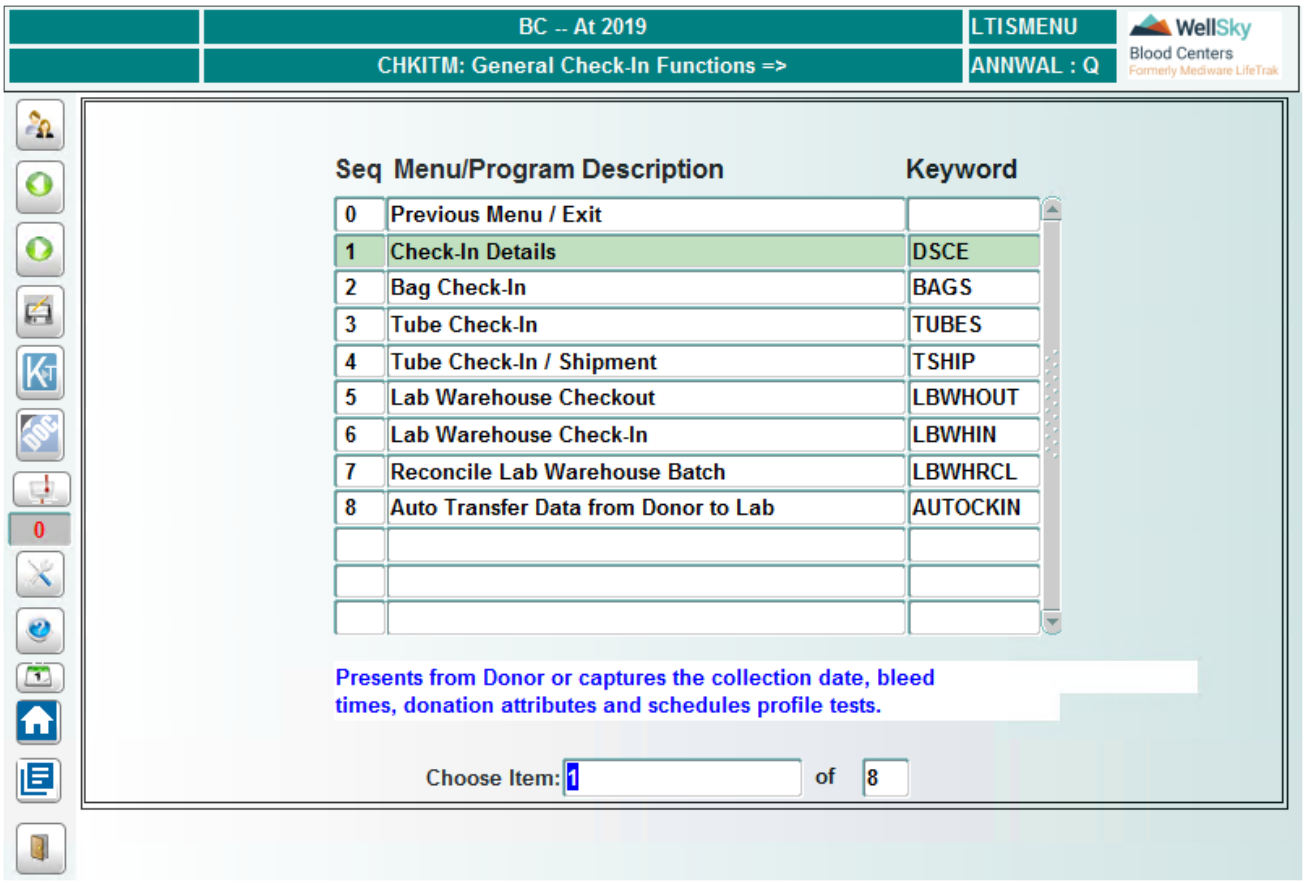


## 18.2.1 Check-In and Donor Source Card Entry (DSCE or DSCE2)

### Intended Use

Use the Check-In and Donor Source Card Details screen to enter or update detail information from the donor cards. It allows you to open a beginning history of the unit to start processing materials and schedule testing. This data is used to perform cGMP calculations for the components. Data collected here includes:

- Bleed start and end time.
- Historical ABO.
- Attribute group.
- Drive ID.
- Attribute Code and Description.
- Pheresis technology/serial number.

- Collection Date
- Donor Confidential Unit Exclusion (CUE)- if applicable.

## Limitations

- Registration information entered in Donor will only default if the donor has been registered and Donor is available.
- Only data entered in Donor will default.
- If the ISBT start date in Chapter Details (VCHAPTER) is equal or prior to the current system date, only ISBT units may be checked into the system. If the ISBT start date in Chapter Details (VCHAPTER) is null or later than the current system date, then only Codabar units may be checked into the system.

## Prerequisites

- Chapter Details must be set-up for the determination of the following: Use of the CUE, Maximum bleed time value, and slow bleed time.
- Entry of product types for the Master Code BLFA for placement of the BLFA interdiction.
- TIME_LIMIT value must have been entered in MENUITM for this program.
- Donation type and procedure code conversions must be defined in Valid Donation Type/Procedure Codes (VDONPP).

Exception:

- Tubes check-in can be done at any time.

## Accessing the Screen

Access this screen from the General Check-In Functions or Check-In Maintenance Functions menus or by entering the keywords `DSCE` or `DSCE2`.


WellSky Corporation
Proprietary and confidential

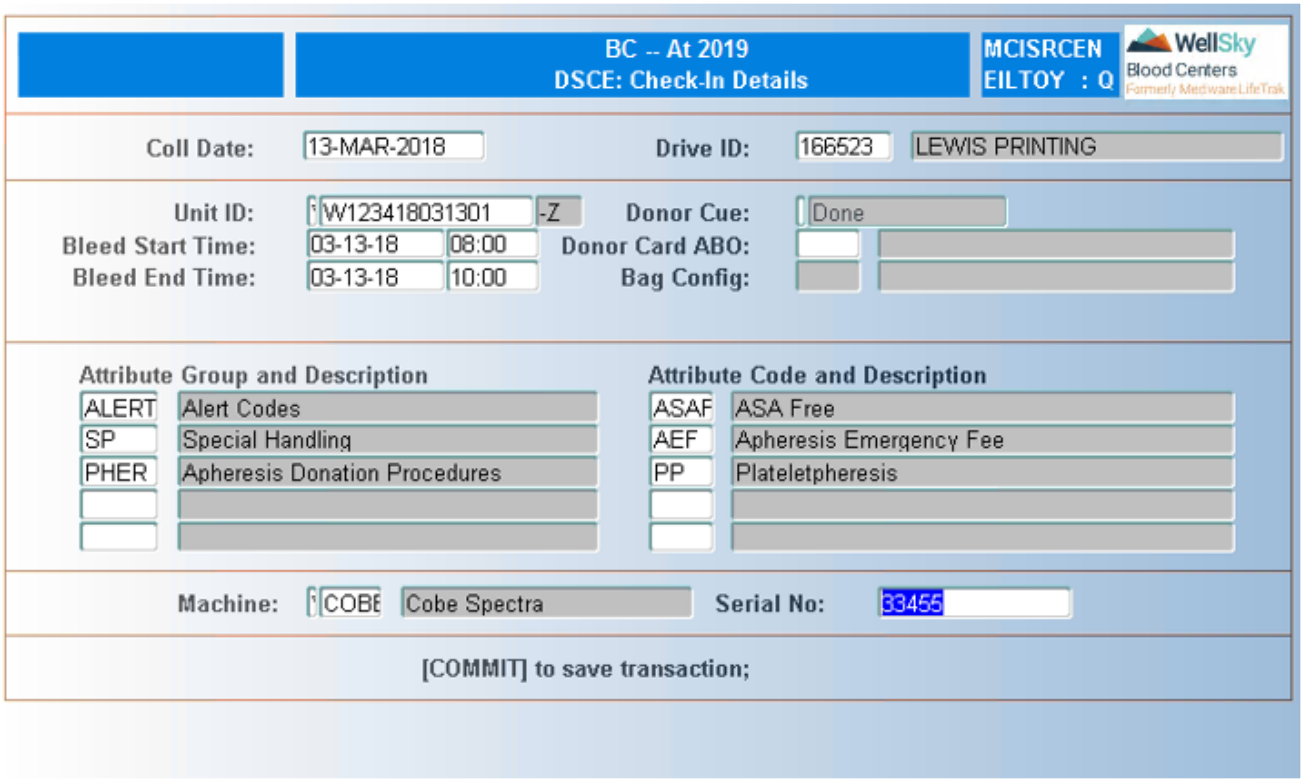


# Control Block Fields and Definitions

## Coll Date

Enter collection date in DD-MON-YYYY format or press **ENTER** to accept the default.

**NOTE –** The system allows a collection date in the past based on the TIME_LIMIT value that is set in menu. If another date is required use Check-In/Card Entry (Extended Days Limit) (DSCE2).

## Drive ID

Enter drive ID or select from LOV.

**NOTE –** The drive IDs displaying in the LOV is equal to the collection date +/- 1 day.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

**NOTE –** If the donor has been registered in Donor, all data present will automatically display on the screen. User is notified if the collection date and/or drive ID does not match the data from Donor.

## Bleed Start Time

Date portion of field defaults to the date shown in the Coll Date field (in Control Block). Press **F4** (Previous Field) to move back to the date field to update. To update the date enter in MMDDYY format and it will automatically format to MM-DD-YY. Enter time portion in HH24mm format. It will automatically format to HH:mm.

If donation has been registered in Donor, bleed start time automatically defaults. If more than one bleed start time exists in Donor (for example, double stick of both arms used), the latest time will default.To change, press enter to move to the start time field from the date field and enter in HH24mm format. If donation has not been registered in Donor, bleed start time will be blank. Enter bleed start time in HH24MI format.

**NOTE –** Time entered cannot be later than current system date and time.

## Bleed End Time

Date portion of field defaults to the date shown in the Coll Date field (in Control Block). Use **F4** (Previous Field) to move back to the date field to update. To update the date enter in MMDDYY format and it will automatically format to MM-DD-YY. Enter time portion in HH24mm format. It will automatically format to HH:mm.

If donation has been registered in Blood Centers Donor, bleed end time automatically defaults. To change, press enter to move to the start time field from the date field and enter in HH24mm format. If donation has not been registered in Blood Centers Donor, bleed start time will be blank. Enter bleed start time in HH24MI format.

**NOTE –** Bleed times cannot be modified once components are defined.

**NOTE –** If bleed time is greater than or equal to Slow Bleed value and less than or equal to Maximum value in Chapter Details, a window warning will alert that bleed time is slow and if accepted a BLFA is placed. BLFA interdiction is placed on the component when defined based on Product types entered in Master Code BLFA. If the product type is not listed in the Master Code, a BLHO interdiction is placed. If bleed times are greater than maximum value set in Chapter Detail, unit has a BLFA interdiction placed. If bleed end time is before bleed start time, user will be alerted that illogical bleed time has been entered; if accepted, UIBT interdiction is placed on unit. If donation has been registered in Donor, bleed start and end times automatically default. If bleed end time is not present in Donor, bleed time of 00:00 automatically displays with collection date. If more than one set of bleed times appear in Donor, end times corresponding with the greatest bleed start time automatically defaults. Default times may be modified.

## Donor Card ABO

Enter donor card ABO or select from LOV. Entry in this field is not required.

**NOTE –** If the donation has been registered in Donor and a blood type is present for the donor, the ABO automatically defaults. Default value can be modified.

## Bag Config

Bag configuration entered in Bag Check-In (BAGS) automatically displays. Field is not navigable.


WellSky Corporation
Proprietary and confidential

**NOTE –** If field is blank, the bag has not been checked in for the unit.

Press CTRL + F3 (Next Block) to enter unit attributes. If there are not attributes to enter, press F12 (Commit).

# Entering Unit Attributes

## Attribute Group and Description

Manually enter attribute group or select from LOV. The group description automatically displays after the code is entered.

**NOTE –** Press CTRL+ F8 (Delete Record) to delete an attribute group and matching code (before commit only).

## Attribute Code And Description

Manually enter the attribute code or select from LOV. Code description automatically displays after the code is entered.

**NOTE –** Press CTRL+ F8 (Delete Record) to delete an attribute group and matching code (before commit only).

## Machine

Scan, manually enter or select machine from LOV.

**NOTE –** If the technology label is scanned, both the machine and its serial number will be included in the scan. If the machine code is manually entered or is selected from LOV, the serial number must also be manually entered.

## Serial No.

Manually enter the serial number or select from LOV.

**NOTE –** After the Serial No. field is populated, press ENTER to return to the Attribute Block.

**NOTE –** The following attribute codes cannot be deleted from this screen, if CUE is used at the facility:

- DON 00 - If the CUE is Autologous.
- DON 14 – If the CUE is therapeutic.

Press F12 (Commit) once all necessary information has been entered.

## At Commit

Updates to the system include the following:

- The data entered on the screen.
- A BLFA interdiction is placed on all units that go over the maximum bleed time, except for pheresis donations.
- LA UIBT interdiction is placed on all units with illogical bleed times.
- Warehouse location is set on the unit if the bag has not been checked-in. If the bag has been checked-in, the location is not changed.
- Tests will be scheduled depending on the donation type attribute code entered. If the donation type attribute is defined in Master Code DON, tests will not be scheduled for the unit.
- If a sample is being checked into the system, the batch ID for the sample will automatically populate with 'SAMPLE' in order to prevent it from being listed as an exception.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the General Check-In Functions or Check-In Maintenance Functions menu.

# 18.2.2 Bag Check-In (BAGS)

## Intended Use

Use the Bag Check-In screen to enter data from blood bags. Data gathered at this point relates to the characteristics of the bag itself, not the blood.

Data collected here about each unit includes the following:

- Batch ID
- Minimum/maximum temp
- Bag catalog
- Lot number

Program allows check-in of units in expired bags; however, a CBEX interdiction will be placed on the unit.

## Limitations

- When a check-in batch is pulled up in this screen, the batch becomes locked and cannot be accessed in another session in QC of Check-In Batch (QCCHK) or Bag Check-In (BAGS).
- If the ISBT start date in Chapter Details (VCHAPTER) is equal or prior to the current system date, only ISBT units may be processed in this screen. If the ISBT start date in Chapter Details (VCHAPTER) is null or later than the current system date, then only Codabar units may be processed in this screen.
- ISBT bags cannot be checked-in for Codabar units.


WellSky Corporation
Proprietary and confidential

## Prerequisites

The unit must have been through initial check-in if the sequential check-in flag is set to Y in Chapter Details (CHAPTER). This data must be committed to a unit before processing the next steps.

Exception:

Tubes check-in can be done at any time and is not required.

## Accessing the Screen

Access this screen from the General Check-In menu or by entering the keyword BAGS.

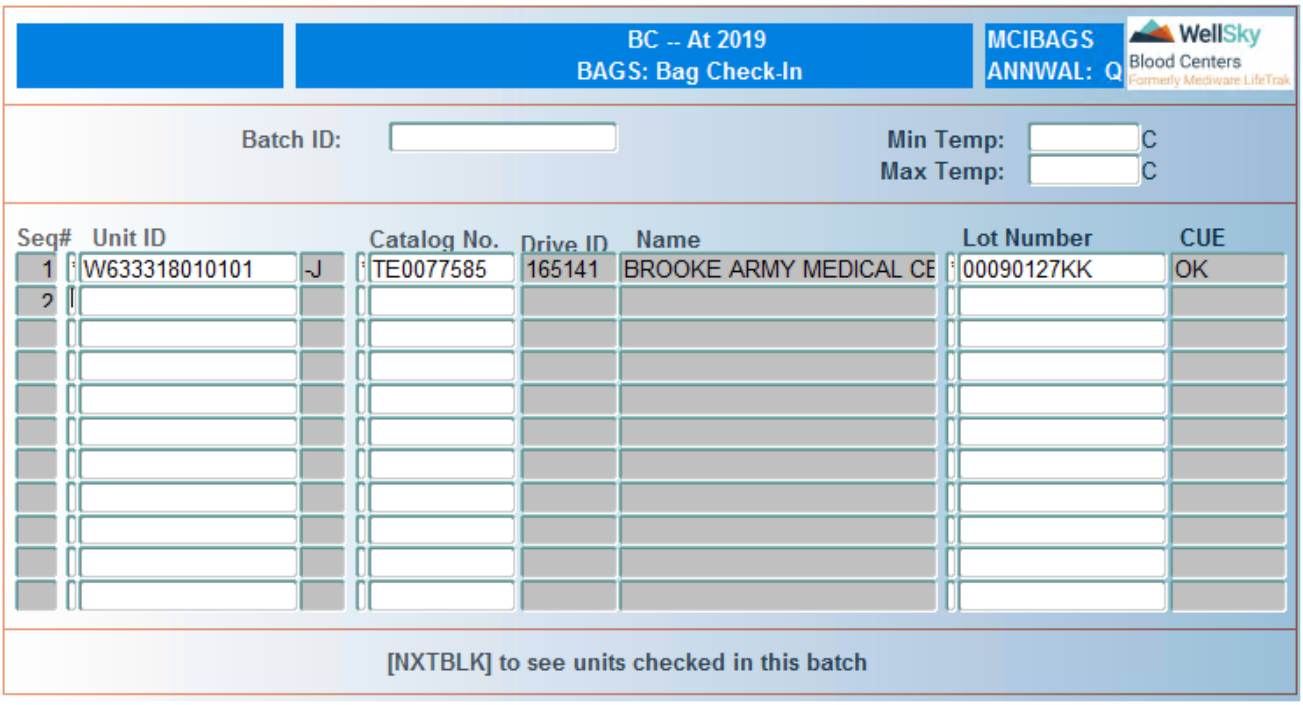


## Control Block Fields and Definitions

### Batch ID

Enter batch ID or select from LOV. Leave field blank to create a new batch.

**NOTE –** Only batches that have not been QC'd will display in the LOV. Additional units cannot be added to QC'd batches.

### Min Temp

Enter the minimum receipt temperature (°C).

### Max Temp

Enter the maximum receipt temperature (°C).

**NOTE –** If maximum temperature entered is greater than 37.5°C, a CMT interdiction will be placed when component is defined.

## Detail Block Fields and Definitions

### Seq#

Unit sequence number automatically displays. Field is not navigable.

### Unit ID

Scan or manually enter unit ID.

**NOTE –** After unit ID is entered, a window will alert if a non-pheresis unit bleed time was greater than or equal to slow bleed value, but less than or equal to maximum bleed value. If a non-pheresis unit bleed time was greater than maximum value, a warning message will display.

### Catalog No.

Scan, manually enter, or select the catalog number from the LOV. Concatenation of catalog number/lot number is permitted from the scan field.

### Drv ID

Drive ID automatically displays after the unit ID is entered if the unit has been checked in. Field is not navigable.

### Drive Name

Drive name automatically displays after the unit ID is entered if the unit has been checked in. Field is not navigable.

### Lot Number

Scan, manually enter, or select the lot number from the LOV.

**NOTE –** Only non-terminated lot numbers valid for the bag configuration you entered display in LOV. After entering this field, the batch ID is assigned. If an expired lot number is entered, a CBEX interdiction is placed on the unit at commit.

### CUE

Confidential unit exclusion (CUE) automatically displays after the unit ID is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

**NOTE –** If the CUE is NFT, No CUE, Ambiguous, or Therapeutic, the following window opens:

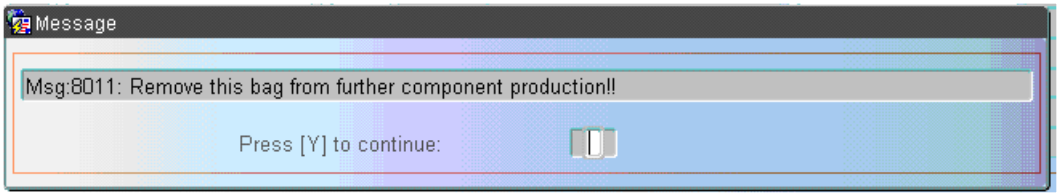


Enter `Y` to continue.

System performs a line-by-line commit.

## To View Units in the Batch

Press **CTRL** + **F3** (Next Block) to view unit in the check-in batch. The follow window opens:

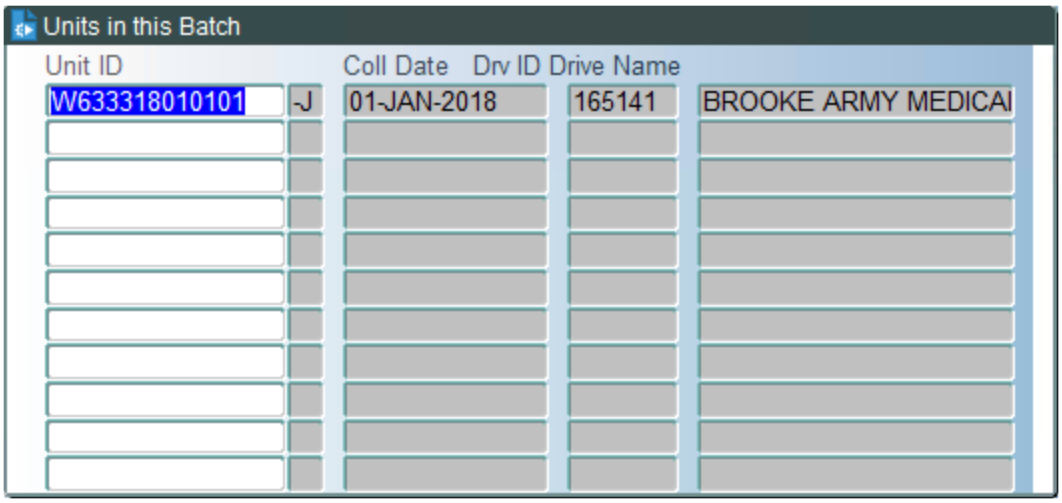


The following information appears:

- Unit ID – Unit ID.
- Coll Date – Unit collection date.
- Drv ID – Drive ID.
- Drive Name – Drive Name.

## At Commit

Updates to the system include the following:

- The data entered on this screen.
- CBEX interdiction is placed on units checked in with expired lot numbers.
- The unit is assigned a warehouse based on the user selection at time of log in. When the bags are checked into the system, it automatically updates the warehouse location, if needed.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Check-In Functions menu.

# 18.2.3 Tube Check-In (TUBES)

## Intended Use

Use the Tube Check-In screen to record receipt of pilot tube samples for units checked in. Tubes can be checked in as follows:

- All red top tubes together.
- All purple top tubes together.
- Both red and purple top tubes on one screen.

## Limitations

- Tube check-in can be configured for red and purple tubes only.
- If the ISBT start date in Chapter Details (VCHAPTER) is equal or prior to the current system date, only ISBT tubes may be processed in this screen. If the ISBT start date in Chapter Details (VCHAPTER) is null or later than the current system date, then only Codabar tubes may be processed in this screen.

## Prerequisites

None

## Accessing the Screen

Access this screen from the General Check-In Functions menu or by entering the keyword `TUBES`.


WellSky Corporation
Proprietary and confidential

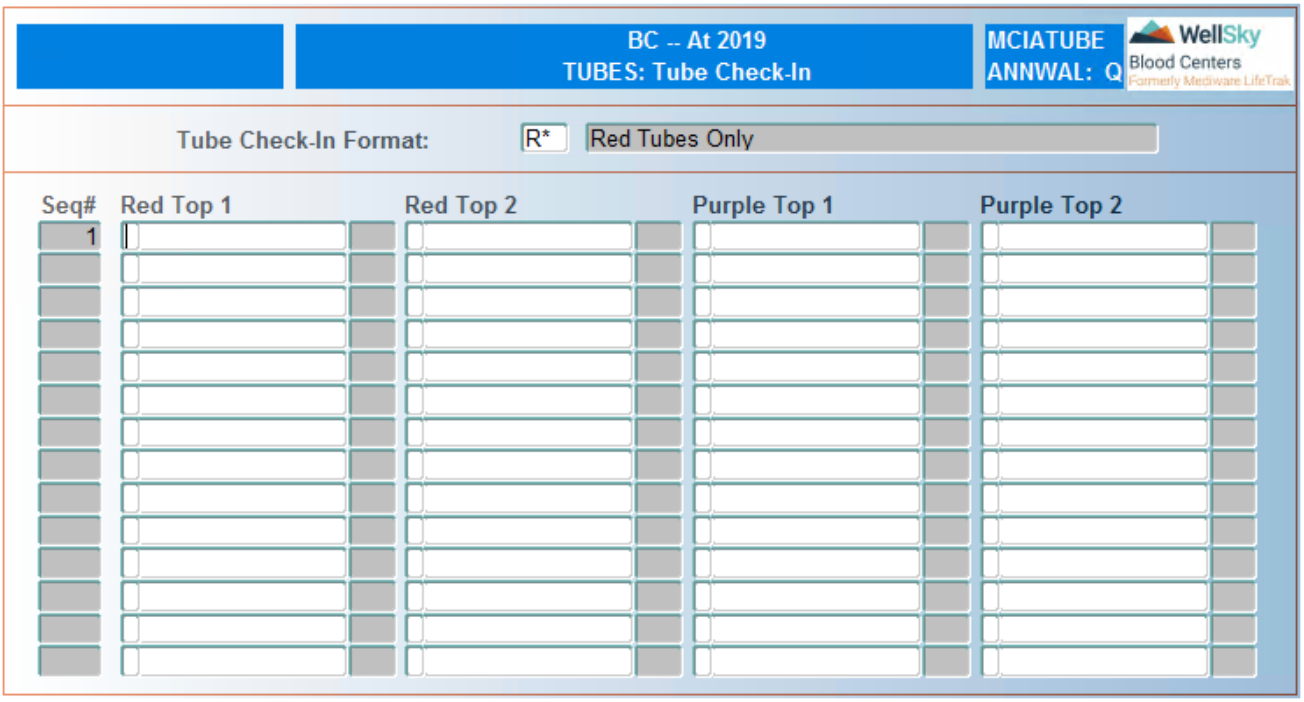


# Control Block Fields and Definitions

## Tube Check-In Format

Enter tube check-in format or select from LOV. Check-in format description automatically displays after the code is entered.

**NOTE –** If A (all) is chosen as the check-in format, each field does not have to be entered on every line item. To skip a field press ENTER.

# Detail Block Fields and Definitions

## Seq

System assigned sequence number automatically displays. Field is not navigable.

## Red Top Tube-1

Scan or manually enter unit ID on 1st red top tube.

**NOTE –** If checking in only red top tubes, Red Top-1 or All, the system moves the cursor to this field. When checking in All tubes or all Red Top Tubes, cursor automatically moves to Red Top-2. If manually checking-in tubes, only red top tubes, press ENTER to move to the next entry field.

## Red Top Tube-2

Scan or manually enter unit ID on 2nd red top tube.

**NOTE –** If checking in only Red Top Tubes or Red Top-2, the system moves the cursor to this field.

### Purple Top Tube-1

Scan or manually enter unit ID on 1st purple top tube.

**NOTE –** If checking in only purple top-tubes, Purple Top-1, or All, the system moves the cursor to this field. When checking in All tubes or all Purple Top Tubes, cursor automatically moves to Red Top-2. If manually checking-in only red top tubes, press ENTER to move to the next entry field.

### Purple Top Tube-2

Scan or manually enter unit ID on 2nd purple top tube.

**NOTE –** If checking in only purple tubes-2, the system moves the cursor to this field. If manually checking in purple top tubes, press ENTER to move to the next entry.

This screen does a line-by-line commit.

## At Commit

- Tubes checked in are saved in the system.
- After Initial Check-in and Tube Check-In are completed, sample data can be extracted to be sent to the remote testing center, using Tube Shipment (MCITSHIP).

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Check-in Functions menu.

# 18.2.4 Tube Shipment (TSHIP)

## Intended Use

Use the Tube Shipment screen to do the following:

- Record the packing of tubes to be sent out for testing.
- Pack tubes for NAT and/or Viral testing.
- Record the type of donors (for example, repeat, first time or autologous/other) that are associated to the packed tubes.
- Print a report which provides the sequence in which the tubes have to be packed.

## Limitations

- Autologous units will be excluded from NAT testing if defined as such in Master Code ANATT.


WellSky Corporation
Proprietary and confidential

- If the ISBT start date in Chapter Details (VCHAPTER) is equal or prior to the current system date, only ISBT tubes may be processed in this screen. If the ISBT start date in Chapter Details (VCHAPTER) is null or later than the current system date, then only Codabar tubes may be processed in this screen.

## Prerequisites

- Initial Check-In or Check-In and Donor Source Card Entry must be used before sample data can be extracted and sent to the remote testing center.
- This screen can be used without prior check-in of tubes.
- Upon initial set-up of the application the user must define where to send the extract file. This parameter is then defined by WellSky.

## Accessing the Screen

Access this screen from the General Check-In Functions menu or by entering the keyword `TSHIP`.

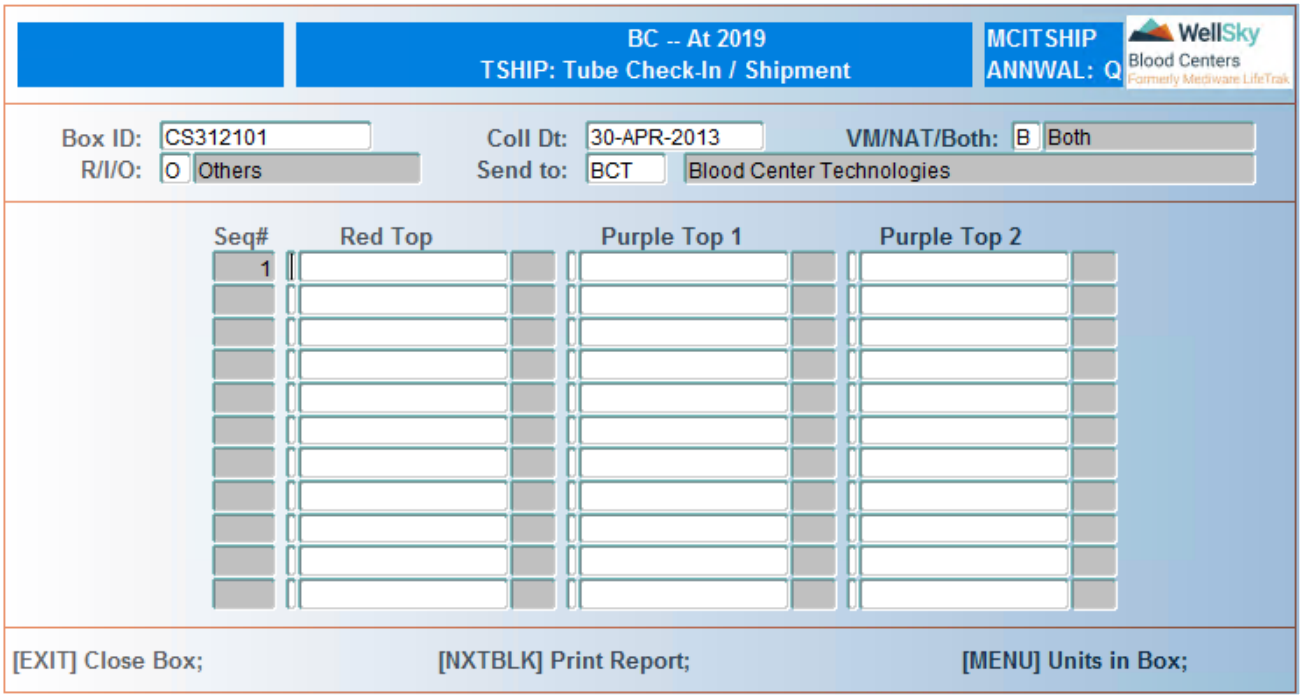


## Control Block Fields and Definitions

### Box ID

Enter box ID or select box ID from LOV to select an existing box. Leave field blank to create a new box.

> **NOTE –** If you select an existing box ID, it will display the corresponding collection date, extract type, donor type, destination code, and corresponding descriptions.

### Coll Dt

Enter collection date in DD-MON-YYYY format or press **ENTER** to accept default.

### VM/NAT/Both

Enter extract type: `N` for NAT, `V` for Viral Marker or `B` for both.

### R/I/O

Enter donor type: `I` for First Time, `R` for Repeat or `O` for others.

> **NOTE –** If Extract type is N, then it will allow donor type I and R only

### Send to

Enter destination or select from LOV.

## Detail Block Fields and Definitions

### Seq

System assigned sequence automatically displays. Field is not navigable.

### Red Top

Scan or manually enter unit ID.

### Purple Top 1

Scan or manually enter unit ID.

### Purple Top 2

Scan or manually enter unit ID.

> **NOTE –** The user will be warned when the box capacity has been reached. Capacity is defined in Master Code PLCAP.

Press CTRL + F3 (Next Block) to print a box content report.

## Closing the Box

Press F8 (Exit Screen) to close the box. The following window opens:




Enter `Y` to close the box or enter `N` to keep the box open.

## Viewing Units in the Box

Press F6 (Menu) to view box contents. The following window opens:


WellSky Corporation
Proprietary and confidential

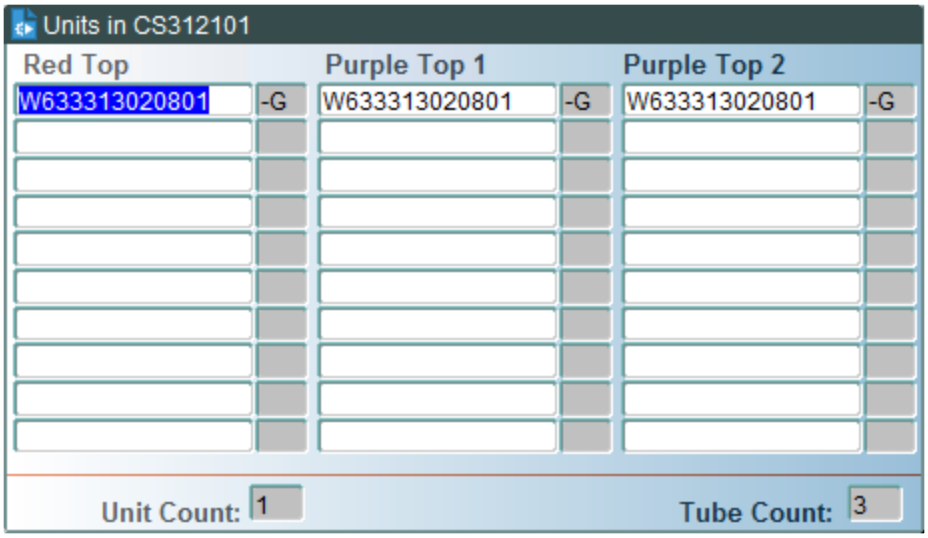


The following information displays:

- Box ID – Tube shipment box ID.
- Red Top – Red top unit ID.
- Purple Top 1 – 1st purple top unit ID.
- Purple Top 2 – 2nd purple top unit ID.
- Unit Count – Total number of units in the box.
- Tube Count – Total number of tubes in the box.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the man screen.

## At Commit

- Commits data to the database.
- Generates a report, which provides the sequence in which the tubes have to be packed.
- Generates electronic samples file that can be sent to the remote testing site.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the General Check-in Functions menu.

# 18.2.5 Lab Warehouse Checkout (LBWHOUT)

## Intended Use

Use the Lab Warehouse Checkout screen to do the following:

- Transfer labeled or unlabeled units and/or components from one warehouse location to another.
- Print a transfer slip displaying source and destination warehouses, batch ID and date, comments, and units/components in batch.

## Limitations

- In-transit interdictions (INTR) are placed on units/components transferred in this function.
- Because component level interdictions are placed by product code, an INTR interdiction will be placed on all aliquots of the component even if only one aliquot is being transferred if the aliquots have the same product code and are only distinguished by the aliquot.

## Prerequisites

- Bag Check-In must have been performed.
- Component definition and labeling may or may not been performed.
- Units/components must be located in user's log-on warehouse in order to be transferred.
- The following units/components may be transferred through this program:
  - Unlabeled
  - Labeled
  - Rejected
  - Expired
  - Aliquots
  - Interdicted (unit or component level)
  - Tested or untested
  - Pools
  - Imports

## Accessing the Screen

Access this screen from the General Check-In Functions menu or by entering the keyword `LBWHOUT`.


WellSky Corporation
Proprietary and confidential

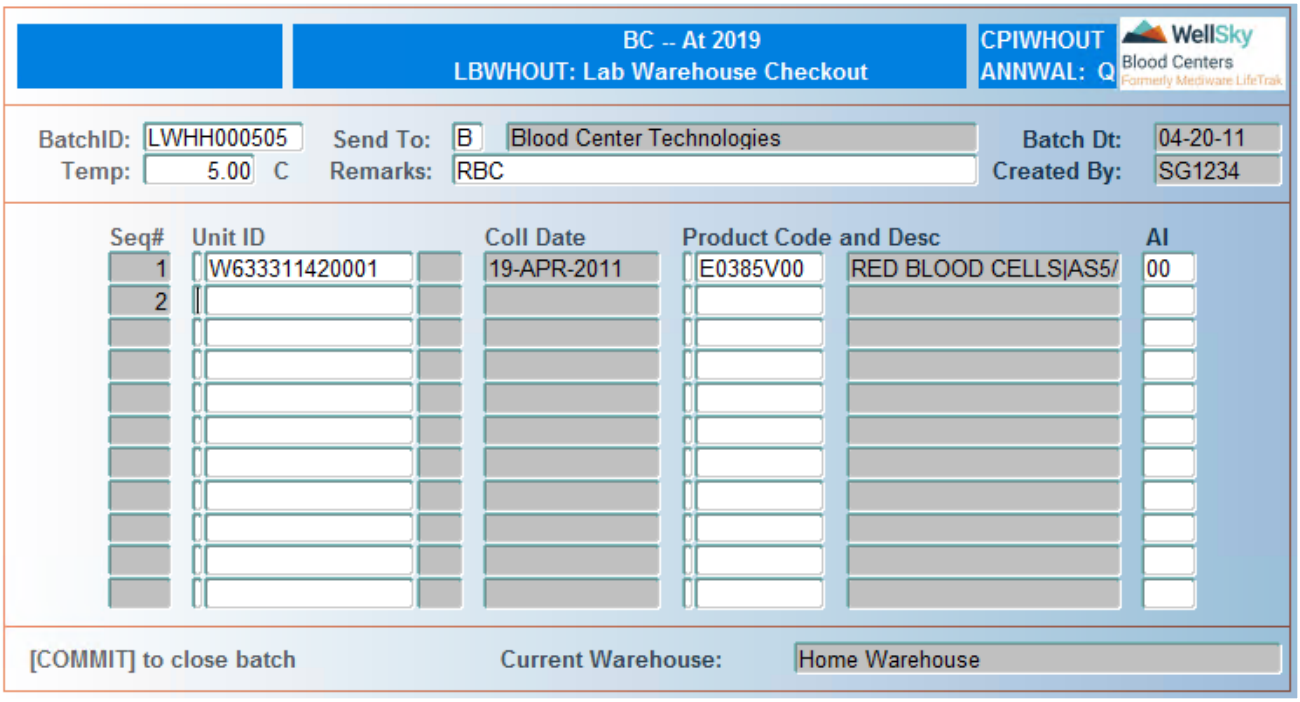


# Control Block Fields and Definitions

## Batch ID

Enter transfer batch ID or select from LOV. Leave field blank to create a new batch.

**NOTE –** If existing batch is entered, all existing batch information displays; prompts for entry of next unit ID.

## Send To

Enter code for warehouse to which the units and/or components are to be transferred or select from LOV. Warehouse description, batch date, and user ID fields automatically display after the send to warehouse is entered.

## Temp

Enter batch temperature ($^{O}$C).

## Remarks

Enter free-text comment. A maximum of 240 characters is allowed. Entry in this field is not required.

## Created By

Field automatically populates after Send To warehouse is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Seq#

System assigned sequence number automatically displays. Field is not navigable.

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

> **NOTE –** Field does not populate if only Bag Check-In has been performed. A warning appears on the screen if unit level interdictions are present. Entry automatically commits if transferring a unit. An INTR interdiction is automatically placed on the unit.

## Product Code And Desc

Scan, manually enter, or select product code from LOV.

> **NOTE –** Only products located in user's log-on warehouse will be accepted. A warning appears on the screen if component level interdictions are present. The aliquot field defaults to 1 and the entry commits if only one aliquot exists for the component.

## Al

Manually enter aliquot or select from LOV.

> **NOTE –** Only aliquots located in the user's log-on warehouse will be accepted.

Press **F8** (Exit Screen) to exit the screen and keep the batch open.

# Closing the Batch

Press **F12** (Commit) to close the batch. The following window opens:




Enter `N` to keep the batch open; the cursor returns to the Unit ID field on the next available line. Enter `Y` to close the batch. A transfer slip automatically prints.

# At Commit

- A transfer slip prints displaying source and destination warehouses, batch ID and date, comments, and units/components in batch.


WellSky Corporation
Proprietary and confidential

- The batch status updates to CLOSE.
- CMT interdictions are placed on components transferred at temperatures that are not within the acceptable range.
- Warehouse transfer slip automatically prints.
- INTR interdictions are placed on the unit or component transferred.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Check-in Functions menu.

# 18.2.6 Lab Warehouse Check-In (LBWHIN)

## Intended Use

Use the Lab Warehouse Check-In screen to do the following:

- Check-in transferred labeled or unlabeled units and/or components.
- Unit/component warehouse location is updated to the check-in user's log-on warehouse.

## Limitations

- Units/components in an OPEN batch cannot be checked-in until the outgoing transfer batch has been closed.
- Because component level interdictions are placed by product code and INTR interdictions placed on all aliquots of a component transferred in the Lab Warehouse Checkout program, the INTR interdiction is removed from aliquots unless another aliquot from the component is still in-transit.
- If units/components checked-in using this screen were not in an outgoing transfer batch, an NITB interdiction is automatically placed on the unit/component.

## Prerequisites

- Warehouse transfer batch must have a status of CLOSED.
- Component definition and labeling may or may not been performed.
- The following units/components may be checked-in through this program:
  - Unlabeled
  - Labeled
  - Rejected
  - Expired
  - Aliquots
  - Interdicted (unit or component level)
  - Tested or untested
  - Pools

- Imports
- Units/components not in-transit

## Accessing the Screen

Access this screen from the General Check-In Functions menu or by entering the keyword `LBWHIN`.

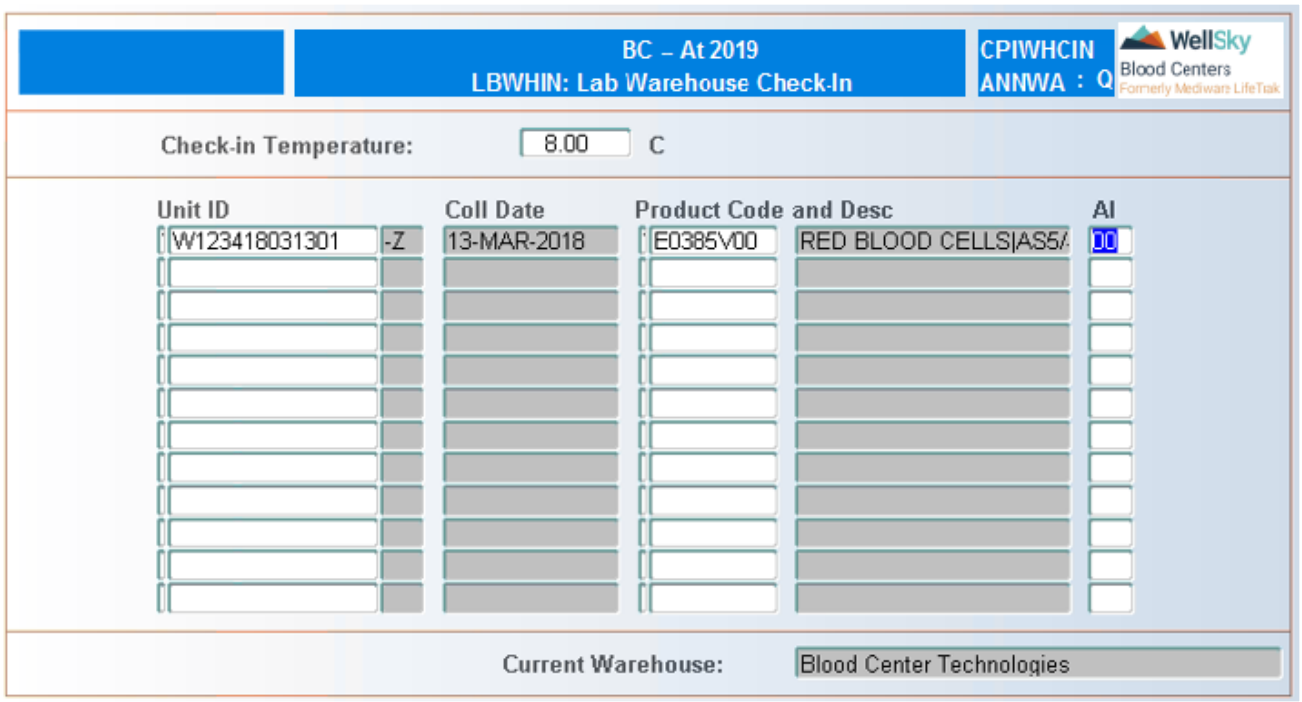


## Control Block Fields and Definitions

### Check-in Temperature

Enter check-in temperature (°C).

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

**NOTE –** A warning appears on the screen if unit level interdictions are present. Entry automatically commits if checking-in a unit. The INTR interdiction is automatically removed from the unit.

### Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

**NOTE –** Field remains blank if the collection date is not present.


WellSky Corporation
Proprietary and confidential

### Product Code And Desc

Scan, manually enter, or select product code from LOV.

**NOTE –** Only products in-transit to user's log-on warehouse appear in LOV.

**NOTE –** A warning appears on the screen if component level interdictions other than INTR are present.

**NOTE –** A warning appears on the screen if component is being checked-in to a warehouse other than the warehouse to which it was transferred.

**NOTE –** The aliquot field defaults to 1 and the entry commits if only one aliquot exists for the component.

### Al

Enter aliquot or select from LOV.

**NOTE –** Only aliquots in transit to user's log-on warehouse appear in LOV. Entry commits, and the INTR interdiction is automatically removed from the components being checked-in.

Press F8 (Exit Screen) once all products have been checked in.

## At Commit

- Multiple product types can be checked in in one screen; however, a temperature interdiction (CMT) will be placed on components checked-in at unacceptable temperatures.
- Unit/component location is automatically updated to the user's log-on warehouse after check-in.
- In-transit interdiction (INTR) automatically removed from units/components when they are checked-in.
- Not in Transfer Batch interdiction (NITB) automatically placed on units/components that were never checked-out from a warehouse.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Check-in Functions menu.

# 18.2.7 Reconcile Lab Warehouse Batch (LBWHRCL)

## Intended Use

Use the Reconcile Lab Warehouse Batch screen to do the following:

- Reconcile lab warehouse transfer batches containing units and/or components.
- Update reconciled unit/component warehouse location to the reconciliation user's log-on warehouse.

## Limitations

- Because component level interdictions are placed by product code and Warehouse Transfer Problem interdictions (WTP) are placed on all aliquots of a component reconciled in the Reconcile Lab Warehouse Batch program, a WTP interdiction is placed on all aliquots from a component.
- If units/components checked-in using this screen were not in an outgoing transfer batch, an NITB interdiction is automatically placed on the unit/component.
- Reconciliation cannot be performed on partial batches; all units/components received in proper condition must be checked-in the receiving warehouse before reconciling those units/components with transfer problems.

## Prerequisites

- Component definition and labeling may or may not have been performed.
- Units/components must be in-transit.
- Warehouse transfer batches must have the status of CLOSE.

## Accessing the Screen

Access this screen from the General Check-In Functions menu or by entering the keyword `LBWHRCL`.

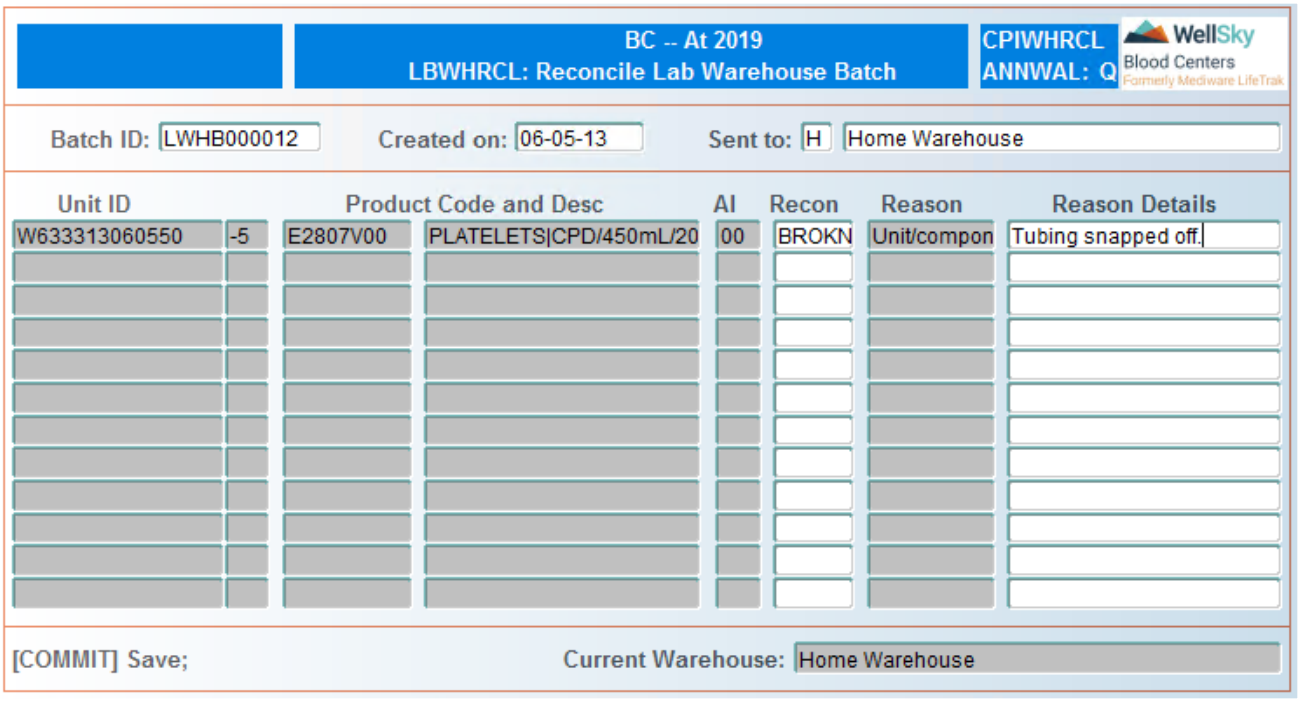



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Batch ID

Enter valid batch ID or select from LOV.

**NOTE –** Batch information automatically populates after batch ID is entered.

## Created On

Batch creation date automatically displays after the batch ID is entered. Field is not navigable.

## Sent To

Batch 'sent to' warehouse automatically displays after the batch ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Unit ID automatically displays after the batch ID is entered. Field is not navigable.

**NOTE –** Unit IDs only display for units/components in the batch that have not been checked-in.

## Product Code And Desc

Product code and description automatically display after the batch ID is entered. Field is not navigable.

**NOTE –** Only products not reconciled appear.

## Al

Product aliquot automatically displays after the batch ID is entered. Field is not navigable.

## Recon

Manually enter valid reconciliation reason or select from LOV.

**NOTE –** Reconciliation reasons are defined in Master Code RECON.

## Reason

Reconciliation reason description automatically displays after the code is entered. Field is not navigable.

## Reason Details

Enter free-text reason detail. A maximum of 240 characters is allowed. Entry in this field is not required.

Press F12 (Commit) to save the transaction.

**NOTE –** Reconciliation reasons must be entered for all unit/components not checked-in for the batch prior to Commit; partial reconciliation is not allowed.

Press F8 (Exit Screen) to exit the screen.

## At Commit

- Unit/component location is automatically updated to the reconciliation user's log-on warehouse after reconciliation.
- In-transit interdiction (INTR) is automatically removed from units/components when they are reconciled, unless additional aliquots from the unit remain in-transit.
- Warehouse Transfer Problem interdiction (WTP) is automatically placed on units/components that were reconciled.
- Transfer batch status is updated to RECON when the units/components are reconciled in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Check-in Functions menu.

# 18.2.8 Auto Transfer Data from Donor to Lab (AUTOCKIN)

## Intended Use

Use the Auto Transfer Data from Donor to Lab option to bring in the tubes and unit information, such as attributes, catalog/lot numbers, equipment and generation of the check-in batch ID.

## Limitations

- If donation type 'Sample' is being collected, the tubes need to be handled separately, according to facility SOPs.
- Tube check-in can be done after entry of Bleed details.

## Prerequisites

- Catalog/Lot numbers need to be defined in Lab.
- Equipment must be defined in Lab.
- Valid Donation Types/Procedure codes need to be defined for conversion information into Lab.
- Chapter Details must be set-up for the determination of the following:
  - Use of the CUE
  - Maximum bleed time value
  - Slow bleed time.
- Entry of product types for the Master Code BLFA for placement of the BLFA interdiction.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the General Check-In menu or by entering the keyword AUTOCKIN.

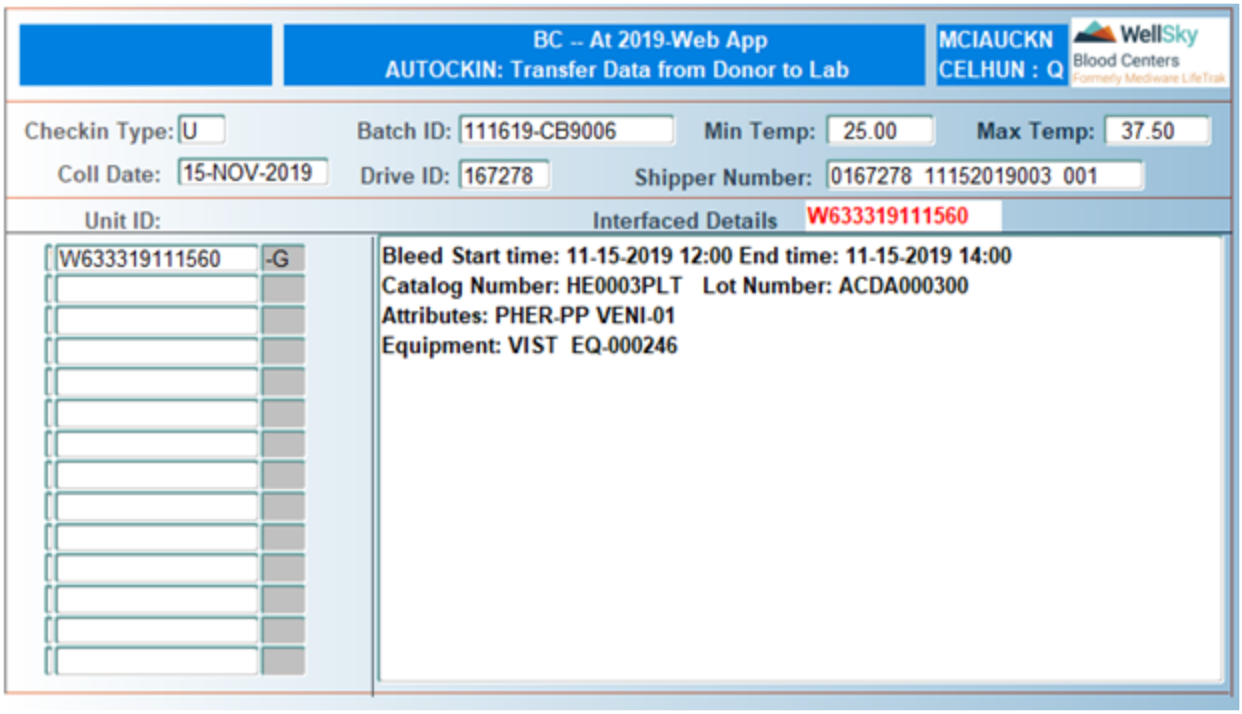


# Control Block Fields and Definitions

## Checkin Type

Entry is required in this field. Valid entries are B, T, and U. These values are hard-coded and cannot be changed.

- B = checking in tubes and units
- T = checking in tubes only
- U = checking in units only (bags)

## Batch ID

Enter the batch ID or select it from the LOV. Leave the field blank to create a new batch.

**NOTE –** Only batches that have not been QC'd will display in the LOV. Additional units cannot be added to QC'd batches.

## Min Temp

Enter the minimum receipt temperature (°C).

## Max Temp

Enter the maximum receipt temperature (°C).

**NOTE –** If the maximum temperature entered is greater than 37.5°C, a CMT interdiction will be placed when the component is defined.

### Coll Date

This field is display-only. Data will display based on the selected question code.

### Drive ID

Enter a drive ID or select from it from the LOV. The drive IDs displaying in the LOV are equal to the collection date +/- 1 day. The user can manually enter a drive ID that is older.

### Shipper Number

Manually enter the shipper number or select it from the LOV. The Shipper number format is <drive ID>_<shipper number>_<number sequence> (e.g. 167088_11052019_001).

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter the unit ID. If the donor has been registered in On-site, all data present will automatically display on the screen. The user is notified if the collection date and/or drive ID does not match the data from Donor.

**NOTE –** After the unit ID is entered, a window will alert if a non-pheresis unit bleed time was greater than or equal to the slow bleed value, but less than or equal to the maximum bleed value. If a non-pheresis unit bleed time was greater than the maximum value, a warning message will display.

### Interfaced Details

Displays the information that is associated to the unit that was interfaced over to Lab.

1. CUE

   Confidential unit exclusion (CUE) automatically displays after the unit ID is entered. Field is not navigable.

   **NOTE –** If the CUE is NFT, No CUE, Ambiguous, or Therapeutic, the following window opens:

   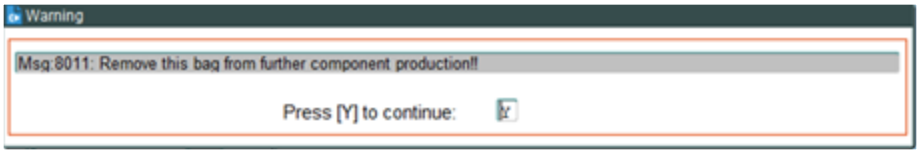
   

   Enter Y to continue.

2. Display of catalog and lot numbers will check for terminated lot numbers, and if present, will place interdiction.

**NOTE –** Only non-terminated lot numbers valid for the bag configuration you entered display in LOV. After entering this field, the batch ID is assigned. If an expired lot number is entered, a CBEX interdiction is placed on the unit at commit.

3. Entry of bleed screens:

   - Bleed Start Time

     If the donation has been registered in Donor, the bleed start time automatically defaults. If more than one bleed start time exists in Donor (for example, double stick of both arms used), the latest time will default.

     **NOTE –** Time entered cannot be later than the current system date and time.

   - Bleed End Time

     If the donation has been registered in Blood Centers Donor, the bleed end time automatically defaults.

     **NOTE –** If the bleed time is greater than or equal to the Slow Bleed value and less than or equal to the Maximum value in Chapter Details, a window warning will alert that bleed time is slow and if accepted, a BLFA is placed. A BLFA interdiction is placed on the component when defined based on Product types entered in Master Code BLFA. If the product type is not listed in the Master Code, a BLHO interdiction is placed.

     If bleed times are greater than the maximum value set in Chapter Detail, the unit has a BLFA interdiction placed on it. If the bleed end time is before the bleed start time, the user will be alerted that illogical bleed time has been entered; if accepted, a UIBT interdiction is placed on the unit. If the donation has been registered in Donor, the bleed start and end times automatically default. If the bleed end time is not present in Donor, a bleed time of 00:00 automatically displays with the collection date. If more than one set of bleed times appear in Donor, end times corresponding with the greatest bleed start time automatically default. Default times may be modified.

4. ABO of the donor:

   If the donation has been registered in Donor and a blood type is present for the donor, the ABO automatically defaults.

5. Display of attributes based on definition in the Donation/Procedure Type table (DONPP).

6. Display of equipment used in the collection – this will display the type of equipment (machine) and the serial number associated to the equipment.

   **NOTE –** If the serial number is not in production, a message will display to the user, and the unit will not be checked into the system.

## At Commit

Updates to the system include the following:

- CBEX interdiction is placed on units checked in with expired lot numbers.
- The unit is assigned a warehouse based on the user selection at time of login. When the bags are checked into the system, it automatically updates the warehouse location, if needed.
- A BLFA interdiction is placed on all units that go over the maximum bleed time, except for pheresis donations.
- A UIBT interdiction is placed on all units with illogical bleed times.
- Tests will be scheduled depending on the donation type attribute code entered. If the donation type attribute is defined in Master Code DON, tests will not be scheduled for the unit.
- The check-in batch number will be generated.
- The catalog and lot numbers will be checked in and associated to the unit.
- If equipment was linked to the donation, equipment reference numbers will be associated to the unit.
- Any attributes, interdictions, donation types, procedure codes that are configured in Valid Donation Type/Procedure codes (DONPP).

## What to Do Next

There is no next step.


WellSky Corporation
Proprietary and confidential

# 18.3 Check-in Maintenance Functions

Check-In Maintenance Functions are accessed from the following menu:

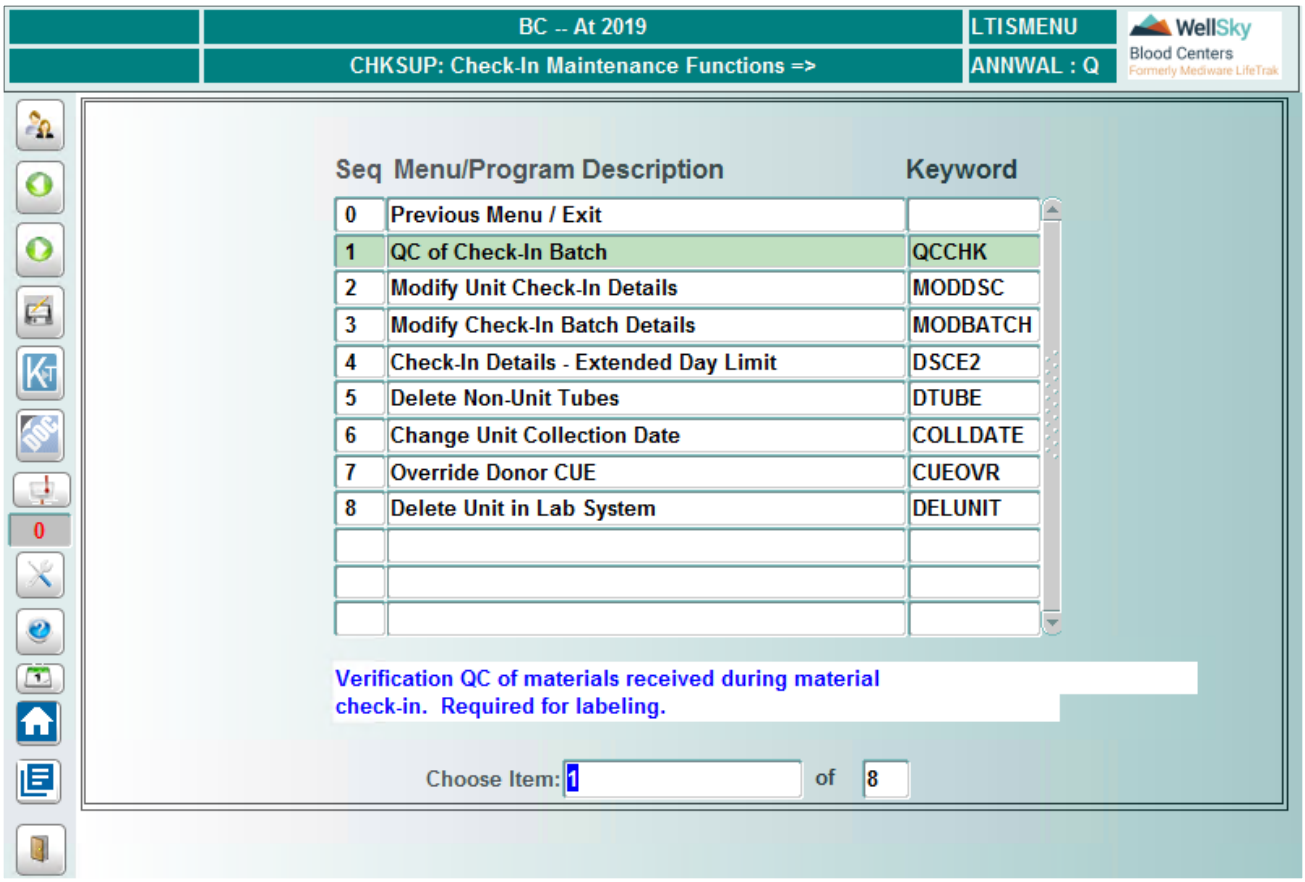


## 18.3.1 QC of Check-In Batch (QCCHK)

### Intended Use

Use the QC of Check-In Batch screen to do the following:

- Review a batch for approval.
- Commit a batch through Quality Control (QC) approval.

All information entered on previous screens is displayed on this screen by check-in batch. Review unit exceptions to all batches for clarification, mark the units for approval, and commit the units in this batch for check-in QC approval.

### Limitations

When a check-in batch is pulled up in this screen, the batch becomes locked and cannot be accessed in another session in QC of Check-In Batch (MCIQC4) or Bag Check-In (MCIBAGS).

## Prerequisites

- You must have a supervisory access level to use this screen.
- Once any unit in the batch has passed QC (accepted or rejected) by supervisory review and has been committed, no additions can be made to the batch. Units with an unacceptable QC flag cannot be labeled as usable products. You can set it to 'Y' to accept or leave as null (allows user to go and update to 'Y' when ready).

## Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu or by entering the keyword QCCHK.

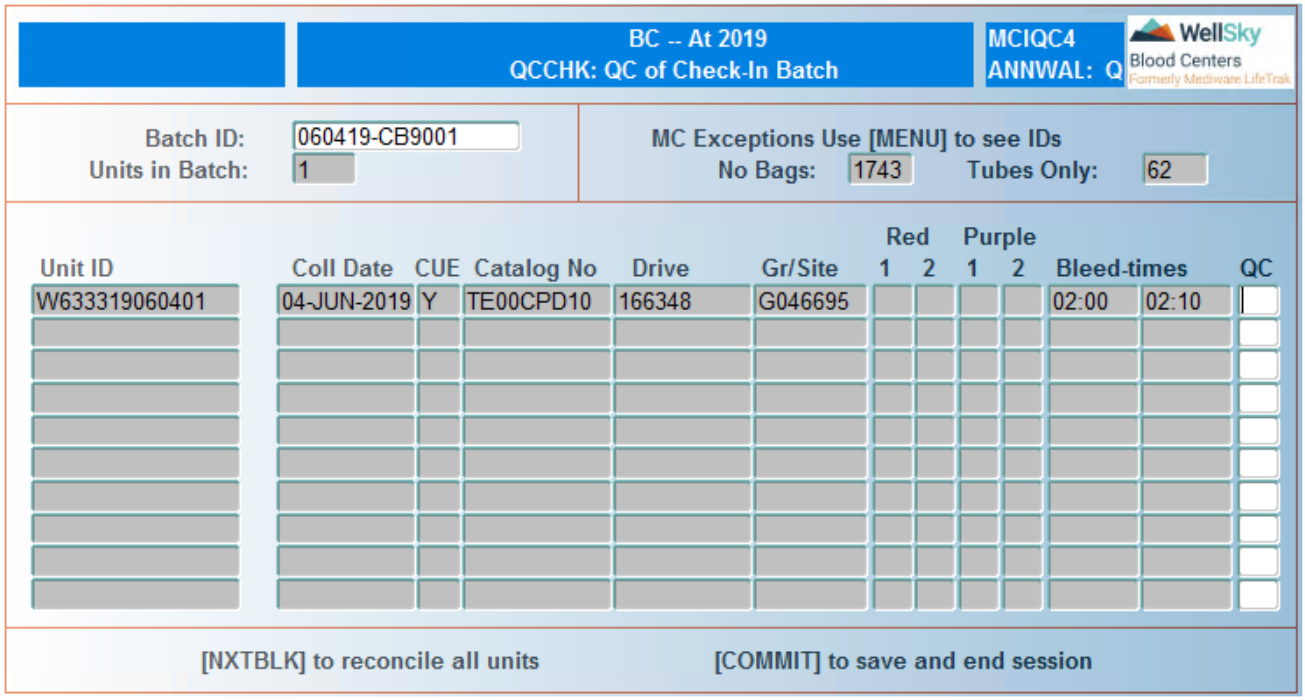


## Control Block Fields and Definitions

### Batch ID

Enter batch ID or select from LOV. After entering the batch ID, information about this batch displays for your review.

**NOTE –** The displayed data cannot be updated on this screen.

## In the Material Check-In Exceptions Block

The following information displays in the Material Check-In Exceptions Block:

- Units in Batch - The total number of units in this batch.
- Units with No Bags - Number of units checked in the system with donor CUE, but with no bags checked in yet.


WellSky Corporation
Proprietary and confidential

- Units with Tubes Only - Number of units in the system with only tubes checked in.

Press F6 (Menu) to view the units involved in the exception. The following window opens:

Press F8 (Exit Screen) to return to the main screen.

## In the Detail Block

The following information displays in the Detail Block:

- Unit ID - Unit ID.
- Coll Date - Unit Collection date.
- CUE - CUE interpretation.
- Bag - Bag Configuration.
- Drive - Drive ID.
- Gr/Site - Group/Site ID.
- Red - Red Tubes checked in (1 and 2).
- Purple - Purple tubes checked in (1 and 2).
- Bleed times - Donor's start and end bleed times.

Use the UP and DOWN arrow keys to scroll through the list of units.

## Viewing Unit Attributes

Press LOV to view unit attributes. The following window opens:

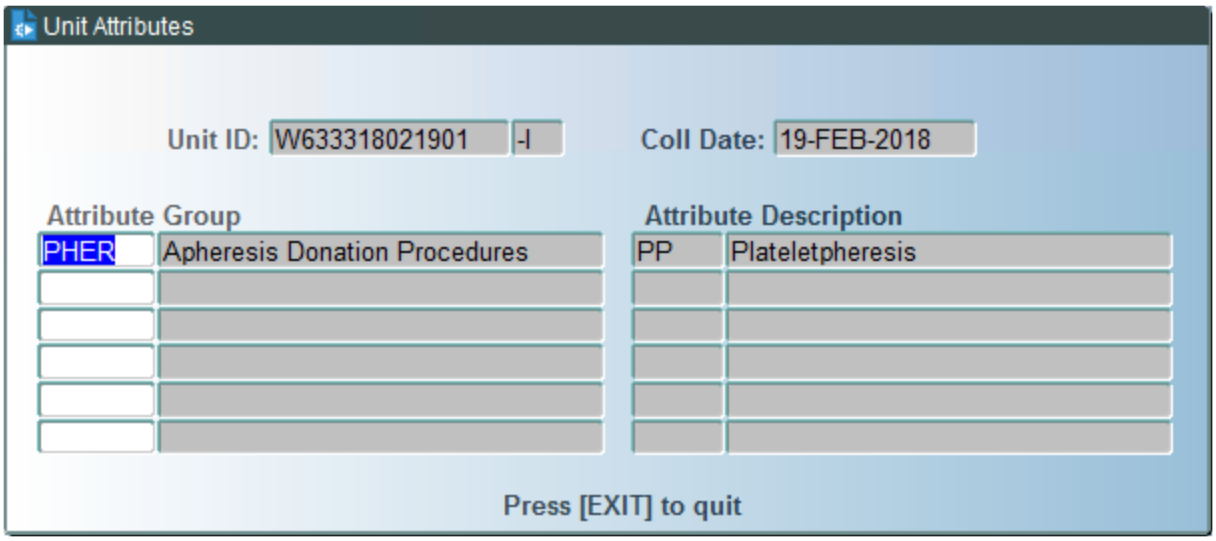


Press F8 (Exit Screen) to return to the main screen.

# Performing Unit QC

## QC

Enter one of the following:

- `Y` – accept unit for QC
- `Null` – reject unit for QC
- CTRL + F3 (Next Block) – reconcile all units in the batch

**NOTE –** Appropriate QC status displays based on data entered from the previous screens: DSCE, BAGS, and TUBES.

**NOTE –** If all data has been entered from material check-in, the system defaults to Y. When doing QC on an entire batch, you may enter `Y` or `Null` in the *QC* field to override the system default QC status. You may also make the following change:

- Y to Null for reasons external to the displayed data
- Null to Y, even though the data is missing from the system (in which case a window asks you to reconcile the units)
- Y or blank (null) if not ready to do QC on a unit. (In this case, the unit continues to display for QC approval next time the screen is accessed.)

Press F12 (Commit) to accept or reject the units in this batch that have Y or Null QC flag sets.

# At Commit

QC flag is updated to Y (accept) or Null (reject) for each unit.


WellSky Corporation
Proprietary and confidential

**NOTE –** Once you commit a QC flag on a unit to the system, the QC flag prevents this unit from appearing on the QC screen again; therefore, updates to the QC decision of Y are not permitted.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.2 Modify Donor Source Card Details (MODDSC)

## Intended Use

Use the Modify Donor Source Card Details screen to update information that was previously entered from the following:

- Donor cards
- Blood bags
- Test tubes

### Static Interdictions

Some static interdictions are placed or removed in the MODDSC screen based on information available when the data is saved. If the system places these interdictions, they will not be removed via MODDSC unless it is appropriate.

**Important!** These interdictions should never be used for manual placement or information other than is intended in this function.

The MODDSC screen will remove the following interdictions based on information available when the data is saved:

- BLFA – Bleed time is greater than the maximum allowable bleed time.
- AMBI – Ambiguous CUE uninterruptable.
- SELF – Donor is self-deferred: CUE - This interdiction is removed if the Donor CUE field is other than 'N'.
- NCP – No CUE Present.
- TEMP – Check-in Temperature is greater than 37.5°C.
- UIBT – Illogical bleed time.

Any attributes removed via MODDSC that have an interdiction associated in the ATTRIB table will automatically remove the interdiction.

## Limitations

Only one unit can be reviewed or updated at a time.

## Prerequisites

- Initial Check-In, Bag Check-In and Enter Donor Source Card Details or Donor Source Card Entry must have been performed.
- Modifications for bag configuration and bleed time are permitted once a unit has passed Check-In QC (if component from unit are labeled HOLD' QUARANTINE, Emergency, or NULL).
- Lab Master Code "DON" is used to not order routine testing when that donation type is entered for the unit.

## Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu or by using the keyword `MODDSC`.

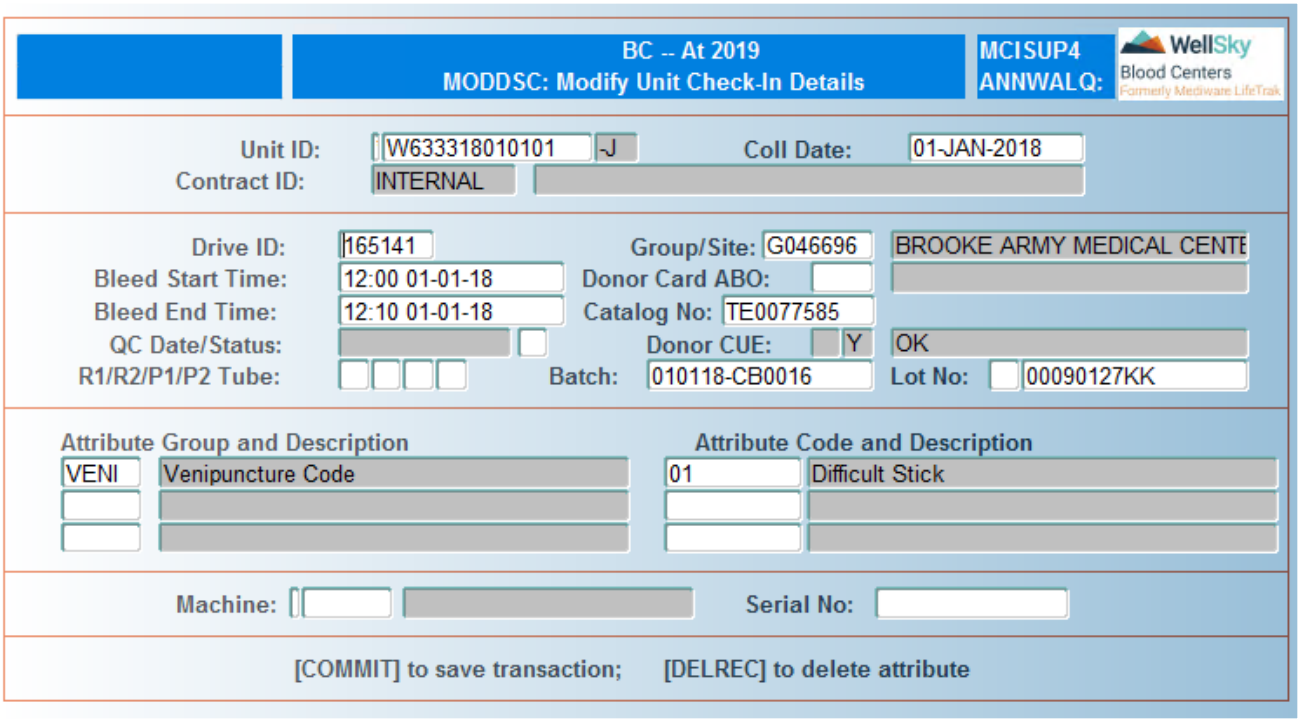


## Control Block Fields and Definitions

### Unit ID

Scan or enter manually enter unit ID.

### Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

### Contract ID

INTERNAL automatically displays after the unit ID is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

**NOTE –** All fields populate with previously entered information after the unit ID is entered.

## Drive ID

Enter correct drive ID or select from LOV. Press ENTER to accept the previously entered drive ID.

**NOTE –** Press CTRL + F3 (Next Block) to proceed directly to the Attributes Block.

## Group/Site

Enter correct group/site ID or select from LOV. Press ENTER to accept the previously entered group/site ID.

## Bleed Start Time

Enter bleed start timein HH24:MI MM-DD-YY format. Press ENTER to accept previously entered bleed time.

**NOTE –** The collection date displays. Only the time of bleed times may be changed. It must match the collection date.

## Bleed End Time

Enter bleed end time in HH24:MI MM-DD-YY format. Press ENTER to accept previously entered bleed time.

**NOTE –** If the bleed end time is before the bleed start time, you will be alerted that an illogical bleed time has been entered; if accepted, a UIBT interdiction is placed on the unit.

**NOTE –** The following bleed time conditions apply:

- If the bleed time is out of range, a window appears at commit.
- If the bleed time is greater than or equal to the Slow Bleed value and less than or equal to the Maximum value in Chapter Details (CHAPTER), a window warning will alert that bleed time is slow and, if accepted, a BLFA interdiction is placed. The BLFA interdiction is placed on the component when defined based on the Product types entered in the Master Code BLFA. If the product type is not listed in this Master Code, a BLHO interdiction is placed.
- If the bleed time is greater than the maximum value set in Chapter Details (CHAPTER), a BLFA interdiction is placed on the unit.
- If the bleed time was incorrectly entered with slow bleed time and corrected to within normal limits, the interdiction is not removed from the components. These interdictions must be released manually by the user.

- If the bleed time was incorrectly entered and it was greater than the maximum value set in Chapter Details (CHAPTER), a BLFA interdiction is placed on the unit, and when the time is corrected to a normal limit, the BLFA will be released from the unit.

### Donor Card ABO

Enter donor card ABO or select from LOV. Press **ENTER** to accept the previously entered donor card ABO.

### Catalog No

Manually enter the catalog number, or select it from the LOV.

### QC Date/Status

Enter `Y` to confirm or `N` to reject, or if QC has not been done, leave the field blank. Press **ENTER** to accept QC status.

### Donor CUE

Donor CUE displays. This field is not navigable.

### Red/Purple Tubes

Press **ENTER** to accept the displayed information, or enter `Y` if red (1 and 2) or purple (1 and 2) tubes have been received or enter `N` if one has not been received.

### Batch (check-in)

Enter check-in batch ID or select from LOV. Press **ENTER** to accept check-in batch ID.

### Lot No

Enter lot number or select from LOV. Press **ENTER** to accept the lot number.

**NOTE –** If the bag configuration code was changed earlier, the lot number must also be changed or the compute will not allow the screen to commit.

## Modifying Attributes

Press **CTRL** + **F3** (Next Block) to modify unit attribute.

### Attribute Group And Description

Enter attribute group or select from LOV. Press **ENTER** to accept the attribute group. Attribute group description automatically displays after the group is entered. To remove the attribute group and code, press **CTRL + F8** ( **DELREC**).

**NOTE –** If changing/adding an attribute group, a corresponding attribute code must be added or changed.


WellSky Corporation
Proprietary and confidential

## Attribute Code And Description

Enter attribute code or select from LOV. Press **ENTER** to accept the attribute code. Attribute code description automatically displays after the code is entered.

**NOTE –** If the donation type for sample collection is entered, the Batch ID will be populated with 'SAMPLE'.

**NOTE –** When updating the donation type, a check for Lab Master Code DON is performed to determine if the routine donor testing should be scheduled or removed from the unit. If testing has already been performed on the unit when the donation type is changed, the testing will have to be removed manually through the Void or Cancel functions.

## Machine

Scan technology label, or press **M** to manually enter machine code or select from LOV.

**NOTE –** If technology label is scanned, both machine code and serial number will be scanned. If the machine code is manually entered, the serial number must also be manually entered.

## Serial No

Manually enter the serial number or select serial number from LOV.

**NOTE –** After the Serial No. field is populated, press **ENTER** to return to the Attribute block. Enter additional attributes or press **F12** (Commit).

# At Commit

Updates to the system include the following:

- The data entered on the screen.
- Interdictions are placed or updated on the unit due to a long bleed time, illogical bleed times, or incomplete data.
- A BLFA interdiction is placed on all units that go over the maximum bleed time, except for pheresis donations.
- A UIBT interdiction is placed on all units with illogical bleed times.
- Routine donor testing scheduled or removed based on donation type.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.3 Modify Check-In Batch Details (MODBATCH)

## Intended Use

Use the Modify Check-In Batch Details screen to revise data that relates to the entire batch. The information that displays here is gathered during Bag Check-In and Check-In Imported Blood Products.

## Limitations

None

## Prerequisites

- User should have a supervisory access level.
- Bag must have been initially checked in.

## Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu, or by entering the keyword `MODBATCH`.

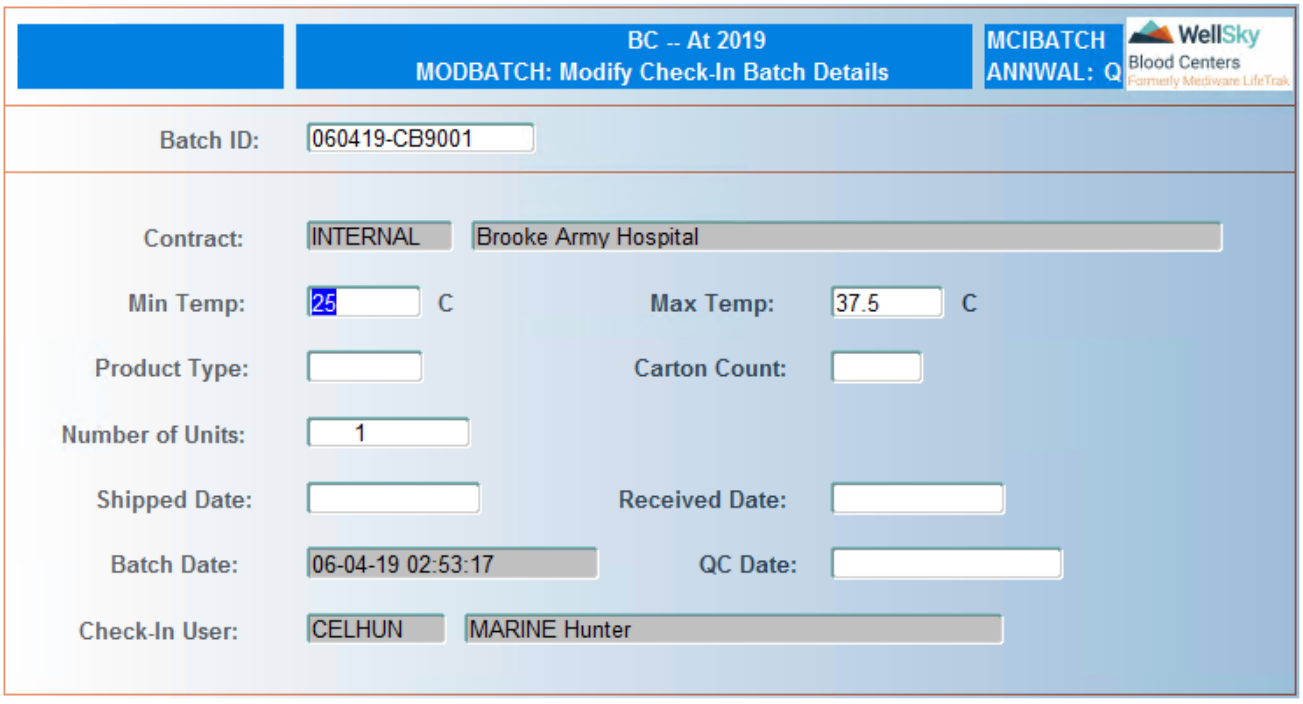


## Control Block Fields and Definitions

### Batch ID

Enter batch ID or select from LOV.

**NOTE –** Once the batch ID is entered, the computer displays data associated with that batch.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Contract

Displays INTERNAL.

## Min Temp

Enter the minimum receipt temperature (°C). Press **ENTER** to accept the displayed minimum receipt temperature.

> **NOTE –** The minimum temperature cannot be greater than the maximum temperature.

## Max Temp

Enter the maximum receipt temperature (°C). Press **ENTER** to accept the displayed maximum receipt temperature.

> **NOTE –** The maximum temperature cannot be less than the minimum temperature. The cursor moves from this field to the QC Date field.

## Product Type

Enter product type or select from LOV. Press **ENTER** to accept the product type.

## Carton Count

Displays the carton count. This field is display only and cannot be modified.

## Number of Units

Displays the number of units. This field is display only and cannot be modified.

## Shipped Date

Press **ENTER** to accept the displayed shipped date, or enter the date the batch was shipped.

> **NOTE –** The shipped date cannot be later than the received date.

## Received Date

Enter receipt date in MM-DD-Yformat. Press **ENTER** to accept the displayed received date.

> **NOTE –** The received date cannot be prior to the shipped date.

## Insert Date

Press **ENTER** to accept the displayed insert date or enter the date the batch was inserted through Imported Blood Products.

**NOTE –** This field displays the date that imported blood was initially checked in.

### QC Date

Press ENTER to accept the displayed date or enter the date the batch was reviewed.

**NOTE –** QC date cannot be modified if the batch has not yet been through a QC review. After entering or updating the QC date, a window opens for entering notes for the batch. Press F8 (Exit Screen) if you do not want to enter notes, or enter notes and press F12 (Commit).

### Checkin User

This field displays the login and name of the user who checked in the blood bag.

## At Commit

Updates to the system include the following:

- The data entered on the screen.
- Interdictions are placed on units and components which are out of the temperature range.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.4 Delete Non-Unit Tubes (DTUBE)

## Intended Use

Use the Delete Non-Unit Tubes to delete tubes that were erroneously committed to the database during Tube Check-In instead of Hospital/Patient Testing Check-In.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu or by entering the keyword `DTUBE`.


WellSky Corporation
Proprietary and confidential

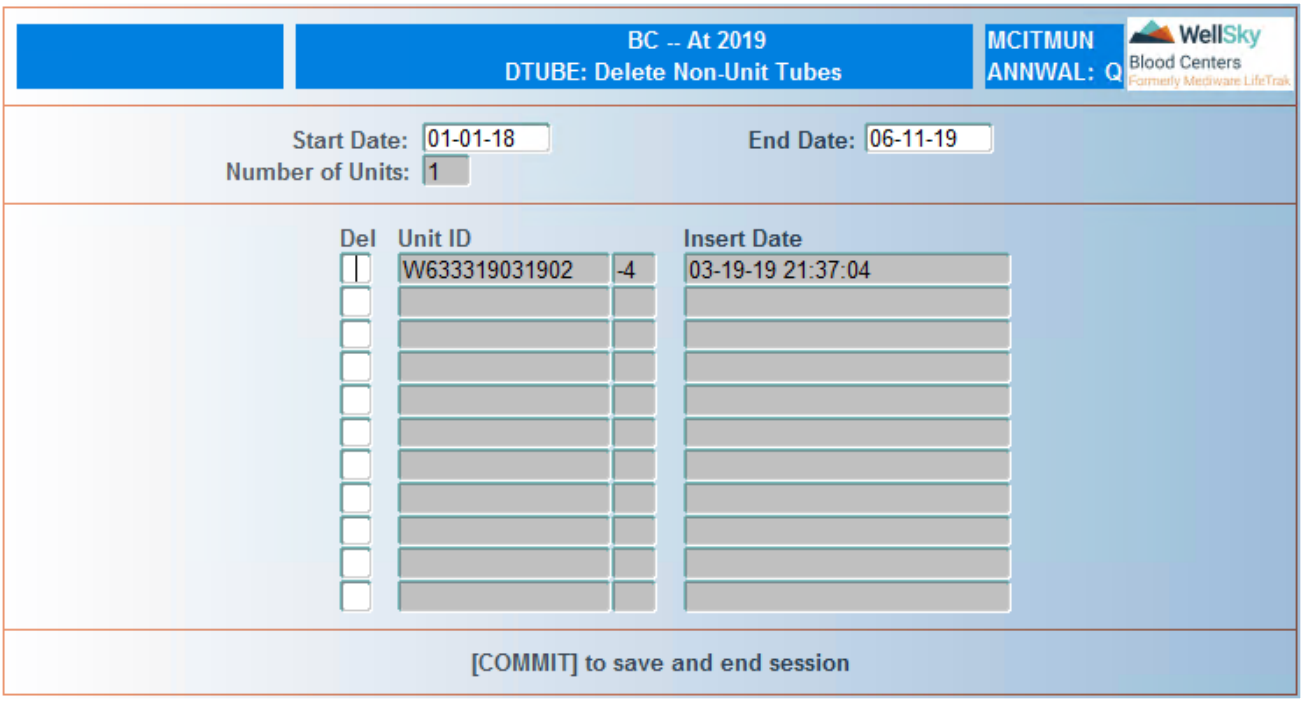


## Control Block Fields and Definitions

The start and end dates entered in this screen, act as a range. The computer searches the database within this range to display all tubes that were entered. The larger the date range, the more tubes display. If you are certain of the date the tubes were entered, enter that date in both the start and end date field.

### Start Date

Enter the start date in MM-DD-YY format.

**NOTE –** This date tells the computer where to begin searching for the tube.

This screen pulls data by insert date instead of by received date. If the multiple chapter flag is set to Y, the user will enter the date based on the time zone for the chapter which should be prior to the receive date. However, if the time zone for the chapter is significantly behind the server date and the server date has rolled to the next day, the start date will need to be after the receive date.

### End Date

Enter the end date in MM-DD-YY format.

**NOTE –** This date tells the computer where to stop searching for the tube.

### Number of Units

The computer displays the number of tubes that were checked in within the date range.

## Detail Block Fields and Definitions

### Delete

Scroll down and press **ENTER** or x to mark a unit to be deleted from the database. To cancel a mark, scroll to the marked unit and press **ENTER**. Press **F12** (Commit) to delete the marked units and clear the screen.

### Unit ID

The computer displays the ID numbers for all the tubes that were checked in within the date range.

### Insert Date

The computer displays the date and time each tube was checked in.

## At Commit

All tubes deleted in this screen are removed from the temporary database.

**Important!** Tube IDs removed here which were for Hospital/Patient Testing need to be checked in through the correct module.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.5 Change Unit Collection Date (COLLDATE)

## Intended Use

Use the Change Unit Collection Date screen to change a collection date that was incorrectly entered during Initial Check-In.

This screen is reserved for the highest level of supervisory access since a collection date change will mean a drastic change to the database.

**Important!** If you change a unit collection date, ensure that any products made from this unit conform to current Good Manufacturing Practices (cGMP).

## Limitations

- Collection date cannot be changed to a future date from the entered date checked-in.
- Collection date cannot be changed once a component has been defined unless the component has not been labeled.

## Prerequisites

This screen can be used before labeling only and is applicable to internally collected units.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu or by entering the keyword COLLDATE.

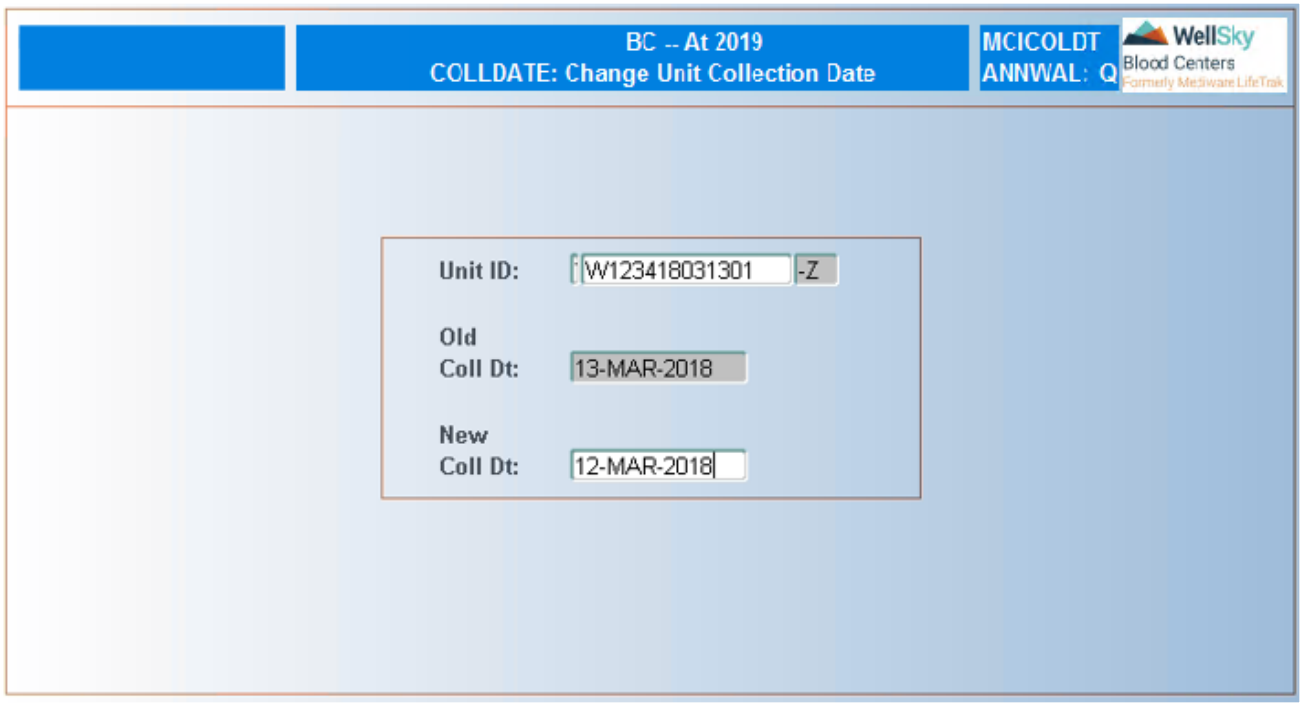


# Fields and Descriptions

## Unit ID

Scan or manually enter unit ID.

## Old Coll Dt

The initial collection date displays in this field.

## New Coll Dt

Enter the correct collection date in DD-MON-YYYY format.

After the new collection date is entered, a window prompts you to confirm that the date is correct.

Enter Y to change the collection date, or enter N to exit without changes to the database.

## At Commit

Updates to the system from this screen include the following:

- Updates made to the collection date.
- Interdictions are placed on units with long bleed times.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.6 Override Donor CUE (CUEOVR)

## Intended Use

Use the Override Donor CUE screen to change the donor CUE field on the database when necessary.

## Limitations

The CUE cannot be overridden using this screen if the CUE required parameter is set to N for the Chapter.

## Prerequisites

This screen can only be used before labeling.

## Accessing the Screen

Access this screen from the Check-In Maintenance Functions menu or by entering the keyword `CUEOVR`.

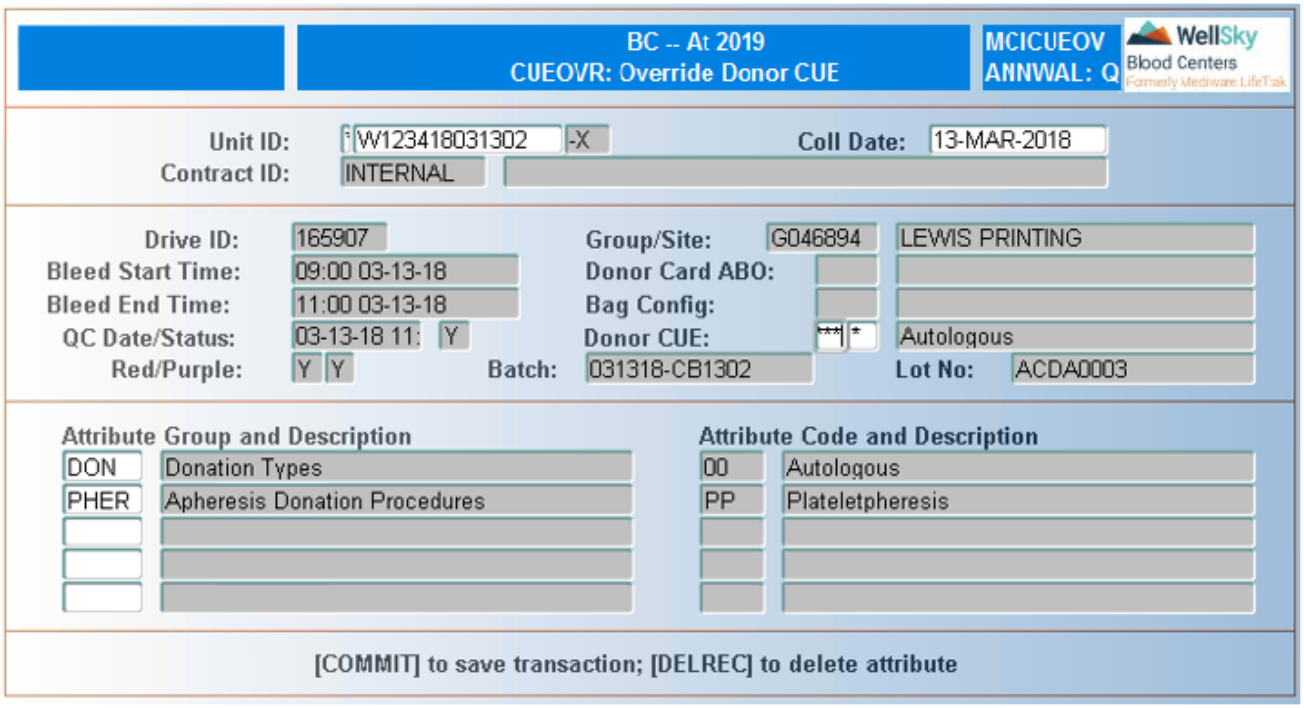



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Contract ID

Contract ID defaults to INTERNAL. Field is not navigable.

# In the Detail Block

The following information displays after the unit ID is entered. These fields are not navigable.

- Drive ID - Identifies the blood drive.
- Bleed Start Time - Date and time the bleed started.
- Bleed End Time - Date and time the bleed stopped.
- QC Date/Status - Status assigned to the unit and date.
- Red/Purple - Identifies if red or purple tubes were received.
- Group/Site - Identifies the site of the blood drive.
- Donor Card ABO - Blood type entered from the donor card.
- Bag Config - Arrangement of bags attached to the unit.
- Batch - Batch ID assigned by the system.
- Lot No. - Manufacturer's lot number for blood bags.
- Attribute Group And Description - Displays the attribute group if placed on the unit.
- Attribute Code And Description - Displays the attribute code if placed on the unit.

The following field is navigable after the unit Id is entered:

- Donor CUE – Scan correct CUE.

**NOTE –** After the correct CUE is scanned, the following window opens:

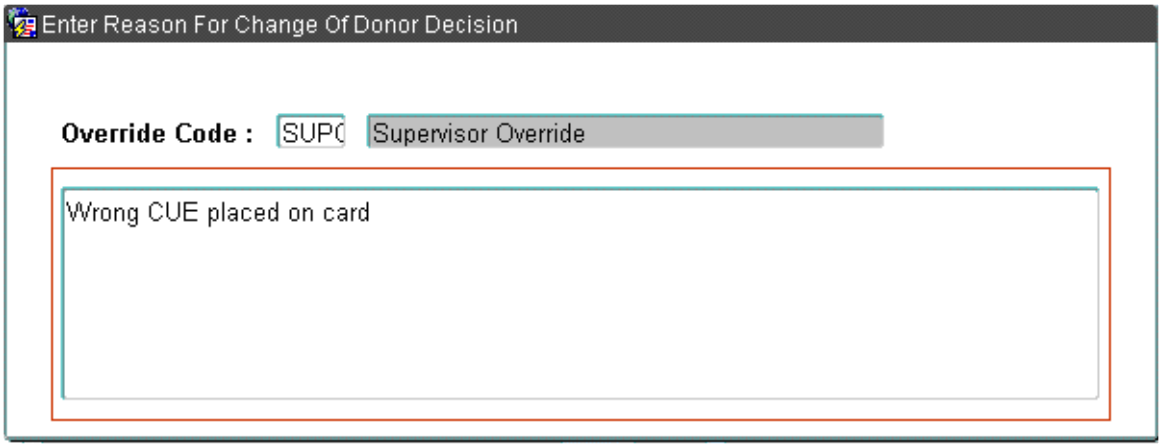


### Override Code

Enter override code or select from LOV. Code description automatically displays after the code is entered.

### Comment

Enter free format comment. A maximum of 240 characters is allowed.

Press **F12** (Commit) to save changes.

## At Commit

Updates made to the system at Commit include the following:

- The data entered on the screen.
- Any associated interdictions.
- Any associated attributes.
- CUE is updated.

## What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Check-In Maintenance Functions menu.

# 18.3.7 Delete Unit from System (DELUNIT)

## Intended Use

This screen is used to delete units from the system. It is strongly recommended that access to this screen be highly restricted.

This screen is only available from the Lab module.


WellSky Corporation
Proprietary and confidential

## Limitations

- You can process a maximum of 10 units per session.
- All products from the unit must be located in Lab in order to perform this function.

## Prerequisites

An authorized user must fully investigate the unit to be deleted prior to deletion.

## Entering/Viewing Data

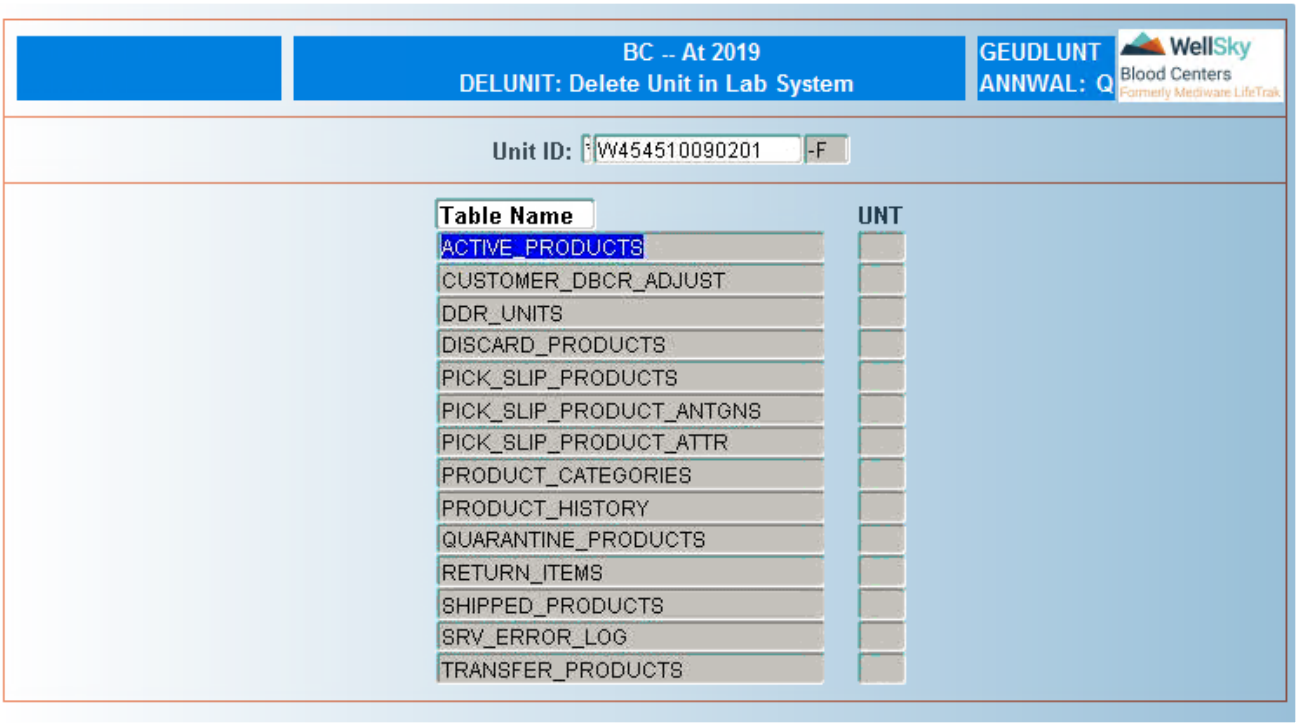


### Unit ID

**NOTE –** Process no more than 10 units before exiting the screen.

Scan or manually enter unit ID. All table names display. A 'Y' appears next to the table name(s) in which the unit to be deleted has entries.

Press **F12** (Commit) to delete the data. The following window opens.




Enter one of the following:

- `Y` – delete unit data.
- `N` – do not delete unit data.

## At Commit

Unit is deleted from the system.

# 18.4 Check-in Queries

Check-In Queries are accessed from the following menu:

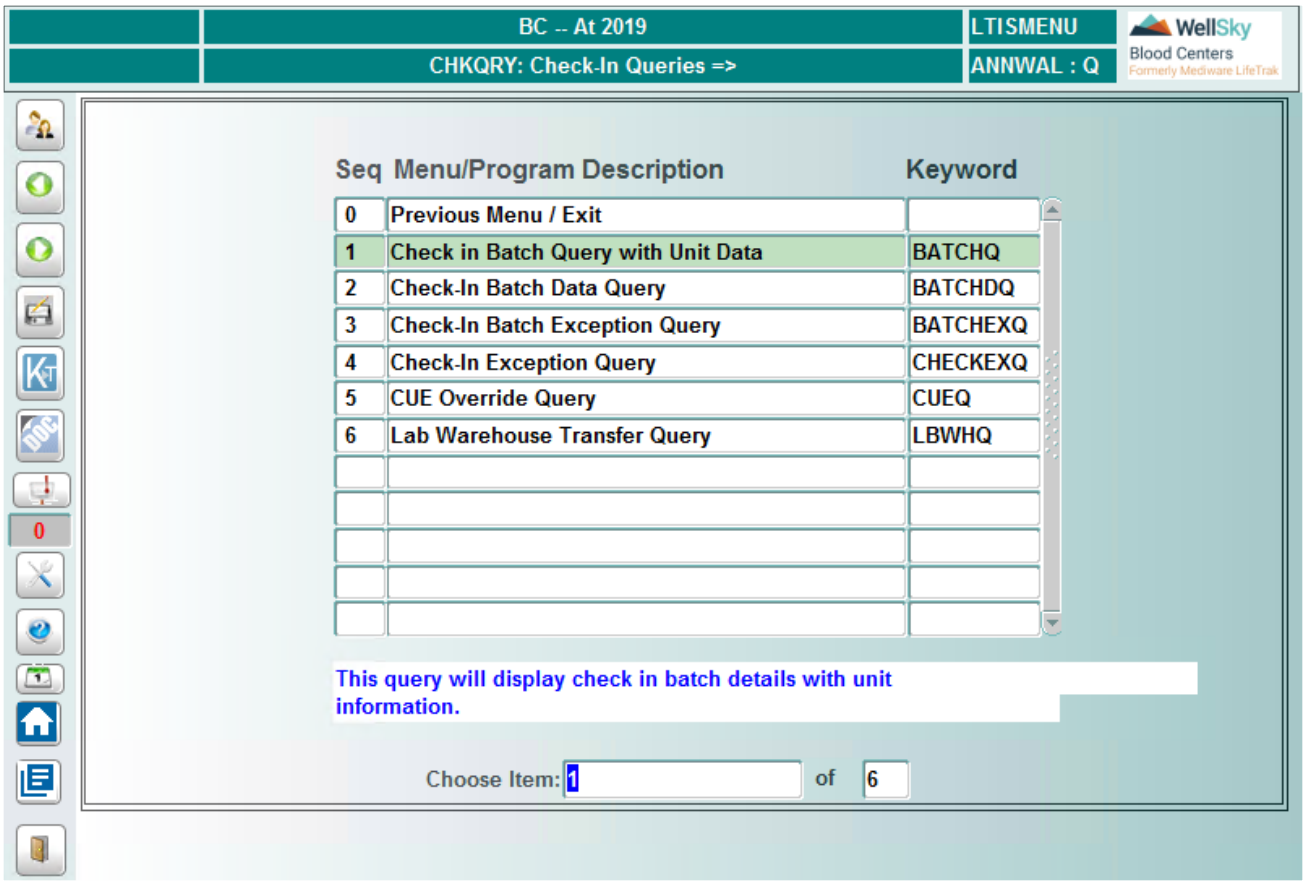


## 18.4.1 Check-In Batch Query with Unit Data (BATCHQ)

### Intended Use

Use the Check-In Batch Query With Unit Data screen to review complete check-in batch information that has been entered on previous screens. All information about the batch is displayed, unit by unit, including QC approval date/time.

### Limitations

This query is for querying internal check-in batches.

# Prerequisites

Use the Check-In Batch Query With Unit Data screen to review complete check-in batch information that has been entered on previous screens. All information about the batch is displayed, unit-by-unit, including QC approval date/time.

# Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword `BATCHQ`. After entering the batch ID, information about this batch displays for your review. The displayed data cannot be updated on this screen.

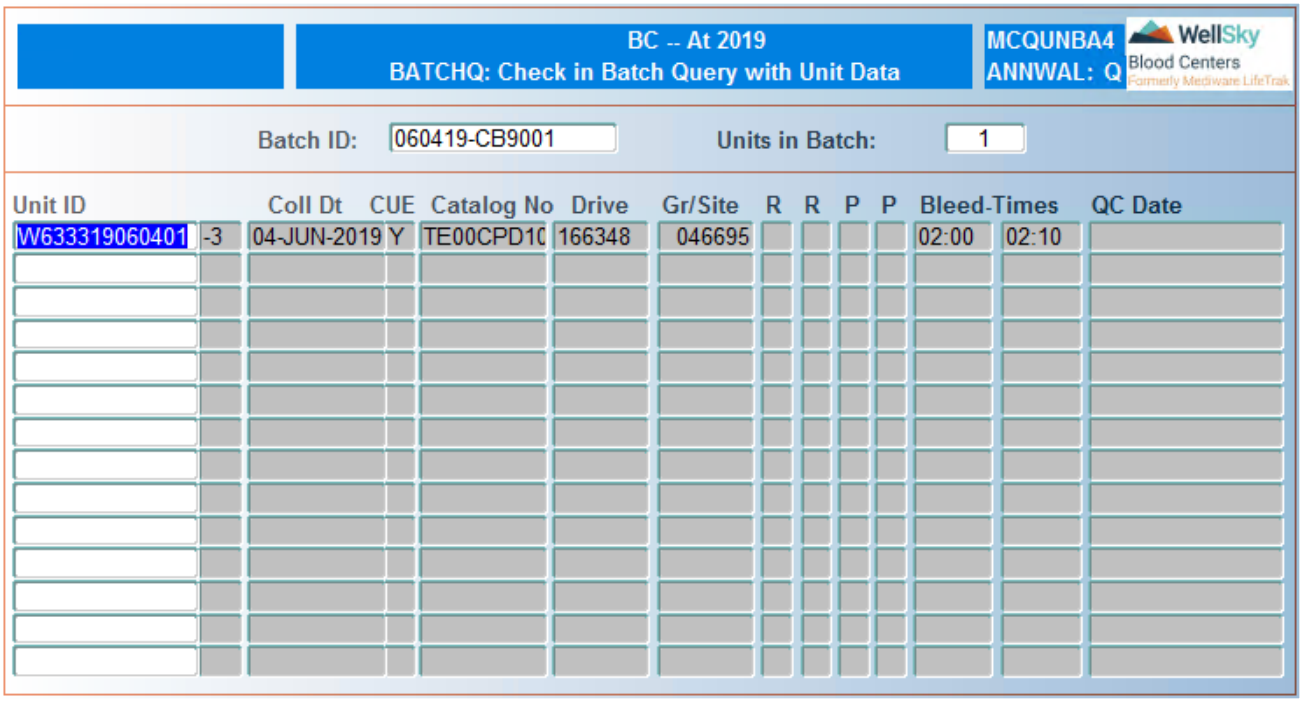


# Control Block Fields and Definitions

## Batch ID

Enter batch ID, if known or use LOV to select a batch. Press **ENTER** again to retrieve information on the batch.

# In the Detail Block

Computer displays the following fields once the batch ID is entered.

Information about the requested batch:

- No of Units - total number of units in this batch.
- Information about each unit in the batch:
  - Unit ID - Unit ID.
  - Coll Date - unit collection date.
  - CUE - interpretation, (for example, N means Not for transfusion).

- Catalog No - catalog defined in MCIBAGS.
- Drive - drive ID.
- Gr/Site - group/site ID.
- RR - red tubes 1 & 2 checked in (Y if checked in).
- PP - purple tubes 1 & 2 checked in (Y if checked in).
- Bleed-times - donor's start and end bleed times.
- QC Date - date/time of QC approval.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

**NOTE –** LOV displays batches from the previous twenty-one (21) days. To query a batch that was created before that time, you must enter the batch ID.

### At Commit

No updates are made to the system from this screen.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-in Queries menu.

## 18.4.2 Check-In Batch Data Query (BATCHDQ)

### Intended Use

Use the Check-In Batch Data Query screen to revise data that relates to the entire batch. The information that displays here is gathered during Bag Check-In and Check-In Imported Blood Products.

### Limitations

None

### Prerequisites

- Supervisory access level.
- Bag must have been initially checked in.
- Changes must be committed to update the database.

### Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword `BATCHDQ`.

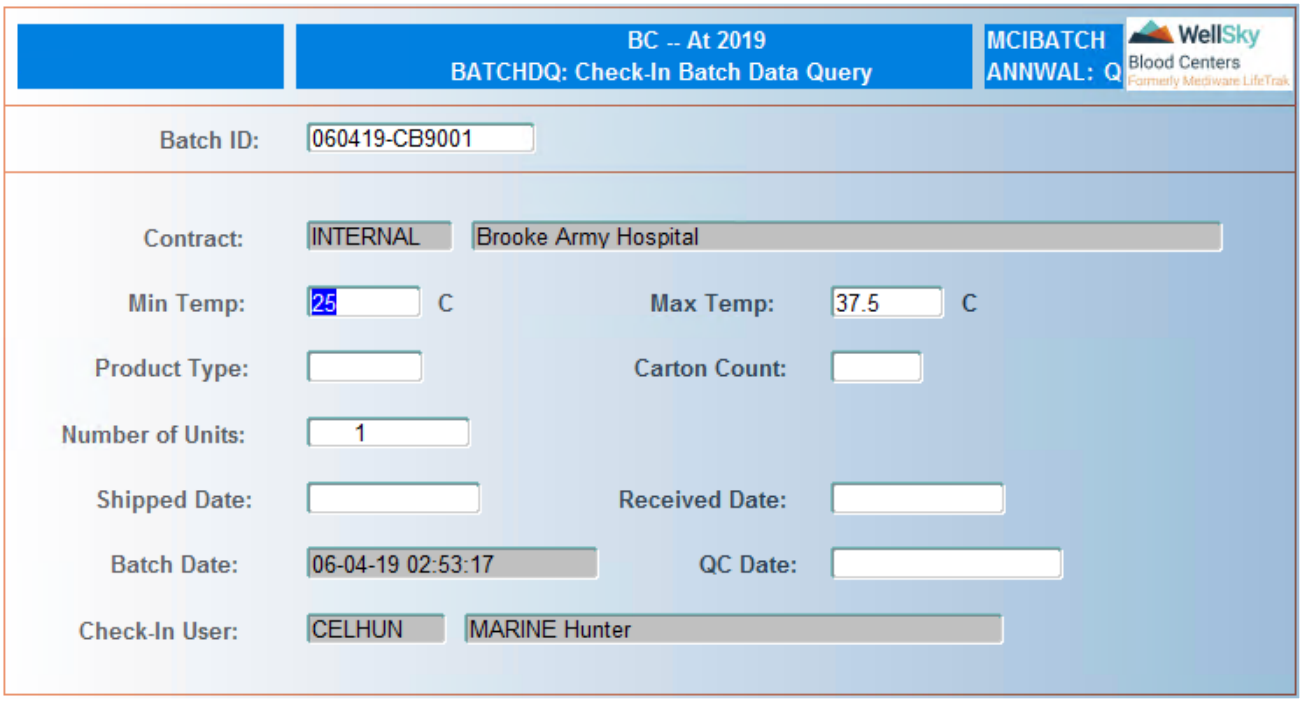


# Control Block Fields and Definitions

## Batch ID

Enter batch or select from [LOV.

**NOTE –** LOV displays batches from the previous twenty-one (21) days. To query a batch that was created before that time, you must enter the batch ID.

# In the Batch Detail Block

The following information displays after the batch ID is entered:

- Contract ID – Displays Internal.
- Min Temp – Minimum temperature.
- Max Temp – Maximum temperature.
- Product type – Product type.
- Carton Count – Number of cartons.
- Number of Units – number of units.
- Shipped Date – Shipment date.
- Received Date – Receipt date.
- Insert Date – Date/time received.


WellSky Corporation
Proprietary and confidential

- QC Date - date/time of QC approval.
- Check-In User – ID of user performing check-in.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-In Queries menu.

# 18.4.3 Check-In Batch Exception Query (BATCHEXQ)

## Intended Use

Use the Check-In Batch Exception Query screen to review only the check-in exceptions for a batch.

## Limitations

None

## Prerequisites

Check-in batch must exist (a bag must be checked in to create a batch).

## Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword `BATCHEXQ`.

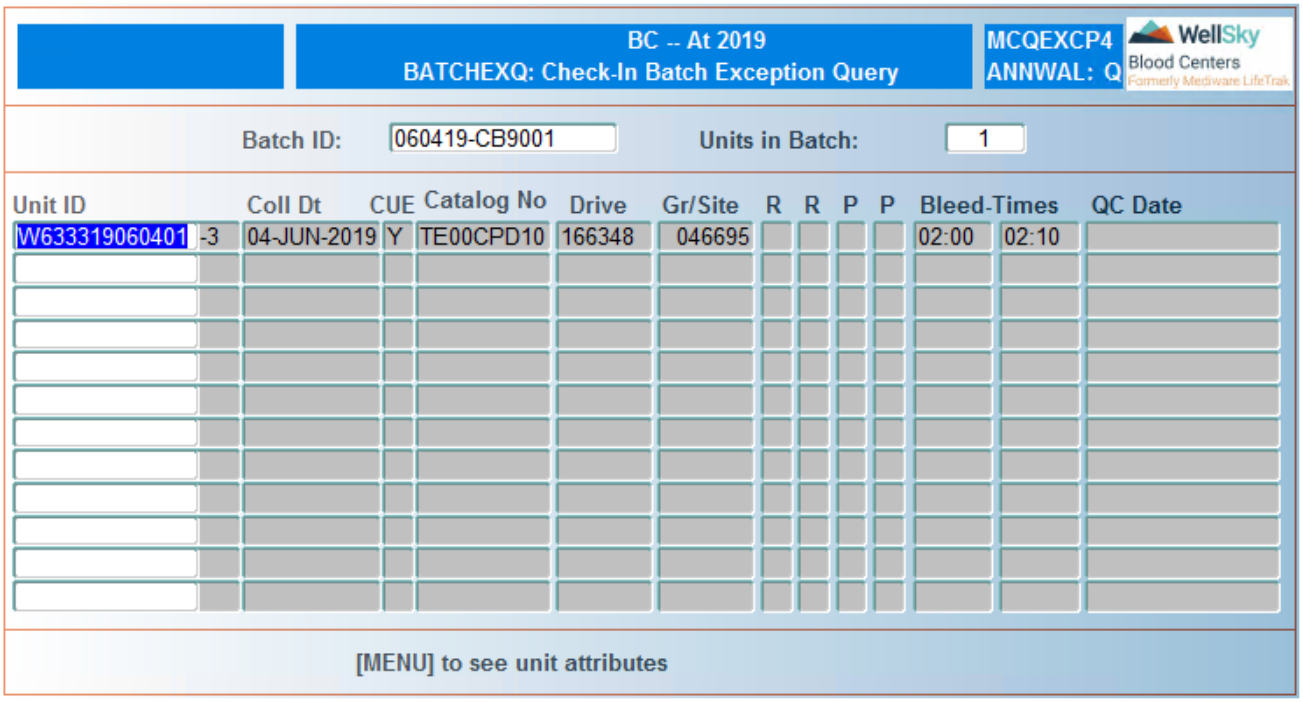

# Control Block Fields and Definitions

## Batch ID

Enter batch ID or select from LOV.

> **NOTE –** LOV displays batches from the previous twenty-one (21) days. To query a batch that was created before that time, you must enter the batch ID.

## Units in Batch

Number of units in the batch automatically displays. Field is not navigable.

# In the Batch Detail Block

Information about each unit in the batch that contains exceptions:

- Unit ID – Unit ID.
- Collection Date - Unit collection date.
- CUE – Confidential Unit Exclusion.
- Catalog No – Catalog number defined in MCIBAGS.
- Drive – Drive ID.
- Group/Site – Group Site ID.
- Red Tubes 1 & 2 - Y or blank.
- Purple Tubes 1 & 2 - Y or blank.
- Bleed Times – Bleed start and end times.
- QC Date – Date QC was performed.

Use the **UP** and **DOWN** arrow keys to scroll through the list of units.

# Viewing Attributes

Press **F6** (Menu) to view unit attributes. The following window opens:


WellSky Corporation
Proprietary and confidential

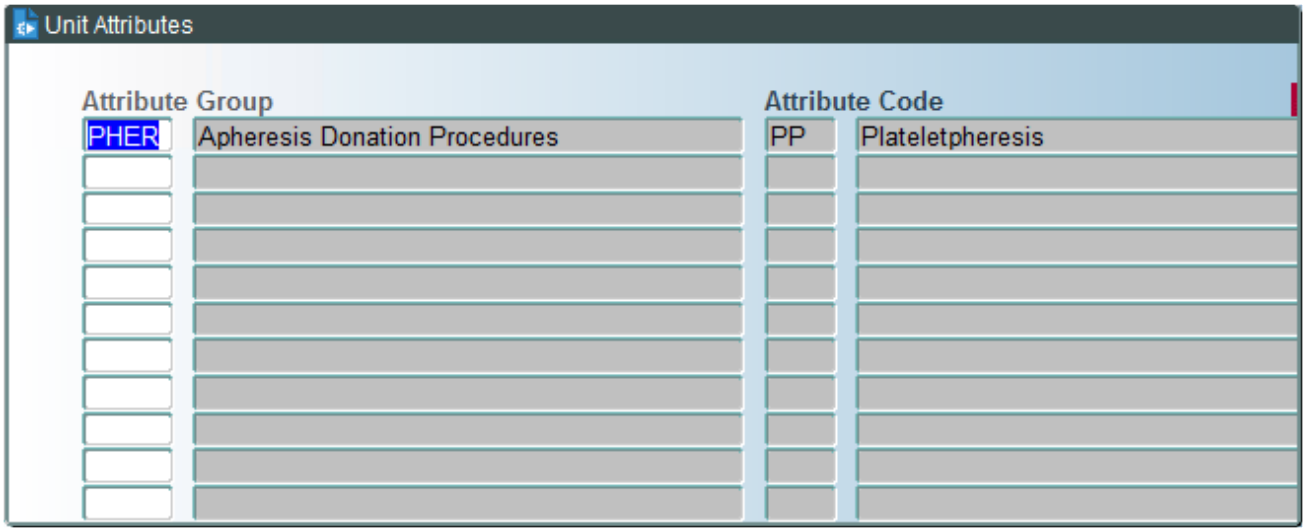


Press **F8** (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-in Queries menu.

# 18.4.4 Check-In Exception Query (CHECKEXQ)

## Intended Use

Use the Check-In Exception Query screen to review the unit exceptions for a given period of time. For the requested time period, IDs displayed are those for which either:

- Tubes only have been checked into the system.
- No bag has been checked in.

## Limitations

None

## Prerequisites

Only units with exceptions are displayed here.

## Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword `CHECKEXQ`.

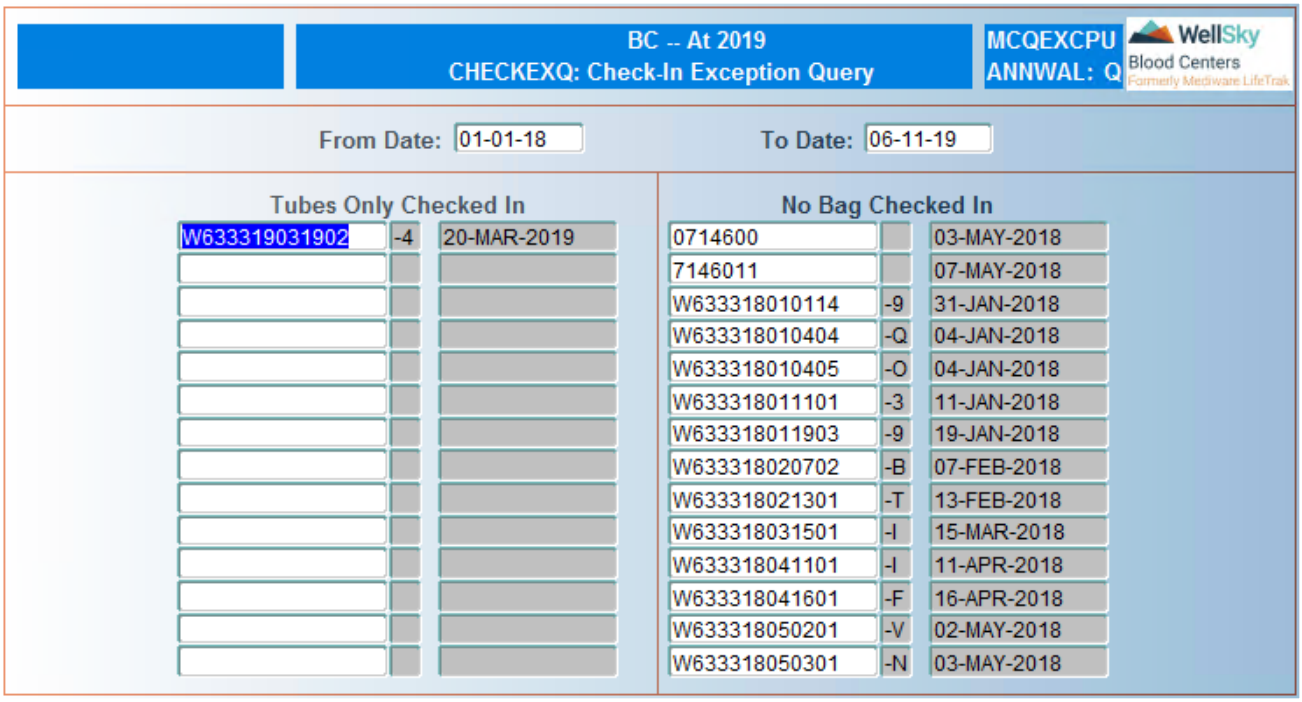


Entering a date range sets boundaries on what information is displayed. Within the range, units with check-in exceptions are displayed for review.

## Control Block Fields and Definitions

### From Date

Enter start date in MM-DD-YY format or leave field blank.

### To Date

Enter to date in MM-DD-YY format or leave field blank.

## In the Detail Block

The following information displays after the date range is entered:

- Tubes Only Checked In - Exceptions showing tube ID and date.
- No Bag Checked-In - Exceptions showing unit ID and date.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Use **CTRL** + **F3** (Next Block) to move from tubes field to bag fields.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-in Queries menu.

# 18.4.5 CUE Override Query (CUEQ)

## Intended Use

Use the CUE Override Query screen to review the details associated with a CUE override on a particular unit.

## Limitations

None

## Prerequisites

CUE overrides are limited to the highest levels of authority, but there is no restriction on the query.

## Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword CUEQ.

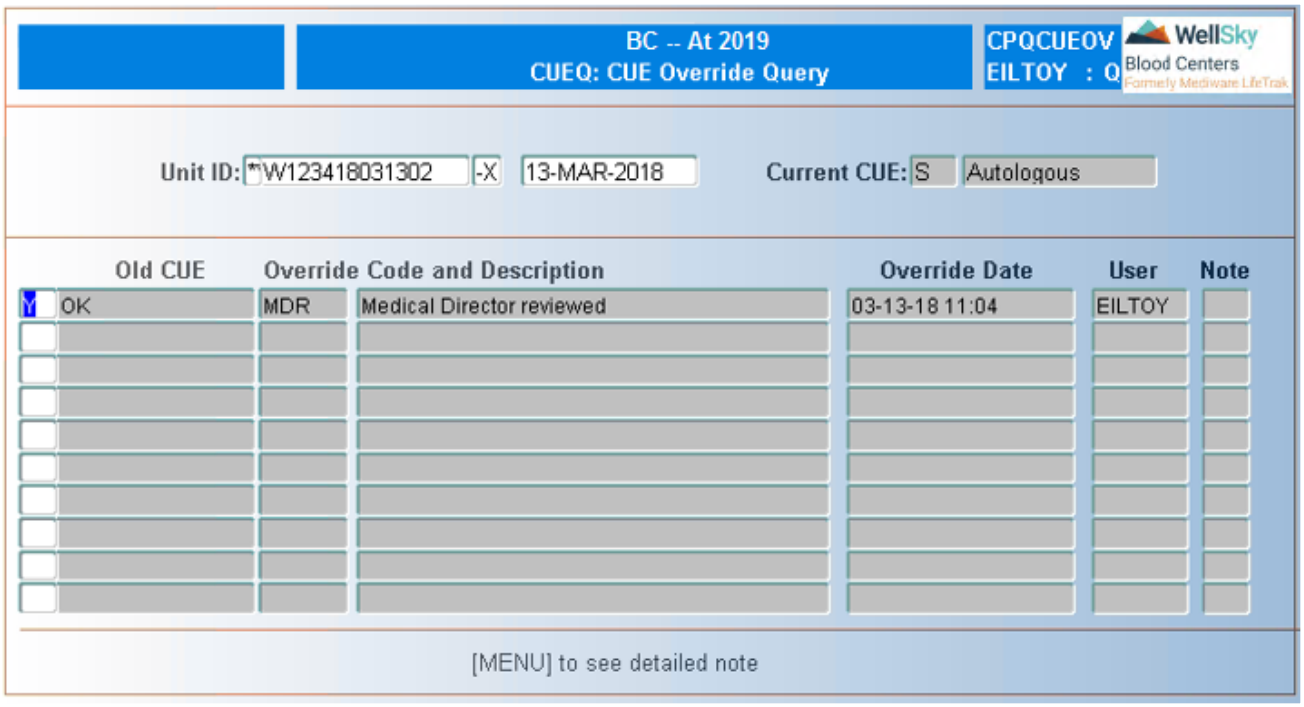


After entering the unit ID, information about the CUE override for this unit displays for your review.

## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID. Unit collection date automatically displays after the unit ID is entered.

### Current CUE

CUE code and description automatically display after the unit ID is entered. Field is not navigable.

## In the Unit Detail Block

The following information displays after the unit ID is entered:

- Old CUE – CUE before the override.
- Override CUE and Description – Override code and reason.
- Override Date - date and time stamp of the override.
- User – User performing override.
- Notes – Field is blank if no notes are present. An X appears in the field if notes are present.

## Viewing Override Notes

Press **F6** (Menu) to view override notes. The following window opens:

Press **F8** (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Check-in Query menu.

# 18.4.6 Lab Warehouse Transfer Query (LBWHQ)

## Intended Use

Use the Lab Warehouse Transfer Query screen to review the details of lab warehouse transfers.

## Limitations

Updates are not allowed on this screen.

## Prerequisites

Units/components must have been transferred using the Lab Warehouse Transfer programs in order to be queried in this screen.

## Accessing the Screen

Access this screen from the Check-In Queries menu or by entering the keyword `LBWHQ`.

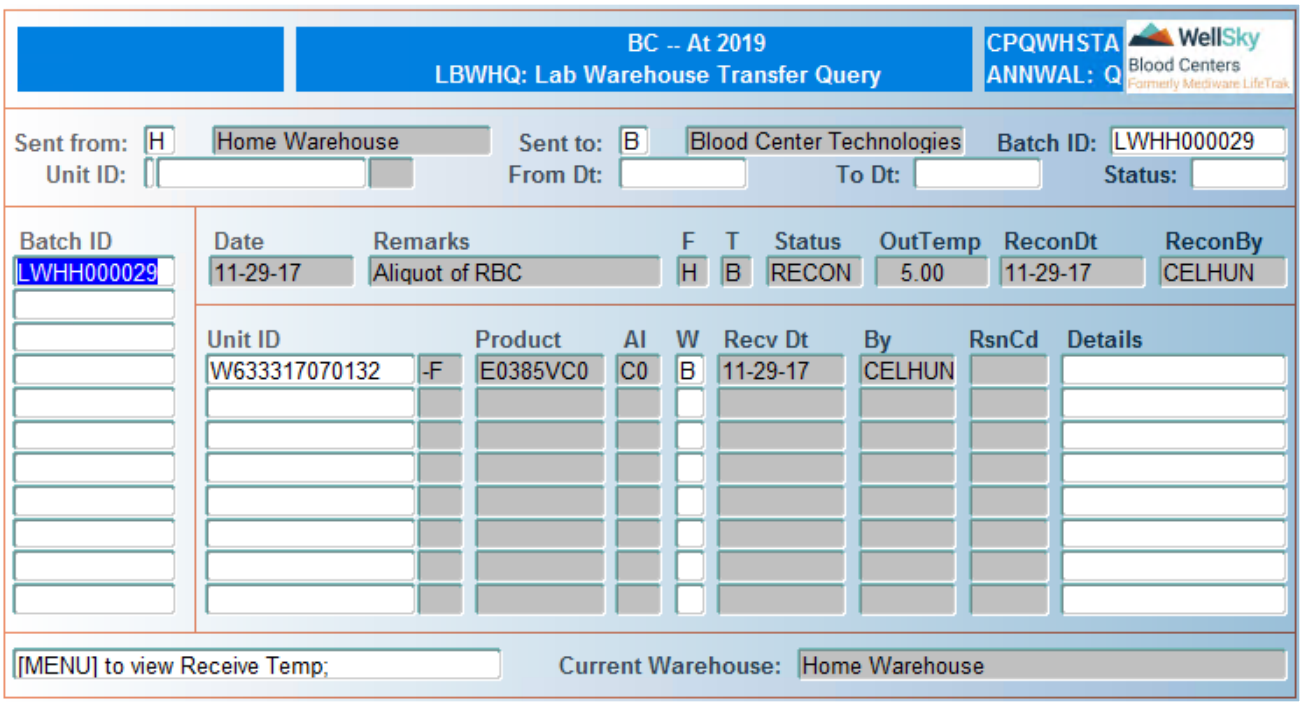


## Control Block Fields and Definitions

### Sent From

Enter sent from warehouse, select from LOV or leave blank.

### Sent To

Enter sent to warehouse, select from LOV or leave blank.

### Batch ID

Enter batch ID, select from LOV, or leave blank.

### Unit ID

Scan or manually enter unit ID or leave blank.

### From DT

Enter from date in MM-DD-YY format or leave blank.

### To DT

Enter to date in MM-DD-YY format or leave blank.

**NOTE –** If all fields were left blank, the query displays all batches from the last 30 days.

## In the Detail Block

Computer displays all lab warehouse transfer batches meeting the criteria entered. The following information displays:

- Batch ID - a list of lab warehouse transfer batches.
- Date – batch creation date.
- Remarks – outgoing transfer comments.
- F – Sent From warehouse ID.
- T– Sent To warehouse ID.
- Status – Batch ID status.
- OutTemp – Outgoing transfer batch temperature.
- ReconDt – Reconciliation date.
- ReconBy – Reconciliation user ID.
- Unit ID – Unit IDs in selected batch.
- Product Code – Product code.
- Al – Component aliquot.
- W – Reconciliation warehouse.
- Recv Dt – Date unit/component received or reconciled.
- By – User receiving or reconciling unit/component.
- RsnCd – Reconciliation code.
- Details – Reconciliation details.

## Viewing Check-In Temperatures

Press F6 (Menu) to view check-in temperatures. The following window opens:


WellSky Corporation
Proprietary and confidential

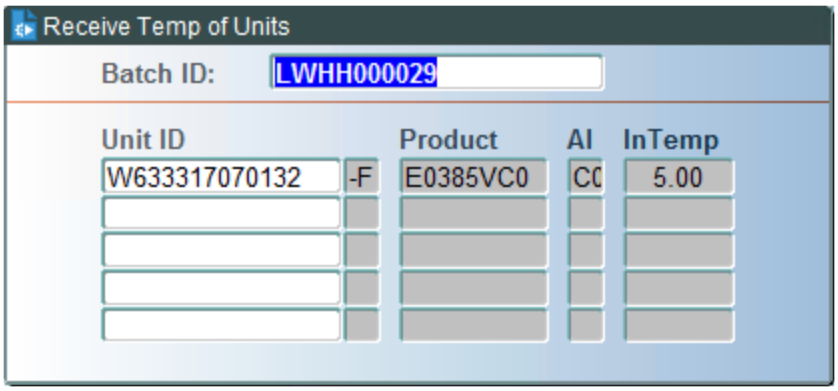


Press F8 (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Check-in Query menu.

This Page Intentionally Left Blank

19

# Chapter 19 - Component Production


19.1 Introduction ..... 1129
19.1.1 Overview ..... 1129
19.1.2 Structure ..... 1129
19.2 Routine Component Production ..... 1131
19.2.1 Separation Times (SEP) ..... 1131
19.2.2 Components Made from the Unit - ISBT (COMPENTI) ..... 1133
19.2.3 Freeze Start Time (FRZ) ..... 1137
19.2.4 Discard Empty Bags (DISMTBAG) ..... 1139
19.2.5 Reject Unit/Component (REJECT) ..... 1141
19.2.6 Modify Component Weight (COMPWT) ..... 1144
19.2.7 Modify Separation Times (MODSEP) ..... 1146
19.2.8 Modify Freeze Start Time (MODFRZ) ..... 1148
19.2.9 Separation Times: Offline (SEPO) ..... 1150
19.3 Component Modification ..... 1153
19.3.1 Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2) ..... 1153
19.3.2 Sterile Docking Definition (SDD) ..... 1155
19.3.3 Convert / Modify Components (ISBT) (CMCI) ..... 1161
19.3.4 Delete Units from SCD Worksheet (DELSCD) ..... 1164
19.3.5 Modify SCD Details (MODSCD) ..... 1165
19.4 Pheresis Processing ..... 1168
19.4.1 Enter Pheresis Components - ISBT (PHERI) ..... 1168
19.4.2 Enter Pheresis Count (PLCOUNT) ..... 1172
19.4.3 Update Number of Bags for Components (CHGBAGS) ..... 1174
19.5 Pathogen Reduction ..... 1176
19.5.1 Pathogen Reduction Manager ..... 1176
19.5.2 Verify Suitability ..... 1178
19.5.3 Intermediate Process ..... 1187
19.5.4 Final Transfer/Storage ..... 1193

19.5.5 Upload Manually ..... 1201
19.5.6 UPLOAD File Automatically (FTP) ..... 1204
19.6 CRYO Production ..... 1207
19.6.1 Scan Units for CRYO Processing (CRYO1) ..... 1207
19.6.2 Entry and Offline CRYO Separation/Freeze Details (CRYO2) ..... 1210
19.6.3 Delete Units from CRYO Worksheet (DELCRYO) ..... 1214
19.6.4 Modify CRYO Details (MODCRYO) ..... 1216
19.7 Component Pooling ..... 1219
19.7.1 Re-Check Products from Inventory (RECHECK2) ..... 1219
19.7.2 Prepare Pooled Components (POOL) ..... 1219
19.7.3 Modify Pooled Components (MODPOOL) ..... 1227
19.7.4 Delete Pooled Components (DELPOOL) ..... 1232
19.8 Special Component Processing ..... 1235
19.8.1 Verify Component Suitability (SUIT) ..... 1235
19.8.2 Spike a Component (SPIKE) ..... 1237
19.8.3 Commit Reagents for Component (REAG) ..... 1239
19.8.4 Convert Component into Spiked Bag – ISBT (CONVI) ..... 1242
19.8.5 Convert Component into Spiked Bag (CONV) ..... 1244
19.8.6 Enter Component Differential (DIFF) ..... 1246
19.8.7 Enter Note for Special Processing (NOTE) ..... 1248
19.8.8 Edit Spiking Details (EDITSP) ..... 1250
19.8.9 Release from Special Processing (RSP) ..... 1252
19.8.10 Verify Component Suitability – Offline (SUITO) ..... 1254
19.9 Component Maintenance Functions ..... 1256
19.9.1 Delete Component (DELCOMP) ..... 1256
19.9.2 Re-check Product from Inventory-Super (RECHK2) ..... 1260
19.9.3 Print Product Labels (PPLBL) ..... 1260
19.10 Component Queries ..... 1263
19.10.1 Component Query (COMPQ) ..... 1263
19.10.2 Unit and Component Attributes Query (ATTRQ2) ..... 1266
19.10.3 Units Awaiting CRYO Results Query (PENDCRY) ..... 1266
19.10.4 Pooled Component Query- by Pool ID (PLPIQ) ..... 1268
19.10.5 Products from Autologous/Directed Donations (AUTOQ) ..... 1269
19.10.6 Special Processing Query (SPQ) ..... 1273
19.10.7 Product Bags Combination Query (BPQ) ..... 1276
19.10.8 ISBT New/Old Attribute Lookup Query ..... 1277


WellSky Corporation
Proprietary and confidential

# 19.1 Introduction

## 19.1.1 Overview

Component Production is made up of all functions that relate to the processing of collected blood into components and aliquots. Here, data is collected as the blood is processed into components, including the following:

- Separation and freeze times.
- Thaw temperatures.
- Product codes.
- Bag identifications.
- Component weights.
- Warehouse (where applicable).

During component production, every step in the process is controlled to verify that each component meets Current Good Manufacturing Practices (cGMPs) set by the FDA. When a component does not meet these Prerequisites, the system creates the appropriate interdictions to alert the user to remove it from further processing. By the same token, the system will not allow an illogical combination of components. For example, the system will reject data that reflects red cells being made from a pheresis platelet donation.

All Prerequisites associated with component conversion, pooling, CRYO preparation, sterile docking, and apheresis component definition, are accounted for at the component preparation level. This means tracking the following:

- cGMP accountability.
- Centrifuges used during separation.
- Lot numbers of bags, filters and wafers used in sterile docking.

Verification of the number of components produced against collection bag configurations, including bags added through sterile docking, yields accountability of the production processes. Critical functions, such as updates affecting the manufacturing guidelines, corrections, and QC approval, are controlled by supervisory access.

As in Material Check-In, components can be queried at any time after they are committed to the system. Reports can be generated and either printed or viewed online. Once generated, these reports are available for viewing or reprinting.

## 19.1.2 Structure

The following sections are included in the Lab Component Production module:

- Routine Component Production.
- Component Modification.
- Pheresis Processing.
- Pathogen Reduction.
- CRYO Production.

- Component Pooling.
- Special Component Processing.
- Component Maintenance Functions.
- Component Queries.
- Component Reports.
- Component Administration

Component Reports are described in the *WellSky® Blood Centers Reports Guide*. Component Administration is described in the *WellSky® Blood Centers Administration Guide*.


WellSky Corporation
Proprietary and confidential

# 19.2 Routine Component Production

Routine Component Production functions are accessed from the following menu:

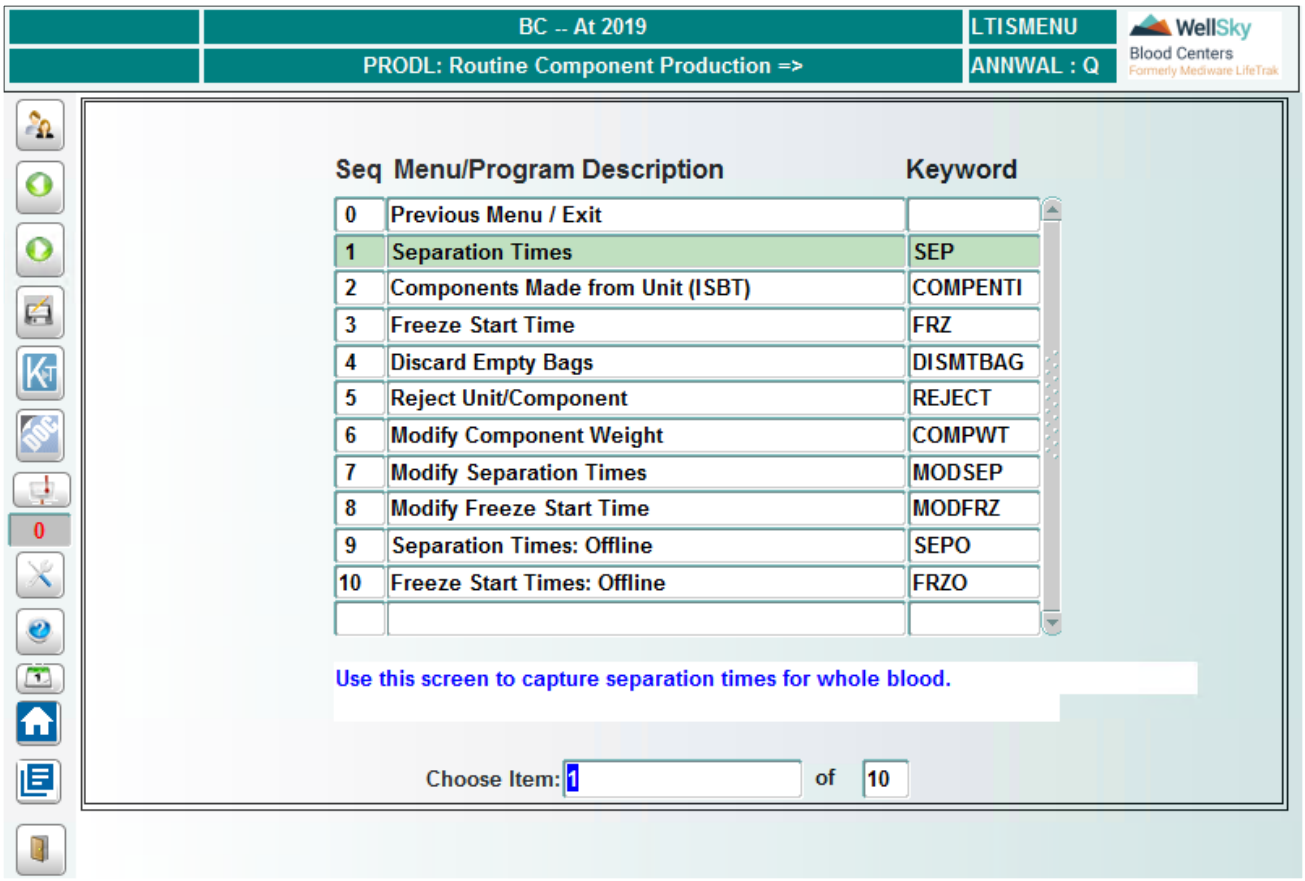


## 19.2.1 Separation Times (SEP)

### Intended Use

Use the Separation Times screen to enter the first and second plasma separation time. The screen is accessed by unit ID. Enter first/second separation and centrifuge ID here. The system calculates duration from start bleed time until separation.

The SEP function can be performed prior to checking in bags using the Bag Check-In (BAGS) function. If SEP is performed prior to BAGS, the separation time data in the Unit Query (UNITQ or UNITI) screen will be populated with an asterisk (*).

### Limitations

Only 1st and 2nd separation times can be entered on this screen.

## Prerequisites

- First separation information must be entered before second separation information.
- Unit must be located in user's log-in warehouse in order to perform this function.
- Unit must not be in-transit in order to perform this function.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `SEP`.

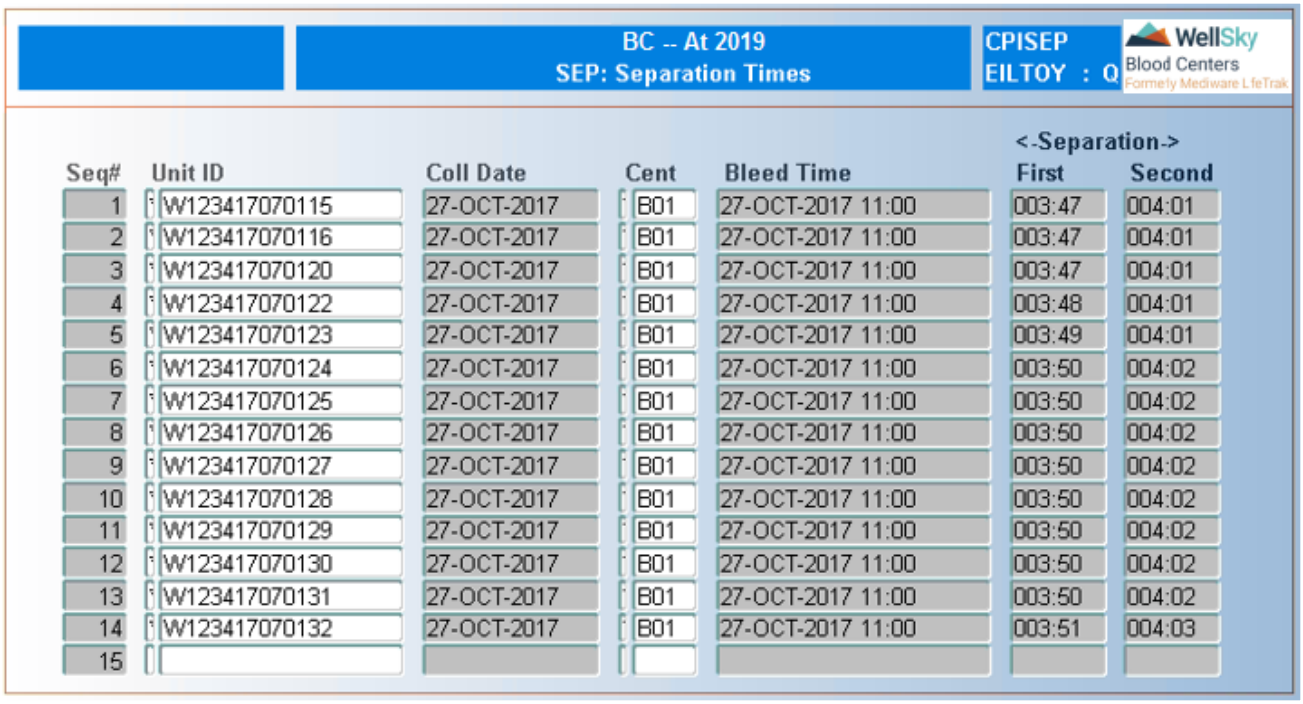


| Seq# | Unit ID | Coll Date | Cent | Bleed Time | <-Separation-> First | Second |
|---|---|---|---|---|---|---|
| 1 | W123417070115 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:47 | 004:01 |
| 2 | W123417070116 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:47 | 004:01 |
| 3 | W123417070120 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:47 | 004:01 |
| 4 | W123417070122 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:48 | 004:01 |
| 5 | W123417070123 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:49 | 004:01 |
| 6 | W123417070124 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 7 | W123417070125 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 8 | W123417070126 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 9 | W123417070127 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 10 | W123417070128 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 11 | W123417070129 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 12 | W123417070130 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 13 | W123417070131 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:50 | 004:02 |
| 14 | W123417070132 | 27-OCT-2017 | B01 | 27-OCT-2017 11:00 | 003:51 | 004:03 |
| 15 | | | | | | |

## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

### Cent ID

Scan, manually enter, or select centrifuge ID from LOV.

**NOTE –** Only centrifuges with a status of IN appear in the LOV. Centrifuges with other statuses may be manually entered, but a CENT interdiction will be placed on the unit.


WellSky Corporation
Proprietary and confidential

### Bleed Time

Bleed start time automatically displays after the unit ID is entered. Field is not navigable.

### Separation: First/Second

Calculated time from bleed start time until first/second separation automatically displays. An asterisk (*) displays if bleed time has not been entered or if 1000 or greater hours have passed. Fields are not navigable.

The screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include:

- Centrifuge ID.
- Process date and time.
- Calculated duration times for first/second separations (from start bleed time).
- Mode of entry (real time).
- Technician doing data entry.
- CENT interdiction placed on the unit if the centrifuge used does not have a status of IN.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Routine Component Production menu.

# 19.2.2 Components Made from the Unit - ISBT (COMPENTI)

## Intended Use

Use the Components Made from the Unit (ISBT) screen of Component Production to do the following:

- Define the components made.
- Enter component weight, if required.
- Check for acceptable product combinations.
- Check for appropriate catalog and lot number.
- Check for cGMPs, such as check-in temperature and bleed times.
- Check for attributes that can be placed through the program using the Smart Manufacturing table.

OPD (Product Code/Expiration) can be printed from this screen.

## Limitations

- This screen is used to define non-apheresis components only of ISBT unit scheme. Define pheresis components using Enter Pheresis Components - ISBT (PHERI).

- Volume displays only if the weight is entered and specific gravity is defined for the product code in Product Codes (PRODUCT).
- Expiration date/time will not print on the system-generated product code labels.
- Aliquots cannot be defined in this program.
- Labels will not print if the Pre-Printed flag is set to Y in Product Codes (PRODUCT) for the product being defined or if the Pre-Printed flag is set to N and the product code, bag ID, catalog number is valid in Pre-Printed Product Labels – ISBT (PREPRINT).

## Prerequisites

- Unit and bag must have been through Material Check-in.
- Separation times must have been entered (depending on the component to be made).
- Menu parameter LBLPRINT has to be defined in the menu to require or not require product verification.
- Unit must be located in user's current log-in warehouse in order to perform this function.
- Unit must not be in-transit in order to perform this function.
- If labels are going to be printed in this screen the form must be defined in Maintain Report Master Table (RMASTER).
- Master Code SPATR must be defined if SP attributes will be placed in conjunction with the ISBT attribute.
- Smart Manufacture Attribute Configurator must be defined for the attributes that can be placed in the program for product types.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `COMPENTI`.


WellSky Corporation
Proprietary and confidential

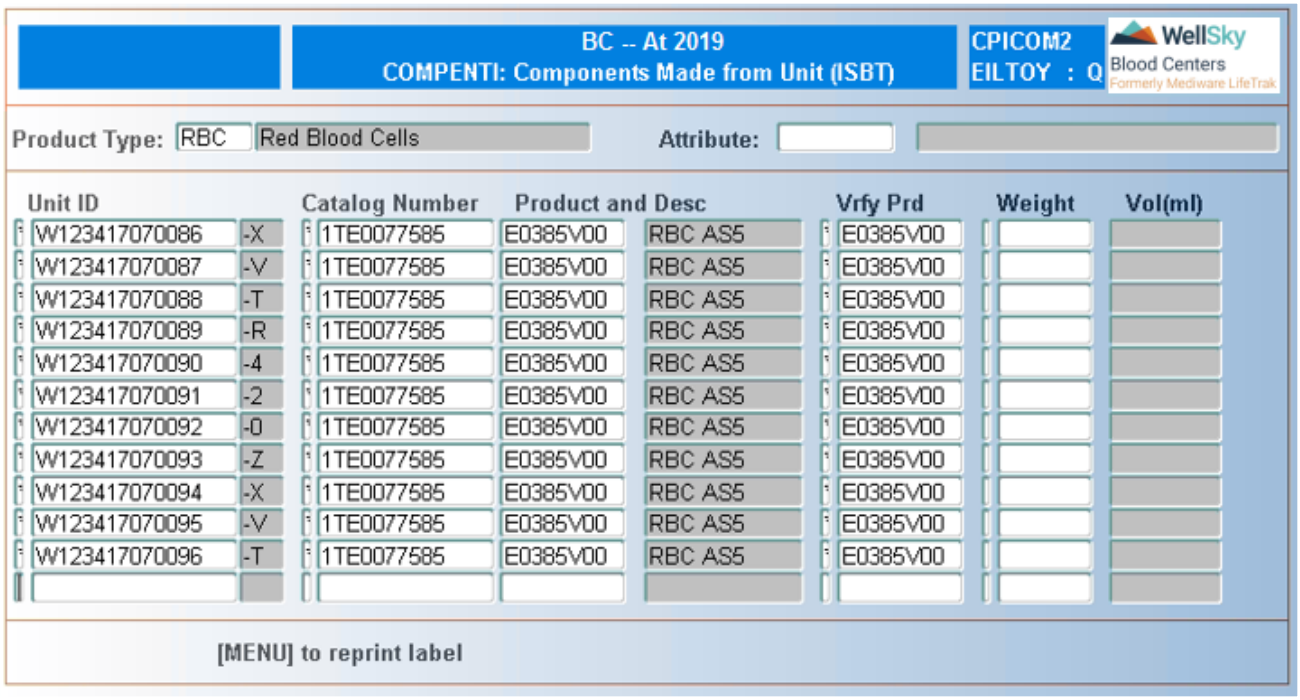


# Control Block Fields and Definitions

## Product Type

Manually enter product type of product to be defined or select from LOV. Product type description automatically displays after entry of a valid product type.

## Attribute

Manually enter attribute to be added to the product being defined or select product code from LOV. Leave field blank if attribute is not to be added. Attribute description automatically displays after entry of a valid attribute code.

**NOTE –** Field is navigable only if the A field is set to Y in Product Type Data – Codabar/ISBT (PRDTYPE) for the product type being defined.

**NOTE –** Attribute has to be defined in the Smart Manufacture Attribute Configurator (ATRCFG) and in Product Type Attributes (PRDATTR) for the specified product type. If not defined, it will not appear in the LOV and it will not be accepted.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Catalog Number

Scan, manually enter, or select valid catalog number from LOV.

## Product and Desc

Select product code from the list. A window opens if multiple product codes are calculated. If a single product code is calculated, it will default and cursor will move to verify product code.

Use the UP and DOWN arrow keys to scroll through the list of possible product codes. Press F12 (Commit) to select the correct product code.

**NOTE –** If a label is to be printed at the time the product is accepted, the label will print a PPD label (4x2).

## Vrfy Prd

Scan or manually enter product code. This field is only navigable if the menu parameter LBLPRINT has been set to verify the products being made.

**NOTE –** Once the product has been verified or the manual entry of the product code has begun re-printing the label is not permitted.

## Weight

Transfer weight from scale, manually enter weight (g), or leave blank.

**NOTE –** Weight must be entered if the W field is set to Y in Product Type Data (PRDTYPE).

## Vol (ml)

Product volume (ml) automatically displays if the weight was entered and if the specific gravity is defined for the product code in Product Codes (PRODUCT). Field is not navigable.

**NOTE –** The system does not allow an illogical combination of components to be entered. If you get a system message about illogical combinations, see your supervisor.

The screen does a line-by-line commit.


WellSky Corporation
Proprietary and confidential

## To Reprint a Label

Press F6 (Menu) to re-print label. Label cannot be re-printed after label verification has started.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- cGMP checks are made by the system, and interdictions placed according to these checks.
- Assignment of a warehouse to the component. Assignment is based on the warehouse to which user is logged on when component is defined.
- CMT interdictions are placed on components whose check-in temperatures are not within the acceptable range defined in Product Codes (PRODUCT) for the product being defined.
- A CMW interdiction is placed on the component if the weight entered in not within the acceptable range defined for the product in Product Codes (PRODUCT).
- If the elapsed time from bleed start time to definition time for WB products is greater than the time limit defined in Product Codes (PRODUCT), a CMTI interdiction is placed on the component. For non-WB products, if the elapsed time from bleed start time to the applicable separation time is greater than the time limit defined in Product Codes (PRODUCT), a CMTI interdiction is placed on the component.
- If the bleed time is greater than or equal to Slow Bleed value and less or equal to the Maximum value in Chapter Details (CHAPTER), a BLFA interdiction is placed on the component if the product type of the product code being defined is defined in Master Codes BLFA. If the product type is not listed in the Master Code, a BLHO interdiction is placed.
- Mandatory attributes defined in Valid Product Code Attributes, (ATTRPRD) are automatically placed on the new product code.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Routine Component Production or Pheresis Processing menu.

# 19.2.3 Freeze Start Time (FRZ)

## Intended Use

Use the Freeze Start Time screen to enter the time in which the unit is placed in the freezer. Use this screen when the system is up and the data is entered at the time the separation is taking place (real time). If the system was down at time of separation and the data is to be entered after the fact, use Freeze Start Times: Offline (FRZO).

## Limitations

Cryo freeze time cannot be entered in this screen.

## Prerequisites

- Component must have been defined.
- Only product types defined in Master Code FROZP can be processed in this screen.
- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `FRZ`.

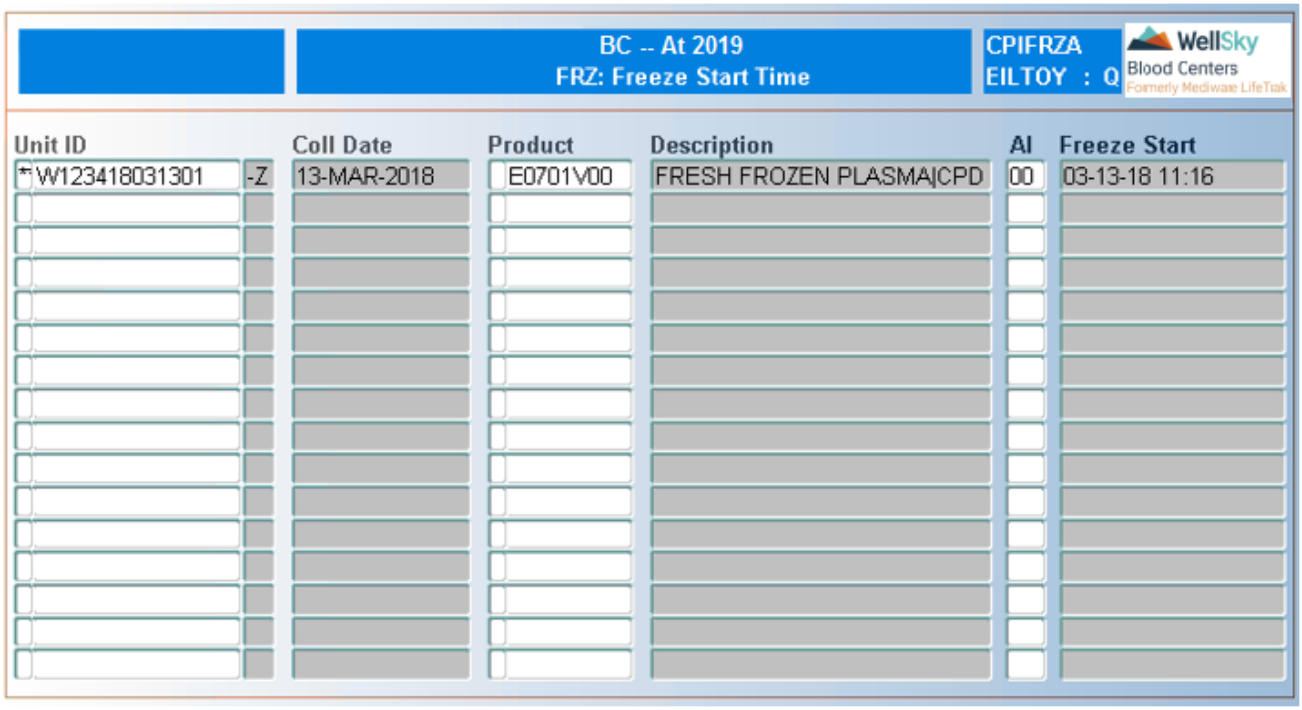


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

### Product

Scan, manually enter, or select product code from LOV.

### Description

Product description automatically displays after the product code is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Al

Enter valid aliquot number for the product code or select from LOV.

**NOTE –** System defaults to 1.

### Freeze Start

Freeze start time automatically populates with the current system time. Field is not navigable.

**NOTE –** If the FFP freeze duration time in the Chapter Details (CHAPTER) screen is set to .25 (that is, .25 hours, or 15 minutes), a CMTI interdiction is placed on the product under the following time limits:

- if the product has an 8 hour time limit and the current system time is 07:45 after the bleed start time
- if the product has a 24 hour time limit and the current system time is 23:45 after the bleed start time

This screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- CMTI interdiction is placed on products whose freeze start time exceeds the FFP freeze duration defined in Chapter Details (CHAPTER).

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Routine Component Production menu.

# 19.2.4 Discard Empty Bags (DISMTBAG)

## Intended Use

Use the Discard Empty Bags screen of Component Production to make a record of bags discarded and the reject reason. Use this screen for empty bags (no component physically in the bag). Bags can be discarded at any time during Component Production. The system updates the number of available bags with each bag discarded. Components can only be produced in bags that are available.

**NOTE –** This screen provides a more convenient method for discarding several empty bags since the product code (NONE for discards) need not be repeatedly entered here.

## Limitations

- Labels are not printed from this screen.
- If products are being defined in the same bag ID (for example, Platelet pheresis in P3 bag), and you need to discard a P3 bag (same bag ID as product is defined), you must discard the P3 bag first and then define the components.
- The LOV for the bag ID will only contain bag codes that are defined in Master Code BAGID and not defined in Master Code BAG, and the bag ID cannot be associated to a component.

## Prerequisites

Material Check-In must have been completed.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `DISMTBAG`.

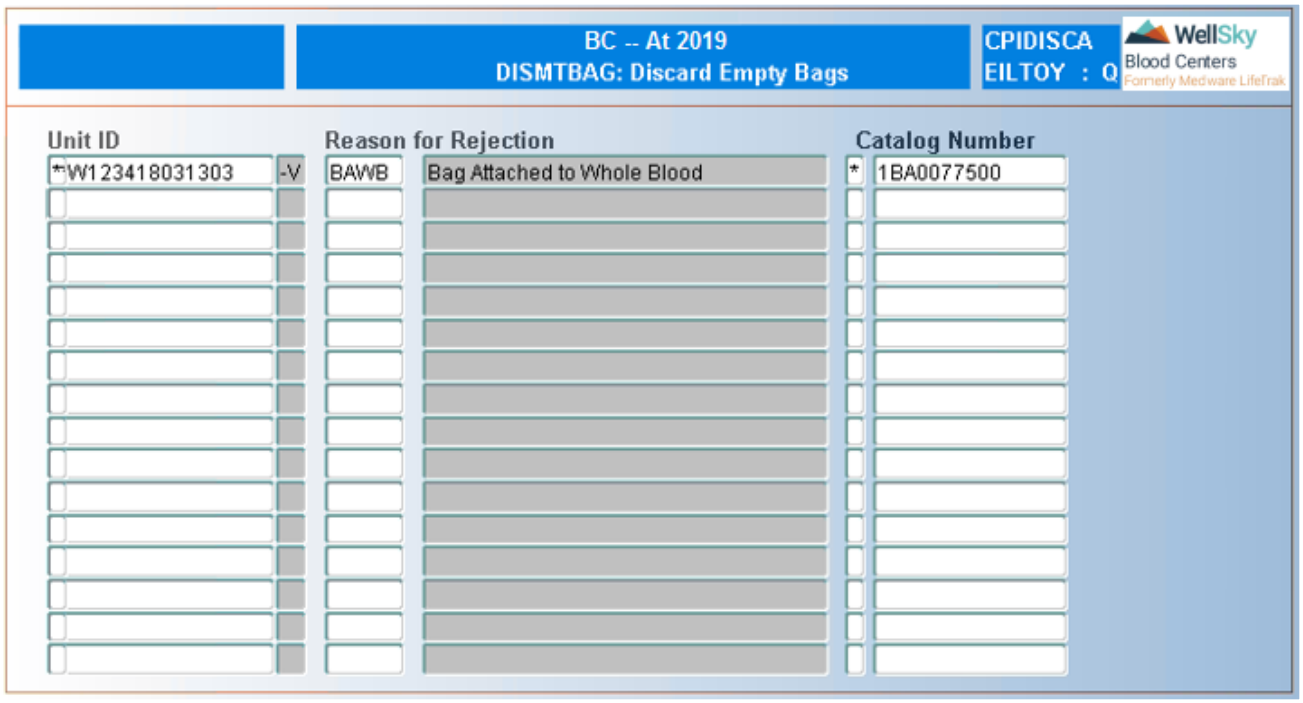


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Reason for Rejection

Enter reject reason code or select from LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** Reject reason code is automatically copied from the previous discarded bag, but this reason can be modified.

### Catalog Number

Scan, manually enter, or select valid catalog number from LOV.

This screen does a line-by-line commit.

### At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- Bag configuration.
- None product is defined with entered reject code.
- NFT system label decision is entered for the bag.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Routine Component Production menu.

## 19.2.5 Reject Unit/Component (REJECT)

### Intended Use

Use the Reject Unit/Component screen to reject empty bags or components such as:

- Components.
- Empty bags.
- Units with BIO interdictions.
- Dummy products.

The components that are rejected will be assigned an NFT, DISC or BIO system label decision, labels print, and components are ready for discard. Once a unit, component, or bag has been rejected using this screen, the system does not allow further processing for it. PCA (1.75x3 ABO/Expiration) labels can be printed for Codabar products, and PFF (4x4 Full-Face) labels can be printed for ISBT products.

**NOTE –** Refer to Appendix F: Scanning Product Labels for instructions on scanning product labels. You can scan individual bar codes, or you can scan using a single concatenated scan for two bar codes.

## Limitations

- Expiration dates do not print on the ISBT labels printed from this program.
- Labels do not print when defining NONE products.
- Expiration date prints on Codabar labels; however, verification is not available and there is no assurance of accuracy of the expiration date printed.

## Prerequisites

- Material Check-In must have been completed.
- In order to define products in the screen, the unit must have bags checked in.
- When rejecting an existing component, the component must be located in user's current log-in warehouse in order to perform this function.
- Unit/component must not be in transit in order to perform this function.
- The Valid Catalog Numbers table needs to be defined with product type of NONE to allow discard of empty bags.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `REJECT`.

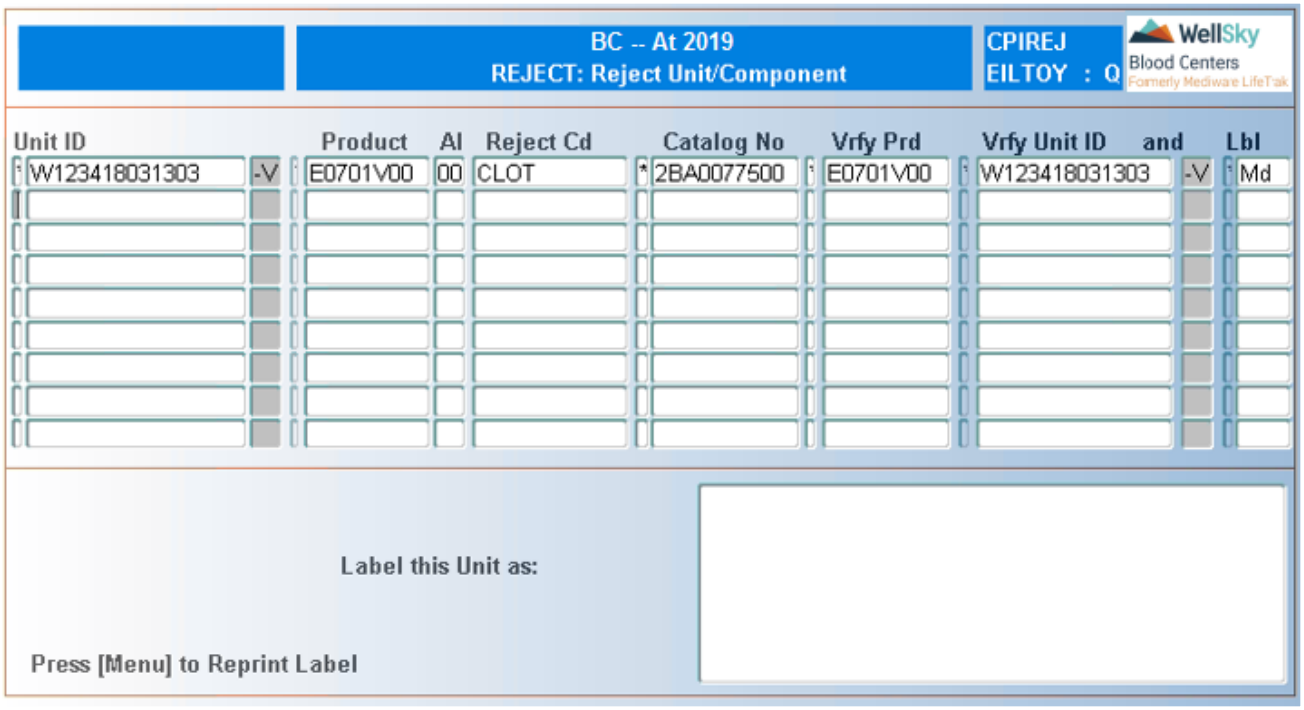



WellSky Corporation
Proprietary and confidential

# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code to be discarded from LOV, if the product has been previously defined.

**NOTE –** Products can be defined in this field. If this is an ISBT128 unit number, the product code must be defined containing the appropriate product code, intended use, and division. For example, E0009V00 is correct and complete; E0009 is incorrect and incomplete.

**NOTE –** Select NONE for rejecting an empty bag (that is, a bag that has no product in it).

## AI

Enter aliquot number or select from LOV.

**NOTE –** Field defaults to 1, but the aliquot can be modified. Field is not navigable if product is NONE (empty bag) or when rejecting existing ISBT products.

## Reject Cd

Enter reject code or select from LOV.

## Catalog No

If the component has already been defined, the catalog number automatically displays, and the field is not navigable. If defining a product in this screen, scan, manually enter, or select the catalog number from the LOV.

**NOTE –** If rejecting an empty bag, the system will commit at this point. BIO, Discard, or NFT label automatically prints after the bag is entered. Label will not print for NONE products.

**NOTE –** If rejecting a NONE product, the product must be defined in the Valid Catalog table for that container with product type of NONE.

## Vrfy Prd

Scan or manually enter product code being defined/rejected.

**NOTE –** This field is navigable only when performing concurrent definition and rejection of a product other than None.

### Vrfy Unit ID and Lbl

Perform concatenate (one) scan of unit ID and SLD label by scanning the unit ID and SLD label together.

To perform individual verification, press **M** and press **ENTER**. Scan or manually enter unit ID.

> **NOTE –** If concatenate verification is performed, the line commits after the concatenated scan is performed.

### ABO

Scan, manually enter, or select ABO from LOV.

> **NOTE –** NFT or DISC marks the component as Not For Transfusion and waiting for discard. BIO marks the component as Biohazard and waiting for discard.

## Reprinting Labels

Press **F6** (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

This screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include:

- Reject reason code/description attached to product.
- SLD update to BIO, NFT, or DISC as appropriate.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Routine Component Production menu.

# 19.2.6 Modify Component Weight (COMPWT)

## Intended Use

Use the Modify Component Weight screen to commit the weight of the component to the system. This can be done either manually or by using the scale to send data to the computer.

## Limitations

- Components with system label decisions, other than HOLD, DISC, or pooled components, cannot be processed through this screen.
- Volume displays only if the weight is entered and gravity is defined for the product code.

## Prerequisites

- Component must have been defined.
- Component must be located in your log-in warehouse and must not be in-transit in order to be processed through this screen.

## Accessing the Screen

You can access this screen from the Routine Component Production menu or by entering the keyword `COMPWT`

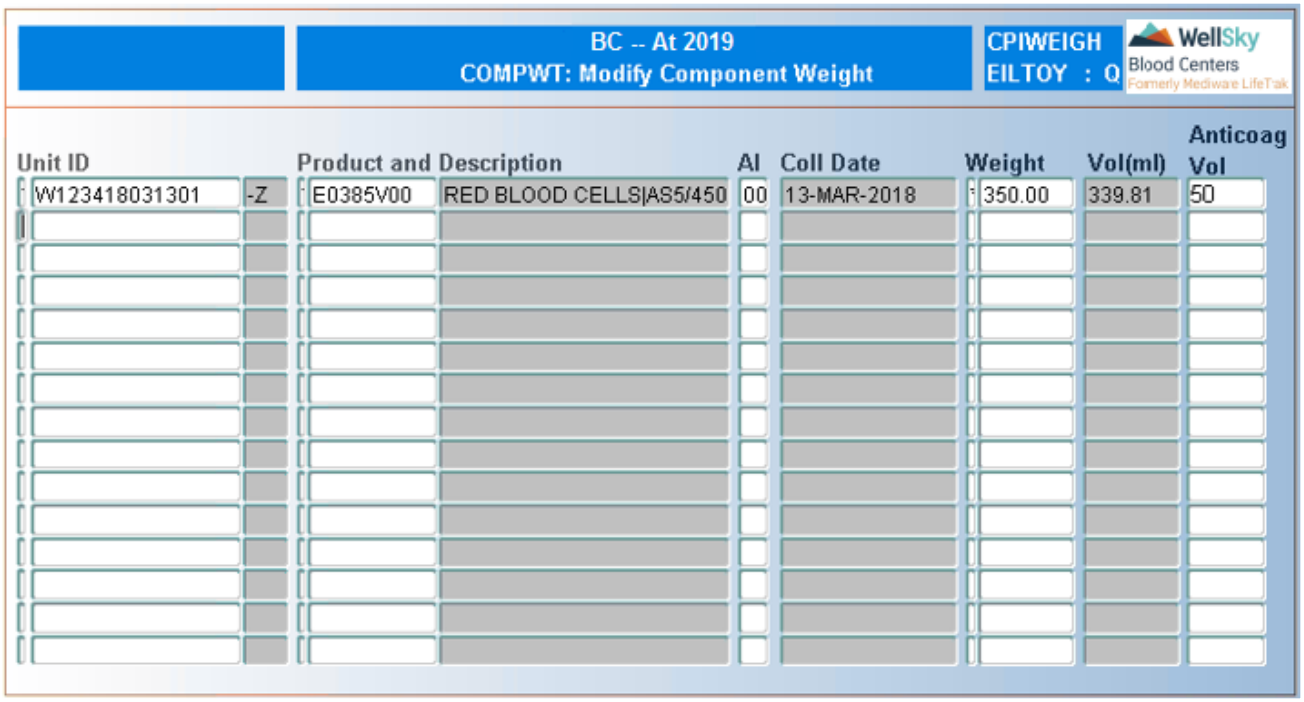


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product and Description

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

### Aliquot

Enter aliquot number or select from LOV.

**NOTE –** System defaults to 1 if only one aliquot exists. Field is not navigable for ISBT products.

### Coll Date
Unit collection date automatically displays after the unit ID is entered.  Field is not navigable.

### Weight
Transmit weight from scale or manually enter component weight (g).

### Vol (ml)
Product volume (ml) automatically displays if the weight was entered and if the specific gravity is defined for the product code.  Field is not navigable.

### Anticoag Vol
Entry is optional. Enter the anticoagulant volume, in ml. A maximum of 999 ml can be entered. If entered, this volume prints on the 4x4 (PFF) label during labeling. The anticoagulant field should be used to capture the anticoagulant volume for pheresis products.

The screen does a line-by-line commit.

## At Commit
Updates made to the system at Commit include the following:

- Component weight is saved.
- CMW interdictions are placed if the weight entered is outside the range defined in Product Codes (PRODUCT) for that product.
- CMW interdiction is removed if the modified weight entered is within the range defined in Product Codes (PRODUCT) for that product.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Routine Component Production menu.

# 19.2.7 Modify Separation Times (MODSEP)

## Intended Use
Use the Modify Separation Times screen to update incorrect separation times that have already been entered into the system.

## Limitations
- Separation times cannot be modified after QC for labeling has been performed for a unit.
- Modifications can be made for 1st and 2nd separations only in this screen.

## Prerequisites
At least one separation must be in the system to use this screen.

# Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword MODSEP.

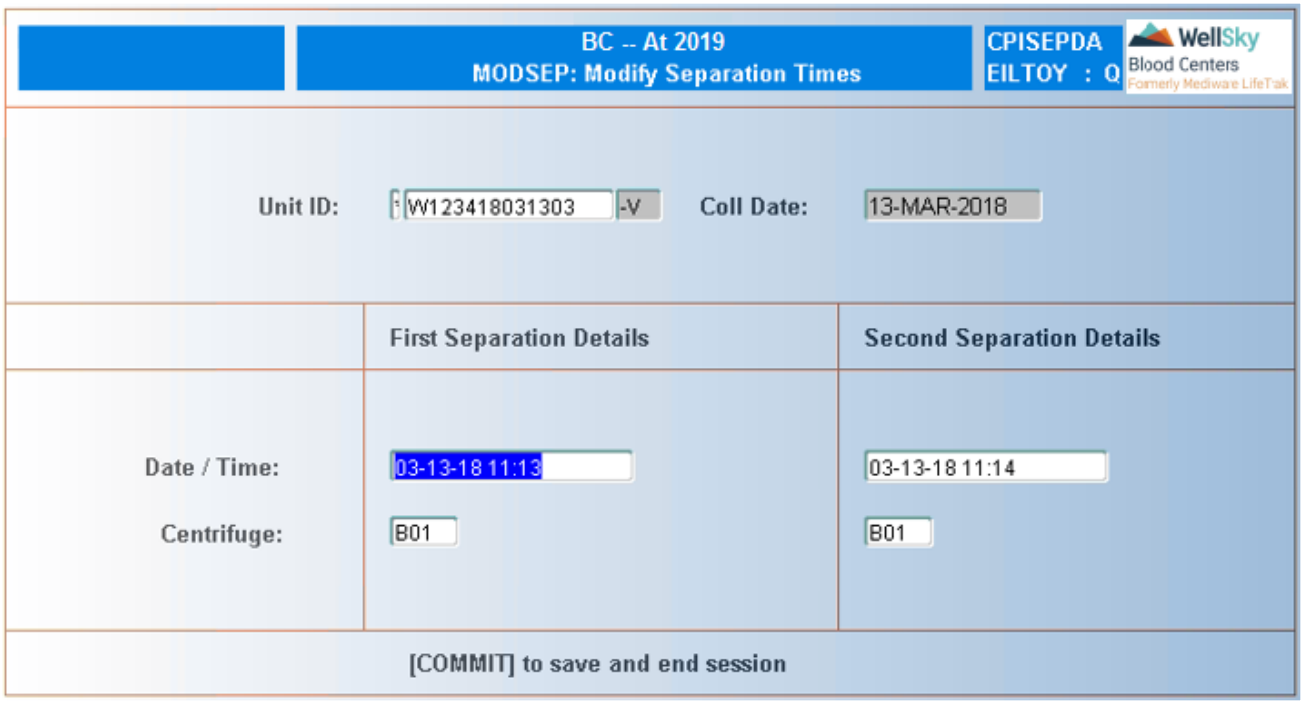


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Collection date automatically displays after the unit ID is entered. Field is not navigable.

# First Separation Detail Block Fields and Definitions

**NOTE –** All fields populate with current separation information after the unit ID is entered.

## Date/Time

Enter correct date/time in MM-DD-YY HH24:MI format. Press ENTER to accept the current value.

## Centrifuge

Scan, manually enter, or select centrifuge from LOV. Press ENTER to accept the current value.

**NOTE –** Only centrifuges with a status of IN appear in the LOV. Centrifuges with other statuses may be manually entered, but a CENT interdiction will be placed on the unit.

## Second Separation Detail Block Fields and Definitions

### Date/Time

Enter correct date/time in MM-DD-YY HH24:MI format . Press **ENTER** to accept the current value.

### Centrifuge

Scan, manually enter, or select centrifuge from LOV. Press **ENTER** to accept the current value.

**NOTE –** Data for a first and/or second separation may also be deleted; however, you must have first separation data whenever second separation data exists.

Press **F12** (Commit) to save entries.

## At Commit

- Separation date/time and centrifuge ID are saved to the database.
- CENT interdiction placed on the unit if the centrifuge used does not have a status of IN.
- CENT interdiction removed if the centrifuge ID causing CENT to be placed is replaced by a centrifuge with the status of IN.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Routine Component Production menu.

# 19.2.8 Modify Freeze Start Time (MODFRZ)

## Intended Use

Use this screen to modify freeze start times for components.

## Limitations

- Cryo freeze times cannot be modified in this screen.
- CMTI interdictions are not removed in this screen.

## Prerequisites

Freeze times must have been entered in Freeze Start Time (FRZ) or Freeze Start Times: Offline (FRZO).

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `MODFRZ`.


WellSky Corporation
Proprietary and confidential

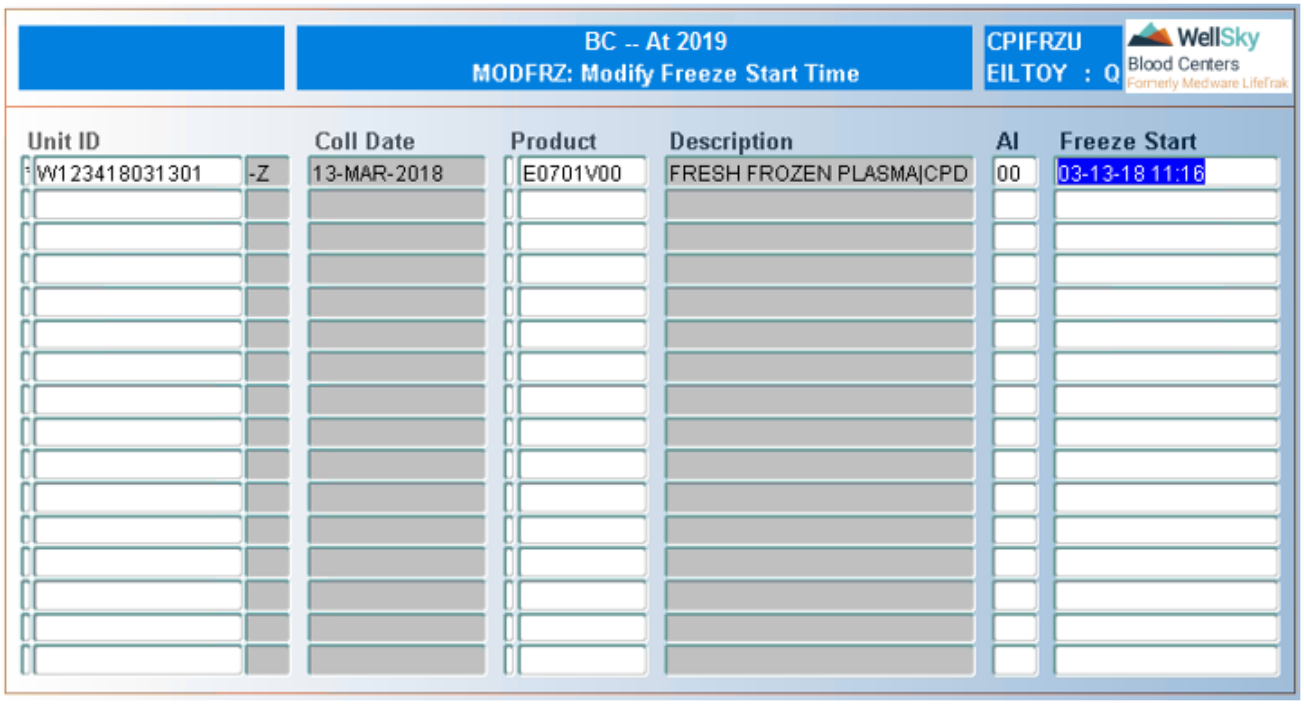


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

## Description

Product description automatically displays after the product code is entered. Field is not navigable.

## AI

Enter aliquot number or select from LOV.

**NOTE –** System defaults to 1. Field is not navigable for ISBT products.

## Freeze Start

Enter correct freeze date and/or time in MM-DD-YY HH24:MI format.

**NOTE –** Previously entered freeze date/time automatically displays.

**NOTE –** If the FFP freeze duration time in the Chapter Details (CHAPTER) screen is set to .25 (that is, .25 hours, or 15 minutes), a CMTI interdiction is placed on the product if the product has an 8 hour time limit and the current system time is 07:45 after the bleed start time.

## At Commit

- New freeze date/time is updated.
- CMTI interdiction is placed on products whose freeze start time exceeds the FFP freeze duration defined in Chapter Details (CHAPTER).

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Routine Component Production menu.

# 19.2.9 Separation Times: Offline (SEPO)

## Intended Use

Use the Separation Times - Offline screen of Component Production to enter the separation time from manual logs (offline) if the system was down at time of separation.

First/second separation times and centrifuge ID can be entered here. The system calculates duration from start bleed time until separation.

## Limitations

Only 1st and 2nd separation times can be entered on this screen

## Prerequisites

- The separation(s) must have been done earlier in order to enter the data manually from logs.
- First separation information must be entered before second separation information.
- Unit/component must be located in user's current log-in warehouse in order to perform this function.
- Unit/component must not be in transit in order to perform this function.

## Accessing the Screen

Access this screen from the Routine Component Production menu or by entering the keyword `SEPO`.


WellSky Corporation
Proprietary and confidential

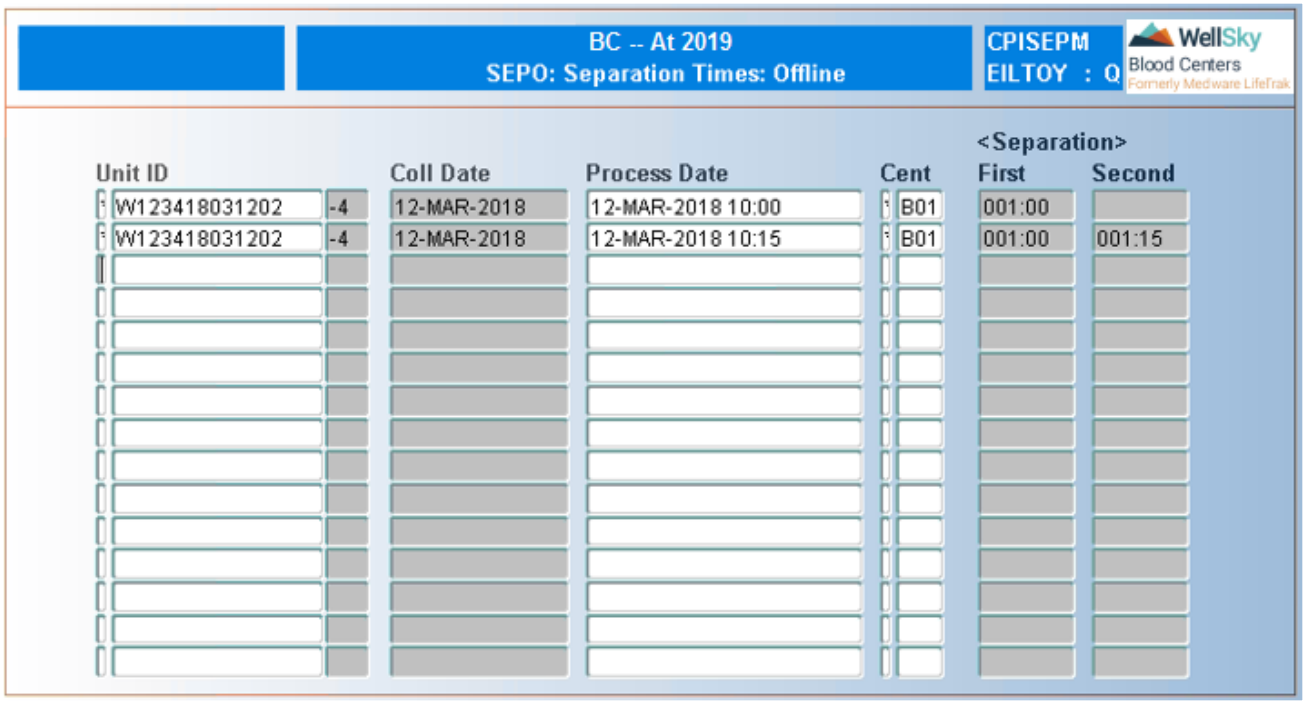


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Process Date

Enter separation date and time in DD-MM-YYYY HH24:MIformat. Press CTRL + F6 (Duplicate Field) to copy the date/time from the previous line.

## Cent ID

Scan, manually enter, or select centrifuge from LOV.

**NOTE –** Only centrifuges with a status of IN appear in the LOV. Centrifuges with other statuses may be manually entered, but a CENT interdiction will be placed on the unit.

## Separation First/Second

Calculated time from bleed start time until first/second separation automatically displays. An asterisk (*) displays if bleed time has not been entered or if 1000 or greater hours have passed. Fields are not navigable.

The screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- Centrifuge ID.
- Process date and time.
- Calculated duration times for first/second separations (from start bleed time).
- Mode of entry (offline).
- Technician doing data entry.
- CENT interdiction placed on the unit if the centrifuge used does not have a status of IN.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Routine Component Production menu.


WellSky Corporation
Proprietary and confidential

# 19.3 Component Modification

Component Modification functions are accessed from the following menu:

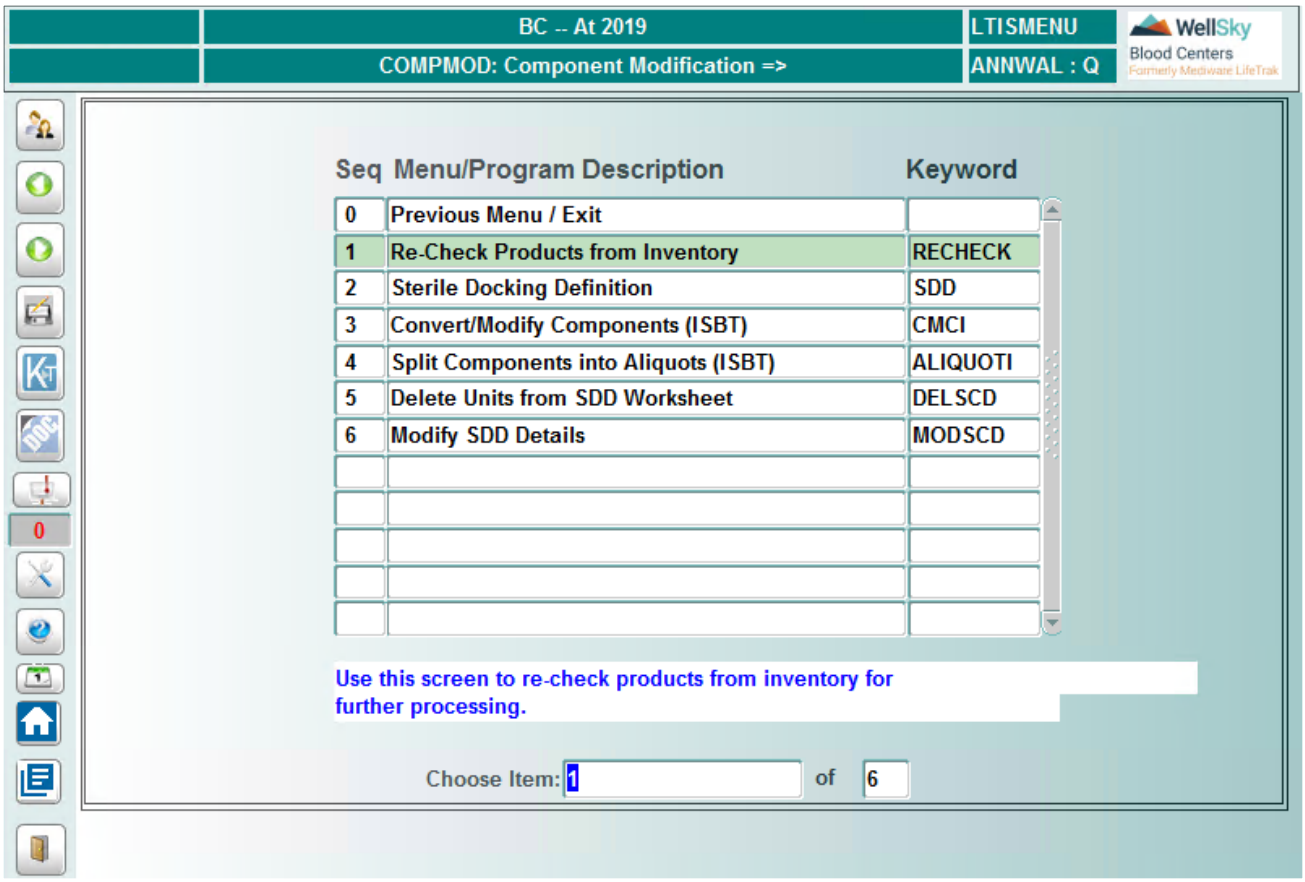


## 19.3.1 Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2)

### Intended Use

Use the Re-Check Products from Inventory screen to check products back into Lab that were already labeled and are located in Distribution. This process allows you to perform further processing on the product.

### Limitations

Interdicted products can be rechecked to Lab only in RECHK2.

### Prerequisites

Products must be located in Distribution before using this screen.

# Accessing the Screen

Access this screen from the Component Modification Functions, Component Pooling, or Component Maintenance Functions menus or by entering the keyword `RECHECK, RECHECK2, or RECHK2`.

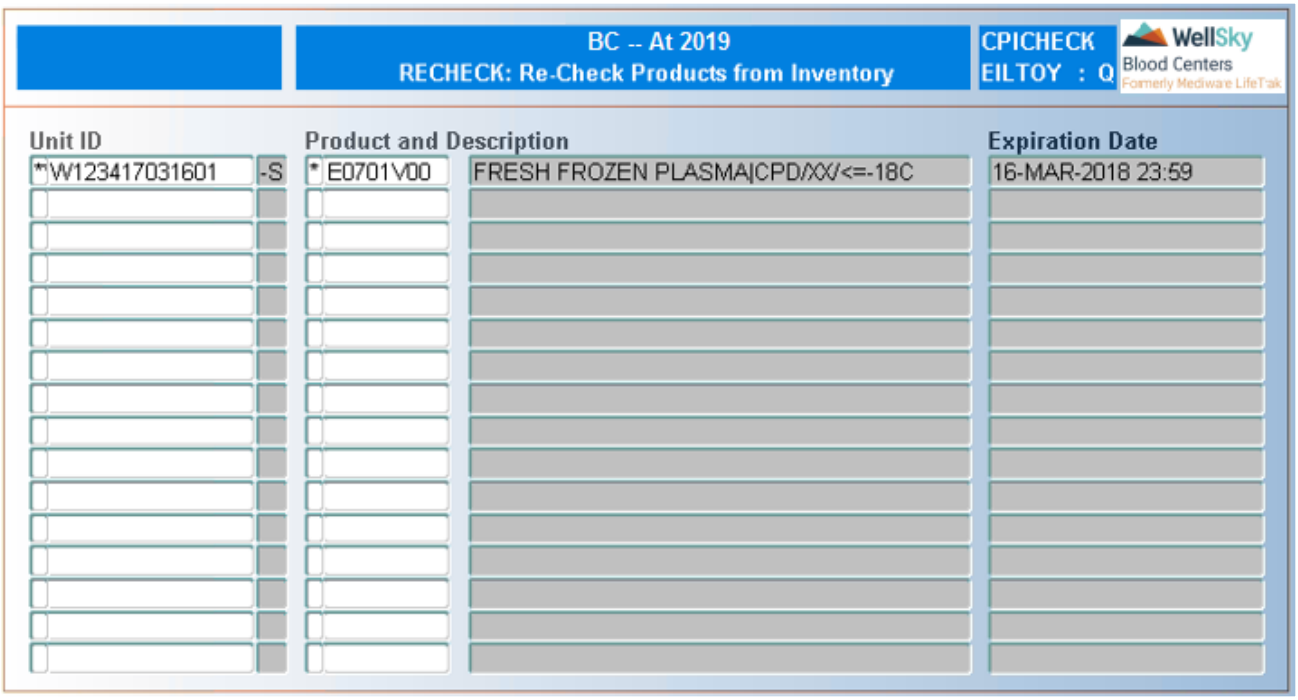


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product and Description

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

**NOTE –** The following window opens if the component is expired.

Enter `Y` to recheck the product into Lab. Enter `N` if you do not wish to check the product into Lab.

**NOTE –** If the product has unit or component level interdictions, recheck cannot continue in RECHECK or RECHECK2. Interdicted products can only be rechecked using RECHK2 .


WellSky Corporation
Proprietary and confidential

### Expiration Date

Product expiration date and time automatically displays after the product code is entered. Field is not navigable.

This screen performs a line-by-line commit.

## At Commit

- The unit is checked back into the Lab system from Distribution.
- A CP6I alert attribute is placed on the product.
- Component warehouse updates based on the warehouse to which user is logged on when component is rechecked.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Component Modification Functions, Component Pooling, or Component Maintenance Functions menus.

# 19.3.2 Sterile Docking Definition (SDD)

## Intended Use

Use the Sterile Docking Definition screen to add the following to components:

- Bags
- Filters
- Needles
- Segments
- Filters with attached bags
- Filters with separate bags

When filters and bags are attached, conversion components can also be defined. Navigation through the fields in this screen is dependent upon the dock type selected.

The following can be entered and tracked through the screen:

- Components
- Aliquot (if more than one exists)
- Number of items docked
- Lot number (being docked to)
- Wafer lot number
- SCD machine used

- Weld acceptability
- Number of new components

Data entered on this screen allows for tracking of all products by docking lot number, wafer lot number and Sterile Connecting Device (SCD) machine. PPD (Product/Expiration) labels can be printed in this screen for ISBT products.

## Limitations

- Pooled components and Codabar product aliquots cannot be processed through this screen.
- If you are only adding additional Bags (BA) and the weld is not complete and set to (N), the WELD interdiction will be placed on the bag and product in which you are adding the additional bag. The WELD interdiction is not carried with the empty bag; thus, if you make a product in the empty bag, the WELD interdiction would have to be placed manually on that product.

## Prerequisites

- Units/components must be located in Lab.
- Sterile connecting machine codes must be defined in Master Code STER.
- Units/components must be located in user's log-in warehouse in order to perform this function.
- In order to convert Codabar products in this screen the conversions must be defined in Valid Product Conversions (PRODCONV).
- Master Code SPATR must be defined if SP attributes will be placed in conjunction with the ISBT attribute.
- Master code CMC must be defined for CMC flags (these should be present, these are hard coded). Define a code for use in the program CPISDDFN
  - A (BA)
  - B (BF)
  - F (FB)
  - N (NE)
  - S (SE)
  - I (FI)
  - W (WA)
- Valid Lots should have CMC flag defined with the master code to be used in CPISDDFN. Smart Manufacture Attribute Configurator must be defined for the attributes that can be placed in the program for product types.
- Catalogs and lots need to be defined in Valid Catalog Numbers (CATALOG) and Lot Details (LOTS). Lot numbers should be defined for each type of CMC flag listed above.
- Filters need to be defined in Valid Filters (FILTERS). Filters need to be linked to the catalog numbers that are associated to each type of sterile docking type.

## Accessing the Screen

Access this screen from the Component Modification Functions menu or by entering the keyword `SDD`.


WellSky Corporation
Proprietary and confidential

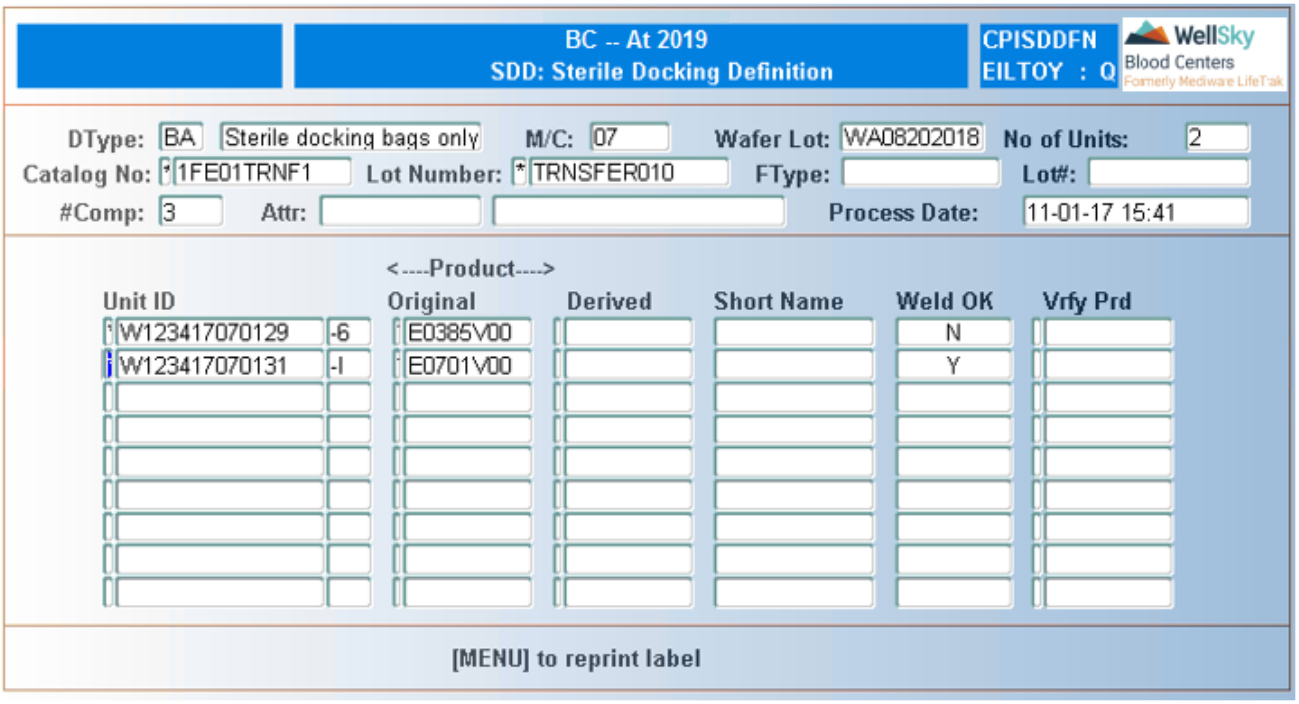


# Control Block Fields and Definitions

## DType

Manually enter docking type or select from LOV.

**NOTE –** Docking type "NE" cannot be performed after components have been made on the unit.

## M/C

Manually enter valid sterile connecting device machine code or select from LOV.

## Wafer Lot

Manually enter a wafer lot number or select from LOV. The wafers that appear in the LOV are the lot numbers defined in Lot Details with CMC flag of W.

## No. of Units

Enter the number of components to be processed in this screen.

**NOTE –** Value entered must be 1 to 999. Screen limits the number of components to be processed by the number entered in this field.

## Catalog No

Scan, manually enter, or select catalog from LOV. The user can concatenate the catalog and lot number when present on the bag.

**NOTE –** Catalog in the LOV is based on the lot numbers that have the CMC flag equal to the program CPISDDFN defined in the master code CMC.

## Lot #

Scan or manually enter lot number or select from LOV.

**NOTE –** Field is not navigable for FB or FI dockings.

## Ftype

Enter valid filter type, or select valid filter type from LOV.

**NOTE –** Only product with the same product can be processed in the screen when performing FB, FI, or BF docking types. This field is only populated for FB, FI, or BF dockings.

**NOTE –** LOV for this field displays FI, BF and FB filter types.

## Filter Lot#

Enter valid filter number or select from LOV.

**NOTE –** This field is not entered for NE, BA, or SE dockings. The Valid Filters (FILTERS) must be linked to the catalog for the specific docking types of FB, FI, BF.

## #Comp

Enter the number of components (`0` or `1`) to be made from each unit.

**NOTE –** This field is not entered for NE, BA, or SE dockings.

## Attr

Enter each attribute to be added through this process, or leave field blank.

**NOTE –** Attributes are only added to ISBT components. Attribute is ignored for Codabar components. Attributes will display based on master code SDD. The SDD master code will list based on sterile docking type and attribute group listed under description. The attribute group will be used to display the attribute code in the LOV. Attribute has to be defined in the Smart Manufacture Attribute Configurator (ATRCFG) and in Product Type Attributes (PRDATTR) for the specified product type. If not defined, it will not appear in the LOV.


WellSky Corporation
Proprietary and confidential

### Process Date

Enter process date and time in MM-DD-YY HH24:MI format.

> **NOTE –** Field defaults to system date/time, but date and/or time can be modified. Future date/time are not allowed.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

For FB, BF, and FI dockings, if the unit entered is older than the time allowed for the filter selected, the following window opens:

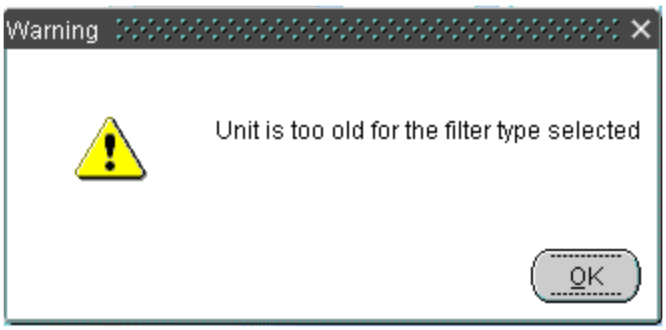

Enter `Y` to continue with the docking process. Enter `N` to stop the docking process. A FILT interdiction is placed on the component if processing continues.

### Original Product

Scan, manually enter, or select original product code from LOV.

> **NOTE –** Pooled product codes and Codabar product aliquots not allowed. Field not populated when performing NE docking on units with no defined components.

### Derived Product

Scan, manually enter, or select convert to product code from LOV for a Codabar product. This field is not navigable for ISBT unit scheme. The system calculates the product code based on attribute addition and the core product.

> **NOTE –** This field is only populated for BF and FB dockings. This field is automatically populated for ISBT components.

If the product code label is to be printed it will print at the time the derived product code is populated. Reprinting of the product code must occur prior to verification of the product code.

### Short Name

Product short name automatically displays after the derived product code is entered. Field is not navigable.

### Weld OK

Enter `Y` if the weld is acceptable, or enter `N` if the weld is not acceptable.

**NOTE –** If N is entered, a WELD interdiction is placed on the component and not on empty bags docked.

### Vrfy Prd

Scan or manually enter new product code.

**NOTE –** Requirement for product code verification is configurable in the MENUITEM program. If the LBLPRINT parameter is set to N, verification is not required; if the parameter is null or set to Y verification is required.

This screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- cGMP checks for the new component are made by the system.
- Interdictions and attributes which were attached to the old product code are attached to the new product code.
- Unit add-on bags is updated.
- All data from a previous sterile dock to the old component is transferred to the new component.
- WELD interdictions are placed for unacceptable weld inspections.
- FILT interdictions are placed on products that are too old for the filter type.
- Mandatory attributes defined in Valid Product Code Attributes, (ATTRPRD) are automatically placed on the new product code for Codabar products.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Routine Component Production menu.


WellSky Corporation
Proprietary and confidential

# 19.3.3 Convert / Modify Components (ISBT) (CMCI)

## Intended Use

Use the Convert / Modify Components (ISBT) screen in order to convert or modify an ISBT product. PPD (Product/Expiration) labels can be printed from this screen.

## Limitations

- Pooled components and rejected components cannot be processed in this screen.
- Codabar products cannot be processed in this screen.
- Maximum of one attribute can be added per transaction.
- Expiration date/time will not print on product label.
- Only attributes of M (modification) or C (conversion) can be added in this screen.
- Component weights are not verified in this program.

## Prerequisites

- Components must exist in this lab.
- If adding a conversion attribute, bags must be available.
- Component must be located in your current log-in warehouse in order to perform this function.
- Component must not be in-transit in order to perform this function.
- Label printing must be configured to print labels. If label printing has been configured upon entry of the screen a printer will need to be selected.
- Master Code SPATR must be defined if SP attributes will be placed in conjunction with the ISBT attribute.

## Accessing the Screen

You can access this screen from the Component Modification menu or by entering the keyword `CMCI`.

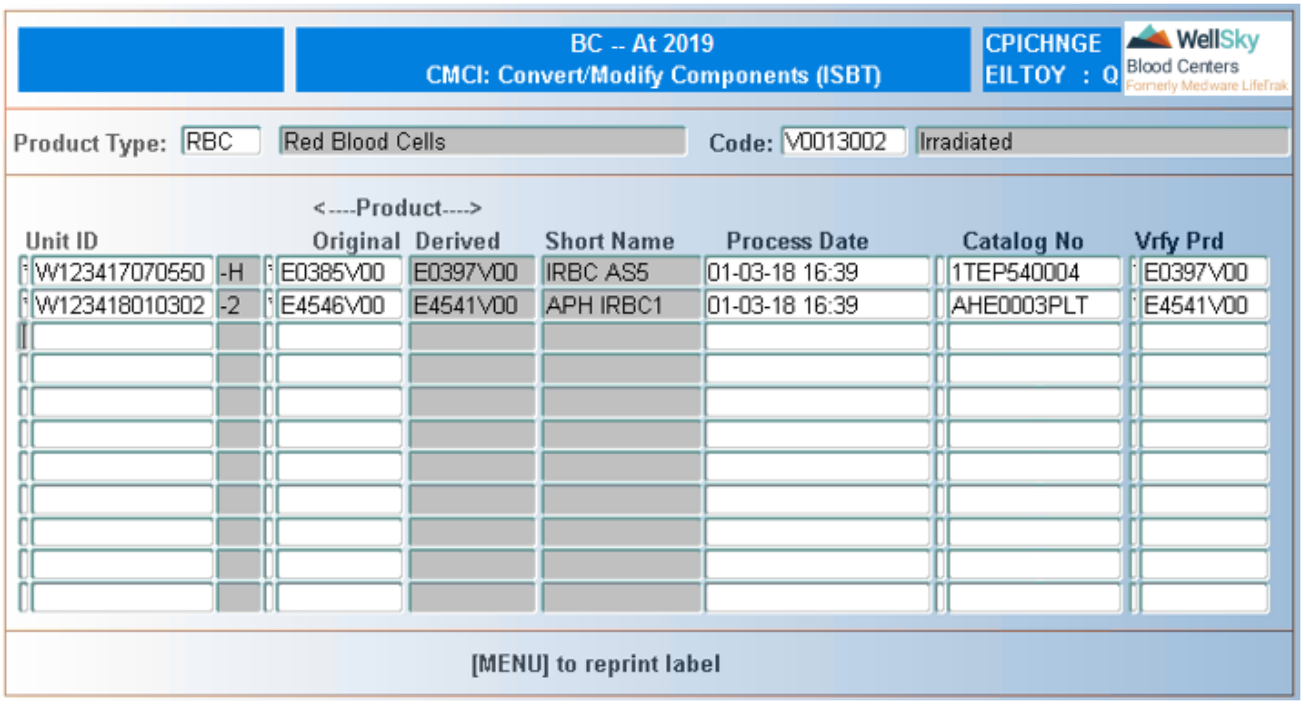


# Control Block Fields and Definitions

## Product Type

Manually enter product type or select from LOV.

## Code

Manually enter or select from LOV.

**NOTE –** LOV is populated from the Product Type Attributes (PRDATTR) and Smart Manufacture Attribute Configurator (ATRCFG).

**NOTE –** Only attributes that are designated as C or M for ISBT will display in the list of values.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Original Product

Scan, manually enter, or select product code from LOV.

**NOTE –** Only product codes that are associated to the product type appear in the LOV.


WellSky Corporation
Proprietary and confidential

### Derived Product

This field will be populated by the system after the product is calculated based on the attribute being added. Field is not navigable.

### Short Name

This field automatically populates from the derived product code. This is populated with the short name defined in the Product Table. Field is not navigable.

### Process Date

Defaults to the current date and time or enter process date in MM-DD-YY HH24:MI format.

**NOTE –** The label does not print until the cursor moves out of the process date/time field. If this form is defined to print labels and the product derived is set to print the product label will print automatically.

### Catalog No

Scan, manually enter, or select catalog from LOV.

### Vrfy Prd

Scan or manually enter derived product code.

**NOTE –** Once the product has been verified or the manual entry of the product code has begun re-printing the label is not permitted.

**NOTE –** Field is navigable only if the program is configured in Maintain Menu Items (MENUITM) to require label verification.

## Re-Printing Labels

Press F6 (Menu) to reprint the product label prior to verification.

The screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include:

- The data entered on the screen.
- All CMGP checks for the new component are made by the system.
- Freeze details entered for the old product are transferred to the new product.
- Component level interdictions present on the old product are transferred to the new product.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Component Modification menu.

# 19.3.4 Delete Units from SCD Worksheet (DELSCD)

## Intended Use

Use the Delete Units from SCD Worksheet to delete units from an SCD worksheet that were entered into the system previously.

## Limitations

None

## Prerequisites

The unit must have been scanned into an SCD worksheet without entering details.

## Accessing the Screen

Access this screen from the Component Modification Functions menu or by using the keyword `DELSCD`.

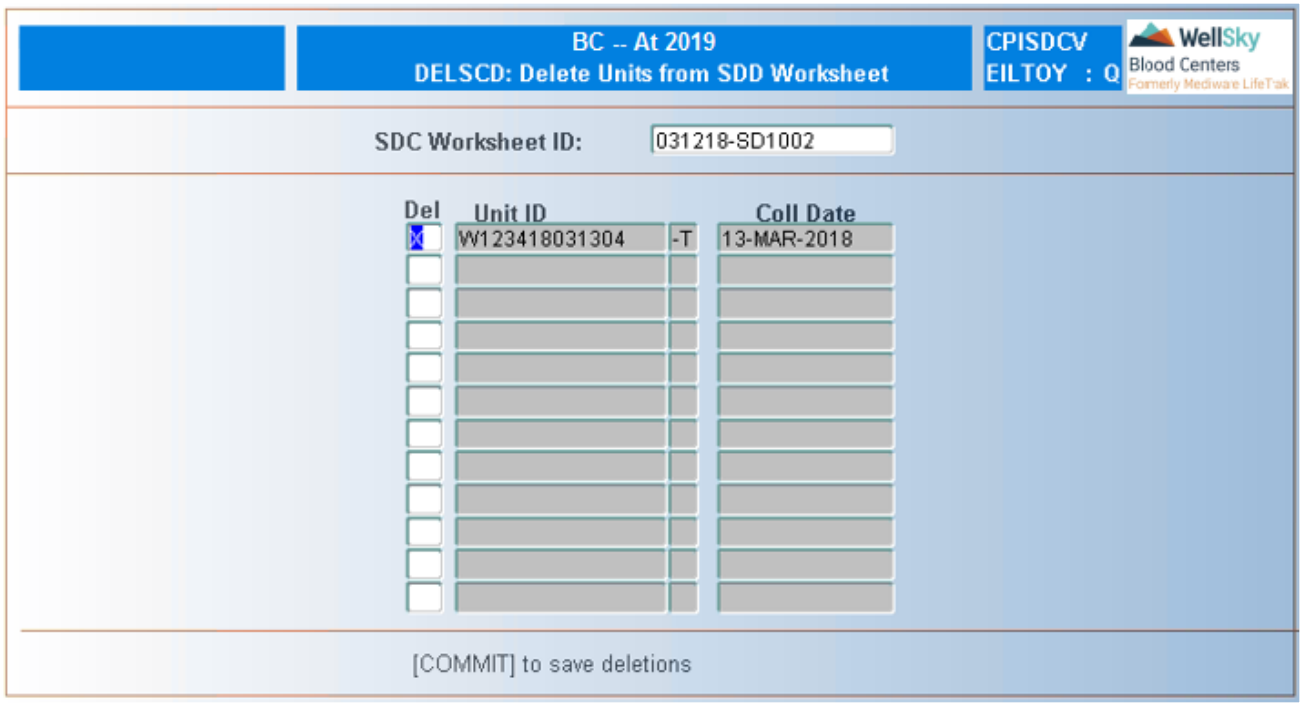


## Control Block Fields and Definitions

### SCD Worksheet ID

Enter worksheet ID or select from LOV.


WellSky Corporation
Proprietary and confidential

## Detail Block Fields and Definitions

The following displays after the SCD worksheet ID is entered:

### Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of units. Press `X` or **ENTER** to select the unit to be deleted. Press `X` or **ENTER** again to deselect the unit.

### Unit ID

Unit IDs associated to worksheet automatically display after the worksheet ID is entered. Field is not navigable.

### Coll Date

Unit collection date automatically displays after the worksheet ID is entered. Field is not navigable.

Press **F12** (Commit) once all desired units have been selected.

## At Commit

Updates made to the system include units selected are deleted from the SCD worksheet.

**NOTE –** If all units from the worksheet are deleted, the entire worksheet is voided automatically.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Component Modification Functions menu.

# 19.3.5 Modify SCD Details (MODSCD)

## Intended Use

Use this screen to modify Sterile Connecting Device details that were entered during division of a product (ALIQUOTI) or during Sterile Docking Definition (SDD).

## Limitations

None

## Prerequisites

Unit must have been labeled and original SCD details entered.

## Accessing the Screen

Access this screen from the Component Modification Functions menu or by entering the keyword `MODSCD`.

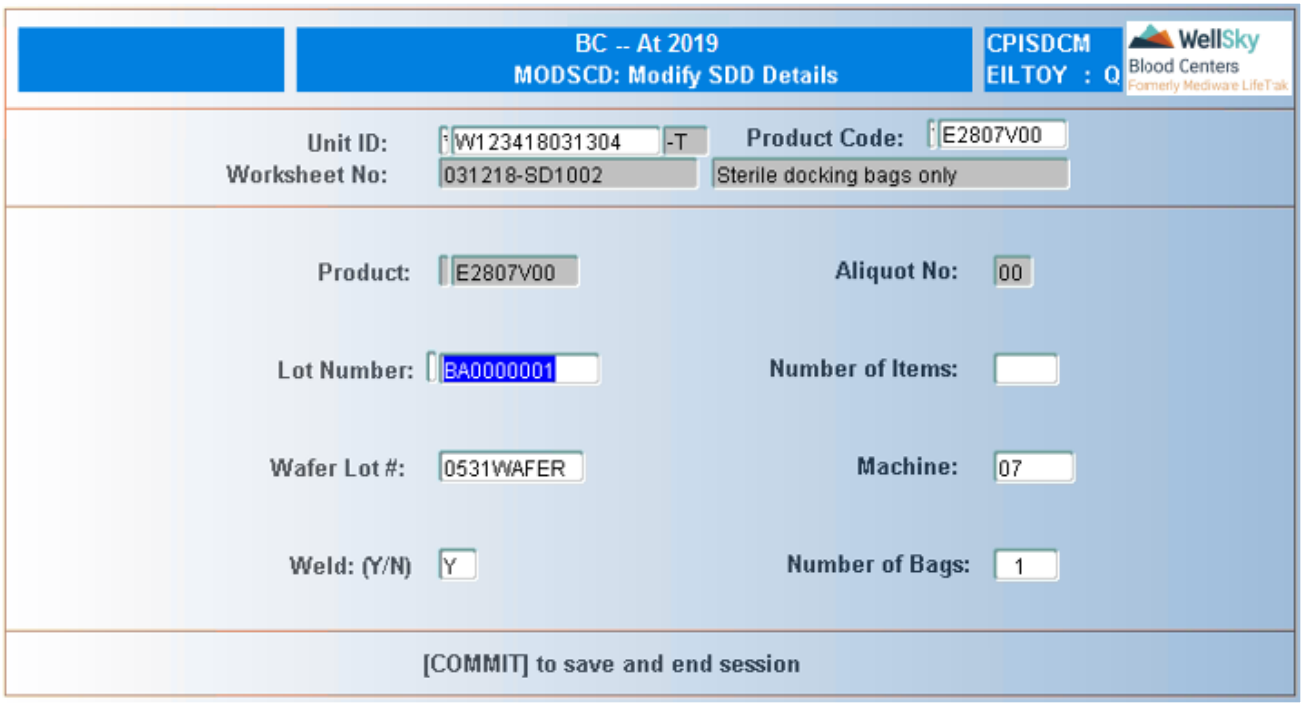


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product Code

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

## Worksheet No.

Worksheet number automatically displays after the product code is entered. Field is not navigable.

# Detail Block Fields and Definitions

**NOTE –** All fields populate with previously entered information after the worksheet ID is entered.

## Product

Displays the product code. Field is not navigable.

## Aliquot No.

Displays the aliquot number. Field is not navigable.

### Lot Number
Enter correct lot number or select from LOV. Press **ENTER** to accept the current value.

### Number of Items
Enter correct number of items. At least 1 must be entered. Field cannot be null.

### Wafer Lot
Enter correct wafer lot number or select from LOV. Press **ENTER** to accept the current value.

### Machine
Enter correct machine number or select from LOV. Press **ENTER** to accept the current value.

### Weld
Enter `Y` if weld is acceptable or enter `N` if weld is unacceptable. Press **ENTER** to accept the current value.

> **NOTE –** If the weld is changed to N, a WELD interdiction is placed on the product. If the weld is changed to Y, the previously placed WELD interdiction is removed from the product.

### Number of Bags
Enter correct number of bags. Press **ENTER** to accept the current value.

## At Commit
Updates made to the system at Commit include the following:

- Modified data entered is saved.
- WELD interdictions are placed/removed based on weld inspection entered.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Component Modification Functions menu.

# 19.4 Pheresis Processing

Pheresis Processing functions are accessed from the following menu:

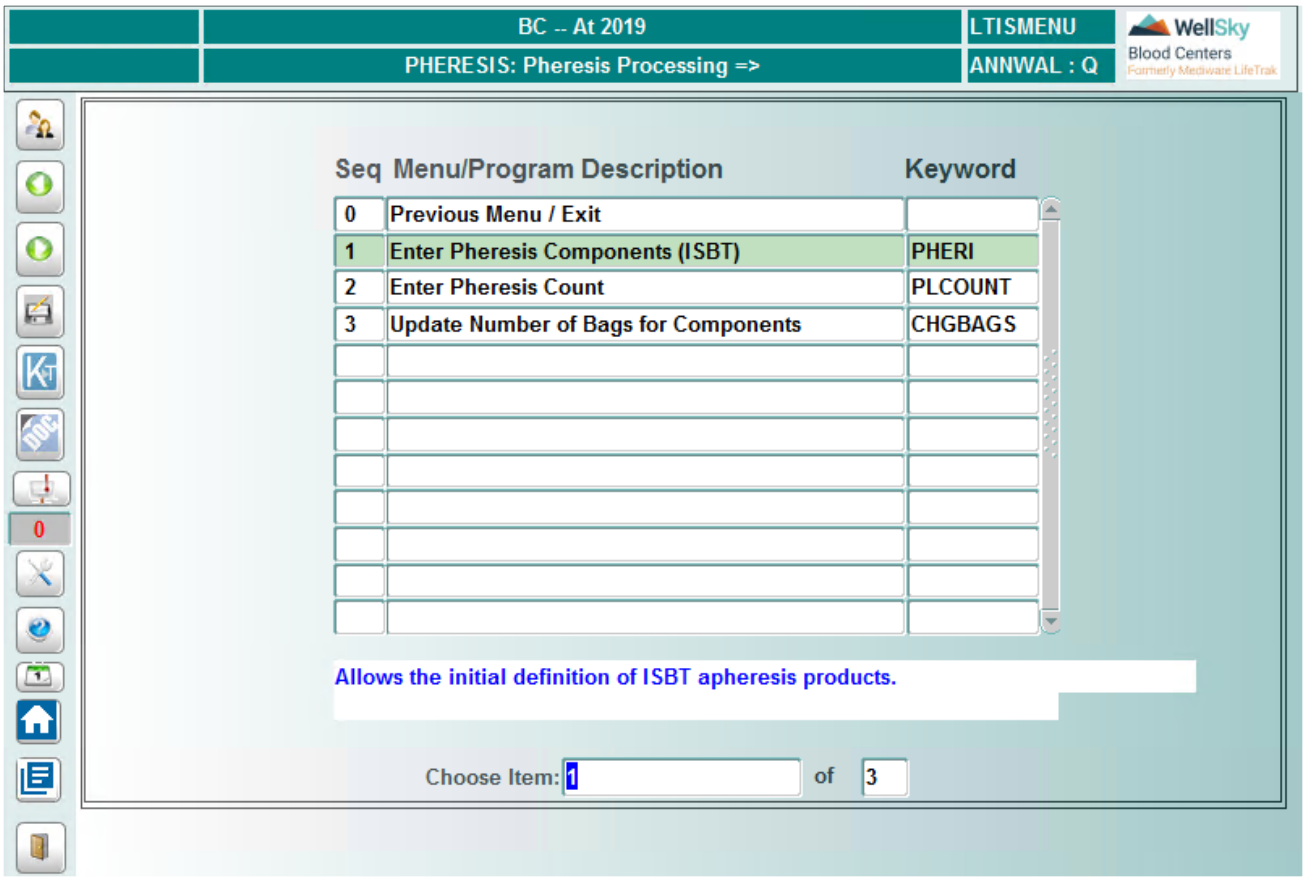


## 19.4.1 Enter Pheresis Components - ISBT (PHERI)

### Intended Use

Use the Enter Pheresis Components screen to enter components made from pheresis donations with ISBT 128 unit scheme. The data is accessed by unit ID. Data collected here includes the following:

- Product code
- Volume
- Weight
- Number of bags holding components


WellSky Corporation
Proprietary and confidential

## Limitations

- Unit must be from an apheresis collection.
- Codabar products cannot be processed in this screen.

## Prerequisites

- Unit must have been processed through Material Check-In.
- Unit must be located in your current log-in warehouse in order to perform this function.
- Unit must not be in transit in order to perform this function.
- Master Code SPATR must be defined if SP attributes will be placed in conjunction with the ISBT attribute.
- All precursor product code short names should begin with 'Pre'. This is used in determining valid equipment, product code, procedure code combinations.
- Smart Manufacture Attribute Configurator must be defined for the attributes that can be placed in the program for product types.

## Accessing the Screen

Access this screen from the Pheresis Processing menu or by entering the keyword `PHERI`.

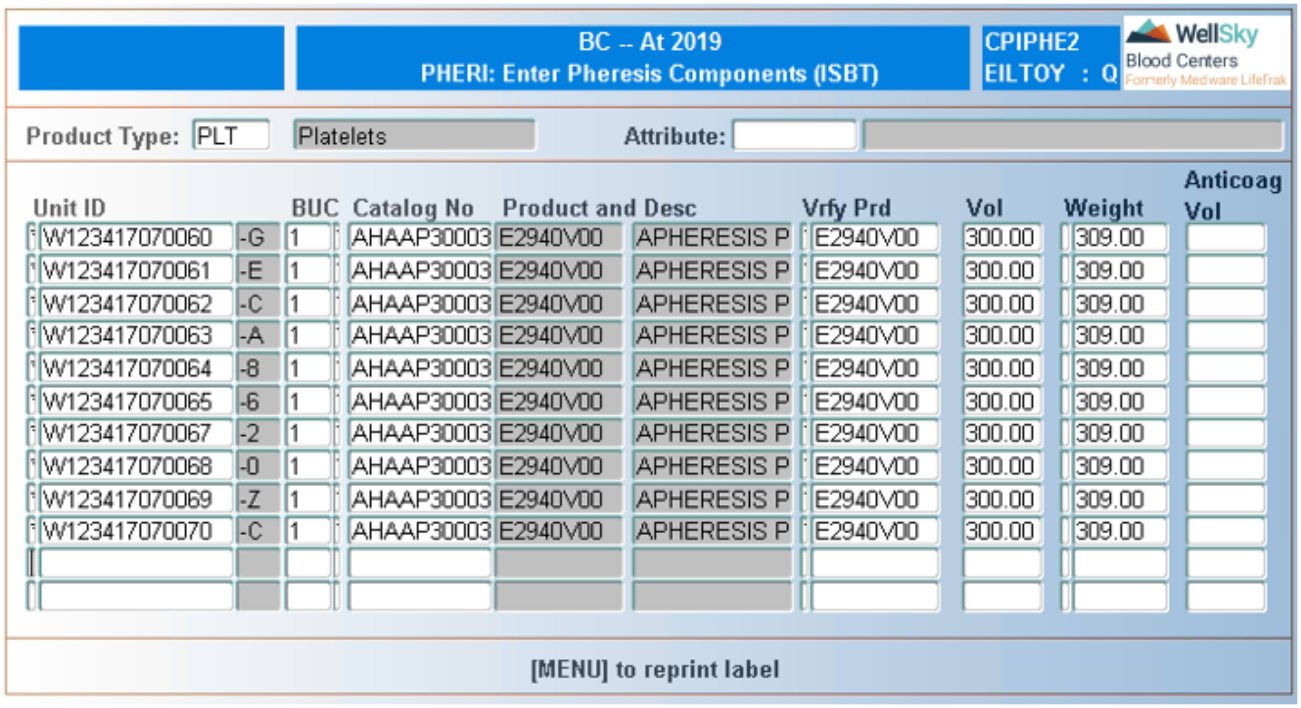


## Control Block Fields and Definitions

### Product Type

Manually enter or use LOV. LOV is populated using data defined in Product Type Data (PRDTYPE).

### Attribute

Manually enter, or select attribute from LOV.

**NOTE –** Attribute has to be defined in the Smart Manufacture Attribute Configurator (ATRCFG) and in Product Type Attributes (PRDATTR) for the specified product type. If not defined, it will not appear in the LOV.

**NOTE –** Field is navigable only if the A field is set to Y in Product Type Data – Codabar/ISBT (PRDTYPE) and Smart Manufacture Attribute Configurator (ATRCFG) for the product type being defined.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### BUC

Enter the number of bags actually holding platelet product.

### Catalog No

Scan, manually enter, or select valid catalog from the LOV.

### Product and Desc

Select product code from the list. A window opens if multiple product codes are calculated. If a single product code is calculated it will default and cursor will move to verify product code.

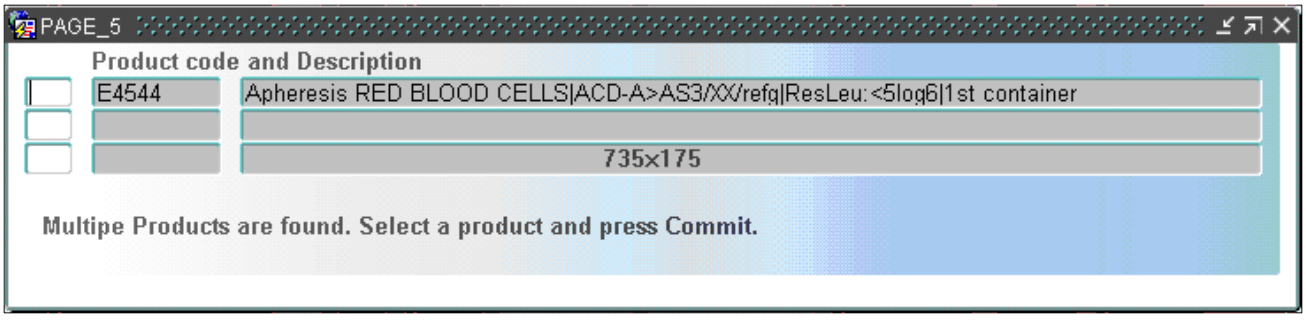


Use the UP and DOWN arrow keys to scroll through the list of possible product codes. Press F12 (Commit) to select the correct product code.

**NOTE –** If a label is to be printed at the time the product is accepted, the label will print an OPD label (4x2).


WellSky Corporation
Proprietary and confidential

### Vrfy Prd

Scan or manually enter product code. This field is only navigable if the menu parameter LBLPRINT has been set to verify the products being made.

**NOTE –** Once the product has been verified or the manual entry of the product code has begun re-printing, the label is not permitted.

### Volume

Enter product volume (mL). Leave field blank to enter component weight.

**NOTE –** The system calculates the volume from the unit weight and specific gravity if volume is left blank.

**NOTE –** Either volume or weight must be entered.

### Weight

Transmit the weight from a scale or manually enter. Field is navigable only if the Volume was left blank.

### Anticoag Vol

Entry is optional. Enter the anticoagulant volume, in ml. A maximum of 999 ml can be entered. If entered, this volume prints on the 4x4 (PFF) label during labeling.

## To Reprint a Label

Press F6 (Menu) to re-print label. Label cannot be re-printed after label verification has started.

## At Commit

The system does a line-by-line commit. Updates made to the system at Commit include the following:

- Data entered on the screen.
- CMW interdiction is placed if the component weight is not within acceptable ranges defined in Product Codes (PRODUCT) or Equipment/Product cGMP Matrix (EQUIPROD).
- CMTI interdiction is placed on the component if the component is not defined within the time defined in Product Codes (PRODUCT).

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Pheresis Processing menu.

# 19.4.2 Enter Pheresis Count (PLCOUNT)

## Intended Use

Use the Enter Pheresis Count screen to enter the tested product counts, where applicable. Pheresis units that have already been checked-in are accessed from the database by collection date.

## Limitations

- The count cannot be modified on units that have already been labeled.
- Count can only be entered for apheresis products with the Cell Count Flag set to Y or O in Product Codes (PRODUCT).

## Prerequisites

Use this screen after the pheresis unit has been defined.

## Accessing the Screen

Access this screen from the Pheresis Processing menu or by entering the keyword `PLCOUNT`.

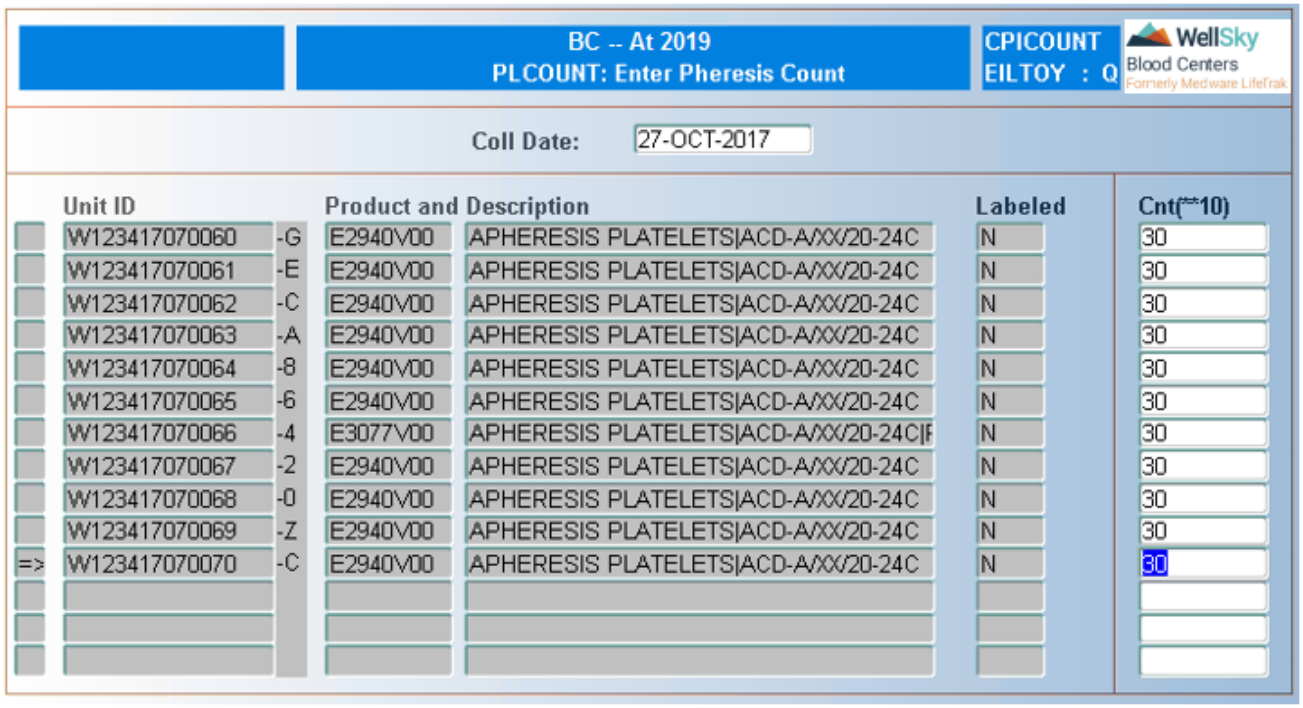


## Control Block Fields and Definitions

### Coll Date

Enter collection date in DD-MON-YYYY format, or press **ENTER** to accept the current date.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Unit ID

Unit ID for products with Cell Count Flag set to Y or O in Valid Product (PRODUCT) automatically display after the collection date is entered. Field is not navigable.

## Product and Description

Product code and description automatically display after the collection date is entered. Fields are not navigable.

## Labeled

Y automatically displays if the unit has been labeled, and N automatically displays if the unit has not been labeled. Field is not navigable.

## Cnt (**10)

Enter product cell count.

**NOTE –** The count entered here is multiplied by $10^{10}$ by the system and is stored in the database.

**NOTE –** If the cell count entered is less than the Count defined for the product in Product Codes (PRODUCT), the following window opens:




Enter `Y` to accept the value entered or enter `N` to modify the value entered.

**NOTE –** A CMCO interdiction is placed on any product with a cell count less than the count defined in Product Codes (PRODUCT).

**NOTE –** Labeled product cell counts can only be modified if the product is labeled to HOLD or Quarantine.

This screen does a line-by-line commit.

# At Commit

Updates made to the system at commit include the following:

- Data entered on the screen.
- CMCO interdictions are placed on products with counts that fall outside of the minimum allowable count.

## What to Do Next

For normal processing, press F8 (Exit Screen) to go to the Pheresis Processing menu.

# 19.4.3 Update Number of Bags for Components (CHGBAGS)

## Intended Use

Use the Update Number of Bags for Component screen to modify the number of bags for components made from pheresis donations.

## Limitations

- This screen is only used for pheresis products.
- To update the bag, the product should be labeled as Quarantine (Mq), or it should not be labeled.

## Prerequisites

- Use this screen after the component is defined.
- Component must be located in your current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.

## Accessing the Screen

Access this screen from the Pheresis Processing menu or by entering the keyword `CHGBAGS`.

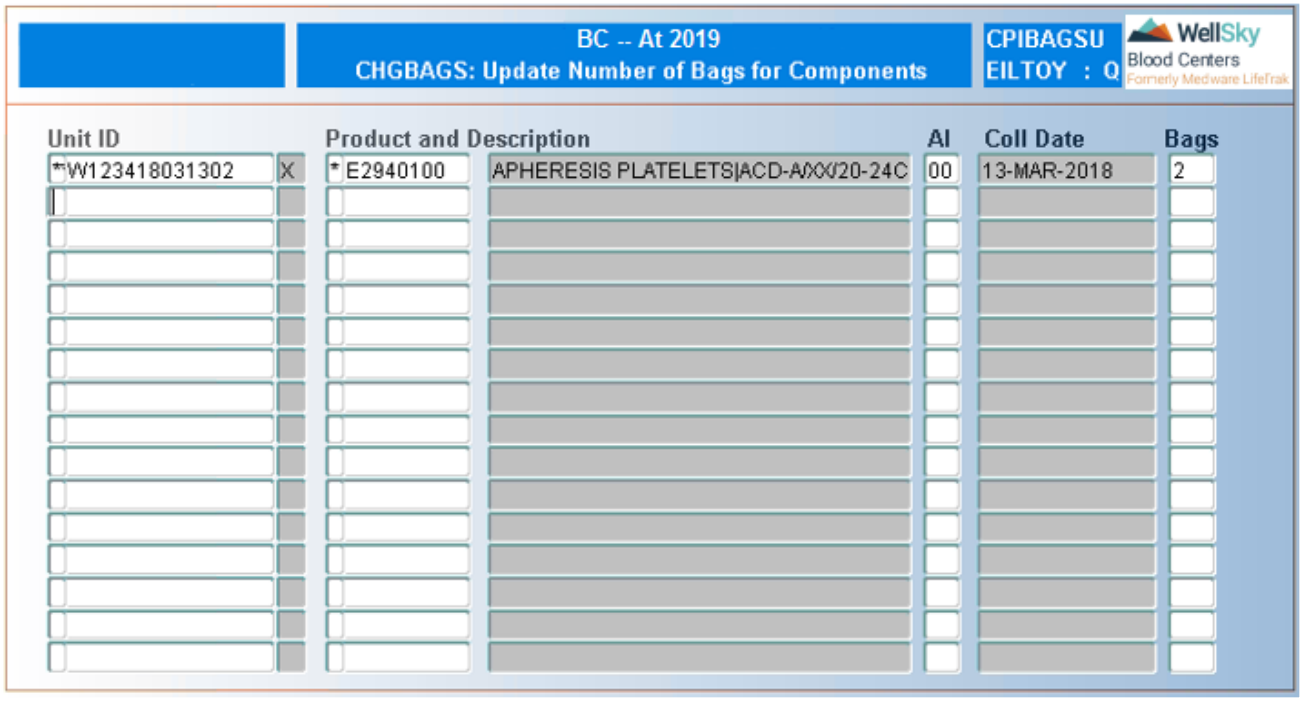



WellSky Corporation
Proprietary and confidential

# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Process and Description

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

## Aliquot

Enter the aliquot number or select from LOV.

**NOTE –** The system will default to aliquot 1. Field is not navigable for ISBT products.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Bags

Enter the correct number of bags holding product.

**NOTE –** This field will automatically populate with the number of bags entered in the BUC field of Enter Pheresis Components (PHER) or Enter Pheresis Components – ISBT (PHERI).

This screen does a line-by-line commit.

# At Commit

The number of bags containing product will be updated.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Pheresis Processing menu.

# 19.5 Pathogen Reduction

Pathogen Reduction Process is accessed through the following menu:

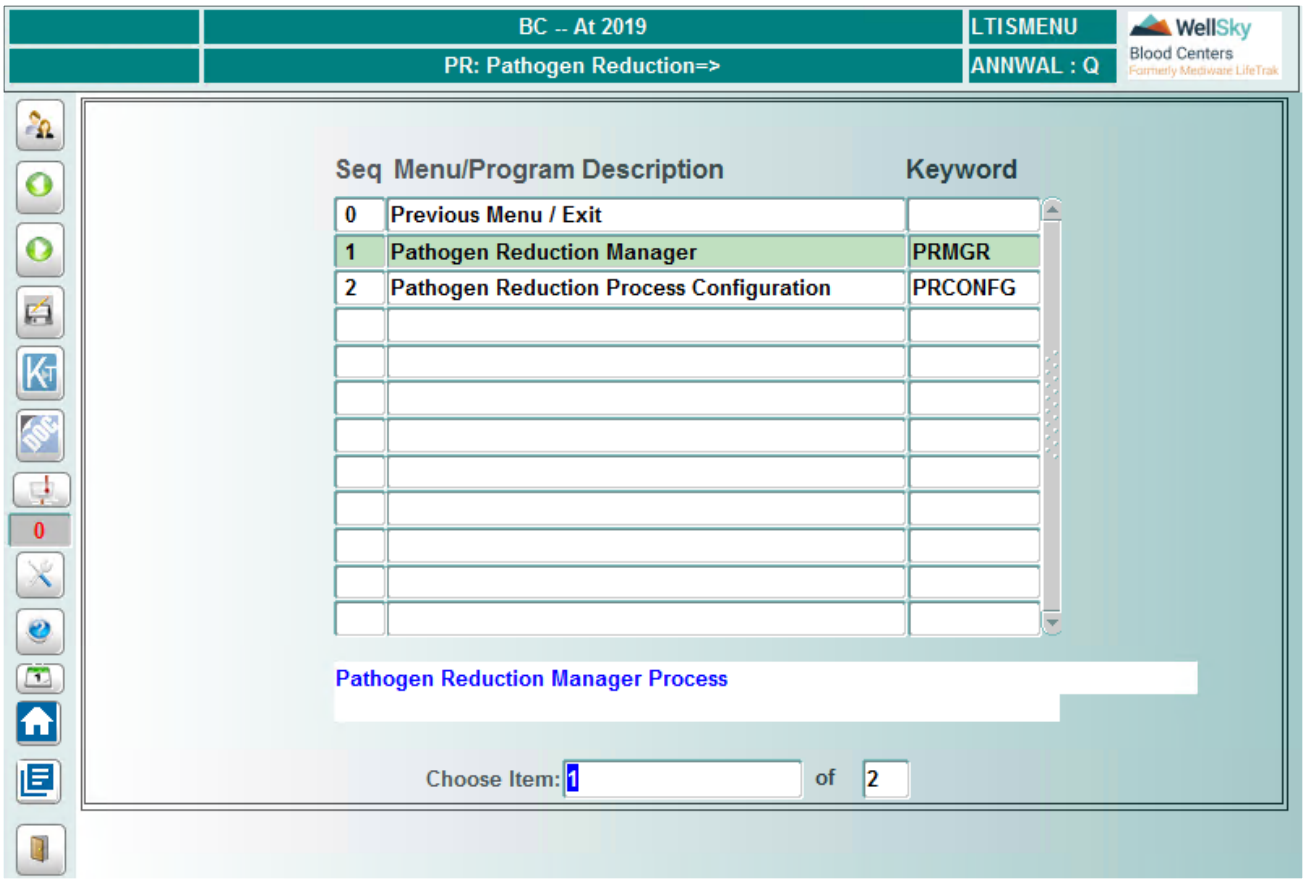


## 19.5.1 Pathogen Reduction Manager

### Intended Use

Pathogen Reduction Manager controls multiple processes. The pathogen reduction process is designed to reduce the risk of transfusion-transmitted infections by inactivating a broad range of pathogens, such as viruses, bacteria, and parasites, that may be present in donated blood.

### Limitations

- The process cannot be performed on Codabar unit number schemes.
- Pooled plasma cannot be processed through this function.

## Prerequisites

- To print labels in the forms, the program CPIPRMGR needs to be defined in RMASTER.
- The user must have Lab user access PRUP to allow update of products in Pathogen Reduction.

## Accessing the Screen

Access this screen from the Pathogen Reduction Menu using the keyword PRMGR.

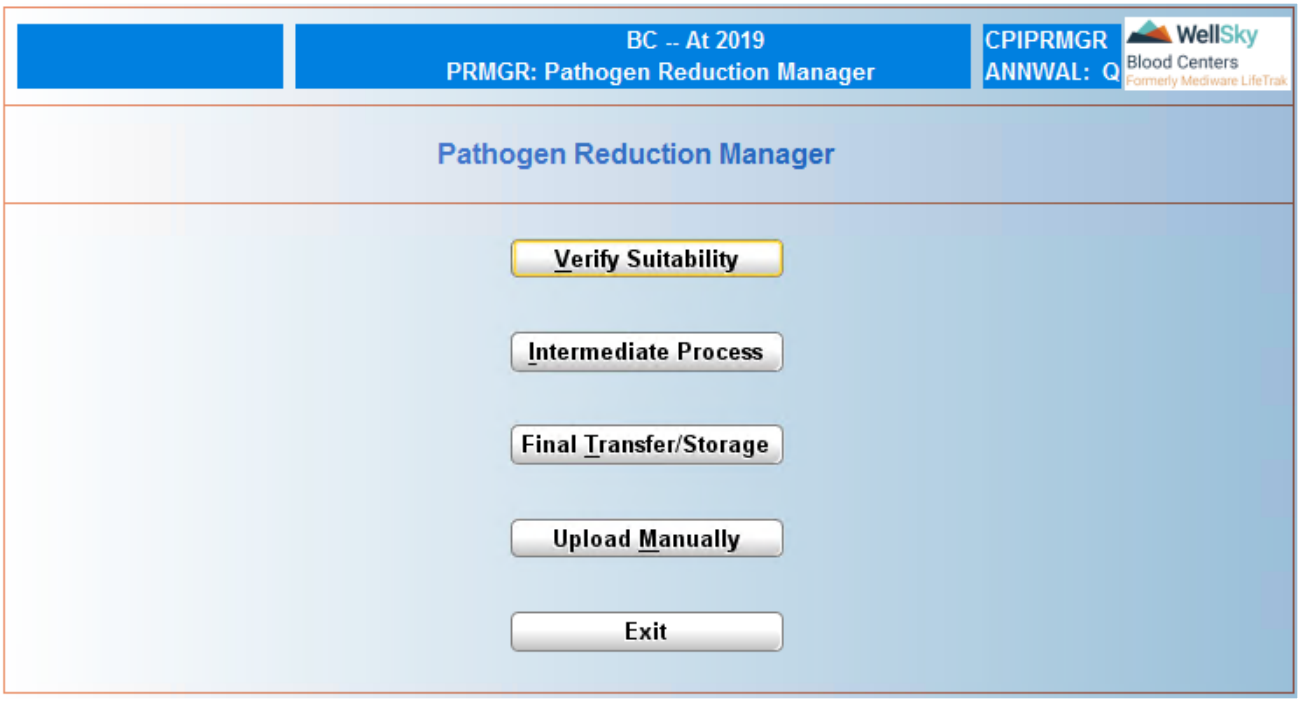


The main screen has five buttons on the form:

- Verify Suitability - this button is used to open the suitability section for pathogen reduction and check if the unit and product is suitable for the process.
- Intermediate Process - this button is used to capture the illumination of the product and creation of the CAD interim product code.
- Final Transfer/Storage - this button is used to complete the process and move the interim product to the final product code and storage container.
- Upload Manually - this button is used to manually load the file from the illumination equipment.
- Exit - this button will close the main form and take you back to the menu for pathogen reduction.

# 19.5.2 Verify Suitability

## Intended Use

The Verify Suitability screen is used to determine if the unit and product is suitable to perform the pathogen reduction process. Once the process is completed, the intermediate product code will be defined, and the sterile docking process will be captured.

## Limitations

Units must be defined in the system in order to be able to perform the pathogen reduction process.

- Unit must be checked into the system using Check-In Details (DSCE).
- Unit must have bags checked in using Bags Check-In (BAGS).

## Prerequisites

1. Codes for the volume set types need to be defined in master codes BAG and BAGID.
2. LOTS and CATALOGS must be defined for the Volume Set Types.
3. The following master codes should be defined:
    - PARDT: Pathogen Reduction Product Types
    - PEQUP: Pathogen Reduction Equipment Types
    - PILL: Pathogen Reduction Illuminators
    - SUSTY: Pathogen Reduction Suspension Types
    - VTYST: Pathogen Reduction Volume Set Types
    - LOGDR: directories defined for the manual upload of the illuminator file
4. Equipment must be defined for the pheresis machines being used in collection of the product and the illuminator machines.
    a. Pheresis machines for Amicus and Trima
    b. Illuminator equipment

    **NOTE –** The equipment master code EQUIP (Equipment Types) should be used in the master codes PEQUP and PILL.
5. Product codes need to be defined for the interim, CAD, and final processes.
    a. Interim product codes should be defined with A#### and the pathogen reduction flag set to Y. These are considered 'dummy' products and will not go through the main labeling form. If the product requires discard, invoke the REJECT button or go to the REJECT screen from the menu.


WellSky Corporation
Proprietary and confidential

b. CAD interim product codes should be defined (C####). These interim product codes are 'dummy' products and will not have the pathogen reduction flag set to Y. These products will not go through the main labeling form.

> **NOTE –** Plasma products do not require an interim CAD product code because they do not use the CAD process per the Intercept Package Insert.

c. Final pathogen reduction product codes should be defined, and these will go through the main labeling form.

6. System Parameters must be defined:
   a. PI_END_CHK - number of hours in which a platelet needs to be processed.
   b. PI_SEAL_RQ - requires the entry of removal of bags by capturing the sealing off of the bag.
      i. If the system parameter is set to N, then the entry of the seal to remove bags will not be required. The buttons will be disabled.
      ii. If the system parameter is set to Y, then the entry of the seal to remove bags will be required before the next process can start. This will require all seal entries; the user cannot just perform certain processes.
   c. PI_ILL_ST - number of hours for pathogen reduction product be placed on illuminator, calculates from end bleed.
7. Define Product Bags table for the product and volume set type.

## Accessing the Screen

Access this screen by clicking **Verify Suitability** or using hot key ALT+V from the Pathogen Reduction Manager screen.

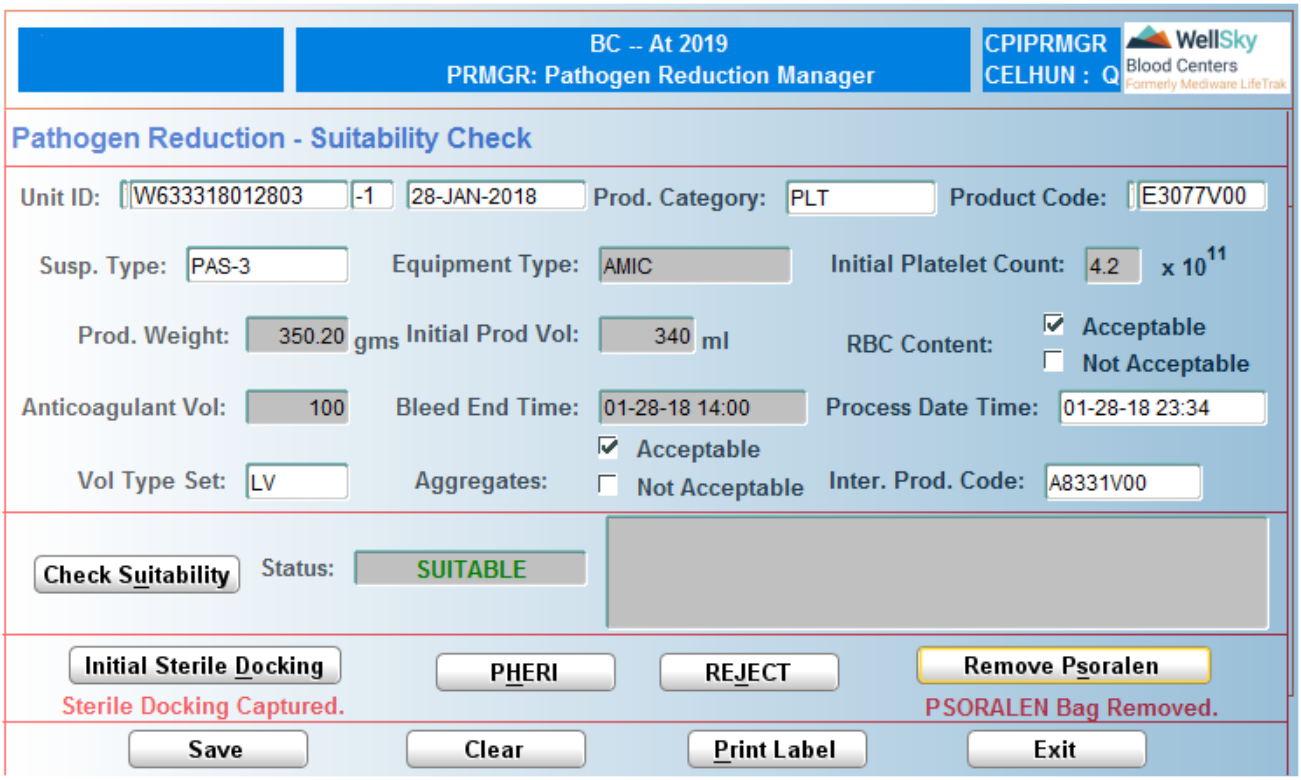


# Fields and Definitions

## Unit ID

Scan or manually enter the unit ID. The unit must have been checked into the system and bags assigned in order to be able to process in the pathogen reduction screen. You will receive an error if these processes have not been completed.

## Prod Category

Enter the product category or select it from the LOV. The LOV is hard-coded for platelets and plasma. The product category is linked to product types defined in Blood Centers. Master code PARDTY is linked with PLT: Blood Centers product type or PLAS: Blood Centers product type. This will allow multiple product types to be linked to the category.

## Product Code

Scan or manually enter the product code. This field is optional.

The product code does not have to be entered if the facility chooses to move to the pathogen reduction process without creating an initial product code. If the initial product code is created and entered in the screen, the product weight, volume, and platelet counts will automatically populate if the values were entered in the component pheresis screens.

## Susp Type

Enter the suspension type or select it from the LOV. The LOV is populated from the Pathogen Reduction Process Config table (PRCFG).


WellSky Corporation
Proprietary and confidential

## Equipment Type

Enter the equipment type or select it from the LOV. The LOV is populated from the Pathogen Reduction Process Config table (PRCFG). This will automatically populate if entered in the Check-In Details screen (DSCE).

## Initial Platelet Count

Enter the initial platelet count. This will automatically populate if entered in Enter Pheresis Count (PLCOUNT). Manual entry of the platelet count should be N x $10^{11}$.

## Prod Weight

Enter the product weight. Product weight will automatically populate if entered in Enter Pheresis Components (ISBT) (PHERI). You will have to know the weight and volume if the initial product code is not defined.

## Initial Prod Vol

Enter the product volume. Product volume will automatically populate if entered in Enter Pheresis Components (ISBT) (PHERI). Product volume is calculated by weight/specific gravity of the product. You will need to know the specific gravity and weight to calculate the volume if the initial product is not defined in Enter Pheresis Components (ISBT) (PHERI).

## RBC Content

Enter RBC content acceptability. Select by either clicking the check box next to the appropriate value or using the space bar when the cursor is in the specified value. The RBC content is performed using the scale provided by the manufacturer.

## Anticoagulant Vol

Enter the anticoagulant volume in mLs. Anticoagulant volume will automatically populate if entered in Enter Pheresis Components (ISBT) (PHERI). Anticoagulant volume cannot be larger than total volume.

## Bleed End Time

The End bleed time displays based on values entered during Check-In Details (DSCE). This field is display only.

## Process Date Time

This field is required. It will default to the current chapter date and time, but you are allowed to back date the process date. The entry format allowed is MMDDYY HHMM24, or you can enter MMDDYYYYHHMM24, and the system will format the date and time.

## Vol Type Set

Enter the volume type set, or select it from the LOV. The LOV is populated based on data configuration in the Pathogen Reduction Process Config table (PRCFG). Once the volume set type is entered, and when the cursor moves out of the field, suitability is performed for the set type on the following fields:

- Initial volume of the product
- Platelet count (only for platelet product types)

If the suitability fails, you will receive a message explaining which fields failed, similar to the following example:




**NOTE –** You can update the set type to a code that will allow the process to occur.

**NOTE –** Lot numbers have to be defined with Set Type Flag for each type of set used in pathogen reduction.

## Aggregates

Enter aggregates acceptability. Select by either clicking the check box next to the appropriate value or using the space bar when the cursor is in the specified value. The aggregate content is a visual inspection for platelet products only.

## Inter Prod Code

Specify the interim product code, or select it from the LOV. The LOV is populated from the Products table (PRODUCT) where the Pathogen Flag is set to Y. The products listed here are dummy products and will not be labeled in the final labeling screen.

**NOTE –** If the program name CPIPRMGR is defined in RMASTER, a 4x2 label will print when moving out of the field.

## Check Suitability

Click this button or use the hot key ALT+U to perform the final product's suitability. The suitability will perform the final checks:

- Platelets:
  - RBC Content
  - Platelet aggregates
  - The age of the platelet. Platelets need to be processed within the specified number of hours defined in system parameter PI_END_CHK. It calculates the time from the current system minus the end bleed time.
- Plasma:
  - RBC Content
  - Whether or not the plasma has been frozen

Once the suitability has been calculated, it will display in the form.

## Status

Based on the suitability check, the product status and associated description will automatically display. The status and description cannot be modified.


WellSky Corporation
Proprietary and confidential

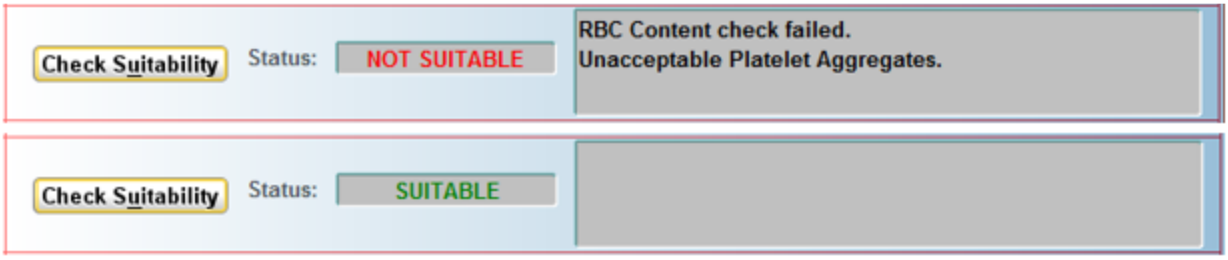


## Initial Sterile Docking:

Click this button or use hot key ALT+D to initiate the sterile docking of the set onto the product. This is a required function.

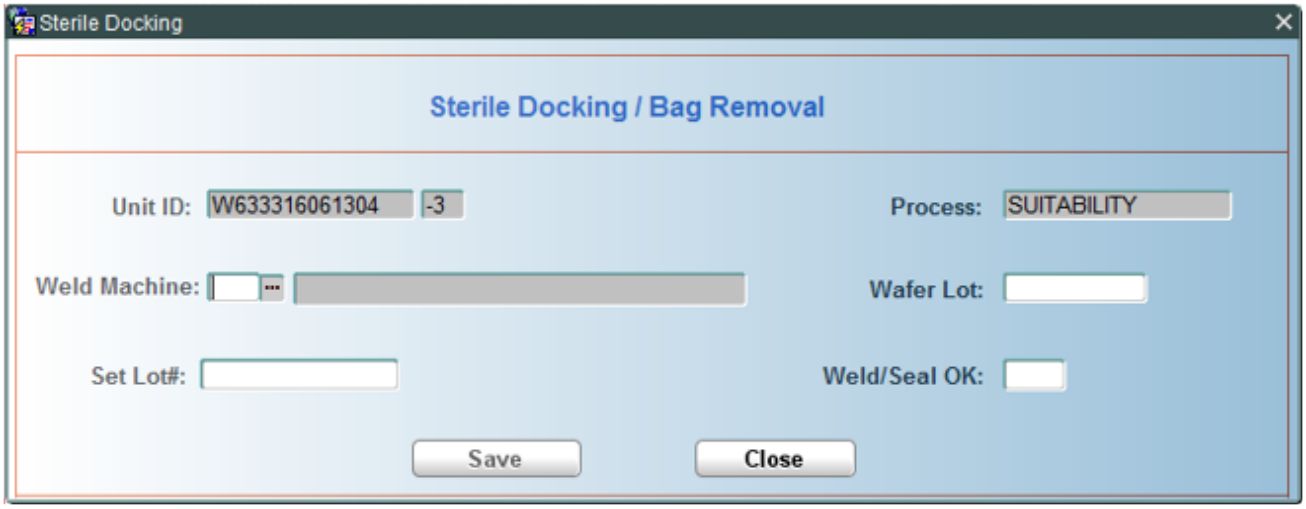


## Fields and Definitions

### Unit ID

Displays the unit number from the parent form. This is display only and cannot be modified.

### Process

Process displays based on screen being captured. The process SUITABILITY is hard-coded within the suitability form and cannot be changed.

### Weld Machine

Enter the machine in which you are performing the sterile docking of the set on the product. Machines listed come from master code STER. This master code is not by chapter and displays all sterile docking machines.

### Wafer Lot

Enter the wafer lot number that is being used to perform the sterile docking process. The LOV of the lot number displayed is by chapter and is based on the LOTS table where the code is equal to WA.

## Set Lot#

Enter the volume set lot number. The LOV is populated by the volume set type selected in the suitability screen. Only those lot numbers linked to that volume set type will display.

**NOTE –** Valid Lots needs to have the Type set field defined for Volume Type set selected in the parent form.

## Weld/Seal OK

Enter Y if the weld is acceptable, or enter N if the weld is not acceptable.

**NOTE –** If N is entered, a WELD interdiction will be placed on the product.

## PHERI:

Click this button or use the hot key ALT+H to move to the Enter Pheresis Components (ISBT). The form will open and allow you to define a regular pheresis product if the initial product has not been defined and the product does not pass suitability.

**NOTE –** You will be required to enter the unit number and other data into the form. It will not pre-populate.

## REJECT:

Click this button or use the hot key ALT+J to move to the Reject Unit/Component (REJECT) form. The form will open and allow you to reject a product if the WELD is bad or other parameters fail, such as RBC content or platelet aggregates.

**NOTE –** You will be required to enter the unit number and other data into the form. It will not pre-populate.

## Remove Psoralen:

Click this button or use the hot key ALT+S to document the removal of the Psoralen bag. This is not a required process. If the system parameter PI_SEAL_RQ is set to Y, the Remove Psoralen button is active and allows you to capture the removal of the bag. If the parameter is set to N, the button is inactive and does not require the capture of the removal of the Psoralen bag.


WellSky Corporation
Proprietary and confidential

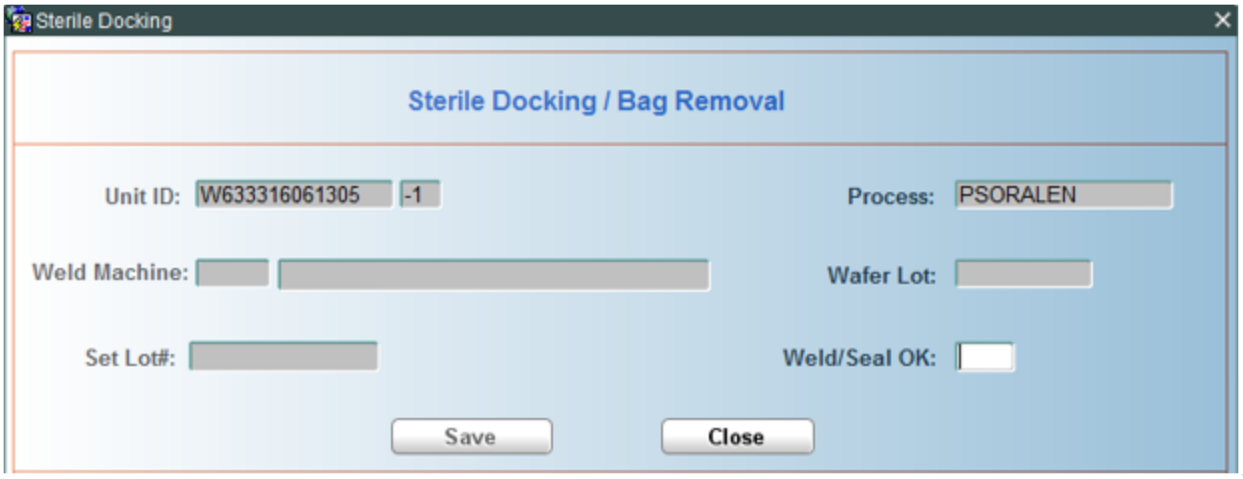


# Fields and Definitions

## Unit ID

The unit number defaults from the parent form and cannot be updated.

## Process

The process will automatically default with PSORALEN; this is hard-coded and cannot be updated.

## The Following Fields Do Not Require Entry:

- Weld machine
- Wafer lot number
- Set lot #

## Weld/Seal OK

Enter Y if the seal is acceptable, or enter N if the seal is not acceptable.

**NOTE –** If N is entered, a WELD interdiction will be placed on the intermediate product.

# Print Label:

Click this button to reprint an intermediate product code label. A 4x2 label will be printed.

# Other Buttons:

**Save:** either click this button to save entered data, or press F12 to commit the data.

**Clear:** either click the button or use ALT+F5 to clear the form.

**Exit:** either click the button or use F8 to close the form.

# Update Data in Suitability:

Scan or manually enter the unit number to be updated and select.

## Unit ID

Scan or manually enter the unit ID. The unit must have been checked into the system and bags assigned in order to be able to process in the Pathogen Reduction screen. You will receive an error if these processes have not been completed.

## Prod Category

Enter the product category or select it from the LOV. The LOV is hard-coded for platelets and plasma. The product category is linked to product types defined in Blood Centers. Master code PARDTY is linked with PLT: Blood Centers product type or PLAS: Blood Centers product type. This will allow multiple product types to be linked to the category.

## Product Code

Scan or manually enter the product code. The LOV will show **UPDATE** for products that can be updated versus initial input.

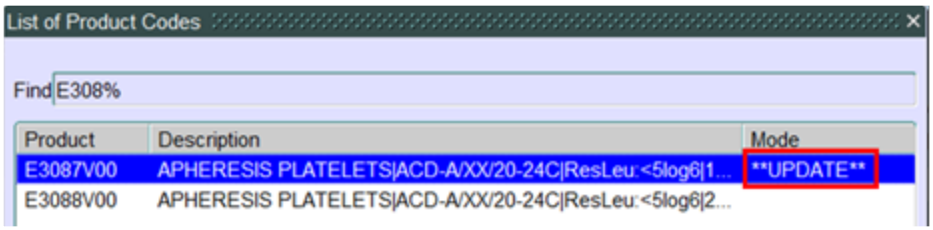


When updating a product, the SAVE button will display as UPDATE.

Only the fields listed below can be updated; all other fields cannot be updated in the suitability process. The fields that will be allowed to be updated in suitability are the following:

- Susp. Type – Enter the suspension type or select it from the LOV. The LOV is populated from the Pathogen Reduction Process Config table (PRCFG).
- Initial Platelet Count – Enter the initial platelet count. This will automatically populate if entered in Enter Pheresis Count (PLCOUNT). Manual entry of the platelet count should be N x$10^{11}$.
- Prod. Weight – Enter the product weight. Product weight will automatically populate if entered in Enter Pheresis Components (ISBT) (PHERI). You will have to know the weight and volume if the initial product code is not defined.
- Anticoagulant Vol – Enter the anticoagulant volumen in mLs. Anticoagulant volume will automatically populate if entered in Enter Pheresis Components (ISBT) (PHERI). Anticoagulant volume cannot be larger than total volume.
- Process Date time – This field is required. It will default to the current chapter date and time, but you are allowed to back date the process date. The entry format allowed is MMDDYY HHMM24, or you can enter MMDDYYYYHHMM24, and the system will format the date and time. The process date/time will be checked against the intermediate start time and CAD start time, and the user will receive an error message if the time is after the intermediate time and CAD start time.


WellSky Corporation
Proprietary and confidential

If the process date/time exceeds the number of hours defined in system parameter PI_END_CHK (it calculates the time from the current system minus the end bleed time), the user will receive a message explaining the issue with the time input.

The fields within Initial Sterile Docking:

- Weld Machine – Enter the machine in which you are performing the sterile docking of the set on the product. Machines listed come from master code STER. This master code is not by chapter, and it displays all sterile docking machines.
- Wafer Lot – Enter the wafer lot number that is being used to perform the sterile docking process. The LOV of the lot number displayed is by chapter and is based on the LOTS table where the code is equal to WA.
- Weld/Seal OK – Enter **Y** if the weld is acceptable, or enter **N** if the weld is not acceptable.

**NOTE –** If **N** is entered, a WELD interdiction will be placed on the product.

The field within Psoralen Bag Removal:

- Weld/Seal OK – Enter **Y** if the weld is acceptable, or enter **N** if the weld is not acceptable.

**NOTE –** If **N** is entered, a WELD interdiction will be placed on the product.

## At Commit

The data is committed to the database and allows the user to move on to the next step, Intermediate Process.

If an initial product code was defined when the interim product code is selected, the initial product will have a system label decision of Md (Discard) and reject reason of CONV.

## What to Do Next

For normal processing, press Exit to return to the Pathogen Reduction Manager (PRMGR) menu, and select either "Intermediate Process" below to manually enter data or "Upload Manually" on page 1201 to load the illuminator file.

# 19.5.3 Intermediate Process

## Intended Use

Intermediate process will capture the information coming from the illuminator. The information can be manually entered into the form, or a file can be automatically loaded. If the file is loaded when the unit number and product is selected, it will populate the form with the data.

## Limitations

If the system parameter PI_SEAL_RQ = Y and the Psoralen bag was not removed, you will receive an error letting you know the suitability process has not been completed.

## Prerequisites

1. The following master codes should be defined:
    a. PILL: Pathogen Reduction Illuminator Equipment Type
    b. LOGDR: with PILOC and PIARC if the file is to be loaded manually. See Manual Upload to understand the process.
2. The following system parameters must be defined:
    a. PI_SEAL_RQ – requires the entry of removal of bags by capturing the sealing off of the bag.
        i. If the system parameter is set to N, then the entry of the seal to remove bags will not be required. The buttons will be disabled.
        ii. If the system parameter is set to Y, then the entry of the seal to remove bags will be required before the next process can start. This will require all seal entries; the user cannot just perform certain processes.
    b. PI_ILL_ST – the number of hours for the pathogen reduction product to be placed on the illuminator; calculates from end bleed.
3. Equipment must be defined and in production to be used in the process.
4. CAD interim products should be defined in the Products Table (PRODUCT).
5. Conversions should be configured in Product Conversion ISBT 'SP' / Codabar table.
6. To upload the file automatically, the cron job needs to be defined and turned on for the Intercept.
    a. LT_INTERCEPT_PARSER.sh
    b. LT_INTERCEPT_PARSER.sql

## Accessing the Screen

Access this screen by clicking **Intermediate Process** or using hot key ALT+I on the Pathogen Reduction Manager screen.


WellSky Corporation
Proprietary and confidential

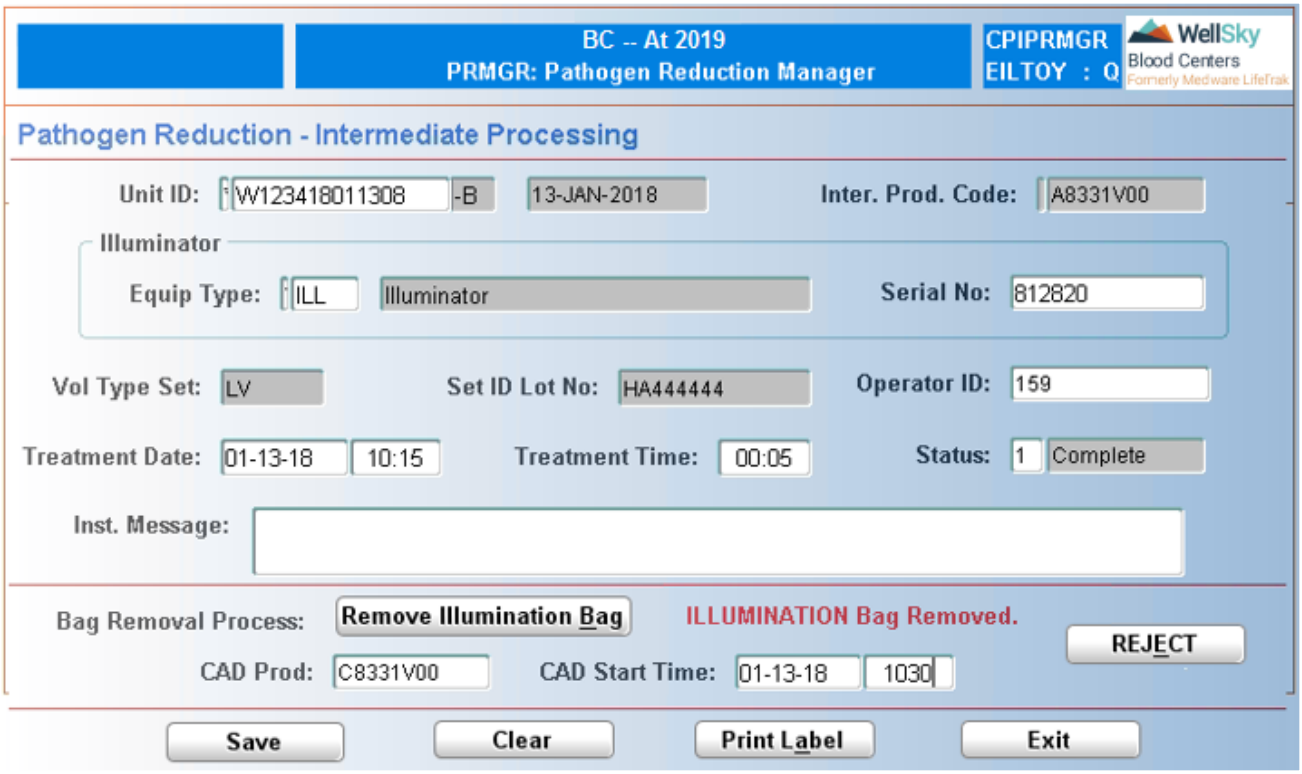


# Fields and Definitions

## Unit ID

Scan or manually enter the unit ID. If the facility has set the system parameter PI_SEAL_RQ = Y and the Psoralen bag removal has not been completed, you will receive the following error message.

## Inter. Prod. Code

Manually enter or scan the interim product code. Entry of this field will only be required if the unit number has multiple interim product codes present. If only one product is defined, it will be a display field only.

## Equip Type

Enter the equipment type, or select it from the LOV. The description of the specified type will automatically populate, and it cannot be edited. The LOV is populated from the master code PILL.

## Serial No

Enter the serial number of the illuminator device. The LOV is populated based on the equipment type and whether or not the equipment is in production.

### Vol Type Set
The volume type set is automatically populated, and it cannot be modified. The population is from the entry in the suitability form.

### Set ID Lot No
The lot number of the set ID type is automatically populated and cannot be modified. The population is from the entry in the suitability form.

### Operator ID
Enter the user ID of the technician who performed the pathogen reduction process. This field allows up to 30 characters and does not check the system users.

### Treatment Date
Enter the date and start time of the illumination treatment in YYYYMMDD HH:MM format. The date field automatically populates with the current system date, but it can be updated.

**NOTE –** The start time must be in a 24-hour clock format.

### Treatment Time
Enter the illumination treatment time in MMSS format. This is the length of time for the process on the illuminator.

**NOTE –** If the start date and time exceeds the value of hours defined in system parameter PI_ILL_ST, an error message will display to the user, explaining the problem with the date/time entry.

### Status
Enter the outcome of the illumination process.

- 1 = Complete
- 0 = Incomplete

The status description will automatically populate. The status description is hard-coded and cannot be changed.

### Inst. Message
Enter an instrument message in the field provided.

**NOTE –** This field allows a maximum of 200 characters, and the use of a comma (,) is not allowed.

## Remove Illumination Bag:
Click this button or use the hot key ALT+B to remove the illumination bag. This is not a required process. If the system parameter PI_SEAL_RQ is set to Y, this button is active and allows you to capture the removal of the bag. If the parameter is set to N, this button is inactive and does not require the capture of the illumination bag removal.


WellSky Corporation
Proprietary and confidential

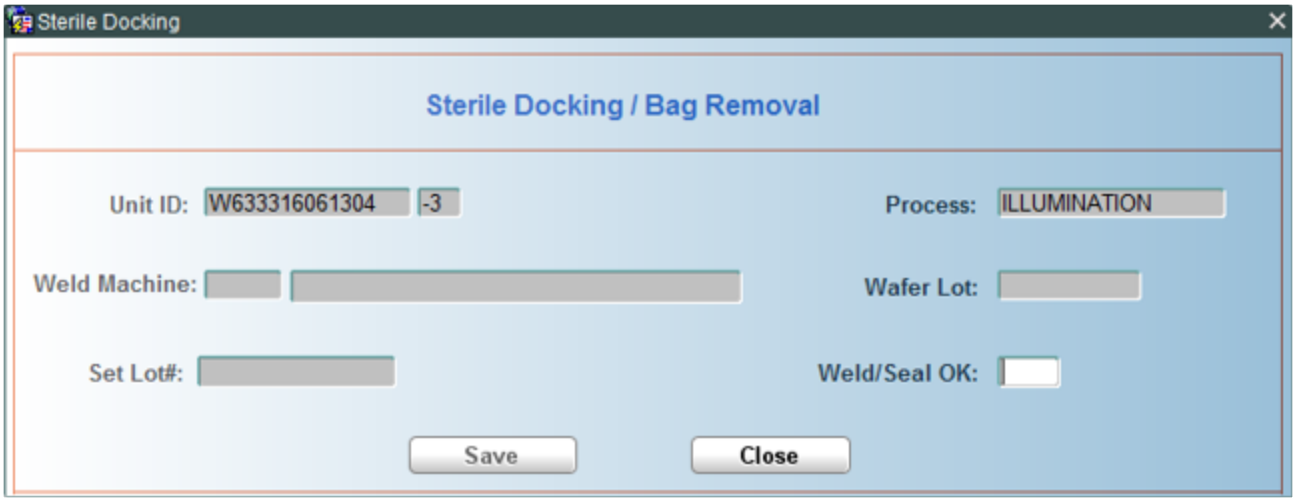


# Fields and Definitions

## Unit ID

The unit number defaults from the parent form and cannot be updated.

## Process

The process will automatically default with ILLUMINATION; this is hard-coded and cannot be updated.

## Following Fields Do Not Require Entry

- Weld Machine
- Wafer Lot
- Set Lot#

## Weld/Seal OK

Enter Y if the seal is acceptable, or enter N if the seal is not acceptable.

**NOTE –** If N is entered, a WELD interdiction will be placed on the product.

## CAD Prod

Select the CAD product based on the intermediate product code. The LOV will be limited based on the configuration in the Product Conversion ISBT 'SP' / Codabar table. Once the cursor leaves the field, a 4x2 label will print.

## CAD Start Time

Enter the date and time the intermediate product is placed on the CAD rotator in MMDDYY HH:MM format.

## REJECT:

Click this button or use the hot key ALT+J to move to the Reject Unit/Component (REJECT) form. The form will open and allow you to reject a product if the seal is bad or other parameters fail, such as the status is incomplete.

**NOTE –** You will be required to enter the unit number and other data into the form. It will not pre-populate.

## Print Label:

Click this button or use the hot key ALT+A to reprint the label. A 4x2 label will print for the CAD product code.

## Other Buttons:

**Save:** click this button to save entered data, or press F12 to commit the data.

**Clear:** click this button to clear the form, or use ALT+F5 to clear the form.

**Exit:** click this button to close the form, or use F8 to close the form.

## Update Fields in Intermediate Process:

To update the information in the intermediate process, scan or manually enter the unit number.

### Unit ID

The unit number defaults from the parent form and cannot be updated.

### Product Code

Scan or manually enter the product code. The LOV will show **UPDATE** for products that can be updated versus initial input.

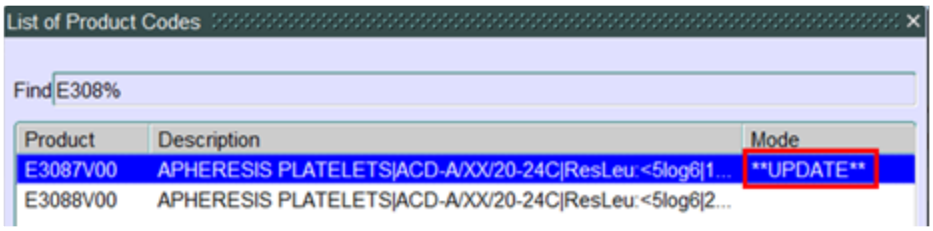


When updating a product, the SAVE button will display as UPDATE.

The fields that can be updated for intermediate process are the following:

- Serial No: – Enter the serial number of the illuminator device. The LOV is populated based on the equipment type and whether or not the equipment is in production.
- Treatment Date – Enter the date and start time of the illumination treatment in YYYYMMDD HH:MM format. The date field automatically populates with the current system date, but it can be updated.
- Treatment Time – Enter the illumination treatment time in MMSS format. This is the length of time for the process on the illuminator.


WellSky Corporation
Proprietary and confidential

> **NOTE –** If the start date and time exceeds the value of hours defined in system parameter PI_ILL_ST, an error message will display to the user explaining the problem with the date/time entry.

- Status – Enter the outcome of the illumination process.
  - 1 = Complete
  - 0 = Incomplete

  The status description will automatically populate. The status description is hard-coded and cannot be changed.
- CAD Start time – Enter the date and time the intermediate product is placed on the CAD rotator in MMDDYY HH:MM format.

Removal of Illumination Bag:

- Weld/Seal OK: – Enter Y if the seal is acceptable, or enter N if the seal is not acceptable.

> **NOTE –** If **N** is entered, a WELD interdiction will be placed on the product.

## At Commit

The data is committed to the database and allows you to move on to the next step, Final Transfer Process.

Once the CAD product is defined, the interim product code will have a system label decision of Md (Discard) and a reject reason of CONV.

## What to Do Next

For normal processing, press Exit to return to the Pathogen Reduction Manager (PRMGR) menu and move to "Final Transfer/Storage" below.

# 19.5.4 Final Transfer/Storage

## Intended Use

The Final Transfer/Storage screen is used to process the interim product to the final product and storage container.

## Limitations

The Intermediate process has to be completed before the final transfer and storage process can be started. If the system parameter PI_SEAL_RQ = Y and the illumination bag was not removed, you will receive an error letting you know that the intermediate process has not been completed.

## Prerequisites

- Validation table Pathogen Reduction Process Config (PRCNFG) must be completed.
- Conversions should be configured in Product Conversion ISBT 'SP' / Codabar table.

# Accessing the Screen

Access this screen by clicking **Final Transfer/Storage** or use the hot key ALT+T on the Pathogen Reduction Manager screen.

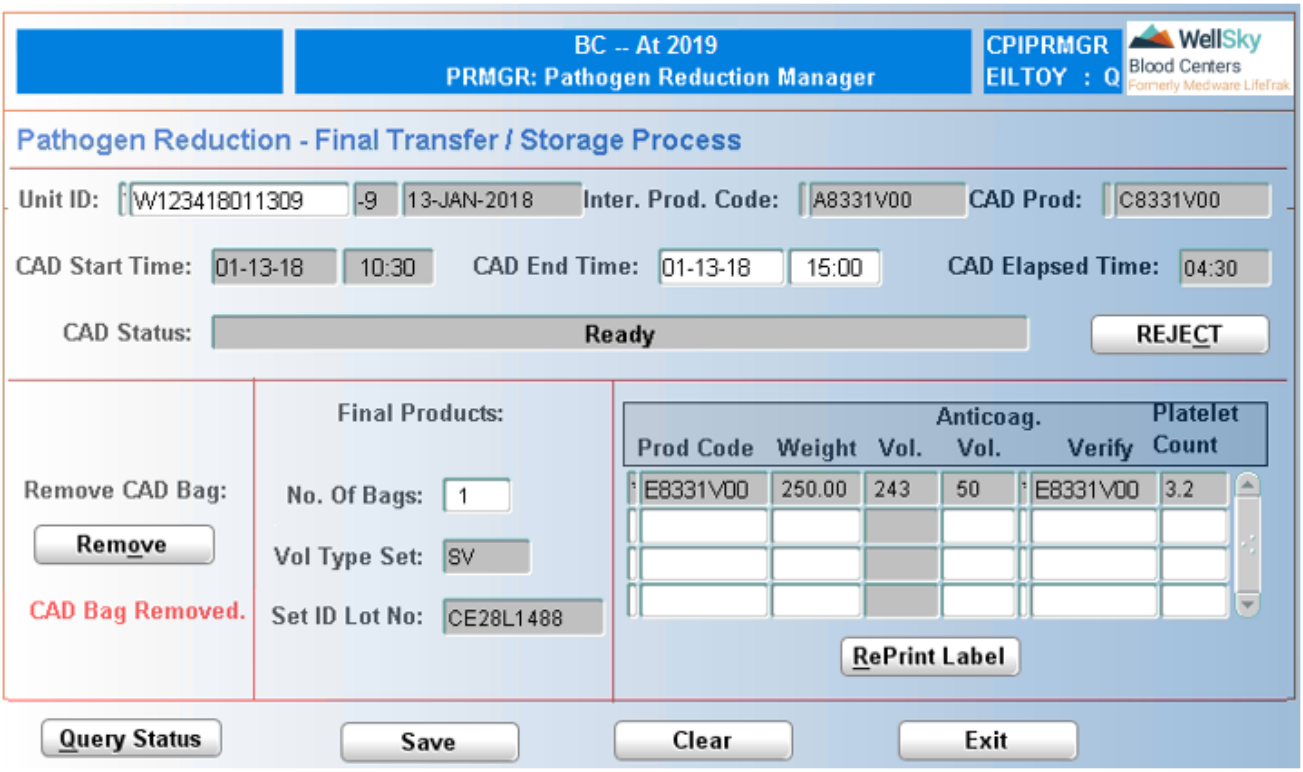


# Fields and Definitions

## Unit ID

Scan or manually enter the unit ID. If the facility has set the system parameter PI_SEAL_RQ = Y and the illumination bag removal has not been completed, you will receive an error message similar to the following:

## Inter. Prod. Code

The interim product code is a display-only field. The code will display once the CAD product code is selected for platelets. If processing a plasma product, once the unit number is scanned, the interim product code displays.

## CAD Prod

Scan or manually enter the CAD product code. The CAD interim product will automatically default if only one CAD interim product is found for the unit number entered.

**NOTE –** CAD interim product entry is not required for plasma products.


WellSky Corporation
Proprietary and confidential

## CAD Start Time

The date and time the CAD interim product was placed on the CAD rotator displays here in MMDDYY HH:MM format. The date and time cannot be modified. The date/time defaults based on what was entered in the intermediate process screen.

## CAD End Time

Enter the date and time the interim product is removed from the CAD rotator in MMDDYY HH:MM format.

**NOTE –** CAD End Time is not required for plasma.

## CAD Elapsed Time

The amount of time the interim product spent on the CAD rotator displays here. It cannot be modified.

## CAD Status

The status of the interim product on the CAD rotator is displayed here. It cannot be modified.



The status lines are hard-coded and cannot be updated. The status is calculated by subtracting the CAD end time from the CAD start time, and comparing the time to the data in the Pathogen Reduction Process Config (PRCONFG) table.

## REJECT:

Click this button or use the hot key ALT+C to move to the Reject Unit/Component (REJECT) form. The form will open and allow you to reject a product if the product exceeds the CAD time.

**NOTE –** You will be required to enter the unit number and other data into the form; it will not pre-populate.

## Remove:

Click this button or use the hot key ALT+O to remove the CAD bag. This is not a required process. If the system parameter PI_SEAL_RQ is set to Y, this button is active and allows you to capture the removal of the bag. If the parameter is set to N, this button is inactive and does not require the capture of the CAD bag removal.

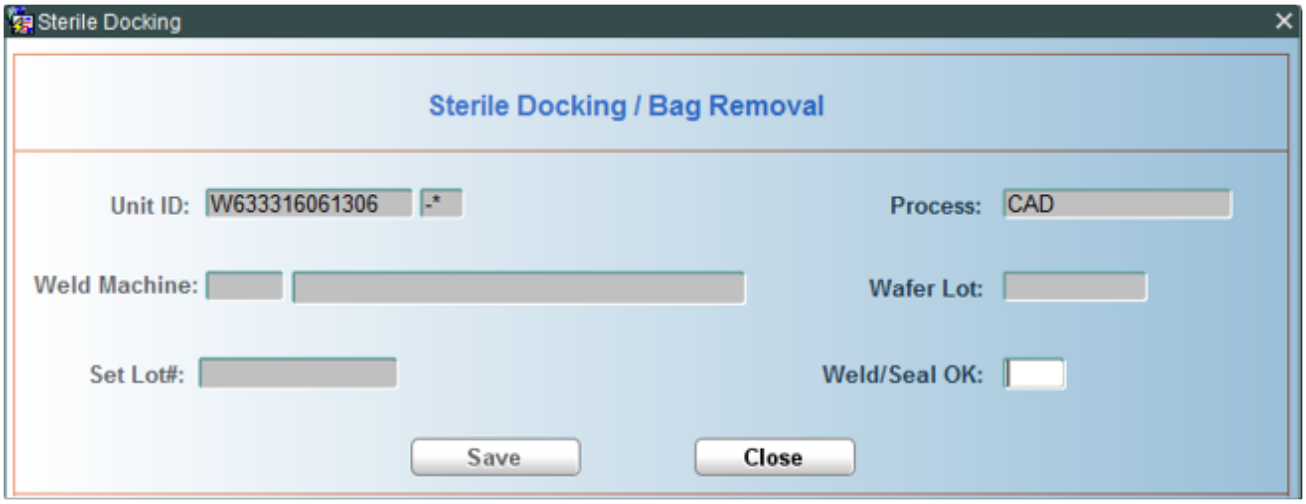


# Fields and Definitions

## Unit ID

The unit number defaults from the parent form and cannot be updated.

## Process

The process automatically defaults with CAD. This is hard-coded and cannot be updated.

## Following Fields Do Not Require Entry

- Weld Machine
- Wafer Lot
- Set Lot#

## Weld/Seal OK

Enter Y if the seal is acceptable, or enter N if the seal is not acceptable.

**NOTE –** If N is entered, a WELD interdiction will be placed on the product.

## No. Of Bags

Enter the number of bags in which the product will be stored. The number will default based on the number of bags defined in the Pathogen Reduction Process Config (PRCONFG) validation table, but the system will allow for updates to the field.

**NOTE –** The number of bags entered will determine how many products will be defined. (Example: Entry of 2 will require two products to be defined.)


WellSky Corporation
Proprietary and confidential

### Vol Type Set

The volume type set is automatically populated, and it cannot be modified. The is the volume type set defined in suitability and sterile docked onto the original product.

### Set ID Lot No

The lot number of the volume set type is automatically populated, and it cannot be modified. The Set ID Lot Number displays what was entered during sterile docking of the set in suitability.

### Prod Code

Enter the product code based on the configuration in the Product Conversion ISBT 'SP' / Codabar table. The LOV is restricted based on the configuration in this table. The 4x2 label will print when the cursor moves out of this field.

### Weight

Enter the weight of the final product. If the weight entered is out of range for the product being entered, a CMW interdiction will be placed at the time of save.

### Vol

The volume will be calculated from the weight and specific gravity defined in the Products table (PRODUCT) for the final product. Volume is weight / specific gravity. This is a display-only field.

### Anticoag Vol

The anticoagulant volume defaults to the value entered in suitability, but you can update the field. You cannot enter an anticoagulant volume larger than the value entered in suitability.

### Verify

Scan or manually enter the product code.

### Platelet Count

Enter the platelet count of the final product. Manual entry of the platelet count should be N x $10^{11}$.

**NOTE –** The data entered can be saved without entering the final platelet count. You can come back to the final transfer screen to enter the final platelet count.

## RePrint Label:

Click this button or use the hot key ALT+R to reprint the label. A 4x2 label will print for the final product code.

## Other Buttons:

**Save:** click this button to save the entered data, or press F12 to commit the data.

**Clear:** click this button to clear the form, or use ALT+F5 to clear the form.

**Exit:** click this button to close the form, or use F8 to close the form.

# Update Data in Final Transfer:

To update the final transfer data, scan or manually enter the unit ID.

## Unit ID

Scan or manually enter the unit ID. If the facility has set the system parameter PI_SEAL_RQ = Y, and the illumination bag removal has not been completed, you will receive an error message similar to the following:

## Inter. Prod. Code

The interim product code is a display-only field. The code will display once the CAD product code is selected for platelets. If processing a plasma product, once the unit number is scanned, the interim product code displays.

## CAD Prod

Scan or manually enter the CAD product code. The CAD interim product will automatically default if only one CAD interim product is found for the unit number entered. The LOV will show **UPDATE** for products that can be updated versus initial input.

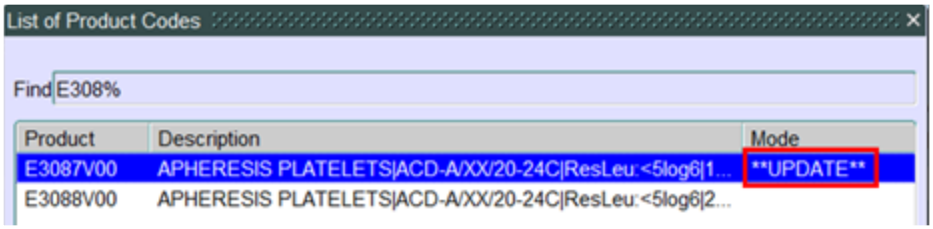


When updating a product, the SAVE button will display as UPDATE.

The following fields can be updated in Final Transfer:

- CAD End Time – Enter the date and time the interim product is removed from the CAD rotator in MMDDYY HH:MM format.
- No. Of Bags – Enter the number of bags in which the product will be stored. The number will default based on the number of bags defined in the Pathogen Reduction Process Config (PRCONFG) validation table, but the system will allow for updates to the field.
- Weight – Enter the weight of the final product. If the weight entered is out of range for the product being entered, a CMW interdiction will be placed at the time of update.
- Anticoag. Vol. – The anticoagulant volume defaults to the value entered in previously, but you can update the field. You cannot enter an anticoagulant volume larger than the value entered in Suitability.
- Platelet count – Enter the platelet count of the final product. Manual entry of the platelet count should be N x $10^{11}$.

Remove CAD Bag Field:

- Weld/Seal OK – Enter **Y** if the seal is acceptable, or enter **N** if the seal is not acceptable.

> **NOTE –** If **N** is entered, a WELD interdiction will be placed on the product.

## Query Status:

Click this button or use the hot key ALT+Q to open the query. The query will display the interim products that are currently on the CAD rotator.

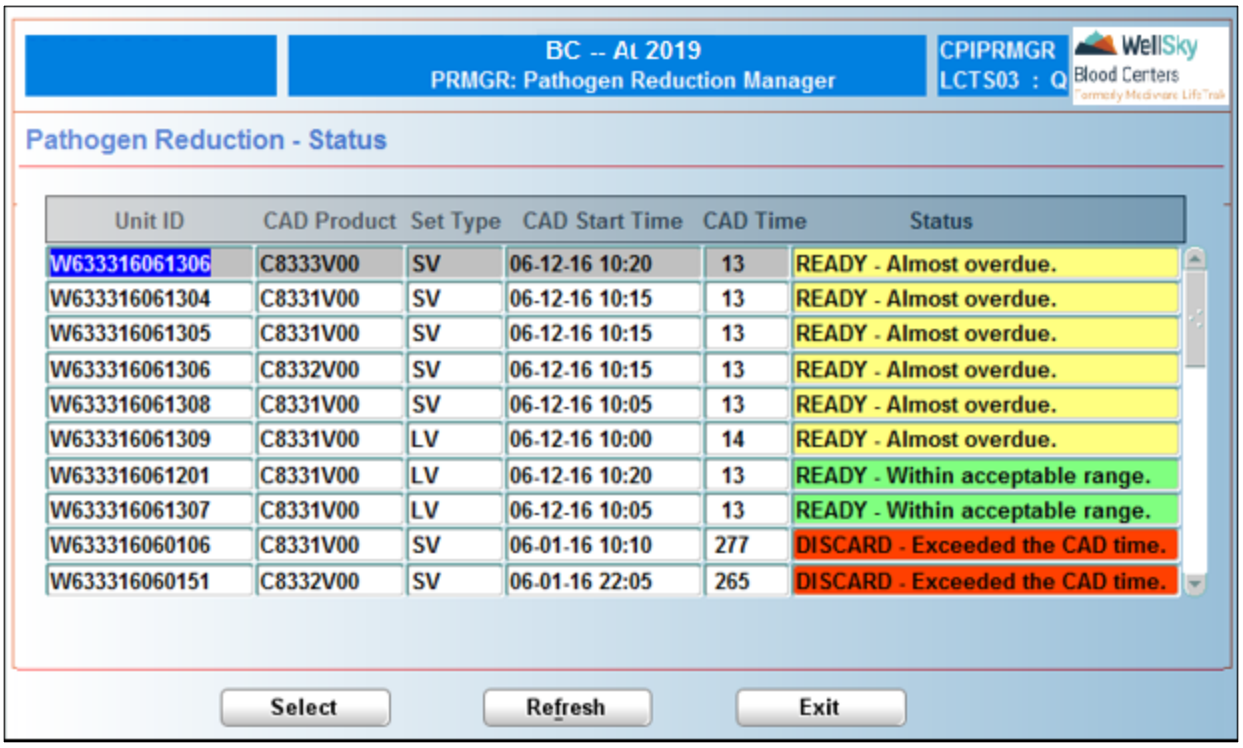


> **NOTE –** This information is for display only; none of the data can be manually updated.

## Data Display:

- At the top of the query, values that are one hour from exceeding the CAD time will display in yellow.
- Second, all products ready to be moved to a final storage bag will display.
- Third, products that are not ready to come off the CAD rotator will display.
- Fourth, products that have exceeded the time on the CAD rotator and need to be discarded will display.

# Fields and Definitions

## Unit ID

Unit numbers that have a CAD interim product code and a CAD start time defined display here. Only products with CAD start times will display in the query.

**NOTE –** Plasma products will not display in the query since they do not go through the CAD process.

## CAD Product

The CAD interim product defined during the intermediate process displays here.

## Set Type

The volume set type that was defined in the suitability screen displays here.

## CAD Start Time

The start time entry defined in the intermediate process displays here.

## CAD Time

The CAD time is calculated by subtracting the current system time minus the CAD start time.

## Status

The description of the product's status displays here.

- A yellow background indicates that the unit is 1 hour away from being on the CAD rotator too long.
- A green background indicates that the unit is ready to come off the CAD rotator.
- A white/gray background indicates that the product is not ready to be removed from the CAD rotator.
- A red background indicates that the unit has exceeded the time limit.

# Buttons:

**Select:** highlight the unit that you want to process, and click this button to copy the unit number to the parent transfer form.

**Refresh:** click this button to update the information on the form.

**Exit:** click this button to close the query.

# At Commit

The data is committed to the database.

Once the final product is defined, the CAD interim product code will have a system label decision of Md (Discard) and a reject reason of CONV.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press **Exit** to return to the Pathogen Reduction Manager (PRMGR) menu.

# 19.5.5 Upload Manually

## Intended Use

Use this screen to upload the illumination file from a local computer to Blood Centers. This will enable sites to place them into a directory on their computer (PC or laptop), and initiate the upload to the Blood Centers primary database server.

## Limitations

N/A.

## Prerequisites

- A directory on the local computers C:\ drive must be designated for uploads.
- The directory for the file path must be set in the master code LOGDR.
  - PILOC: should be defined based on the directory identified on the local computer. In the description, enter the directory location (e.g. C:\PI\).
  - PIARC: should be defined as the location where the files will be archived after processing (e.g. C:\PI\ARCHIVE).
- Parsing package to parse the file and place the data into the API table.
- SBCLIB.pkg - A new procedure INTERCEPT_DATA_PARSER is added to this existing database package SBCLIB.pkg. This package must be recreated (reinstalled).

## Accessing the Screen

Access this screen by clicking **Upload Manually** or using the hot key ALT+M on the Pathogen Reduction Manager (PRMGR) screen.

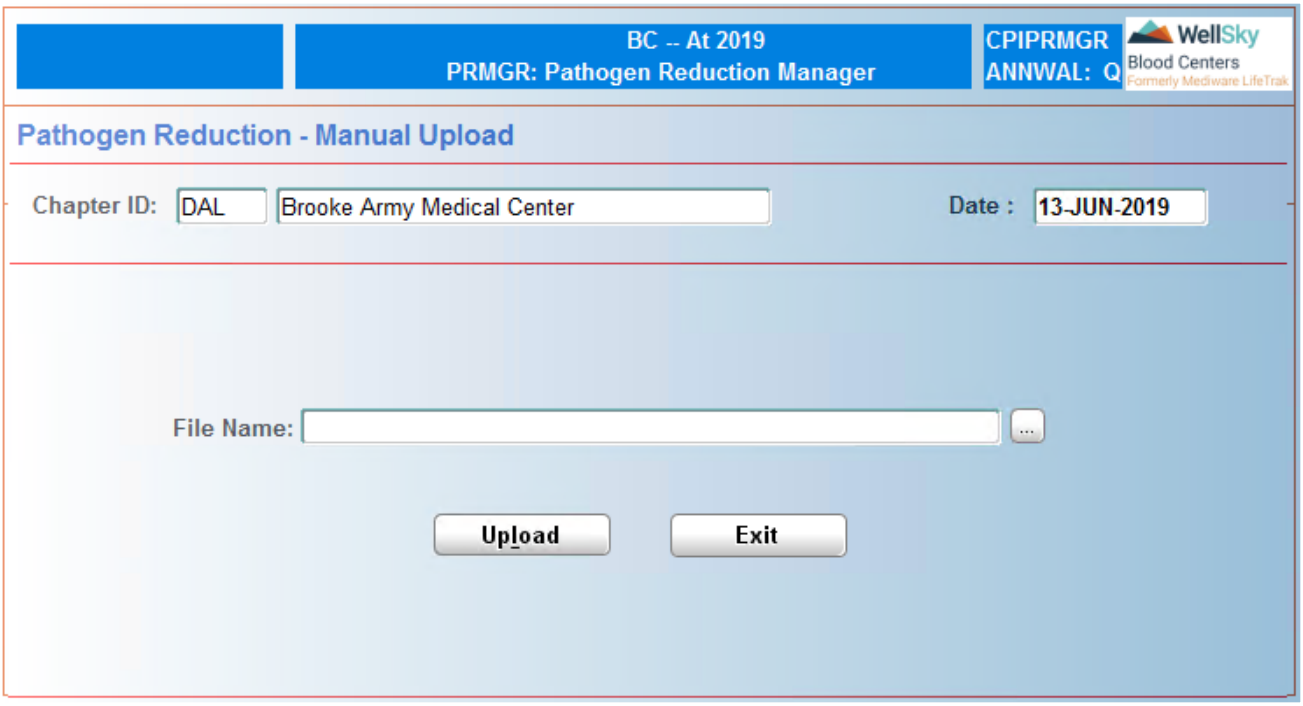


# Fields and Definitions

## Chapter ID

The chapter code is automatically populated with your current logged in chapter. The chapter ID can be updated.

## Chapter ID Description

The name of the chapter associated with the chapter ID is automatically populated. The chapter name cannot be modified on this screen.

## Date

The current date is automatically populated. This field is not navigable.

## File Name

Entry is required. Either enter the name of the file you want to upload, or click the ellipsis button ( ... ) next to the box to browse your local computer directory and select the file you wish to upload.


WellSky Corporation
Proprietary and confidential

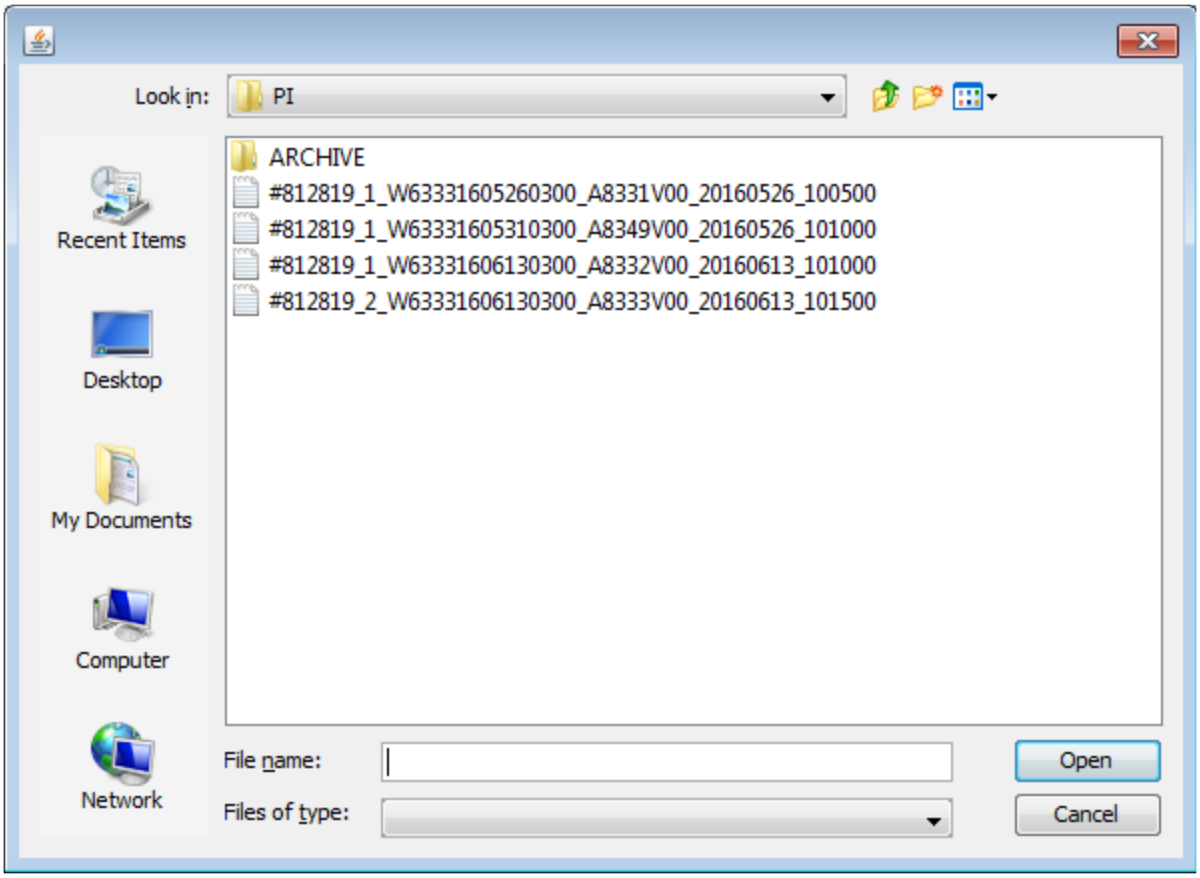


Click on the file so that it is highlighted and populates the File name field, and click **Open**. The file location will populate in the main form.

**NOTE –** When first using the form and the program has not opened the directory, you will need to know the name of the directory and navigate to that location. Once the local PC has used the directory, you will no longer have to navigate to the directory; the File Explorer window will automatically open to that location.

## Upload:

Click this button or use the hot key ALT+L to initiate the upload of the file to the primary database server. When the file is successfully uploaded to the Blood Centers application, the original input file is moved to a separate archive directory on the C:\ drive. When the file has been successfully loaded to the API table, you will receive the following message:

If the file cannot be processed by the parsing package, the failure reason will be displayed in the log file on the database.

## Exit:

Click this button to exit the Pathogen Reduction - Manual Upload screen and return to the Pathogen Reduction Manager (PRMGR) menu.

## At Commit

The file is manually loaded to the database and available when the unit is scanned in the intermediate process section for pathogen reduction.

## What to Do Next

For normal processing, press **Exit** to return to the Pathogen Reduction Manager (PRMGR) menu.

# 19.5.6 UPLOAD File Automatically (FTP)

## Intended Use

Use the Upload Automatically (through FTP) method to upload an illumination file directly from the illuminator to Blood Centers through the Blood Centers interface.

## Limitations

- The facility must allow direct access to the Blood Centers server.
- The file cannot have the following special characters in the file name.
  - / - dash
  - ' - single quote
  - " - double quote
  - ; - semi colon
  - : - colon
  - , - comma — this must be used only as a delimiter; it cannot be used inside any data field.

## Prerequisites

1. The following fields have to be present in the file, or the file cannot be processed successfully.
   - Unit ID
   - Product Code
   - Treatment Start Time
   - Status
   - Site Code
   - Set Lot Number
   - Set Code


WellSky Corporation
Proprietary and confidential

2. Cron job and shell script to parse the file. These files should be placed in /home/sbcsys/IIF/intercept (or in the customer-configured directory).
    - LT_INTERCEPT_PARSER.sh
    - LT_INTERCEPT_PARSER.sql
3. The following database package must be installed with the appropriate privileges.
    - LT_INTERCEPT_PARSER.pkg

## Accessing the Screen

N/A.

## Process

The illuminator file will be transferred (via FTP) to the designated directory. The file is placed in the file directory, and the parsing package will process the file.

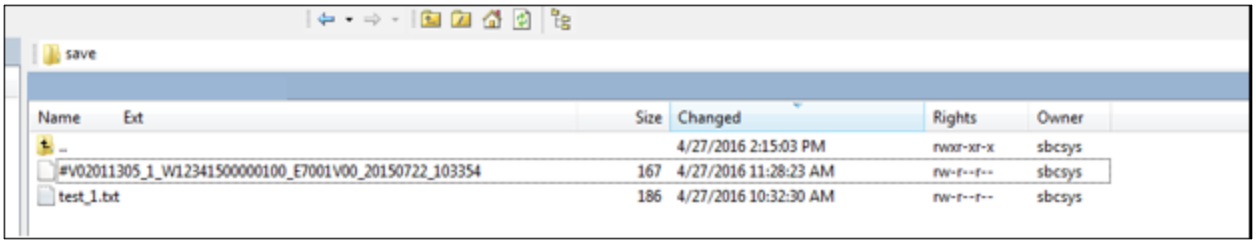


Once the parsing engine process pick up the file, it will move the file to the SAVE directory.

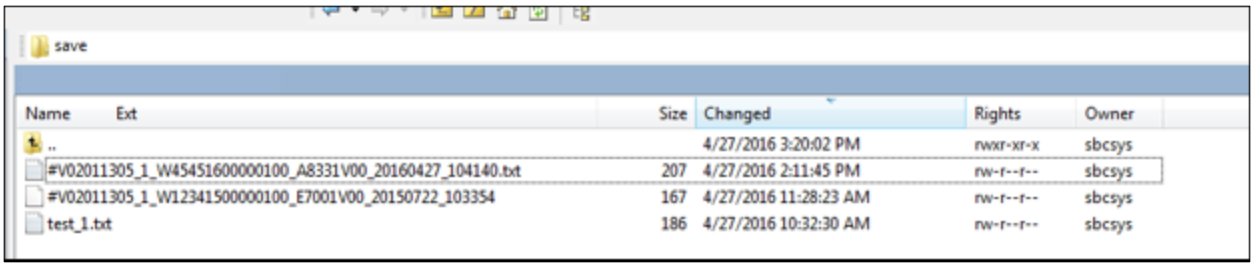


After the file is parsed successfully, the parsed file will be loaded to the table API_PATHOGEN_REDUCTION.

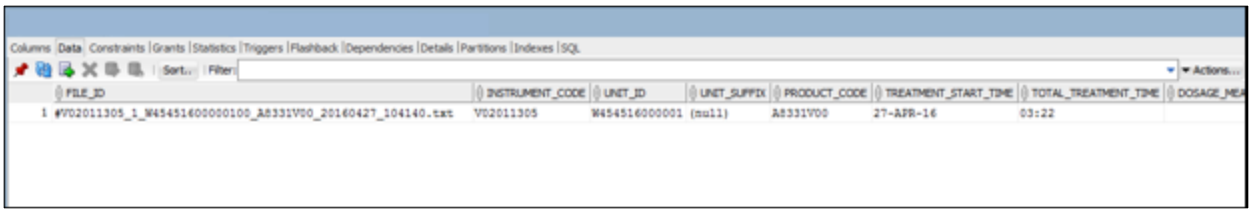


If there are any issues with the file, the file cannot be parsed, and the API table will not be populated. The appropriate error message will be placed in the log file.

The file will be present in the table until you process the unit and product in the intermediate process section. When the unit is scanned and the product entered, the data will populate from the API table. When the process is completed, the file will move to the API_PATHOGEN_REDUCTION_ARCH table.

## What to Do Next

For normal processing, press **Exit** to return to the Pathogen Reduction Manager (PRMGR) menu.


WellSky Corporation
Proprietary and confidential

# 19.6 CRYO Production

CRYO Production functions are accessed from the following menu:

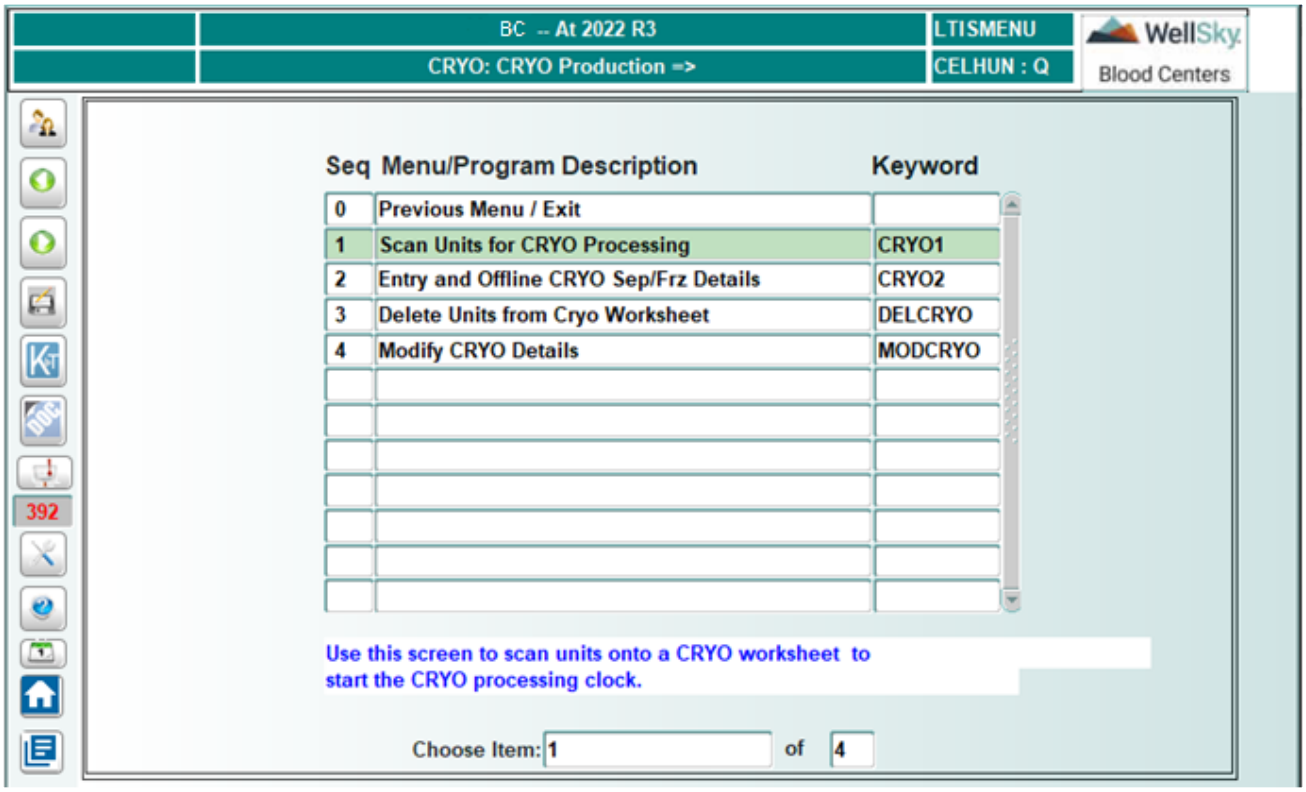


## 19.6.1 Scan Units for CRYO Processing (CRYO1)

### Intended Use

Use the Scan Units for CRYO Processing screen to commit details into the system when CRYO-destined plasma (FFP) thawing has begun. The system validates thaw start time based on the CRYO thaw method, and rejects unacceptable units.

### Limitations

FFP products cannot be placed on the worksheet. You must modify to a dummy product in order to allow the product to have CRYO created.

### Prerequisites

The unit must have completed and passed testing and must have no interdictions or holds to be committed for processing.

### Accessing the Screen

Access this screen from the CRYO Production menu or by entering the keyword `CRYO1`.

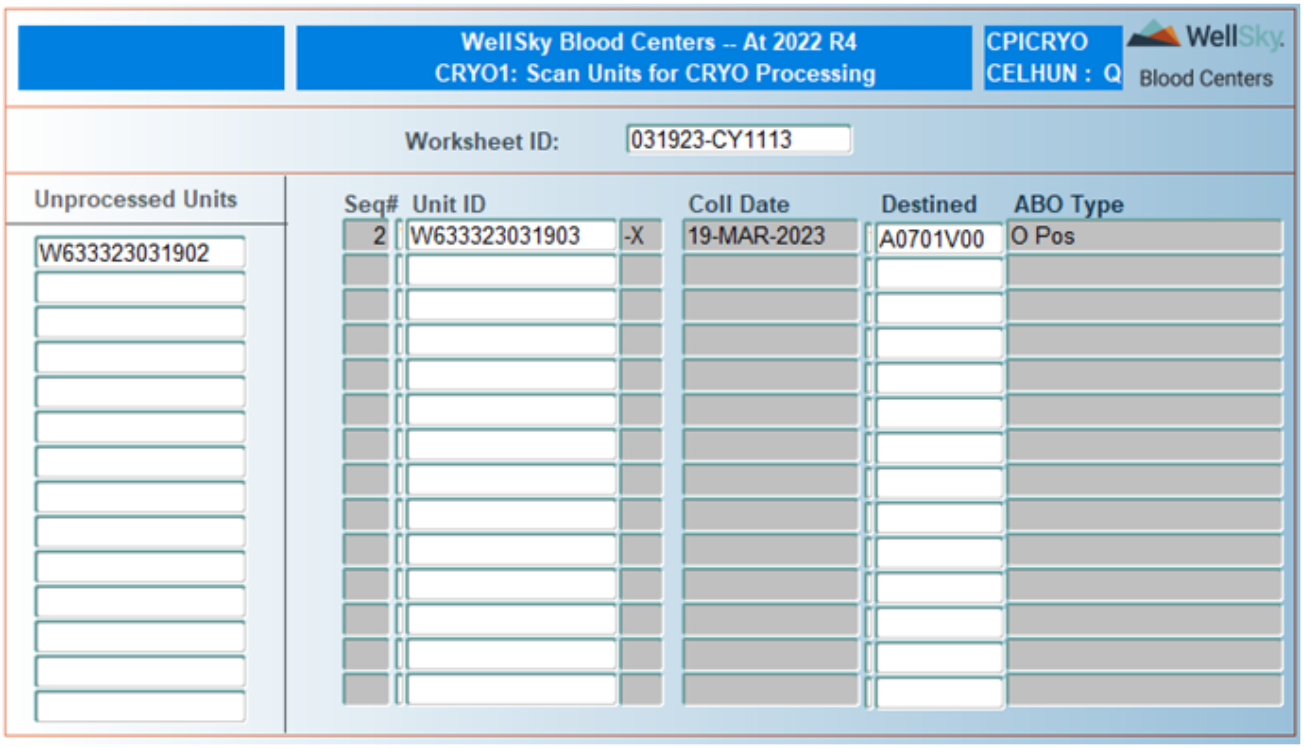


# Control Block Fields and Definitions

## Worksheet ID

Enter worksheet ID or select from LOV to add to an existing worksheet. Leave field blank to create a new worksheet.

**NOTE –** System generates a worksheet ID after the first unit is committed.

The worksheet ID can be used to view units that have not been processed from the worksheet. If a unit on the worksheet has already started the CRYO processing, and there are other units still pending when you enter the worksheet, a message will display.




You can view the units on the worksheet that have not been processed on the left side of the page. If none of the units on the worksheet have started processing, after entering the worksheet ID, the unprocessed unit(s) will display on the left side, and the cursor will be on the right side with the next consecutive number.

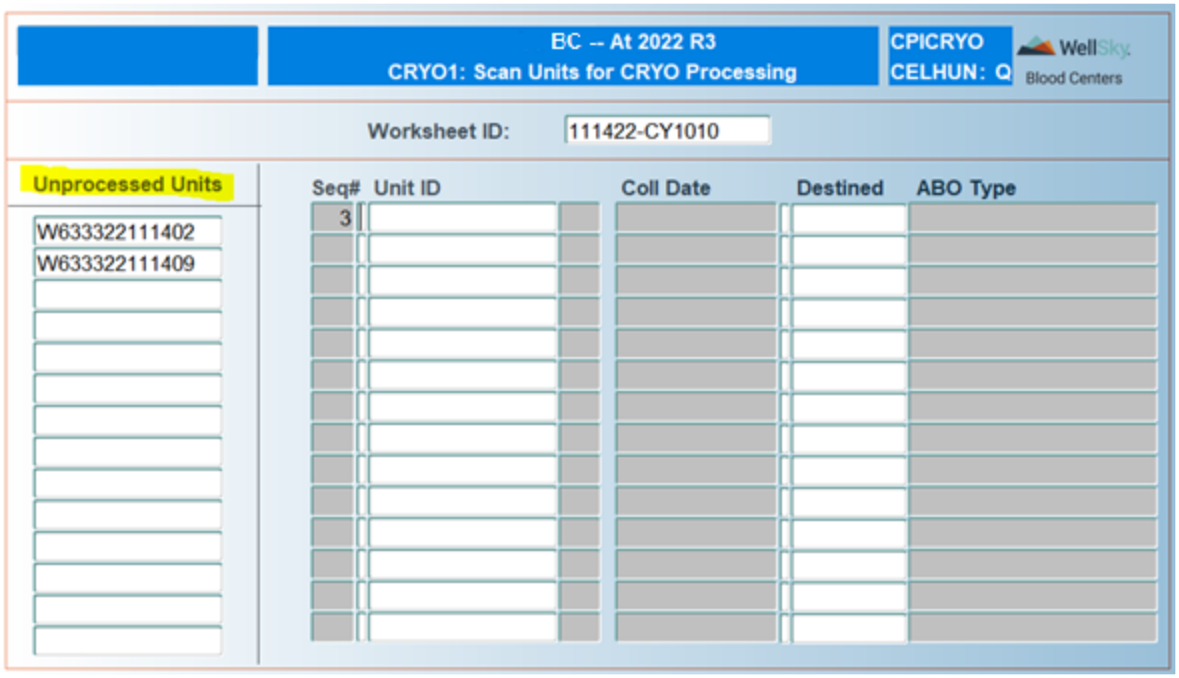


# Detail Block Fields and Definitions

## Unprocessed Units

Unprocessed units display when there are units on the worksheet that have not started the CRYO processing. Entry of a worksheet ID determines whether or not more units can be added to the worksheet.

## Seq

A sequence is automatically assigned. Field is not navigable.

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Destined

Scan or manually enter the product code. After entering the product code, press ENTER. The system will check to see if the product has the freeze time present. If the freeze time has not been entered, the following error message will display.

## ABO Type

Unit ABO automatically displays after the unit ID is entered.

This screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- Cryo thaw time is started.
- CRYO worksheet ID is created (MMDDYY-CY####).

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the CRYO Production menu. Entry and Offline CRYO Separation/Freeze Details (CRYO2).

# 19.6.2 Entry and Offline CRYO Separation/Freeze Details (CRYO2)

## Intended Use

Use the Entry and Offline CRYO Separation/Freeze Details screen to add details to the CRYO-destined units previously scanned for CRYO processing for ISBT units. Each unit will only appear on this screen if the unit ID is scanned, and if it was scanned into the worksheet at the Scan Units for CRYO Processing (CRYO1) screen. Units from different worksheets can be mixed together, and the units can be scanned in any order.

The offline feature can add details to the CRYO-destined ISBT units previously scanned for CRYO processing. This function is used to enter separation details from manual logs (offline) and freeze times from manual logs if the system was down at the time of separation and freezing. Data entered here includes the following:

- Thaw method and temperature
- Bag ID
- Product codes
- Centrifuge ID
- Cryo freeze times
- Cryo visual QC

## Limitation

Codabar products cannot be processed through this screen.

## Prerequisites

- The unit must have been checked in to a worksheet using the CRYO1 screen.
- Dummy product must be located in the user's current log-in warehouse in order to perform this function.
- Dummy product must not be in transit in order to perform this function.


WellSky Corporation
Proprietary and confidential

- Product conversions (ISBT 'SP'/Codabar) table has to be defined to change the Dummy product (FFP) to CRYO product.
- Menu item should be defined with 'LPRINT" and set to either Y or N. Y will require the user to verify the product, and N will not require verification of the new product code.

## Accessing the Screen

Access this screen from the CRYO Production menu or by entering the keyword `CRYO2`.

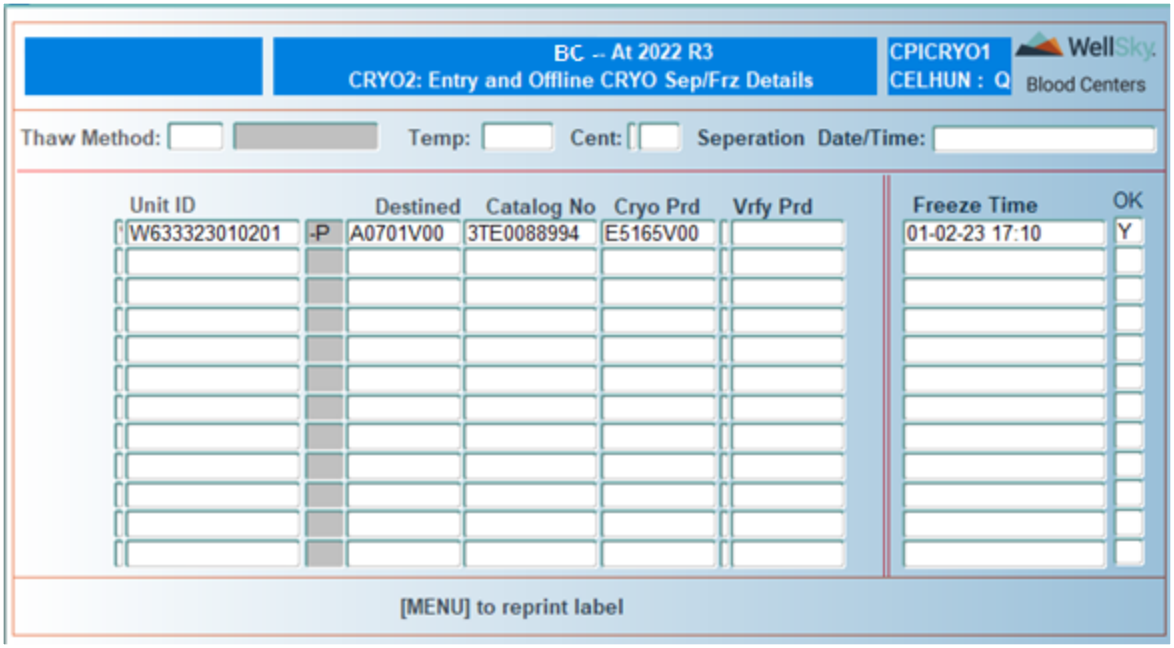


## To Enter Cryo Separation Details - Control Block

### Thaw Method

Enter the thaw method or select from the LOV. The description will populate after selecting the method. The thaw methods come from the CRYO Methods (CRYMET) validation table.

### Tmp

Enter the thaw temperature (°C) method.

> **NOTE –** Temperatures between –99.99 and 99.99 are acceptable. If the temperature is out of range based on the values entered in the CRYO Method validation table, a CRTE interdiction will be placed.

### Cent

Scan, manually enter, or select centrifuge from the LOV.

**NOTE –** If the centrifuge is not in production and is used for the separation of the CRYO product, a CENT will be placed on the product.

### Separation Date/Time

Leave the field blank if accepting the current system date and time. If working offline, enter the separation date/time in MMDDYYHH24MM format.

## To Enter Cryo Separation Details - Detail Block

### Unit ID

Scan or manually enter the unit ID. The unit must be present on a CRYO worksheet. If the unit is not on a CRYO worksheet, the user will receive the following error message:




### Destined

This field will populate from the CRYO1 entry for the CRYO batch.

### Catalog No

The catalog number will automatically display based on the catalog number entered when the dummy product is defined.

**NOTE –** The CRYO product type should be defined in the CATALOG table for the same container as the CRYO-destined product type (DUFFP).

### Cryo Prd

A window opens if multiple product codes are calculated. If a single product code is calculated, it will default, and the cursor will move to the Vrfy Prd field.

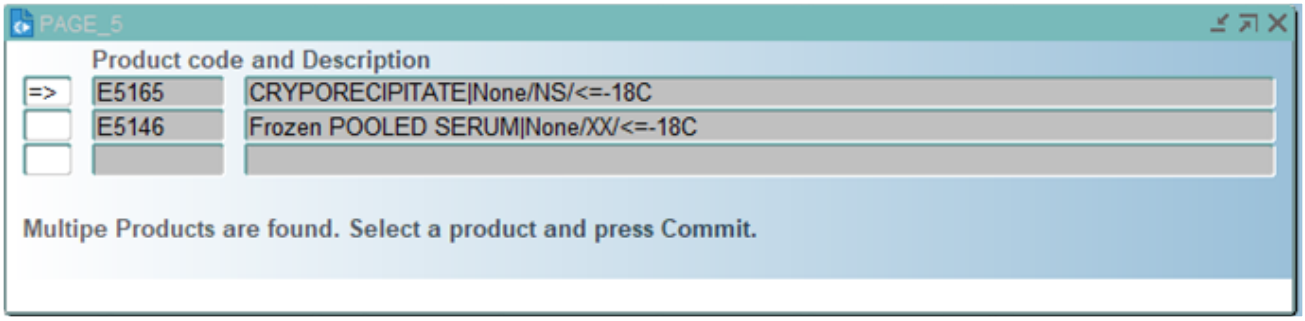


Use the **UP** and **DOWN** arrow keys to scroll through the list of possible product codes. Press **F12** (Commit)to select the correct product code.

**NOTE –** If this form is defined to print labels and the product derived is set to print the label, the product label PDP (4x2) will print automatically.

**NOTE –** Placement of the CMTI interdiction when separation times exceed the time defined in the products table.

### Vrfy Prd

Scan, manually enter, or select the CRYO product code from the LOV.

**NOTE –** Once the product has been verified or the manual entry of the product code has begun, re-printing the label is not permitted.

## To Reprint a Label

Press F6 (Menu) to re-print label. The label cannot be re-printed after label verification has started.

The screen does a line-by-line commit.

## To Enter Cryo Freeze Details

To enter the CRYO freeze details when the cursor is in the Thaw Method, press **TAB** or **Enter** to move to the Unit ID field in the Detail Block.

### Unit ID

Scan or manually enter the unit ID.

### Freeze Time

Enter the freeze date and time in MMDDYYHH24MI format. Use the **F2** key to populate with the current date and time for the chapter (system). Updates can be made prior to moving out of the field.

**NOTE –** Freeze details can only be entered for product codes defined in the Master Code FCRYO.

### OK

Enter **Y** if the CRYO is acceptable, or enter **N** if the CRYO is unacceptable.

**NOTE –** If **N** is entered, a CRYO interdiction is placed on the product.

The screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- Components are removed from the old product code (no further processing is necessary).
- Interdictions and attributes are transferred from the old product code to the new product code.
- All cGMP checks are made by the system.
- CRTE interdiction placed if the thaw temperature is not within the acceptable range defined in Cryo Methods (CRYOMET).
- CRSE interdiction is placed if the separation to freeze time is greater than the value defined in Cryo Methods (CRYOMET).
- CRWS interdiction is placed based on time allowed from the time the unit is placed on a CRYO worksheet until the time the CRYO is frozen.
- CRYO interdiction is placed if the Visual QC of the product fails.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the CRYO Production menu.

## 19.6.3 Delete Units from CRYO Worksheet (DELCRYO)

### Intended Use

Use the Delete Units from CRYO Worksheet to delete units from a CRYO worksheet that were entered into the system previously.

### Limitations

None

### Prerequisites

The unit must have been scanned for a CRYO worksheet without entering CRYO details.

### Accessing the Screen

Access this screen from the CRYO Production menu or by entering the keyword `DELCRYO`.


WellSky Corporation
Proprietary and confidential

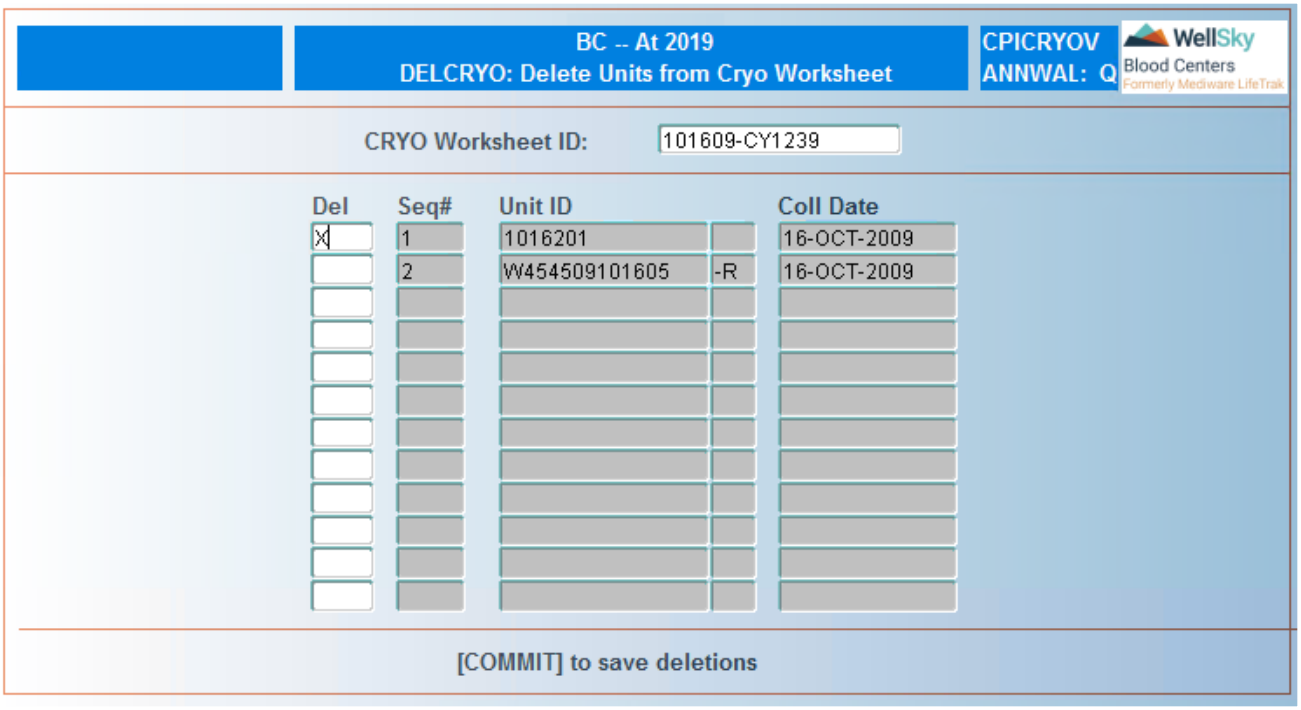


# Control Block Fields and Definitions

## CRYO Worksheet ID

Enter worksheet ID or select from LOV.

**NOTE –** LOV displays the number of units in a worksheet as well as the worksheet ID.

# Detail Block Fields and Definitions

## Delete

Use the **UP** and **DOWN** arrow keys to scroll through the list. Press x or **ENTER** to select a unit to be deleted from the database. Press **ENTER** again to deselect the unit.

## Seq#

Sequence number automatically displays after the worksheet ID is entered. Field is not navigable.

## Unit ID

Unit ID automatically displays after the worksheet ID is entered. Field is not navigable.

## Coll Date

Unit collection date automatically displays after the worksheet ID is entered. Field is not navigable.

Press **F12** (Commit) to delete selected units.

## At Commit

Updates made to the system include units selected are deleted from the CRYO worksheet.

**NOTE –** If all units in the worksheet are deleted, the entire worksheet is voided automatically.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the CRYO Production menu.

# 19.6.4 Modify CRYO Details (MODCRYO)

## Intended Use

Use the Modify CRYO Details screen to change details for CRYO processing.

## Limitations

None

## Prerequisites

Cryo product must have been defined.

## Accessing the Screen

Access this screen from the CRYO Production menu or by entering the keyword `MODCRYO`.

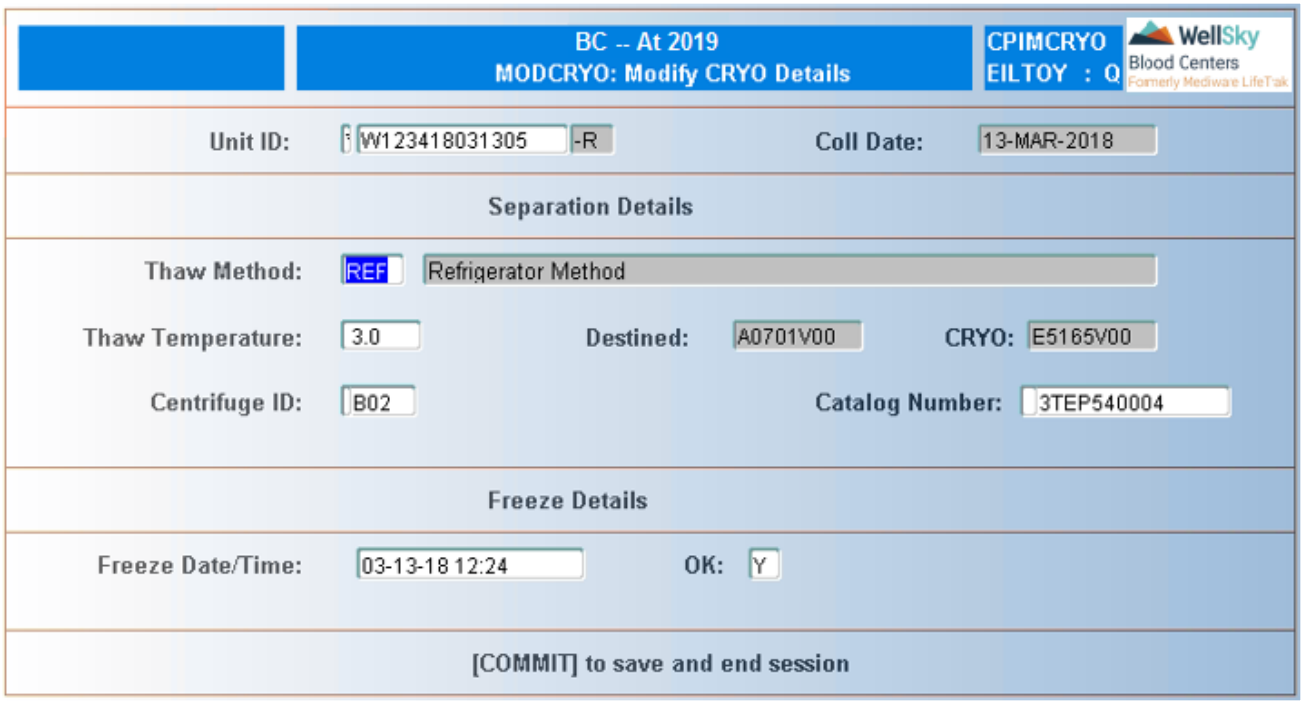



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

# Separation Details Block Fields and Definitions

**NOTE –** All fields populate with previously entered information after the unit ID is entered.

## Thaw Method

Enter the thaw method or select from LOV. Press **ENTER** to accept the current entry.

## Thaw Temperature

Enter thaw temperature (°C). Press **ENTER** to accept the current value.

## Destined

CRYO-destined product code automatically displays after the unit Id is entered. Field is not navigable.

## CRYO

CRYO product code automatically displays after the unit Id is entered. Field is not navigable.

## Centrifuge ID

Scan, manually enter, or select centrifuge from LOV. Press **ENTER** to accept the current entry.

## Catalog Number

Scan, manually enter or select catalog number from LOV. Press **ENTER** to accept the current value. Press **CTRL + F3** (Next Block) to modify freeze details.

**NOTE –** The LOV will contain container/catalogs that have been defined for CRYO product type for the original catalog number.

# Freeze Details Block Fields and Definitions

## Freeze Date/Time

Enter correct freeze date and time in DD-MON-YYYY HH24:MI format. Press **ENTER** to accept the current entry.

## OK

Enter `Y` if the CRYO is acceptable or enter `N` if CRYO is unacceptable. Press **ENTER** to accept the current entry.

Press F12 (Commit) once necessary changes have been made.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- Associated interdictions may be placed or removed.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the CRYO Production menu.


WellSky Corporation
Proprietary and confidential

# 19.7 Component Pooling

Component Pooling functions are accessed from the following menu:

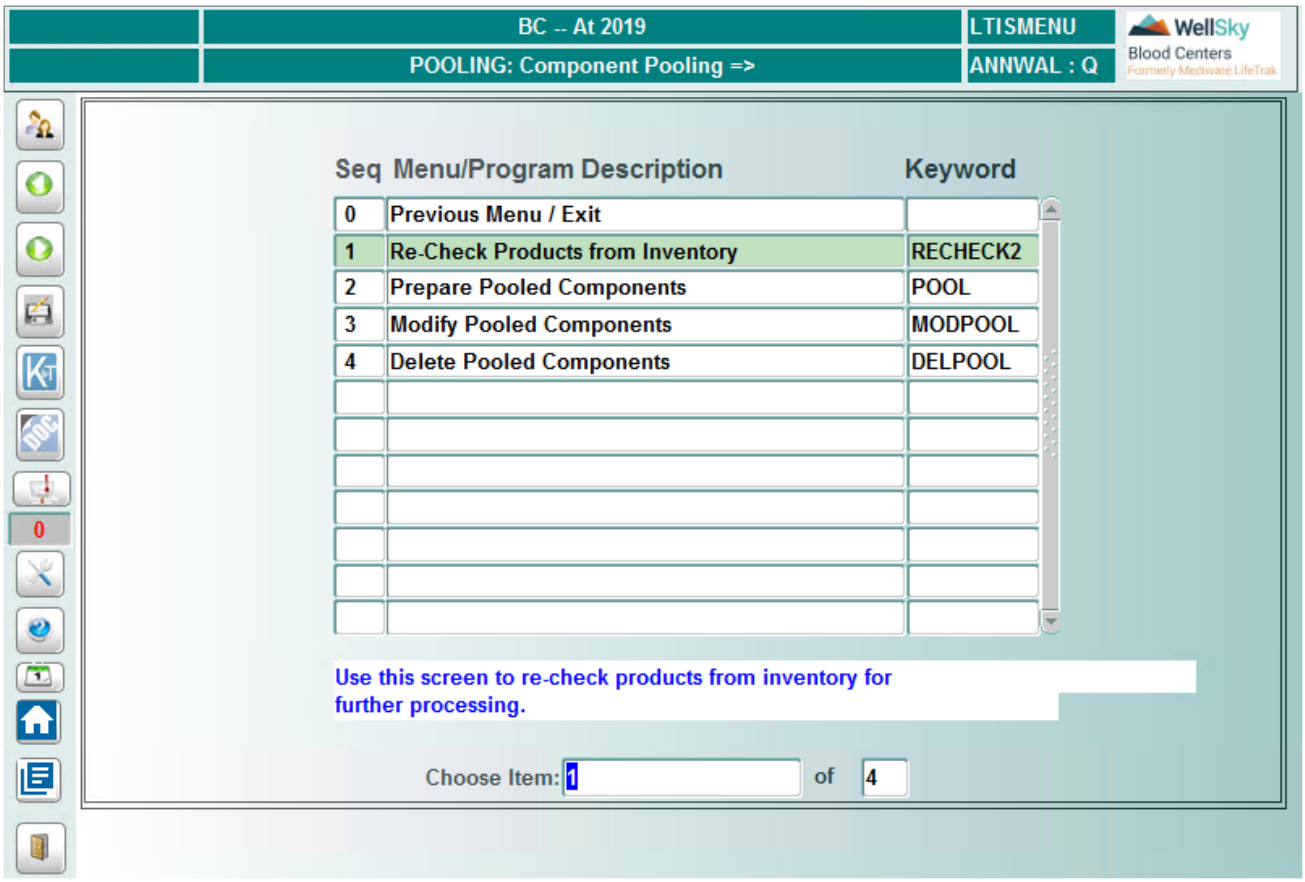


## 19.7.1 Re-Check Products from Inventory (RECHECK2)

Refer to Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2)

## 19.7.2 Prepare Pooled Components (POOL)

### Intended Use

Use the Prepare Pooled Components screen to pool components. The system assigns pooled components to a pool ID and adds the following:

- Time of pooling.
- Lot numbers involved in pooling.
- Expiration date of the pool.
- Expiration of each component in the pool.

- System label decision (SLD).
- POOL attribute plus other requested attributes.

This screen also captures facility/patient information.

**NOTE –** Refer to Appendix F: Scanning Product Labels for instructions on scanning product labels. You can scan individual bar codes, or you can scan using a single concatenated scan for two bar codes.

## Limitations

- Components with unit or component level interdictions are not allowed in pools.
- Imported components not allowed in pools requiring freeze time entry.
- The number of units field is only used when initially creating the pool; additions to existing pools are not governed by this entry.
- Program does not look at the interdictions override tables for calculating the pool SLDs.
- Aliquoted Codabar components are not allowed in pools.
- Components can be added to the pool until the pool expires.
- Codabar pools cannot be created using mixed ABOs.
- Product code label will not be printed for Codabar pools.
- Label verification is required; pool created only after successful label verification.
- Program does not allow for the creation of reconstituted whole blood products.
- Products cannot be added to or removed from existing pools after the pool is expired.
- CRWS, CRSE, and CMW interdictions placed on the pool cause the SLD of NFT for Codabar and Discard for ISBT pools; these cannot be removed from the pool.
- Attributes to be added and required for the pool must be valid for both ISBT and Codabar if products of both unit schemes are to be added to the pool.
- The pool unit ID must be Codabar if the ISBT Start Date is not effective in Chapter Details (CHAPTER); the pool unit ID must be ISBT if the ISBT Start Date is effective.
- CMV is the only special testing attribute that can be printed for pooled components.

## Prerequisites

- Only components with an “acceptable for transfusion” label decision can be pooled.
- Components to be pooled, or pool to be added to or deleted from must be located in your log-on warehouse and must not be in-transit.
- Import QC must be performed on imported products before they can be added to a pool.

- Master code CMC must be defined for CPIPOOL2, and the code must be linked to a lot number in Valid Lots (LOTS).
- Master code LBVOL must be defined for product types, and the code must be linked to the pooled product code's product type.
- Product Type Data – (ISBT/Codabar) (PRDTYPE), the W column must have 'Y' for the weight to be required in the Pool screen for the product types being pooled (POCRY, POPLT).
- If labels are going to be printed from this screen, the form must be defined in Maintain Report Master Table (RMASTER).

## Accessing the Screen

Access this screen from the Component Pooling Functions menu or by entering the keyword `POOL`.

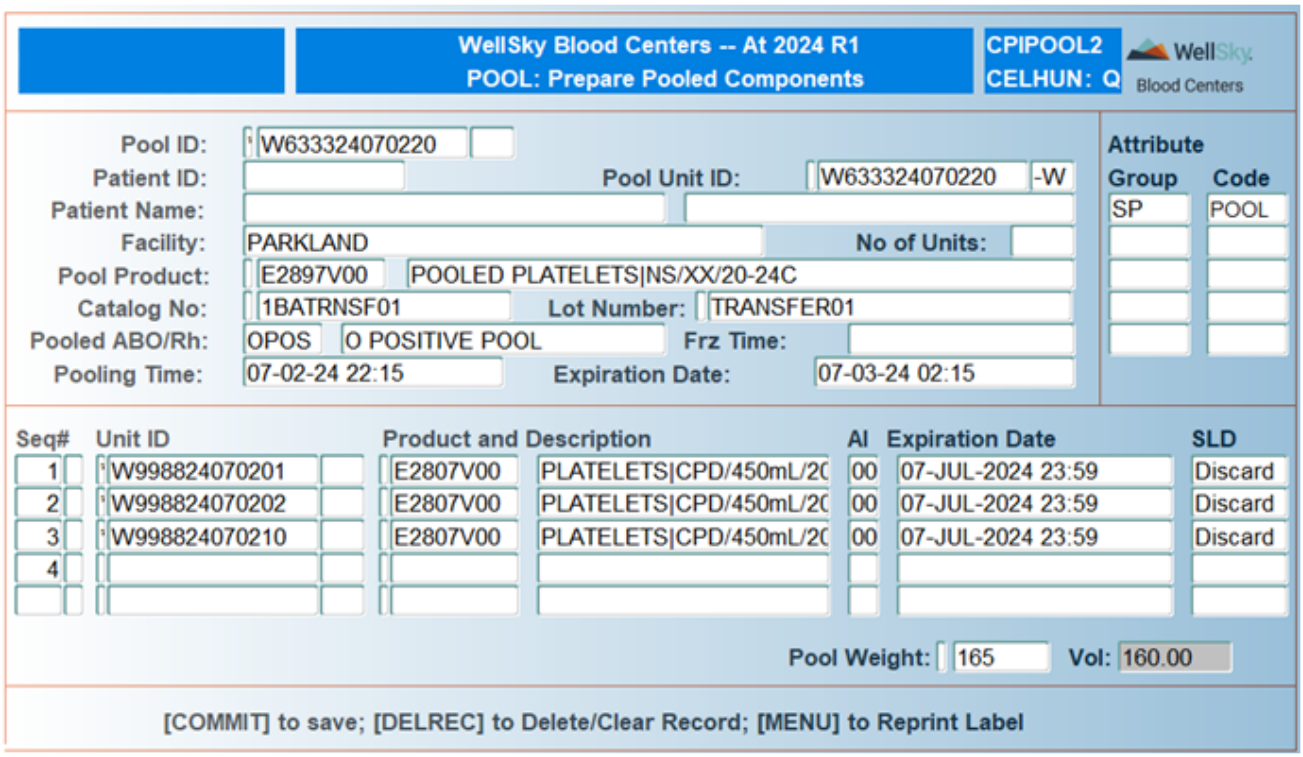


## Control Block Fields and Definitions

### Pool ID

For new pools: press **ENTER**. For existing pools: scan or manually enter pool unit ID.

### Patient ID

Enter optional patient identification number. A maximum of 10 characters is allowed. Entry in this field is not required.

### Pool Unit ID

Scan or manually enter pool unit ID.

## Patient Name

Enter patient last name. Enter patient first name. A maximum of 50 characters is allowed for each name. Entries in these fields are not required.

## Facility

Enter ordering facility name. A maximum of 50 characters is allowed. Entry in this field is not required.

## No. of Units

Enter number of components to be placed in pool. Enter an integer between 1 and 999.

## Pool Product Code

Scan, manually enter, or select product code from LOV.

## Catalog No

Scan, manually enter, or select catalog number from LOV.

**NOTE –** Concatenation of the catalog number and lot number is possible in this field. Scan both fields at the same time, and it will populate the Catalog No field and the Lot Number field.

**NOTE –** Catalog numbers display based on the configuration of master code CMC and the Lots table CMC flag. Only Catalog/Lot numbers that have the matching CMC flag defined in master CMC for CPIPOOL2 will display.

## Lot Number

Scan or manually enter bag lot number or select from LOV.

**NOTE –** Lot numbers display based on the configuration of master code CMC and the Lots table CMC flag. Only Lot numbers that have the matching CMC flag defined in master CMC for CPIPOOL2 and match the catalog selected will display.

## Pooled ABO/Rh

Enter ABO/Rh of the pool or select from LOV.

## Pooling Time

Field automatically displays the current system date and time in MM-DD-YY HH24:MI format. You can update the pooling time in MM-DD-YY HH24:MI format.

## Frz Time

Enter pool freeze time in MM-DD-YY HH 24:MI format.


WellSky Corporation
Proprietary and confidential

**NOTE –** Entry in this field required only if pooled product code is defined in Master Code FCRYO. Freeze time must be greater than or equal to pooling time. If freeze time entry is required, at F12 (Commit) the cursor prompts for acceptance or modification of freeze times. Interdictions are placed on the pooled component if the thaw to freeze time (CRWS) or separation to freeze time (CRSE) is greater than those values defined in Cryo Methods (CRYOMET; program performs the check for each product being added to the pool. These interdictions cannot be removed, and the pool will get an SLD of NF for Codabar pools and Discard for ISBT pools.

### Expiration Date

Pool expiration date automatically displays after the pooling time is entered. Field is not navigable.

**NOTE –** System calculates expiration date from pooling time based on pooling product code and pooling time, POOL attribute and product type.

### Attribute Group

Enter attribute group or select from LOV. Entry in this field is not required.

**NOTE –** DON and PHER attributes are not allowed.

### Attribute Code

Enter attribute code, or select code from LOV. Entry in this field is required only if an entry was made in the Attribute Group field.

**NOTE –** Only valid attribute codes for pooled products can be added. All individual components to be placed in the pool also must have this attribute in order to be allowed in the pool. Attributes have to be linked to the pooled product code in the Product Type Attributes table (PRDATTR).

## Detail Block Fields and Definitions

Enter one line of data for each component to be placed in the pool.

### Seq#

System automatically assigns sequence number as the product is added. Field is not navigable.

### Unit ID

Scan or manually enter unit ID.

**NOTE –** The system automatically checks the donor system for the registration of the donor and for the presence of interdictions on the donor. If the donation has not been registered, you will not be able to enter the unit.

## Product and Description

Scan, manually enter, or select product code from LOV.

## AI

System populates this field with the aliquot number of the component being pooled.

## Expiration Date

Product expiration automatically displays after the product code is entered. Field is not navigable.

In the event the expiration date of any component being pooled precedes the expiration date calculated for the pooled component, the following window opens:

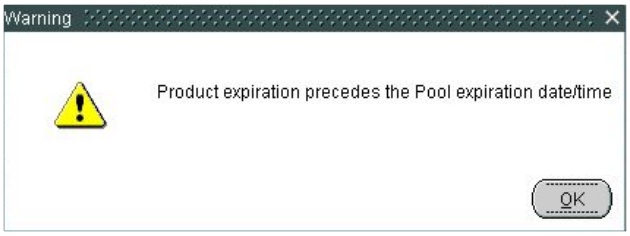


Click **OK** to close the window.

## SLD

Product SLD automatically displays. Field is not navigable.

Press **F12** (Commit) once all products have been added to the pool. The ABO/Expiration label automatically prints, and the system prompts for label verification.

**NOTE –** If the weight is not required for the pooled product when **F12** (Commit) is pressed, the verification block will appear to verify the label. If the weight is required for the pooled product, press **F12** (Commit) or **CTRL** + **F3** (Next Block) to move the cursor to the Pool Weight field.

## Pool Weight

If the Pool Weight field is configured to be not required, the cursor will never move to the Pool Weight field. After entering the last unit to the pool, press **CTRL** + **F3** (Next Block) or **F12** (Commit) to move to the Pool Weight field. Transfer the weight from a scale or manually enter the weight (g). If the weight is entered through the interface from a scale, the cursor moves directly to the verification block. If manually entering the weight, press **ENTER** or **TAB** to move out of the Pool Weight field and go to the verification block.

**NOTE –** Weight must be entered if the W field is set to 'Y' in Product Type Data (PRDTYPE).

## Vol (ml)

Product volume (ml) automatically displays if the weight was entered and if the specific gravity is defined for the product code in the Product Codes (PRODUCT) table. The field is not navigable.


WellSky Corporation
Proprietary and confidential

**NOTE –** The system does not allow an illogical combination of components to be entered. If you get a system message about illogical combinations, see your supervisor.

After the weight is entered, the system will determine if the weight is within the acceptable range based on the weight entry in the Product Codes (PRODUCT) table. If the product is outside of the acceptable range, a CMW interdiction will be placed on the product. The CMW interdiction will cause the pooled product to be labeled as "Not For Transfusion (NFT)(Md)".

## Verifying System Label Decision

The following window opens when the pool is committed:

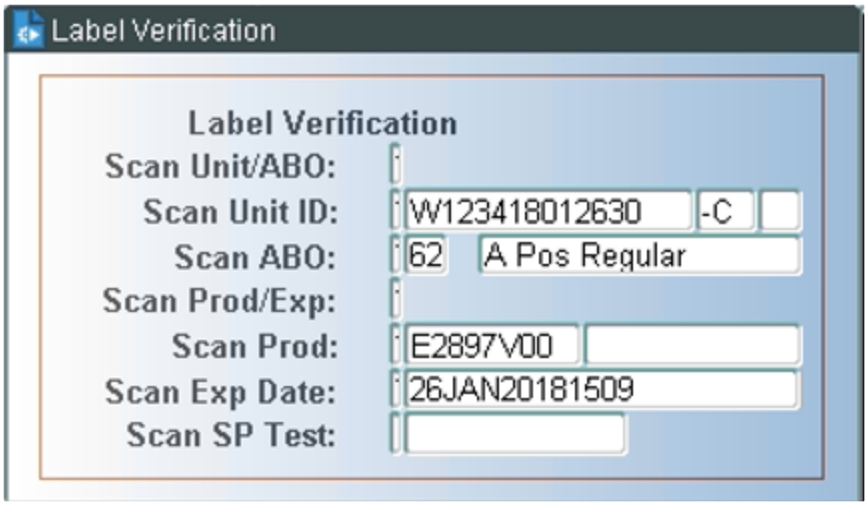


### Scan Unit/ABO

Scan unit ID and ABO label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

**NOTE –** After a concatenate (one) scan, the cursor moves to the Scan Exp/Prod field. If doing manual entry, the cursor moves down to the next field, *Scan Unit ID*.

### Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This the first manual option to a concatenate scan.

### Scan ABO

Scan, manually enter, or select ABO from LOV.

### Scan Prod/Exp

Perform concatenated scan of Product Code and Expiration for ISBT pools or press M and ENTER for individual entry of product code and expiration.

### Scan Prod

Scan, manually enter, or select product code from LOV.

### Scan Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

**NOTE –** Components with expiration times other than 23.59 must be manually entered for Codabar pools.

**NOTE –** Screen commits after verification and Pool Report prints if special testing verification is not required.

### Scan SP Test

Scan, manually enter, or select special testing code from LOV.

**NOTE –** Field is navigable only if the pool is ISBT and CMV Negative.

Screen commits after verification and Pool Report prints.

## Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

## To Delete a Component

Use the UP and DOWN arrow keys to highlight the component to be deleted and press [DelRec]. The component will be deleted, and the expiration date will be recalculated.

## Update Component Weight

To update the weight of a pooled product, enter the unit ID in the Pool ID field. This will display the details for the pooled product. Once the data is displayed, press CTRL + F3 (Next Block) to move the cursor to the Pool Weight field where the weight can either be sent through the scale interface or manually entered.

## At Commit

- If the thaw to freeze time for any component in a frozen CRYO pool exceeds the time defined in Cryo Methods, a CRWS interdiction is placed on the pool.
- If the separation to freeze time for any component in a frozen CRYO pool exceeds the time defined in Cryo Methods, a CRSE interdiction is placed on the pool.


WellSky Corporation
Proprietary and confidential

- If the weight for any component in the pooled product exceeds the weight defined in the Product Codes (PRODUCT) table, a CMW interdiction is placed on the pool, and the pool will be labeled to discard.
- Pool is saved to the database.
- SLD of individual components in the pool is updated to NFT, and a reject reason of POOL is assigned.
- Pooled component warehouse is assigned. Assignment is based on the warehouse to which user is logged on when component is pooled.
- Requested attributes and POOL attribute are added to the pool.
- Pooled Components Report automatically prints.
- At the time of commit, the unit ID will be linked to the POOL batch ID, so when reviewing the unit ID, it will list the batch ID as POOL.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Component Pooling menu.

# 19.7.3 Modify Pooled Components (MODPOOL)

## Intended Use

Use the Modify Pooled Components screen to modify pool components. The system adds the following:

- Modification date/time.
- Lot numbers involved in modification.
- Expiration date of the pool.
- System label decision (SLD).
- Attributes associated to new product code, if applicable.

## Limitations

- Pool to be modified must be located in user's log-on warehouse and must not be in-transit.
- Program does not look at the interdictions override tables for calculating the pool SLDs.
- Program does not consider life spans associated with pool product type attributes.
- Process date/time must be prior to pooled component expiration.
- Pools can be modified only if the modification results in a new product code.

## Prerequisites

- Only pooled components can be modified in this screen.
- Process codes must be defined in SP Products/Special Processes (SPPROC).
- Master code CMC must be defined for CPIPOOL2 and the code must be linked to a lot number in Valid Lots (LOTS).

- Product Type Data –(ISBT/Codabar) (PRDTYPE), the W column must have 'Y' for the weight to be required in the Pool screen for the product types being pooled (POCRY, POPLT).
- Master code LBVOL must be defined for product types, and the code must be linked to the pooled product code's product type.
- CMW interdictions placed on the pool cause the SLD of NFT for Codabar and Discard for ISBT pools; these cannot be removed from the pool.
- If labels are going to be printed from this screen, the form must be defined in Maintain Report Master Table (RMASTER).

## Accessing the Screen

Access this screen from the Component Pooling Functions menu or by entering the keyword `MODPOOL`.

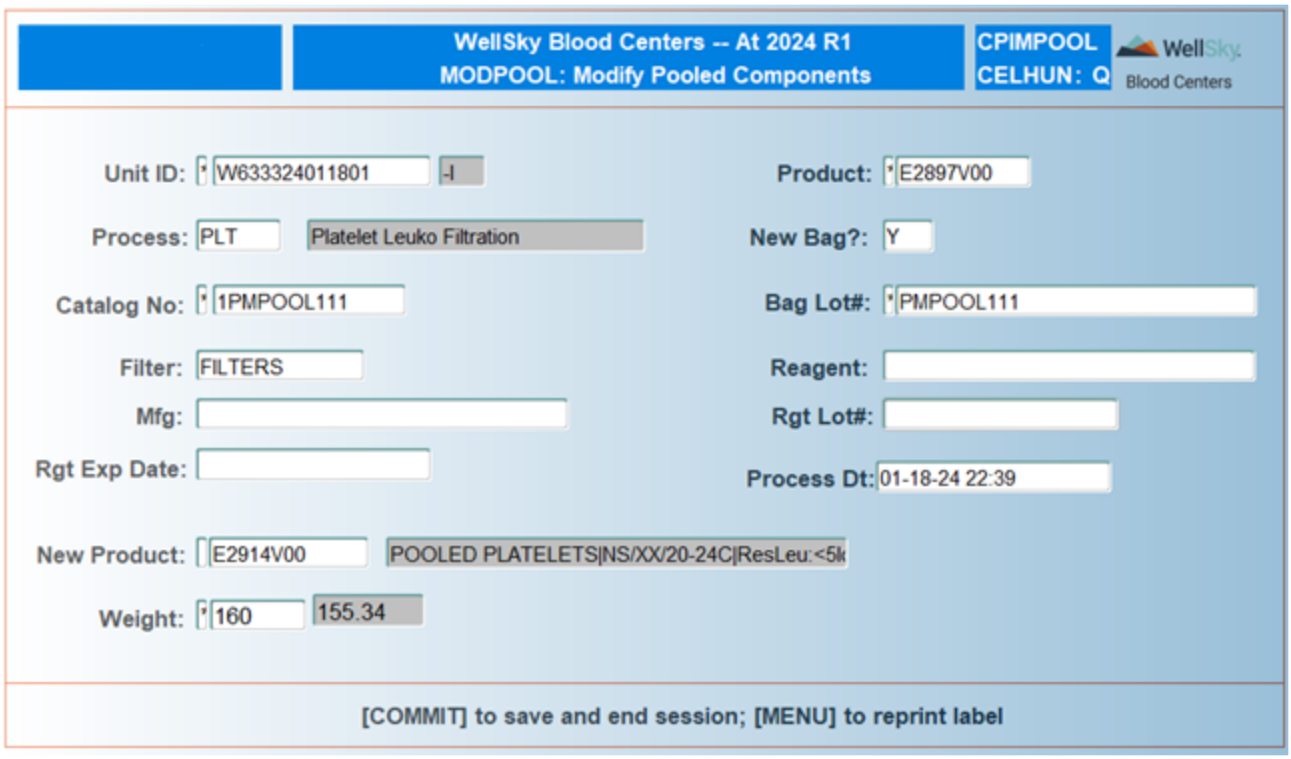


## Fields and Definitions

### Unit ID

Scan or manually enter pool unit ID.

### Product

Scan, manually enter, or select pool product code from LOV.

### Process

Enter process code or select from LOV. Process description automatically displays after the code is entered.

## New Bag?

Enter Y if the pool will be in a new bag after the modification is performed or enter N if the pool remains in the same bag after modification.

**NOTE –** If Y is entered, the cursor goes to the Bag ID field. If N is entered, the cursor goes to the Reagent field.

## Catalog No

Scan, manually enter, or select catalog number from LOV.

**NOTE –** Concatenation of the catalog number and lot number is possible in this field. Scan both fields at the same time and it will populate the catalog no field and the lot number field.

**NOTE –** Catalog numbers display based on the configuration of master code CMC and the Lots table CMC flag. Only Catalog/Lot numbers that have the matching CMC flag defined in master CMC for CPIMPOOL will display.

## Bag Lot #

Scan, manually enter, or select bag lot number from LOV.

**NOTE –** Lot numbers display based on the configuration of master code CMC and the Lots table CMC flag. Only Lot numbers that have the matching CMC flag defined in master CMC for CPIMPOOL and match the catalog selected will display.

## Filter

Enter filter lot number or select from LOV. Entry in this field is not required.

## Reagent

Enter reagent name. A maximum of 50 characters is allowed. Entry in this field is not required.

## Mfg

Enter reagent manufacturer. A maximum of 50 characters is allowed. Entry in this field is not required.

## Rgt. Lot #

Enter reagent lot number. A maximum of 50 characters is allowed. Entry in this field is not required.

## Rgt Exp Date

Enter reagent expiration date in DD-MON-YYYY format. Entry in this field is not required.

**NOTE –** Expired reagents not allowed.

### Process Dt.

Enter process date and time in MM-DD-YY HH24:MI format.

**NOTE –** Process date/time must be before pool expiration.

### New Product

Scan, manually enter, or select new product code from LOV.

Press F12 (Commit) to save the modification. The ABO/Expiration label automatically prints, and the system prompts for label verification if the weight is not required entry.

### Pool Weight

If the Pool Weight field is configured to be not required, the cursor will never move to the Pool Weight field. After entering the new product, press **ENTER** or **TAB** to move the cursor to the Pool Weight field. Transfer the weight from a scale or manually enter the weight (g). If the weight is entered through the interface from a scale, the cursor moves directly to the verification block. If manually entering the weight, press F12 (Commit) to move out of the Pool Weight field and go to the verification block.

**NOTE –** Weight must be entered if the W field is set to 'Y' in Product Type Data (PRDTYPE).

### Vol (ml)

Product volume (ml) automatically displays if the weight was entered and if the specific gravity is defined for the product code in the Product Codes (PRODUCT) table. The field is not navigable.

**NOTE –** The system does not allow an illogical combination of components to be entered. If you get a system message about illogical combinations, see your supervisor.

After the weight is entered, the system will determine if the weight is within the acceptable range based on the weight entry in the Product Codes (PRODUCT) table. If the product is outside of the acceptable range, a CMW interdiction will be placed on the product. The CMW interdiction will cause the pooled product to be labeled as "Not For Transfusion (NFT)(Md)".

Press F12 (Commit) to save the modification and weight. The ABO/Expiration label automatically prints, and the system prompts for label verification.

## Verifying System Label Decision

The following window opens when the pool modification is committed:


WellSky Corporation
Proprietary and confidential

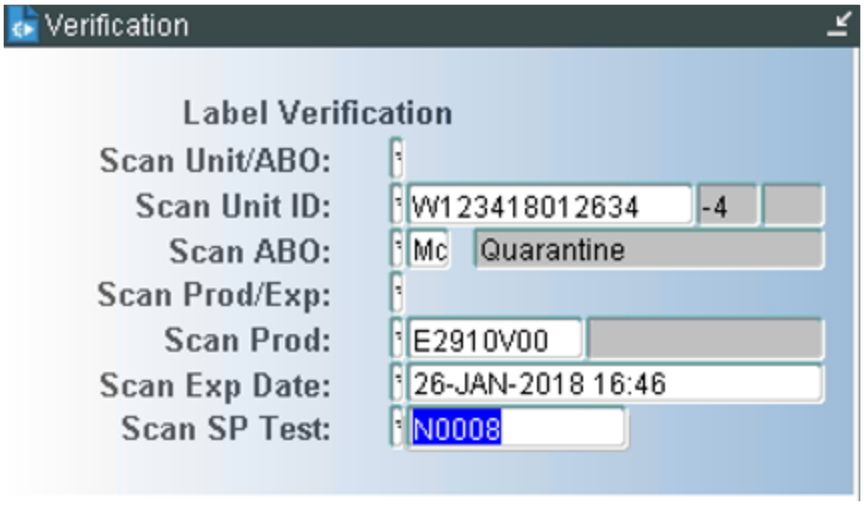


## Scan Unit/ABO

Scan unit ID and ABO label as one scan or press **M** to verify unit ID and ABO labels with separate scans.

**NOTE –** After a concatenate (one) scan, the cursor moves to the Scan Exp/Prod field. If doing manual entry, the cursor moves down to the next field, Unit ID.

## Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This the first manual option to a concatenate scan.

## Scan ABO

Scan, manually enter, or select ABO from LOV.

## Scan Exp/Prod

Press M and **ENTER** for individual entry of product code and expiration.

## Scan Prod

Scan, manually enter, or select product code from LOV.

## Scan Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

**NOTE –** Components with expiration times other than 23.59 must be manually entered for Codabar pools.

**NOTE –** Screen commits after verification and Pool Report prints if special testing verification is not required.

### Scan Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

### Scan SP Test

Scan, manually enter, or select special testing code from LOV.

**NOTE –** Field is navigable only if the pool is ISBT and CMV Negative.

Screen commits after verification and Pool Report prints.

## Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- The original pool product code appears with an SLD of NFT or Discard and a reject reason of CONV for pooled products that go into a new bag. For components that remain in the same bag, the component information is updated.
- Modified pooled component warehouse is assigned. Assignment is based on the warehouse to which user is logged on when component is modified.
- Product code associated attributes are added to Codabar pools.
- Pooled Components Report automatically prints.
- If the weight for the pooled products is not within the range defined in the Product Codes (PRODUCT) table, a CMW interdiction is placed on the pool, and the pool will be labeled to discard.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Component Pooling menu.

# 19.7.4 Delete Pooled Components (DELPOOL)

## Intended Use

Use the Delete Pooled Components screen to delete pooled components. The system deletes the pooled component and makes the components in the pool available.


WellSky Corporation
Proprietary and confidential

## Limitations

Only pooled products can be deleted in this screen.

## Prerequisites

Pool to be deleted must be located in user's log-on warehouse and must not be in-transit.

## Accessing the Screen

Access this screen from the Component Pooling Functions menu or by entering the keyword `DELPOOL`.

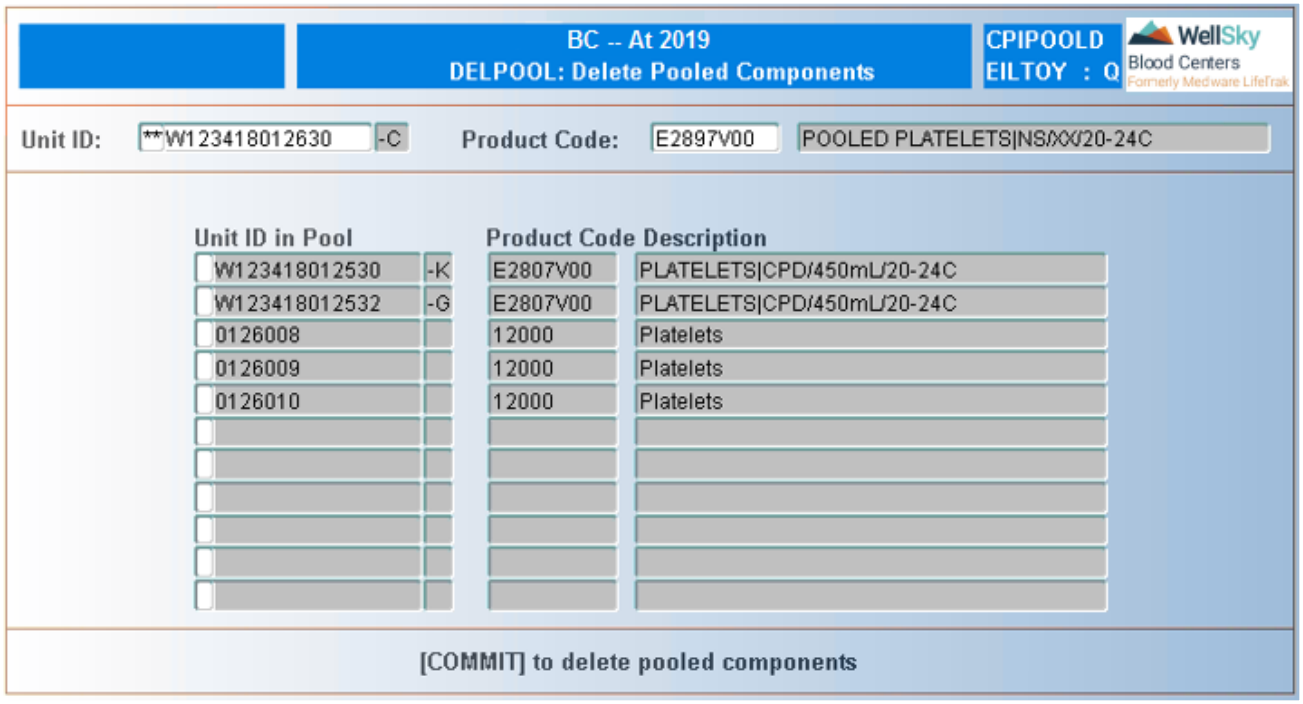


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Pooled product code and description automatically display after the unit ID is entered. Field is not navigable.

## Detail Block Fields and Definitions

### Unit ID in Pool

Unit ID of each component in the pool automatically displays. Field is not navigable.

### Product Code And Description

Product code and description of each component in the pool automatically displays. Field is not navigable.

Use the **UP** and **DOWN** arrow keys to scroll through the products in the pool.

Press **F12** (Commit) to delete the pool. The following window opens:

Enter `Y` to delete the pool or enter `N` to return to the Unit ID field.

## At Commit

Updates made to the system at Commit include the following:

- Data entered on the screen.
- The pooled product and any component made from the pool are deleted.
- All components in the pool are available but must be re-labeled prior to use.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Component Pooling menu.


WellSky Corporation
Proprietary and confidential

# 19.8 Special Component Processing

Special Component Processing functions are accessed from the following menu:

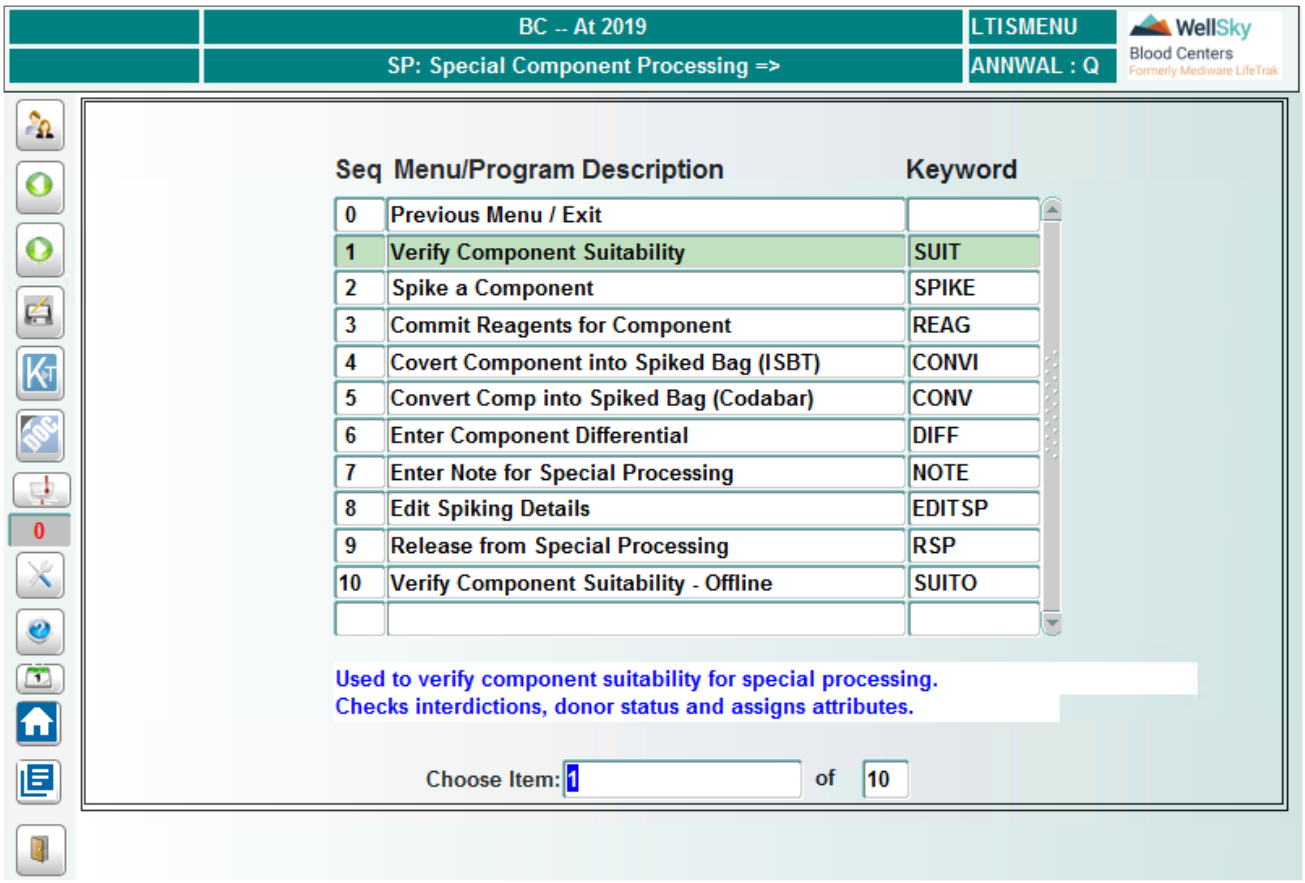


## 19.8.1 Verify Component Suitability (SUIT)

### Intended Use

The Verify Component Suitability screen is the first step in Special Processing. Upon completion of verification, a transaction for the component is opened. During this step, you identify a component that does not have interdictions and meets criteria.

### Limitations

- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in-transit in order to perform this function.
- Product must not have unit or component interdictions.
- Product must not be expired.

## Prerequisites

- The component must be labeled with a valid system label decision.
- The component must be in Lab.

## Accessing the Screen

Access this screen from the Special Component Processing menu or by using the keyword `SUIT`.

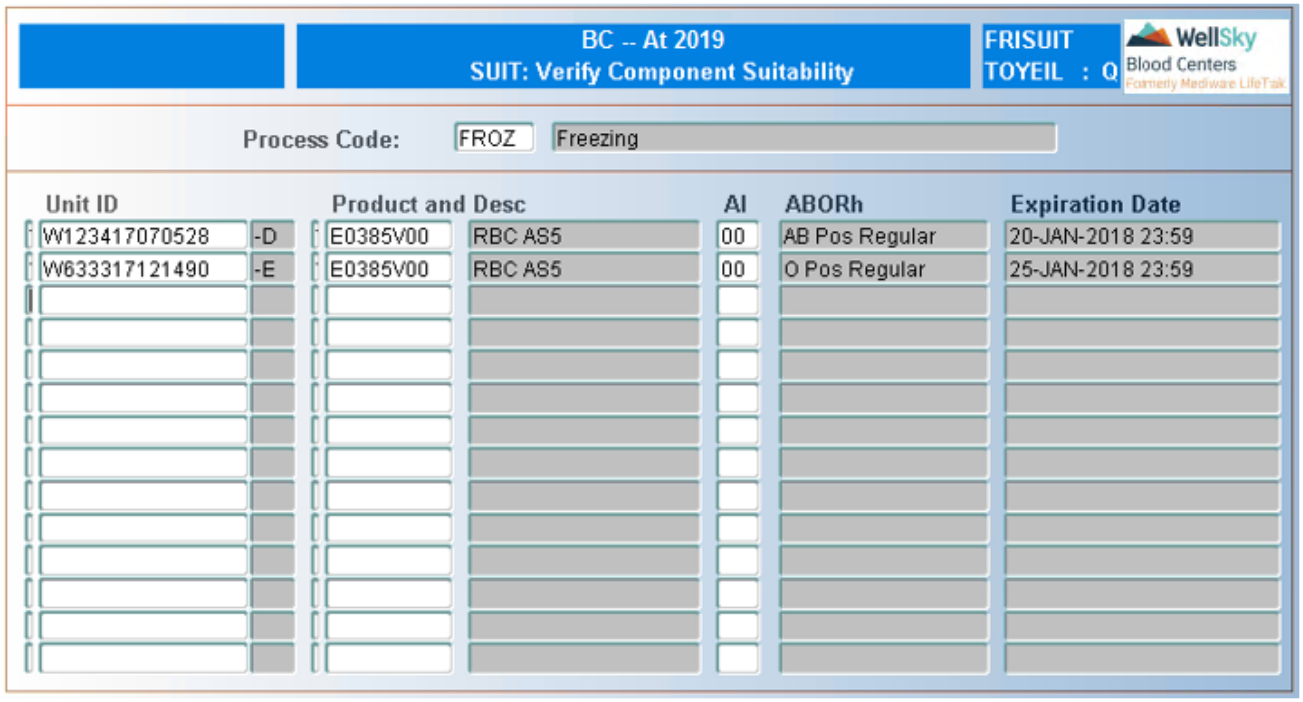


## Control Block Fields and Definitions

### Process Code

Enter process code or select from LOV. The process description automatically displays after the code is entered.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product and Desc

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

### AI

Enter aliquot number or select from LOV.


WellSky Corporation
Proprietary and confidential

### ABORh

Product ABO/Rh automatically displays after the product code is entered. Field is not navigable.

### Expiration Date

Product expiration date automatically displays after the product code is entered. Field is not navigable.

Program does a line-by-line commit.

## At Commit

The attribute associated to the process code is placed on the product with the current system process date and time.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.2 Spike a Component (SPIKE)

## Intended Use

The Spike a Component screen is used to record details when a bag was added by spiking.

## Limitations

None

## Prerequisites

- The component must be in Lab.
- Component must be located in user's current log-in warehouse in order to perform this function.
- If the process code is not 'REG', then the product must have been verified in Verify Component Suitability (SUIT) or Verify Component Suitability – Offline (SUITO).
- Master code CMC must be defined for FRISPIKE and the code must be linked to a lot number in Valid Lots (LOTS).

## Accessing the Screen

Access this screen from the Special Component Processing menu or by using the keyword `SPIKE`.

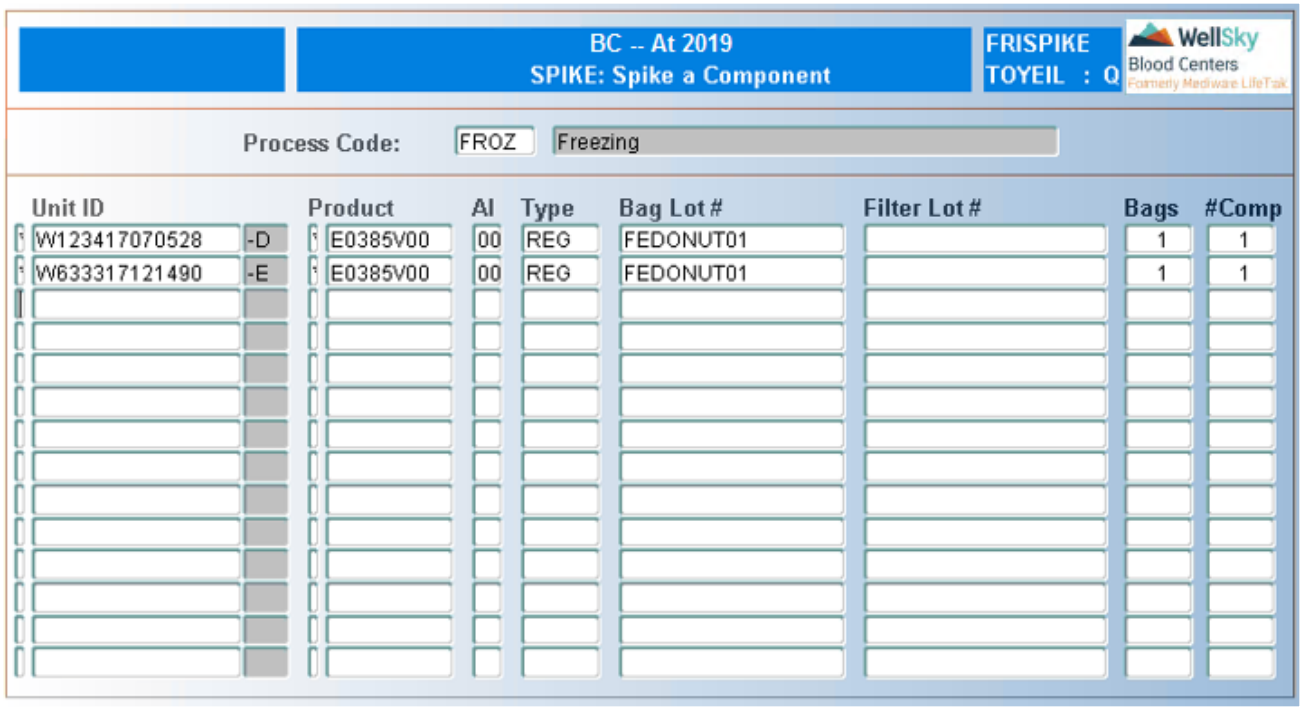


# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## AI

Enter aliquot number or select from LOV. Field is not navigable for ISBT products.

## Type

Enter the spiking type or select from LOV.

## Bag Lot #

Enter the lot number of the new bag(s) being added or select from LOV.

**NOTE –** If more than one bag is added, and if not of one lot, then make separate line item for each lot.

**NOTE –** Lot numbers display based on the configuration of master code CMC and the Lots table CMC flag. Only lot numbers that have the matching CMC flag defined in master CMC for FRISPIKE will display.

### Filter Lot #

Enter the filter number or select lot from LOV. Press `Enter` to accept the current value. Entry in this field is not required.

**NOTE –** Lot numbers need to be defined with CMC flag of I (used for FI).

### Bags

Enter the number of bags of this lot number being added.

### # Comp

Enter the number of components to be produced.

Screen does a line-by-line commit.

## At Commit

Updates made to the system at Commit include the following:

- The data entered on the screen.
- The unit add-on bags is updated.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.3 Commit Reagents for Component (REAG)

## Intended Use

The Commit Reagents for Component screen is used to record/update reagents used for each process and stage.

## Limitations

Reagent must be committed prior to converting components.

## Prerequisites

- Component must have been verified as suitable.
- Component must be in Lab.

# Accessing the Screen

Access this screen from the Special Component Processing menu or by using the keyword REAG.

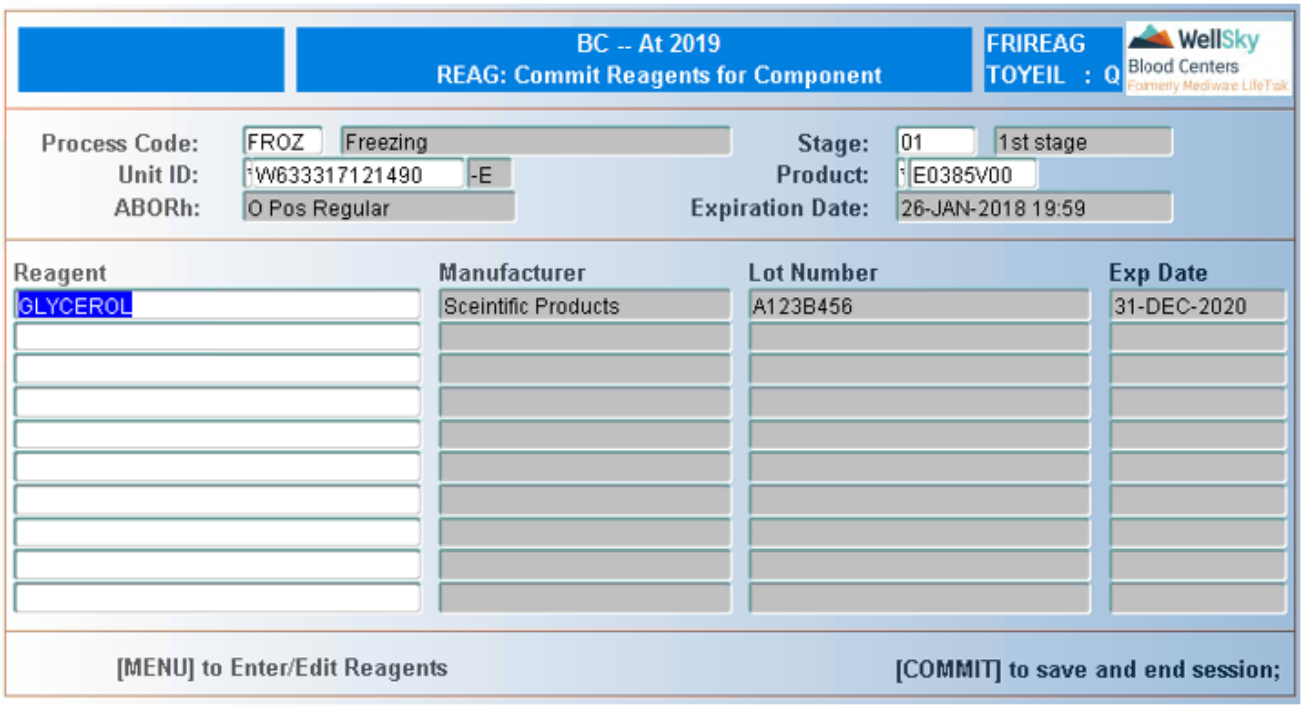


# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

## Stage

Enter stage or select from LOV.

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## ABORh

ABO/Rh automatically displays after the product code is entered. Field is not navigable.

## Expiration Date

Product expiration date and time automatically displays after the product code is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

## In the Detail Block

The following display after the product code is entered:

- Reagent
- Manufacturer
- Lot Number
- Exp Date

Press **F12** (Commit) to accept the default reagents.

## Modifying Reagents

Press **F6** (Menu) to modify existing or enter new reagents. The following window opens:

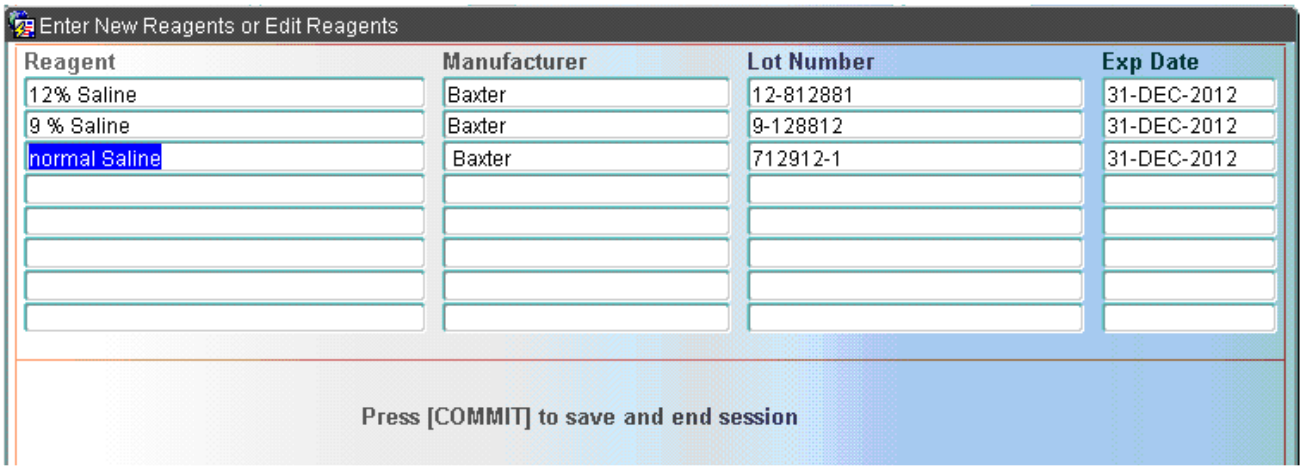


### Reagent

Enter reagent or press **ENTER** to accept default. A maximum of 50 characters is allowed.

### Manufacturer

Enter reagent manufacturer or press **ENTER** to accept default. A maximum of 50 characters is allowed.

### Lot Number

Enter reagent lot number or press **ENTER** to accept default. A maximum of 50 characters is allowed.

### Exp Date

Enter reagent expiration date in DD-MON-YYYY format, or press **ENTER** to accept default.

Press **F12** (Commit) when reagent data has been entered.

## At Commit

- The reagent table for that process and stage is updated.
- The reagent details are saved for this component.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.4 Convert Component into Spiked Bag – ISBT (CONVI)

## Intended Use

The Convert Component into Spiked Bag - ISBT screen is used to record the creation of the new product and discard the original product and bag.  OPD (Product/Expiration) labels can be printed in this screen.

## Limitations

- Codabar products cannot be processed through this screen.
- Attributes in SPPROC must only be configured with Converted-type attributes (C not M - modify type) in the ATTRIB table.

## Prerequisites

- Reagents must be committed prior to converting products.
- Component must have been spiked.
- Component must be in Lab.
- If the process code is other than REG, the product should have been verified for suitability.
- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- Master Code SPATR must be defined if SP attributes will be placed in conjunction with the ISBT attribute.
- CMC flag must be defined for FRICONV. Valid Lots should have CMC flag defined with the master code to be used in FRICONV.
- Smart Manufacture Attribute Configurator must be defined for the attributes that can be placed in the program for product types.

## Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword `CONVI`.


WellSky Corporation
Proprietary and confidential

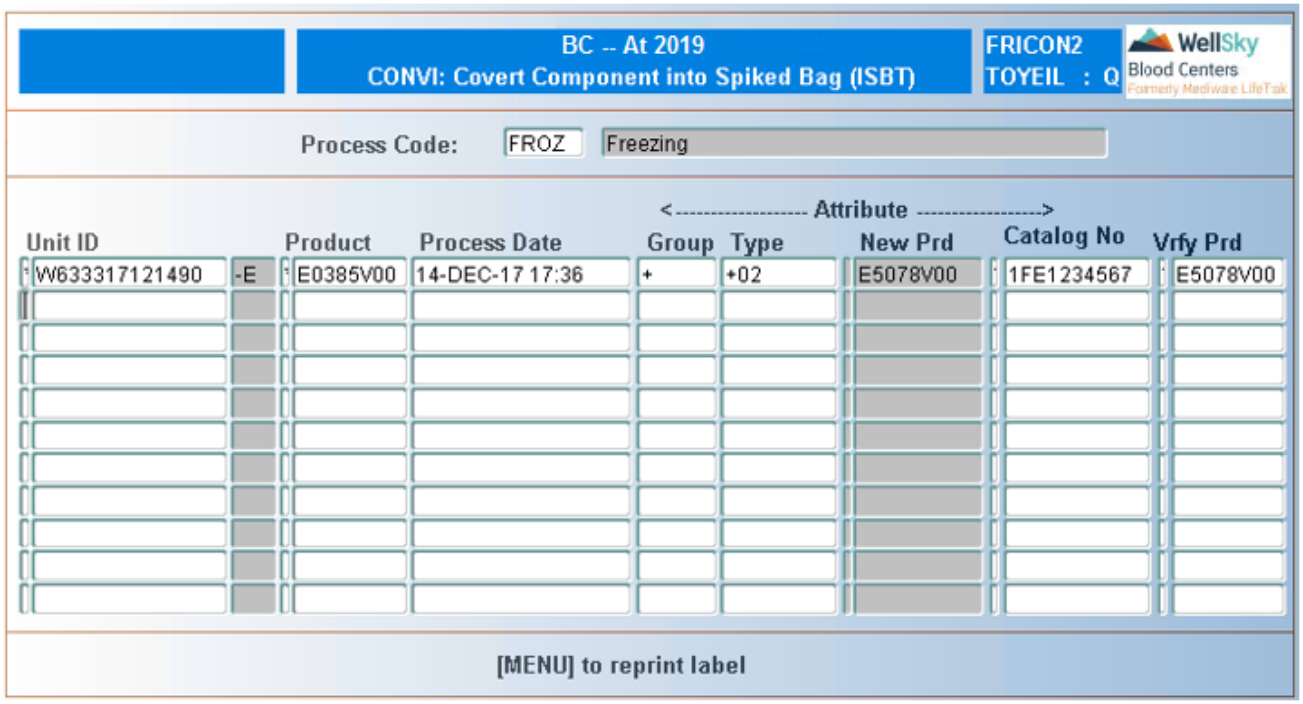


# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Orig Product Code

Scan, manually enter, or select product code from LOV.

## Process Date/Time

Field will default to current date and time or a different date and time can be entered in DD-MON-YY HH:MI format.

## Attribute Group

Attribute group defaults according to process code entered. Field is not navigable.

**NOTE –** The attribute group and code must be defined in Smart Manufacturing Attribute Configurator to allow the attribute to be placed on the product, otherwise the user will receive an error.

## Attribute Type

Attribute type defaults according to process code entered. Field is not navigable.

### New Prd

Product code defaults to the derived product code determined by the system.  Field is not navigable.

### Catalog No

Scan, manually enter or select from LOV. The LOV will be populated with the catalog that is linked to the lot numbers selected in FRISPIKE.

**NOTE –** Lot numbers must be defined with the CMC flag for FRICON2 and FRISPIKE. These lot numbers are linked back to the catalog number that are used in calculation of the product.

### Vrfy Prd

Scan or manually enter the derived product code.

**NOTE –** This field is navigable only if the program is configured to require label verification.

**NOTE –** Once the verification process has begun, reprinting a label is not allowed.

## Re-Printing Labels

Press F6 (Menu) to reprint labels

Screen does a line-by-line commit.

## At Commit

- The spiking details table is checked for bag reconciliation.
- Original product is discarded.
- New product code is created.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.5 Convert Component into Spiked Bag (CONV)

## Intended Use

The Convert Component into Spiked Bag screen is used to record the creation of the new product and discard the original product and bag.


WellSky Corporation
Proprietary and confidential

## Limitations

- ISBT products cannot be processed in this screen.
- In Convert Component into Spiked Bag (FRICON2)/(CONVI), attributes in SPPROC must only be configured with Converted-type attributes (C not M - modify type) in the ATTRIB table.

## Prerequisites

- Reagents must be committed prior to converting products.
- Component must have been spiked.
- Component must be in Lab.
- If the process code is other than REG, the product should have been verified for suitability.
- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.

## Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword CONV.

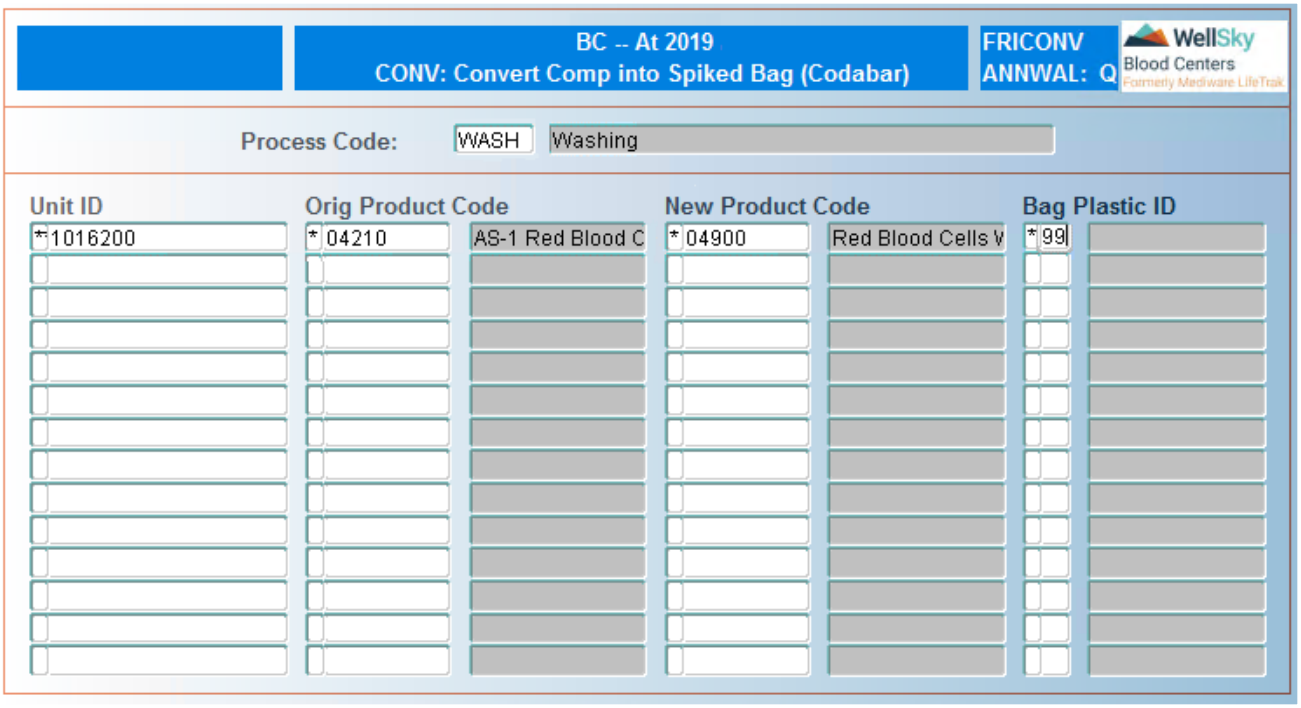


## Control Block Fields and Definitions

### Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Orig Product Code

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

### New Product Code

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

### Bag

Scan, manually enter, or select bag ID from LOV.

### Plastic ID

Bag description automatically displays after the bag ID is entered. Field is not navigable.

Screen does a line-by-line commit.

## At Commit

- The spiking details table is checked for bag reconciliation.
- Original product is discarded.
- New product is defined.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.6 Enter Component Differential (DIFF)

## Intended Use

The Enter Component Differential screen is used to record results after doing a differential.

## Limitations

None

## Prerequisites

Before using this screen the component must have been verified.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword `DIFF`.

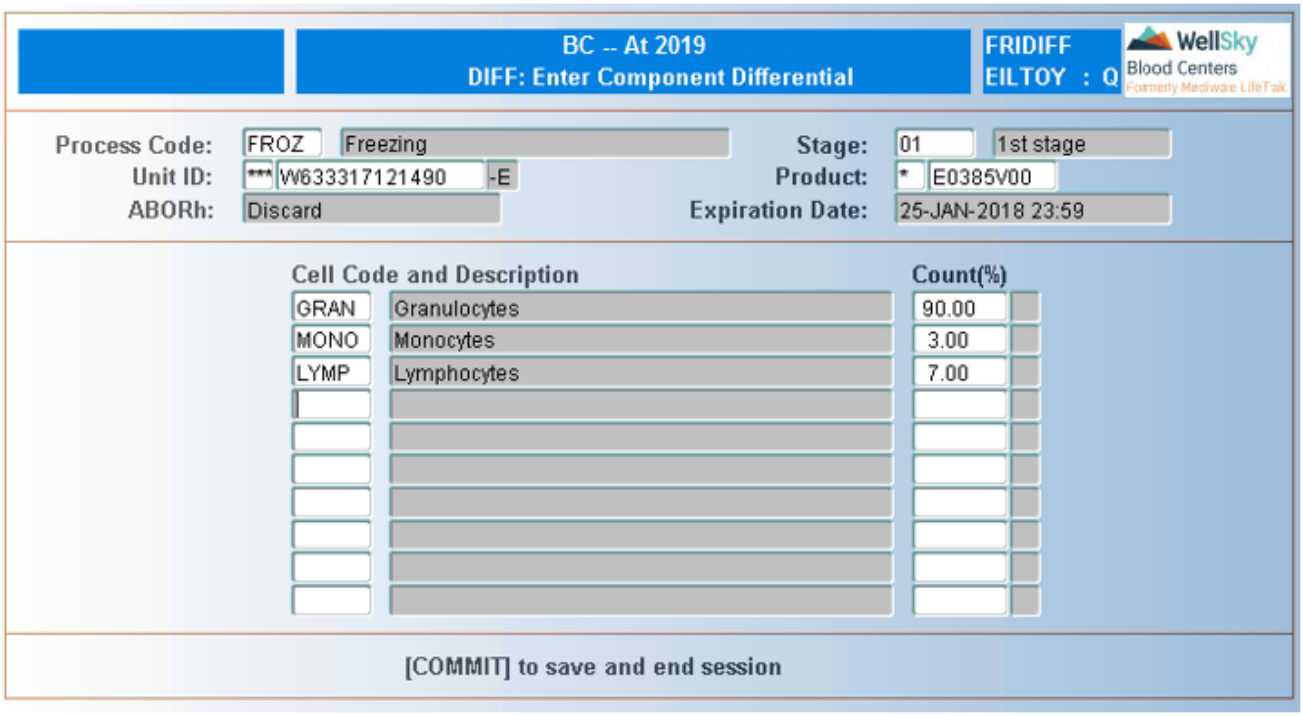


# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

## Stage

Enter process stage or select from LOV.

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## ABORh

ABO/Rh automatically displays after the product code is entered. Field is not navigable.

## Expiration Date

Expiration date and time automatically displays after the product code is entered.

## Detail Block Fields and Definitions

### Cell Code and Description

Enter cell code or select from LOV. Cell Code description automatically displays after the code is entered.

### Count %

Enter count in numeric form.

> **NOTE –** Count column does not have to add up to exactly 100.

Press F12 (Commit) once desired counts have been entered.

## At Commit

The entered counts are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.7 Enter Note for Special Processing (NOTE)

## Intended Use

The Enter Note for Special Processing screen is used to record/update/view notes for Special Processing.

## Limitations

None

## Prerequisites

Component must have been processed through Verify Component Suitability (SUIT).

## Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword NOTE.


WellSky Corporation
Proprietary and confidential

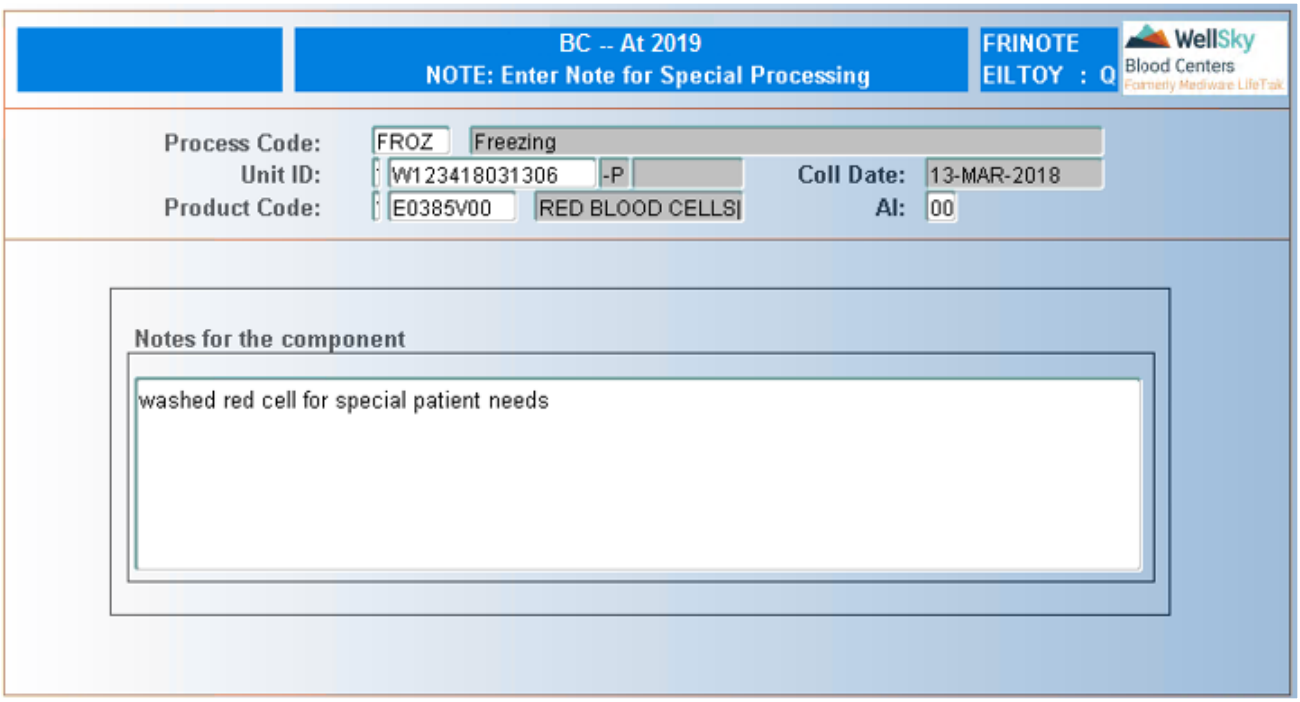


# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. The process description automatically displays after the code is entered.

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Product Code

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

## AI

Enter aliquot number or select from LOV. Field is not navigable for ISBT products.

# Detail Block Fields and Definitions

## Notes for the Component

Enter free format notes. A maximum of 240 characters is allowed.

Press F12 (Commit) once all comments have been entered.

## At Commit

Notes entered for the component are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.8 Edit Spiking Details (EDITSP)

## Intended Use

The Edit Spiking Details screen is used to update/correct spiking details.

## Limitations

None

## Prerequisites

- Component must have been spiked.
- Component must be in Lab.
- If the process code is other than REG, then the product should have been processed through Verify Component Suitability (SUIT).

## Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword `EDITSP`.

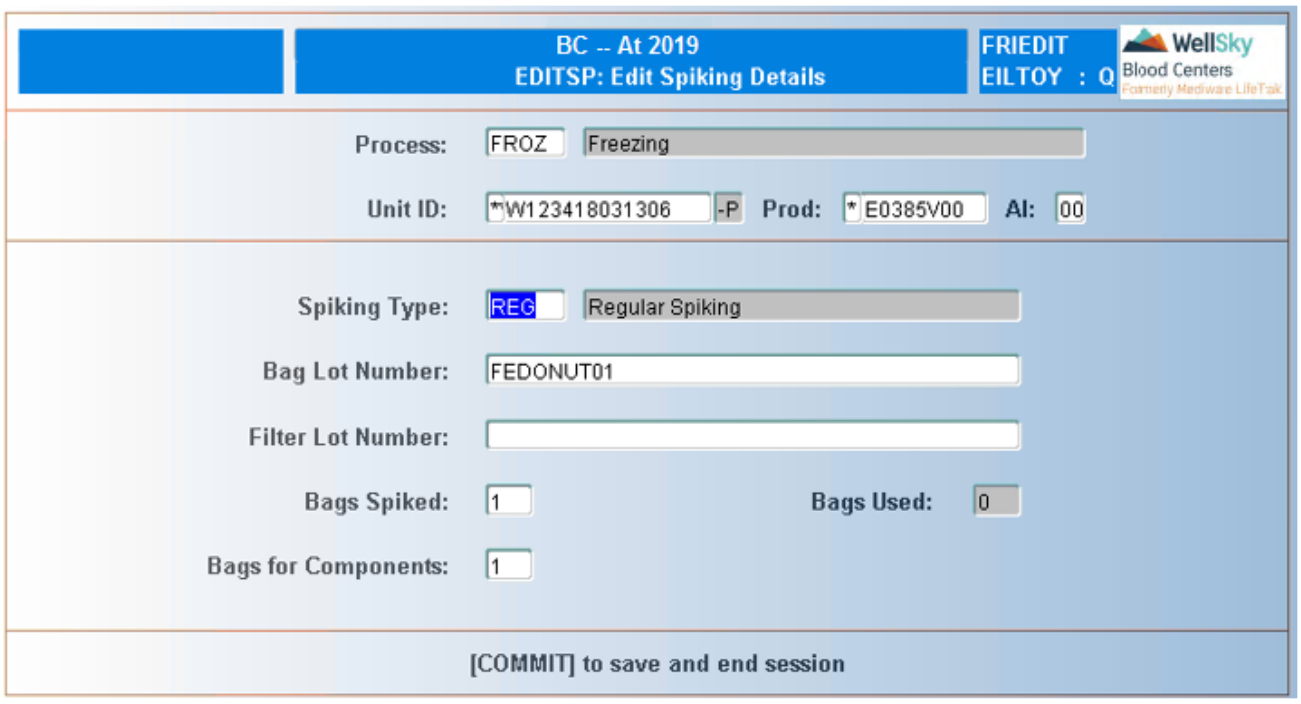



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Process

Enter process code or code from LOV. Process description automatically displays after the code is entered.

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## Al

Enter aliquot number or select from LOV. Field defaults to 1 if only 1 aliquot is present.

# Detail Block Fields and Definitions

The current system displays the current information from the spiking entry after the aliquot is entered.

## Spiking Type

Enter spiking type code or select from LOV. Press **ENTER** to accept the current value.

## Bag Lot No.

Enter bag lot number or select from LOV. Press **ENTER** to accept the current value.

> **NOTE –** Lot numbers need to be defined with CMC flag linked to FRIEDIT.

## Filter Lot No.

Enter filter number, or select lot from LOV. Press **ENTER** to accept the current value.

> **NOTE –** Lot numbers need to be defined with CMC flag of I (used for FI- filters).

## Bags Spiked

Enter number of bags spiked. Press **ENTER** to accept the current value.

## Bags Used

Number of bags used automatically displays. Field is not navigable.

## Bags for Components

Enter number bags for components. Press **ENTER** to accept the current value.

> **NOTE –** Bags spiked cannot be less than bags used.

Press F12 (Commit) after necessary changes have been made.

### At Commit

Data entered on the screen is committed to the database.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

## 19.8.9 Release from Special Processing (RSP)

### Intended Use

Use the Release from Special Processing screen to cancel a prior verification of a component for a process. If a component was verified for the wrong process using the Verify Component Suitability; this screen must be used before verifying it for the correct process.

### Limitations

None

### Prerequisites

- Component must have been verified using the Verify Component Suitability (SUIT) or Verify Component Suitability – Offline (SUITO).
- Reagents must not have been defined.

### Accessing the Screen

Access this screen from the Special Component Processing menu or by entering the keyword `RSP`.


WellSky Corporation
Proprietary and confidential

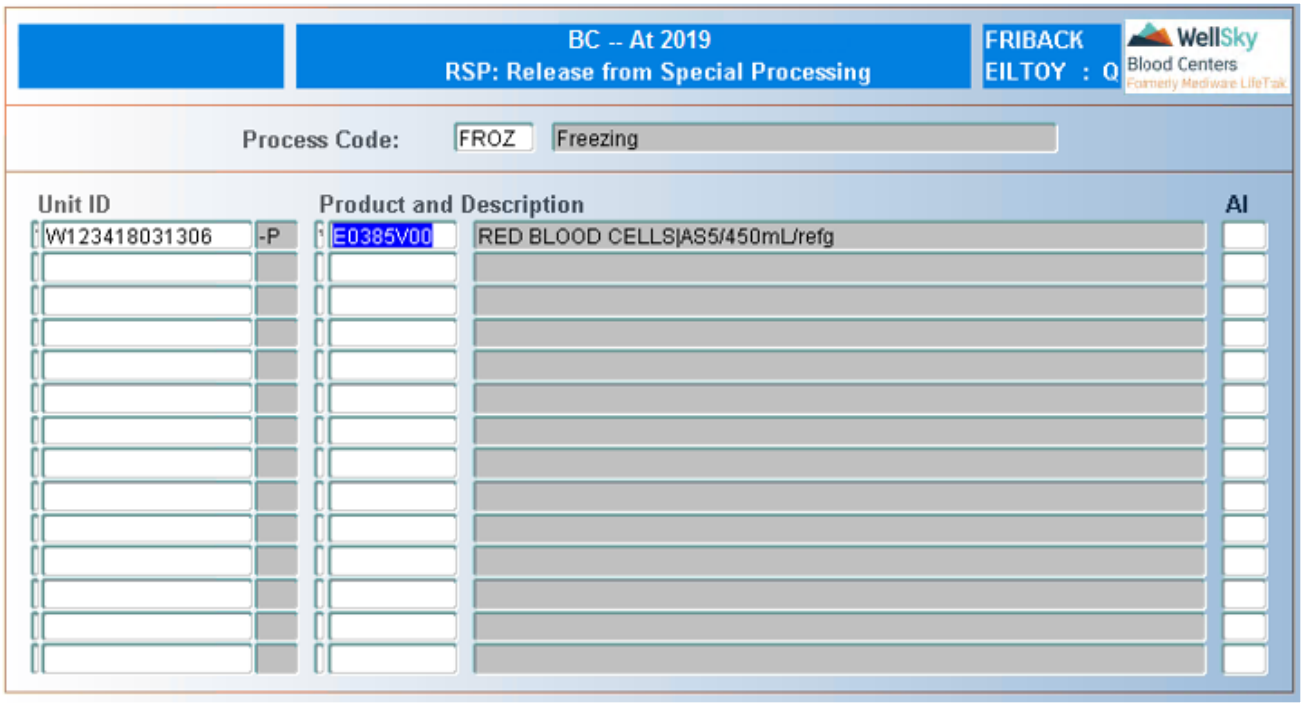


## Control Block Fields and Definitions

### Process Code

Enter process code or select from LOV.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product and Description

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

### AI

Enter aliquot number or select from LOV.

Screen does a line-by-line commit.

## At Commit

The components entered are canceled from the special process.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.8.10 Verify Component Suitability – Offline (SUITO)

## Intended Use

The Verify Component Suitability - Offline screen is used when the system is not operational/available when the special processing occurred. Upon completion of verification, a transaction for the component is opened in the special processing table.

If an interdiction is present, you are warned and allowed to override and continue since the process has already physically been performed.

## Limitations

None

## Prerequisites

- Component must have been made from the unit.
- Component must be in Lab.
- Component must be located in your current log-in warehouse in order to perform this function.
- Unit/component must not be in-transit in order to perform this function.

## Accessing the Screen

Access this screen from the Special Component Processing menu or by the keyword `SUITO`.

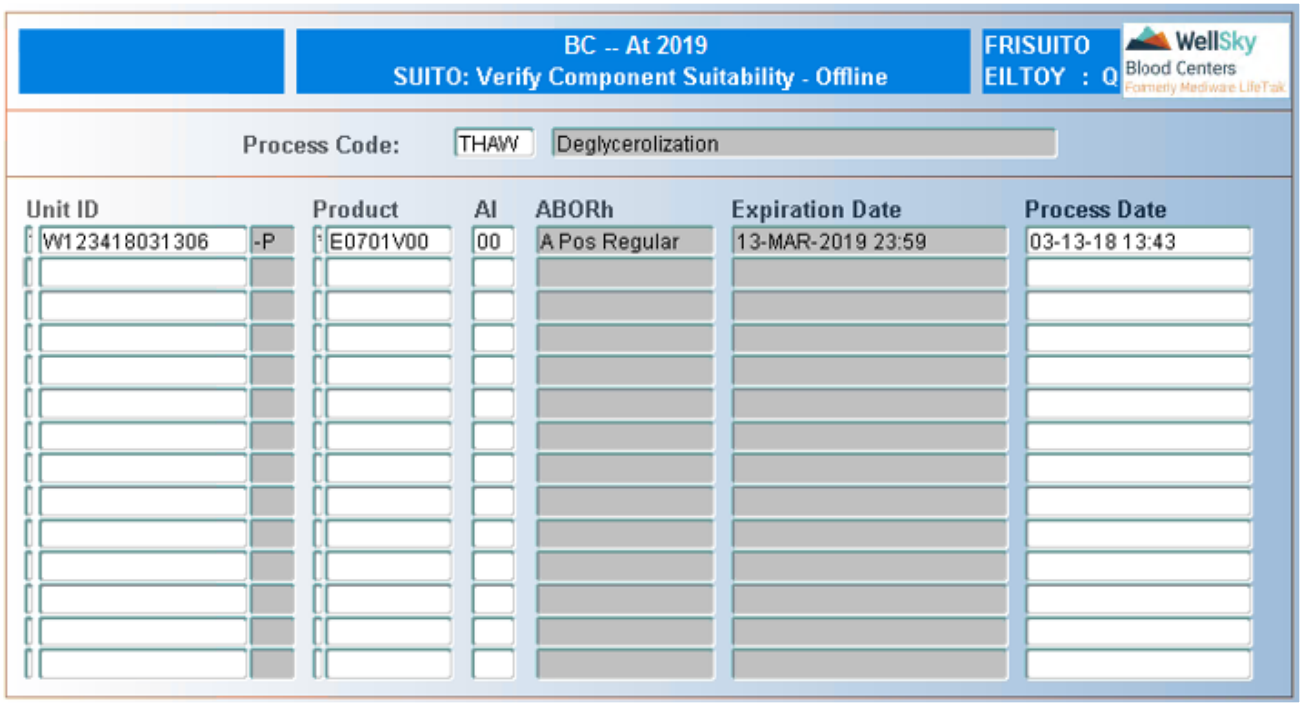



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Process Code

Enter process code or select from LOV. Process description automatically displays after the code is entered.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## Al

Enter aliquot number or select from LOV.

**NOTE –** If unit and/or component interdictions are present, the following window opens after the aliquot is entered:

Press `Y` to continue the process or press `N` to stop.

## ABORh

ABO/Rh automatically displays after the product code is entered. Field is not navigable.

## Expiration Date

Expiration date and time automatically displays after the product code is entered. Field is not navigable.

## Process Date

Enter process date and time in MM-DD-YY HH24:MI format. Press CTRL + F6 (Duplicate Field) to copy the date/time entered on the previous line.

Screen does a line-by-line commit.

# At Commit

The attribute associated to the process code is placed on the product with the process date and time entered.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Special Component Processing Functions menu.

# 19.9 Component Maintenance Functions

Component Maintenance Functions are accessed from the following menu:

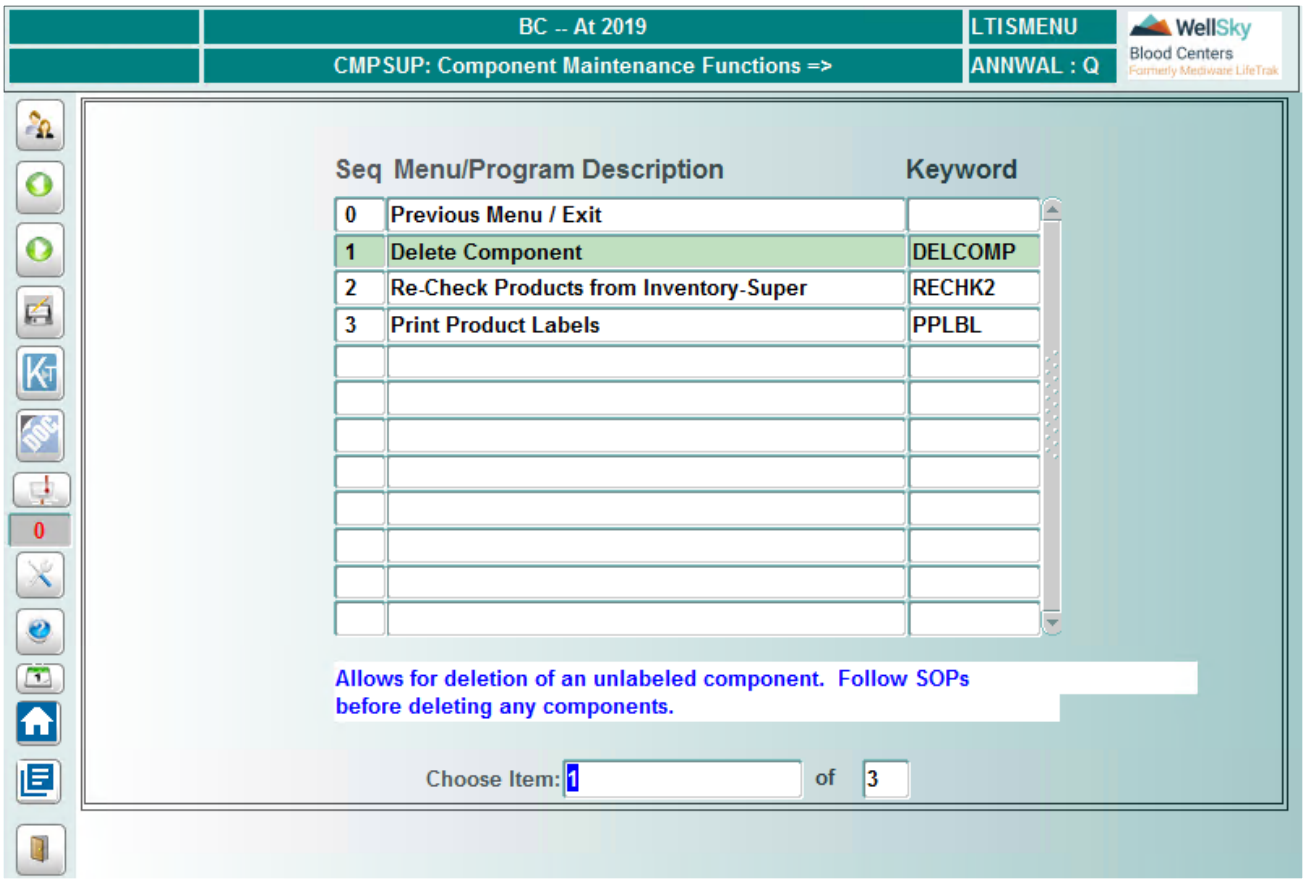


## 19.9.1 Delete Component (DELCOMP)

### Intended Use

Use the Delete Component screen to delete a component from the database that was added to the system in error (that is, a component that was not actually made).

The following components can be deleted:

- Labeled or unlabeled components associated with your warehouse.
- Components that have only been checked out and checked in, and are associated with your warehouse.

The following components cannot be deleted:

- Labeled or unlabeled components that are not associated with your warehouse.
- Components that have been shipped (not in custody of Lab or Distribution).


WellSky Corporation
Proprietary and confidential

- Components that have been packed.
- Components that have been shipped and returned to shipping custody.

## Limitations

- There must be at least one component that has been defined for this unit, which is in the custody of Lab.
- Units or products that are not available in the current warehouse cannot be deleted.
- Units or products that are in transit (that is, checked out from a warehouse and not checked back in to any other warehouse) cannot be deleted.

## Prerequisites

Product must be defined.

## Accessing the Screen

Access this screen from the Component Maintenance Functions menu or by entering the keyword `DELCOMP`.

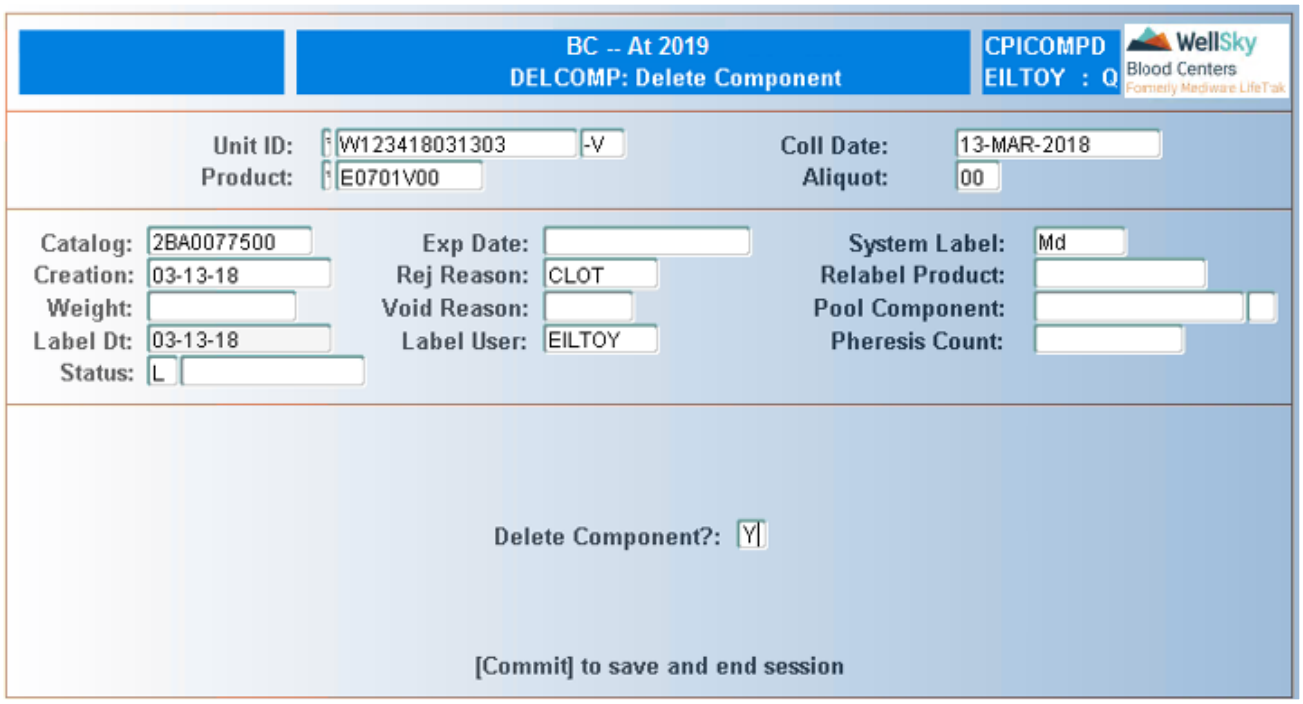


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date

Unit collection date automatically displays. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

The system does not allow products to be deleted under certain conditions. For ISBT, if the product cannot be deleted, you will receive one of the following messages, depending on the type of deletion attempted:

- Product is not in your warehouse. Deletion not permitted
- Deletion not allowed. Product has been shipped
- Product returned but deletion not allowed from Distribution status (unit checked back into Lab)
- Deletion not allowed. Product has been packed
- Deletion not allowed. Product has been shipped and returned

You must enter a different product code or unit ID to continue.

Once an acceptable product is entered, you will receive one of the following messages, depending on the type of deletion:

- Product has been labeled
- Product has not been labeled

Click OK to dismiss the message. The cursor moves to the *Delete Component?* field.

## Aliquot

Enter aliquot number or select from LOV.

**NOTE –** Field defaults to 1. Field is not navigable for ISBT products.

The system does not allow products to be deleted under certain conditions. For Codabar, if the product cannot be deleted, you will receive one of the following messages, depending on the type of deletion attempted:

- Product is not in your warehouse. Deletion not permitted
- Deletion not allowed. Product has been shipped
- Product returned but deletion not allowed from Distribution status (unit checked back into Lab)
- Deletion not allowed. Product has been packed
- Deletion not allowed. Product has been shipped and returned

Click OK to dismiss the message. You must enter a different product code or unit ID to continue.

Once an acceptable product is entered, you will receive one of the following messages, depending on the type of deletion:

- Product has been labeled
- Product has not been labeled

Click OK to dismiss the message. The cursor moves to the *Delete Component?* field.


WellSky Corporation
Proprietary and confidential

## In the Detail Block

The following information displays in the detail block after the aliquot is entered:

- Catalog - Container number/catalog number.
- Creation – Component creation.
- Weight – Product weight.
- Label - Label.
- Status – 'L' if product in Lab; 'S' if product in Distribution.
- Exp Date – Component expiration date.
- Rej Reason – Component reject reason.
- Void Reason - Reason the component was voided.
- Labeled Date - Date and time the component was labeled.
- System Label - ABO/Rh label.
- Relabel Product - If the component stemmed from a relabeled component.
- Pool Component - Pool component product code.
- Pheresis Count – Pheresis cell count.

## To Delete a Component

### Delete Component?

Enter `Y` if the component is to be deleted. Enter `N` if the component is not to be deleted.

If you enter Y, you will receive one of the following messages, depending on the type of deletion:

- Product has been labeled
- Product has not been labeled

The Comments window opens:

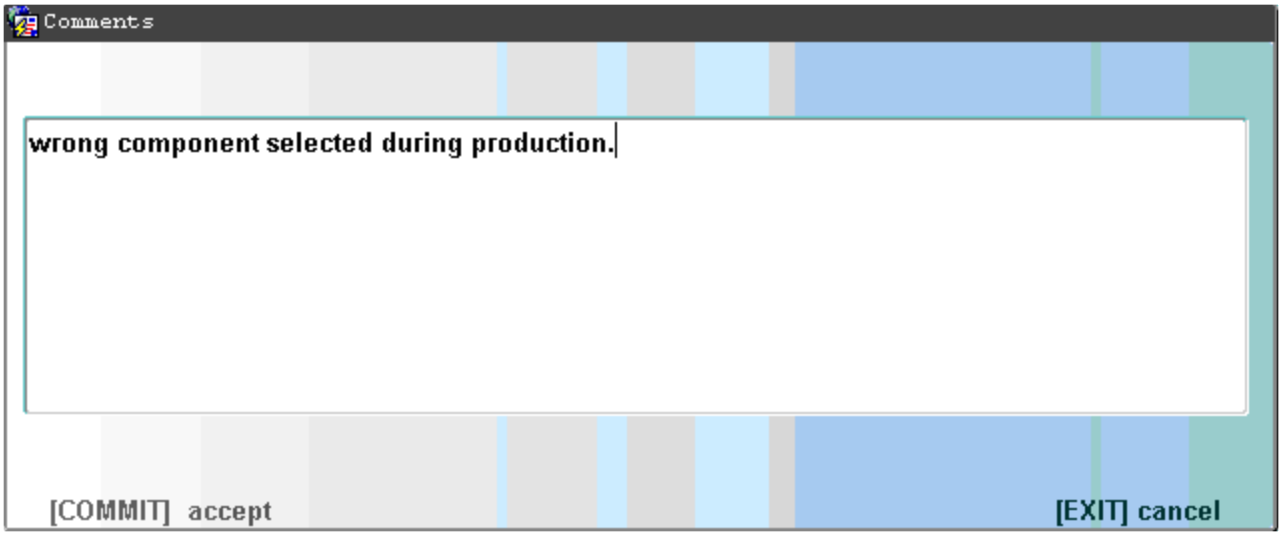


Enter comment for the deletion. A maximum of 240 characters is allowed.

Press F12 (Commit) after comments have been entered to return to the main screen.

Press F12 (Commit) to save the deletion.

### At Commit

Component is deleted from the system.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Component Maintenance Functions menu.

## 19.9.2 Re-check Product from Inventory-Super (RECHK2)

Refer to Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2).

## 19.9.3 Print Product Labels (PPLBL)

### Intended Use

Use the Print Product Labels screen to print a product label to a designated printer.

### Limitations

- Will only print the product code portion of the label (lower left quadrant).
- Will print as it is setup in the Hematrax software.
- Will not print any additional information other than the information in Hematrax.

## Prerequisites

- Product must be defined in the application in the same manner as it is defined in Hematrax.
- Label printer must be defined and installed (refer to the *WellSky® Blood Centers Installation Guide* for more details).
- Hematrax software must be installed (refer to the *WellSky® Blood Centers Installation Guide* for more details).

## Accessing the Screen

Access this screen from the Component Maintenance Functions menu or by entering the keyword `PPLBL`.

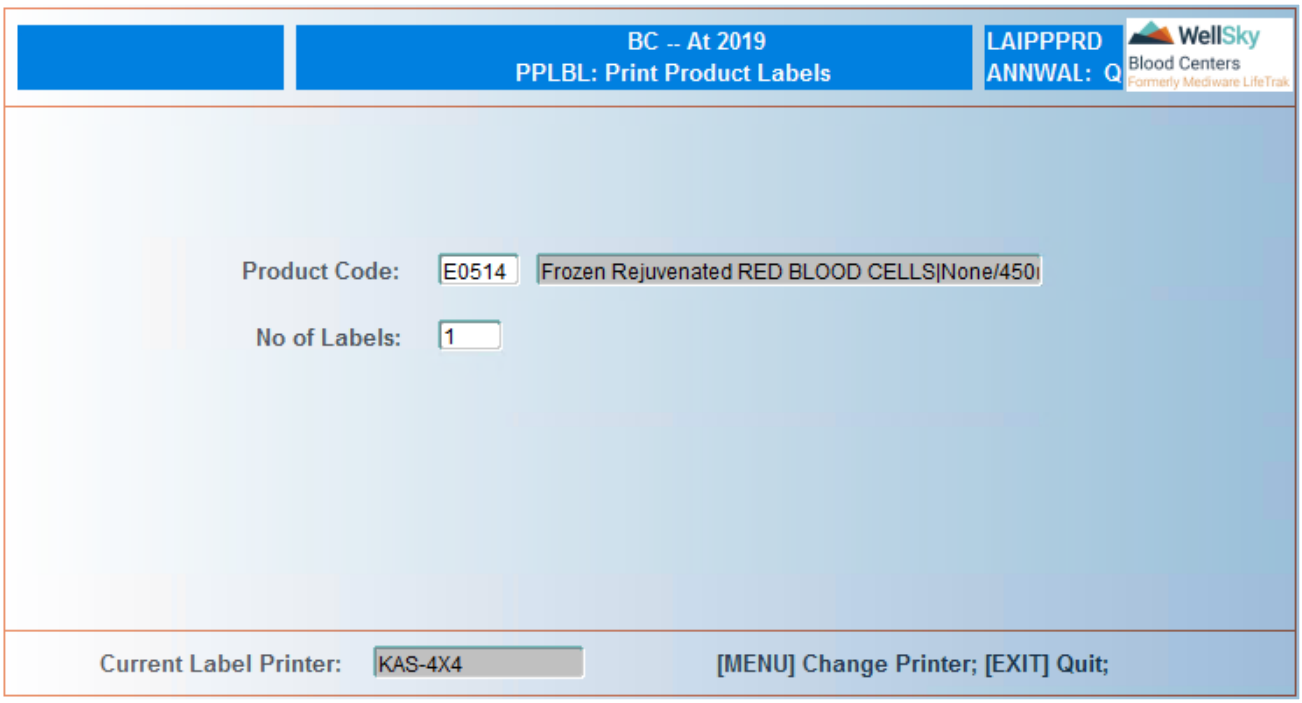


## Detail Block Fields and Definitions

### Product Code

Enter product code or select from LOV. The product code description automatically displays.

### No of Labels

Enter the number of labels to be printed. A maximum of 1,000 copies can be printed.

### Current Label Printer

The current printer name displays. If no printer is selected, or if you wish to change the printer, do the following:

1. Press **F6** (Menu). The following window opens:

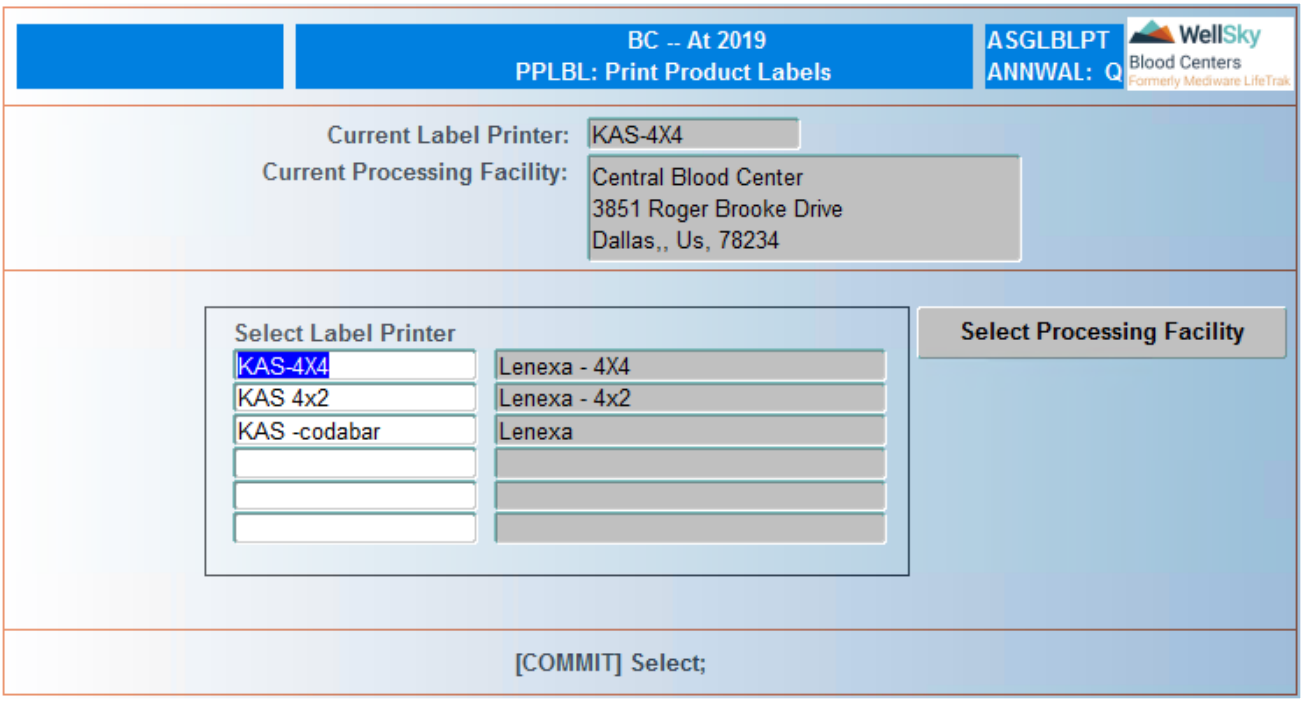


2. Use the **UP** and **DOWN** arrow to select the desired printer.
3. Press **F12** (Commit).

## To Print Labels

Press **ENTER**. The following window opens:

Enter `Y` to print the label. Enter `N` to cancel the printing.

## At Commit

The selected product labels are printed.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Component Pooling menu.

# 19.10 Component Queries

Component Queries are accessed from the following menu:

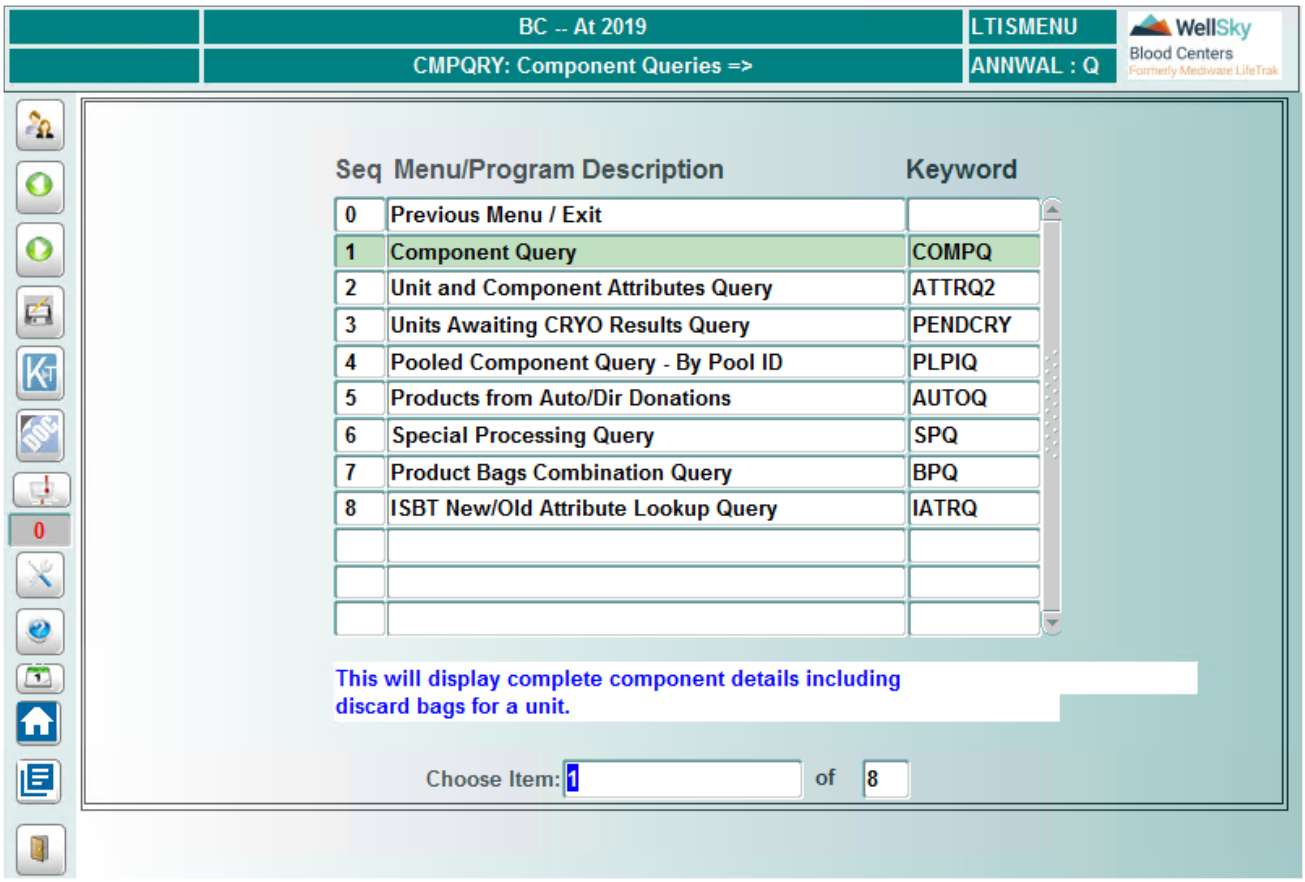


## 19.10.1 Component Query (COMPQ)

### Intended Use

Use Component Query screen to review information on all components that have been produced from a unit and entered into the system. All component information is displayed, including labeling, expiration dates, and pool ID.

### Limitations

Volume displays only if the weight is entered and specific gravity is defined for the product code.

### Prerequisites

None

### Accessing the Screen

Access this screen from the Component Query menu or by entering the keyword COMPQ.

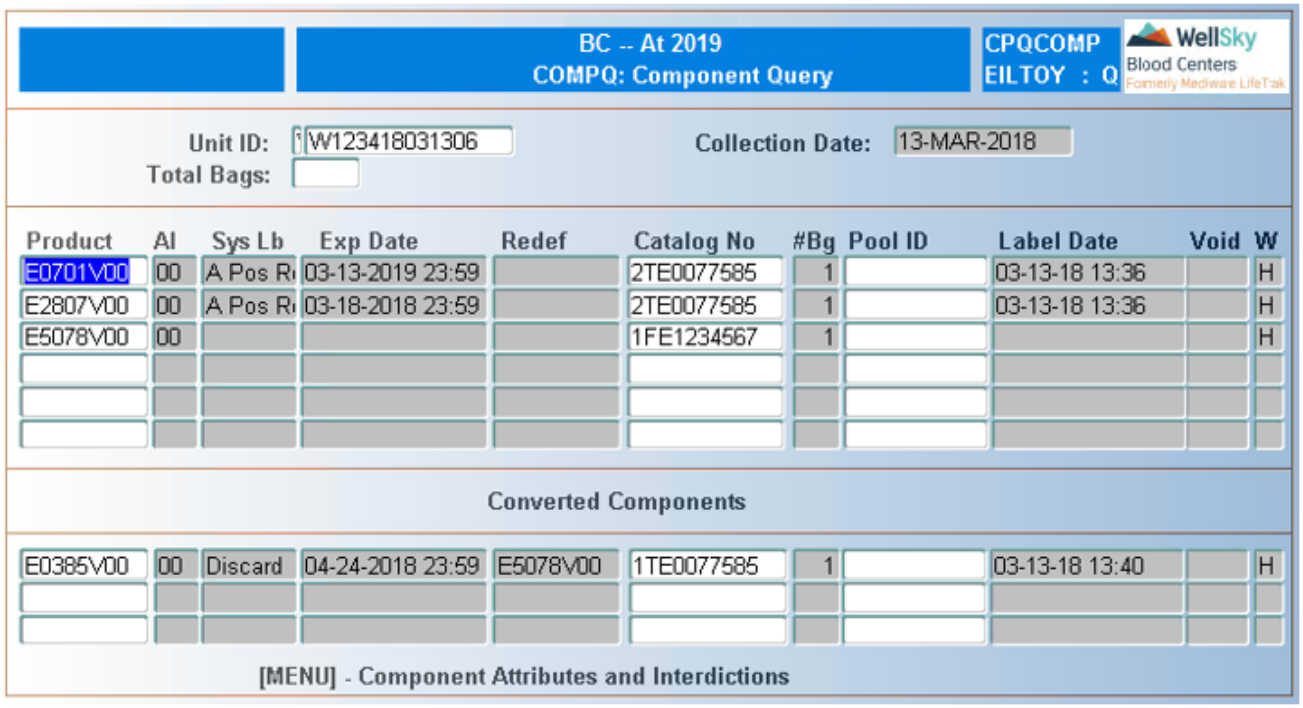


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Collection Date

Unit collection date automatically displays after the unit ID is entered.  Field is not navigable.

## Total Bags

Total bags made from this unit  Field is not navigable.

# In the Detail Block

The following information automatically displays after the unit ID is entered:

- Product - Product type produced from this unit.
- AI - Aliquot number produced for the component.
- Sys Lb - System label decision for the component.
- Exp Date - Expiration date of the component.
- Redef - The product code of the newly defined component.
- Catalog No- Displays container/catalog number.
- #Bg - Number of bags associated with the component.


WellSky Corporation
Proprietary and confidential

- Pool ID - Pool in which component was added.
- Label Date - Date component was labeled.
- Void - Reason code if the component has been voided.
- W - Lab warehouse location.
- Weight – Product weight (g).
- Volume – Product volume (mL) - displays if weight is present and specific gravity defined for product code.
- Count – Product cell count.
- St – Component custody (L – Lab or S – Distribution).
- RejCd – Reject reason.
- Out Sys Dats – Date and time component was interfaced with Distribution.
- Prep Date – Date and time component was prepared.
- Label User – User labeling product.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Use **ENTER** or [Tab] to scroll across the fields.

## In the Converted Component Block

Press **CTRL** + **F3** (Next Block) to navigate to the Converted Components Block. The information displayed in the Detail Block also displays for the converted component.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Use **ENTER** or [Tab] to scroll across the fields.

## Viewing Component Attributes and Interdictions

Press **F6** (Menu) to view component attributes and interdictions. The following window opens:

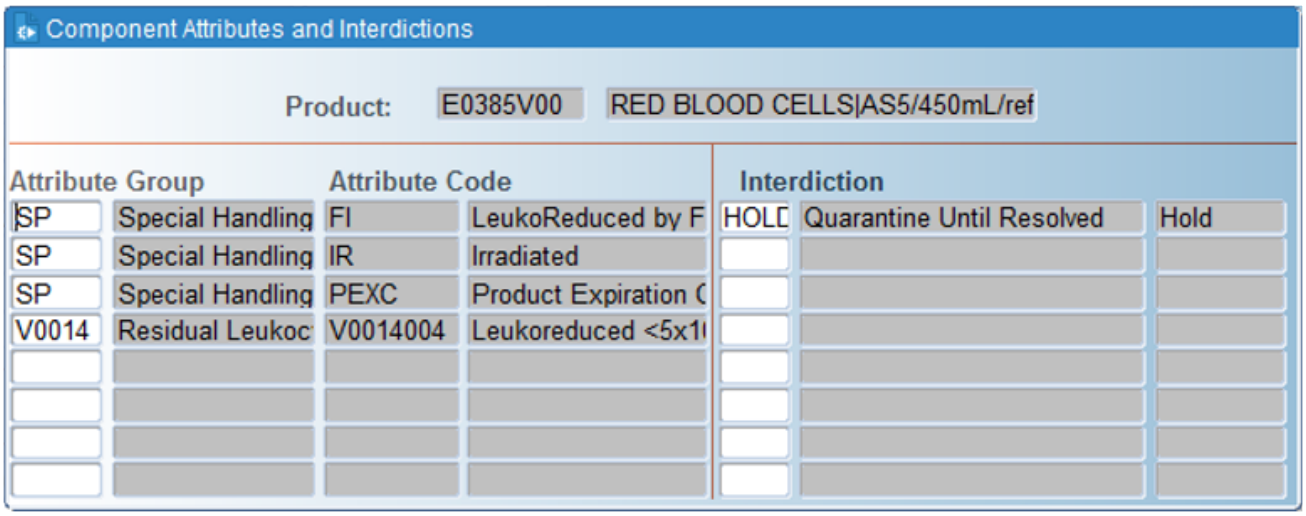

The following unit attribute and interdiction information displays:

- Attribute Group/Description
- Attribute Code/Description
- Interdiction Code/Description
- Interdiction Type

**NOTE –** Only active attributes and interdictions display.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

### At Commit

No updates are made to the system from this screen.

### What To Do Next

For normal processing, press F8 (Exit Screen) to return to Component Queries menu.

## 19.10.2 Unit and Component Attributes Query (ATTRQ2)

Refer to Unit and Component Attribute Query (ATTRQ or ATTRQ2).

## 19.10.3 Units Awaiting CRYO Results Query (PENDCRY)

### Intended Use

Use the Units Awaiting CRYO Results Query screen to view data on all units in a batch that have not completed CRYO processing. The data is accessed by batch ID.

### Limitations

None

### Prerequisites

To access this screen, a batch must have already been processed through Scan Units for CRYO Processing (CRYO1).

### Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword `PENDCRY`.


WellSky Corporation
Proprietary and confidential

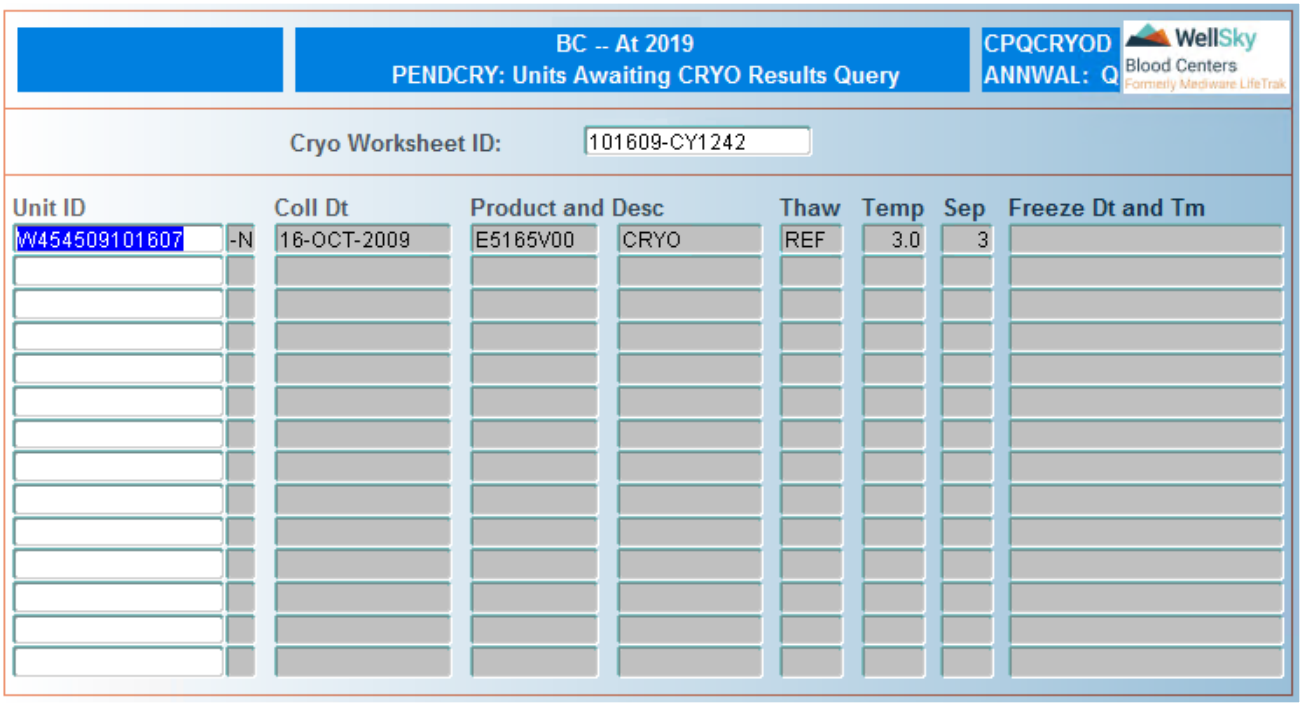


# Control Block Fields and Definitions

## Batch ID

Enter Cryo Worksheet ID or select from LOV.

# In the Detail Block

The following automatically displays after the worksheet ID is entered:

- Unit ID - Pending unit ID.
- Coll Dt – Unit collection date.
- Product and Desc - Component produced from the unit.
- Thaw - Method used to thaw plasma.
- Temp - Temperature at which the plasma was thawed.
- Sep - Centrifuge ID used for separation.
- Freeze Dt and Tm - Date the component was frozen.

Use the **UP** and **DOWN** arrow keys to scroll through the list of pending units.

# At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to Component Queries menu.

# 19.10.4 Pooled Component Query- by Pool ID (PLPIQ)

## Intended Use

Use the Pooled Component Query-by Pool ID screen to view data pooled products, using the pool ID to access information. The pool ID is created during labeling.

## Limitations

None

## Prerequisites

Pool must have been created.

## Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword `PLPIQ`.

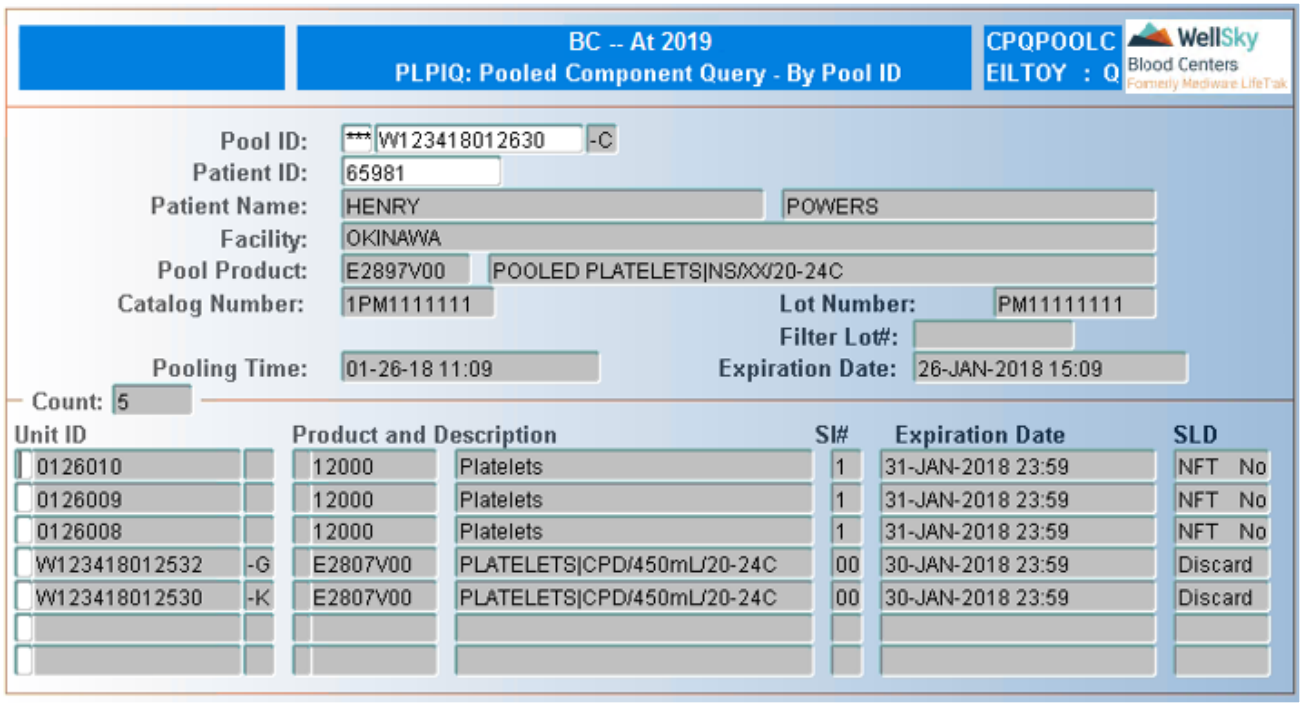


## Fields and Definitions

### Pool ID

Scan, manually enter, or select pool ID from LOV.

The following information displays after the pool ID is entered:

- Patient ID - ID of patient receiving pooled products.
- Patient Name - Patient receiving pooled products.
- Facility - Facility requesting pooled products.
- Pool Product – Pool product code.
- Catalog Number - Container and catalog number.
- Lot Number - Lot number of the bag ID.
- Filter Lot # - Lot number of filter used during pooling.
- Pooling Time - Actual time pooling begins.
- Expiration Date - Date a pooled product expires.

One line of information about each product in the pool displays:

- Unit ID - Unit ID.
- Product and Description - Product code in the pool.
- Sl#- Sequence of number of product.
- Expiration Date - Expiration Date.
- SLD - System Label Decision.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to Component Queries menu.

# 19.10.5 Products from Autologous/Directed Donations (AUTOQ)

## Intended Use

Use the Products from Auto/Directed Donations screen to view complete information that has been entered for a particular unit, including products defined, patient information, hospital assignment, surgery date, when unit is needed.

## Limitations

None

## Prerequisites

Unit should be linked in special donations in Donor.

# Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword AUTOQ.

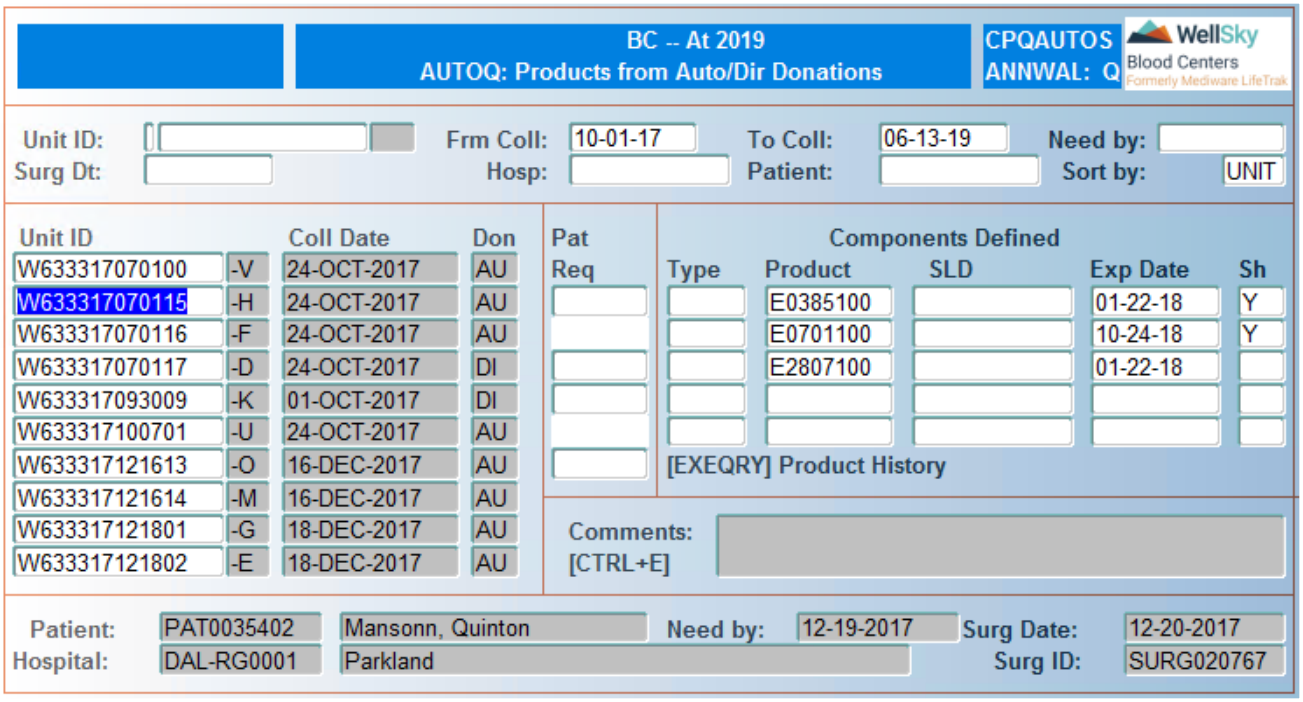


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID. Leave field blank to query by other criteria.

> **NOTE –** If the unit ID is entered, the query automatically runs. All other fields in the Control Block will not be navigable.

## Frm Coll

Enter from date in MM-DD-YY format. Leave field blank to query by other criteria.

## To Coll

Enter to date in MM-DD-YY format. Leave field blank to query by other criteria.

> **NOTE –** Entry in this field is required if the Frm Coll date is entered.

## Need by

Enter product need by date in MM-DD-YY format. Leave field blank to query by other criteria.


WellSky Corporation
Proprietary and confidential

### Surg Dt
Enter surgery date in MM-DD-YY format. Leave field blank to query by other criteria.

### Hosp
Enter hospital ID or select from LOV. Leave field blank to query by other criteria.

### Patient
Enter patient name or select from LOV. Leave field blank to query by other criteria.

### Sort By
Enter `COLL` or `UNIT`.

**NOTE –** If nothing is entered in this field, the system defaults UNIT and requires a Frm Coll date and To Coll date entry.

## In the Unit Detail Block

- Unit ID – Auto or directed unit ID.
- Coll Date – Unit collection date.
- Don - Donation, this is the type of donation - Autologous or directed.

## In the Components Defined Detail Block

- Pat Req - Type of product required for a patient. This is entered in Donor when registering special donation request.
- Type - Product type.
- Product - Product Code.
- SLD – Product system label decision.
- Exp Date – Product expiration date.
- Sh – Displays Y is product has been shipped. Field is blank if product has not been shipped.

## To View Comments

Press **CTRL + e** (Edit) to view comments. The following window opens:

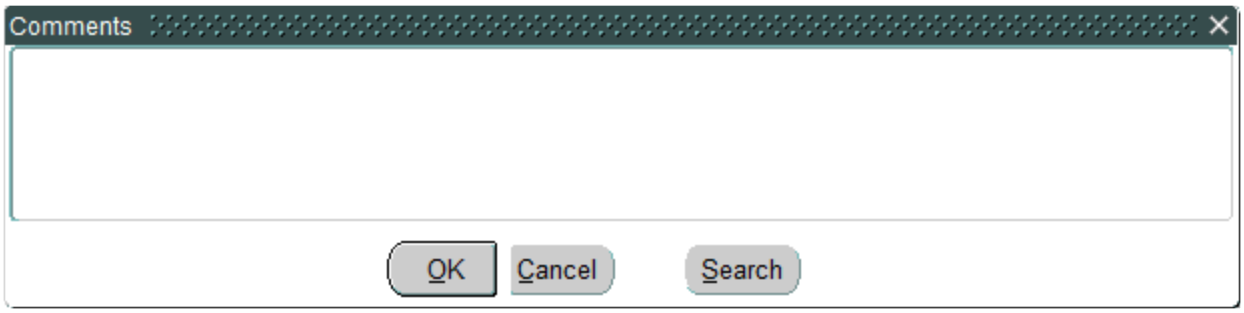


Press F8 (Exit Screen) to return to the main screen.

## In the Patient Details Block

- Patient - Patient name.
- Hospital - Hospital ID and description.
- Need By – Special donations need by date entered in Donor when the special donations requested is entered.
- Surg Date - Surgery Date.
- Surg ID – Sugerical procedure ID generated by the Donor when the special donations requested is entered.

## To View Product History

Press ALT + F12 (Execute Query) to view the product history. The following screen opens:

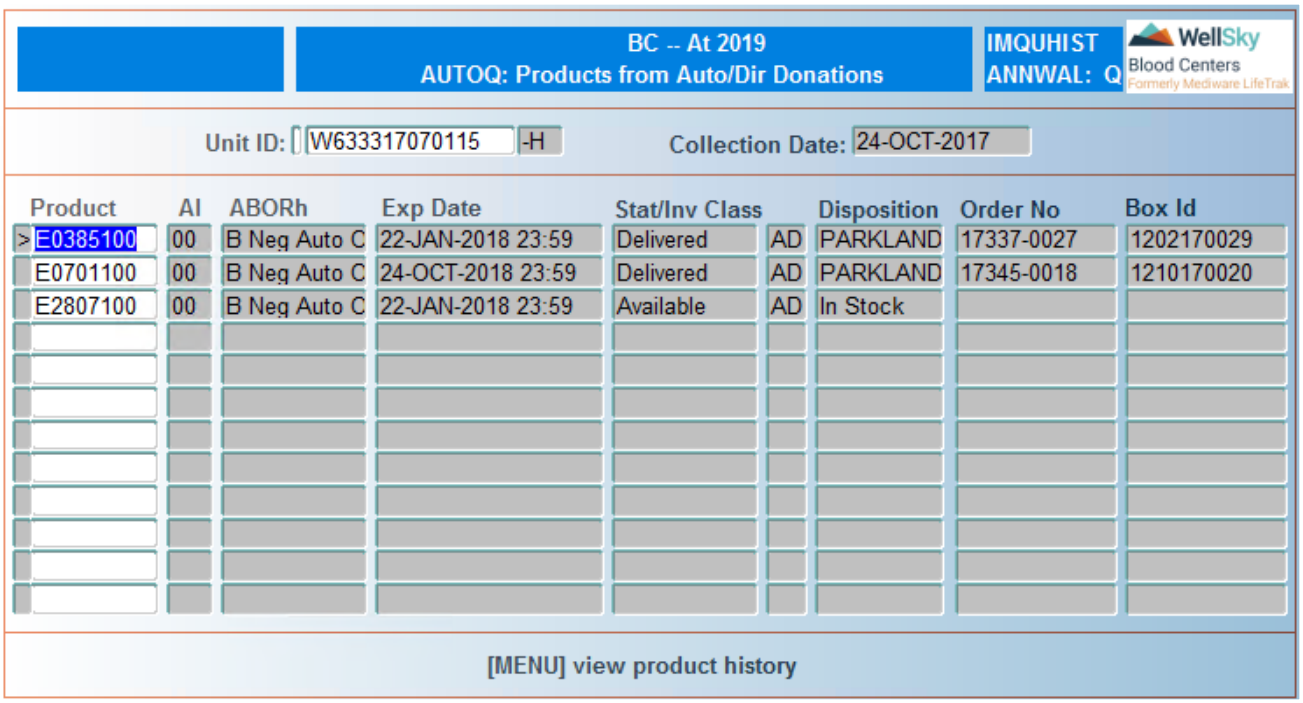


Refer to Product History Query (PHISTQ) in the Distribution section for information on this query.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

No data is committed to the database at commit.

## What to Do Next

Press F8 (Exit Screen) to return to Component Queries menu.

# 19.10.6 Special Processing Query (SPQ)

## Intended Use

Use the Special Processing Query screen to view processing information on a product, such as the following:

- Old and new product code.
- Processing performed and reagents used.
- Date and time of processing.
- Differential counts.

## Limitations

None

## Prerequisites

Special processing must have been performed on the unit.

## Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword `SPQ`.

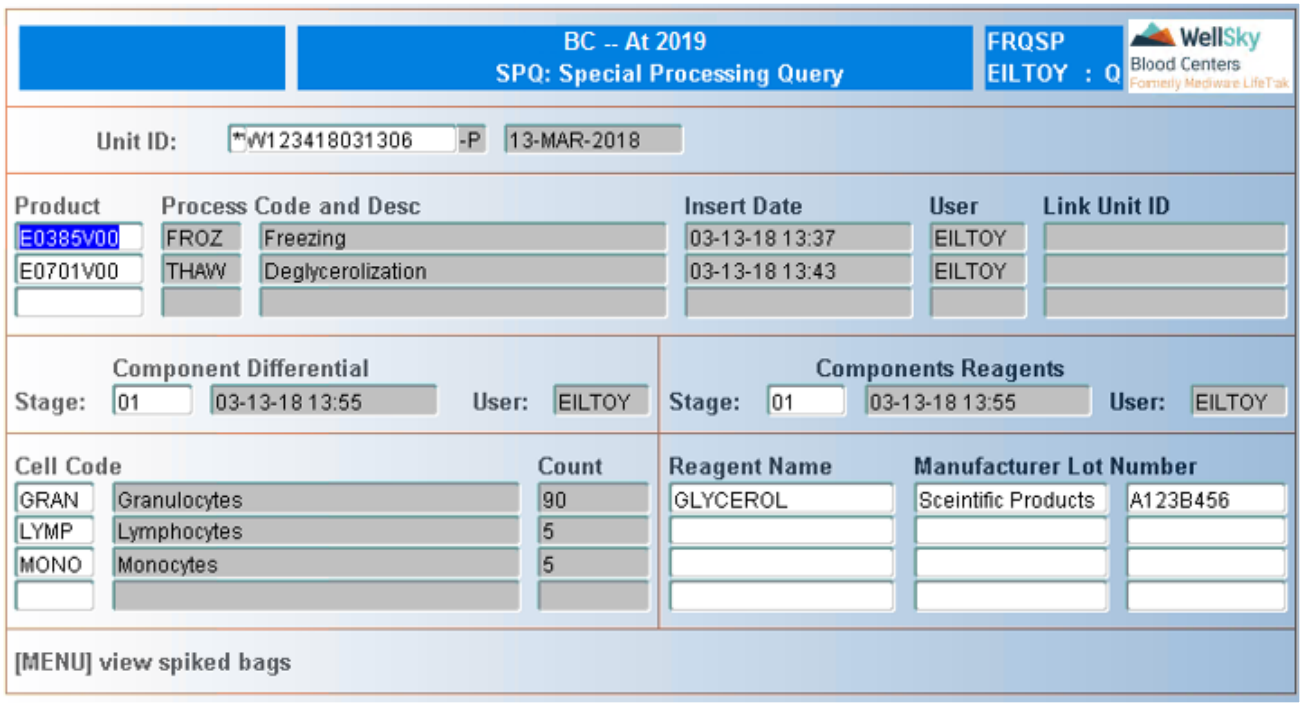


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID. Unit collection date automatically displays after the unit ID is entered.

# In the Product Detail Block

The following information displays in the Product Detail Block after the unit ID is entered:

- Product – Product code.
- Process Code and Desc – Special processing code.
- Insert Date - Transaction date and time.
- User - ID of person doing the processing.
- Link Unit ID – Sample ID that was linked to the unit, if applicable.

Use the UP and DOWN arrow keys to scroll through the list.

# In the Component Differential Detail Block

The following information displays in the Component Differential Detail Block after the unit ID is entered:

- Stage – Stage and description.
- User – User entering differential.


WellSky Corporation
Proprietary and confidential

- Cell Code – Cell code and description.
- Count – Cell count.

## In the Component Reagent Detail Block

The following information displays in the Component Reagent Detail Block after the unit ID is entered:

- Stage – Stage and time reagents were entered.
- User – User entering reagents.
- Reagent Name – Reagent name.
- Reagent Manufacturer – Reagent manufacturer.
- Lot Number - Reagent lot number.
- Exp Date – Reagent expiration date.

**NOTE –** In each of the blocks in the screen, down arrow key can be used to see more information about the product. (e.g. in the 'Stage' field, down arrow scrolls through all the stages.

## View Spiked Bags

To view spiked bags, press F6 (Menu). The following window opens:

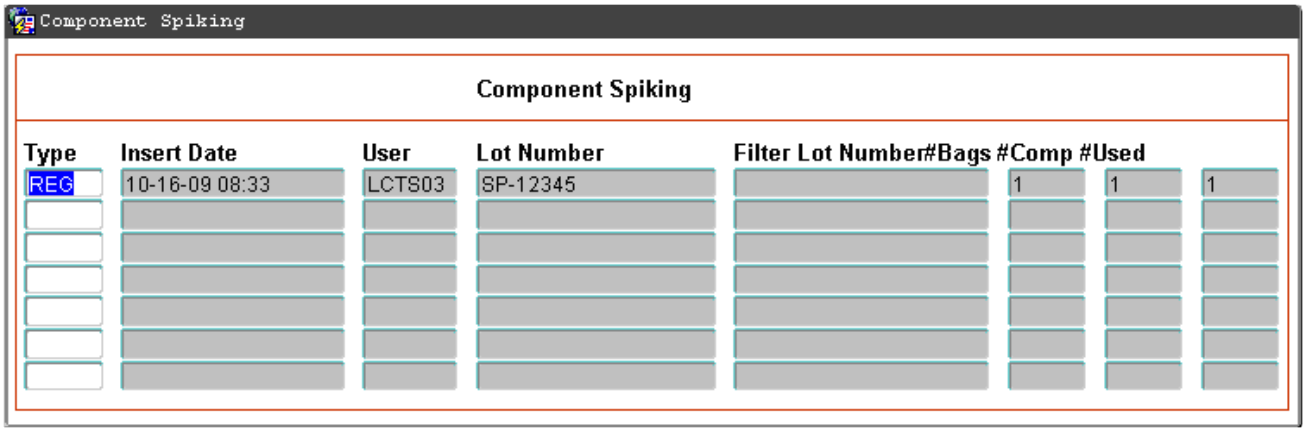


## At Commit

No updates are made to the system from this screen.

## What to Do Next

Press F8 (Exit Screen) to return to Component Queries menu.

# 19.10.7 Product Bags Combination Query (BPQ)

## Intended Use

Use the Product Bags Combination Query screen to query valid product bag combinations by number of bags, product type or both.

## Limitations

None

## Prerequisites

Combinations must have been defined in Product Combinations (PRODCOM).

## Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword BPQ.

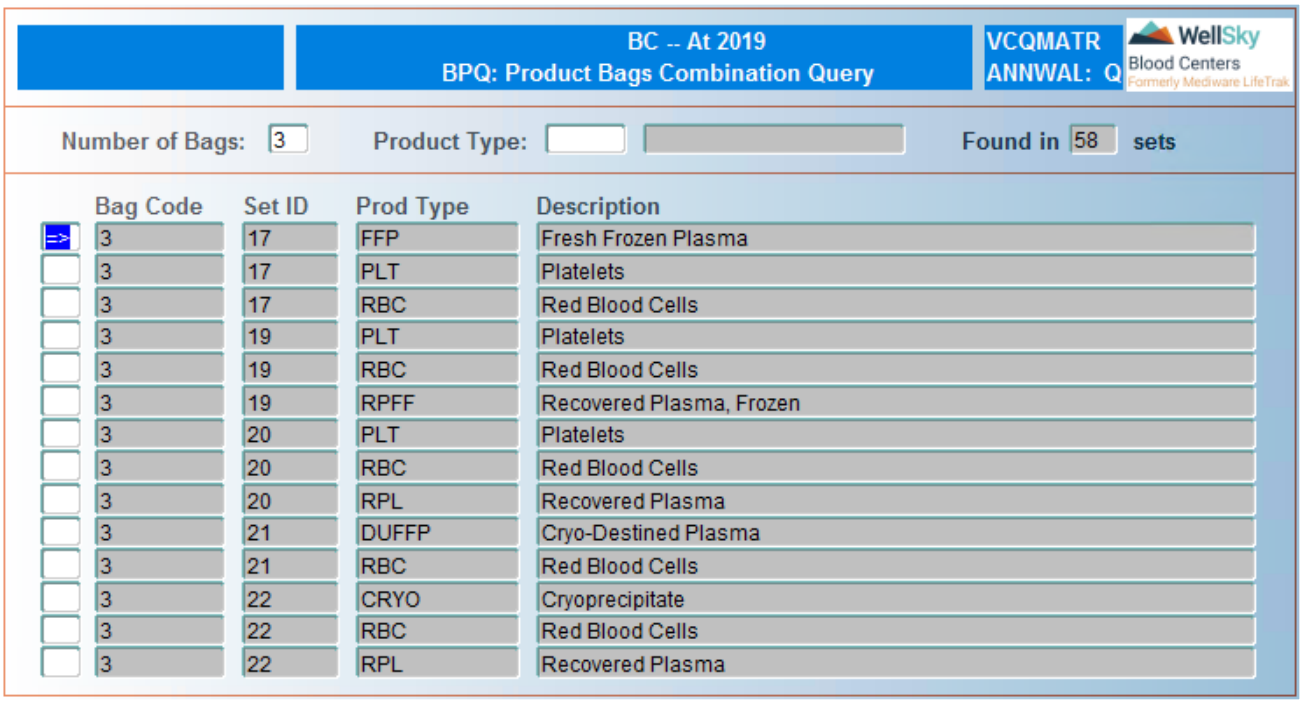


## Control Block Fields and Definitions

### Number of Bags

Enter number of bags to query. Leave field blank to query by product type.

### Product Type

Enter product type to query or select from LOV. Leave field blank to query by number of bags.


WellSky Corporation
Proprietary and confidential

### Found in [Blank] Sets

Number of sets in database which contain the specified number of bags and/or product type automatically displays. Field is not navigable.

## Detail Block Fields and Definitions

The following information displays after the Control Block is populated:

- Bag Code - Bag code of bags which match specified number of bags and/or product type.
- Set ID – System assigned set number.
- Prod Type - Code of retrieved product type.
- Description - Description of product type.

Use the **UP** and **DOWN** arrow keys to scroll through the retrieved list.

## At Commit

No updates are made to the system at **F12** (Commit).

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to Component Queries menu.

# 19.10.8 ISBT New/Old Attribute Lookup Query

## Intended Use

Use this screen to view old and new attribute codes and products for ISBT 128.

## Limitations

Only used to look at ISBT 128 attribute groups, codes, and products.

## Prerequisites

- Attribute groups and codes should be defined in the Attribute Codes (ATTRIB) table.
- Product codes should be defined in the Product Codes (PRODUCT) table.

## Accessing the Screen

Access this screen from the Component Queries menu or by entering the keyword `IATRQ`.

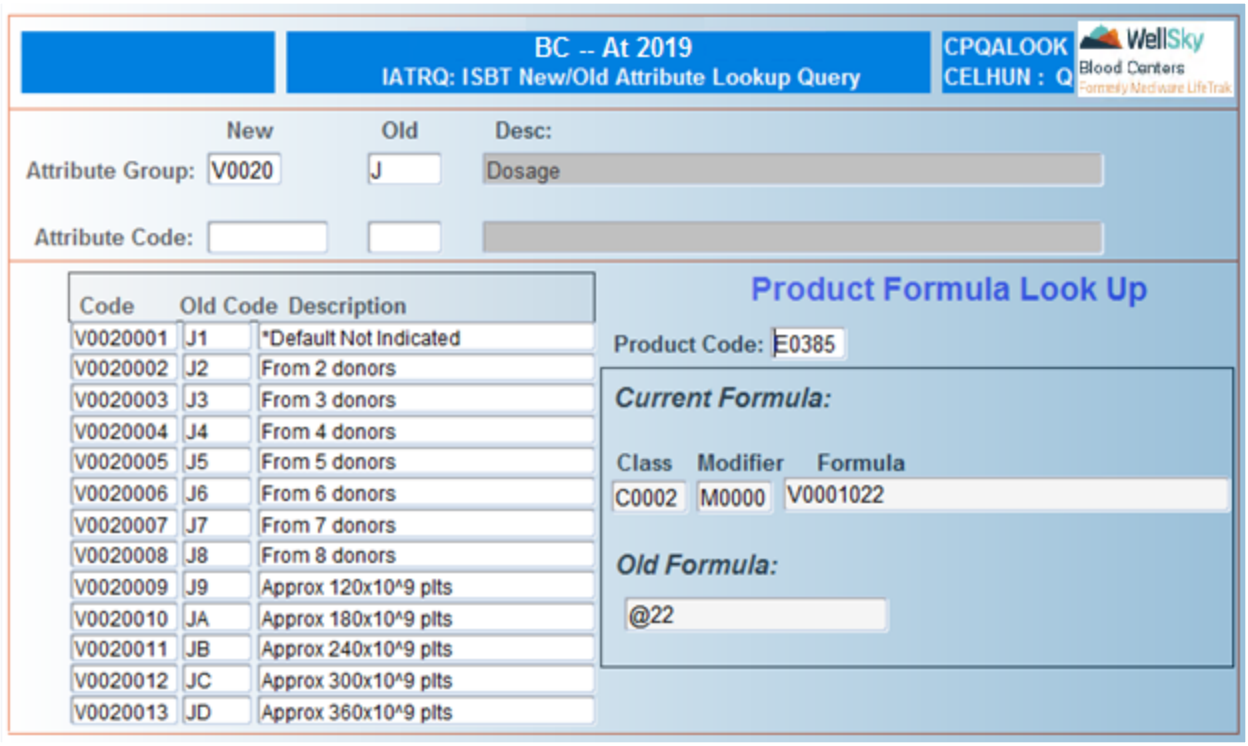


# Control Block Fields and Definitions

## Attribute Group

The attribute group can be entered by either the old ISBT 128 group code or the new ISBT 128 group code.

## Attribute Code

The attribute code can be entered by either the old ISBT 128 attribute code or the new ISBT 128 attribute code.

# In the Attribute Detail Block

The following information displays in the Product Detail Block after the unit ID is entered:

- Code - the new ISBT 128 attribute code
- Old Code - the old ISBT 128 attribute code
- Description - the description of the attribute code

# Product Formula Look Up

## Product Code

Enter the ISBT product code for lookup.

# Current Formula

The formula with the new attribute codes displays. The following information is presented:

- **Class** - the product class associated to the product code
- **Modifier** - the modifier code associated to the product code
- **Formula** - the new ISBT formula

## Old Formula

Displays the formula with the old attribute codes associated to the product code.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8 (Exit Screen)** to return to the Component Queries menu.

This Page Intentionally Left Blank

20

# Chapter 20 - Attributes and Interdictions


20.1 Introduction ..... 1282
20.1.1 Overview ..... 1282
20.1.2 Structure ..... 1282
20.2 Attributes and Interdictions ..... 1283
20.2.1 Unit and Component Attribute Query (ATTRQ or ATTRQ2) ..... 1283
20.2.2 Interdiction Query (LINTQ) ..... 1285
20.2.3 Enter Component Attributes (COMPATT) ..... 1288
20.2.4 Enter Unit Attributes (AUATTR) ..... 1290
20.2.5 Delete Component Attributes (DCATTR) ..... 1292
20.2.6 Delete Unit Attributes (DUATTR) ..... 1294
20.2.7 Enter Component Interdiction (CMPINT2) ..... 1296
20.2.8 Add Interdictions for Units Not Checked (ADDIN) ..... 1297
20.2.9 Release Component Hold (RCHOLD) ..... 1298
20.2.10 Release Component Interdiction (RCINT) ..... 1300
20.2.11 Release Component System Interdiction (RCSYSINT) ..... 1302
20.2.12 Release Unit System Interdiction (RUSYSINT) ..... 1303
20.2.13 Place Group Interdiction or Hold (EGRPINT) ..... 1305
20.2.14 Release Group Interdiction or Hold (RGRPINT) ..... 1307
20.2.15 Component Notes (CNOTE) ..... 1310
20.2.16 Unit Notes (UNOTE) ..... 1312
20.2.17 Place/Release Multiple Unit Interdiction (UNTINT2) ..... 1313

# 20.1 Introduction

## 20.1.1 Overview

The Attributes and Interdictions module in Lab is designed to provide a mechanism to identify products that have special conditions that are informational or restrictive in nature. The screens in this module provide a means of placing and/or removing attributes and/or interdictions that are placed on units and/or components.

## 20.1.2 Structure

This section describes the screens used in the following:

- Placement of interdictions.
- Removal of interdictions.
- Placement of attributes.
- Removal of attributes.
- Query of Attributes and Interdictions.
- Placement of component and unit notes.

Attribute and Interdiction reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 20.2 Attributes and Interdictions

Attributes and Interdictions functions are accessed from the following menu:

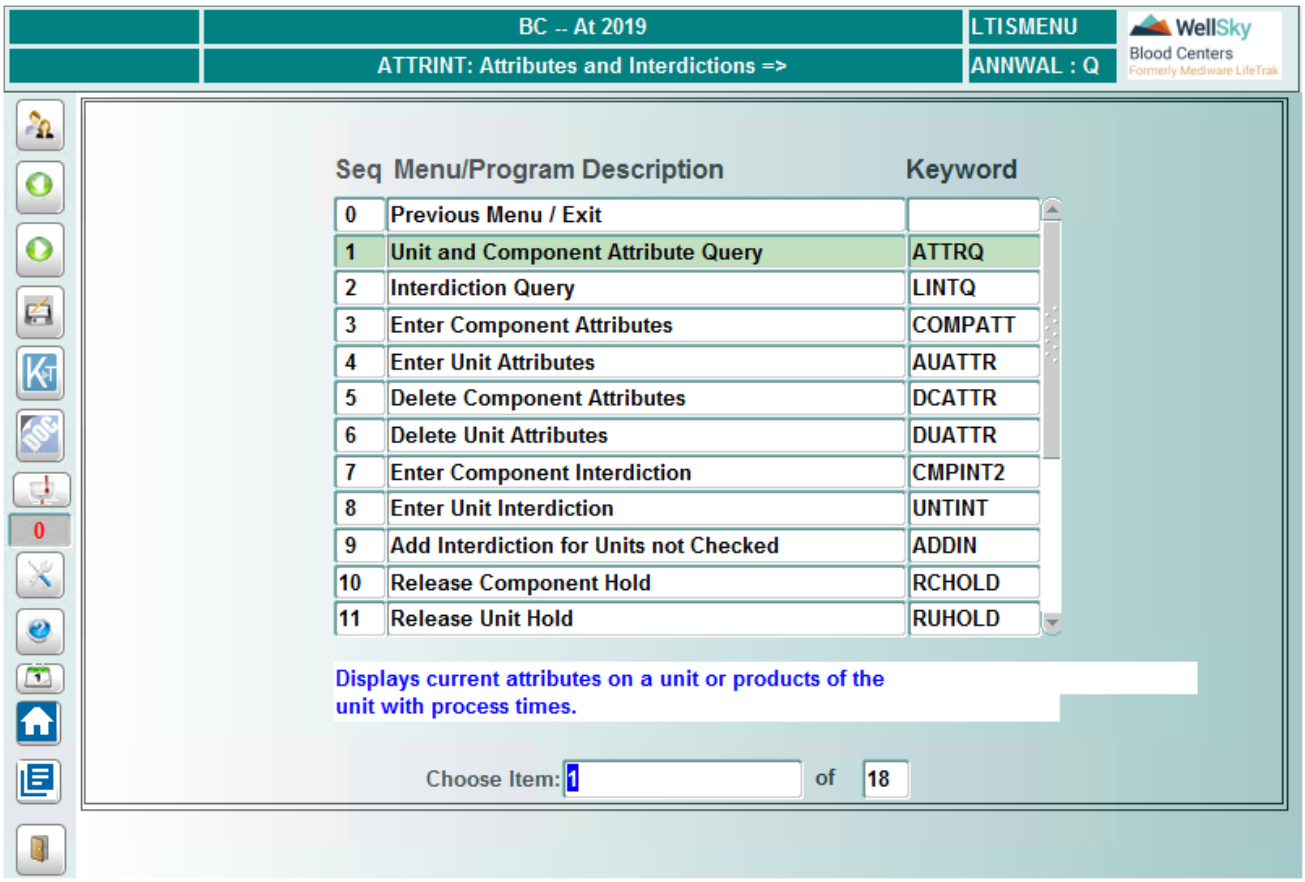


## 20.2.1 Unit and Component Attribute Query (ATTRQ or ATTRQ2)

### Intended Use

Use the Unit and Component Attribute Query screen to review information on any attributes for a unit and component, including the following:

- Unit attribute code, description, type and time.
- Component attribute.

Query can be used to view both internal and external contract samples.

### Limitations

Products with aliquots cannot be queried in this screen.

## Prerequisites

None

## Accessing the Screen

Access this screen from the General Check-In Functions or Component Queries menus, or by entering the keyword `ATTRQ` or `ATTRQ2`.

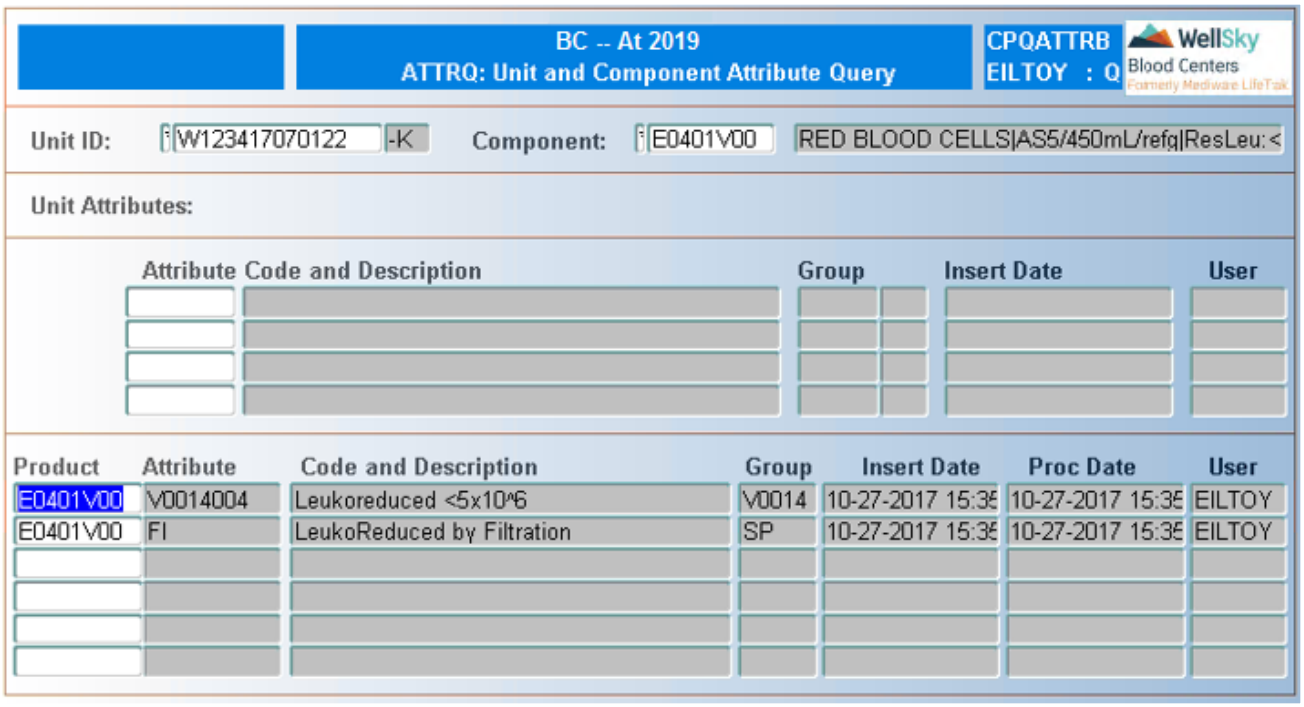


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Component ID

Scan, manually enter, or select product code from LOV. Leave field blank to view attributes present on all components.

## In the Unit Attributes Block

The following information automatically displays, if present, after the product code field is populated:

- Attribute Code and Description – Attribute code and description for attribute present on the unit.
- Group - Attribute Type.
- Insert Date - Date and time attribute was placed.
- User - User who placed attribute.


WellSky Corporation
Proprietary and confidential

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Component Attributes Block.

## In the Component Attributes Block

The following information automatically displays, if present, after the product code field is populated:

Product Code - Product code having attribute.

- Attribute Code and Description – Attribute code and description for attribute present on the product.
- Group - Interdiction Type.
- Insert Date - Date and time attribute was placed.
- Proc Date – Date and time process was performed (only present for attributes with associated life spans).
- User - User who placed attribute.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F4** (Previous Block) to return to the Unit Attributes Block.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions or Component Queries menu.

# 20.2.2 Interdiction Query (LINTQ)

## Intended Use

Use the Interdiction Query screen to review information on any interdictions and attributes for a unit and component, including the following:

- Unit interdiction code, description, type and time.
- Component interdiction.
- Unit and component attributes.

For units/components with interdictions, the attributes can also be reviewed. Query can be used to view both internal and external contract samples.

## Limitations

None

## Prerequisites

None

# Accessing the Screen

Access this screen from the General Check-In Functions menu, or by entering the keyword LINTQ.

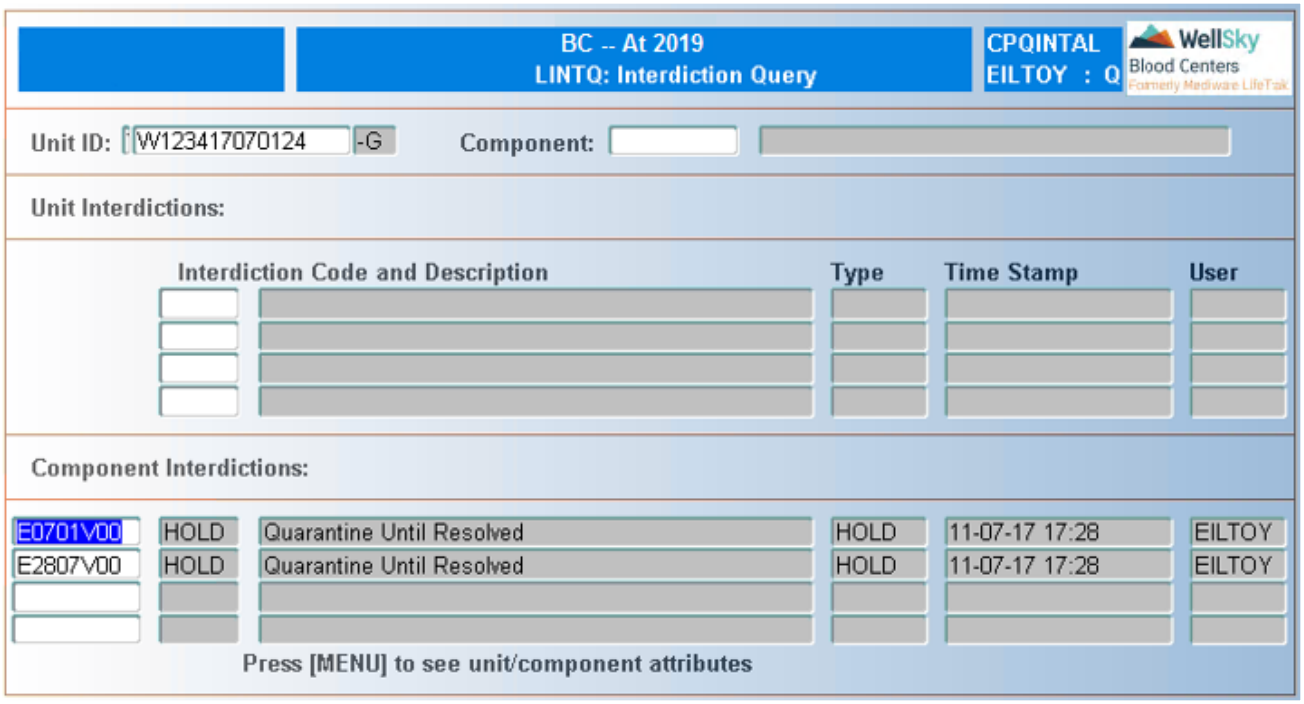


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Component ID

Scan, manually enter, or select product code from LOV. Leave field blank to view interdictions present on all components.

# In the Unit Interdictions Block

The following information automatically displays, if present, after the product code field is populated:

- Interdiction Code and Description – Interdiction code and description for interdiction present on the unit.
- Type - Interdiction Type.
- Time Stamp - Date and time interdiction was placed.
- User - User who placed interdiction.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Component Interdictions Block.


WellSky Corporation
Proprietary and confidential

## In the Component Interdictions Block

The following information automatically displays, if present, after the product code field is populated:

- Product Code - Product code having interdiction.
- Interdiction Code and Description – Interdiction code and description for interdiction present on the product.
- Type - Interdiction Type.
- Time Stamp - Date and time interdiction was placed.
- User - User who placed interdiction.

## Viewing Unit and Component Attributes

Press **F6** (Menu) to view unit and component attributes. The following window opens:

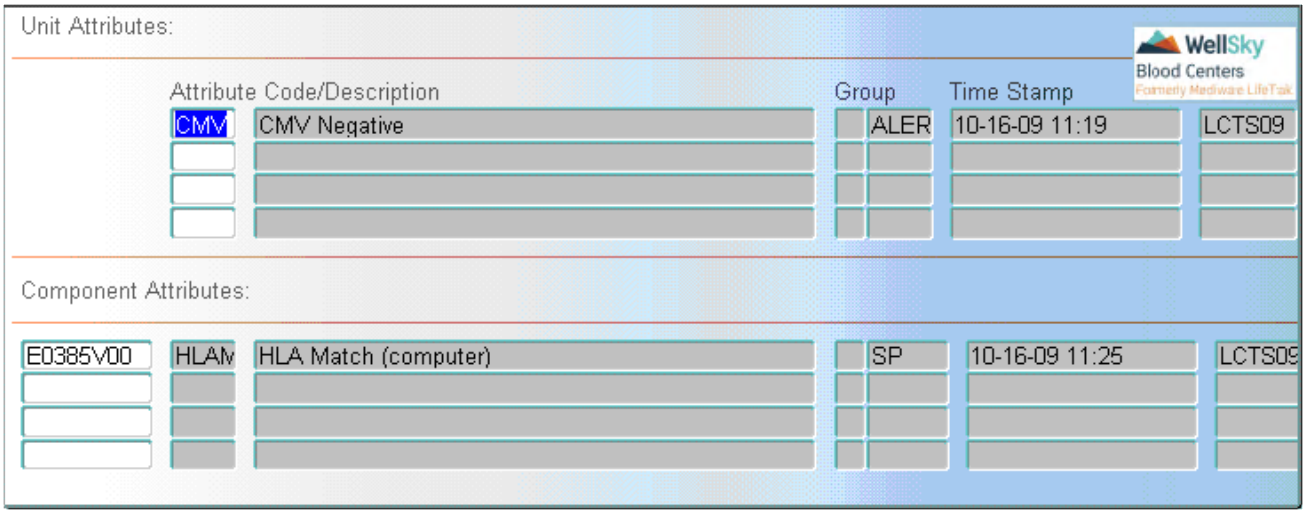


## In the Unit Attributes Block

The following automatically display after the Component is entered:

- Attribute Code/Description – Attribute code and description.
- Group – Attribute group.
- Time Stamp - Date and time attribute was placed.
- User - Login or user who placed attribute.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Component Attributes Block.

## In the Component Attributes Block

The following automatically display after the Component is entered:

- Product Code – Product code having attribute.
- Attribute Code/Description – Attribute code and description.
- Group – Attribute group.
- Time Stamp - Date and time attribute was placed.
- User - Login or user who placed attribute.

Press **F8** (Exit Screen) or **CTRL** + **F4** (Previous Block) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.3 Enter Component Attributes (COMPATT)

## Intended Use

Use the Enter Component Attributes screen to add attribute information to components already defined to the system. The screen is accessed by unit ID. The system validates the entries the only allows special handling, venipuncture or pheresis attributes to be committed.

## Limitations

- Attributes that have a life span associated to them cannot be placed on pooled components. Pooled components are defined in Product Codes (PRODUCT) with the Pool Prd Cd flag set to Y.
- Only simple attributes can be placed in this screen (Attribute group: SP).

## Prerequisites

- Use this screen after the component is defined.
- The attribute must be defined in Product Type Attributes (PRDATTR) to allow the attribute to be placed on the component.

## Accessing the Screen

Access this screen from the Attributes & Interdictions menu or by entering the keyword `COMPATT`.


WellSky Corporation
Proprietary and confidential

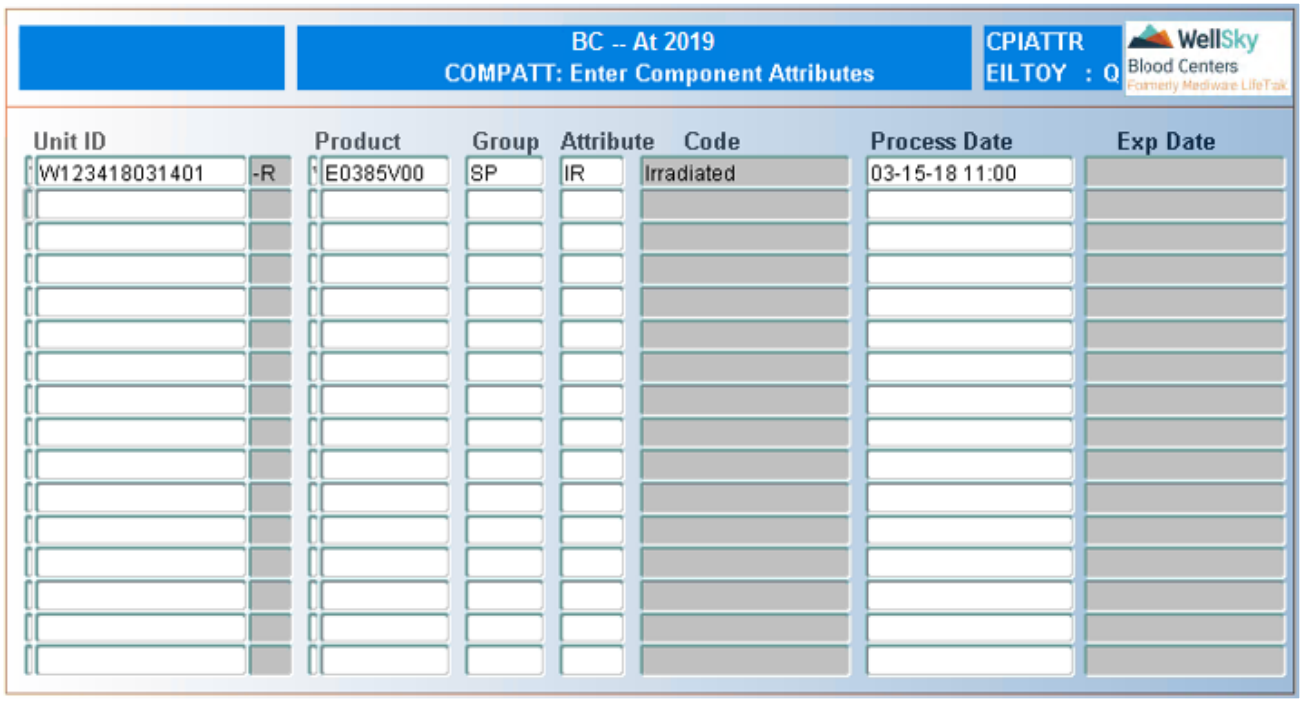


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## Attribute Group

Enter attribute group or select from LOV.

## Attribute Code

Enter attribute code or select from LOV.

**NOTE –** The attribute must be SP group, and it must have an entry in the PRDATTR table.

## Process Date

Enter process date and time in MM-DD-YY HH24:MI format, or press CTRL + F6 (Duplicate Field) to copy the process date/time entered on the previous line.

**NOTE –** Entry in this field is required only if a life span is associated with the attribute being added.

### Exp Date

Field is not utilized. Field is not navigable.

## At Commit

The system does a line-by-line commit. Updates made to the system at Commit include the following:

- Attribute group and code.
- May update charges associated with the component when interfaced to the shipping system.
- Interdictions are assigned if attribute entered at this screen are associated with interdictions in the validation table.
- If the attribute being placed has an associated life span, the system label decision and expiration date are removed from the product. Product will have to be labeled again.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.4 Enter Unit Attributes (AUATTR)

## Intended Use

Use the Enter Unit Attributes screen to add attribute information to a unit that has already been checked-in. Attribute groups include the following:

- Alert Codes
- Special Handling

If there are unit attributes present on the unit, they will display when you enter the unit number.

## Limitations

- Only Internal contract units can be processed through this screen.
- SP and ALERT are the only attribute types that can be entered in this screen.
- ATTRIB allows 50 characters for the attribute description, but CPIUATTR only displays 45 characters.

## Prerequisites

Unit must have been checked in.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu or by entering the keyword `AUATTR`.


WellSky Corporation
Proprietary and confidential

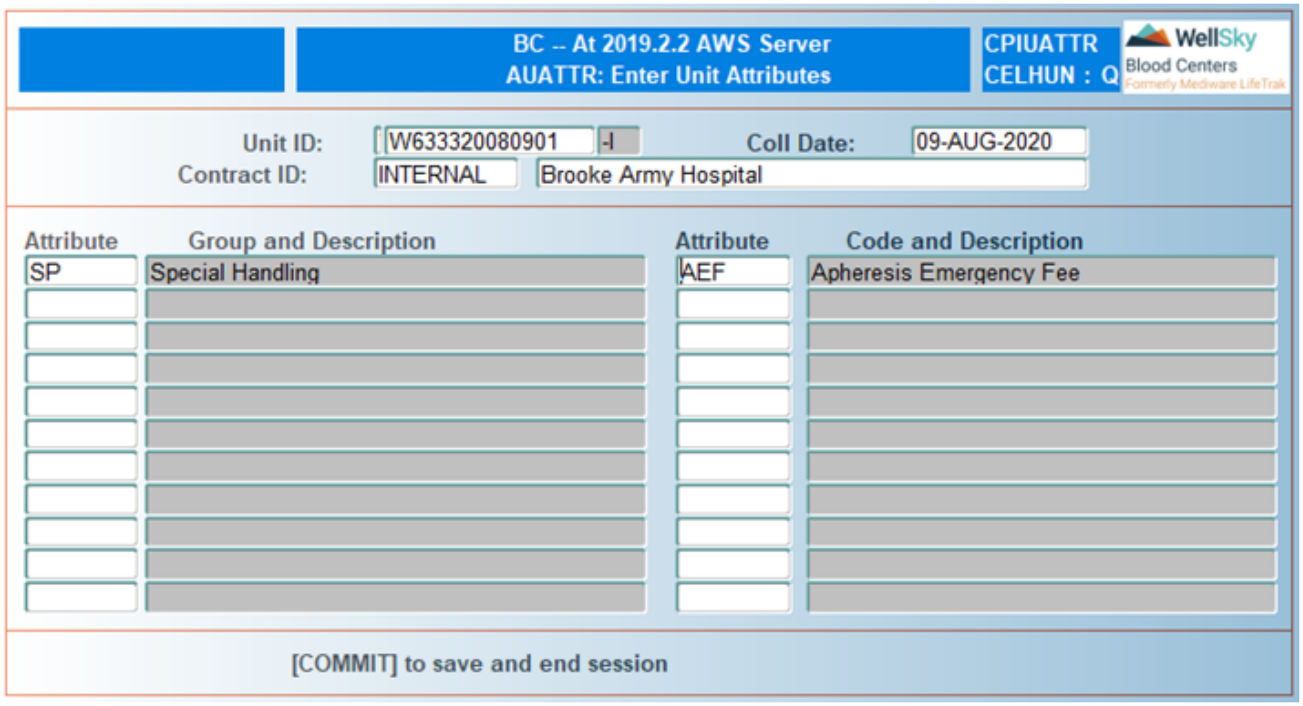


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

System automatically displays unit collection date. Field is not navigable.

## Contract ID

System defaults to INTERNAL. Field is not navigable.

## Attribute Group And Description

Enter attribute group or select group from LOV. The attribute group description automatically displays after the code is entered.

## Attribute Code And Description

Enter attribute code or select code from LOV. The attribute code description automatically displays after the code is entered.

Press F12 (Commit) once all necessary attributes have been added.

## Removing a Code Placed in Error

To remove an attribute code that was placed in error, use CTRL+ F8 (Delete Record) to remove the entire row for that attribute code. If you try to commit when one field is not populated, you will receive the error message, "Err: 1701: Record must be entered or deleted first – Missing data.".

## At Commit

The attributes entered at this screen are committed to the system.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions Functions menu.

# 20.2.5 Delete Component Attributes (DCATTR)

## Intended Use

Use the Delete Component Attributes screen to do the following:

- Remove attributes previously placed on a component before release to labeling.
- Allow a component to be checked back into Lab. This screen can be used to remove the CP6I attribute that was placed on the component by the system.

## Limitations

- Unit/component must be located in user's current log-in warehouse in order to perform this function.
- Unit/component must not be in transit in order to perform this function.
- Maximum of one attribute can be deleted at a time.
- Expiration date/time will not print on the system-generated product code label.
- Labels will be printed for ISBT only.
- Rejected products cannot be processed through this screen.
- For ISBT products, only attributes placed in Blood Centers can be deleted in this screen (for example, if an irradiated RBC is imported into the system, the irradiated attribute cannot be removed).
- Certain attributes (for example, +) for ISBT components may take the product back to a base/precursor product code. Modification of these products should be done in CPICHNGE (CMCI) to obtain the appropriate ISBT product code.
- Conversion and modification attributes must be removed in reverse order of addition.
- Attributes that are placed at the time the component is defined cannot be removed in this screen. The component will have to be deleted and redefined.
- When deleting ISBT conversion type attributes the bags used information is not updated in UNIT_ADD_ON_BAGS. If you need to do another conversion process you will need to add additional bags.

## Prerequisites

- This screen requires supervisory access level.
- This screen is not normally used after the product has been labeled, except when the component has been processed all the way through the system, and then checked back in for further processing.


WellSky Corporation
Proprietary and confidential

- Attribute must be present on the component.
- Program must be defined in Maintain Report Master Table (RMASTER) if labels are going to be printed for ISBT products.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `DCATTR`.

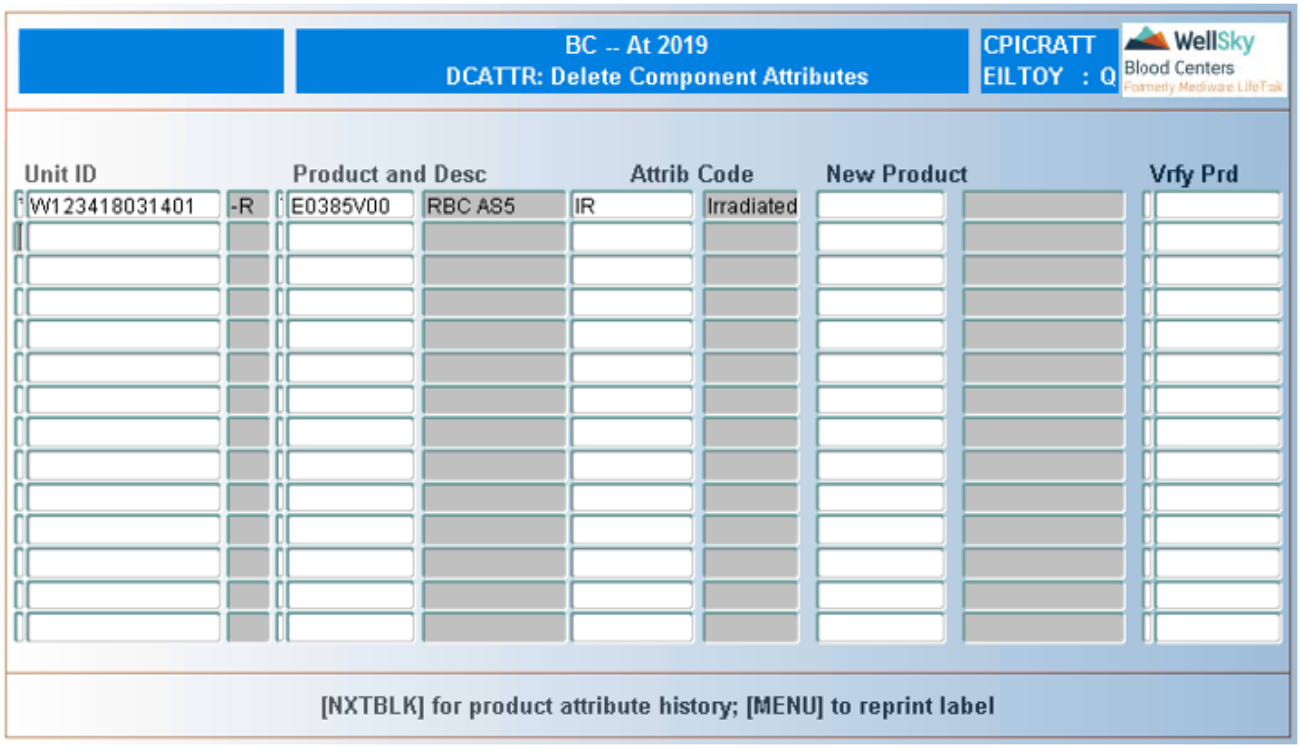


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product and Desc

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

### Attrib Code

Enter attribute code to be removed or select from LOV. Attribute code description automatically displays after the code is entered.

### New Product

Field is not navigable. System defaults product based on removal of attributes.

**NOTE –** Once the new product has been displayed if the program has been configured to print labels it will automatically print the new product code label for ISBT units.

### Vrfy Prd

Scan or manually enter new product code.

**NOTE –** The ISBT product code label can be reprinted if the verification of the new product code has not been started. Reprinting of the product code can be done by pressing F6 (Menu) prior to verification.

## At Commit

The attributes entered on this screen are deleted from the component.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.6 Delete Unit Attributes (DUATTR)

## Intended Use

Use the Delete Unit Attributes screen to remove attributes previously placed on a unit.

## Limitations

Donation type attributes cannot be deleted in this screen.

## Prerequisites

- This screen requires supervisory access level.
- Attribute must be present on the unit.

## Accessing the Screen

Access this screen from the Delete Unit Attributes menu, or by entering the keyword `DUATTR`.


WellSky Corporation
Proprietary and confidential

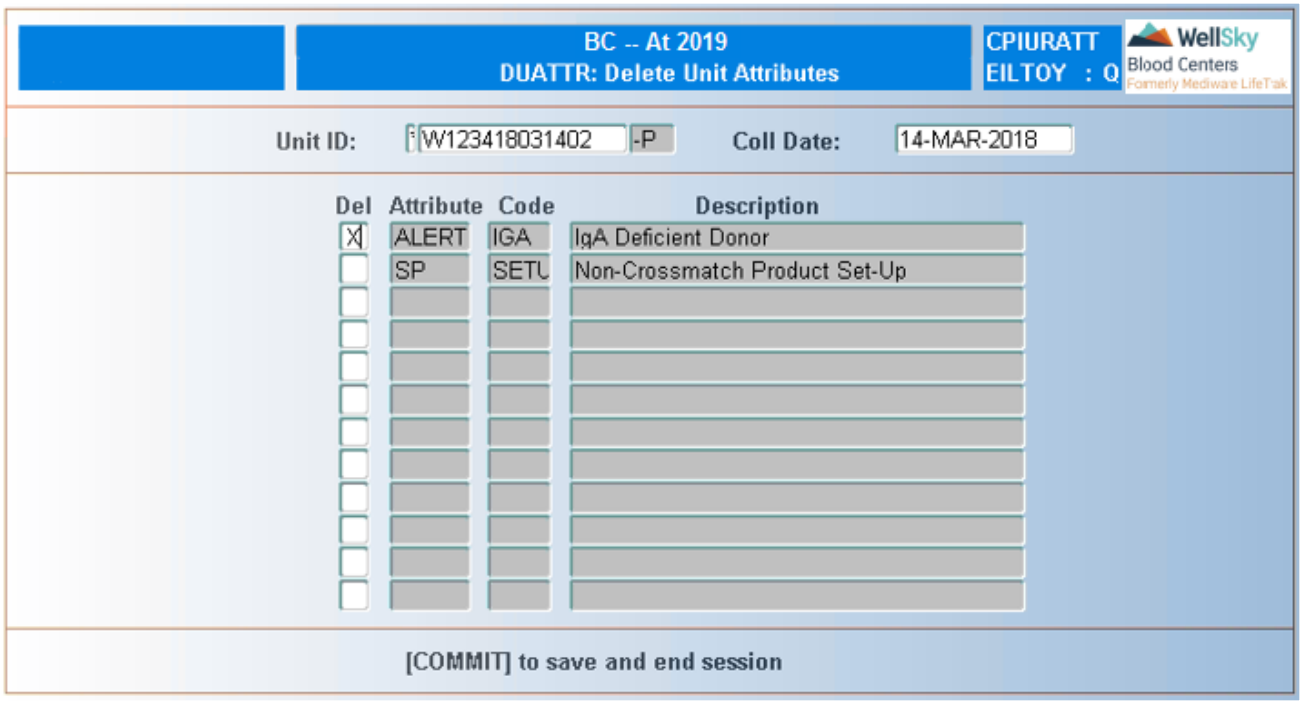


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Collection Date

Collection date automatically displays after the unit ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of unit attributes. Press x or **ENTER** to select the attribute to be deleted. Press x or **ENTER** again to deselect the attribute.

## Attribute Code And Description

Attribute group, code, and description automatically display after the unit ID is entered. Fields are not navigable.

Press **F12** (Commit) once all desired attributes have been selected.

# At Commit

The attributes selected are deleted from the unit.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.7 Enter Component Interdiction (CMPINT2)

## Intended Use

Use the Enter Component Interdiction screen to place an interdiction at the component level. The screen displays the coded reason and description of the type of interdiction. Interdictions may place a hold on any further processing and prevent shipment of components made from a unit.

## Limitations

- Users can only place interdictions that are available to user ID or group.
- BIO and INITIAL interdictions cannot be placed in this screen.
- Interdictions assigned to a component are automatically applied to all aliquots.

## Prerequisites

Use this screen any time after the unit has been checked in.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `CMPINT2`.

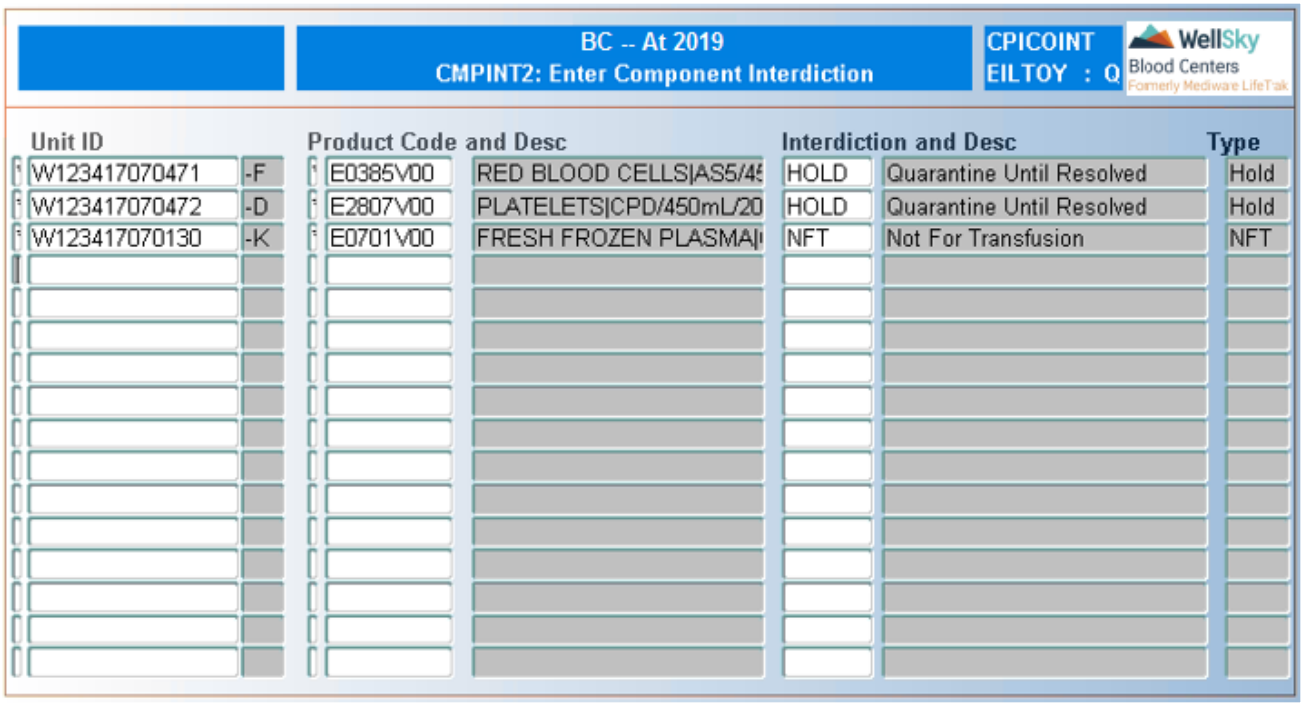


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.


WellSky Corporation
Proprietary and confidential

### Product Code And Desc

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

### Interdiction and Desc

Enter interdiction code or select from LOV. Interdiction description automatically displays after the code is entered.

**NOTE –** Only interdictions appropriate to your user ID or group are available.

### Type

The type of interdiction associated with the code (NFT or Hold) automatically displays. Field is not navigable.

The system does a line-by-line commit.

## At Commit

The interdictions entered are placed on the component, preventing products from further processing or preventing shipment.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.8 Add Interdictions for Units Not Checked (ADDIN)

## Intended Use

Use Add Interdictions for Units Not Checked screen to interdict a unit not yet checked into Lab.

## Limitations

- Users can only place interdictions that are available to user ID or group.
- BIO and INITIAL interdictions cannot be placed in this screen.
- This function can only be used for units from the INTERNAL contract.

## Prerequisites

- Unit Number
- Reason for Interdiction

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `ADDIN`.

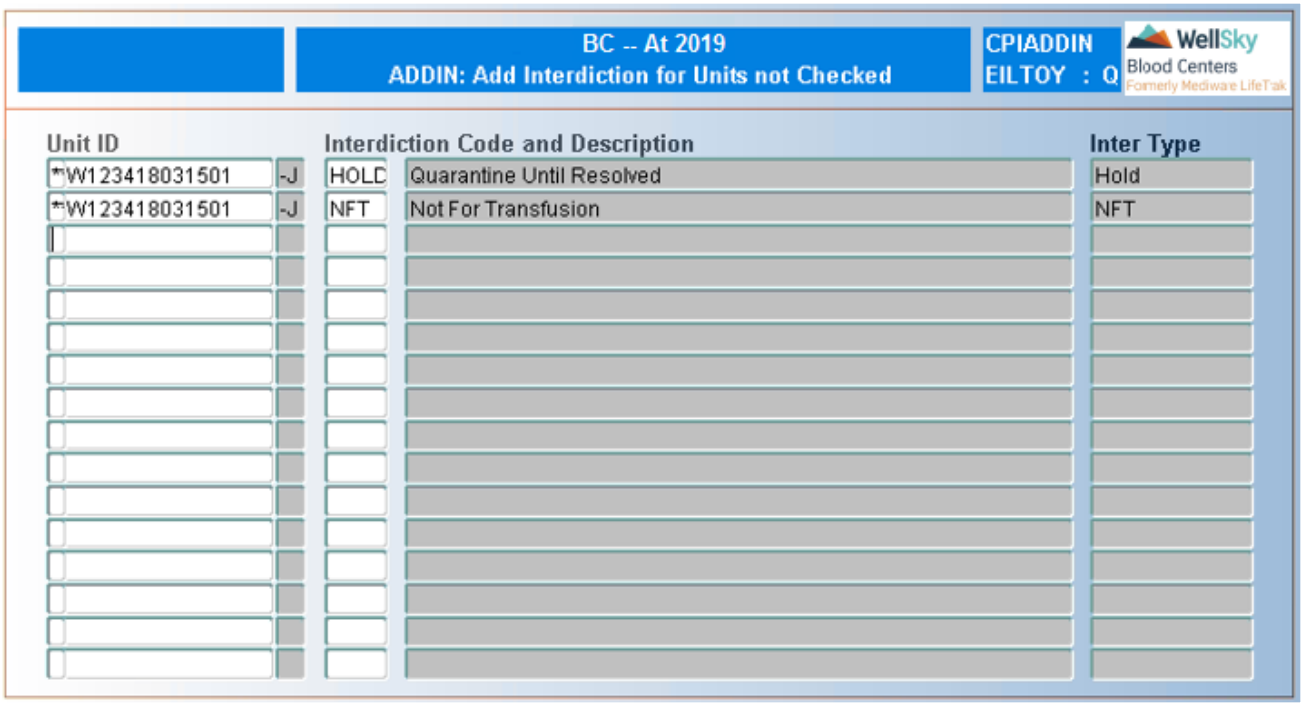


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Interdiction Code And Description

Enter interdiction code or select from LOV. Interdiction code automatically displays after the code is entered.

### Inter Type

Interdiction type (HOLD or NFT) automatically displays. Field is not navigable.

The system does a line-by-line commit.

## At Commit

The interdictions entered are placed on the unit, preventing products from further processing or preventing shipment.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.9 Release Component Hold (RCHOLD)

## Intended Use

Use Release Component Hold screen to release a hold on a component by removing the interdiction flag.


WellSky Corporation
Proprietary and confidential

## Limitations

- Users can only release interdictions that are available to user ID or group.
- Only component HOLD interdictions can be removed in this screen.

## Prerequisites

This screen requires supervisory access level.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `RCHOLD`.

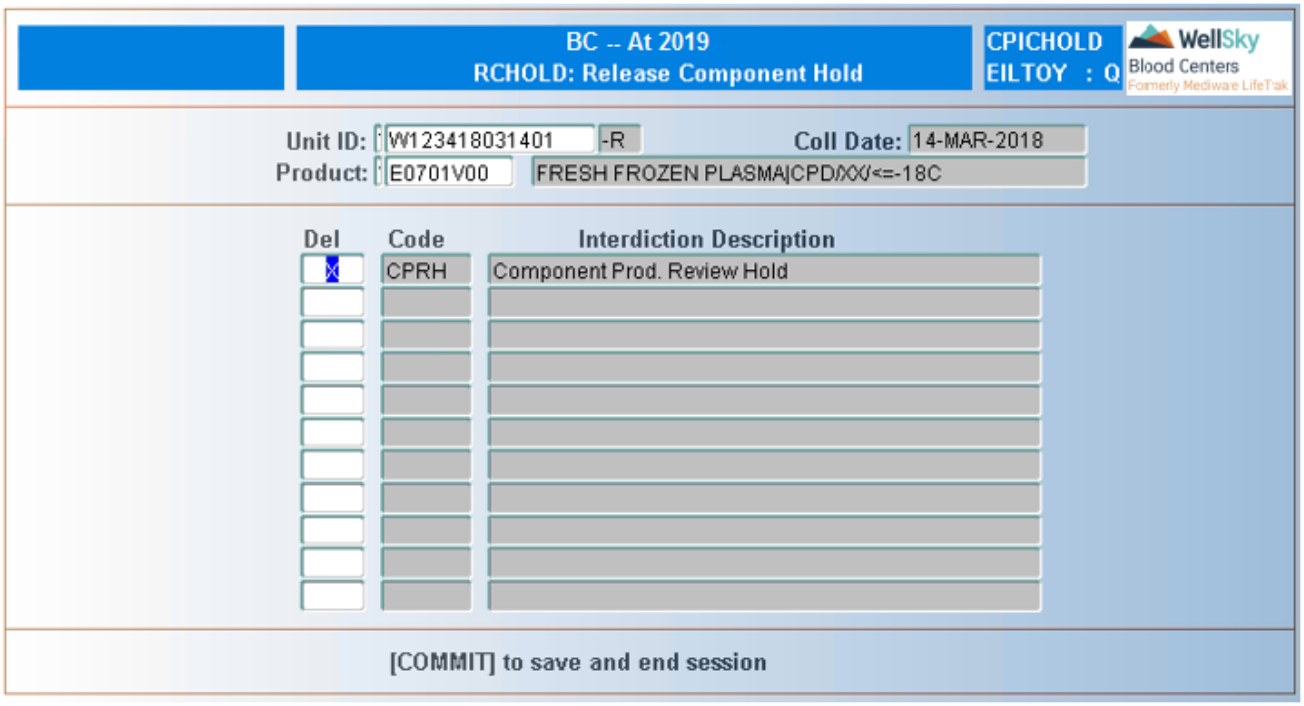


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID

### Coll Date

Collection date automatically displays after the unit ID is entered. Field is not navigable.

### Product

Scan, manually enter, or select code from LOV. Product code description automatically displays after the product code is entered.

### Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of interdictions. Press `X` or **ENTER** to select the interdiction to be deleted. Press `X` or **ENTER** again to deselect the interdiction.

### Interdiction Code And Description

Interdiction group, code, and description automatically display after the unit ID is entered. Fields are not navigable.

Press **F12** (Commit) once all desired interdictions have been selected.

## At Commit

The selected HOLD interdictions are deleted from the component.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes & Interdictions menu.

# 20.2.10 Release Component Interdiction (RCINT)

## Intended Use

Use Release Component Interdiction screen to remove manually placed component level NFT interdictions.

## Limitations

- You can only release interdictions that are available to your ID or group.
- Only component NFT interdictions can be removed in this screen.
- Only manually placed interdictions can be removed in this screen.

## Prerequisites

This screen requires supervisory access level.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `RCINT`.


WellSky Corporation
Proprietary and confidential

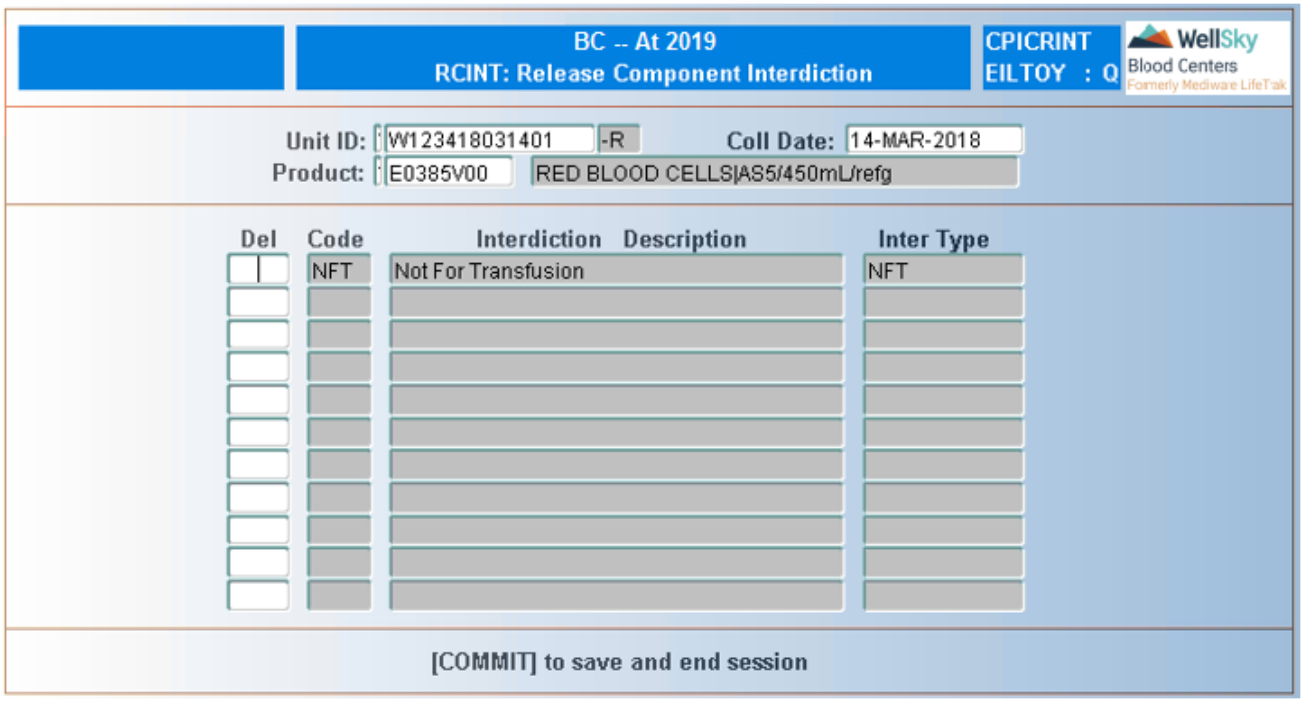


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Collection Date

Collection date automatically displays after the unit ID is entered. Field is not navigable.

## Product Code

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

# Detail Block Fields and Definitions

## Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of interdictions. Press x or **ENTER** to select the interdiction to be deleted. Press x or **ENTER** again to deselect the interdiction.

## Interdiction Code And Description

Interdiction group, code, and description automatically display after the unit ID is entered. Fields are not navigable.

## Inter Type

Interdiction type automatically populates after the unit ID is entered. Field is not navigable.

Press **F12** (Commit) once all desired interdictions have been selected.

## At Commit

The selected NFT interdictions are deleted from the component.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.11 Release Component System Interdiction (RCSYSINT)

## Intended Use

Use Release Component System Interdiction screen to remove an interdiction that has been placed on a component by the system.

## Limitations

- Users can only release interdictions that are available to user ID or group.
- Only component interdictions can be removed in this screen.

## Prerequisites

This screen requires supervisory access level.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `RCSYSINT`.

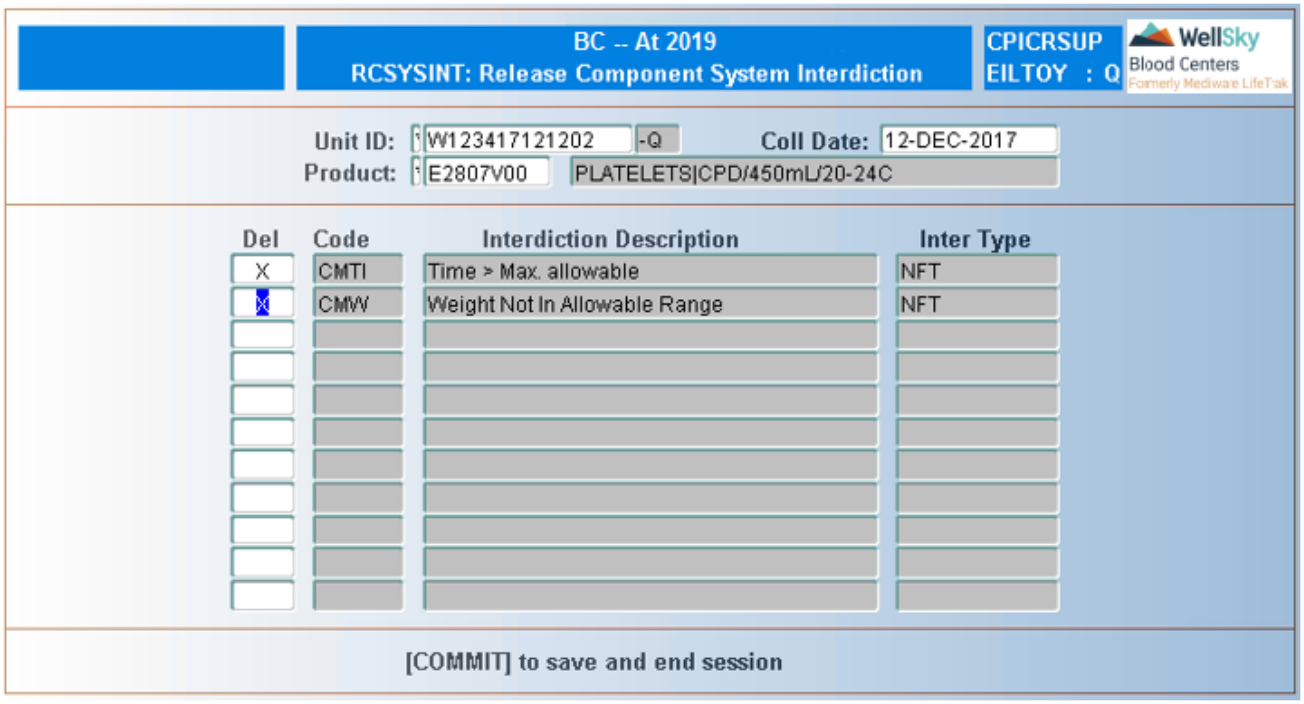



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Collection Date

Collection date automatically displays after the unit ID is entered. Field is not navigable.

### Product Code

Scan, manually enter, or select product code from LOV. Product code description automatically displays after the product code is entered.

## Detail Block Fields and Definitions

### Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of interdictions. Press x or **ENTER** to select the interdiction to be deleted. Press x or **ENTER** again to deselect the interdiction.

### Interdiction Code And Description

Interdiction group, code, and description automatically display after the unit ID is entered. Fields are not navigable.

### Inter Type

Interdiction type automatically populates after the unit ID is entered. Field is not navigable.

Press **F12** (Commit) once all desired interdictions have been selected.

## At Commit

The selected interdictions are deleted from the component.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.12 Release Unit System Interdiction (RUSYSINT)

## Intended Use

Use the Release Unit System Interdiction screen to remove an interdiction that has been placed on a unit by the system.

## Limitations

- You can only release interdictions that are available to your ID or group.
- Only unit interdictions can be removed in this screen.

## Prerequisites

This screen requires supervisory access level.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `RUSYSINT`.

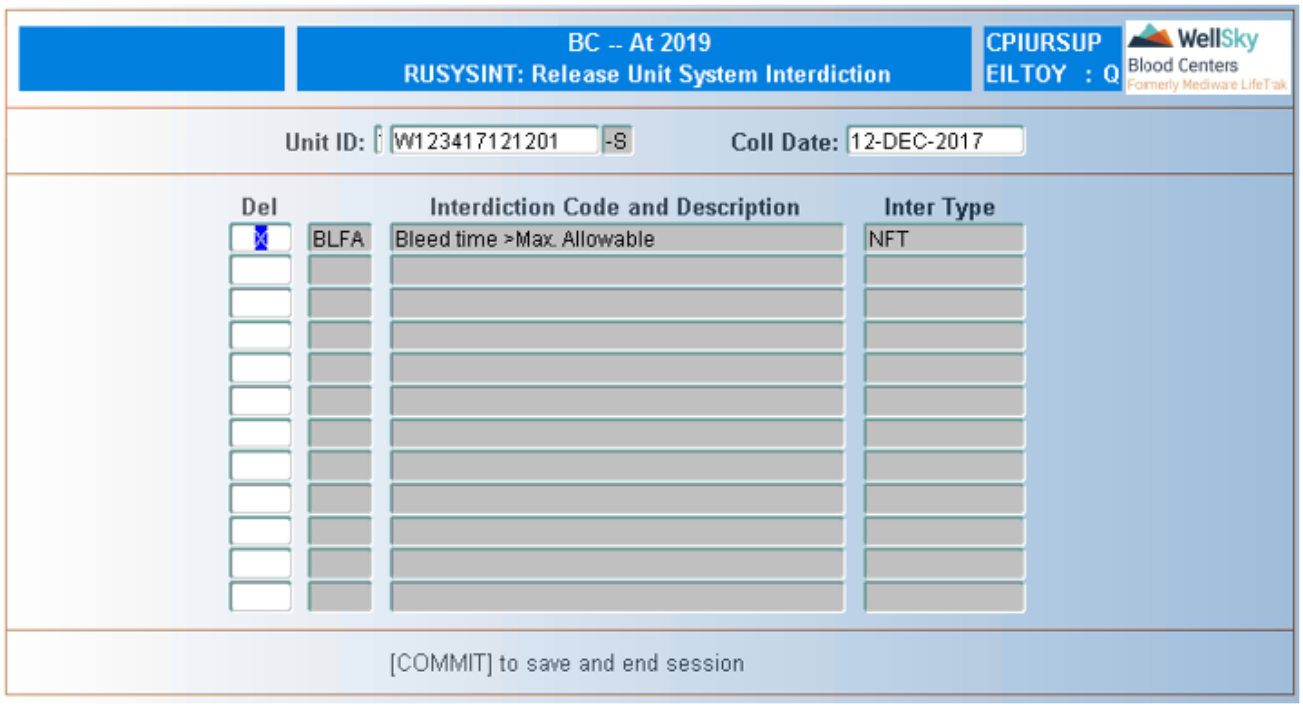


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Collection Date

Collection date automatically displays after the unit ID is entered.

## Detail Block Fields and Definitions

### Del

Use the **UP** and **DOWN** arrow keys to scroll through the list of interdictions. Press `X` or **ENTER** to select the interdiction to be deleted. Press `X` or **ENTER** again to deselect the interdiction.

### Interdiction Code And Description

Interdiction group, code, and description automatically display after the unit ID is entered. Fields are not navigable.


WellSky Corporation
Proprietary and confidential

### Inter Type

Interdiction type automatically populates after the unit ID is entered.  Field is not navigable.

Press F12 (Commit) once all desired interdictions have been selected.

## At Commit

The selected interdictions are deleted from the unit.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.13 Place Group Interdiction or Hold (EGRPINT)

## Intended Use

Use Place Group Interdiction or Hold screen to place a hold or interdiction on a group of units. Units receiving interdictions or holds are grouped by:

- Batch (any check-in batch type)
- Collection date
- Drive
- Test Batch ID
- Lot number
- Instrument Test Batch ID

## Limitations

Users can only place interdictions that are available to user ID or group.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `EGRPINT`.

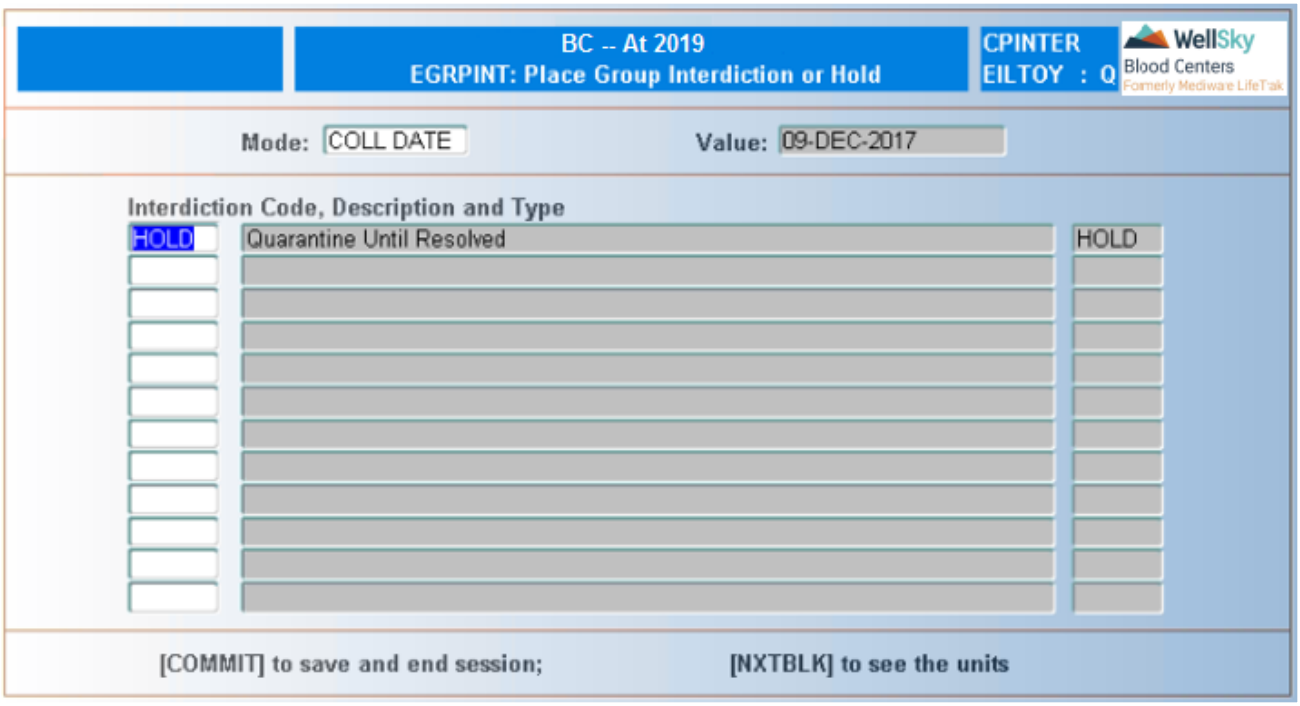


# Control Block Fields and Definitions

## Mode

Enter one of the following:

- `BATCH` – Batch ID
- `COLL DATE` – Collection Date
- `DRIVE` – Drive ID
- `TBID` – Test Batch ID
- `LOT` – Lot Number
- `ITBID` – Instrument test batch ID – places interdiction on all the units within the test batch

**NOTE –** The mode entered is the type of group that will receive an interdiction or hold.

## Value

Enter mode value or select from LOV.

**NOTE –** The value entered is the specific batch, collection date, drive, test batch, or lot number.

**NOTE –** LOV not available for TBID mode.


WellSky Corporation
Proprietary and confidential

## Detail Block Fields and Definitions

### Interdiction Code, Description, And Type

Manually enter interdiction or select code from LOV. Interdiction description and type automatically display after the code is entered.

**NOTE –** More than one interdiction can be placed on a group.

Press F12 (Commit) once all desired interdictions have been entered.

## Viewing Units in the Group

Press CTRL + F3 (Next Block) to view units in the group. The following window opens:

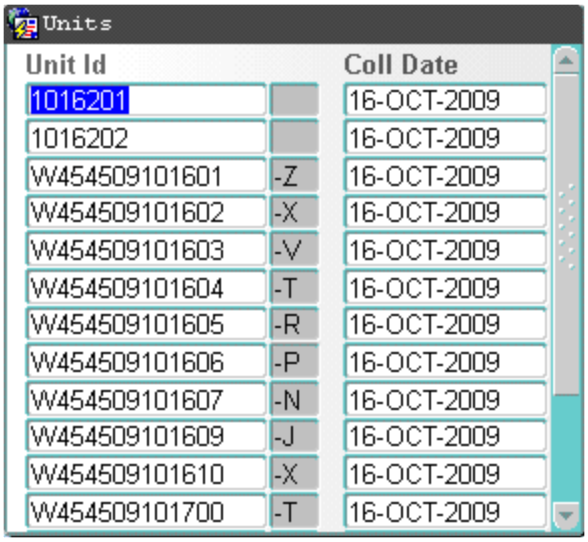


Use the UP and DOWN arrow keys to scroll through the list of units. Updates are not allowed in this screen.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

Interdictions and holds are placed on all the units in the group entered on this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.14 Release Group Interdiction or Hold (RGRPINT)

## Intended Use

Use the Release Group Interdiction or Hold screen to release a hold or interdiction on a group of units. Units are grouped at this screen by the following:

- Batch (accepts any type)
- Collection date
- Drive
- Test Batch ID
- Lot number
- Instrument Test Batch ID

## Limitations

Users can only remove interdictions that are available to user ID or group.

## Prerequisites

Interdiction must be present.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `RGRPINT`.

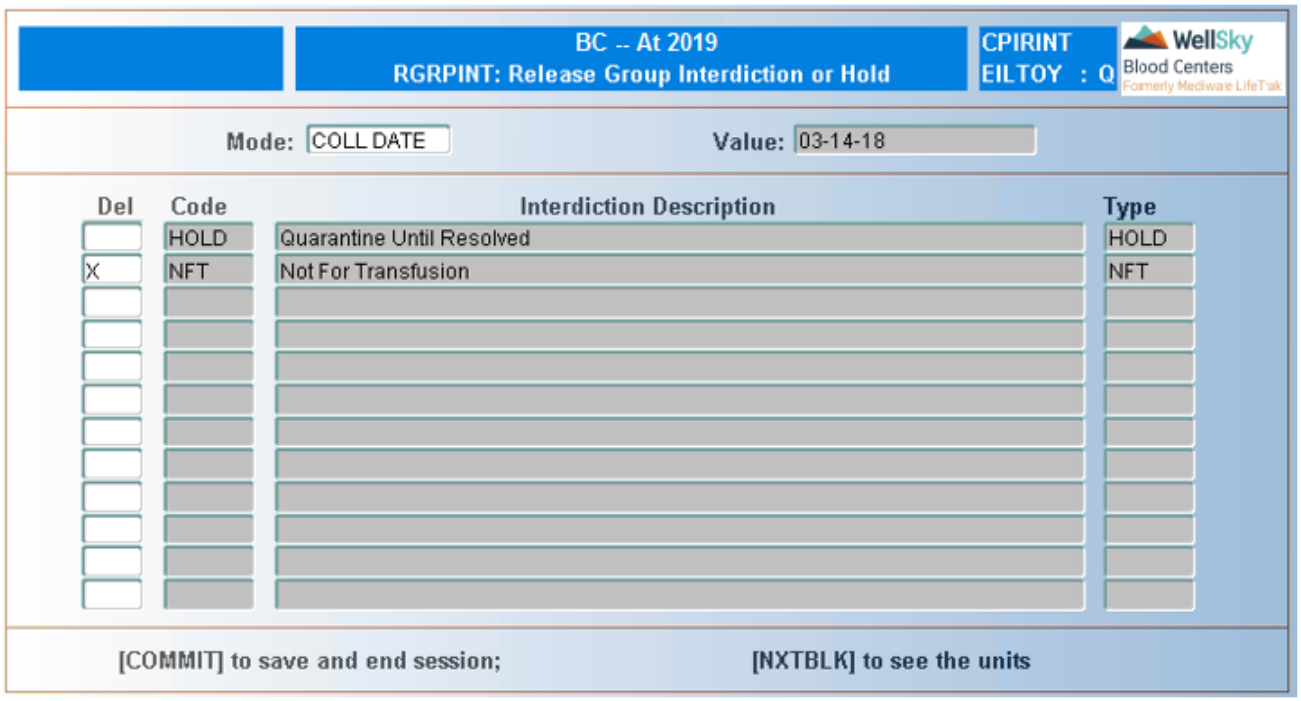


## Control Block Fields and Definitions

### Mode

Enter one of the following:

- BATCH – Batch ID
- COLL DATE – Collection Date
- DRIVE – Drive ID
- TBID – Test Batch ID
- LOT – Lot Number
- ITBID – Instrument Test Batch ID

**NOTE –** The mode is the type of group from which interdiction is to be released.

### Value

Manually enter value or select from LOV.

**NOTE –** The value entered is the specific batch, collection date, drive, test batch ID, or lot number.

## Detail Block Fields and Definitions

### Delete

Use the UP and DOWN arrow keys to scroll through the list of interdictions. Press X or ENTER to select the interdiction to be deleted. Press ENTER again to deselect the interdiction.

### Interdiction Code, Description, And Type

Interdiction code, interdiction description and type automatically display after the value is entered. Fields are not navigable.

Press F12 (Commit) once all desired interdictions have been selected.

## Viewing Units in the Group

Press CTRL + F3 (Next Block) to view units in the group. The following window opens:

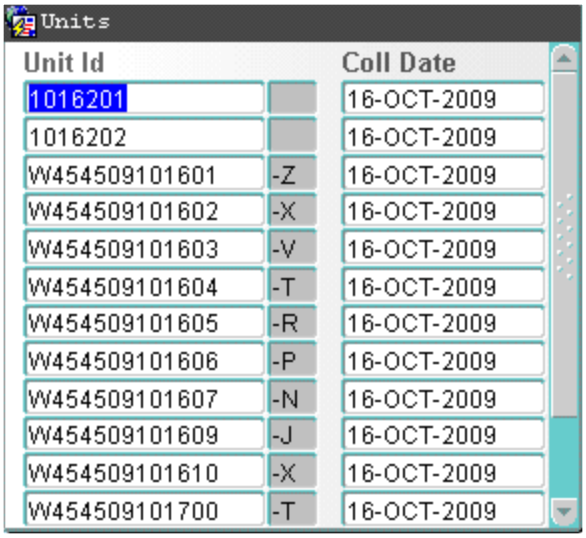


Use the **UP** and **DOWN** arrow keys to scroll through the list of units. Updates are not allowed in this screen.

Press **F8** (Exit Screen) to return to the main screen.

## At Commit

Selected interdictions and holds are released from all the units in the group entered on this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.15 Component Notes (CNOTE)

## Intended Use

Use the Component Notes screen to document any details of interest at the component level.

The notes are free form and are associated with the unit ID, product code, and aliquot number, if applicable.

## Limitations

None

## Prerequisites

Notes can be entered at any time after component is defined.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword `CNOTE`.


WellSky Corporation
Proprietary and confidential

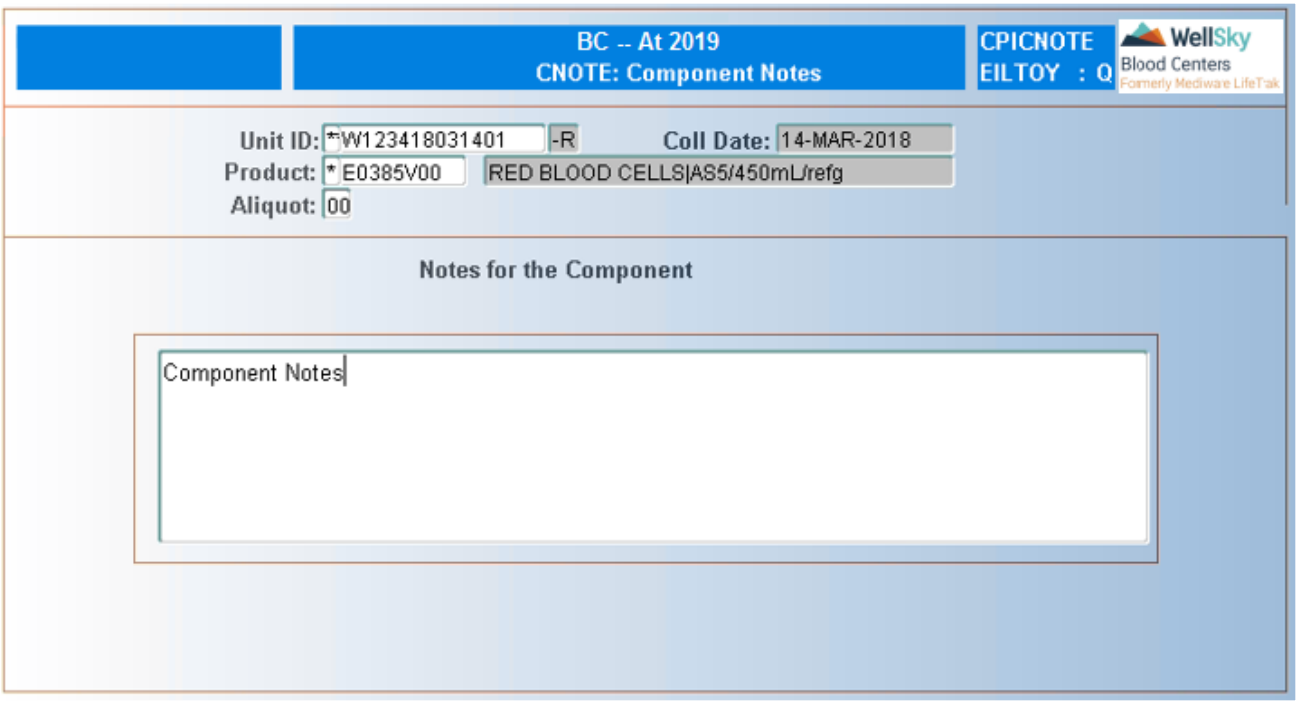


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Collection date automatically displays after the unit ID is entered.

## Product Code

Scan, manually enter, or select product code from LOV. The product code description automatically displays after the product code is entered.

## Aliquot

Enter aliquot or select from LOV.

**NOTE –** This field defaults to 1.

# Detail Block Fields and Definitions

## Notes for the Component

Enter free format notes. A maximum of 240 characters is allowed.

Press F12 (Commit) once all comments have been entered.

## At Commit

Notes entered for the component are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.16 Unit Notes (UNOTE)

## Intended Use

Use the Unit Notes screen to document any details of interest for the unit. The notes are free format and are associated with the unit ID.

## Limitations

None

## Prerequisites

Unit must have been checked in.

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu, or by entering the keyword UNOTE.

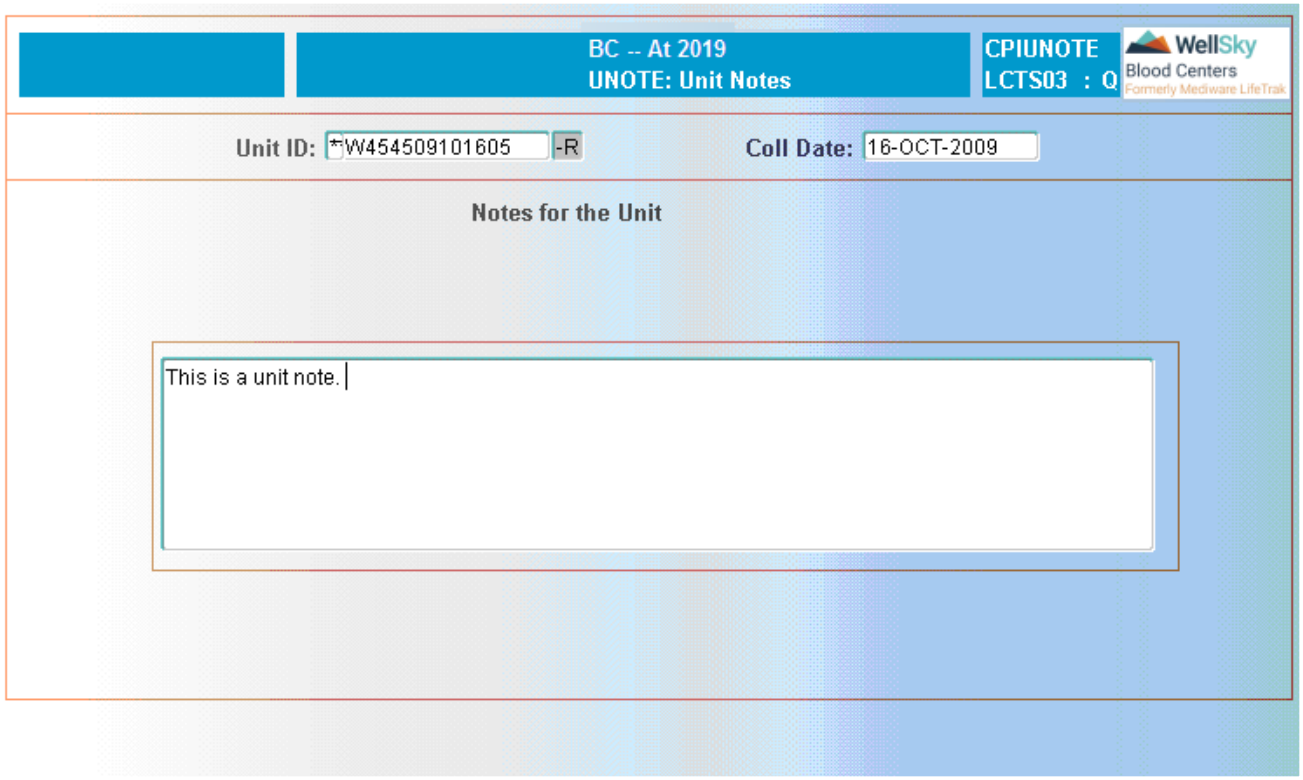



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date

Collection date automatically displays after the unit ID is entered.

## Detail Block Fields and Definitions

### Notes for the Unit

Enter free format notes. A maximum of 240 characters is allowed.

Press F12 (Commit) once all comments have been entered.

Notes entered for the unit are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Attributes and Interdictions menu.

# 20.2.17 Place/Release Multiple Unit Interdiction (UNTINT2)

## Intended Use

Use the Place/Release Multiple Unit Interdiction screen to place an interdiction(s) at the unit level. The screen displays the coded reason and description of the type of interdiction, Initial, Hold, or NFT. Interdictions may place a hold on any further processing and prevent shipment of components made from a unit.

## Limitations

- Not able to place/remove BIO interdiction.
- Not able to place or remove initial interdictions that are linked to a test ID in the Valid Test table.

## Prerequisites

- The user must be assigned to an interdiction class to be able to place or remove interdictions based on assignment of the interdictions.
- The user must be assigned to the following classes:
  - PLACE – to place interdictions
  - REMOV – to release interdictions

## Accessing the Screen

Access this screen from the Attributes and Interdictions menu or by entering the keyword **UNTINT2**.

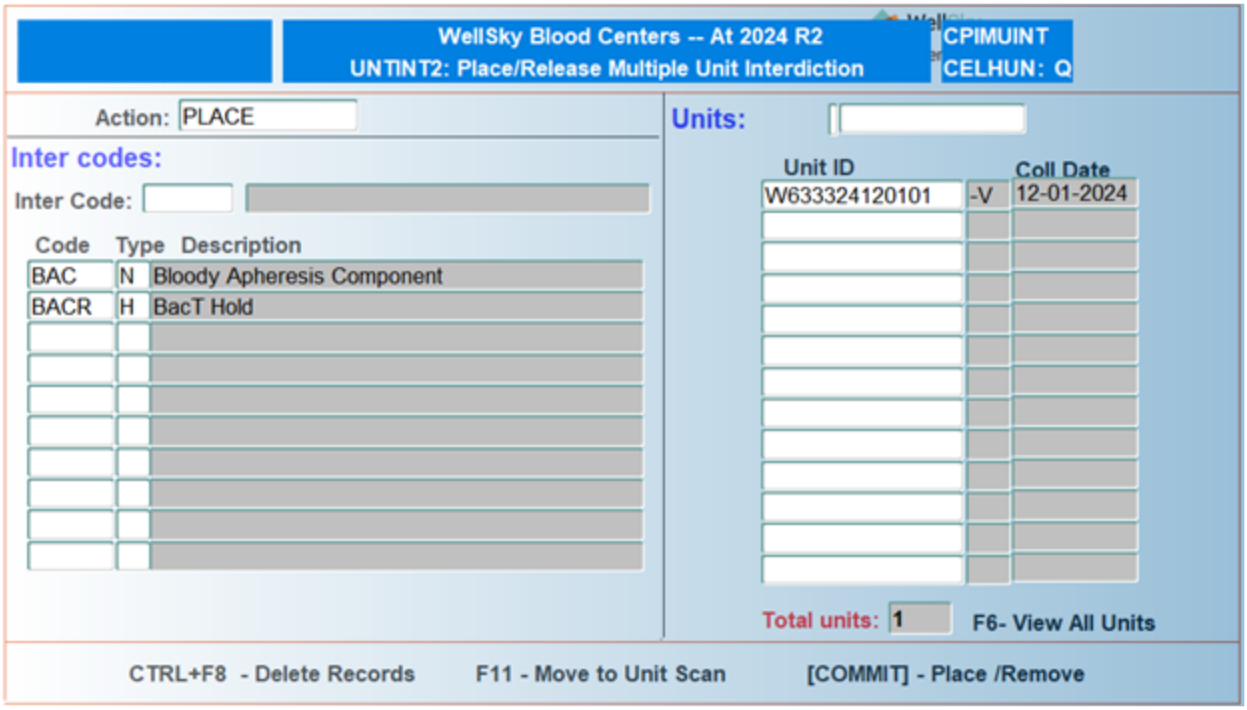


# Control Block Fields and Definitions

## Action

Select the action that will be performed by either selecting it from the LOV or manually typing the code.

- PLACE – place interdictions on a unit(s)
- RELEASE – remove interdictions on a unit(s)

> **NOTE –** Access to the functions is defined in Lab User Access. User access will need to be determined for PLACE and RELEASE.

## Inter Code

Only interdictions that are assigned to the user's interdiction class can be added or removed.

### To Select a Single Interdiction Code

1. Enter the desired interdiction in the Inter Code field, or select it from the LOV.
2. Press **ENTER**. The selected interdiction appears in the Inter Code section.

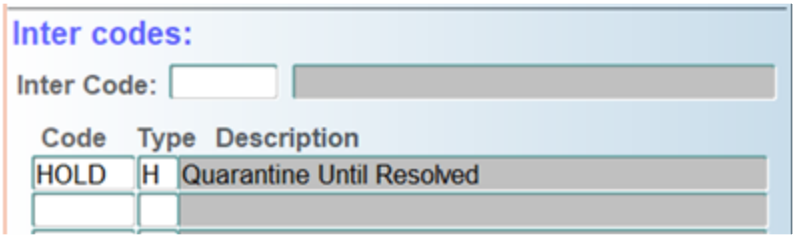


## To Select Multiple Interdictions Within the Same Type

To select one or more interdictions from the same type, do the following:

1. Leave the Inter Code field blank, and press **ENTER**. The following window opens:

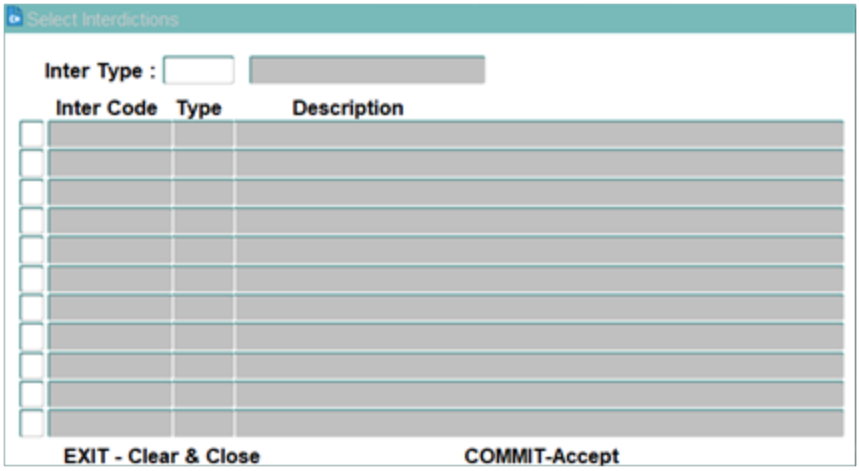


2. Enter the interdiction type in the Inter Type field, using the following letters:
   - **I** = Initial
   - **H** = HOLD
   - **N** = NFT
3. Press **ENTER**. All available interdictions from the specified interdiction type are displayed, as shown in the following figure.

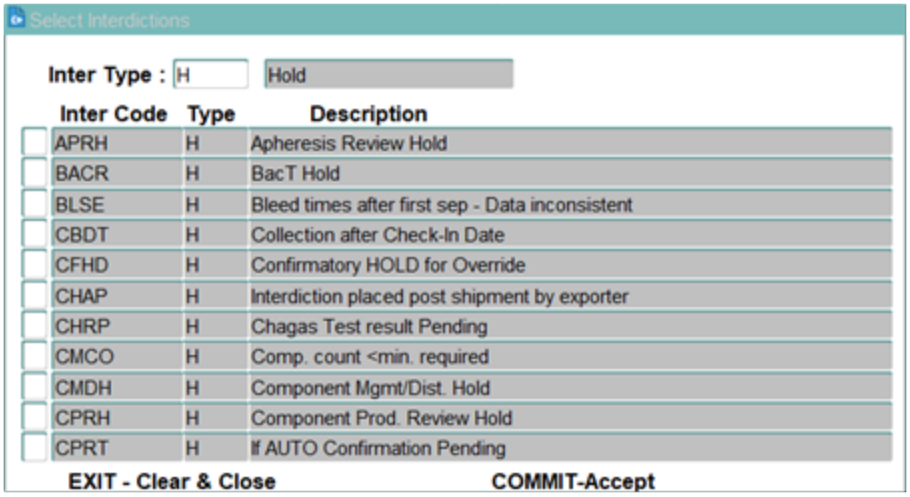


4. Select the appropriate interdiction(s) by placing an **X** in the selection box, or by pressing **ENTER**. Use the UP (▲) and DOWN (▼) arrow keys to navigate through the list.

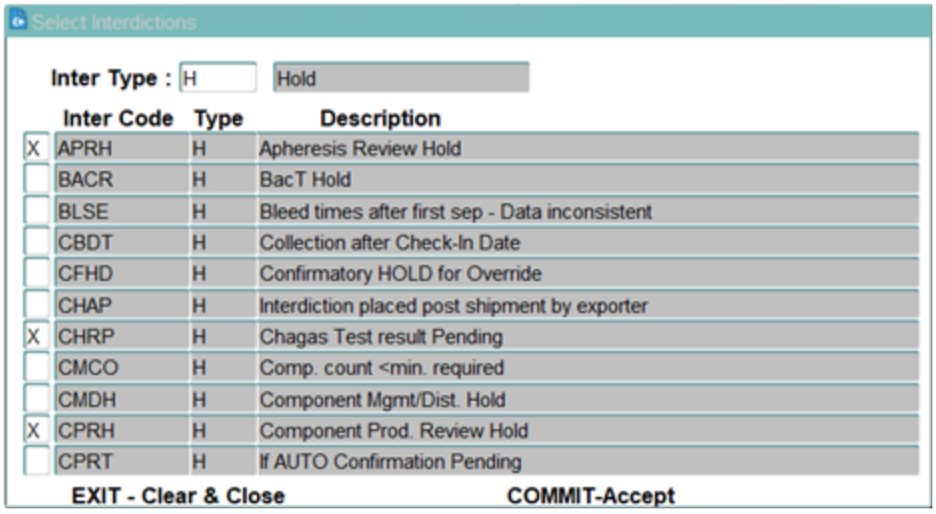


5. Press F8 (Exit Screen) to abort without saving. Press F12 (Commit) to save the selected interdiction(s). The selected interdiction(s) appears in the Inter Codes section, as shown in the following figure.

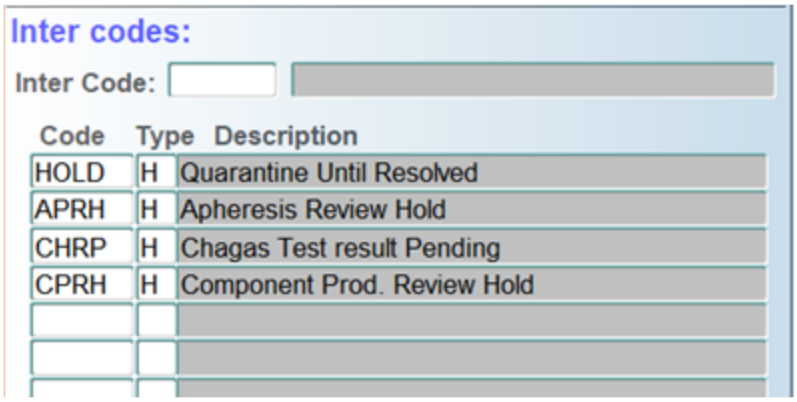

## To Select Multiple Tests From Different Group IDs

To select multiple interdictions from different types, perform the following procedure.

1. Leave the Inter Code field blank and press **ENTER**. The following window opens.

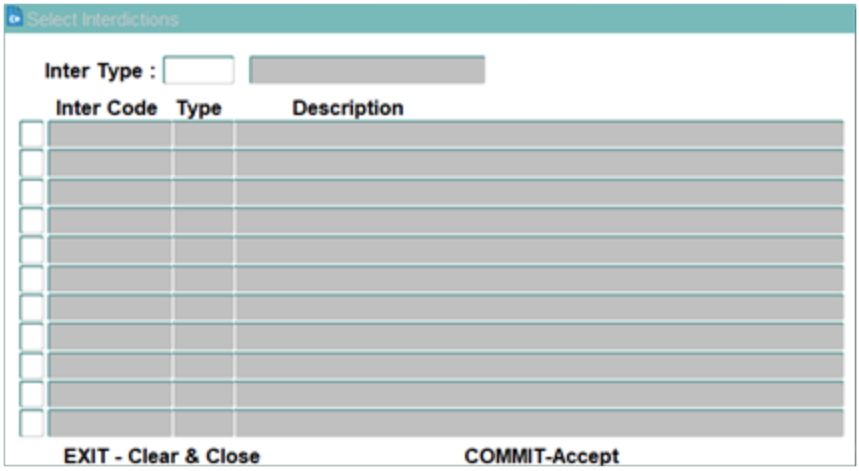


2. Leave the Inter Type field blank and press **ENTER**. All available interdictions from all types will display.

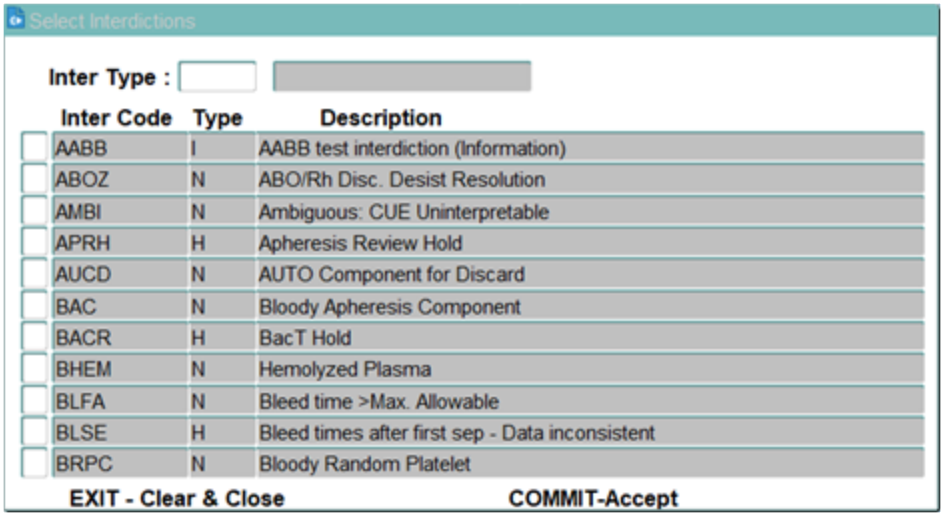


3. Select the appropriate test(s) by placing an **X** in the selection box, or by pressing **ENTER**. Use the UP ( ) and DOWN ( ) arrow keys to navigate through the list.
4. Press F8 (Exit Screen) to abort without saving. Press F12 (Commit) to save the selected interdiction(s). The

selected interdiction(s) appears in the Inter Codes section, as shown in the following figure.

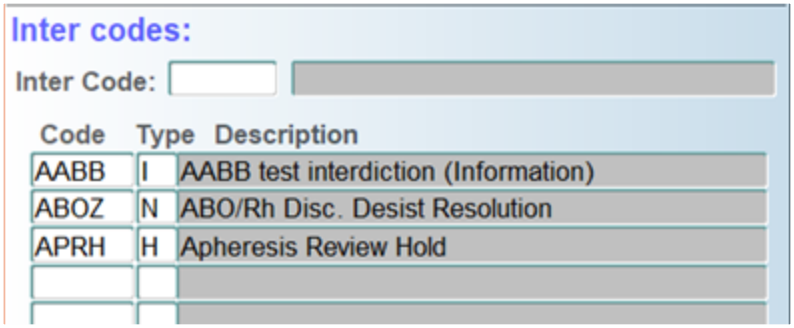


### Units

Scan or manually enter the unit ID. To enter manually, press **ENTER**. The cursor will move to the next entry field. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system.

After all the units have been entered, press **F12** to commit the interdictions to the unit IDs.

## Units Detail Block Fields and Definitions

### Unit ID

This field is populated from the entry scanned or manually entered in the control block. This field cannot be updated.

### Collection Date (Coll Date)

This field displays the collection date of the unit. This field cannot be updated.

## Delete Units

The cursor needs to be in the unit ID field on the right side of the form. Press CTRL + F3 (Next Block) from the unit ID field and the cursor moves into the list of unit numbers present.

Scroll through the list to select the unit number that needs to be removed from the list. Press CTRL+ F8 (Delete Record) to remove the unit number from the list.


WellSky Corporation
Proprietary and confidential

**NOTE –** The removal of the unit number must occur prior to committing the information on the screen. If commit has already occurred, then the user must go and release the interdiction manually by the unit number.

# Delete Interdictions

The cursor needs to be in the interdiction field on the left side of the form. Press CTRL + F3 (Next Block) from the interdiction code field and the cursor moves into the list of interdictions present.

## Steps if the Cursor is in the Unit ID Field:

1. If the cursor is in the Unit ID field, press CTRL + F4 (Previous Block) to move the cursor back to the Interdiction Code field.
2. Once the cursor is in the Interdiction Code field, press CTRL + F3 (Next Block) to move the cursor to the interdictions list.
3. Scroll through the list and press CTRL+ F8 (Delete Record) to remove the appropriate interdiction.

## Steps if the Cursor is in the Unit ID List:

1. If the cursor is in the Unit ID list, press CTRL + F4 (Previous Block) to move the cursor back to the Unit ID field.
2. Once the cursor is in the Unit ID field, press CTRL + F4 (Previous Block) to move the cursor to the Interdiction ID field.
3. Once the cursor is in the Interdiction Code field, press CTRL + F3 (Next Block) to move the cursor to the interdictions list.
4. Scroll through the list and press CTRL+ F8 (Delete Record) to remove the appropriate interdiction.

# View of Units

To view all of the units that are in the list, press **F6** to open a separate window that allows you to scroll through all of the units.

Press F8 (Exit Screen) to close the window and move back to the main page.

## At Commit

The system commits the data to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Registration General Functions menu.


WellSky Corporation
Proprietary and confidential

21

# Chapter 21 - Testing Module


21.1 Introduction ..... 1323
21.1.1 Overview ..... 1323
21.1.2 Structure ..... 1323
21.2 Manual Testing Functions ..... 1325
21.2.1 Create Test Batch/ Worksheet (WKS) ..... 1325
21.2.2 Assign Reagents to Test Batch/Worksheet (REAGENT) ..... 1328
21.2.3 First Tech Test Result (RES1) ..... 1330
21.2.4 Second Tech Test Result Verification (RES2) ..... 1333
21.2.5 Test Result Reconciliation (TRR) ..... 1335
21.2.6 Antigen Result Entry (AG) ..... 1337
21.2.7 Print Manual Testing Worksheet (LTRWKSHT) ..... 1339
21.2.8 Print Antigen Worksheet (TSRANTWS) ..... 1341
21.3 Multiple Observation Testing ..... 1342
21.3.1 Enter Test Observations: Tech 1 (OBS1) ..... 1342
21.3.2 Verify Test Observations: Tech 2 (OBS2) ..... 1346
21.3.3 Multiple Observation Reconciliation (RECOBS) ..... 1349
21.3.4 Edit Test Observation Results (EDITOBS) ..... 1352
21.3.5 Results Observation Query (OBSQ) ..... 1354
21.3.6 Print Multiple Observation Worksheet (LTRCNFWS) ..... 1356
21.4 Test Staging Parameters ..... 1358
21.4.1 Valid Test Staging Parameters (TPARM) ..... 1358
21.4.2 Define Critical Controls for Test (TSTPARM) ..... 1360
21.4.3 Enter Control Values for Test Batch (TECH1) ..... 1363
21.4.4 Verify Control Values for Test Batch (TECH2) ..... 1367
21.5 Common Testing Functions ..... 1371
21.5.1 Void/SUPVOID/Cancel Test Results (VOIDCA) ..... 1371
21.5.2 Void Test Batch (VOIDTB) ..... 1382
21.5.3 Edit Test Results (EDIT) ..... 1385
21.5.4 Additional Test Scheduling (ATS) ..... 1388
21.5.5 Enter 'NT' Results (NT) ..... 1393
21.5.6 Cancel Test Batch (in Holding Area) (CANCELTB) ..... 1396

21.6 Testing Queries ..... 1399
21.6.1 All Tests for a Unit Query (TESTQ) ..... 1399
21.6.2 Test Batches in Holding Area Query (HOLDQ) ..... 1401
21.6.3 Test Batches Details Query (TBQ) ..... 1405
21.6.4 Voided Tests by Test Batch ID Query (VTBQ) ..... 1412
21.6.5 Voided Tests by Unit ID Query (VTUQ) ..... 1413
21.6.6 Unscheduled Tests Query (UTQ) ..... 1415
21.6.7 Unit & Donor Tested Antigen Query (ANTQL) ..... 1418
21.6.8 Test Kit Reagents Query (REAGQ) ..... 1420
21.6.9 Instrument Upload Log Query (IULQ) ..... 1423
21.6.10 Instrument Error Log Query (IELQ) ..... 1425
21.6.11 Plate Controls Query (SPCQ) ..... 1427
21.6.12 RT Results File Detail Status Query (UPDQ) ..... 1429
21.6.13 RT Results and Upload Query by Unit ID (RUNT) ..... 1431
21.7 Reagent Qualification Functions ..... 1433
21.7.1 Valid Reagent Supplier Codes (VSUPPL) ..... 1433
21.7.2 Valid Reagent Codes (VREAG) ..... 1435
21.7.3 Enter Reagents into Repository (STORE) ..... 1438
21.7.4 Enter Reagents into Repository – Super (STORE2) ..... 1441
21.7.5 Reagent Kit (No Pre-Qualification) (RKNPQ) ..... 1441
21.7.6 Prepare Reagents for Testing (RPREP) ..... 1443
21.7.7 Reagents Check-Out - Internal QC (CHKOQC) ..... 1446
21.7.8 Reagents QC Entry: Tech 1 (RTECH1) ..... 1449
21.7.9 Reagents QC Entry: Tech 2 (RTECH2) ..... 1450
21.7.10 Resolve Reagent QC Discrepancy (RSUPER) ..... 1452
21.7.11 Re-Check Reagents into Repository (RCHKIN) ..... 1455
21.7.12 Reagent Check-Out - - Send Out (CHKOUT) ..... 1457
21.7.13 Reagent Query (RGQRY) ..... 1459
21.7.14 Supplier Query (SPQRY) ..... 1462


WellSky Corporation
Proprietary and confidential

# 21.1 Introduction

## 21.1.1 Overview

The Testing Modules is made up of all functions that relate to the testing of collected blood for antigens, viruses, ABO blood type and cholesterol level. Here, testing data is tracked as the blood is tested, including:

- Reagents used during testing
- Test results
- Band values
- Plates
- Batches
- Worksheets

The Testing Module handles routine and custom tests, patient testing and testing services. Here, the system's detailed tracking abilities fulfill completely cGMP criteria.

During testing, data security is strongly maintained. Only authorized personnel are allowed access, and the system provides a complete audit trial. The system will not allow a label to be produced before all required tests have been completed.

The system prompts the user to print worksheets generated during manual testing for the handwritten results. These worksheets are then used when results are entered into the system.

Data from automated tests is transferred directly into the computer, eliminating the chance the human transcription error. When double entry of manual test results and follow-up verification are used it assures accurate results. When discrepancies in data entry are detected, the system alerts the user immediately. In such cases, a supervisory level of authorization is required in order to make corrections.

The system automatically schedules repeats tests for units with unacceptable results and places interdictions on these units until the repeat tests are conducted successfully. Through query and report screens, the testing module provides the user with the ability to review both testing data and the number of repeat tests required.

If any test result/test is voided or canceled after labeling or extraction of result, then a QCRE interdiction will be generated on such limits.

## 21.1.2 Structure

The following sections are included in the Lab Testing Module:

- Manual Testing Functions
- Multiple Observation Testing
- Test Staging Parameters
- Common Testing Functions
- Testing Queries

- Testing Reports
- Reagent Qualifications
- Proficiency Testing

Testing Reports are described in the *WellSky® Blood Centers Reports Guide*.

# 21.2 Manual Testing Functions

Manual Testing Functions are accessed from the following menu:

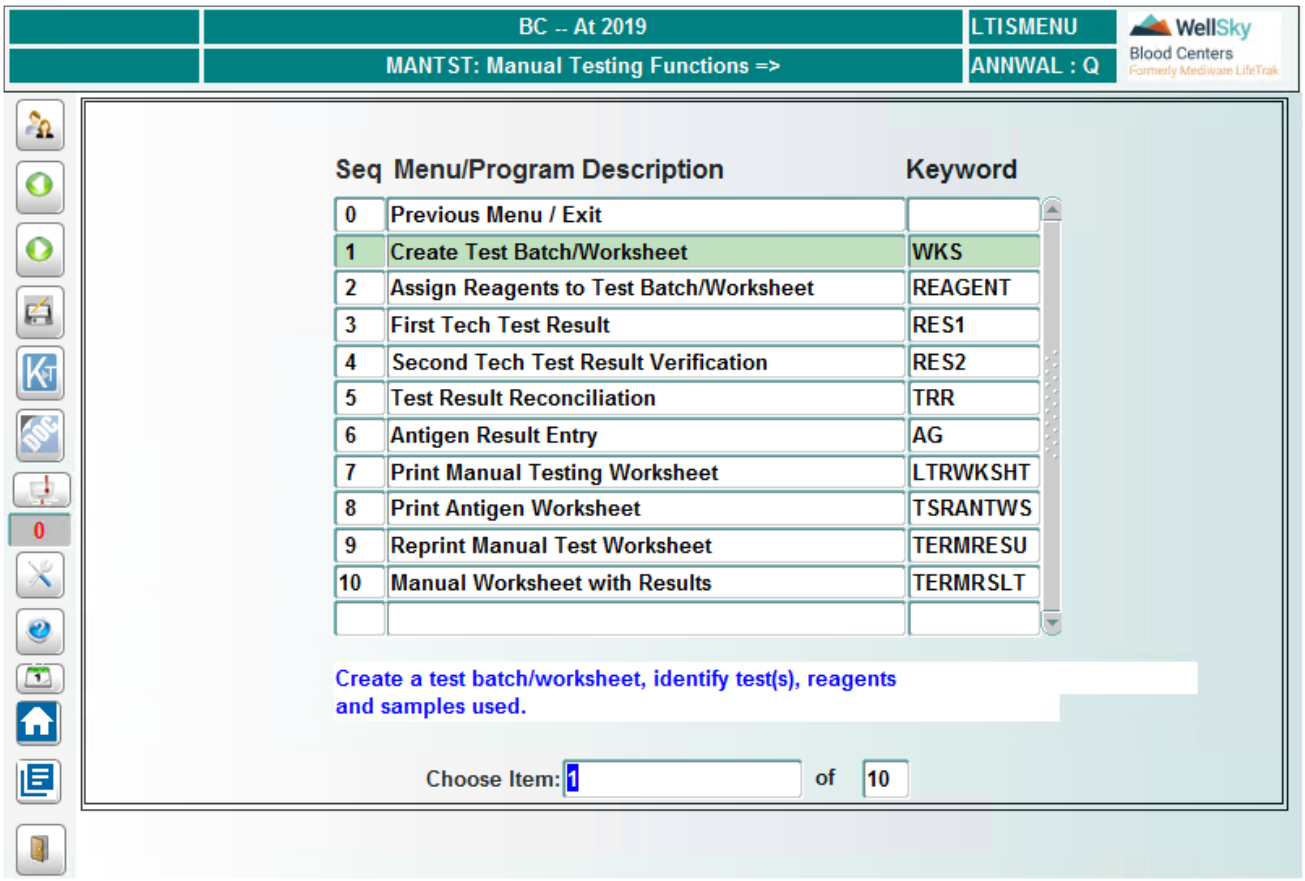


## 21.2.1 Create Test Batch/ Worksheet (WKS)

### Intended Use

Use the Create Test Batch/Worksheet screen to create a worksheet for a test batch or to add units to an existing worksheet. Units can be added to an existing worksheet until result query occurs for one unit.

**NOTE –** If you create antigen test worksheets, create them separately from all other manual worksheets.

### Limitations

- There can be only seven antigens associated to one worksheet at a time.
- Do not add units to a worksheet for test being resulted in multi-observation as NT. These should be entered using Enter NT Results (LTIMRENT).

- Printing a confirmatory test worksheet from this program is not possible due to the requirement of the test type. User must generate by going to the Confirmatory worksheet (LTRCNFWS ) and entering in the necessary parameters.
- When creating an antigen worksheet, only place tests IDs that are antigens (group AG). Do not mix antigen tests with other tests.

## Prerequisites

When entering multiple tests at one time the system will create a worksheet for each test entered and unlimited number of units can be placed on the worksheet. The user can determine which worksheets are to be printed.

## Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword `WKS`.

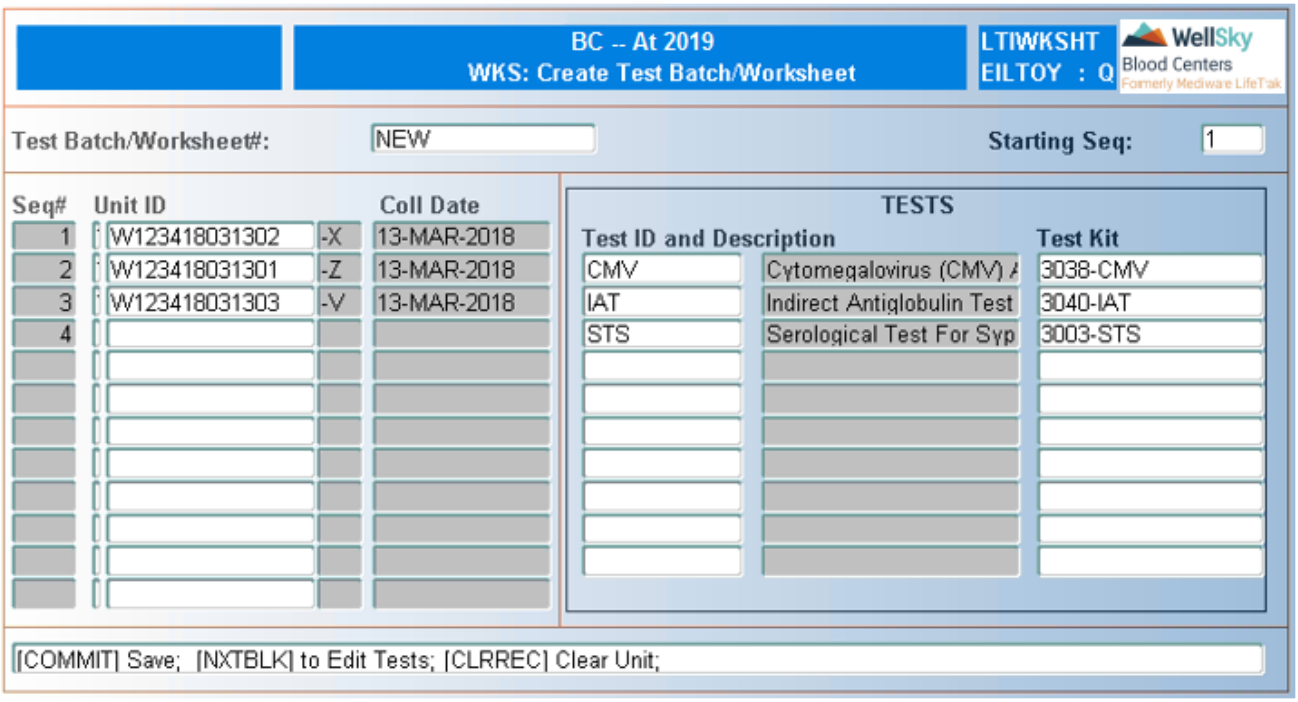


## Control Block Fields and Definitions

### Test Batch/Worksheet #

If you are adding unit IDs to a worksheet, enter worksheet ID, otherwise, press **CTRL** + **F2** (Create Record) to create a new batch. NEW will automatically display.

**NOTE –** The computer assigns a worksheet ID when the first unit in a test batch is committed to the system.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Starting Seq

Enter the sequence number of the first tube in the batch.

**NOTE –** If you are adding to a worksheet, after the worksheet ID is entered, the next available work number displays.

## Test ID

Enter test ID or select from LOV.

## Test Kit ID

Enter test kit ID, select from LOV, or leave blank.

**NOTE –** Within the LOV: If the kit ID has the test ID beside the kit pre-qualification was not performed. Expired kits may be manually entered, but they will not appear in the LOV. A warning is given if an expired Kit ID is entered. User must override to use expired kit.

## Seq

The system assigns a sequence number. This is the same as the starting sequence number. Field is not navigable.

## Unit ID

Scan or manually enter unit ID.

**NOTE –** When entering manually, a window displays for a required double blind entry of the unit ID. A confirmation message displays if the unit has not been checked in. Enter `Y` or `N` to acknowledge the message.

## Coll Date

The system displays the date the unit was collected. If the unit was not checked in, this field is blank. Field is not navigable.

Press **F12** (Commit) to save worksheet.

# At Commit

Updates made to the system at commit are as follows:

- A worksheet is created for the test batch.
- A window message will display for the user to print the worksheet for all tests except ABO/Rh. Enter `Y` or `N` to acknowledge the message.

## What To Do Next

For normal processing, press F8 (Exit Screen) to return to the Manual Testing Functions menu.

# 21.2.2 Assign Reagents to Test Batch/Worksheet (REAGENT)

## Intended Use

Use the Assign Reagents to Test Batch/Worksheet screen to assign reagent kit to a worksheet. The information entered here remains in effect for the selected test until modified.

## Limitations

None

## Prerequisites

- Test batch might have been created without assigning a reagent kit.
- Reagent kits must have been created.

## Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword `REAGENT`.

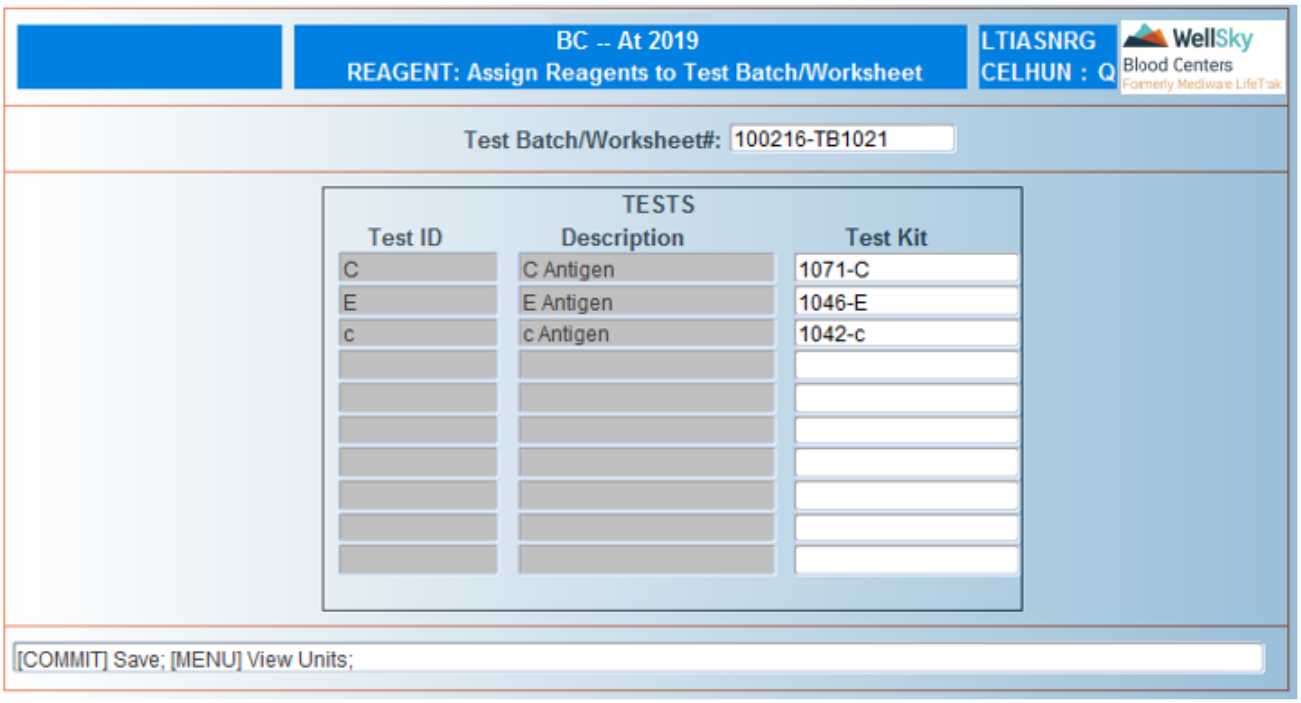

# Control Block Fields and Definitions

## Test Batch/Worksheet ID

Enter test batch/worksheet ID or select from LOV.

**NOTE –** Only batches associated to your lab code appear in the LOV.

# Detail Block Fields and Definitions

## Test ID and Description

Test ID and description associated to the test batch/worksheet automatically displays. Field is not navigable.

## Test Kit

Enter test kit ID or select from LOV.

**NOTE –** The kits that display are kits that have been qualified through reagent Qualification or have been created with Reagent Kit (no Pre-Qualification).

If a kit has been defined for the test, it displays here.

Press F12 (Commit) to save entry.

# View Units in Batch

To view units in batch, press F6 (Menu). The following window opens:

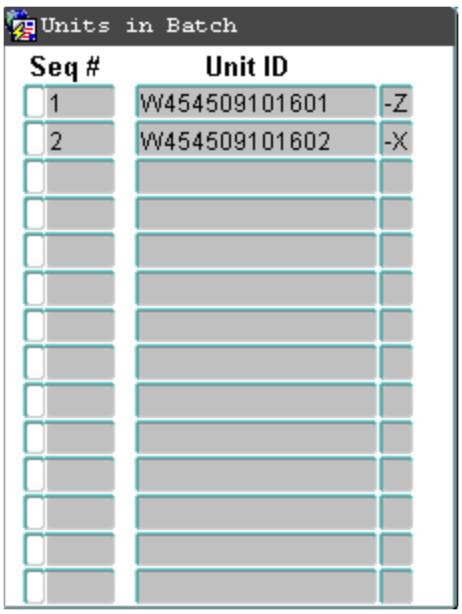

## At Commit

Reagent entered is assigned to the worksheet.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Manual Testing Functions menu.

# 21.2.3 First Tech Test Result (RES1)

## Intended Use

Use the First Tech Test Result screen to enter test result interpretations for units in a test batch. After result interpretations are entered, they are stored in a temporary area.

Results are uploaded in the database if second tech entry or staging is not required. If second tech entry is required and staging is not required, updates to the database do not occur until a different tech enters results in the Second Tech Test Result Verification screen. When staging is required updates to the database does not occur until the first and second tech entry is completed in the staging module.

## Limitations

None

## Prerequisites

- Screen is used for manual test only this does not include antigen testing.
- You can only enter results if the worksheet was created in your lab area.

## Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword `RES1`.


WellSky Corporation
Proprietary and confidential

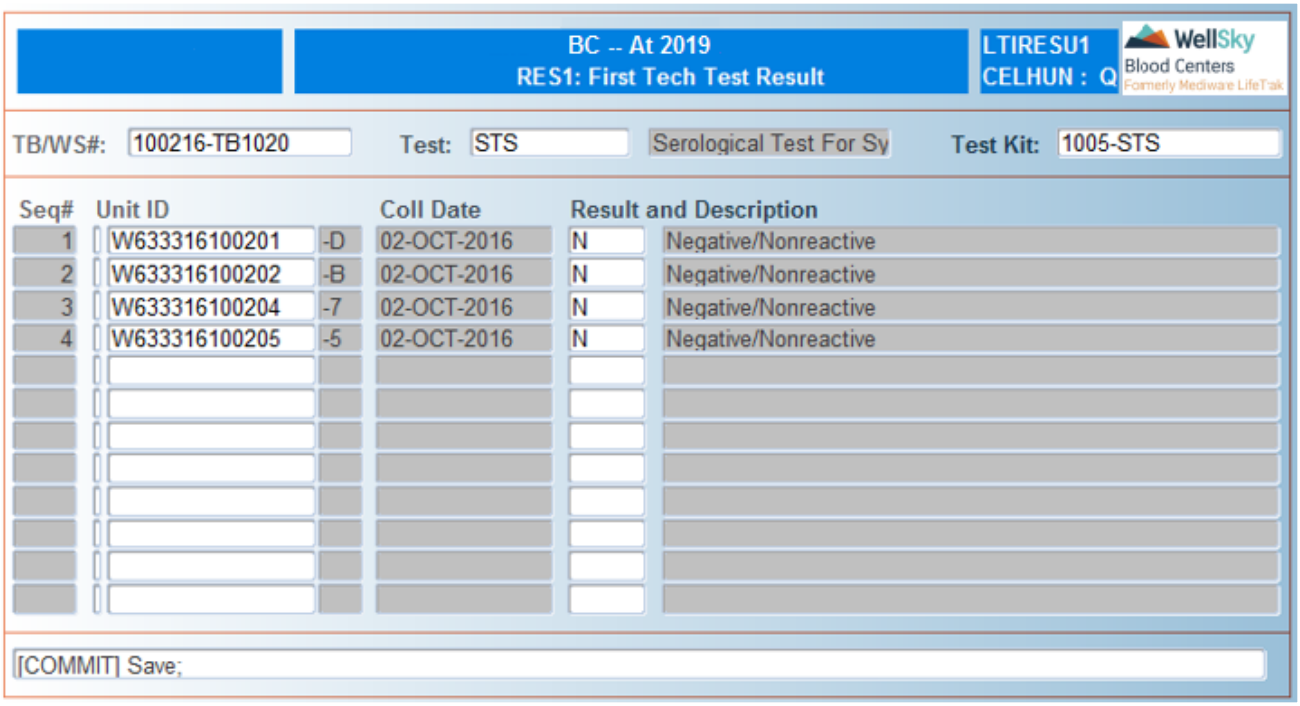


# Control Block Fields and Definitions

## TB/WS#

Enter worksheet ID or select from LOV to select an existing worksheet ID. Leave field blank to create a new worksheet.

**NOTE –** Results can only be entered for worksheets in your lab code.

## Test ID

Enter test ID or select from LOV.

## Test Kit

Enter test kit ID or select from LOV.

**NOTE –** Entry of the kit ID is only used if reagents were not previously assigned or when creating new worksheet.

# Detail Block Fields and Definitions

## Seq

Sequence number of the first tube in the batch automatically displays. Field is not navigable.

**NOTE –** System displays the sequence numbers assigned in the Create Test Batch/Worksheet screen.

## Unit ID

Scan or manually enter unit ID.

**NOTE –** Unit IDs entered in Create Test Batch/Worksheet (WKS) automatically display.

## Coll Date

Unit collection date automatically displays, if present. Field is not navigable.

## Result Code and Description

Enter result code or select from LOV.

**NOTE –** Results may be reviewed and changed until they are committed. If screen is exited before pressing F12 (Commit), results will be lost.

After all results are entered, press F12 (Commit) to save the data.

# At Commit

- Test results entered on the screen are not updated to the database if second tech entry or staging is required. If staging is not required but second tech entry is updates to the database will not occur until the second tech entry is performed. If staging is required the results are not updated until the first and second tech in staging is completed.
- Test results entered on the screen are saved directly to the database when second tech staging is not required.
- If the worksheet number was not populated and the user is creating a worksheet in this screen the number is generated upon commit.
- Upon commit , the following window opens, giving a summary of the results entered.:

This allows you to review entered results and modify before committing.

Enter Y to continue or enter N to abort.

A second technician must enter the results using the Second Tech Test Result Verification screen if required for the test.

# What to Do Next

Perform one for he following functions, based on test set-up:

- Second Tech Test Result Verification (RES2).
- Enter Control Values for Test Batch (TECH1).
- No further entry required if the test if second result entry or staging is not required.

# 21.2.4 Second Tech Test Result Verification (RES2)

## Intended Use

Use the Second Tech Test Result Verification screen to enter test result interpretations for units in a test batch. This screen is used to confirm manual test results earlier by a different lab technician.

Once the second lab technician enters the results, they are moved to the database where they can be reviewed, if staging is not required. If staging is required the test batch then appears for first tech entry in staging.

**NOTE –** System Administrator defines which test will require a second tech entry or staging. Upon defining these tests it is determined if a full entry, where all test results are entered, or a partial entry where selected test results are entered.

## Limitations

None

## Prerequisites

- The batch must have had results entered by a different user in First Tech Test Result (RES1) or Enter Tech Observations – Tech 1 (OBS1).
- Test must be defined in the Available Tests (TEST) requiring second tech entry.
- Worksheet must have been created in your lab code.

## Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword `RES2`.

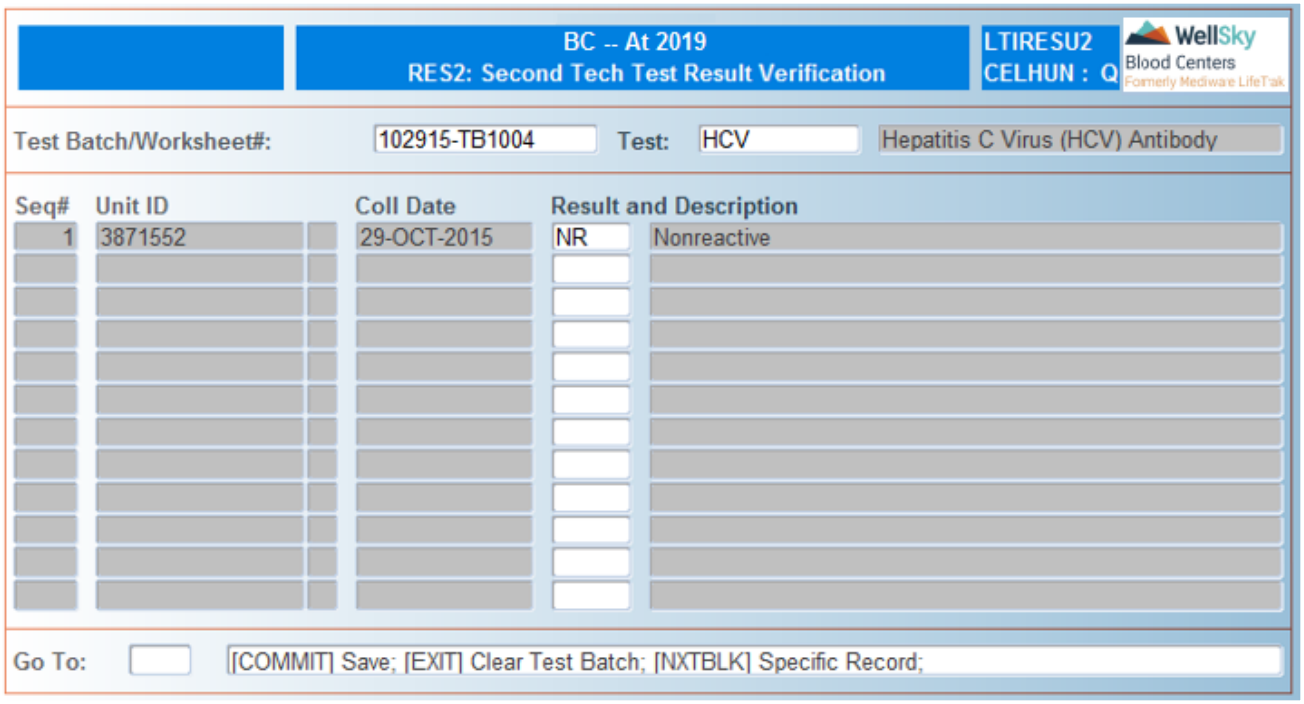


# Control Block Fields and Definitions

## Test Batch/ Worksheet #

Enter worksheet ID or select from LOV.

**NOTE –** LOV displays only worksheets that have results entered by another user in First Tech Test Result (RES1) or Enter Tech Observations – Tech 1 (OBS1).

## Test ID

Enter test ID or select from LOV. Test description automatically displays after ID is entered.

# Detail Block Fields and Definitions

## Seq

Sequence number automatically displays. Field is not navigable.

## Unit ID

Unit ID automatically displays. Field is not navigable.

## Coll Date

Unit collection date automatically displays, if present. Field is not navigable.

## Result Code And Description

Enter result code or select from LOV.

**NOTE –** Results may be reviewed and changed until they are committed. If screen is exited before pressing F12 (Commit), results will be lost.

Press F12 (Commit) once all entries have been made.

## Result Discrepancies

When discrepant results are entered, the following window opens:




**NOTE –** If the system is configured to require second tech entry, all results must be entered for the worksheet before any results are updated in the database or can be reconciled.

## Go To Field

Enter a line number and the cursor will move to that line number.

## At Commit

- All results that are not discrepant are uploaded to the database if staging is not required.
- If discrepant result exists, they must be reconciled in Test Result Reconciliation (TRR).
- Upon commit, the following window opens, giving a summary of the results entered:

Enter Y to continue or enter N to abort.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Manual Testing Functions menu.

# 21.2.5 Test Result Reconciliation (TRR)

## Intended Use

Use the Test Result Reconciliation screen to reconcile manual test result entry discrepancies. The information is accessed by worksheet ID and test ID. This screen is used when different results were entered from First Tech Test Result (RES1), and Second Tech Test Result Verification (RES2).

## Limitations

Discrepancies can be resolved only by users in the same lab code.

## Prerequisites

This screen is used when different results were entered from First Tech Test Result (RES1), and Second Tech Test Result Verification (RES2).

## Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword `TRR`.

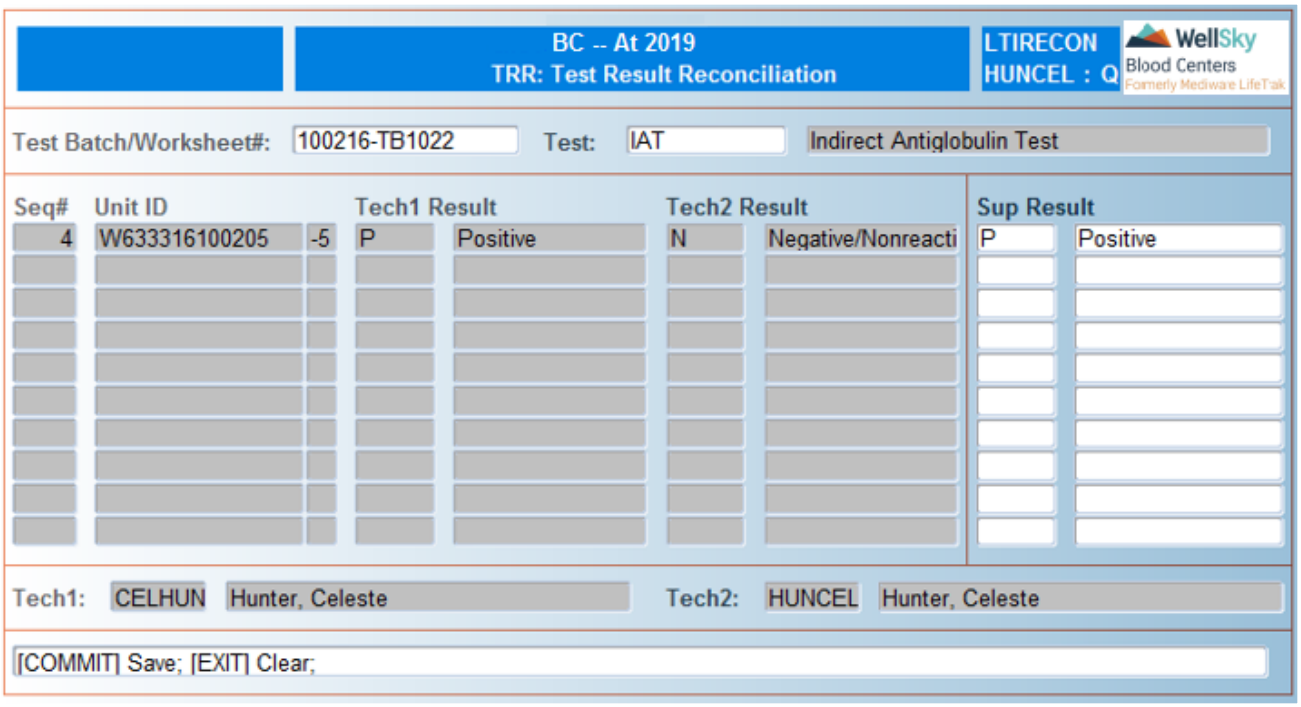


## Control Block Fields and Definitions

### Worksheet ID

Enter worksheet ID or select from LOV.

### Test ID

Enter test ID or select from LOV.

## Detail Block Fields and Definitions

### Seq#

Sequence number displays. Field is not navigable.

### Unit ID

Unit ID to be reconciled displays. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Tech 1 Result
Result code and description entered in First Tech Test Result (RES1) displays. Field is not navigable.

### Tech 2 Result
Result code and description entered in Second Tech Test Result Verification (RES2) displays. Field is not navigable.

### Sup
Result Enter the correct result or select from LOV.

> **NOTE –** The result entered in the Sup Result field is considered the correct result; it does not have to match either of the first two results.

Press F12 (Commit) to reconcile the test result and worksheet. The following window opens:

- Enter Y if the results entered are correct.
- Enter N to return to the screen and modify results.

## At Commit
Reconciled results are uploaded to the unit(s).

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Manual Testing Functions menu.

# 21.2.6 Antigen Result Entry (AG)

## Intended Use
Use the Antigen Result Entry screen to manually enter test results for antigens, that is, tests for which the test type has been defined in Master Code ANTGR. Results are uploaded in the database if staging is not required.

When staging is required, results do not upload to the unit until entry has been completed in Verify Control Values for Test Batch (TECH2).

## Limitations
None

## Prerequisites
- Units must have been scanned into a test batch.
- Reagents must have been committed to the batch.

# Accessing the Screen

Access this screen from the Manual Testing Functions menu or by entering the keyword AG.

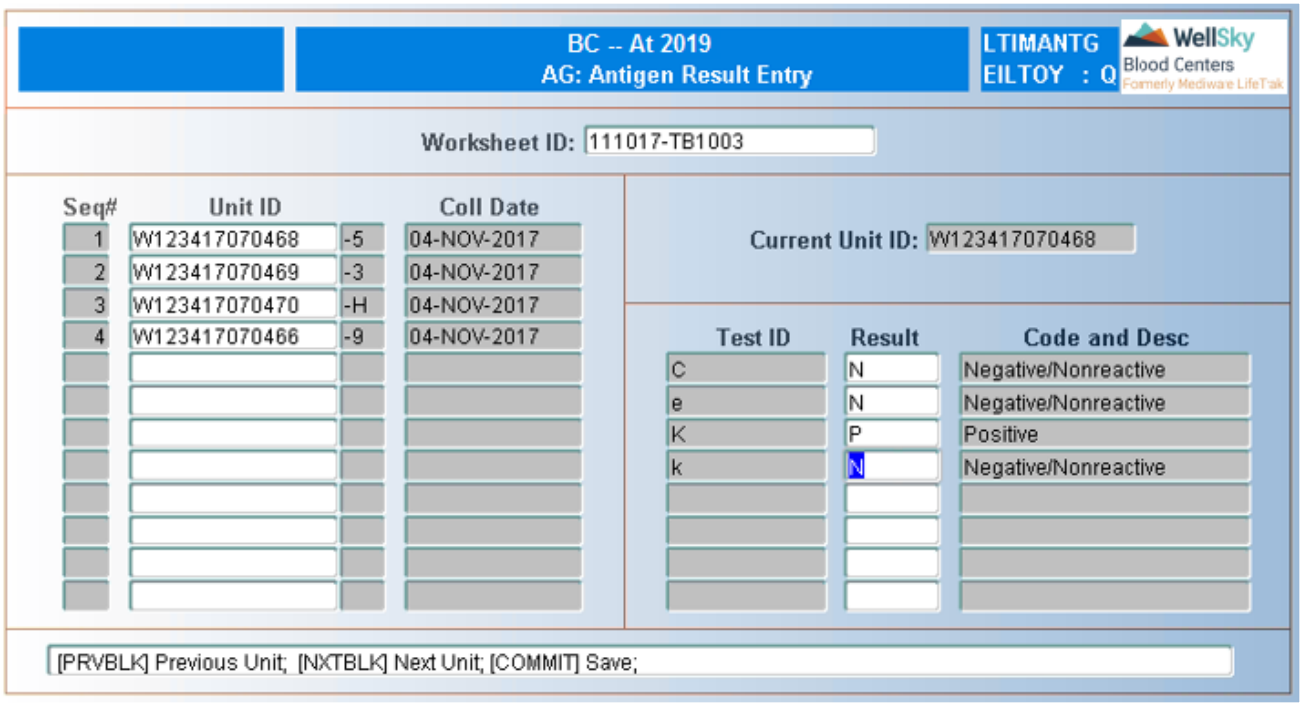


# Control Block Fields and Definitions

## Worksheet ID

Enter worksheet ID or select from LOV.

# Unit ID Block Fields and Definitions

## Seq

Sequence number previously assigned by the system automatically displays. Field is not navigable.

## Unit ID

Unit IDs assigned to the worksheet automatically display. Field is not navigable.

## Coll Date

Unit collection date automatically displays, if present. Field is not navigable.

# Results Block Fields and Definitions

## Current Unit ID

Unit ID currently being resulted displays. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Test ID

Test ID to be resulted displays. Field is not navigable.

### Result Code and Description

Enter result code or select from LOV.

**NOTE –** Press CTRL + F3 (Next Block) to go to the next unit ID in the list. Press CTRL + F4 (Previous Block) to go to the previous unit ID in the list.

Press F12 (Commit) once all results have been entered.

**NOTE –** If F12 (Commit) is pressed without entering results for all units on the batch, the following window opens:

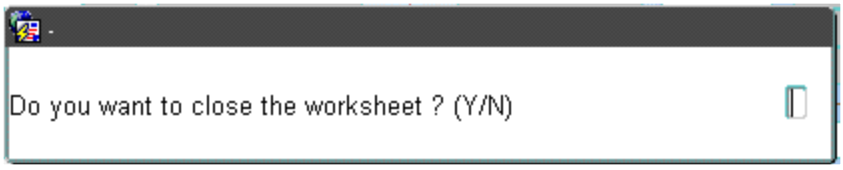


- Enter Y to close the batch and automatically insert 'NT' for the units that were not resulted.
- Enter N to leave the batch open for entry of other units at a later time.

## At Commit

- If staging is not required, results are uploaded to the unit if the worksheet is closed.
- If staging is not required and the worksheet is left open, results will not upload to the units until the worksheet is closed.
- If staging is required, results will not upload until staging is completed.

## What to Do Next

- If staging is required, perform Enter Control Values for Test Batch (TECH1).
- If staging is not required, there is no next step.

# 21.2.7 Print Manual Testing Worksheet (LTRWKSHT)

## Intended Use

Use the Print Manual Testing Worksheet screen to reprint the worksheet that was generated when the test batch ID was created. This report gives details about the testing batch ID and location for entering results for each unit in the testing batch ID.

## Generating the Report

| Parameter Value | Multiple Entries Allowed? | LOV Available? | Other Information |
|---|---|---|---|
| Chapter ID | Yes | Yes | Default is WAD |
| Test Batch ID | Yes | Yes | N/A |
| Test ID | Yes | Yes | N/A |

## Report Content

Use this report to reprint the worksheet for the purpose of entering test results and entering into the system.

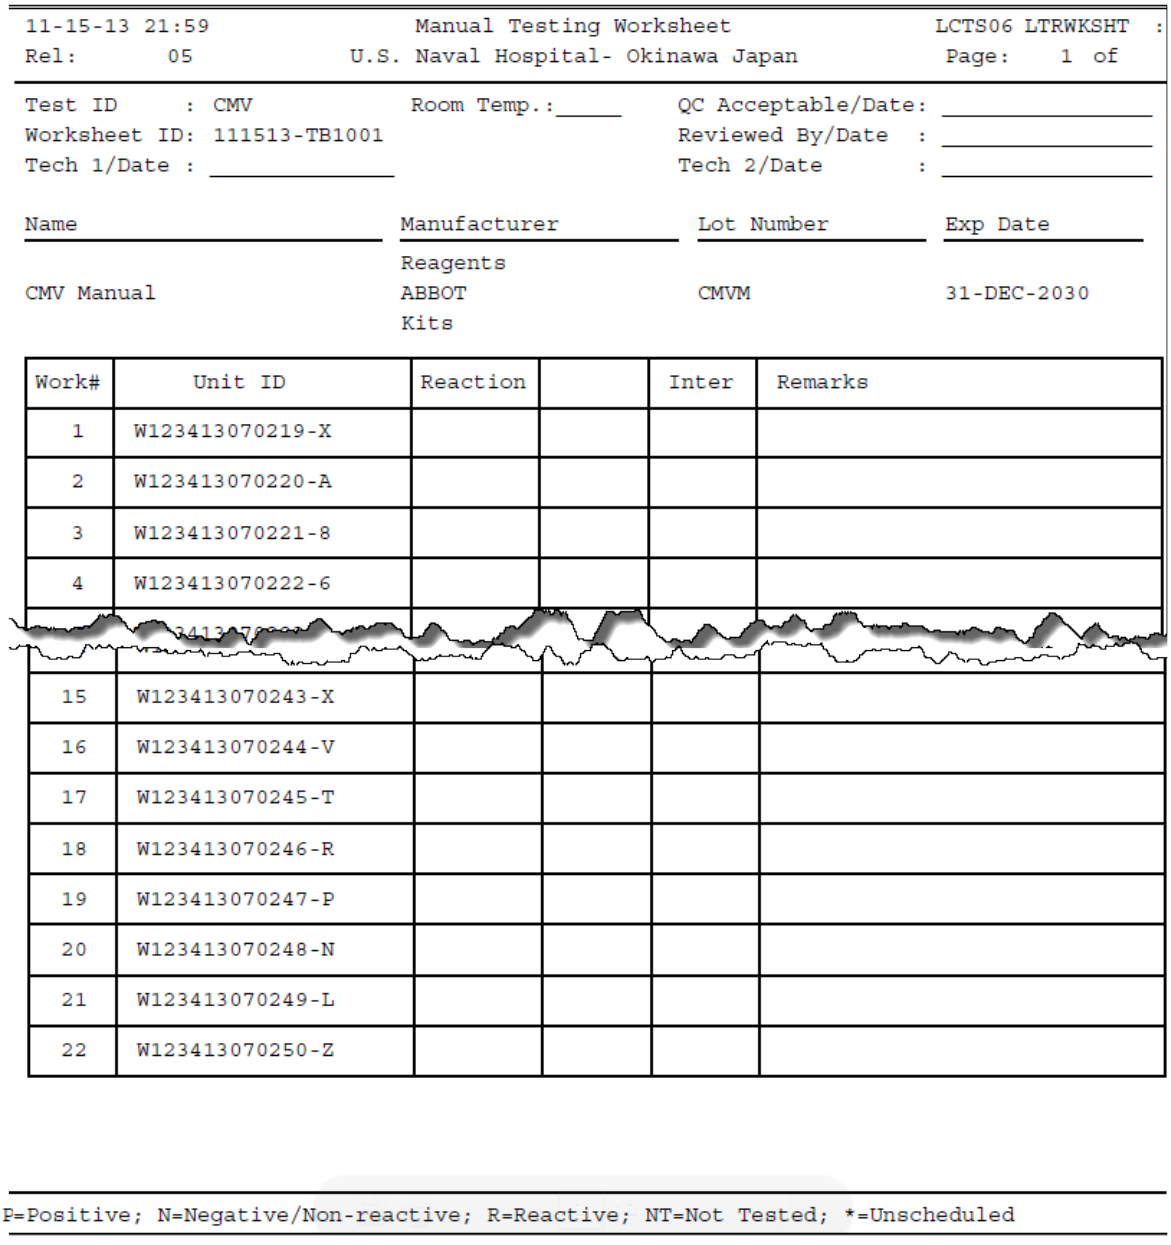

11-15-13 21:59 Manual Testing Worksheet LCTS06 LTRWKSHT :
Rel: 05 U.S. Naval Hospital- Okinawa Japan Page: 1 of

Test ID : CMV Room Temp.:_____ QC Acceptable/Date: _____
Worksheet ID: 111513-TB1001 Reviewed By/Date : _____
Tech 1/Date : _____ Tech 2/Date : _____

| Name | Manufacturer | Lot Number | Exp Date |
|---|---|---|---|
| CMV Manual | Reagents ABBOT Kits | CMVM | 31-DEC-2030 |

| Work# | Unit ID | Reaction | | Inter | Remarks |
|---|---|---|---|---|---|
| 1 | W123413070219-X | | | | |
| 2 | W123413070220-A | | | | |
| 3 | W123413070221-8 | | | | |
| 4 | W123413070222-6 | | | | |
| 15 | W123413070243-X | | | | |
| 16 | W123413070244-V | | | | |
| 17 | W123413070245-T | | | | |
| 18 | W123413070246-R | | | | |
| 19 | W123413070247-P | | | | |
| 20 | W123413070248-N | | | | |
| 21 | W123413070249-L | | | | |
| 22 | W123413070250-Z | | | | |

P=Positive; N=Negative/Non-reactive; R=Reactive; NT=Not Tested; *=Unscheduled


WellSky Corporation
Proprietary and confidential

# 21.2.8 Print Antigen Worksheet (TSRANTWS)

## Intended Use

Use Print Antigen Worksheet screen to reprint the worksheet that was generated when the test batch ID was created for only antigen test. This report gives details about the testing batch ID and location for entering results for each unit in the testing batch ID.

## Generating The Report

| Parameter Value | Multiple Entries Allowed? | LOV Available? | Other Information |
|---|---|---|---|
| Chapter ID | Yes | Yes | Default is WAD |
| Testing Batch ID | Yes | Yes | N/A |

## Report Content

Use this report to reprint the worksheet for the purpose of recording antigen test results and entering into the system.

```
05-16-07 14:49                          Antigen Worksheet Report                          LCTS03 TSRANTWS  :Q
Rel:      01                          Your Blood Center, Anywhere, USA                       Page:  1 of   1

Worksheet ID: 051607-TB5115                                                  QC Acceptable : _____________
                                                                             Reviewed By   : _____________

      Test-ID     Name                        Manufacturer                 Lot Number          Exp-Date
      ----------  --------------------------  ---------------------------  ------------------  ----------

                                          ----  Reagents  -----
      K           Anti-K                      GAMMA                        K999                30-DEC-2010
```

| Worksheet ID: 051607-TB5115 | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Work# | Unit ID | K | | | | | | | | |
| Ctrl | | | | | | | | | | |
| Ctrl | | | | | | | | | | |
| 1 | W454507810001-N | | | | | | | | | |

```
P = Positive; N = Negative; R = Reactive; NR = Non-reactive; NT = Not Tested; * = Unscheduled
```

# 21.3 Multiple Observation Testing

Multiple Observation Testing functions are accessed from the following menu:

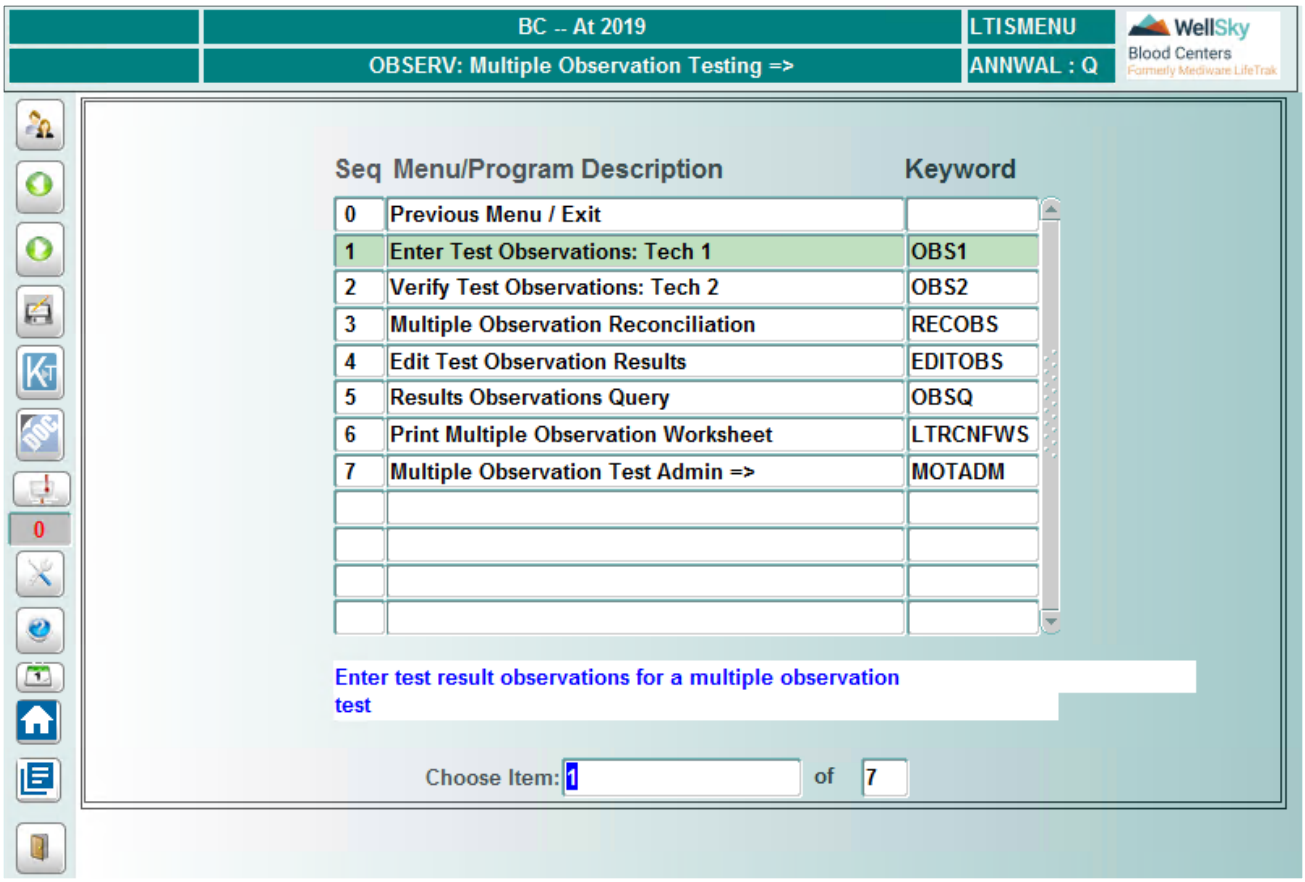


## 21.3.1 Enter Test Observations: Tech 1 (OBS1)

### Intended Use

Use Enter Test Observations: Tech 1 screen enter results for a test that has multiple observations to determine the final interpretation.

### Limitations

- User should not enter all band values as null and result as NT. Results should be entered through Enter NT Results (NT).
- Worksheet must have been created in user's lab code.


WellSky Corporation
Proprietary and confidential

## Prerequisites

- Units must have been scanned into a test batch using Create Test Batch/Worsheet (WKS).
- Reagents must have been committed to the worksheet.
- Observation fields must have been defined for the test using Multiple Observation Fields (MOF).
- Test types must have been defined using Multiple Observation Test Types by MFG (MOTTMFG).

## Accessing the Screen

Access this screen from the Multiple Observation Testing menu or by entering the keyword `OBS1`.

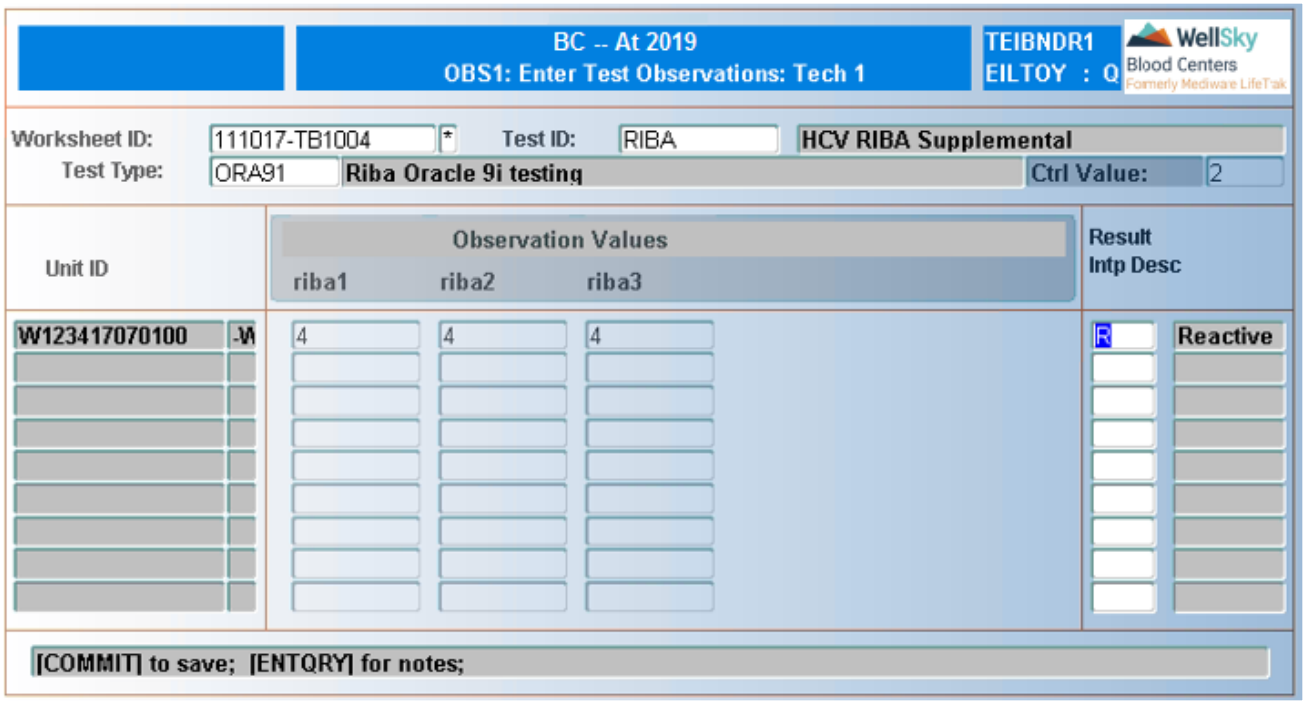


## Control Block Fields and Definitions

### Worksheet ID

Enter worksheet ID or select from LOV.

### Test ID

Enter test ID or select from LOV. Test description displays after the ID is entered.

### Type

Enter type or select from LOV.

### Control Value

Control value displays, if applicable, according to value entered for the test type in Multiple Observation Test Types by Mfg (MOTTMFG). Field is not navigable.

> **NOTE –** Positive results entered must be greater than or equal to the control value in order to be considered positive.

## Detail Block Fields and Definitions

### Unit ID

Unit IDs entered in Create Test Batch/Worksheet (WKS) automatically display. Field is not navigable.

### Band Values

Enter applicable band values or select from LOV.

> **NOTE –** Band value columns vary by test ID and test type.

### Result Intp Desc

Result interpretation automatically displays based on combination and values entered.

Entry is allowed only if system interpretation is allowed to be overridden in Multiple Observation Test Types by Mfg (MOTTMFG). The following window opens whenever the system interpretation is overridden:

- Enter `Y` to accept the override result.
- Enter `N` to return to the Result Intp Desc field.

Press F12 (Commit) once all results have been entered.

## Entering Other Band Results

Press F6 (Menu) to enter other band results. The following window opens:

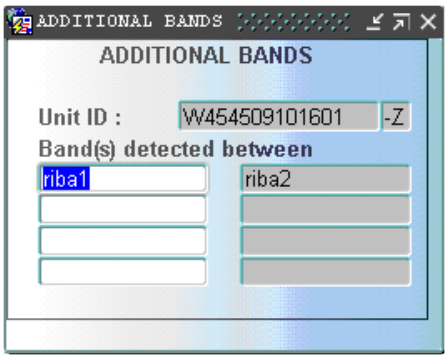

Other band entry allowed only if the O field is set to Y in Multiple Observation Test Types by Mfg (MOTTMFG) for the test and test type.

### Unit ID

Unit ID automatically displays. Field is not navigable.

### Other Bands

Enter valid band or select from LOV.

Press **CTRL** + **F2** (Create Record) to add additional bands.

Press **ALT** + **F5** (Clear Record) to delete added bands.

Press **F8** (Exit Screen) to return to the main screen.

## Entering Notes

Press **CTRL** + **F12** (Enter Query) to enter notes. The following window opens:

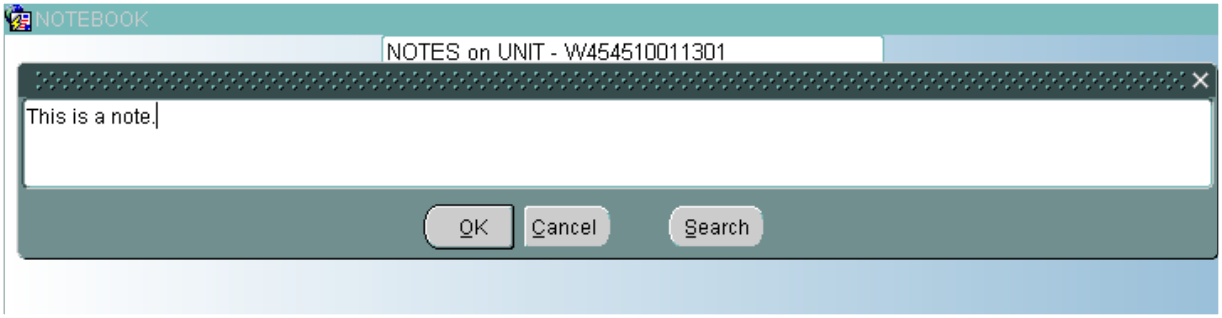


### Notes on UNIT

Enter free format note. A maximum of 240 characters is allowed.

Press **F12** (Commit) to save notes and return to the main screen.

Press **F8** (Exit Screen) to return to the main screen without saving notes.

## At Commit

Data from this screen is stored in temporary area, pending second result verification.

## What to Do Next

A different user must re-enter results using one of the following:

- Verify Test Observations: Tech 2 (OBS1) (for full entry).
- Second Tech Test Results Verification (RES2) (for final interpretation only) screen.

**NOTE –** Determination of which screen to use next is defined in Multiple Observation Test Types by Mfg (MOTTMFG).

# 21.3.2 Verify Test Observations: Tech 2 (OBS2)

## Intended Use

Use Verify Test Observations: Tech 2 screen to enter multiple observations for units in a test batch. This screen is used to confirm manual test results entered earlier to a temporary area by a different user.

Once the second user enters the results, they are moved to the database where they can be reviewed, if staging is not required. Results in the temporary area cannot be reviewed. If staging is required, the test batch then appears for first tech entry in staging.

## Limitations

User should not enter all band values as null and results as NT. Results should be entered through Enter NT Results (NT).

## Prerequisites

You will not be able to use this screen unless the following conditions are met:

- The unit has already been manually tested.
- A different user has entered the test results in Enter Test Observations: Tech 1 (OBS1).
- Worksheet must have been created in your lab code.
- Test must be configured to require full Tech 2 entry.

## Accessing the Screen

Access this screen from the Multiple Observation Testing menu or by entering the keyword `OBS2`.

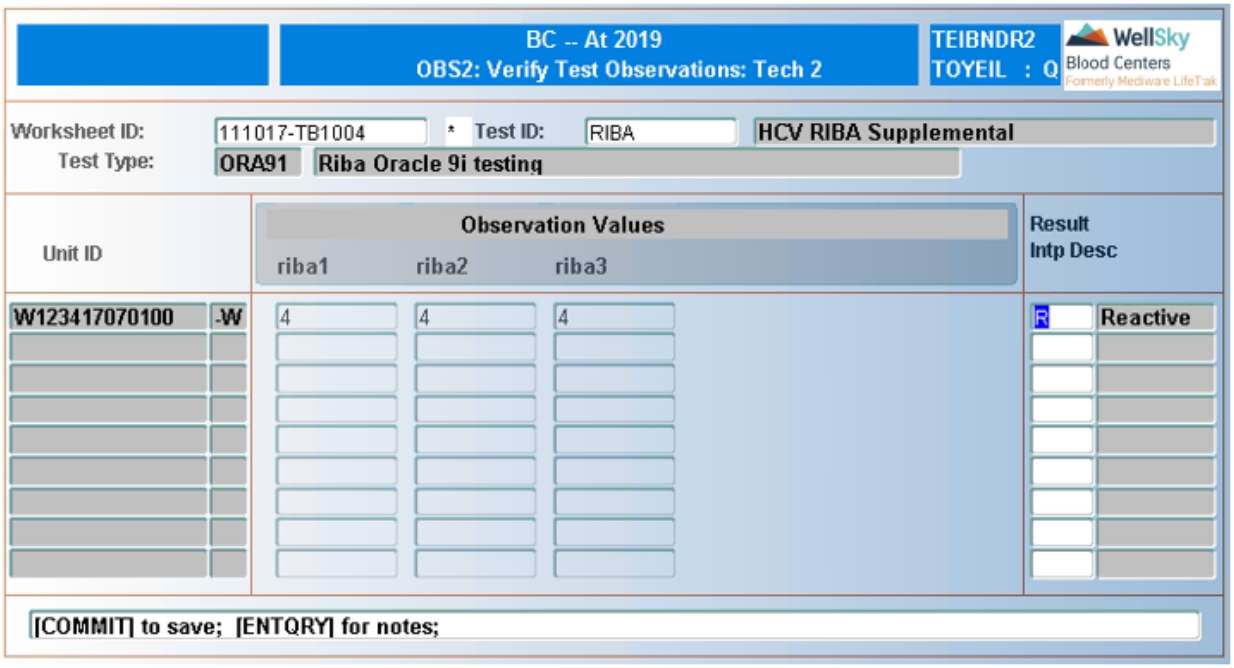



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Worksheet ID

Enter worksheet ID or select from LOV.

> **NOTE –** LOV displays only worksheets that have results entered the first time and that were created in user's lab code.

## Test ID

Enter test ID or select from LOV.

> **NOTE –** LOV will display only the manual tests selected for this worksheet.

## Test Type

Test type entered in Enter Test Observations: Tech 1 (OBS1) automatically displays. Field is not navigable.

## Control Value

Control value automatically displays value entered in Enter Test Observations: Tech 1 (OBS1). Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Unit IDs associated to worksheet automatically display. Field is not navigable.

## Band Values

Enter band values or select from LOV.

## Result IntpDesc

System Interpretation automatically displays based on combination and entry value, enter interpretation or select from LOV.

Manual entry allowed only if system interpretation is allowed to be overridden in validation table Valid Confirmatory Test Types. If the interpretation is overridden, the following window opens:

- Enter `Y` to accept the override.
- Enter `N` to return to the Result Interpretation field.

Press **F12** (Commit) to save entries.

**NOTE –** If discrepant results are entered, the following window opens:

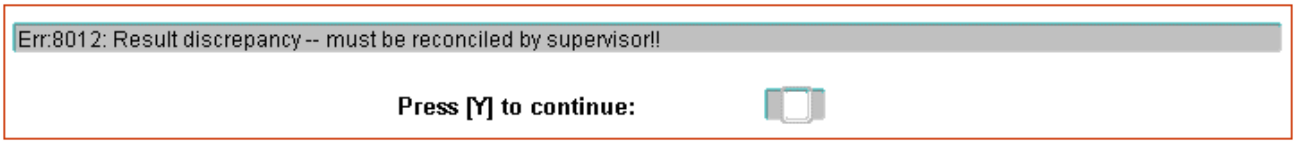


Results may be reviewed and changed prior to commit. You must commit data before exiting the screen, or it will be lost.

## Entering Other Bands

Press **F6** (Menu) to enter other band results. The following window opens:

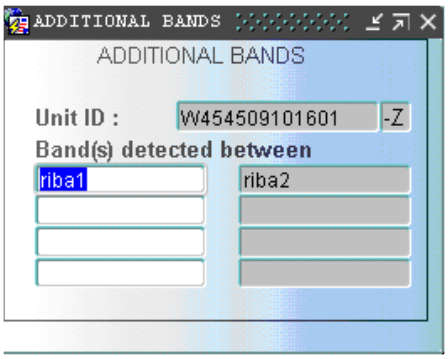


**NOTE –** Other band entry allowed only if the O field is set to Y in Multiple Observation Test Types by Mfg (MOTTMFG) for the test and test type.

### Unit ID

Unit ID automatically displays. Field is not navigable.

### Other Bands

Enter valid band or select from LOV.

Press **CTRL** + **F2** (Create Record) to add additional bands.

Press **ALT** + **F5** (Clear Record) to delete added bands.

Press **F8** (Exit Screen) to return to the main screen.

## Entering Notes

Press CTRL + F12 (Enter Query) to enter notes. The following window opens:

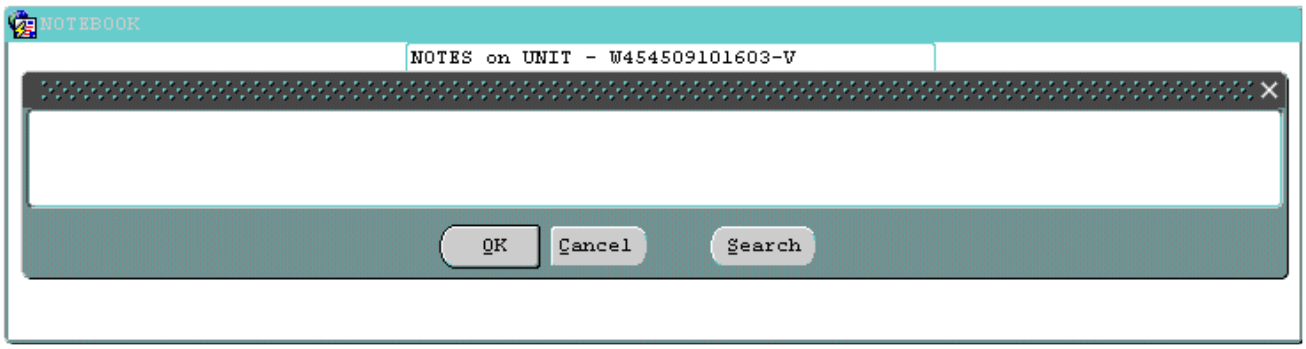


### Notes on UNIT

Enter free format note. A maximum of 240 characters is allowed.

Press F12 (Commit) to save notes and return to the main screen.

Press F8 (Exit Screen) to return to the main screen without saving notes.

## At Commit

All results that are not discrepant are uploaded to the database.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Multiple Observation Testing menu.
- If discrepant results exist, they can be reconciled in Multiple Observation Reconciliation (RECOBS).

# 21.3.3 Multiple Observation Reconciliation (RECOBS)

## Intended Use

Use Multiple Observation Reconciliation screen to reconcile manual multiple observation discrepancies. The information is accessed by worksheet ID. This screen is used when different results were entered from:

- First tech/second tech result entry.
- First tech/second test observation entry.
- Overridden system interpretation.

## Limitations

None

## Prerequisites

- This screen is usually used by supervisory personnel.
- You can only correct discrepancies if occurred in your lab area.

## Accessing the Screen

Access this screen from the Multiple Observation Testing menu or by entering the keyword RECOBS.

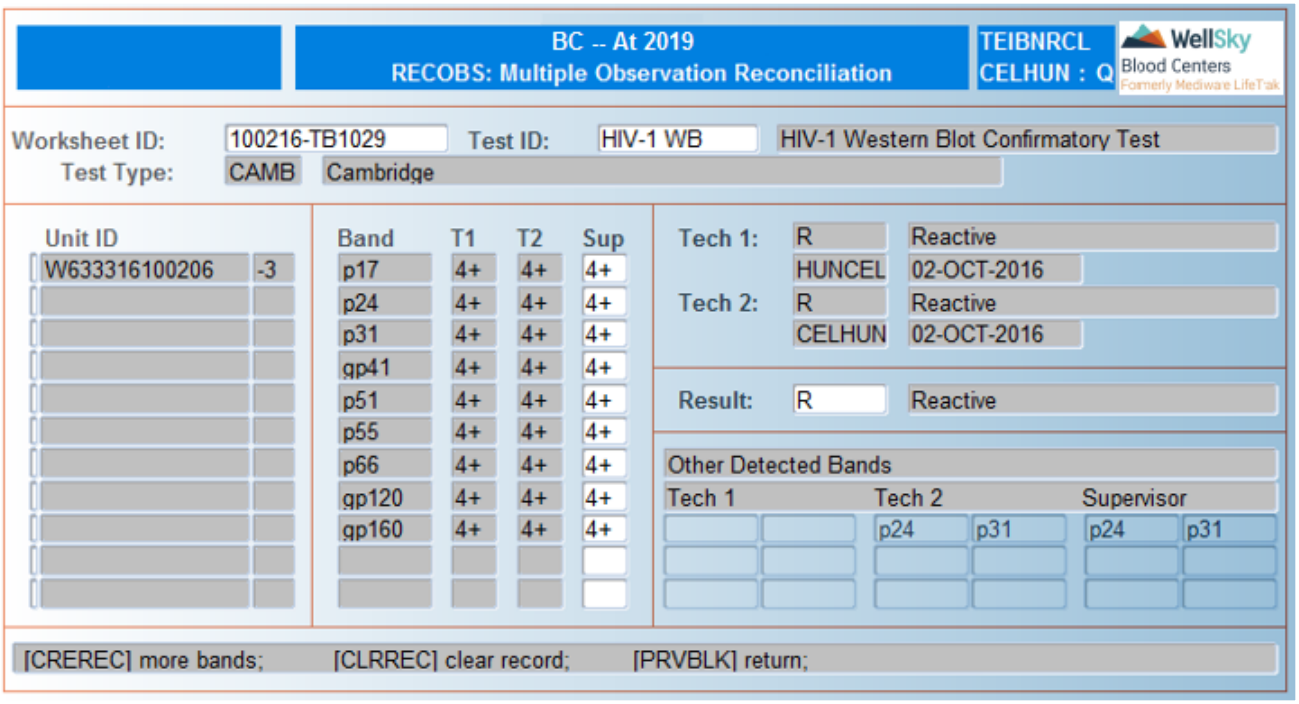


## Control Block Fields and Definitions

### Worksheet ID

Enter Worksheet ID or select from LOV.

### Test ID

Enter test ID or select from LOV. Test description displays after ID is entered.

> **NOTE –** Multiple Test IDs could be present if associated to the worksheet ID and resulted through multiple observations screens. Computer displays information about discrepancy between the first and second tech entries for resolution.

### Test Type

Test type automatically displays base on entry in Enter Test Observations: Tech 1 (OBS1).


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Unit ID

Unit IDs to be reconciled automatically display.

## T1

First tech result entry automatically displays. Field is not navigable.

## T2

Second tech result entry automatically displays. Field is not navigable.

**NOTE –** Will only display results that are discrepant. If Tech 2 is entered through RES2 no results will display.

## Supervisor

Entered by supervisor to resolve discrepancy.

## Sup

To resolve discrepancy the supervisor will enter the correct results for all band values that have discrepancy, and/or enter the correct results for other band values.

**NOTE –** When the last field is entered, the computer will display the Result field (interpretation).

## Notes

Notes can be entered on each unit using any alpha or numeric character.

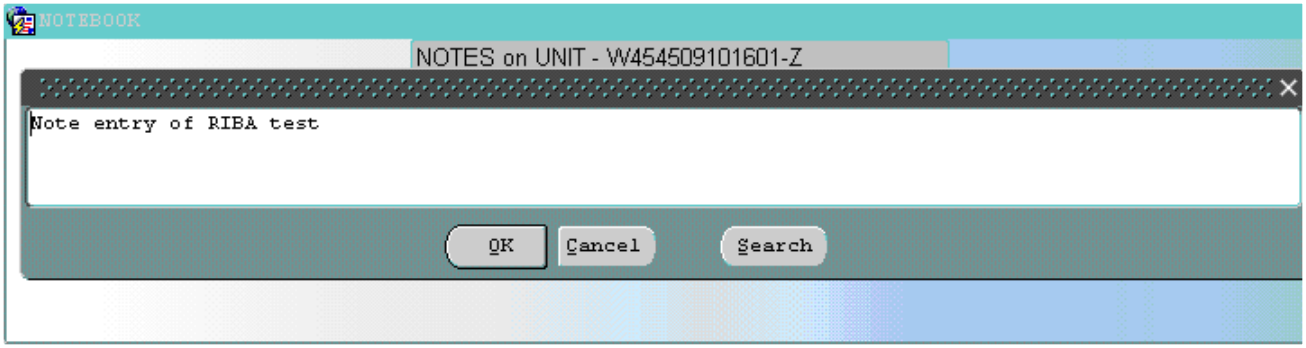


**NOTE –** The sequence of reactions must match an already defined combination in the Valid Observation Test Matrix table. If you try to enter a valid combination and an error messages says Invalid Combination, you may have to define the new combination in the Valid Observation Test Matrix table.

## At Commit

Data from this screen is stored in a temporary area if staging is required; otherwise, it is uploaded to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Multiple Observation Testing Functions menu.

# 21.3.4 Edit Test Observation Results (EDITOBS)

## Intended Use

Use Edit Test Observation Results screen to edit test observations for a specific unit.

## Limitations

None

## Prerequisites

You will not be able to use this screen unless the following conditions are met:

- The unit has already been manually tested.
- A different user has entered the test results.

## Accessing the Screen

Access this screen from the Multiple Observation Testing menu or by entering the keyword `EDITOBS`.

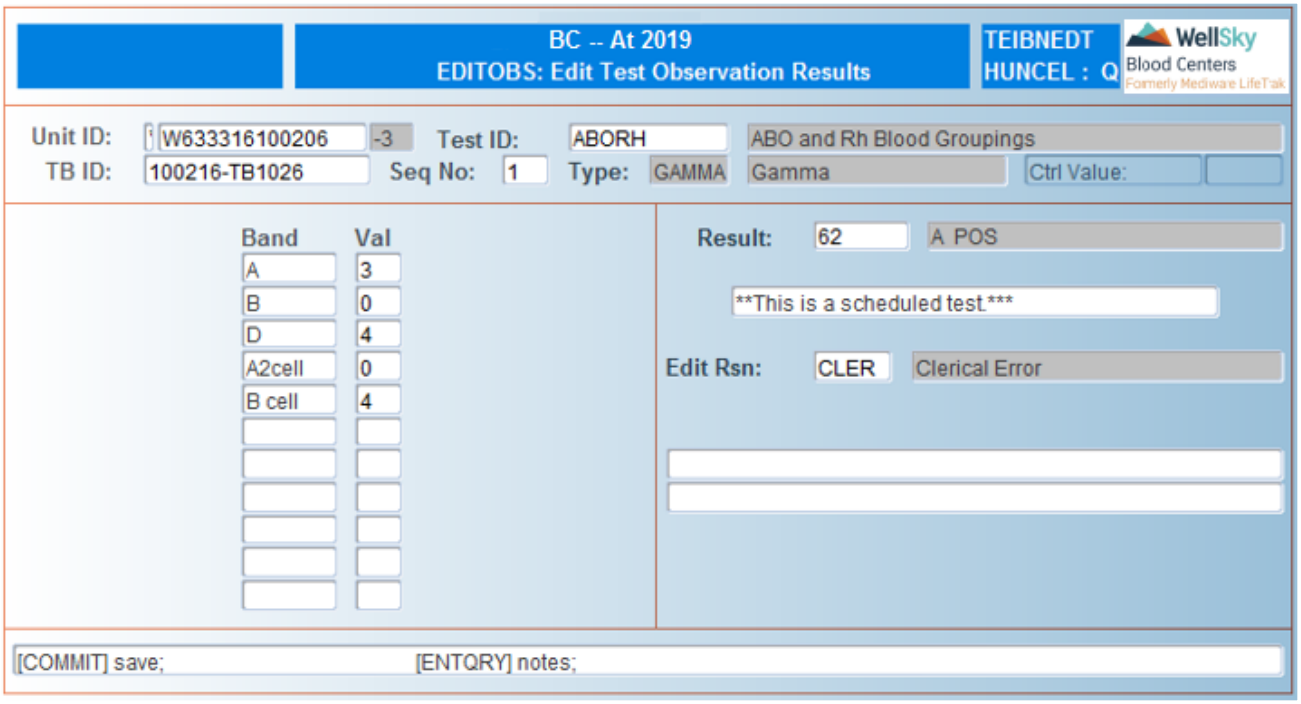



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Test ID

Enter test ID or select from LOV.

> **NOTE –** LOV will display only the manual tests selected for this worksheet.

## TB ID

Test batch ID linked to the test ID and unit number automatically displays after the test ID is entered. Field is not navigable.

## Seq No.

Sequence number automatically displays based on the entry when creating the worksheet. Field is not navigable.

## Type

Test type selected in TECH1 automatically displays. Field is not navigable.

## Ctrl Value

Control value associated to test type automatically displays, if applicable. Field is not navigable.

# Detail Block Fields and Definitions

## Band Values

In each band value field enter value or select from LOV. Press ENTER to accept current value.

## Result

System Interpretation is displayed based on band combination and entry value; press ENTER to accept system result or enter desired interpretation or select from LOV.

> **NOTE –** Entry allowed only if result override flag is set to Y in Multiple Observations Test Types by MFG (MOTTMFG). Unscheduled tests will display with the following message: This is an unscheduled test.

## Edit Reason

Enter edit reason or select from LOV.

# Entering Other Band Results

Press CTRL + F3 (Next Block) to enter other band results. The cursor moves to the Other Bands Detected Block.

**NOTE –** Other band entry allowed only if the O field is set to Y in Multiple Observations Test Types by MFG (MOTTMFG).

### Tech 1

Additional bands entered by Tech1 display. Field is not navigable.

### Tech 2

Additional bands entered by Tech2 display. Field is not navigable.

### Supervisor

Enter valid band or use LOV.

Press F12 (Commit) to save entry. The following window opens whenever the system interpretation is overridden. The user must acknowledge this warning to proceed.

Enter Y to save the changes. Enter N to return to the edit screen.

## At Commit

All results are uploaded to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Multiple Observation Testing menu.

# 21.3.5 Results Observation Query (OBSQ)

## Intended Use

Use the Results Observation Query screen to view results for a unit with confirmatory test using multiple observations. Able to view data such as the following:

- Observation results.
- Other band entries.
- Notes entered about a test.
- Test results.
- And result date.
- Test type and control value.

## Limitations

None

## Prerequisites

Final interpretation must be entered and committed to the database before results can be viewed in this query.

## Accessing the Screen

Access this screen from the Multiple Observation Testing menu or by entering the keyword OBSQ.

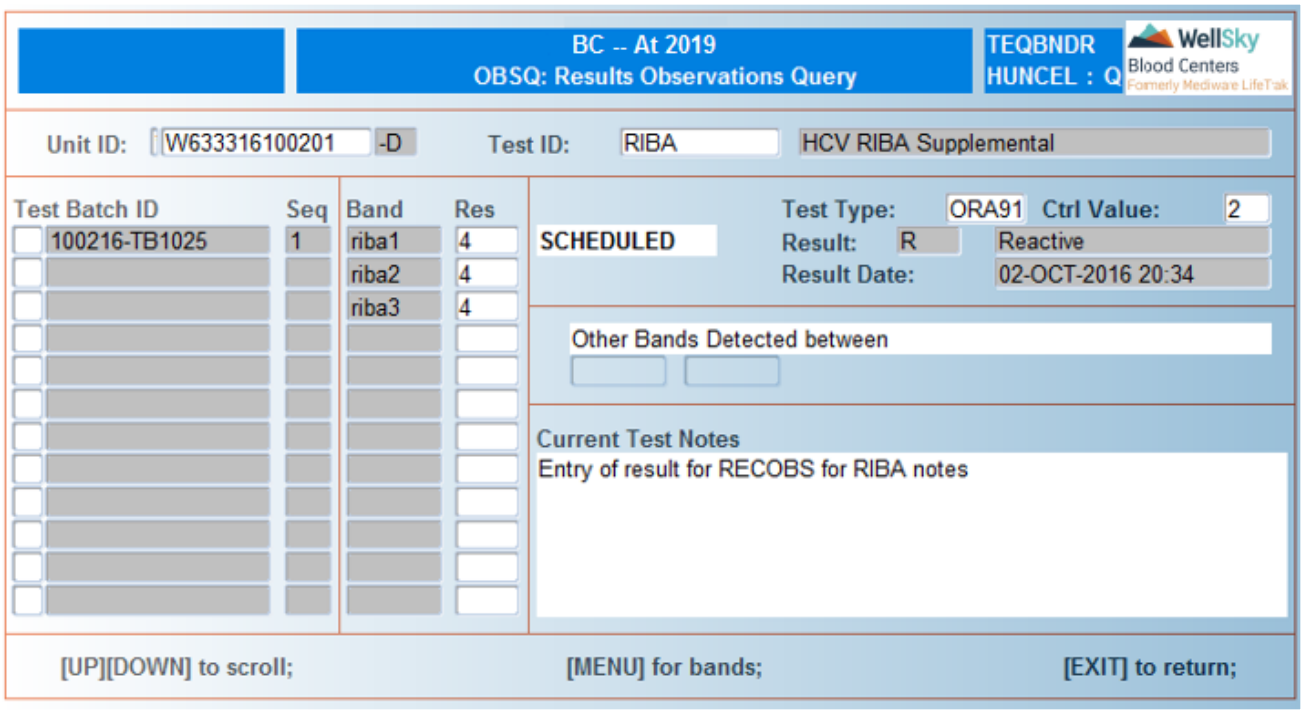


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Test ID

Enter test ID or select from LOV. Test description displays after ID is entered.

## In the Detail Block

The following information displays:

- Unit ID – unit ID.
- Test ID – test ID.
- Test Batch ID - batch the unit was tested in.
- Bands and Band Results - the actual grade of the band.
- Test result and result date - final interpretation and date entered.

- Test type and the control value - manufacturer and the value entered for the control band.
- Other bands detected - bands detected that were not listed.
- Current test notes - information entered during first tech, second tech or supervisor reconciliation.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Multiple Observation Testing menu.

# 21.3.6 Print Multiple Observation Worksheet (LTRCNFWS)

## Intended Use

Use the Print Multiple Observation Worksheet screen to reprint the worksheet that was generated when the test batch ID was created for ABO/Rh or confirmatory tests. This report gives details about the testing batch ID and location for recording results for each unit in the testing batch.

## Generating the Report

| Parameter Value | Multiple Entries Allowed? | LOV Available? | Other Information |
|---|---|---|---|
| Chapter ID | Yes | Yes | Default is WAD |
| Test ID | Yes | Yes | N/A |
| Testing Batch ID | Yes | Yes | N/A |
| Test Type | No | No | ALL is allowed |


WellSky Corporation
Proprietary and confidential

Report Content:

```
Worksheet ID: 051607-TB5111  Test ID: RIBA        Test Type: ORA91        Control Value:            Room Temp: _____

Tech1/Date: _____________ Tech2/Date: _____________ QC Acceptable/Date: _____________ Reviewed By/Date: _____________

                    Name                  Manufacturer       Lot Number     Exp Date
                    --------------------- ------------------ -------------- ----------
                    R E A G E N T S
                    RIBA Kit              ABBOT              ASFD           31-DEC-2010
```

| | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | | | | | | |
| Observed Values | | | | | | | | | | | | | | | | | | | |
| Seq# | Unit ID | iba1 | iba2 | iba3 | | | | | | | | | | | | | | | Interpret |
| | CONTROL | | | | | | | | | | | | | | | | | | |
| | CONTROL | | | | | | | | | | | | | | | | | | |
| 1 | W454507516001-8 | | | | | | | | | | | | | | | | | | |

```
05-16-07 09:15                    ABO / Confirmatory                    LCTS03 LTRCNFWS  :Q
Rel:     01                       Observation Worksheet                    Page:  1 of   1
                                  Your Blood Center. Anywhere. USA
```

Use this report to reprint multiple observation worksheets for the purpose of recording test results and entering into the system.

**NOTE –** Column headers display only if a specific test type is entered. Results will display on the worksheet if it is printed after result entry.

# 21.4 Test Staging Parameters

Test Staging Parameters are accessed from the following menu:

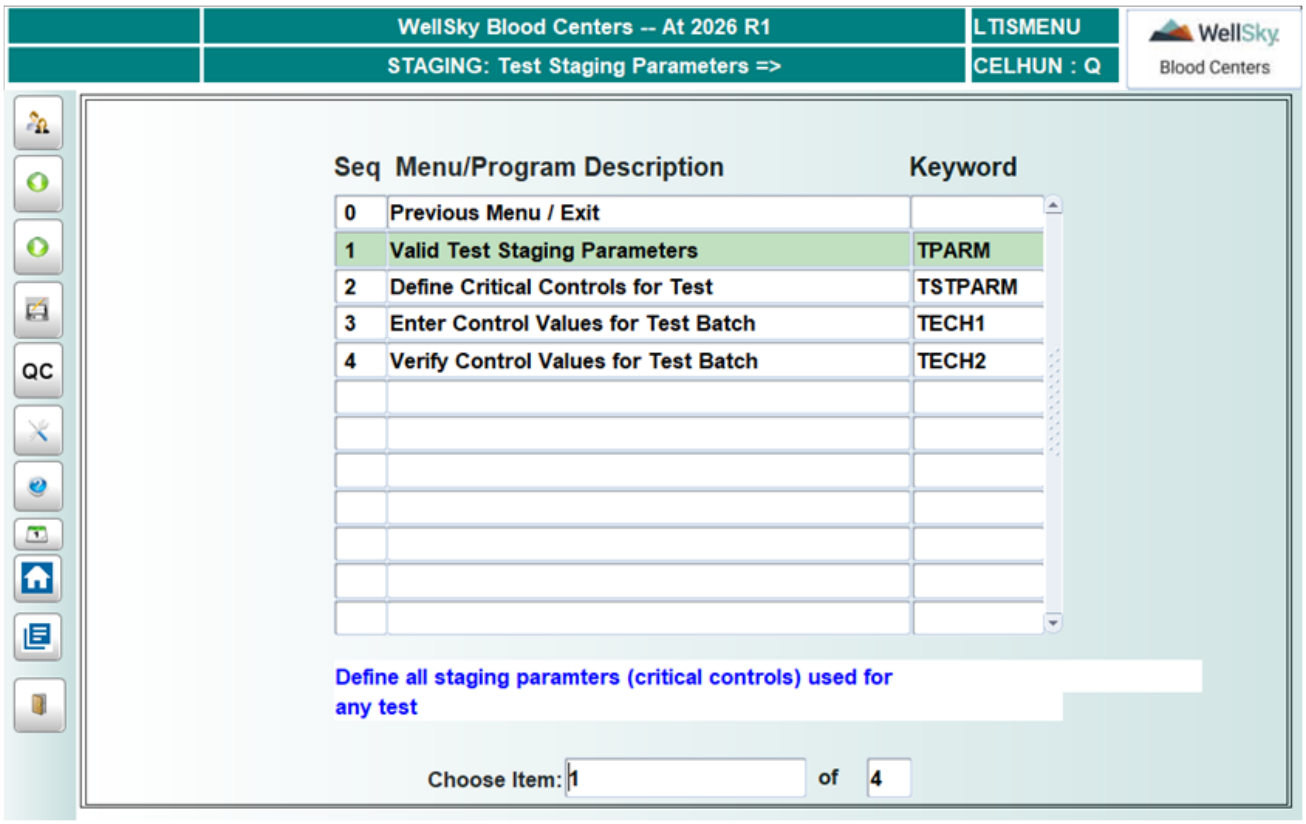


## 21.4.1 Valid Test Staging Parameters (TPARM)

### Intended Use

Use Valid Test Staging Parameters screen is used to define the parameters that will be used in the Define Critical Controls for a Test. The codes are defined and used later to control the processes for performing each test.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Test Staging Parameters menu or by entering the keyword `TPARM`.

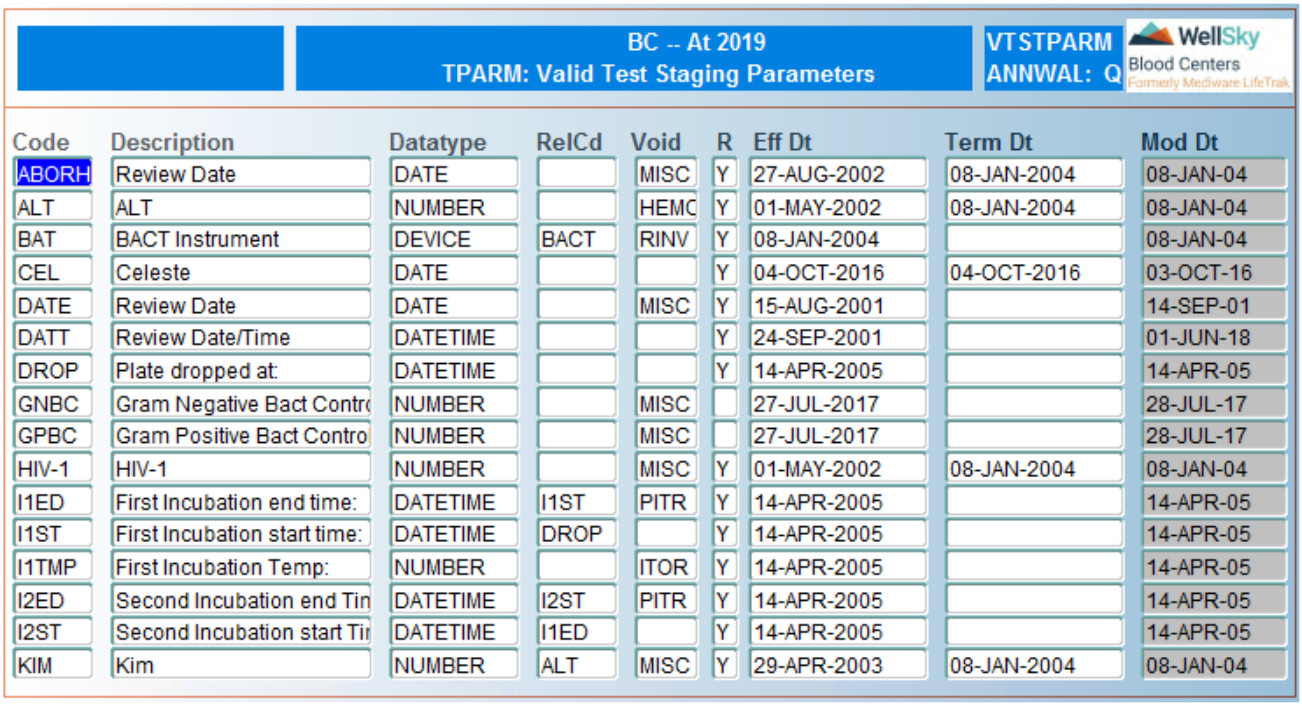
BC -- At 2019
TPARM: Valid Test Staging Parameters
VTSTPARM
ANNWAL: Q
WellSky Blood Centers Formerly Medware LifeTrak

| Code | Description | Datatype | RelCd | Void | R | Eff Dt | Term Dt | Mod Dt |
|---|---|---|---|---|---|---|---|---|
| ABORH | Review Date | DATE | | MISC | Y | 27-AUG-2002 | 08-JAN-2004 | 08-JAN-04 |
| ALT | ALT | NUMBER | | HEMC | Y | 01-MAY-2002 | 08-JAN-2004 | 08-JAN-04 |
| BAT | BACT Instrument | DEVICE | BACT | RINV | Y | 08-JAN-2004 | | 08-JAN-04 |
| CEL | Celeste | DATE | | | Y | 04-OCT-2016 | 04-OCT-2016 | 03-OCT-16 |
| DATE | Review Date | DATE | | MISC | Y | 15-AUG-2001 | | 14-SEP-01 |
| DATT | Review Date/Time | DATETIME | | | Y | 24-SEP-2001 | | 01-JUN-18 |
| DROP | Plate dropped at: | DATETIME | | | Y | 14-APR-2005 | | 14-APR-05 |
| GNBC | Gram Negative Bact Contr | NUMBER | | MISC | | 27-JUL-2017 | | 28-JUL-17 |
| GPBC | Gram Positive Bact Contro | NUMBER | | MISC | | 27-JUL-2017 | | 28-JUL-17 |
| HIV-1 | HIV-1 | NUMBER | | MISC | Y | 01-MAY-2002 | 08-JAN-2004 | 08-JAN-04 |
| I1ED | First Incubation end time: | DATETIME | I1ST | PITR | Y | 14-APR-2005 | | 14-APR-05 |
| I1ST | First Incubation start time: | DATETIME | DROP | | Y | 14-APR-2005 | | 14-APR-05 |
| I1TMP | First Incubation Temp: | NUMBER | | ITOR | Y | 14-APR-2005 | | 14-APR-05 |
| I2ED | Second Incubation end Tin | DATETIME | I2ST | PITR | Y | 14-APR-2005 | | 14-APR-05 |
| I2ST | Second Incubation start Tir | DATETIME | I1ED | | Y | 14-APR-2005 | | 14-APR-05 |
| KIM | Kim | NUMBER | ALT | MISC | Y | 29-APR-2003 | 08-JAN-2004 | 08-JAN-04 |

## Code

Enter a code that will represent a parameter to be resulted through staging. A maximum of 5 characters is allowed.

**NOTE –** Reagent parameter must follow a date parameter.

## Description

Enter code description. A maximum of 50 characters is allowed.

**NOTE –** When entering the description, it will wrap in the cell. It will not be completely displayed when viewing the parameter.

## Data Type

Enter data type or select from LOV.

- `DATE` – entry of date only .
- `DATETIME` – entry of date/time.
- `DEVICE` – Enter a device type, which is defined in equipment management.
- `NUMBER` – numerical value.
- `REAGENT` – enter a reagent code, which is defined in valid reagent codes.

**NOTE –** These codes are hard coded and cannot be changed.

### RelCd

Enter related code or select from LOV. Entry in this field is not required.

> **NOTE –** Related code must have the same data type. Related codes will have to be created prior to creating this code.

### Void

Enter void code to be placed if the parameter is unacceptable or select from LOV. Entry in this field is not required.

### R

Enter `Y` if this parameter can be entered in the Enter Run values for the Test (RUNPARM). Leave field blank if parameter cannot be entered for a run.

> **NOTE –** If Y if a null parameter can only be entered in TECH1 and TECH2 of the staging module.

### Effective Date

Enter parameter code effective date in DD-MON-YYYY format.

### Term Date

Enter parameter code termination date in DD-MON-YYYY format.

### Modify Date

Field automatically populates with the date modifications were last made. Field is not navigable.

Press **F12** (Commit) to save entry.

## At Commit

Entries are saved to the database.

## What to Do Next

Define parameters for tests using Define Critical Controls for Test (TSTPARM).

# 21.4.2 Define Critical Controls for Test (TSTPARM)

## Intended Use

Use the Define Critical Controls for Test screen to enter the steps that will be captured for a specified test. It provides the procedures for defining processing criteria that will be used to keep track of processing for a specified test on a specified type of test instrument. This procedure allows you to change or track parameters for an instrument or manual test steps.

**NOTE –** This is an institution-level screen. Once parameters have been entered, all chapters will follow the parameters that were entered. Any modification to the values will affect all chapters under that institution.

## Limitations

None

## Prerequisites

Parameters must be defined in Valid Test Staging Parameters (TPARM).

## Accessing the Screen

Access this screen from the Test Staging Parameters menu, or by entering the keyword `TSTPARM`.

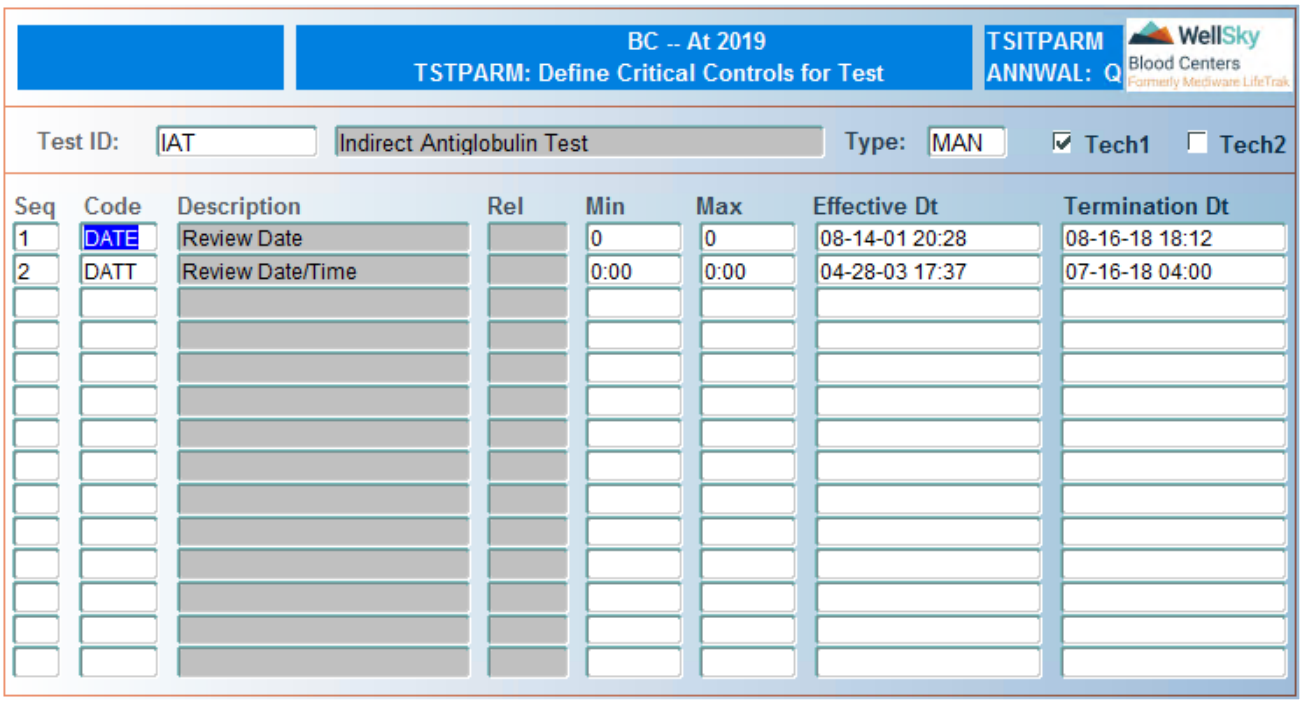


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV. Test description automatically displays after the ID is entered.

### Type

Enter test type or select from LOV.

**NOTE –** Parameters can be defined based on the type of resulting (automated or manual).

### Tech1

This field will display if the test and type have been set for Tech1. This is a required field. Use the space bar or mouse to select the check box. This indicates that TECH1 (TSIENTPM) must be performed for the test and instrument type being defined. When only Tech1 is selected, results will be uploaded upon completion.

**NOTE –** Tech1 is required for all tests that are loaded through instrument files.

### Tech2

This field will display if the test and type have been set for Tech2. This is an optional field. Use the space bar or mouse to select the check box. This indicates that TECH2 (TSIENTPM) must be performed for the test and instrument type being defined. When the Tech1 and Tech2 check boxes are both selected, both functions must be completed in order to upload test results.

## Detail Block Fields and Definitions

### Seq

Sequence number automatically displays. Field is not navigable.

### Code

Enter parameter code or select from LOV.

**NOTE –** These codes are defined in the Valid Test Staging Parameters (TPARM).

### Description

Code description automatically displays after the code is entered. Field is not navigable.

### Rel

Related code automatically displays after the code is entered. Field is not navigable.

**NOTE –** Field is populated only if a related code was defined in Valid Test Staging Parameters (TPARM).

### Min

Enter minimum acceptable value. Entry in this field is not required.

### Max

Enter maximum acceptable value. Entry in this field is not required.

### Effective Date

Enter critical control effective date for the test in DD-MON-YYYY format.


WellSky Corporation
Proprietary and confidential

### Term Date

Enter critical control termination date for the test  in DD-MON-YYYY format.

Press F12 (Commit) to save entries.

## At Commit

Critical controls entered for the tests are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Test Staging Parameters Function menu.

# 21.4.3 Enter Control Values for Test Batch (TECH1)

## Intended Use

The Enter Control Values for Test Batch screen provides the procedure to enter observed values for a specified test and batch.

You may commit data to the database at any time. Entry of additional data into the screen may be continued at a later time by identifying the same test batch and test. Modification of previously-entered data is also allowed. The system can check observed values, reagent kits, and specified equipment for out-of-limit, expired, or out-of-QC conditions and void any batches and/or runs for which they were specified.

Any run values entered in the Enter Run Values for Test screen will display as default values if the batch is associated with a run in this screen.  Such default values may be modified. Once a user has begun entry of values in the screen, it cannot be accessed by any other user.

## Limitations

None

## Prerequisites

- Valid assay processing parameters must have been defined for the test and test type in Define Critical Controls for Test (TSTPARM).
- TECH must have been defined as the parameter with a value of 1 in Maintain Menu Items (MENUITM).
- Manual worksheet must have been created if not performing concurrently.
- Lab code for the user and test batch must be the same in order to perform this function on a specified batch.

## Accessing the Screen

Access this screen from the Test Staging Parameters menu, or by entering the keyword `TECH1`.

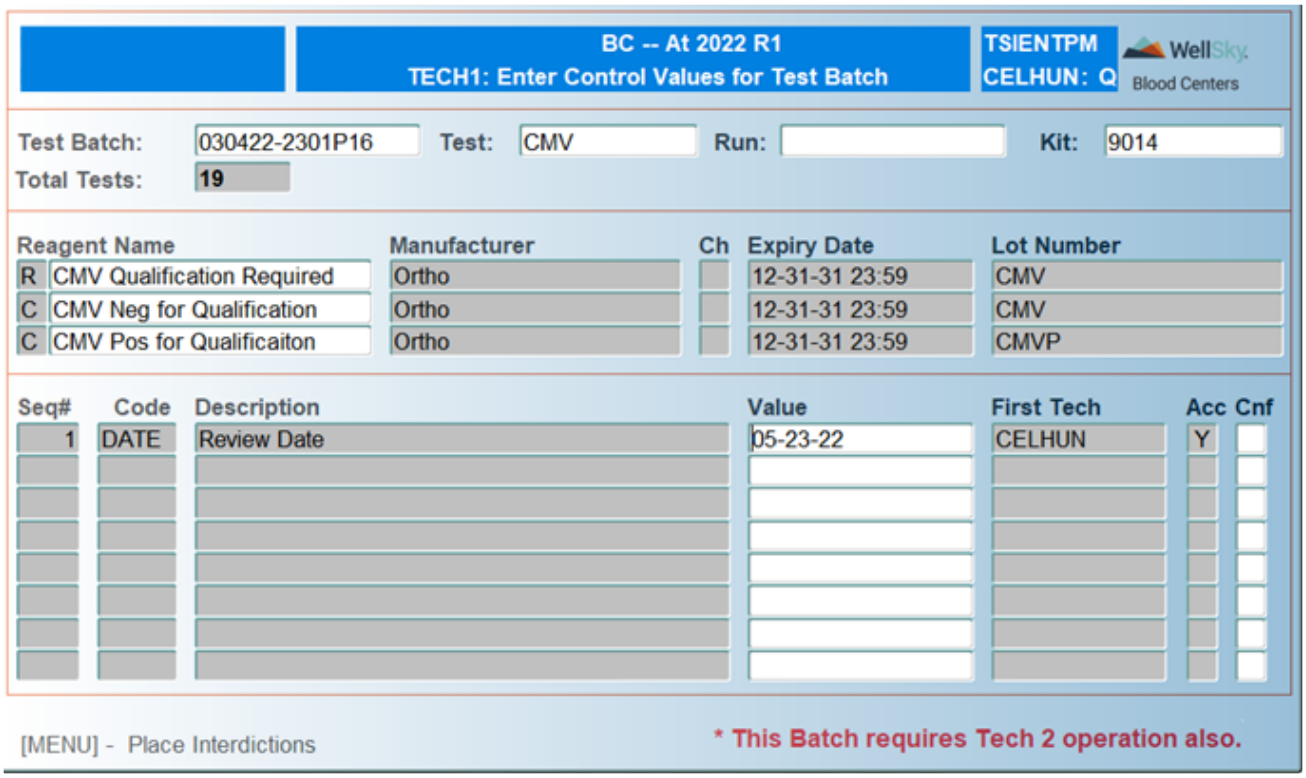


# Control Block Fields and Definitions

## Test Batch ID

Enter valid test batch ID or select ID from LOV.

**NOTE –** The LOV will only display in reverse chronological order for the dates, from latest to oldest. There is a limitation where batches occurring on the same date will not be sorted by the system-generated number, only by reverse chronological date order.

## Test ID

Enter valid test ID or select ID from LOV.

**NOTE –** LOV will only display the test IDs associated to the test batch ID selected.

**NOTE –** Once the test ID is entered, if TECH2 is also required, then a message appears at the bottom of the screen to direct the user to proceed to TECH2.

## Run ID

Enter run ID or select ID from LOV. Entry in this field is not required.


WellSky Corporation
Proprietary and confidential

**NOTE –** LOV will only display if run parameter values were entered.

### Kit

Enter valid reagent kit ID or select from LOV. If valid kit has already been assigned to this test batch, this value will automatically display.

**NOTE –** The system validates the specified test kit for acceptability. If the kit is not acceptable, the entry is accepted but the batch will be voided.

### Total Tests

For the test batch and test ID selected in the control block, the number of units with that test in the batch displays in this field. This field is display-only.

## In the Reagent Block

The following data displays in the reagent block:

- Reagent Name – reagent name.
- Manufacturer - reagent manufacturer.
- Ch- test plate channel.
- Expires - reagent expiration date and time.
- Lot Number - reagent lot number.

Information in this block cannot be modified in this screen. Block is not navigable.

## Test Parameter Block Fields and Definitions

### Seq#

Parameter sequence number automatically displays. Field is not navigable.

### Code

Parameters defined for the test and test type automatically display. Field is not navigable.

### Description

Code description automatically displays. Field is not navigable.

### Value

Enter value, select from LOV, or press ENTER to accept default value.

**NOTE –** Press LOV to enter the current date and/or time for any control that requires a date and/or time entry.

**NOTE –** Default values may be modified, and values may be entered for assay processing parameters with no specified values.

**NOTE –** Default values display only if run parameter was entered.

### First Tech

ID of user performing this function automatically displays. Field is not navigable. This ID displays as each default value is accepted by pressing ENTER.

### Acc

Y displays if the value is acceptable. N displays if the value is not acceptable.

**NOTE –** Unacceptable entries are permitted, but if Tech 2 does not change the value to an acceptable value, results for the batch are voided for the specific test.

### Cnf

Field not used for TECH 1 entry.

**NOTE –** Indication confirmation, as entered by Tech 2: Y=Yes, N=No.

Press F12 (Commit) to save entries.

## Button/Key

### MENU Key (F6)

MENU (F6) is used to go to the Place Group Interdiction or Hold (EGRPINT), based on the test batch ID selected in the control block.

**NOTE –** You must have access to the Place Group Interdiction or Hold (EGRPINT) to be able to navigate to that form. If you do not have access, you will receive "Err: 9125: Error granting access to users".

Placing Group Interdiction will place the interdiction at the unit level for all units in the test batch.

## At Commit

Entries are saved for confirmation by a second tech entry.

## What to Do Next

A second technician must enter the results using Verify Control Values for Test Batch (TECH2).


WellSky Corporation
Proprietary and confidential

# 21.4.4 Verify Control Values for Test Batch (TECH2)

## Intended Use

The Verify Control Values for Test Batch screen provides the procedure to review assay processing parameter values entered for a specified test.

The system can check observed values, reagent kits, and specified equipment for out-of-limit, expired, or out-of-QC conditions and prompt for correct entries of values. Once a user has begun to review of values in this screen, it cannot be accessed by another user.

## Limitations

None

## Prerequisites

- The initial process data must have been entered by another user. The reviewing person cannot be the same user who entered values in the Enter Control Values for Test Batch (TECH1).
- Lab code for the user and test batch must be the same in order to perform this function on a specified batch.
- TECH must have been defined as the parameter with a value of 2 in Maintain Menu Items (MENUITM).

## Accessing the Screen

Access this screen from the Test Staging Parameters menu or by entering the keyword `TECH2`.

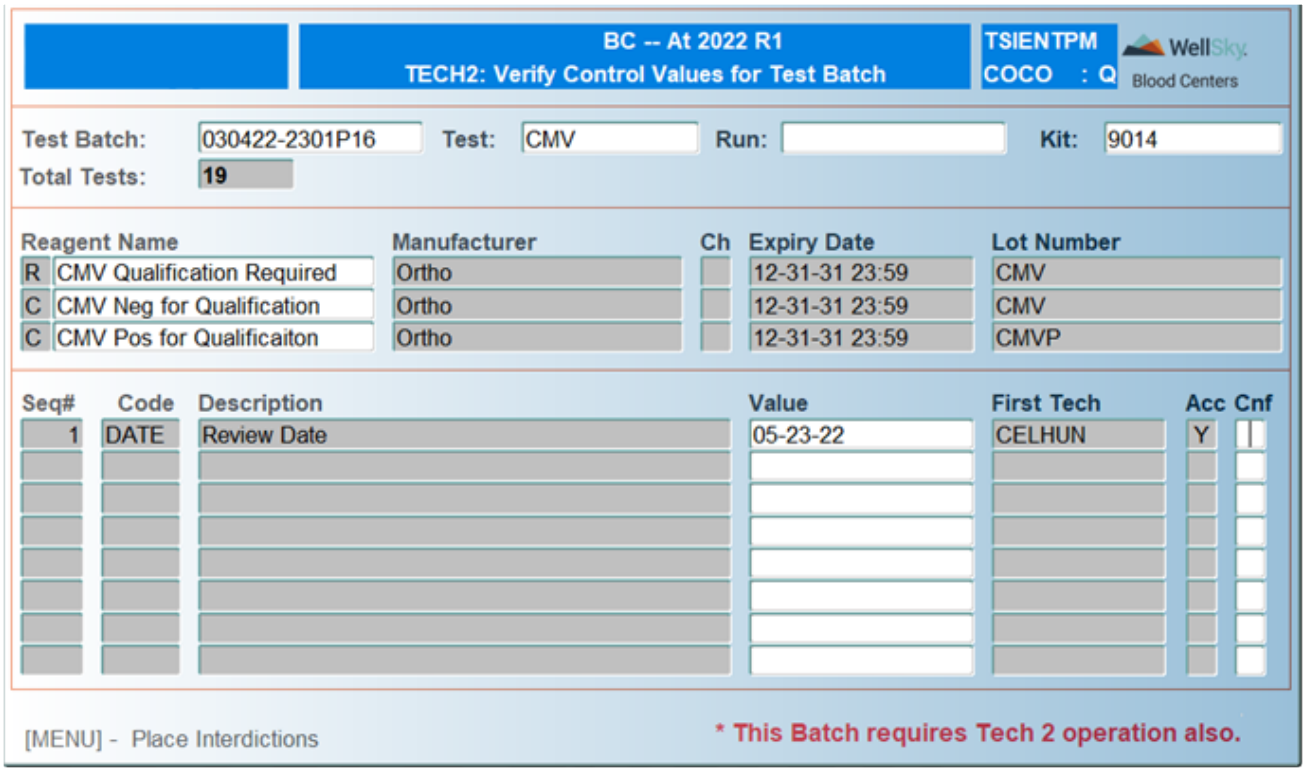

# Control Block Fields and Definitions

## Test Batch ID

Enter valid test batch ID, or select ID from LOV. Test batch ID will only be available for batches that have been resulted by tech's in your lab area.

## Test ID

Enter valid test batch ID, or select ID from LOV.  Will only display the test ID that is associated to the test batch ID selected.

**NOTE –** Once the test ID is entered, if TECH2 is also required, then a message appears at the bottom of the screen to direct the user to proceed to TECH2.

## Run ID

Entry is optional. Enter run ID, or select ID from LOV. LOV will only be populated if run parameter values were entered.

## Kit

Displays valid reagent test kit ID if specified by Tech 1. Can be assigned if a manual test. Tech 2 may not modify this section. The system validates the specified test kit for acceptability. If the kit is not acceptable, the entry is accepted but the batch will be voided.

## Total Tests

For the test batch and test ID selected in the control block, the number of units with that test in the batch displays in this field. This field is display-only.

# Detail Block Fields and Definitions

## Reagent Name

Displays name of the reagent.

## Manufacturer

Displays manufacturer of the reagent.

## Ch

Displays channel of the test plate.

## Expires

Displays date and time the reagent expires.

## Lot Number

Displays lot number of the reagent.


WellSky Corporation
Proprietary and confidential

### Seq#
Displays sequential numbers for each of the parameters displayed.

### Code
Displays valid assay parameter that has been defined for the test and type.

### Description
Displays description of the code.

### Value
Displays the values entered by Tech 1.

### First Tech
Displays user ID of the Tech 1. This ID displays as each default value is accepted by pressing ENTER.

### Acc
Acceptability status: Y – Yes, N – No.

**NOTE –** Unacceptable entries are permitted, but if Tech 2 does not change the value to an acceptable value, results for the batch are voided for the specific test.

### Cnf
Indication of confirmation of the acceptability of the value, as entered by Tech 1.

If Tech 2 enters a Y, the cursor advances to the next row for confirmation.

If Tech 2 enters a N, the cursor returns to the Value field so the value can be modified. That field must then be modified in order to continue. To modify, Tech 2 must enter a new value and press ENTER. The cursor advances to the Cnf field so that the Y can be entered. To continue without modifying the value in the Value field, Tech 2 must exit and then re-enter the screen.

**NOTE –** LOV displays the current date and time for assay processing parameters that require a date and/or time value.

## Button/Key

### MENU Key (F6)
MENU (F6) is used to go to the Place Group Interdiction or Hold (EGRPINT), based on the test batch ID selected in the control block.

**NOTE –** You must have access to the Place Group Interdiction or Hold (EGRPINT) to be able to navigate to that form. If you do not have access, you will receive "Err: 9125: Error granting access to users".

Placing Group Interdiction will place the interdiction at the unit level for all units in the test batch.

## At Commit

Codes may be reviewed and changed until they are committed. Do not exit before pressing F12 (Commit), or results will be lost.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Test Staging Parameters Function menu.


WellSky Corporation
Proprietary and confidential

# 21.5 Common Testing Functions

Common Testing Functions are accessed from the following menu:

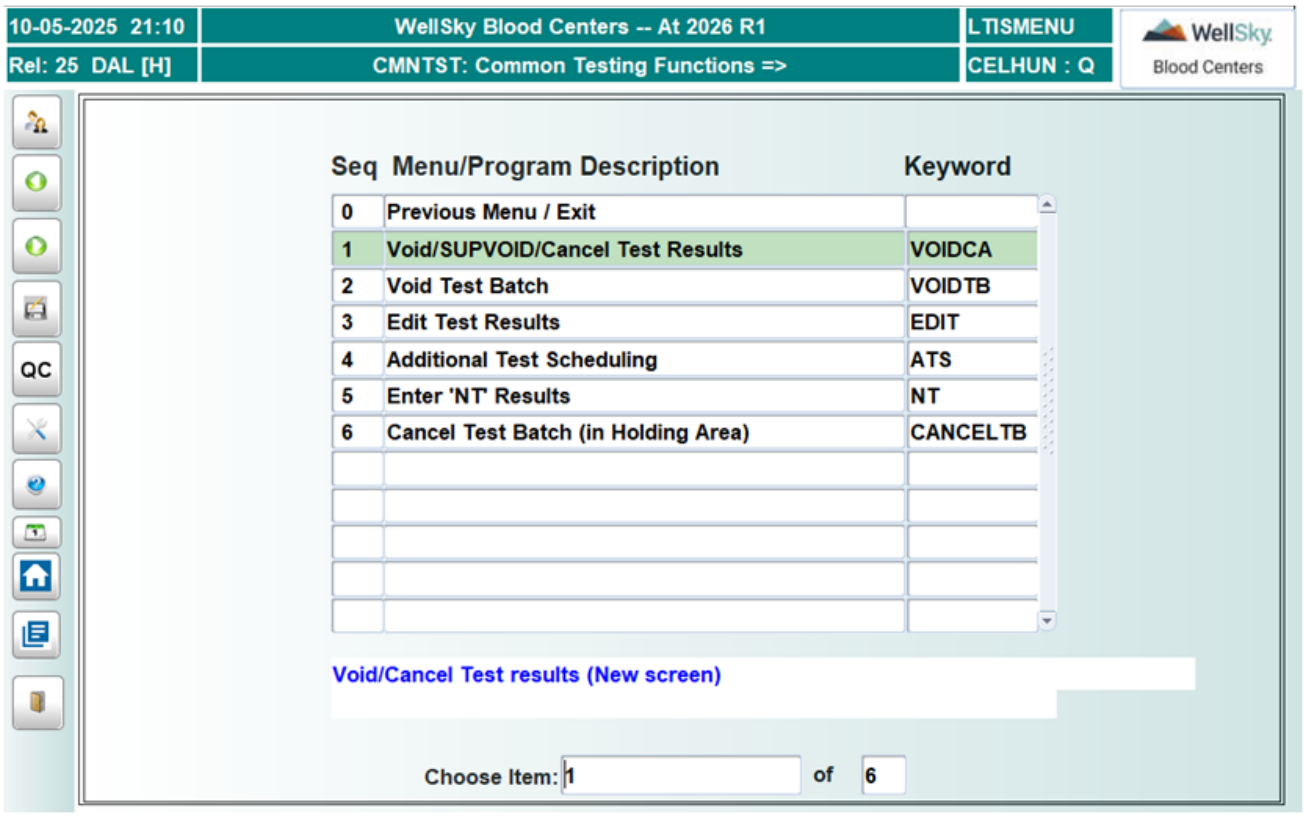


## 21.5.1 Void/SUPVOID/Cancel Test Results (VOIDCA)

### Intended Use

Use the Void Test Results function to void an unscheduled or scheduled test result that has already been entered into the system. When a scheduled test is voided, the results are removed, and the test remains in the Lab system with no results. When an unscheduled test is voided, the test is removed along with the results.

Supervisory Void would be used for a unit ID received from an instrument that is not in a recognizable unit scheme or does not have a collection date. When a scheduled test is voided, the results are removed, and the test remains in the Lab system with no results. When an unscheduled test is voided and the collection date is present, the Cancel flag is updated to Y; when an unscheduled test with no collection date is voided, the test is deleted along with the result, if applicable.

The Cancel Scheduled Tests function is used to cancel one or more tests that have already been scheduled in the system. The screen can also be used to cancel a test from which results have already been updated. When a test

with reactive results is canceled, both the test and result are removed from the database, as long as there are no other reactive results for that unit. If there are other reactive results, the system recalculates the number of tests required. To completely cancel a test for a unit that has tested reactive, you must void the reactive test result and cancel the retests the system has scheduled.

## Limitation

The Cancel function will only allow scheduled tests to be canceled.

## Prerequisites

- The following applies to all functions:
  - QCRE interdiction should be created.
  - Can only cancel or void tests that are in your lab area.
- CANCEL function:
  - The unit must have been checked in, and the test must already be scheduled. If there are any reactive results from the test being canceled, each reactive result must be voided before using this screen to cancel the test.
- VOID/SUPVOID function:
  - Test results must have already been entered on a unit in scheduled or unscheduled results.

## Accessing the Screen

Access this screen from the Common Testing menu or by clicking on Void/SUPVOID/Cancel Test Results.

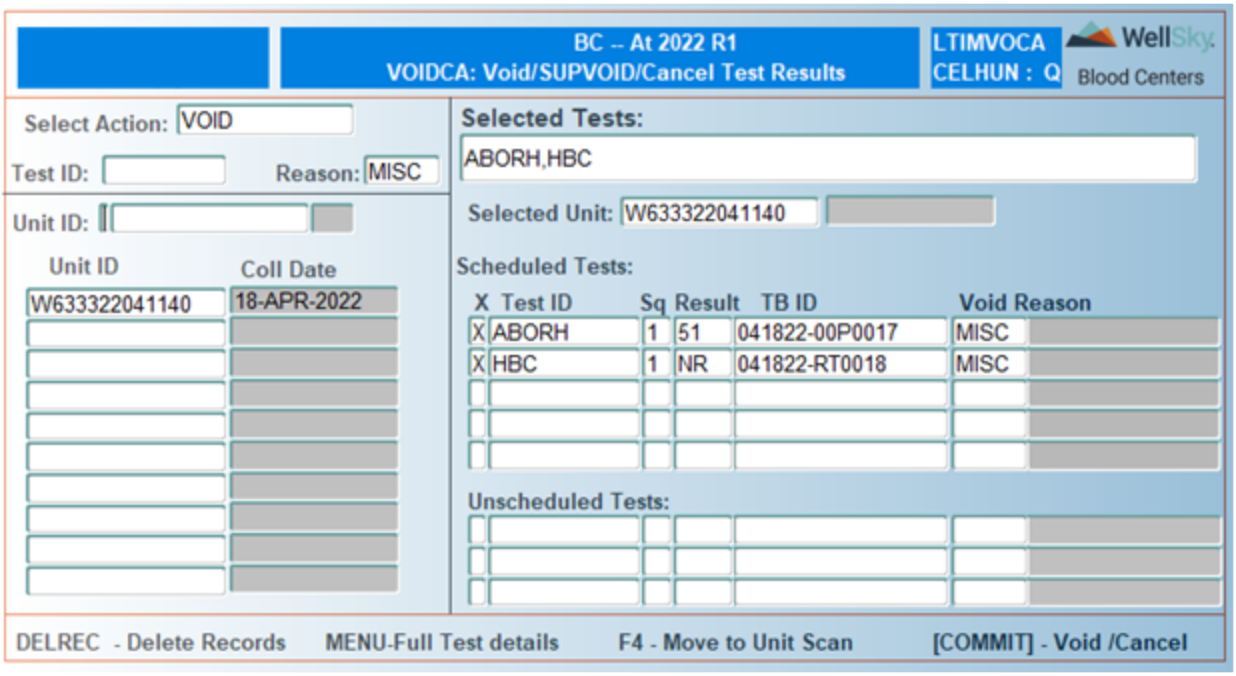



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Select Action

Select the action that will be performed by either selecting it from the LOV or manually typing the code.

- CANCEL – cancel a scheduled test result.
- SUPVOID – void scheduled or unscheduled test results with or without collection date.
- VOID – void scheduled or unscheduled test results with a collection date.

**NOTE –** Access to the functions is defined in Lab User Access. User access will need to be determined for VOID, CANCL, and SUPVD.

## Test ID

### To select a single test, do the following:

1. Enter the desired test in the Test/Group ID field, or select it from the LOV.
2. Press ENTER. The selected test appears in the *Selected Tests* block.

### To select multiple tests within a single Group ID

To select one or more tests from the same Group ID, do the following:

1. Leave the Test/Group ID field blank, and press ENTER. The following window opens:

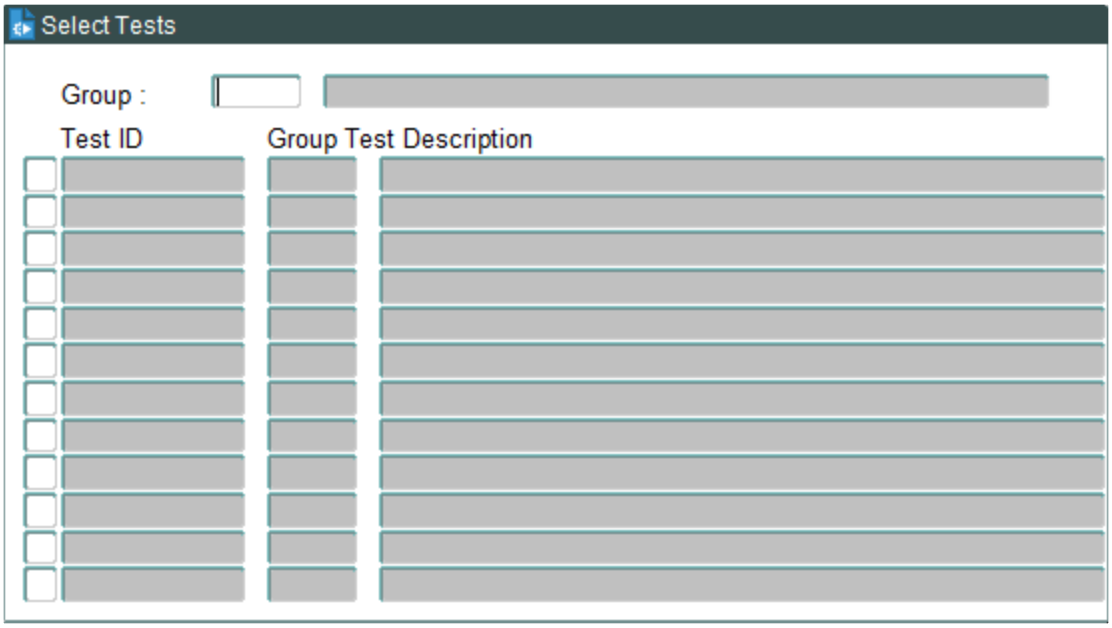


2. Enter the desired test group in the Group field, or select it from the LOV.
3. Press ENTER. All available test IDs from the selected test group display, as shown in the following figure.

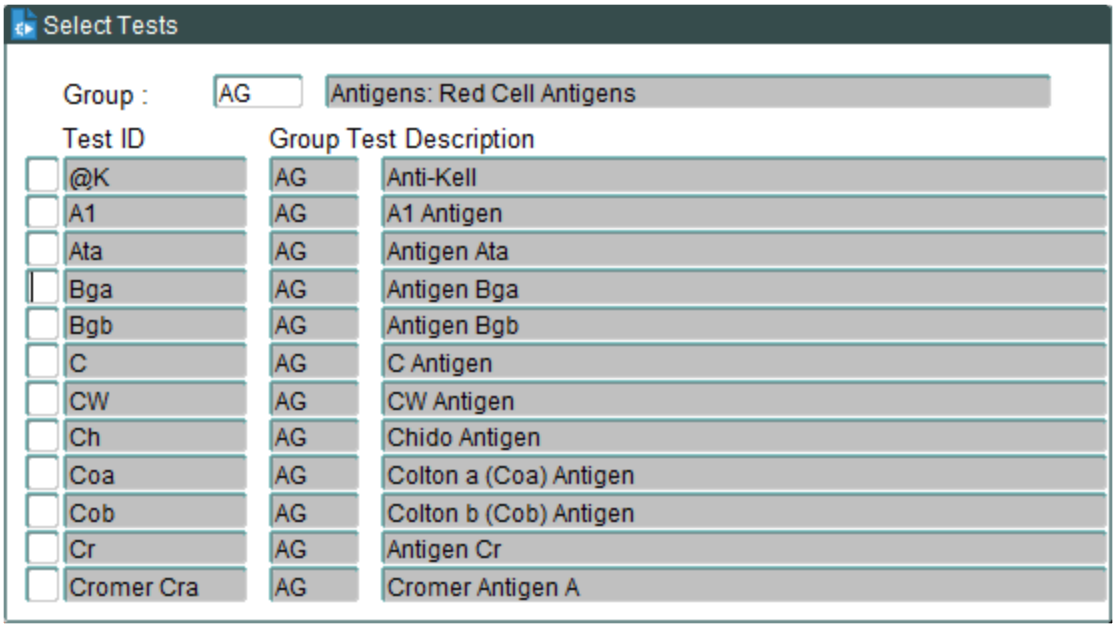


4. Select the desired tests by placing an **x** in the select box, or by pressing ENTER. Use the UP ( ) and DOWN ( ) arrows to navigate through the list.

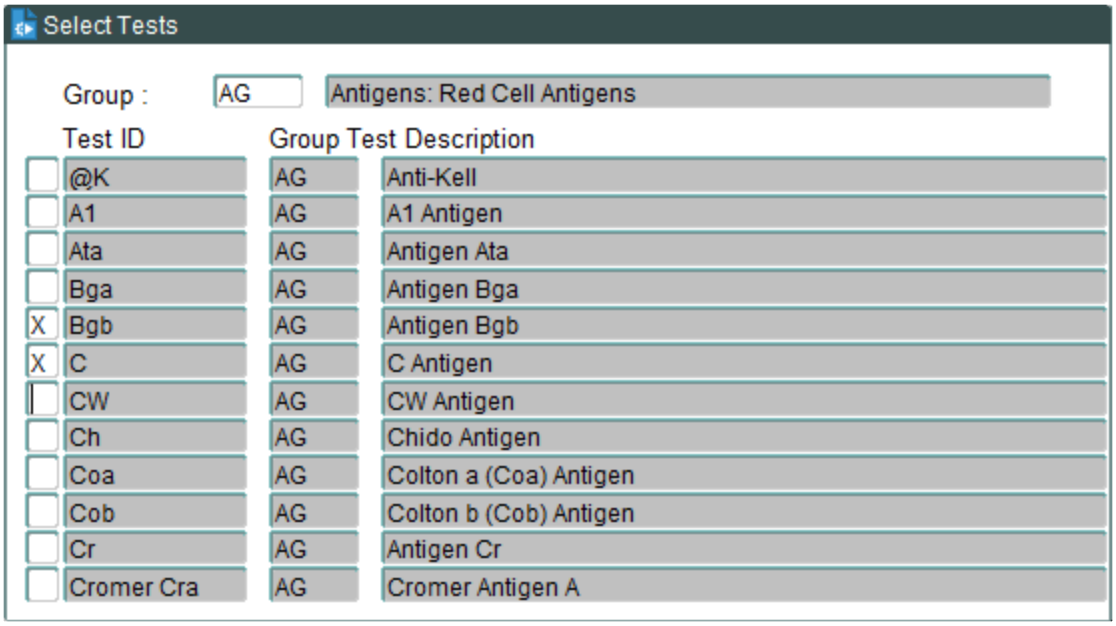


**NOTE –** The ENTER key works like a toggle switch for selecting a test and removing the selection.

5. Press F8 (Exit Screen)to abort without saving. Press F12 (Commit)to save the selected test(s). The selected test(s) appears in the Selected Tests field, as shown in the following figure.

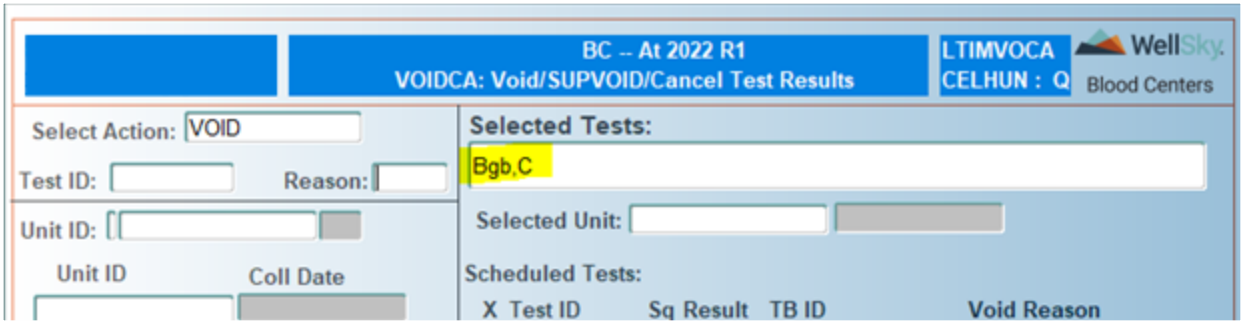


## To select multiple tests from different Group IDs

To select multiple tests from different Group IDs, do the following:

1. Leave the Test/Group ID field blank and press **ENTER**. The following window opens:

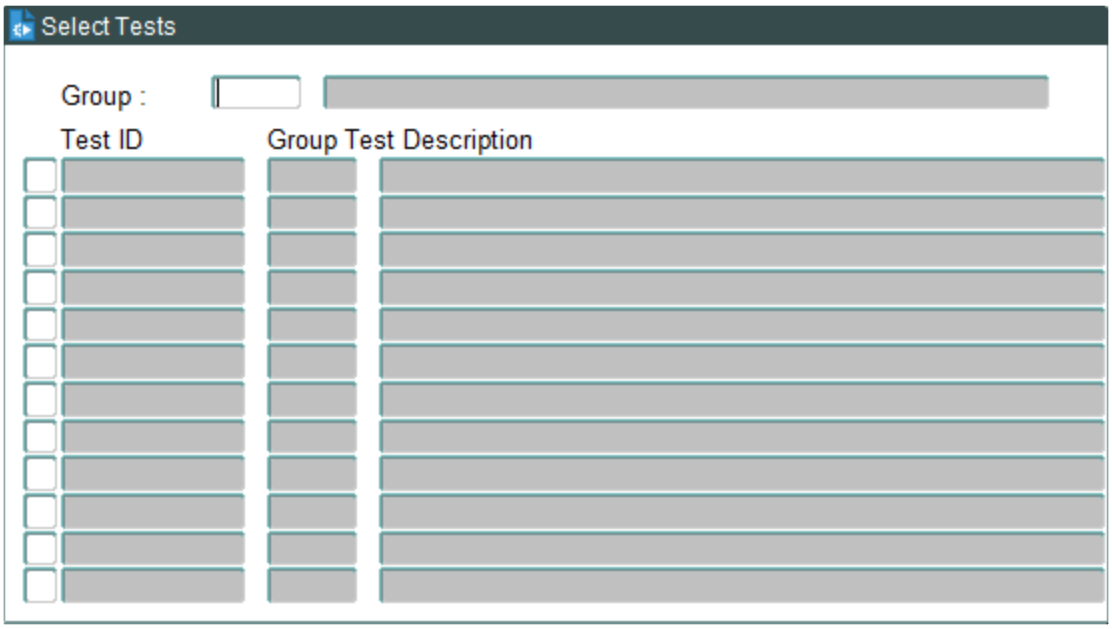


2. Leave the Group field blank and press **ENTER**. All available tests from all Group IDs display, as shown in the following figure.

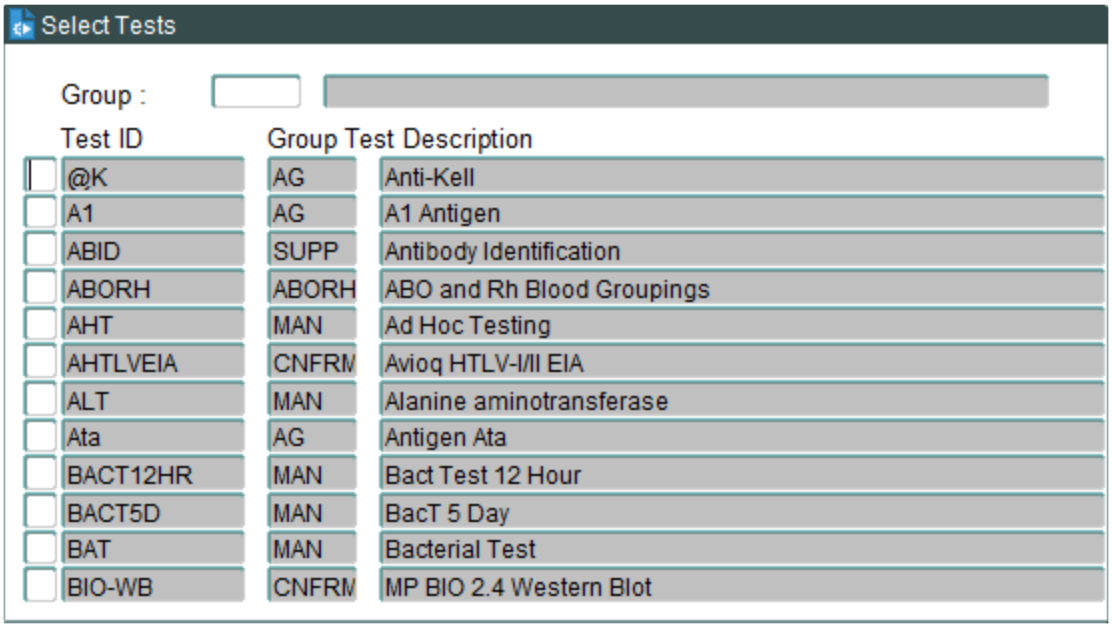


3. Select the desired tests by placing an **x** in the select box, or by pressing ENTER. Use the UP ( ) and DOWN ( ) arrows to navigate through the list.

> **NOTE –** The ENTER key works like a toggle switch for selecting a test and removing the selection.

4. Press F8 (Exit Screen) to abort without saving. Press F12 (Commit) to save the selected test(s). The selected test(s) appears in the Selected Tests field.

## Reason

The reason code field is a required field. The list of values is populated from Lab master code VOID. The reason code selection will apply to all units and tests selected.

## Selected Test

This field is for display only and cannot be updated.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions for Units

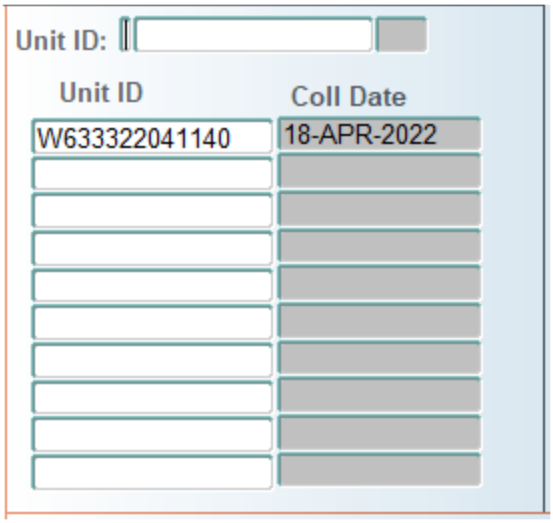


## Unit ID

Scan or manually enter the unit ID. After the unit ID is entered, the collection date displays if the unit has been checked into the system.

## Coll Date

This is a display-only field and cannot be updated. The unit's collection date will display if the unit has been checked into the system.

# VOID Function

1. In the Select Action field, select the VOID action.

   **NOTE –** The user must have access to the VOID code in LUACCESS in order for the VOID action to be available for selection.

2. Select the tests (single or multiple tests).
3. Select the reason for the void.
4. Scan or manually enter the unit ID.

   Once the unit number is scanned, and the system determines that the selected test ID is present on the unit with results in scheduled or unscheduled, the test will display on the right side of the screen. For a single test, the system will automatically place an 'X' by the test and display the VOID reason.

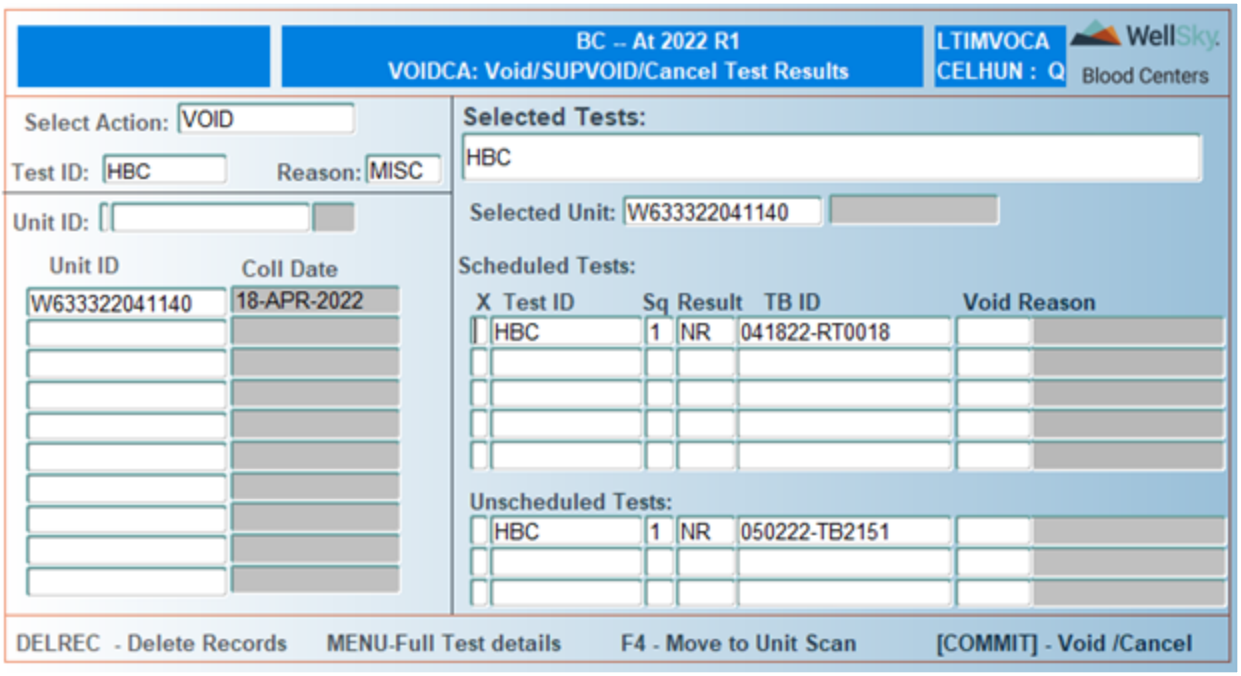


When there is more than one test result to be voided, the test is not automatically selected. Selection of the test is required. Once 'X' is placed by the test, the Void Reason field will automatically populate with the reason entered in the control block.

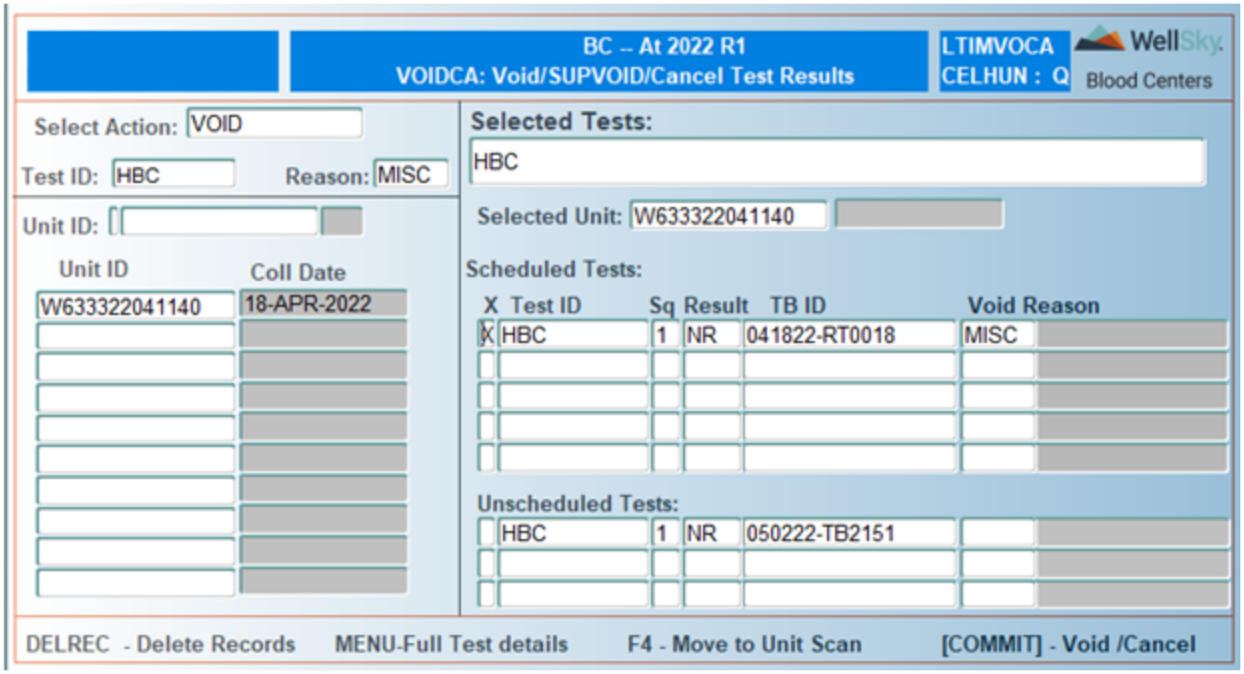


You can void in both scheduled and unscheduled tests at the same time.


WellSky Corporation
Proprietary and confidential

# SUPVOID Function

**Important!** The SUPVOID function does not require the user to be in Lab code 99 in order to perform the function. Access will be determined through the Lab User Access class (LUACCESS).

In the Select Action field, select the SUPVOID action.

**NOTE –** The user must have access to the SUPVD code in LUACCESS in order for the SUPVOID action to be available for selection.

1. Select the tests (single or multiple tests).
2. Select the reason for the void.
3. Scan or manually enter the unit ID. To manually enter a unit ID, press Enter from the scan field, and the system will take you to the entry field. Enter the unit ID.

**NOTE –** SUPVOID does not check the format of the unit ID; it will allow any entry. This is to allow unit IDs that have been sent from an instrument in the wrong format.

Once the unit number is scanned, and the system determines that the selected test ID is present on the unit with results in scheduled or unscheduled, the test will display on the right side of the screen. For a single test, the system will automatically place an 'X' by the test and display the VOID reason.

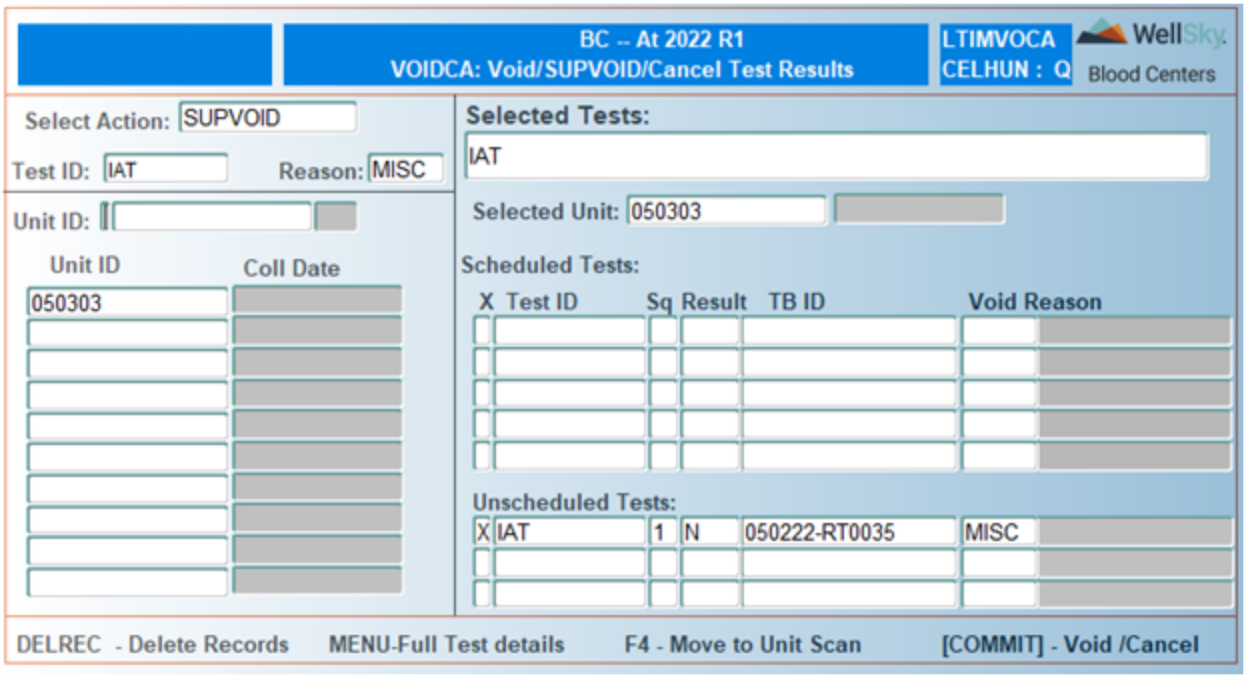

When there is more than one test result to be voided, the test is not automatically selected. Selection of the test is required. Once 'X' is placed by the test, the Void Reason field will automatically populate with the reason entered in the control block.

You can void in both scheduled and unscheduled tests at the same time.

**NOTE –** Units that are not checked into the system will only be in Unscheduled Tests. When these tests are voided, they are deleted from Unscheduled Tests.

## CANCEL Function

1. In the Select Action field, select the CANCEL action.

   **NOTE –** The user must have access to the CANCL code in LUACCESS in order for the CANCEL action to be available for selection.

2. Select the tests (single or multiple tests).
3. Select the reason for the cancellation.
4. Scan or manually enter the unit ID.

   Once the unit number is scanned, and the system determines that the selected test ID is present on the unit with results in scheduled or unscheduled, the test will display on the right side of the screen. For a single test, the system will automatically place an 'X' by the test and display the CANCEL reason.

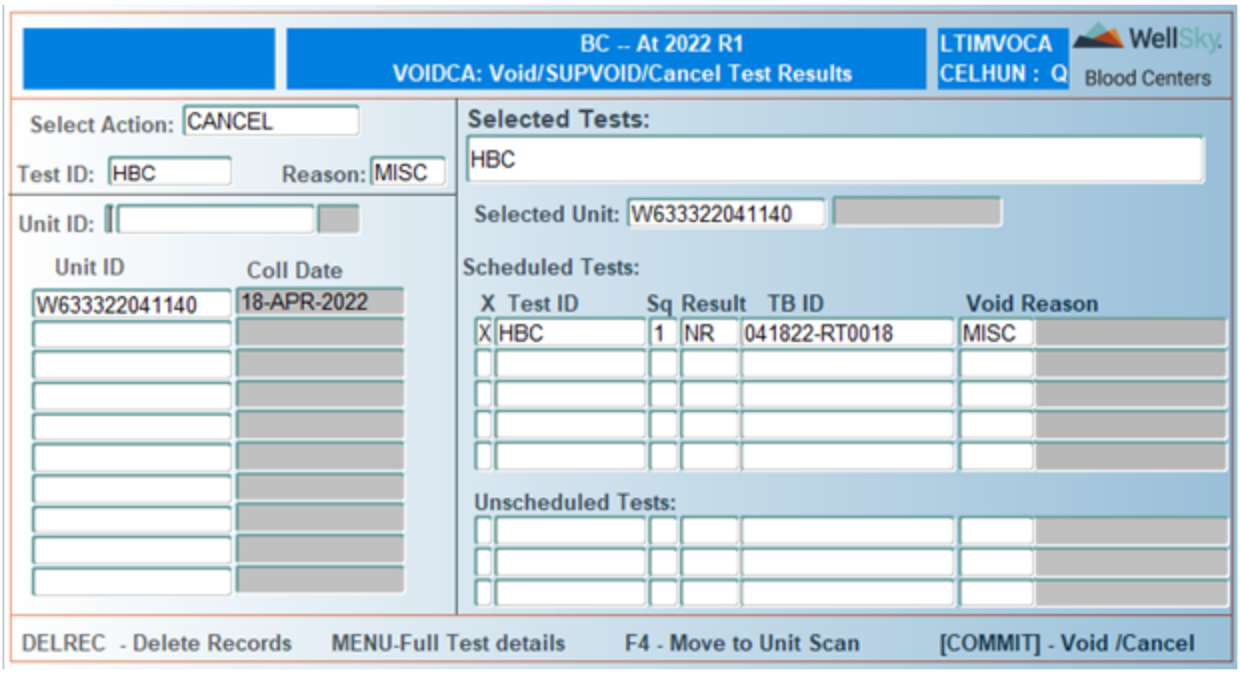



WellSky Corporation
Proprietary and confidential

When there is more than one test result to be canceled, the test is not automatically selected. Selection of the test is required. Once 'X' is placed by the test, the Void Reason field will automatically populate with the reason entered in the control block.

**NOTE –** Canceling a test is only allowed for scheduled tests. If a unit has both scheduled and unscheduled tests present, when selecting CANCEL, only the scheduled test will display.

**NOTE –** You are allowed to CANCEL a test regardless of whether or not a test result is present.

# Buttons and Keys

## DELREC (CTRL+F8)

Press **DELREC** to remove the unit number from the list.

Put the cursor on the unit number that displays in the unit block. Once the cursor is on the unit, press **DELREC** to remove the unit number. This will prevent the selected action from occurring on that unit ID.

When **DELREC** is pressed, the unit and the associated details are removed from the program.

## MENU (F6)

Press **MENU** to view additional details about the result and test batch. The cursor needs to be on the selected unit in order to view additional details about the unit and selected tests.

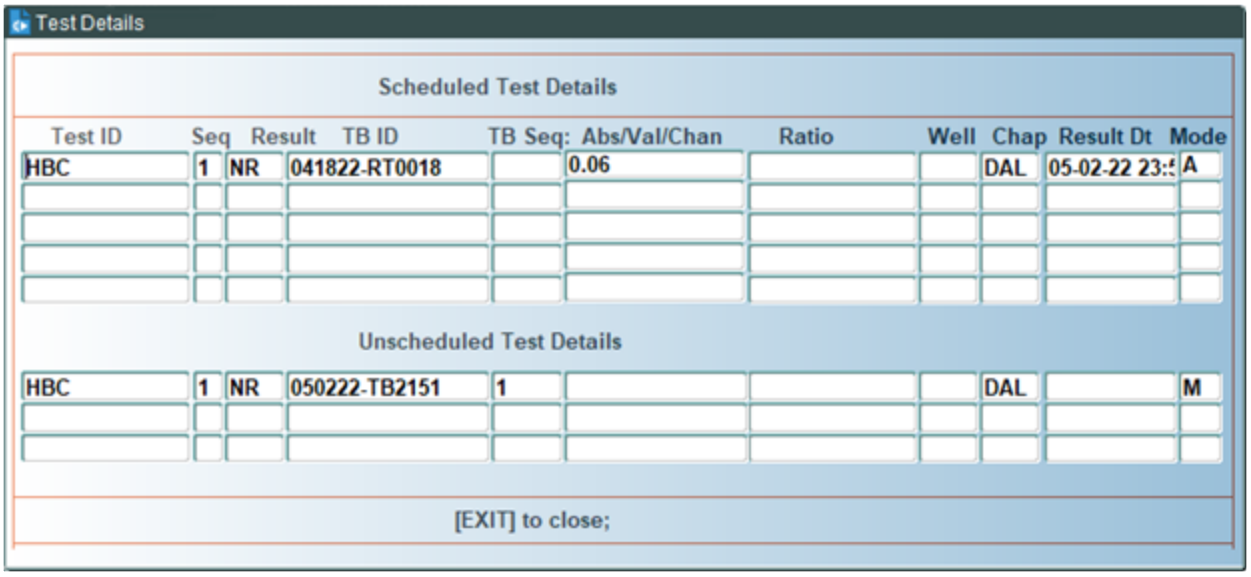


## Previous Field (F4)

Press **Previous Field** to move back to the Unit ID field from the scheduled/unscheduled test block with a single keystroke.

## At Commit

Data is committed to the database.

Test Voids report (TERVOID) is automatically generated and will be present in the Report Action – User (PRINT) screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Testing Functions menu.

# 21.5.2 Void Test Batch (VOIDTB)

## Intended Use

Use the Void Test Batch screen after test results are committed to the database and the batch is found to be unsuitable. Use this screen to void an unsuitable:

- Worksheet from a manual test.
- Plate or testing batch.

This screen voids only the non-reactive results in the batch. Reactives have to be voided on a unit-by-unit basis using Void/SUPVOID/Cancel Test Results screen.

The system can be configured to allow for either a 1-tech or 2-tech option. The 2-tech option will place a VOID Hold type interdiction on the batch. When the void is confirmed by a second person, the interdiction will automatically be removed from the batch.

## Limitations

Cannot enter worksheets, plate or test batches that are being loaded into the holding test area.

## Prerequisites

- Test information must have already been transmitted or entered in order to void the results.
- You can only void a test batch if it was created in your lab area or uploaded by a tech in your lab area.
- Menu Item can be defined for two tech entry; if two-tech entry is required, the menu parameter TECH must be set in the program MENUITEM (MENUITM). The program must be defined twice in the menu with different mnemonics: The first entry will have the parameter TECH set to 1 and the second entry for the parameter TECH will be set to 2.
- The QCRE Interdiction must be defined.

## Accessing the Screen

Access this screen from the Common Testing Functions menu, or by entering the keyword `VOIDTB`.


WellSky Corporation
Proprietary and confidential

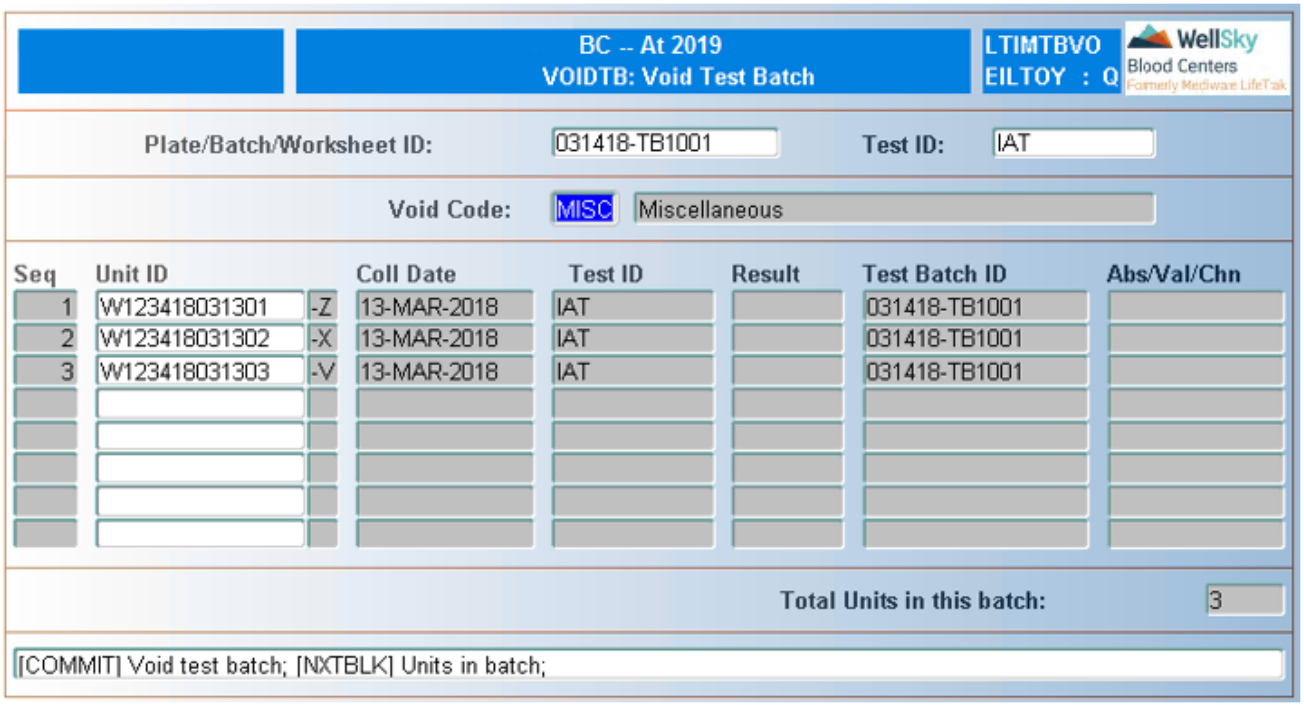


# Control Block Fields and Definitions

## Plat/Batch/Worksheet ID

Enter valid test, batch, or worksheet ID, or select ID from LOV.

**NOTE –** You cannot void a test batch that was not created in your lab area.

## Test ID

Use LOV to select correct code.

# Detail Blocks Fields and Definitions

## Void Code

Use LOV to select correct code.

The system displays information about the requested unit and information about each test for the unit, as follows:

### Information about the requested unit:

- Unit ID
- Collection Date of the unit

### One line information about each test for this unit:

- Test ID – Test ID associated to the batch.
- Result – Code and Interpretation.

- Test Batch ID – Test batch ID for this unit.
- Abs/Va/Chn –
  - *Absorbence* for viral testing,
  - *Value* for cholesterol of ALT testing, or
  - *Channel* reading for ABO/Rh testing.

If you need to review the units in this batch:

Press **CTRL** + **F3** (Next Block) to move the cursor into unit ID field

Scroll through the batch using the **UP** and **DOWN** arrows.

When done with the review, press **CTRL** + **F4** (Previous Block) to return the cursor to the Void reason field on the screen.

**NOTE –** This step can be done at any time while in this screen before commit.

When screen first displays, the only field that displays on the screen are Test ID through Abs/Val/Chan.

To review additional fields, press the **F6** (Menu) button to display all the details.

When certain this is the batch to be voided: Press **F12** (Commit) to void the batch.

If these units have already been through QC, a message appears asking to confirm the void request by entering a `Y`. Once the test batch is voided a QCRE interdiction is placed on the unit.

**NOTE –** If the two-tech entry has been configured, both entries for voiding a test result must be completed before the result will be removed. Users performing the void process must be within the same lab code or 99.

## At Commit

Updates made to the system at commit include the following:

- The data entered on the screen.
- The batch is voided from the database.
- A QCRE Interdiction is placed when test results that are required for labeling or extract are voided, cancelled or edited after the unit has been through QC for labeling.
- Test Voids report (TERVOID) is automatically generated and will be present in the Report Action – User (PRINT) screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Common Testing Functions menu.


WellSky Corporation
Proprietary and confidential

# 21.5.3 Edit Test Results (EDIT)

## Intended Use

Use the Edit Test Results screen to correct test results. Editing is done unit by unit. All scheduled and unscheduled tests for the requested unit are available for correction.

## Limitations

None

## Prerequisites

- The unit must have been checked in and the test results must be available for correcting.
- To edit a test it must be set in Available Tests (TEST); otherwise, the user will not be able to edit.
- Users can only edit tests that were previously scheduled in their lab code.
- Test ID must be defined in Master Code EDABS to allow edit of ratio and absorbance fields.

## Accessing the Screen

Access this screen from the Common Testing Functions menu or by entering the keyword `EDIT`.

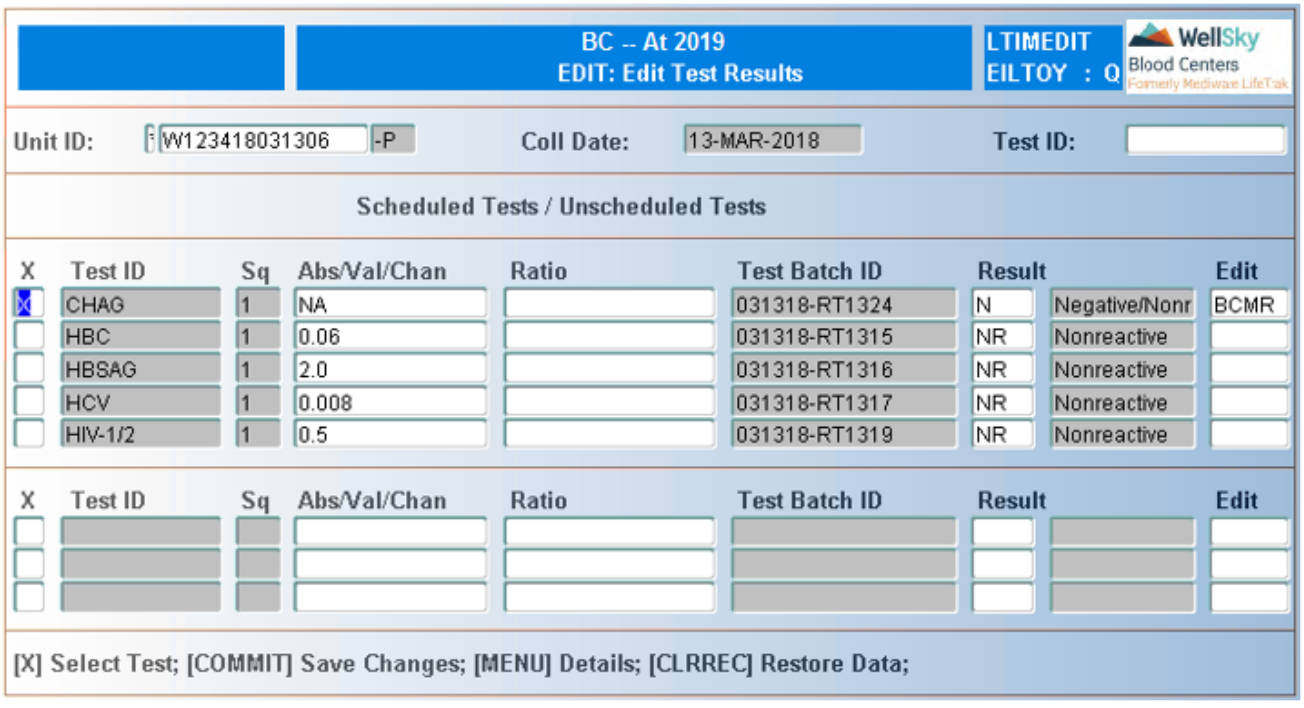


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date
Unit collection date automatically displays, if present.

### Test ID
Enter Test ID or select from LOV.

## In the Scheduled Tests Block

### X
Place an x next to the test result to be edited.

**NOTE –** Multiple tests can be edited before committing.

### Test ID
Test ID displays. Field is not navigable.

### Sq
Test sequence number displays. Field is not navigable.

### Abs/Val/Chan
Enter absorbance for viral testing, value for cholesterol or ALT testing, or channel reading for ABO/Rh testing displays, if applicable. Up to 12 characters can be entered.

**NOTE –** If Test ID is present in Master Code EDABS, field can be modified; otherwise, field is not navigable.

### Ratio
Ratio of optical density (OD) to cutoff displays, if applicable. Up to 17 alpha numeric or special characters (or combination of the two) can be entered.

**NOTE –** If Test ID is present in Master Code EDABS, field can be modified; otherwise, field is not navigable.

### Test Batch ID
Test batch ID displays. Field is not navigable.

### Result
Enter new result code or select from LOV.

### Edit
Enter edit reason code or select from LOV.


WellSky Corporation
Proprietary and confidential

## In the Unscheduled Tests Block

Press CTRL + F3 (Next Block) to navigate to the unscheduled tests block.

Press F12 (Commit) to save to edited result.

## Viewing Additional Test Information

Press F6 (Menu) to view additional test information. The following window opens:

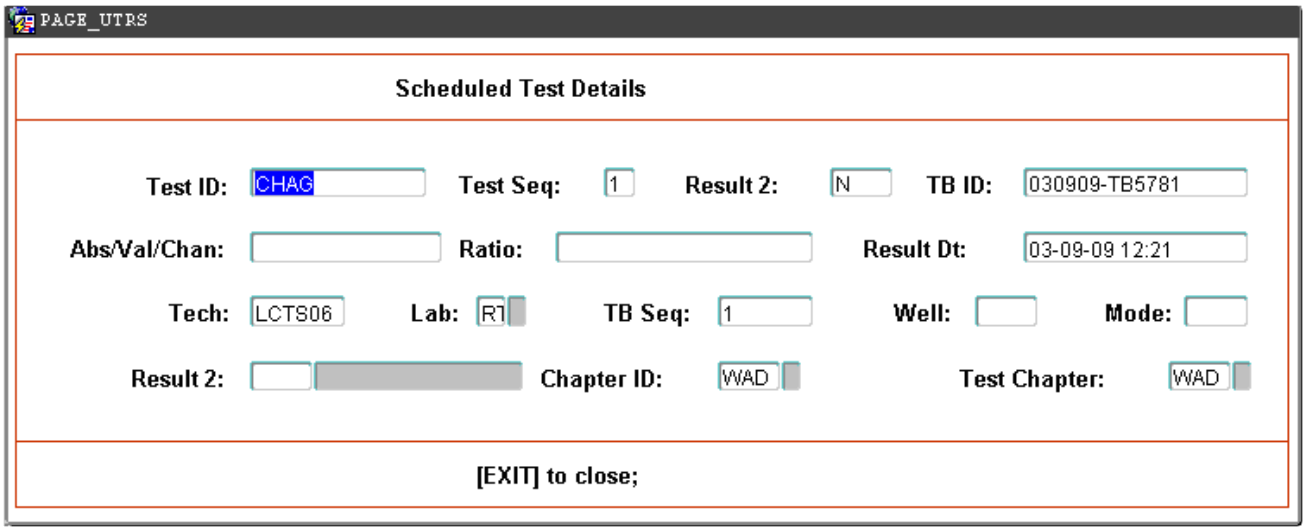


- Test ID – test ID.
- Test Seq – test sequence number.
- Result 2 – result code and interpretation.
- TB ID – test batch ID for this test.
- Abs/Val/Chan - Absorbance for viral testing, Value for cholesterol or ALT testing, or Channel reading for ABO/Rh testing.
- Ratio (for viral testing) – ratio of OD (optical density) to cutoff.
- Result Dt – date and time of result entry.
- Tech – technician recording test result.
- Lab – lab number within the testing chapter.
- TB Seq – unit test sequence # within batch (work #).
- Well – location on the plate of unit being tested.
- Mode – MAN (manual) or AUTO (automated).
- Result 2 – result code and interpretation.
- Chapter ID – unit collection chapter.
- Test Chapter – chapter where testing was performed.

**NOTE –** Data cannot be updated on this window screen.

Press F8 (Exit Screen) to return to the main screen.

To move the cursor from scheduled tests window to unscheduled window, press CTRL + F3 (Next Block).

To review additional tests not shown on the screen, place the cursor in either the scheduled or unscheduled test window, and scroll using the UP and DOWN arrows.

## At Commit

Updates made to the system at commit include the data entered on the screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Testing Functions menu.

# 21.5.4 Additional Test Scheduling (ATS)

## Intended Use

Use the Additional Test Scheduling screen to schedule any needed tests in addition to those scheduled automatically at check-in. If a unit is tested before being checked into the computer, the system holds any testing done as an unscheduled test. You can use this screen to move tests from unscheduled to scheduled status.

You can use this screen to schedule (for a group of units):

- A single additional test.
- A group of tests (for example, any combination of C, E, c and e).

**NOTE –** Test Query (TESTQ) shows status of scheduled and unscheduled tests.

## Limitations

This screen is to be used for Internal Contract (Internally test only).

## Prerequisites

Definition of the Menu with SCREEN_MODE=DTL.

## Accessing the Screen

Access this screen from the Common Testing Functions menu, or by entering the keyword `ATS`.

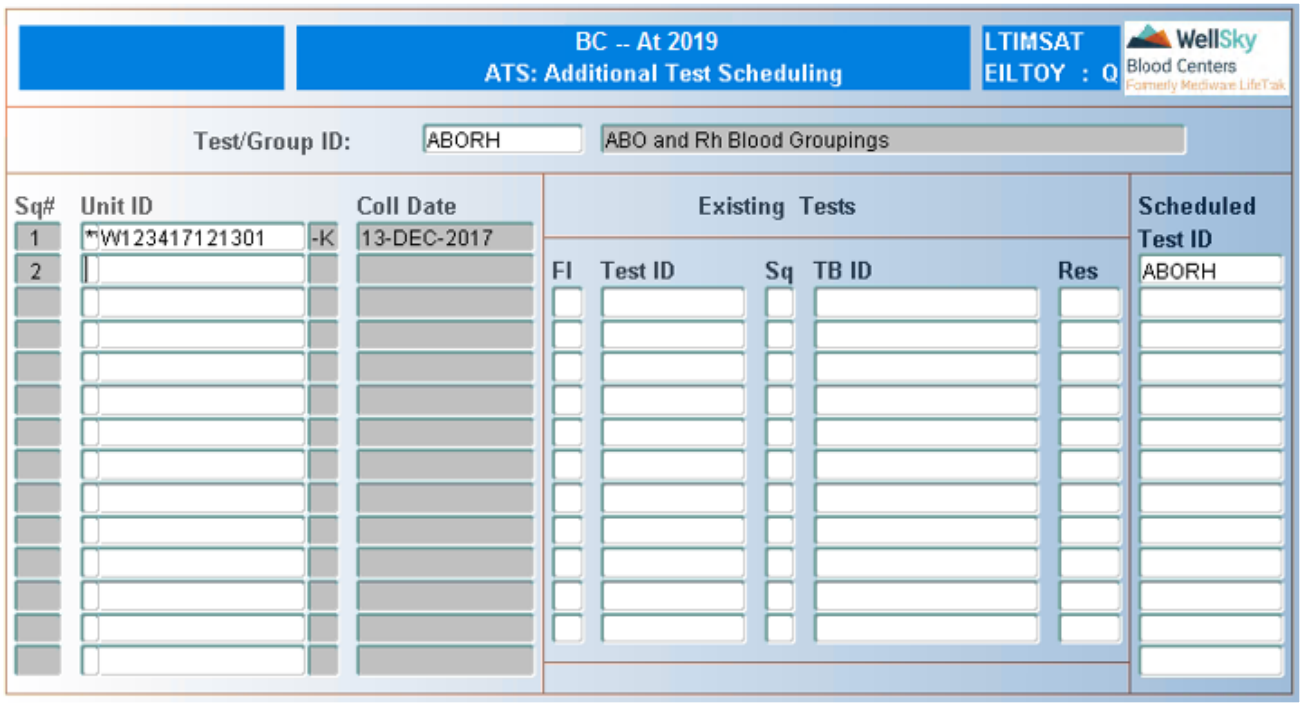


## To Select a Single Test

To select a single test, do the following

1. Enter the desired test in the *Test/Group ID* field, or select from LOV.
2. Press **ENTER**. The selected test appears in the *Scheduled Test ID* field.

## To Select Multiple Tests Within a Single Group ID

To select one or more tests from the same Group ID, do the following:

1. Leave the *Test/Group ID* field blank and press **ENTER**. The following window opens:

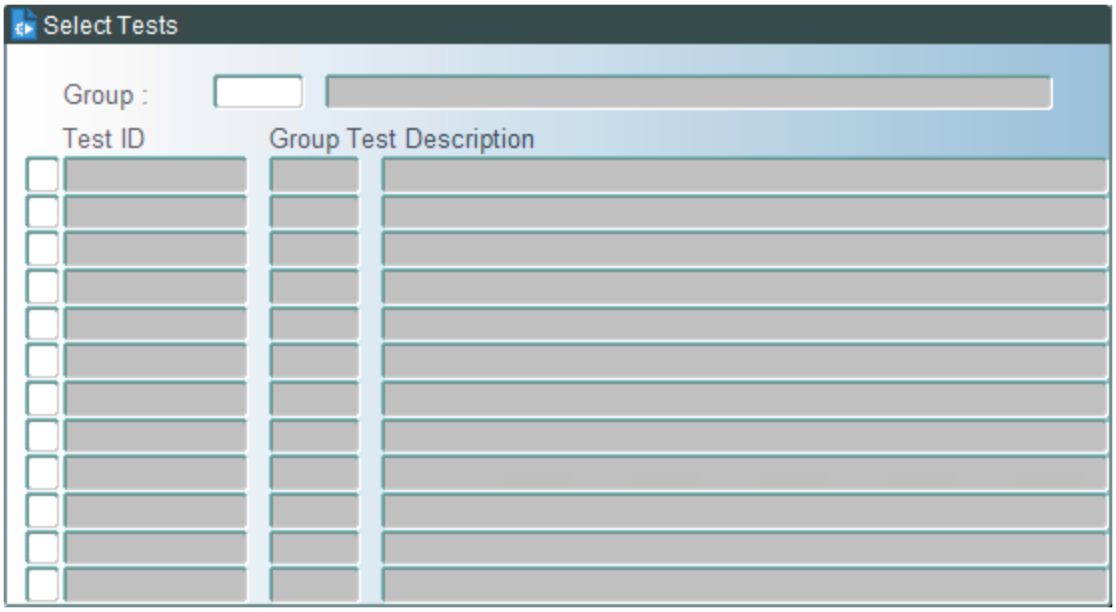


2. Enter the desired Test Group in the *Group* field, or select from LOV.
3. Press **ENTER**. All available Test IDs from the selected Test Group are displayed, as shown:

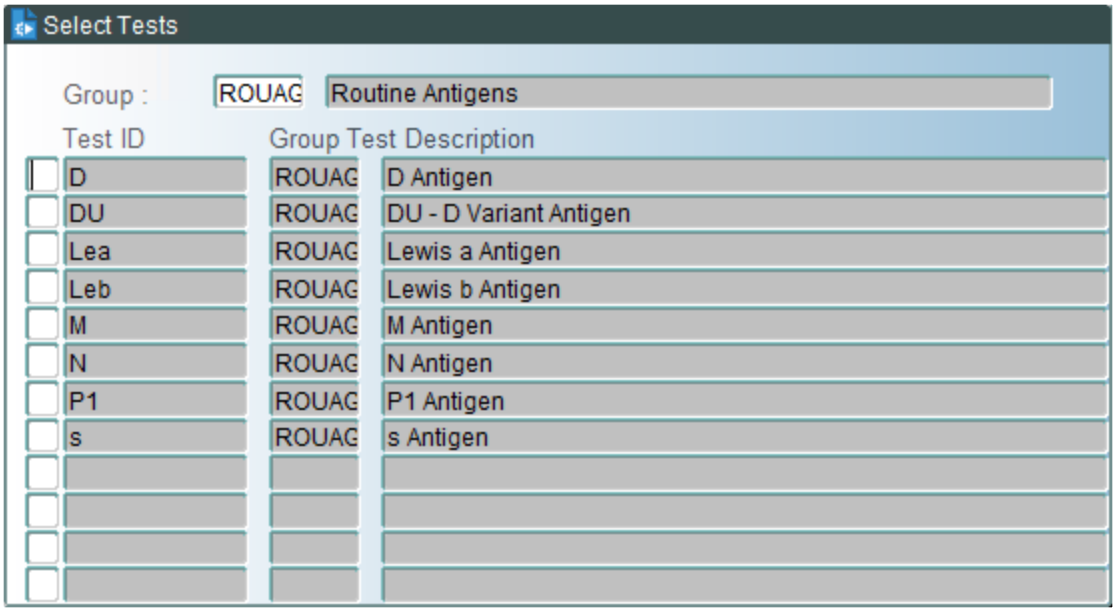



WellSky Corporation
Proprietary and confidential

4. Select the desired tests by placing an x in the select box, or by pressing **ENTER** . Use the **UP** and **DOWN** arrow to navigate through the list.

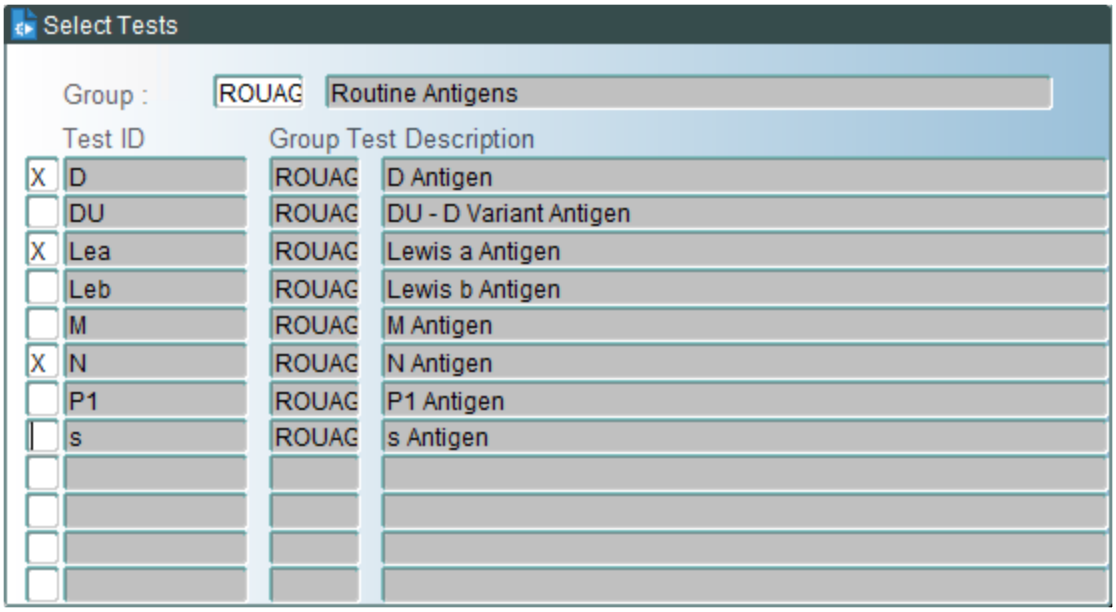


5. Press **F8** (Exit Screen) to abort without saving. Press **F12** (Commit) to save the selected tests. The selected test appears in the *Scheduled Test ID* field, as shown:

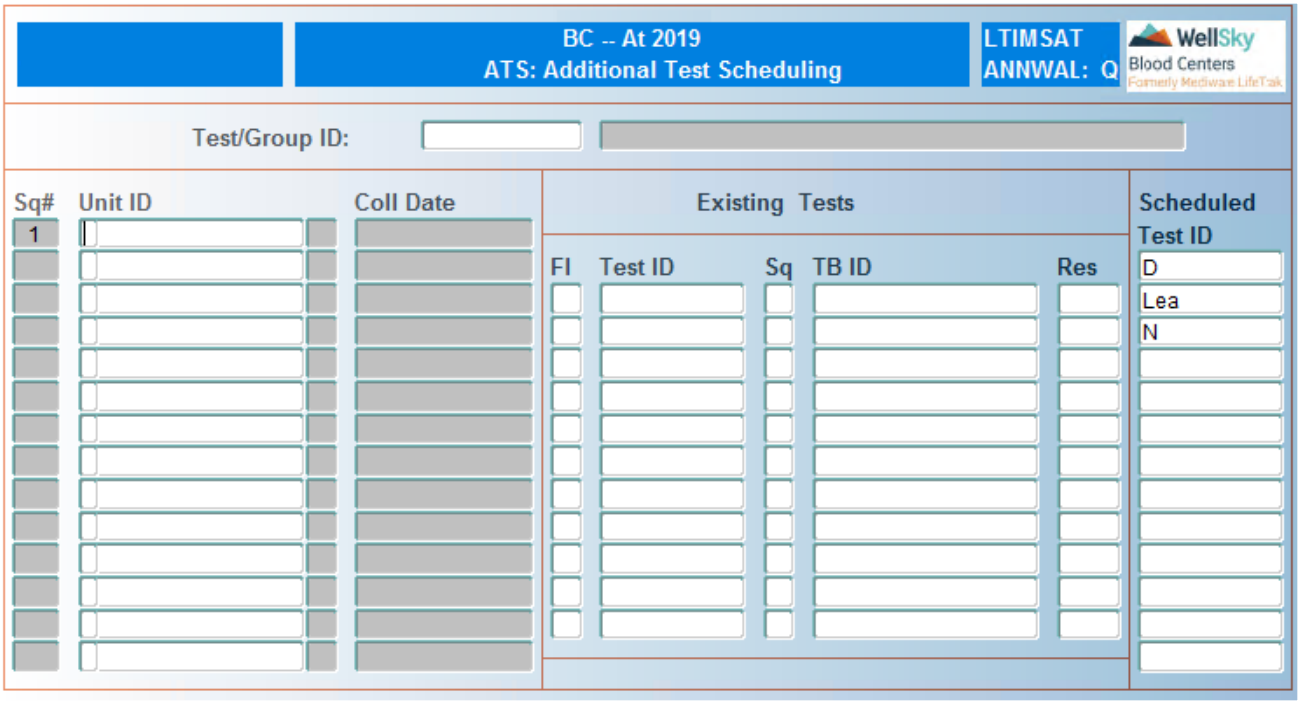


**NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

## To Select Multiple Tests From Different Group IDs

To select multiple tests from different Group IDs, do the following:

1. Leave the *Test/Group ID* field blank and press **ENTER**. The following window opens:

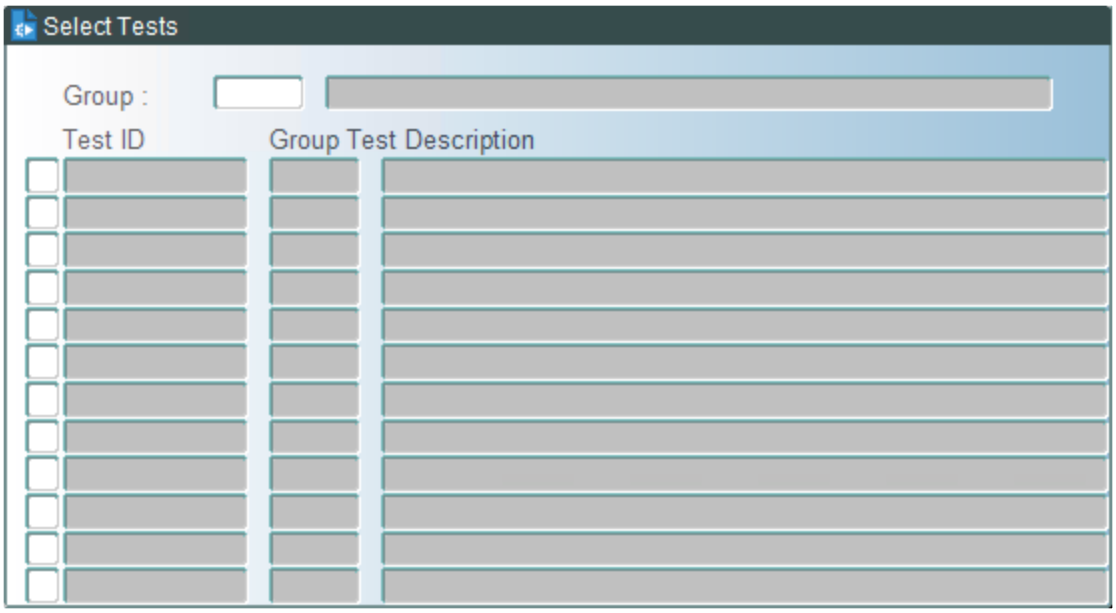


2. Leave the *Group* field blank and press **ENTER**. All available tests from all Group IDs are displayed, as shown:

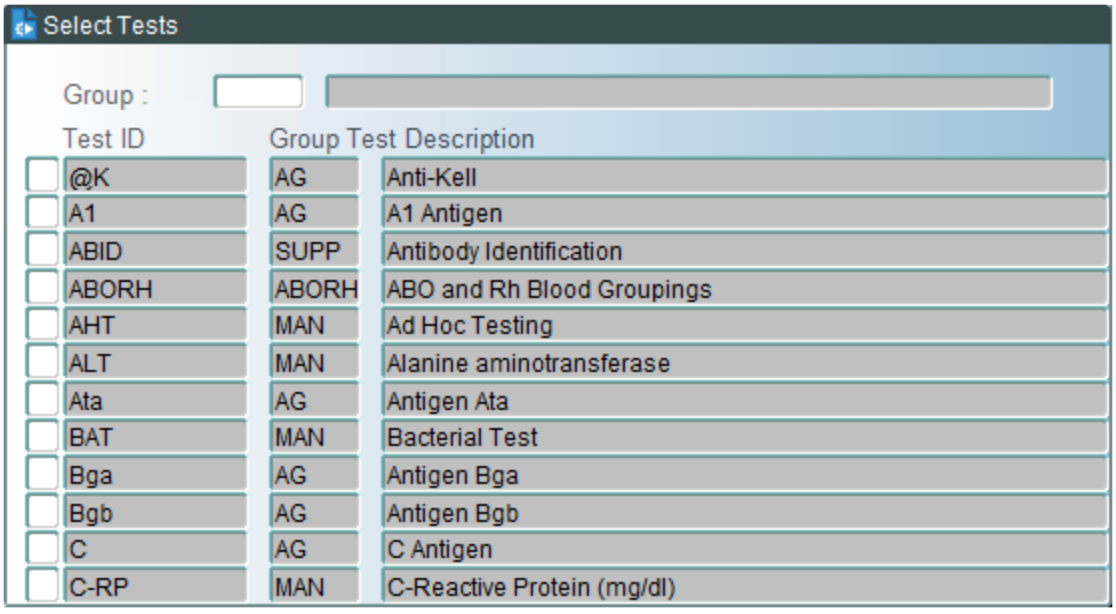


3. Select the desired tests by placing an x in the select box, or by pressing **ENTER** . Use the **UP** and **DOWN** arrow to navigate through the list.
4. Press **F8** (Exit Screen) to abort without saving. Press **F12** (Commit) to save the selected tests. The selected test appears in the *Scheduled Test ID* field.


WellSky Corporation
Proprietary and confidential

**NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID. After the unit ID is entered, the collection date displays. Tests are scheduled for units on a line-by-line basis.

If the unit already has the test schedule, the following window opens:




Close the window by entering `Y` or `N`. The tests that are already scheduled will display in the Existing Test block.

The selected tests are displayed on the right side of the screen. Scan the unit ID to schedule a unit for the listed tests.

## At Commit

Updates made to the system at commit include the data entered on the screen.

If additional tests are scheduled for a sample, they must be identified in this screen. If this is done in only one screen, extraction of data of testing will not occur.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Common Testing Functions menu.

# 21.5.5 Enter 'NT' Results (NT)

## Intended Use

Use the Enter 'NT' Results screen to put an NT test result for a blood sample that will associate an interdiction that the sample was not tested for the specified test.

## Limitations

None

## Prerequisites

- NT test batches will not appear in HOLDQ.
- Unit must have a scheduled test that is not result to place NT result.

## Accessing the Screen

Access this screen from the Common Testing Functions menu or by entering the keyword `NT`.

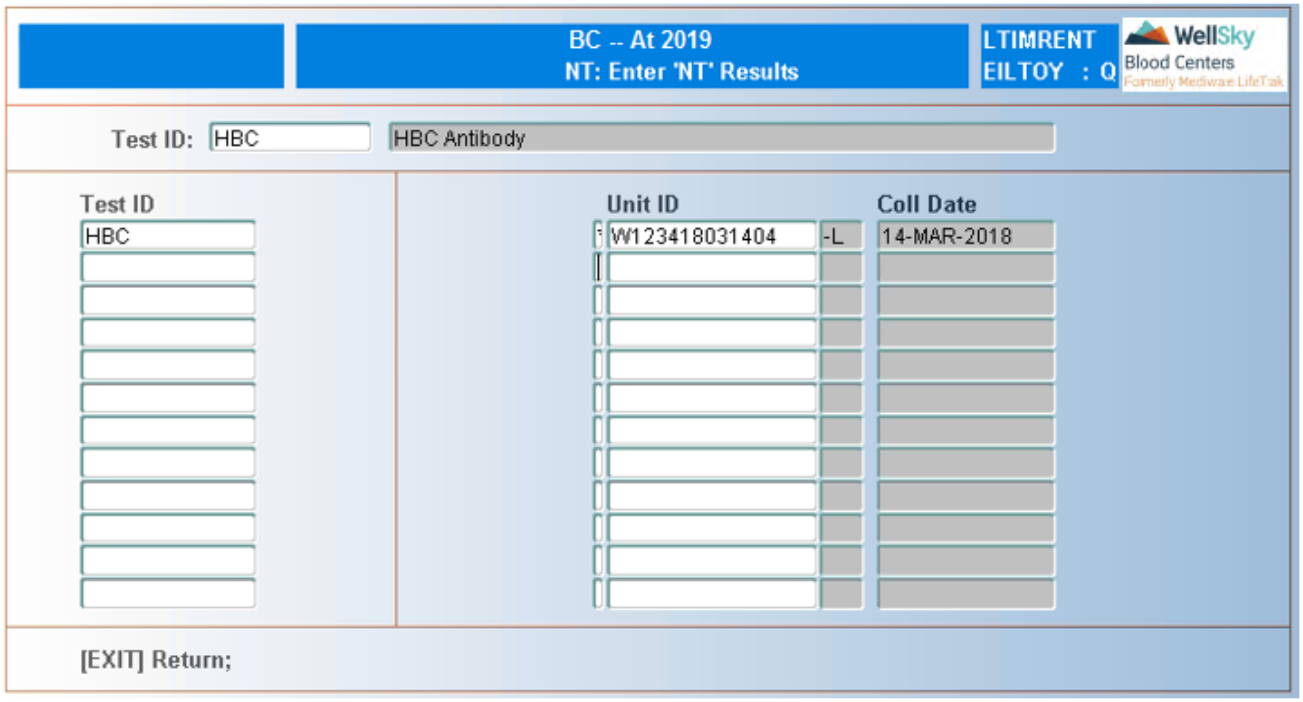


# Control Block Fields and Definitions

## Test ID

Enter test ID or use LOV to select a test ID.

# To Select Multiple Test by Group ID

## Test/Group ID

Leave the test/group ID field blank and press ENTER for a window screen to enter a group ID or use LOV.

You must select the test group as follows:

- Arrow down to the selected group.
- Press F12 (Commit) to accept the group.
- Scheduling Multiple Single Tests.

The system does not require that tests be selected as part of a group. To select tests from different groups, leave the Test/Group ID field blank, and press ENTER and the select test ID block appears. Press ENTER again. The following window opens:


WellSky Corporation
Proprietary and confidential

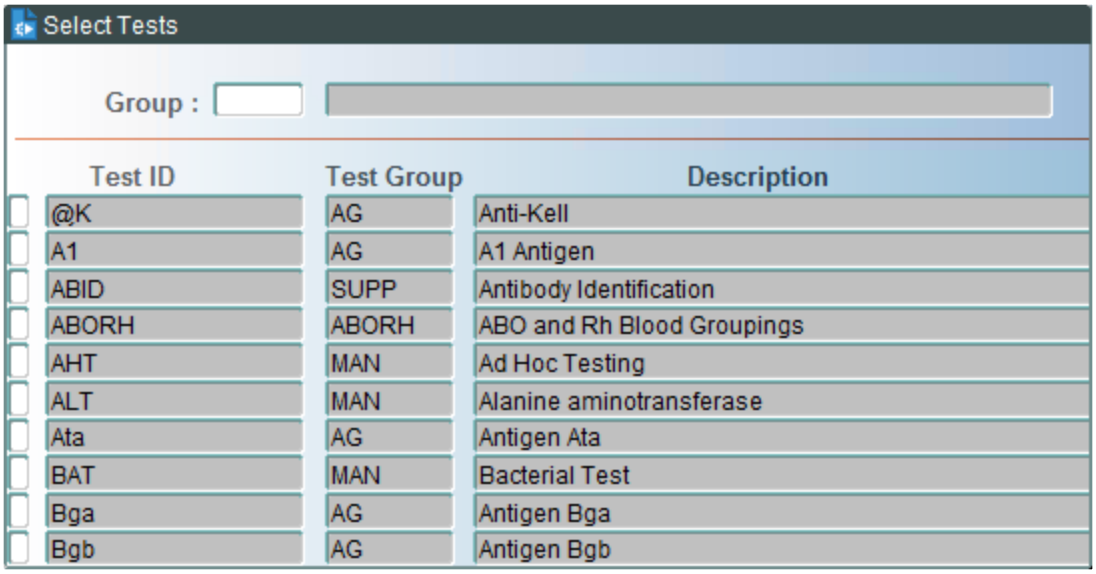


To select a test (any or all), enter an x or press ENTER to select each test.

**NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

Press F8 (Exit Screen) to abort without saving.

The selected tests are displayed on the right side of the screen. Scan the unit ID to schedule a unit for the listed tests.

**NOTE –** Both F12 (Commit) and F8 (Exit Screen) close the window and return the cursor to the screen.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

**NOTE –** A confirmation message displays if the unit has not been checked in.

Press ENTER to acknowledge the message. There must be a scheduled test with no result for the system to accept an 'NT' result.

# At Commit

An NT result is placed on the unit.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Testing Function.

# 21.5.6 Cancel Test Batch (in Holding Area) (CANCELTB)

## Intended Use

Use the Cancel Test Batch (in Holding Area) (CANCELTB) screen to cancel a test batch that is currently in the holding area and results have not been loaded into scheduled or unscheduled tests.

## Limitations

None

## Prerequisites

- The unit must have been checked in and the test must already be scheduled.
- You can only cancel tests that were previously scheduled in your lab area.
- Test results do not need to be present on the manual worksheet in order to cancel the worksheet.

## Accessing the Screen

Access this screen from the Common Testing Functions menu, or by entering the keyword `CANCELTB`.

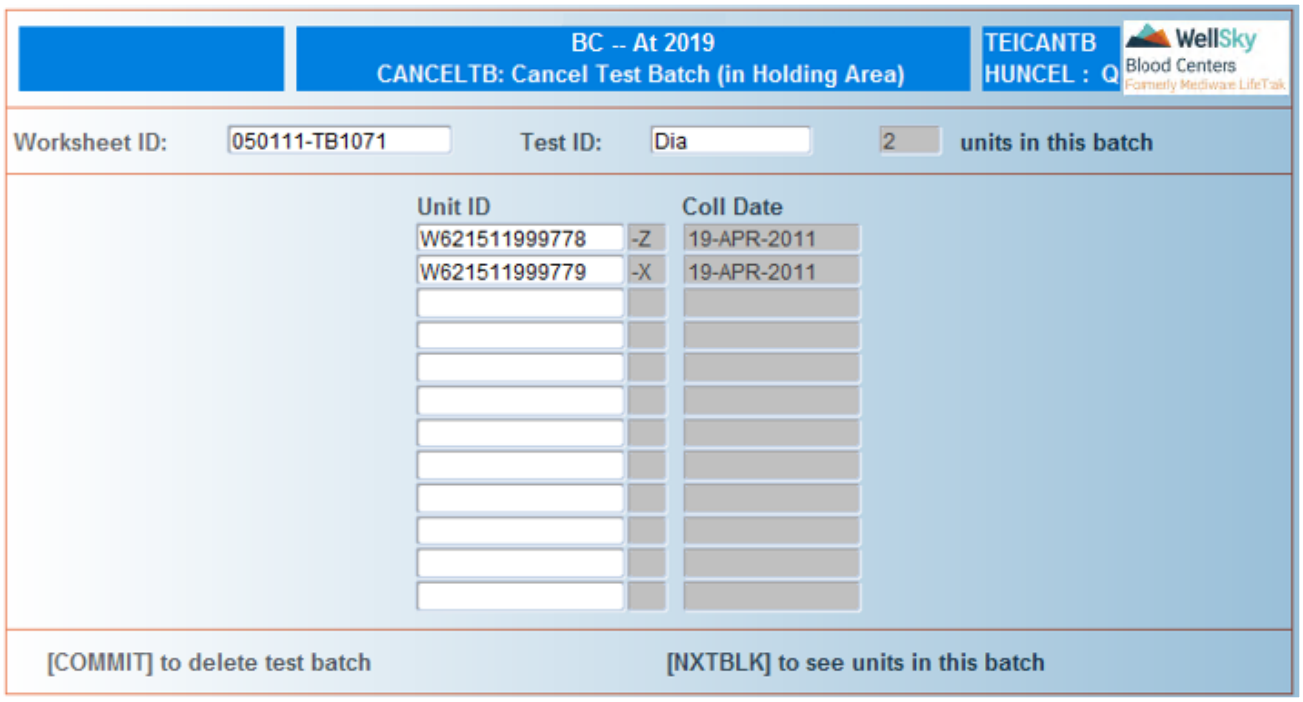


## Control Block Fields and Definitions

### Worksheet ID

Enter worksheet ID or select from LOV.


WellSky Corporation
Proprietary and confidential

- If the manual worksheet is created and is not linked to require the Entry of Control Values for a Tech (TECH1 or TECH2), and there are not any results linked to the worksheet, it will be present in the LOV.
- If it is an instrument file, and the Entry of Control Values for a Tech (TECH1 or TECH2) has not been performed, it will be present in the LOV.
- If it is an instrument file or manual worksheet that requires both entries for Entry of Control Values for a Tech (TECH1 and TECH2), and only TECH1 is performed, it will be in the LOV.
- Manual worksheets that have reagents assigned will appear in the LOV if results are not present in scheduled or unscheduled tests.
- If results are present in scheduled or unscheduled tests, the worksheet or instrument file will not be in the LOV and cannot be entered manually.

### Test ID

Enter the Test ID or select from LOV.

Press **CTRL** + **F3** (Next Block) to display the units in the batch.

- If the worksheet has multiple test IDs linked and one test has been resulted or canceled, the test will not appear in the LOV.
- If there is a single test ID linked to the test batch that can be canceled, the cursor will NOT move to the test ID, but the system will populate the test and the cursor will move to the detail block.

### units in this batch

The system displays the number of units in the batch. Field is not navigable.

## In the Detail Block

The system displays the following fields:

- Unit ID
- Coll Date of the unit

## To Delete the Test Batch

1. Press **F12** (Commit) . The following window opens:




2. Enter `Y` to cancel the test batch, or enter `N` to cancel the operation without canceling the test batch.

## At Commit

Updates made to the system at commit include the data entered on the screen.

The holding test table will be updated with a status of 'C', which can be viewed in the Test Batches in Holding Test Area Query (HOLDQ).

Test Voids report (TERVOID) is automatically generated and will be present in the Report Action – User (PRINT) screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Testing Functions menu.


WellSky Corporation
Proprietary and confidential

# 21.6 Testing Queries

Testing Queries are accessed from the following menu:

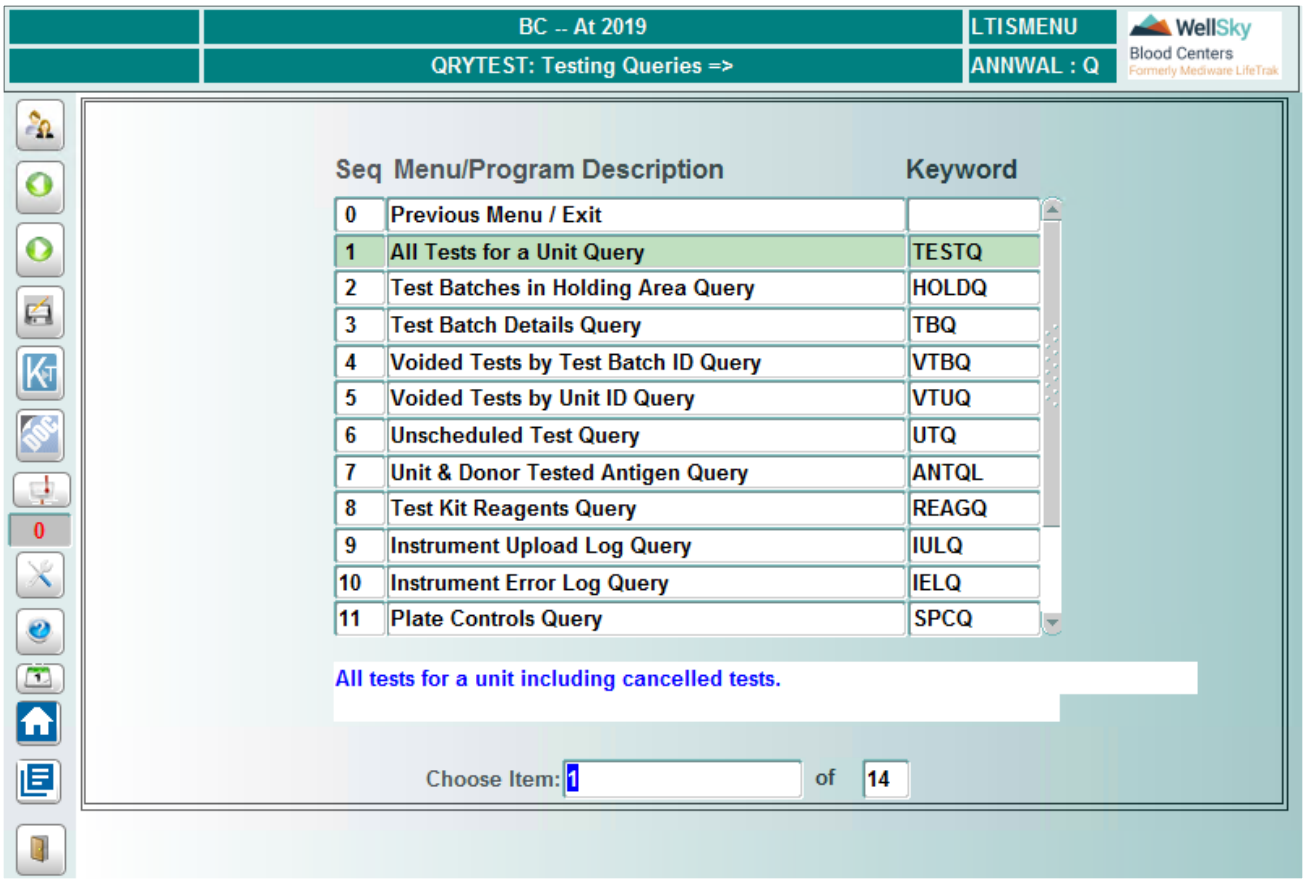


## 21.6.1 All Tests for a Unit Query (TESTQ)

### Intended Use

Use the All Tests for a Unit Query screen to view all scheduled and unscheduled tests for a unit as well as results and interpretations from those tests, including cancels.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `TESTQ`.

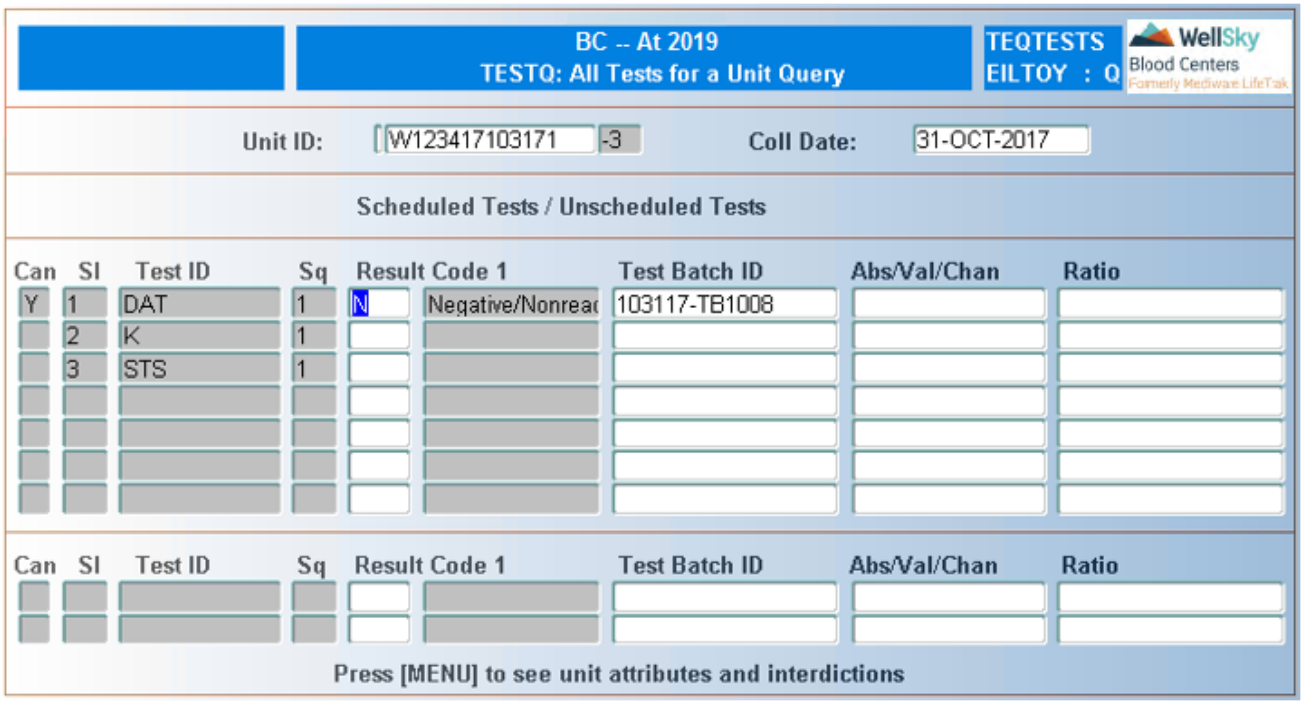


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system.

## Collection Date

Collection date automatically displays after unit ID is entered. Field is not navigable.

# In the Detail Block

**NOTE –** When screen first displays, the only fields that show on the screen are *Can* through *Ratio*. To see the additional fields, scroll the window to the right using TAB or ENTER. To move from scheduled to unscheduled window, press CTRL + F3 (Next Block).

The following information displays on the screen, if applicable:

# Scheduled Tests

- Can – an X displays if the test has been cancelled, or D if the test was cancelled due to discrepancy.
- SI – sequence number of the test.
- Test ID – test ID.


WellSky Corporation
Proprietary and confidential

- Sq – test sequence number.
- Result Code 1 – test result code and interpretation.
- Test Batch ID – batch the unit was tested in. If the test gets scheduled through the worksheet in manual testing the test batch ID will display without any results. If the test is scheduled through check-in the test batch ID does not display unit the results are uploaded.
- Abs/Val/Chan - absorbance – for viral testing, value – for cholesterol or ALT testing, or channel reading for ABO/Rh testing.
- Ratio – ratio of absorbance to cutoff.

  **NOTE –** This field will display the Unit ID if results have been linked to the unit from a sample checked into the hospital patient testing function.

- Result D&TS – date and time the result was achieved.
- Tech – lab tech who entered the result.
- Lab – lab number where testing is done.
- TB Seq – test batch sequence for sample.
- Well – location of the tested unit on the test plate.
- Mode – mode in which test was performed (manual or automated).
- Edit – if result is edited, flag is 1, otherwise this field is blank.
- Temp Resu Code – temperature result code.
- UChap – unit collection chapter.
- TChap – unit testing chapter.

Update cannot be made in this screen.

### At Commit

No updates are made to the system from this screen.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

## 21.6.2 Test Batches in Holding Area Query (HOLDQ)

### Intended Use

Use the Test Batches in Holding Area Query screen to view test batches awaiting the staging process.

## Limitations

- Does not display the test batches generated through Enter NT Results (NT).
- Results modifications made after upload to the system are not reflected in this query.

## Prerequisites

Test batches must exist.

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `HOLDQ`.

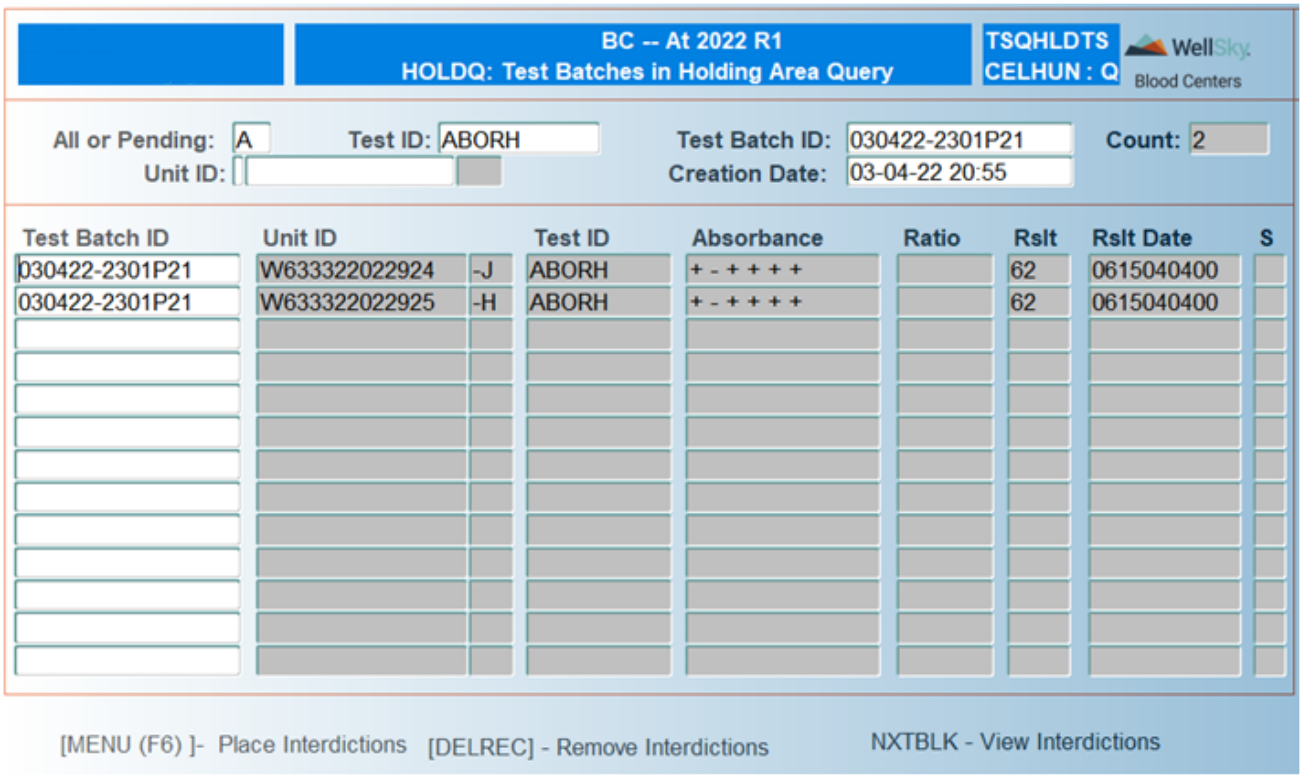


## Control Block Fields and Definitions

### All or Pending

Enter `A` for all tests, regardless of upload status. Enter `P` to select only tests pending upload into the system.

### Test ID

Enter test ID or select from LOV. Entry in this field is not required.

> **NOTE –** The list will contain data based on what the user selected for pending or all units.


WellSky Corporation
Proprietary and confidential

### Test Batch ID

Enter Test Batch ID or select from LOV. Entry in this field is not required.

**NOTE –** LOV availability is dependent upon the flag for all or pending and the test ID selected.

### Count

System automatically displays the count matching the criteria entered. Field is not navigable.

### Unit ID

Scan or manually enter unit ID to be queried. Entry in this field is not required.

### Creation Date

Field automatically populates with the creation date of the batch ID entered, if applicable. Field is not navigable.

## In the Detail Block

The following data displays after the control block is populated:

- Batch ID – Batch ID.
- Abs/Val/Chan - Absorbance – for viral testing, value – for cholesterol or ALT testing, or channel reading for ABO/Rh testing.
- Ratio – Ratio of absorbance to cutoff calculated by system.
- Rslt – Result value for the test.
- Result Date - Date the result was completed.
- S – Status if the result has been uploaded into the database. If a U is present the result has been uploaded into the database. If there is nothing in the column the result has not been uploaded.

**NOTE –** If the test batch has been canceled in Cancel Test Batch (in Holding Area) (CANCELTB), the status will appear as 'C'.

Use the **UP** and **DOWN** arrow keys to scroll through the retrieved information.

## Buttons/Keys

### MENU Key (F6)

MENU (F6) is used to go to the Place Group Interdiction or Hold (EGRPINT), based on the test batch ID selected in the control block.

**NOTE –** You must have access to the Place Group Interdiction or Hold (EGRPINT) to be able to navigate to that form. If you do not have access, you will receive "Err: 9125: Error granting access to users".

## DELREC (CTRL+F8)

DELREC (CTRL+F8) is used to go to the Release Group Interdiction or Hold (RGRPINT), based on the test batch ID selected in the control block.

**NOTE –** You must have access to the Release Group Interdiction or Hold (RGRPINT) to be able to navigate to that form. If you do not have access, you will receive "Err: 9125: Error granting access to users".

## NXTBLK (CTRL+F3)

NXTBLK (CTRL+F3) is used to view the interdictions that have been placed on the units. This will display all interdictions associated to the unit.

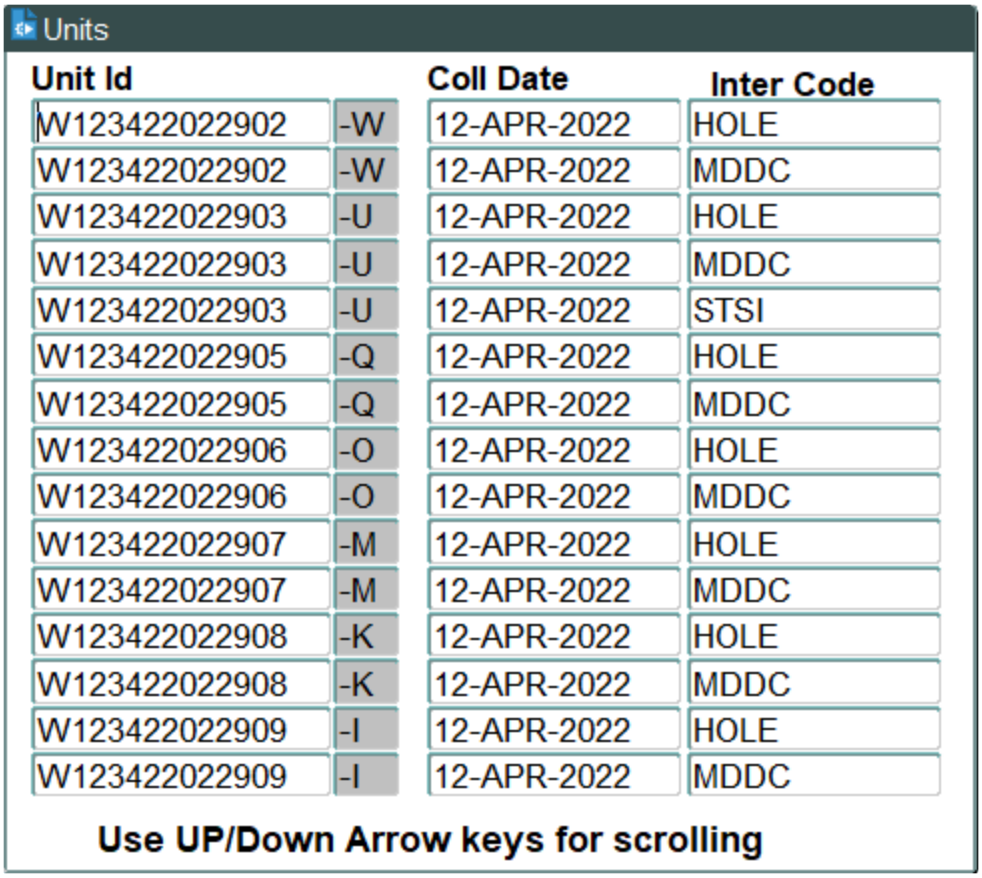


# At Commit

No updates are made to the system from this screen.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.3 Test Batches Details Query (TBQ)

## Intended Use

Use the Test Batches Details Query screen to review data about a particular test batch, such as the following:

- Units in the batch
- Reagents and expiration dates
- Test results and result dates

You can also view, add, or delete test batch notes from this screen.

## Limitations

- You must have access permission to add or delete test batch notes.
- System Parameter TB_ID must be configured in the SYSPARM table.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `TBQ`.

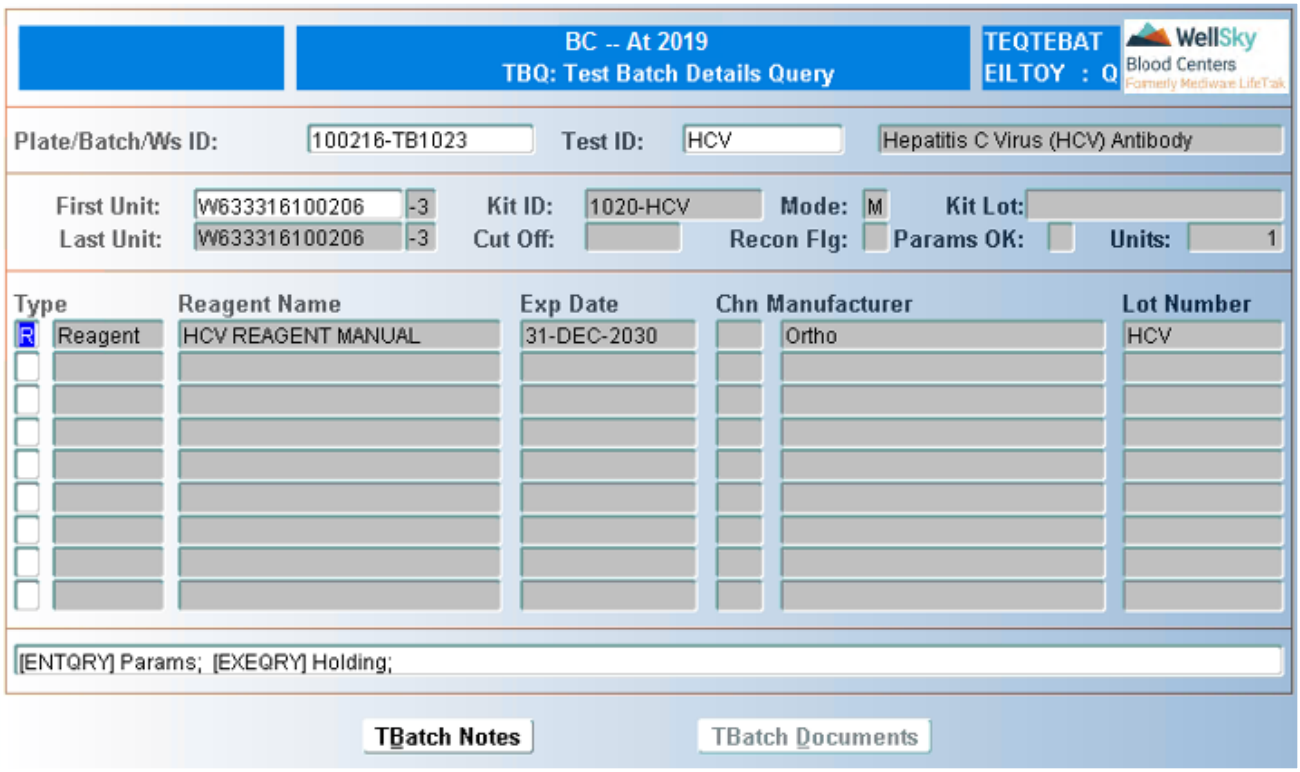


# Control Block Fields and Definitions

## Plate/Batch/WS

Enter plate ID, batch ID, or worksheet ID or select from LOV.

## Test ID

Enter test ID or select from LOV. Test description displays.

# In the Detail Block

The following test batch information displays:

- Unit information:
  - First Unit – first unit on the worksheet, plate, or test batch.
  - Last Unit – last unit on the worksheet, plate, or test batch.
- Test information:
  - Kit ID.
  - Cut Off – cutoff value read from the instrument, if using the Ortho-Summit.
  - Number of Unit – number of units in the plate, batch, W/S.
  - Reconcile Flag- Y if batch has been reconciled, N if batch has a discrepancy, or blank if reconciliation has not been done.
  - Mode – A for automated or M for manual.


WellSky Corporation
Proprietary and confidential

- Reagent information:
  - Type – C for Control, R for Reagent, or K for Kit.
  - Reagent Name – reagent name.
  - Exp Date – reagent expiration date.
  - Chn – location of reagent (for ABO automated tests).
  - Manufacturer – reagent manufacturer.
  - Lot Number – reagent lot number.

Use the **UP** and **DOWN** arrow keys to scroll through the reagents.

## Viewing Scheduled Tests

Press **F6** (Menu) to view scheduled tests. The following window opens:

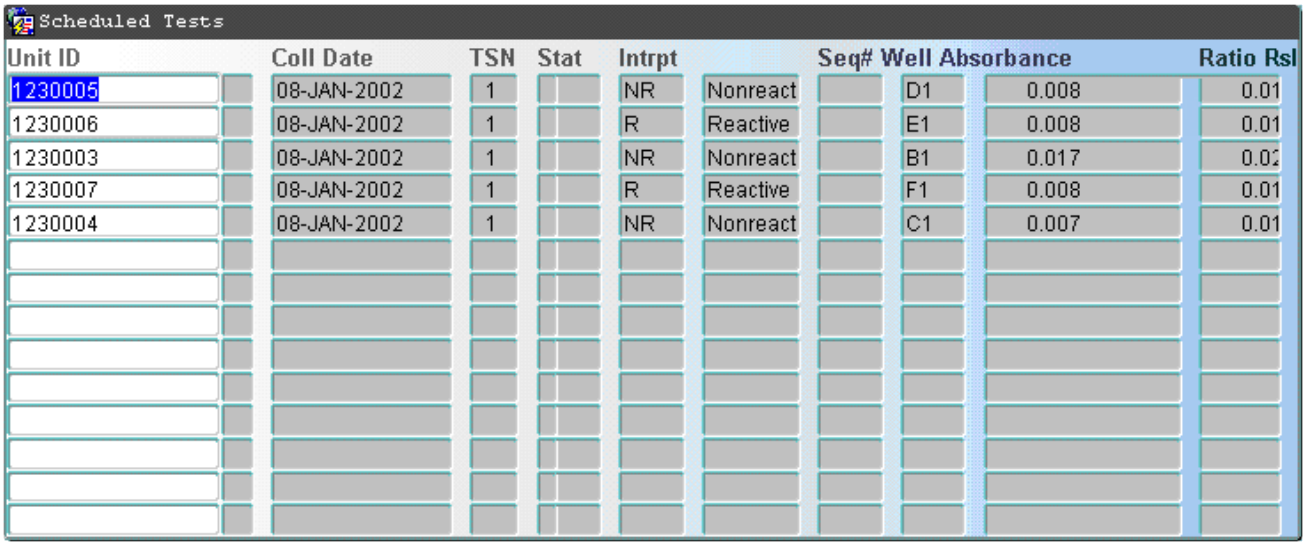


**NOTE –** This query can only be performed if scheduled results have uploaded to the system.

The following information is displayed:

- Unit ID – unit ID.
- Coll Date – collection date for this unit.
- TSN – test sequence number.
- Stat – instrument identification number (for automated tests).
- Intrpt – test result and description.
- Seq# - manual worksheet sequence number.
- Well – location on the plate of this unit.
- Absorbance – absorbance reading (for viral testing).

- Ratio – ratio of testing result to cutoff (viral).
- Rslt Dats – test result date.
- Lab – lab code.

**NOTE –** When screen first displays, the only fields that show on the screen are Unit ID through Absorbance. To see the additional fields, press ENTER or TAB.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Viewing Unscheduled Tests

Press CTRL + F3 (Next Block) to view unscheduled tests. The following window opens:

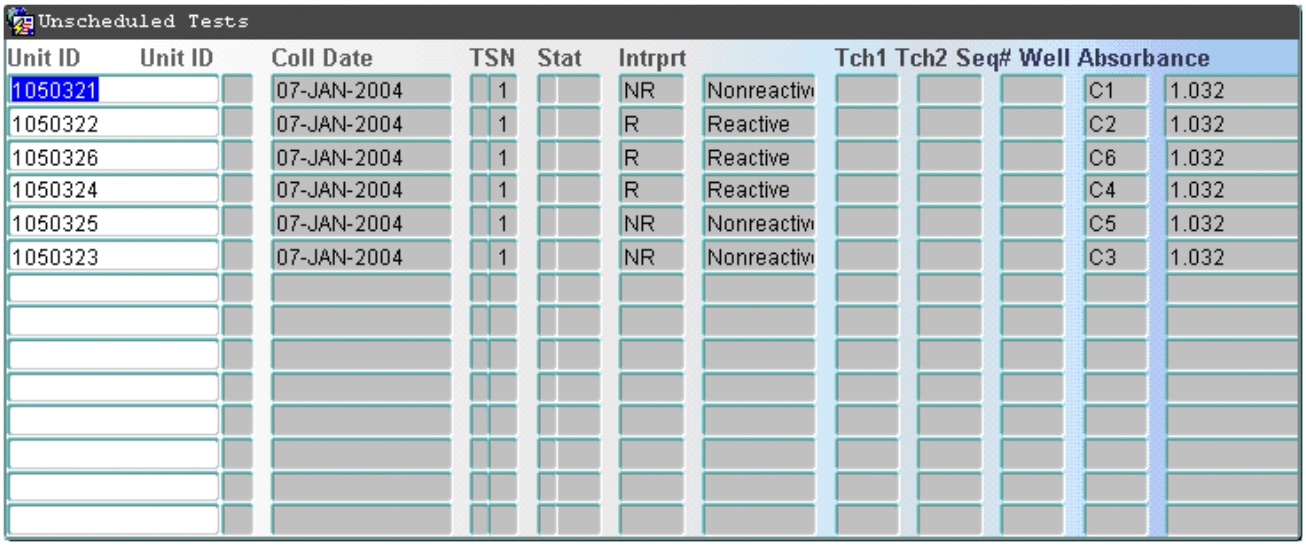


**NOTE –** This query can only be performed if unscheduled results have uploaded to the system.

The following information is displayed:

- Unit ID – unit ID.
- Coll Date – collection date for this unit, if present.
- TSN – test sequence number.
- Stat – instrument identification number (for automated tests).
- Intrpt – test result and description.
- Seq# - manual worksheet sequence number.
- Well – location on the plate of this unit.


WellSky Corporation
Proprietary and confidential

- Absorbance – absorbance reading (for viral testing).
- Ratio – ratio of testing result to cutoff (viral).
- Rslt Dats – test result date.
- Lab – lab code.

**NOTE –** When screen first displays, the only fields that show on the screen are Unit ID through Absorbance. To see the additional fields, press ENTER or TAB.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Viewing Test Staging Parameters

Press CTRL + F12 (Enter Query) to view test staging parameters. The following window opens:

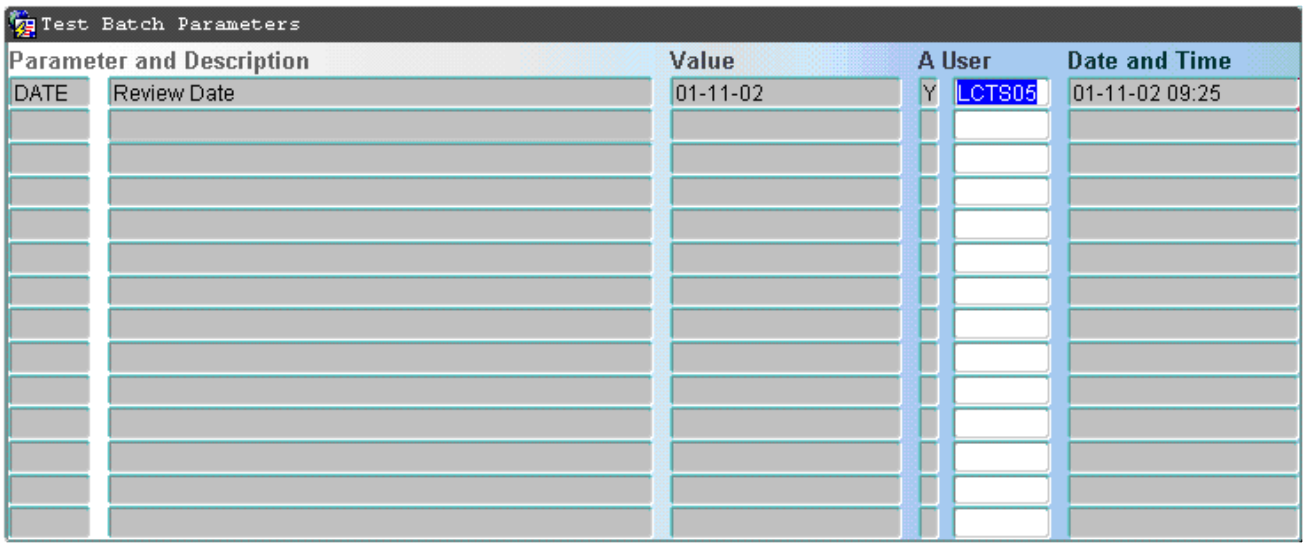


The following data displays in the query:

- Parameter and Description - staging parameter.
- Value – value entered for the parameter, if present.
- A – Value acceptability.
- User – User who entered the value (performed TECH1).
- Date and Time – Date and time entered for the parameter.
- Confirmed by – user who entered confirmation (performed TECH2).

**NOTE –** When screen first displays, the only fields that show on the screen are Parameter through Date and Time. To see the additional fields, press ENTER or TAB.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Viewing Holding Test

Press ALT + F12 (Execute Query) to view tests in the holding area. The following window opens:

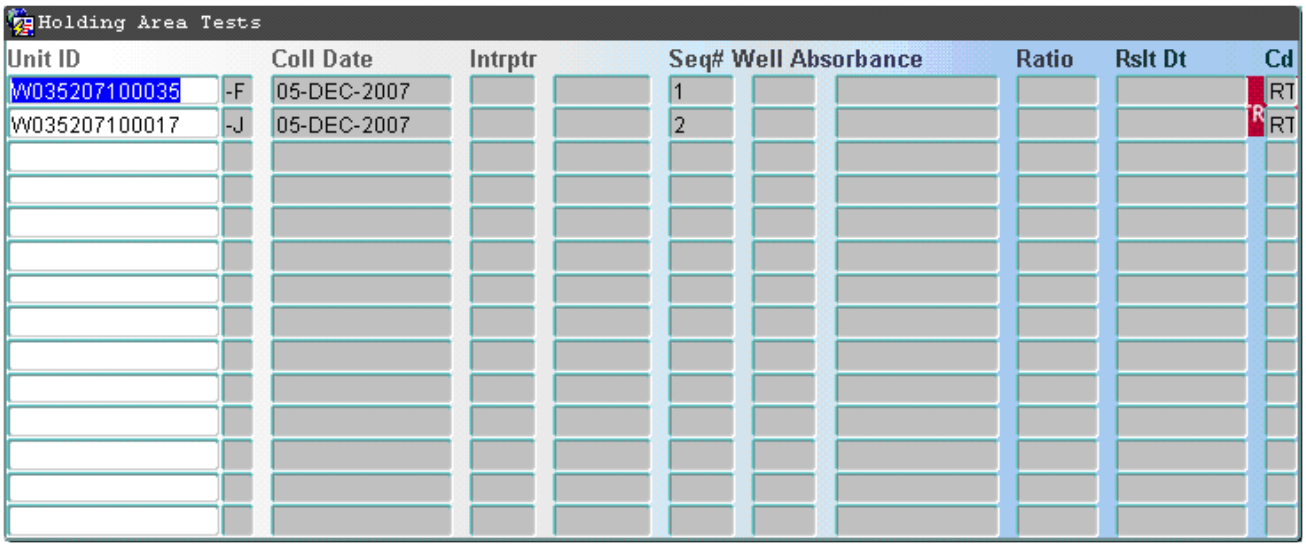


**NOTE –** This query can only be performed if the results have not uploaded to the unit.

The following information is displayed:

- Unit ID – unit ID.
- Coll Date – collection date for this unit, if present.
- Intrptr – result code and interpretation, if present.
- Seq# - manual worksheet sequence number.
- Well – location on the plate of this unit.
- Absorbance – absorbance reading (for viral testing).
- Ratio – ratio of testing result to cutoff (viral).
- Rslt Dt – test result date.
- Cd – lab code.
- User - User who entered second result.


WellSky Corporation
Proprietary and confidential

**NOTE –** When screen first displays, the only fields that show on the screen are Unit ID through CD. To see the additional fields, press ENTER or TAB.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## The TBatch Notes Button

Click TBatch Notes to view, add, or delete test batch notes for the selected Batch ID using the GEWNOTES window, as shown:

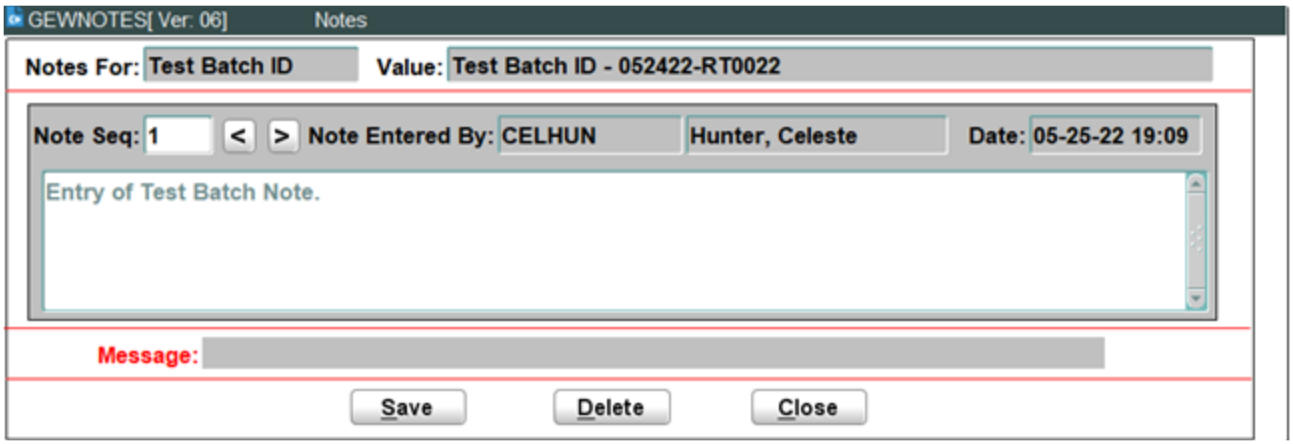


Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## The TBatch Documents Button

Click TBatch Documents to view or delete documents from a test batch. The Document Library opens to view or delete documents. To delete a document, the user must have access to UDOC, otherwise the user can view or add a document.

**NOTE –** The button will only be active if there are external documents linked to the test batch.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.4 Voided Tests by Test Batch ID Query (VTBQ)

## Intended Use

Use the Voided Tests by Test Batch ID Query screen to review data about the voided tests for a plate, batch, or worksheet, such as the following:

- Test result status
- Void reasons
- Void time
- Technician

## Limitations

Only voided test batches can be queried in this screen.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `VTBQ`.

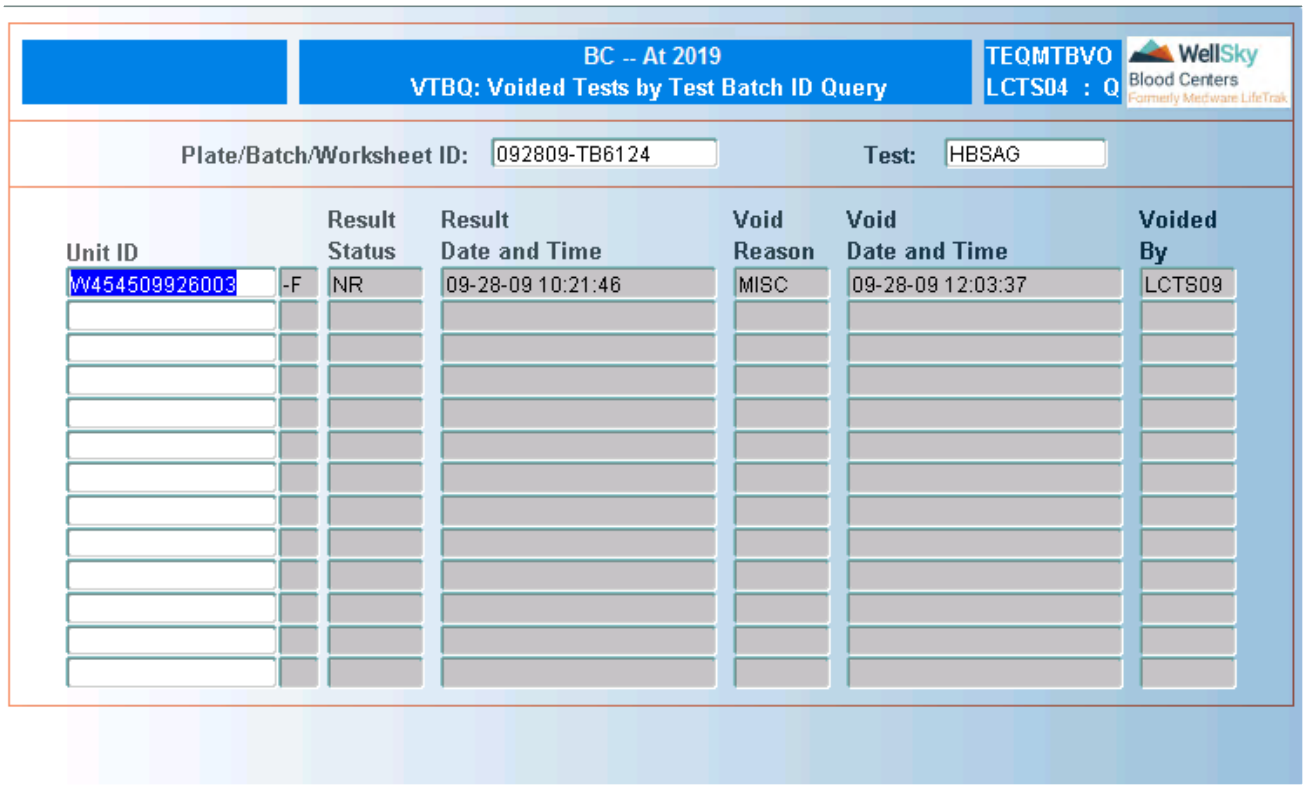



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

### Plate/Batch/Worksheet ID

Enter plate ID, batch ID, or worksheet ID, or select from LOV.

### Test

Enter test ID or select from LOV.

## In the Detail Block

The following information displays:

- Unit ID – unit ID.
- Result Status – test result.
- Result Date & Time – result date and time.
- Void Reason – test batch void reason.
- Void Date & Time – void date and time.
- Voided By – user ID.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.

# 21.6.5 Voided Tests by Unit ID Query (VTUQ)

## Intended Use

Use the Voided Tests by Unit ID Query screen to review data about the voided tests for a specific unit such as the following:

- Test batch
- Test result status
- Void reasons
- Void time

## Limitations

Only voided tests display in this query.

# Prerequisites

None

# Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword VTUQ.

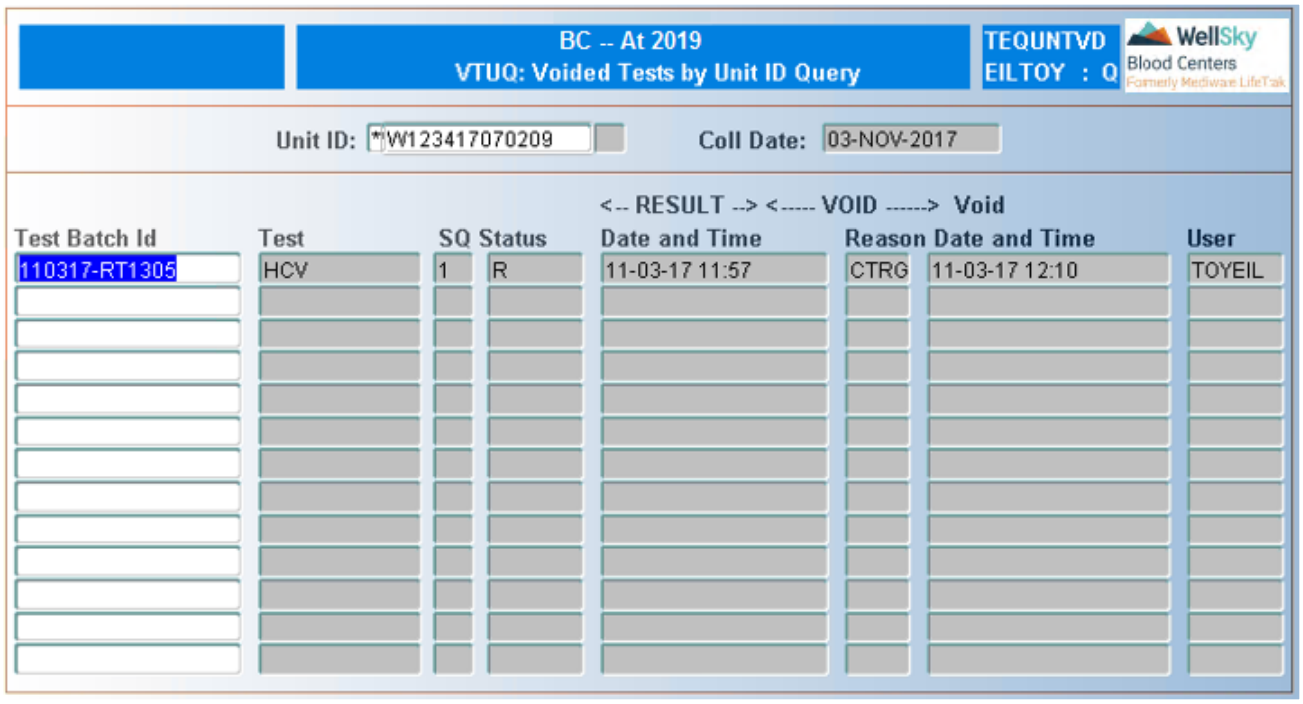


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system.

## Coll Date:

Unit collection date automatically displays after the units ID is entered.  Field is not navigable.

# In the Detail Block

The following information displays:

- Batch ID – batch ID.
- Test – test ID.
- Sq – result sequence number.
- Result Status – test result.


WellSky Corporation
Proprietary and confidential

- Result Date & Time – result date and time.
- Void Reason – void reason.
- Void Date & Time – result void date and time.
- Void User – ID of user voiding results.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.

# 21.6.6 Unscheduled Tests Query (UTQ)

## Intended Use

Use the Unscheduled Tests Query screen to review unscheduled pending tests by specifying the Test ID (or ALL) and unit collection date.

## Limitations

This query cannot be chapter specific because there may be units in unscheduled that do not have a collection date or chapter ID. If you need to check on a specific unit, scan or manually enter that unit ID into the *Unit ID* field in the control block. You can also limit the number of records that display by using the other fields in the control block (*Test ID*, *From Dt*, *To Dt*, etc.).

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `UTQ`.

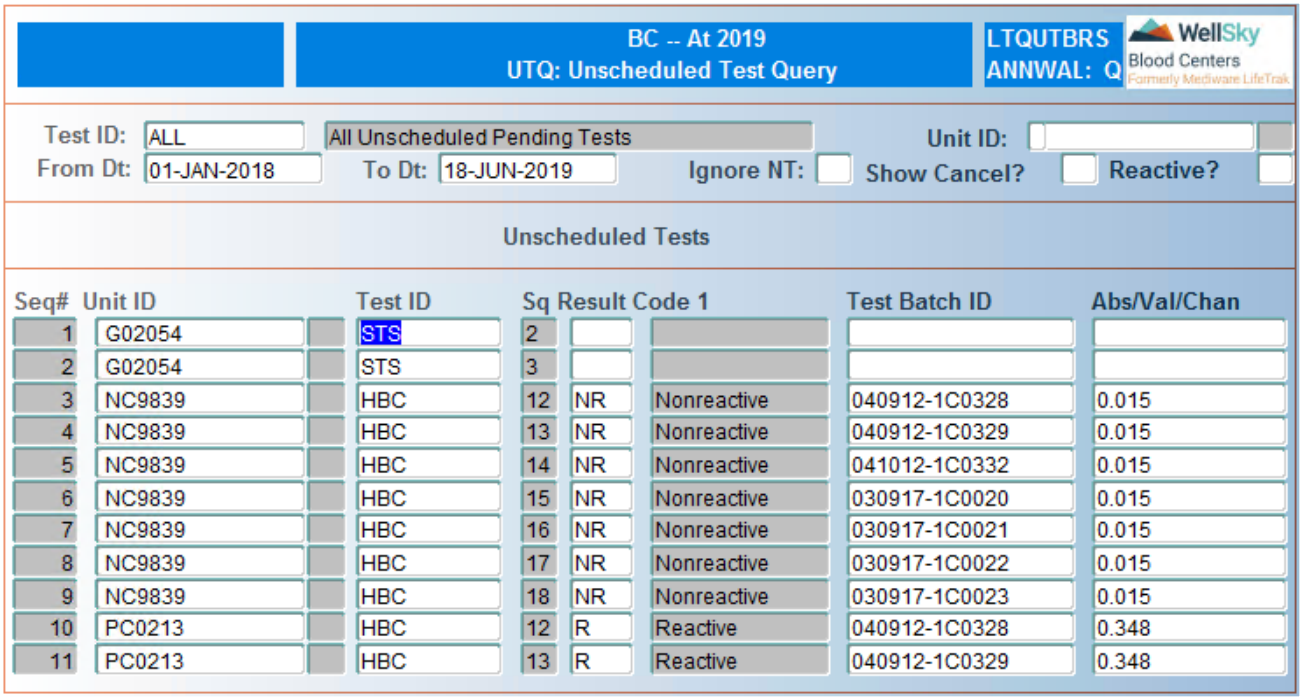


# Control Block Fields and Definitions

## Test ID

Enter the Test ID or select from LOV.

## Unit ID

Entry in this field is not required. Scan or manually enter unit ID. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system.

## From Dt

Enter from date in DD-MON-YYYY format. Entry in this field is not required.

**NOTE –** Date is associated to the unit collection date. If a date range is entered, the query will also bring any unit that does not have a collection date, so the query will show both units with a collection date within that range and units without a collection date.

## To Dt

Enter to date in DD-MON-YYYY format. Entry in this field is not required.

## Ignore NT

Enter `Y` to exclude NT results. Leave field blank to include NT results.


WellSky Corporation
Proprietary and confidential

### Show Cancel

Enter Y to retrieve only cancelled results. Leave field blank to exclude cancelled results.

### Reactive

Enter Y to retrieve only reactive results. Leave field blank to retrieve all results.

## In the Detail Block

The following information displays:

- Sq – sequence number.
- Unit ID – unit ID.
- Test ID – test ID.
- Sq - testing sequence.
- Result Code 1 – result code and interpretation.
- Test Batch ID – test batch ID.
- Abs/Val/Chan - absorbance – for viral testing, value – for cholesterol or ALT testing, or channel reading for ABO/Rh testing.
- Ratio - ratio of testing result to cutoff (viral).
- Result Date – test result date.
- Tech – user ID.
- Lab – lab code.
- TB Seq – manual worksheet test batch sequence.
- Well - location on the plate of this unit.
- Mode - Auto for automated or MAN for manual.
- Result Code 2 – second result code and interpretation.
- CD – Y is unit has been checked into Lab or N if unit has not been checked in.
- Uchp - unit collection chapter.
- TChap – unit testing chapter.

**NOTE –** When screen first displays, the only fields that show on the screen are Seq# through Abs/Val/Chan. To see the additional fields, press ENTER or TAB.

Use the UP and DOWN arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.7 Unit & Donor Tested Antigen Query (ANTQL)

## Intended Use

Use the Unit and Donor Tested Antigen Query screen to query antigens that are tested on the unit as well as historic donor tested antigen results. Current and historic ABO/RH and CMV results also display in this query.

The donor system is accessed to bring in the donor's prior antigen test results, which display on this screen.

## Limitations

None

## Prerequisites

In order to view historic donor results the following conditions must be met:

- Donation must be linked to the donor in Donor.
- Donor must be available.

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `ANTQL`.

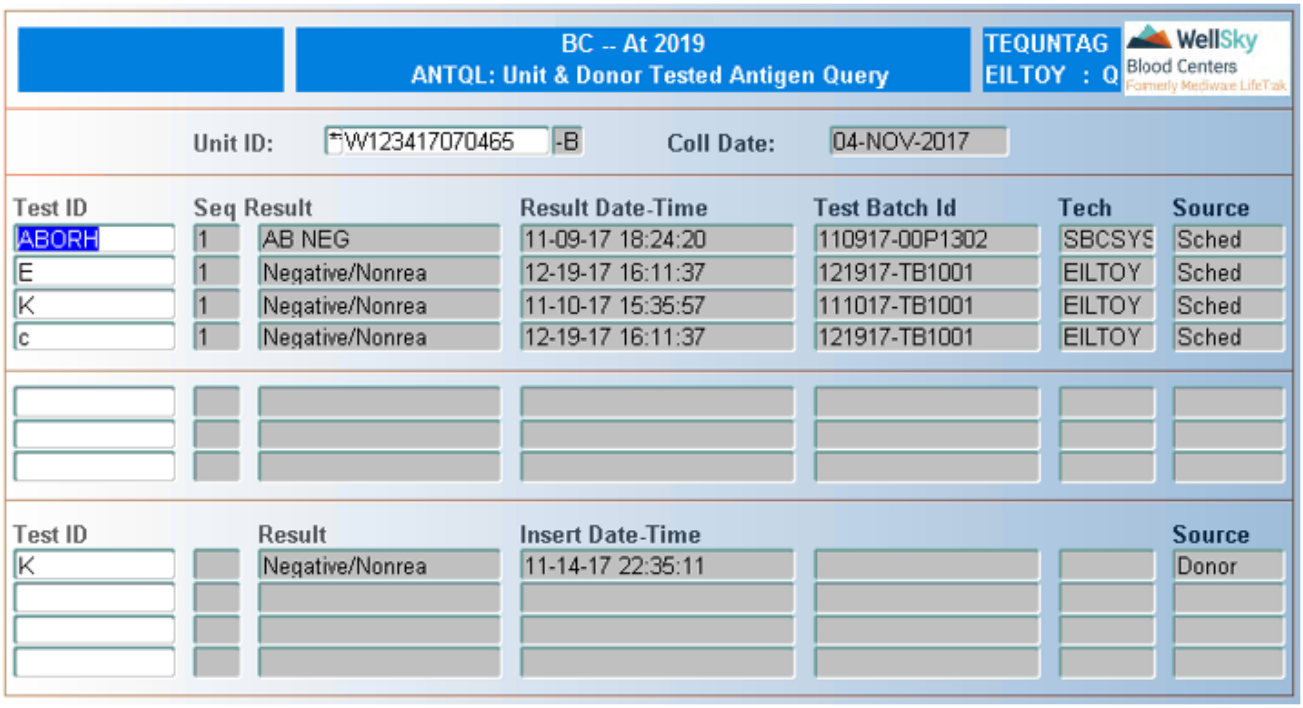



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

# In the Detail Block

**NOTE –** The detail block consists of three sections:

- The first section displays scheduled test results for the current unit.
- The second section displays unscheduled test results for the current unit.
- The third sections displays historic donor tested results.

The following information automatically displays in the details blocks:

- Test ID - antigen test ID.
- Seq – test sequence number.
- Result – result code interpretation.
- Result Date-Time – date and time test result was obtained.
- Test Batch ID – ID of test batch.
- Tech – user login of lab technician.
- Source – displays Sched for scheduled results (1st block), 'Unsched' for unscheduled results (2nd block), and Donor for historic donor results (3rd block).

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to go to the unscheduled tests block. Press **CTRL** + **F3** (Next Block) again to go to the last block, which contains the donor's historic antigen testing results.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.

# 21.6.8 Test Kit Reagents Query (REAGQ)

## Intended Use

Use the Test Kit Reagents Query to review information pertaining to kits created for a test. Information that displays includes the following:

- Reagents and controls in each kit.
- Lot numbers of reagents.
- Test batches each kit was used in.
- First and last units in the test batches that used each kit.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `REAGQ`.

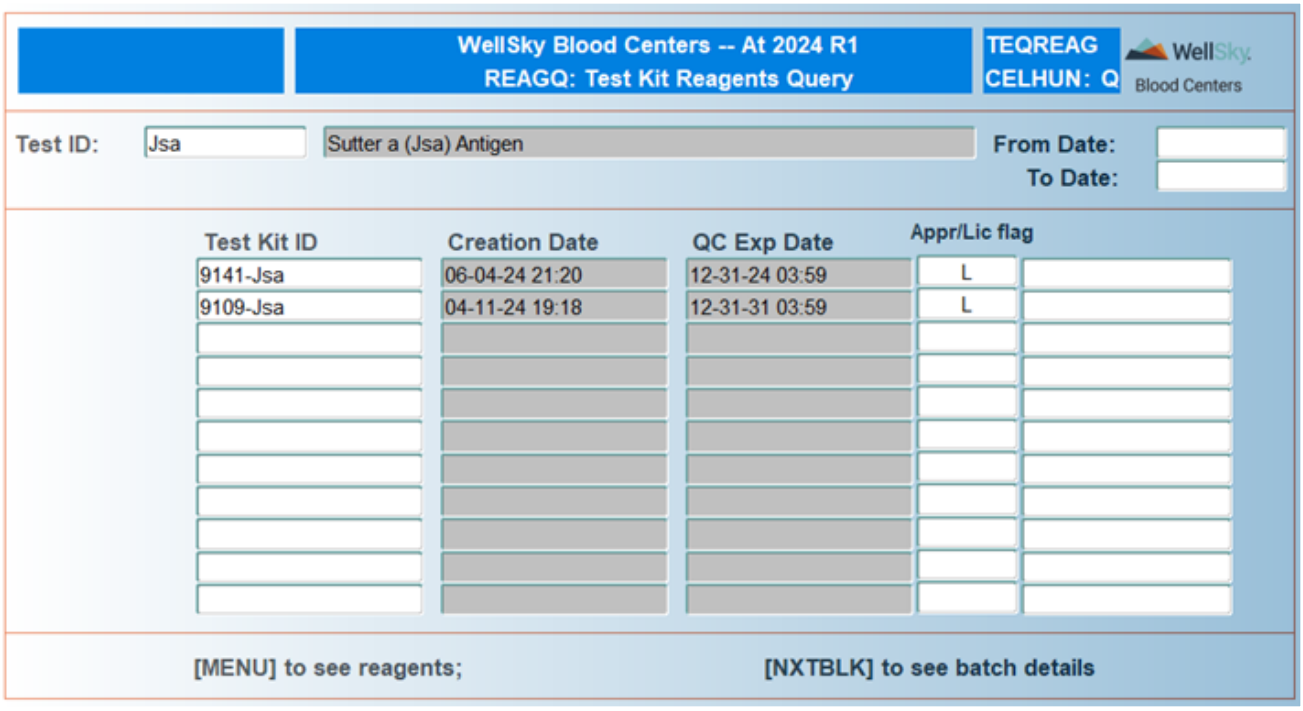

# Control Block Fields and Definitions

## Test ID

Enter Test ID or select from LOV.

## From Date

Enter start date in MM-DD-YY format to retrieve reagents created for the test during a specific period. Leave field blank to retrieve all dates.

## To Date

Enter end date in MM-DD-YY format to retrieve reagents created for the test during a specific period. Leave field blank to retrieve all dates.

# In the Detail Block

The following information displays:

- Test Kit ID – test kit ID.
- Creation Date – kit creation date and time
- QC Expiration Date – kit QC expiration date and time.
- Appr/Lic Flag – it will display one of the following:
  - L = Licensed
  - A = Approved
  - U = Unlicensed, Unapproved
- Reason – reason reagent not used, if present.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# Viewing Reagents in Test Kit

Press **F6** (Menu) to view reagents in the test kit. The following window opens:

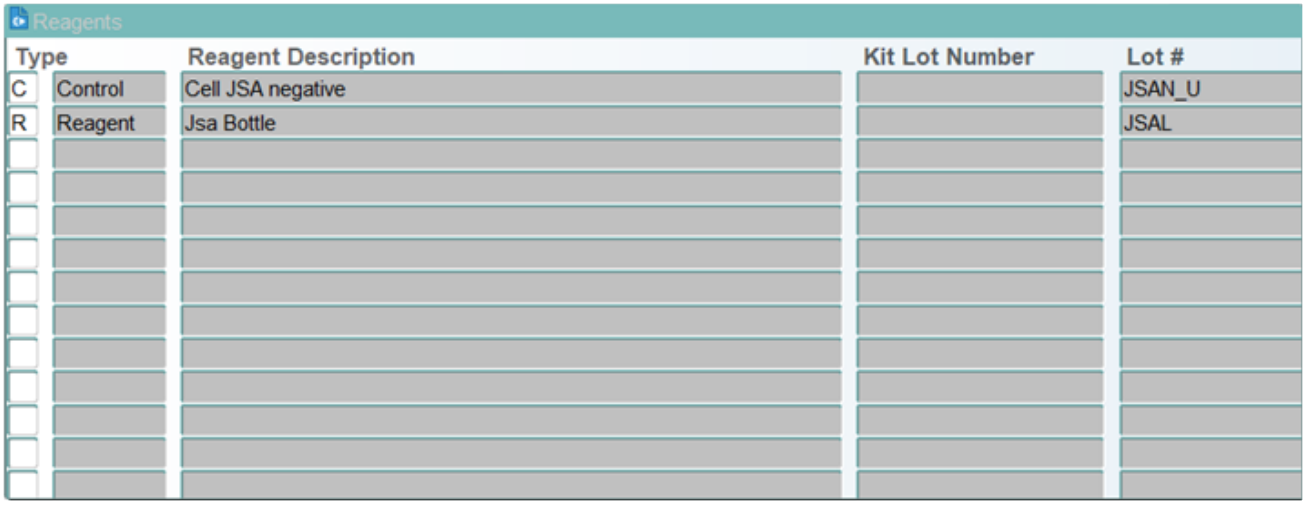


The following information displays:

- Type – reagent type (C=Control, R=Reagent, K=Kit).
- Reagent Description – reagent description.
- Kit Lot Number - master lot number associated to all reagents within that kit.
- Lot # - lot number of each individual reagent.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the main screen.

## Viewing Batches Test with Reagent

Press **CTRL** + **F3** (Next Block) to view batches tested with the reagent. The following window opens:

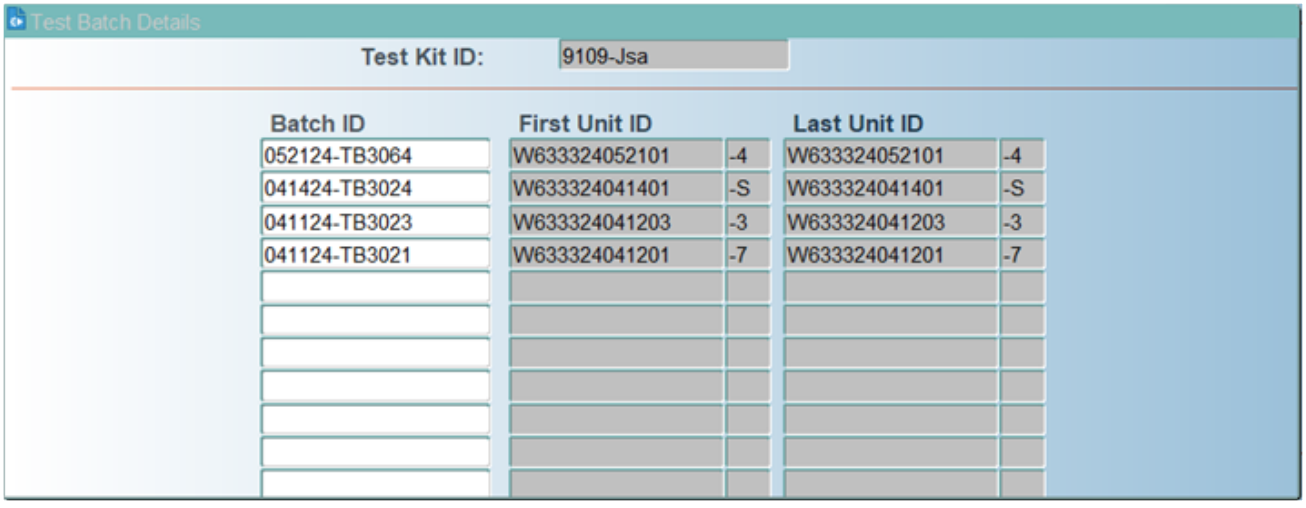


The following information displays:


WellSky Corporation
Proprietary and confidential

- Test Kit ID – test kit ID.
- Batch ID – test batch ID.
- First Unit ID – first unit in the test batch.
- Last Unit ID – last unit in the test batch.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.

# 21.6.9 Instrument Upload Log Query (IULQ)

## Intended Use

Use the Instrument Upload Log Query screen to review information on all of the automated tests that have been conducted on a given date. This screen displays the batch ID that the system assigns to batch data transmitted from the testing machines.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `IULQ`.

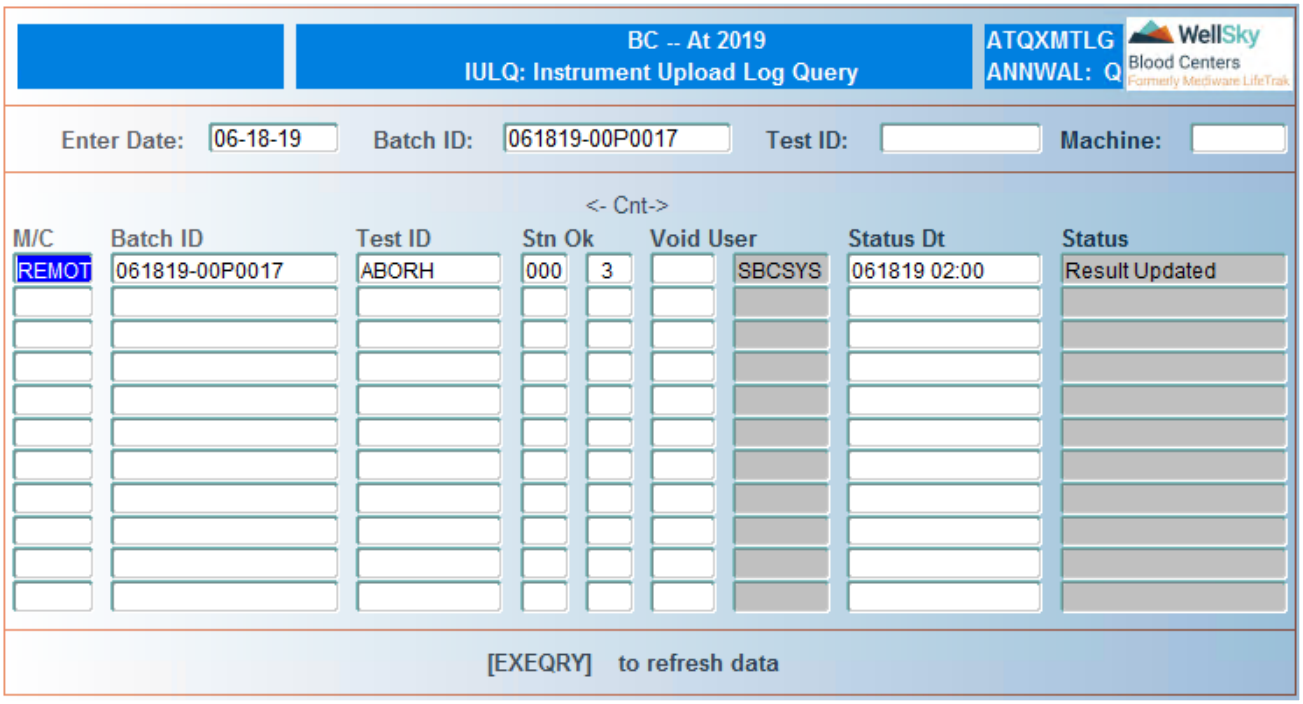


# Control Block Fields and Definitions

## Enter Date

Enter testing date in MM-DD-YY format to review, or select from LOV.

## Batch ID

Enter batch ID or select from LOV. Leave field blank to retrieve all batches from the date entered.

## Test ID

Enter the test ID or select from LOV. Leave field blank to retrieve all test IDs.

## Machine

Enter machine ID or select from LOV. Leave field blank to retrieve uploads from all instruments.

# In the Detail Block

The following information displays:

- M/C – the machine used to test the batch.
- Batch ID – the batch ID assigned to a test batch by the system.
- Test ID – the name of the test conducted on that batch.
- Stn – the station you are working on.
- Ok – the number of tested blood samples in the batch.


WellSky Corporation
Proprietary and confidential

- Void – the number of voided results in the batch.
- User – user ID.
- Status Dt – the date and time the batch achieved its status.
- Status –test batch status (e.g. Reagents Awaited, Update OK!).

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.

# 21.6.10 Instrument Error Log Query (IELQ)

## Intended Use

Use the Instrument Error Log Query to view program errors occurring in Lab that prevent the system from uploading data that was transmitted from instrument interface files to the Lab system.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `IELQ`.

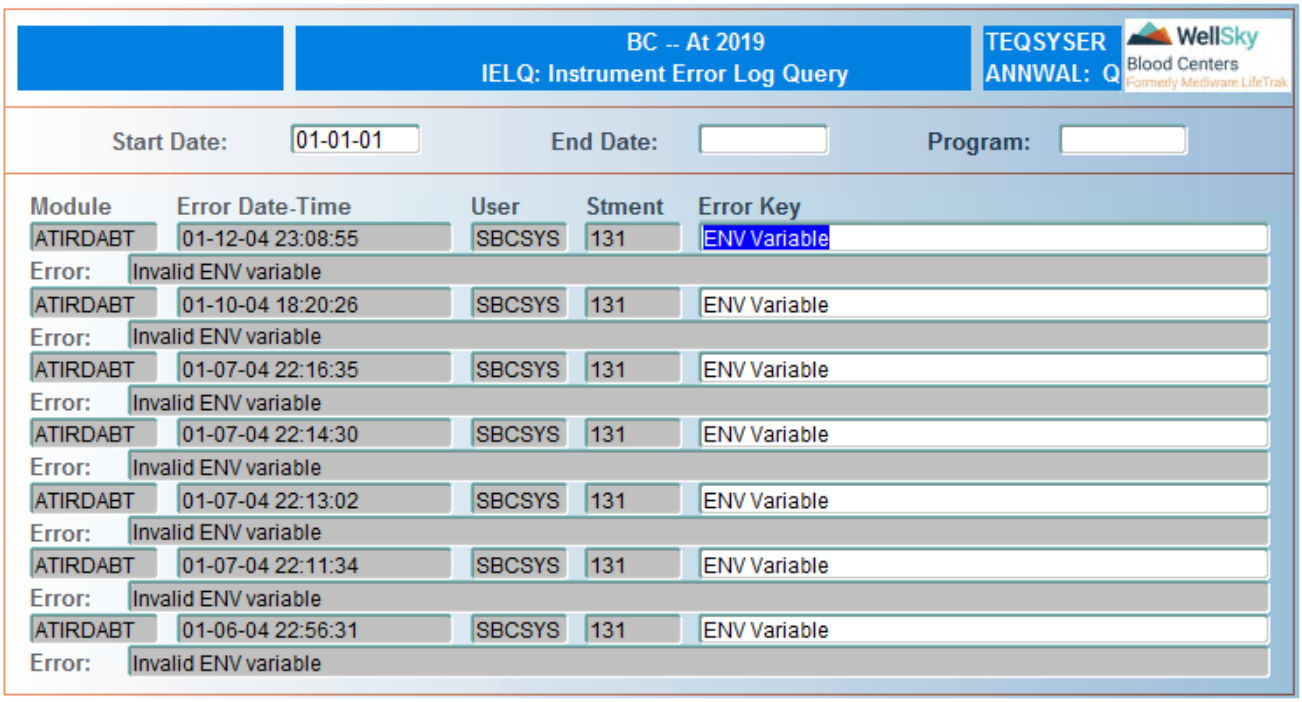


# Control Block Fields and Definitions

## Start Date

Enter start date in MM-DD-YY format.

## End Date

Enter end date in MM-DD-YY format.

## Program

Enter program name or leave field blank to retrieve all instrument upload errors.

# In the Detail Block

The following information displays:

- Module – module in which the error occurred.
- Error Date-Time – date and time at which the error occurred.
- User – user logged in at time of error.
- Stment – statement number within the program where the error occurred.
- Error Key – operating system error code and description.

Use the UP and DOWN arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.11 Plate Controls Query (SPCQ)

## Intended Use

Use the Plate Controls Query screen to review data about negative and positive controls used during instrument upload testing. Such data includes the following:

- Absorbance values
- Cutoff values
- Ratios

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword SPCQ.

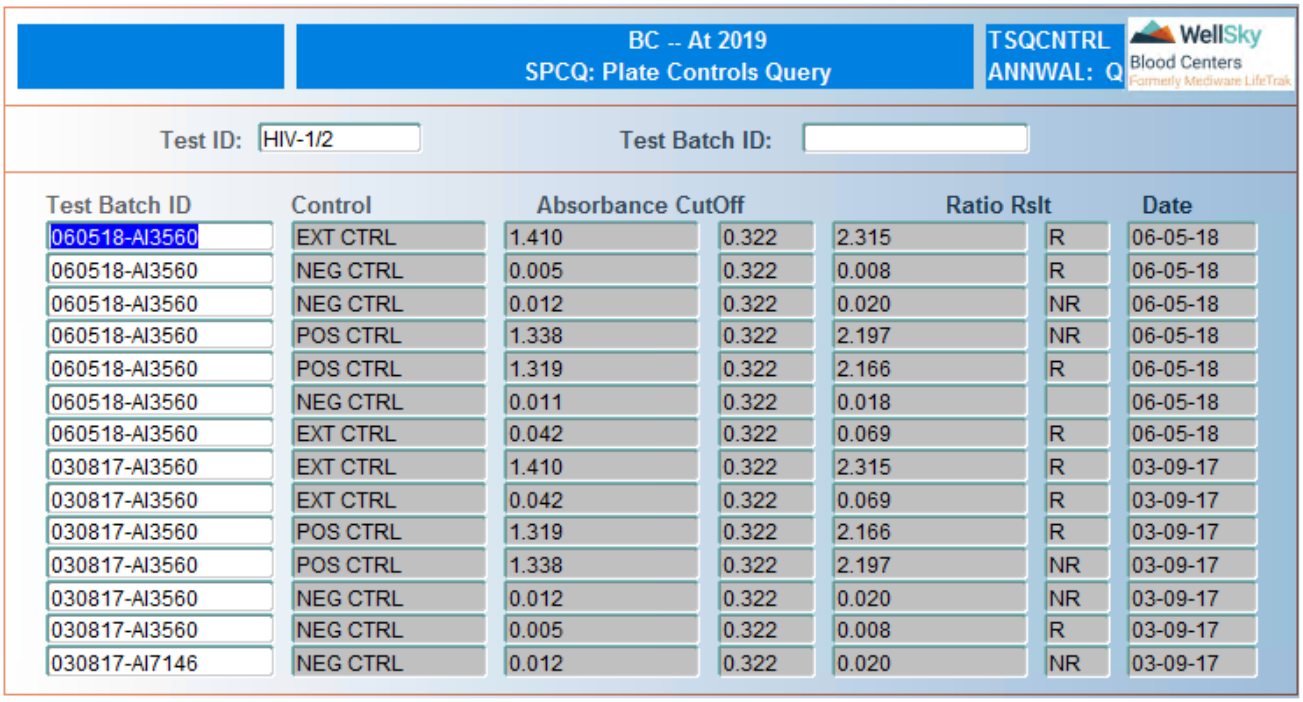


# Control Block Fields and Definitions

## Test ID

Enter Test ID or select from LOV.

## Test Batch ID

Enter Test Batch ID or select from LOV. Entry in this field is not required.

# In the Detail Block

Computer displays one line of information about each control used in testing the batch:

- Test Batch ID – test batch ID.
- Control – control used in testing the batch.
- Absorbance – absorbance value read from the instrument.
- CutOff – cutoff value read from the instrument.
- Ratio – ratio of absorbance to cutoff calculated by the system.
- Rslt – test result interpretation (for example, R=Reactive).
- Date – date control was used.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) when done.


WellSky Corporation
Proprietary and confidential

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.12 RT Results File Detail Status Query (UPDQ)

## Intended Use

Use the Results File Detail Status Query screen to review information on test results that have been uploaded to the system. Information is arranged by test batch ID within a date range. Screen also allows review of unit level information.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by using the keyword UPDQ.

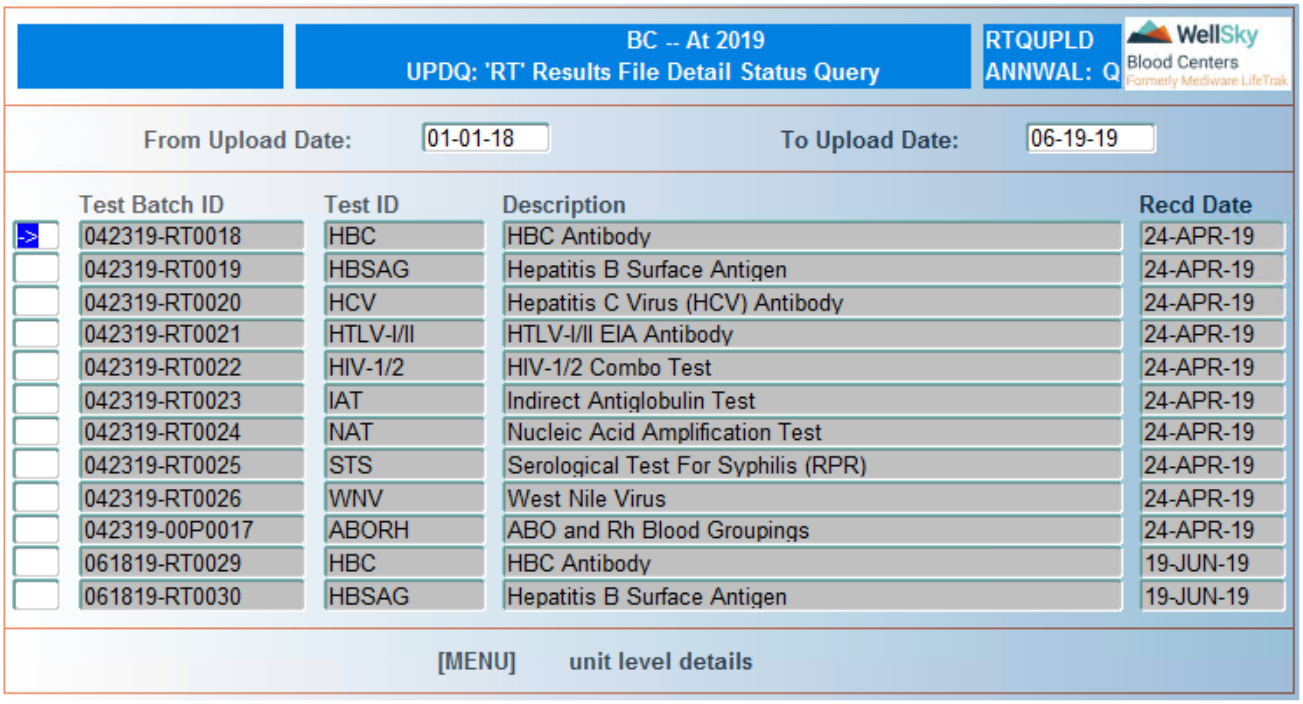
BC -- At 2019
UPDQ: 'RT' Results File Detail Status Query
RTQUPLD
ANNWAL: Q
WellSky Blood Centers Formerly Mediware LifeTrak

From Upload Date: 01-01-18 To Upload Date: 06-19-19

| Test Batch ID | Test ID | Description | Recd Date |
|---|---|---|---|
| 042319-RT0018 | HBC | HBC Antibody | 24-APR-19 |
| 042319-RT0019 | HBSAG | Hepatitis B Surface Antigen | 24-APR-19 |
| 042319-RT0020 | HCV | Hepatitis C Virus (HCV) Antibody | 24-APR-19 |
| 042319-RT0021 | HTLV-I/II | HTLV-I/II EIA Antibody | 24-APR-19 |
| 042319-RT0022 | HIV-1/2 | HIV-1/2 Combo Test | 24-APR-19 |
| 042319-RT0023 | IAT | Indirect Antiglobulin Test | 24-APR-19 |
| 042319-RT0024 | NAT | Nucleic Acid Amplification Test | 24-APR-19 |
| 042319-RT0025 | STS | Serological Test For Syphilis (RPR) | 24-APR-19 |
| 042319-RT0026 | WNV | West Nile Virus | 24-APR-19 |
| 042319-00P0017 | ABORH | ABO and Rh Blood Groupings | 24-APR-19 |
| 061819-RT0029 | HBC | HBC Antibody | 19-JUN-19 |
| 061819-RT0030 | HBSAG | Hepatitis B Surface Antigen | 19-JUN-19 |

[MENU] unit level details

# Control Block Fields and Definitions

## From Upload Date

Enter from upload date in MM-DD-YY format.

## To Upload Date

Enter to upload date in MM-DD-YY format.

# In the Detail Block

The following information displays:

- Test Batch ID – test batch ID created by the system.
- Test ID – test ID.
- Description – test description.
- Recd Date – date results were uploaded to the system.

**NOTE –** Result upload test batch ID's are assigned by the system as results are received.

Use the UP and DOWN arrow keys to scroll through the list.

# Viewing Unit Details

Press F6 (Menu) to view unit details. The following window opens:

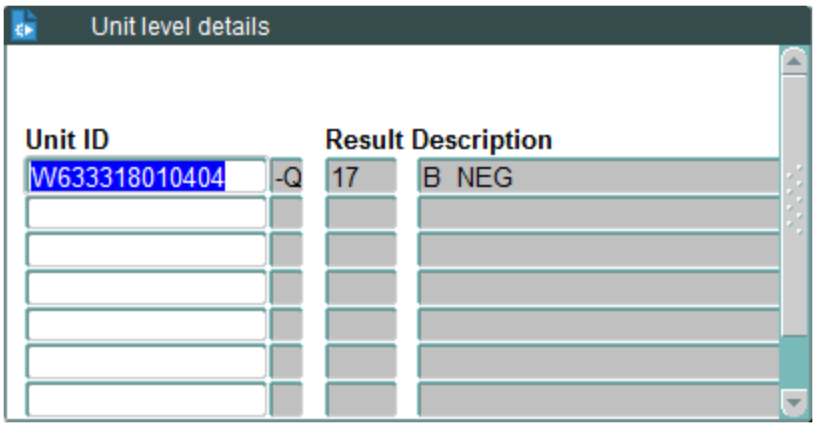


The following information displays:

- Unit ID – unit ID.
- Result – received test result code.
- Description – result description.

Use the UP and DOWN arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

Press F8 (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Testing Queries menu.

# 21.6.13 RT Results and Upload Query by Unit ID (RUNT)

## Intended Use

Use the RT Results and Upload Query by Unit ID screen to review information on a unit that has results that were uploaded back at the remote site through Remote Testing Upload (RTURLOAD).

## Limitations

Only results obtained through the Remote Testing Upload (RTURLOAD) can be viewed in this screen.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Testing Queries menu or by entering the keyword `RUNT`.

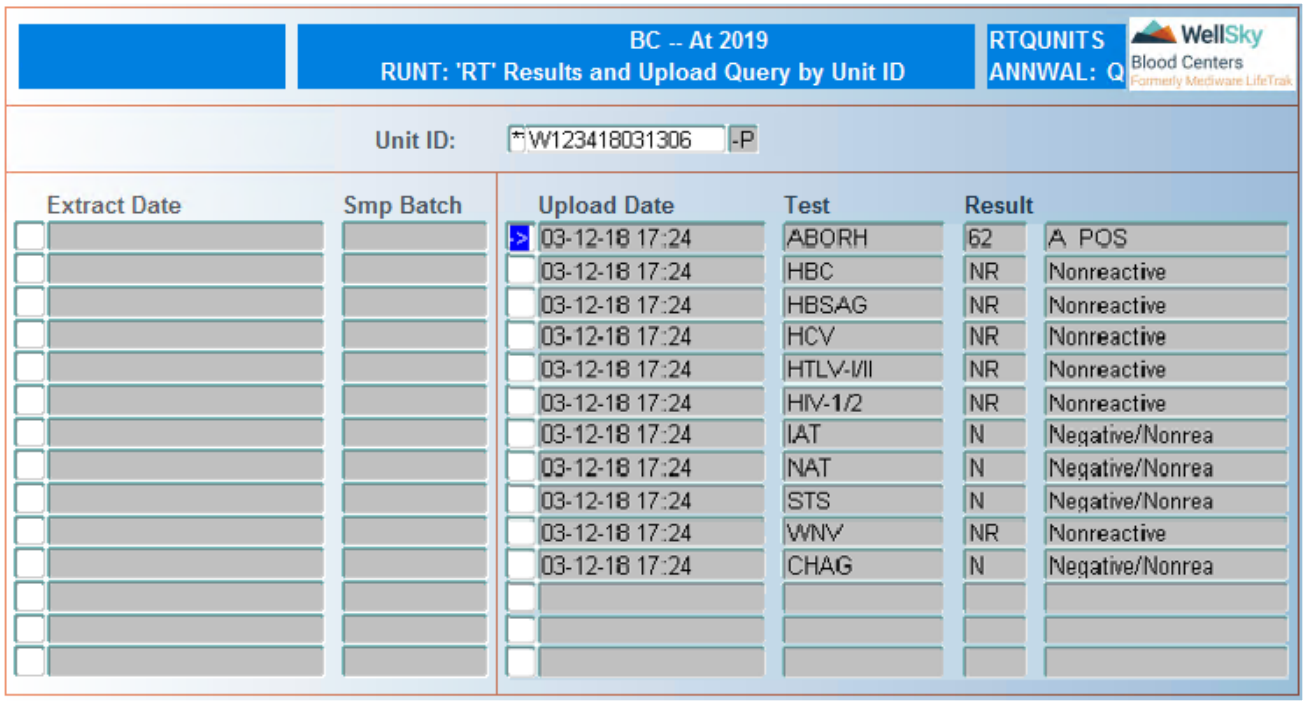

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

# In the Detail Block

The following information displays:

- Extract Date – not utilized.
- Smp Batch – not utilized.
- Upload Date – the date when the results file, which is generated at the testing facility, is uploaded into Lab.
- Test – test ID that is sent in the results file.
- Result – result code and description sent in the results file.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Testing Queries menu.


WellSky Corporation
Proprietary and confidential

# 21.7 Reagent Qualification Functions

Reagent Qualification Functions are accessed from the following menu:

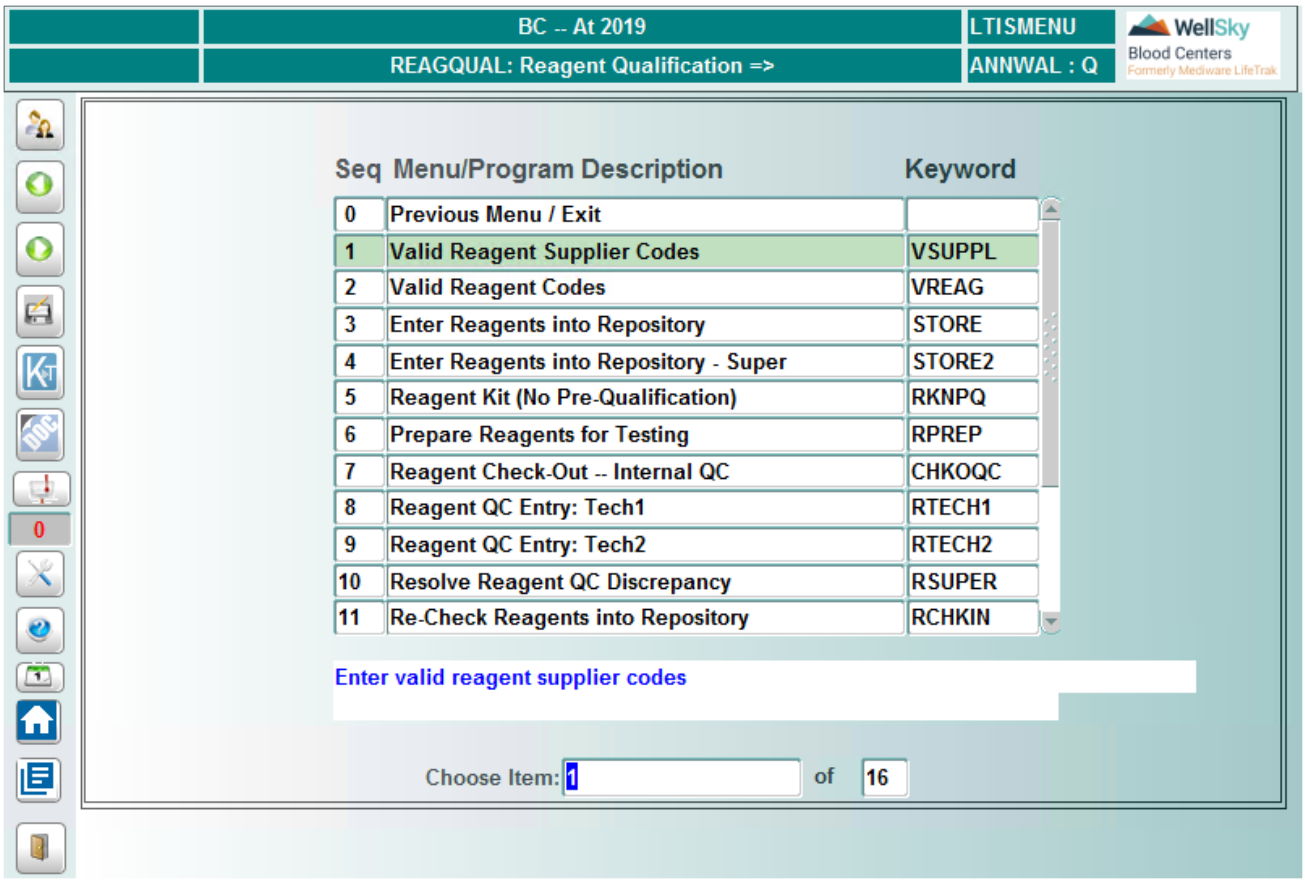


## 21.7.1 Valid Reagent Supplier Codes (VSUPPL)

### Intended Use

Use the Valid Reagent Supplier Code screen to enter supplier codes that will appear in the list of values for supplier when entering reagents into the repository. You may query on supplier codes that have already been entered.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Reagent Qualification menu or by using the keyword `VSUPPL`.

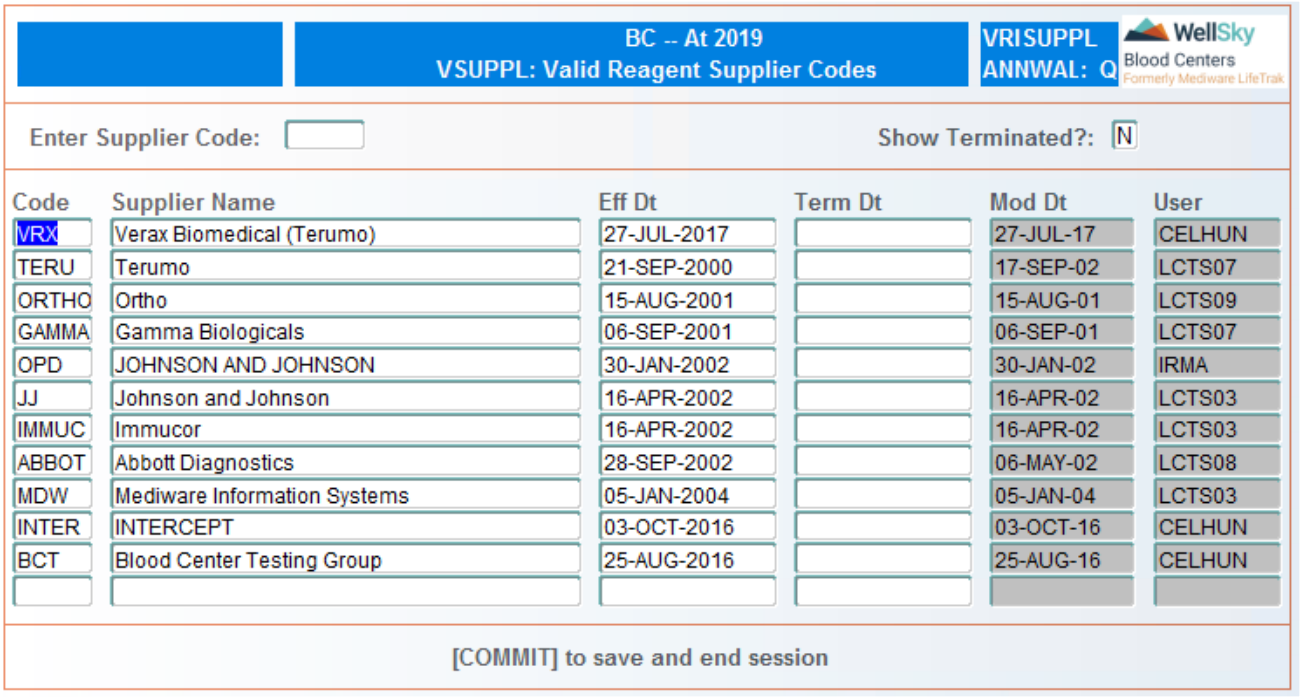


# Control Block Fields and Definitions

## Enter Supplier Code

Enter supplier code or leave blank to retrieve existing codes. A maximum of 5 upper case characters is allowed.

## Show Terminated

Enter `Y` to display all supplier codes, including those that have been terminated. Enter `N` to display only non-terminated supplier codes.

# Detail Block Fields and Definitions

## Code

Enter supplier code. A maximum of 5 upper case characters is allowed.

## Supplier Name

Enter supplier description. A maximum of 50 characters is allowed.

## Eff Date

Enter a date in which the supplier can be used in the system in DD-MON-YYYY format.

## Term Date

Enter a date in which the supplier code is no longer to be used in DD-MON-YYYY format.

## Mod Date

Field automatically populates with the date modifications were last made. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### User

Field automatically updates with the user ID who created the supplier code. Field is not navigable.

Press F12 (Commit) to save entry.

## At Commit

Data entered is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.

# 21.7.2 Valid Reagent Codes (VREAG)

## Intended Use

Use the Valid Reagent Code screen to describe or modify a reagent code. These codes will be used when entering reagents into the repository. When defining the codes the following will be determined:

- Type of reagent – a control, reagent, substrate.
- Whether a master lot number will be associated to the reagents when creating a kit ID.
- If the reagent is to be prepared or used in preparing other reagents.
- If pre-qualification is required on the reagents prior to use.

Existing reagent codes can also be queried by test ID in this screen.

## Limitations

None

## Prerequisites

Valid tests must have been defined in Available Tests (TEST).

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by using the keyword VREAG.

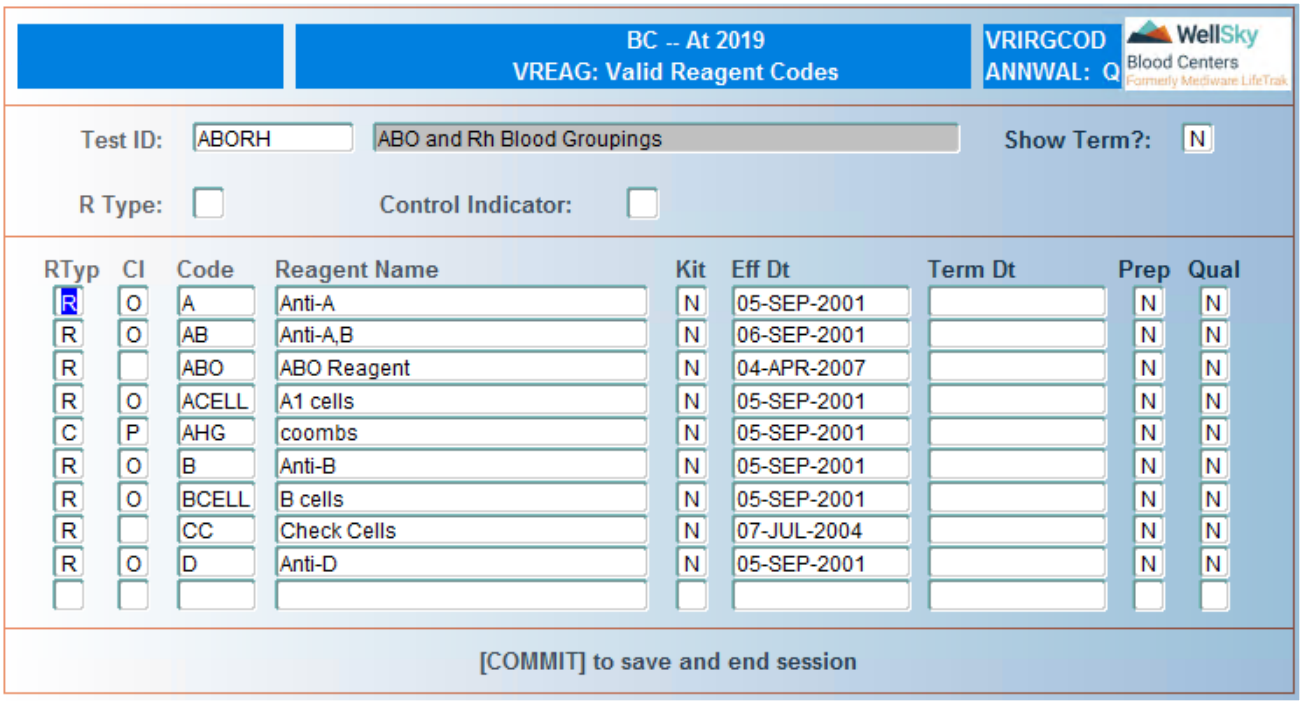


# Control Block Fields and Definitions

## Test ID

Enter a valid test ID or select from LOV. Test description displays after the ID is entered.

## Show Terminated?

Enter `Y` to display all reagent codes, including terminated entries. Enter `N` to display only non-terminated entries.

## R Type

Enter reagent type: `R` – Reagent, `C` – Control, or `S` – Substrate. Leave field blank to retrieve all entries.

## Control Indicator

Enter `N` for a negative control or `P` for a positive control. Leave field blank to retrieve all entries.

**NOTE –** P is used no matter the strength of the positive control.

# Detail Block Fields and Definitions

## RTyp

Enter a reagent type: `R` – Reagent, `C` – Control, or `S` – Substrate

## CI

Enter `N` – negative or `P` – positive.

**NOTE –** Field is navigable only if a reagent type of 'C' was entered in the Rtyp field.

## Code

Enter reagent code. A maximum of 5 characters is allowed.

## Reagent Name

Enter reagent description. A maximum of 50 characters is allowed.

## Kit

Enter `Y` if, when creating the new kit ID the system is to check that all reagents entered have the same master lot number, otherwise enter `N`.

## Eff. Date

Enter reagent effective date in DD-MON-YYYY format.

## Term Date

Enter reagent termination date in DD-MON-YYYY format.

**NOTE –** Entry is required only if terminating a reagent.

## Prep

Enter reagent preparation indicator:

- `P` – preparation necessary (final reagent).
- `Y` – used in preparation of the final or intermediate reagent.
- `I` – intermediate reagent.
- `N` – not required.

## Qual

Enter `Y` if pre-qualification required. Enter `N` if no pre-qualification is required.

**NOTE –** If qualification is not required, the kit can be created in Reagent Kit (No Pre-qualification) (RKNPQ).

Press F12 (Commit) to save entries.

# What to Do Next

Check-in reagents using Enter Reagents into Repository (STORE).

# 21.7.3 Enter Reagents into Repository (STORE)

## Intended Use

Use the Enter Reagents into Repository to describe a reagent received from a supplier and commit it to the repository. You may also query reagents that you have previously entered.

## Limitations

- Existing entries can be queried or modified only if the SUPERVISOR parameter is set to Y in MENUITM. This should be set for STORE2.
- Reagent must have been created in user's lab code in order to modify existing information.

## Prerequisites

- Reagent supplier codes must be defined in Valid Reagent Supplier Codes (VSUPPL).
- Reagent codes must be defined in Valid Reagent Codes (VREAG).

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `STORE` or `STORE2`.

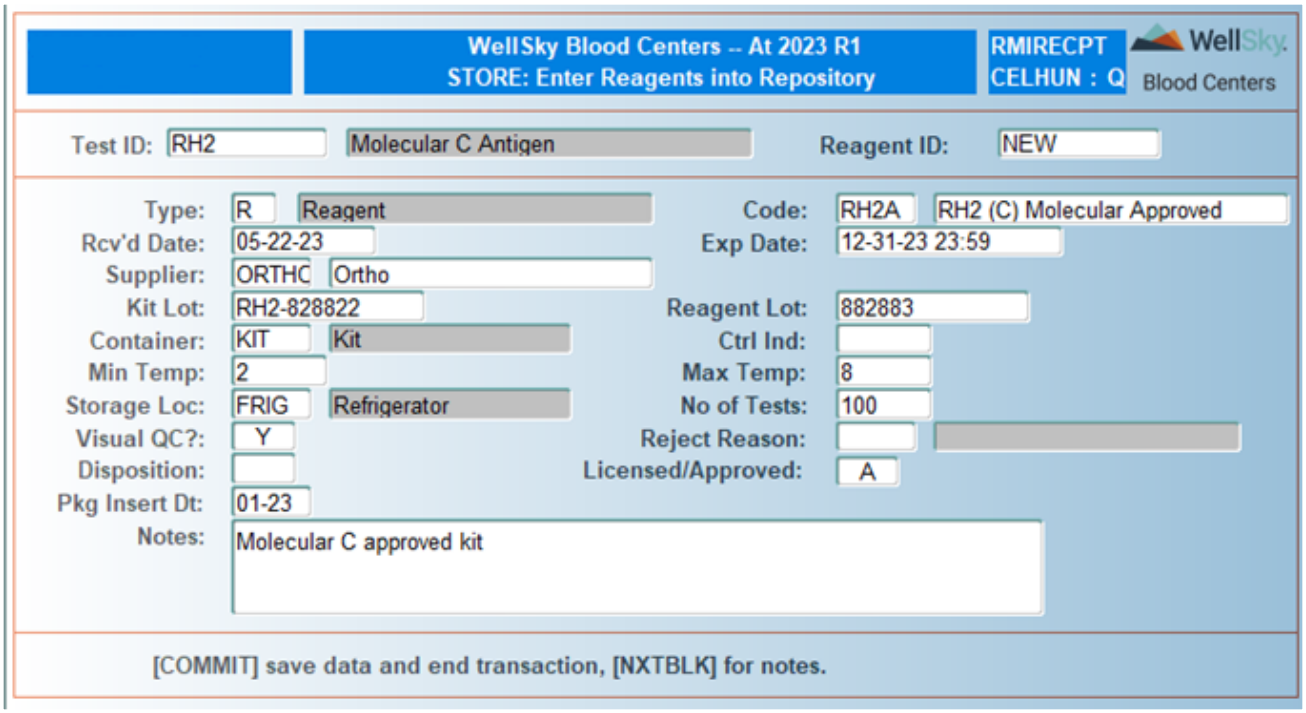


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV.


WellSky Corporation
Proprietary and confidential

### Reagent ID
Enter `NEW` to enter a new reagent. Enter reagent code or select from LOV to query or modify an existing reagent.

## Detail Block Fields and Definitions

### Type
Enter reagent type: `C` – Control or `R` – Reagent.

### Code
Enter reagent code or select from LOV.

### Received Date
Enter reagent receipt date in MM-DD-YY format.

### Exp Date
Enter reagent expiration date and time in MM-DD-YY HH24MI format.

### Supplier
Enter supplier code or select from LOV.

### Kit Lot
Enter kit master lot number. A maximum of 30 characters is allowed; however, only 12 characters at a time are displayed.

### Reagent Lot
Enter reagent lot number. A maximum of 30 characters is allowed; however, only 12 characters at a time are displayed.

### Container
Enter reagent container type or select from LOV.

### Ctrl Ind
Enter control indicator or select from LOV.

**NOTE –** Field is accessible only if you have entered C or Control in the Type field. If the control entered is negative, negative values apply. If the control entered is positive, positive values apply.

### Min Temp
Enter reagent minimum storage temperature ($^{O}$C).

### Max Temp
Enter reagent maximum storage temperature ($^{O}$C).

## Storage Loc

Enter reagent storage location or select from LOV.

## No. of Tests

Enter number of tests that may be run from the reagent entered into the repository.

**NOTE –** This is for record keeping purposes only. This value does not control the number of tests that may be performed using this reagent.

## Visual QC?

Enter `Y` if visual inspection is acceptable; enter `N` if visual inspection is unacceptable.

**NOTE –** To change an N entry after a reject reason has been entered, do the following:

- Clear the reject reason code entry.
- Press **F4** (Previous Field) to return to the Visual QC? field.
- Change the entry to `Y`.

## Reject Reason

Enter reject reason code or select from LOV.

**NOTE –** Field is navigable only if N was entered for the Visual QC.

## Disposition

Enter `HOLD` to place a hold status on the reagent. Leave field blank if no hold status is to be placed.

**NOTE –** IF HOLD is entered, the reagent will have a disposition of HOLD. This field is reserved for modification by supervisory personnel having a supervisory lab code.

## Licensed/Approved

This field is not required. Acceptable entry in the field is `L`, `A`, or `U`. This field is used specifically for antigen test reagents.

**NOTE –** L = Licensed, A = Approved, and U = Unapproved or Unlicensed.

## Pkg Insert Date

Enter package insert revision date in MM-YY format.


WellSky Corporation
Proprietary and confidential

**NOTE –** Press CTRL + F3 (Next Block) from the Disposition field to enter reagent notes. Enter free format information about the reagent. A maximum of 240 characters is allowed.

Press F12 (Commit) to save entry.

## At Commit

- Data entered on the screen is saved to the database.
- Disposition of HOLD placed on reagents entered with HOLD disposition.
- Reject reason placed on reagents with unacceptable visual QC results.

## What to Do Next

- If reagent preparation is required, prepare reagents in Prepare Reagents for Testing (RPREP).
- If preparation is not required but qualification is required, qualify reagents using Reagent Check-Out – Internal QC (CHKOQC).
- If neither preparation nor qualification is required, create kit using Reagent Kit (No Pre-qualification) (RKNPQ).

# 21.7.4 Enter Reagents into Repository – Super (STORE2)

Refer to Enter Reagents into Repository (STORE or STORE2).

# 21.7.5 Reagent Kit (No Pre-Qualification) (RKNPQ)

## Intended Use

Use the Reagent Kit (No Pre-Qualification) screen to create a kit ID for tests that do not require pre-qualification of the reagents used in testing.

## Limitations

None

## Prerequisites

Reagents must have been entered into the system using Enter Reagents into Repository (STORE) or Enter Reagents into Repository – Supervisor (STORE2).

# Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword RKNPQ.

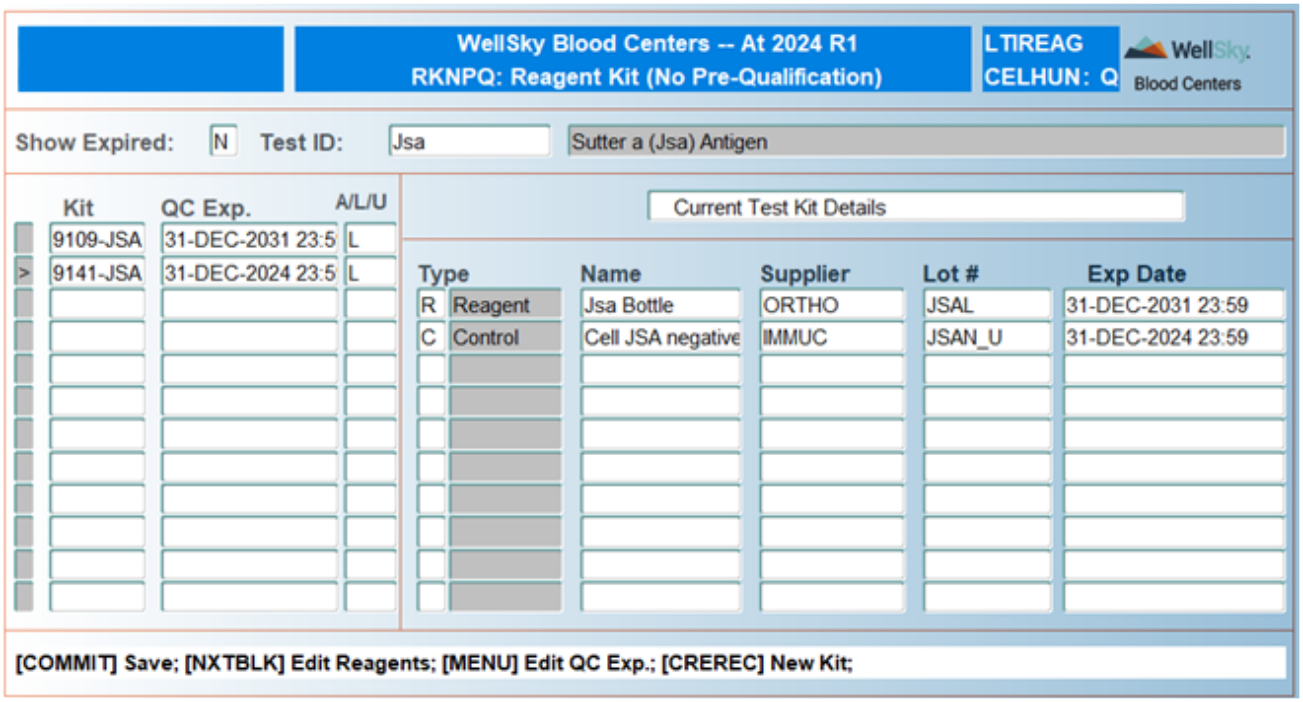


# Control Block Fields and Definitions

## Show Expired

Enter Y to display all reagents, including expired reagents. Enter N to display only in-date active reagents.

## Test ID

Enter test ID or select from LOV. Test description automatically displays after the ID is entered.

# Detail Block Fields and Definitions

## Kit ID

Press **CTRL** + **F2** (Create Record) to enter reagents for a new kit. The Kit ID will default to NEW.

> **NOTE –** Displays all kit ID's associated to that test. Only kit IDs with the test ID appended to them do not require pre-qualification.

## A/L/U

Enter the license flag for the entire kit. This is a required field for AG or MAG test types.


WellSky Corporation
Proprietary and confidential

- A = Approved
- L = Licensed
- U = Unapproved or Unlicensed

The field will be disabled for test types other than AG or MAG.

### QC Exp.

Kit expiration date automatically displays. Field is not navigable.

## Creating New Test Kits

Press **CTRL** + **F2** (Create Record) to create a new test kit. Cursor moves to the Type field.

### Type

Enter reagent type: `R` – Reagent, `C` – Control, or `K` - Kit.

### Name

Enter reagent name or select from LOV.

### Supplier

Reagent supplier code automatically displays after reagent name is entered. Field is not navigable.

### Lot #

Lot number automatically displays after reagent name is entered. Field is not navigable.

### Exp. Date

Reagent expiration automatically displays after reagent name is entered. Field is not navigable.

Press **F12** (Commit) to save new kit.

## At Commit

- The kit ID number is created.
- Kit QC expiration is assigned as the shortest expiration date of any reagent in the kit.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Reagent Qualification menu.

# 21.7.6 Prepare Reagents for Testing (RPREP)

## Intended Use

Use the Prepare Reagents for Testing to document reagent preparation for a specified test for use in testing.

## Limitations

Users with a lab code of 99 may modify preparation details in this screen; however, they may not prepare reagents.

## Prerequisites

- The reagent(s) used in the preparation of the new reagent must have been checked into the repository using Enter Reagents into Repository (STORE) or Enter Reagents into Repository – Supervisor (STORE2).
- Prep flag must be set to Y for the reagent in Valid Reagent Codes (VREAG).

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by using the keyword `RPREP`.

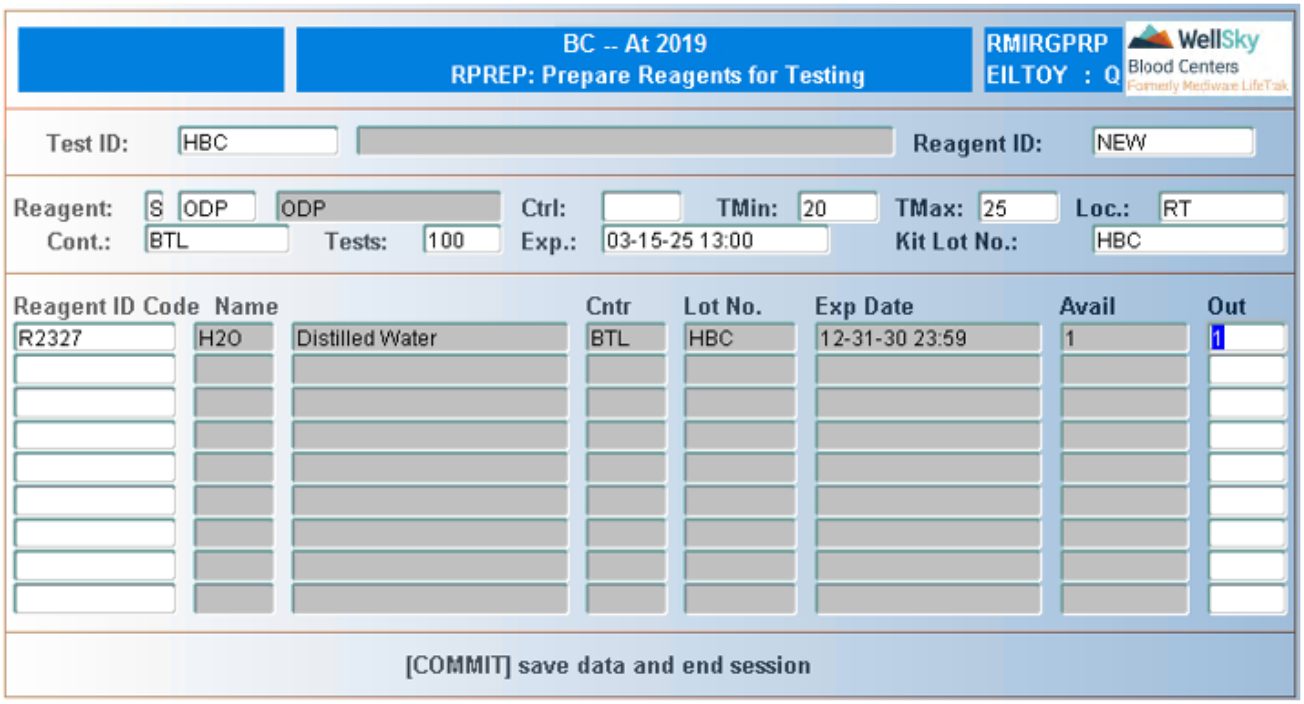


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV. Test description displays after the ID is entered.

### Reagent ID

Enter reagent ID or select from LOV to modify an existing reagent. Enter `NEW` to create a new reagent ID.

### Reagent

- First Field – Enter reagent type: `R` - reagent, `C` - control or `S` - substrate.
- Second Field – Enter reagent code or select from LOV.


WellSky Corporation
Proprietary and confidential

- Third Field – Reagent description automatically displays after the reagent code is entered. Field is not navigable.

### Ctrl
Enter control indicator or select from LOV.

> **NOTE –** Field is navigable only if the reagent type is C – control.

### TMin
Enter minimum storage temperature (°C) of the prepared reagent.

### TMax
Enter maximum storage temperature (°C) of the prepared reagent.

### Location
Enter reagent storage location or select from LOV.

### Container
Enter reagent container that will be used for the prepared reagent or select from LOV.

### Tests
Enter number of tests to be performed using the prepared reagent. A maximum entry of 99999 is allowed.

### Exp. Date Time
Enter prepared reagent expiration date and time in MM-DD-YY HH24:MI format.

### Kit Lot No
Enter kit lot number or select from LOV.

## Detail Block Fields and Definitions

### Reagent ID
Enter reagent ID to be used in the preparation or select from LOV.

### Code
Reagent code automatically displays after reagent ID is entered. Field is not navigable.

### Name
Reagent name automatically displays after reagent ID is entered. Field is not navigable.

### Cntr
Container type automatically displays after reagent ID is entered. Field is not navigable.

### Lot No
Reagent lot number automatically displays after reagent ID is entered. Field is not navigable.

### Exp Date
Reagent expiration date and time automatically display after reagent ID is entered. Field is not navigable.

### Avail
Available quantity automatically displays after reagent ID is entered. Field is not navigable.

### Out
Enter number of tests to be performed with the prepared reagent.

**NOTE –** A user with a supervisory lab code (99) may enter 0 for all reagents used in preparation to void the prepared reagent. The system then expires the prepared reagent by doing the following:

- Changing the number of tests that can be performed from the prepared reagent to 0 (Tests field in the Master Block).
- Setting the expiration date and time of the prepared reagent as the current date and time (Exp Date Time field in Master Block).

The reagents that were used in the preparation are then returned to the repository.

Press CTRL + F2 (Create Record) to add an additional reagent and follow instructions above.

Press F12 (Commit) to save entry.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.

# 21.7.7 Reagents Check-Out - Internal QC (CHKOQC)

## Intended Use
Use the Reagents Check-Out Internal QC screen to check reagents out of the repository for QC or to query QC checkout details about a kit. A supervisory user may not check out reagents for QC, but may invalidate or terminate a kit or query QC checkout details for a kit.

## Limitations
None

## Prerequisites
The reagent must have been checked in to the repository.

## Accessing the Screen
Access this screen from the Reagent Qualification menu or by entering the keyword CHKOQC.


WellSky Corporation
Proprietary and confidential

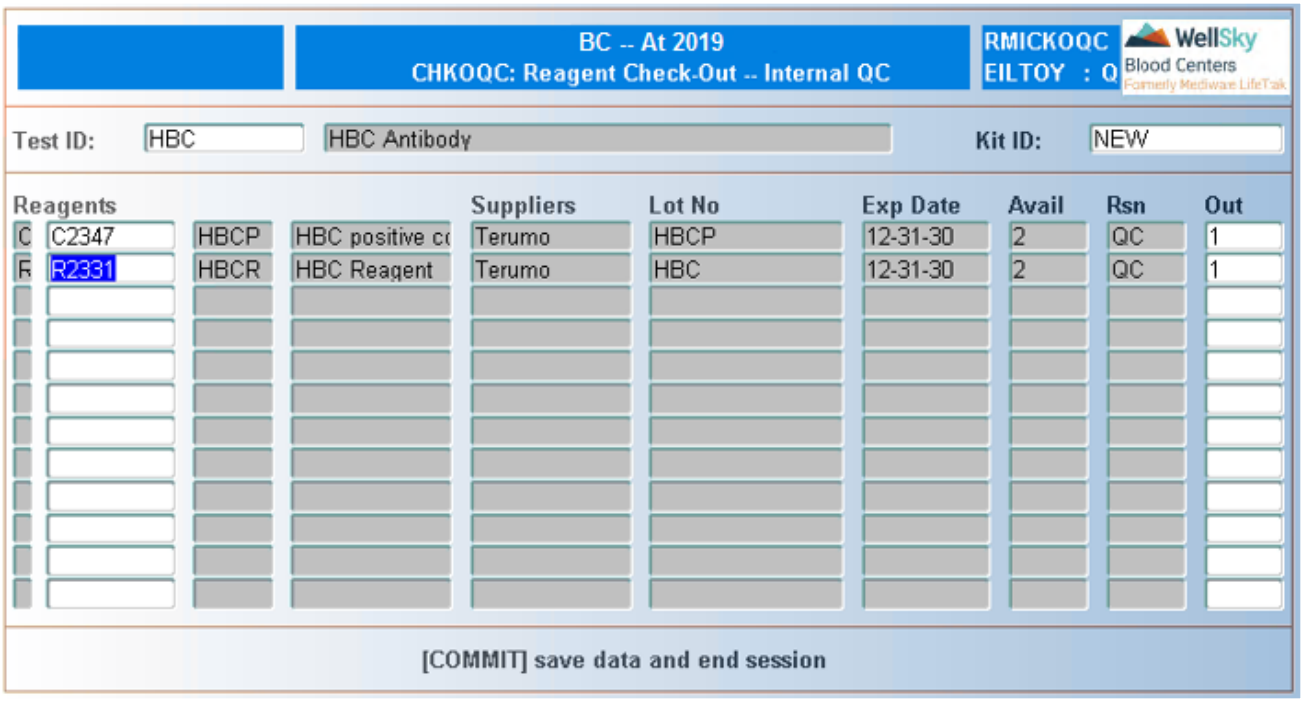


# Control Block Fields and Definitions

## Test ID

Enter test ID or select from LOV.

## Kit ID

Enter kit ID or select from LOV to query an existing kit. Enter `NEW` to create a new kit.

**NOTE –** The checkout quantity may not be changed while in query mode.

**NOTE –** If an existing kit is selected, the following window opens:




- Enter `Y` to invalidate or terminate the kit ID. All reagents in the kit will be set to 0.
- Enter `N` to continue with the query.

# Detail Block Fields and Definitions

## Reagents

Enter reagent ID or select from LOV. The reagent type, reagent code, and reagent description automatically display after the ID is entered.

**NOTE –** If the kit ID field has been left blank, the cursor advances to this field.

**NOTE –** At a minimum, one reagent and control must be checked out.

## Suppliers

Reagent supplier automatically displays after the reagent ID is entered. Field is not navigable.

## Lot No.

Reagent lot number automatically displays after the reagent ID is entered. Field is not navigable.

## Exp Date

Reagent expiration date automatically displays after the reagent ID is entered. Field is not navigable.

## Avail

Number of tests that can be performed with the available quantity automatically displays after the reagent ID is entered. Field is not navigable.

## Rsn

QC automatically displays as the check-out reason after the reagent ID is entered. Field is not navigable.

**NOTE –** When defining the Valid Reagent Code and the Kit flag is set to Y once a reagent is selected, the LOV will then only display reagents that have the same Kit lot number.

## Out

Enter the number being checked out in terms of the number of tests that can be performed.

Press **F12** (Commit) to save entry.

# At Commit

Reagents are checked out for QC.

# What to Do Next

Perform reagent QC using Reagent QC Entry: Tech 1 (RTECH1).


WellSky Corporation
Proprietary and confidential

# 21.7.8 Reagents QC Entry: Tech 1 (RTECH1)

## Intended Use

Use the Reagent QC Entry: Tech 1 screen to enter the first tech's reagent QC results. This tech must not have a supervisory lab code and the user ID must differ from the user who will perform the second tech QC entry. QC must occur for reagents to be available for use if qualification flag is set to Y in Valid Reagent codes.

## Limitations

None

## Prerequisites

The reagent must have been checked out using Reagent Check-Out -- Internal QC (CHKOQC).

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `RTECH1`.

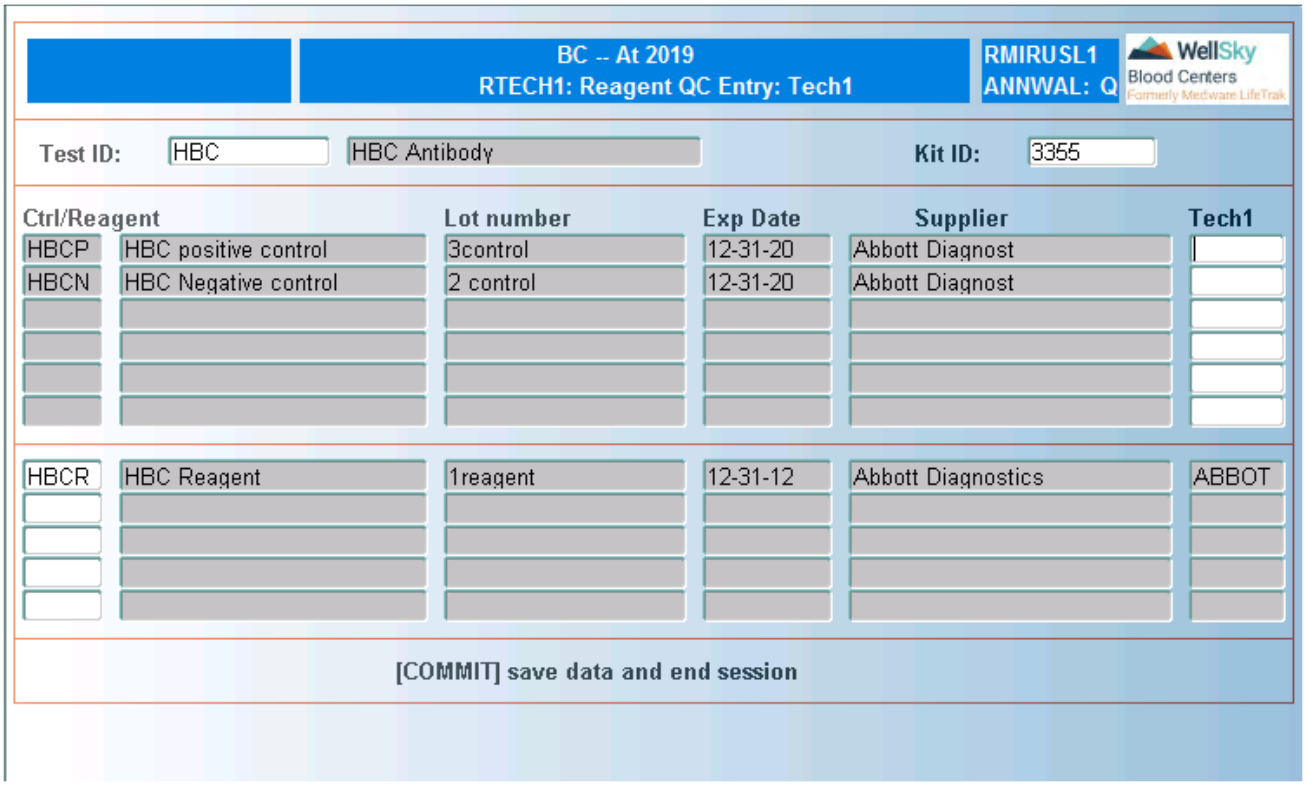


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV. Test description displays after the ID is entered.

### Kit ID

Enter kit ID or select from LOV.

## Detail Block Fields and Definitions

### Ctrl/Reagent

Reagent code automatically displays after kit ID is entered. Field is not navigable.

### Lot Number

Reagent/control lot number automatically displays after kit ID is entered. Field is not navigable.

### Expiration Date

Reagent/control expiration date automatically displays after kit ID is entered. Field is not navigable.

### Supplier

Supplier automatically displays after kit ID is entered. Field is not navigable.

### Tech1

Enter control value for each control or select from LOV.

Press **F12** (Commit) to save entry.

## At Commit

At commit the first tech control value result is committed to the database.

## What to Do Next

Perform second tech QC entry using Reagent QC Entry: Tech 2 (RTECH2).

# 21.7.9 Reagents QC Entry: Tech 2 (RTECH2)

## Intended Use

Use the Reagent QC Entry: Tech 2 screen to enter the second tech's reagent QC results.

## Limitations

The second user must not have a supervisory lab code (99) and must have an ID that differs from the first user ID.

## Prerequisites

Reagent QC Entry: Tech 1 (RTECH1) must have been completed.

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `RTECH2`.


WellSky Corporation
Proprietary and confidential

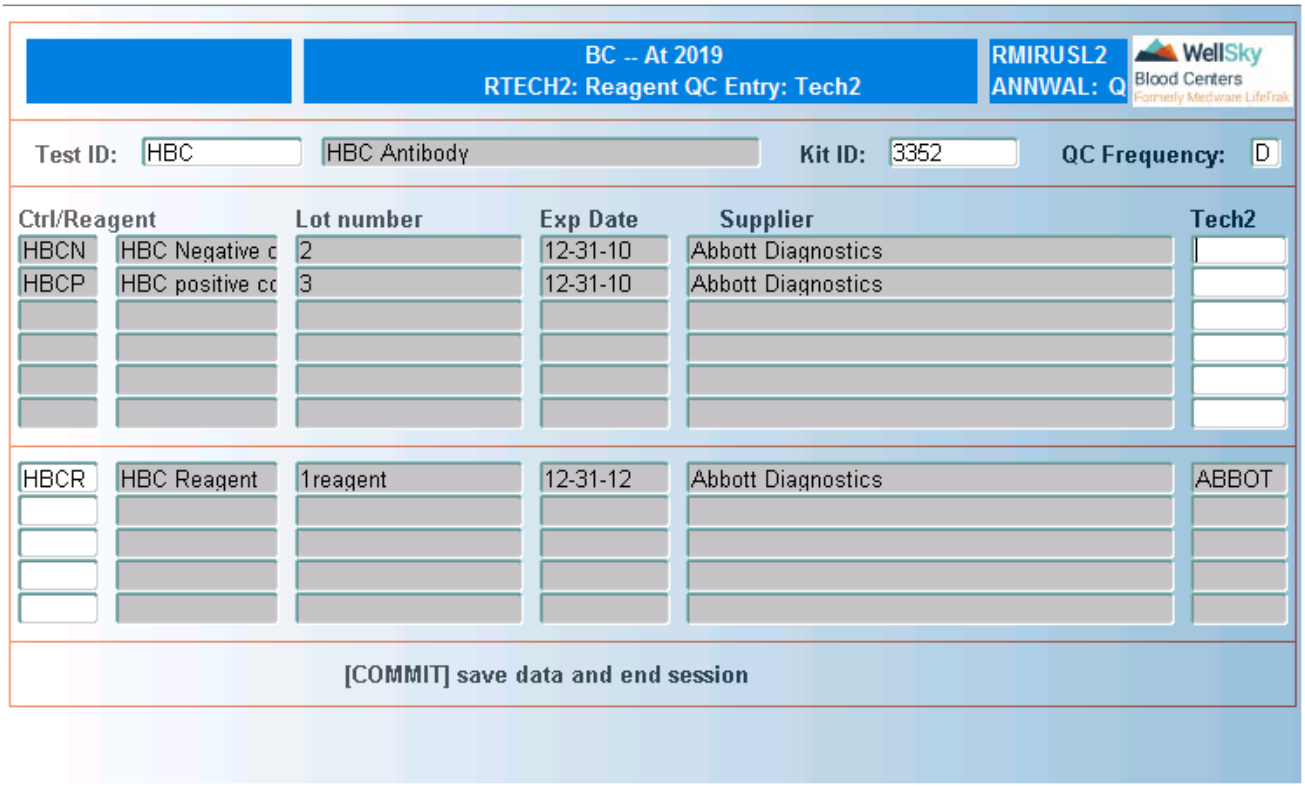


# Control Block Fields and Definitions

## Test ID

Enter test ID or select from LOV. Test description displays after the ID is entered.

## Kit ID

Enter kit ID or select from LOV.

## QC Frequency

**NOTE –** When Kit ID is populated, Detail Blocks 1 and 2 are populated, and the cursor advances to the *Tech2* field.

Enter kit QC frequency, as follows:

- D – Daily the kit is good for all day.
- P – Plate once entered in on a plate the kit expires.
- R – As Requested; the kit remains active until a reagent expires in the kit.

**NOTE –** Entry of the frequency determines when the kit ID will expire.

## Detail Block Fields and Definitions

### Ctrl/Reagent

Reagent code and description automatically display after QC frequency is entered. Field is not navigable.

### Lot Number

Reagent lot number automatically displays after QC frequency is entered. Field is not navigable.

### Exp Date

Reagent expiration date automatically displays after QC frequency is entered. Field is not navigable.

### Supplier

Reagent supplier automatically displays after QC frequency is entered. Field is not navigable.

### Tech2

Enter test result code for each control listed or select from LOV.

**NOTE –** If the Tech2 results differ from either the Tech1 result or the control indicator, the kit is given a status of HOLD.

Press F12 (Commit) to save entries.

## At Commit

- If results are acceptable, reagents are acceptable for use in testing. Kit expiration set based on QC frequency entered.
- If results are discrepant or are not acceptable, HOLD placed on reagent and reconciliation must be performed using Resolve Reagent QC Discrepancy (RSUPER).

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.
- If discrepancy resolution is required, resolve discrepancy using Resolve Reagent QC Discrepancy (RSUPER).
- Re-check unused reagent into the repository using Re-Check Reagent into Repository (RCHKIN).

# 21.7.10 Resolve Reagent QC Discrepancy (RSUPER)

## Intended Use

Use the Resolve Reagent QC Discrepancy screen to resolve any discrepant reagent QC results for the control indicator between Tech 1 and Tech 2 entries.


WellSky Corporation
Proprietary and confidential

**Important!** The supervisory result can override either or both tech entries to resolve a discrepancy with the control indicator. Should the supervisory result differ from the control indicator, the entire kit will be given a status of 'HOLD'.

## Limitations

None

## Prerequisites

- User must have lab code of 99 to update the reagent QC results.
- Both Tech1 and Tech2 results must have been entered, and a discrepancy must exist between the tech entries and/or the control indicator.

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `RSUPER`.

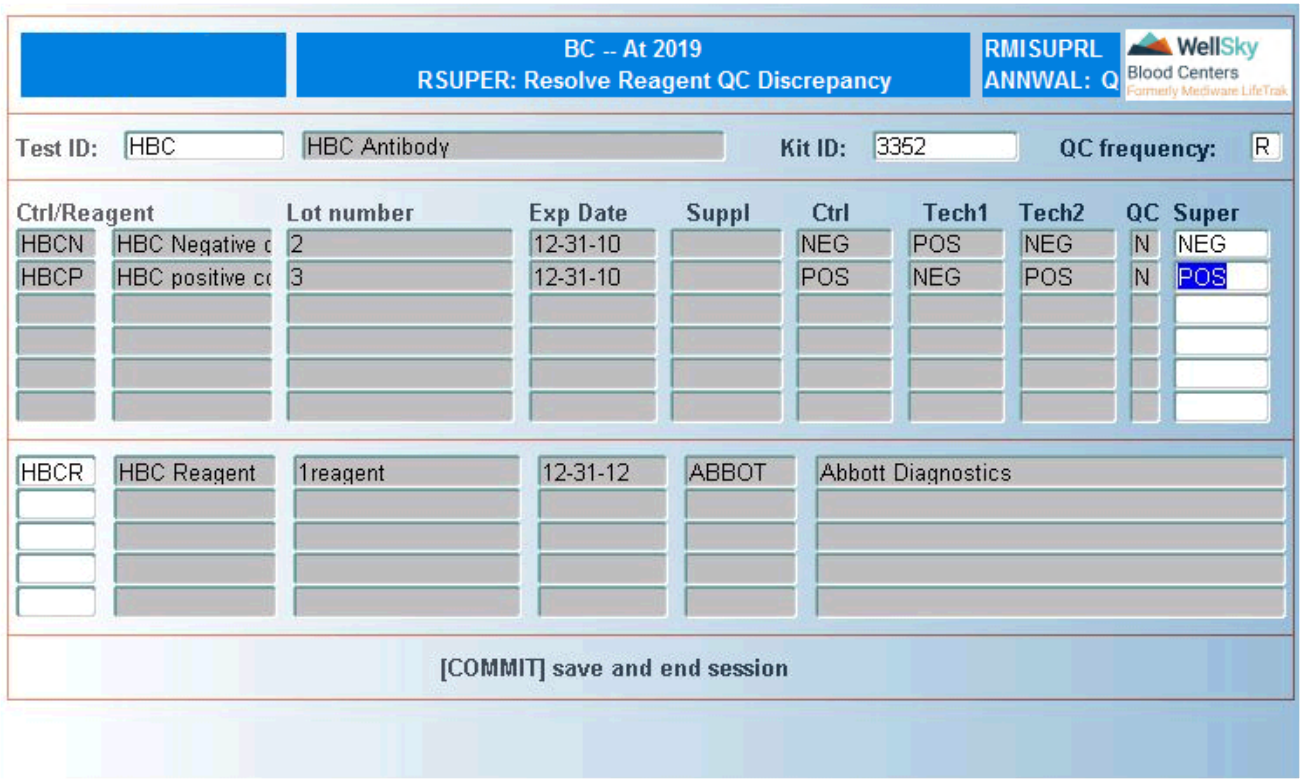


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV. Test description displays after ID entered.

### Kit ID
Enter kit ID or select from LOV.

### QC
Enter kit QC frequency, as follows:

- D – Daily the kit is good for all day.
- P – Plate once entered in on a plate the kit expires.
- R – As Requested; the kit remains active until a reagent expires in the kit.

**NOTE –** This code can be different than the original RTECH2 entry.

**NOTE –** Entry of the frequency determines when the Kit ID will expire.

## Reagent Control Detail Block Fields and Definitions

### Ctrl/Reagent
Control code and description automatically display after the QC frequency is entered. Field is not navigable.

### Lot Number
Control lot number automatically displays after the QC frequency is entered. Field is not navigable.

### Exp Date
Control expiration date automatically displays after the QC frequency is entered. Field is not navigable.

### Supplier
Control supplier automatically displays after the QC frequency is entered. Field is not navigable.

### Ctrl
Control indicator automatically displays after the QC frequency is entered. Field is not navigable.

### Tech1
Control results entered in Reagent QC Entry: Tech1 (RTECH1) automatically display after the QC frequency is entered. Field is not navigable.

### Tech2
Control results entered in Reagent QC Entry: Tech2 (RTECH2) automatically display after the QC frequency is entered. Field is not navigable.

### QC

Y displays if discrepancies do not exist or have been resolved for the control indicator. N displays if discrepancies have not been resolved for either for the control indicator and one or more tech entries.

### Super

Enter control value or select from LOV.

**NOTE –** The supervisor must re-enter each control indicator code regardless off discrepancy status.

**NOTE –** The supervisory result can override either or both tech entries to resolve a discrepancy with the control indicator.

Press F12 (Commit) to save entries.

## In the Reagent Detail Block

The following information about the reagents used for QC performance display:

- Ctrl/Reagent – reagent ID and description.
- Lot Number – reagent lot number.
- Exp Date reagent expiration date.
- Suppl – reagent supplier code and description.
- Reagent Detail Block is not navigable and cannot be modified.

## At Commit

- If the supervisory result differs from the control indicator, the entire kit will be given a status of HOLD.
- If the result entered matches the control indicator, the HOLD is removed from the reagent.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.
- Re-check unused reagent into the repository using Re-Check Reagent into Repository (RCHKIN).

# 21.7.11 Re-Check Reagents into Repository (RCHKIN)

## Intended Use

Use the Re-Check Reagents into the Repository screen to check reagents back into the repository that were previously checked out.

## Limitations

None

## Prerequisites

- A supply of the reagent must exist in the repository.
- Reagents must have been previously checked out.

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `RCHKIN`.

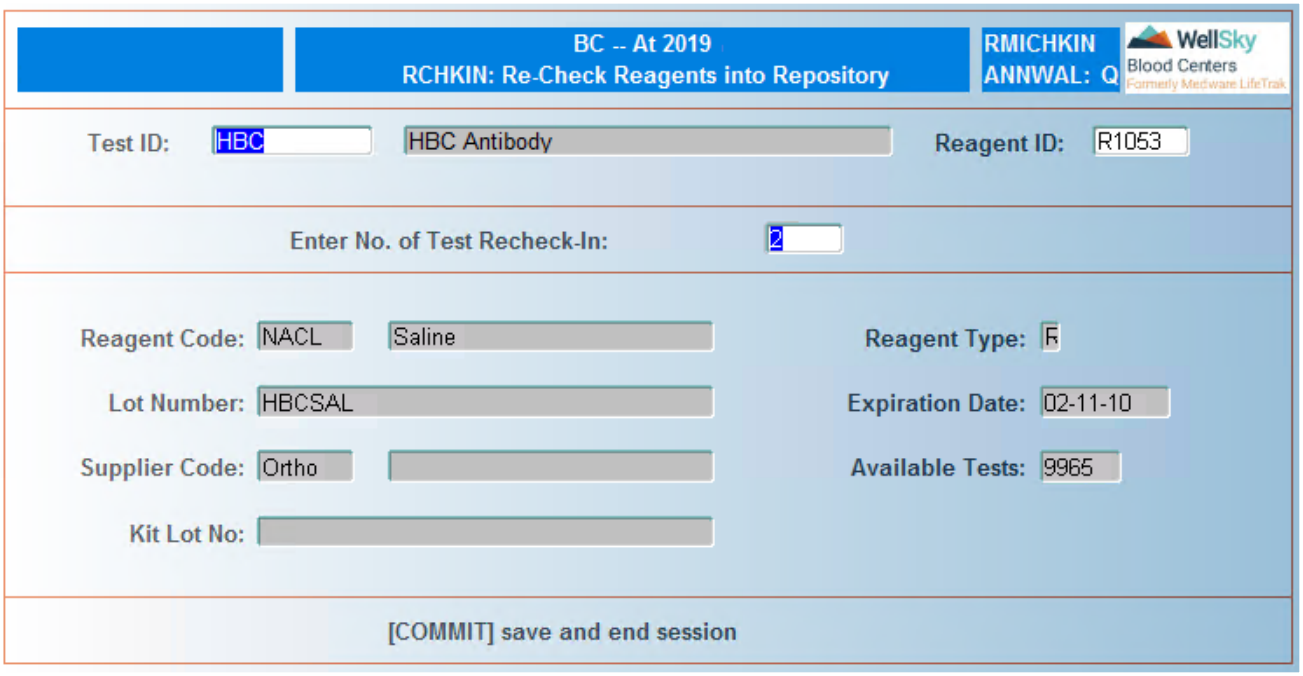


## Control Block Fields and Definitions

### Test ID

Enter test ID or select from LOV. Test description displays after ID is entered.

### Reagent ID

Enter reagent ID or select from LOV.

## Detail Block Fields and Definitions

### Enter No. of Test Recheck-In

Enter number of tests to be checked back into the repository.

**NOTE –** Value cannot exceed the original checked out.

Press **F12** (Commit) to save entry.

The following information displays after the reagent ID is entered:


WellSky Corporation
Proprietary and confidential

- Reagent Code – reagent code and description.
- Lot Number - reagent lot number.
- Supplier Code – reagent supplier code.
- Kit Lot No – kit lot number, if applicable.
- Reagent Type – reagent type (R – reagent, C – control).
- Exp Date – reagent expiration date.
- Available Tests - number of tests that can be performed with the available quantity.

Displayed reagent information cannot be modified in this screen.

### At Commit

Reagent is checked back into the repository.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Reagent Qualification menu.

## 21.7.12 Reagent Check-Out - - Send Out (CHKOUT)

### Intended Use

Use the Reagent Check-Out - - Send Out to check reagents out of the repository for reasons other than for quality control.

### Limitations

None

### Prerequisites

The reagent must exist in the repository.

### Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `CHKOUT`.

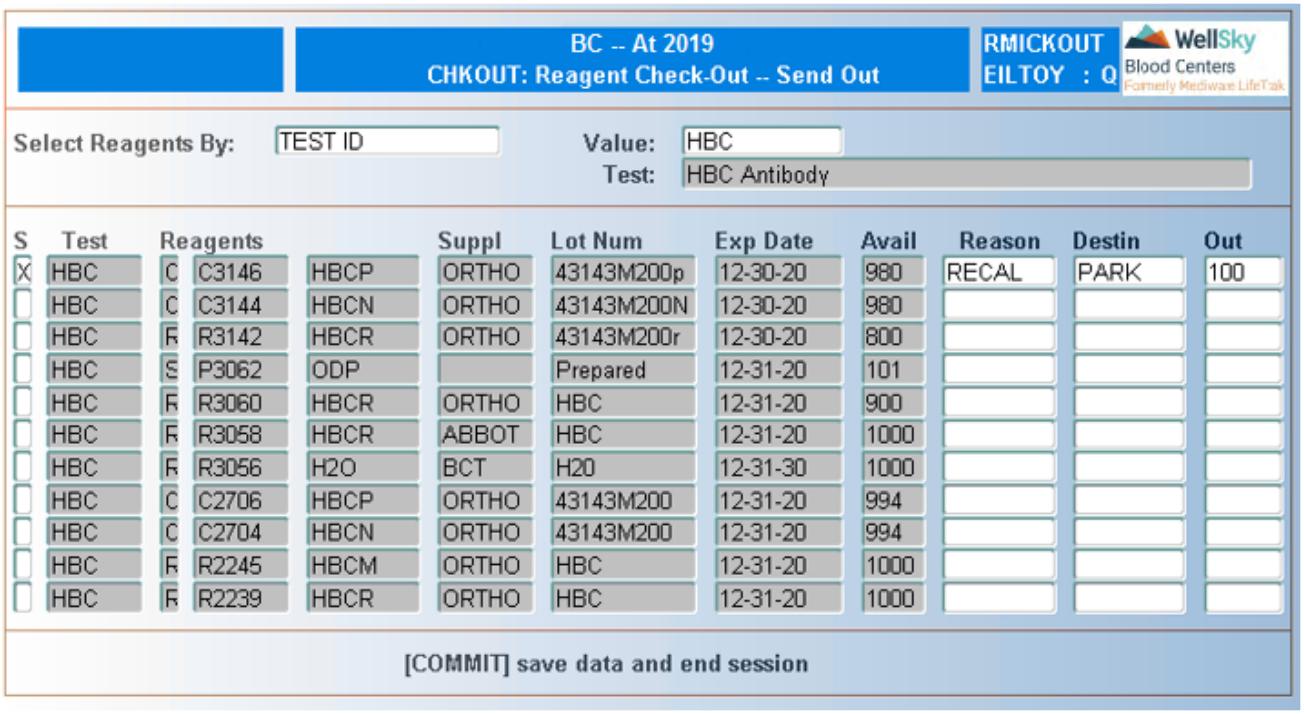


# Control Block Fields and Definitions

## Select Reagents By

Enter reagent selection criteria (Reagent ID, Lot Number, Master Kit Lot Number, or Test ID) or select from LOV.

## Value

Enter reagent selection value or select from LOV.

## Test

Test code associated with the selected criteria and value automatically displays after the value is entered. Field is not navigable.

# Detail Block Fields and Definitions

## S

Enter x to select reagent to be checked out.

Use the **UP** and **DOWN** arrow keys to scroll through the list of reagents.

**NOTE –** Only one reagent may be checked out at a time.

## Test

Test code automatically displays after the value is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Reagents
Reagent type and code automatically display after the value is entered. Field is not navigable.

### Suppl
Reagent supplier code automatically displays after the value is entered. Field is not navigable.

### Lot Num
Reagent lot number automatically displays after the value is entered. Field is not navigable.

### Exp Date
Reagent expiration date automatically displays after the value is entered. Field is not navigable.

### Avail
Available test quantity automatically displays after the value is entered. Field is not navigable.

### Reason
Enter check out reason codes or select from LOV.

### Destin
Enter destination or select from LOV.

### Out
Enter the quantity to be checked out.

Press F12 (Commit) to save entry.

## At Commit
Available reagent quantity is reduced by the number checked out.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.

# 21.7.13 Reagent Query (RGQRY)

## Intended Use
Use the Reagent Query screen to view reagent details for a specified test ID. Data displayed may be limited by a user-specified date range or lot number.

## Limitations
None

# Prerequisites

Reagents must have been entered into the repository.

# Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword RGQRY.

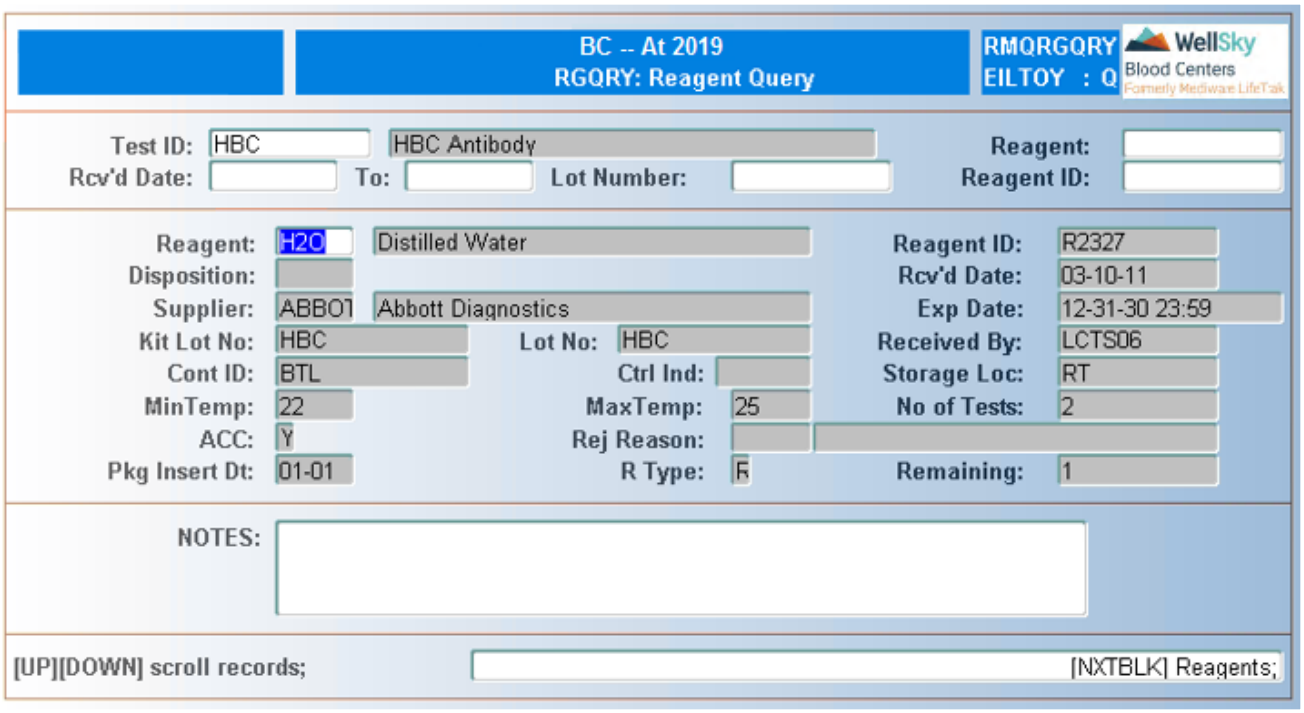


# Control Block Fields and Definitions

## Test ID

Enter test ID or select from LOV. Test description displays after ID is entered.

## Reagent Code

Enter reagent code or select from LOV. Entry in this field is not required. Entry in this field narrows the query search.

## Rcv'd Date

Enter reagent receipt date in MM-DD-YY format. Entry in this field is not required. Entry in this field narrows the query search.

## To

Enter ending reagent receipt date in MM-DD-YY format. Entry in this field is required only if entry was made in the Rcv'd Date field.


WellSky Corporation
Proprietary and confidential

### Lot Number

Enter reagent lot number or select from LOV. Entry in this field is not required. Entry in this field narrows the query search.

### Reagent ID

Enter reagent ID or select from LOV. Entry in this field is not required. Entry in this field narrows the query search.

**NOTE –** The reagent ID must correspond to the reagent code if entered.

## In the Detail Block

The following information displays in the query:

- Reagent – Code used to identify a specific reagent.
- Reagent ID – reagent number assigned in the repository.
- Disposition – display of HOLD's.
- Received Date – reagent receipt date.
- Supplier – reagent manufacturer.
- Exp – reagent expiration date and time.
- Kit Lot No – master lot number for an entire kit.
- Lot No – lot number of each individual reagent.
- Received by – ID of user entering reagent into repository.
- Cont ID – reagent container type.
- Ctrl Ind – control indicator.
- Storage Loc – reagent storage location.
- Min Temp – minimum reagent storage temperature ($^{O}$C).
- Max Temp – maximum reagent storage temperature ($^{O}$C).
- No of Tests – number of tests entered during initial entry into the repository.
- Acc –reagent acceptability (Y or N).
- Rej Reason – reagent reject reason.
- Package Insert Dt – package insert date.
- R type – type of reagent, R = reagent, C = control, S = substrate.
- Remaining – number of reagent that have not been checked out of the repository.
- Notes – additional information about the reagent.

Use the **UP** and **DOWN** arrow keys to view additional reagents meeting search criteria.

## Viewing Test Kits

Press LOV to view test kits made from selected reagent. The following window opens:

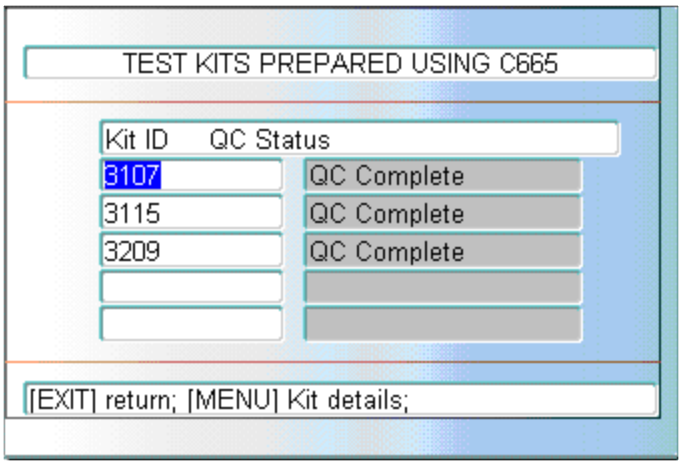


The following information displays:

- Kit ID – kit ID created with queried reagent.
- QC Status – kit QC status.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.

# 21.7.14 Supplier Query (SPQRY)

## Intended Use

Use the Supplier Query screen to view reagent details for reagents from a specified supplier and received within a specified date range.

## Limitations

None

## Prerequisites

Reagents must have been entered into the repository.

## Accessing the Screen

Access this screen from the Reagent Qualification menu or by entering the keyword `SPQRY`.

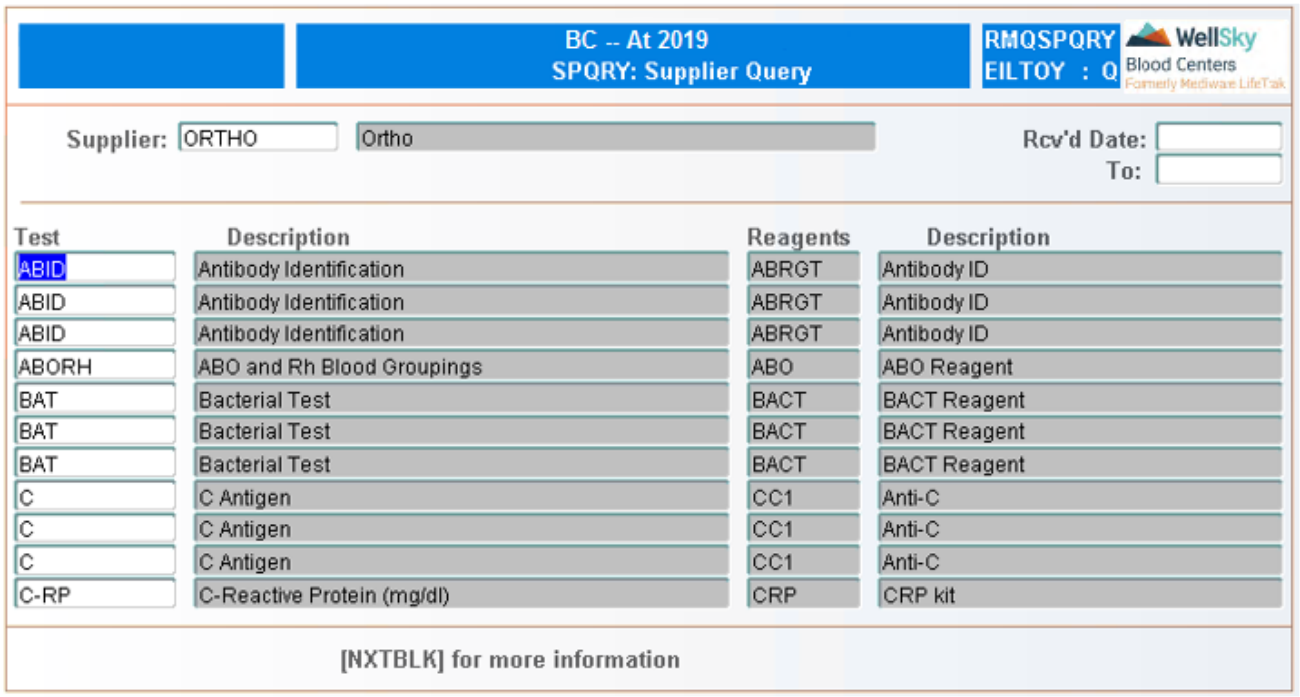


# Control Block Fields and Definitions

## Supplier

Enter supplier ID or select from LOV. Supplier name displays after ID is entered.

## Rcv'd Date

Enter reagent receipt date in MM-DD-YY format. Entry in this field is not required. Entry in this field narrows the query search.

## To

Enter ending reagent receipt date in MM-DD-YY format. Entry in this field is required only if entry was made in the Rcv'd Date field.

# In the Detail Block

The following information displays:

- Test – test code.
- Description – test description.
- Reagents – reagent code.
- Description – reagent description.
- Rcv'd by – tech ID who entered into repository.
- Received Date – Date in which it was entered into the repository.

- Expiration Date – when the reagent is to expire.
- Lot Number – individual lot number.
- Quantity Avail – remaining number of test available in repository that has not been checked out.
- Reject Reason – if the reagent was rejected.
- Kit Lot Number – master kit lot number.

Use ENTER and [Up Arrow], respectively, to move to the next or previous reagent listed.

## Viewing Additional Reagent Information

Press CTRL + F3 (Next Block) to view additional reagent information. The following window opens:

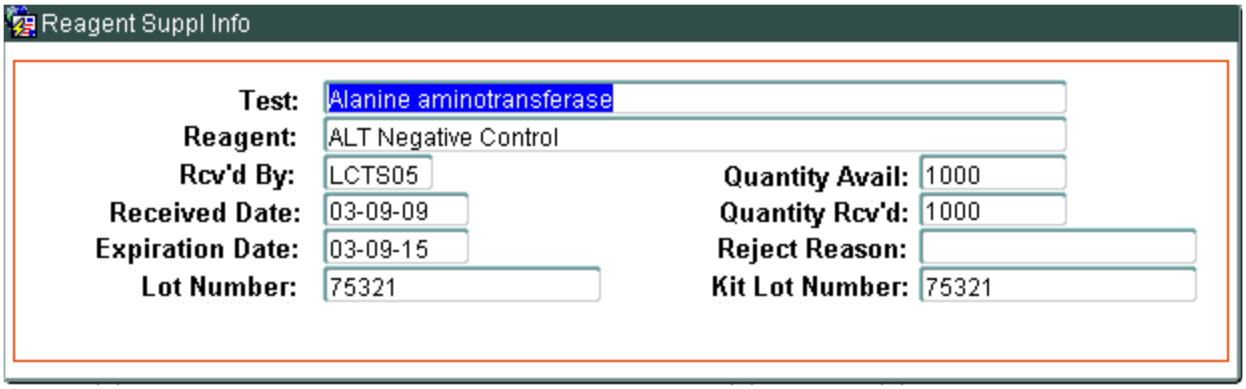


The following information displays:

- Test – test description.
- Reagent – reagent description.
- Rcv'd By – ID of user receiving reagents.
- Quantity Avail – current quantity available.
- Received Date – reagent receipt date.
- Quantity Rcv'd – reagent quantity received.
- Expiration Date – reagent expiration date.
- Reject Reason – reagent reject reason, if applicable.
- Lot Number – reagent lot number.
- Kit Lot Number - reagent kit lot number, if applicable.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Reagent Qualification menu.

This Page Intentionally Left Blank

22

# Chapter 22 - Labeling Functions


22.1 Introduction ..... 1468
22.1.1 Overview ..... 1468
22.1.2 Structure ..... 1468
22.2 Change Labeling Function ..... 1469
22.2.1 Change Label Printer (CHLBP) ..... 1469
22.3 Common Labeling Functions ..... 1473
22.3.1 ABO Labeling - ISBT (LABELI) ..... 1473
22.3.2 Void Product Label into HOLD (LBLOVR) ..... 1480
22.3.3 Emergency Medical Release (EMGREL) ..... 1483
22.3.4 ABO Labeling - ISBT – Super (SUPLABLI) ..... 1488
22.3.5 Research Product Labeling (LBLRSH) ..... 1488
22.3.6 Pre-Label Frozen Product (PRELBL) ..... 1492
22.3.7 Reprint Labels (REPLBL) ..... 1498
22.3.8 Re-Label Codabar units to ISBT Schema (CDISBT) ..... 1503
22.3.9 ABO Labeling (LABEL or SUPLABEL) ..... 1508
22.3.10 ABO Labeling - Super (SUPLABEL) ..... 1512
22.3.11 ABO Labeling - Antigens (AGLBL) ..... 1512
22.4 Special Labeling Functions ..... 1519
22.4.1 QC for Labeling (LBLQC) ..... 1519
22.4.2 Unit Level QC for Labeling (LBLUNQC) ..... 1523
22.4.3 Link Test Results (LINKL) ..... 1527
22.5 Labeling Queries Functions ..... 1530
22.5.1 ABO Label Override Query (LBLOVRQ) ..... 1530

# 22.1 Introduction

## 22.1.1 Overview

The data gathered in previous modules determines the system labeling decision (SLD). At this point in the process, the Labeling Functions module performs a final quality check, examining information on manufacturing requirements, prior donations, registry verifications, test results, nursing audit, component reconciliation and interdictions.

Only when all data concerning a unit of blood or component is available, can the unit or component be labeled as ABORh, AUTO, AUTO/BIO, BIO, NFT, Discard, or MFG. When further processing is required or incomplete information is available, only a HOLD or Quarantine system label decision is obtained.

The system allows the capability to override the system label decision to a HOLD or Quarantine status. New criteria must be introduced in order to change the system label decision once overridden to a HOLD or Quarantine.

When an emergency release of a unit/component is required, the Emergency Medical Release screen allows only for that system label decision. Criteria which must be met under normal labeling conditions are not required for emergency labeling.

A full audit is performed on all labeling functions. Once a unit number and product is accessed by any of the labeling screens the full audit begins, capturing all complete or attempted labeling functions. The Labeling Module acts as a final check point before releasing the unit or component to distribution.

## 22.1.2 Structure

There are four sections to the Lab Labeling Functions module:

- Common Labeling Functions
- Special Labeling Functions
- Labeling Queries
- Labeling Reports

Labeling reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 22.2 Change Labeling Function

The Change Labeling Function is accessed from the following menu:

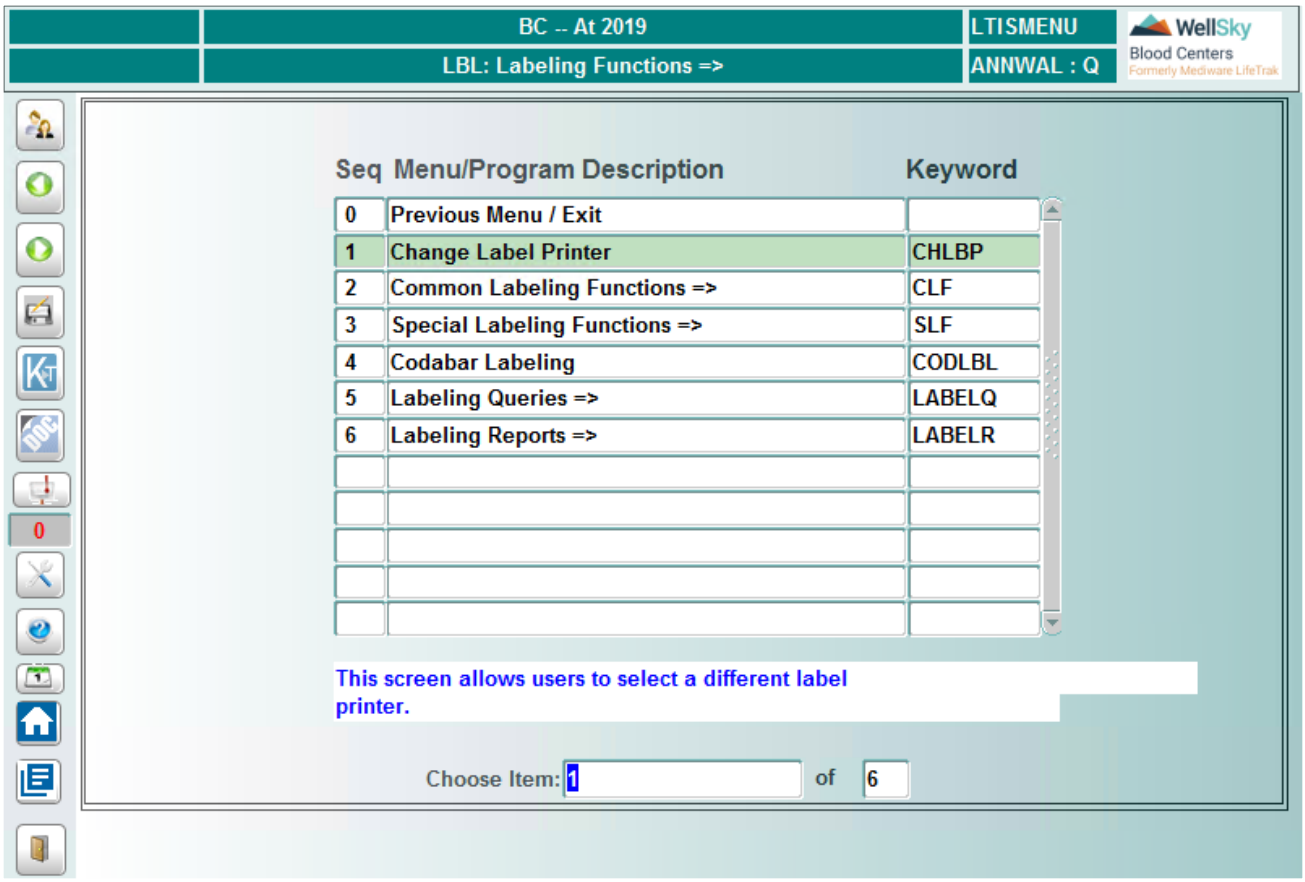


## 22.2.1 Change Label Printer (CHLBP)

### Intended Use

This screen is used to change the currently selected label printer and to select the facility that will print in the lower right corner of labels for imported units that have been modified, and selection of the tie tag printer when labeling units with antigens.

### Limitations

Report printers are changed elsewhere.

**NOTE –** If only one (1) printer is defined for the chapter, the program will not automatically display when it is called by other programs, and it will not open when selected from the menu.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Labeling Functions menu or by entering the keyword CHLBP.

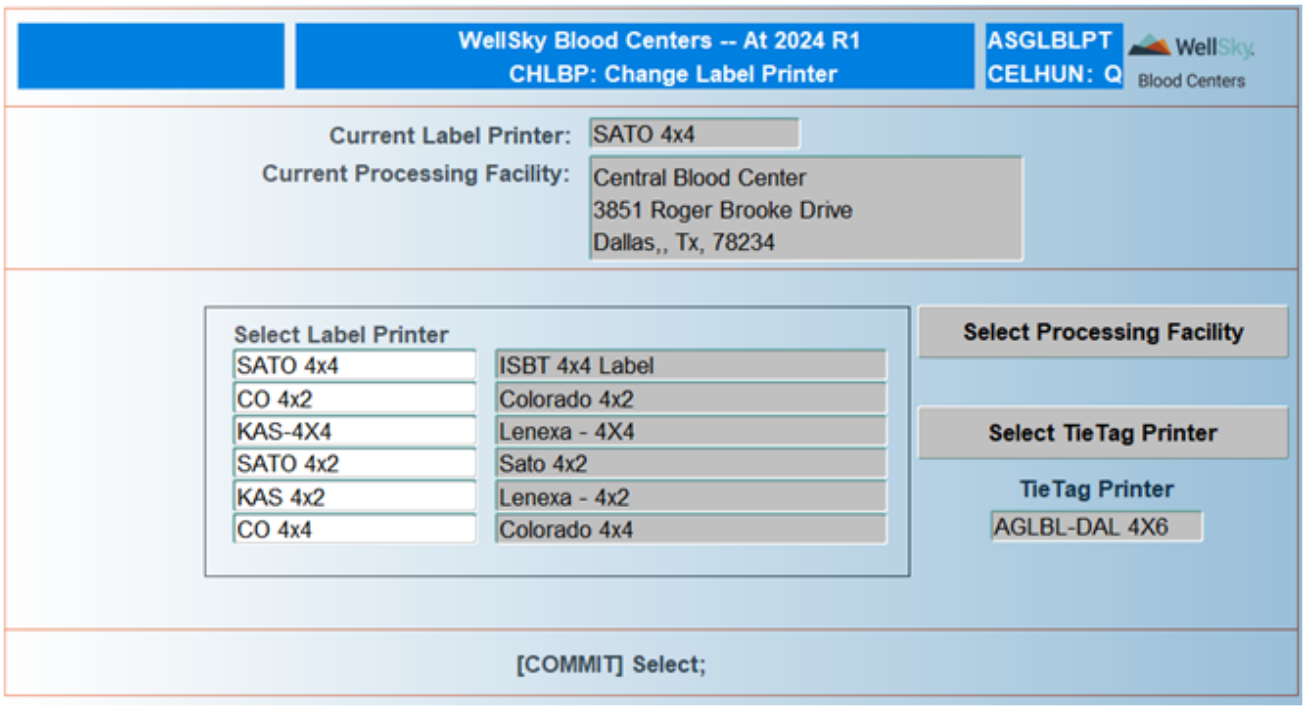


To select the facility name that will print in the lower right corner of labels for imported units that have been modified, do the following:

1. Click Select Processing Facility. The following window opens:

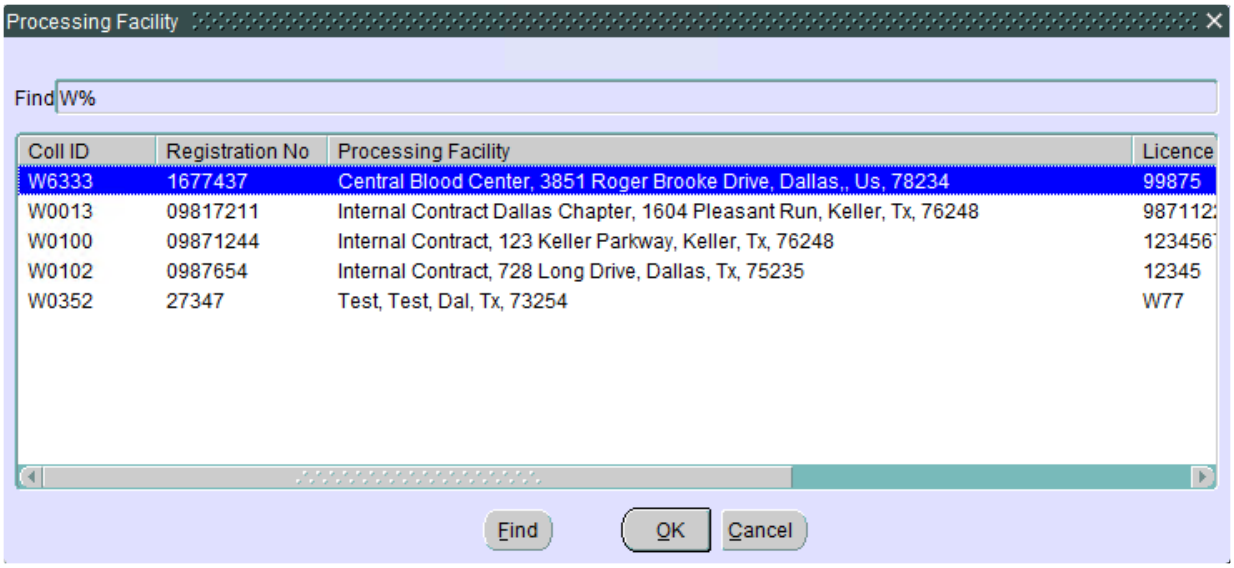

2. Select the desired facility .
3. The selected facility displays in the *Current Processing Facility* field and the cursor moves to the *Select Label Printer* field.

**NOTE –** If you are modifying a product in a screen that prints the 4x2 label (product code label), you must select a processing facility. If you do not select a processing facility, you will receive an error stating that you have not selected a processing facility. The processing facility selection is required for any program that prints a label and the unit is an imported unit.

To select the desired label printer, do the following:

1. Using the UP and DOWN arrow keys, select the desired label printer.
2. Press F12 (Commit). The following message appears, confirming the selection:




3. Press F8 (Exit Screen).

To select the desired tie tag label printer, do the following:

1. Click Select Tie Tag Printer. The following list will display:

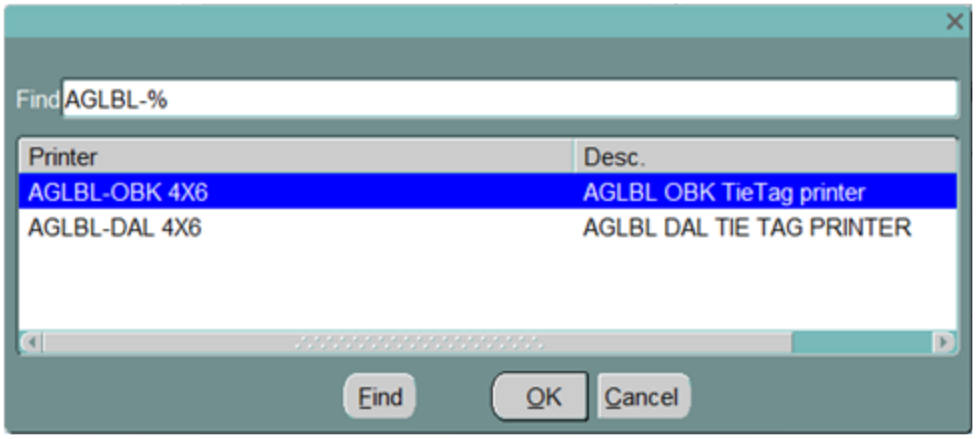


2. Highlight the row to select the printer, and click OK.

The selected printer displays in the Tie Tag Printer field on the Change Label Printer screen, as shown in the following figure.

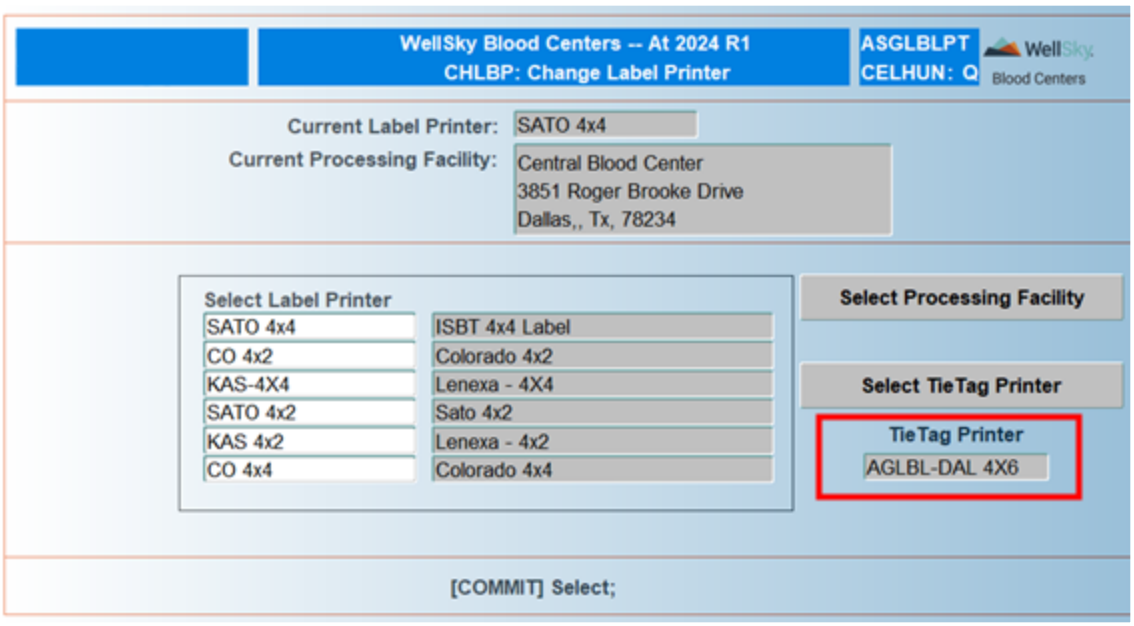


**NOTE –** The tie tag printers have to be defined in Maintain Report Master Table with the type of AGTPTR.

## At Commit

The selected label printer is saved.

## What to Do Next

There is no next step.

# 22.3 Common Labeling Functions

Common Labeling Functions are accessed from the following menu:

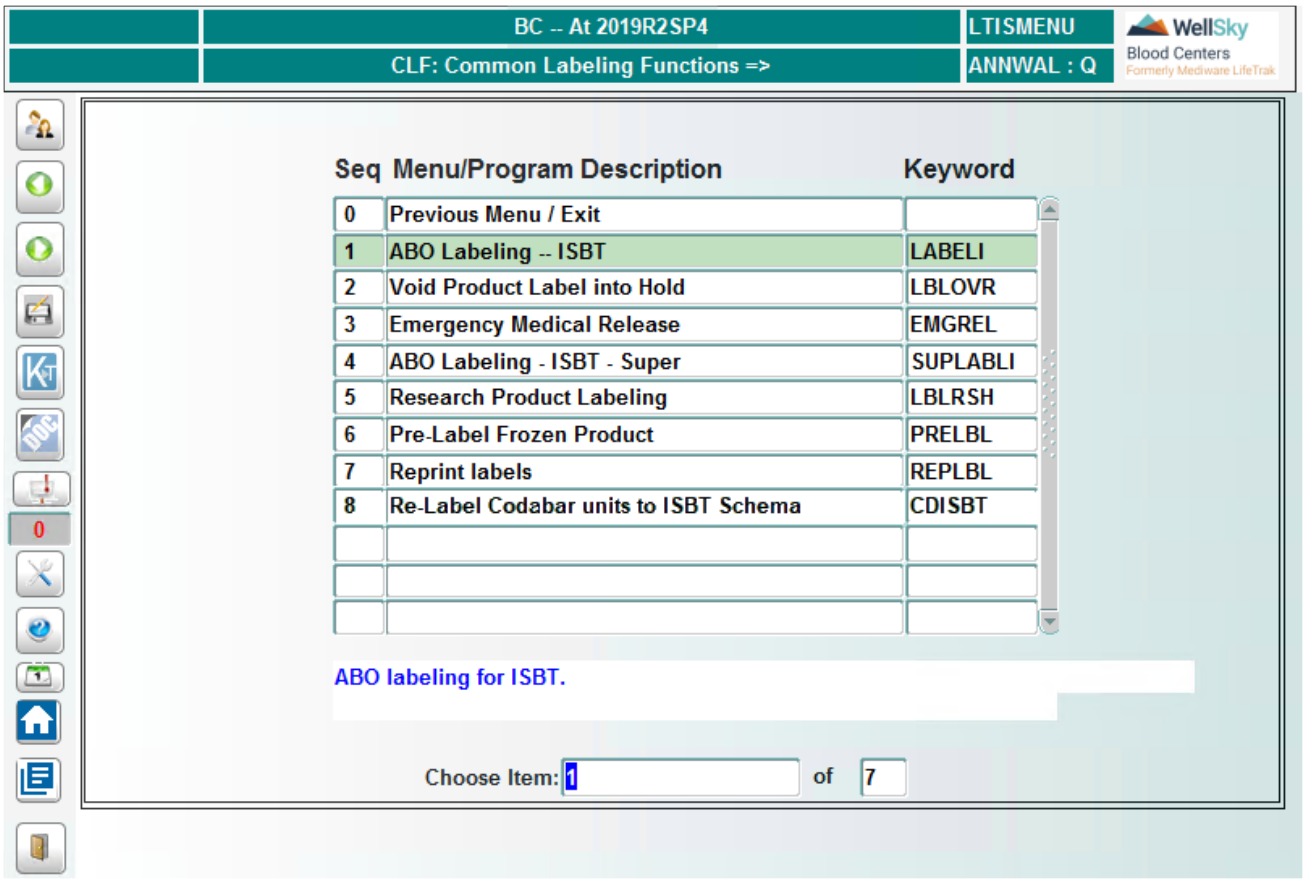


**NOTE –** Refer to Appendix B - Licensure Requirements for information on the requirements to determine licensure.

## 22.3.1 ABO Labeling - ISBT (LABELI)

### Intended Use

Use the ABO Labeling - ISBT screen as the last step in component preparation. The "label decision" sticker is applied to the product, and the label decision is committed to the database from this screen. During this step, you identify and label components that are:

- Acceptable for release (affix an ABO type label).
- For further manufacturing (Manufacturing).

- Autologous requested products,AUTO/BIO products will have the 6th character updated according to Master Code AUBIO.
- Unacceptable and ready for discard due to cGMP (Discard).
- Unacceptable and ready for discard due to testing (BIO).
- Needing further resolution (Quarantine).
- Prints a 7-10 digit registration number.

The system will print the chapter's license information on the label if the product meets all licensure requirements.

**NOTE –** Refer to Appendix F: Scanning Product Labels for instructions on scanning product labels. You can scan individual bar codes, or you can scan using a single concatenated scan for two bar codes.

## Limitations

- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- Dummy products cannot be labeled in this screen.
- Program is used for assigning system label decisions to ISBT products only.
- License information will only print on licensed products.
- License information will not print on modified imported products or products with a system label decision of Discard, Emergency Use, Biohazardous, or Quarantine.
- Only non-reactive testing information will print for recovered plasma products.
- Special testing information only prints when the following conditions are met:
  - Label being re-printed is OFF or PAD label type.
  - CMV attribute is present on the unit.
  - Product type of the product being processed is valid in Master Code CMVLB.
- Concatenated label verification not allowed for product code/collection date combination.
- Therapeutic and reagent donation units cannot be labeled with an acceptable for transfusion label.
- cGMP checks are not performed when labeling products from therapeutic donations.
- When configured to print labels, only one label will print generated for each product code processed; additional labels can be printed using the re-print function.

## Prerequisites

- Component must have been made from the unit and reviewed.
- Donor interface must have been completed.


WellSky Corporation
Proprietary and confidential

- Unit must have been accepted/rejected by Labeling QC, if configured as required in Chapter Details (CHAPTER):
  - Interface to donor registry.
  - Required initial testing.
  - Nursing audit.
  - Component reconciliation/review.
- The SUPER parameter must have been set for this program in Maintain Menu Items (MENUITM). If the parameter is set to U, expired products cannot be labeled with a good system label decision (SLD). If the parameter is set to S, the screen is set for a supervisory level that will allow an expired product to be labeled with a good SLD; you will receive a warning that the product is expired, and you must acknowledge the warning in order to continue.
- Must have weight and specific gravity for a component and Digi-Trax will print the volume for products.

## Additional Information

The hierarchy for assigning system label decisions is as follows:

Allogeneic and Directed Units:

- Hold type interdictions - should take precedence over all other interdiction types and should result in a system label decision of Mq (Quarantine).
- BIO type interdictions - should take precedence over NFT type interdictions and should result in a system label decision of Mb (Biohazard).
- NFT type interdictions – when these are present with no other interdictions, the system label decision should be Md (Discard).
- If no interdictions are present and no other conditions are present that prevent labeling, the system label decision should be based on the ABORH result for the unit with the intended use of RG (Intended Use not Specified) for both allogeneic and directed products.

Autologous Units:

- Hold type interdictions - should take precedence over all other interdiction types and should result in a system label decision of Mq (Quarantine).
- BIO type interdictions - should take precedence over NFT type interdictions.
  - If both BIO and NFT interdictions are present, the resulting system label decision should be Mb (Biohazard).
  - If only a BIO interdiction is present, the resulting system label decision should be based on the ABORH result for the unit with an intended use of 'AB' (for Autologous Use / Biohazardous).
- NFT type interdictions – when these are present with no other interdictions, the system label decision should be Md (Discard).
- If no interdictions are present, the resulting system label decision should be based on the ABORH result with an intended use of 'AO' (for Autologous Use Only).

Reagent Units:

- Hold type interdictions - should take precedence over all other interdiction types and should result in a system label decision of Mq (Quarantine).
- BIO type interdictions - should take precedence over NFT type interdictions and should result in a system label decision of Mb (Biohazard).
- NFT type interdictions – when these are present with no other interdictions, the system label decision should be Md (Discard).
- If no interdictions are present and no other conditions are present that prevent labeling, the system label decision should be Mf (Manufacturing).

Therapeutic Units (DON – 14 attribute present):

- BIO type interdictions - should take precedence over HOLD or NFT type interdictions and should result in a system label decision of Mb (Biohazard).
- NFT type interdictions – when these are present with no other interdictions, the system label decision should be Md (Discard).
- If only the therapeutic NFT interdiction is present, the system label decision should be Md (Discard).

**NOTE –** The only checks performed for therapeutic donations are for the presence of interdictions; no other cGMP checks are performed during labeling.

## Accessing the Screen

Access this screen from the Labeling Function menu, or by entering the keyword `LABELI` or `SUPLABLI`.

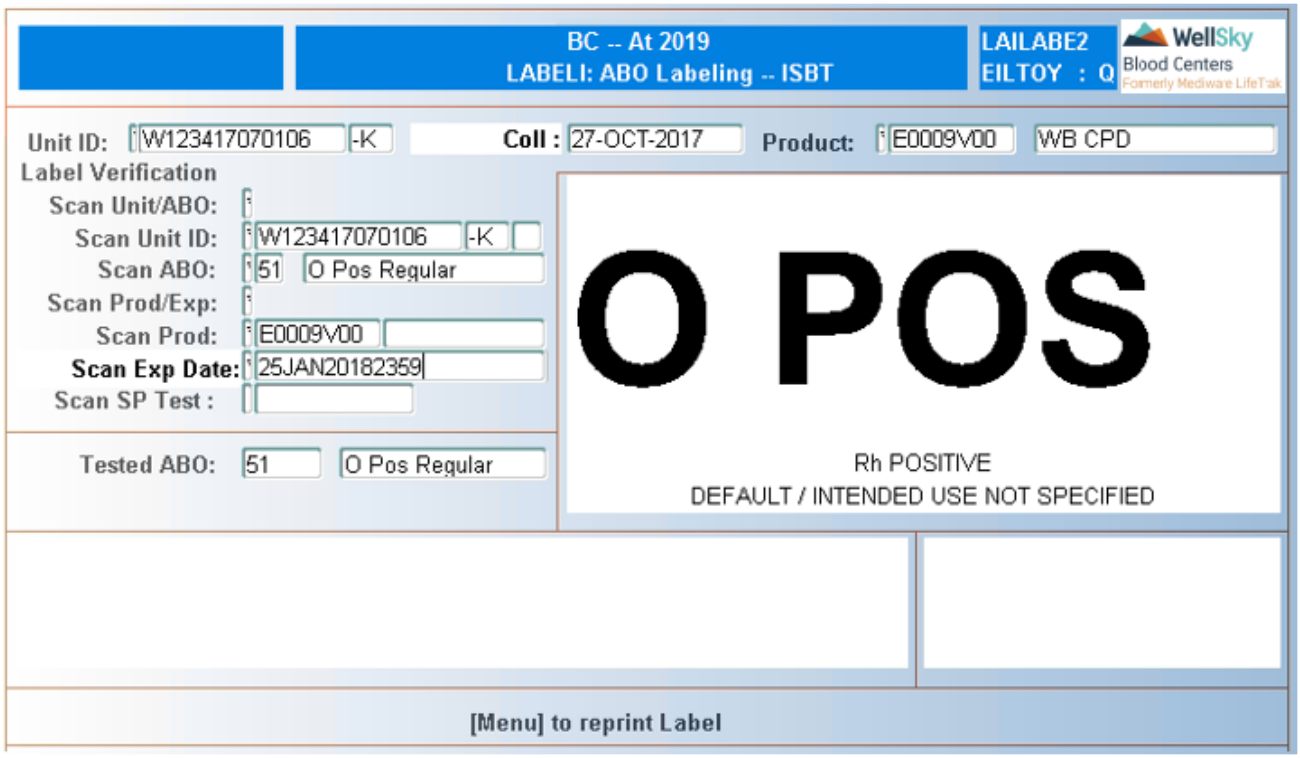

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

**NOTE –** If all products made from a unit are already labeled or no components are defined, you cannot proceed beyond this field.

## Coll Date

Field automatically displays the collection date after the unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

**NOTE –** If product is expired and user is in ABO Labeling – Super (SUPLABEL), the following window opens:

Enter `Y` to continue and label the product. Enter `N` if you do not wish to label the product.

**NOTE –** The system displays the "system label decision" in a window on the right of the screen. ABO/Expiration label automatically prints if system is configured to print labels. Here, following SOP's, place the physical ABO label on the product.

# Label Verification Block Fields and Definitions

## Label Verification

Field displays **HOLD** only when the product that is being labeled is currently labeled as Quarantine. Otherwise, this field does not display.

## Scan unit/ABO

Scan unit ID and ABO label as one scan, or press 'M' to verify unit ID and ABO labels with separate scans.

## Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to the concatenate scan.

### Scan ABO

Scan, manually enter, or select ABO from the LOV.

### Scan Product

Scan, manually enter, or select product code from LOV.

### Scan Exp Date or Scan Coll Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format, or collection date in DD-MON-YYYY format.

**NOTE –** The collection date must be entered for manufacturing products.

If Special Testing verification is not required, labeling is complete and the screen clears.

### Scan SP Test

Scan, manually enter, or select special testing code from LOV.

**NOTE –** In order for verification to be performed in this field, the following conditions must be met:

- CMV attribute must be present on the unit.
- Product type of the product code being labeled must be valid (defined, effective, non-terminated) in Master Code CMVLB.

**NOTE –** Products labeled as 'Quarantine' can be relabeled. If relabeling a 'Quarantine', a small window appears next to the expiration date to indicate that this product was already labeled earlier as a quarantine.
Due to the need for security measures, after you enter the unit ID, the only way to backout of the screen is by pressing CTRL + F5 (Clear Form). This procedure is audited in the system.

## Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

### Tested ABO

Field should display the unit's tested ABO after successful entry in the Product field. Field is not navigable.

## In the Interdiction and Information Block

Press CTRL + F3 (Next Block) to view all unit/component exceptions, interdictions and related information. These display in the lower left portion of the screen. Use the UP and DOWN arrow keys to scroll through this block.

The following information should be displayed in this block:


WellSky Corporation
Proprietary and confidential

- Overridden interdictions.
- Unit and component level NFT interdictions.
- Unit and component level HOLD interdictions.
- Unit level BIO interdictions.
- Contract tests required for labeling that have not been completed.
- Contract tests required for labeling that have NT results.
- Required freeze times missing.
- Required weights missing.
- Nursing audit information.
- Missing donor interface.
- Missing material check-in QC.

Press **CTRL** + **F4** (Previous Block) to return to the Label Verification Block.

## In the Attribute Information Block

This block is not navigable. The following information should display in this block after successful entry in the Product field in the Control Block:

- DON (donation) type attributes that are present for the unit in that have been defined in Attribute Codes (ATTRIB) to be displayed at labeling.
- ALERT type attributes that are present either on the unit in or on the component been defined in Attribute Codes (ATTRIB) to be displayed at labeling.

## At Commit

- If the label is verified, system marks the unit with the System Label Decision and Expiration.
- If labeling QC is not required for the Chapter, the QC label flag and date are set for the unit, if not already present.
- If an expired product is labeled using ABO Labeling - ISBT (LABELI), an EXPR interdiction is placed on the product.
- If an expired product is labeled using ABO Labeling – ISBT - Super (SUPLABLI), the EXPR interdiction is not placed.
- The 0 or 1 designation to interpret the unit ID as Codabar numeric or Codabar alpha numeric in the registration number is not represented in the barcode for ISBT units.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.2 Void Product Label into HOLD (LBLOVR)

## Intended Use

Use the Void Product Label into HOLD screen to change the system label of a component to HOLD (Codabar) or Quarantine (ISBT). The reject reason associated with component, if applicable, is also removed.

The system displays all other components from this unit that have already been labeled. This screen is used to process both Codabar and ISBT products. PCA (1.75 x 3 ABO/Rh – Expiration) labels can be printed for Codabar products and OFF (4 x 4 full-face) labels can be printed for ISBT products.

**NOTE –** Refer to Appendix F: Scanning Product Labels for instructions on scanning product labels. You can scan individual bar codes, or you can scan using a single concatenated scan for two bar codes.

## Limitations

- Component must be located in user's current log on warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- License information will not print on labels generated in this screen.

## Prerequisites

- Supervisor access level is required to use this screen.
- The product status must be L (Lab). If product status is S (Shipping), use Re-Check Products from Inventory (RECHECK) to return to Lab.
- Only a HOLD (Codabar) or Quarantine (ISBT) label can be generated using this screen.

## Accessing the Screen

Access this screen from the Common Labeling Function menu or by entering the keyword `LBLOVER`.


WellSky Corporation
Proprietary and confidential

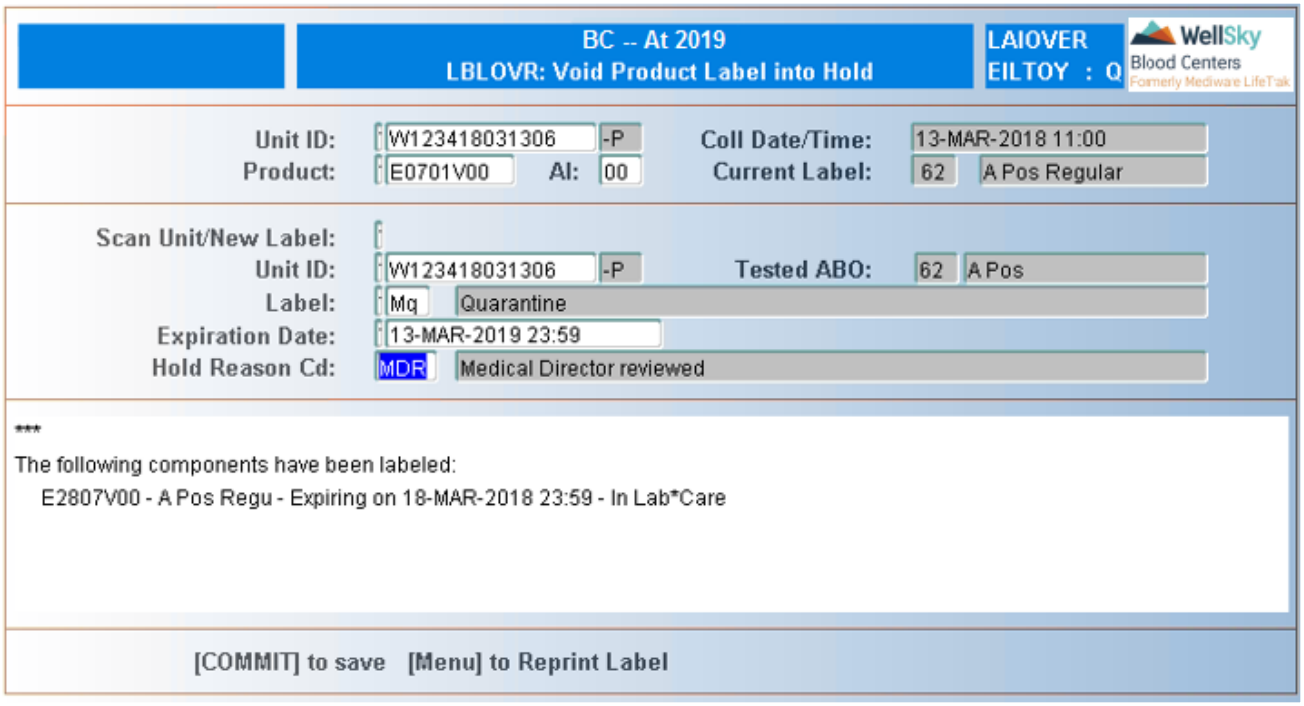


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Collection Date/Time

Field automatically displays the unit collection date and time after the unit ID is entered. Field is not navigable.

**NOTE –** The collection date and time does not appear for imported products.

## Product

Scan, manually enter, or select product code from LOV.

## AI

Manually enter or select aliquot number from LOV for Codabar products. Aliquot will automatically display after entry of ISBT product codes. This field is not navigable for ISBT products.

HOLD (Codabar) or Quarantine (ISBT) label automatically prints after the aliquot is entered if the system is configured to print labels.

**NOTE –** For autologous units, only 1 HOLD or Quarantine label prints. For pheresis platelets in the double bag configuration, only 1 HOLD or Quarantine label prints.

### Current Label

Field automatically displays the current system label decision for the product. Field is not navigable.

## Label Verification Block Fields and Definitions

### Scan Unit/NewLabel

Scan unit ID and HOLD/Quarantine label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

**NOTE –** After a concatenate (one) scan, the cursor moves to the Hold Reason Cd field. If doing manual entry, the cursor moves down to the Unit ID field.

### Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to a concatenate scan.

### Tested ABO

Field displays the unit's tested ABO after successful entry in the Product field. Field is not navigable.

### Label

Scan, manually enter, or select HOLD/Quarantine from LOV.

### Expiration Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

### Hold Reason CD

Enter hold reason code or select code from LOV.

**NOTE –** After entering the hold reason code, the following window appears:

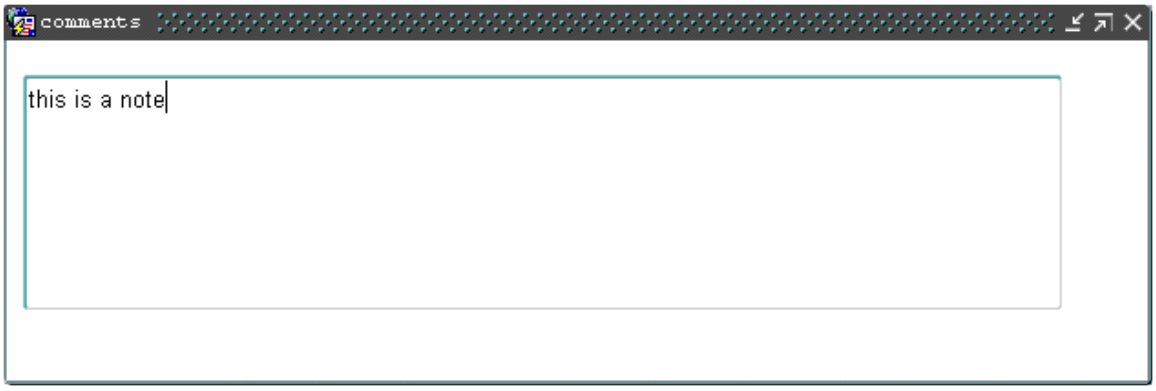



WellSky Corporation
Proprietary and confidential

### Comments

Enter comment. A maximum of 240 characters is allowed.

Press F12 (Commit) after entering comments to save and exit the screen.

## Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

## Viewing Component Related Information

Press CTRL + F3 (Next Block) to view information for all components made from the unit. These display in the lower left portion of the screen. Modification cannot be made in this block. Use the UP and DOWN arrow keys to scroll through this block.

Press CTRL + F4 (Previous Block) to return to the Label Verification Block.

## At Commit

Updates made to the system at commit include:

- Override information on the product.
- Component system label decision updated to HOLD (Codabar) or Quarantine (ISBT).
- Reject reason removed from component, if applicable.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.3 Emergency Medical Release (EMGREL)

## Intended Use

Use the Emergency Medical Release screen to release products on an emergency basis. The system displays all incomplete tests. This screen is used to process both Codabar and ISBT products.

PCA (1.75 x 3 ABO/Rh – Expiration) labels can be printed for Codabar products and OFF (4 x 4 full-face) labels can be printed for ISBT products.

**NOTE –** Refer to Appendix F: Scanning Product Labels for instructions on scanning product labels. You can scan individual bar codes, or you can scan using a single concatenated scan for two bar codes.

## Prerequisites

- Supervisor access level is required to use this screen.
- The product must meet the following:

- Must have been defined.
- Must have been tested for ABO/Rh, at minimum.
- Cannot have been labeled earlier, unless labeled as HOLD (Codabar) or Quarantine (ISBT).

## Limitations

- Component must be located in your current log on warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- License information will not print on labels generated in this screen.

## Accessing the Screen

Access this screen from the Common Labeling Function menu or by entering the keyword `EMGREL`.

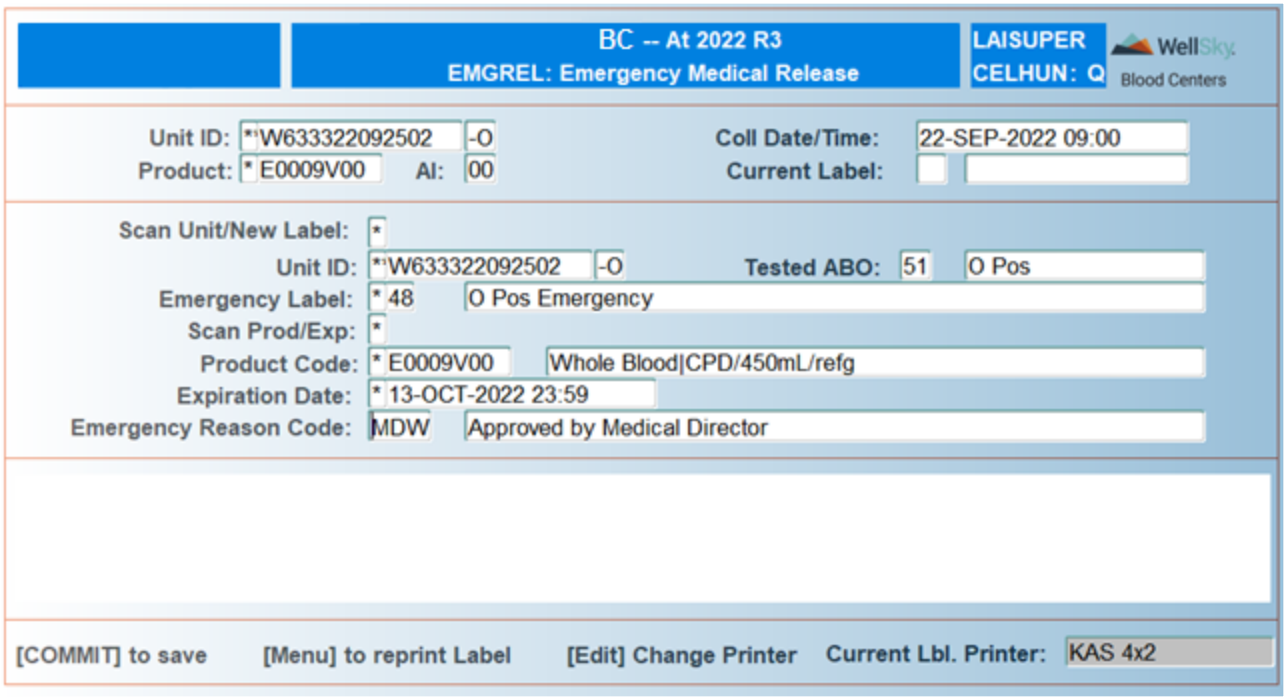


### Unit ID

Scan or manually enter unit ID.

### Collection Date/Time

Field automatically displays the unit collection date and time after the unit ID is entered. Field is not navigable.

**NOTE –** The collection date and time will not display for imported products.

### Product

Scan, manually enter, or select product code from LOV.


WellSky Corporation
Proprietary and confidential

### AI

Manually enter or select aliquot number from LOV for Codabar products. Aliquot will automatically display after entry of ISBT products codes. This field is not navigable for ISBT products.

For emergency use only, the label automatically prints after the aliquot is entered if the system is configured to print labels.

**NOTE –** For autologous units, only 1 label prints. For pheresis platelets in the double bag configuration, only 1 label prints.

### Current Label

Field automatically displays the current system label decision for the product, if applicable. Field is not navigable.

## Label Verification Block Fields and Definitions

### Scan Unit/New Label

Scan unit ID and Emergency label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

**NOTE –** After a concatenate (one) scan, for ISBT products the cursor moves to the Scan Prod/Exp field and to the Product Code field for Codabar products. If doing manual entry, the cursor moves down to the Unit ID field.

### Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to a concatenate scan.

### Test ABO

Field should display the unit's tested ABO after successful entry in the Product field. Field is not navigable.

### Emergency Label

Scan, manually enter, or select emergency label value from LOV.

### Scan Prod/Exp

Scan product code and expiration labels as one scan for ISBT products, or enter `M` to verify product code and expiration labels with separate scans. Field is not navigable for Codabar products.

**NOTE –** After a concatenate (one) scan, the cursor moves to the Emergency Reason Code field. If doing manual entry, the cursor moves down to the Product Code field.

## Product Code

Scan or manually enter product code.

## Expiration Date

Scan or manually enter expiration date and time in DD-MON-YYYY HH24:MI format.

## Emergency Reason Code

Enter emergency reason code or select from LOV.

**NOTE –** After entering the emergency reason code, the following window opens:

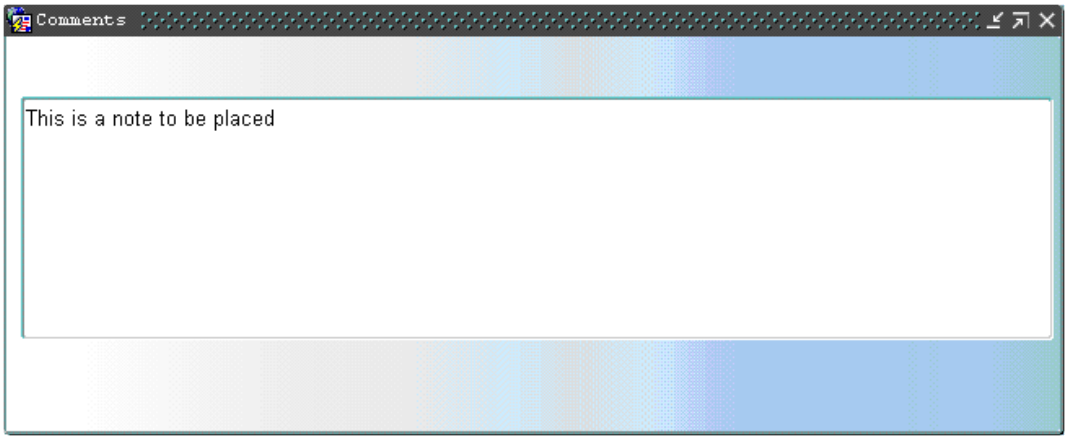


## Comments

Enter comment. A maximum of 240 characters is allowed.

Press F12 (Commit) after entering comments to save and exit the screen.

# Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

# [Edit] Change Printer

Press CTRL+E to select a new printer. The following window opens:

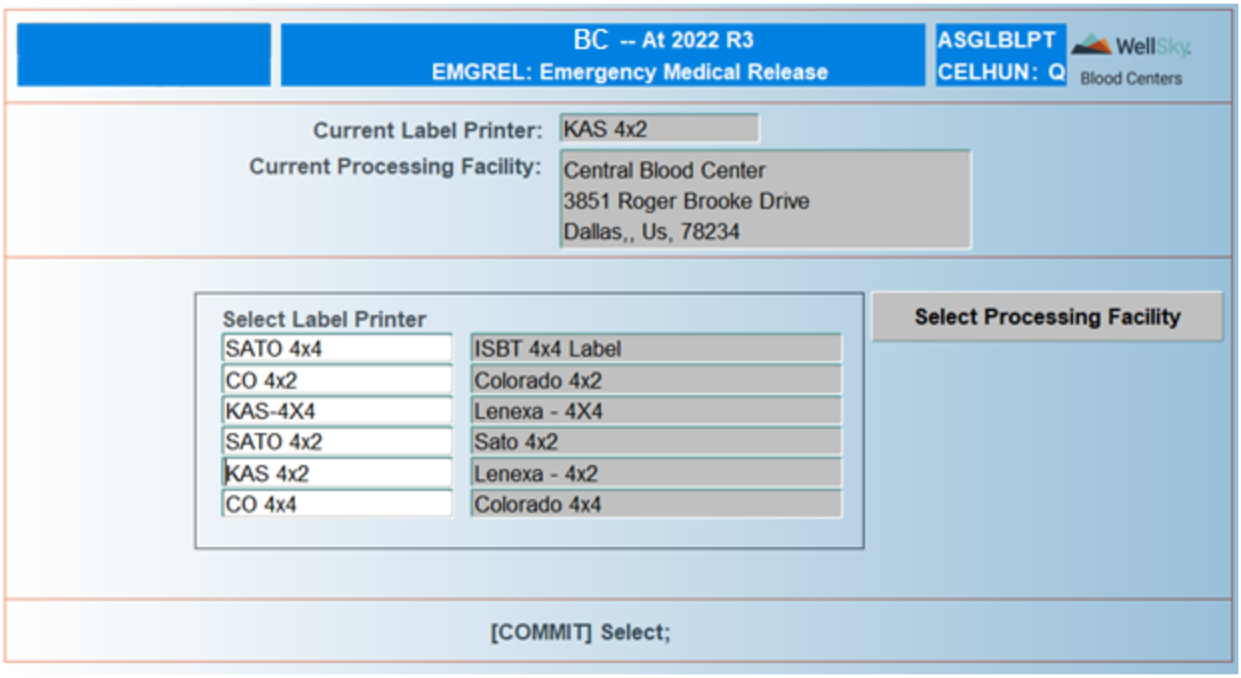


## Current Label Printer

The field automatically populates with the current label printer that has been selected. The field is not navigable.

## Select Label Printer

All printers automatically display. Use the UP and DOWN arrow keys to scroll through the list of printers.

Press F12 (Commit) when the correct printer is underlined. The following window opens:

Press F8 (Exit Screen) to return to the main screen.

**NOTE –** Printer selection can occur only when in the Print Label Block.

# At Commit

Updates made to the system at commit include the following:

- Emergency labeling reason information is saved for the product.
- Component system label decision updated to reflect the product was labeled for Emergency use.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.4 ABO Labeling - ISBT – Super (SUPLABLI)

Refer to ABO Labeling – ISBT (LABELI) for instruction on this screen.

# 22.3.5 Research Product Labeling (LBLRSH)

## Intended Use

Use the Research Product Labeling screen to label products as research. Products can be created in the form, or existing products can be labeled or relabeled to research.

- Expired products
- Products with HOLD (quarantine)
- Products that are labeled
- Products that are not labeled

## Limitations

- Test messages are limited to 200 characters (DigiTrax limitation).
- Hard-coded to print 'SEE TIE-TAG FOR TEST RESULT INFORMATION' if there are multiple test result types on the unit.

## Prerequisites

- Material Check-In must have been completed.
- In order to define products in the screen, the unit must have bags checked in.
- When rejecting an existing component, the component must be located in the user's current log-in warehouse in order to perform this function.
- The unit/component must not be in transit in order to perform this function.
- Test messages must be defined in the Validation Table - Labeling Configuration.

## Accessing the Screen

Access this screen from the Labeling Function menu or by entering the keyword `LBLRSH`.


WellSky Corporation
Proprietary and confidential

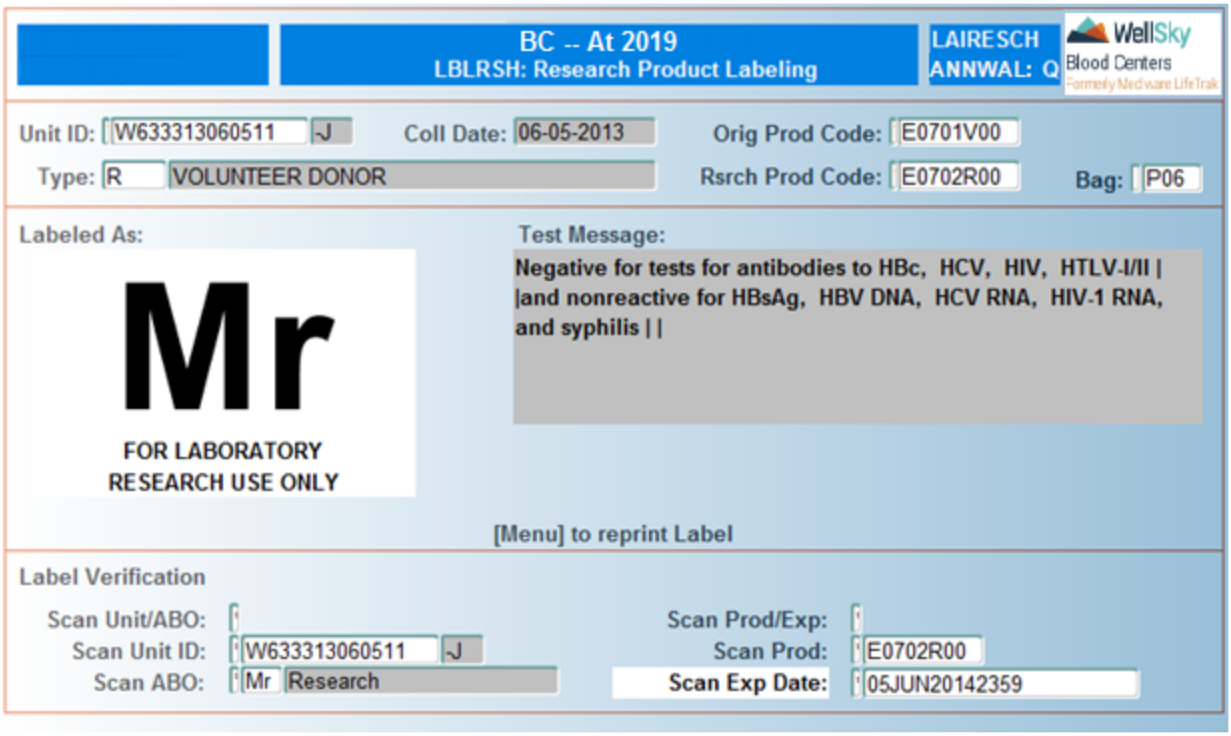


If a label printer has not already been selected, the Change Label Printer screen opens before the PRELBL screen opens:

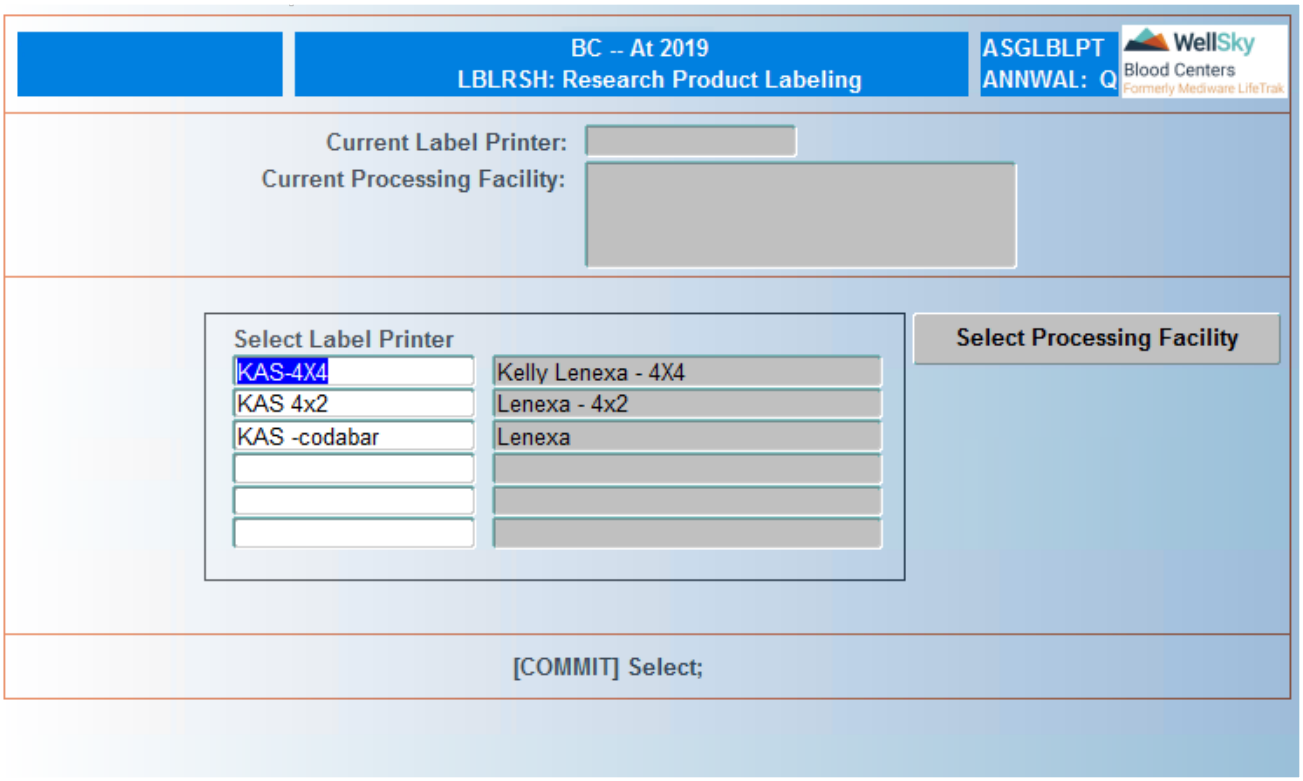

Select a printer, as described in the Change Label Printer (CHLBP) section of this document. Once the label printer has been selected, press F8 (Exit Screen); the LBLRSH screen will then open.

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter the unit ID.

> **NOTE –** If all products made from a unit are already labeled or no components are defined, you cannot proceed beyond this field.

## Coll Date

Field automatically displays the collection date after the unit ID is entered. Field is not navigable.

## Original Product Code

Scan, manually enter, or select product code from LOV. Leave field blank if the product is going to be defined in the screen, and press ENTER to move to the *Research Prod Code* field.

## Type

The system automatically defaults Type to R (Volunteer Donor), and advances the cursor to the *Rsrch Prod Code* field. To change the default value, press F4 (Previous Field) and select value from LOV. The Type definition automatically displays. *Type* field is controlled by Master Code RETYP.

## Rsrch Prod Code

Scan, manually enter, or select research product code from LOV. The LOV will only be populated if the validation table Products has been defined with product codes that have the research flag set to Y. After selecting the product code from the LOV, you must enter the (r) or (R) and 00 to the end of the product code; otherwise, you will receive an error for invalid product code.

## Bag

Scan, manually enter, or select bag type from LOV. Navigation to this field is allowed only if the *Orig Prod Code* field is blank.

# Label Block

## Labeled As

Displays Mr after all data has been entered.

## Test Message

Field is used to display test messages, as follows:

- Test messages display based on the configuration in the validation table Labeling Configuration (LBLCF).
- Test message is hard coded to display the message 'SEE TIE-TAG FOR TEST RESULT INFORMATION' if there are multiple types of test results present.


WellSky Corporation
Proprietary and confidential

- Missing results and some other test results (non-reactive/negative results, BIO, NFT, INITIAL only)
- Any combination of test results that are missing (no result), negative/non-reactive, BIO, NFT and INITIAL without final result)
- Any 'NT' result
- Any BIO interdiction for a test
- Any NFT interdiction for a test
- Any INITIAL interdiction and no final result for a test

- Test message will display || for breaks in the message when printing the label, but will not appear on the label itself.

## Label Verification Block Fields and Definitions

### Scan Unit/ABO

Concatenation of the unit ID and ABO label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

### Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to the concatenate scan.

### Scan ABO

Scan, manually enter, or select ABO from the LOV.

### Scan Prod/Exp

Concatenation of the product code and expiration date as one scan, or press **M** to verify product code and expiration date with separate scans.

### Scan Prod

Scan or manually enter product.

### Scan Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format, or collection date in DD-MON-YYYY format.

**NOTE –** The collection date must be entered for manufacturing products.

After successful entry in this field, labeling is complete, and the screen clears.

**NOTE –** The following limitation exists:
Due to the need for security measures, after you enter the unit ID, the only way to back out of the screen is by pressing CTRL + F5 (Clear Form). This procedure is audited in the system.

## Printing the Label

After all data is entered, press F6 (Menu) to print the label to the specified label printer.

## At Commit

The product is labeled with Mr (research) system label decision.

## What to do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.6 Pre-Label Frozen Product (PRELBL)

## Intended Use

Use the Pre-Label Frozen Product screen to pre-label frozen products for ISBT components. This screen allows for the optional printing of PFF (ISBT full-face labels) with special testing (CMV negative) messages, where applicable. The screen requires verification of key information, regardless of whether or not the label is generated.

## Limitations

- License information will not print on products with the following system label decisions, regardless of calculated licensure status: Md (Discard).
- License information will print only for licensed products.
- Collection date will print on products with a system label decision of Mf (Manufacturing); expiration dates will not print for these products.
- Dummy products cannot be labeled in this screen.
- Pooled components cannot be processed through this screen.
- Codabar products cannot be processed through this screen.
- Concatenated label verification is not allowed for product code/collection date combination.
- Therapeutic and reagent donation units cannot be labeled with an 'acceptable for transfusion' label.
- cGMP checks are not performed when labeling products from therapeutic donations.
- Program does not call the SRVDON package.
- When configured to print labels, only one label will print generated for each product code processed; additional labels can be printed using the re-print function F6 (Menu).
- You cannot label products if a HOLD interdiction is present.


WellSky Corporation
Proprietary and confidential

## Prerequisites

- Component must be located in your current log-on warehouse and must not be in-transit (that is, INTR interdiction must not be present on the unit).
- Only products from internal contracts can be processed through this screen.
- Product codes must be defined in Product Codes (VPRODUCT).
- Details for product type must be defined in Product Type Data - Codabar/ISBT (VPRDTYPE).
- Labeling interdiction overrides must be defined in Labeling Interdiction Override: Tech 1 (VINTOVER) and Labeling Interdiction Override: Tech 2 (VINTOVR2).
- Special testing attributes will print if defined for the frozen product.
- If labels are to be printed, program must be defined in Maintain Report Master Table (RMMASTER).
- Label printers must be defined in Maintain Report Master Table (RMMASTER).
- PFF label type must be defined in Master Codes (VMASTCD), code type DLBLT.
- Master Code PRTYP must be defined. This is a list of product types that can be labeled in the Pre-label frozen products.

## Accessing the Screen

Access this screen from the Labeling Function menu or by entering the keyword `PRELBL`.

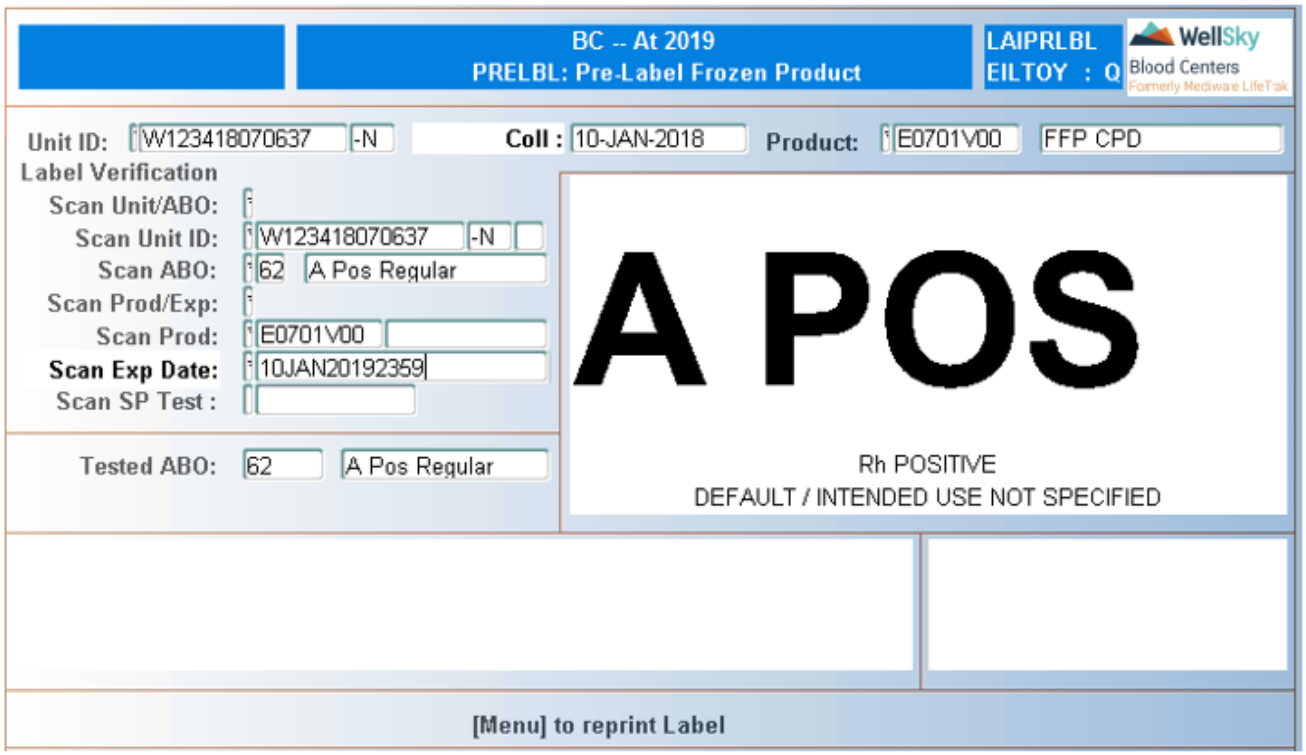

If a label printer has not already been selected, the Change Label Printer screen opens before the PRELBL screen opens:

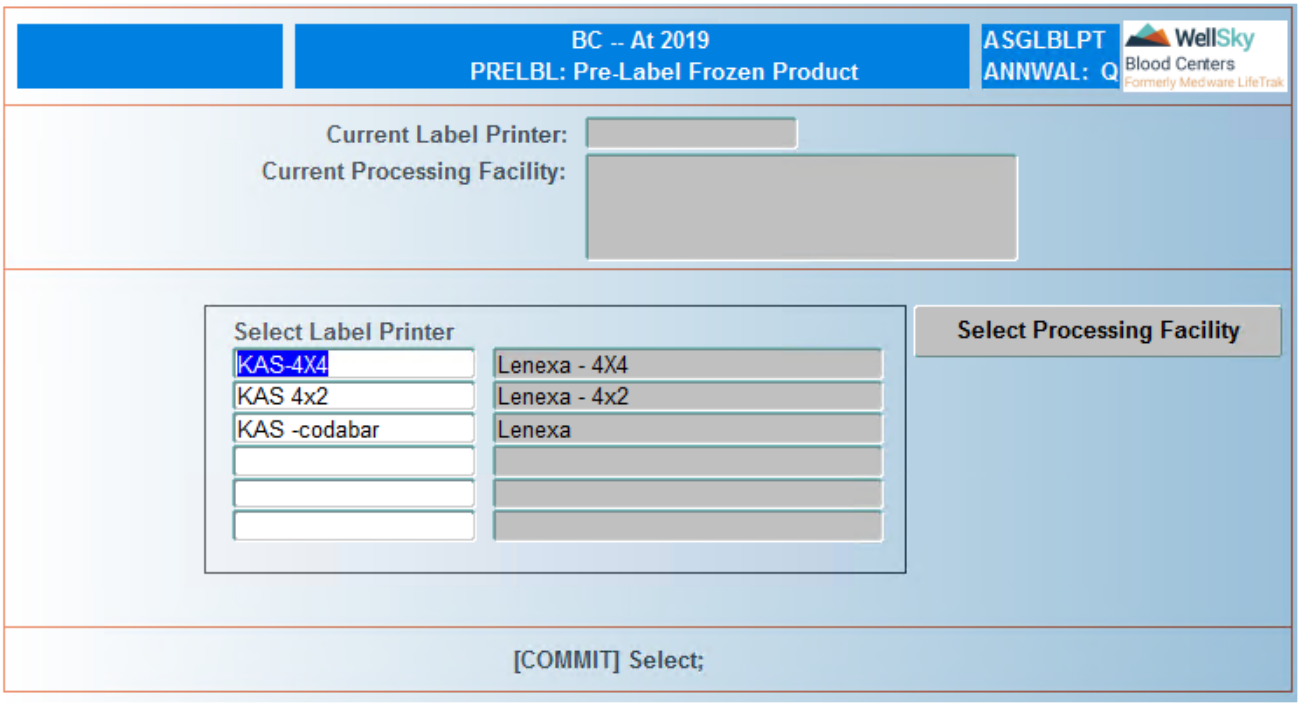


Select a printer, as described in the Change Label Printer (CHLBP) section of this document. Once the label printer has been selected, press **F8** (Exit Screen); the PRELBL screen will then open.

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

> **NOTE –** If all products made from a unit are already labeled or no components are defined, you cannot proceed beyond this field.

## Coll Date

Field automatically displays the collection date after the unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

> **NOTE –** If you scan a unit number and product code that is linked to a donor that does not have a prior ABORH, the following error message displays:

If the donor to lab interface has not occurred, the following message displays:

The system will check the donor application for prior ABORH.

# Label Verification Block Fields and Definitions

## Scan Unit/ABO

Scan unit ID and ABO label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

## Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to the concatenate scan.

## Scan ABO

Scan, manually enter, or select ABO from the LOV.

## Scan Prod/Exp

Scan product code and expiration date as one scan, or press **M** to verify product code and expiration date with separate scans.

## Scan Prod

Scan or manually enter product.

## Scan Exp Date or Scan Coll Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format, or collection date in DD-MON-YYYY format.

**NOTE –** The collection date must be entered for manufacturing products.

After successful entry in this field, labeling is complete and the screen clears, or progresses to the second label decision if double labeling is required.

**NOTE –** The following limitations exist:

- Products labeled as 'HOLD' cannot be labeled. If you try to label a product that is labeled as hold, the following error message displays:

- Due to the need for security measures, after you enter the unit ID, the only way to backout of the screen is by pressing CTRL + F5 (Clear Form). This procedure is audited in the system.

## Scan SP Test

Scan or manually enter special testing (CMV negative) code.

## Tested ABO

Displays the historical ABORH for the unit and the ABORH description. Field is not navigable.

# Interdiction and Information Block

The Interdiction and Information block is located in the lower-left portion of the screen, as shown:

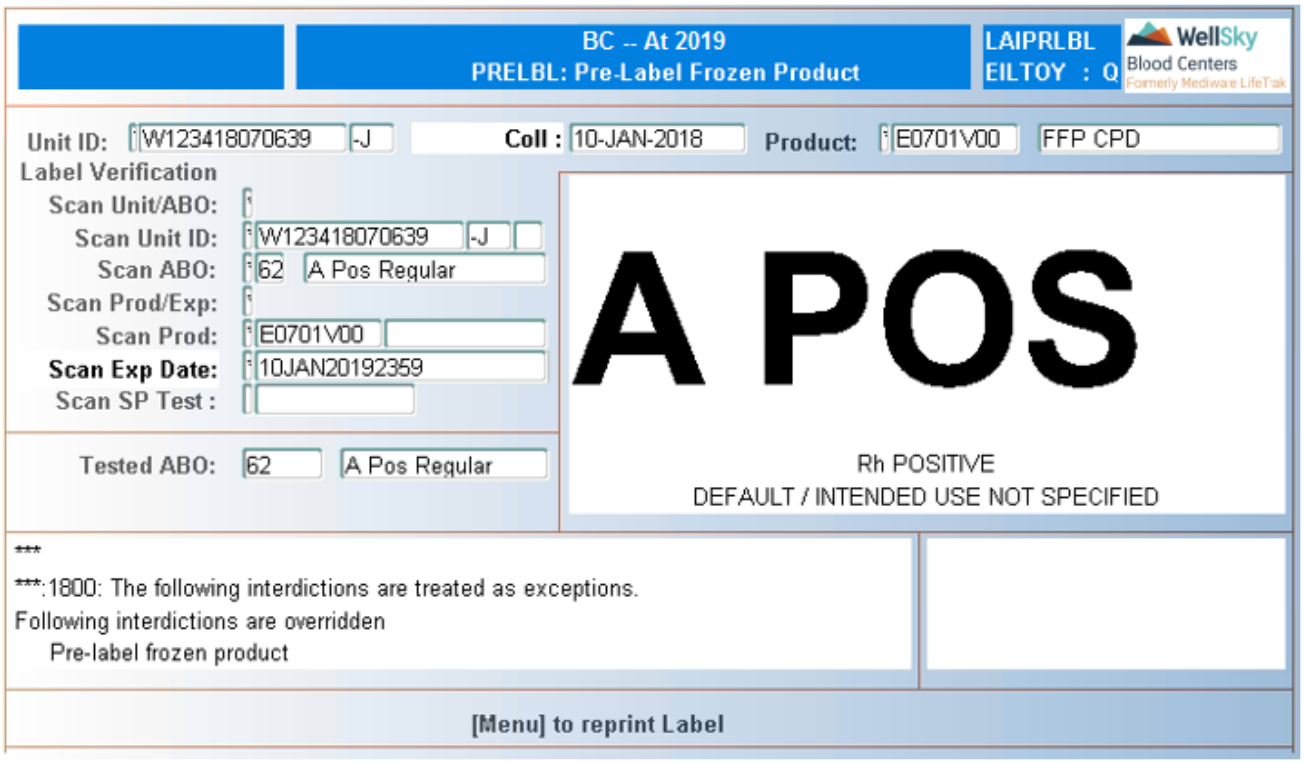


The following information may appear, as applicable:

- Overridden interdictions.
- Unit and component level NFT interdictions.

- Unit and component level HOLD interdictions.
- Unit level BIO interdictions.
- Contract tests required for labeling that have not been completed.
- Contract tests required for labeling that have NT results.
- Required freeze times missing.
- Required weights missing.
- Nursing audit information.
- Missing donor interface.
- Missing material check-in QC.

## Attribute Information Block

The Attribute Information block is located in the lower-right portion of the screen, as shown:

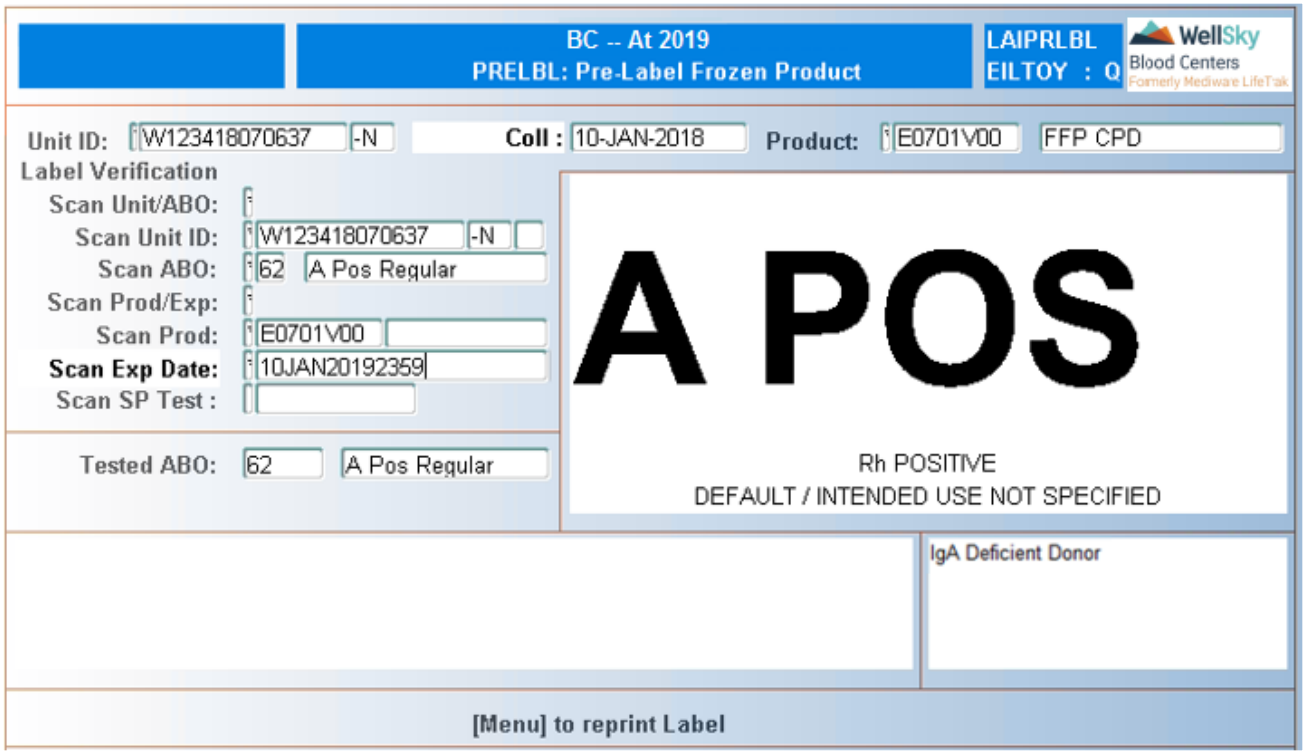


The following information may appear, as applicable:

- DON (donation) type attributes that are present for the unit in UNIT_ATTRIBUTES that have been defined with the SHOW_ON_LABEL_FLAG set to 'Y' in VALID_ATTRIBUTES.
- ALERT type attributes that are present either on the unit in UNIT_ATTRIBUTES or on the component in COMPONENT_ATTRIBUTES that have been defined with the SHOW_ON_LABEL_FLAG set to 'Y' in VALID_ATTRIBUTES.

## Printing the Label

After all data is entered, press **F6** (Menu) to print the label to the specified label printer.

## At Commit

if the system label decision is 'Md', the system updates PRE_LABEL_SLD, PRE_LABEL_USER_ID, PRE_LABEL_DATS, SYSTEM_LABEL_DECISION, LABEL_USER_ID, LABEL_DATS, EXPIRY_DATE columns in the COMPONENTS table with the values of “Tested ABO”, user id, system date, “Tested ABO”, user id, system date and the expiration date.

If the system label decision is not 'Md', the system updates PRE_LABEL_SLD, PRE_LABEL_USER_ID, PRE_LABEL_DATS columns in the COMPONENTS table with the values of “Tested ABO”, user id and the system date.

## What to do Next

For normal processing, press **F8** (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.7 Reprint Labels (REPLBL)

## Intended Use

The Reprint Labels screen allows for reprint and verification of labels.  This process can only be performed once the product has a valid system label decision (SLD) when printing labels that contain the SLD (PCA, PFF).

The following label types can be printed from this screen:

- PCA (Codabar 1.75 x 3 ABO/Expiration) labels.
- PFF (ISBT 4 x 4 Full-Face) labels.
- PPD (ISBT 4 x 2 Product/Expiration) labels.

## Limitations

- Expiration date does not print on PPD label types.
- Expiration date does not print for products that have reject reasons present.
- Expiration does not print for products with a system label decision of Manufacturing; collection date prints when printing PFF labels for ISBT manufacturing products.
- Labels cannot be reprinted for components that have a reject reason of POOL or CONV.
- License information will only print on licensed products.
- License information will not print on products with a system label decision of NFT, Quarantine, Discard, Emergency Use, Biohazardous, or Hold.
- License information prints for imported products based on the combination of the import license flag and the LICPROD table being defined for the internal product.
- Reprinting an import product that has not been modified will reprint with the manufacturing facility on bottom based on import licensure and the LICPROD table for the internal flag. The manufacturing address and


WellSky Corporation
Proprietary and confidential

license number will have to be marked out by the facility reprinting a non-modified imported label. WellSky recommends not reprinting non-modified imported unit labels.

- Special testing information only prints when the following conditions are met:
  - Label being re-printed is PFF label type.
  - Product type of the product being processed is valid in Master Code CMVLB for pooled component.
  - Special testing defined for a product type in the LBLCF table and the related attribute is present.

## Prerequisites

Before using this screen, component(s) must have been assigned a valid system label decision in order to print labels that contain the system label decision (PCA and PFF).

## Accessing the Screen

Access this screen from the Common Labeling Function menu or by entering the keyword `REPLBL`.

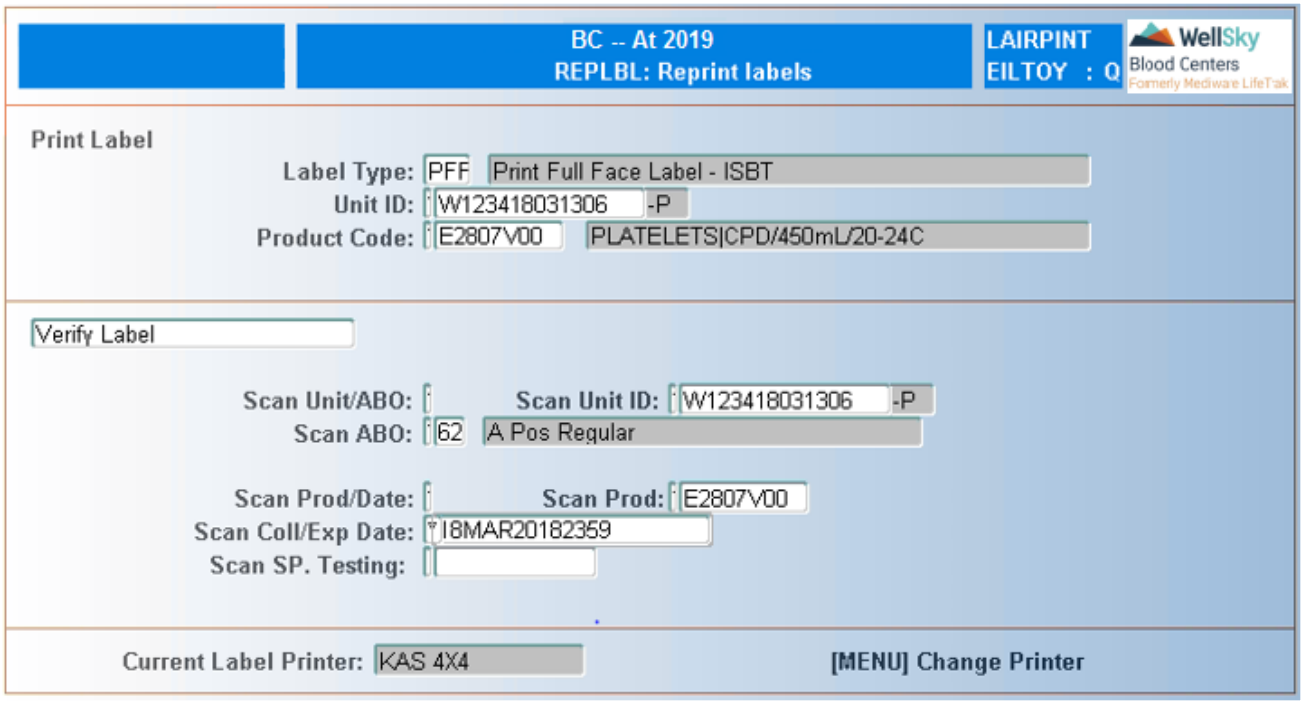


## Control Block Fields and Definitions

### Label Type

Enter label type to be reprinted or select from LOV.

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually enter, or select product code from LOV.

**NOTE –** If the product entered has unit or component level interdictions, the following window opens:

Enter `Y` to continue to the following window, or enter `N` if you do not want to continue.

After the product code is entered, the following window opens:

Press `Y` and **ENTER** to reprint the label; press `N` and **ENTER** if the label is not to be reprinted. The label automatically prints if Y is entered. Here, following SOPs, place the physical label on the product.

**NOTE –** For pheresis platelets in the double bag configuration, only one label prints.

# Verify Label Block Fields and Definitions

## Scan Unit/ABO

Scan unit ID and ABO label as one scan, or press `M` to verify unit ID and ABO labels with separate scans.

**NOTE –** After a concatenate (one) scan, the cursor moves to the Scan Prod/Date field, unless the system label decision of the product is Manufacturing. If doing manual entry, the cursor moves down to the Unit ID field.

## Scan Unit ID

Scan or manually enter unit ID.

**NOTE –** This is the first manual option to a concatenate scan.

- PFF labels must be printed.
- Product type of the product code being processed must be valid (defined, effective, non-terminated) in Master Code CMVLB for pooled products.
- Product type must be defined in the LBLCF (Labeling configuration) under the Product Code Configuration. Bar Code configuration button must be defined for each barcode being scanned in special testing.

## Scan ABO

Scan, manually enter, or select ABO from LOV.

## Scan Prod/Date

Press `M` and **ENTER** for individual entry of product code and expiration/collection date.


WellSky Corporation
Proprietary and confidential

## Scan Prod

Scan, manually enter, select product code from LOV.

## Scan Coll/Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format, or collection date in DD-MON-YYYY format.

**NOTE –** Screen commits after verification in this field for Codabar products and ISBT products that do not require special testing verification.

## Scan SP. Testing

Scan, manually enter, or select special testing (CMV Negative) code from LOV. Field not navigable for Codabar products or products not labeled as CMV Negative.

**NOTE –** In order for verification to be performed in this field, the following conditions must be met:

- PFF labels must be printed.
- CMV attribute must be present on the unit.
- Product type of the product code being processed must be valid (defined, effective, non-terminated) in Master Code CMVLB for pooled products.
- Product type must be defined in the LBLCF (Labeling configuration) under the Product Code Configuration. Bar Code configuration button must be defined for each barcode being scanned in special testing.

# To Change Printers

Press F6 (Menu) to select a new printer. The following window opens:

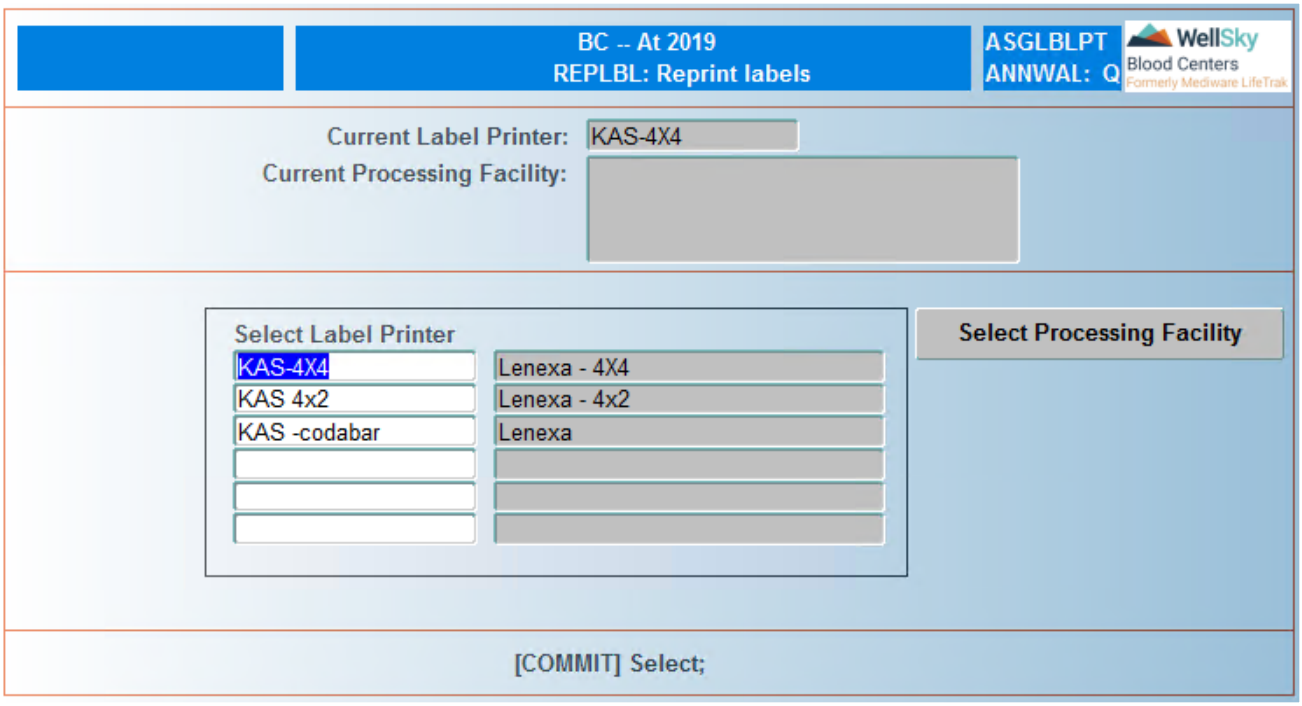


## Current Label Printer

Field automatically populates with the current label printer. Field is not navigable.

## Select Label Printer

All printers automatically display. Use the **UP** and **DOWN** arrow keys to scroll through the list of printers.

Press **F12** (Commit) when the correct printer is underlined. The following window opens:




Press **F8** (Exit Screen) to return to the main screen.

**NOTE –** Printer selection can occur only when in the Print Label Block.

# At Commit

Verification commits.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Common Labeling Functions menu.


WellSky Corporation
Proprietary and confidential

# 22.3.8 Re-Label Codabar units to ISBT Schema (CDISBT)

## Intended Use

Use this screen to change a Codabar unit to ISBT schema so the unit can be further processed through the system. Also, this screen allows the expiration date to be extended on the Codabar unit.

## Limitations

- The customer will be responsible to make sure the imported units have a contract defined and the collection ID associated to the contract.
- License of the product will have to be determined by the facility, and the correct license numbers will need to be applied manually. The system will not calculate the licensure of the product.
- Catalog manufacturer (MFGCD) needs to be created with a 99 code. Once the manufacturer is defined, create a catalog using this manufacturer. The program is looking for the manufacturer code 99 only.

## Prerequisites

- Lab Master Code CBISB – define Codabar product codes and the link to the ISBT product code.
- The component must be located in the user's current log-in warehouse in order to perform this function.
- The component must not be in transit in order to perform this function.
- Dummy products cannot be labeled in this screen.
- The program is used for assigning system label decisions to ISBT products only.
- Define the program in RMASTER with LBLPGM type to print the 4x4 label (PFF).
- User access code UPEXP to allow the user to extend the expiration date of the Codabar unit.
- The catalog needs to be created with manufacturer code 99.
- The Lab Master Code CMC needs to have a code defined for the LAICDISB program. The lot number table needs to have the lot number linked to the CMC flag for the LAICDISB.

## Accessing the Screen

Access this screen from the Common Labeling Function menu, or by entering the keyword `CDISBT`.

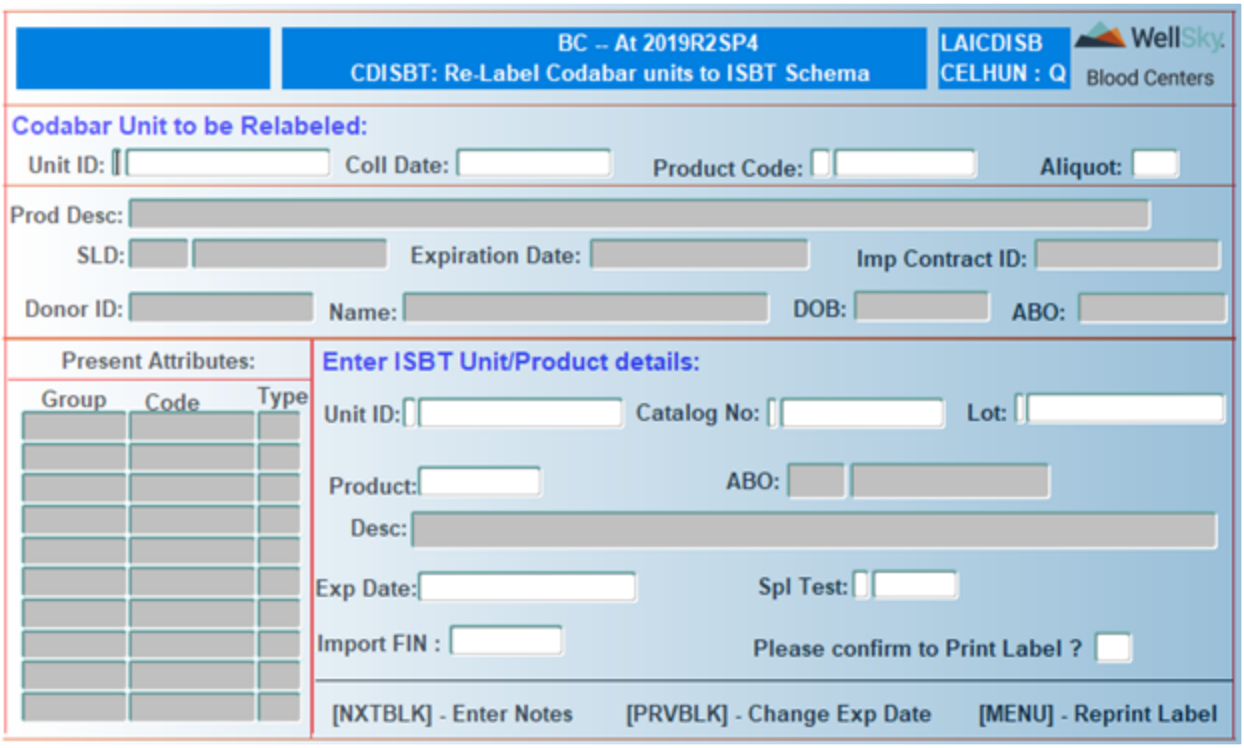


# Control Block Fields and Definitions

## Codabar Unit to be Relabeled:

### Unit ID

Entry is required. Scan or manually enter the Codabar unit ID.

### Coll Date

The collection date will default if only a single collection date is found in the UNITS table. If a unit number has more than a single collection date, the cursor will move to the Coll Date field and not the Product Code field. The user can select the collection date from the list of values.

### Product Code

Entry is required. Scan or manually enter the Codabar product code.

**NOTE –** The LOV will only contain product codes that are listed in the master code CBISB. These are the only products that can be relabeled.

### Aliquot

The aliquot number will default to 1. The user can update it, if required.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Prod Desc

This field will automatically display the product description that is defined in the Products table for the Codabar product code. This field cannot be updated.

## SLD

This will default to the system label decision of the Codabar unit. This field cannot be updated.

## Expiration Date

This will default to the expiration date of the Codabar product. This field cannot be updated.

## Imp Contract ID

If the unit is imported, the Import Contract ID will display here.

## Donor ID

The donor ID linked to the Codabar unit number (internal contract units only) displays here.

**NOTE –** The donor ID is not populated for imported units. If the field is blank, this is an imported unit for which the donor information will not display.

## Name

The donor name linked to the Codabar unit number (internal contract units only) displays here.

**NOTE –** The donor ID is not populated for imported units. If the field is blank, this is an imported unit for which the donor information will not display.

## DOB

The donor's date of birth linked to the Codabar unit number (internal contract units only) displays here.

**NOTE –** The donor ID is not populated for imported units. If the field is blank, this is an imported unit for which the donor information will not display.

## ABO

The donor's ABORH linked to the Codabar unit number (internal contract units only) displays here.

**NOTE –** The donor ID is not populated for imported units. If the field is blank, this is an imported unit for which the donor information will not display.

# Enter ISBT Unit / Product Details

## Unit ID

Entry is required. Scan or manually enter the ISBT unit number.

**NOTE –** This is the first manual option to the concatenate scan.

## Catalog No

Scan or manually enter the catalog number. There should be a generic catalog defined in order to be able to move a Codabar unit over to ISBT.

**NOTE –** The catalog has to be defined with manufacturer code 99 in order for the program to find it.

## Lot

Scan or manually enter the lot number. There should be a generic lot defined in order to be able to move a Codabar unit over to ISBT.

**NOTE –** The lot number needs the have the CMC flag set for the LAICDISB program.

## Product

Scan or manually enter the product code. The List of Values (LOV) will contain the ISBT products that are linked in master code CBISB to the selected Codabar product in the control block.

## ABO

Scan or manually enter the ABORH.

## Desc

The product description will automatically display once the product code is selected.

## Exp Date

This field defaults to the Codabar unit's expiration date. Entry in this field will be allowed only if the user has access to the UPEXP access code.

**NOTE –** User Access code UPEXP allows the user to update the expiration date when changing the Codabar unit over to ISBT.

## Spl Test

Scan or manually enter the special testing associated to the Codabar unit. The LOV is populated from the Lab master code BCODE. This is an optional field. The user will have to assign the special testing scan based on unit and component attributes.


WellSky Corporation
Proprietary and confidential

# Label Verification Block Fields and Definitions

## Scan Unit/ABO

Scan the unit ID and ABO label as one scan, or press **M** to verify the unit ID and ABO labels with separate scans.

## Scan Unit ID

Scan or manually enter the unit ID.

**NOTE –** This is the first manual option to the concatenate scan.

## Scan ABO

Scan, manually enter, or select the ABO from the LOV.

## Scan Product

Scan, manually enter, or select the product code from the LOV.

## Scan Exp Date

Scan or manually enter the expiration date in DD-MON-YYYY HH24:MI format. If Special Testing verification is not required, labeling is complete, and the screen clears.

## Scan SP Test

Scan, manually enter, or select the special testing code from the LOV.

**NOTE –** In order for verification to be performed in this field, the following conditions must be met:

- CMV attribute must be present on the unit.
- Product type of the product code being labeled must be valid (defined, effective, non-terminated) in Master Code CMVLB.

# Reprinting Labels

Press F6 (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

# Enter Notes [NXTBLK]

Use the Next Block [CNTRL+F3] to view, add, or delete notes for the selected unit ID using the GEWNOTES window, as shown:

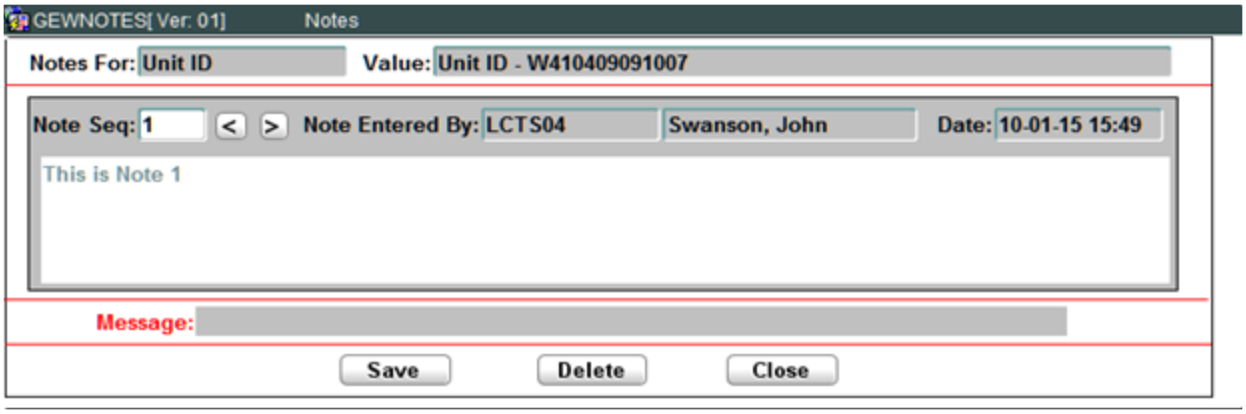


Refer to the Notes (GEWNOTES) description in Chapter 27 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 27 - Called Windows for details on permissions.

## To Query

To query the ISBT unit and see all the details, use PRVBLK and scan the ISBT unit number. All data (Codabar and ISBT) will automatically display for the unit.

## At Commit

The data is committed to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.9 ABO Labeling (LABEL or SUPLABEL)

## Intended Use

Use the ABO Labeling screen as the last step in component preparation. The "label decision" sticker is applied to the product, and the label decision is committed to the database from this screen. During this step, you identify and label components that are:

- Acceptable for release (affix an ABO type label).
- For further manufacturing (MFG).
- Autologous requested products (AUTO).
- Unacceptable and ready for discard due to cGMP (NFT).
- Unacceptable and ready for discard due to testing (BIO).
- Needing further resolution (HOLD).

The system will print the chapter's license information on the label if the product meets all licensure requirements.


WellSky Corporation
Proprietary and confidential

## Limitations

- Component must be located in user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- Dummy products cannot be labeled in this screen.
- Program is used for assigning system label decisions to Codabar products only.

## Prerequisites

- Component must have been made from the unit and reviewed.
- Donor interface must have been completed.
- Unit must have been accepted/rejected by Labeling QC, if configured as required in Chapter Details (CHAPTER):
  - Interface to donor registry.
  - Required initial testing.
  - Nursing audit.
  - Component reconciliation/review.
- The SUPER parameter must have been set for this program in Maintain Menu Items (MENUITM). If the parameter is set to U, expired products cannot be labeled with a good system label decision (SLD). If the parameter is set to S, the screen is set for a supervisory level that will allow an expired product to be labeled with a good SLD; you will receive a warning that the product is expired, and you must acknowledge the warning in order to continue.

## Accessing the Screen

Access this screen from the Labeling Function menu or by entering the keyword `LABEL` or `SUPLABEL`.

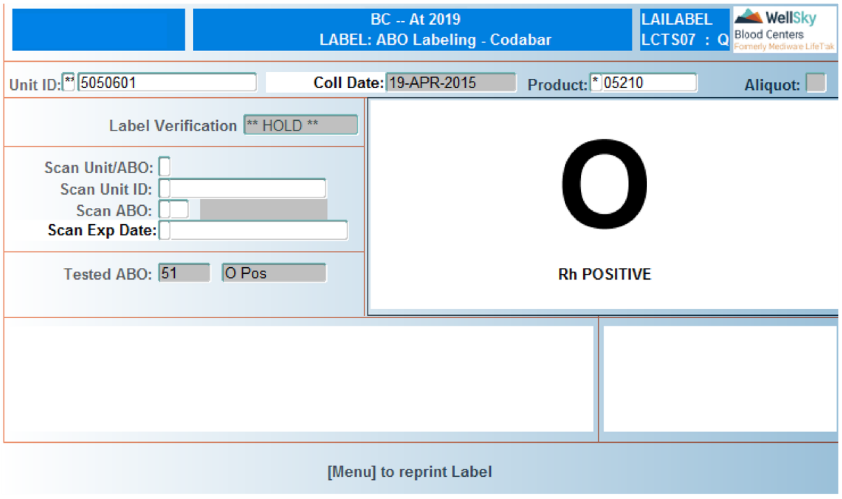

# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

**NOTE –** If all products made from a unit are already labeled or no components are defined, you cannot proceed beyond this field.

## Coll Date

Field automatically displays the collection date after the unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

## Aliquot

Enter aliquot number or select from LOV. Field is not navigable if only 1 aliquot exists for the product.

**NOTE –** If product is expired and user is in ABO Labeling – Super (SUPLABEL), the following window opens:

Enter `Y` to continue and label the product. Enter `N` if you do not wish to label the product.

**NOTE –** The system displays the "system label decision" in a window on the right of the screen. ABO/Expiration label automatically prints if system is configured to print labels. Here, following SOP's, place the physical ABO label on the product.

**NOTE –** The system uses the following hierarchy for determining the system label system: HOLD>BIO>NFT

**NOTE –** Autologous products with both BIO and NFT type interdictions will be assigned an SLD of BIO.

# Label Verification Block Fields and Definitions

## Label Verification

Field displays **HOLD** only when the product that is being labeled is currently labeled to Hold. Otherwise, this field does not display.


WellSky Corporation
Proprietary and confidential

### Scan unit/ABO

Scan unit ID and ABO label as one scan, or press **M** to verify unit ID and ABO labels with separate scans.

### Scan Unit ID

Scan or manually enter unit ID.

> **NOTE –** This is the first manual option to the concatenate scan.

### Scan ABO

Scan, manually enter, or select ABO from the LOV.

### Scan Exp Date or Scan Coll Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format, or collection date in DD-MON-YYYY format.

> **NOTE –** The collection date must be entered for manufacturing products.

After successful entry in this field, labeling is complete and the screen clears, or progresses to the second label decision if double labeling is required.

> **NOTE –** The following limitations exist:
>
> - For autologous units, labeling must be performed twice; first for the autologous label and again for the system label decision. (Exception: NFT and HOLD autologous components only appear as NFT or HOLD; autologous components with BIO and NFT interdictions appear only as BIO).
> - For pheresis platelets in the double bag configuration, double labeling is required and verified. After the first label is scanned, the field clears, and the computer prompts you to scan the second label.
> - Products labeled as 'HOLD' can be relabeled. If relabeling a 'HOLD', a small window appears next to the expiration date to indicate that this product was already labeled earlier as a hold.
> - Due to the need for security measures, after you enter the unit ID, the only way to backout of the screen is by pressing **CTRL** + **F5** (Clear Form). This procedure is audited in the system.

## Reprinting Labels

Press **F6** (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

### Tested ABO

Field should display the unit's tested ABO after successful entry in the Product field. Field is not navigable.

## In the Interdiction and Information Block

Press CTRL + F3 (Next Block) to view all unit/component exceptions, interdictions and related information. This data displays in the lower left portion of the screen. Use the UP and DOWN arrow keys to scroll through this block. Modifications cannot be made in this block.

Press CTRL + F4 (Previous Block) to return to the Label Verification Block.

## At Commit

- If the label is verified, system marks the unit with the System Label Decision and Expiration.
- If labeling QC is not required for the Chapter, the QC label flag and date are set for the unit, if not already present.
- If an expired product is labeled using ABO Labeling (LABEL), an EXPR interdiction is placed on the product.
- If an expired product is labeled using ABO Labeling – Super (SUPLABEL), the EXPR interdiction is not placed.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.

# 22.3.10 ABO Labeling - Super (SUPLABEL)

Refer to ABO Labeling for instruction on this screen.

# 22.3.11 ABO Labeling - Antigens (AGLBL)

## Intended Use

Use the ABO Labeling - Antigens screen to label products with antigen testing. During this step, antigens can be selected to print based on the needs for the customer.

The same requirements for the regular labeling screen is required for the unit to be labeled here.

## Limitations

- Component must be located in the user's current log-in warehouse in order to perform this function.
- Component must not be in transit in order to perform this function.
- Dummy products cannot be labeled in this screen.
- Program is used for assigning system label decisions to ISBT products only.
- License information will only print on licensed products.

> **NOTE –** License information will not print on modified imported products or products with a system label of 'Discard', 'Emergency Use', 'Biohazardous', or 'Quarantine'.


WellSky Corporation
Proprietary and confidential

- There is not a label verification for the antigen barcode.
- Molecular antigens and antigens tested by unapproved or unlicensed method will not print on the 4x4 label.

## Prerequisites

- Component must have been made from the unit and reviewed.
- Donor interface must have been completed.
- Unit must have been accepted/rejected by Labeling QC, if configured as required in Chapter Details (CHAPTER).
  - Interface to donor registry
  - Required initial testing
  - Nursing audit
  - Component reconciliation/review
- Must have weight and specific gravity for a component and Digi-Trax will print the volume for products.
- Antigen test results must have interfaced over to the RBC Antigen Manager in Donor to appear in the Antigen window.
- Set up the tie tag label printer in Maintain Report Master Table (RMASTER) to define the printer type: AGTPTR.

## Additional Information

When selecting the label printer, the user needs to select the 4x4 label printer as well as the Tie Tag label printer.

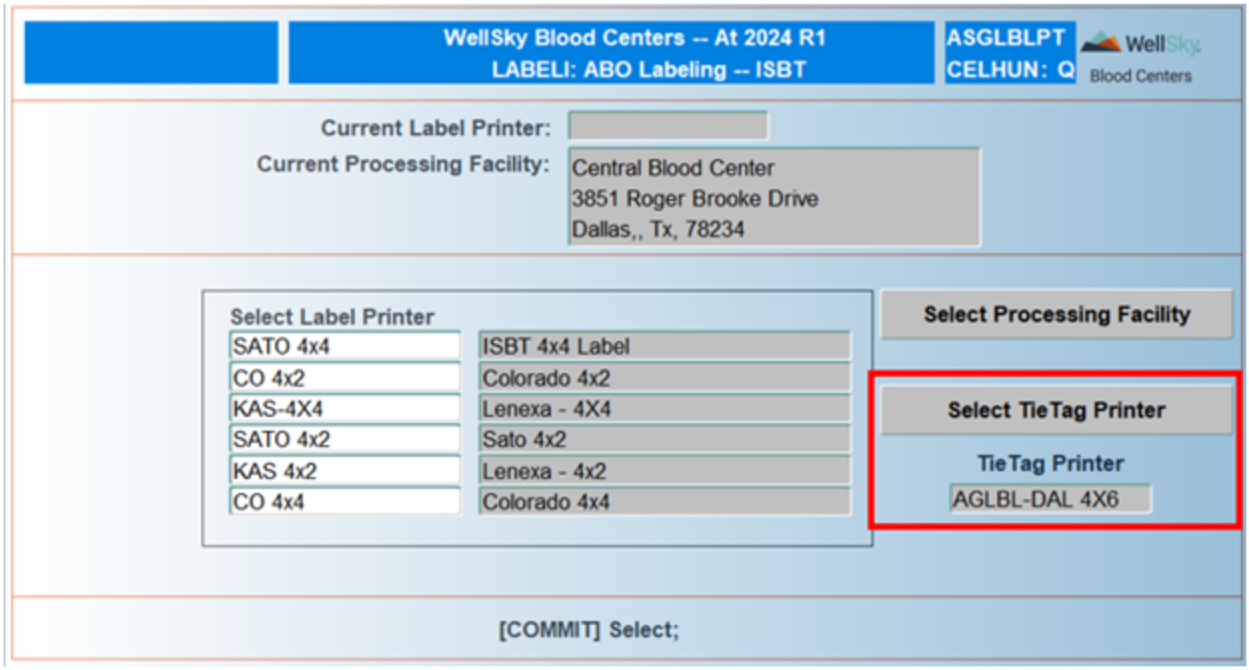

1. To select the printer, click **Select Tie Tag Printer**, and the list of printers will display.

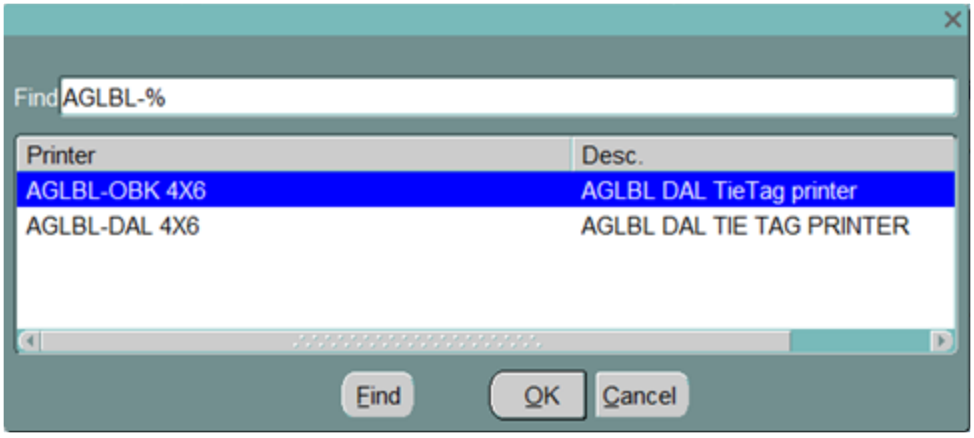


2. Select the printer and click **OK**. The selection will display in the Tie Tag Printer field.

## Accessing the Screen

Access this screen from the Labeling Function menu, or by entering the keyword `AGLBL`.

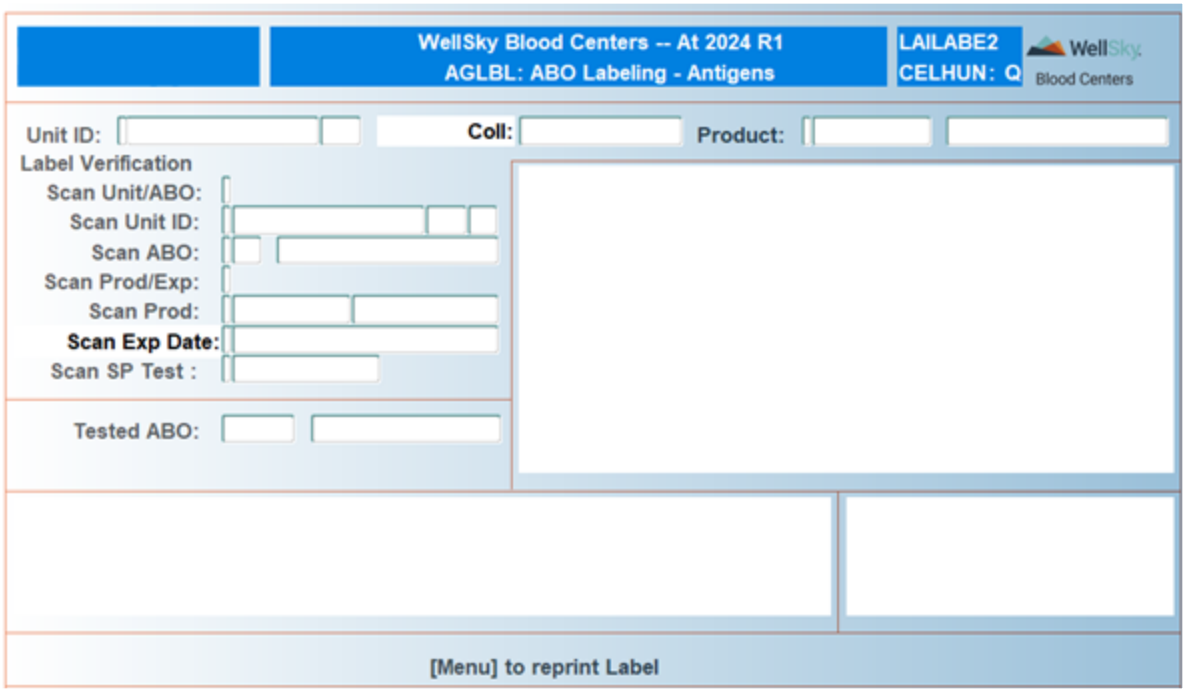


The antigen labeling screen is the same labeling program, but defined in the menu with parameter AG set to 'Y'.

## Control Block Fields and Definitions

### Unit ID

Scan or manually enter the unit ID. The units entered into the antigen labeling screen can already be labeled, and a new 4x4 label will be generated based on the selection of the antigens to print.


WellSky Corporation
Proprietary and confidential

## Select Antigens for Printing:

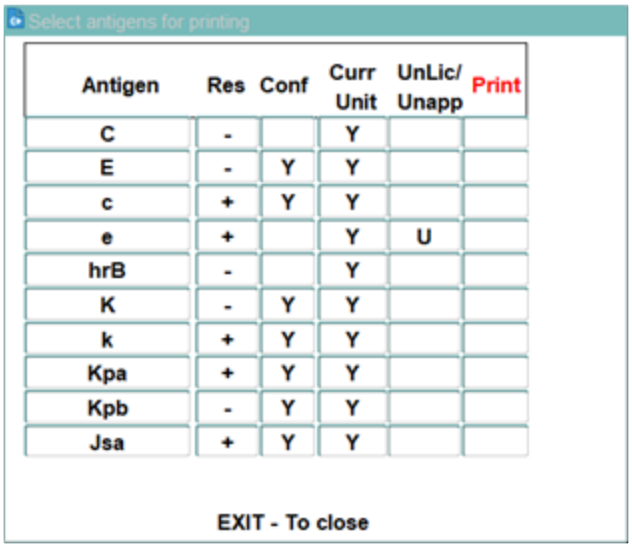


The antigen list automatically displays after the unit number is scanned or manually entered. Based on the current testing and historical testing of the donor, this window displays the following:

- Antigen Code
- Antigen result (Positive +, Negative -)
- If the antigen has been confirmed (Conf)
- If the testing has occurred on the current donation
- If the testing was performed by an unlicensed method or unapproved method (U). If approved or licensed, the field is null.
- PRINT – enter **Y** to print the antigens on the 4x4 and tie tag label. If left blank, then that antigen will not print.
  - Unlicensed and molecular antigens will not print on the 4x4, only on the tie tag.

Press **F8** (Exit Screen)after selecting the antigen to print, and the cursor will move to the Product Code field.

**NOTE –** If the list appears and it is blank, the antigen results may not have moved over to the RBC Antigen Manager in Donor from Lab. This timing is based on the results being sent to a temporary table and the RBC antigen cron job running.

## Coll Date

This field automatically displays the collection date after the unit ID is entered. The field is not navigable.

## Product

Scan, manually enter, or select the product code from the LOV.

**NOTE –** If the product type is not defined in Labeling Configuration (LBLCF) – Product Type for this antigen printing, an error will display: Err. 1245: Invalid Product Type for antigen to print on label.

# Label Verification Block Fields and Definitions

## Label Verification

This field displays **HOLD** only when the product that is being labeled is currently labeled as 'Quarantine'. Otherwise, this field does not display.

## Scan Unit/ABO

Scan the unit ID and ABO label as one scan, or press **M** to verify the unit ID and ABO labels with separate scans.

## Scan Unit ID

Scan or manually enter the unit ID.

**NOTE –** This is the first manual option to the concatenate scan.

## Scan ABO

Scan, manually enter, or select the ABO from the LOV.

## Scan Product

Scan, manually enter, or select the product code from the LOV.

## Scan Exp Date or Scan Coll Date

Scan or manually enter the expiration date in DD-MON-YYYY HH24:MI format, or the collection date in DD-MON-YYYY format.

**NOTE –** The collection date must be entered for manufacturing products.

If Special Testing verification is not required, labeling is complete and the screen clears.

## Scan SP Test

Scan, manually enter, or select the special testing code from the LOV. This field will only be used if there are not any antigens to be printed on the 4x4 labels and special testing is present on the current donation.

Examples:

- If the only antigen being sent is unlicensed or unapproved – these do not print on the 4x4, but they will print on the tie tag.

**NOTE –** If you are sending only special testing for a unit, the Regular Labeling – ABO Labeling - ISBT (LABELI) form should be used, but the 4x4 will print with the special testing code.


WellSky Corporation
Proprietary and confidential

## Reprinting Labels

Press **F6** (Menu) to reprint labels. Labels cannot be reprinted once label verification has started.

### Tested ABO

This field will display the unit's tested ABO after successful entry in the Product Field. This field is not navigable.

## In the Interdiction and Information Block

Press **CTRL** + **F3** (Next Block) to view all unit/component exceptions, interdictions and related information.

These are displayed in the lower left portion of the screen. Use the UP ( ) and DOWN ( ) arrow keys to scroll through this block.

The following information will display in this block:

- Overridden interdictions
- Unit- and component-level NFT interdictions
- Unit- and component-level HOLD interdictions
- Unit-level BIO interdictions
- Contract tests required for labeling that have not been completed
- Contract tests required for labeling that have 'NT' results
- Required freeze times missing
- Required weights missing
- Nursing audit information missing donor interface
- Missing material check-in QC

Press **CTRL** + **F4** (Previous Block) to return to the Label Verification Block.

## In the Attribute Information Block

This block is not navigable. The following information will display in this block after successful entry in the Product field in the Control Block:

- DON (donation) type attributes that are present for the unit that have been defined in Attribute Codes (ATTRIB) to be displayed at labeling.
- ALERT type attributes that are present either on the unit or on the component and have been defined in Attribute Codes (ATTRIB) to be displayed at labeling.

## At Commit

- If the label is verified, the system marks the unit with the System Label Decision and Expiration.
- If labeling QC is not required for the Chapter, the QC label flag and date are set for the unit, if not already present.

- If an expired product is labeled using ABO Labeling - ISBT (LABELI), an EXPR interdiction is placed on the product.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Labeling Functions menu.


WellSky Corporation
Proprietary and confidential

# 22.4 Special Labeling Functions

Special Labeling Functions are accessed from the following menu:

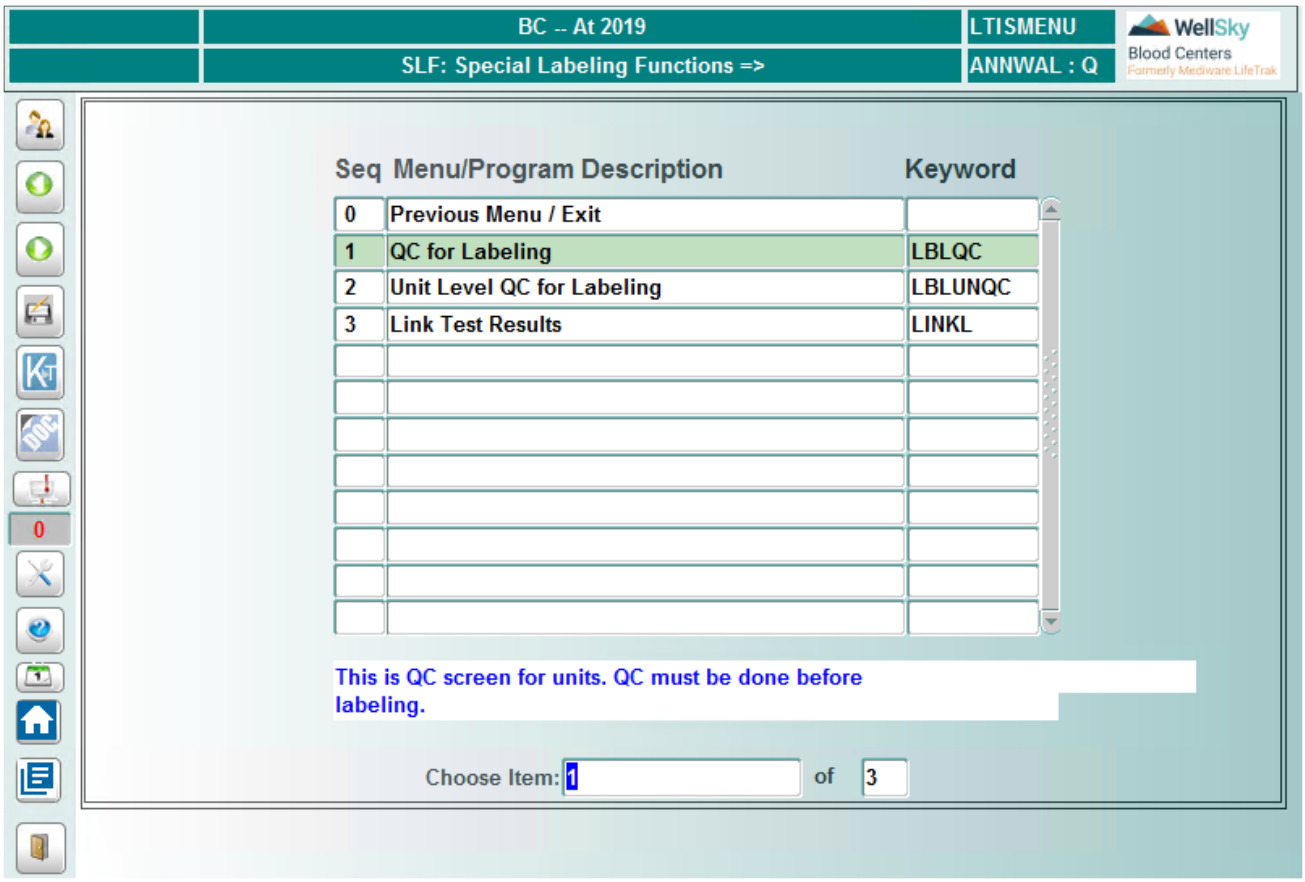


## 22.4.1 QC for Labeling (LBLQC)

### Intended Use

Use the QC for Labeling screen to ensure that the following reviews were conducted before the final label decision:

- Donor interface
- Testing
- Nursing audit
- Component review

### Limitations

None

## Prerequisites

The ABO/Rh Batch (run) must exist for the testing date of the units to be reviewed for quality control.

## Accessing the Screen

Access this screen from the Special Labeling Function menu or by entering the keyword `LBLQC`.

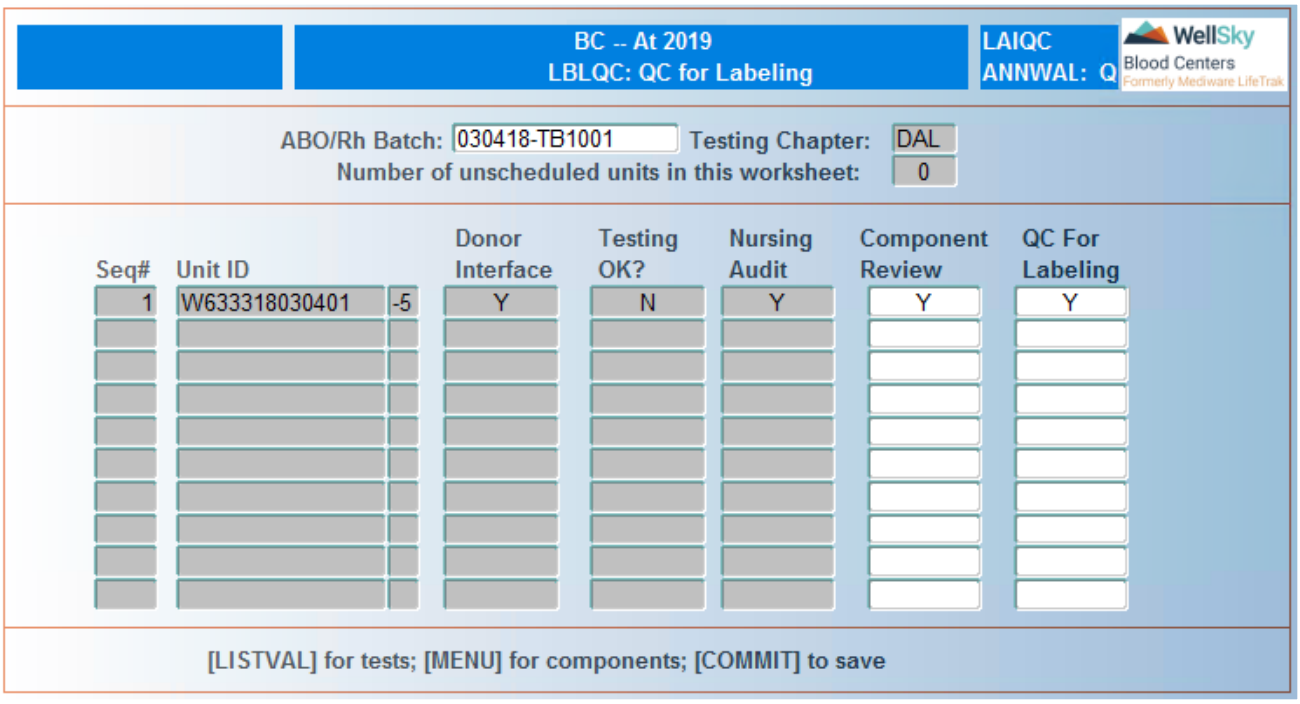


## Control Block Fields and Definitions

### ABO/Rh Batch

Manually enter ABO/Rh batch ID or select from LOV.

**NOTE –** LOV displays batches from the last 21 days, but older batches can be manually entered. Batches with sample only units will remain in the LOV for 21 days.

### Testing Chapter

Chapter ID automatically populates after the ABO/Rh Batch ID is entered. Field is not navigable.

### Number of Unscheduled units in this worksheet

Field automatically displays the number of units with unscheduled ABO test results. Field is not navigable.

## Detail Block Fields and Definitions

The following data displays after the Batch ID is populated. These fields are not navigable:


WellSky Corporation
Proprietary and confidential

- Seq# - Sequence number of the unit.
- Unit ID - ID number of the unit in the test batch.
- Donor Interface - Y indicates that the donor interface has occurred for that unit; it does not mean that the interface was successful or that there are no problems in Donor. N indicates that the donor interface has not occurred for that unit.
- Testing OK? - Y indicates an initial test result exists for each required test for labeling for that unit. N indicates that at least one missing initial test result for required tests for that unit exists.
- Nursing Audit - Y indicates nursing audit has occurred for that unit. N indicates nursing audit has not occurred for that unit.

The following data displays after the Batch ID is populated. These fields are navigable:

## Component Review

Y indicates component review has occurred and is acceptable for that unit. N indicates component review has occurred, but reconciliation is unacceptable. When null, components produced to the bag configuration are not reconciled by the system, and component review must be performed. Refer to Reviewing Components below.

**NOTE –** A previous component review is indicated by the presence of 3 asterisks (***).

**NOTE –** N allows unit for labeling, but system label decision is HOLD due to component reconciliation. However, if the *Component Field* is set to N and the *QC for Labeling* field is set to Y, the system will return a valid System Label Decision (SLD).

## QC for Labeling

The labeling QC status will be assigned here after review is complete. Enter `Y` if QC is acceptable for the unit. Enter `N` if QC is not acceptable for the unit.

**NOTE –** A null QC for Labeling flag does not allow the unit to go to labeling, and the QC batch remains active.

**NOTE –** If Donor Interface, Testing OK?, and/or Nursing Audit are N, only N can be entered. The system only allows a HOLD system label decision due to the unacceptable or missing data.

**NOTE –** If the donor interface, testing, nursing audit, and component reviews have already been conducted, the system inserts a Y in the QC for Labeling field. This status can be changed if the unit is not ready for labeling.

Press F12 (Commit) once all QC entries have been made.

## Reviewing Components

Press F6 (Menu) to review components from the selected unit. The following window opens:

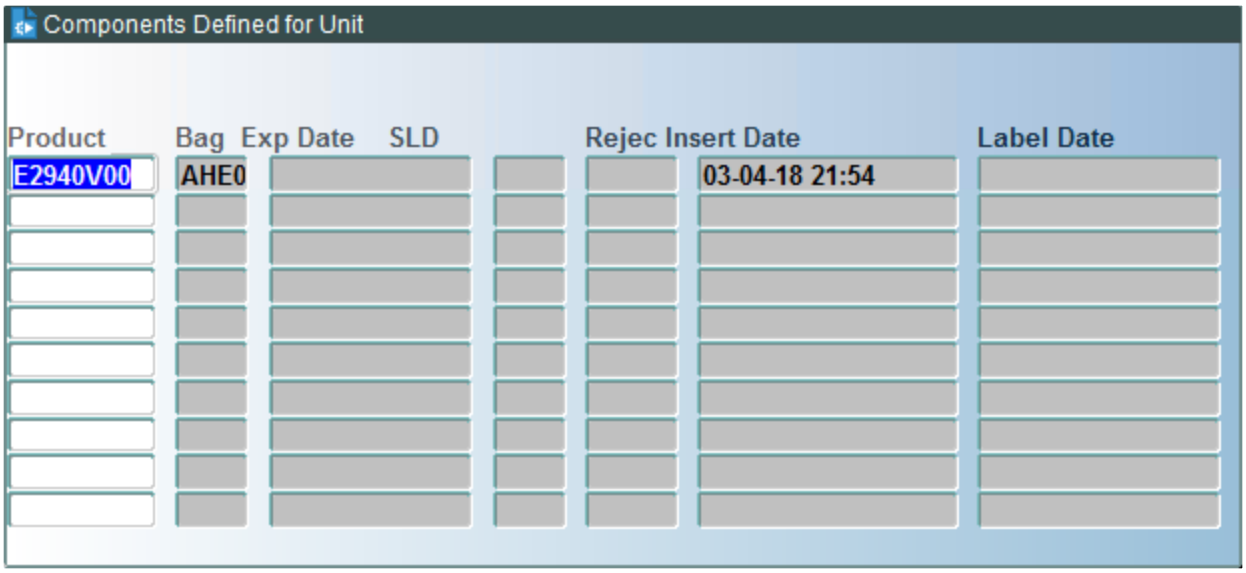


Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Reviewing Scheduled/Unscheduled Tests for a Unit

Press LOV to review scheduled test results for the unit. The following window appears:

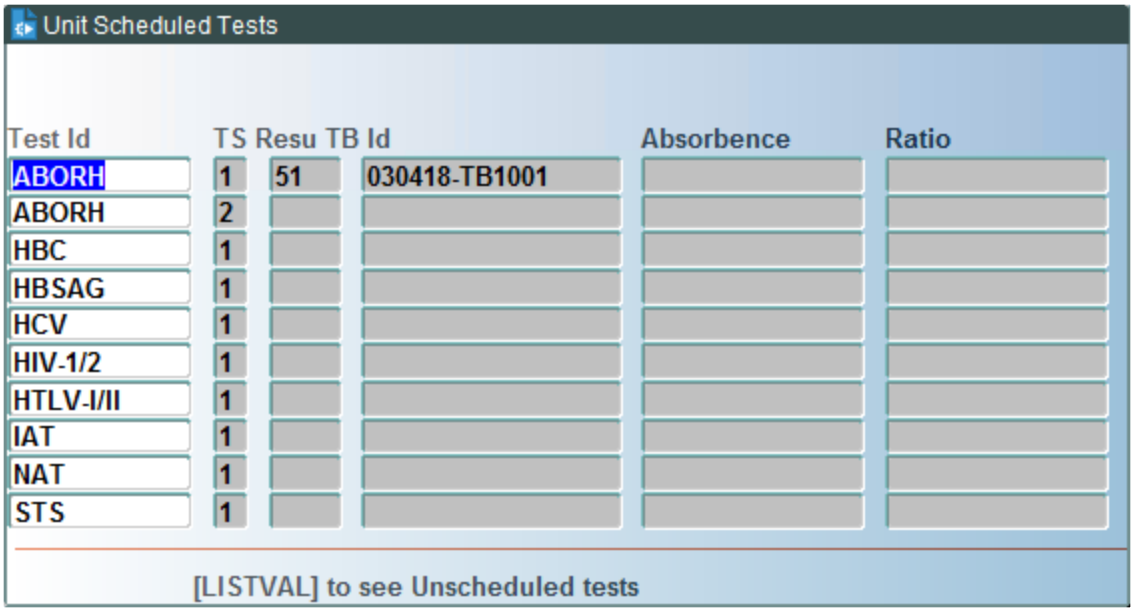


Use the UP and DOWN arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

Press F8 (Exit Screen) to return to the main screen.

Press LOV again from this window to view unscheduled test results. The following window appears if unscheduled test results are present:

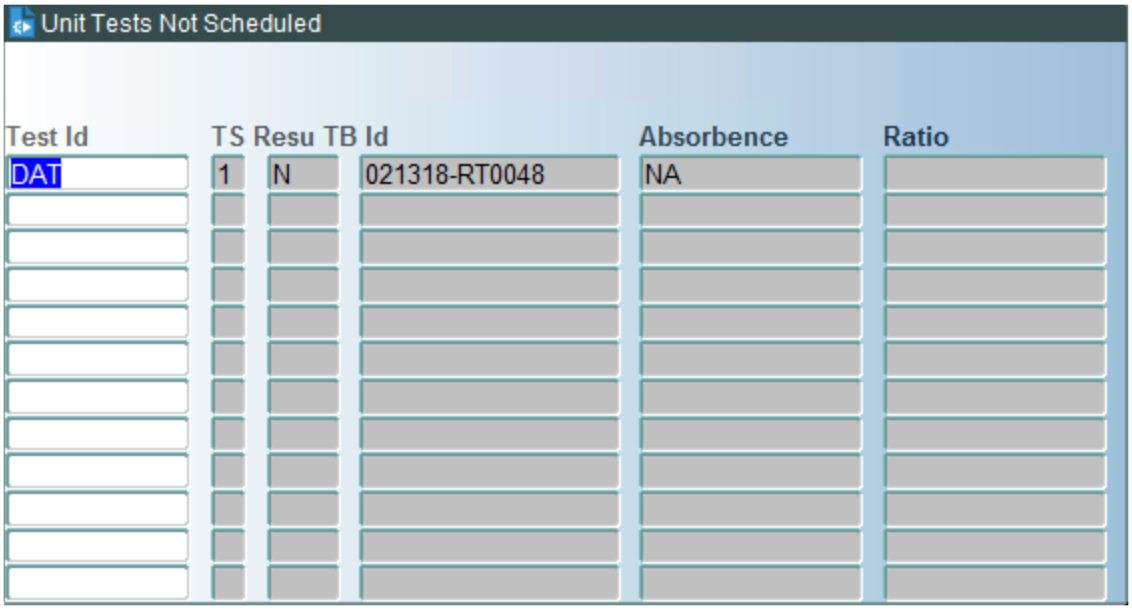


Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return Unit Scheduled Tests window.

## At Commit

The unit is either accepted or rejected for labeling.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to Special Labeling menu.

# 22.4.2 Unit Level QC for Labeling (LBLUNQC)

## Intended Use

Use the Unit Level QC for Labeling screen to record a supervisory QC prior to labeling.

## Limitations

This screen is used to QC one unit at a time.

## Prerequisites

For acceptable QC for labeling there must exist:

- Donor Interface.
- Unit Testing – at least one result for each required test.
- Nursing Audit.
- Component Reconciliation.

## Accessing the Screen

Access this screen from the Special Labeling Function menu, or by entering the keyword `LBLUNQC`.

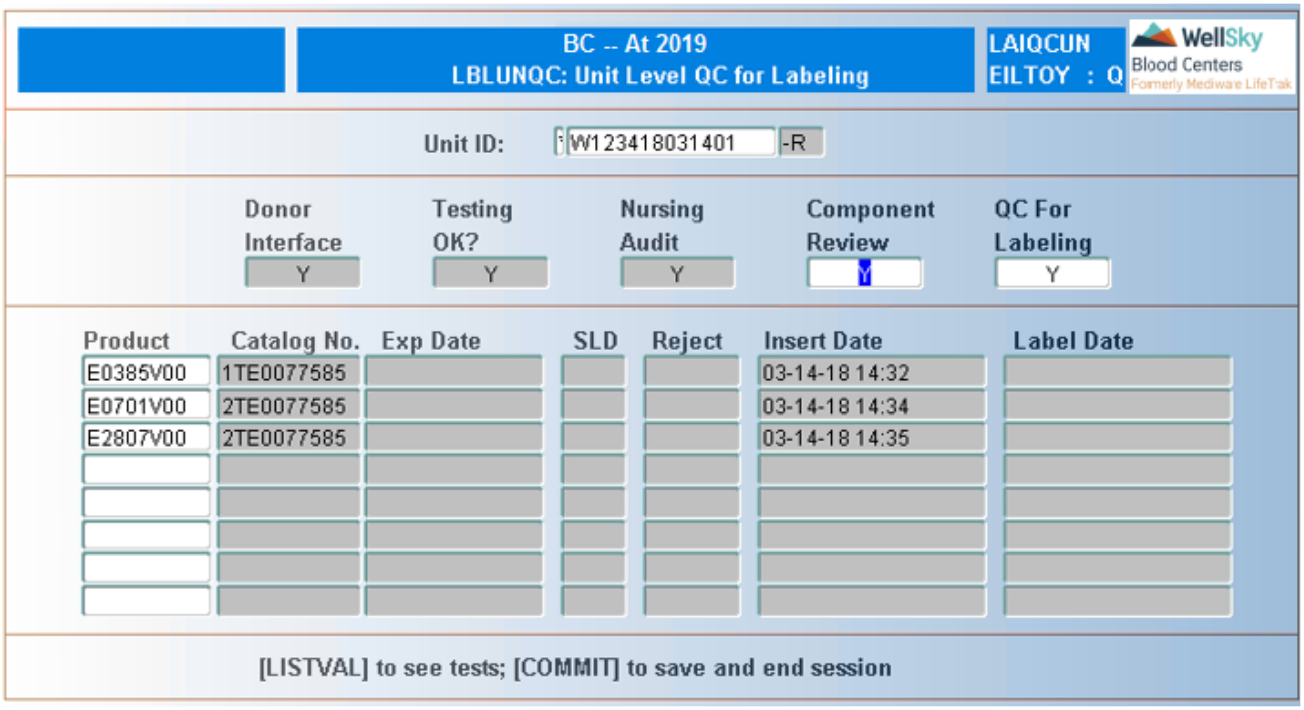


### Unit ID

Scan or manually enter unit ID.

The following data displays after the Batch ID is populated. These fields are not navigable:

- Donor Interface - Y indicates that the donor interface has occurred for that unit; it does not mean that the interface was successful or that there are no problems in Donor. N indicates that the donor interface has not occurred for that unit.
- Testing OK? - Y indicates an initial test result exists for each required test for labeling for that unit. N indicates that at least one missing initial test result for required tests for that unit exists.
- Nursing Audit - Y indicates nursing audit has occurred for that unit. N indicates nursing audit has not occurred for that unit.

The following data displays after the Batch ID is populated. These fields are navigable:


WellSky Corporation
Proprietary and confidential

## Component Review

Y indicates component review has occurred and is acceptable for that unit. N indicates component review has occurred, but reconciliation is unacceptable. When null, components produced to the bag configuration are not reconciled by the system, and component review must be performed. Refer to Reviewing Components below.

**NOTE –** A previous component review is indicated by the presence of 3 asterisk (***).

**NOTE –** N allows unit for labeling, but system label decision is HOLD due to component reconciliation. However, if the *Component Field* is set to N and the *QC for Labeling* field is set to Y, the system will return a valid System Label Decision (SLD).

## QC for Labeling

The labeling QC status will be assigned here after review is complete. Enter `Y` if QC is acceptable for the unit. Enter `N` if QC is not acceptable for the unit.

**NOTE –** A null QC for Labeling flag does not allow the unit to go to labeling, and the QC batch remains active.

**NOTE –** If Donor Interface, Testing OK?, and/or Nursing Audit are N, only N can be entered. The system only allows a HOLD system label decision due to the unacceptable or missing data.

**NOTE –** If the donor interface, testing, nursing audit, and component reviews have already been conducted, the system inserts a Y in the QC for Labeling field. This status can be changed if the unit is not ready for labeling.

Press F12 (Commit) once all QC entries have been made.

# Reviewing Components

Press F6 (Menu) to review components from the selected unit. The following window opens:

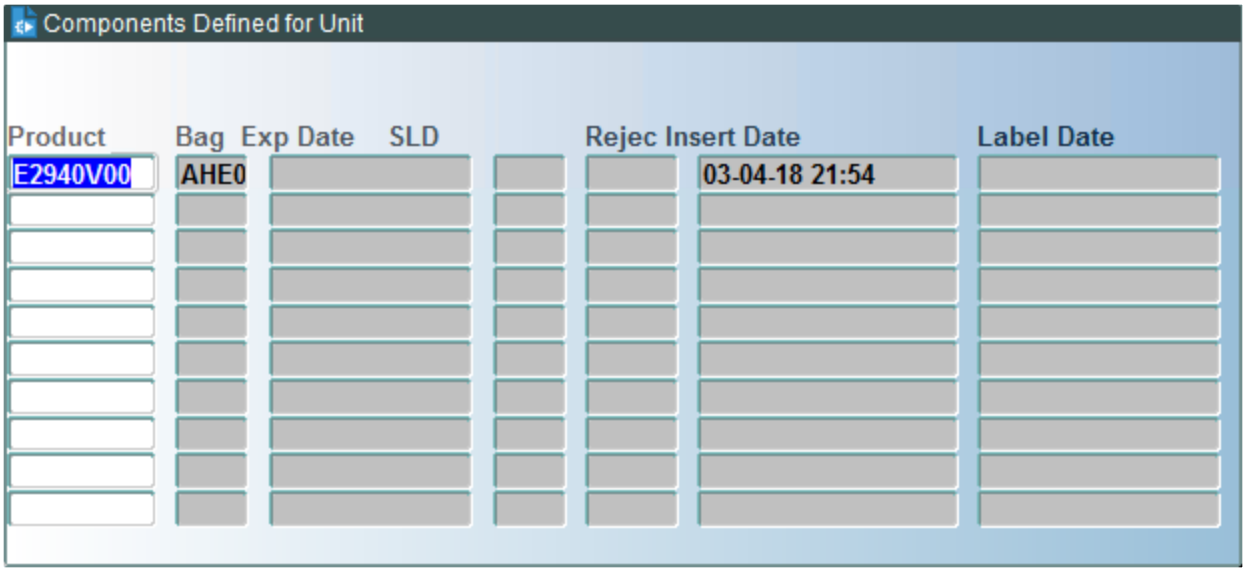


Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Reviewing Scheduled/Unscheduled Tests for a Unit

Press LOV to review scheduled test results for the unit. The following window opens:

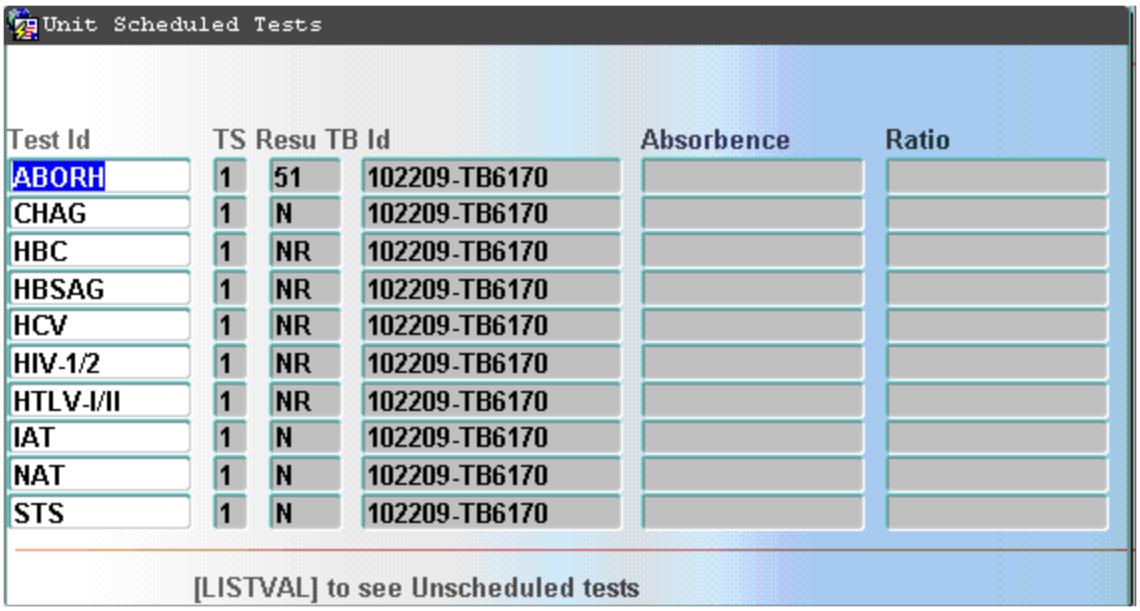


Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

Press LOV again from this window to view unscheduled test results. The following window opens if unscheduled test results are present:


WellSky Corporation
Proprietary and confidential

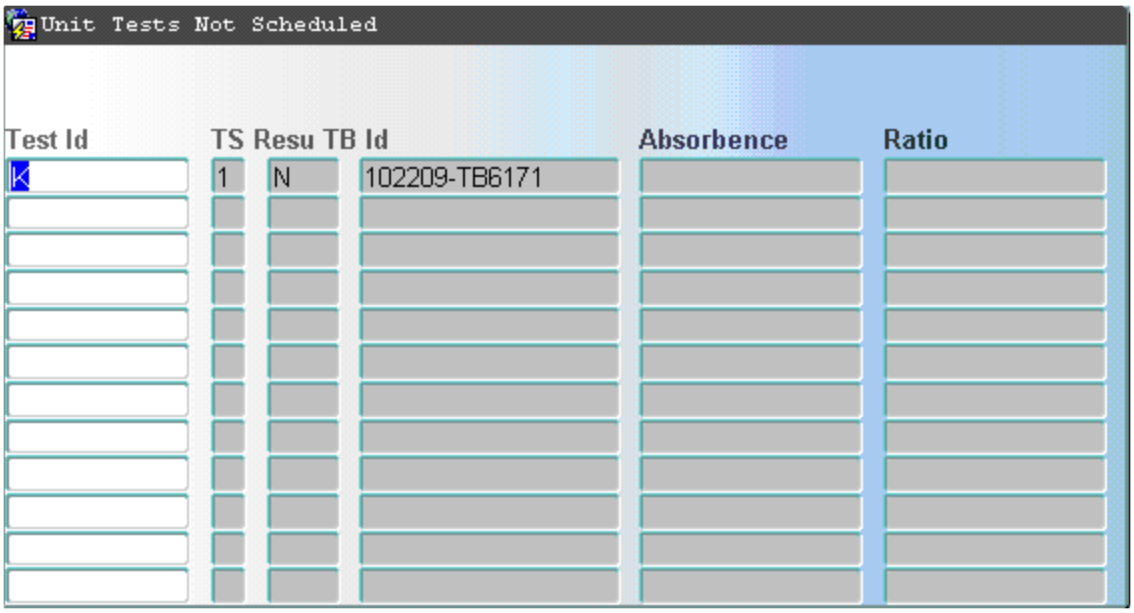


Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return Unit Scheduled Tests window.

## At Commit

The required QC for the unit is entered at the time of **F12** (Commit), qualifying the unit to be labeled.

> **NOTE –** A unit may be labeled with either Y or N entry in the QC field. A HOLD will be placed on a unit with N in the QC field.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to Special Labeling menu.

# 22.4.3 Link Test Results (LINKL)

## Intended Use

Use the Link Test Results screen to associate test results from a previous sample to this unit.

## Limitations

Test results can be linked to a unit from a sample only; test results cannot be linked from one unit to another unit.

## Prerequisites

- Sample must have been checked into Lab's Testing Services.
- Sample must have test results.

- If donation is autologous, sample collection must have been within the past 30 days.
- If donation is directed or allogeneic, sample collection must have been within the time defined for Sample Age in Chapter Details (CHAPTER).

## Accessing the Screen

Access this screen from the Special Labeling Function menu, or by entering the keyword `LINK`.

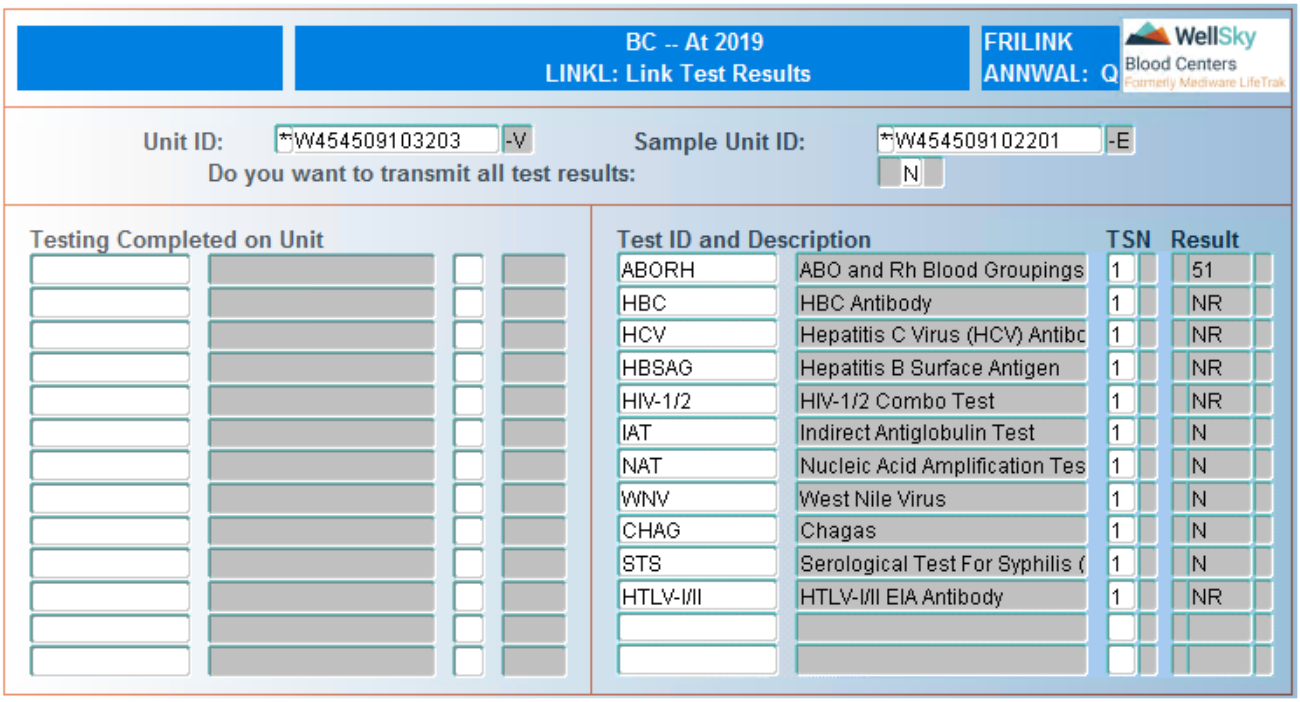


### Unit ID

Scan or manually enter unit ID.

### Sample Unit ID

Scan or manually enter sample's unit ID.

### Transmit ALL Test Results?

Enter `Y` to link all of the sample's results or enter `N` to select one or more results to link.

If Y is entered, the system displays the test ID's, sequence #'s, and results of tests for the sample and automatically starts transmitting those results to the unit.

If N is entered, the cursor positions in the Test ID field for the first result to select.

### Test ID

Manually enter the test ID for each test to link or select test(s) from LOV.

### Description

The system automatically displays the description of the test ID entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### TSN

Enter the test sequence number for a particular test or select from LOV.

**NOTE –** Even if there is only one test, you must enter a test sequence number of `1`.

### Test Result

The system displays the test result of the test ID entered. The system scrolls through the tests as the test results are transmitted. Field is not navigable.

Press F12 (Commit) once all needed tests have been added to the listing.

## At Commit

- Test results for all selected tests are transferred to the unit.
- When test results are queried, linked test results will appear with a batch ID of '9999.'

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to Special Labeling menu.

# 22.5 Labeling Queries Functions

Labeling Queries Functions are accessed from the following menu:

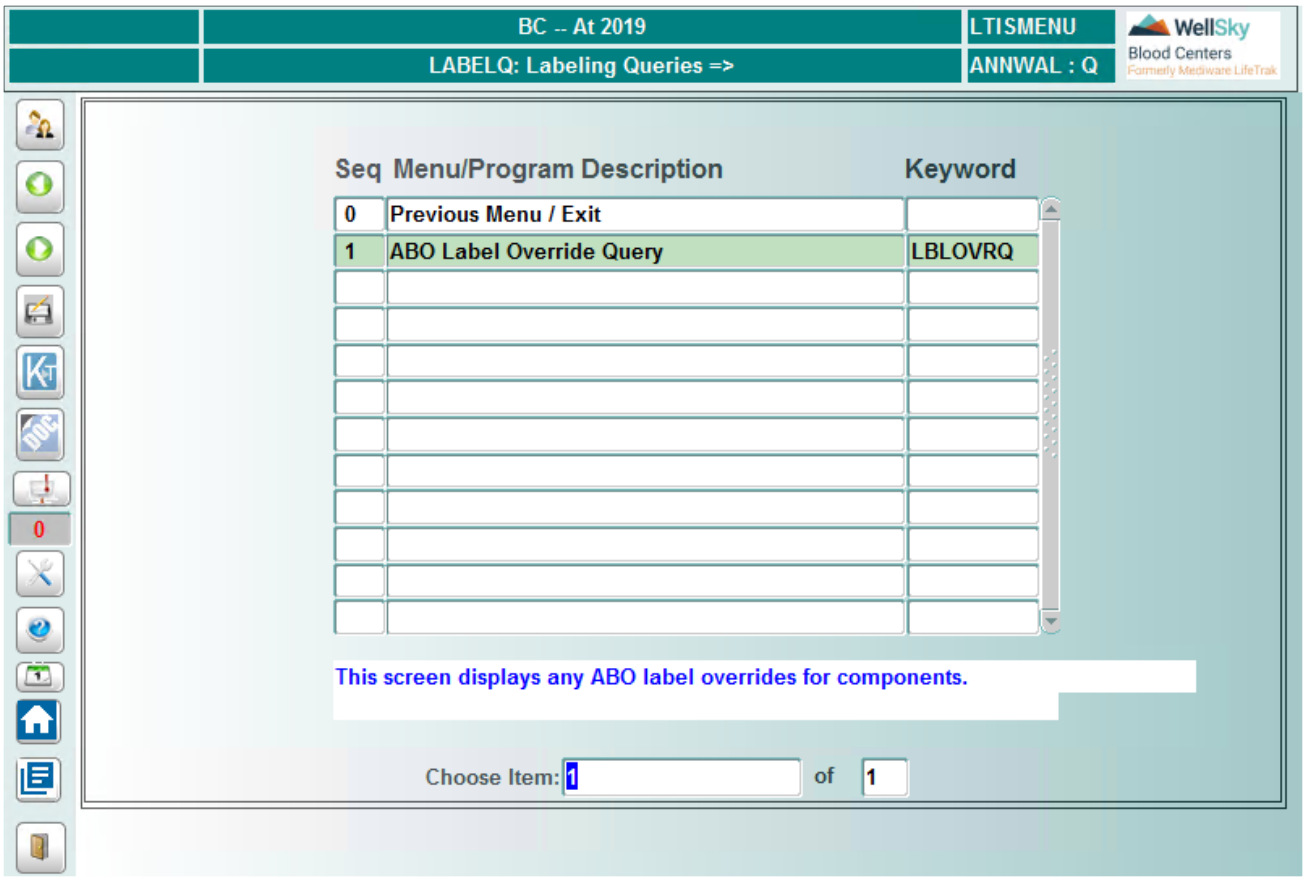


## 22.5.1 ABO Label Override Query (LBLOVRQ)

### Intended Use

Use the ABO Label Override Query screen to review override information on a product, such as the following:

- Old and new label.
- Override code.
- Date and time of override.
- Emergency labeling.

### Limitations

None


WellSky Corporation
Proprietary and confidential

# Prerequisites

Supervisor access level is required to access this screen.

# Accessing the Screen

Access this screen from the Labeling Queries menu, or by entering the keyword `LBLOVRQ`.

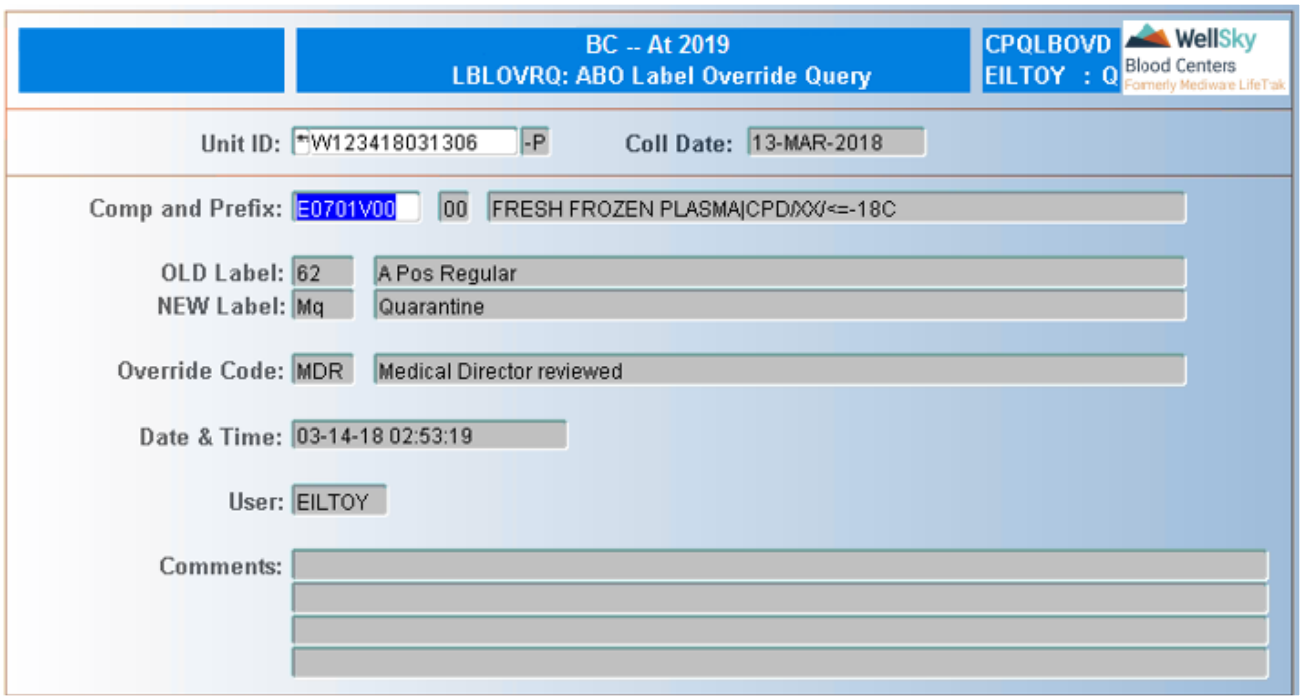


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Collection Date

Unit collection date automatically displays after the unit ID is entered.  Field is not navigable.

# In the Detail Block

The following information is displayed after the unit ID is entered:

- Coll Date  - collection date of unit.
- Comp & Prefix – product code and aliquot number.
- OLD Label – label interpretation prior to override.
- NEW Label – label interpretation after override.
- Override Code – override code and description.

- Date & Time – date and time of override.
- User – identification of user entering override.
- Comments- displays any comment entered when product was labeled in LBLOVR or EMGREL.

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to Labeling Queries menu.


WellSky Corporation
Proprietary and confidential

23

# Chapter 23 - Sample Management


23.1 Introduction ..... 1535
23.1.1 Overview ..... 1535
23.1.2 Structure ..... 1536
23.2 Regional Sample Tracking Functions ..... 1537
23.2.1 Enter Regional Testing Contract (RGCON) ..... 1537
23.2.2 Enter Test Mapping (TMAP) ..... 1553
23.2.3 Enter Results Mapping (RMAP) ..... 1555
23.2.4 Tubes Check-In (REGTUBES) ..... 1557
23.2.5 Maintain Batch Data (RGMODBAT) ..... 1564
23.2.6 Skip Results from Extraction (RESKIP) ..... 1567
23.2.7 Enter Interim Result Code (EIRC) ..... 1569
23.2.8 Release Test Results (RGRQC) ..... 1571
23.2.9 Extract Test Results (EXTRACT) ..... 1580
23.2.10 Re-Extract Test Results (REXTRACT) ..... 1589
23.2.11 Reset Under Extract Flag (UNDEXT) ..... 1593
23.2.12 Delete Regional Sample Check-In Batch (SUPERDEL) ..... 1595
23.2.13 Reset Extract for Parm/Batch Sample (SUPEXRST) ..... 1597
23.2.14 Change Testing Unit Collection Date (TUCOLDAT) ..... 1599
23.3 Regional Sample Tracking Queries ..... 1604
23.3.1 Tubes Check-in Query (RGTUBEQ) ..... 1604
23.3.2 Missing Tubes Query (MSTUBEQ) ..... 1607
23.3.3 Interim Results Query (IRQ) ..... 1609
23.3.4 Non-Extracted Batches Query (NEBQ) ..... 1611
23.3.5 Results Extract Query (REQ) ..... 1614
23.3.6 Contract Profile Test Query (RGPROFQ) ..... 1616
23.3.7 Batch In Progress Query (BIPQ) ..... 1618
23.3.8 Samples Query (SAMPQ) ..... 1625
23.4 Confirmatory Sample Management Functions ..... 1638
23.4.1 Sample Transfer Out (STOUT) ..... 1638
23.4.2 Sample Transfer In (STIN) ..... 1641
23.4.3 Skip Confirmatory Results for Extraction (CNSKIP) ..... 1649

23.4.4 Additional Confirmatory Test Scheduling (ATC) ....1652
23.4.5 Confirmatory Release Test Results (CNRQC) ....1660
23.4.6 Confirmatory Extract (CEXTRACT) ....1667
23.4.7 Re-Extract Confirmatory Test Results (CRXTRACT) ....1673
23.5 Confirmatory Queries (CNFQ) ....1678
23.5.1 Sample Transfer Out not Checked In Query (SAMPTQ) ....1678
23.6 Hospital/Patient Testing Functions ....1681
23.6.1 Hospital/Patient Testing Contract (TSCNTR) ....1681
23.6.2 Hospital/Patient Contract Profile Tests (TSTEST) ....1685
23.6.3 Hospital/Patient Ad Hoc Testing Contract (AHCNTR) ....1687
23.6.4 Fixed Profile Tube Check-In (TSTUBES) ....1691
23.6.5 Ad Hoc Tube Check-In (AHTUBES) ....1694
23.6.6 Modify Contract for Hospital/Patient Batch (MODTSCON) ....1698


WellSky Corporation
Proprietary and confidential

# 23.1 Introduction

## 23.1.1 Overview

Regional Sample Management is used to test predefined contracts with designated profiles along with additional testing, if any, specified by the contract. These results are then electronically or by report sent back to the contracting facility.

The Regional Sample Management subsystem is described in the following sections.

### Setting Up of Contract

A contract will be established for each client site that is sending the samples for testing. A set of tests called profile tests will be associated with each contract ID. Multiple profiles can be linked to a single contract. The client will have an option to schedule additional tests that may be performed on individual samples in addition to the profile tests or schedule any tests, regardless of profiled tests. Each contract can have multiple chapters linked so that the contract only has to be defined once in the system.

### Receive and Upload of Electronic Data Interface (EDI) Samples Files

Sample files consisting of units and tests to be performed on them will be sent by the client to the regional testing facility through EDI. The EDI samples data file transmitted from the client will be received at the testing center. The file will be uploaded into Lab database for further processing.

The upload program will read the EDI sample data and validate for any errors, automatically generate a new samples batch ID, upload the data into the transmittal file with batch ID in the same sequence as it was received, and schedule all additional tests listed in samples file for the tube checked-in units.

Batch Header record will be read for duplicate transmission. If a batch already exists, it will be treated as duplicate transmission and program will abort the batch upload. The program will validate the unit ID to ensure that duplicate units are not received in the same batch.

### Hospital/Patient Tubes Check-in

The tubes sent from client will be checked-in at the testing center. At the time of check-in the tubes checked in are validated for duplication.

If samples upload has already been completed for the tube, then tests will be scheduled as per samples data. In the absence of the EDI samples data, initial check-in details are created in Lab tables, and contract profile tests are automatically scheduled. Upon completion of tube check-in for all the tubes in a batch, the check-in batch will be closed. On receipt of more tubes on the same day additional batches can be created. Addition of new units to a closed batch can be done only through a supervisory option.

### Reconciliation of the Samples Data with Tubes Checked In

Tubes checked in are reconciled against the unit list received through EDI samples input or samples manually checked into the system.

## Testing Process

The testing of samples will be done using the existing Blood Centers testing module.

## Results Release and QC to be Performed

An exception report can be generated to check if the testing activity for a client is complete. Results can be extracted only if every unit in the batch has either results or interim results.

QC will check the result details for every test and set "QC check-in flag" at test result level. Interim results can be replaced by regular results only upon QC approval.

Results release can be performed by selection of a contract and batch, or by leaving the batch blank and pulling all batches for the contract across chapters.

## Result Extraction

Upon QC approval, results will be extracted onto an EDI results file. The extraction can be on the following criteria: by batch ID (across chapters), by unit ID, and by Test ID. The time of QC results extraction approval will be considered as the cut off time for the result extraction. If any test result/test is voided or cancelled after extraction of result, then an interdiction will be generated on such units.

The results extracted will be sent to client by EDI results file.

# 23.1.2 Structure

There are three sections to the Blood Centers Regional Sample module:

- Regional Sample Tracking
- Confirmatory Sample Management
- Hospital /Patient Testing

Testing Reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 23.2 Regional Sample Tracking Functions

Regional Sample Tracking Functions are accessed from the following menu:

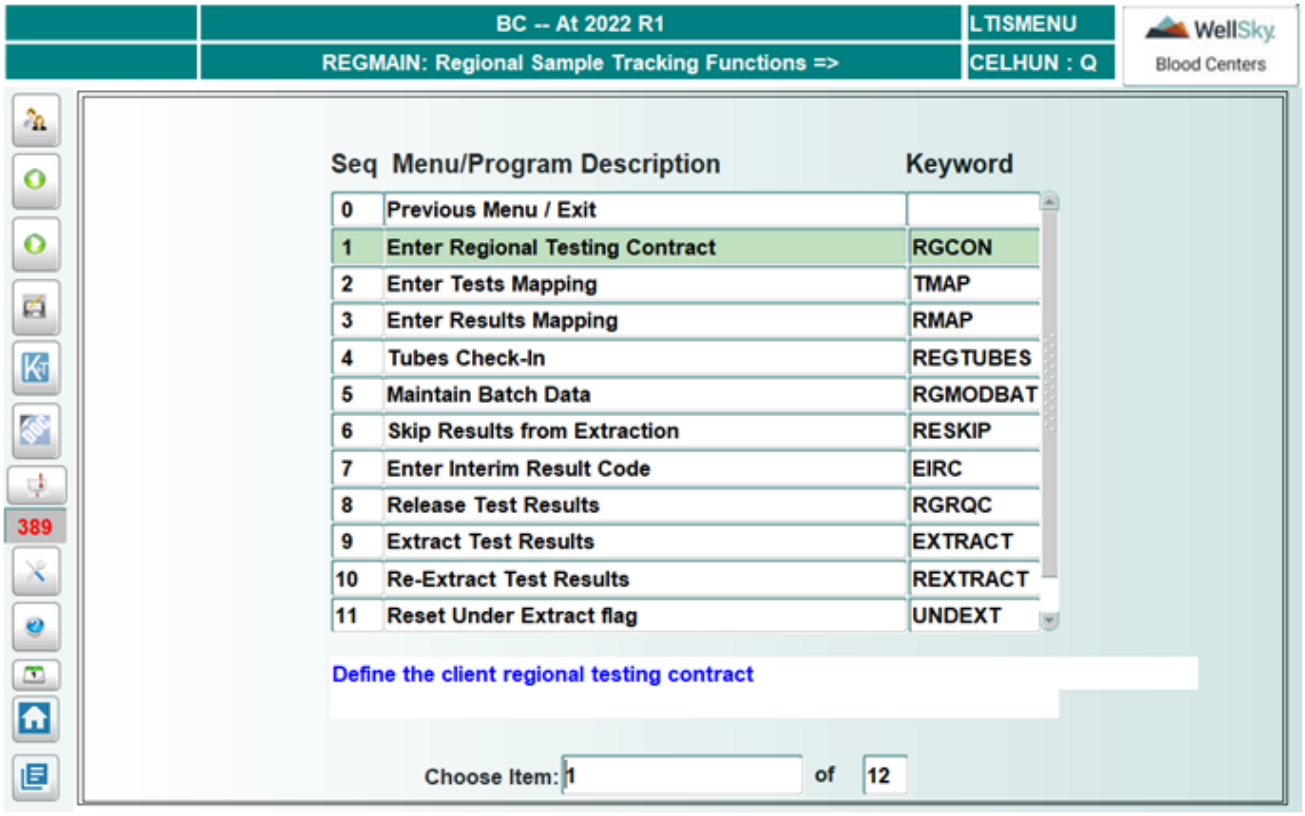


## 23.2.1 Enter Regional Testing Contract (RGCON)

### Intended Use

Use the Enter Regional Testing Contract screen to create/modify a contract and associate single/multiple testing profiles for designated chapter(s).

**NOTE –** Specific tests or test groups will be specified for each sample as the samples are checked in. This screen is classified as a configuration data table entry and is password protected.

### Limitations

- In the RGCON screen, any changes to the non-profile test must be committed in the main screen.
- ISBT 128 format will not extract using the SafeBlood format.

- Profile set ID will be created with the current user's logged-in date. Setting the test to future effective dates will not prevent the profile number from being displayed in the RGITUBES form. User will receive error that there are not any tests defined.
- The collection ID must be defined in the same chapter in which the contract is defined, regardless of whether or not the chapter is part of the contract.

## Prerequisites

- Client chapters must be defined in Master Code CBCID.
- Chapters should be defined for the Institution in the Chapters table.
- The Institution table should be defined with the contract prefix.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword RGCON.

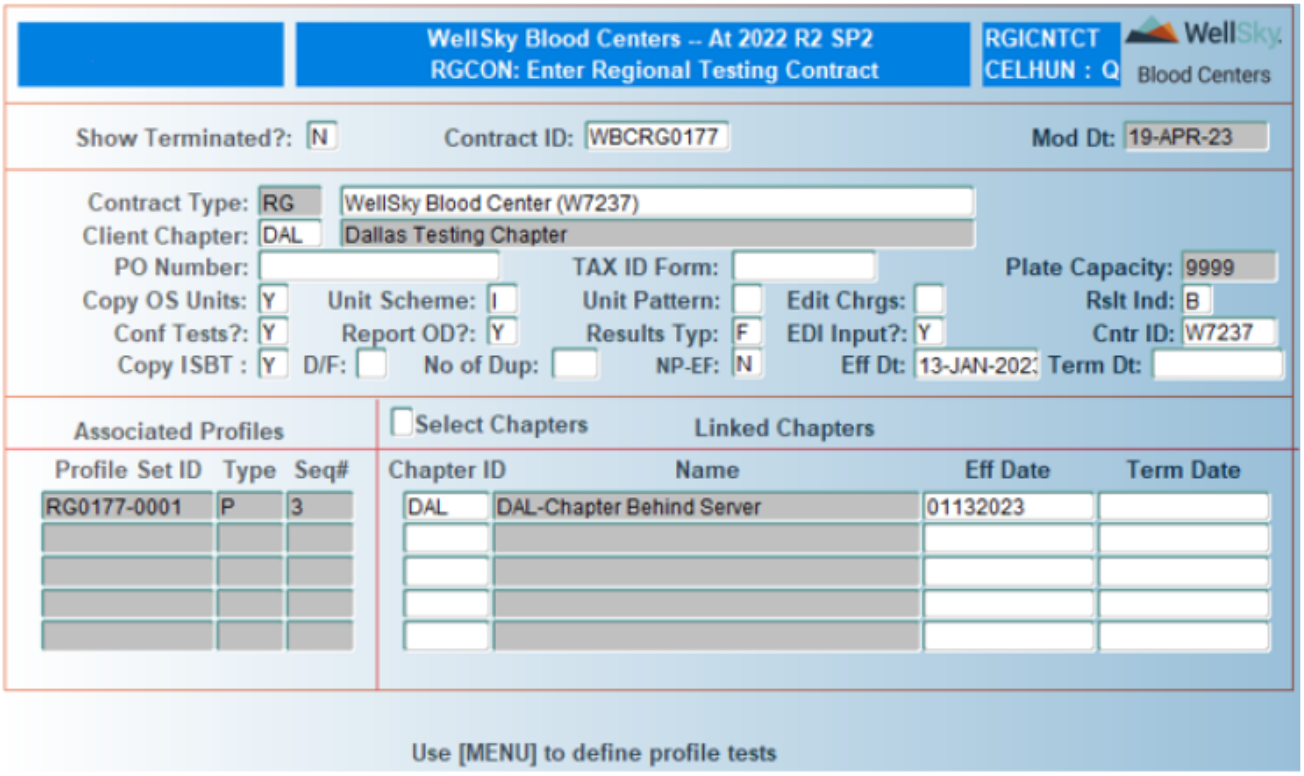


## Control Block Fields and Definitions

### Show Terminated?

Enter Y to show terminated contracts in the LOV. Enter N to exclude terminated contracts from the LOV. Default value is N.

**NOTE –** To see contracts with future effective dates, you must set the Show Terminated flag to Y.


WellSky Corporation
Proprietary and confidential

## Contract ID

Leave blank to create a new contract. To modify an existing contract, enter Contract ID or select from LOV.

## Mod Dt

Field displays the date the test mapping for the contract was last modified. Field is not navigable.

# Detail Block Fields and Definitions

## Contract Type

Field automatically populates with RG. Field is not navigable.

## Description

Enter facility name. A maximum of 50 characters is allowed.

**NOTE –** After entering the description, the following window opens:

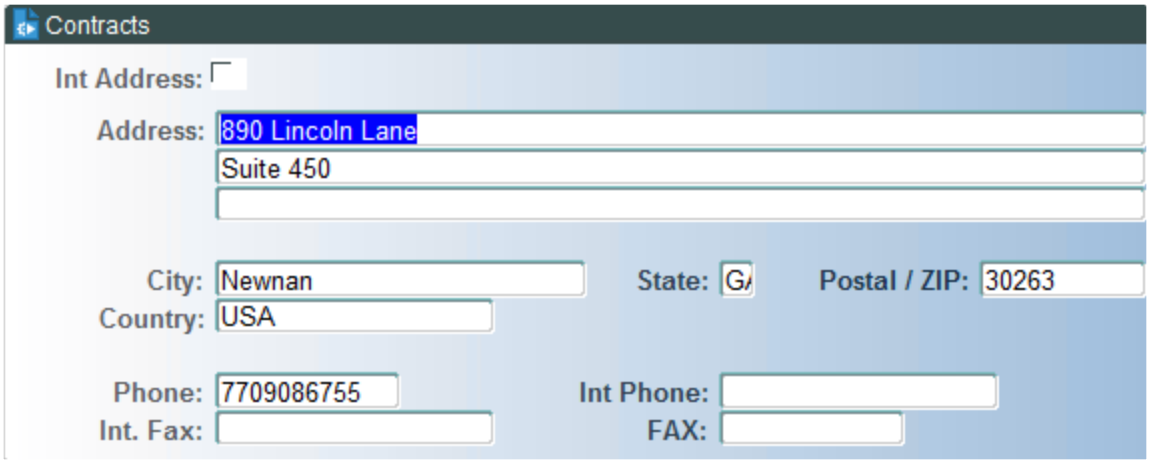


## Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

## Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. A maximum of 50 characters is allowed on each of the three address lines.

For international addresses, use the third line for country-specific designations such as province or state.

## City

Entry is required. Enter the city. A maximum of 20 characters is allowed.

## State

Entry is required for a domestic address (Int Address box not checked). Enter the state abbreviation or select from LOV. A maximum of 2 characters is allowed.

## Postal/Zip

Entry is required. Enter the postal or zip code. A maximum of 15 characters is allowed.

## Country

Entry is required. Enter the country. A maximum of 15 characters is allowed.

## Phone

Entry is optional. Enter the phone number. A maximum of 10 characters is allowed.

## Int Phone

Entry is optional. Enter the internal phone number, beginning with the country code. A maximum of 15 characters is allowed.

## Int Fax

Entry is optional. Enter the international Fax number, beginning with the country code. A maximum of 15 characters is allowed.

## FAX

Entry is optional. Enter the Fax number. A maximum of 10 characters is allowed.

**NOTE –** After entry of the fax number, the Address window will disappear, and the cursor will return to the main entry screen.

## Client Chapter

Enter identifier for a client chapter or select ID from LOV.

**NOTE –** If the client blood center receives extracted results and is also a Blood Centers User, the chapter ID must be WAD in order for the client to successfully upload results.

## Chk Digit

Enter **Y** or leave blank. Enter **Y** to have the check digit appear on the Regional Sample Management (RSM) report. Leave the field blank for the check digit not to be seen on the RSM report.

## PO Number

Enter purchase order number for the contract. A maximum of 15 characters is allowed. Entry in this field is not required.


WellSky Corporation
Proprietary and confidential

**NOTE –** If the client blood center is going to be using the Safeblood format to extract test results, then entry is required in this field.

## Tax ID Form

Enter client blood center Federal Tax ID. A maximum of 9 characters is allowed. Entry in this field is not required.

## Plate Capacity

This field is display only and will have a gray background with 9999 in the field. The cursor never goes to the field.

## Copy OS Units

Enter `Y` if the client unit ID numbers are to be copied over as the internal testing ID. Enter `N` if the client unit ID numbers are to be assigned a new internal testing ID.

## Unit Scheme

Enter valid unit scheme for contract or select scheme from LOV.

## Unit Pattern

This field is not utilized.

## Edit Chrgs

Enter `Y` if the standard profile charges may be modified. Enter `N` if the standard profile charges may not be modified.

## Rslt Ind

Enter one of the following:

- `R` – hard copy results are to be sent.
- `E` – electronic results are to be sent.
- `B` – both hard copy and electronic results are sent.

## Conf Tests?

Enter `Y` if confirmatory and supplemental tests are to be included in the electronic extract of test results. Leave field blank if confirmatory and supplemental tests are not to be included in the electronic extract of test results.

**NOTE –** If confirmatory and supplemental test results are to be included in the electronic extract of test results in the SafeBlood format, the test and result position must be defined in the test ID section below.

## Report OD?

Specify whether or not optical density is reported in the extract file. Entry in this field is not required. However, if the field is left blank, it will be treated the same as a 'Y'.

Enter one of the following:

- `Y` (or leave blank) – optical density results are to be reported with results.
- `N` – optical density results are not to be reported.

## Results Typ

Enter results type to be sent to client. Enter one of the following:

- `F` – for final interpretation only.
- `A` – for all results.

## EDI Input?

Enter `Y` if the results are to be received by electronic data transfer. Enter `N` if results are not received through electronic data transfer.

## Cntr ID

Enter an identifier for the client blood center. Entry in this field is not required.

**NOTE –** If the client blood center is going to be using the Safeblood format to extract test results, then entry is required in this field.

## Copy ISBT

Enter one of the following:

- `Y` – the ISBT units are to be copied to the internal unit number ID when the tubes are checked-in [using the Tubes Check-In (REGTUBES) screen].
- `N` – the ISBT units are not to be copied to the internal unit number ID when the tubes are checked in, which will allow the assignment of a different internal number.

## D/F

Enter **`N`** or leave blank if duplicate check-in is not going to be allowed in the Tubes Check-In (REGTUBES). The same external unit number is allowed to be checked in a maximum of two times with a duplicate tube entry being selected when the tube is checked in the second time.

Enter **`Y`** if duplicate tube check-in is going to be allowed in the Tubes Check-In (REGTUBES). The same external unit number can be checked in multiple times without requiring a duplicate tube reason. The number of allowable times is determined by the value in the No of Dup field.

## No of Dup

If Y is entered in the D/F field, enter the number of times the external unit number can be duplicated. Allowable values are 1 through 99.

If N is entered in the D/F field, this field will not be navigable.

**NOTE –** The No of Dup refers to rows in the REGTUBES screen.


WellSky Corporation
Proprietary and confidential

## NP-EF

If additional tests are scheduled on the sample and are not part of the profile (terminated or active), the extract program will check this flag to see if the results should be present in the electronic file. Leave the field blank to have the test results present in the electronic file, or enter **N** to not have the results present in the electronic file.

## Eff Dt

Enter the effective date of the contract in DD-MON-YYYY format.

## Term Dt

Enter the contract termination date in DD-MON-YYYY format. Entry in this field is only required to terminate a contract.

After valid entry in the Term Date field, the following window opens for entry of Contacts Information.

## T

Enter the type of contact. Enter **C** for contact, or **I** for Facility.

## Last Name

Enter contact last name. A maximum of 50 characters is allowed.

## First Name

Enter the first name of the contact. A maximum of 50 characters is allowed.

## Title

Enter the title of the contact. Entry in this field is not required. A maximum of 30 characters is allowed.

## Phone No

Enter contact phone number. Entry in this field is not required. A maximum of 12 characters is allowed.

## Fax No

Enter contact fax number. Entry in this field is not required. A maximum of 12 characters is allowed.

**NOTE –** After entry of the fax number, the cursor will return to the 'T' field to allow for entry of additional contacts. If no additional contacts need to be entered, press CTRL + F3 (Next Block) to return to the contracts screen; the cursor will be waiting in the Test ID field.

## Associated Profile Block Fields and Definitions

**NOTE –** This block is for display only; data cannot be updated. To view additional profiles that are not in the display, use the down arrow to move the cursor down the list of profiles.

### Profile Set ID

The field automatically populates with the profile set IDs that have been defined for the contract.

### Type

The field automatically populates with the type of profile:

- (P) - Primary
- (A) - Ad Hoc
- (S) - Secondary
- Null - Other profiles

### Seq

The field automatically populates with the current testing sequence number for the profile.

## Linked Chapters Block Fields and Definitions

### Select Chapters

Enter 'S' or 'A', or press **ENTER** to move to the Chapter ID field and enter chapters manually.

- S - allows you to select individual chapters.
- A - selects all chapters defined for the institution.

**NOTE –** Entering 'S' or 'A' will automatically open the multiple selection LOV.


WellSky Corporation
Proprietary and confidential

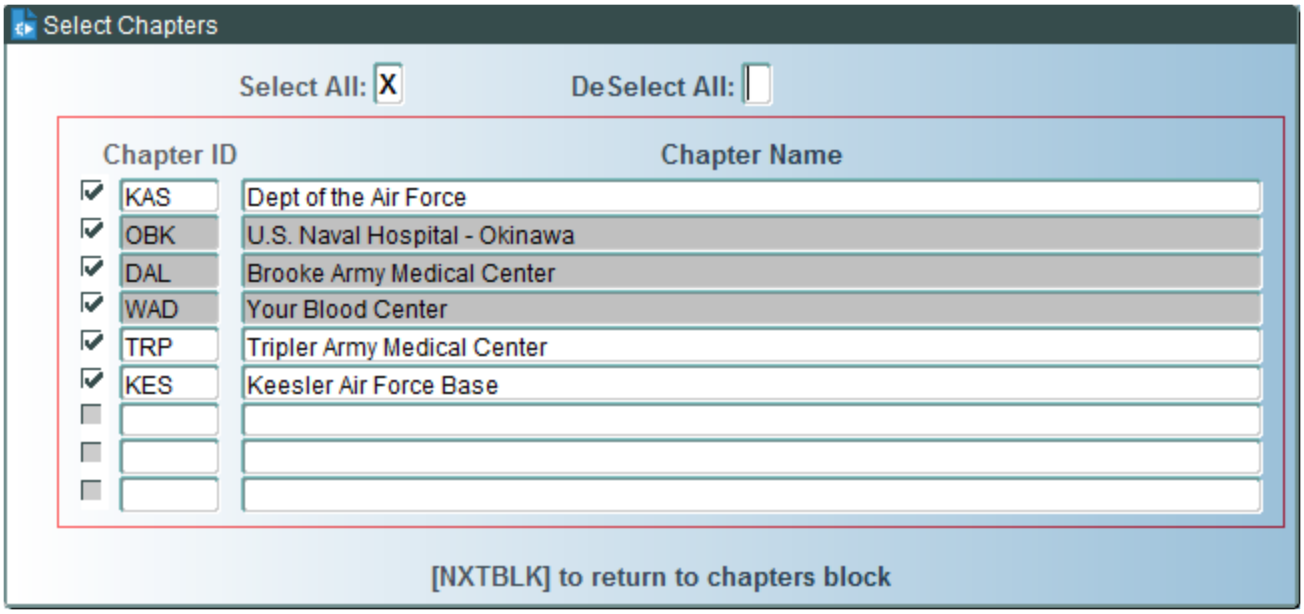


**NOTE –** Once a chapter has been selected and saved, the Chapter ID and Chapter Name turn gray to show that it has been selected. To de-select a chapter, the chapter must be terminated in the parent section.

## Select All

The check box is automatically selected when 'A' is entered in the *Select Chapters* field.

## DeSelect All

The check box is automatically selected when 'A' is entered in the *Select Chapters* field.

**NOTE –** You can only de-select the Chapter ID if it has not been committed to the database.

## Chapter ID

The field automatically populates with the chapters that have been created for the institution.

## Chapter Name

The field automatically populates with the current testing sequence number for the profile.

**NOTE –** Entering 'S' or 'A' will automatically open the multiple selection LOV.

# Test Details Block Fields and Definitions

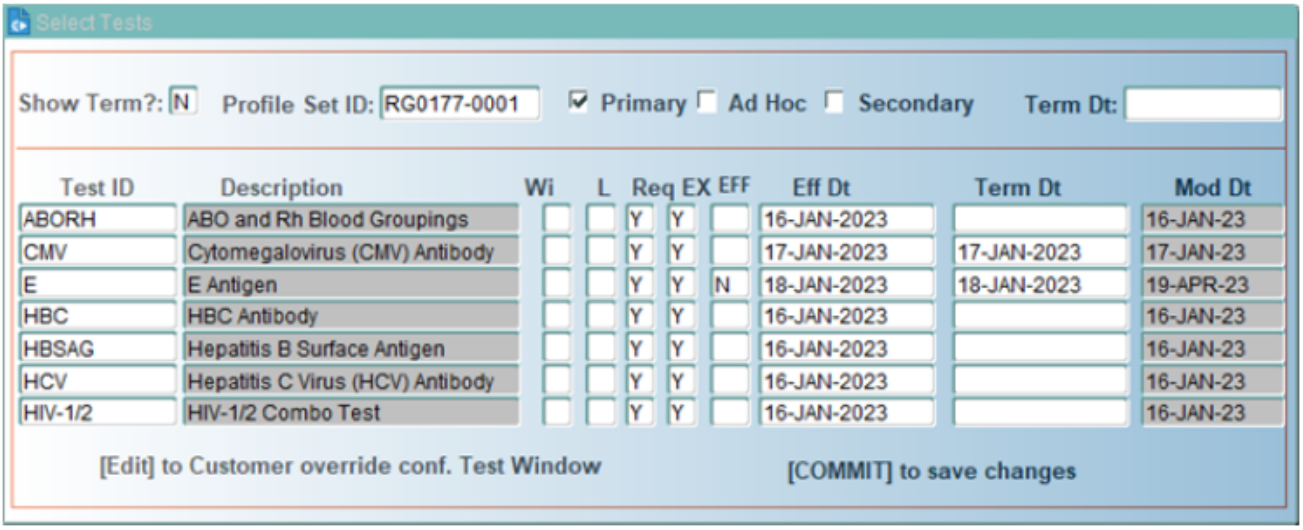


## Show Term?

Enter Y to view the terminated profiles in the profile set ID LOV. The field defaults to N to not show the terminated profiles in the profile set ID LOV.

## Profile Set ID

Select from the LOV or enter **NEW** to create a new profile.

## Primary

To select the profile as the primary profile, press the space bar to select the check box.

**NOTE –** Entry is not required in this field.

Only one profile can be selected as the primary profile. If you try to select a second profile as the primary, you will see the following message:

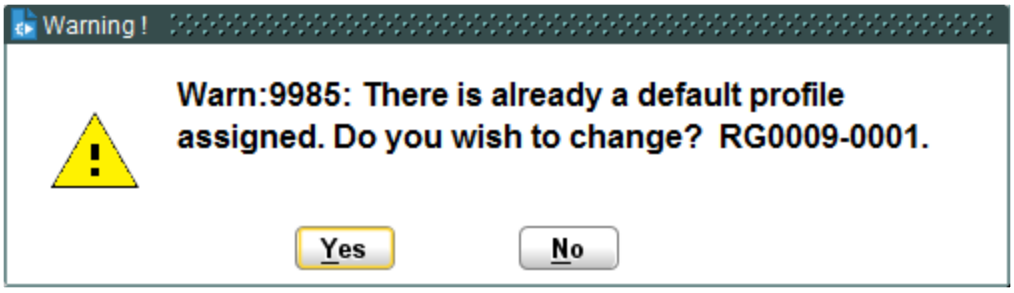


Click Yes to remove the primary designation from the original profile and place it on the new profile being created.

## Ad Hoc

To select the profile as an Ad Hoc profile, press the space bar to select the check box.

**NOTE –** Entry is not required in this field.

Only one profile can be selected as Ad Hoc. If you try to select a second profile as Ad Hoc, you will see the following message:

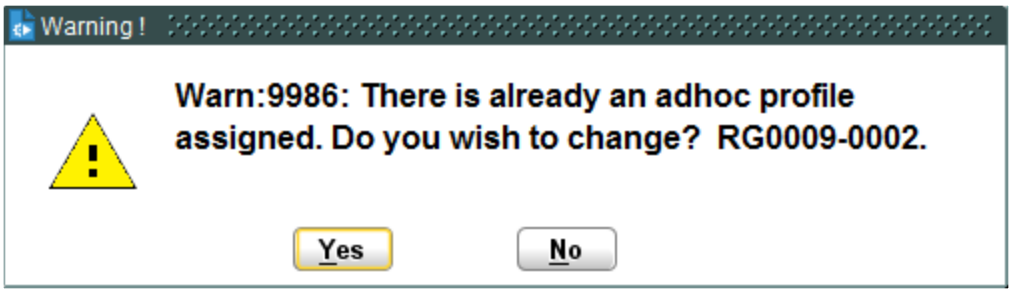


Click **Yes** to remove the Ad Hoc designation from the original profile and place it on the new profile being created.

## Secondary

To select the profile as Secondary, press the space bar to select the check box.

**NOTE –** Entry is not required in this field.

## Term Dt

Enter a termination date (in MMDDYYYY format) if the profile is no longer in effect. Otherwise, leave the field empty.

## Test ID

Enter valid test ID or select from LOV.

## Description

Description of the test that was entered in the Test ID field automatically displays. Field is not navigable.

## Wi

Enter the starting column for results in electronic result transfer. A maximum of 2 numeric characters is allowed.

**NOTE –** Entry in this field is required only for customers receiving results electronically.

## L

Enter result length in electronic result transfer. A maximum of 1 numeric character is allowed.

**NOTE –** Entry in this field is required only for customers receiving results electronically.

## Req

Enter **Y** if results are required for extract. Enter **N** if results are not required for extract.

### EX

Enter **Y** if profile tests are to be extracted in the electronic file. Enter **N** if profile tests will never be extracted in the electronic file.

### EFF

Leave the field blank if tests are to be included in the electronic file. Enter **N** if the tests will not be included in the electronic file.

### Eff Dt

Enter test effective date in DD-MON-YYYY format.

### Term Dt

Enter test termination date in DD-MON-YYYY format.

**NOTE –** Entry in this field is only required to terminate a required test.

### Mod Dt

Date the test mapping was last modified automatically populates. Field is not navigable.

## Customer Override of Confirmatory Tests

The Customer Override of Confirmatory Tests window is used to define a different confirmatory test to be ordered for a specific customer. Entries in this table will take precedent over the TEST Table entries.

The customer override of confirmatory tests can be accessed from the Profile window, using **CNTRL+E** (Edit). Once CNTRL+E is pressed, the Customer Override Confirmatory Test Scheduling window opens, as follows:

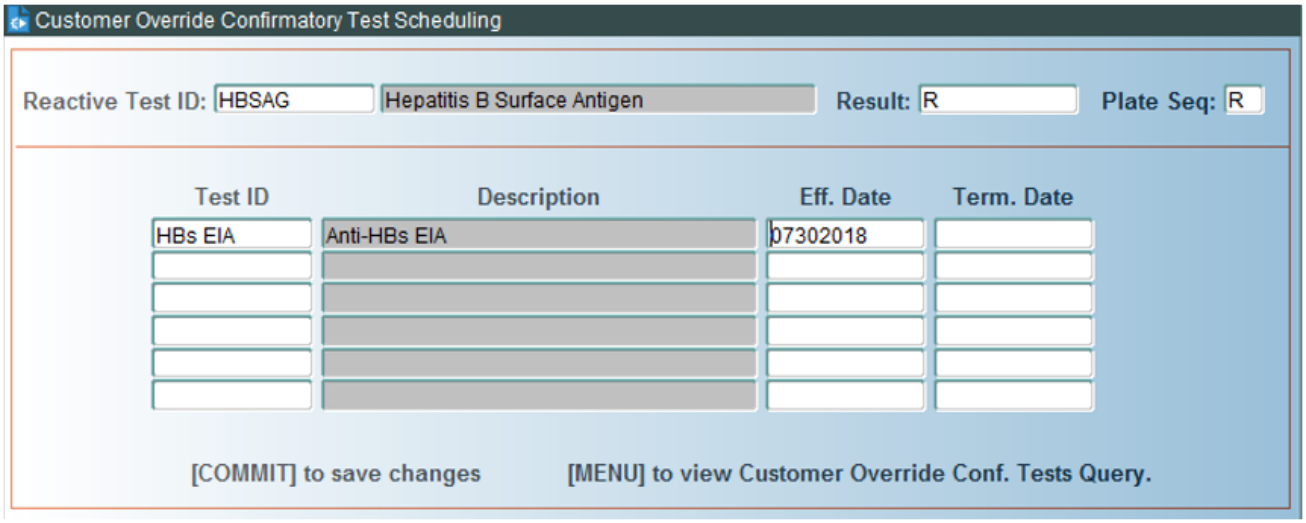


### Reactive Test ID

Enter valid test ID or select from LOV for a single test.

## Result
Enter a valid test result or select from LOV. This test result should be the result that reflexes the confirmatory test.

## Plate Seq
Displays 'R' for repeat tests. This is not a navigable field.

## Test ID
Enter a valid test ID or select from LOV for a single test. Once the test is entered, the description will display.

## Eff. Date
Enter the test's effective date in MMDDYYYY format. After moving out of the field, the system will format as MM-DD-YYYY.

## Term. Date
Enter test's termination date in MMDDYYYY format. After moving out of the field, the system will format as MM-DD-YYYY.

**NOTE –** Entry in this field is only required to terminate a required test.

## Commit
Press F12 (Commit) to save entry to the database.

# MENU Command to Invoke Query Mode
Press F6 (Menu) to view the confirmatory tests that have already been defined and committed to the database.

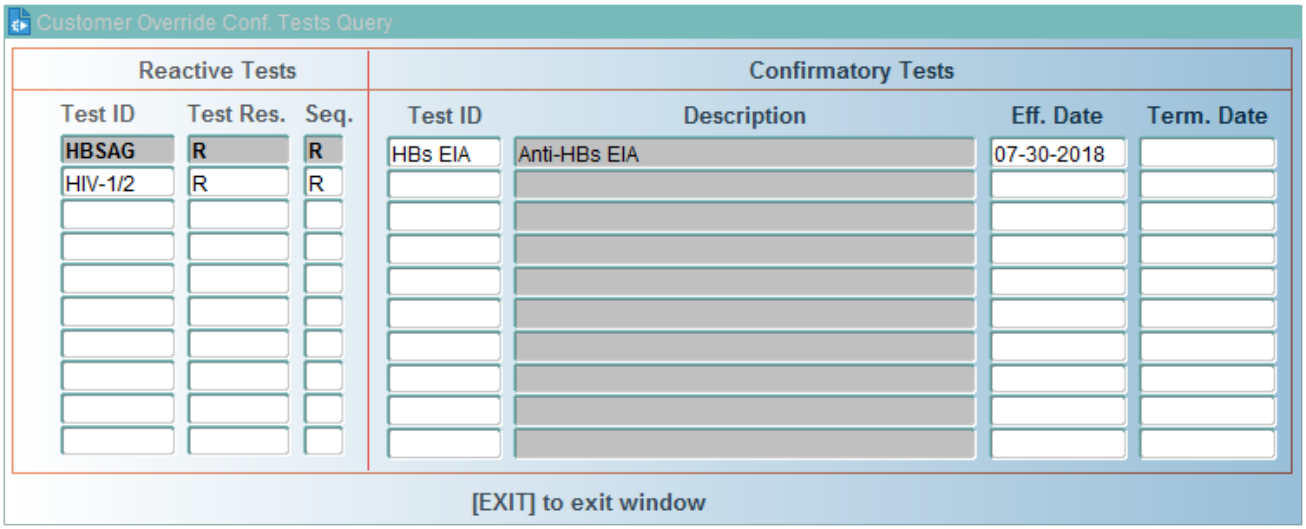


Press F8 (Exit Screen) to close the window and move back to the Customer Override Confirmatory Tests window.

## Reactive Tests Block
Displays the Test ID, Result code, and Plate Sequence value. This is display only.

### Confirmatory Tests Block

Displays the new confirmatory Test ID to be ordered for the customer, and the effective and termination date entries.

## Non-Profile Test Block

The non-profile window can be accessed from the F6 (Menu) button. Once the Menu button is pressed, the Select Tasks window opens, as follows:

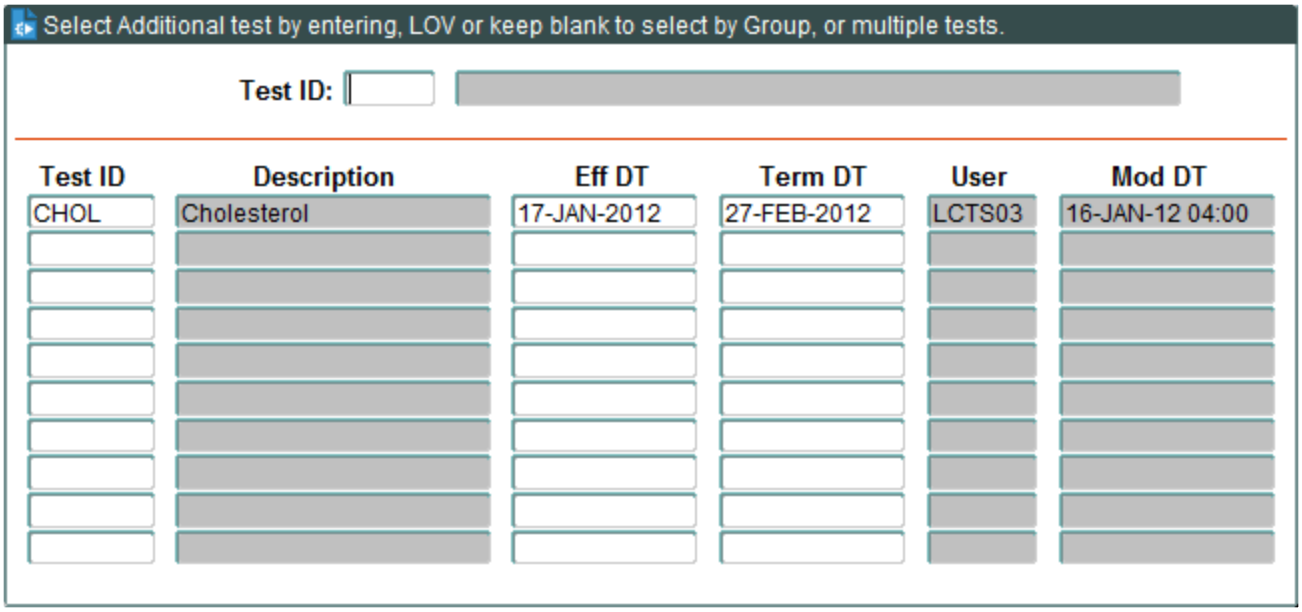


## Selection of a Single Test ID

## Control Block:

### Test ID

Enter valid test ID or select from LOV for a single test.

## Detail Block:

### Test ID

Test ID displays based on entry in control block.

### Description

Description displays based on description field in Test table.

### Eff DT

The effective date automatically populates with current system date. Modification is allowed in DD-MON-YYYY format.


WellSky Corporation
Proprietary and confidential

### Term DT
The termination  date is entered if the test no longer needs to be in effect.  Enter date in DD-MON-YYYY format.

### User
Displays the user ID that entered the test.  Field is not navigable.

### Mod DT
This field is not navigable and will update when there is a change to the test listed.

## Selection of Multiple Test IDs within a Group
To select multiple tests within a group, leave field blank.  The following window opens, allowing for the selection of multiple tests that will never be extracted.

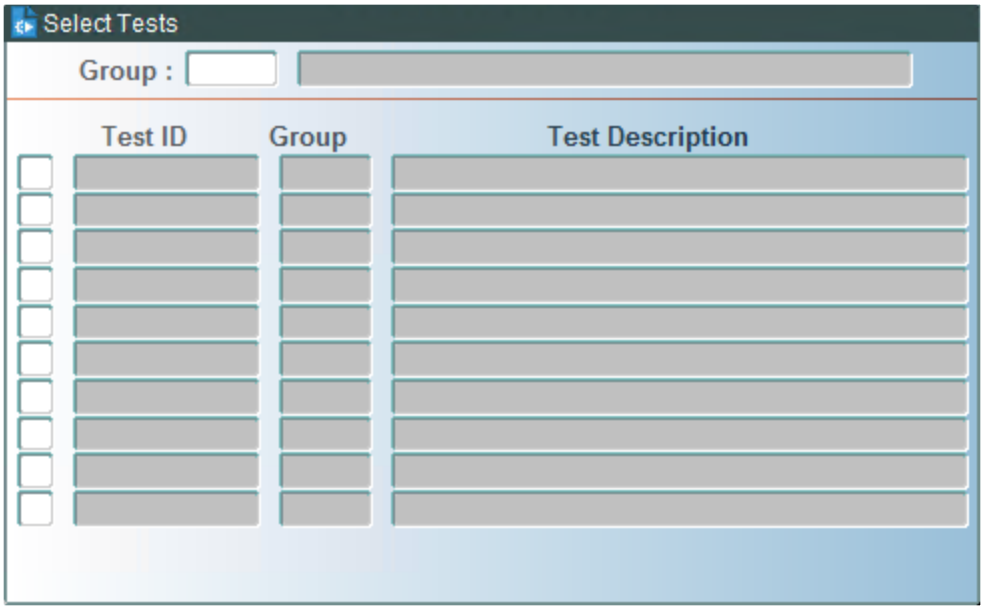


## Control Block:

### Group
Enter the Group ID or use LOV for list of values to select from.

## In the Detail Block:

### Test ID
Description of the test that was entered in the Test ID field automatically displays.  Field is not navigable.

### Group
Group code in which the test belongs.

### Test Description

Description displays based on description field in Test table.

To select a test (any or all), enter an **x** or press ENTER to select each test.

**NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

Press F8 (Exit Screen) to abort without saving.

**NOTE –** Both F12 (Commit) and F8 (Exit Screen) close the window and return the cursor to the Screen.

## Selection of Multiple Test IDs

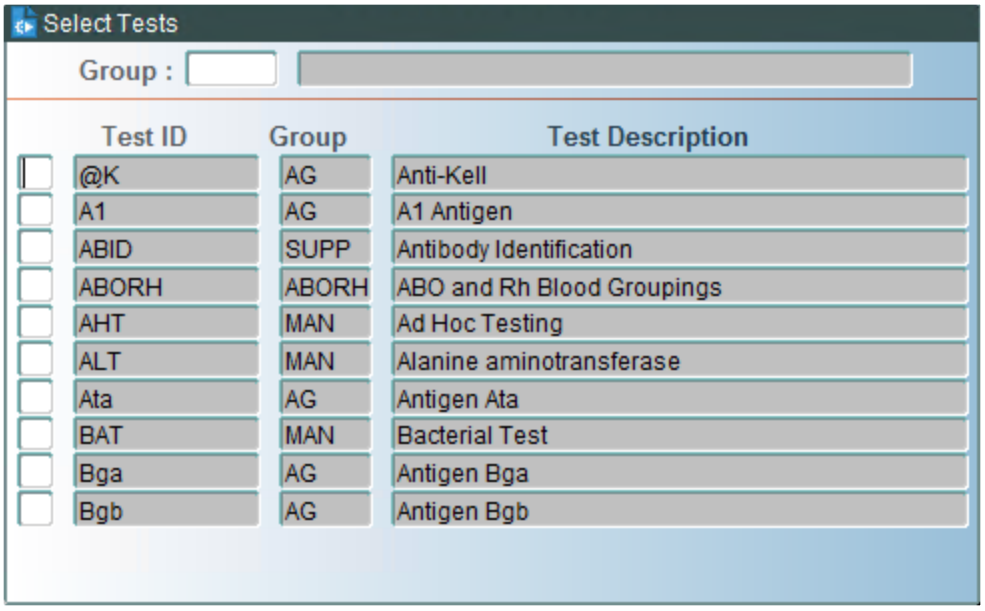


## In the Control Block:

### Group ID

Leave field null and press ENTER.

## In the Detail Block:

### Test ID

Displays the Test ID. Field is not navigable.

### Group

Displays the Group name. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Test Description

Displays the Test Description. Field is not navigable.

To select a test (any or all), enter an **x** or press ENTER to select each test.

## At Commit

Updates made to the system at commit include the data entered on this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.2 Enter Test Mapping (TMAP)

## Intended Use

Use Enter Test Mapping screen to map test codes used by a client blood center to those used internally at the testing facility if the client's test codes are not identical to those used at the testing facility. The system will use the test code mapping described in this procedure to map the codes when result files are returned to the client blood center.

**NOTE –** Only those test codes that differ must be mapped.

## Limitations

None

## Prerequisites

A valid testing contract must exist.

## Accessing the Screen

Access this screen from the Regional Sample Tracking menu or by entering the keyword `TMAP`.

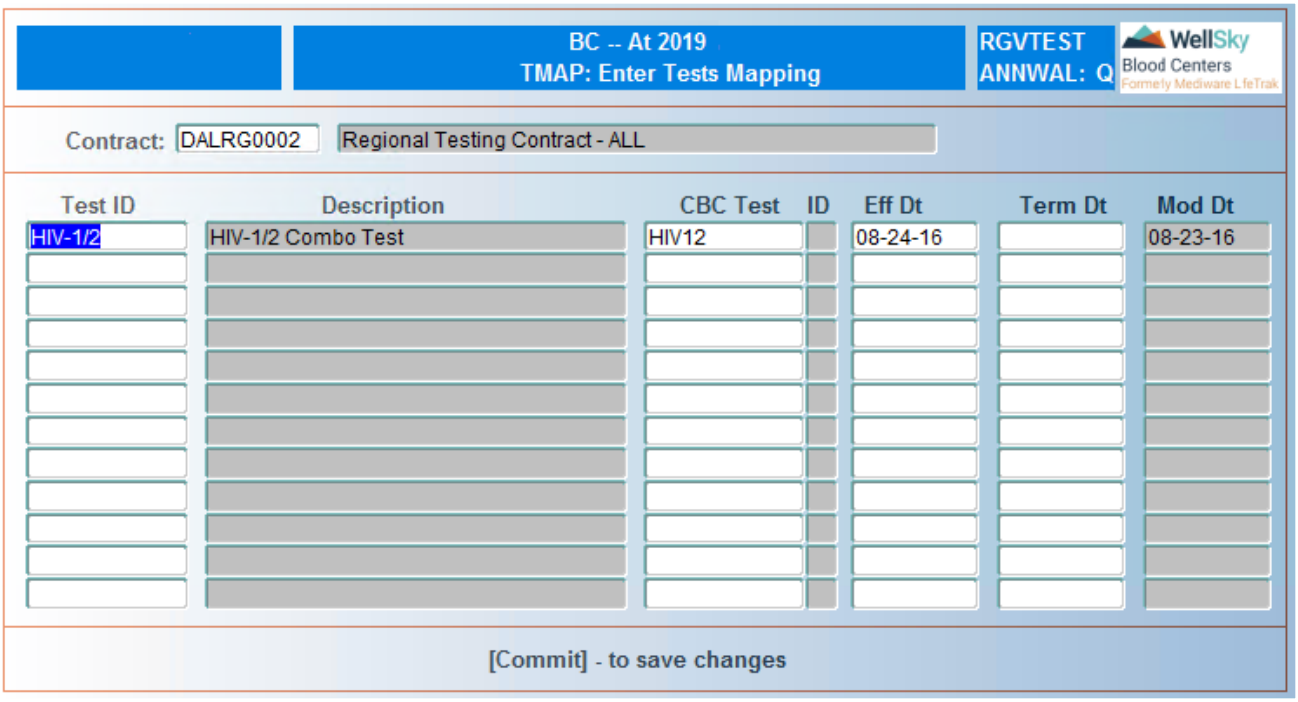


# Control Block Fields and Definitions

## Contract ID

Enter valid contract ID or select from LOV.

# Detail Block Fields and Definitions

## Test ID (Internal Code)

Enter internal test ID or select from LOV.

**NOTE –** Test IDs must be entered individually.

## Description

Display only field. Description for the test ID that was entered displays.

## CBC Test ID

Enter test ID used by the client's blood center. A maximum of 10 characters is allowed.

## Eff Dt

Enter test mapping effective date in MM-DD-YY format.

## Term Dt

Enter test mapping termination date in MM-DD-YY format.


WellSky Corporation
Proprietary and confidential

**NOTE –** Entry in this field is not required unless terminating test mapping.

### Mod Dt

System displays date the test mapping for test was last modified automatically displays. Field is not navigable.

Press F12 (Commit) to save entry.

## At Commit

At commit, all entered data is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.3 Enter Results Mapping (RMAP)

## Intended Use

Use Enter Results Mapping screen to map test result codes used by a client blood center to those used internally at the regional testing facility only if they differ. The system will use the result code mapping described in this screen to map the codes in reverse order when files are returned to the client blood center.

**NOTE –** Only those test result codes that differ must be mapped.

## Limitations

None

## Prerequisites

- Regional contract must be defined.
- Test codes and result values must have been defined in Available Tests (TEST).

## Accessing the Screen

Access this screen from the Regional Sample Tracking menu or by entering the keyword `RMAP`.

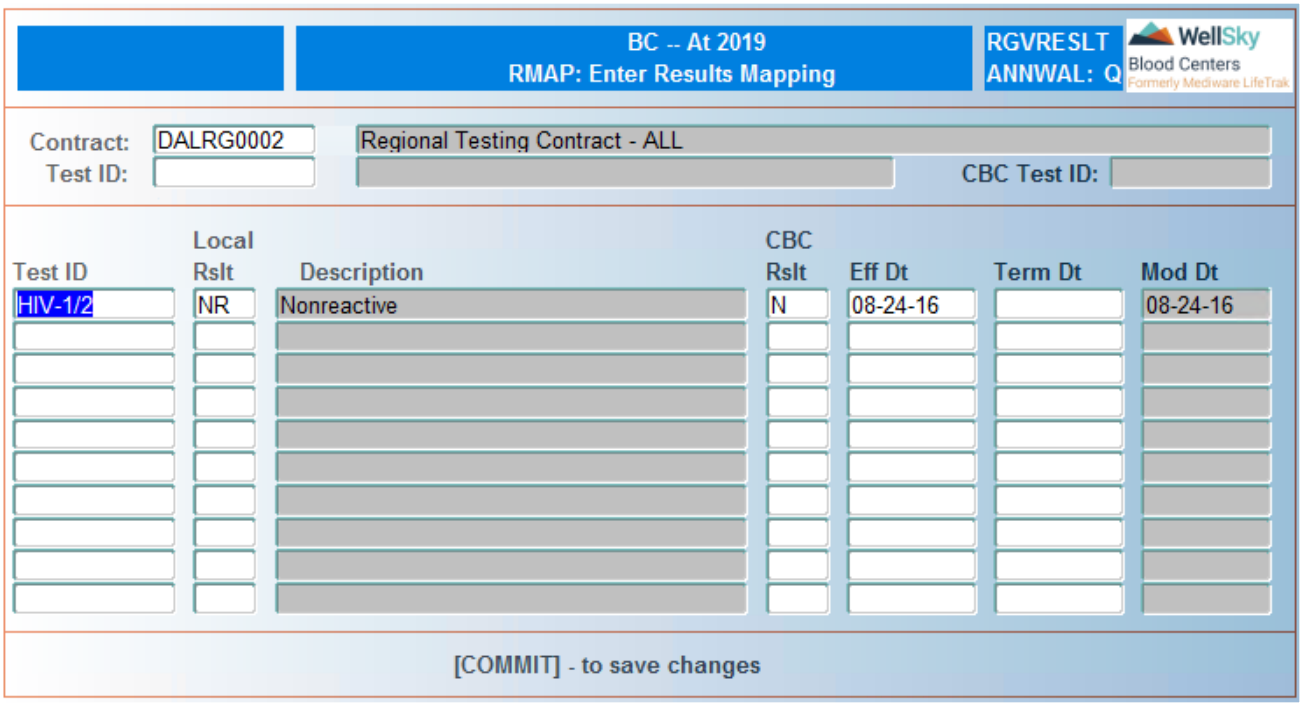


# Control Block Fields and Definitions

## Contract ID

Enter valid contract ID or select ID from LOV.

**NOTE –** When valid contract ID is entered, a description displays to the right.

## Test ID (Internal Code)

Enter internal test ID or select valid test ID from LOV. Leave blank to enter multiple test ID's in the detail block.

**NOTE –** When the test ID is entered, the testing coding of the client blood center for that test displays in the CBC Test ID field, if present.

## CBC Test ID

Test coding of the client blood center automatically displays, if present. Field is not navigable.

# Detail Block Fields and Definitions

## Test ID

Enter valid test ID, or select ID from LOV. If test ID was entered in the control block, that ID will automatically display.

## Local Rslt

Enter test result used by your institution or select test result from LOV.

### Description
System displays the description for the result after the result is entered. Field is not navigable.

### CBC Rslt
Enter result code used by the client blood center. A maximum of 4 characters is allowed.

### Eff Dt
Enter result mapping effective date in MM-DD-YY format.

### Term Dt
Enter result mapping termination date in MM-DD-YY format.

**NOTE –** Entry in this field is not required unless terminating result mapping.

### Mod Dt
System displays date the result mapping for test was last modified. Field is not navigable.

**NOTE –** When mapping results the user must be careful to review data before committing. The system does not perform any checks for result mapping.

Press F12 (Commit) to save entries.

## At Commit
At commit, all entered data is saved to the database.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.4 Tubes Check-In (REGTUBES)

## Intended Use
Use Tubes Check-In screen to check in sample tubes received for testing under a fixed profile contract. The instructions below apply to the tubes for a single unit, and will be repeated for each additional unit to be checked in. Each check-in operation is automatically saved to the database on a unit-by-unit basis.

If tests are performed before the sample is checked into Blood Centers, the tests and test results that are in 'Unscheduled Tests' (UTB) will move to 'Scheduled Tests' (UTRS). Any interdiction or attribute associated to the specific test will remain as expected.

You can also view, add, or delete check-in batch notes from this screen.

## Limitations

- The same tube type cannot be checked into multiple chapters.
- You must have access permission to add or delete checkin batch notes.
- System Parameter CB_ID must be configured in the SYSPARM table.

## Prerequisites

- A valid contract ID must exist.
- Profile set numbers must contain test IDs to be used in tube check-in process.
- System Parameter RCCHK must be defined to check the collection date entry on the form. This system parameter should be equal to the value in the Chapters table for the sample age.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `REGTUBES`.

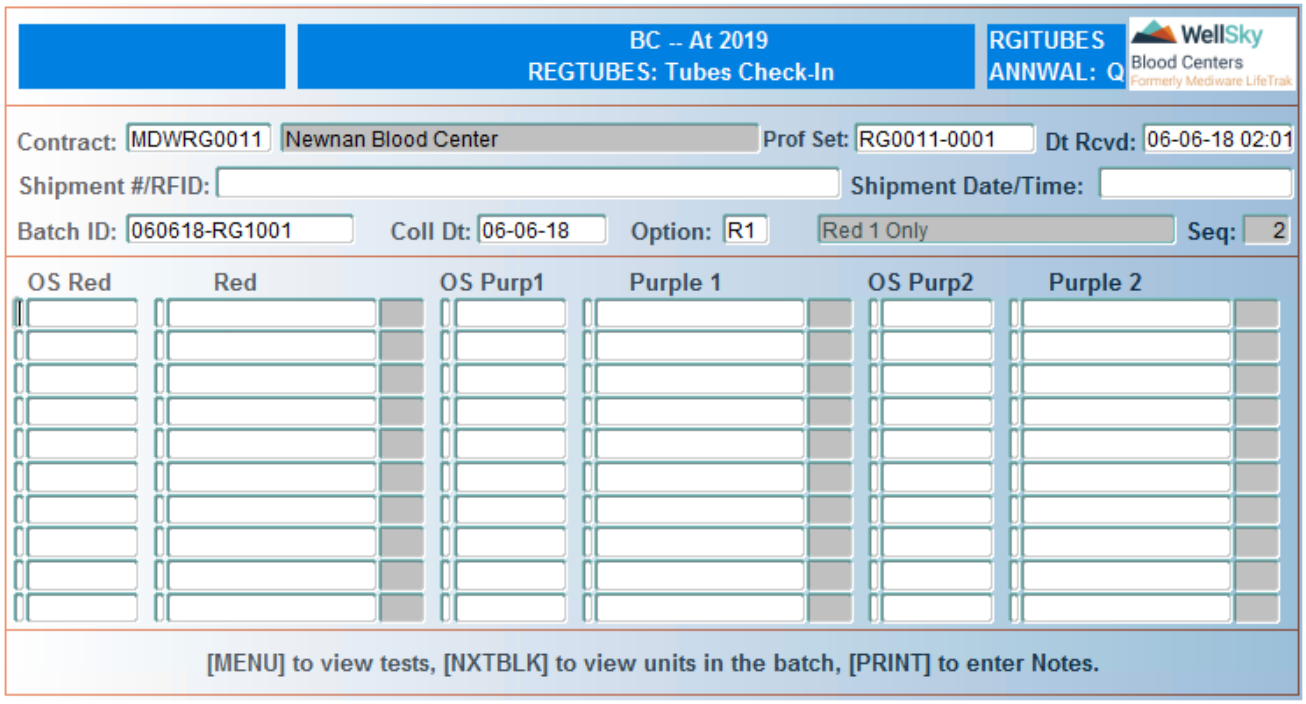


## Control Block Fields and Definitions

### Contract

Enter valid contract ID or select ID from LOV.

**NOTE –** When valid contract ID is entered, a description displays to the right.

### Prof Set
Enter the profile set ID, or select it from LOV. Tests for the sample will be ordered based on the selection of the profile set ID.

### Dt Rcvd
Enter date and time tubes were received in MM-DD-YY HH24:MI format. System defaults to the current date and time.

### Shipment #/RFID
This is an optional field. Enter the shipment # or RFID.

**NOTE –** A maximum of 50 characters can be entered, including numbers and special characters. Special characters that are NOT allowed are: "\", "/", and " ' " (apostrophe).

### Shipment Date/Time
This is an optional field. However, if the shipment #/RFID is entered, then entry is required in this field. Enter the date and time of the shipment in MMDDYYHH24MI format.

### Batch ID
Enter `NEW` to start a new batch. To add to an existing batch, enter batch ID or select ID from LOV.

### Coll Dt
This is a required field. Enter the collection date in MM-DD-YY format.

**NOTE –** System Parameter RCCHK determines how old the entered collection date can be. The current Chapter Date (system date) counts as day zero. If the date entered exceeds the required date entry, the user will receive the following error:

### Option
Enter tube check-in option or select from LOV.

### Seq
Displays number of samples for which tubes have been checked in for an existing batch. Field is not navigable.

## Detail Block Fields and Definitions

### OS Red
Scan or enter manually the outside unit identifier for the red tube.

**NOTE –** If the D/F field in the Enter Regional Testing Contract (RGCON) screen is set to N or left blank, the system will allow the same external (OS) unit number to be entered in multiple rows. The specific number of rows that the same external unit number can be entered is determined by the No of Dup field value in the RGCON screen.

If the D/F field in the Enter Regional Testing Contract (RGCON) screen is set to Y, the system will allow the same external (OS) unit number to be entered once. If the same OS number is entered a second time, the following window opens:

Entry of a duplicate reason code is required. IF the reason code is QNS it will accept the same internal unit ID multiple times, but if the reason code is TRUE is will require a different internal unit ID.

## Red

Scan or enter manually the unit identifier for the red tube.

**NOTE –** If the contract calls for identical internal and outside unit IDs, the cursor skips this field.

## OS Purp 1

Scan or enter manually the outside unit identifier for the purple 1 tube.

**NOTE –** If the contract calls for differing internal and outside unit IDs, the cursor advances to the 'Purple 1' field. If the internal and outside unit IDs are identical, the 'Purple 1' field populates automatically, and the cursor advances to the 'OS Purp 2' field.

## Purple 1

Scan or enter manually the unit identifier for the purple 1 tube.

**NOTE –** If the contract calls for identical internal and outside unit IDs, the cursor skips this field.

## OS Purp 2

Scan or enter manually the outside unit identifier for the purple 2 tube.

**NOTE –** If the contract calls for differing internal and outside unit IDs, the cursor advances to the 'Purple 2' field. If the internal and outside unit IDs are identical, the 'Purple 2' field populates automatically, and the cursor advances to the 'OS Red' field for entry of next set of tubes for this contract.


WellSky Corporation
Proprietary and confidential

### Purple 2

Scan or enter manually the unit identifier for the purple 2 tube.

**NOTE –** If the contract calls for identical internal and outside unit IDs, the cursor skips this field.

## To Check In Second Red Tube

### Option

Enter the tube check-in option `R2`, and the following window will open for entering the second Red top tube.

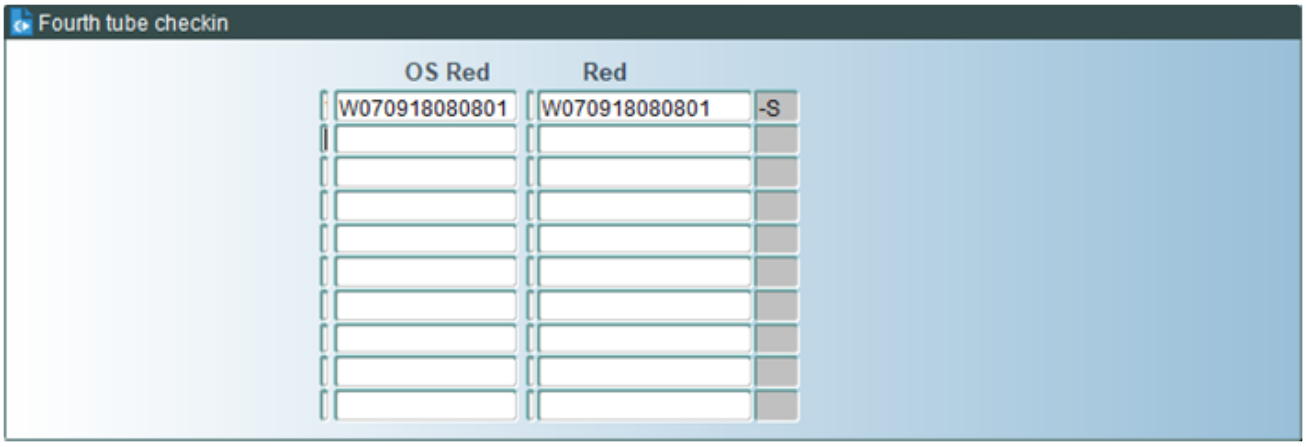


### OS Red

Scan or manually enter the external unit identifier for the red tube.

**NOTE –** If the D/F field in the *Enter Regional Testing Contract (RGCON)* screen is set to 'N' or left blank, the system will allow the same external (OS) unit number to be entered in multiple rows. The specific number of rows that the same external unit number can be entered in is determined by the No of Dup field value in the RGCON screen.

**NOTE –** If the D/F field in the *Enter Regional Testing Contract (RGCON)* screen is set to 'Y', the system will allow the same external (OS) unit number to be entered once. If the same OS number is entered a second time, the following window opens:

Entry of a duplicate reason code is required. If the reason code is 'QNS', it will accept the same internal unit ID multiple times, but if the reason code is 'TRUE', is will require a different internal unit ID.

### Red

San or manually enter the unit identifier for the red tube.

**NOTE –** If the contract calls for identical internal and external unit IDs, the cursor skips this field.

## To View Tests

Press F6 (Menu) to view test scheduled for the unit. The following window opens:

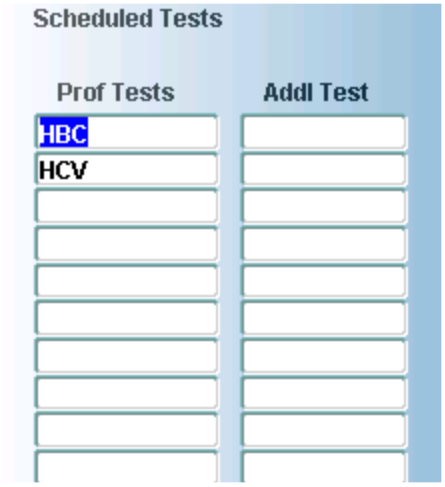


**NOTE –** The option to view tests being ordered is available after the profile set number has been entered. Press F6 (Menu) to view tests in the profile set number.

### Prof Tests

Field automatically populates with the profile tests that are ordered on the sample.

### Addl Test

Field automatically populates with any additional tests that were scheduled for the sample.

Use the UP and DOWN arrow keys to scroll through the tests.

Press F8 (Exit Screen) to return to the tubes check-in screen.

## To View Units in the Batch

Press CTRL + F3 (Next Block) to view all units contained in the check-in batch. The following window opens:

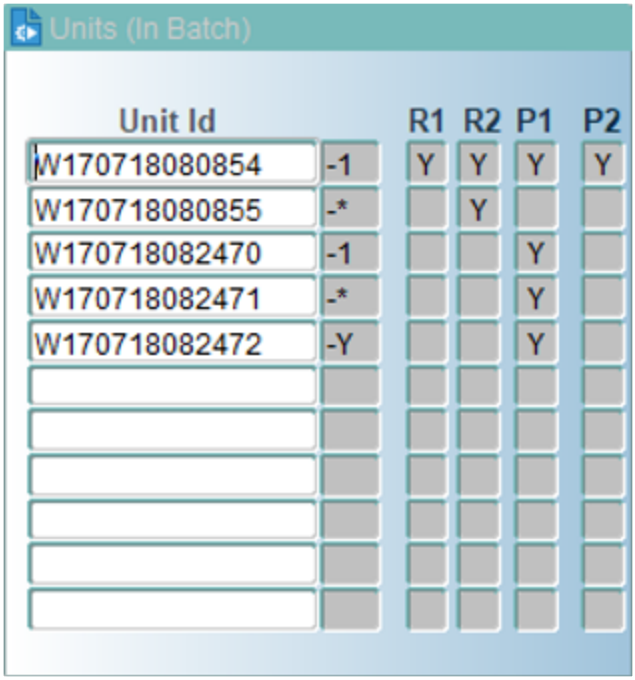


## Unit ID

Field automatically populates with the unit ID's of those units contained in the check-in batch.

## R1

Field automatically populates with Y if the red 1 tube has been received. Field is blank if tube has not been checked in.

## R2

Field automatically populates with Y if the red 2 tube has been received. Field is blank if tube has not been checked in.

## P1

Field automatically populates with Y if the purple 1 tube has been received. Field is blank if tube has not been checked in.

## P2

Field automatically populates with Y if the purple 2 tube has been received. Field is blank if tube has not been checked in.

Use the **UP** and **DOWN** arrow keys to scroll through the units.

Press **F8** (Exit Screen) to return to the tubes check-in screen.

The system does a line-by-line commit.

# Entering Notes

Press **F7** to view, add, or delete notes for the selected Checkin Batch ID using the GEWNOTES window, as shown:

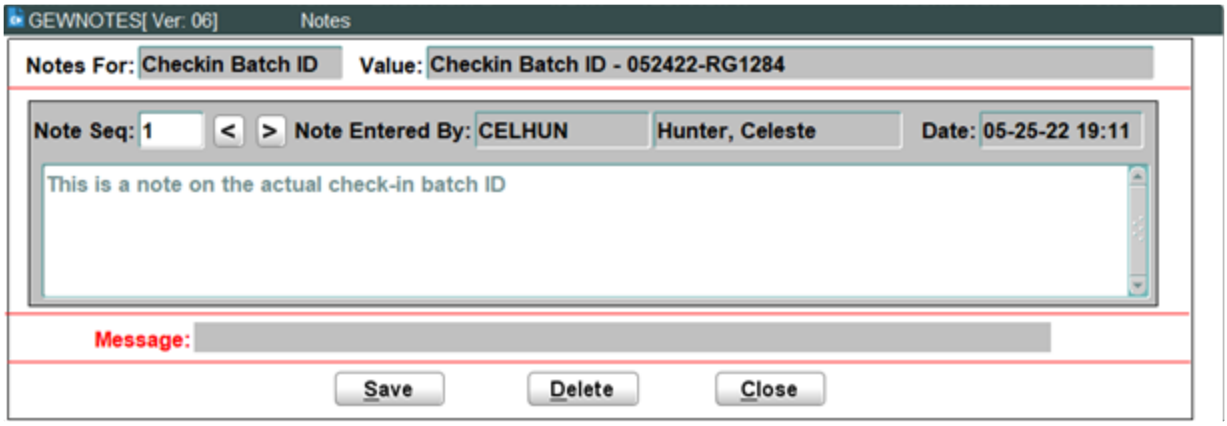


Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

Once a note has been entered, you can go to the Tubes Check-In Query (RGQTUBES) screen to view the notes entered for the batch ID or in Samples Query (SAMPQ) screen for individual units within the batch.

## At Commit

All units are checked into the system and testing is scheduled.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.5 Maintain Batch Data (RGMODBAT)

## Intended Use

Use the Maintain Batch Data screen to revise data that relates to the entire batch. The information that displays here is gathered during Tube Check-In. Perform when modification to a batch is required, such as making notes or voiding batch QC.

## Limitations

None

## Prerequisites

Batch must have been created during tube check-in.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `RGMODBAT`.


WellSky Corporation
Proprietary and confidential

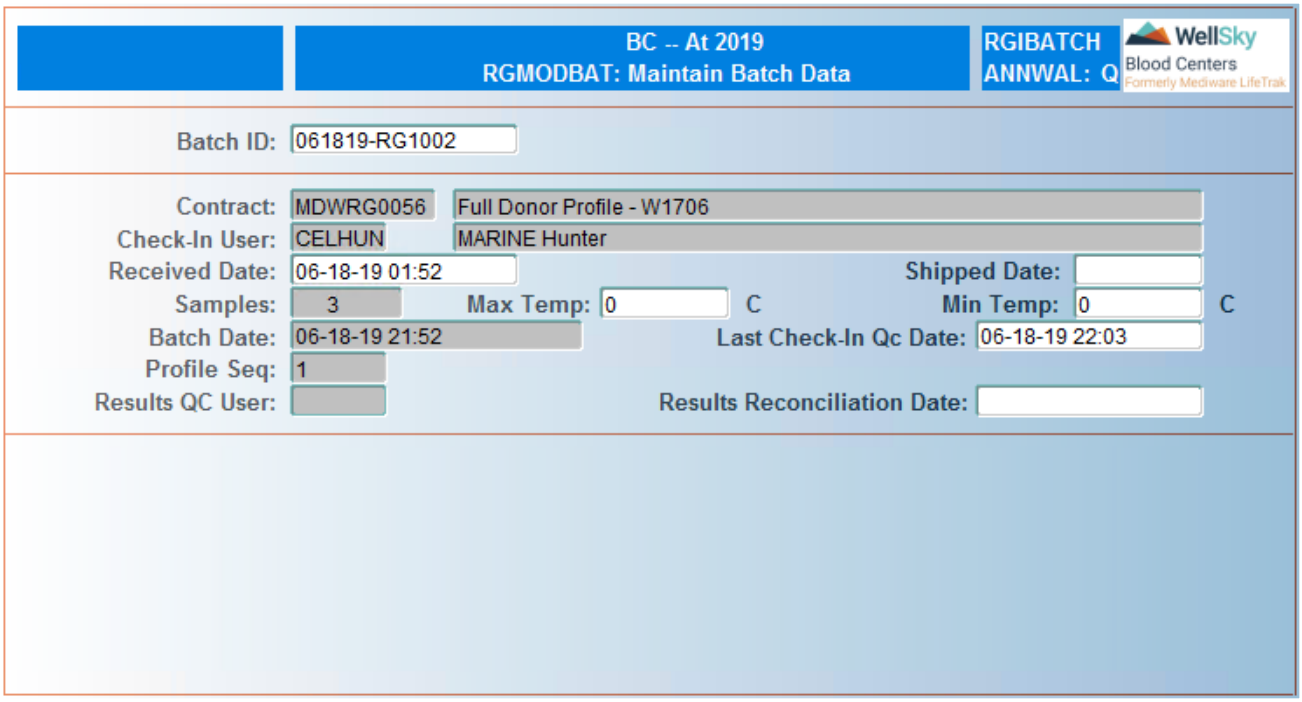


# Control Block Fields and Definitions

## Batch ID

Enter valid batch ID or select batch from LOV.

**NOTE –** Once the batch ID is entered the system displays data associated with that batch.

# Detail Block Fields and Definitions

## Contract

Displays the contract for batch ID. Field is not navigable.

## Check-In User

Displays the user ID that checked-in the batch. Field is not navigable.

## Received Date

Displays date and time that the batch was received. Field is not navigable.

## Shipped Date

Enter date batch was shipped in MM-DD-YY format.

## Samples

Displays the number of samples checked-in for that batch. Field is not navigable.

### Min Temp
Enter the minimum receipt temperature (°C).

### Max Temp
Enter the maximum receipt temperature (°C).

**NOTE –** The maximum temperature cannot be less than the minimum temperature.

### Last Check-In QC Date
Displays the date/time QC was performed; if QC has not been performed, the field will be blank. To check in additional units to the batch, press F5 (Clear Field) to remove the QC flag.

**NOTE –** User cannot enter the QC date if the field is null. Field is populated using the Reconcile Tube Check-In Batch screen.

### Profile Seq
Field automatically populates with the profile sequence used for scheduling the test. Field is not navigable.

### Results QC User
Field automatically populates with the user ID that performed result QC. Field is not navigable.

### Results Reconciliation Date
Displays the date/time QC was performed; if QC has not been performed, the field will be blank. If units were added to the batch and result QC had been set prior, the user can remove the flag and perform QC for pending units.

**NOTE –** User cannot enter the QC date if the field is null. Field is populated using the Release Test Results screen.

Press F12 (Commit) to save entries.

## At Commit
At commit, all entered data is saved to the database.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.


WellSky Corporation
Proprietary and confidential

# 23.2.6 Skip Results from Extraction (RESKIP)

## Intended Use

Use the Skip Results from Extraction screen to apply a skip to a sample so results for that sample are skipped during the extraction process.

## Limitations

None

## Prerequisites

The sample must have been checked in.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `RESKIP`.

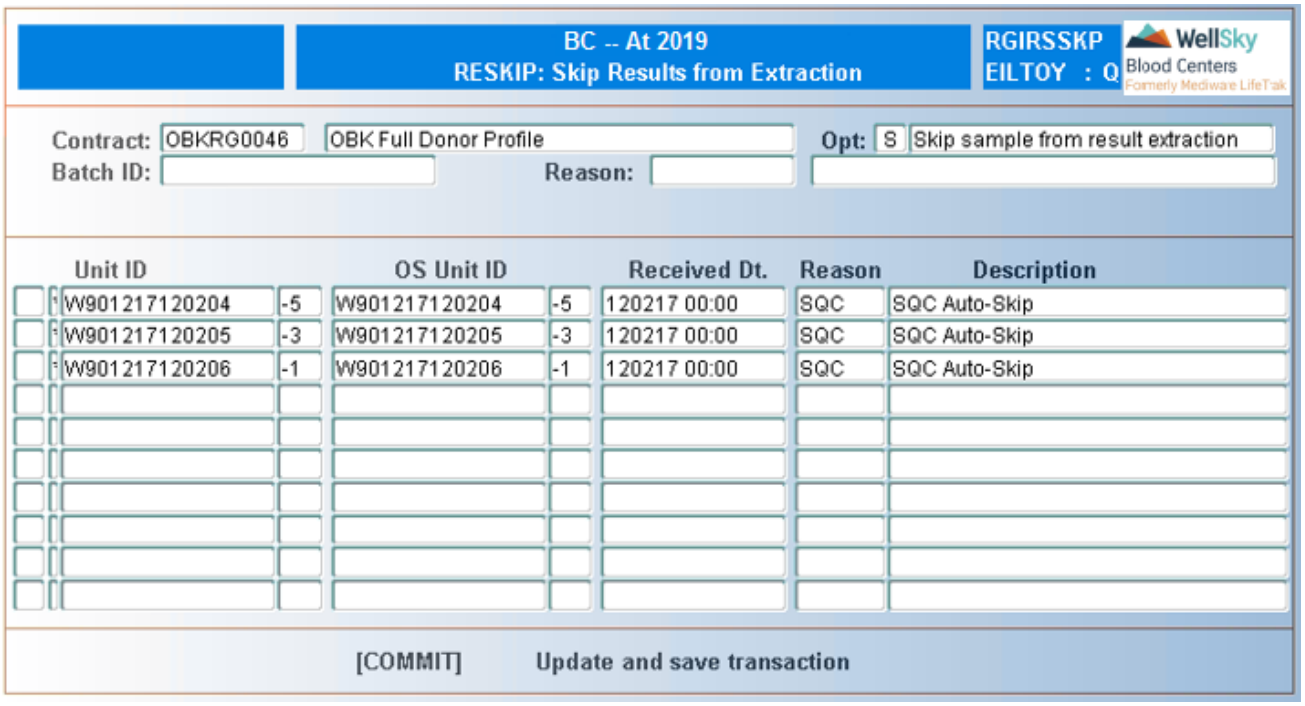


## Control Block Fields and Definitions

### Contract ID

Enter valid contract ID or select from LOV.

**NOTE –** When the contract ID is entered, a description of the contract displays to the right.

### Opt

Enter S to skip sample from results extraction. Enter R to release a skip flag that exists for a sample.

**NOTE –** When the option code is entered, a description of the code displays to the right.

### Batch ID

Enter batch ID or select from LOV. This is not required.

### Reason

Enter the reason that a Skip or Release flag is being applied to the sample. For skips, enter the reason code or select from LOV. For releases, the skip reason is displayed: overwrite the skip reason with a valid release reason or select reason code from LOV. Reason code is required when batch ID has been entered.

### Desc

Field automatically populates with the description of the skip or release reason code that was entered. Field is not navigable.

## Detail Block Fields and Definitions

### Unit ID

Scan the unit ID or enter manually if the skip option was chosen. Enter an 'X' by the unit ID to be released if the release option was chosen.

**NOTE –** Unit ID will automatically populate when batch ID has been entered.

### OS Unit ID

Enter external ID for the unit assigned by the client blood center.

**NOTE –** If the specified contract calls for an internal unit ID that differs from the external unit ID, the outside ID displays.

### Received Date

Displays date and time that the sample was received at the regional testing facility. Field is not navigable.

### Reason

Enter the reason that a Skip or Release flag is being applied to the sample. For skips enter the reason code or select from LOV. For releases the skip reason is displayed, overwrite the skip reason with a valid release reason or select reason code from LOV.


WellSky Corporation
Proprietary and confidential

### Desc

Field automatically populates with the description of the skip or release reason code that was entered. Field is not navigable.

Press **F12** (Commit) to save entries.

## At Commit

At commit, all entered data is saved to the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.7 Enter Interim Result Code (EIRC)

## Intended Use

Use Enter Interim Result Code screen to specify an interim result for a specified test to be reported to the client blood center for one or more samples in a specified sample batch.

## Limitations

None

## Prerequisites

A valid sample batch must exist and samples in the batch must otherwise qualify for extraction.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `EIRC`.

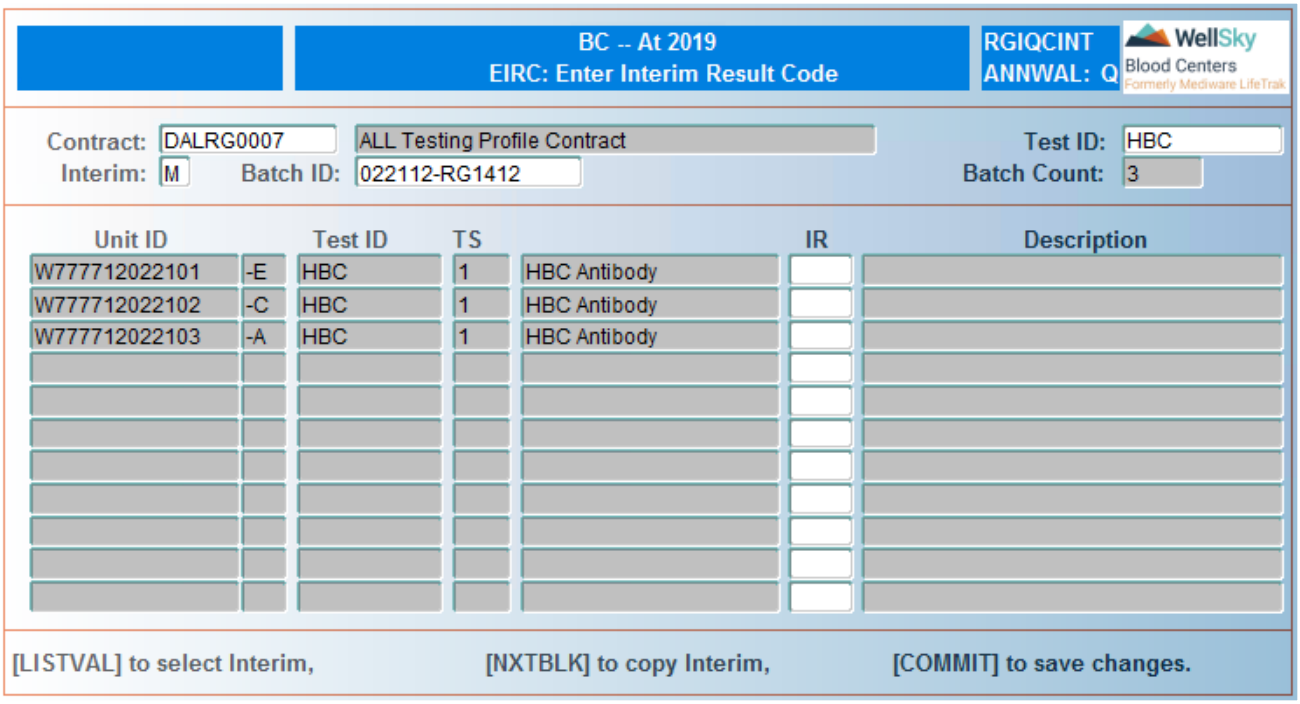


# Control Block Fields and Definitions

## Contract ID

Enter valid contract ID or select from LOV.

**NOTE –** When contract ID is entered, the contract description displays to the right.

## Test ID

Enter test ID or select from LOV. Entry in this field is not required.

## Interim

Enter interim code for the batch or select code from LOV.

**NOTE –** If an entry is made in this field, the reason entered will default to each unit.

## Batch ID

Enter valid batch ID or select batch from LOV.

## Batch Count

Field automatically populates with the number of units in the batch. Field is not navigable.


WellSky Corporation
Proprietary and confidential

## Detail Block Fields and Definitions

### Unit ID

Field automatically populates with the unit ID numbers contained in the batch. Field is not navigable.

### Test ID

Test ID automatically populates. Field is not navigable.

### TS

Field automatically populates with the test sequence. Field is not navigable.

### IR

Enter the interim result code or select from LOV.

**NOTE –** If an interim result of T is present at time of extract, the following actions occur:

- The interim result is not included in the extract file.
- Once a result is present on the test ID, the extract program never extracts those test results. The extract package continually skips those tests with the interim result of T (even if the T has been replaced with completed test result).

### Description

Field automatically populates with the description of the interim result code that was entered. Field is not navigable.

Press F12 (Commit) to save entries.

## At Commit

At commit, all entered data is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.8 Release Test Results (RGRQC)

## Intended Use

Use the Release Test Results screen to review test results on submitted samples (units) and release the check-in batch for results extraction. To qualify for release and per required test for extract, each unit must meet the following:

- Have either an actual result or interim result.
- Test results must reconcile - the correct number of tests and results including repeat testing for the required profile tests.

- No results in HOLDQ pending upload.
- No unscheduled tests, either required or additional.

Additionally, units with a HOLD type interdiction will present, but cannot be released for extract. The above data will cause an SQC Skip Reason to automatically be placed on the specified unit at QC commit. A Check-In Batch or unit with a Skip Reason will not display, with the exception of units that have an SQC Skip Reason. The SQC will be automatically removed by the system once the results are reconciled and there is no HOLD interdiction on the unit. The original samples check-in batch will continue to appear in this screen as "pending" until all results for every test required for extract per contract profile have been reconciled and attained final release.

The system will allow the Check-In Batch to be brought back to the RGRQC screen if the batch was previously QC'd when additional tests have been added to a unit ID.

## Limitations

- SQC Skip Reason is placed within the program and cannot be modified.
- If individual units in a batch have a HOLD type interdiction and the same HOLD type interdiction is used to place the entire BATCH on hold, once the hold is released from the batch, it will release the hold on the individual units.

## Prerequisites

- A Check-In Batch that is not skipped or attained a final QC in this function.
- Lab Master codes need to be defined:
  - RSMRR – list of test IDs that will be checked for reactive test results, so to highlight them in the form
  - SMAGE – the days based on the age of the sample
    - BLUE – 8+ days
    - GREEN – 5 days
    - RED – 6 - 7 days
    - YELLW – 3 - 4 days (yellow)
    - WHITE – 0 - 1 day

    The master code SMAGE must have the sequence 1 and sequence 2 defined for each individual code. The codes cannot be changed, but the description can change and the sequence values can change. If a code should not be used, terminate the code and it will not display.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword RGRQC.


WellSky Corporation
Proprietary and confidential

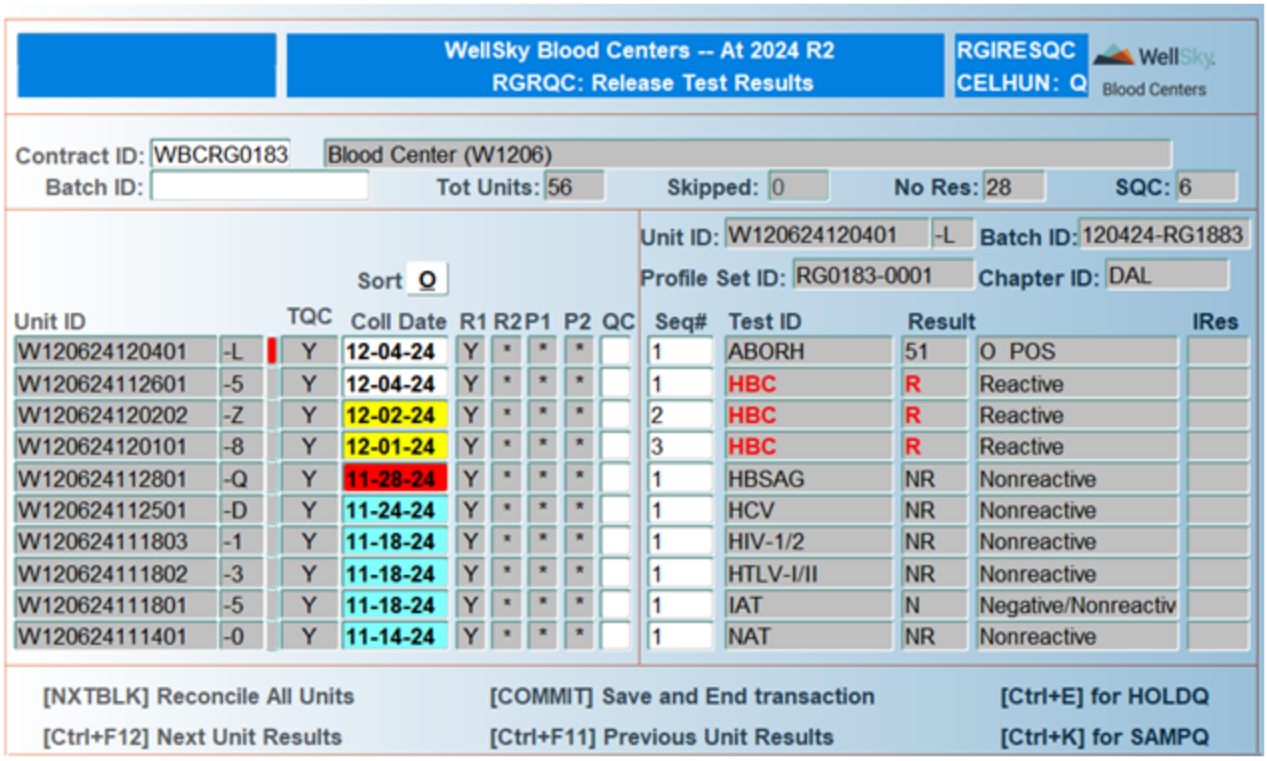


# Control Block Fields and Definitions

## Contract ID

Enter valid contract ID or select from LOV.

**NOTE –** When the contract ID is entered, a description of the contract displays to the right.

## Batch ID

Batch ID is not a required field. If the batch ID is left blank, all batches that have been checked in for that contract will be pulled for the user's logged-in chapter. If you specify the batch ID number, only those units and tests linked to that check-in batch will be pulled.

**NOTE –** LOV displays valid batches for the specified contracts that are not Skipped. When a valid batch ID is entered, the Total Units field, Skipped Units field, No Results field, and the SQC field populate. Units and test data also populate the detail block. The LOV will contain the batch number and chapter ID that checked in the batch.

## Total Units

Field automatically populates with the total number of units in the sample batch. Field is not navigable.

## Skipped Units

Field automatically populates with the number of units flagged to skip extraction. Field is not navigable.

**NOTE –** Count does not include units with SQC reason.

### No Results

Field automatically populates with the number of units in batch with no results. Field is not navigable.

**NOTE –** If the number in this field is not zero, a message displays in the status line that required results are missing. Use the "Batch In Process Query" screen to view details.

### SQC

Field displays number of units in the batch that has SQC reason present.

## Detail Block Fields and Definitions

### Unit ID

Field automatically populates all non-skipped units in a Check-In Batch. Field is not navigable.

### Reactive Unit Indicator

The indicator populates with RED if the unit has any test initial or repeats with reactive test results. The indicator displays as the user scrolls through the units that have reactive test results.

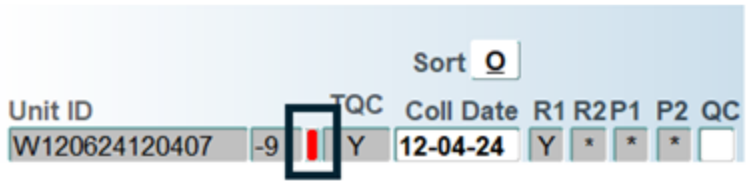


### TQC

Field automatically populates and represents whether the batch has had the Reconcile Tube Check-in performed. Y states QC has been performed and accepted. Field is not navigable.

### Coll Date

Field automatically displays the collection date for the sample. Field is not navigable. Use the Sort to sort the collection date in ascending or descending order.

The background of the collection date will change colors based on how old the sample is based on the current chapter date minus the collection date.

- BLUE – 8+ days
- GREEN – 5 days
- RED – 6 - 7 days


WellSky Corporation
Proprietary and confidential

- YELLW – 3 - 4 days (yellow)
- WHITE – 0 - 1 day

The display of colors is based on Lab master code SMAGE. Codes are defined for date ranges set in the master code table for sequence 1 and sequence 2. The following is an example of the code setup:

| Code | Description | Seq 1 | Seq 2 |
|---|---|---|---|
| BLUE | 8+ days | 8 | 999 |
| GREEN | 5 days | 5 | 5 |
| RED | 6-7 days | 6 | 7 |
| WHITE | 0-2 days | 0 | 2 |
| YELLW | 3-4 days | 3 | 4 |

The codes defined in SMAGE are static and unable to be changed. The descriptions can change and sequence 1 and sequence 2 can be updated. If only certain codes are to be used, terminate the other codes and they will not display in the program.

## R1

Field displays Y when red tube is present. A reason code displays for a missing tube, if applicable. Field is not navigable.

## R2

Field displays Y when red 2 tube is present. A reason code displays for a missing tube, if applicable. Field is not navigable.

## P1

Field displays Y when purple 1 tube is present. A reason code displays for a missing tube, if applicable. Field is not navigable.

## P2

Field displays Y when purple 2 tube is present. A reason code displays for a missing tube, if applicable. Field is not navigable.

## QC

Press **CTRL** + **F3** (Next Block) or **PAGE DOWN** to automatically populate the derived QC status. Otherwise, enter `Y` if QC is acceptable and results can be extracted. Enter `N` if QC is not acceptable and results cannot be extracted.

**NOTE –**

- Use the **UP** and **DOWN** arrow keys to scroll through the samples listed to make entries. As the cursor moves to a unit, test and results details displays at the right in Detail Block 2.
- Units with pending results cause the sample batch to be recalled for further reconciliation.

- Units with interim results during a previous QC process are flagged 'T' for temporary when that sample batch is again retrieved for reconciliation.
- Contracts that are to receive "All" result format must have an interim result for the repeat tests if they are not completed in order to extract the initial result.
- Units with a system QC Flag of N cannot be changed to a Y if it is a profile test that is required for extraction.
  - The only time allowed to change the QC flag to Y is if the profile has been updated with a new test ID which was not part of the profile when the unit was checked into the system.
- The QC flag can be updated from N to Y if the test ID is not required for extraction and results are/are not present.
- Any unit can be given a QC flag of N to identify it is unacceptable for results extraction.
- Pressing **CTRL** + **F3** (Next Block) or **PAGE DOWN** applies a system-defined QC flag to all the units in the samples batch, or for the entire contract if the batch ID is not specified.
- If a unit does not meet all the criteria for QC, the system will automatically set the QC flag to N and place an SQC reason.
- If the SQC Skip Reason was removed in the RESKIP (Skip Results from Extraction) function, and the results have yet to be reconciled, the unit will again receive a QC status of N and the SQC will be placed at QC commit.

## Reviewing Unit Test Results

Press **F6** (Menu) to navigate to Detail Block 2 to review unit test results.

Use the **UP** and **DOWN** arrow keys to scroll through the tests.

When the cursor moves to the Review Unit Test Results block, the Detail block at the top of the screen will change for each test with the unit number, check-in batch ID, profile set ID, and chapter that did the testing. The QC flag in the left block will be highlighted in yellow to show where you are on the left side.


WellSky Corporation
Proprietary and confidential

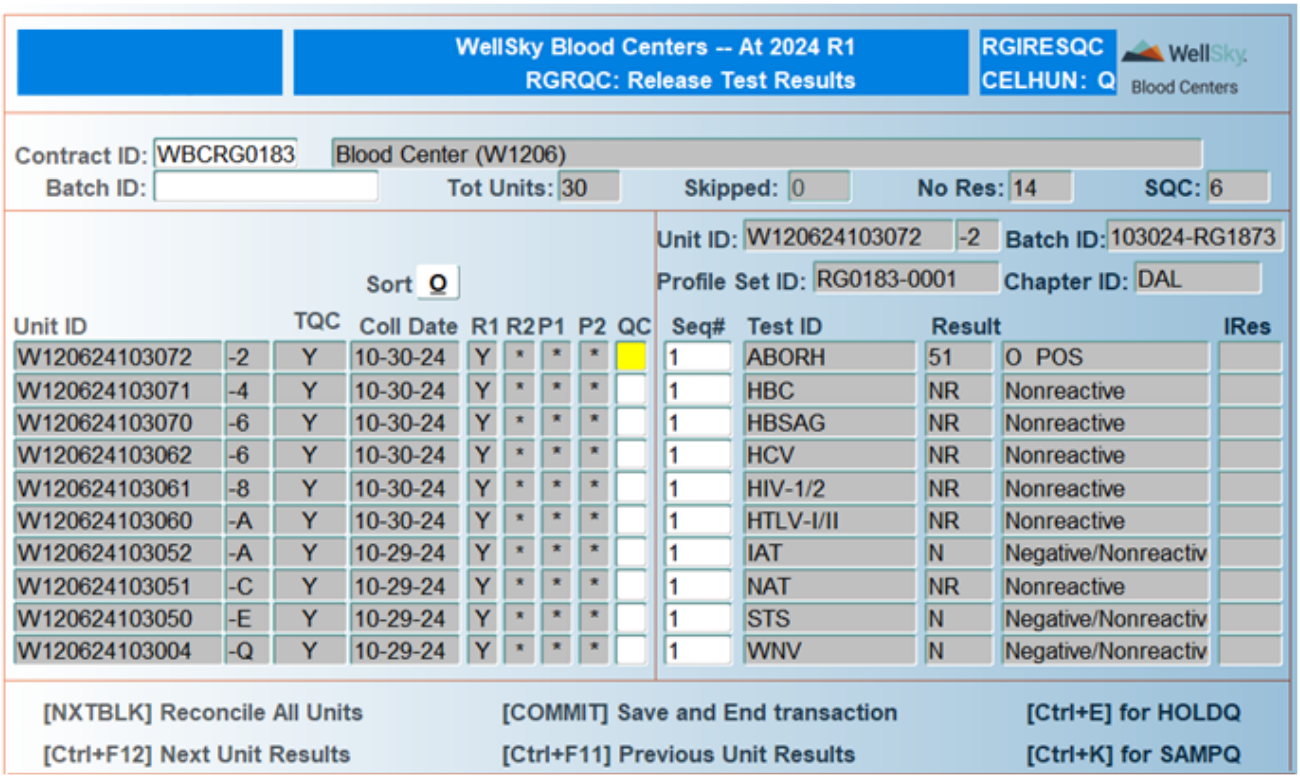


# Detail Block for Each Test for the Unit

## Unit ID

Field displays Y when purple 1 tube is present. A reason code displays for a missing tube, if applicable. Field is not navigable.

## Batch ID

Field displays the check-in batch created during REGTUBES. Field is not navigable. This field will update as you move down the tests to show the batch check-in number to which the test is linked.

## Profile Set ID

Field displays the profile set ID selected during REGTUBES. Field is not navigable. This field will update as you move down the tests to show the profile set ID to which the test is linked.

**NOTE –** The profile set ID will be blank for additional tests and repeat tests.

## Chapter ID

Field displays the chapter ID that performed the testing on the test ID. This field will update as you move down the tests to show different chapter IDs if the tests were performed in different chapters.

### Seq

Field populates automatically with the sequential identifier for each test. The numeral 1 indicates an initial test and numerals greater than 1 indicate repeat tests. Field cannot be updated.

### Test ID

Field populates automatically with the test ID code. Field is not navigable. The test ID will display in red if the test is listed in master code RSMRR, otherwise it will display in black font.



| | | | |
|---|---|---|---|
| 1 | HBSAG | R | Reactive |
| 2 | HBSAG | R | Reactive |
| 3 | HBSAG | NR | Nonreactive |

### Result

Field populates automatically and displays actual results for each test if available. The result code and its interpretation will display. Field is not navigable. The result code will display in red if the test ID is listed in master code RSMRR, otherwise it will display in black font.

| | | | |
|---|---|---|---|
| 1 | HBSAG | R | Reactive |
| 2 | HBSAG | R | Reactive |
| 3 | HBSAG | NR | Nonreactive |

### Ires

Field populates automatically and displays any interim results entered for the respective test. Field is not navigable.

## Hot Keys

### [NXTBLK]

When the cursor is in the Units block, press **[NXTBLK]** (**CTRL+F3**) to reconcile all units at one time.

### [Execute Query]

When the cursor is in the Test block, press Execute Query [END] to move the cursor to the next unit without moving back to the Units block.

### [CTRL+E]

Press **CTRL+E** to move to Test Batch in Holding Test Query (HOLDQ). The user will have to enter data in that control block. To move back to RGRQC, press **F8** (Exit Screen).

### [CTRL+K]

Press **CTRL+K** to move to Samples Query (SAMPQ). The unit number will be passed from the parent to SAMPQ. In other words, whatever unit number the cursor is on will be passed to SAMPQ. Press **F8** (Exit Screen)to close SAMPQ and move back to RGRQC.


WellSky Corporation
Proprietary and confidential

## Saving notes or running reports after moving to SAMPQ from RGRQC

To add notes to sample or run reports in SAMPQ, do not make any updates in RGRQC. Move to SAMPQ (CTRL +K) and then run reports or add notes.

Limitation:

If the user has made any updates in RGRQC and then moves to SAMPQ and tries to enter notes or run a report, the following message will appear:

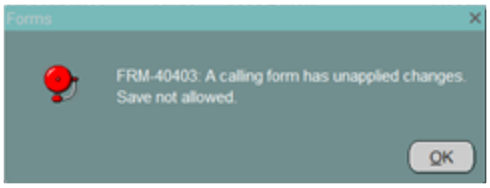


If the user exits out of SAMPQ and is back in RGRQC, clearing the field will not allow the user to run reports and enter notes in SAMPQ again. The program still thinks the user is making updates to the data in the screen. The RGRQC screen will need to be cleared and the data refreshed in the screen in order to run reports and enter notes in SAMPQ.

## Locking Records

If a user is working in RGRQC and another user is in RGRQC trying to work on the same record the first user has been working on, the following message will appear:

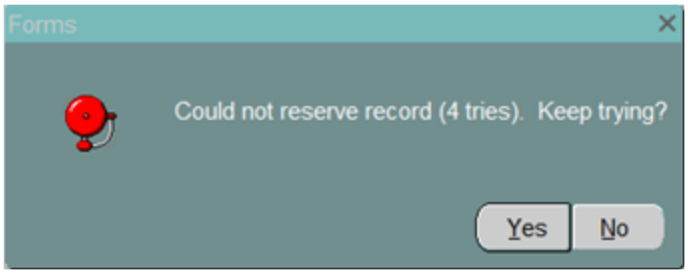


The record is locked, and you will have to ask the other user to exit the screen in order for you to work on that record.

## [F8]

When the cursor is in the Tests block, press **F8** to move out of the Test block and back to the Units block.

## [Commit - F12]

Press **F12** (Commit) to commit the updated information to the database and release the units that have passed the QC criteria.

# At Commit

At commit, all entered data is saved to the database.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Functions menu. Extract results to clients using Extract Test Results (EXTRACT).

# 23.2.9 Extract Test Results (EXTRACT)

## Intended Use

Use the Extract Test Results screen to extract contract results for units that have been designated suitable for customer release. The results extraction must be manually defined to include either initial results or repeat results if the contract calls for all results to be reported. Extraction of initial and repeat results must occur as separate operations. A single results file cannot contain both types of results. Once the type of extraction has been defined, the system will list samples batches that qualify for extraction.

The system will also produce an extraction log report and RSM report as part of the extraction process.

## Limitations

The following are extraction exceptions:

- No result for a unit having a HOLD interdiction may be extracted.
- No result on a unit may be extracted for which a SKIP reason has been defined and not removed.
- Even though a samples batch may have been released for extraction, no results for a unit in that samples batch may be extracted for which a QC flag of N has to be manually set.
- ISBT 128 format will not extract using the SafeBlood format.

## Conditions to Cause the Extraction Process to Fail

The system will abort that entire extraction process if one or more of the following abnormal conditions exist for units or check-in samples batches marked for extraction:

- Any results exist for test(s) not scheduled.
- A profiled test is missing.
- A result required for extraction is missing.
- During a repeat extraction, an initial result has not been extracted.
- Final interpretation was requested, and no repeats have been performed for a required test.
- Results for an incorrect number of repeat tests exist.
- More than one non-reactive result exists and no reactive result exists.
- A required test result has been voided, cancelled, or edited post-RGRQ.
- A sample has not been through RGRQC.
- A batch selected for extraction has not been released.
- A sample for which an actual result is available at the time of extraction has been reconciled with an interim result.

In the event the extraction process is aborted for one or more of the conditions listed above, offending units must either be resolved or marked to skip extraction (for later resolution). The aborted extraction may then be redefined and re-attempted.


WellSky Corporation
Proprietary and confidential

Extraction must be performed by a user other than the one who performed Release Test Results (RGRQC) if the TWOTECH parameter value is set to Y in Maintain Menu Items (MENUITM). If the TWOTECH parameter value is set to N in Maintain Menu Items (MENUITM), then the same tech can perform both functions.

## Prerequisites

- A sample batch must have been released for extraction (QC) before results for any unit in the batch may be extracted.
- Test must be defined in Regional Testing Contract (RCON) screen.
- Each test must have the "required for extract" flag set and the "never extracted" flag set and required in the electronic file (EFF) for all profiles.
- Non-profile tests will not be extracted in the electronic file if the NP_EF is set to N. If it is blank, non-profile tests will be in the electronic file. If non-profile tests are in the profile and terminated, you need to decide if they should be included in the electronic file by setting the EFF flag.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu, or by entering the keyword `EXTRACT`.

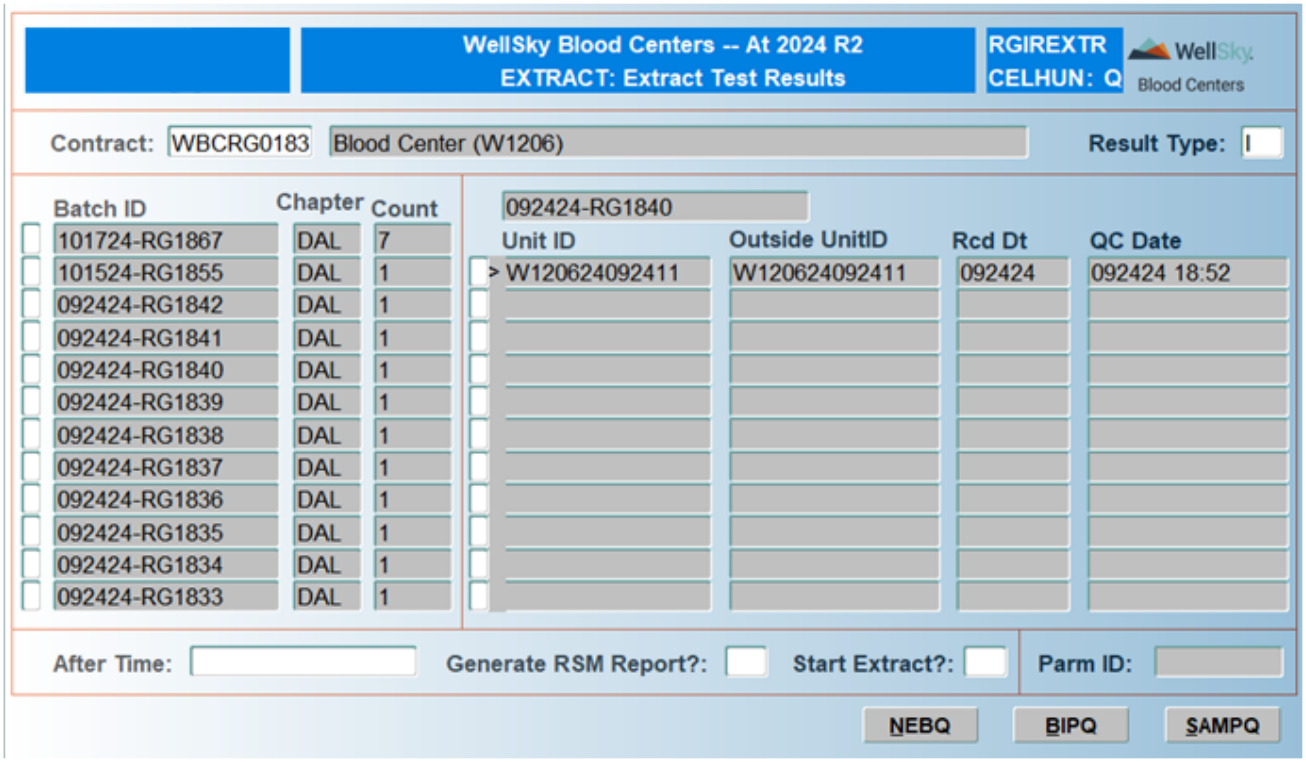


## Control Block Fields and Definitions

### Contract ID

Enter valid contract ID or select from LOV.

**NOTE –** When the contract ID is entered, a description of the contract displays to the right.

### Result Type

Enter `I` for initial (and Final) results, `R` for repeat results, or `F` for SafeBlood results.

**NOTE –**

- If the result type for the contract is F, then I is entered.
- If the result type for the contract is S, then F is entered.
- If the result type for the contract is A, then for the initial extract, I is entered, and R is entered for repeats.

## Detail Block Fields and Definitions

After the contract ID is entered, the following displays:

### Batch ID

Field automatically populates with the Batch ID numbers for the contract selected. Field cannot be updated.

### Chapter

Field automatically populates with the chapter ID that generated the batch ID number. Field cannot be updated.

### Count

Field automatically populates with the total number of units in the sample batch. Field is not navigable.

### Unit ID

Field automatically populates with the unit IDs that are contained in the batch. Field is not navigable.

**NOTE –** If a batch has been extracted but has skipped samples, the batch will appear and the unit numbers will be blank. Units will not appear in extract until the skip reason has been resolved.

### Outside Unit ID

Field automatically populates with the outside unit ID number if present. Field is not navigable.

### Rcd Dt

Field automatically populates with the date the sample was received. Field is not navigable.

### QC Date

Field automatically populates with the date and time that QC was performed. Field is not navigable.

Use the UP and DOWN arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

Press **ENTER** next to the batch to be extracted. Press **ENTER** again to deselect a batch.

Press **CTRL** + **F3** (Next Block) once desired batches have been selected.

# Second Detail Block Fields and Definitions

## After Time

To delay extraction for a later time, enter the desired date and time MM-DD-YY HH24:MI. To begin extraction immediately, press **ENTER** and leave the field blank.

**NOTE –** If the after time is set, the RSM report is generated and has a status of SUBMIT. It will not complete until extract has met the After Time date and time. If the extract ABORTS, the RSM report will be removed from the PRINT screen.

## Generate RSM Report

Field defaults to `Y`. Leave the default to print an RSM Report, or enter `N` to disable RSM report printing. The RSM report opens as a PDF file in a new window, as shown in the following example.

**NOTE –** Master Code TLABS must be defined for the chapter. If it is not defined, the RSM report will abort (but extract will still occur).

## Move RSM Report to Designated Directory

To move the RSM report to a designated directory, the system parameter RSM_COPY must be defined for the facility. If it is not defined, the RSM report will not move to the directory.

**NOTE –** Only one directory can be defined for the Institution; it cannot be different by chapter.

**EXAMPLE –** /home/sbcsys/qtrak/RSMCOPY/

09-11-15 13:57 LCTS03 : Q
RSMREPRT Rel: 06 Page 1 of 2

Results Report
Custom Testing Solutions

Chapter: WAD Your Blood Center
Contract: WADRG0069 ADD TEST INTERDICTION API

**Reactive Units:**

Collection Date: 09-09-2015

| Client Unit ID | Tested Unit ID | HBC | HBSAG | HCV | HIV | HTLV |
|---|---|---|---|---|---|---|
| W807715090905 | W807715090905 | NR | NR | NR | NR | R |

Testing Performed By: Custom Testing Solutions
1813 Erie

CLIA #: 518976
Tempe AZ 67777

R5254600_WADRG0069_091101

This information has been disclosed to you from confidential records which are protected by the law.
State law prohibits you from making any further disclosure of a transmissible disease result without the specific written consent of the person to whom it pertains, or as otherwise permitted by law.

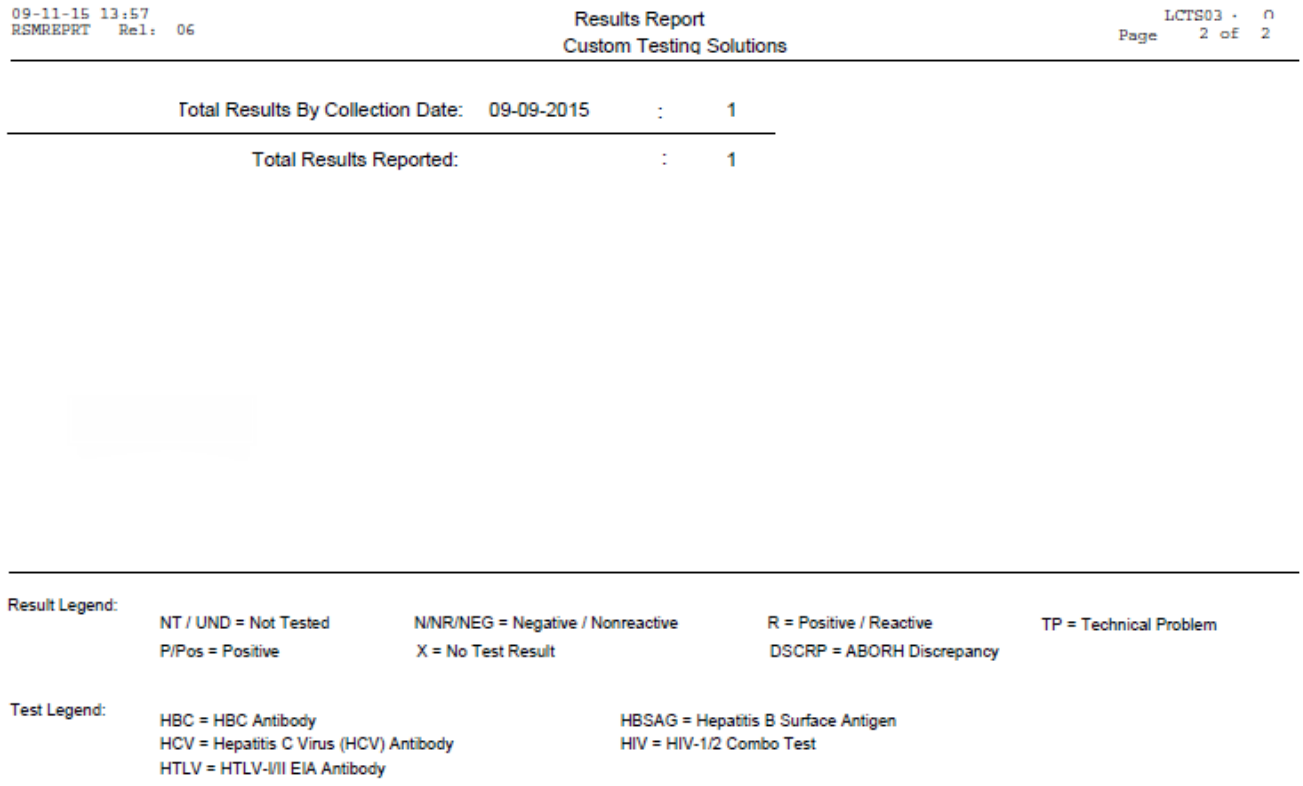

09-11-15 13:57
RSMREPRT Rel: 06

Results Report
Custom Testing Solutions

LCTS03 - 0
Page 2 of 2

Total Results By Collection Date: 09-09-2015 : 1

Total Results Reported: : 1

Result Legend:

NT / UND = Not Tested
P/Pos = Positive
N/NR/NEG = Negative / Nonreactive
X = No Test Result
R = Positive / Reactive
DSCRP = ABORH Discrepancy
TP = Technical Problem

Test Legend:

HBC = HBC Antibody
HCV = Hepatitis C Virus (HCV) Antibody
HTLV = HTLV-I/II EIA Antibody
HBSAG = Hepatitis B Surface Antigen
HIV = HIV-1/2 Combo Test

## Start Extract

Enter Y to begin the extraction either immediately or after the delay time. Enter N in the field to not start extract.

## Parm ID

Field populates automatically and displays system-assigned number. Field is not navigable.

Press **F12** (Commit) to start extraction.

**NOTE –** A system-assigned number is generated from the Application Sequence Number table (NUMBERS). The number sequence is based on RESULT_BATCH_ID. It will take the number in the MAX NUMBER field and add 1 to assign the next number.

**NOTE –** Parm ID is generated after the user tabs out of the After Time field. If the user follows the normal workflow of tabbing out of the fields, they will see the parm ID. However, if the user uses mouse navigation and skips the After Time field to go directly to the Extract field, the system will generate the parm ID at commit, and the user will not be able to see the parm ID in this case.

# Extraction Log Report

The system generates a report detailing the success or failure of the extract. One of the following reports is generated:

## Extract of Test Not to be Included in Electronic File

**NOTE –** If the test is set to not be included in the electronic file, the number of associated units and the number of associated tests are subtracted from the total, which could be 'No of unit records created=0' and 'No of results included=0'.

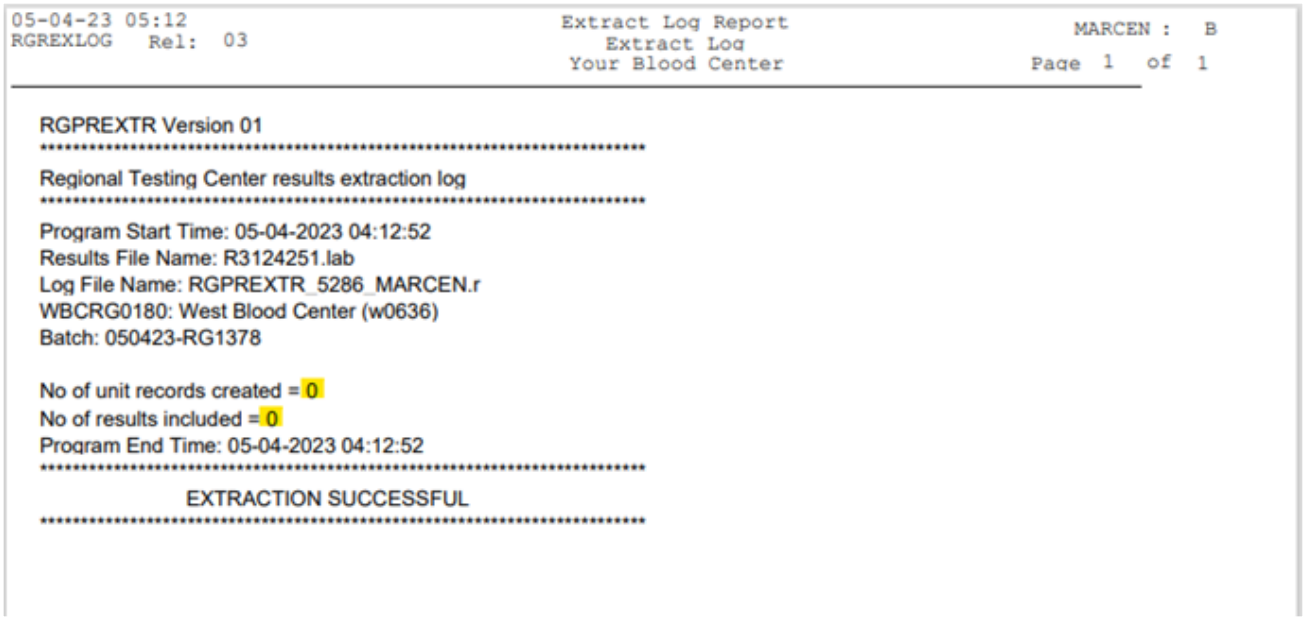

```
05-04-23 05:12                    Extract Log Report                    MARCEN :  B
RGREXLOG   Rel:  03                    Extract Log
                                  Your Blood Center                  Page  1  of  1

RGPREXTR Version 01
**********
Regional Testing Center results extraction log
**********
Program Start Time: 05-04-2023 04:12:52
Results File Name: R3124251.lab
Log File Name: RGPREXTR_5286_MARCEN.r
WBCRG0180: West Blood Center (w0636)
Batch: 050423-RG1378

No of unit records created = 0
No of results included = 0
Program End Time: 05-04-2023 04:12:52
**********
                EXTRACTION SUCCESSFUL
**********
```

## Extract Aborted (Incomplete Testing)

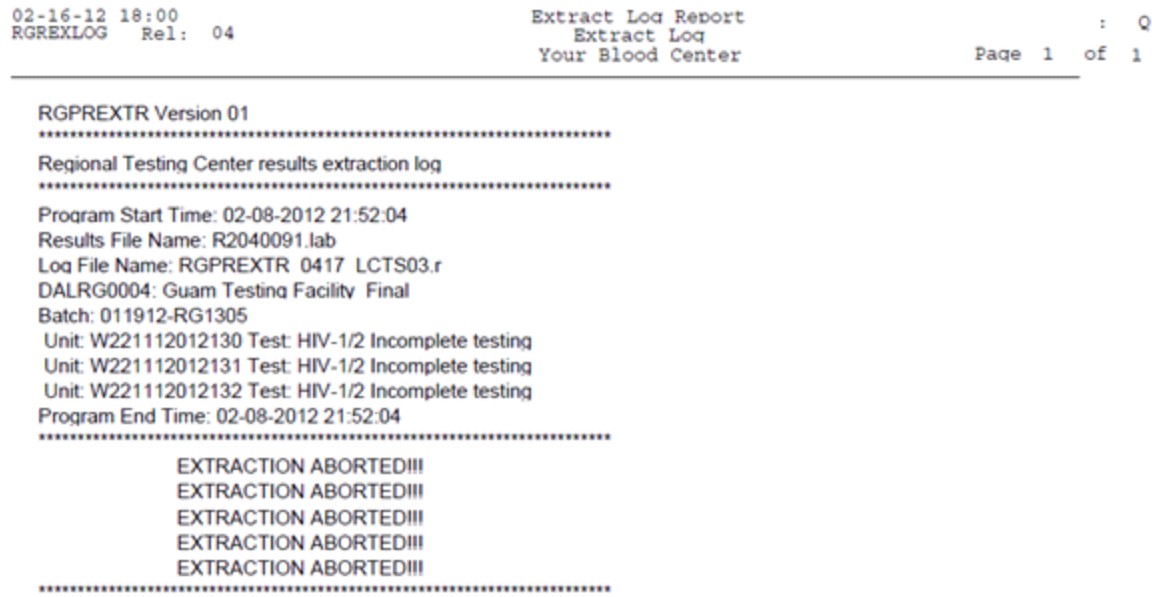

```
02-16-12 18:00                    Extract Log Report                       :  Q
RGREXLOG   Rel:  04                    Extract Log
                                  Your Blood Center                  Page  1  of  1

RGPREXTR Version 01
**********
Regional Testing Center results extraction log
**********
Program Start Time: 02-08-2012 21:52:04
Results File Name: R2040091.lab
Log File Name: RGPREXTR_0417_LCTS03.r
DALRG0004: Guam Testing Facility_Final
Batch: 011912-RG1305
 Unit: W221112012130 Test: HIV-1/2 Incomplete testing
 Unit: W221112012131 Test: HIV-1/2 Incomplete testing
 Unit: W221112012132 Test: HIV-1/2 Incomplete testing
Program End Time: 02-08-2012 21:52:04
**********
                EXTRACTION ABORTED!!!
                EXTRACTION ABORTED!!!
                EXTRACTION ABORTED!!!
                EXTRACTION ABORTED!!!
                EXTRACTION ABORTED!!!
**********
```


WellSky Corporation
Proprietary and confidential

## Extract Aborted (Repeat with no Initial Extract)

```
02-16-12 17:57                          Extract Log Report                          :  Q
RGREXLOG   Rel:  04                        Extract Log
                                        Your Blood Center                  Page  1  of  1
```

RGPREXTR Version 01

**********

Regional Testing Center results extraction log

**********

Program Start Time: 02-13-2012 03:26:49
Results File Name: R2044156.lab
Log File Name: RGPREXTR_4987_LCTS03.r
DALRG0007: ALL Testing Profile Contract
Batch: 012012-RG1341
Unit: W777712012100 Test: HBC Repeat with no initial extraction
Unit: W777712012101 Test: HBC Repeat with no initial extraction
Unit: W777712012102 Test: HBC Repeat with no initial extraction
Program End Time: 02-13-2012 03:26:49

**********

EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!

**********

## Extract Successful (Reactive After Non-Reactive)

```
02-16-12 18:01                          Extract Log Report                          :  Q
RGREXLOG   Rel:  04                        Extract Log
                                        Your Blood Center                  Page  1  of  1
```

RGPREXTR Version 01

**********

Regional Testing Center results extraction log

**********

Program Start Time: 02-08-2012 22:11:01
Results File Name: R2040092.lab
Log File Name: RGPREXTR_0133_LCTS03.r
DALRG0004: Guam Testing Facility_Final
Batch: 011912-RG1307
Unit: W221112012139 Test: HBSAG Reactive after nonreactive (no abort)

No of unit records created = 3
No of results included = 27
Program End Time: 02-08-2012 22:11:01

**********

EXTRACTION SUCCESSFUL

**********

## Extract Successful (Successful Extract)

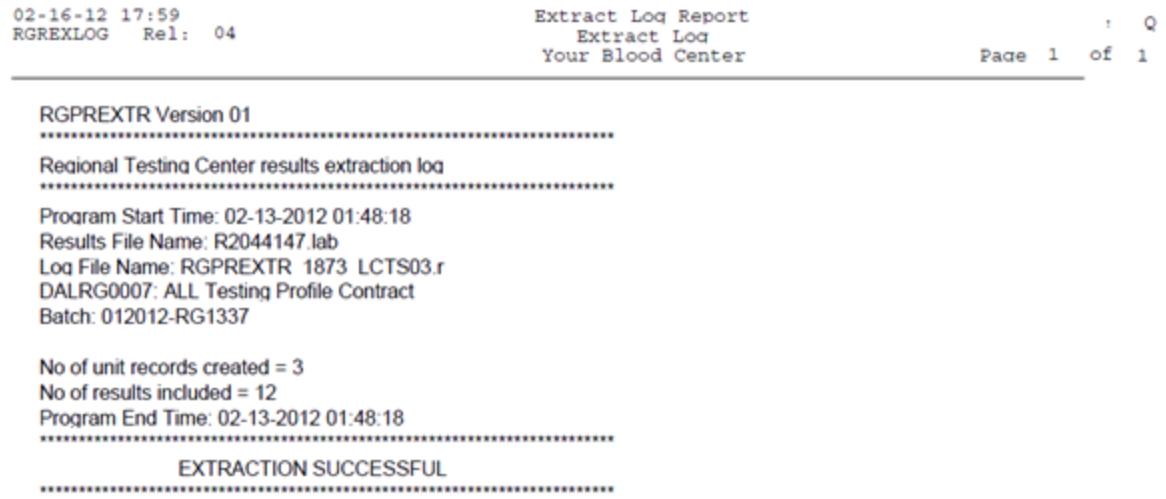

```
02-16-12 17:59                    Extract Log Report                    :  Q
RGREXLOG   Rel:  04                   Extract Log
                                  Your Blood Center              Page  1  of  1

RGPREXTR Version 01
**********
Regional Testing Center results extraction log
**********
Program Start Time: 02-13-2012 01:48:18
Results File Name: R2044147.lab
Log File Name: RGPREXTR  1873  LCTS03.r
DALRG0007: ALL Testing Profile Contract
Batch: 012012-RG1337

No of unit records created = 3
No of results included = 12
Program End Time: 02-13-2012 01:48:18
**********
              EXTRACTION SUCCESSFUL
**********
```

To view the extraction log report, use the PRINT or SPRINT screen.

### NEBQ Button

After entering the contract ID, the NEBQ button will enable. Click NEBQ or use the hot key **ALT + N** to move the cursor to Non-Extracted Batches Query (NEBQ). Once the query opens, the contract ID will populate based on the Extract Test Results contract ID entry. Execute the query based on the field entry. Press F8 (Exit Screen) to exit the query and move back to Extract Test Results.

### BIPQ Button

After entering the contract ID, the BIPQ button will enable. Click BIPQ or use the hot key **ALT + B** to move the cursor to Batches in Progress Query (BIPQ). Once the query opens, the contract ID will populate based on the Non-Extracted Batches Query contract ID. Execute the query based on the field entry. Press F8 (Exit Screen) to exit the query and move back to Non-Extracted Batches Query.

### SAMPQ Button

After entering the contract ID and Result Type, the batches display and the SAMPQ button will enable.

If a specific unit is not selected and the user clicks SAMPQ or uses the hot key **ALT + S** to move the cursor to Samples Query (SAMPQ). Once the query opens, the user has to enter the unit number.

If a specific unit is selected (by placing the cursor on the unit ID row), click SAMPQ or use the hot key **ALT + S** to move the cursor to Samples Query (SAMPQ). The unit will automatically populate in SAMPQ and all data related to the unit number displays in the query.

## At Commit

At commit, all entered data is saved to the database and extraction begins either immediately or after the time that was entered.

- When extract has occurred and skipped samples are present in the batch ID, the batch will remain in extract without any unit numbers present. This is because the pending skipped units still need to be extracted.

- If the batch was aborted, it will remain in the extract screen until the problem is resolved and the batch can be extracted successfully.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.10 Re-Extract Test Results (REXTRACT)

## Intended Use

Use the Re-Extract Test Results screen to re-extract results for a sample batch when the original extract file was damaged or must otherwise be regenerated. Data selected for the original extract cannot be changed. When using the re-extract process, the entire extraction must be repeated as a single entity. All batches and/or units included in the extraction, however, may be viewed in this screen.

## Limitations

None

## Prerequisites

A sample batch must have been released for extraction before results for any unit in the batch may be extracted.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `REXTRACT`.

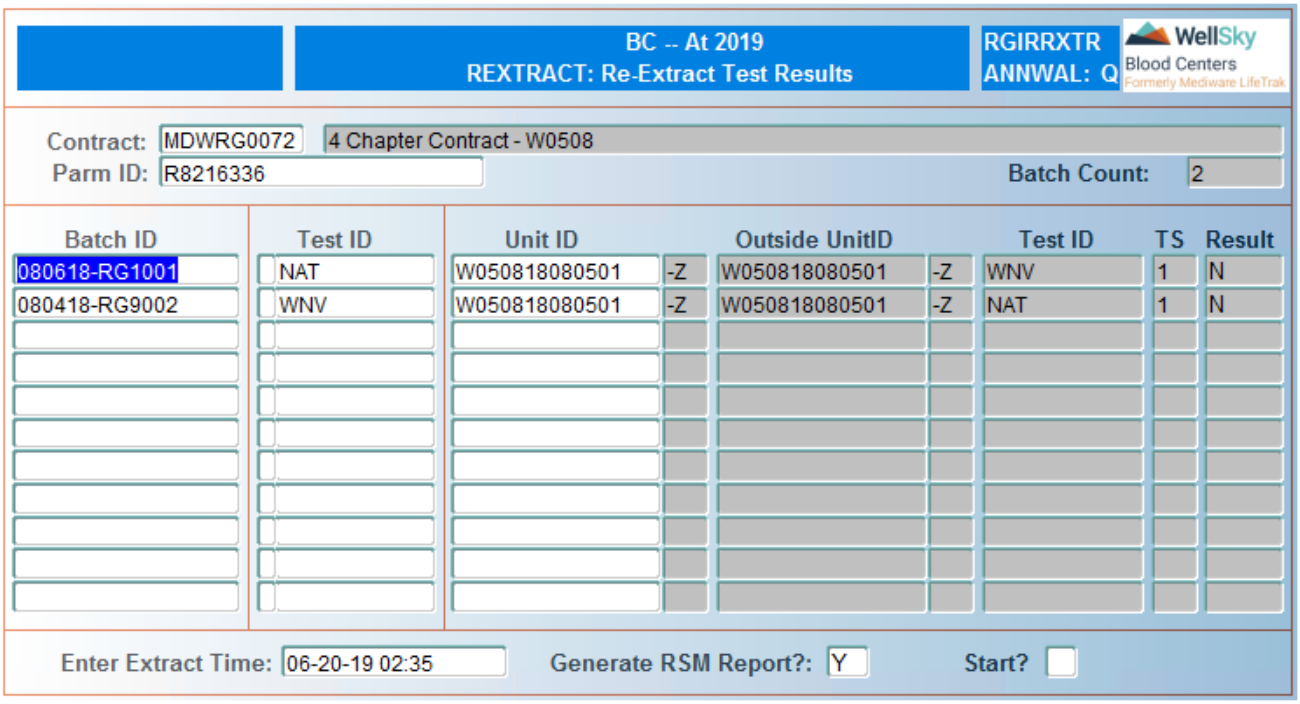

# Control Block Fields and Definitions

## Contract ID

Enter valid contract ID or select from LOV.

**NOTE –** When the contract ID is entered, a description of the contract displays to the right.

## Parm ID

Enter Parm ID for the extraction process to be repeated or select valid ID from LOV.

## Batch Count

Field automatically populates with the total number of batches for the selected criteria. Field is not navigable.

# Detail Block Fields and Definitions

## Batch ID

Field automatically populates with the Batch ID numbers for the contract selected. Field cannot be updated.

**NOTE –** To select Batch IDs for extraction press ENTER to mark or unmark sample batch.

When all batches intended for extraction are marked, press CTRL + F3 (Next Block).

## Test ID

Field automatically populates with the Test ID for the batch.

## Unit ID

Field automatically populates with the unit ID's that are contained in the batch.

## Outside Unit ID

Field automatically populates with the outside unit ID number if present.

## Test ID

Field automatically populates with the Test ID for the unit.

## TS

Field automatically populates with the test sequence.

## Rslt

Field automatically populates with the test result.

Use the UP and DOWN arrow keys to scroll through the list.

Press ENTER next to the batch to be extracted. Press ENTER again to deselect a batch.


WellSky Corporation
Proprietary and confidential

Press CTRL + F3 (Next Block) once desired batches have been selected.

# Second Detail Block Fields and Definitions

## Enter Extract Time

Enter the time to start re-extraction in MM-DD-YY HH24:MI format, or press ENTER to start at the current time.

## Generate RSM Report

Field defaults to Y. Leave the default to print an RSM Report, or enter N to disable RSM report printing. The RSM report opens as a PDF file in a new window, as shown in the following example.

**NOTE –** Master Code TLABS must be defined for the chapter. If it is not defined, the RSM report will abort (but extract will still occur).

## Move RSM Report to Designated Directory

To move the RSM report to a designated directory, the system parameter RSM_COPY must be defined for the facility. If it is not defined, the RSM report will not move to the directory.

**NOTE –** Only one directory can be defined for the Institution; it cannot be different by chapter.

**EXAMPLE –** /home/sbcsys/qtrak/RSMCOPY/

09-11-15 13:57 Results Report LCTS03 : Q
RSMREPRT Rel: 06 Custom Testing Solutions Page 1 of 2

Chapter: WAD Your Blood Center
Contract: WADRG0069 ADD TEST INTERDICTION API

**Reactive Units:**

Collection Date: 09-09-2015

| Client Unit ID | Tested Unit ID | HBC | HBSAG | HCV | HIV | HTLV |
|---|---|---|---|---|---|---|
| W807715090905 | W807715090905 | NR | NR | NR | NR | R |

Testing Performed By: Custom Testing Solutions
1813 Erie

CLIA #: 518976
Tempe AZ 67777

R5254600_WADRG0069_091101

This information has been disclosed to you from confidential records which are protected by the law.
State law prohibits you from making any further disclosure of a transmissible disease result without the specific written consent of the person to whom it pertains, or as otherwise permitted by law.


WellSky Corporation
Proprietary and confidential

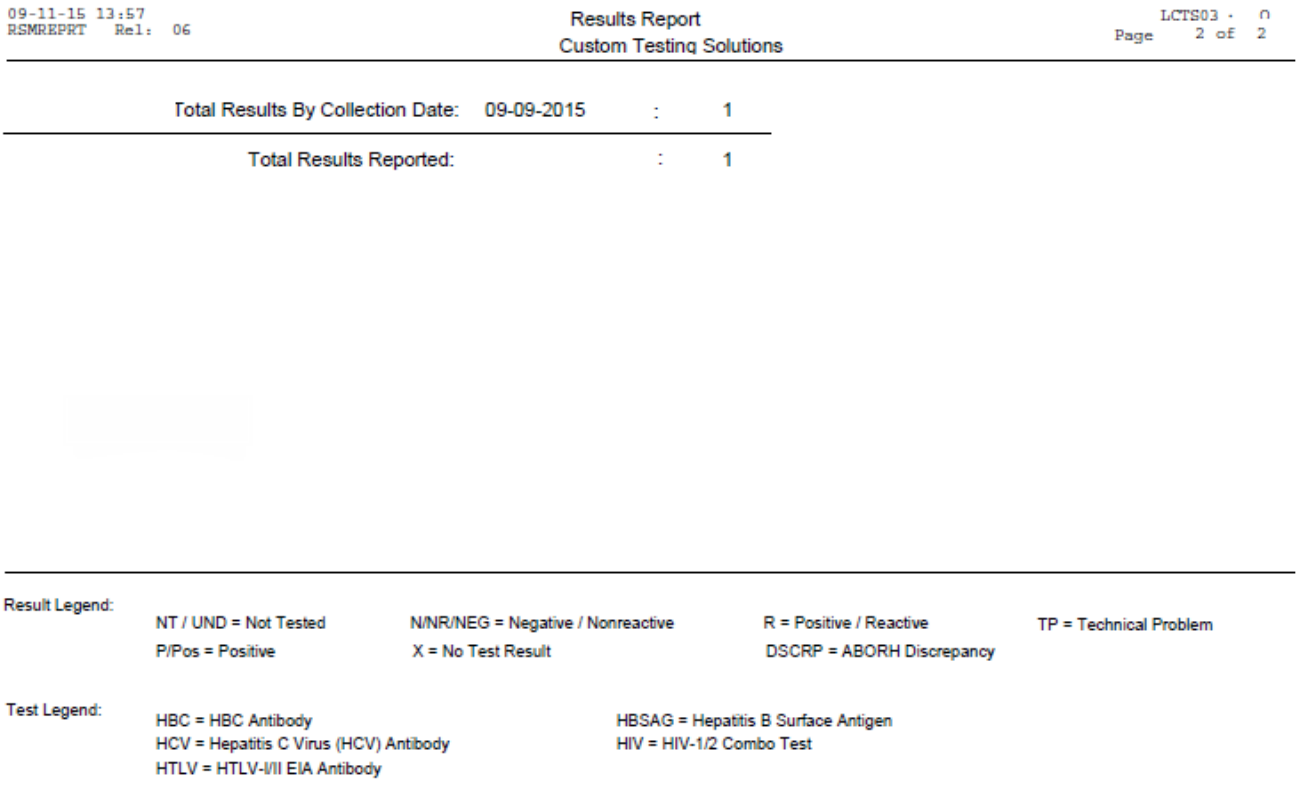

09-11-15 13:57 Results Report LCTS03 - 0
RSMREPRT Rel: 06 Custom Testing Solutions Page 2 of 2

Total Results By Collection Date: 09-09-2015 : 1

Total Results Reported: : 1

Result Legend:
NT / UND = Not Tested
N/NR/NEG = Negative / Nonreactive
R = Positive / Reactive
TP = Technical Problem
P/Pos = Positive
X = No Test Result
DSCRP = ABORH Discrepancy

Test Legend:
HBC = HBC Antibody
HBSAG = Hepatitis B Surface Antigen
HCV = Hepatitis C Virus (HCV) Antibody
HIV = HIV-1/2 Combo Test
HTLV = HTLV-I/II EIA Antibody

### Start

Enter `Y` to begin the extraction immediately.

Press **F12** (Commit) to start extraction.

## At Commit

At commit, all entered data is saved to the database and extraction begins.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.11 Reset Under Extract Flag (UNDEXT)

## Intended Use

Use the Reset Under Extract Flag to reset the under extract flag when extract has been attempted but the file was not generated. This could be due to network insufficiency at time of extract. Once the under extract flag is reset will allow user to perform extract process again.

## Limitations

None

## Prerequisites

A sample batch must have had extract process attempted, but file was not generated for 60 minutes or longer.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `UNDEXT`.

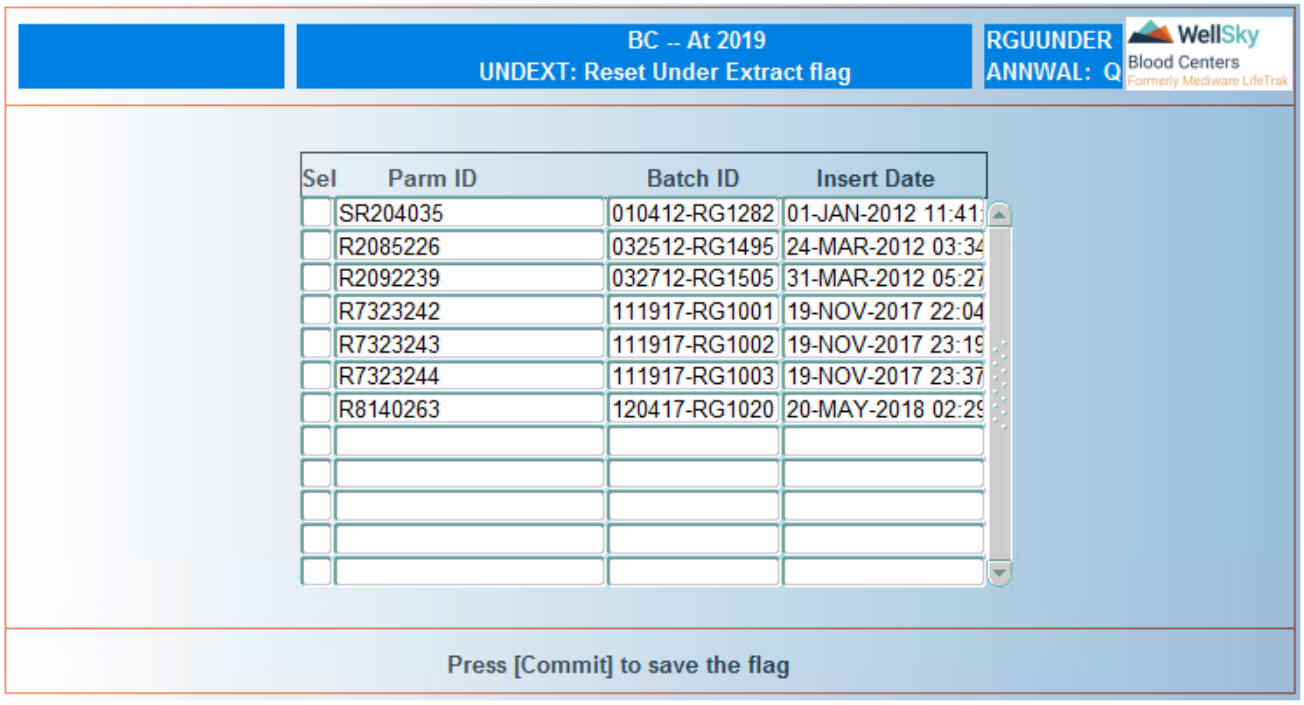


## Detail Block Fields and Definitions

### Reset

Use the **UP** and **DOWN** arrow keys to scroll through the list. Press **ENTER** to select or deselect the batches to be extracted. The system will place an X in the Reset field next to each batch selected to be extracted.

### Parm ID

Field populates automatically and displays a list of Parm IDs that have not been extracted in the last 60 minutes or longer. Multiple batches can be assigned to a single Parm ID. This field is not navigable.

### Batch ID

Field populates automatically and displays the Batch ID associated with the listed Parm ID. This field is not navigable.

### Time

Field populates automatically and displays the insert time and date that the Parm ID was inserted into the appropriate table. This field is not navigable.


WellSky Corporation
Proprietary and confidential

## At Commit

At commit, under extract flag is reset.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.12 Delete Regional Sample Check-In Batch (SUPERDEL)

## Intended Use

Use the Delete Regional Sample Check-In Batch screen to purge information on units with a barcode scheme of Codabar, ISBT 128 or free format and batches that do or do not contain units. The system shows all tables that have information associated with the selected unit.

**Important!** Using this screen will remove from the system all data related to the entered unit or batch; the user will not be able to retrieve such removed information.

**NOTE –** If an external number has been checked where it copies the external to the internal, and then checked in as a duplicate, it will have a different internal number linked to the external unit number. If you scan in the external number it will display both internal unit numbers in the Detail Block.

## Limitations

None

## Prerequisites

A Check-In batch must exist with or without units present.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `SUPERDEL`.

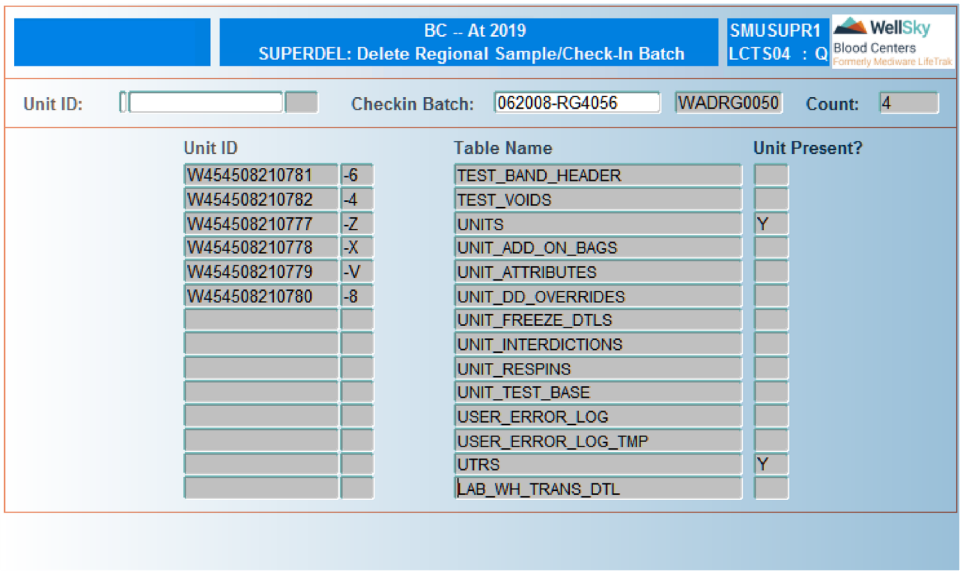


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter the unit ID. Press **ENTER** to leave the field blank and advance to cursor to the Check-in batch field.

## Check-In Batch

Enter the check-in batch ID. Entry in this field is not required if a unit ID was entered.

**NOTE –** LOV is not available for this field.

## Count

System displays the number of tables that have information associated with the unit selected in the Detail Block.

# In the Detail Block

## Unit ID

The system displays all Unit IDs associated with the checkin batch entered in the Control Block. If a Unit ID was entered in the Control Block, the system displays that Unit ID only.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## Table Name

The system lists all tables that could contain information associated with the selected unit. The system displays a Y in the *Unit Present?* field if the associated table does contain information associated with the selected unit, as shown in the following example:

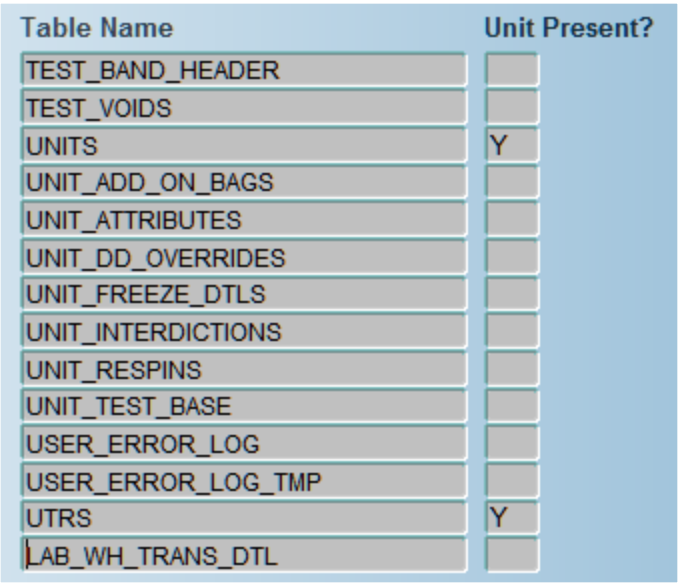

| Table Name | Unit Present? |
|---|---|
| TEST_BAND_HEADER | |
| TEST_VOIDS | |
| UNITS | Y |
| UNIT_ADD_ON_BAGS | |
| UNIT_ATTRIBUTES | |
| UNIT_DD_OVERRIDES | |
| UNIT_FREEZE_DTLS | |
| UNIT_INTERDICTIONS | |
| UNIT_RESPINS | |
| UNIT_TEST_BASE | |
| USER_ERROR_LOG | |
| USER_ERROR_LOG_TMP | |
| UTRS | Y |
| LAB_WH_TRANS_DTL | |

Press **CTRL** + **F3** (Next Block) to move to the *Table Name* field. Use the **UP** and **DOWN** arrow keys to scroll through the list.

## Deleting the Unit/Batch

Press **F12** (Commit) to delete the select unit/batch. The following window opens, requiring confirmation.




Enter `Y` to confirm and delete the unit/batch. Enter `N` to abort the deletion.

## At Commit

At commit, all selected data is deleted from the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.13 Reset Extract for Parm/Batch Sample (SUPEXRST)

## Intended Use

Use the Reset Extract for Parm/Batch Sample screen to reset an extract based on a Parm ID /Batch ID combination, or a Unit ID.

## Limitations

None

## Prerequisites

A Check-In batch must exist with or without units present.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword `SUPEXRST`.

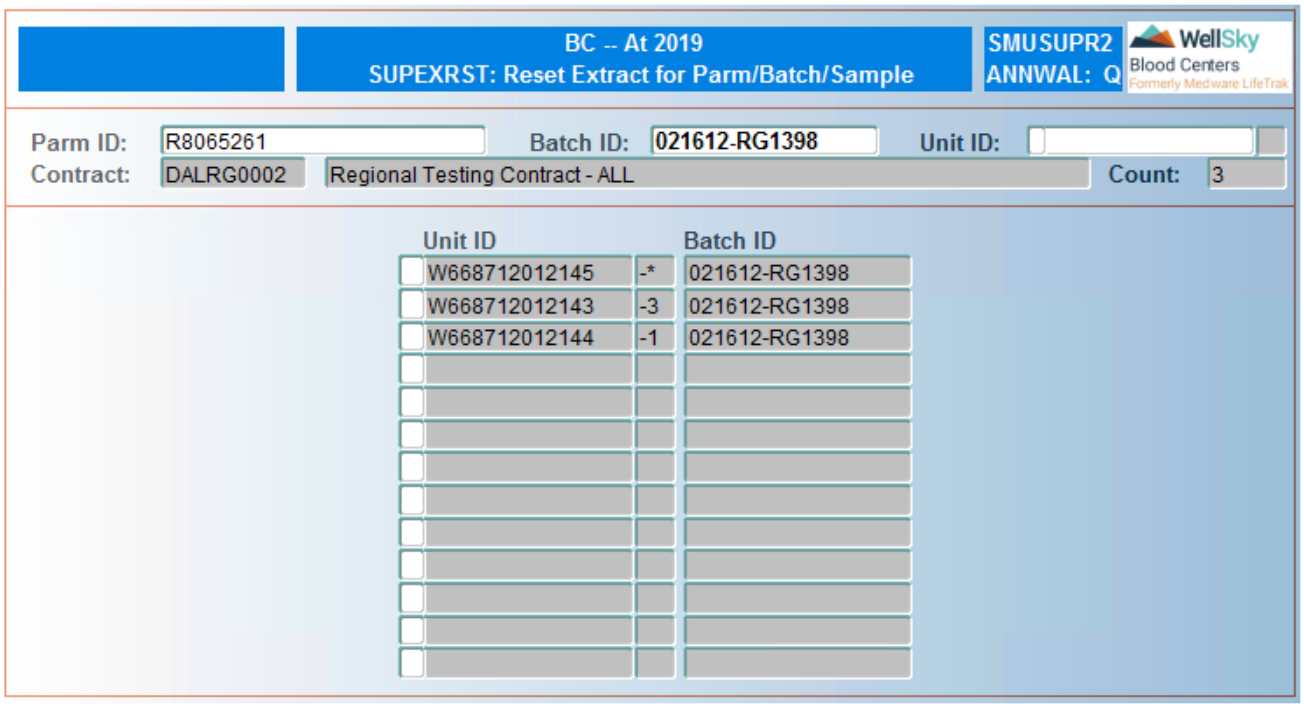


## Control Block Fields and Definitions

### Parm ID

Enter Parm ID to be reset, or leave blank. If left blank, a valid unit ID must be entered.

### Batch ID

Enter Batch ID to be reset. If a Parm ID is not entered, this field is skipped.

### Unit ID

Scan or manually enter unit ID. If a Parm ID/Batch ID combination has been entered, this field is skipped.

**NOTE –** LOV is not available for this field.

### Contract

Displays the contract ID and description associated with the parm ID. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Count

Displays the number of units in batch. Field is not navigable.

## In the Detail Block

Once the Parm ID /Batch ID, or Unit ID has been entered, the following information is displayed:

- Unit ID- Unit Number.
- Batch ID- Batch Number.

Use the UP and DOWN arrow keys to scroll through the list.

Place an 'X' in the box next to the unit IDs that are to be reset. Press F12 (Commit) to reset units.

## At Commit

At commit, the extract is reset.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.2.14 Change Testing Unit Collection Date (TUCOLDAT)

## Intended Use

Use the Change Testing Unit Collection Date screen to modify the collection date of a unit that was checked in through Regional Sample Management or Hospital/Patient Testing modules. Update of the collection date can be by check-in batch ID or by single unit entry. If the collection date is changed for a single sample or multiple samples (in a check-in batch with more than one sample), then the system will create a new batch ID for that sample.

## Limitations

- User cannot set collection date in the future.
- User cannot update the collection date through batch ID if the batch contains multiple collection dates.
- User is responsible for updating the collection date of a unit in each chapter, if the unit has been checked into multiple chapters.

## Prerequisites

- Must know the batch ID if greater than 7 days.
- Must know the new collection date.
- Menu Parameter must be defined to determine field entry. BATCH mode will allow the collection date to change by batch ID only. UNIT mode will allow changing the collection date by batch or unit ID.

## Accessing the Screen

Access this screen from the Regional Sample Management Supervisory menu, or by entering the keyword `TUCOLDAT`.

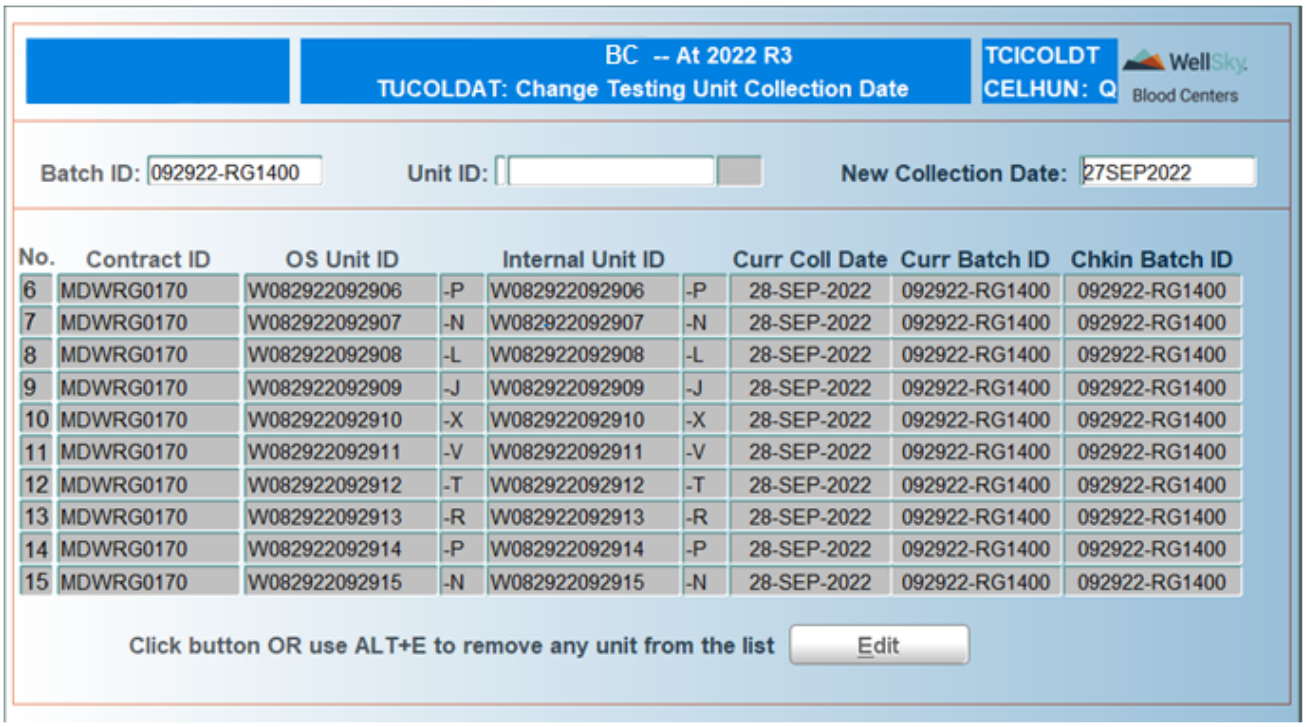


| No. | Contract ID | OS Unit ID | | Internal Unit ID | | Curr Coll Date | Curr Batch ID | Chkin Batch ID |
|---|---|---|---|---|---|---|---|---|
| 6 | MDWRG0170 | W082922092906 | -P | W082922092906 | -P | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 7 | MDWRG0170 | W082922092907 | -N | W082922092907 | -N | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 8 | MDWRG0170 | W082922092908 | -L | W082922092908 | -L | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 9 | MDWRG0170 | W082922092909 | -J | W082922092909 | -J | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 10 | MDWRG0170 | W082922092910 | -X | W082922092910 | -X | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 11 | MDWRG0170 | W082922092911 | -V | W082922092911 | -V | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 12 | MDWRG0170 | W082922092912 | -T | W082922092912 | -T | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 13 | MDWRG0170 | W082922092913 | -R | W082922092913 | -R | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 14 | MDWRG0170 | W082922092914 | -P | W082922092914 | -P | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |
| 15 | MDWRG0170 | W082922092915 | -N | W082922092915 | -N | 28-SEP-2022 | 092922-RG1400 | 092922-RG1400 |

## Control Block Fields and Definitions

### Batch ID

Enter a valid batch ID or select from LOV. Leave the field blank if changing the collection date on a single or multiple units.

**NOTE –** Batch ID field is required if menu parameter is set to BATCH.

**NOTE –** If the batch ID is older than 7 days it will not appear in the LOV, but it can be manually entered.

**NOTE –** Batches that contain multiple collection dates cannot be entered, must change by individual unit ID.

### Unit ID

Scan or manually enter unit ID. If Batch ID is selected, this field is not used.


WellSky Corporation
Proprietary and confidential

**NOTE –** Unit ID is not navigable if the menu parameter BATCH is defined. Unit ID can only be entered if menu parameter is set to UNIT.

**NOTE –** If the unit ID has been checked into multiple chapters, you will receive a message alerting you that the unit is located in more than one chapter.

### New Collection Date

Enter new unit collection date in DDMONYYYY format. Date cannot be later than original check-in date. Once the collection date is entered, the following window opens.

Enter Y to commit. Enter N to cancel and return to the collection date field.

## Detail Block Fields and Definitions

### Contract ID

Field automatically populates with the contract ID for which the unit was checked in or based on batch ID entered. Field is not navigable.

### OS Unit ID

Field automatically populates with the Outside (external) unit IDs that are associated to the contract ID for the batch selected or the internal unit ID entered. Field is not navigable.

### Internal Unit ID

Field automatically populates with the internal unit IDs that are associated to the contract ID for the batch selected or the internal unit ID entered. Field is not navigable.

### Curr Coll Date

Field automatically populates with the unit collection date.  Field is not navigable.

### Curr Batch ID

Field displays the new batch ID that is created when you change the collection date of a single sample (in a check-in batch with more than one sample). Field is not navigable.

Before the new batch ID is created, you must confirm in the window that displays:

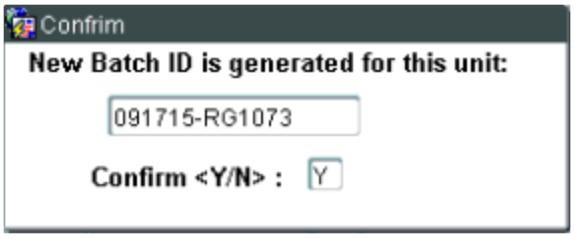


Enter `Y` to confirm and create a new Batch ID. Enter `N` to cancel the operation.

### Chkin Batch ID

Field displays the check-in batch ID. Field is not navigable.

## Change the Collection Date on Multiple Units

Leave the Batch ID field blank, and press Enter to move to the Unit ID field. Scan or manually enter the first unit ID; the detail block will populate with the unit information. The cursor will remain in the Unit ID field for you to scan the next unit. The checks that are made on each unit scanned are the following:

The unit must have been checked into the system.

The unit must be linked to the user's chapter.

The unit must be linked to the same contract. All units being scanned must be linked to the same contract.

**NOTE –** If you are changing the collection date on multiple units, the same collection date will be assigned to units scanned, and a single batch ID will be generated for those units.

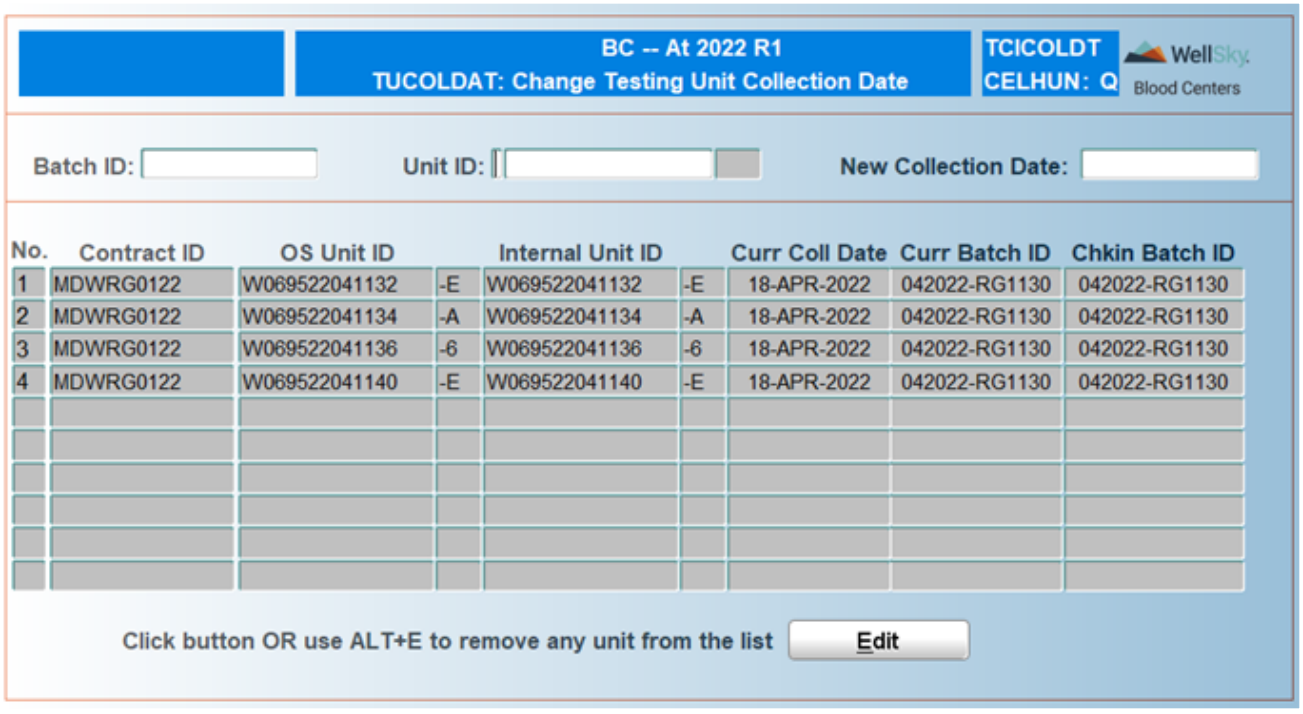



WellSky Corporation
Proprietary and confidential

If you have scanned a unit in by mistake, click Edit or use **ALT+E** to remove the unit from the new batch. The Remove Unit window will appear for you to enter the unit number or select the record number (No.). Press **Tab** to remove the unit row. Scanning the unit number will automatically remove the unit from the list. Click Close to close the Remove Unit window.

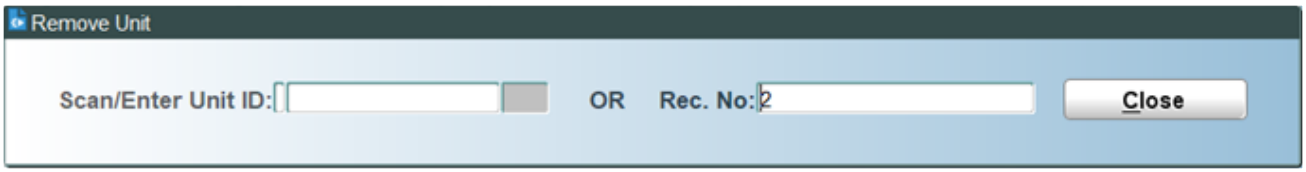


**NOTE –** Editing or removing the unit must occur before entering a new collection date. If you enter a new collection date and then realize a unit needs to be removed, do not confirm the new collection date, and then you can remove the unit.

Once all of the units are scanned into the screen, press **Enter** to move from the Unit ID field to the New Collection Date field.

Once the cursor is in the New Collection Date field, enter the new collection date in DD-MON-YYYY format. A window similar to the one below will display with the new batch ID.

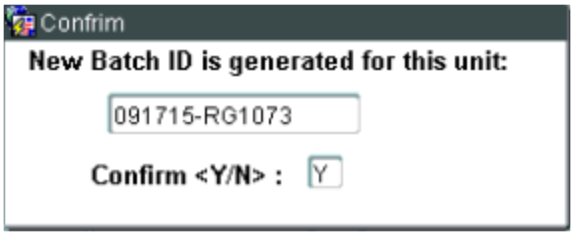


You will need to clear the form in order to enter any other data after entering the Confirm flag (Y).

## Change the Collection Date on a Single Unit

Scan or manually enter the unit ID in the Unit ID field. If the unit being scanned is in a batch all by itself, it will not update the batch number; it will only change the collection date.

## At Commit

Collection date is updated for all units in the batch or for a single unit.

## What to Do Next

There is no next step.

# 23.3 Regional Sample Tracking Queries

Regional Sample Tracking Queries are accessed from the following menu:

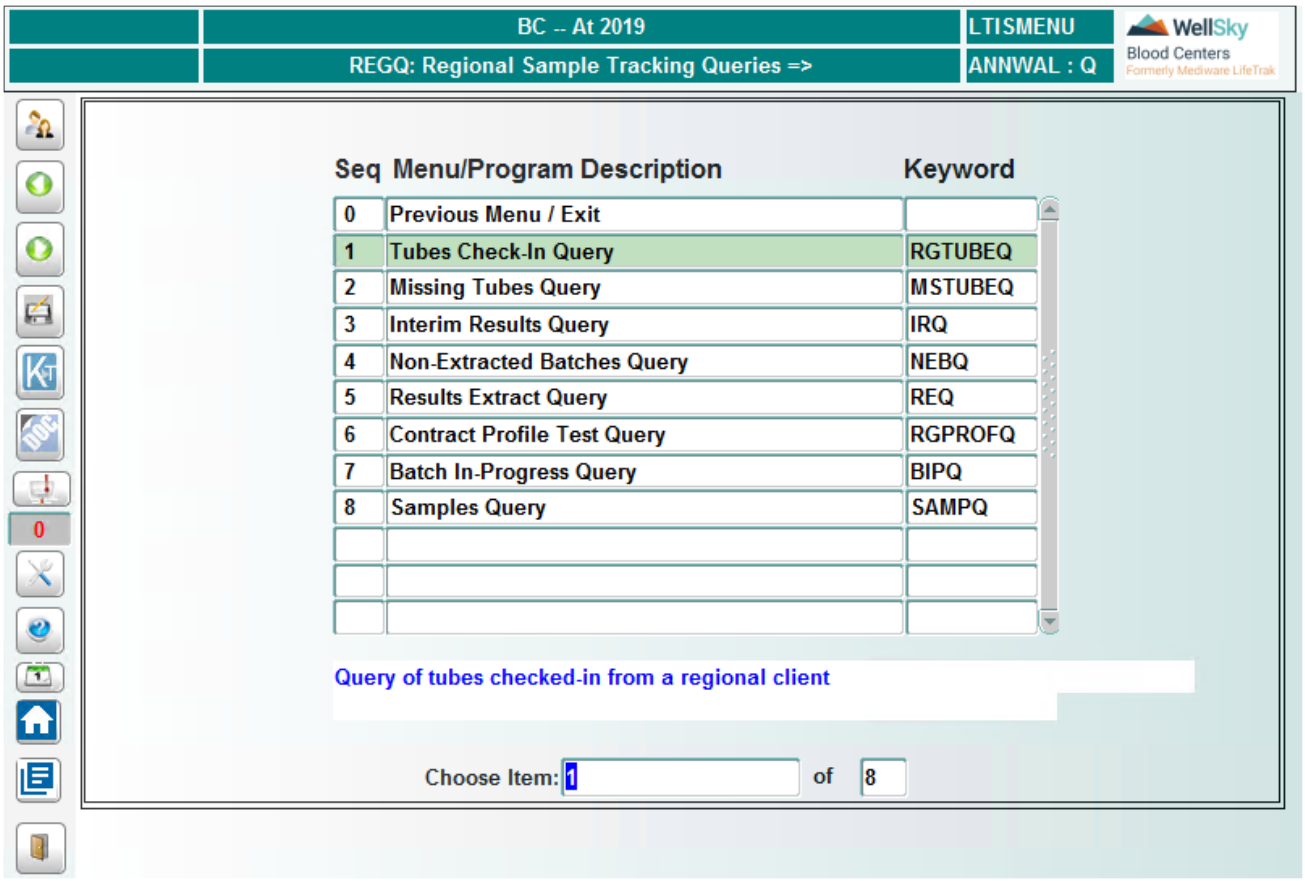


## 23.3.1 Tubes Check-in Query (RGTUBEQ)

### Intended Use

Use the Tubes Check-in Query screen to view tube check-in status for a specified contract ID or tube check-in date. You can also view, add, and delete checking batch notes with this screen.

### Limitations

- You must have access permission to add or delete a note.
- System Parameter CB_ID must be configured in the SYSPARM table.

### Prerequisites

A check-in batch must exist.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword RGTUBEQ.

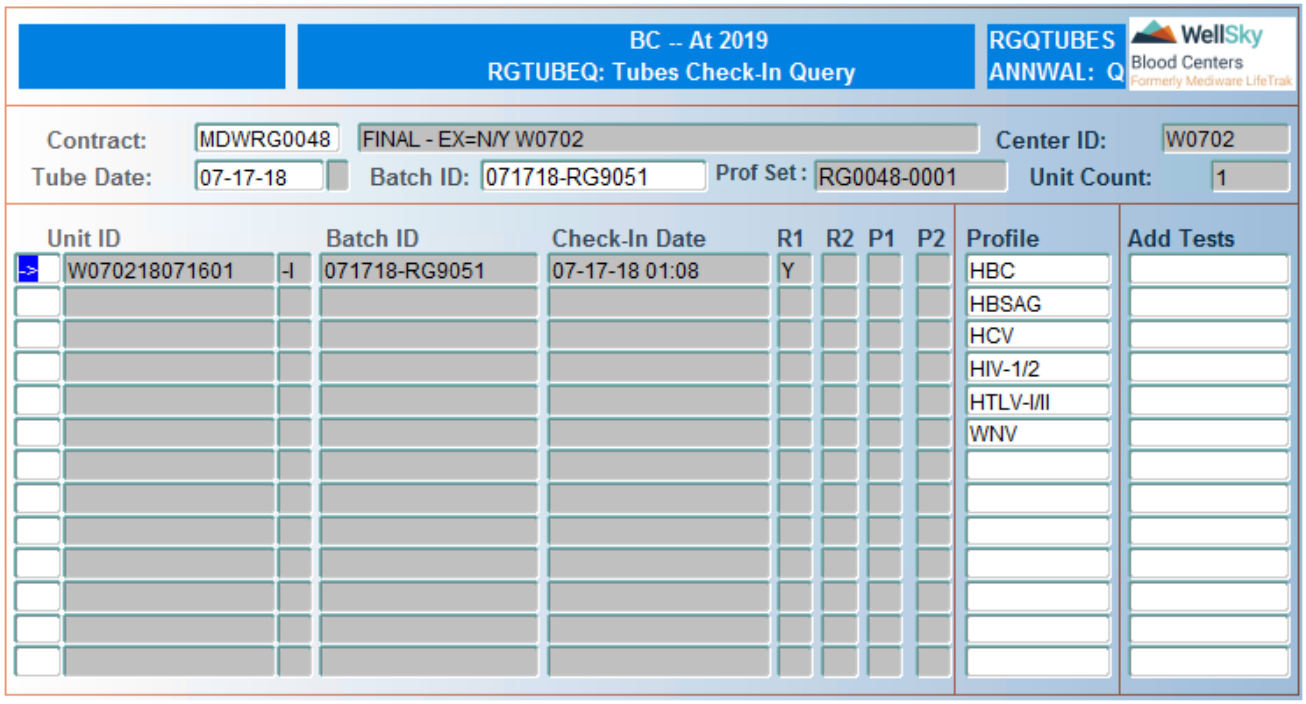


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or use LOV.

## Center ID

Field automatically populates with the facility's center ID, if present. Field is not navigable.

## Tube Date

Enter tube date or use LOV. Entry in this field is not required.

## Batch ID

Enter batch ID or use LOV. Entry in this field is not required.

## Prof Set

This field is display only. It displays the profile set ID that is linked to the check-in batch.

## Unit Count

Field automatically populates with the number of units in the batch. Field is not navigable.

## In the Detail Block

The following data displays after the Control Block is completed:

- Unit ID – Internal unit ID that was signed by the testing facility.
- Batch ID – Displays the check-in batch ID associated to each unit.
- Check-in Date – Time of the samples were checked into the system.
- R1 – Red 1 status, as follows:
  - Y – Red 1 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Red 1 tube was checked in for the corresponding sample.
- R2 – Red 2 status, as follows:
  - Y – Red 2 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Red 2 tube was checked in for the corresponding sample.
- P1 – Purple 1 status, as follows:
  - Y – Purple 1 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Purple 1 tube was checked in for the corresponding sample.
- P2 – Purple 2 status, as follows:
  - Y – Purple 2 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Purple 2 tube was checked in for the corresponding sample.
- Profile – Profile test that are associated to that contract.
- Add Tests – Any test in addition to the standard profile for the selected sample.

Use the **UP** and **DOWN** arrow keys to scroll through the list. As the cursor (>) rests next to each unit ID, corresponding data for that unit will appear in the columns at right, including profile tests and any additional tests requested for the unit.

## The CBatch Notes Button

Click **CBatch Notes** to view, add, or delete notes for the selected Checkin Batch ID using the GEWNOTES window, as shown:


WellSky Corporation
Proprietary and confidential

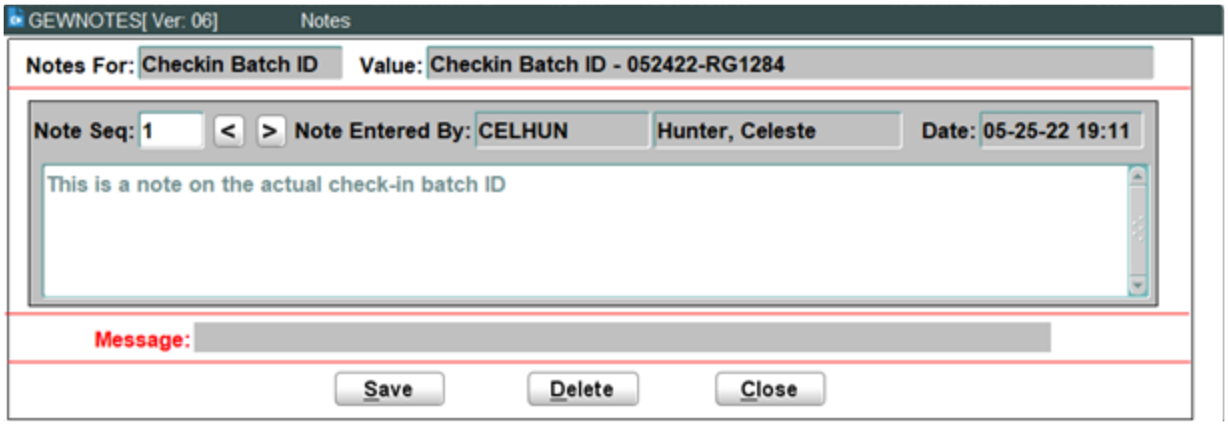


Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.3.2 Missing Tubes Query (MSTUBEQ)

## Intended Use

Use the Missing Tubes Query screen to view tube check-in status for a specified contract ID or tube check-in date.

## Limitations

None

## Prerequisites

Tube check-in must have been completed.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword `MSTUBEQ`.

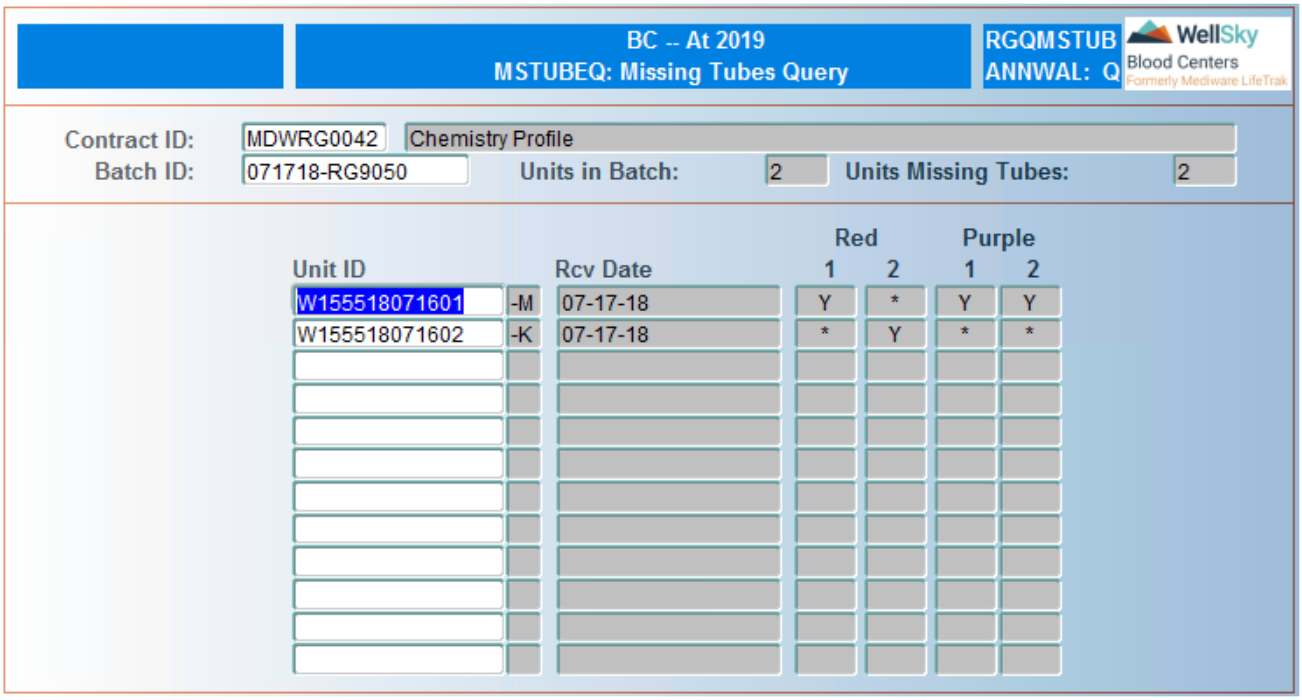


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV.

## Batch ID

Enter batch ID or select from LOV.

## Units in Batch

Number of units associated to the check-in batch ID.

## Units Missing Tubes

Displays the number of units that have missing tubes associated to them in the check-in batch.

The following data displays after the Control Block is completed:

- Unit ID – Internal unit ID that was signed by the testing facility.
- Received Date – Date the tubes were received into the system.
- R1 – Red 1 status, as follows:
  - Y – Red 1 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Red 1 tube was checked in for the corresponding sample.
- R2 – Red 2 status, as follows:


WellSky Corporation
Proprietary and confidential

- Y – Red 2 tube checked in for the corresponding sample.
- Any other code – A missing tube.
- Blank – No Red 2 tube was checked in for the corresponding sample.

- P1 – Purple 1 status, as follows:
  - Y – Purple 1 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Purple 1 tube was checked in for the corresponding sample.
- P2 – Purple 2 status, as follows:
  - Y – Purple 2 tube checked in for the corresponding sample.
  - Any other code – A missing tube.
  - Blank – No Purple 2 tube was checked in for the corresponding sample.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

### At Commit

No updates can be made in this screen.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Queries menu.

## 23.3.3 Interim Results Query (IRQ)

### Intended Use

Use the Interim Results Query screen to view interim results by test ID, interim result code, or samples batch ID.

### Limitations

None

### Prerequisites

Interim results must have been specified for initial tests scheduled, but actual results not received.

### Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword `IRQ`.

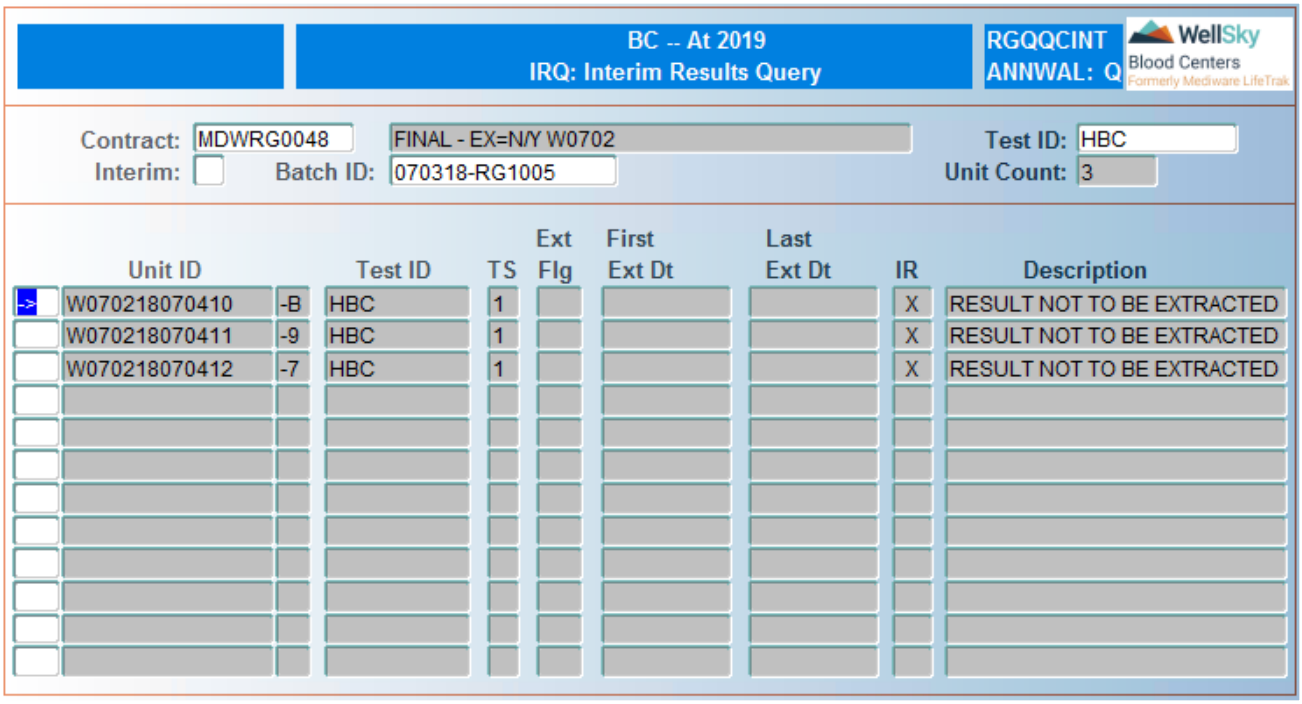


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV.

> **NOTE –** The LOV will only be populated if interim results exist on a contract.

## Test ID

Enter test ID or select from LOV. Entry in this field is not required.

## Interim

Enter interim code or select from LOV. Leave field blank to retrieve all interim codes from the batch.

## Batch ID

Enter batch ID or select from LOV.

## Unit Count

Field automatically displays the number of units matching the entered criteria. Field is not navigable.

# In the Detail Block

The following data displays after the Control Block is completed:

- Unit ID - Internal unit ID that was signed by the testing facility.
- Test ID - Test ID that has an interim result code.
- TS- test sequence for each test ID.
- Ext Flg – Indicates whether the interim result has been extracted or not. (Y or N).
- First Ext Date - Date when the interim result was initially extracted.
- Last Ext Date - Date when the interim result was most recently extracted.
- IR - Interim result code.
- Description - Description of the interim result code.

Use the UP and DOWN arrow keys to scroll through the list.

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.3.4 Non-Extracted Batches Query (NEBQ)

## Intended Use

Use the Non-Extracted Batches Query screen to view non-extracted samples batches created within a specified time frame under a specified contract. The query displays progressively more detailed data as follows:

- Batches meeting the time frame criteria specified.
- Units in each batch listed.
- Tests scheduled for each unit listed.

## Limitations

None

## Prerequisites

Valid sample batches must exist.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword `NEBQ`.

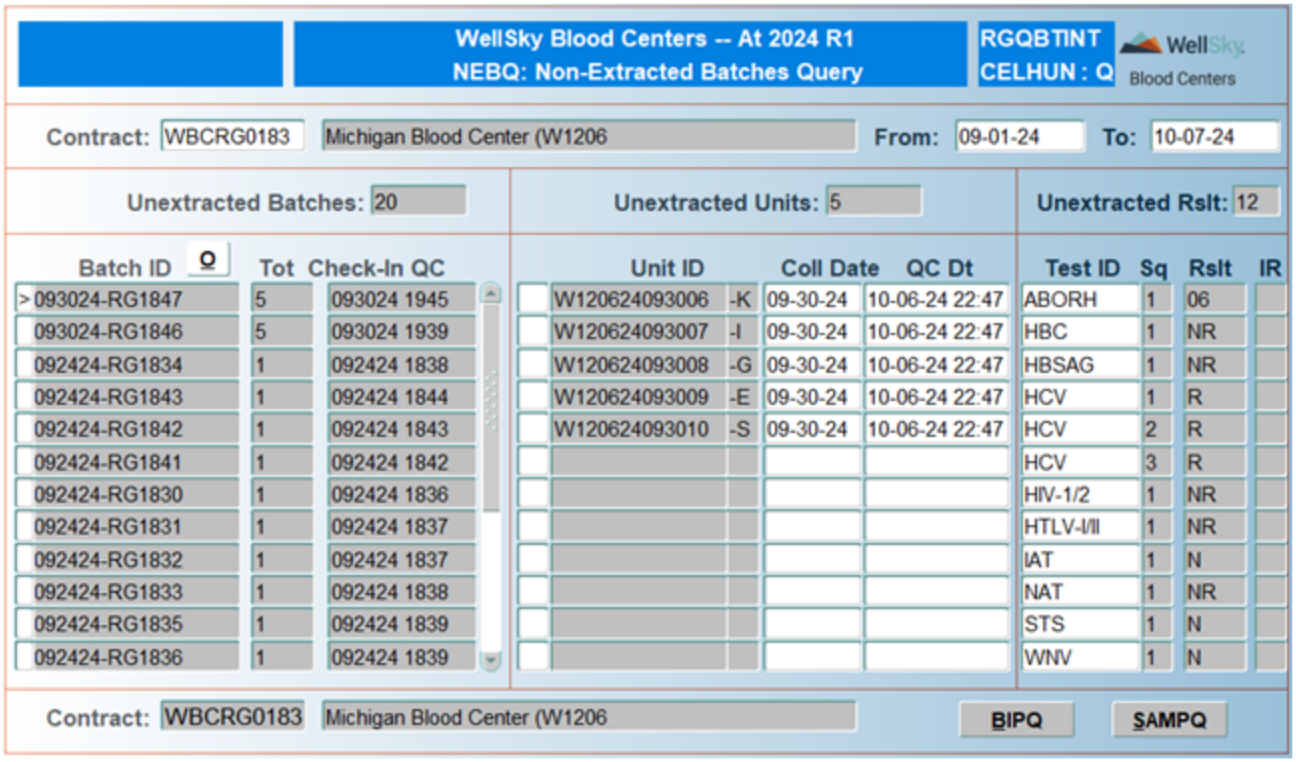


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV. Entry not required in this field.

> **NOTE –** The LOV will only be populated if interim results exist on a contract.

## From

Enter start date for the query in MM-DD-YY format.

> **NOTE –** Default is 3 days prior to the current system date.

## To

Enter ending date for the query in MM-DD-YY format.

> **NOTE –** Default is the current system date

# In the Detail Block

The following data displays after the Control Block is completed:

- Unextracted Batches – number of batches that have not been extracted.
- Batch ID – batch IDs that have not been extracted. The IDs display automatically in descending order. Click the O by the Batch ID header to change the sort order.
- Tot – Total number of units in each batch.
- Check-in QC – Date and time check-in reconciliation was performed.
- Unextracted Units – number of units with the unextracted batch.
- Unit ID – unit IDs in the unextracted batch.
- Collection Date – the date on which the unit was associated to collection in tube check-in.
- QC Date – Date of QC for each unit.
- Unextracted Results – number of unextracted results for the unit
- Test ID – test ID associated to the extracted unit.
- Sq – sequence number for the test ID.
- Rslt – result code for the test.
- IR – interim result code, if an interim result code has been entered for the test.
- Contract – displays the contract number and company name when querying each batch ID.

To view all units and their scheduled tests associated with a batch, move to that batch ID and press CTRL + F3 (Next Block). The cursor will move to the Unit ID field. Use the UP and DOWN arrow keys to navigate through the list.

As the cursor moves to each unit ID, the tests scheduled for that unit will display in the Test ID field. If more tests with reconciled results exist for a unit than can be displayed on screen at one time, move to that unit and press CTRL + F3 (Next Block) to move to the Test ID field.

As the cursor moves to each batch the numerical value for unextracted units and results will change accordingly.

As the cursor moves through each unit the numerical value for unextracted results will change.

Press CTRL + F4 (Previous Block) to return to previous blocks.

## BIPQ Button

After entering the contract ID, the BIPQ button will enable. Click BIPQ or use the hot key **ALT + B** to move the cursor to Batches in Progress Query (BIPQ). Once the query opens, the contract ID will populate based on the Non-Extracted Batches Query contract ID. Execute the query based on the field entry. Press F8 (Exit Screen) to exit the query and move back to Non-Extracted Batches Query.

## SAMPQ Button

After entering the contract ID, the SAMPQ button will enable. Click SAMPQ or use the hot key **ALT + S** to move the cursor to Samples Query (SAMPQ). If a specific unit is not selected, it will populate SAMPQ with the first unit listed for the check-in batch selected. If a different unit is needed, use the mouse to click on the specific unit or select the specific batch and use CTRL + F3 (Next Block) to move to the units block. Use the up and down arrows (UP and

DOWN ) to move to the specific unit number, and then click SAMPQ.

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.3.5 Results Extract Query (REQ)

## Intended Use

Use the Non-Extracted Batches Query screen to view results upload details for a specified regional testing contract within a specified extraction date range.

## Limitations

None

## Prerequisites

Extractions must have occurred to view the contract and batch.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword REQ.

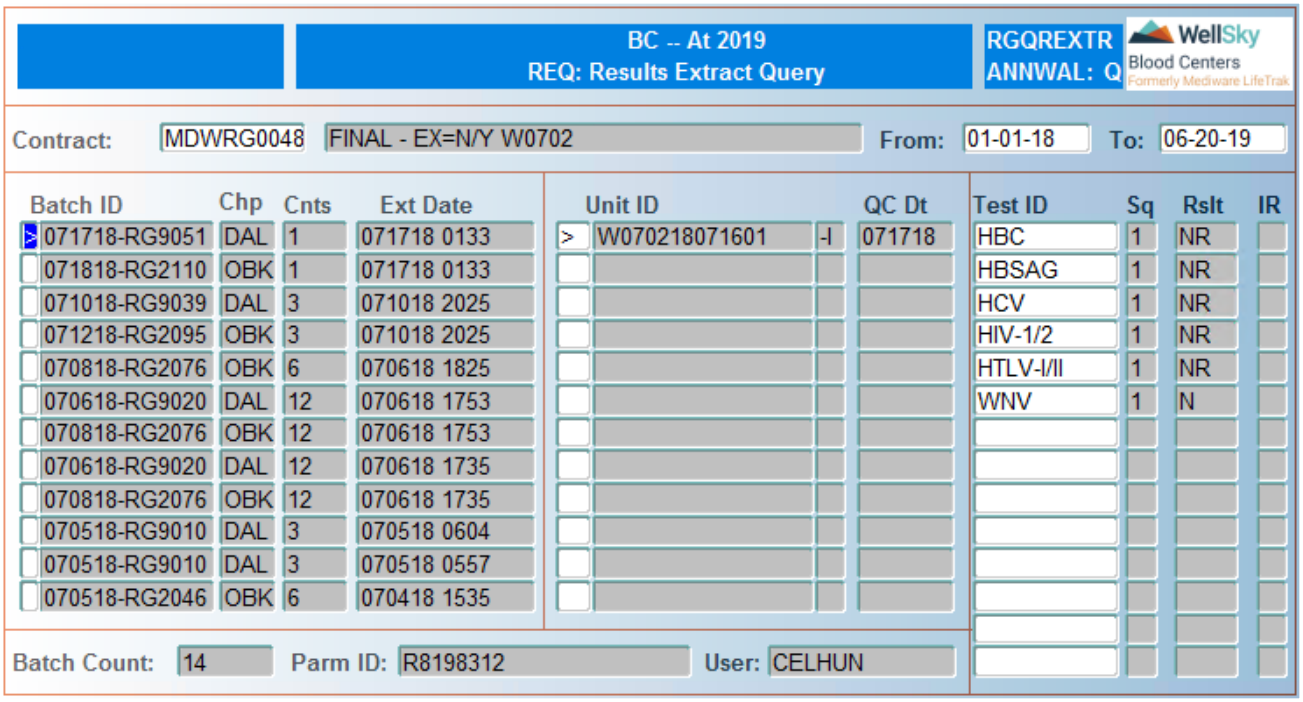



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV.

**NOTE –** The LOV will only be populated if test batches have been extracted for the contract.

## From

Enter start date for the query in MM-DD-YY format.

**NOTE –** Default is 3 days prior to the current system date.

## To

Enter ending date for the query in MM-DD-YY format.

**NOTE –** Default is the current system date.

# In the Detail Block

The following data displays after the Control Block is completed:

- Batch ID – Extracted batch ID.
- Chapter ID – Chapter ID that performed the check-in of the tubes.
- Cnts – Total number of units in each batch.
- Extract Date – Date and time when extraction of test results occurred.
- Unit ID – Unit ID in batch.
- QC Date – Date when QC of results occurred.
- Test ID – Test ID for units.
- Sq – The sequence number for the test ID.
- Rslt – The result code for the test.
- IR – Interim result code, if an interim result code has been entered for the test.

**NOTE –** The test information will update based on the test profile number linked to the check-in batch and chapter.

To view all units and their scheduled tests associated with a batch, move to that batch ID and press CTRL + F3 (Next Block). The cursor will move to the 'Unit ID' field.

Use the **UP** and **DOWN** arrow keys to navigate through the units.

As the cursor moves to each unit ID, the tests scheduled for that unit will display in the Test ID field. If more tests with reconciled results exist for a unit than can be displayed on screen at one time, move to that unit and press **CTRL** + **F3** (Next Block) to move to the Test ID field.

Press **CTRL** + **F4** (Previous Block) to return to the previous block.

### At Commit

No updates can be made in this screen.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Queries menu.

## 23.3.6 Contract Profile Test Query (RGPROFQ)

### Intended Use

Use the Contract Profile Test Query screen to view standard profile test details for a specified testing contract.

### Limitations

None

### Prerequisites

Contract must exist and have test IDs associated to it.

### Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword `RGPROFQ`.


WellSky Corporation
Proprietary and confidential

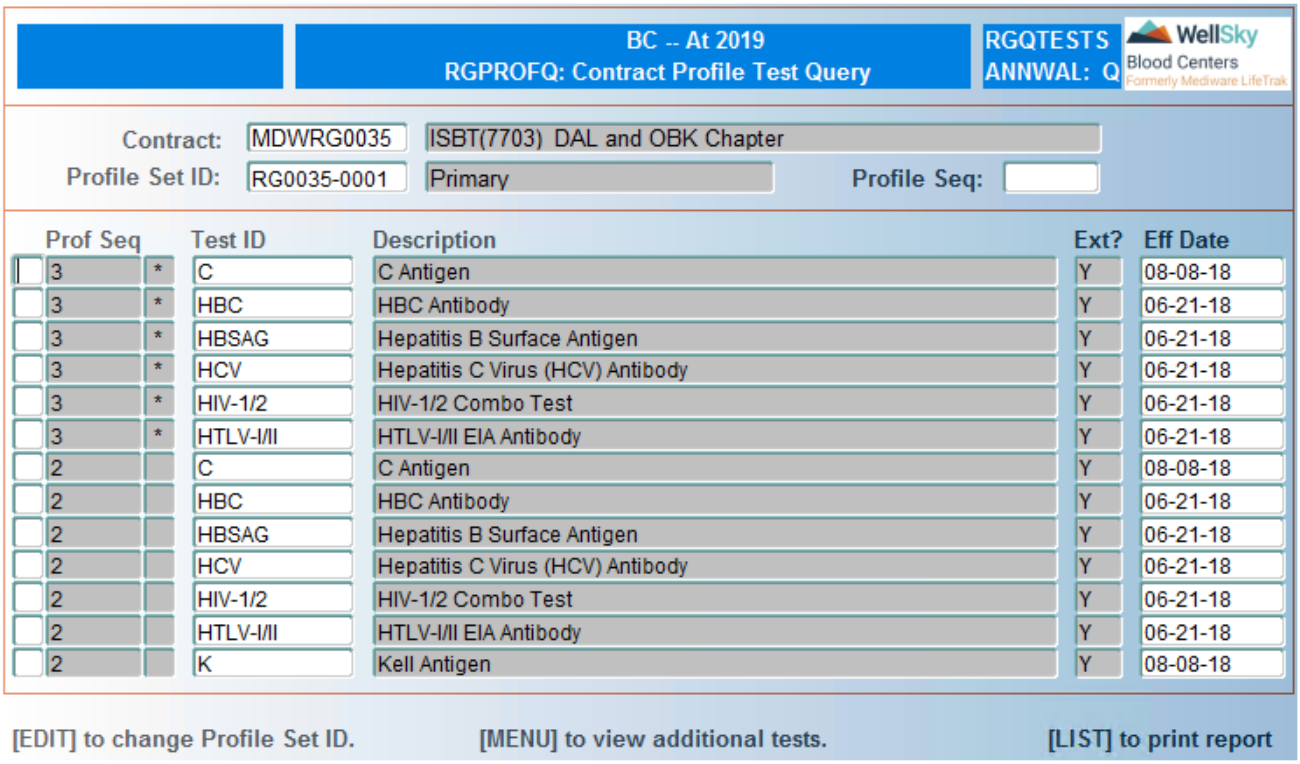


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV.

## Profile Set ID

Enter the profile set ID or select from LOV.

## Profile Seq

Enter profile sequence number or use LOV. Leave field blank to see current and previous profiles.

# In the Detail Block

The following data displays after the Control Block is populated:

- Prof Seq – Profile Sequence number – active profile sequence numbers are followed by an asterisk (*).
- Test ID – test ID in profile.
- Description - Description of the test code.
- Ext? – indicates whether test is required for extract.
- Eff Date – effective date for each test ID.

Use the **UP** and **DOWN** arrow keys to navigate through the tests.

## Contract Profile Test Query Actions

Press **CTRL + E** (Edit) to change the Profile Set ID.

Press **F6** (Menu) to view additional tests for the selected profile sequence.

Press **F2** (List) to print the report for the selected sequence.

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.3.7 Batch In Progress Query (BIPQ)

## Intended Use

Use the Batch In Progress Query screen to view details for a check-in batch that has results that have not been reconciled and have not been QC'd. You may specify whether all batch details or only those units having exceptions are to be viewed.

## Limitations

- The system will only bring batches that have not gone through QC.
- The Test Results Query button will only be active for the check-in batch unit that is associated to the user's chapter where they are currently logged in to the query.

## Prerequisites

Batch must have been checked in to the system.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword `BIPQ`.


WellSky Corporation
Proprietary and confidential

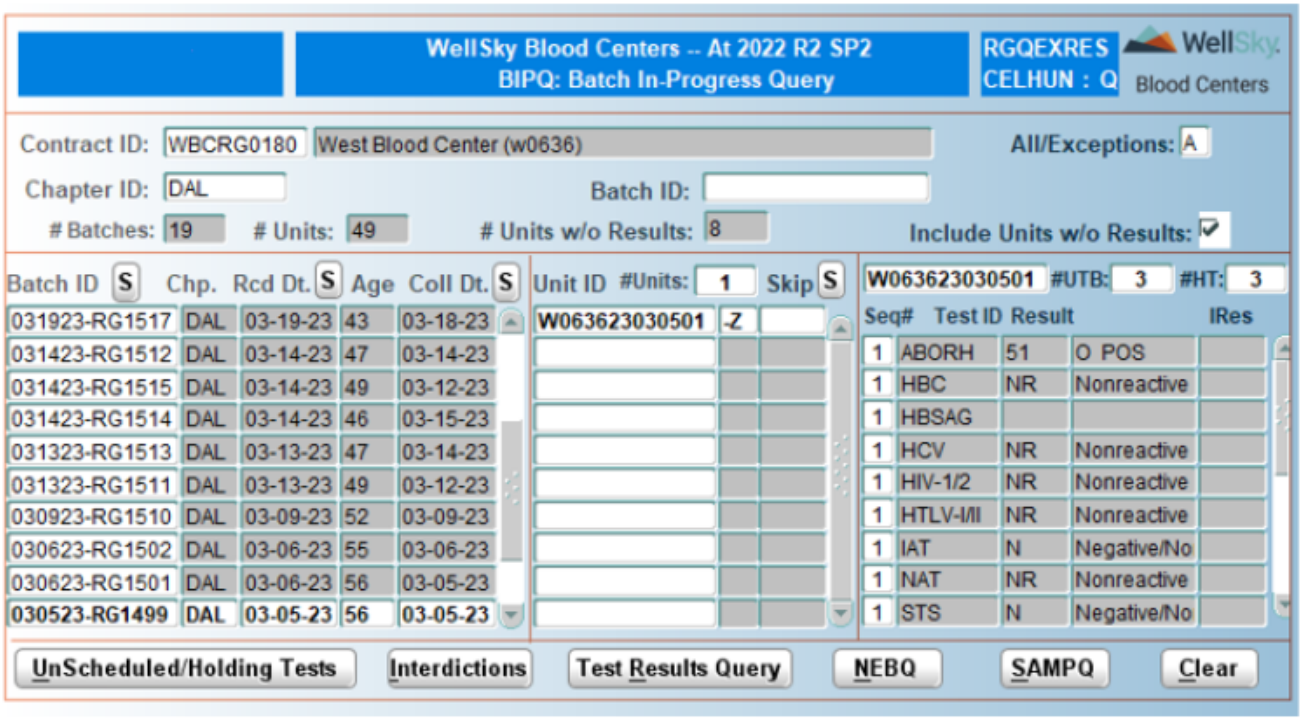


# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select from LOV. Facility name automatically displays after the contract ID is entered.

## All/Exceptions

Entries include A (All) or E (Exception).

The E (Exception) option includes the following:

- Units with interdictions
- Units that had unscheduled tests for the unit (#UTB)
- Units that have missing test results, such as initial result is not present, or repeats have not been tested

The A (All) option includes the following:

- Units that have not been QC'd
- Units with interdictions
- Units that had unscheduled tests for the unit (#UTB)
- Units that have missing test results, such as initial result is not present, or repeats have not been tested
- Units that have been skipped

## Chapter ID

The chapter ID will automatically default to the user's logged-in chapter. The user can change the chapter or select multiple chapters by selecting them in the LOV. Clicking the **Select All** option selects all chapters. Clearing (unchecking) the **Select All** option after all chapters are selected deselects all chapters.

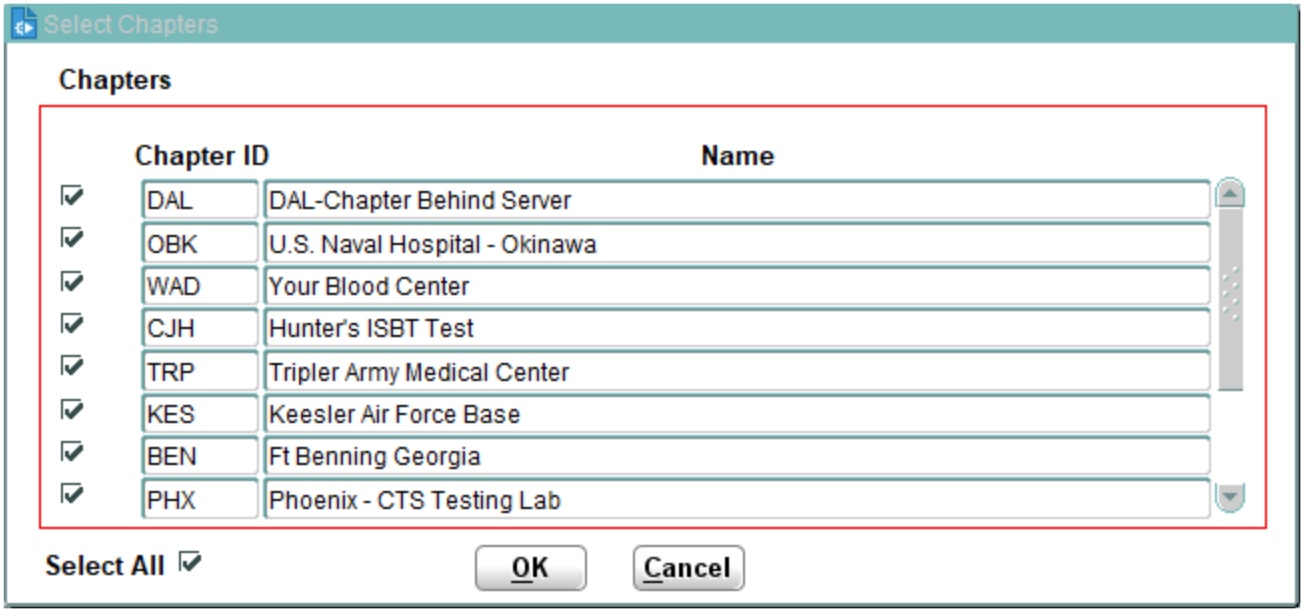


If multiple chapters are selected, after clicking **OK** 'Multiple Chapters' displays in red by the Chapter ID field.

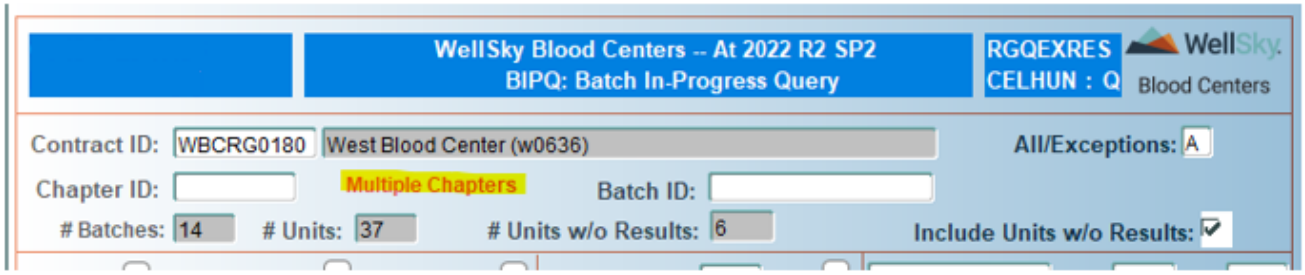


## Batch ID

Enter the batch ID or select it from the LOV. A single batch or multiple batches can be selected from the LOV.


WellSky Corporation
Proprietary and confidential

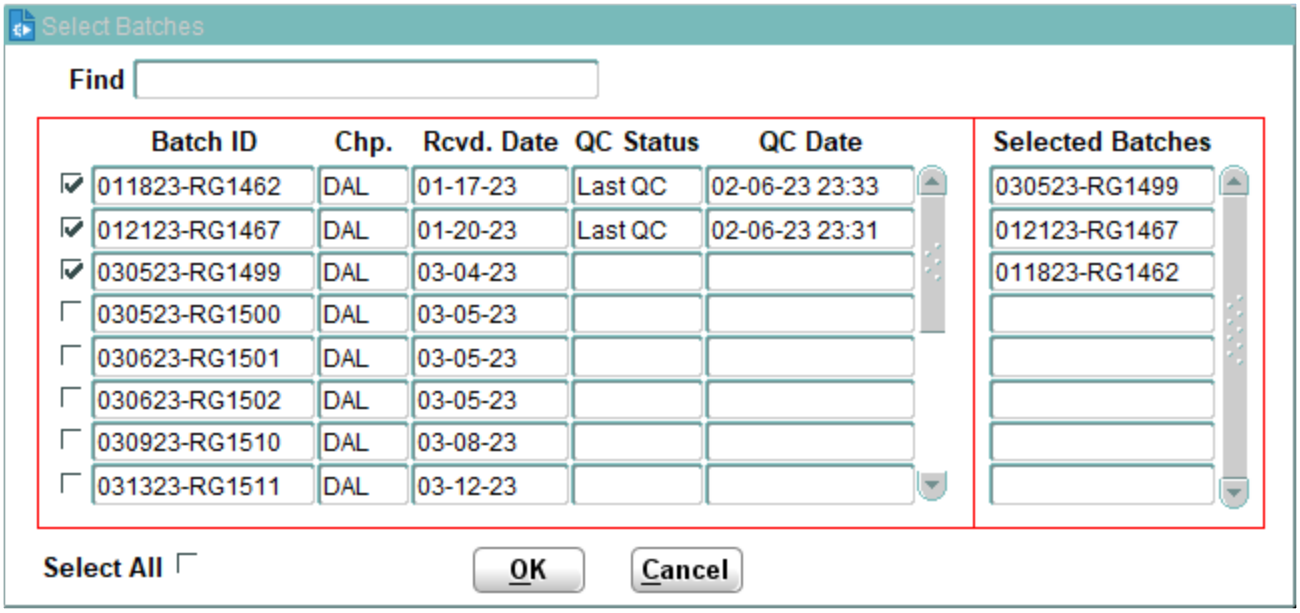


Once a batch(es) is selected, it will display on the right side of the LOV under 'Selected Batches'. If a batch is deselected, it will be removed from the 'Selected Batches' section. Clicking the **Select All** option selects all batches. Clearing (unchecking) the **Select All** option after all batches are selected deselects all batches.

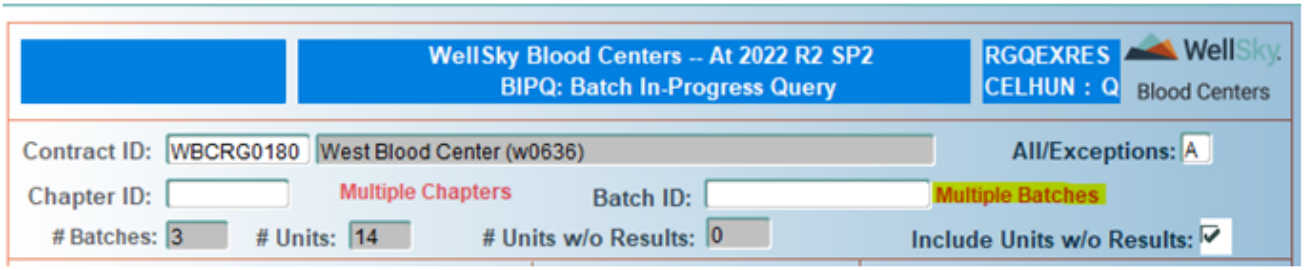


## # Batches

The field automatically displays the number of batches selected based on the chapter selected and the batch selected. The field is not navigable.

## # Units

The field automatically displays the number of units in the number of batches. The field is not navigable.

## # Units w/o Results

The field automatically displays the number of units that do not have any results at all. An example would be units that were just checked into the system and have not been sent for testing.

## Include Units w/o Results

The field is automatically populated with a check mark, but the check mark can be removed to not include units that do not have test results, such as units just checked into the system.

## Batch Details Block

The following data displays after the Control Block is populated:

- Batch ID – Batch IDs display based on the field entry in the Control Block. Batch IDs are displayed in descending order. To change the sort order, click S to sort the batch IDs in ascending order.
- Chp (Chapter ID) – The chapter ID associated with the batch number displays here.
- Rcd Dt. (Received Date) – The date when the batch was checked into the system. The receive date is displayed in descending order. To change the sort order, click S to sort the dates in ascending order.
- Age – The age of the samples in the batch ID. This is calculated by subtracting the collection date from the current date.
- Coll Dt. (Collection Date) – The date the batch was collected displays in this field. The collection date is displayed in descending order. To change the sort order, click S to sort the dates in ascending order.

Use the **UP** and **DOWN** arrow keys to scroll through the batches.

Press **CTRL** + **F3** (Next Block)to navigate to the Unit Detail Block.

## Unit Detail Block

The following data displays after a batch is selected. When a batch is selected, the batch ID displays in BOLD.

- Unit ID – The unit numbers that were checked in under the selected batch ID display here.
- Skip (Skip Reason) – The field is blank if a skip reason is not present on the unit based on skipping a result or a skip is placed at the batch level. To change the sort order, click S to sort the reasons in ascending order.
- # Units – The total number of units within the batch displays in this field.

## Unit Test Results Detail Block

The following data displays after a unit number is selected. When a unit number is selected, it displays in BOLD.

**NOTE –** The unit ID displays in the block above the results. The field cannot be changed.

- #UTB – The number of unscheduled tests for the unit displays here.
- #HT – The number of test results for the unit that are sitting in HOLDING TEST and have not been uploaded to the system displays here.
- Seq# – The test sequence number for each test listed in the Test ID field displays here.
- Test ID – The test code that is scheduled for the unit displays here.
- Result – The result code for the test ID displays here.


WellSky Corporation
Proprietary and confidential

- Result Description – The description related to the specified result code displays here.
- IRes – This field is populated if an interim result is present for the test ID.

## Unscheduled/Holding Tests

Click **UnScheduled/Holding Tests** or press **ALT+U** to view unscheduled test results for the selected unit or tests that are in HOLDING TEST and not uploaded to the system. The following window opens:

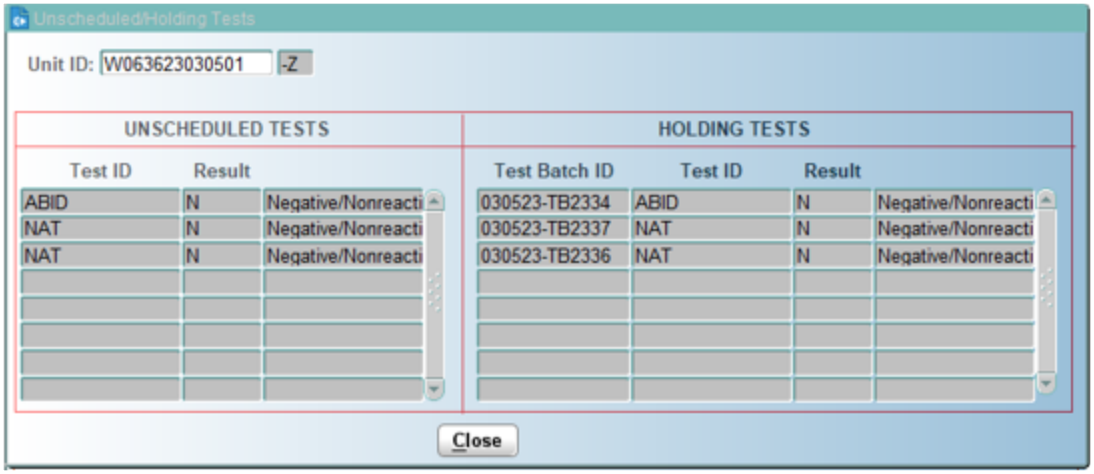


Unscheduled tests display on the left side of the window with the following information:

- Test ID
- Result Code
- Description of the result code

Holding Tests display on the right side of the window with the following information. Use the mouse and click in the Test Batch ID column to allow scrolling through the Test Batch ID field.

- Test Batch ID
- Test ID
- Result
- Result description

Use the **UP** and **DOWN** arrow keys to scroll through the unscheduled tests.

Press **F8** (Exit Screen) or click **Close** to return to the main screen.

## Interdictions Button

Click **Interdictions** or press **ALT+I**. The following window opens:

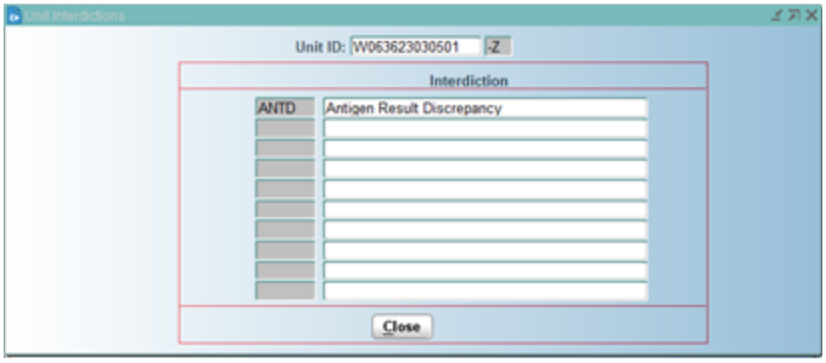


The unit ID displays at the top of the list of interdictions. The following displays in the window for interdictions:

- Interdiction code
- Interdiction description

Use the **UP** and **DOWN** arrow keys to scroll through the interdictions.

Click **Close** or press **F8** (Exit Screen) to return to the main screen.

## Test Results Query Button

Click **Test Results Query** or press **ALT+R** to open the All Test for a Unit Query. This query displays both scheduled and unscheduled tests and test results. If you scroll to the right of the test ID, you can view detailed information.

**NOTE –** If there are multiple batches present from different chapters, the button will only be active on the chapter the user is logged in to.

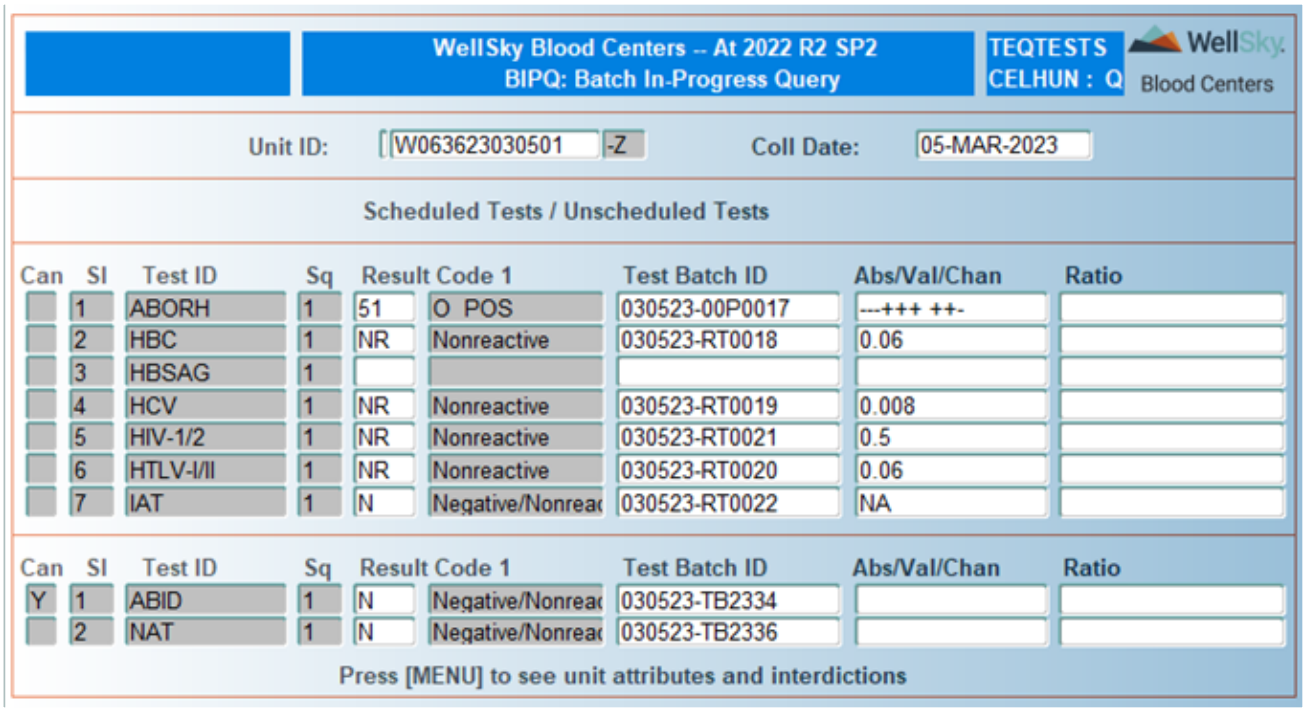



WellSky Corporation
Proprietary and confidential

Press F8 (Exit Screen) to go back to the BIPQ screen.

## NEBQ Button

Click NEBQ or press **ALT+N** to move the cursor to Non-Extracted Batches Query (NEBQ). Once the query opens, the contract ID will populate based on the contract ID entered in Batches in Progress (BIPQ). Execute the query based on field entry. Press F8 (Exit Screen) to exit the query and return to Batches in Progress Query (BIPQ).

## SAMPQ Button

Click SAMPQ or press **ALT+S** to move the cursor to Samples Query (SAMPQ). Once the query opens, the unit ID will populate based on the unit ID selected. Press F8 (Exit Screen) to exit the query and return to Batches in Progress Query (BIPQ).

## At Commit

No updates can be made in this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.3.8 Samples Query (SAMPQ)

## Intended Use

Use the Samples Query screen for the following:

- View complete details for a sample. Displayed data includes contract and drive affiliation, check-in batch ID, samples batch ID, confirmatory details, and test and results information.
- View, add and delete sample, test ID, test batch, and check-in batch notes.
- View and print the General Information for Sample (GERSAMPQ) and Unit Notes (GERUNOTE) report for the selected sample.
- View, place, and remove sample notations for confirmatory samples.

## Limitations

- You must have access permission to add and delete notes.
- You must have access permission to add and delete notations for confirmatory samples.

## Prerequisites

Sample must have been checked in to the system.

The following System Parameters must be configured in the SYSPARM table for placement of notes:

- CB_ID
- TB_ID

- UNIT_ID
- TEST_ID

## Accessing the Screen

Access this screen from the Regional Sample Tracking Queries menu or by entering the keyword SAMPQ.

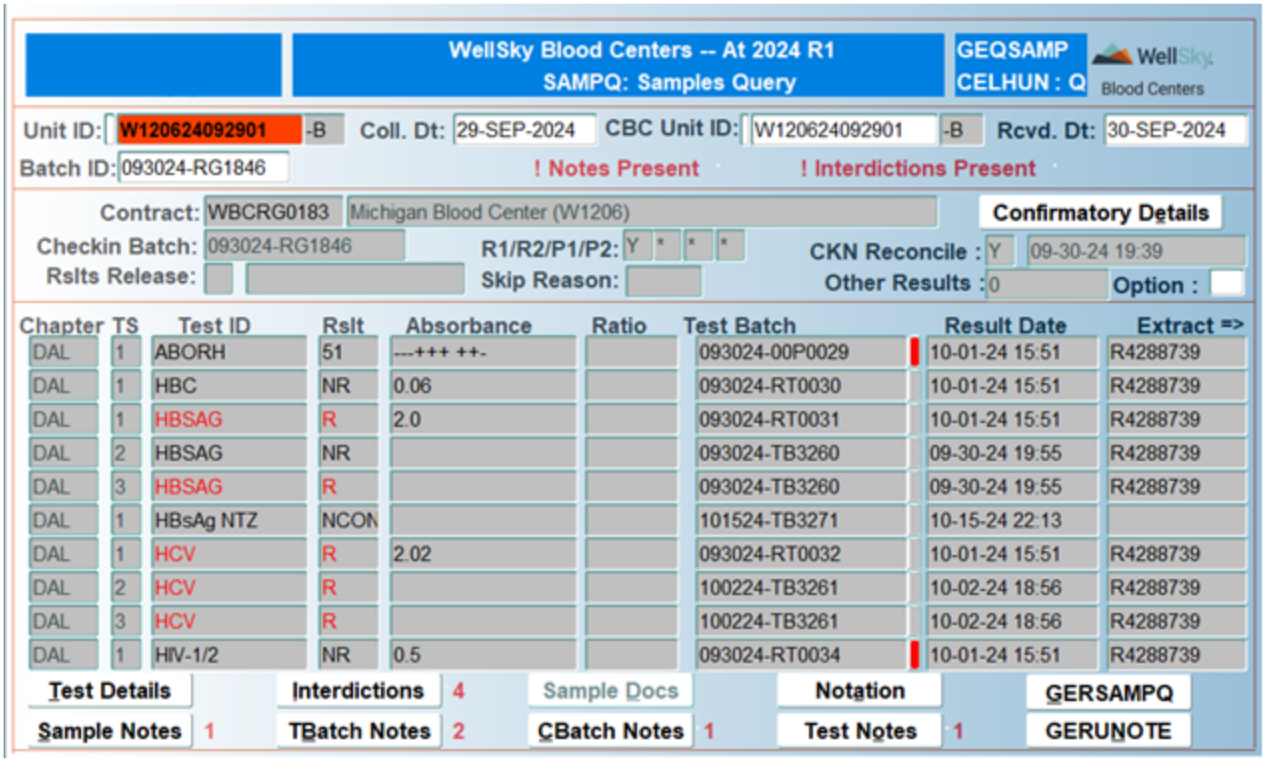


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter the unit ID. To enter manually, press **Enter**. The cursor will move to the next entry field. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system. Leave the field blank if querying by the client blood center ID. The cursor will automatically stay in the scan field of the unit ID, allowing the scanning of the next unit.

To enter the next unit, just scan or press **Enter** to move to manual entry, or click in the unit ID manual entry field, and the field will clear and allow the user to manually enter the next unit ID.

**NOTE –** The unit number will be bold with a red background if there are reactive tests. The test ID must be listed in the Lab master code RSMRR to be considered as reactive.


WellSky Corporation
Proprietary and confidential

## Coll Dt

This field displays the collection date of the specified unit. The field automatically populates when the unit ID is entered.

## CBC Unit ID

Scan or manually enter the client blood center unit ID. Field is navigable only if the Unit ID field was left blank and automatically populates if the Unit ID was populated. The receipt date automatically populates after the CBC ID is entered or defaults.

To enter manually, enter `M` and press **Enter**. The cursor will move to the next entry field. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system. Leave the field blank if querying by the client blood center ID.

## Rcvd Dt

This field displays the received date of the specified unit. The field automatically populates when the unit ID is entered.

## Batch ID

Manually enter the batch ID or leave blank. The LOV is available to select the batch ID. The LOV will contain the batch number and the chapter ID linked to the check-in batch. If the batch ID is not entered, it will display the check-in batch information and pull all testing across chapters.

> **NOTE –** If there is a red exclamation point ( ! ) next to the batch number, that indicates there are multiple check-in batches linked to the unit number.

## Indicators

If the unit has interdictions or notes present, a notice will appear in the control block for the unit.

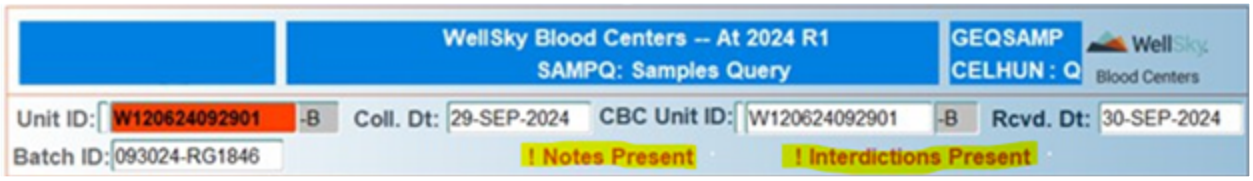

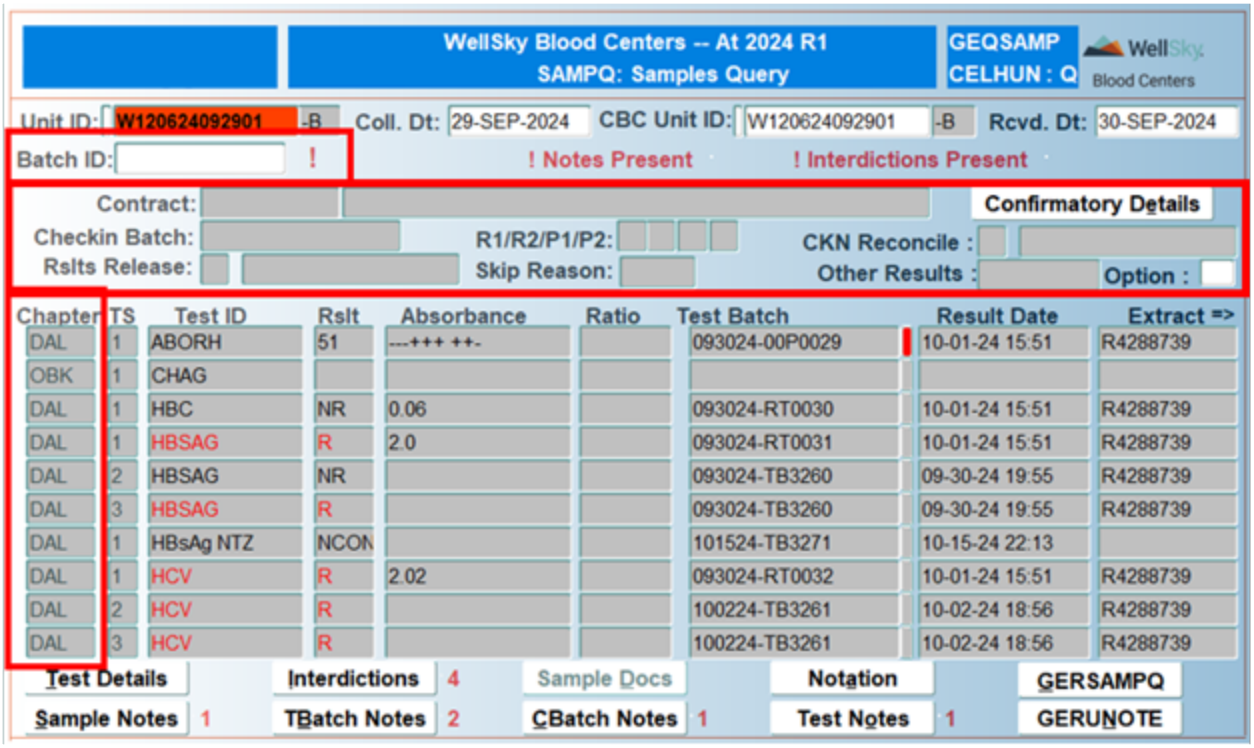


## In the First Detail Block

**NOTE –** The check-in batch detail block displays the information for check-in of tubes for the user's logged-in chapter if the batch ID is selected in the Control Block.

The following data displays after the Control Block is populated:

- Contract – contract ID and name of requesting facility displays.
- Checkin Batch – Check-in batch ID displays.
- R1/R2/P1/P2 – For each tube (in the exact order of the field name) that was checked in, a Y will display. A blank means a tube was not checked in, and any other code indicates that the tube was verified as missing with a reason code.
- CHKN Reconcile – Check-in reconciliation flag. If the check-in batch for the queried sample was reconciled, a Y will display, followed by the date and time of check-in batch reconciliation. The field will be blank if the batch has not been reconciled.
- Rslts Release – Indicates whether or not the results have been reconciled. A Y in the Rslts Release field indicates that test results for the unit have been reconciled, followed by the date and time of reconciliation. The field is blank if reconciliation has not occurred. This field represents the donor testing lab check-in and not confirmatory check-in.
- Skip Reason – reason code entered for the skip will display, if applicable.
- Other Results – number of unscheduled test results holding for the unit will display in this field.


WellSky Corporation
Proprietary and confidential

- Option – without entering any value, all donor and confirmatory testing displays in the test detail block. Enter **C** to view confirmatory testing, or **D** to view donor testing. To move to this field from the Contract field, press CTRL + F3 (Next Block).

## In the Second Detail Block

The following data displays after the Control Block is populated:

- Chapter – chapter ID that performed the testing on the test ID.
- TS – test sequence relating to the test ID at right will display for each test listed.
- Test ID – test ID for each test scheduled for the specified unit.
- Rslt – the result will display for each test listed, if available.
- Absorbance – absorbance value of the test, if available.
- Ratio – ratio of absorbance to cutoff value, if available.
- Test Batch – test batch relating to each listed test will display.
- Indicator that the test batch has a note present
- Result Date – date and time that each result became available will display.
- Extract – the extract Parm ID displays if the result has been extracted; if the result has not been extracted, this will be blank. This field is for extracting the donor testing lab.
- Confir. QC Date – this is the date that the confirmatory test results were QC'd. If the results have not been QC'd, the field will be blank. This field is for confirmatory samples only. To view this information, the cursor has to be in the test block. Press Tab to move to the right.
- Confir. Extract ID – the confirmatory extract ID displays if the results have been extracted. If the results have not been extracted, the field will be blank. To view this information, the cursor has to be in the test block. Press Tab to move to the right.

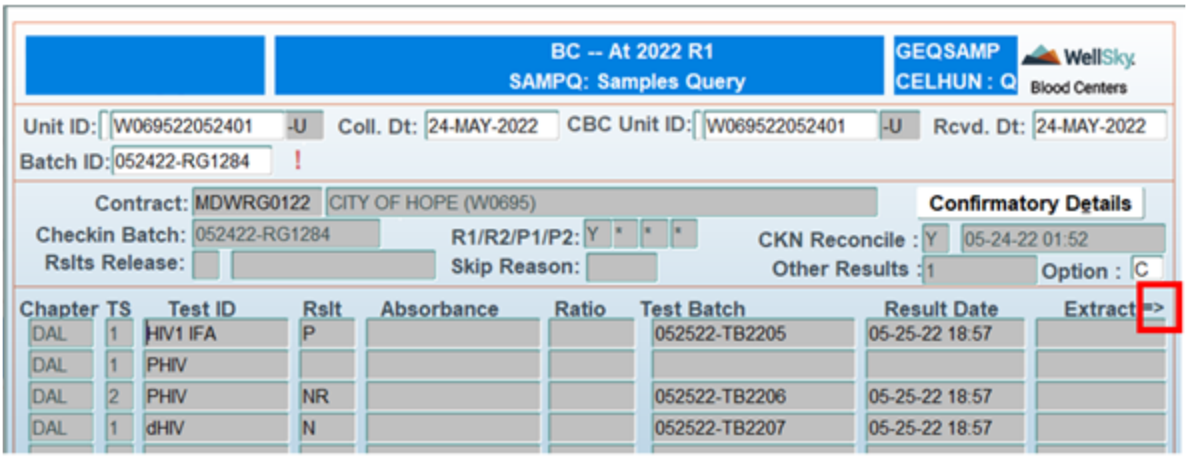


**NOTE –** The arrow next to the Extract column indicates that there is more information to the

right of the Extract column.

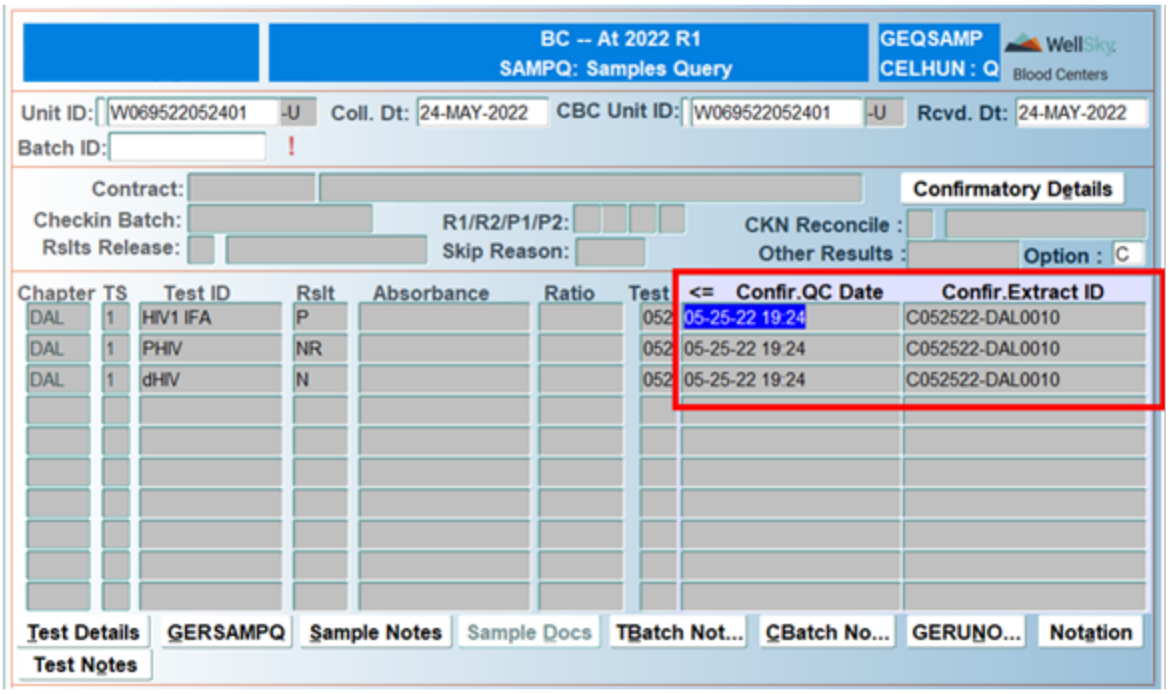


## Viewing Unscheduled Tests or Tests in Staging/Holding Area

Press ALT + F12 (Execute Query) to display unscheduled test results and any test in holding/staging area. The following window opens:

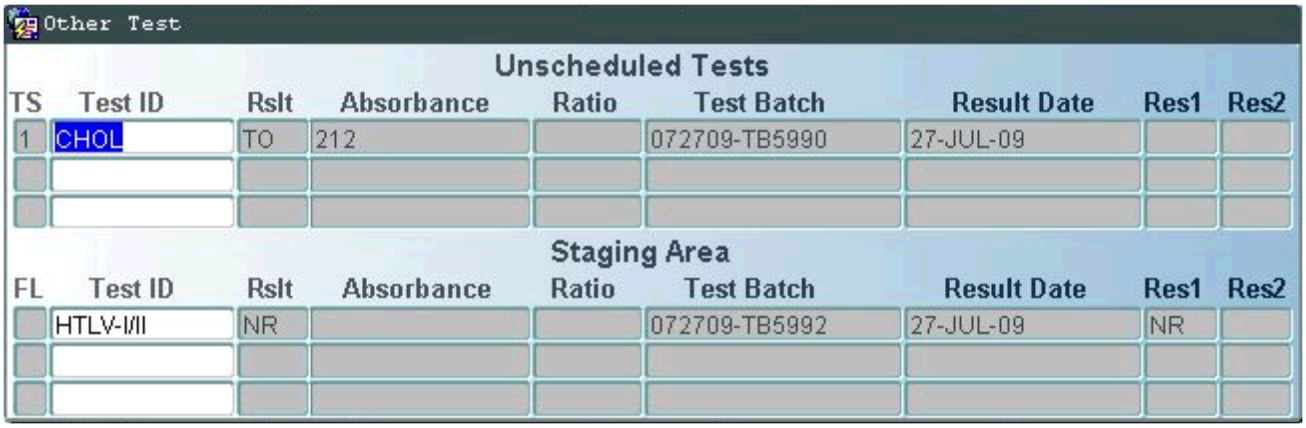


Press F8 (Exit Screen) to return to the main query screen.

## Viewing Sample Attributes and Interdictions

Press F6 (Menu) to view all attributes and interdictions associated to a sample. The following window opens:


WellSky Corporation
Proprietary and confidential

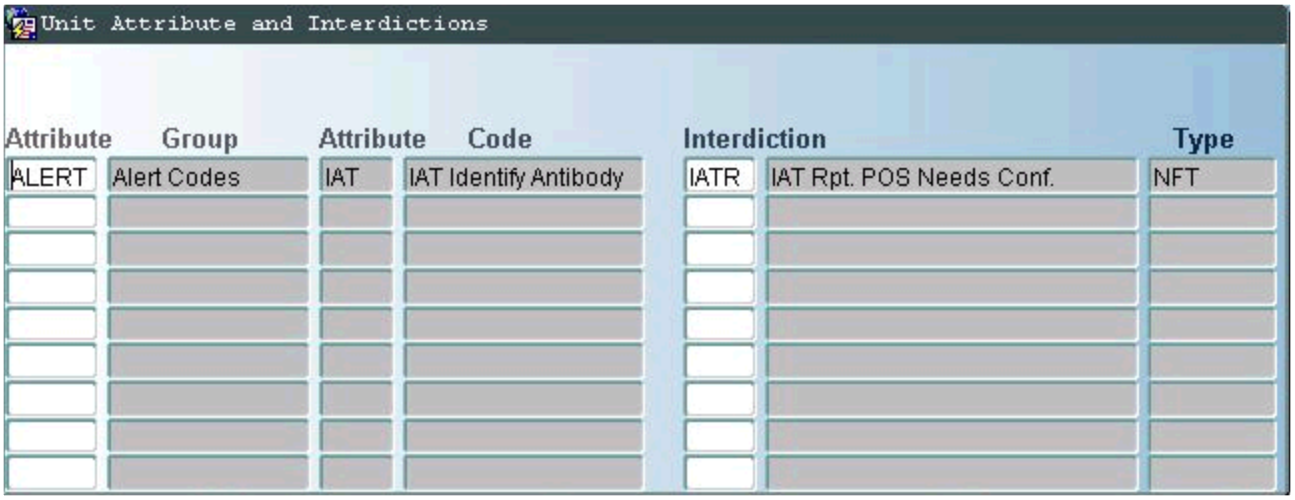


Press **F8** (Exit Screen) to return to the main query screen.

## Confirmatory Details Button

Click **Confirmatory Details** to automatically open the window. The screen is populated with the sample transfer in details associated with the Unit ID that was used to open the SAMPQ screen, as shown.

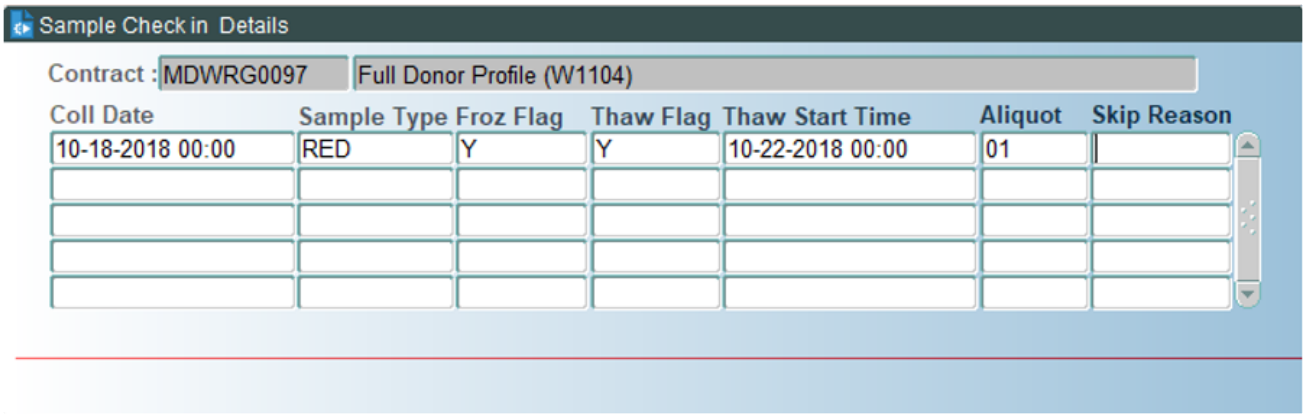


**NOTE –** The Confirmatory Details button will only bring data if a confirmatory sample has been transferred to the confirmatory lab. If the sample does not have any confirmatory details, the user will receive Err: 1412: Confirmatory/Special Samples not transferred for unit.

## The Test Details Button

Click **Test Details** to automatically open the All Tests for a Unit Query (TESTQ) screen. The screen is populated with the test details associated with the same Unit ID that was used to open the SAMPQ screen, as shown:

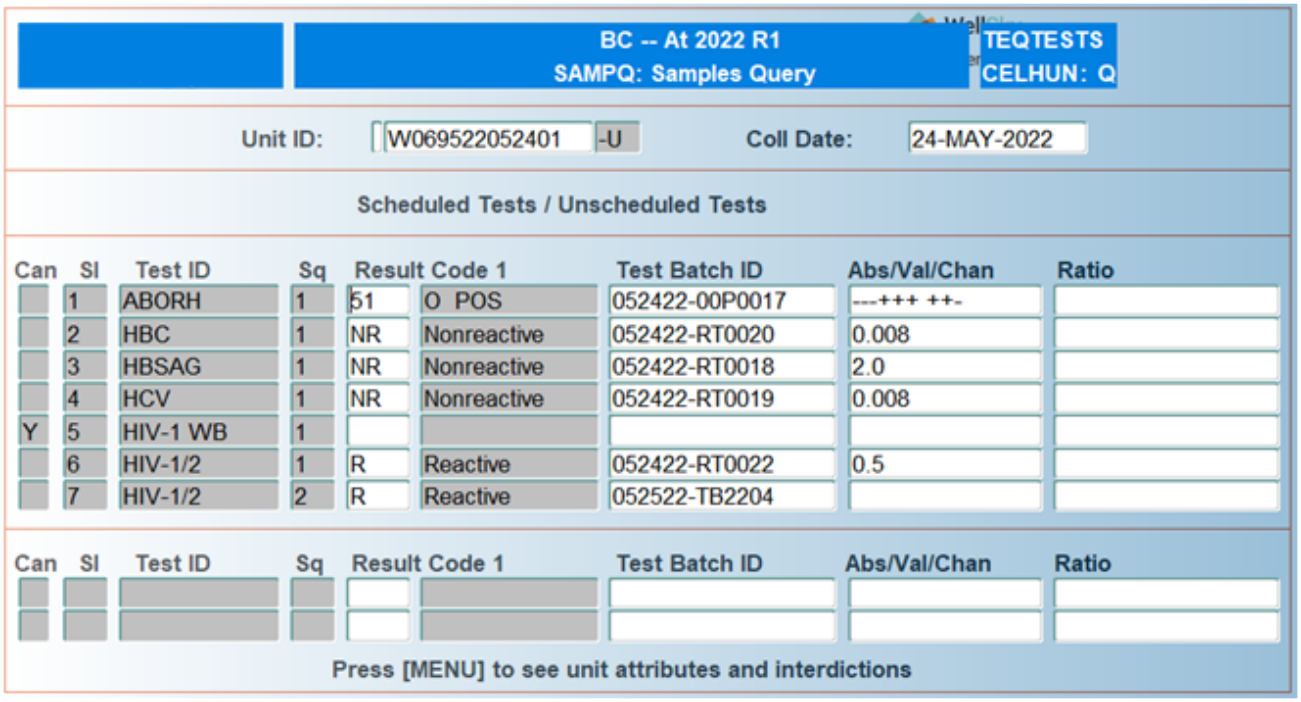


Press F6 (Menu) to display unit attributes and interdictions. Press F8 (Exit Screen) to close the test details window and return to the main SAMPQ screen.

## The Interdictions Button

Click Interdictions to automatically open the Unit Attribute and Interdictions window. The screen is populated with the attributes and interdictions associated with the unit ID that was used to open the SAMPQ screen, as shown:

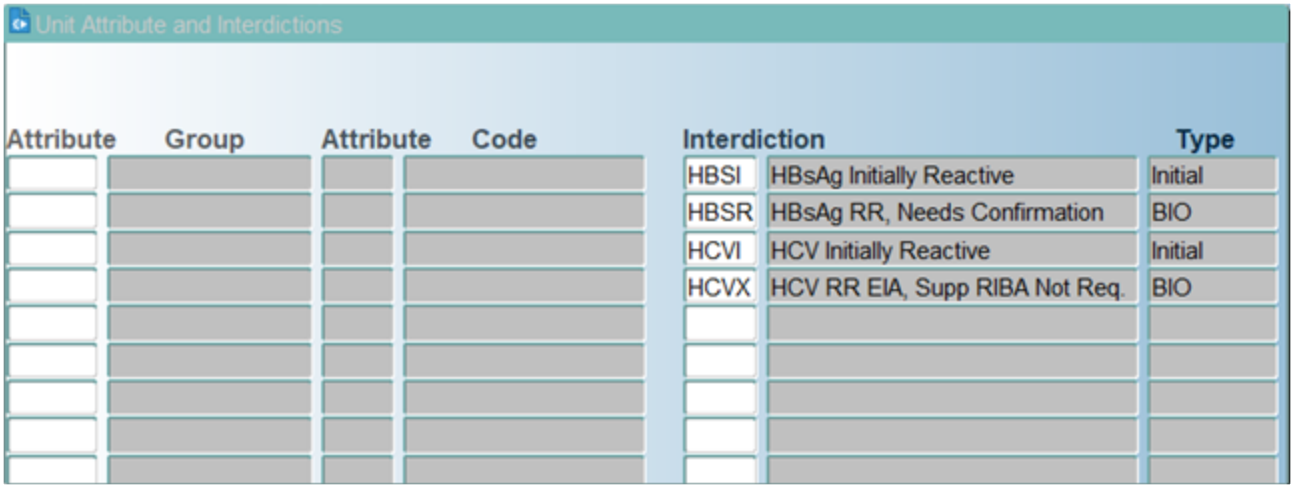


Press F8 (Exit Screen) to close the Unit Attribute and Interdictions window and return to the main SAMPQ screen.

## The Sample Docs Button

Click **Sample Docs** to view or delete documents from a test batch. The Document Library form opens to view or delete documents. To delete a document, the user must have access to UDOC, otherwise the user can view or add a document.

**NOTE –** The button will only be active if there are external documents linked to the unit/sample.

## The Notation Button

Click **Notation** to open the Notation window and associate notations to confirmatory samples. Refer to the Notations Window (CFWNOTAN) section in this guide for more information.

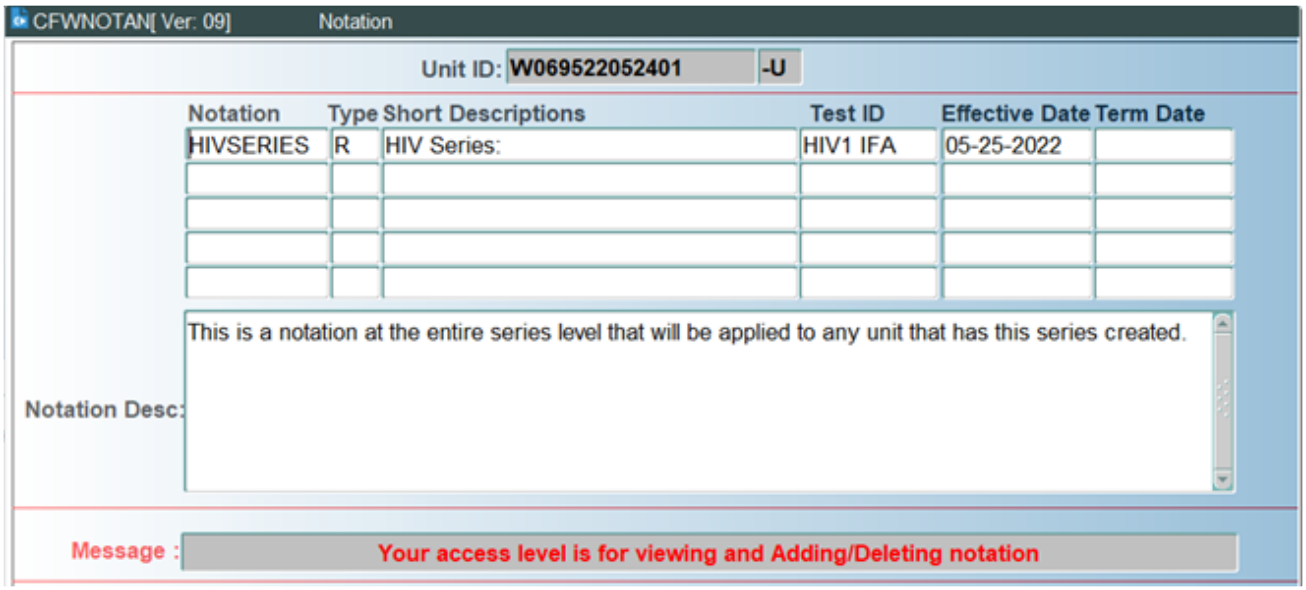


**NOTE –** You must have access permission to add or delete a note. Please refer to the Notations (CNFNOT) description in Chapter 27 - Called Windows for details on permissions.

## The GERSAMPQ Button

Click **GERSAMPQ** to generate and display the General Information for Sample (GERSAMPQ) report for the selected sample, as shown:

10-20-24 19:41 General Information for Sample CELHUN GERSAMPQ : B
Rel: 10 Brooke Army Medical Center - San Antonio Texas Page: 1 of 2

Unit Id: W120624092901-B Coll-Date: 29-SEP-2024 Insert-Date: 30-SEP-2024 19:39
Os-Unit: W120624092901-B Rcvd-Date: 30-SEP-2024
Contract: WBCRG0183 Michigan Blood Center (W1206)

Batch-ID: 093024-RG1846 Tubes R1 R2 P1 P2: Y * * * QC-Check-In: Y 30-SEP-2024 19:39
Result QC Date: Chapter ID: DAL

Unit Unscheduled Tests: None

Unit Interdictions:

| Interdiction Code | | Type | CHP |
|---|---|---|---|
| HBSI | HBsAg Initially Reactive | INITIAL | DAL |
| HBSR | HBsAg RR, Needs Confirmation | BIO | DAL |
| HCVI | HCV Initially Reactive | INITIAL | DAL |
| HCVX | HCV RR EIA, Supp RIBA Not Req. | BIO | DAL |

Unit Scheduled Tests:

| Test-ID | TSN | Result | Test Batch ID | Absorbance | Ratio | Result Date | Parm ID | Extract Date | CHP |
|---|---|---|---|---|---|---|---|---|---|
| ABORH | 1 | O POS | 093024-00P0029 | ---+++ ++- | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| CHAG | 1 | | | | | | | | |
| HBC | 1 | NR | 093024-RT0030 | 0.06 | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| HBSAG | 1 | R | 093024-RT0031 | 2.0 | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| HBSAG | 2 | NR | 093024-TB3260 | | | 30-SEP-2024 19:55 | R4288739 | 14-OCT-2024 17: | DAL |
| HBSAG | 3 | R | 093024-TB3260 | | | 30-SEP-2024 19:55 | R4288739 | 14-OCT-2024 17: | DAL |
| HBsAg NTZ | 1 | NCON | 101524-TB3271 | | | 15-OCT-2024 22:13 | | | DAL |
| HCV | 1 | R | 093024-RT0032 | 2.02 | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| HCV | 2 | R | 100224-TB3261 | | | 02-OCT-2024 18:56 | R4288739 | 14-OCT-2024 17: | DAL |
| HCV | 3 | R | 100224-TB3261 | | | 02-OCT-2024 18:56 | R4288739 | 14-OCT-2024 17: | DAL |
| HIV-1/2 | 1 | NR | 093024-RT0034 | 0.5 | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| HTLV-I/II | 1 | NR | 093024-RT0033 | 0.06 | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| IAT | 1 | N | 093024-RT0035 | NA | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| NAT | 1 | NR | 093024-RT0036 | NA | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| RIBA | 1 | | | | | | | | |
| STS | 1 | N | 093024-RT0037 | +-+++ -+- | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |
| WNV | 1 | N | 093024-RT0038 | NA | | 30-SEP-2024 19:51 | R4288739 | 14-OCT-2024 17: | DAL |

**Unit Notes:**

**Unit Notes:** 093024-RG1846
**Note ID:** 24055

| Seq No | Notes | Insert Date | Insert User | Chp ID |
|---|---|---|---|---|
| 1 | This is the first sample notes for unit. Received late for testing on 09/29/2024 | 30-SEP-24 19:56 | CELHUN | DAL |

**NOTE –** The bottom of GERSAMPQ will contain the notes that are present on the unit, each type listed separately.

## The Sample Notes Button

Click **Sample Notes** to view, add, or delete notes for the selected sample using the GEWNOTES window, as shown:


WellSky Corporation
Proprietary and confidential

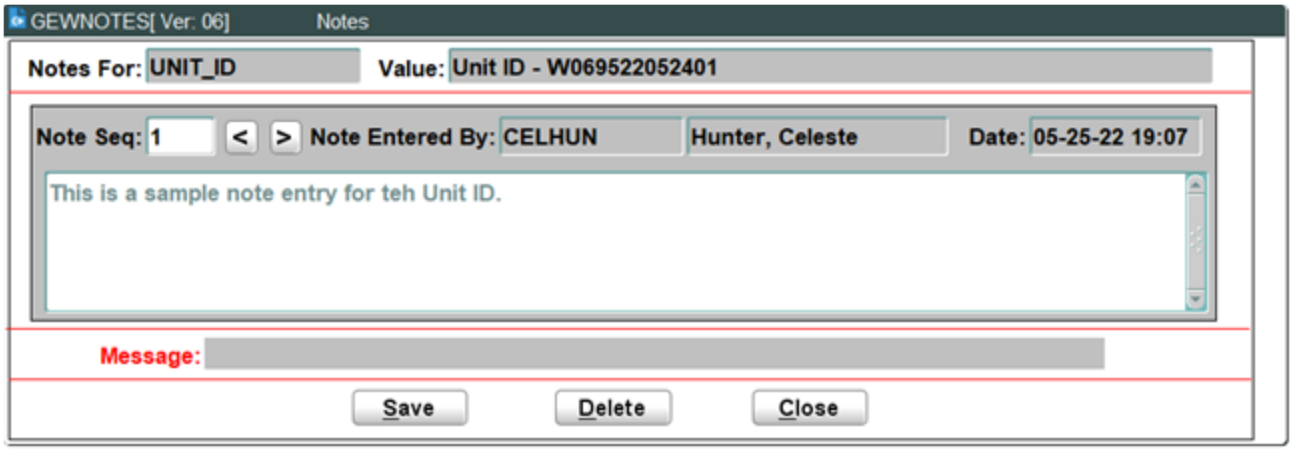


If there are notes present on the sample, a number will display by the button to indicate the quantity of notes present.

Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## The TBatch Notes Button

Press CTRL + F3 (Next Block) to move to the Detail Block, then use the UP and DOWN arrow keys to select a Test Batch ID. Click TBatch Notes to view, add, or delete notes for the selected test batch using the GEWNOTES window, as shown:

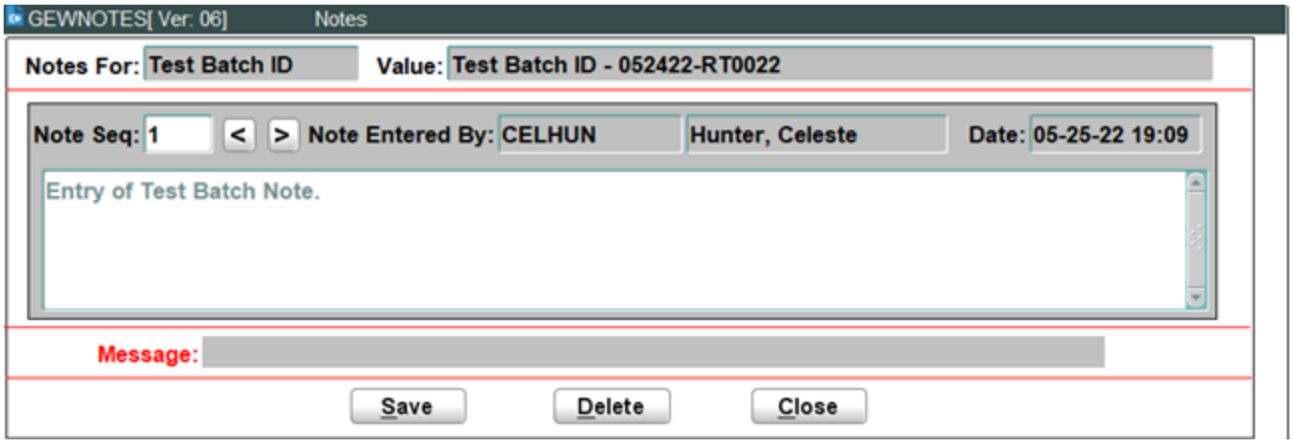


Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## The CBatch Notes Button

Click **CBatch Notes** to view, add, or delete notes for the selected checkin batch using the GEWNOTES window, as shown:

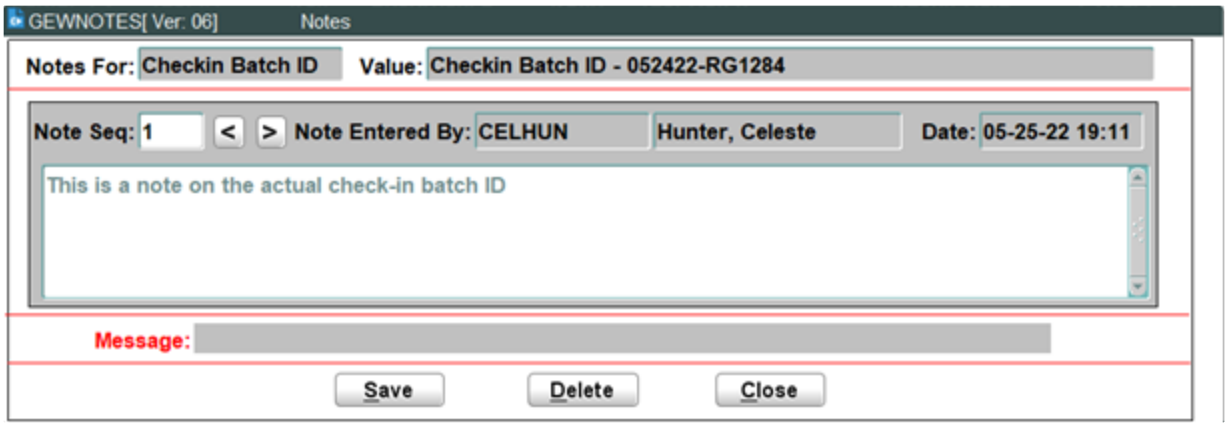


If there are notes present on the check-in batch, a number will display by the button to indicate the quantity of notes present.

Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## The Test Notes Button

Click **Test Notes** to view, add, or delete notes for the selected Test ID using the GEWNOTES window, as shown:

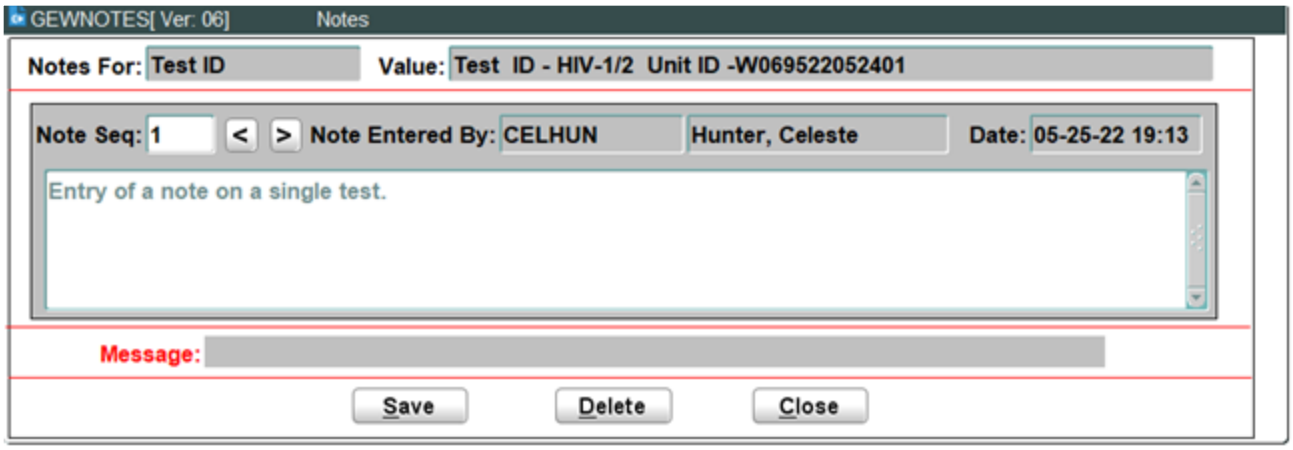


If there are notes present on the test, a number will display by the button to indicate the quantity of notes present.

## The GERUNOTE Button

Click **GERUNOTE** to generate and display the Unit Notes (GERUNOTE) report for the selected sample, as shown:


WellSky Corporation
Proprietary and confidential

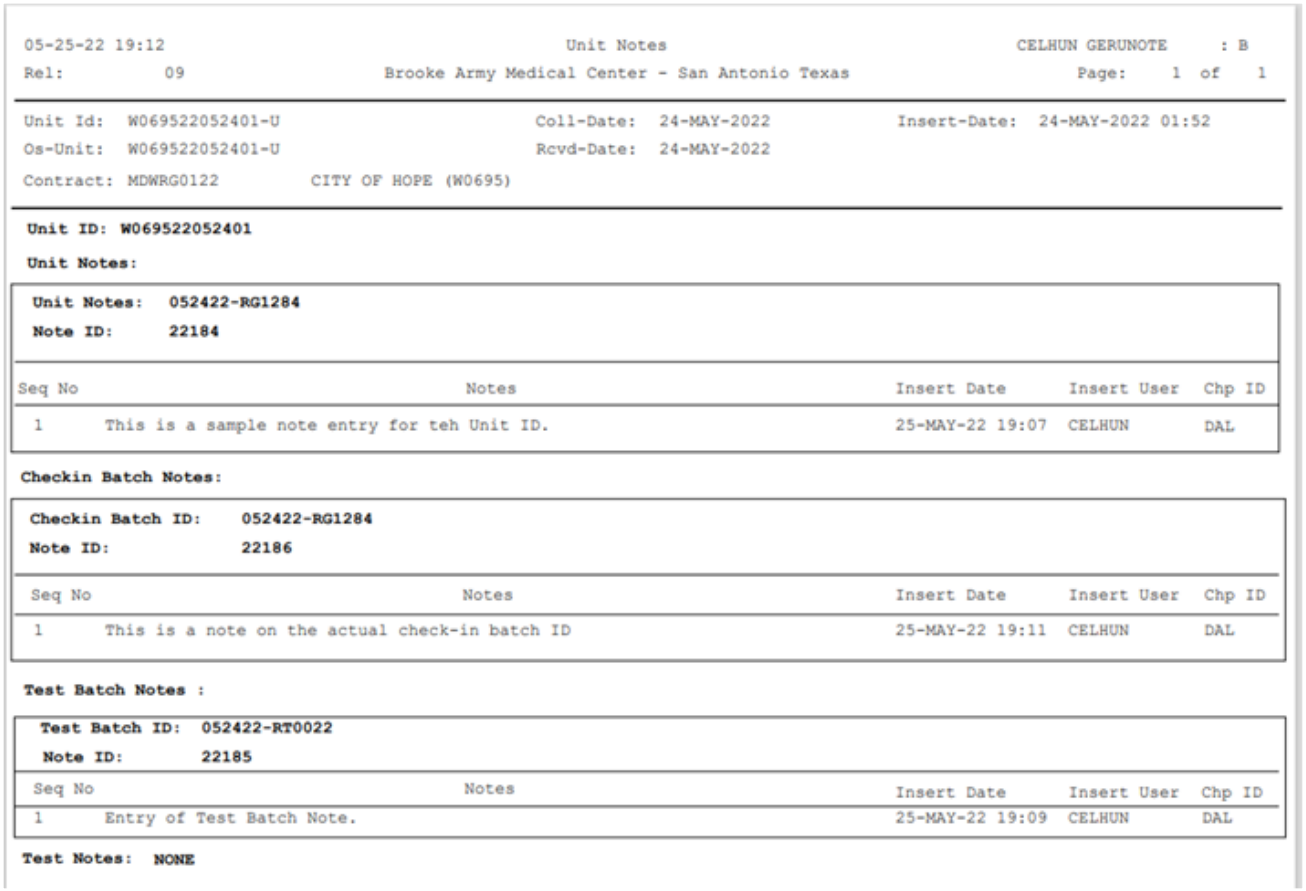

05-25-22 19:12 Unit Notes CELHUN GERUNOTE : B
Rel: 09 Brooke Army Medical Center - San Antonio Texas Page: 1 of 1

Unit Id: W069522052401-U Coll-Date: 24-MAY-2022 Insert-Date: 24-MAY-2022 01:52
Os-Unit: W069522052401-U Rcvd-Date: 24-MAY-2022
Contract: MDWRG0122 CITY OF HOPE (W0695)

**Unit ID: W069522052401**

**Unit Notes:**

**Unit Notes: 052422-RG1284**
**Note ID: 22184**

| Seq No | Notes | Insert Date | Insert User | Chp ID |
|---|---|---|---|---|
| 1 | This is a sample note entry for teh Unit ID. | 25-MAY-22 19:07 | CELHUN | DAL |

**Checkin Batch Notes:**

**Checkin Batch ID: 052422-RG1284**
**Note ID: 22186**

| Seq No | Notes | Insert Date | Insert User | Chp ID |
|---|---|---|---|---|
| 1 | This is a note on the actual check-in batch ID | 25-MAY-22 19:11 | CELHUN | DAL |

**Test Batch Notes :**

**Test Batch ID: 052422-RT0022**
**Note ID: 22185**

| Seq No | Notes | Insert Date | Insert User | Chp ID |
|---|---|---|---|---|
| 1 | Entry of Test Batch Note. | 25-MAY-22 19:09 | CELHUN | DAL |

**Test Notes: NONE**

## At Commit

Added or deleted notes are updated in the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Regional Sample Tracking Queries menu.

# 23.4 Confirmatory Sample Management Functions

Confirmatory Sample Management Functions are accessed from the following menu:

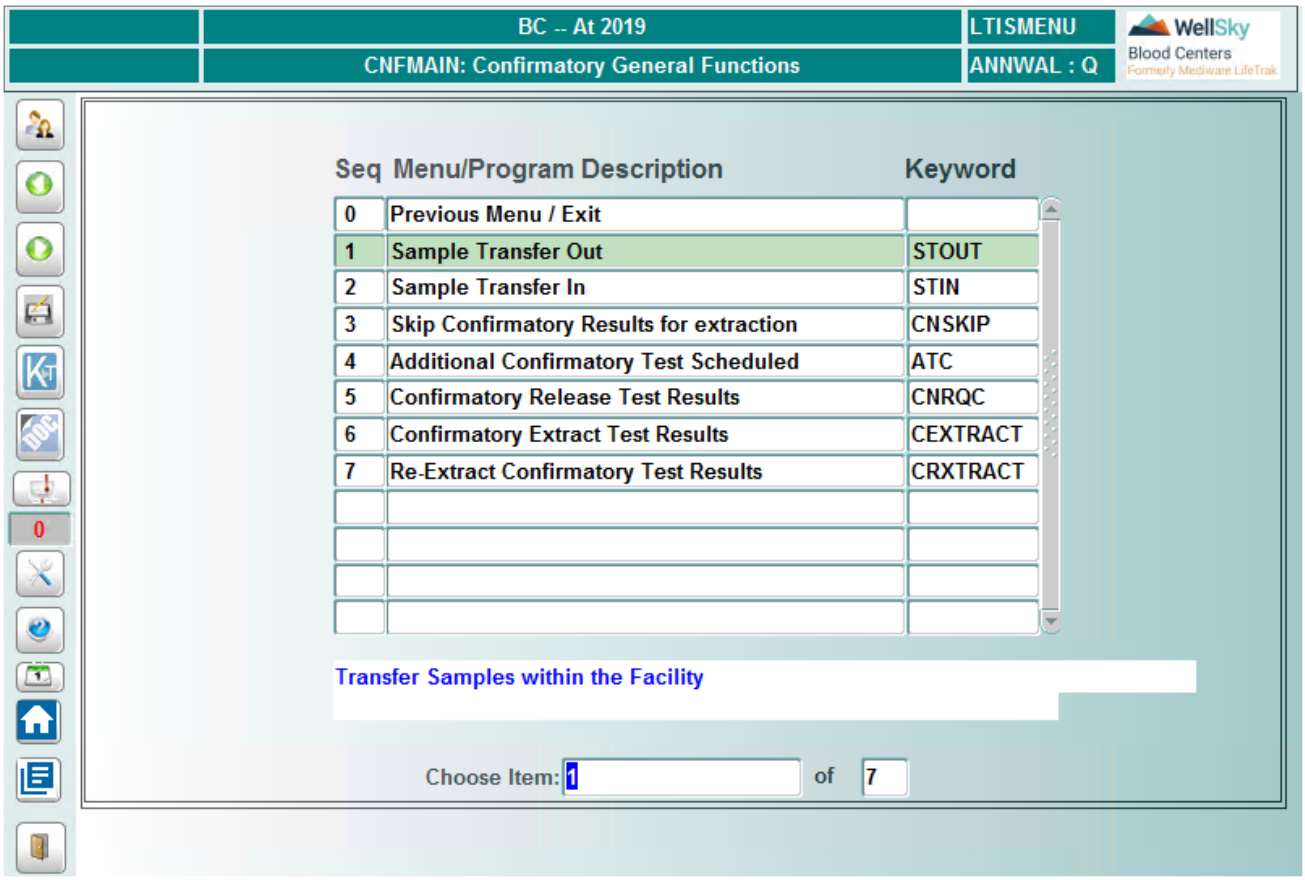


## 23.4.1 Sample Transfer Out (STOUT)

### Intended Use

Use the Sample Transfer Out screen to transfer samples either within a facility or to an outside facility.

### Limitations

None.

### Prerequisites

- Samples must exist.
- Sample Test Linkage (STMAP) must be defined.
- Master codes to be defined:
  - STFAC - Sample Transfer Facilities.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword STOUT.

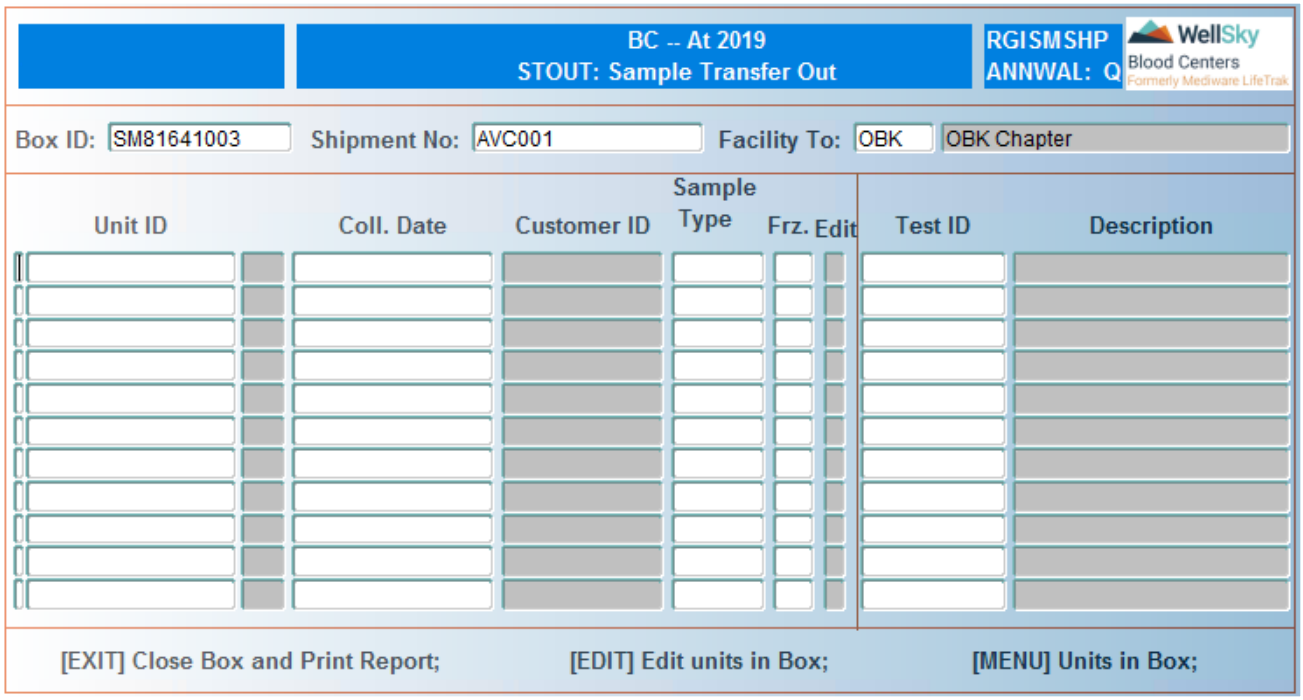


# Control Block Fields and Definitions

## Box ID

To create a new box, press **Tab** to move to the next field. For an open box, enter the box ID or use the LOV.

## Shipment No

This is an optional field. Enter the shipment number in this field.

> **NOTE –** A maximum of 50 characters can be entered, including numbers and special characters. Special characters that are NOT allowed are: "\", "/", and " ' " (apostrophe).

## Facility To

Enter the code of the facility you are transferring the samples to, or use the LOV. The LOV comes from master code STFAC. The name of the facility will display next to the facility code once it has been entered/selected.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter the unit ID. Manual entry of an ISBT 128 unit number does not require the check digit entry. A Codabar unit number does not require double entry.

## Coll. Date

The internal unit collection date will populate automatically after entering the unit number.

**NOTE –** If the unit was not checked in with a collection date and time, the date will appear as MM-DD-YYYY 00:00.

## Customer ID

The customer ID displays automatically based on the customer the unit was checked in with in RGITUBES (REGTUBES).

## Sample Type

Enter the sample type or select from LOV. The LOV is populated from the master code STTYP.

## Frozen

Specify whether or not the sample is frozen. Enter `Y` if the sample is frozen, otherwise leave the field blank.

## Test ID

Enter the test ID or select from the LOV. Entry of the test ID is only required if shipping samples to a facility that is outside of the institution.

**NOTE –** Internal samples will have tests scheduled based on testing done within the chapter.

## Description

The description of the specified test displays here.

# Viewing Units in the Box

Press **F6** to view the units in the specified box. The list of units displays in a new window, as shown in the following example.

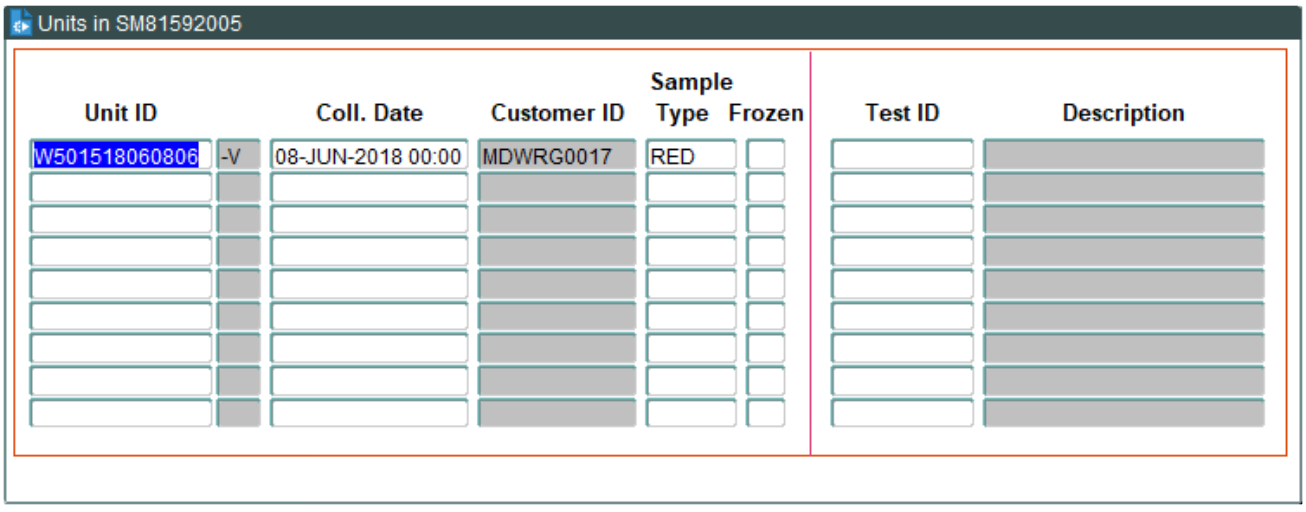

## Editing Units in the Box

Press CTRL + E to edit the units in the box.

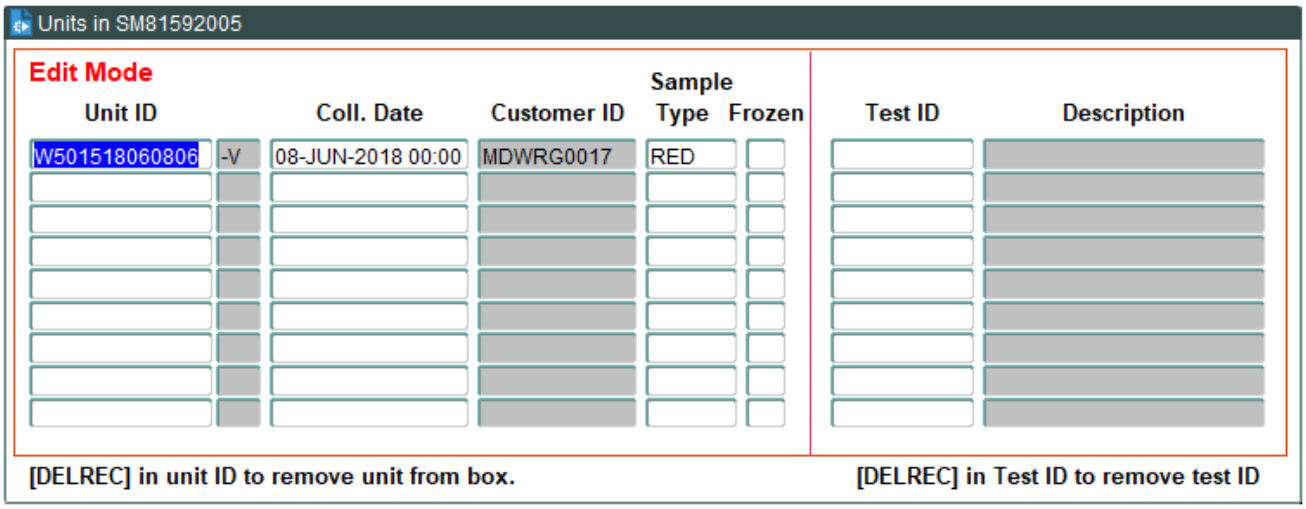


To remove a particular unit from the box, place the cursor in the Unit ID field for the unit to be removed, and press CTRL + F8 to remove the unit from the box. Repeat these steps as needed to remove additional units.

To remove a test from a unit in the box, place the cursor in the Test ID field for the test to be removed, and press CTRL + F8 to remove the test from the unit. Repeat these steps as needed to remove additional tests.

## At Commit

At commit, all entered data is saved to the database, the box is closed, and the Sample Transfer Slip (RGRSMSHP) is generated.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu. The Sample Transfer Slip (RGRSMSHP) will automatically print.

# 23.4.2 Sample Transfer In (STIN)

## Intended Use

Use the Sample Transfer In screen to receive samples internally from within the institution, or from an external contract.

## Limitations

This process is strictly used for confirmatory samples.

## Prerequisites

- Samples must exist with results that will generate a confirmatory test.
- Samples being transferred could already have a customer-defined confirmatory test, which will be transferred with the sample.
- Sample Test Linkage (STMAP) must be defined.
- Master codes to be defined:
  - CFCOM – confirmatory canned comments
  - CFHLD – hold interdictions that are specific for confirmatory sample override.
- Lab User Access codes
  - CFSUP – supervisor override for the sample
- Lab Interdictions that will be entered for the master code CFHLD.
- Available Tests defined for testing groups CNFRM and SUPP.

## Accessing the Screen

Access this screen from the Confirmatory General Functions menu or by entering the keyword `STIN`.

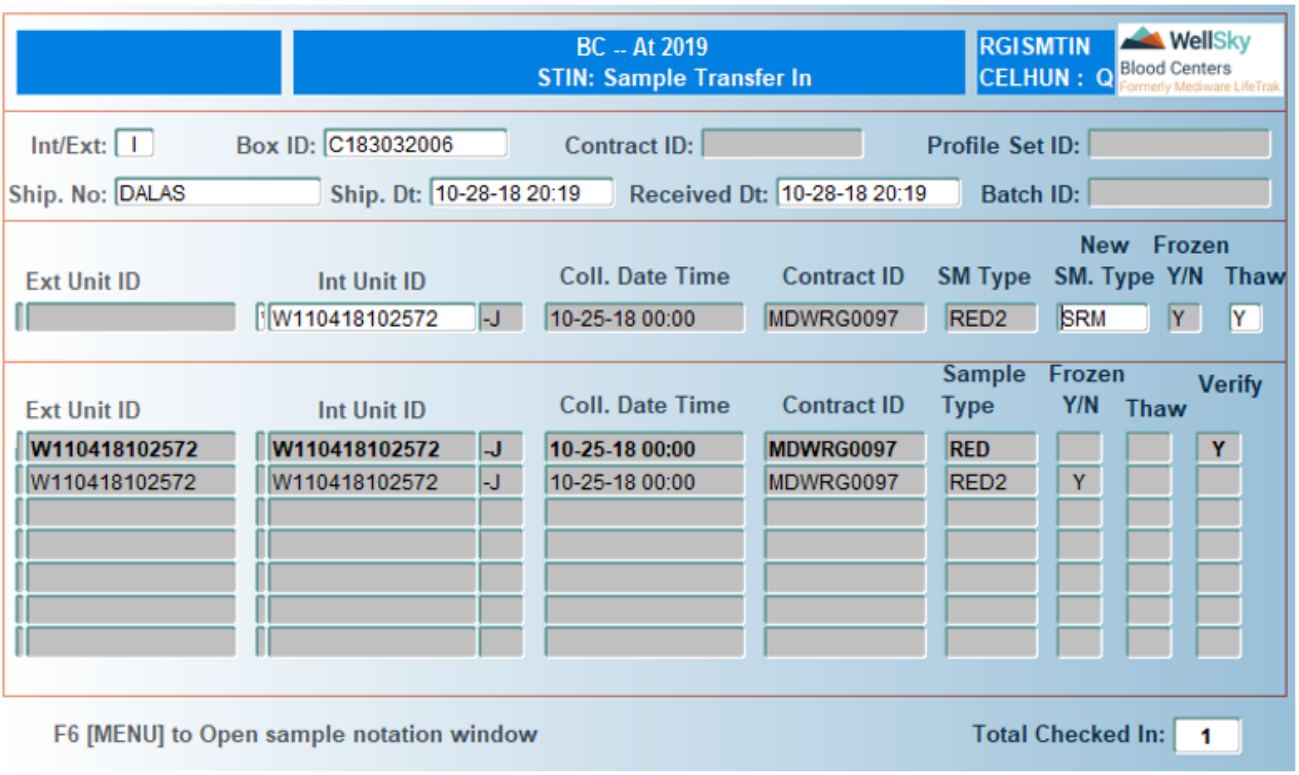

# Control Block Fields and Definitions

## Int/Ext

The Internal/External flag is used to determine if it is an internal transfer or an external receipt.

## Box ID

Enter the box ID or use the LOV. Box IDs in the LOV are from the Transfer Out process for shipments that are transferred out to the user's current logged-in chapter. The facility code in the LOV is the chapter that shipped the box to the confirmatory chapter.

**NOTE –** If the receipt if from an external customer, the box ID is a required entry.

## Contract ID

Enter the contract ID or use the LOV. This field is only used for external shipments being received into the system.

**NOTE –** If the transfer is internal, the contract ID is not applicable, and the field is disabled.

## Profile Set ID

Enter the profile set ID or use the LOV. This field is only used for external shipments being received into the system.

**NOTE –** If the transfer is internal, the profile set ID is not applicable, and the field is disabled.

## Ship. No

Enter the shipment number or leave the field blank.

**NOTE –** If receiving a transfer from an internal shipment, the shipment number will automatically display, based on the box ID and if the shipment number was entered during Transfer Out.

## Ship. Dt

Enter the shipment date in MMDDYYHH24MI format if receiving an external unit number.

**NOTE –** If the transfer is internal, the shipment date will automatically display, based on the entry during Sample Transfer Out (STOUT).

## Received Dt

The received date field is automatically populated with the current chapter date and time. This date can be updated.

### Batch ID

This field is only used if receiving external samples. Enter the batch ID or use the LOV. If the batch ID does not exist, enter `NEW` to generate a new batch ID.

**NOTE –** If the transfer is internal, the batch ID is not applicable, and the field is disabled.

## First Detail Block Fields and Definitions

### Ext Unit ID

If the sample transfer is from an external facility, scan or manually enter the unit ID.

**NOTE –** If the sample transfer is from within the institution (internal transfer), this field will be disabled.

**NOTE –** If the contract calls for differing internal and external unit IDs, the cursor advances to the *Int Unit ID* field. If the internal and external unit IDs are identical, the system populates the *Int Unit ID* automatically, and the cursor advances to the *Coll. Date Time* field.

### Int Unit ID

Scan or manually enter the unit ID.

**NOTE –** If the unit ID is an external unit number, the contract will determine if the external unit number can be entered in the field, or if it will be copied to the field.

### Coll. Date Time

The internal unit collection date will populate automatically after entering the unit number. Enter the collection date in MMDDYYHHMM format for external unit numbers.

**NOTE –** If there is not a time available when entering a collection date, the system will automatically append 00:00 to the entered collection date.

**NOTE –** If the internal transfer unit was not checked in with a collection date and time, the date will appear as MM-DD-YYYY 00:00.

### Contract ID

Enter the contract ID or use the LOV.

**NOTE –** If the transfer is internal, the contract ID is not applicable, and the field is disabled.


WellSky Corporation
Proprietary and confidential

### SM Type

Enter the sample type or select from the LOV. The LOV is populated from the master code STTYP.

**NOTE –** If the transfer is internal, this field is disabled.

### New SM. Type

Enter the new sample type or select from the LOV. The LOV is populated from the master code STTYP.

**NOTE –** Enter the new sample type here if the wrong sample type was originally entered in Transfer Out.

### Frozen Y/N

Specify whether or not the sample is frozen. Enter `Y` if the sample is frozen; otherwise leave the field blank.

**NOTE –** If the transfer is internal, this field is disabled.

### Thaw

Specify whether or not the sample has been thawed. Enter `Y` if the sample has been thawed, otherwise leave the field blank.

**NOTE –** This field defaults to Y if the Frozen flag is set to Y for internal transfers.

## Second Detail Block Fields and Definitions

### Ext Unit ID

The external unit ID of the sample unit automatically displays in this field when checking in an internal transfer. The external unit number will not appear for external transfer until the unit has been received.

### Int Unit ID

The internal unit ID of the sample unit automatically displays in this field when checking in an internal transfer. The external unit number will not appear for external transfer until the unit has been received.

### Coll. Date Time

The internal unit collection date automatically displays in this field when checking in an internal transfer. The collection date/time will not appear for external transfer until the unit has been received.

**NOTE –** If the unit was not checked in with a collection date and time, the date will appear as MM-DD-YYYY 00:00.

### Contract ID
The contract ID automatically displays in this field when checking in an internal transfer. The contract ID will appear when the unit is checked in for external transfer.

### Sample Type
The sample type automatically displays in this field when checking in an internal transfer. The sample type will appear when the unit is checked in for external transfer.

### Frozen Y/N
This field indicates whether or not the sample is frozen.

### Thaw
This field indicates whether or not the sample has been thawed.

### Verify
This field indicates whether or not the sample has been verified. Once the sample has been verified, a Y will appear in the field.

### Total Checked In
Displays the total number of samples checked in from the box.

## Check Sample Suitability
When accepting the sample type or entering a new sample type, the system will check for sample suitability for tests being ordered. If the sample is acceptable, the test will be scheduled and the verify flag will be set to 'Y'. If the sample is not acceptable, you will receive a warning message:




You must enter `Y` or `N` to the question.

- If you enter N, the test will be scheduled, but it will be placed on the Unacceptable sample report. You will have to enter a final result for the sample.
- If you enter Y, you will be required to override the sample type to place the sample and test on the Units Received with Acceptable Sample Type report and the Units Received with Override Reason report. An override window will display.

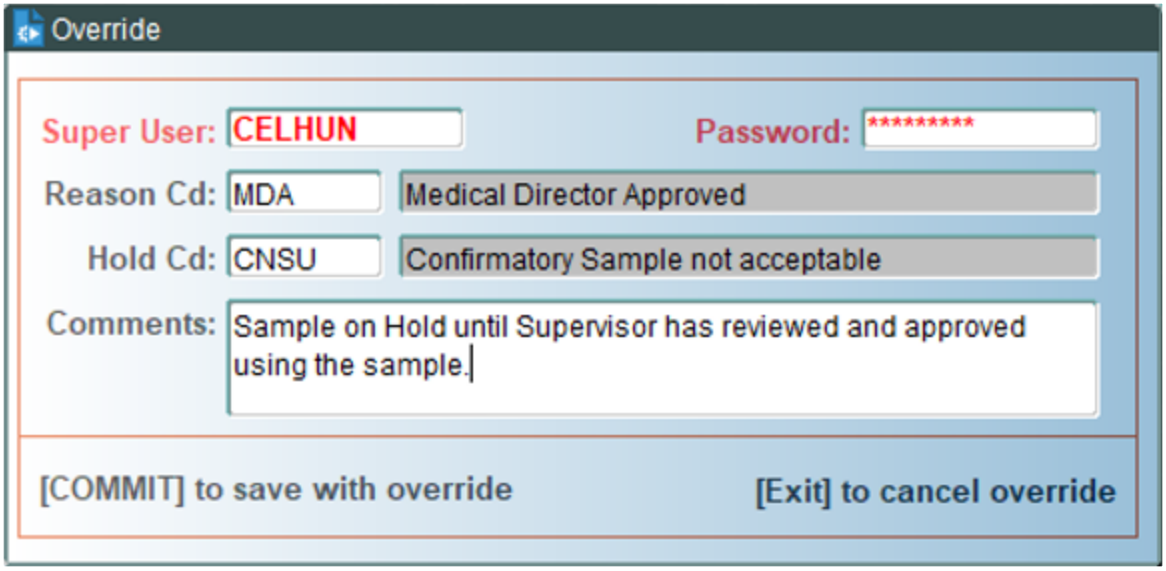


To be able to override a sample type, you will need to have user access to the CFSUP. If you do not have access to CFSUP, you will receive an error message.

The override entry requires the following fields to be entered:

- Super User – user ID
- Password – password that belongs to the entered user ID
- Hold Cd – this is not a required field. This code is an interdiction code that is defined in master code CFHLD.
- Comment – this is a required field and allows 250 characters. It allows free format entry or use of canned comments. You can select multiple comments through the master code CFCOM. To select a canned comment, press F2 (List of Values). The following window displays:

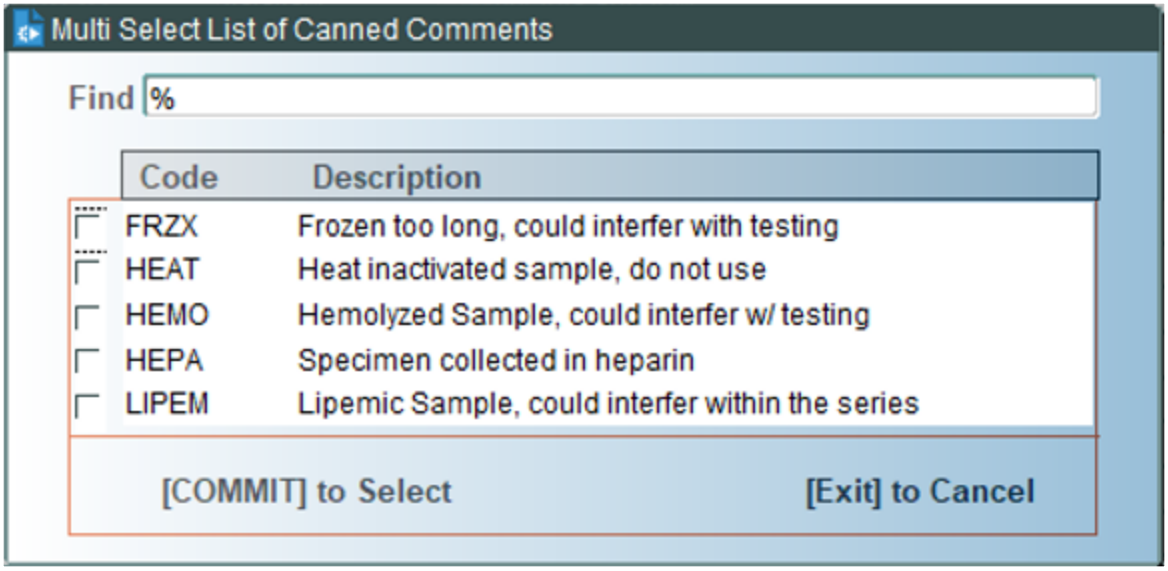


To select a canned comment, the cursor must be in the check box next to the comment. Press the SPACE BAR to place an 'X' by the comment. After all comments are selected, press F12 (Commit). The list will close, and the cursor will be back in the Comments field on the Override window.

Press F12 (Commit) to save all information entered in the Override window.

## Sample Notation Window

Use F6 (Menu)to open the Sample Notation window and place a notation on the sample being transferred into the confirmatory lab. For more information, refer to the Sample Notation Window section in the User Guide.

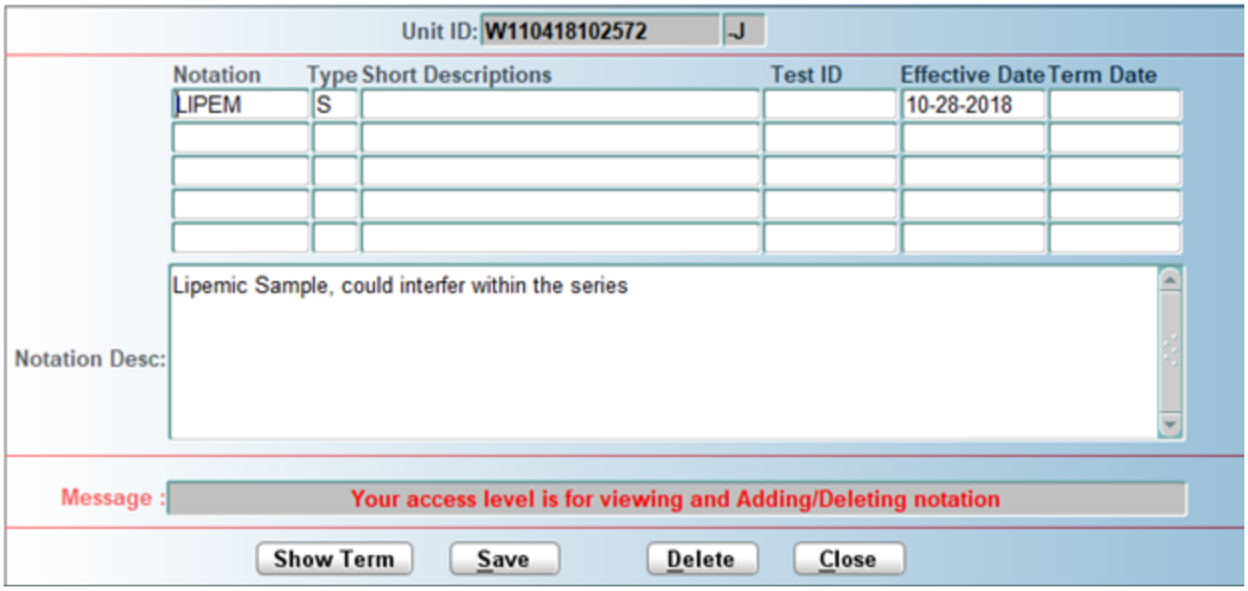


**NOTE –** Once you open the Sample Notation window, your access level for viewing, placing, and deleting notations will display in the *Message* field.

## At Commit

At commit, all entered data is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Regional Sample Tracking Functions menu.

# 23.4.3 Skip Confirmatory Results for Extraction (CNSKIP)

## Intended Use

Use the Skip Confirmatory Results for Extraction screen to apply a skip to a sample so results for that sample are skipped from the extraction process. This same screen will allow the user to release a skip from a sample to be included for QC and extraction.

## Limitations

- This screen is used only for confirmatory samples.
- Skip reasons are placed at the unit level only.

## Prerequisites

- The sample must be checked in to the system.
- Master codes:
  - SSKIP – sample skip reasons
  - RSKIP – release skip reasons

## Accessing the Screen

Access this screen from the Confirmatory Sample General Functions menu or by entering the keyword `CNSKIP`.

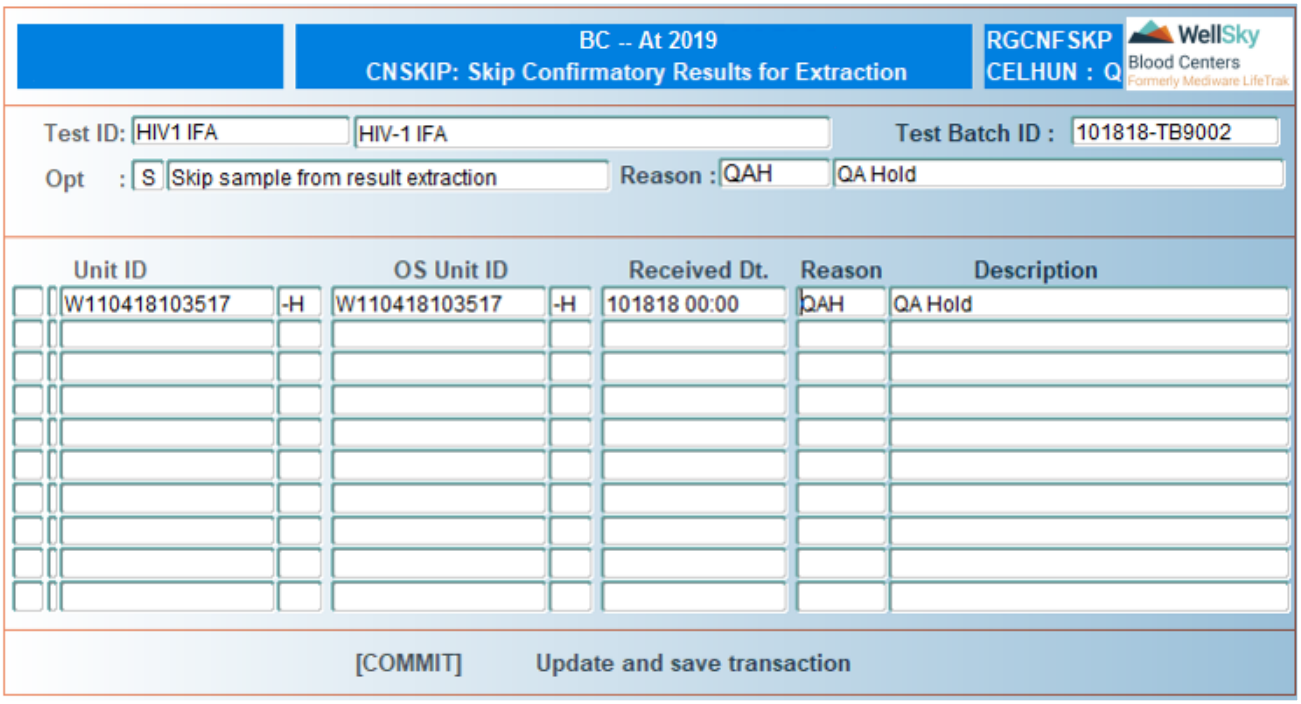


## Control Block Fields and Definitions

Selecting a test ID and test batch is used strictly to pull up multiple units and place and release skips on those units. Skip reasons are placed at the UNIT level, and not at the test level.

### Test ID

This field is not required. Enter a test ID or select from the LOV. The LOV comes from Available Tests, which have a group type of CNFRM or SUPP. The test ID should be selected if trying to pull multiple units to the screen based on a test ID.

### Test Batch ID

This field is not required. Enter a test batch ID or select from the LOV. The LOV is linked to the test ID. The test batch ID LOV displays the last 15 days, but will allow manual entry of an older test batch ID.

### Opt

Enter `S` to skip sample from results extraction. Enter `R` to release a skip flag that exists for a sample. When the option code is entered, a description of the code displays to the right.

### Reason

Enter the reason that a Skip or a Release flag is being applied to the sample. For skips, enter the reason code or select it from the LOV. For releases, the skip reason is displayed. Overwrite the skip reason with a valid release reason, or select the reason code from the LOV. The reason code is required when the test batch ID has been entered. The description automatically displays when the reason code is entered.

**NOTE –** The sequence of the LOV is determined in the master SSKIP, RSKIP with the numbering entered in the Seq 1 field.

# Detail Block Fields and Definitions

## Unit ID

Scan the unit ID, or enter it manually if the skip option was chosen. Enter X by the unit ID to be released if the release option was chosen.

The unit ID will automatically populate when the test batch ID has been entered.

## OS Unit ID

Enter the external ID for the unit assigned by the client blood center. The external unit ID automatically displays when the internal unit number is entered.

## Received Date

This field displays the date and time that the sample was received at the confirmatory chapter. This field is not navigable.

## Reason

Enter the reason that a Skip or Release flag is being applied to the sample.

## Description

This field automatically populates with the description of the skip or release reason code that was entered. This field is not navigable.

# Place Skips

To place a skip at the batch level, enter S for the test ID and test batch ID, and enter the reason. The skip will apply to all of the units in the batch. The units and reason display in the detail block.

To place a skip at the unit level, do not enter the test ID or the test batch ID. Enter S, and the cursor moves directly to the unit ID field for the unit to be scanned or manually entered. The reason code will have to be entered for each individual unit.

Press F12 (Commit) to save entries.

# Release Skips

To release a skip that was placed at the batch level, enter R for the test ID and test batch ID, and enter the reason. The release will apply to all of the units in the batch. The units and reason display in the detail block.

To release a skip that was placed at the unit level, do not enter the test ID or the test batch ID. Enter S, and the cursor moves directly to the unit ID field for the unit to be scanned or manually entered. The reason code will have to be entered for each individual unit.

If you enter R in the control block and press **Enter** through all of the other fields, ALL units will be pulled to the detail block, and the cursor will move to the first field. Enter X next to each unit that will have the skip released. The release reason code will have to be entered for each unit selected.

Press **F12** (Commit) to save entries.

## At Commit

At commit, all entered data is saved to the database.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Confirmatory General Functions menu.

# 23.4.4 Additional Confirmatory Test Scheduling (ATC)

## Intended Use

Use the Additional Confirmatory Test Scheduling screen to schedule any needed confirmatory tests in addition to those scheduled automatically at check-in. If a unit is tested before being checked in to the computer, the system holds any testing done as an unscheduled test. You can use this screen to move tests from unscheduled to scheduled status.

You can use this screen to schedule (for a group of units):

- A single additional test
- A group of tests (SUPP or CNFRM types only)

**NOTE –** Test Query (TESTQ) shows status of scheduled and unscheduled tests.

## Limitation

This screen is to be used for confirmatory testing (laboratory only).

## Prerequisites

- Menu definition of SCREEN_MODE=CNFRM.
- Master codes to be defined:
  - CFCOM – confirmatory canned comments
  - CFHLD – hold interdictions that are specific for confirmatory sample override
- Lab User Access Code
  - CFSUP – supervisor override for the sample
- Lab Interdictions that will be entered for the master code CFHLD.
- Available Tests defined for testing groups CNFRM and SUPP.


WellSky Corporation
Proprietary and confidential

## Accessing the Screen

Access this screen from the Confirmatory General Functions menu, or by entering the keyword ATC.

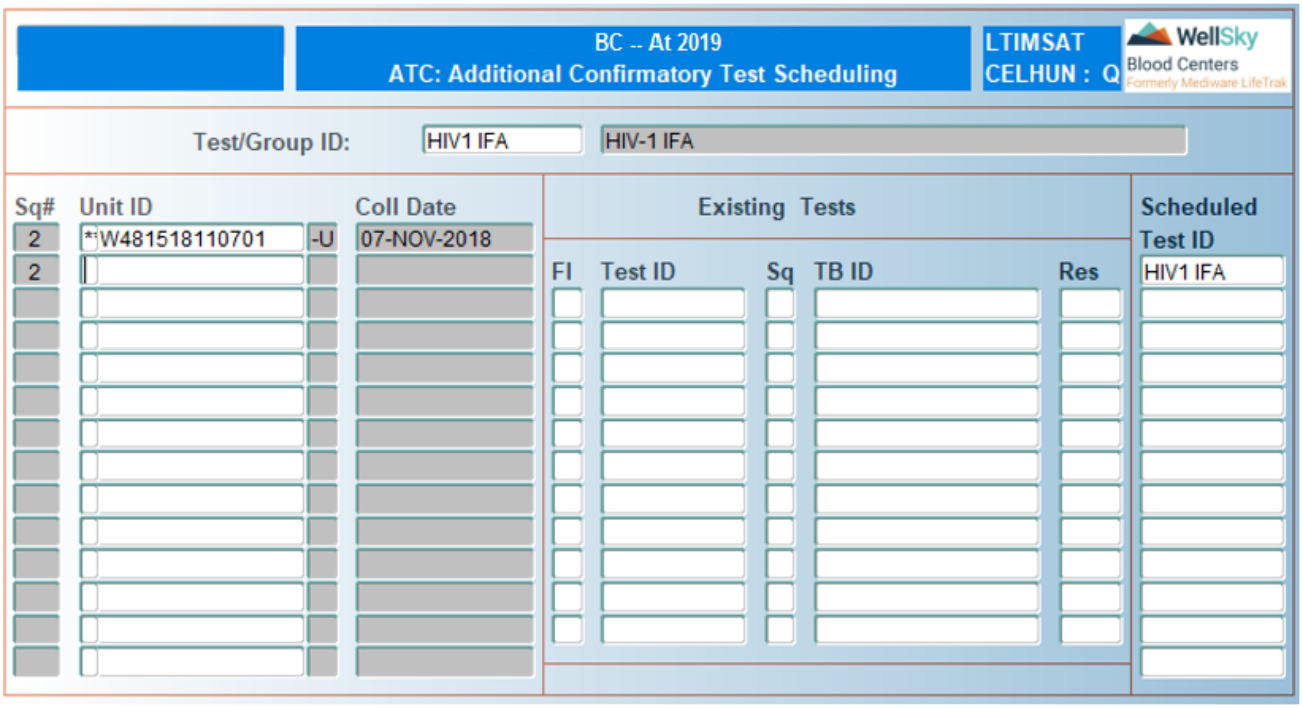


## To Select a Single Test

To select a single test, do the following:

1. Enter the desired test in the *Test/Group ID* field, or select it from the LOV.
2. Press **ENTER**. The selected test appears in the *Scheduled Test ID* field.

## To Select Multiple Tests Within a Single Group ID

To select one or more tests from the same Group ID, do the following:

1. Leave the *Test/Group ID* field blank, and press **ENTER**. The following window opens:

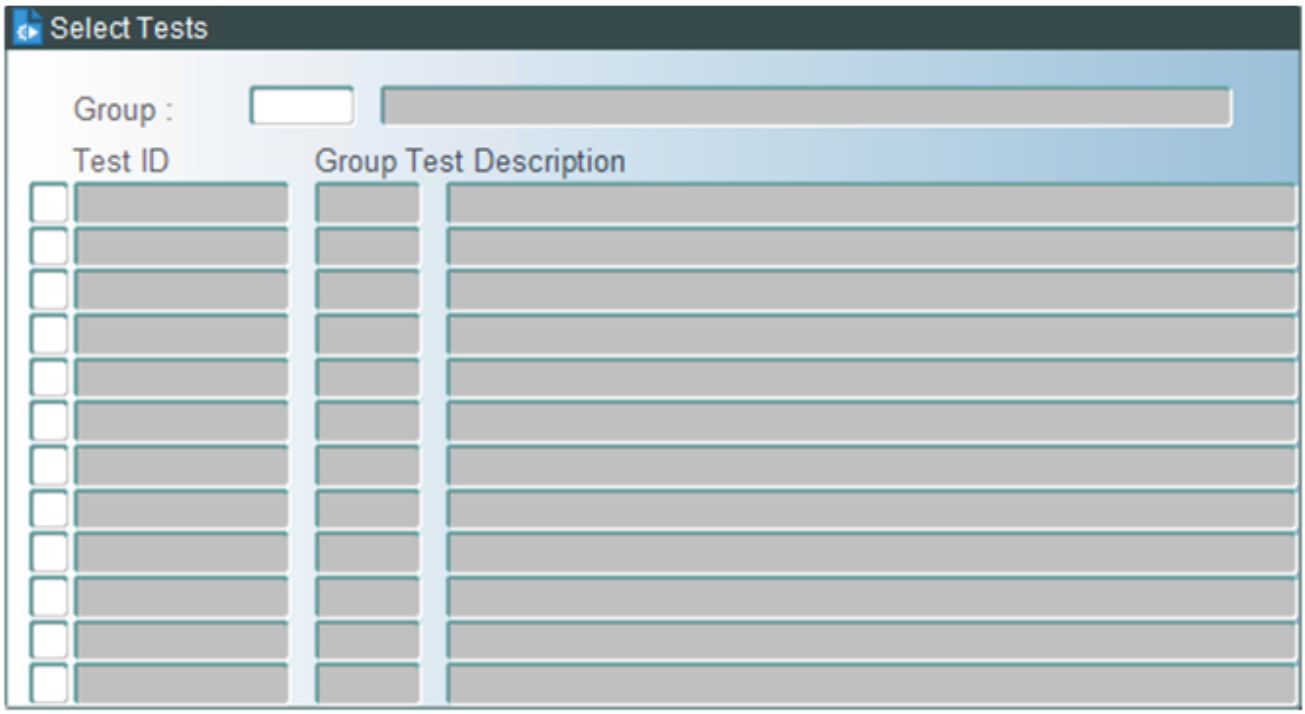


2. Enter the Test Group in the *Group* field, or select it from the LOV.
3. Press **ENTER**. All available Test IDs from the selected Test Group are displayed, as shown:

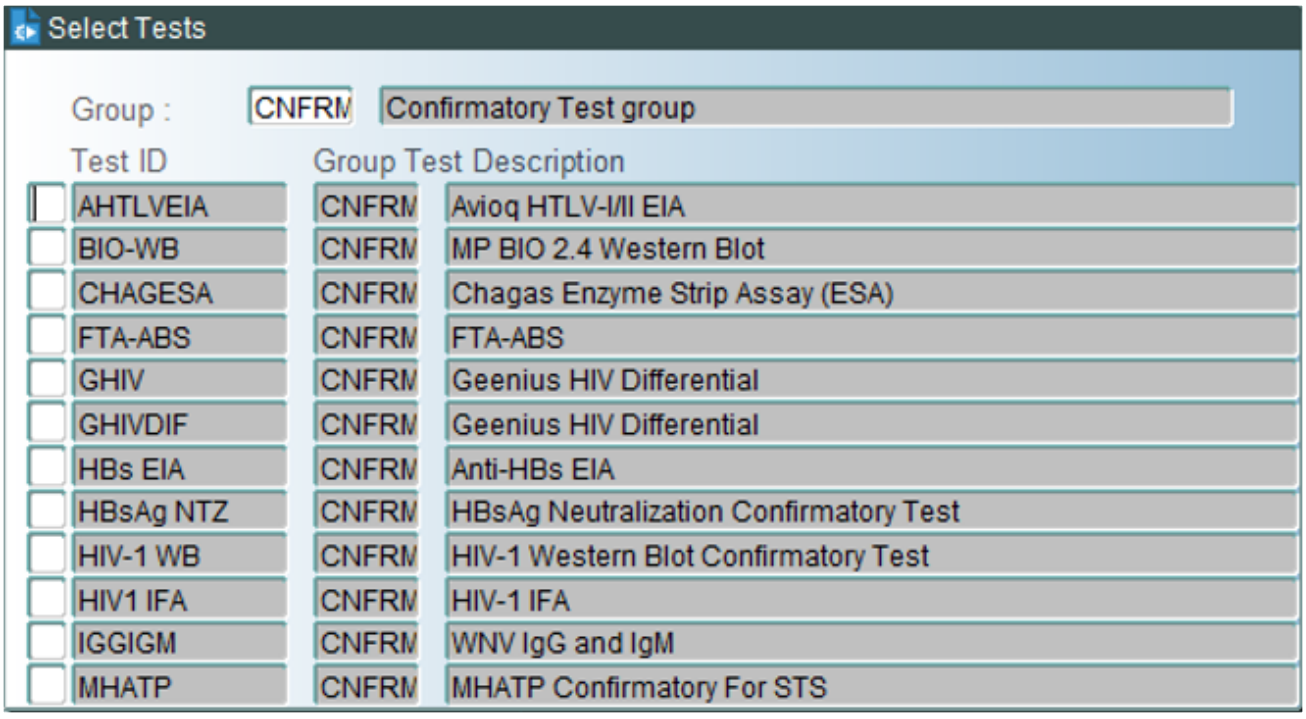



WellSky Corporation
Proprietary and confidential

4. Select one or more tests by placing an X in the checkbox next to the Test ID, or by pressing **ENTER**. Use the **UP** and **DOWN** arrows to navigate through the list.

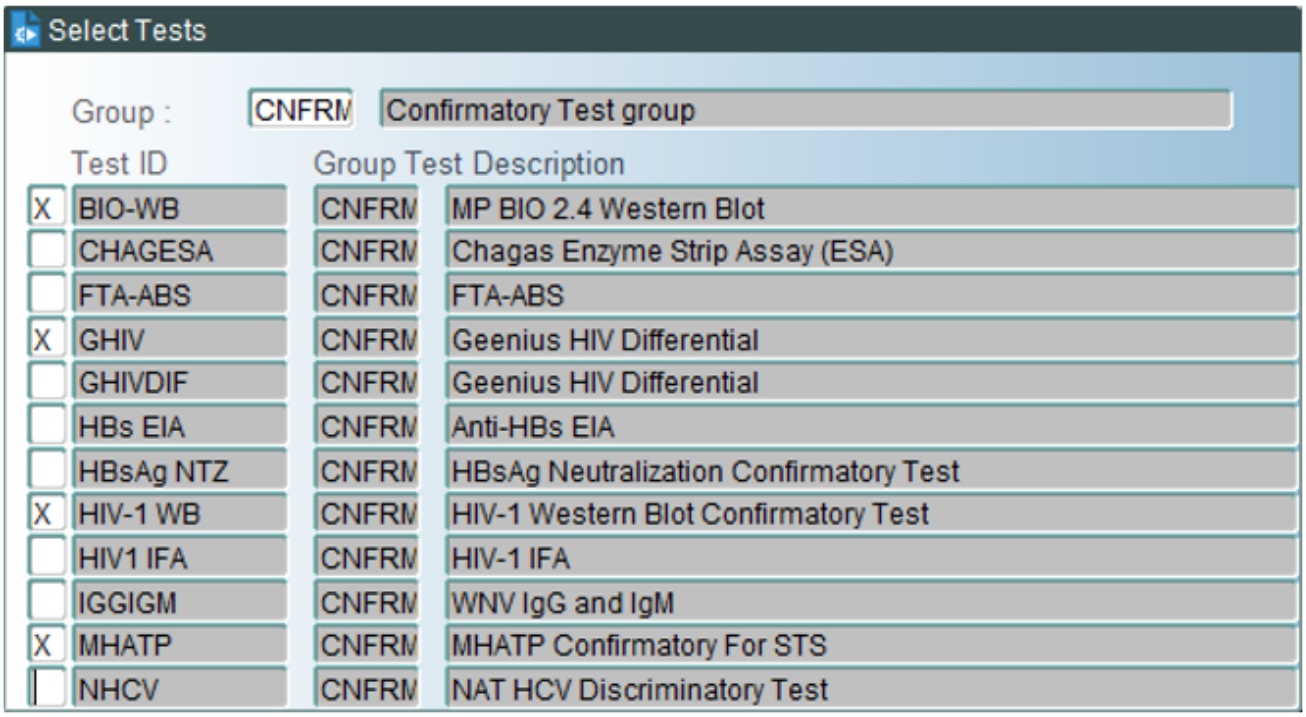


5. Press **F8** (Exit Screen) to abort without saving. Press **F12** (Commit) to save the selected tests. The selected tests appear in the *Scheduled Test ID* field, as shown:

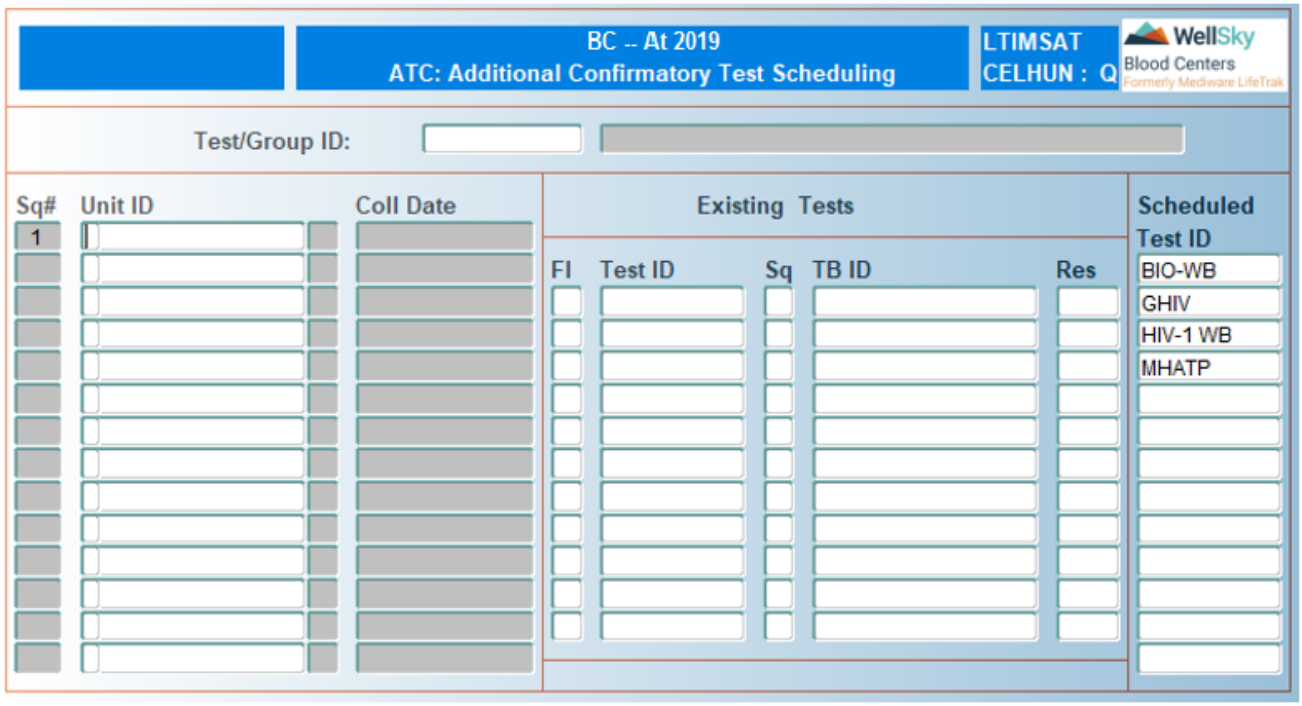

**NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

## To Select Multiple Tests From Different Group IDs

To select multiple tests from different Group IDs, do the following:

1. Leave the *Test/Group ID* field blank, and press **ENTER**. The following window opens:

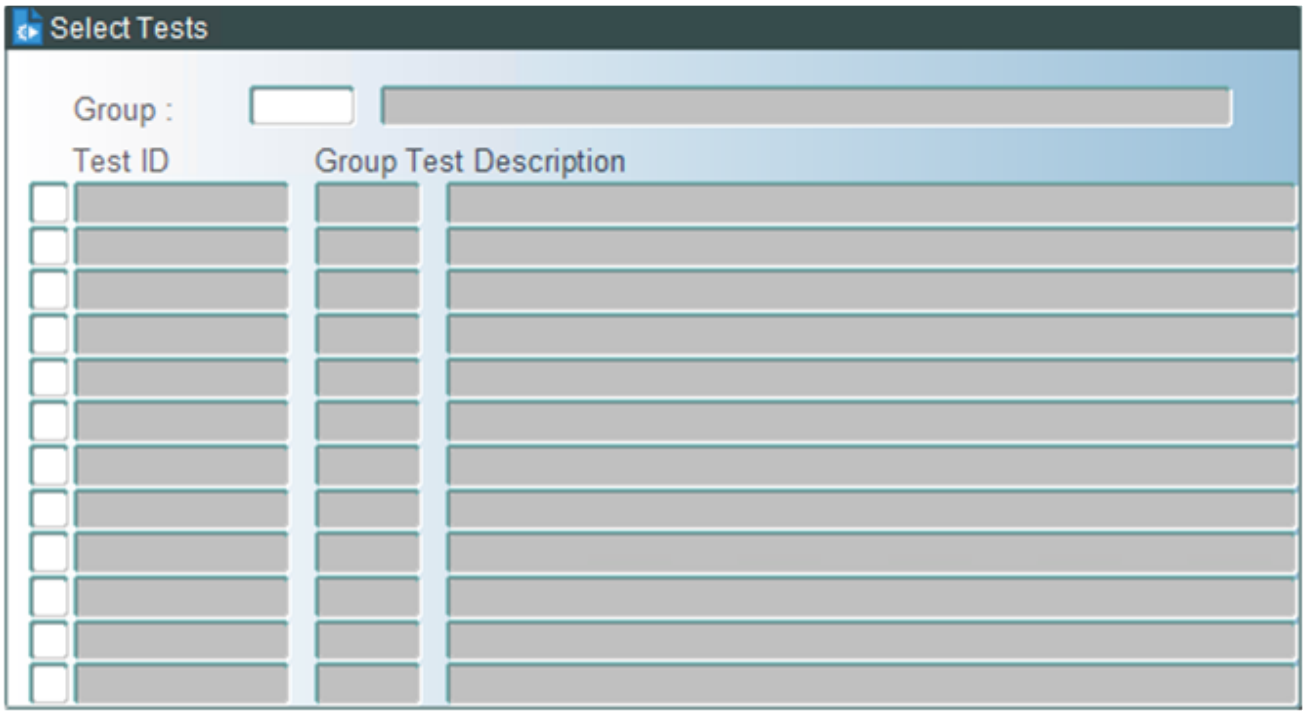


2. Leave the *Group* field blank and press **ENTER**. All available tests from all Group IDs are displayed, as shown:

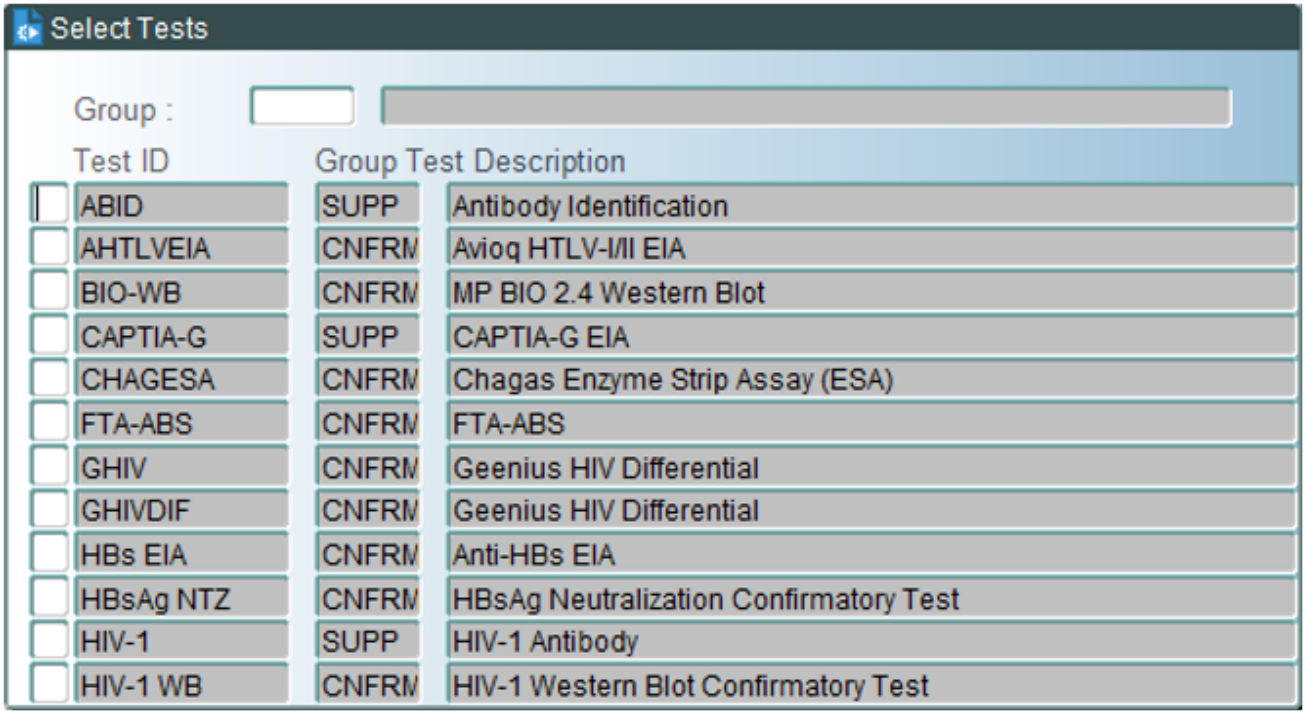


3. Select the desired tests by placing an `X` in the select box, or by pressing **ENTER** . Use the **UP** and **DOWN** arrow to navigate through the list.
4. Press **F8** (Exit Screen) to abort without saving. Press **F12** (Commit) to save the selected tests. The selected test appears in the *Scheduled Test ID* field.

> **NOTE –** ENTER works like a toggle switch for selecting and removing the selection.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID. After the unit ID is entered, the collection date displays. Tests are scheduled for units on a line-by-line basis.

If the unit already has the test schedule, the following window opens:




Close the window by entering `Y` or `N`. The tests that are already scheduled will display in the Existing Test block.

The selected tests are displayed on the right side of the screen. Scan the unit ID to schedule a unit for the listed tests.

## Check Sample Availability and Suitability

After scanning or manually entering the unit ID, the system will check for sample types checked in for the unit ID. A list of sample types that were checked in on the sample will display:

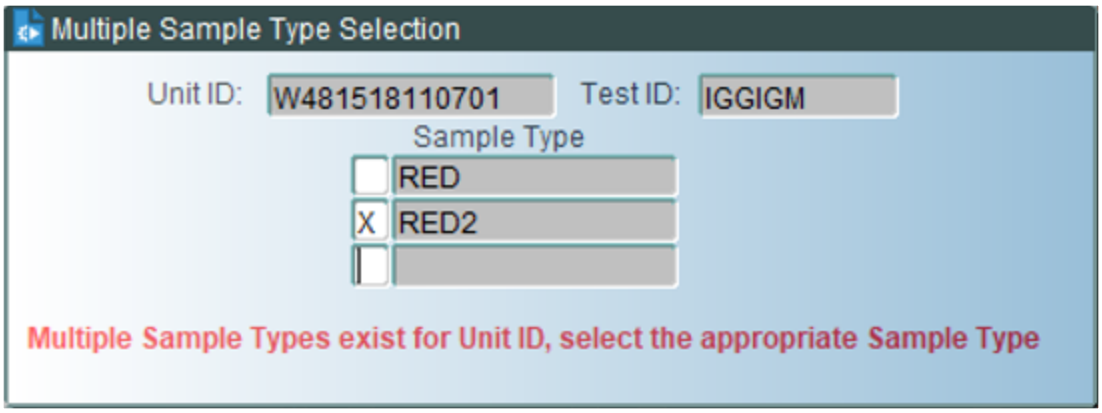


Select a sample type by placing the cursor in the check box next to the sample type and pressing ENTER. Press F12 (Commit) to accept the selection. When the commit key is pressed, the system will check for sample suitability for the test being scheduled. If the sample is acceptable, the test will be scheduled. If the sample is not acceptable, you will receive a warning message:




You must enter `Y` or `N` to the question.

- If you enter N, the test will be scheduled, but it will be placed on the Unacceptable sample report. You will have to enter a final result for the sample.
- If you enter Y, you will be required to override the sample type to place the sample and test on the Units Received with Acceptable Sample Type report and the Units Received with Override Reason report. An override window will display.


WellSky Corporation
Proprietary and confidential

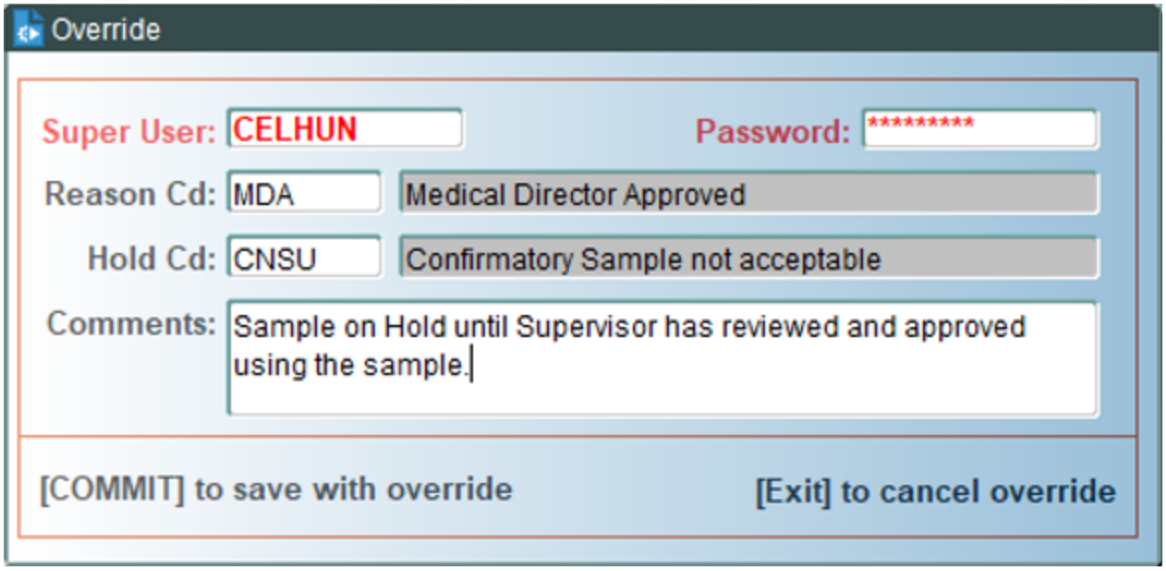


To be able to override a sample type, you will need to have user access to the CFSUP. If you do not have access to CFSUP, you will receive an error message.

The override entry requires the following fields to be entered:

- Super User – user ID
- Password – password that belongs to the entered user ID
- Hold Cd – this is not a required field. This code is an interdiction code that is defined in master code CFHLD.
- Comment – this is a required field and allows 250 characters. It allows free format entry or use of canned comments. You can select multiple comments through the master code CFCOM. To select a canned comment, press F2 (List of Values). The following window displays:

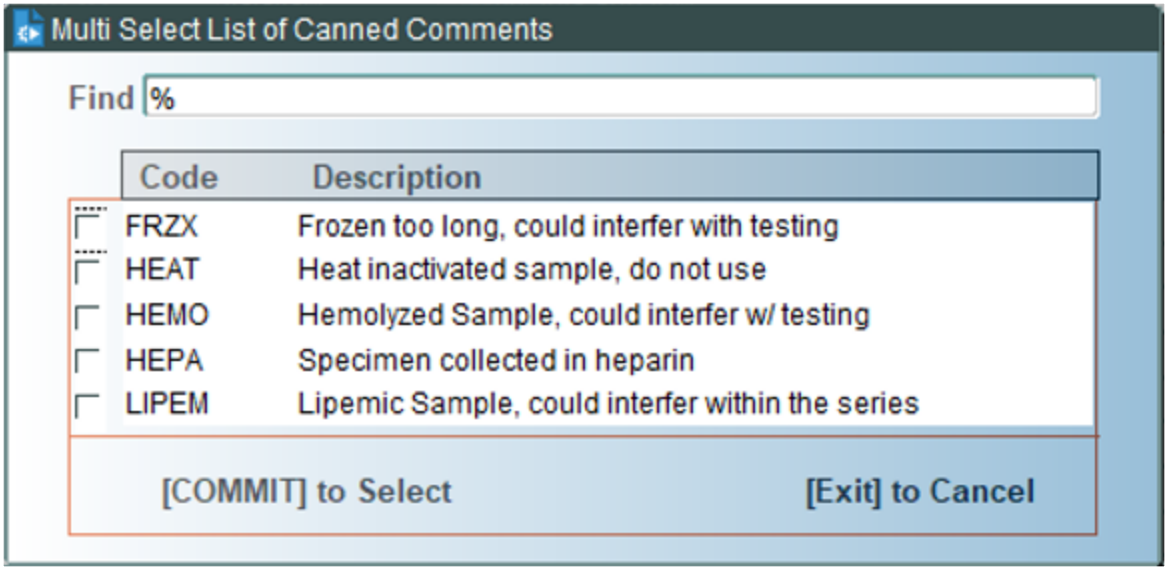


To select a canned comment, the cursor must be in the check box next to the comment. Press the SPACE BAR to place an 'X' by the comment. After all comments are selected, press F12 (Commit). The list will close, and the cursor will be back in the Comments field on the Override window.

Press F12 (Commit) to save all information entered in the Override window.

## At Commit

Updates made to the system at commit include the data entered on the screen.

If additional tests are scheduled for a sample, they must be identified in this screen. If this is done in only one screen, extraction of testing data will not occur.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Common Testing Functions menu.

# 23.4.5 Confirmatory Release Test Results (CNRQC)

## Intended Use

Use the Confirmatory Release Test Results screen to review test results on submitted samples (units), and release the test series or test ID for results extraction. To qualify for release, and per required test for extract, each unit must meet the following:

- Test results must reconcile - the entire test series must be completed to allow QC of the test series
- No results in HOLDQ pending upload
- No unscheduled tests, either required or additional
- Units with a HOLD type interdiction will present, but cannot be released for extract


WellSky Corporation
Proprietary and confidential

The above data will cause an SQC Skip Reason to automatically be placed on the specified unit at QC commit. A unit with a Skip Reason will not display, with the exception of units that have an SQC Skip Reason. The SQC will be automatically removed by the system once the results are reconciled and there is no HOLD interdiction on the unit. The samples will continue to appear in this screen as "pending" until all results for every test required for extract have been reconciled and attained final release.

The system will allow a unit to be brought back to the CNRQC screen if the unit was previously QC'd for a test when additional tests have been added to the unit ID.

## Limitations

SQC Skip Reason is placed within the program and cannot be modified.

## Prerequisites

A sample that is not skipped or has attained a final QC in this function, and the test series or test is at a final state.

## Accessing the Screen

Access this screen from the Confirmatory Sample General Functions menu, or by entering the keyword CNRQC.

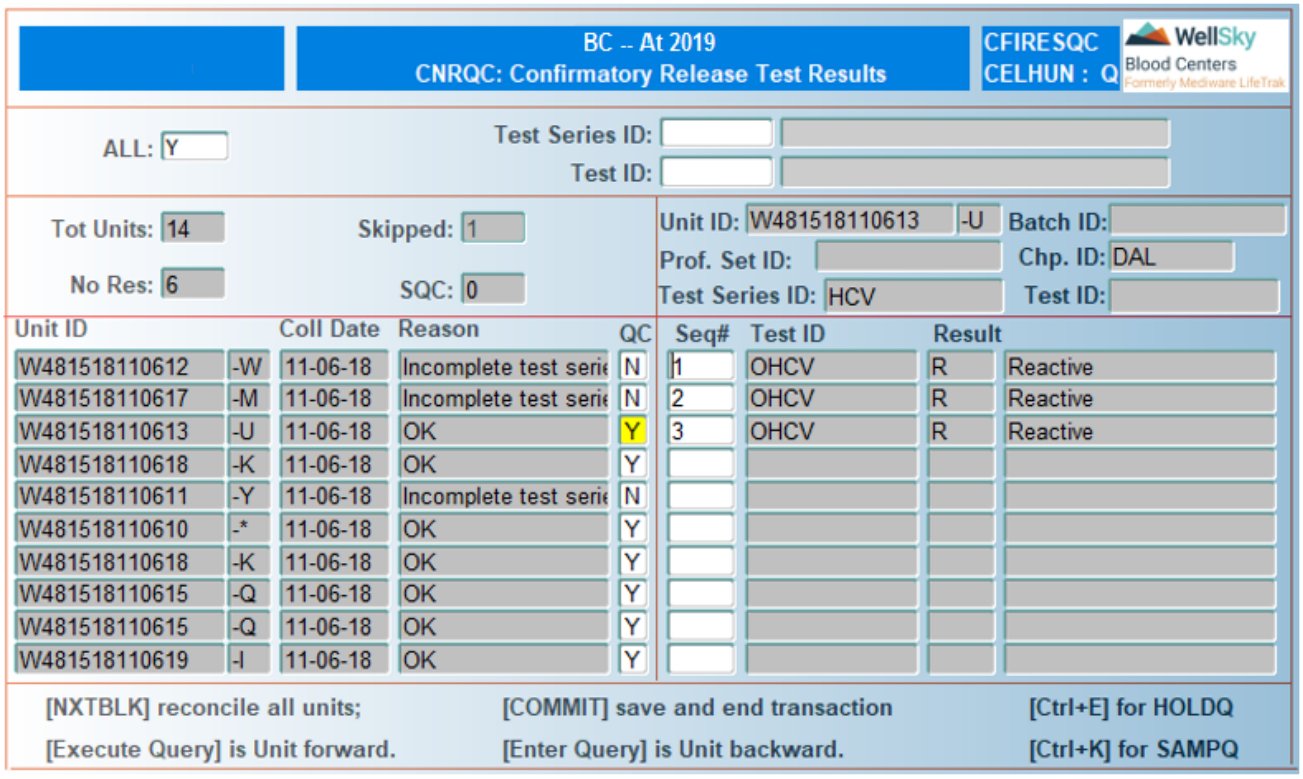


## Control Block Fields and Definitions

### ALL

This field automatically defaults to 'Y'. If this field is set to 'Y', the screen will display all units that have completed or partial results, and the cursor will not move to the *Test Series ID* or *Test ID* field. If this field is set to 'N', the cursor will

move to the *Test Series ID* or *Test Series* field for the user to select which one they want to enter.

### Test Series ID
This field is not required. Enter a test series ID or select it from the LOV. The LOV comes from the Test Series/Test Configuration Table.

### Test ID
This field is not required if the test series is selected. Enter a test ID or select it from the LOV. The LOV is linked to Available tests that are linked to the CNFRM or SUPP test group.

## Unit Detail Block Fields and Definitions

### Total Units
This field automatically populates with the total number of units for the test series or test ID. The field is not navigable.

### Skipped Units
This field automatically populates with the number of units flagged to skip extraction. The field is not navigable. Units with an SQC hold are not included here.

### No Results
This field automatically populates with the number of units with no results. The field is not navigable.

### SQC
This field displays the number of units in the batch that have the SQC reason present.

## Detail Block Fields and Definitions

### Unit ID
This field automatically populates with the unit IDs that are linked to the test series or test ID. The field is not navigable.

### Collection Date
This field automatically populates with the date of the unit. The field is not navigable.

### Reason
This field automatically populates with the status of the unit for the test series or test ID.

- OK – the unit has met the final stage for the test series or test ID
- Incomplete Test Series – at least one test is incomplete due to either a missing result or too many results
- Unit on HOLD – the unit has a HOLD type interdiction present at the unit level
- Results Not Reconciled – if a test ID is missing a result
- Too many results


WellSky Corporation
Proprietary and confidential

### QC

Press **CTRL** + **F3** (Next Block) or **PAGE DOWN** to automatically populate the derived QC status. Otherwise, enter `Y` if the QC is acceptable, and the results can be extracted. Enter `N` if the QC is not acceptable, and the results cannot be extracted.

**NOTE –** Use the **UP** and **DOWN** arrow keys to scroll through the samples listed to make entries. As the cursor moves to a unit, test and results details display at the right in Detail Block 2.

- Units with pending results will be recalled for further reconciliation.
- Units with a system QC flag of N cannot be changed to a Y if it is a test series that is not in a final status that is required for extraction.
- Units with any type of HOLD interdiction will have the QC flag set to N.
- If the test require repeat tests, and those repeats are not completed, the QC flag will be set to N.
- If there are too many results for a test, the QC flag is set to N.
- If there are results present in Unscheduled or Holding Test, the QC flag will be set to N.
- If a unit does not meet all of the criteria for QC, the system will automatically set the QC flag to N and place an SQC reason.
- If the SQC Skip Reason was removed in the CNSKIP (Confirmatory Skip Results for Extraction) function, and the results have yet to be reconciled, the unit will again receive a QC status of N, and the SQC will be placed at QC commit.

## Result Detail Block for Each Test for The Unit

Press **F6** (Menu) to navigate to Detail Block 2 to review unit test results.

Use the **UP** and **DOWN** arrow keys to scroll through the tests.

When the cursor moves to the Review Unit Test Results block, the Detail Block at the top of the screen will change for each test with the unit number, check-in batch ID, profile set ID, and chapter that did the testing. The QC flag in the left block will be highlighted in yellow to show your position on the left side.

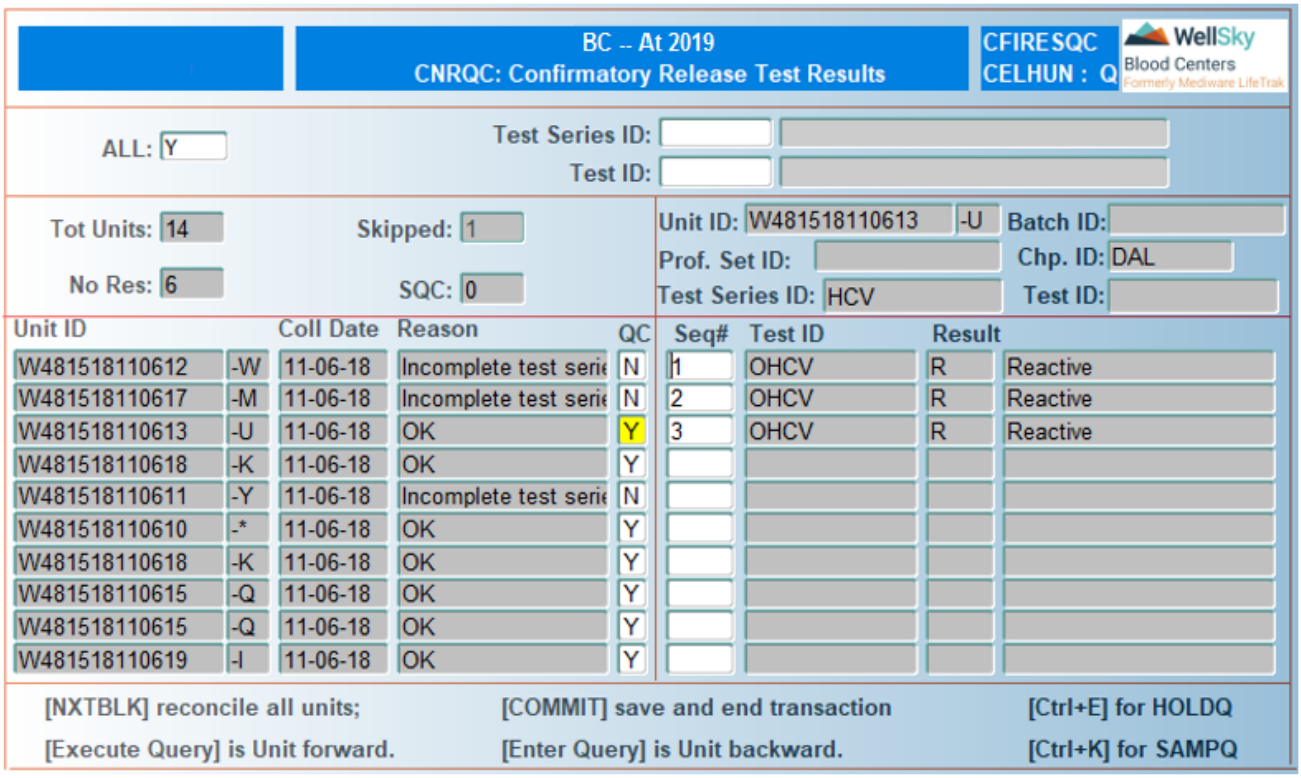


## Unit ID

This field displays the unit number that the cursor is on in the left side of the screen.

## Batch ID

This field displays the check-in batch ID created during STIN. The field is not navigable. The field will update as you move down the tests to display the batch check-in number to which the test is linked.

## Profile Set ID

This field displays the profile set ID selected during STIN. The field is not navigable. The field will update as you move down the tests to show the profile set ID to which the test is linked.

**NOTE –** The profile set ID will be blank for internal sample transfer units.

## Chapter ID

This field displays the chapter ID that performed the testing on the test ID. The field will update as you move down the tests to show different chapter IDs if the tests were performed in different chapters.

## Test Series ID

This field is display-only, and it displays the series ID of the test series that was performed on the unit.

## Test ID

This field is display-only, and it displays the test ID of the test that was performed on the unit.


WellSky Corporation
Proprietary and confidential

### Seq
This field populates automatically with the sequential identifier for each test. The numeral 1 indicates an initial test, and numerals greater than 1 indicate repeat tests. The field cannot be updated.

### Test ID
This field populates automatically with the test ID code. The field is not navigable.

### Result
This field populates automatically and displays actual results (result code and its description) for each test, if available.

## Hot Keys

### [NXTBLK}
When the cursor is in the Units block, press **CTRL** + **F3** (Next Block) to reconcile all units at one time.

### [Execute Query]
When the cursor is in the Tests block, press **ALT** + **F12** (Execute Query) to move the cursor to the next unit without moving back to the Units block.

### [CTRL+E]
Press **CTRL+E** to move to the Test Batch in Holding Test Query (HOLDQ). The user will have to enter data in that control block. To move back to CNRQC, press **F8** (Exit Screen).

### [CTRL+K]
Press **CTRL+K** to move to the Samples Query (SAMPQ). The unit number will be passed from the parent to SAMPQ. In other words, whatever unit number the cursor is on will be passed to SAMPQ. Press **F8** (Exit Screen) to close SAMPQ and move back to CNRQC.

### [F8]
When the cursor is in the Tests block, press **F8** (Exit Screen) to move out of the Tests block and back to the Units block.

### [Commit - F12]
Press **F12** (Commit) to commit the updated information to the database and release the units that have passed the QC criteria.

## Exception Log
When the data is committed, the exception log will print. To view the exception log, go to PRINT or SPRINT.

Example of the Exception Log

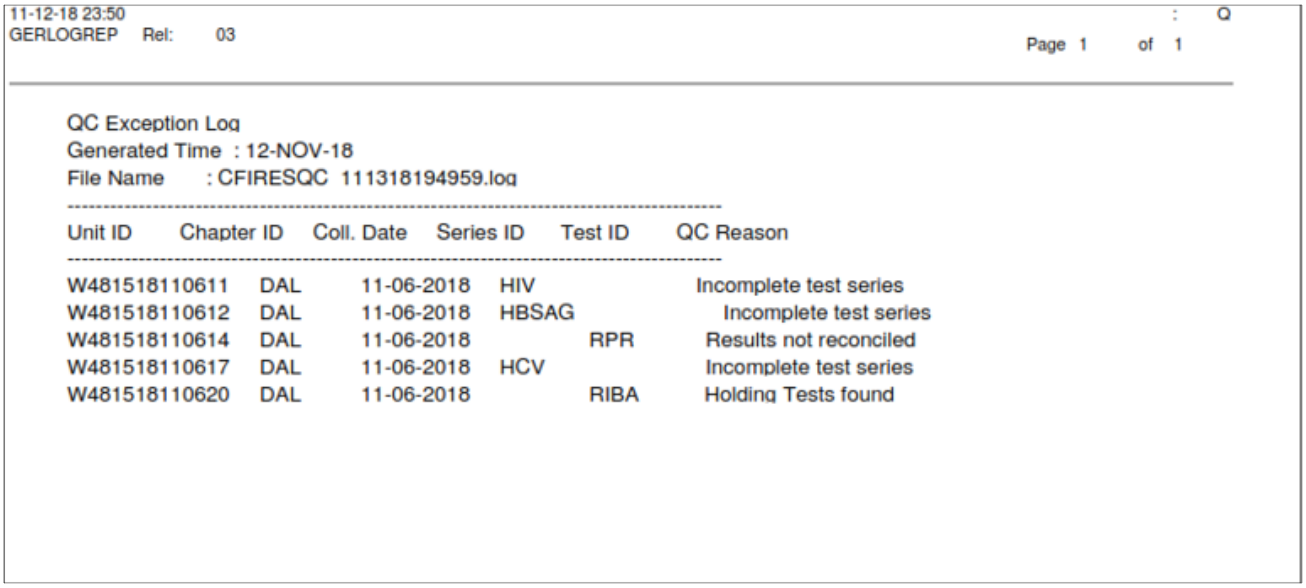

11-12-18 23:50 : Q
GERLOGREP Rel: 03 Page 1 of 1

QC Exception Log
Generated Time : 12-NOV-18
File Name : CFIRESQC 111318194959.log

| Unit ID | Chapter ID | Coll. Date | Series ID | Test ID | QC Reason |
|---|---|---|---|---|---|
| W481518110611 | DAL | 11-06-2018 | HIV | | Incomplete test series |
| W481518110612 | DAL | 11-06-2018 | HBSAG | | Incomplete test series |
| W481518110614 | DAL | 11-06-2018 | | RPR | Results not reconciled |
| W481518110617 | DAL | 11-06-2018 | HCV | | Incomplete test series |
| W481518110620 | DAL | 11-06-2018 | | RIBA | Holding Tests found |

If there are no exceptions during the setting of the QC Flag, the exception log generates and states "No Exceptions found", as shown in the following example.

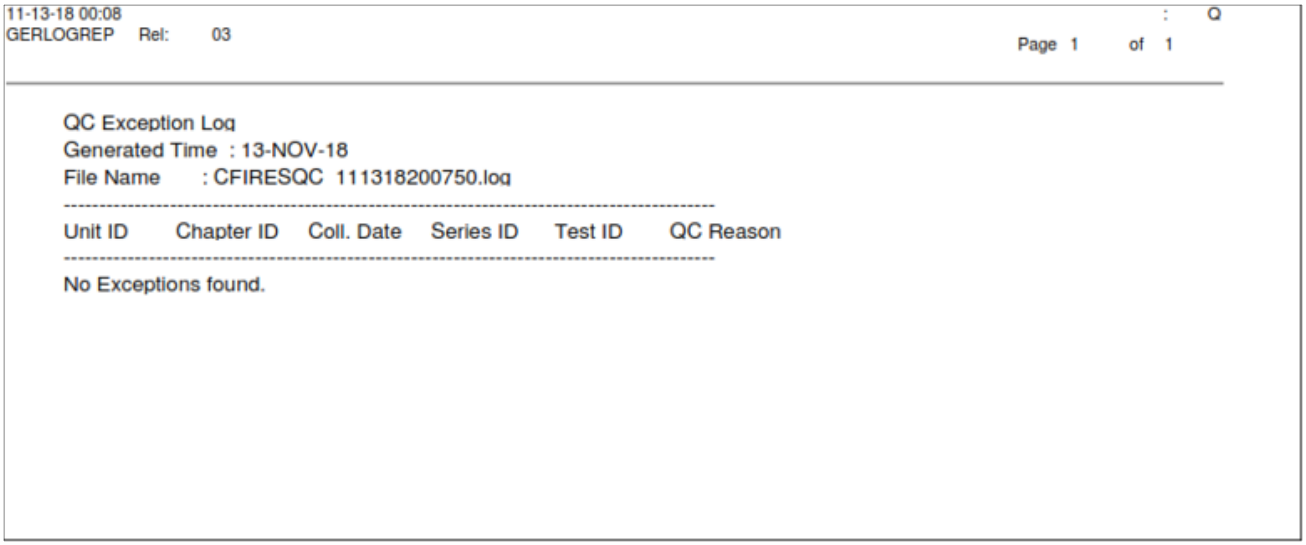

11-13-18 00:08 : Q
GERLOGREP Rel: 03 Page 1 of 1

QC Exception Log
Generated Time : 13-NOV-18
File Name : CFIRESQC 111318200750.log

| Unit ID | Chapter ID | Coll. Date | Series ID | Test ID | QC Reason |
|---|---|---|---|---|---|

No Exceptions found.

**NOTE –** The exception log can only be generated from the Confirmatory QC screen (CNRQC). It cannot be generated from the menu.

## At Commit

At commit, all entered data is saved to the database.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Confirmatory General Functions menu. Extract results to clients using Confirmatory Extract (CEXTRACT).

# 23.4.6 Confirmatory Extract (CEXTRACT)

## Intended Use

Use the Confirmatory Extract Test Results screen to extract test series or test results for units that have been designated suitable for customer release. The results extraction is for all results to be reported that are in final status. The system will list samples that qualify for extraction. The system will also produce an Extraction Log report and Test Series report as part of the extraction process. Test series reports are generated by unit and test series/test ID.

## Limitations

Entry of the after time must be longer than the cron job time has been defined to run. If you enter a time that is less than the time in the cron job, the extract will occur immediately.

The following are extraction exceptions:

- No result for a unit having a HOLD interdiction may be extracted.
- No result on a unit may be extracted for which a SKIP reason has been defined and not removed.
- No results for a unit may be extracted for which a QC flag of N can be extracted.

### Conditions to Cause the Extraction Process to Fail

The system will abort the entire extraction process if one or more of the following abnormal conditions exist for units or check-in sample batches marked for extraction:

- Any results exist for test(s) not scheduled.
- A test series test ID is missing.
- A result required for extraction is missing.
- No repeats have been performed for a required test.
- Results for an incorrect number of repeat tests exist.
- More than one non-reactive result exists and no reactive result exists.
- A required test result has been voided, canceled, or edited post-Confirmatory Release Test Results (CNRQC).
- A sample has not been through Confirmatory Release Test Results (CNRQC).

## Prerequisites

- A unit must have been released for extraction (QC) before results for the unit can be extracted.
- System parameter SERIES_CPY must be defined for the Test Series report to move to the defined directory.
- Valid Remote Testing Labs (VTILABS) must be defined for the testing chapters.

- Notation Configuration (NOTCFG) - general footer notation
  - SRSRPT_1 - user-defined description (the code is static)
  - SRSRPT_2 - user-defined description (the code is static)

## Accessing the Screen

Access this screen from the Confirmatory General Functions menu, or by entering the keyword `CEXTRACT`.

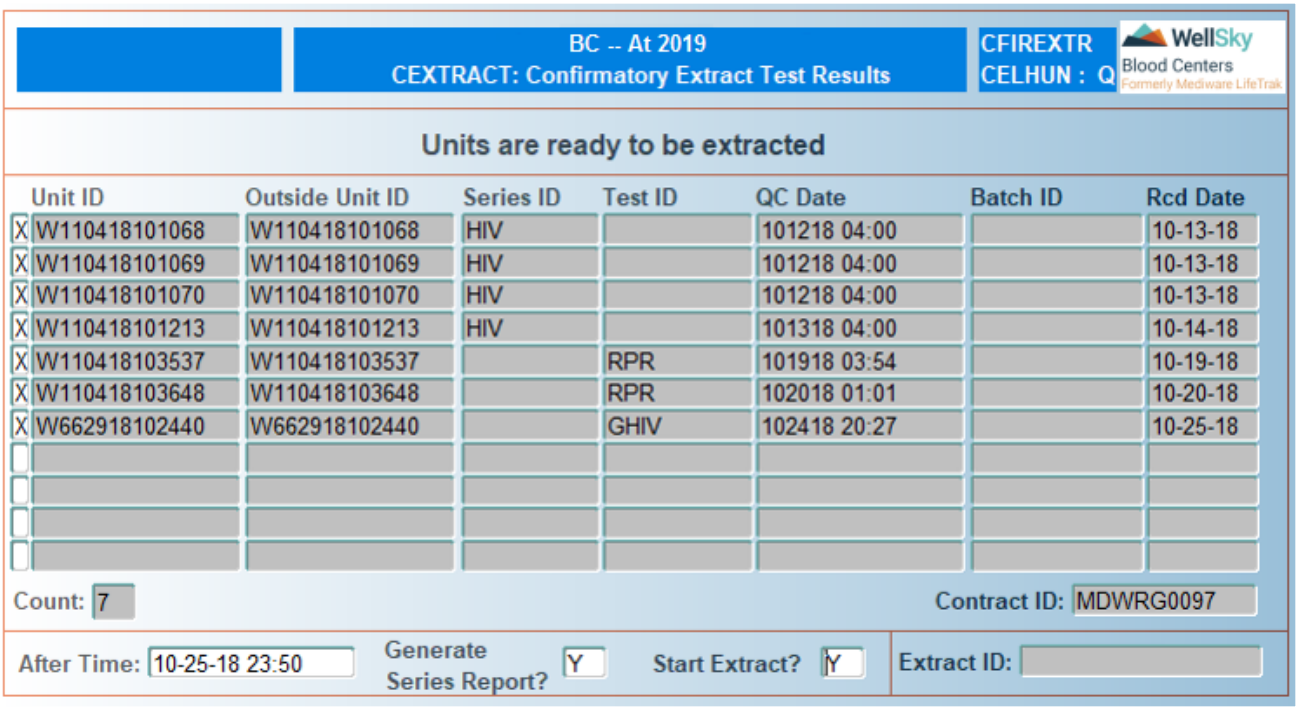


## Detail Block Fields and Definitions

After entering the form, all units display and are automatically selected. To not extract a unit, remove the 'X' next to that unit. The following details are provided:

### Unit ID

This field automatically populates with the unit IDs that have a QC date, flag, and user set for the test results. The unit ID could display multiple times if more than one test series or test ID is being extracted on the unit.

### Outside Unit ID

This field automatically populates with the outside unit number, if present. The field is not navigable.

### Series ID

This field automatically populates with the test series ID for the unit. The field is not navigable.

### Test ID

This field automatically populates with the test ID for the unit that is not linked to a test series. The field is not navigable.


WellSky Corporation
Proprietary and confidential

### QC Date
This field automatically populates with the date and time that QC was performed. The field is not navigable.

### Batch ID
This field automatically populates with the batch ID number if the unit was transferred in from an external customer. The field cannot be updated.

### Rcd Date
This field automatically populates with the date the sample was received. The field is not navigable.

### Count
This field automatically populates with the total number of units that will be extracted. The field is not navigable.

### Contract ID
This field automatically populates with the contract ID when the cursor is on a specific unit ID. The field is not navigable.

## Second Detail Block Fields and Definitions

### After Time
To delay extraction for a later time, enter the desired date and time in MM-DD-YY HH24:MI format. To begin extraction immediately, press Enter and leave the field blank.

**NOTE –** Time entry should be longer than the time limit entered in the cron job to run.

**EXAMPLE –** If the cron job is configured to have the extract and series report run every 5 minutes, and after time is less than 5 minutes, the extract and series report generation will occur immediately.

### Generate Series Report?
This field defaults to Y. Leave the default entry to print a Test Series Report , or enter N to disable the Test Series report printing. The Test Series report opens as a pdf file in a new window, as shown in the following example.

**NOTE –** If the VTILABS is not defined for the testing facility, the Test Series report will not generate, but extract will occur.

### Move Series Report to Designated Directory
To move the Test Series report to a designated directory, the system parameter SERIES_CPY must be defined for the facility. If it is not defined, the Test Series report will not move to the directory.

**NOTE –** Only one directory can be defined for the institution; it cannot be different by chapter.

**EXAMPLE –** /home/sbcsys/qtrak/SERIES_REPORTS/

Example of a Test Series report generated at extract.

Dallas Testing Facility, 1604 Pleasant Run, Suite 400, Keller TX 76248 CLIA#619812
Medical Directors: R.Cusick, MD; L. reale, MD; P. Williamson, Phd
Okinawa Testing Lab, U.S. Naval Hospital, PSC 482, FPO AP, Okinawa JP 96362 CLIA#03091109
Medical Directors: Dr. Thomas Lane M.D.

To: Full Donor Profile (W1104)
Attn: Profile (1104) Donor
1104 Rockwood Drive, Suite 400, Bedford, TX 76021

Internal Unit ID: W1104181103652 Client Unit ID: W1104181103652 Collection Date: 10-18-2018 00:00 Receive Date/Time: 10-20-2018 00:26
Test Series: Abbott PRISM HIV IIR

| Tests | Interpretation | Completion Date/Time |
|---|---|---|
| Differential HIV | Negative/Nonreactive | 10-20-2018 00:34:44 |
| HIV-1 IFA | Positive | 10-20-2018 00:34:26 |
| Prism HIV | Nonreactive | 10-20-2018 00:35:04 |

Prism HIV-1/2 : The Prism Anti-HIV-1/2 test is licensed for use with cadaveric samples

Refer to Interpretation Information Sheets available at www.mycte.org

Samples received did not meet acceptance criteria established by this laboratory or the manufacturer's FDA approved package insert. Therefore valid results may not exist. Use of any final interpretation from testing these samples should not apply to diagnostics, clinical or donor counseling situations.

## Start Extract?

Enter `Y` to begin the extraction either immediately or after the delay time. Enter `N` in the field to not start extract.

## Extract ID

This field automatically displays the system-assigned ID number. The field is not navigable.

Press **F12** (Commit) to start extraction.

## Extraction Log Report

The system generates a report detailing the success or failure of the extract. One of the following reports is generated. Examples of the extraction log report can be viewed in PRINT.

Mandatory Test Not Present:

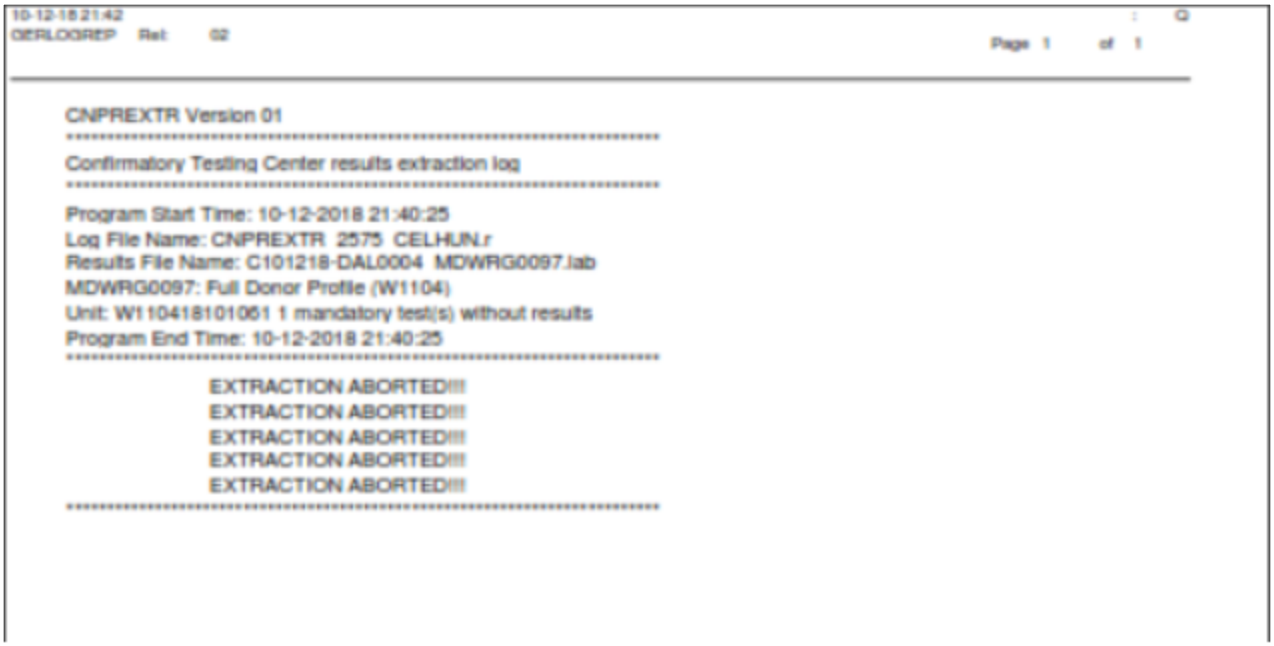

10-12-18 21:42 : Q
GERLOGREP Rel: 02 Page 1 of 1

CNPREXTR Version 01
**********
Confirmatory Testing Center results extraction log
**********
Program Start Time: 10-12-2018 21:40:25
Log File Name: CNPREXTR 2575 CELHUN.r
Results File Name: C101218-DAL0004 MDWRG0097.lab
MDWRG0097: Full Donor Profile (W1104)
Unit: W110418101061 1 mandatory test(s) without results
Program End Time: 10-12-2018 21:40:25
**********
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
**********

Incorrect Number of Repeats for a Test:

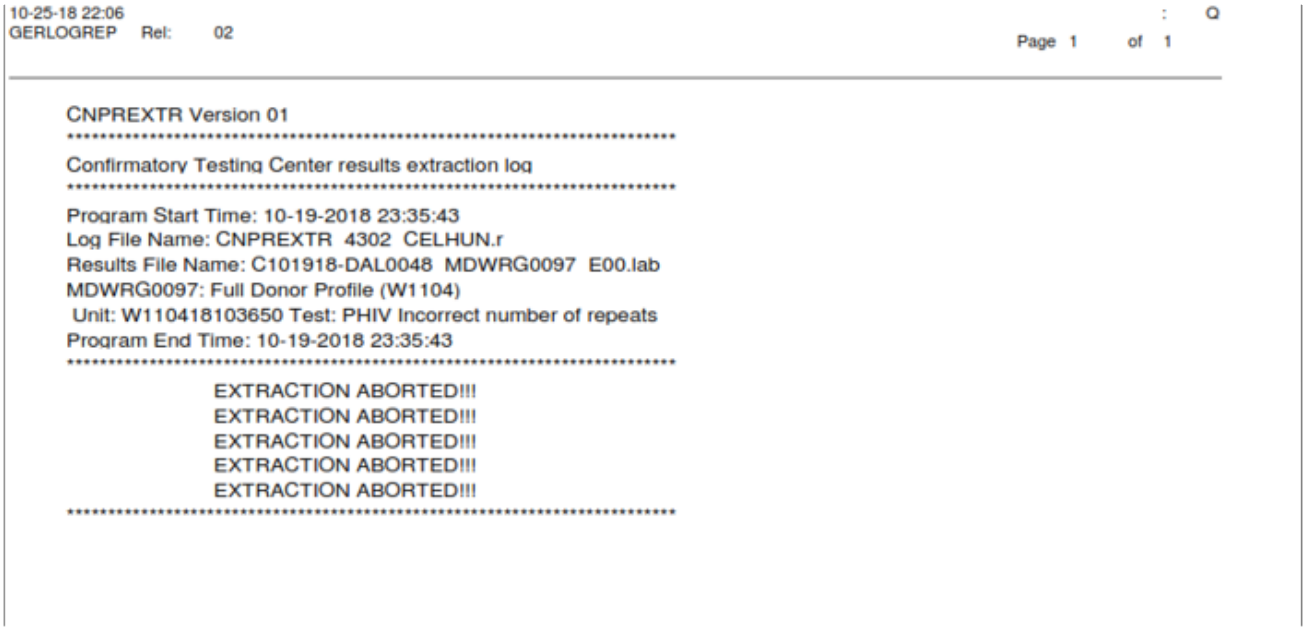

10-25-18 22:06 : Q
GERLOGREP Rel: 02 Page 1 of 1

CNPREXTR Version 01
**********
Confirmatory Testing Center results extraction log
**********
Program Start Time: 10-19-2018 23:35:43
Log File Name: CNPREXTR 4302 CELHUN.r
Results File Name: C101918-DAL0048 MDWRG0097 E00.lab
MDWRG0097: Full Donor Profile (W1104)
Unit: W110418103650 Test: PHIV Incorrect number of repeats
Program End Time: 10-19-2018 23:35:43
**********
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
EXTRACTION ABORTED!!!
**********

Extraction Successful for Multiple Contracts:

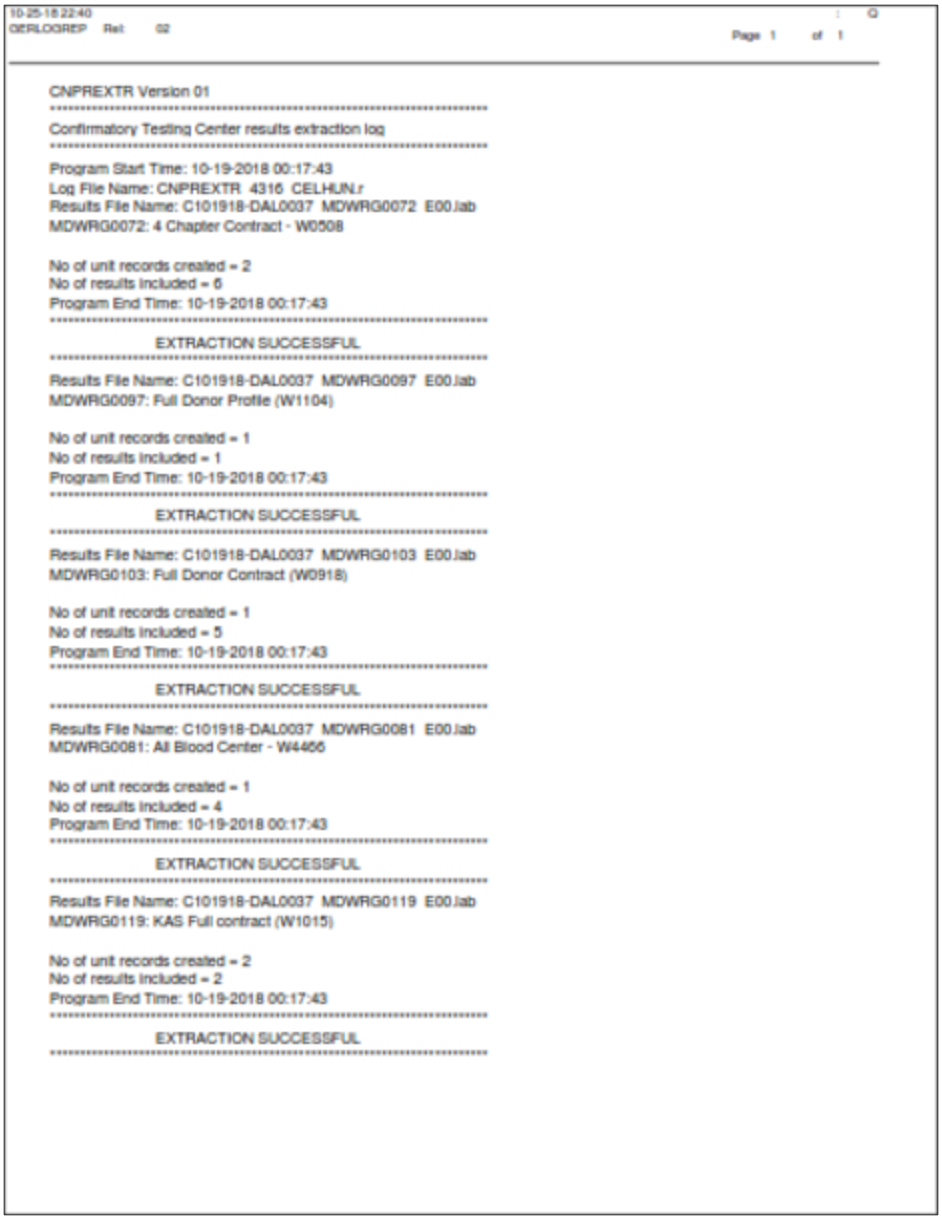

10-25-18 22:40
CERLOGREP Rel: 02 Page 1 of 1

CNPREXTR Version 01

Confirmatory Testing Center results extraction log

Program Start Time: 10-19-2018 00:17:43
Log File Name: CNPREXTR 4316 CELHUN.r
Results File Name: C101918-DAL0037 MDWRG0072 E00.lab
MDWRG0072: 4 Chapter Contract - W0508

No of unit records created = 2
No of results included = 6
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0097 E00.lab
MDWRG0097: Full Donor Profile (W1104)

No of unit records created = 1
No of results included = 1
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0103 E00.lab
MDWRG0103: Full Donor Contract (W0918)

No of unit records created = 1
No of results included = 5
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0081 E00.lab
MDWRG0081: All Blood Center - W4456

No of unit records created = 1
No of results included = 4
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0119 E00.lab
MDWRG0119: KAS Full contract (W1015)

No of unit records created = 2
No of results included = 2
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

To view the Extraction Log report, use the PRINT or SPRINT screen.

## At Commit

At commit, all entered data is saved to the database, and extraction begins either immediately or after the time that was entered.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Confirmatory General Functions menu.


WellSky Corporation
Proprietary and confidential

# 23.4.7 Re-Extract Confirmatory Test Results (CRXTRACT)

## Intended Use

Use the Re-Extract Confirmatory Test Results screen to extract test series or test results for an extract ID when the original extract file was damaged or must otherwise be regenerated. Data selected for the original extract cannot be changed. When using the re-extract process, the entire extraction can be repeated as a single entity, or a selection of a single unit can be re-extracted. All units included in the extraction, however, may be viewed in this screen.

## Limitations

Entry of the after time must be longer than the cron job time has been defined to run. If you enter a time that is less than the time in the cron job, the extract will occur immediately.

## Prerequisites

A sample must have been released for extraction before results for any unit in the batch may be extracted.

## Accessing the Screen

Access this screen from the Confirmatory General Functions menu, or by entering the keyword `CRXTRACT`.

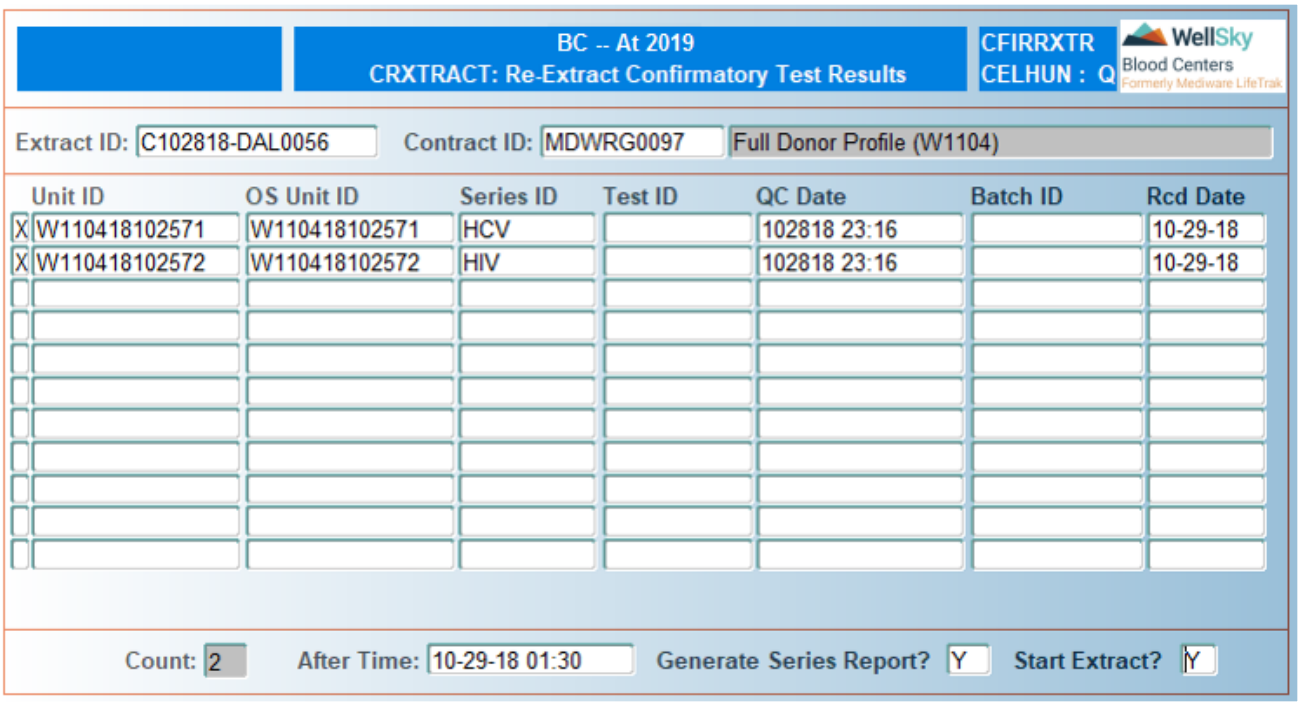


## Control Block Fields and Definitions

### Extract ID

Enter the extract ID or select it from the LOV. The LOV displays the extract IDs from the last 14 days, but the field allows entry of an older extract ID.

### Contract ID

This is not a required field. Enter a contract ID or select it from the LOV. The LOV displays only the contract IDs that were found in the selected extract ID.

## Detail Block Fields and Definitions

### Unit ID

This field automatically populates with the unit IDs that were included in the extract ID or extract/contract ID entered in the control block. The field is not navigable.

### OS Unit ID

The Outside Unit ID field automatically populates with the unit IDs that were included in the extract ID or extract/contract ID entered in the control block. The field is not navigable.

### Series ID

This field automatically populates with the test series ID for the unit. The field is not navigable. The field will be blank if the unit ID is linked to a test ID and not a test series.

### Test ID

This field automatically populates with the test ID for the unit that is not linked to a test series. The field is not navigable. The field will be blank if the unit has a test series.

### QC Date

This field automatically populates with the date and time that QC was performed. The field is not navigable.

### Batch ID

This field automatically populates with the Batch ID number if the unit was transferred in from an external customer. The field cannot be updated.

### Rcd Date

This field automatically populates with the date the sample was received. The field is not navigable.

## Second Detail Block Fields and Definitions

### Count

This field automatically populates with the total number of units that will be extracted. The field is not navigable.

### After Time

To delay extraction for a later time, enter the desired date and time in MM-DD-YY HH24:MI format. To begin extraction immediately, press **Enter** and leave the field blank.

**NOTE –** Time entry should be longer than the time limit entered in the cron job to run.


WellSky Corporation
Proprietary and confidential

**EXAMPLE –** If the cron job is configured to have the extract and series report run every 5 minutes, and after time is less than 5 minutes, the extract and series report generation will occur immediately.

## Generate Series Report?

This field defaults to Y. Leave the default entry to print a Test Series Report , or enter N to disable the Test Series report printing. The Test Series report opens as a pdf file in a new window, as shown in the following example.

**NOTE –** If the VTILABS is not defined for the testing facility, the Test Series report will not generate, but extract will occur.

## Move Series Report to Designated Directory

To move the Test Series report to a designated directory, the system parameter SERIES_CPY must be defined for the facility. If it is not defined, the Test Series report will not move to the directory.

**NOTE –** Only one directory can be defined for the institution; it cannot be different by chapter.

**EXAMPLE –** /home/sbcsys/qtrak/SERIES_REPORTS/

Example of a Test Series report generated at extract.

Dallas Testing Facility, 1604 Pleasant Run, Suite 400, Keller TX 76248 CLIA#519512
Medical Directors: R.Cusick, MD; L. reale, MD; P. Williamson, Phd
Okinawa Testing Lab, U.S. Naval Hospital, PSC 482, FPO AP, Okinawa JP 96362 CLIA#09091109
Medical Directors: Dr. Thomas Lane M.D.

To: Full Donor Profile (W1104)
Attn: Profile (1104) Donor
1104 Rockwood Drive, Suite 400, Bedford, TX 76021

Internal Unit ID: W110418103652 Client Unit ID: W110418103652 Collection Date: 10-16-2018 00:00 Receive Date/Time: 10-20-2018 00:26
Test Series: Abbott PRISM HIV IIIR

| Tests | Interpretation | Completion Date/Time |
|---|---|---|
| Differential HIV | Negative/Nonreactive | 10-20-2018 00:34:44 |
| HIV-1 IFA | Positive | 10-20-2018 00:34:26 |
| Prism HIV | Nonreactive | 10-20-2018 00:35:04 |

Prism HIV-1/2 : The Prism Anti-HIV-1/2 test is licensed for use with cadaveric samples

Refer to Interpretation Information Sheets available at www.mycls.org

Samples received did not meet acceptance criteria established by this laboratory or the manufacturer's FDA approved package insert. Therefore valid results may not exist. Use of any final interpretation from testing these samples should not apply to diagnostics, clinical or donor counseling situations.

## Start Extract?

Enter `Y` to begin the extraction either immediately or after the delay time. Enter `N` in the field to not start extract.

Press **F12** (Commit) to start extraction.

## Extraction Log Report

The system generates a report detailing the success or failure of the extract. One of the following reports is generated. Examples of the extraction log report can be viewed in PRINT.


WellSky Corporation
Proprietary and confidential

Extraction Successful for Multiple Contracts:

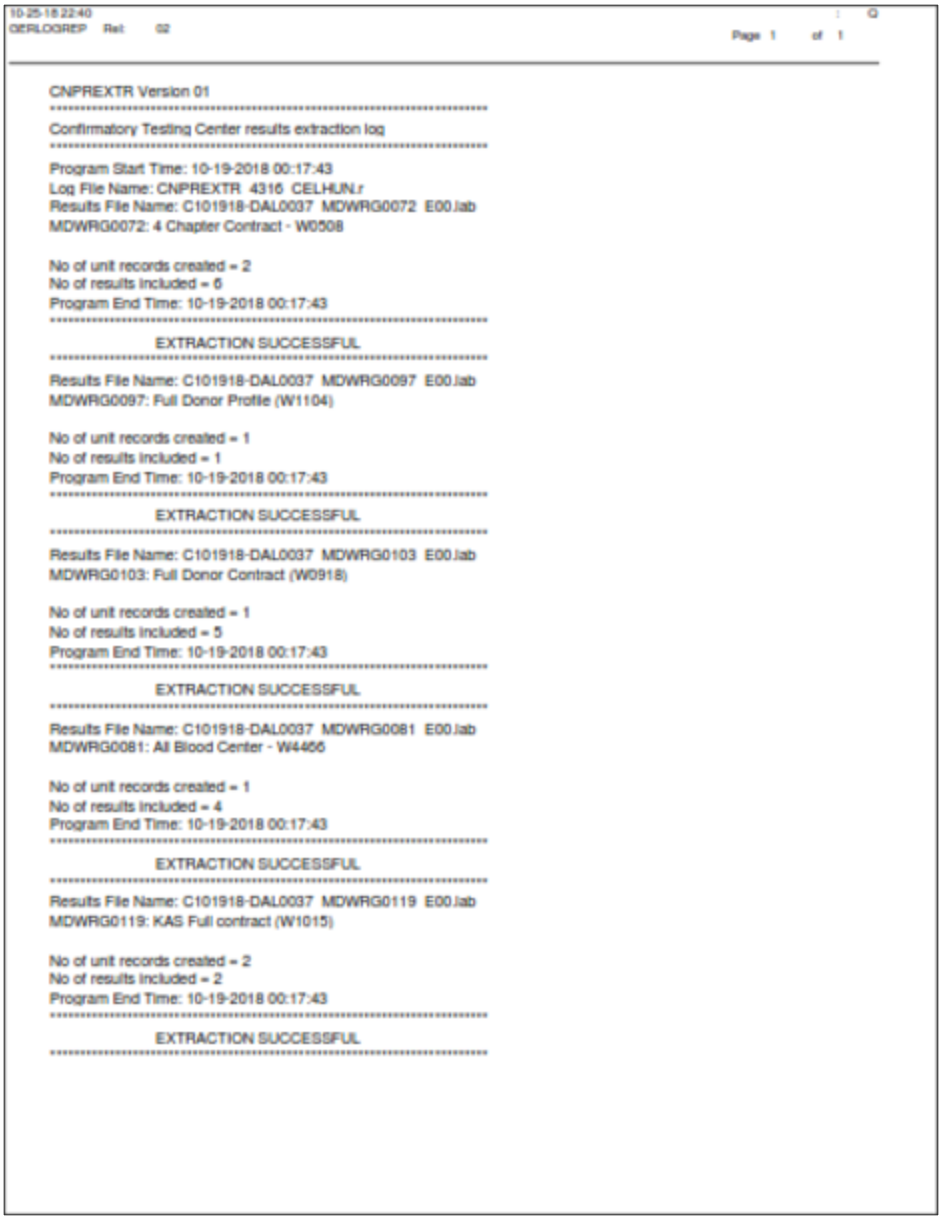

10-25-18 22:40
GERLOGREP Rel: 02
Page 1 of 1

CNPREXTR Version 01

Confirmatory Testing Center results extraction log

Program Start Time: 10-19-2018 00:17:43
Log File Name: CNPREXTR 4316 CELHUN.r
Results File Name: C101918-DAL0037 MDWRG0072 E00.lab
MDWRG0072: 4 Chapter Contract - W0508

No of unit records created = 2
No of results included = 6
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0097 E00.lab
MDWRG0097: Full Donor Profile (W1104)

No of unit records created = 1
No of results included = 1
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0103 E00.lab
MDWRG0103: Full Donor Contract (W0918)

No of unit records created = 1
No of results included = 5
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0081 E00.lab
MDWRG0081: All Blood Center - W4466

No of unit records created = 1
No of results included = 4
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

Results File Name: C101918-DAL0037 MDWRG0119 E00.lab
MDWRG0119: KAS Full contract (W1015)

No of unit records created = 2
No of results included = 2
Program End Time: 10-19-2018 00:17:43

EXTRACTION SUCCESSFUL

To view the Extraction Log report, use the PRINT or SPRINT screen.

## At Commit

At commit, all entered data is saved to the database, and extraction begins either immediately or after the time that was entered.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Confirmatory General Functions menu.

# 23.5 Confirmatory Queries (CNFQ)

Confirmatory Queries are accessed from the following menu:

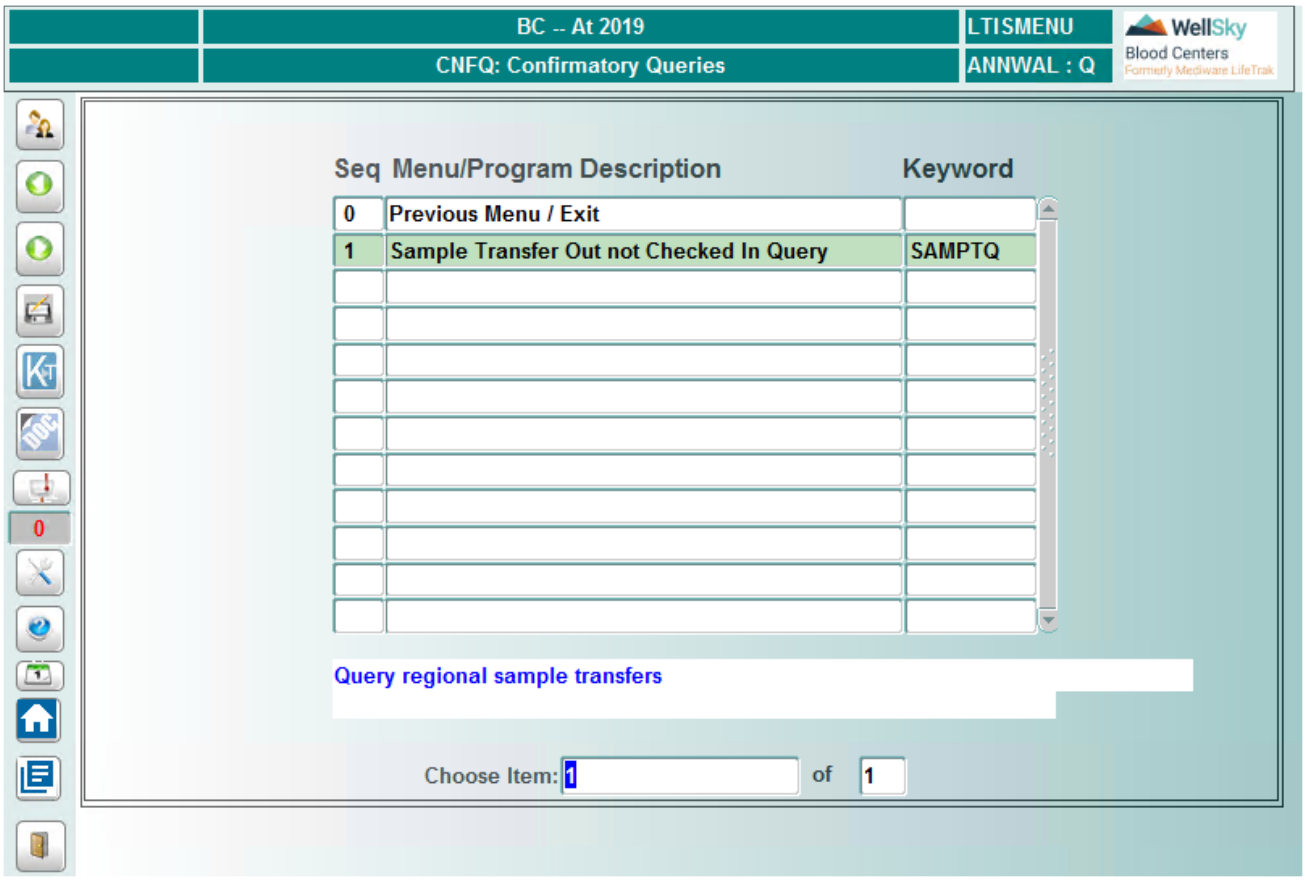


## 23.5.1 Sample Transfer Out not Checked In Query (SAMPTQ)

### Intended Use

Use Sample Transfer Out not Checked In Query to view samples that have been transferred to the confirmatory lab, but the confirmatory lab has not received the samples.

### Limitations

this query is for use within the institution and shipping samples from chapters inside the institution.

### Prerequisites

Master code STFAC – sample transfer facilities.

### Accessing the Screen

Access this screen from the Confirmatory Queries menu, or by entering the keyword SAMPTQ.


WellSky Corporation
Proprietary and confidential

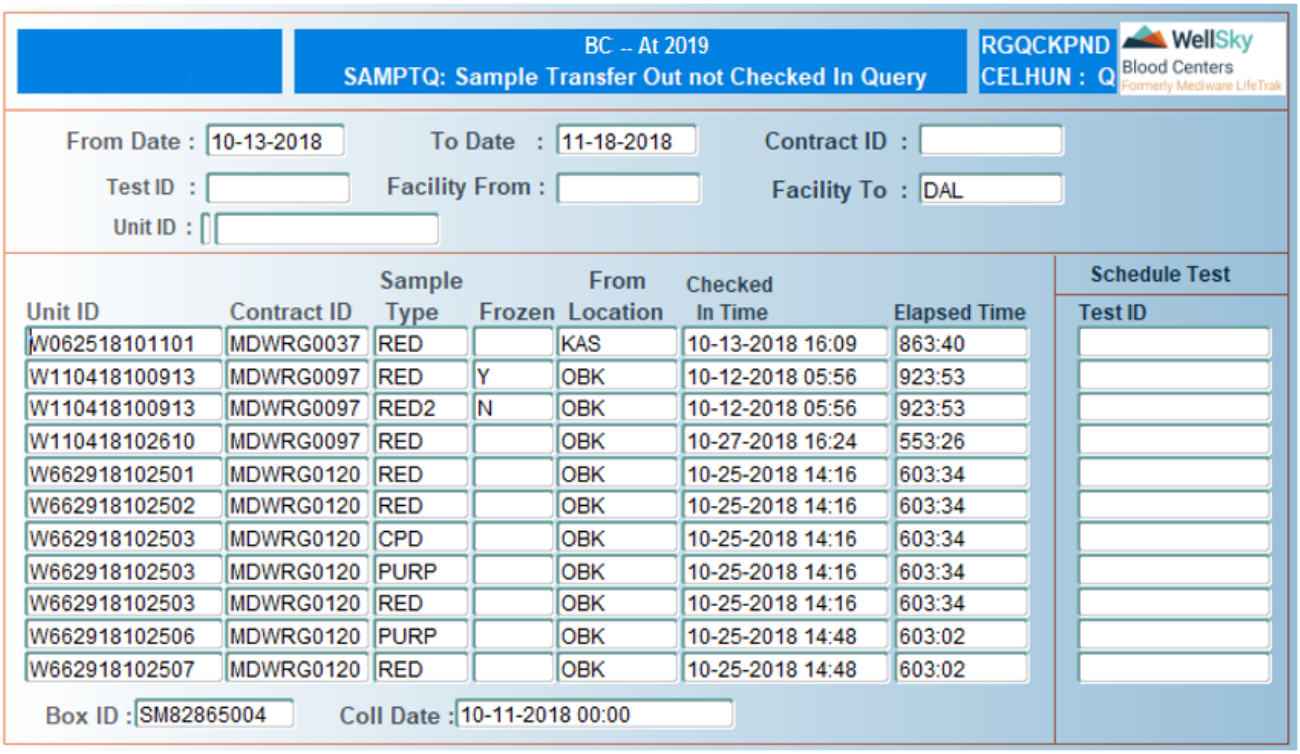


# Control Block Fields and Definitions

## From Date

This is an optional field. Enter in MMDDYYYY format, and the system will reformat to MM-DD-YYYY.

## To Date

This is an optional field. Enter in MMDDYYYY format, and the system will reformat to MM-DD-YYYY. If a From Date is entered, then the To Date field is required.

## Contract ID

This field is not required. Manually enter a contract ID or select it from the LOV. The LOV comes from the Regional Contract Table (RGCON).

## Test ID

This field is not required. Manually enter a test ID or select it from the LOV. The LOV comes from Available Tests (TEST).

## Facility From

This field is not required. Manually enter the facility ID or select it from the LOV. The LOV comes from master code STFAC.

### Facility To
This field is not required. Manually enter the facility ID or select it from the LOV. The LOV comes from master code STFAC.

### Unit ID
This field is not required. Scan or manually enter the unit ID. Manual entry requires a single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of the check digit; the check digit will be calculated by the system.

## Unit Detail block Fields and Definitions

### Unit ID
This field automatically populates the units that meet the criteria entered in the control block.

### Contract ID
This field automatically populates based on the contract that was entered when the sample was checked in to the system during Regional Tube Check-In (REGTUBES).

### Sample Type
this field automatically populates with the sample type that was entered during the Sample Transfer Out (STOUT) process.

### Frozen
This field automatically populates based on the entry during the Sample Transfer Out (STOUT) process.

### From Location
This field automatically populates with the chapter ID in the Sample Transfer Out (STOUT) process.

### Checked In Time
This is the time in which the sample was transferred out (STOUT) of the testing facility to the confirmatory lab.

### Elapsed Time
The number of hours from the time the Sample Transfer Out (STOUT) process was started to the current system time.

## Schedule Test Block
For internal samples, this block will be blank. Tests do not get scheduled until the sample is checked in to the system.

## At Commit
This is a query in which nothing will be committed to the database.


WellSky Corporation
Proprietary and confidential

# 23.6 Hospital/Patient Testing Functions

Hospital/Patient Testing Functions are accessed from the following menu:

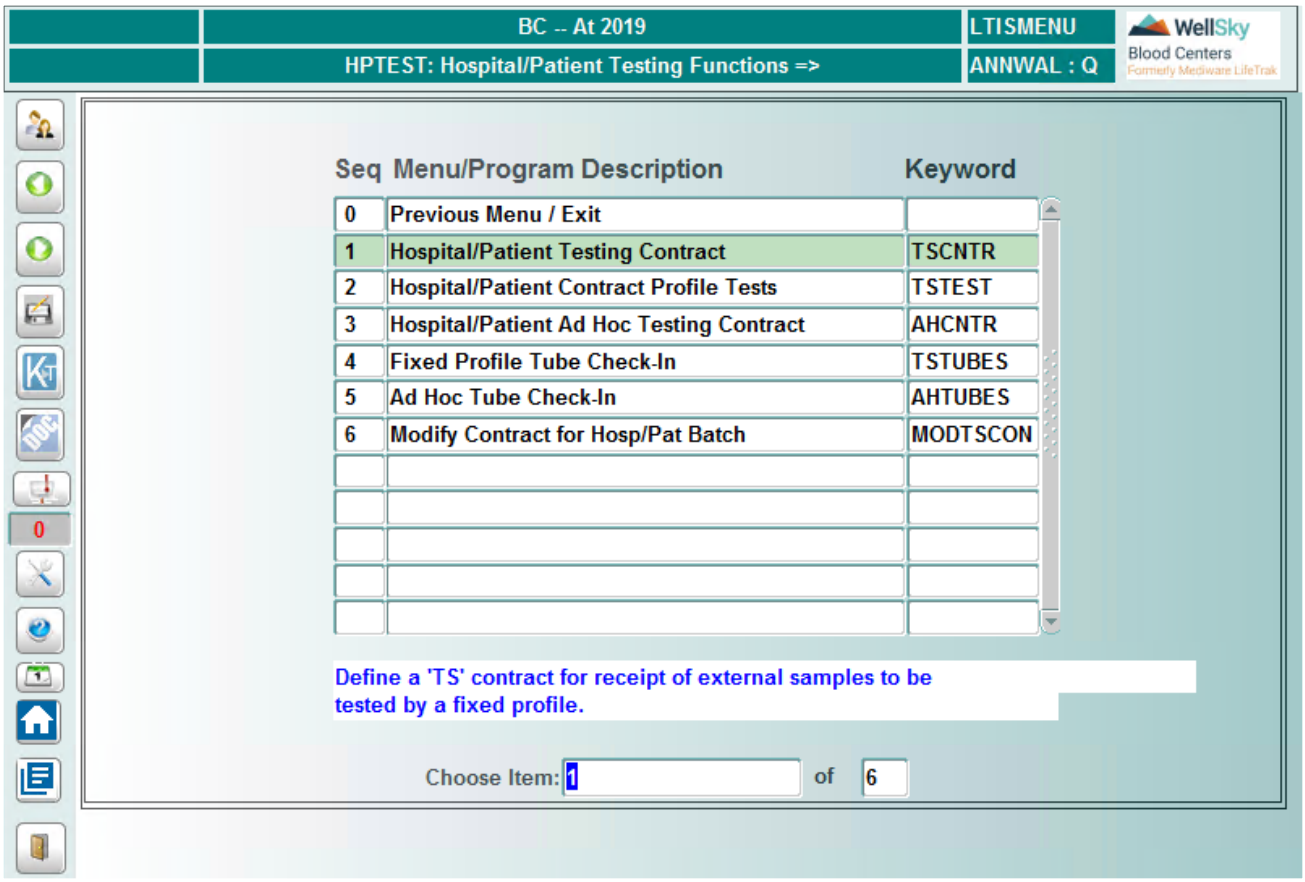


## 23.6.1 Hospital/Patient Testing Contract (TSCNTR)

### Intended Use

Use the Hospital/Patient Testing Contract screen to set up a contract for units to be tested from outside sources. This screen is used to commit data about the facility and the contact.

### Limitations

This contract is used for ongoing contract with fixed testing profiles. For testing batches without fixed profiles, use the Maintain AD HOC Patient Testing Contract screen.

### Prerequisites

None

# Accessing the Screen

Access this screen from the Hospital/Patient Testing Functions menu or by entering the keyword TSCNTR.

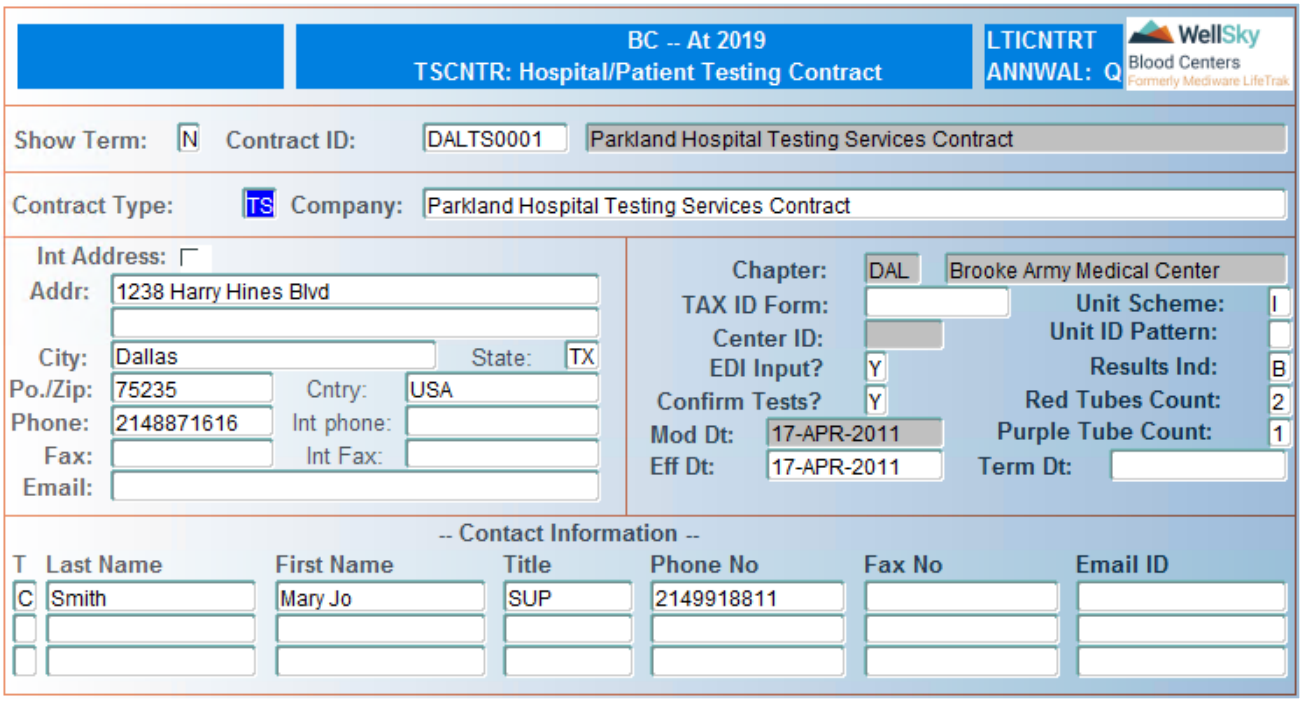


# Control Block Fields and Definitions

## Show Term

Enter Y to show terminated contracts in the LOV. Enter N to exclude terminated contracts from the LOV. Default value is Y.

## Contract ID

Enter contract ID or select ID from LOV. Leave field blank to create a new contract.

## Contract Type

Press **ENTER**. The system defaults to TS since testing services contracts are created in this screen.

## Company

Enter name of facility requesting tests. Entry is limited to a maximum of 50 characters.

# Detail Block Fields and Definitions

## Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).


WellSky Corporation
Proprietary and confidential

## Address
Entry in the first line is required. Enter the facility address. Two lines are available to record the necessary information. Entry is limited to a maximum of 50 characters in each of the address lines.

## City
Enter facility city. Entry is limited to a maximum of 20 characters.

## State
Enter facility state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters.

## Postal/Zip
Enter facility postal or zip code. Entry is limited to a maximum of 15 characters.

## Cntry
Enter country where the requesting facility is located. Entry is limited to a maximum of 15 characters.

## Phone
Enter the main number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## Int Phone
Enter the internal phone number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Int Fax
Enter the international fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Fax
Enter the Fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## E-mail
Enter the valid e-mail address for the facility. Entry in this field is not required. Entry is limited to a maximum of 50 characters.

## Chapter
System defaults the chapter ID. Field is not navigable.

## Tax ID Form
Enter the tax ID. Entry in this field is not required. A maximum of 9 numeric characters is allowed.

## Unit Scheme
Enter the unit scheme for the facility. Enter one of the following:

- C – External ID same as internal ID.
- N – External ID is Codabar numeric.
- X – External ID is free format.
- A – External unit ID is Codabar alphanumeric.
- I – External unit ID is ISBT 128.
- 8 – External unit ID is Code 128.

## Unit ID Pattern

Field is not utilized.

## Center ID

Field is automatically populated based on the center ID defined for the facility in Valid Collection Facilities (COLLID). Field is not navigable.

## EDI Input

Enter Y if electronic data transfer is requested; otherwise, leave blank.

## Results Ind

Enter R for reports, enter E for electronic mail, or enter B for both.

**NOTE –** This entry establishes the form in which testing results are sent back to the contract facility.

## Confirm Test

Enter Y if confirmatory tests are requested. Enter N if confirmatory tests are not requested.

**NOTE –** Confirmatory tests are not always requested for units with non-reactive test results.

## Red Tube Count

Enter the number of red tubes that will be entered routinely with this contract. A maximum of 2 tubes is allowed.

## Mod Date

System displays the date when the contract was last modified. Field is not navigable.

## Purple Tube Count

Enter the number of purple tubes that will be entered routinely for this contract. A maximum of 2 tubes is allowed.

## Eff Date

Enter the date the contract is to start in DD-MON-YYYY format. A date must be entered in order to test units under the requested profile.


WellSky Corporation
Proprietary and confidential

### Term Date
Enter contract termination date in DD-MON-YYYY format, or leave blank.

### T
Enter the type of contact. Enter `C` for contact, or `I` for facility.

### Last Name
Enter contact last name. A maximum of 50 characters is allowed.

### First Name
Enter the first name of the contact. A maximum of 50 characters is allowed.

### Title
Enter the title of the contact. Entry in this field is not required. A maximum of 30 characters is allowed.

### Phone No
Enter contact phone number. Entry in this field is not required. A maximum of 12 characters is allowed.

### Fax No
Enter contact fax number. Entry in this field is not required. A maximum of 12 characters is allowed.

### Email ID
Enter the e-mail address for the contact. Entry in this field is not required. A maximum of 50 characters is allowed.

**NOTE –** After information has been entered about the contact the cursor will return to the 'T' field for entry of additional contact information. If entry of contact information is complete press **F12** (Commit) to commit the data to the database.

## At Commit
Data pertaining to the contract, including the facility, contact, and test profile are committed to the database.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Hospital/Patient Testing Functions menu.

# 23.6.2 Hospital/Patient Contract Profile Tests (TSTEST)

## Intended Use
Use the Hospital/Patient Contract Profile Tests screen to enter test IDs that are associated to a contract. When samples are checked in the contract these tests will automatically be scheduled. This screen will only be used for contracts that are established in the Hospital/Patient Testing Contract screen.

## Limitations

None

## Prerequisites

- A contract must be established in Hospital/Patient Testing Contract (TSCNTR).
- Test IDs have to have been created in Available Tests (TESTS).

## Accessing the Screen

Access this screen from the Hospital/Patient Testing Functions menu or by using the keyword `TSTEST`.

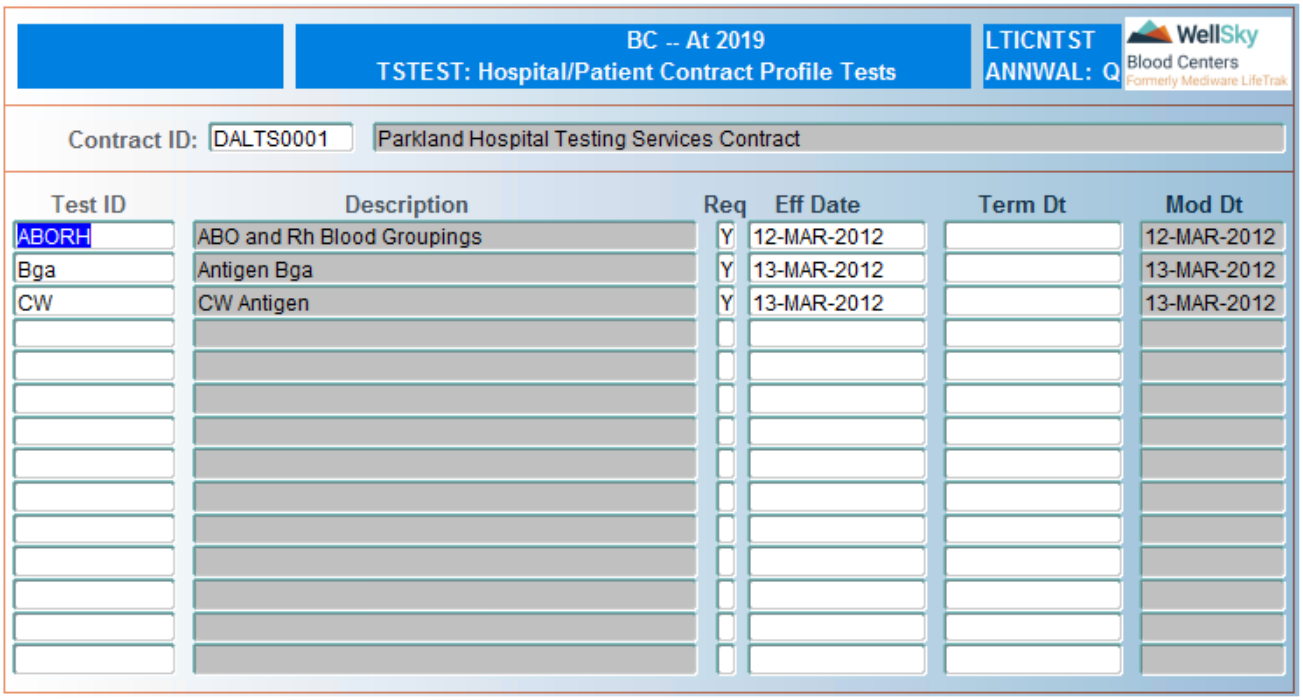


## Control Block Fields and Definitions

### Contract ID

Enter contract ID or select from LOV.

**NOTE –** After entry or selection of Contract ID, the description of the contract will be displayed.

## Detail Block Fields and Definitions

### Test ID

Enter test ID or select from LOV.


WellSky Corporation
Proprietary and confidential

### Description
The test description of the test ID automatically displays.  Field is not navigable.

### Req
Enter `Y` if the test is to be reported, or enter `N` if the test is not to be reported.

### Eff Date
Enter test effective date in DD-MON-YYYY format.  This is the date in which the system will begin to schedule the test for the contract.

### Term Dt
Enter test termination date in DD-MON-YYYY format. This is the date in which the system will no longer schedule the test for the contract.

### Mod Dt
Modification date will display each time there is a modification to the contract.  Field is not navigable.

Press **F12** (Commit) to save entries.

## At Commit
Updates made to the system at commit include the data entered on the screen.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Hospital/Patient Testing Functions menu.

# 23.6.3 Hospital/Patient Ad Hoc Testing Contract (AHCNTR)

## Intended Use
Use the Hospital/Patient Ad Hoc Testing Contract screen to set up a contract for units to be tested from outside sources.  This screen is used to commit data about the facility, the contract, and then testing profile requested on incoming units.

## Limitations
None

## Prerequisites
None

## Accessing the Screen
Access this screen from the Patient Testing Functions menu or by entering the keyword `AHCNTR`.

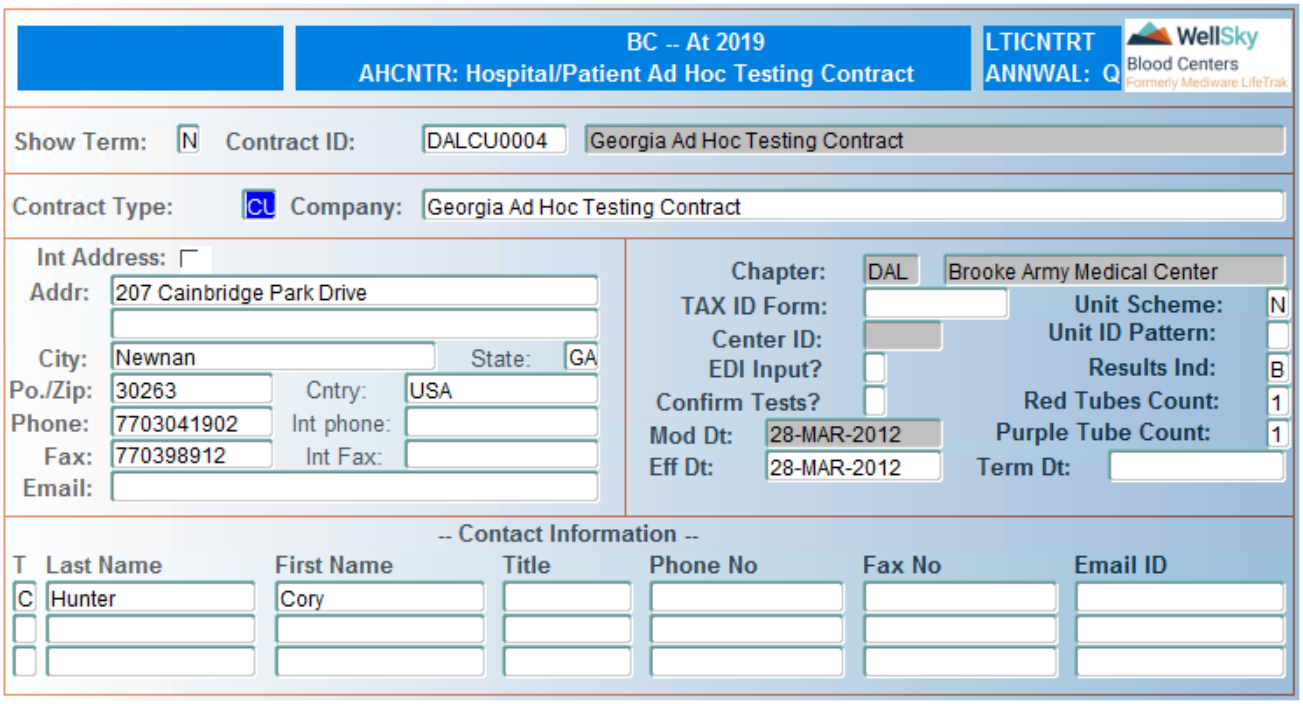


# Control Block Fields and Definitions

## Show Term

Enter `Y` to show terminated contracts in the LOV. Enter `N` to exclude terminated contracts from the LOV. Default value is Y.

## Contract ID

Enter contract ID or select ID from LOV. Leave field blank to create a new contract.

## Contract Type

Press **ENTER**. The system defaults to CU since you are opening a testing services contract with this screen. Entry cannot be modified.

## Company

Enter the name of the facility requesting tests. A maximum of 50 characters is allowed.

# Detail Block Fields and Definitions

## Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

## Address
Entry in the first line is required. Enter the facility address. Two lines are available to record the necessary information. Entry is limited to a maximum of 50 characters in each of the address lines.

## City
Enter facility city. Entry is limited to a maximum of 20 characters.

## State
Enter facility state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters.

## Postal/Zip
Enter facility postal or zip code. Entry is limited to a maximum of 15 characters.

## Cntry
Enter country where the requesting facility is located. Entry is limited to a maximum of 15 characters.

## Phone
Enter the main number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## Int Phone
Enter the internal phone number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Int Fax
Enter the international fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Fax
Enter the Fax number for the facility. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## E-mail
Enter the valid e-mail address for the facility. Entry in this field is not required. Entry is limited to a maximum of 50 characters.

## Chapter
System defaults the chapter ID. Field is not navigable.

## Tax ID Form
Enter the tax ID. Entry in this field is not required. A maximum of 9 numeric characters is allowed.

## Unit Scheme
Enter the unit scheme for the facility. Enter one of the following:

- C – External ID same as internal ID.
- N – External ID is Codabar numeric.
- X – External ID is free format.
- A – External unit ID is Codabar alphanumeric.
- I – External unit ID is ISBT 128.
- 8 – External unit ID is Code 128.

## Unit ID Pattern

Field is not utilized.

## Center ID

Field is automatically populated based on the center ID defined for the facility in Valid Collection Facilities (COLLID). Field is not navigable.

## EDI Input

Enter Y if electronic data transfer is requested; otherwise, leave blank.

## Results Ind

Enter R for reports, enter E for electronic mail, or enter B for both.

**NOTE –** This entry establishes the form in which testing results are sent back to the contract facility.

## Confirm Test

Enter Y if confirmatory tests are requested. Enter N if confirmatory tests are not requested.

**NOTE –** Confirmatory tests are not always requested for units with non-reactive test results.

## Red Tube Count

Enter the number of red tubes that will be entered routinely with this contract. A maximum of 2 tubes is allowed.

## Mod Date

System displays the date when the contract was last modified. Field is not navigable.

## Purple Tube Count

Enter the number of purple tubes that will be entered routinely for this contract. A maximum of 2 tubes is allowed.

## Eff Date

Enter the date the contract is to start in DD-MON-YYY format. A date must be entered in order to test units under the requested profile.


WellSky Corporation
Proprietary and confidential

### Term Date
Enter contract termination date in DD-MON-YYYY format, or leave blank.

### T
Enter the type of contact. Enter `C` for contact, or `I` for facility.

### Last Name
Enter contact last name. A maximum of 50 characters is allowed.

### First Name
Enter the first name of the contact. A maximum of 50 characters is allowed.

### Title
Enter the title of the contact. Entry in this field is not required. A maximum of 30 characters is allowed.

### Phone No
Enter contact phone number. Entry in this field is not required. A maximum of 12 characters is allowed.

### Fax No
Enter contact fax number. Entry in this field is not required. A maximum of 12 characters is allowed.

### Email ID
Enter the e-mail address for the contact. Entry in this field is not required. A maximum of 50 characters is allowed.

> **NOTE –** After information has been entered about the contact the cursor will return to the 'T' field for entry of additional contact information. If entry of contact information is complete press **F12** (Commit) to commit the data to the database.

## At Commit
Data pertaining to the contract, including the facility, contact and test profile are committed to the database.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Sample Management menu.

# 23.6.4 Fixed Profile Tube Check-In (TSTUBES)

## Intended Use
Use the Fixed Profile Tube Check-In screen to check samples into the system under a pre-established contract that assigns a fixed set of tests.

**NOTE –** If checking in units that require tests in addition to the normal contract profile, use the Additional Test Scheduling screen. If checking in units requiring tests other than tests included in the normal contract profile, use the Ad-Hoc Check-In screen.

Tubes checked in using the Fixed Profile Tube Check-In screen cannot also be checked in via the Ad Hoc Tube Check-In screen, and vice-versa.

## Limitations

If the ISBT DIN has already been imported as a product, that DIN must be tested under that number without entry into TSTUBES.

## Prerequisites

This requires an established contract. If one does not exist, set one up using Hospital/Patient Testing Contract (TSCNTR).

Testing profile will have to be established in Hospital/Patient Contract Profile Tests (TSTEST).

## Accessing the Screen

Access this screen from the Hospital/Patient Testing Functions menu or by entering the keyword `TSTUBES`.

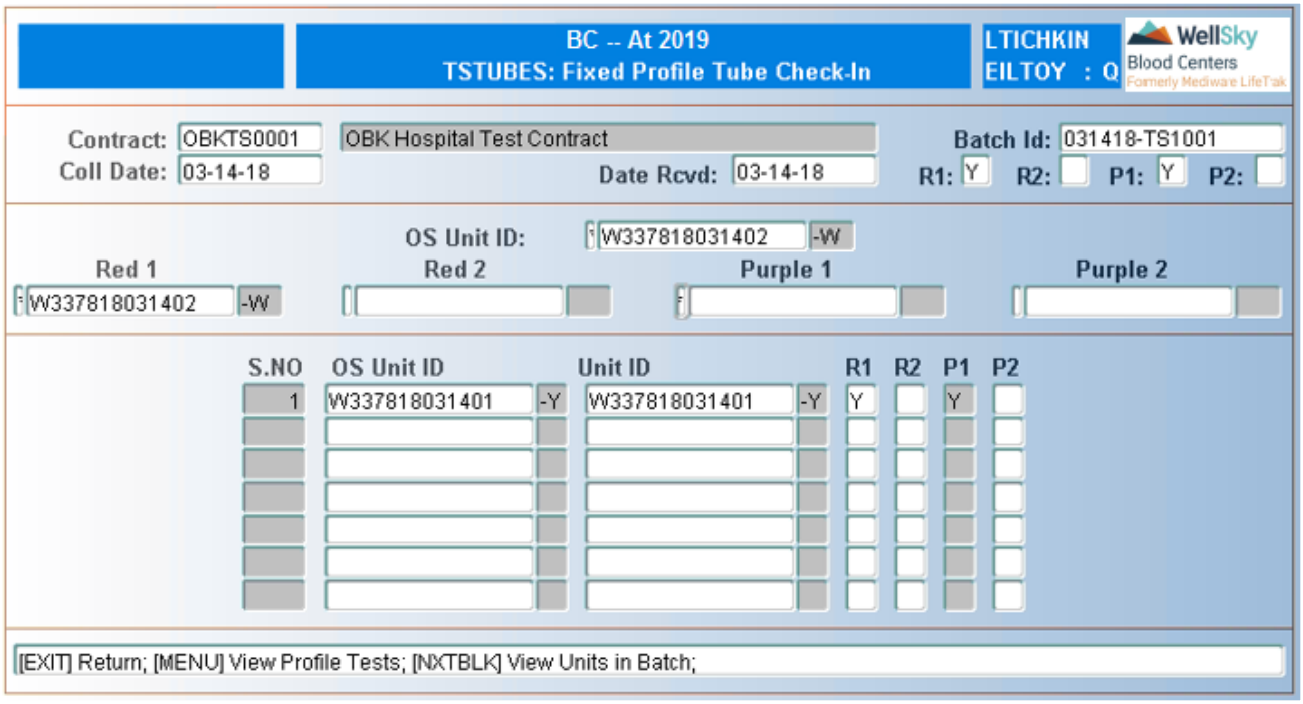


## Control Block Fields and Definitions

### Contract ID

Enter contract ID or select contract ID from LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** After the contract is entered, profile tests for that contract display in the 'Profile Tests' field at the right of the screen.

### Batch ID

Leave field blank to create a new batch. To add to an existing batch, enter the batch ID or select batch from LOV.

**NOTE –** When adding to a batch, after the batch ID is entered the next available sequence number displays in the 'eq' field. Units can be added to a batch until the batch is QCd.

### Coll

Enter unit collection date in MM-DD-YY format.

### Date Rcvd

Enter unit receipt date in MM-DD-YY format.

### R1

Enter `Y` if the tube is present. Enter `S` if the tube is serum only. Enter `P` if the tube is plasma only.

## Detail Block Fields and Definitions

### OS Unit ID

Scan or manually enter outside unit ID.

**NOTE –** Depending on the contract, you may or may not have to assign a new unit ID. If the contract is set to reassign unit numbers and the unit has not already been entered into the database the same number will be entered for TS unit ID and the tube Ids.

### Red 1

Scan or manually enter outside unit ID.

### Red 2

Scan or manually enter outside unit ID

### Purple 1

Scan or manually enter outside unit ID.

### Purple 2

Scan or manually enter outside unit ID.

Screen does a line-by-line commit.

## At Commit

Updates made to the system at commit include the data entered on this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Sample Management menu.

# 23.6.5 Ad Hoc Tube Check-In (AHTUBES)

## Intended Use

Use the Ad Hoc Tube Check-In screen to check samples into the system when tests are not defined or included in a normal contract profile. This screen allows you to select multiple tests randomly for a unit.

## Limitations

If the ISBT DIN has already been imported as a product, that DIN must be tested under that number without entry into AHTUBES.

## Prerequisites

This requires an established contract. If one does not exist, set one up using the Hospital/Patient Ad-Hoc Testing Contract screen. When the contract is established, the user will determine what tubes will be entered routinely for the contract, and those are the only tubes that will be required to be entered.

## Accessing the Screen

Access this screen from the Hospital/Patient Testing Functions menu or by entering the keyword `AHTUBES`.

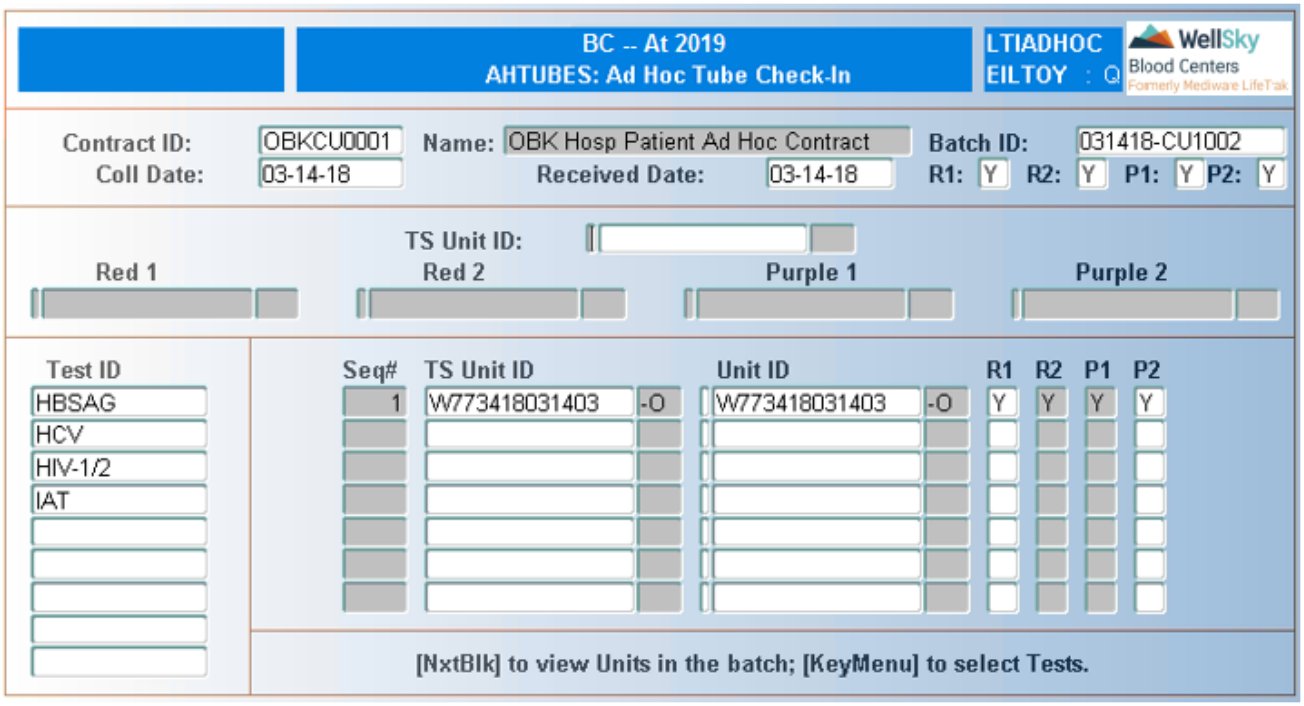



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Contract ID

Enter contract ID or select contract ID from LOV.

## Batch ID

Leave field blank to create a new batch. To add to an existing batch, enter the batch ID or select batch from LOV.

**NOTE –** When adding to a batch, after the batch ID is entered the next available sequence number displays in the Seq field.

Units can be added to a batch until the batch is QCd.

## Coll

Enter unit collection date in MM-DD-YY format.

## Date Rcvd

Enter unit receipt date in MM-DD-YY format.

## R1

Enter `Y` if the tube is present. Enter `S` if the tube is serum only. Enter `P` if the tube is plasma only.

**NOTE –** This is not a required field. Entry here is only required if the check-in of tubes is different from what was set at the contract level.

## R2

Enter `Y` if the tube is present. Enter `S` if the tube is serum only. Enter `P` if the tube is plasma only.

**NOTE –** This is not a required field. Entry here is only required if the check-in of tubes is different from what was set at the contract level.

## P1

Enter `Y` if the tube is present. Enter `S` if the tube is serum only. Enter `P` if the tube is plasma only.

**NOTE –** This is not a required field. Entry here is only required if the check-in of tubes is different from what was set at the contract level

## P2

Enter `Y` if the tube is present. Enter `S` if the tube is serum only. Enter `P` if the tube is plasma only.

**NOTE –** This is not a required field. Entry here is only required if the check-in of tubes is different from what was set at the contract level.

# Scheduling a Single Test

Tests can be scheduled individually or by group. To schedule individual tests, use the following steps:

## Group

Leave field blank. A listing of all valid test results appears along with the test short name and test type.

Enter an x or press ENTER next to each test that is to be scheduled for the units being checked in. To clear a selected test, press SPACE BAR or F5 (Clear Field) and the 'X' will be cleared. Use the UP and DOWN arrow keys to scroll through the test list.

Once all required tests have been selected, press F12 (Commit).

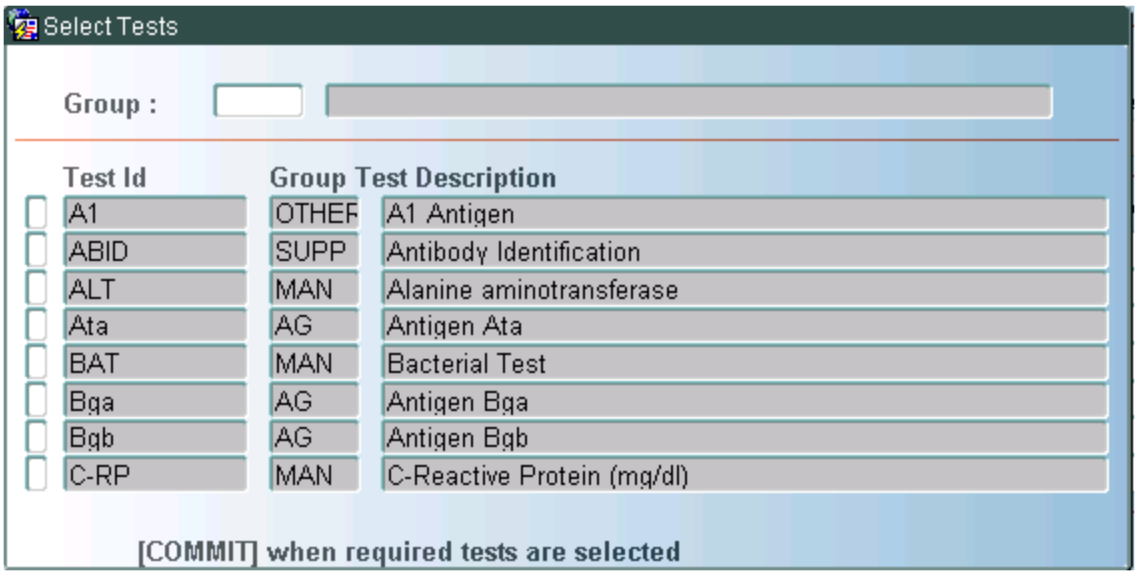


**NOTE –** After commit is pressed Scan a unit ID for the tests of enter manually. After the unit ID is entered, the collection date displays. Tests are scheduled for units on a line-by-line basis.

# Scheduling From a Test Group

## Group

Enter Group ID select from LOV.


WellSky Corporation
Proprietary and confidential

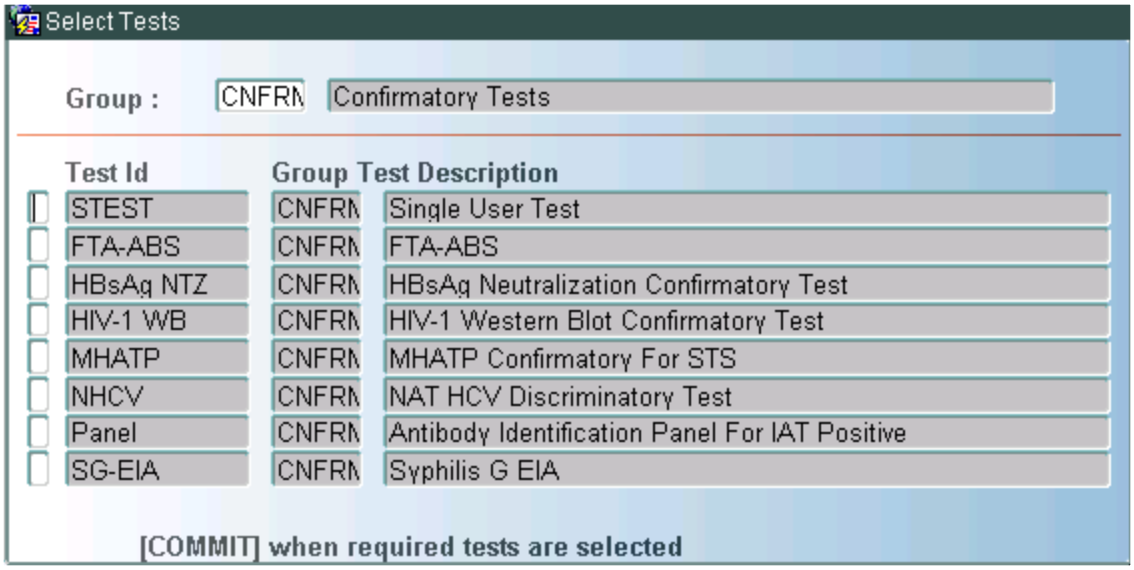


**NOTE –** After selection of the group ID the system displays the Test ID, Group (selected tests for each of the tests displayed), and the test description.

Enter an x or press **ENTER** next to each test that is to be scheduled for the units being checked in. To clear a selected test, press **SPACE BAR** or **F5** (Clear Field) and the 'X' will be cleared. Up the **UP** and **DOWN** arrow keys to scroll through the test list.

Once all required tests have been selected, press **F12** (Commit).

**NOTE –** Depending on the contract, you may or may not have to assign a new unit ID. If the contract is set to not reassign unit numbers and the unit has not already been entered into the database the same number will be entered for TS unit ID and the tube IDs.

## Detail Block Fields and Definitions

### TS Unit ID

Scan or manually enter outside unit ID.

### Red 1

Scan or manually enter outside unit ID.

### Red 2

Scan or manually enter outside unit ID.

### Purple 1

Scan or manually enter outside unit ID.

### Purple 2

Scan or manually enter outside unit ID.

> **NOTE –** Leave field blank if the corresponding tube was not received.

Screen does a line-by-line commit.

## At Commit

Updates made to the system at commit include the data entered on this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Sample Management menu.

# 23.6.6 Modify Contract for Hospital/Patient Batch (MODTSCON)

## Intended Use

Use the Modify Contract Information for Hospital/Patient Batch screen to change the contract ID for a batch when it is checked-in to testing services under the wrong contract.

## Limitations

None

## Prerequisites

Contract must have been entered.

## Accessing the Screen

Access this screen from the Hospital/Patient Testing Functions menu or by entering the keyword `MODTSCON`.


WellSky Corporation
Proprietary and confidential

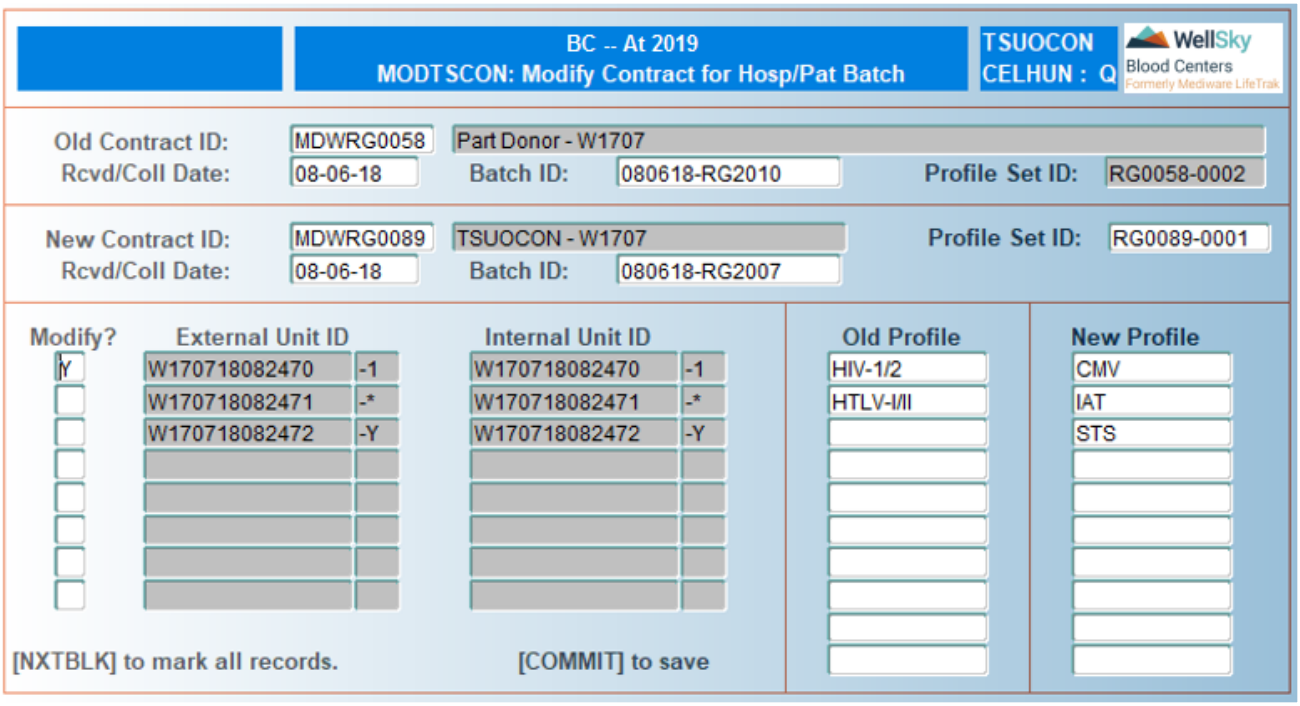


# Old Contract Control Block Fields and Definitions

## Old Contract ID

Enter contract ID that the batch was checked in under or select contract ID from LOV.

## Received/Collection Date

Enter batch receipt date in MM-DD-YY format, or select date from LOV.

## Batch ID

Enter batch ID or select from LOV.

## Profile Set ID

This field is display only. It will be populated if the contract entered has a profile set ID linked to the batch ID.

# New contract Control Block Fields and Definitions

## New Contract ID

Enter correct contract ID for the batch or select contract from LOV.

**NOTE –** The new contract ID should have the same collection ID defined as the units that are being transferred to the new contract.

### Profile Set ID

Enter the profile set ID for the new contract. This field is only required if you are changing to a regional sample management contract.

**NOTE –** If the contract is a testing service contract, this field cannot be populated.

### Received/Collection Date

Enter correct batch receipt date in MM-DD-YY format. Field automatically populates with the date entered for the original contract.

### Batch ID

Leave field blank to create a new batch. To add to an existing batch, enter existing batch ID or select from LOV.

### Modify?

Enter `Y` to mark certain units, or press CTRL + F3 (Next Block) to mark all units. Use the UP and DOWN arrow keys to scroll through the list.

### Internal Unit ID

System displays all of the internal IDs in the batch specified. Field is not navigable.

### External Unit ID

System displays all external unit IDs in the batch specified. Field is not navigable.

### Old Profile

System displays the testing profile of the previously selected contract. Field is not navigable.

### New Profile

System displays the testing profile of the newly selected contract. Field is not navigable.

Press F12 (Commit) once desired units have been selected.

## At Commit

- Selected units are moved from the old previous batch to the newly selected batch.
- A new batch ID is created if the Batch ID field for the new contract was left blank.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Sample Management menu.


WellSky Corporation
Proprietary and confidential

24

# Chapter 24 - Imported Blood Processing


24.1 Introduction ..... 1702
24.1.1 Overview ..... 1702
24.1.2 Structure ..... 1702
24.2 Imported Blood Processing ..... 1703
24.2.1 Imported Blood Contract (IMCONTR) ..... 1703
24.2.2 Imported Blood Product Check-In (IMPORT) ..... 1708
24.2.3 Correct Imported Unit Data (IMPCORR) ..... 1714
24.2.4 Valid Collection Facilities (COLLID) ..... 1718

# 24.1 Introduction

## 24.1.1 Overview

The Imported Blood Processing module allows for receipt and processing of products from sources outside the blood center. Information related to the institution and their testing profile is retained in the database.

Within the module, the user will be able to configure an import blood contract and testing Prerequisites for units imported from the outside source. When the user performs the check-in process of the imported units, the system will check for the acceptable temperature for the product type and place an interdiction if the temperature is not within acceptable range. While performing the check-in process, the system will calculate the collection date based on the expiration date of the unit. Correction of imported unit data is allowed on the following information: external unit ID, product code, aliquot, ABO label and expiration date.

## 24.1.2 Structure

The following functions are included in the Lab Import Blood Processing module:

- Contract Definition
- Import and Import Modifications
- Imported Products Received Report

Import Blood Processing Reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 24.2 Imported Blood Processing

Imported Blood Processing functions are accessed from the following menu:

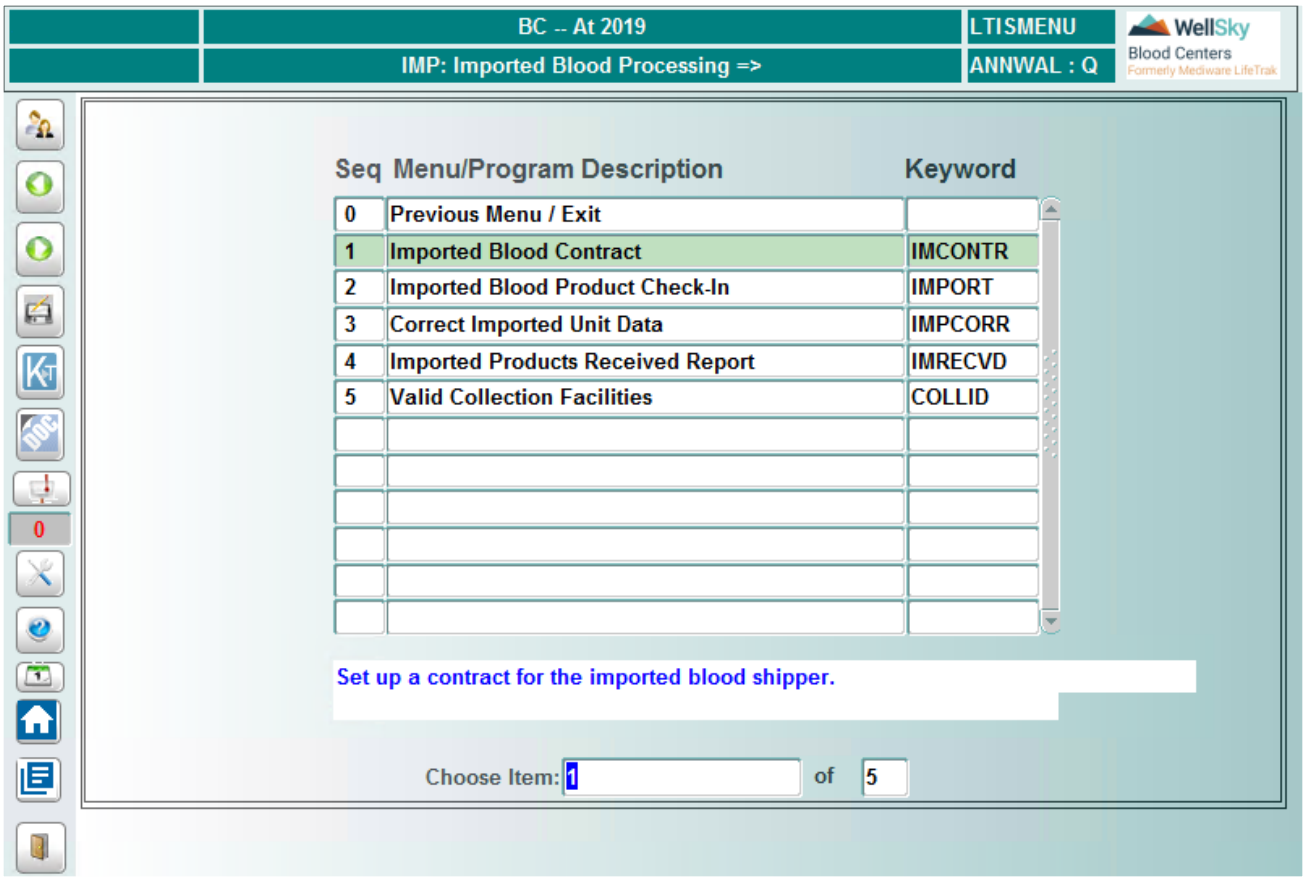


## 24.2.1 Imported Blood Contract (IMCONTR)

### Intended Use

Use the Imported Blood Contract screen to set up a contract for units imported from outside sources. This contract will also set up testing Prerequisites for this contract.

This screen is used to commit data about the institution, the contact, and the testing profile requested on the incoming units.

### Limitations

None

### Prerequisites

None

# Accessing the Screen

Access this screen from the Imported Blood Processing menu, or by entering the keyword IMCONTR.

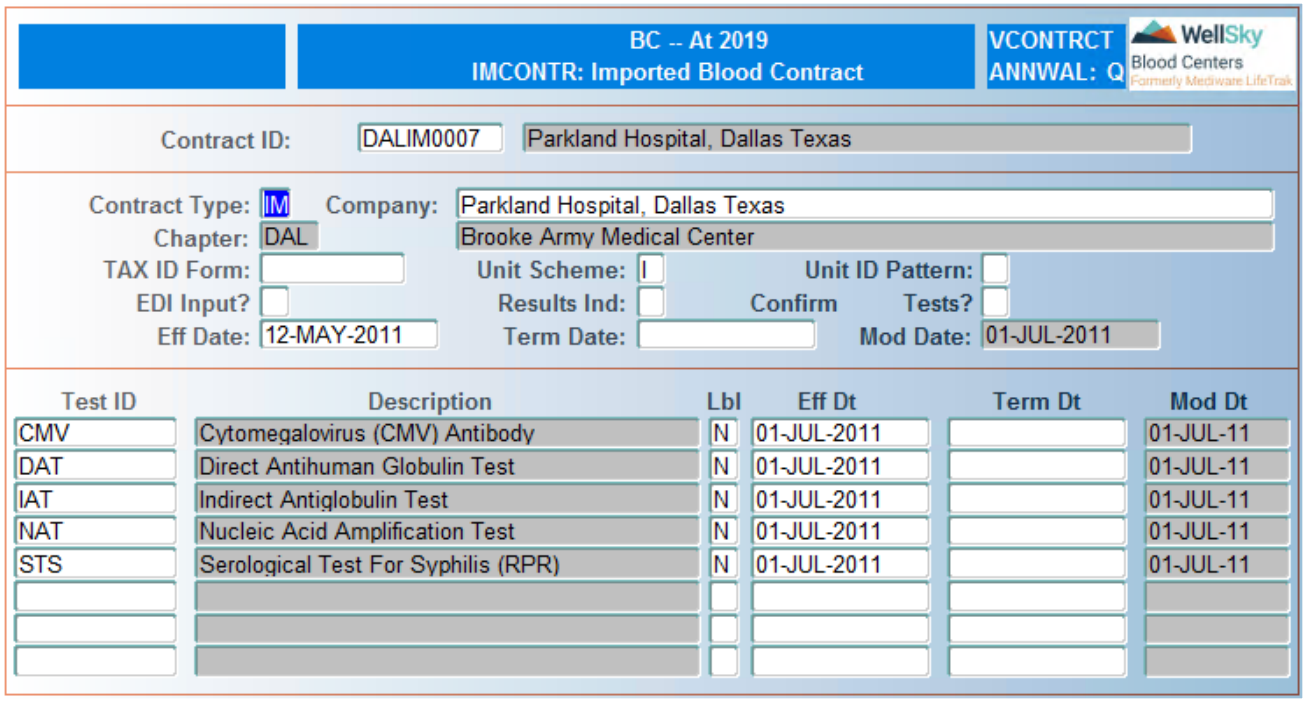


# Fields and Definitions

## Contract ID

Leave field blank to create a new contract. To modify an existing contract, enter the contract ID or select from LOV.

**NOTE –** If entering an existing contract ID, all existing data for the contract displays.

## Contract Type

IM automatically displays in this field. Field cannot be updated. Press ENTER to continue.

## Company

Enter the name of the company from which blood is being imported. A maximum of 50 characters is allowed.

After the company name is entered, the following window opens:


WellSky Corporation
Proprietary and confidential

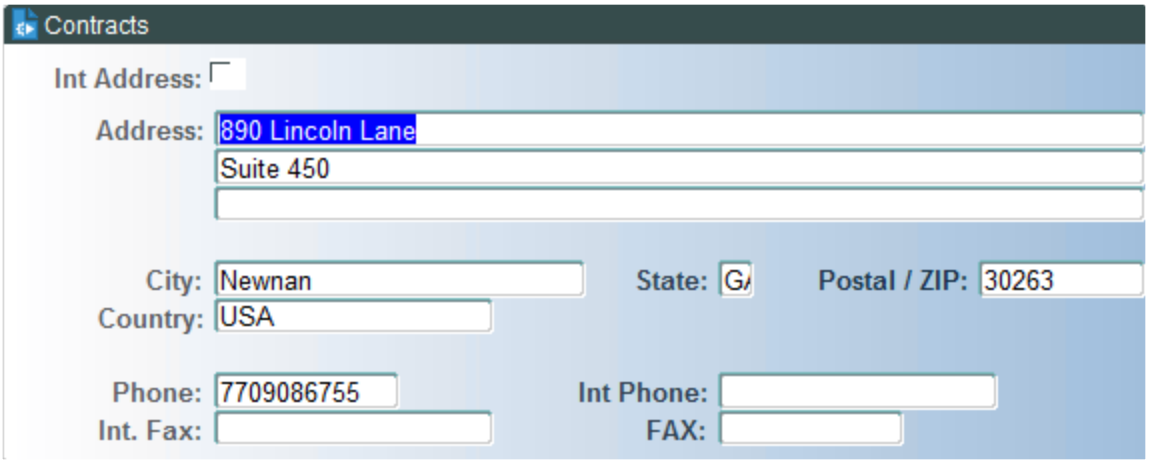


## Int Address (check box)

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

## Address

Entry in the first line is required. Enter the facility address. Three lines are available to record the necessary information. A maximum of 50 characters is allowed on each of the three address lines.

For international addresses, use the third line for country-specific designations such as province or state.

## City

Entry is required. Enter the city. A maximum of 20 characters is allowed.

## State

Entry is required for a domestic address (Int Address box not checked). Enter the state abbreviation or select from LOV. A maximum of 2 characters is allowed.

## Postal/Zip

Entry is required. Enter the postal or zip code. A maximum of 15 characters is allowed.

## Country

Entry is required. Enter the country. A maximum of 15 characters is allowed.

## Phone

Entry is optional. Enter the phone number. A maximum of 10 characters is allowed.

## Int Phone

Entry is optional. Enter the internal phone number, beginning with the country code. A maximum of 15 characters is allowed.

## Int Fax

Entry is optional. Enter the international Fax number, beginning with the country code. A maximum of 15 characters is allowed.

## FAX

Entry is optional. Enter the Fax number. A maximum of 10 characters is allowed.

**NOTE –** After entry of the fax number the window will disappear and cursor will return to the main entry screen.

## Chapter

Chapter ID automatically displays.

## Tax ID Form

Enter importing facility's Federal Tax ID. A maximum of 9 numeric characters is allowed. Entry in this field is not required.

## Unit Scheme

Enter valid unit scheme for contract or select scheme from LOV.

## Unit ID Pattern

This field is not utilized.

## Center ID

Field is automatically populated based on the center ID defined for the facility in Valid Collection Facilities (COLLID). Field is not navigable.

## EDI Input

This field is not utilized.

## Result Ind

This field is not utilized.

## Confirm Tests

This field is not utilized.

## Eff Date

Enter contract effective date in DD-MON-YYYY format.

## Term Date

Enter contract termination date in DD-MON-YYYY format, or leave blank.


WellSky Corporation
Proprietary and confidential

## Mod Date

System displays the date when the contract was last modified. Field is not navigable.

After the termination date is entered, the following window opens:

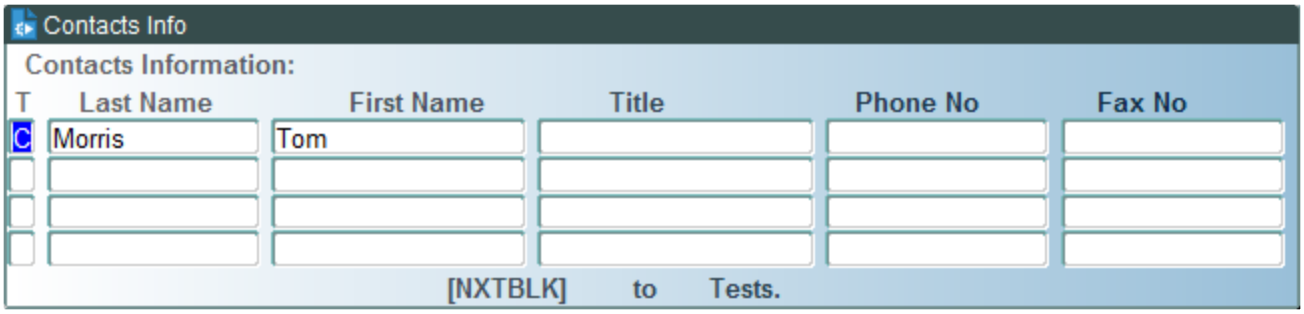


## T

Enter the type of contact. Enter `C` for contract, or `I` for institution.

## Last Name

Enter contact last name. A maximum of 50 characters is allowed.

## First Name

Enter contact first name. A maximum of 50 characters is allowed.

## Title

Enter the title of the contact. Entry in this field is not required. A maximum of 30 characters is allowed.

## Phone No

Enter contact phone number. Entry in this field is not required. A maximum of 12 characters is allowed.

## Fax No

Enter contact fax number. Entry in this field is not required. A maximum of 12 characters is allowed.

Press CTRL + F3 (Next Block) to return to the main screen.

# Test Details Block Fields and Definitions

If a product is imported from a contract that does not perform all testing required by your facility, these test IDs can be defined in this block. If a test is defined for the contract, the test must be resulted before the unit can be labeled or checked in to distribution; the product will have a null value for the system label decision.

## Test ID

Enter test ID to be performed or select from LOV.

## Description

Test description automatically displays after the test ID is entered.

### Lbl
Enter Y if testing is necessary for labeling. Enter N if testing is not necessary for labeling.

### Eff Dt
Enter test effective date for the contract in DD-MON-YYYY format.

### Term Date
Enter test termination date for the contract in DD-MON-YYYY format, or leave field blank.

### Mod Dt
System displays the date when the contract was last modified.  Field is not navigable.

Press F12 (Commit) once all data has been entered.

## At Commit
- Contract ID is assigned for new contracts.
- Data pertaining to the contract, including this institution, contact and test profile are committed to the database.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Imported Blood Processing menu.

# 24.2.2 Imported Blood Product Check-In (IMPORT)

## Intended Use
Use the Imported Blood Product Check-In screen to check in imported blood products from other blood centers into Lab.

## Limitations
- If a testing sample has been checked in, and subsequently a product from the same DIN is imported, the contract will be updated to the Import Contract ID.  Testing results will be seen for the unit and imported product under the Import contract ID (i.e. UNITQ).
- The user is responsible for applying the correct donation type code if it impacts the product code's intended use.
- Master Code PABO must be defined in Lab master codes with the ABO values for Pooled ABO. This will allow the entry of the pooled ABO in the import screen.

## Prerequisites
- If any testing or modification is required for the import contract, the following steps are necessary:
  - Testing


WellSky Corporation
Proprietary and confidential

  - Labeling
  - Check into Distribution
- If no testing or modification is required:
  - Check into Distribution
- The Facility Interface Numbers (FINs) must be defined in Master Code SRVCK.
- The license number must be defined in the Valid Collection Facilities (COLLID) screen for the license number to print for the imported product, if it meets the specified criteria, as follows:

| Import Contract | Receiving Facility (Modify Contract – Internal) | License Number Prints on 4x4 Label |
|---|---|---|
| Import Product is licensed | Modified product is licensed. Multiple chapter (LICPROD set to Y for product). Single Chapter (Product table set to Y). | License number of both facilities prints – collection facility in upper left quadrant and the modifying facility in lower right quadrant. |
| Import Product is licensed | Modified product is not licensed. Multiple chapter (LICPROD set to N for product). Single Chapter (Product table set to N). | Neither license number prints. |
| Import Product is not licensed | Modified product is licensed. Multiple chapter (LICPROD set to Y for product). Single Chapter (Product table set to Y). | Neither license number prints. |
| Import Product is not licensed | Modified product is not licensed. Multiple chapter (LICPROD set to N for product). Single Chapter (Product table set to N). | Neither license number prints. |

## Accessing the Screen

Access this screen from the Imported Blood Processing menu or by entering the keyword `IMPORT`.

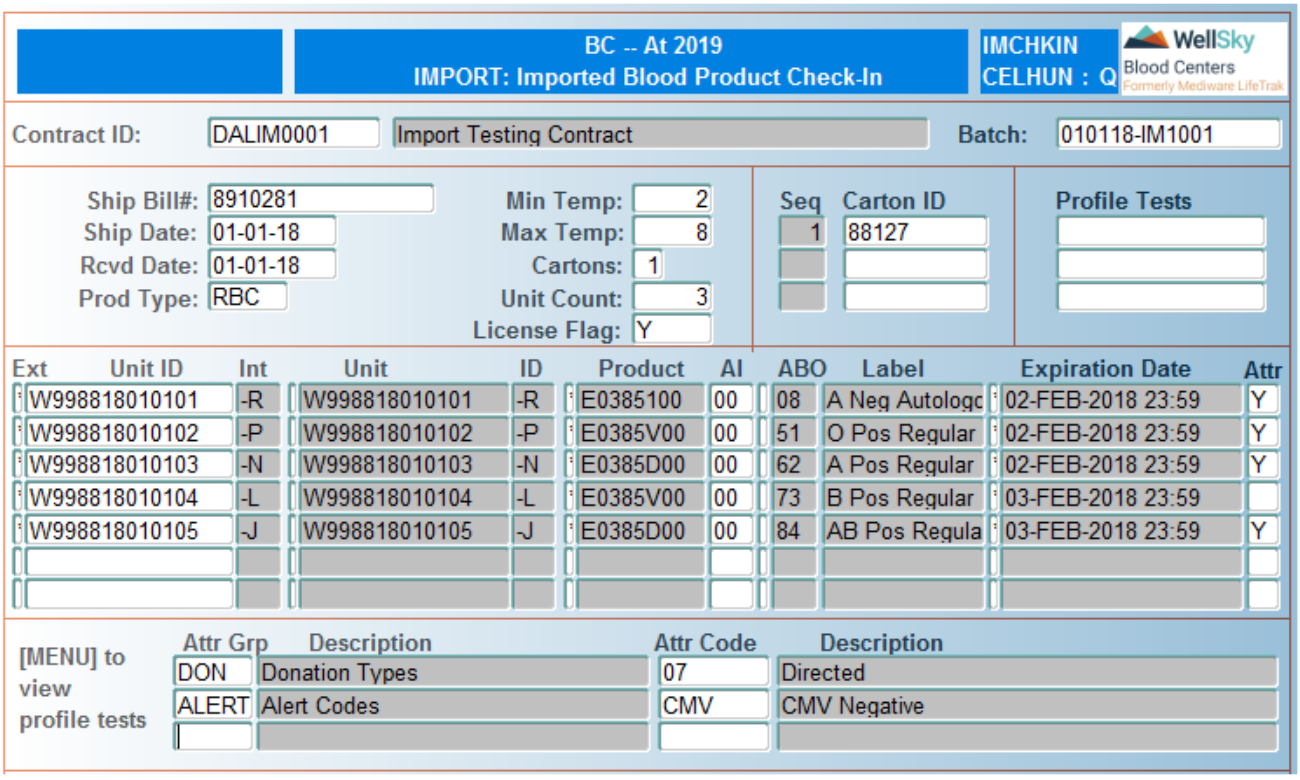


# Fields and Definitions

## Contract ID

Enter import contract ID or select from LOV.

## Batch

Leave field blank to create a new batch. To add to an existing batch, enter batch ID or select from LOV.

**NOTE –** If a new batch is being created, the system assigns and displays a batch number after the first carton ID is committed.

**NOTE –** If entering a new batch, fill in the fields described below. If modifying a batch, the system displays fields already entered. Enter or modify fields as necessary.

## Ship Bill #

Enter shipment bill number or air freight bill number. A maximum of 14 characters is allowed.

## Ship Date

Enter batch shipment date in MMDDYY format.


WellSky Corporation
Proprietary and confidential

## Rcvd Date

Enter shipment receipt date in MMDDYY format.

## Prod Type

Manually enter product type received (for example, RBC) or select from LOV.

## Min Temp

Enter minimum receiving temperature (°C).

**NOTE –** Temperatures outside cGMP standards will assign an NFT label decision.

## Max Temp

Enter maximum receiving temperature (°C).

**NOTE –** Temperatures outside cGMP standards will assign an NFT label decision.

## Cartons

Enter the number of cartons received. A maximum of 2 numeric characters is allowed.

## Unit Count

Enter the number of units received. A maximum of 5 numeric characters is allowed.

## License Flag

Entry is required. Enter one of the following:

- Y – all units checked in have a license number associated to the imported facility name in upper left corner.
- N – all units checked in do not have a license number associated to the imported facility name in the upper left corner.

## Seq

System automatically assigns a sequence number after each carton ID is entered. Field is not navigable.

## Carton ID

Enter individual carton numbers for each carton received.

**NOTE –** The system will accept a number of cartons based on the total number of cartons entered above.

# Enter Imported Units

## External Unit ID

Scan or manually enter the external unit ID.

**NOTE –** The unit ID should be entered according to the import contract unit scheme.

## Internal Unit ID

Scan or manually enter the internal unit ID, if required.

## Product

Scan, manually enter, or select the product code from the LOV for Codabar only. ISBT products can be scanned or manually entered, but there is no LOV available.

**NOTE –** When importing products from other chapters, the system will be checking if the product has been shipped out of the other chapter. If the product has not been shipped, the user will receive the following error message:
Err. 2075: Internal Product must be exported to allow checkin in Import

## AI

Enter the aliquot number. A maximum value of 9 is allowed for Codabar units. Field not navigable for ISBT units.

## ABO Label

Scan, manually enter, or select the ABO from the LOV.

**NOTE –** You are prompted for entry of tested ABO if the component is labeled with an SLD other than the tested ABO.

ISBT ABO label decisions that are a BIO type will have an IBIO interdiction placed on the unit.

## Exp. Date

Scan or manually enter the expiration date in DD-MON-YYYY HH24:MI format.

**NOTE –** If the product has already expired, the system changes the ABO label to NFT. (A window opens to allow expiration date edit.)

**NOTE –** When entering the expiration manually, if an expiration time is not entered, the system defaults the expiration time to 00:00.


WellSky Corporation
Proprietary and confidential

### Attr

Enter `Y` if attributes are to be added to the unit/product. If no attributes are to be added, leave the field blank, and press `Enter`.

- If Y is entered, the cursor moves to the *Attr Grp* field.

## Attribute Block

### Attr Grp

Enter the attribute group, or select from the LOV.

### Attr Code

Enter the attribute code that corresponds to the attribute group, or select from the LOV. After all attributes have been added to the product, press `CTRL+F4` to move back to the External Unit ID field.

**NOTE –** Multiple attribute codes can be placed on the product.

## Checking for Interdictions

During import, the system will check Master Code SRVCK and determine if the Chapter FIN receiving the import is defined and associated with the same institution. The system will then check for interdictions posted after final labeling and shipment of the product.

If interdictions are present, the system will apply a Hold to the Product and assign a CHAP interdiction to the unit/product. The system will then display the following message:

The [Name of Chapter and Chapter Description] placed an interdiction after unit/product labeled and shipped.

You must dismiss this message before continuing.

## Viewing Profile Tests

Press **F6** (Menu) to view profile tests for the contract.

Use the **UP** and **DOWN** arrow keys to scroll through the test list.

Press **ENTER** to return the cursor to the entry window.

## Correction of Attributes

To add or remove attributes placed on a unit, perform the following steps:

- If the cursor starts in the Attribute block, and you need to change attributes on a different unit, use **CTRL** + **F4** (Previous Block) to move the cursor to the Attr column in the upper detail block. Press **ENTER** to move the cursor to the Attribute block and display the attributes that are present on the component. To delete, press **ENTER** until the attribute to be removed is highlighted. Use **CTRL**+ **F8** (Delete Record) to remove the attribute. The system will remove the attribute and show a 'transaction committed' message.

- If the cursor starts in the Detail block for the units, press the **UP** and **DOWN** arrow keys to move to the Attr column. Press **ENTER** to move the cursor to the Attribute block and display the attributes that are present on the component. To delete, press **ENTER** until the attribute to be removed is highlighted. Use **CTRL**+ **F8** (Delete Record) to remove the attribute. The system will remove the attribute and show a 'transaction committed' message.
- If an additional attribute is needed and the cursor is in the Attribute block, press **CTRL** + **F4** (Previous Block) to move the cursor to the Attr column in the upper detail block. Press **ENTER** to move the cursor to the Attribute block and display the attributes that are present on the component. Press **ENTER** until the cursor is in an empty attribute line. Select the attribute to add to the unit.
- If an additional attribute is needed and the cursor is in the Detail Block for the units, press the **UP** and **DOWN** arrow keys to move to the Attr column. Press **ENTER** to move the cursor to the Attribute block and display the attributes that are present on the component. Press **ENTER** until the cursor is in an empty attribute line. Select the attribute to add to the unit.

## At Commit

Updates made to the system at commit include the following:

- The data entered on the screen.
- Assignment of a warehouse to the imported component. Assignment is based on the warehouse to which the user is logged on when the component is imported.
- Collection date will be calculated based on product code and the Life Span and Indicator found in Product Codes Table (PRODUCTS). Collection date is calculated from the expiration date of the product minus the life span/indicator. Collection date will display in queries such as Unit Query (UNITQ).
- Attributes will be placed at the component level.

## What to Do Next

- For normal processing, press **F8** (Exit Screen) to return to the Imported Blood Processing menu.

# 24.2.3 Correct Imported Unit Data (IMPCORR)

## Intended Use

Use the Correct Imported Unit Data screen to modify data that was entered incorrectly on imported units.

The following data can be corrected using this program:

- Aliquot
- ABO label
- Expiration date
- Product code
- Attribute


WellSky Corporation
Proprietary and confidential

## Limitations

Modifications to unit information is not allowed if the unit has gone through any other processing steps to convert the product.

## Prerequisites

The unit must be checked-in using the Imported Blood Product Check-In screen.

## Accessing the Screen

Access this screen from the Imported Blood Processing menu, or by entering the keyword `IMPCORR`.

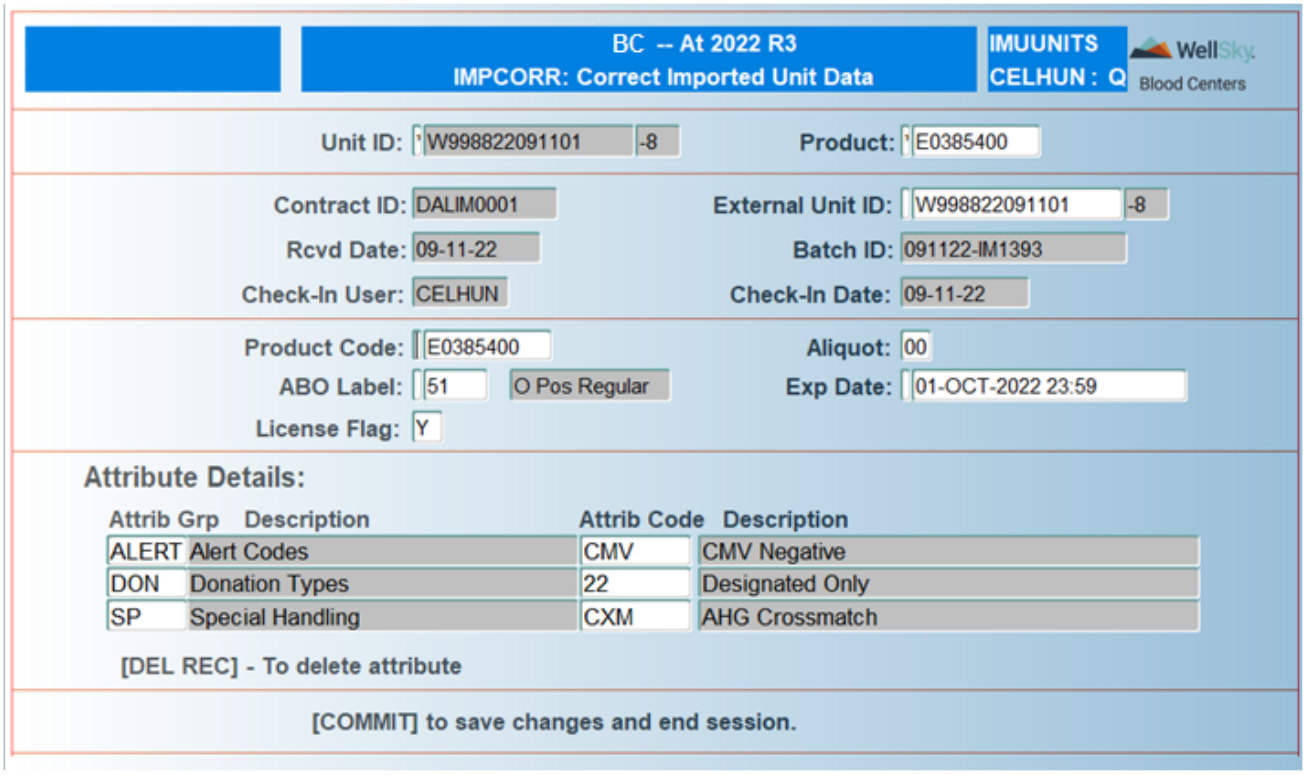


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually enter, or select product code from LOV.

### External Unit ID

External unit ID automatically displays. Scan or manually enter the correct external unit ID.

**NOTE –** Field is only navigable if you press CTRL + F4 (Previous Block) from the bottom detail block.

## Contract ID

Import contract ID for the unit automatically displays. Field is not navigable.

## Rcvd Date

Receipt date automatically displays. Field is not navigable.

## Batch ID

Import batch ID automatically displays. Field is not navigable.

## Check-in User

Check-in user ID automatically displays. Field is not navigable.

## Check-in Date

Check-in date automatically displays. Field is not navigable.

## Product Code

Scan, manually enter, or select proper product code from LOV. Press [Return] if there is no correction to be made.

**NOTE –** The product code must be of the same type.

## Aliquot

Enter the correct aliquot number. Press ENTER if there is no correction to be made.

## ABO Label

Scan, manually enter, or select the correct ABO from the LOV. Press ENTER if there is no correction to be made.

**NOTE –** If the product has been labeled with the Md label decision, it can only be changed to Mq.

## Exp Date

Scan or enter manually the correct expiration date in DD-MON-YYYY HH24:MI format. Press ENTER if there is no correction to be made.

**NOTE –** If the expiration date is entered without a time, the time will be updated to 00:00.

**NOTE –** If the product has already expired, the label decision is automatically changed to NFT.


WellSky Corporation
Proprietary and confidential

**NOTE –** Only the data entered earlier can be corrected. No new data can be entered through this screen.

### License Flag

Entry is required. Enter one of the following:

- `Y` – the unit has a license number in the upper left corner of the product.
- `N` – the unit does not have a license number in the upper left corner of the product.

## Update of System Label Decision

### Update SLD Due to Out of Temperature

1. Go to the Modify Check-In Batch Details (MODBATCH) screen, and modify the temperature of the check-in batch.
2. Release the CMT on the unit.
3. Go to **Correct Import Unit Information**, and change the system label decision from 'Md' to 'Mq'.
4. Once it has been labeled to 'Hold', go to Labeling ABO - ISBT (LABELI), and label the product to the correct ABO.

### Update SLD Due to Expiration Date

1. Go to **Correct Import Unit Information**, change the label decision from 'Md' to 'Mq', and update the expiration date.
2. Go to Release Component Interdiction (RCINT) and release the NFT interdiction.
3. Go to Labeling ABO - ISBT (LABELI), and label the product to the correct ABO.

## Update of Attribute Details

### Delete Attributes

1. Go to **Correct Import Unit Information**, and scan the unit and product to be updated. Use **CTRL** + **F3** (Next Block) to move to the Attribute Details block.
2. Place the cursor on the attribute that needs to be deleted.
3. Press **CTRL**+ **F8** (Delete Record) to remove the attribute.
4. Press **F12** (Commit) to complete the transaction.

### Add Attributes

1. Go to **Correct Import Unit information**, and scan the unit and product to be updated. Use **CTRL** + **F3** (Next Block) to move to the Attribute Details block.
2. Move the cursor to an empty row.

3. Select the attribute to be added.
4. Press F12 (Commit) to complete the transaction.

## At Commit

Updates made to the system at commit include the date entered on the screen.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Imported Blood Processing menu.
- Perform Imported Blood Check-In Batch QC (IMPORTQC).

# 24.2.4 Valid Collection Facilities (COLLID)

## Intended Use

This screen is used to define valid collection facility identification number (FIN) for ISBT contracts. This number is defined for all contract types, internal, import, regional sample management and hospital/patient contracts. It is also used to define the license number that will print on the product label if the product meets the licensure requirements.

## Limitations

- If an F is assigned to more than one contract it is the responsibility of the user to understand the contract linkage for that FIN.
- If the address and the license address are the same, do not enter the license address. Doing this will cause the address to print twice on the product label.

## Prerequisites

- Define Master code STATE.
- Define Internal Contract (CONTR).
- Define Imported Blood Contract (IMCONTR).
- Define Hospital/Patient Testing Contract (TSCNTR).
- Define Regional Testing Contract (RGCON).


WellSky Corporation
Proprietary and confidential

# Entering/Viewing Data

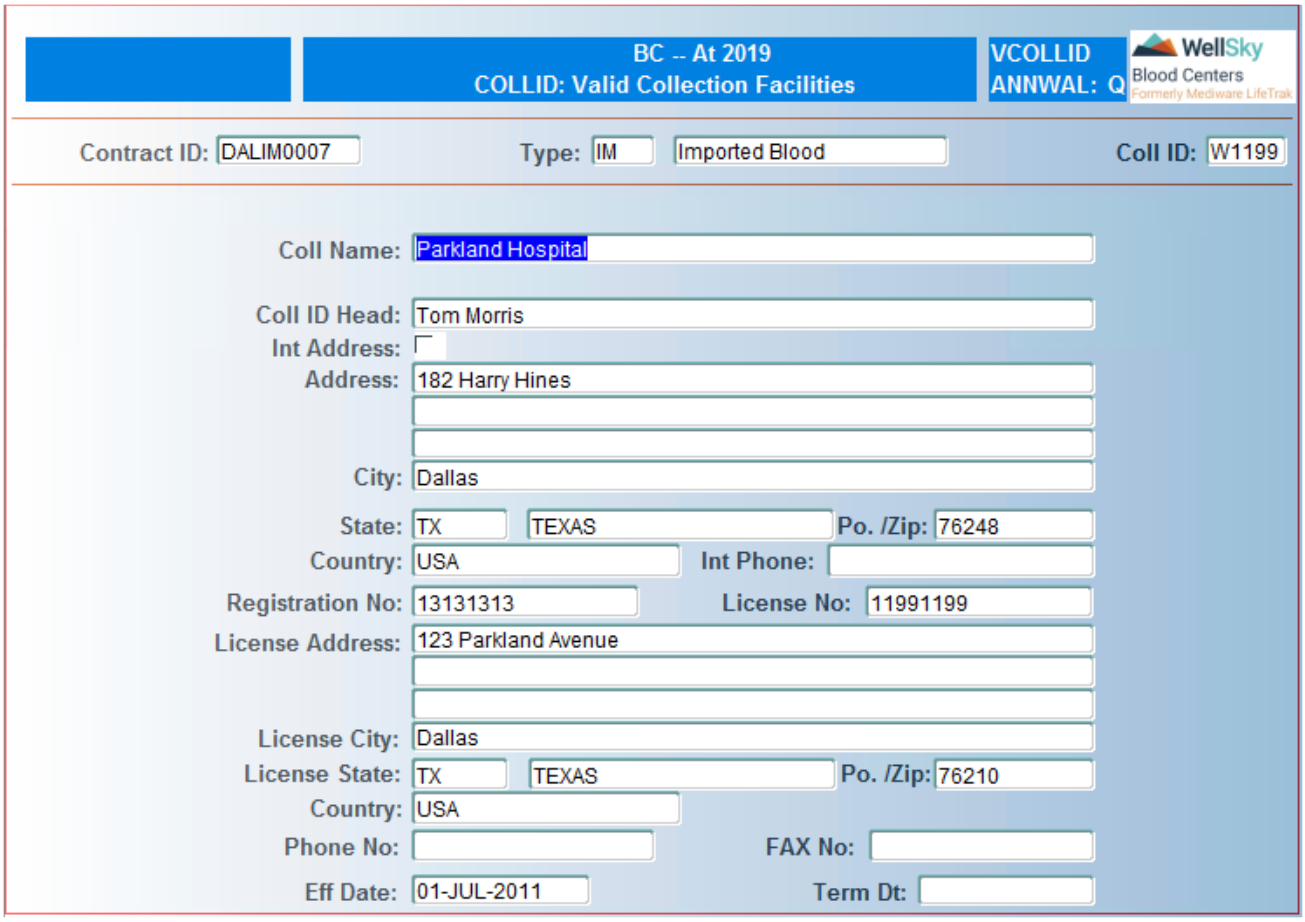


# In the Control Block

## Contract ID

Enter the contract ID or select from LOV.

## Type

Defaults to the type based on the contract ID selected.

## Coll ID

Enter collection ID (FIN) that has been assigned to the facility by ICCBBA. The LOV can be used to view all the prior facility codes assigned and to query on the FIN already entered.

**NOTE –** To process a Codabar unit number and allow the Codabar label to print, you must select CDBAR from the LOV.

If a different contract already has the same FIN associated with the Coll ID (FIN) entered, the following window opens:

Enter one of the following:

- `Y` – acknowledge and allow the same Coll ID (FIN) to be assigned to the contract.
- `N` – not assign the collection ID (FIN). The cursor will move back to the parent screen in the collection ID field. The field will contain the collection ID entered; the field must be cleared to enter a new collection ID.

# In the Detail Block

## Coll Name

Enter the name of the facility.

This field will take up to 100 characters.

**NOTE –** For longer facility names, use the | (bar or pipe) on the keyboard to insert a specific break in the name for printing on two lines.

The field accepts a maximum of 100 characters, but to get the 100 characters to print on the 4x4 label, the following steps need to be reviewed:

- If you enter 100 characters in the Coll Name field and do not use the pipe character (|), then Digi-Trax will only print 50 characters on the first line. If the last word in the 50 characters will exceed the 50 character limit, then that word will feed to the second line. An additional 50 characters will print on the second line, and printing will stop after the 50-character limit is reached.
- If you enter 100 characters in the field, place a pipe character at the location where you want the first line to break, and the rest will print on the second line of the label as long as it does not exceed 100 characters.


WellSky Corporation
Proprietary and confidential

- To start the second line aligned to the left with the first line, a space may need to be removed from the line.

- Digi-Trax's HemaTrax can only print 100 characters. The name cannot be printed with 100 characters on one line. It must be split between two lines. Digi-Trax requests a pipe character (|) be used to show where the separation between the first and second line should be. WellSky is making the field accept 101 characters to include the '|', although the '|' will not print. If you enter 101 characters in this field, it will not print correctly.

## Coll ID Head

Enter the name of the main contact person for this facility.  This field will take up to 40 characters.

## Int Address

For an international address, click mouse in box. A check mark ( )appears. For a domestic address, leave this box blank (un-checked).

## Address

Enter the address of the facility. The address has 3 lines each line can contain a maximum of 40 characters.

## City

Enter the city of the facility.

## State

Enter the state or select from LOV.

## Po. /Zip

Enter the zip code.

## Country

Enter the country. A maximum of 15 characters is allowed

## Int Phone

Enter the international telephone number. A maximum of 15 characters is allowed

## Registration No

Enter the registration number of the facility.  A maximum of 40 characters is allowed.

## License No

Enter the U.S. License Number for the facility. A maximum of 30 characters is allowed.

**NOTE –** Enter data into the *License Address*, *License City*, *License State*, and *Country* fields **only** if the license address is different than the facility address. If the facility address and the license facility address are the same, leave these fields blank.

### License Address
Enter the address of the facility associated with the U. S. License Number. The address has 3 lines each line can contain a maximum of 40 characters.

### License City
Enter the city of the facility associated with the U. S. License Number. A maximum of x characters is allowed.

### License State
Enter the state of the facility associated with the U. S. License Number or select from LOV.

### Country
Enter the country of the facility associated with the U. S. License Number. A maximum of 15 characters is allowed.

### Phone No
Enter the phone number of the facility. This field allows up to 13.

### Fax No
Enter the fax number of the facility. This field allows up to 13.

### Eff Date
Enter an effective date in DD-MON-YYYY format.

### Term Date
Enter a termination date in DD-MON-YYYY format.  Only enter termination date if no longer needing to use the facility code.

Press **F12** (Commit) to save entries.

## At Commit
Entries are saved to the database.

## What to Do Next
There is no next step for this screen.


WellSky Corporation
Proprietary and confidential

25

# Chapter 25 - Equipment Management


25.1 Introduction ..... 1724
25.1.1 Overview ..... 1724
25.1.2 Structure ..... 1724
25.2 Equipment General Functions ..... 1725
25.2.1 Enter Equipment Details (EQDET2) ..... 1725
25.2.2 Enter Equipment Downtime and Service Details (EQMAINT) ..... 1728
25.2.3 Enter Equipment QC Details – First Tech (EQC1) ..... 1730
25.2.4 Enter Equipment QC Details – Second Tech (EQC2) ..... 1734
25.2.5 Edit Equipment Details (EQEDIT) ..... 1737
25.2.6 Edit Equipment Downtime and Service Details (EQEDTMN) ..... 1739
25.2.7 Equipment Worksheet Report (EQWORK) ..... 1742
25.3 Equipment Supervisory Functions ..... 1744
25.3.1 Maintain Valid Equipment QC Data (EQWS) ..... 1744
25.3.2 Maintain Equipment Access Control – by Type (EQACCESS) ..... 1747
25.3.3 Configure Equipment Worksheet (EQCONFIG) ..... 1749
25.3.4 Enter Equipment Installation Qualifications (EQUALIF) ..... 1751
25.3.5 Edit or Reconcile Equipment QC Details (EQSUPQC) ..... 1753
25.4 Equipment Queries ..... 1757
25.4.1 Status and History Query (EQSTATQ) ..... 1757
25.4.2 Downtime History Query (EQMAINTQ) ..... 1761
25.4.3 Service History Query (EQSHISTQ) ..... 1763
25.4.4 QC History Details Query (EQCHISTQ) ..... 1765

# 25.1 Introduction

## 25.1.1 Overview

Equipment Management functions allow the blood-testing center to automate most functions relating to installation, use, and routine maintenance of equipment used in the production of blood and blood components. Since there are different types of equipment in use at the blood center, Equipment Management functions are highly configurable. The functionality has been broken down into the following areas:

- General Functions: Data entry function that deal with specific machines. These functions are used routinely and include print the QC worksheet.
- Supervisory Functions: These functions control the entry of data into the general functions. They are used to enter data by equipment type rather than for a specific machine.
- Query Functions: The functions display summary data for equipment data stored in the database.

## 25.1.2 Structure

The following sections are included in the Lab Equipment Management Functions module:

- Equipment General Function
- Equipment Supervisory Functions
- Equipment Queries
- Equipment Reports


WellSky Corporation
Proprietary and confidential

# 25.2 Equipment General Functions

Equipment General Functions are accessed from the following menu:

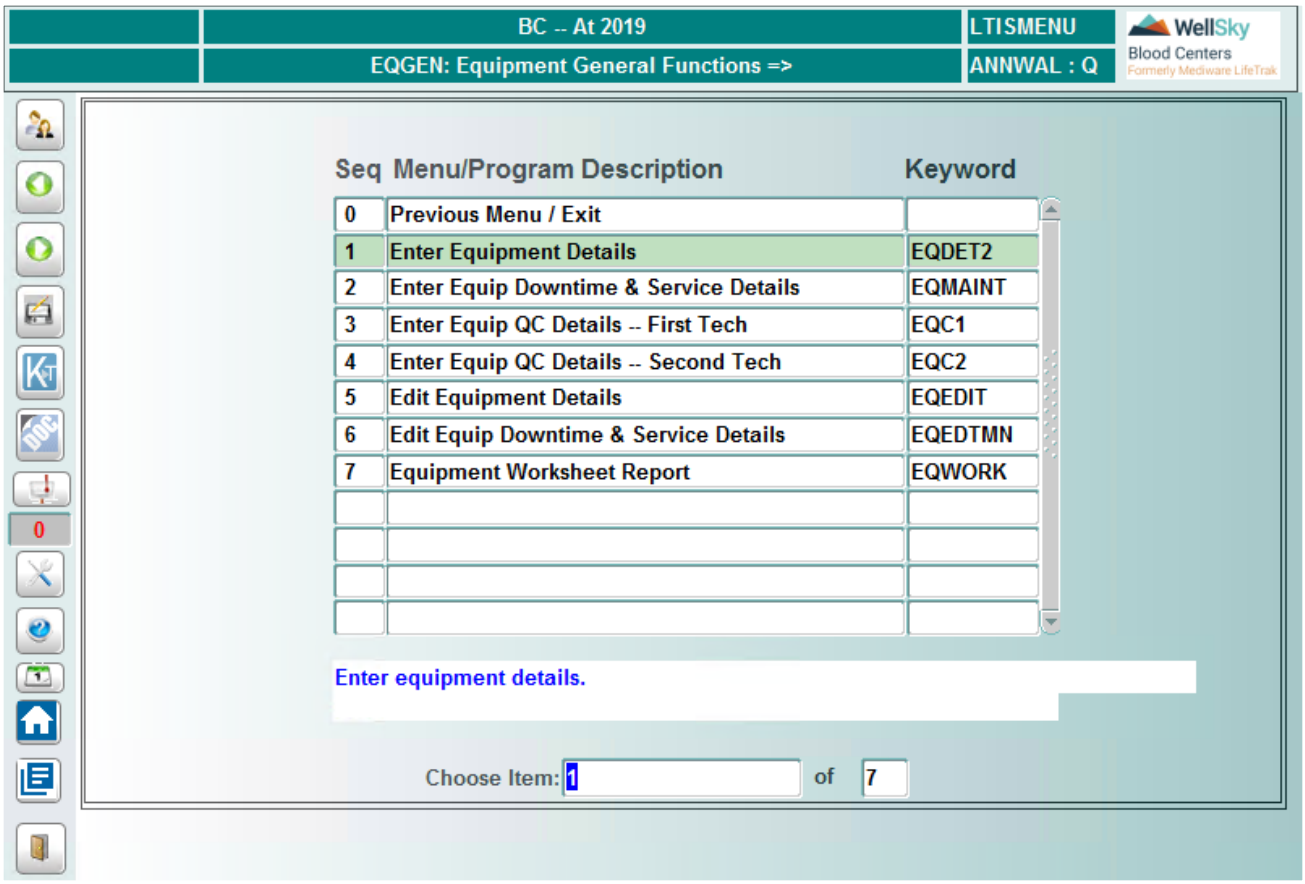


## 25.2.1 Enter Equipment Details (EQDET2)

### Intended Use

Use the Enter Equipment Details to create a record for each piece of critical equipment used in the manufacture, storage, testing and distribution of blood or blood products. Such information will uniquely identify each instrument, specify fixed data that every piece of equipment must have, detail variable data specific to the individual equipment type being entered, and assign a unique reference number to the piece of equipment being entered.

### Prerequisites

The equipment type must have been defined in the Equipment Master Codes supervisory screen. System security features restrict user access to those equipment types that have been defined for, and are appropriate to, a user's work area.

# Limitations

None

# Accessing the Screen

Access this screen from the Equipment Management menu or by entering the keyword `EQDET2`.

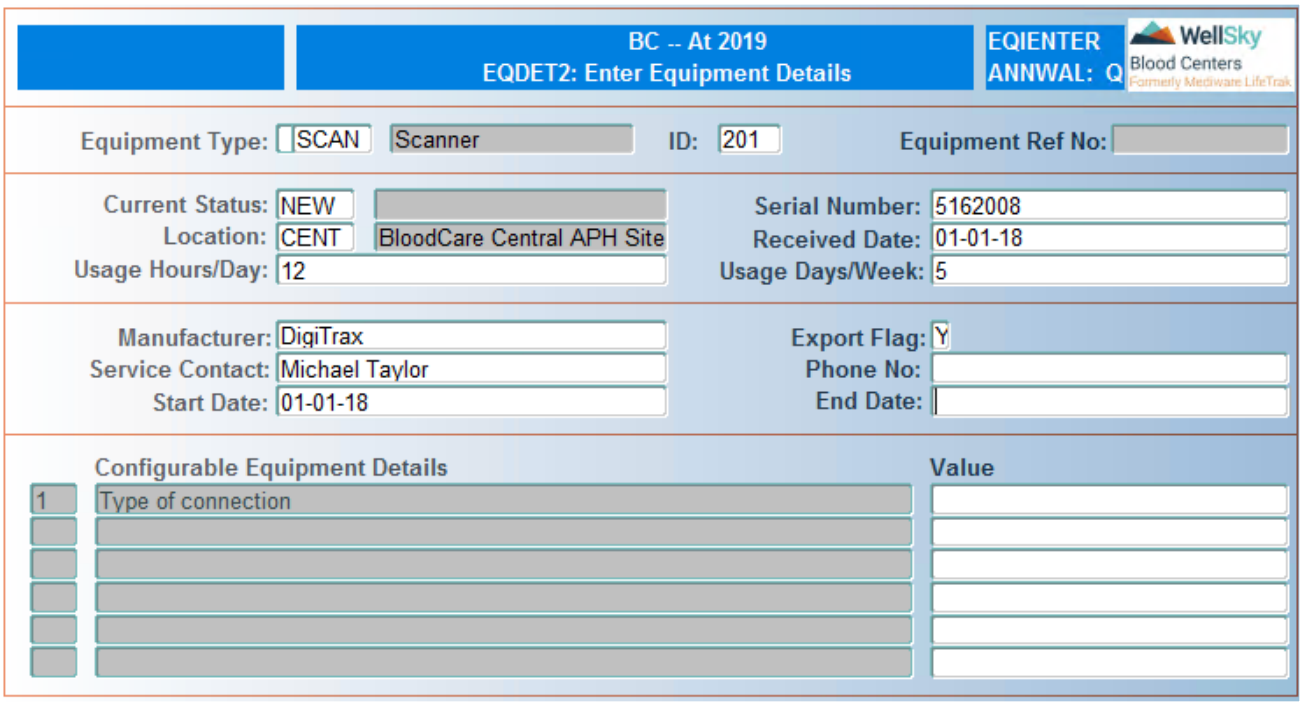


# Fields and Definitions

## Equipment Type

Enter equipment type or select from LOV.

## ID

Enter equipment ID. A maximum of 4 characters accepted. The system can accept an identifier that has been used but does not allow two instruments with the same ID to be placed into production simultaneously. When an entry is made to this field, the cursor advances to the Serial Number field.

## Equipment Ref No

The system populates this field when data is committed.

## Current Status

Production status of the equipment.


WellSky Corporation
Proprietary and confidential

## Serial Number

Enter the manufacturer's serial number. A maximum of 12 characters accepted. Duplicates for the same equipment type are not accepted.

## Location

Enter equipment location or select location from LOV.

## Received Date

Enter the instrument received date in MM-DD-YY format.

## Usage Hour/Days

Number of hours per day (1-24) the equipment will be used.

## Usage Day/Weeks

Number of days per week (1-7) the equipment will be used.

## Manufacturer

Enter the manufacturer's name. Maximum of 50 alphanumeric characters accepted. Entry is not required in this field.

## Export Flag

Enter `Y` if products collected from this equipment are licensed to ship out of state. Enter `N` or leave the field blank if products collected from this equipment are not licensed to ship out of state.

**NOTE –** Additional criteria is considered when determining product licensure status, including drive, site, product code, and product/equipment cGMP matrix.

## Service Contact

Enter name of person to contact for service. Maximum of 24 alphanumeric characters accepted. Entry optional.

## Phone No

Enter the service contact telephone number. Entry is not required in this field.

## Start Date

Enter the service contract effective date in MM-DD-YY format. Entry is not required in this field.

## End Date

Enter the service contract expiration date in MM-DD-YY format. Entry optional.

## Configurable Equipment Details

Specific details about the equipment that are configurable.

**NOTE –** Configurable equipment details must have been defined for this type of equipment in the Configure Equipment Worksheet supervisory screen. Mandatory fields are defined by the user in Configure Equipment Worksheet when the fields are defined.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Equipment General Functions menu.

## 25.2.2 Enter Equipment Downtime and Service Details (EQMAINT)

### Intended Use

Use the Enter Equipment Downtime and Service Details to create a record of equipment downtime and service events.

### Prerequisites

The equipment must exist in the database.

### Limitations

None

### Accessing the Screen

Access this screen from the Equipment Management menu or by entering the keyword `EQMAINT`.


WellSky Corporation
Proprietary and confidential

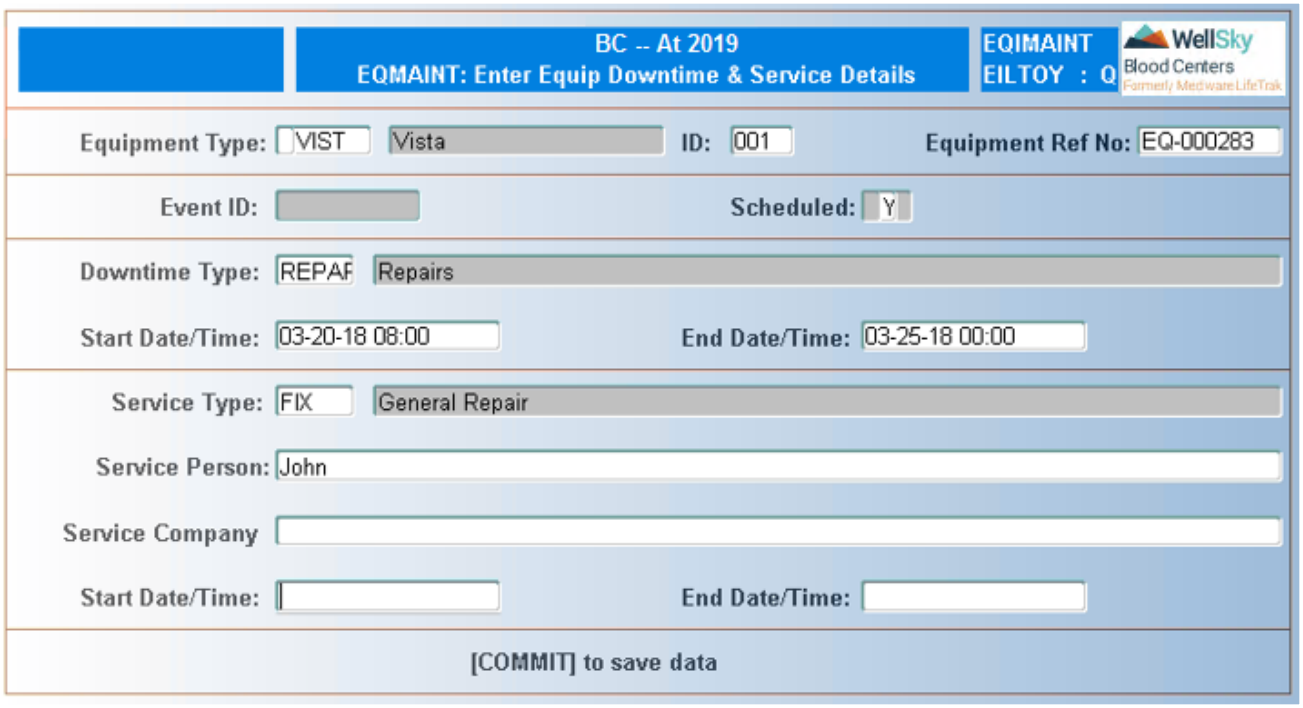


# Fields and Definitions

## Equipment Type

Scan the barcode on the instrument to populate all fields in the Control Block. The cursor advances to the Schedule field. If you manually enter a valid equipment type code or select from LOV, the cursor advances to the ID field.

## ID

Manually enter equipment or select equipment ID from LOV.

**NOTE –** Data is listed in LOV in the following order:

1. New instruments not yet in service.
2. Instruments in service.
3. Instruments removed from service.

## Equipment Ref No

Enter the equipment reference number or select equipment reference number from LOV.

## Event ID

Identifier for a maintenance event automatically generated by the system.

## Scheduled

Enter `Y` if the event was scheduled. Enter `N` if the event was not scheduled.

### Downtime Type
Enter the downtime type or select valid type from LOV.

### Start Date/Time
Enter the date and time the downtime began in MM-DD-YY HH24:MI format.

### End Date/Time
Enter the date and time the downtime ended in MM-DD-YY HH24:MI format.

### Service Type
Enter valid service type or select valid type from LOV.

### Service Person
Enter name of the company that performed the maintenance.

### Start Date/Time
Enter the date and time the maintenance began in MM-DD-YY HH24:MI format.

> **NOTE –** If downtime has been recorded for this event, the start date/time for service cannot precede the time downtime began.

### End Date/Time
Enter the date and time the maintenance ended in MM-DD-YY HH24:MI format.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Equipment General Functions menu.

# 25.2.3 Enter Equipment QC Details – First Tech (EQC1)

## Intended Use
This topic provides the procedure to create a record of a QC event performed on an instrument and the results obtained.

If Tech1 enters the overall QC result of unacceptable, the system will automatically change the status of the instrument to Down. A manual supervisory entry will then be required to bring the instrument back into service once the unacceptable QC event has been resolved.

## Prerequisites
An instrument must be defined, and the link between the QC type and the equipment type must have been entered in Maintain Valid Equipment QC Data (EQWS) screen.


WellSky Corporation
Proprietary and confidential

# Limitations

None

# Accessing the Screen

Access this screen from the Equipment General Management menu or by entering the keyword `EQC1`.

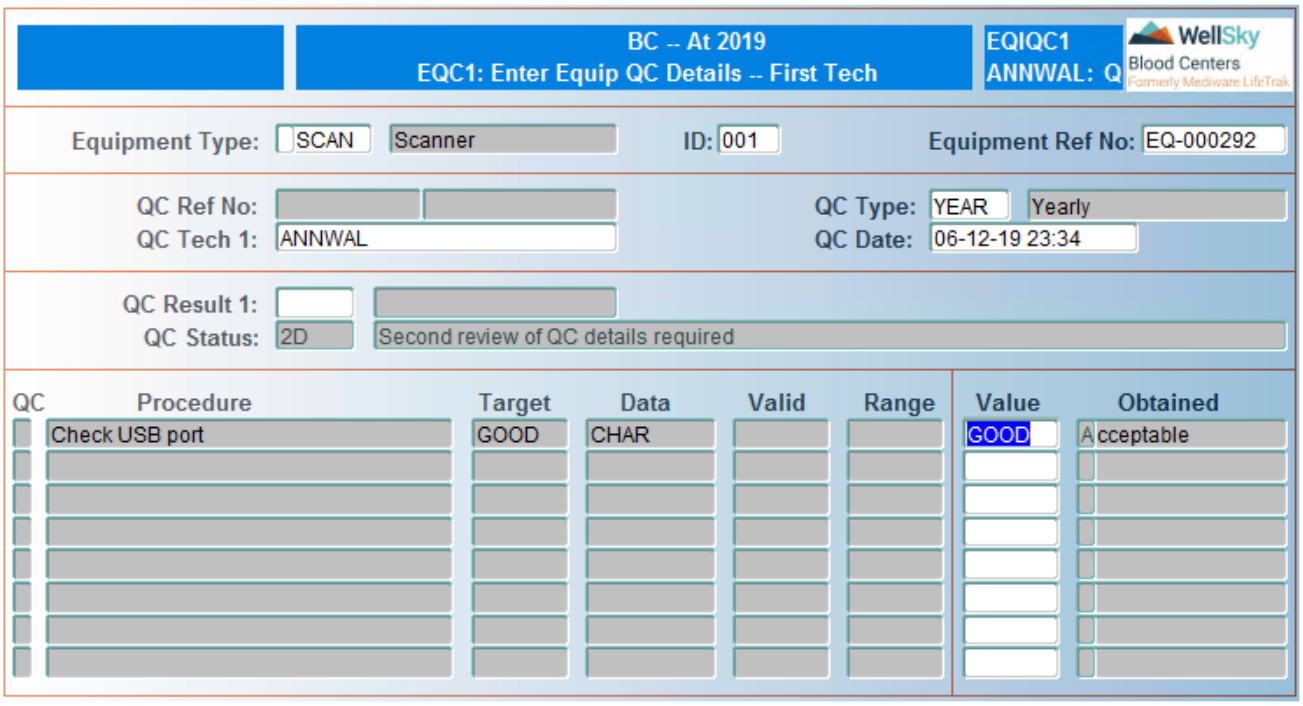


# Control Block Fields and Definitions

## Equipment Type

Scan or manually enter the equipment type. All fields populate automatically when scanned. The cursor advances to one of two fields in Control Block 1. If the instrument has scheduled QC events, the cursor advances to the QC Ref No field. If the instrument does not have scheduled QC events, the cursor advances to the QC Type field. Manual entry the cursor advances to the ID field.

## ID

Manually enter device ID or select from LOV.

**NOTE –** If the ID is valid for multiple devices, the cursor advances to the Equipment Ref No field, and a list of values is displayed.

## Equipment Ref No

Manually enter or select from LOV.

**NOTE –** If more than one instrument was defined for the specified equipment type and the ID was manually entered, a list of values is displayed. Select the appropriate equipment reference number and press ENTER.

If QC events are scheduled for the specified instrument, a window screen appears, displaying a list of scheduled QC events. Select the appropriate event and press ENTER. The cursor advances to the QC Date field. The QC Ref No and the QC Type field populate automatically. If you want to schedule a QC event that is not displayed, press F8 (Exit Screen) to terminate the window screen. The cursor advances to the QC Ref No. Not scheduled, the cursor advances to the QC Type field.

## QC Ref No(Display only)

Identifier for the QC event that has been defined for this instrument.

**NOTE –** When a QC event is selected in the window screen of scheduled QC events (Control Block), this field and the QC Type field populate automatically. The cursor advances to the QC Date field, or if not scheduled and not selected in the window screen of scheduled QC events (Control Block), this field stays blank. The cursor advances to the QC Type field. The system assigns a QC reference number when the screen is committed.

## QC Type

Enter the QC type, or select valid QC type from LOV.

**NOTE –** If a scheduled QC event exists for this instrument of the QC type selected, the schedule event is used. The system does not permit an unscheduled event to be performed when an event of the same QC type is already scheduled.

## QC Tech 1

ID of the person performing QC appears in field.

## QC Date

Enter scheduled date and time for QC event in MM-DD-YY HH24:MI format or press ENTER for the current date/time.

**NOTE –** This date represents the latest time that the QC event can be performed without becoming delinquent. Edit the displayed date/time to reflect the actual date/time the QC event was performed. If this is an unscheduled event, the date must be entered.

If a QC Worksheet for the QC type/equipment combination specified exists, it must be completed prior to recording a final QC result. The cursor advances to the Value Obtained field. If it does not exist the cursor advances to the QC Result 1 field.


WellSky Corporation
Proprietary and confidential

## QC Results 1

Enter valid QC result. Press **CTRL** + **F3** (Next Block) to move the cursor back and forth between the worksheet and the QC Result 1 field.

**NOTE –** For a scheduled event, the code S – Scheduled displays the unit for which a Tech 1 enters a final QC result code. Note the following:

- If a future date has been specified, the only QC result allowable is S – scheduled.
- If a worksheet exists for the equipment type/QC type specified, the latest result for each item in the worksheet must be Acceptable before the QC Result 1 entry may be acceptable. An initial result of Unacceptable in the QC worksheet may be overridden when a repeat test is performed with an acceptable result.
- If an unacceptable result is obtained when the QC event is performed and that QC event is repeated, the Unacceptable result must be recorded. To record, press **CTRL** + **F2** (Create Record) and record repeat results. The repeat results override the original result when the final result is confirmed.
- If a result of Unacceptable is entered by Tech1, the system changes the status (QC status field) to Down. A manual supervisory entry is required to bring the instrument back into service after the Unacceptable QC event has been resolved.

## QC Status(Display only)

Status of the QC event. A scheduled event for which a Tech 1 has not entered or committed a QC result, this field displays S – Scheduled.An unscheduled event, this field displays the level of review required for the event until a QC result is entered.

## QC Procedure

QC procedures defined for the instrument display.

## Target

Optimum value for each QC procedure display, if applicable.

## Data

Type of value referenced in the Target field displays. The entry must fall within the valid range defined to achieve an Acceptable result. However, if the type is CHAR, the result entered must exactly match data in the Target field to achieve an Acceptable result. If the type is FREE, any entry for result achieves an Acceptable result.

## Valid Range

Lower- and upper-range value limits for each QC procedure listed display, if applicable.

## Value Obtained

Enter value obtained for each QC procedure listed. As each value is entered, an interpretation displays to the righ: A– Acceptable U– Unacceptable.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Equipment General Functions menu. If the QC procedures entered for the equipment call for verification by a second tech, a different user must verify Tech 1 results using Equipment QC Details – Second Tech Entry screen.

# 25.2.4 Enter Equipment QC Details – Second Tech (EQC2)

## Intended Use

Use the Enter Equipment QC Details – Second Tech screen to verify results recorded by the first tech for all QC events requiring second tech review. Second tech review of a QC event can be configured to one of the following:

- Verification of the final result interpretation by a second tech.
- Detail verification of the result for each worksheet item, as well as the final QC result interpretation by a second tech.

## Limitations

None

## Prerequisites

A QC event must exist for an instrument for which verification by a second tech is pending, and first tech final result entry of A or U must have been already been entered using the Equipment QC Details – First Tech Entry screen. The user ID of the second tech must differ from that of the first tech.

## Accessing the Screen

Access this screen from the Equipment General Management menu or by entering the keyword `EQC2`.


WellSky Corporation
Proprietary and confidential

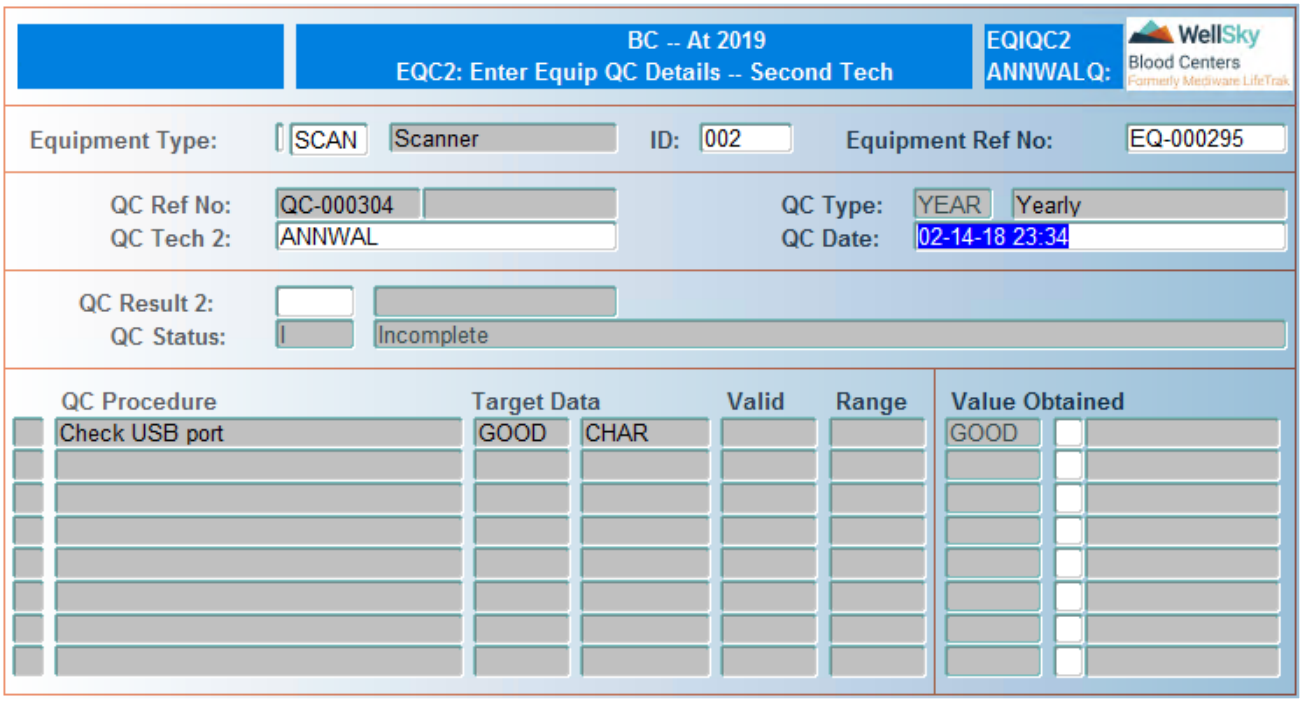


# Control Block Fields and Definitions

## Equipment Type

Scan or manually enter the equipment type. All fields populate automatically when scanned. The cursor advances to one of two fields in Control Block 1. If the instrument has scheduled QC events, the cursor advances to the QC Ref No field. If the instrument does not have scheduled QC events, the cursor advances to the QC Type field. Manual entry the cursor advances to the ID field.

## ID

Manually enter device ID or select from LOV.

**NOTE –** If the ID is valid for multiple devices, the cursor advances to the Equipment Ref No field, and a list of values is displayed.

## Equipment Ref No

One instrument exists for the specified ID or the ID was selected from a list of values, a reference number displays automatically, or an ID was manually entered and multiple instruments exist for that ID, a list of values displays. Select the appropriate reference number and press ENTER to accept, or QC events are pending for second tech entry, a window appears. Select the desired event and press ENTER. The cursor advances to the QC Date field (Master Block 1).

## QC Ref No (Display only)

Identifier for the QC event that has been defined for this instrument.

**NOTE –** When a QC event is selected in the screen of scheduled QC events (Control Block), this field and the QC Type field populate automatically. The cursor advances to the QC Date field, or not scheduled and not selected in the window screen of scheduled QC events (Control Block), this field stays blank. The cursor advances to the QC Type field. The system assigns a QC reference number when the screen is committed.

### QC Type
QC type associated with the QC event selected displays.

### QC Tech 2
QC tech 2 user ID displays.

### QC Date
Enter date and time QC event was performed in MM-DD-YY HH:MI format. Press ENTER to accept the entry, or modify the date and time to the reflect the correct data.

### QC Results 2
Valid QC result code. If the review type requires only Tech2 verification of the Tech1 final results entry, Tech2 enters a final result here, or a detailed review is required and all applicable worksheet items have been verified as Acceptable, Tech2 can enter only a final result of Acceptable.

### QC Status
Indicator that QC status is incomplete (I) pending second tech review or a discrepancy exists between the Tech1 final result and the Tech2 final result.

### QC Procedure
Displays QC procedures defined for the instrument.

### Target
Displays optimum value for each QC/procedure if appropriate.

### Data
Displays type of value referenced in the Target field for each QC procedure.

### Valid range
Displays lower-end and upper-range value limits for each QC procedure list, if applicable.

### Value Obtained
Verification of each worksheet item. A=Acceptable U=Unacceptable

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Equipment General Functions menu.


WellSky Corporation
Proprietary and confidential

# 25.2.5 Edit Equipment Details (EQEDIT)

## Intended Use

Use the Edit Equipment Details screen to edit details for a specific instrument.

## Prerequisites

The instrument for which details are to be edited must exist in the system. System security features restrict user access to equipment that has been defined for, and is appropriate to, a user's work area.

## Limitations

None

## Accessing the Screen

Access this screen from the Equipment General Management menu or by entering the keyword `EQEDIT`.

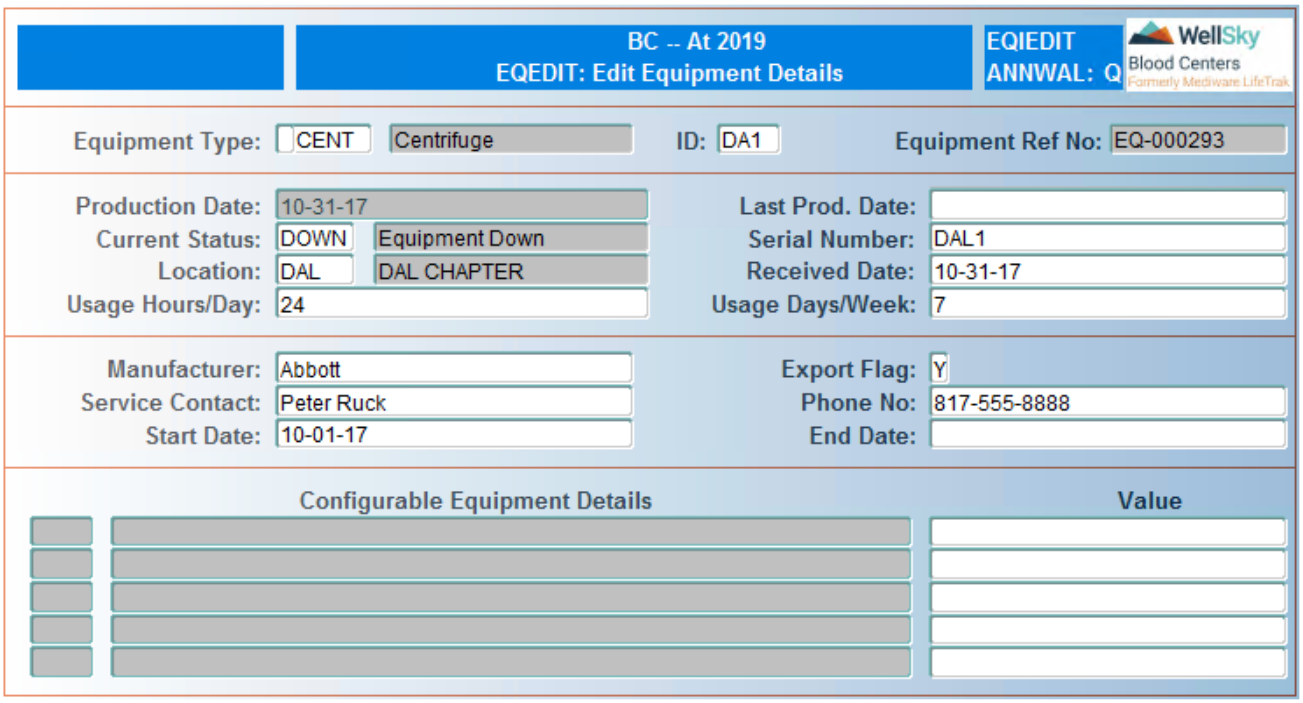


## Fields and Definitions

### Equipment Type

Scan or manually enter equipment type. The fields will populate automatically in the control block when scanned. Manual entry cursor goes to the ID field.

### ID

Manually enter ID or select from LOV.

**NOTE –** If the ID is valid for one device, the valid entry is accepted. The cursor advances to the Equipment Ref No field, and the valid reference number is displayed. If the ID is valid for multiple devices, the cursor advances to the Equipment Ref No field, and a list of values is displayed or by pressing LOV. The list of values displayed for the specified equipment type includes the equipment ID, equipment reference number, and services dates. To select an ID, use the Up and Down arrow keys. Pressing ENTER enters the selected ID into the ID field. Pressing ENTER a second time advances the cursor to the Equipment Ref No field (Control Block).

## Equipment Ref No

Enter valid equipment reference number or select from LOV.

## Production Date

Date the specified instrument was first placed in production displays.

## Last Production Date

Date, if applicable, that a final production date has been defined for permanently removing the specified instrument from service in MM-DD-YY format. After entering the date, while the cursor is still in the field, press F12 (Commit). The current status will then be updated to OUT.

**NOTE –** Once you update the status, it can be updated again.

## Current Status

Enter instrument status or select from LOV.

**NOTE –** If you press F12 (Commit) while the cursor is still in the *Last Production Date* field and no changes have been made, you will receive error 8103, no changes to commit.

## Serial Number

Enter serial number, select from LOV, or press ENTER to accept default.

## Location

Enter valid location code, select from LOV, or press ENTER to accept default.

## Received Date

Enter the instrument received date in MM-DD-YY format.

## Usage Hour/Days

Number of hours per day (1-24) the equipment will be used.

## Usage Day/Weeks

Number of days per week (1-7) the equipment will be used.


WellSky Corporation
Proprietary and confidential

### Manufacturer
Enter the manufacturer's name. Maximum of 50 alphanumeric characters accepted. Entry optional.

### Export Flag
Enter `Y` if products collected from this equipment are licensed to ship out of state. Enter `N` or leave the field blank if products collected from this equipment are not licensed to ship out of state.

> **NOTE –** Additional criteria is considered when determining product licensure status, including drive, site, product code, and product/equipment cGMP matrix.

### Service Contact
Enter name of person to contact for service. Maximum of 24 alphanumeric characters accepted. Entry optional.

### Phone No
Enter the service contact telephone number. Entry optional.

### Start Date
Enter the service contract effective date in MM-DD-YY format. Entry optional.

### End Date
Enter the service contract expiration date in MM-DD-YY format. Entry optional.

### Configurable Equipment Details
Field automatically displays equipment detail, if present.

### Value
Enter valid value or select valid entry from LOV. Navigation to this field is allowed only if the equipment has customized entries.

## What to Do Next
For Normal processing, press **F8** (Exit Screen) to return to the Equipment General Functions menu.

# 25.2.6 Edit Equipment Downtime and Service Details (EQEDTMN)

## Intended Use
Use the Edit Equipment Downtime and Service Details screen to edit downtime and service events for a specific instrument. This screen may not be used to enter a new downtime or service event. Use the Enter Equip Downtime and Service Details screen to enter new events.

## Limitations

None

## Prerequisites

The instrument for which details are to be edited must exist in the system. System security features restrict user access to equipment that has been defined for, and is appropriate to, a user's work area.

## Accessing the Screen

Access this screen from the Equipment General Management menu or by entering the keyword `EQEDTMN`.

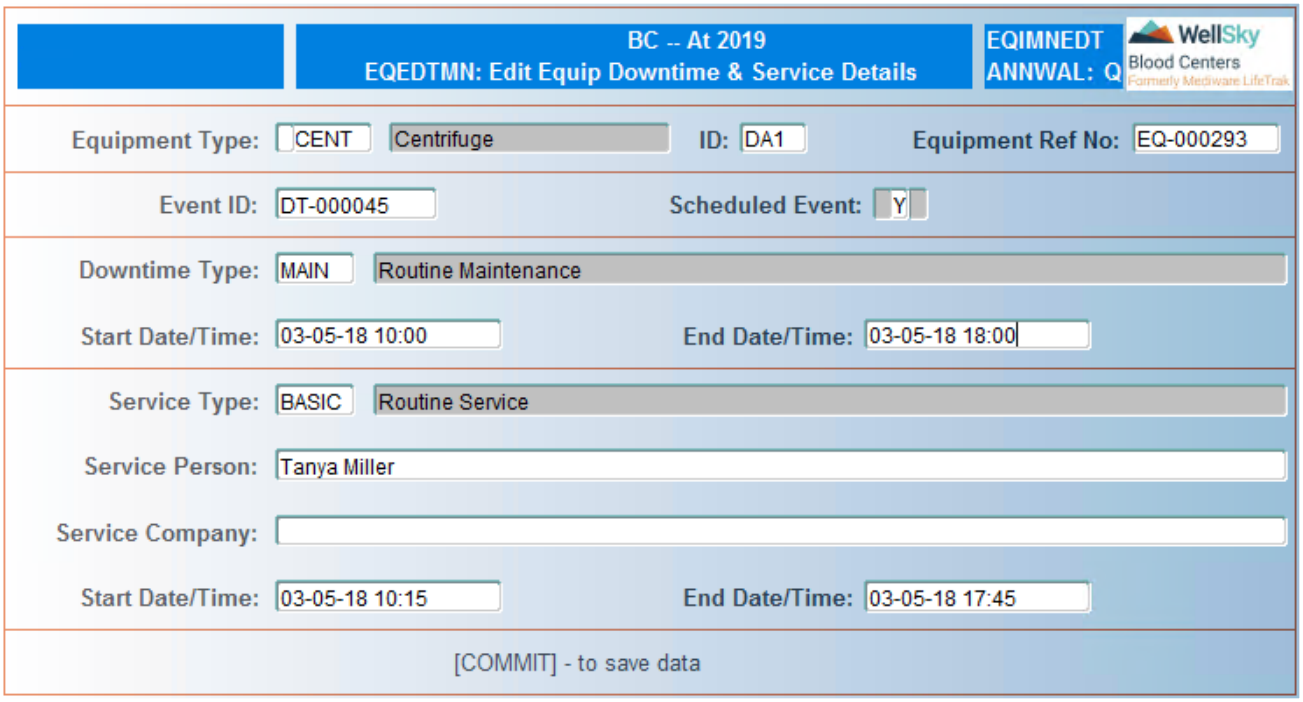


## Fields and Definitions

### Equipment Type

Scan instrument barcode to populate all fields in the Control Block, or manually enter a valid equipment code, or select valid equipment type from LOV.

### ID

Enter valid equipment ID, or select valid equipment ID from LOV.

### Equipment Ref No

Enter valid equipment reference number or select from LOV.

### Event ID

Displays valid event IDs. Values are displayed in descending order.


WellSky Corporation
Proprietary and confidential

### Scheduled Event
Enter Y for scheduled maintenance events. Enter N for unscheduled maintenance events.

### Start Date/Time
Enter date and time the downtime started in MM-DD-YY HH24:MI field.

### Downtime Type
Enter valid downtime type, or select valid type from LOV.

### End Date/Time
Enter date and time the downtime ended  in MM-DD-YY HH24:MI field.

**NOTE –** This field can be left blank when entering downtime not yet ended.

### Service Type
Enter valid service type, or select valid service type from LOV.

### Service Person
Enter service person name.

### Service Company
Enter service company name.

### Start Date/Time
Enter date and time the maintenance began in MM-DD-YY HH24:MI format.

**NOTE –** If downtime has been recorded for this event, the start date/time for service cannot precede the time downtime began.

### End Date/Time
Enter date and time the maintenance ended in MM-DD-YY HH24:MI format.

**NOTE –** Leave this field blank for an event still in progress. The end date/time for service must precede the end date/time for any downtime entered for this event.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Equipment General Functions menu.

# 25.2.7 Equipment Worksheet Report (EQWORK)

## Intended Use

Use the Equipment Worksheet Report to generate a blank QC worksheet to use while recording QC details away from the computer or to print a QC worksheet complete with details previously entered into the computer.

## Generating the Report

The following parameters must be entered to generate the report.

### Chapter ID

Select valid chapter IDs from the LOV. Only one may be specified.

### Equipment Type ID

Enter `ALL` to specify equipment types; LOV is not available. Press the DOWN arrow key to move to the next parameter.

### Equipment ID

Enter `ALL` to specify all equipment IDs, or press **ENTER** to specify additional equipment IDs. LOV is not available. Press the DOWN arrow key to move to the next parameter.

### QC Type

Enter `ALL` to specify all QC types, or press **ENTER** to specify additional QC types. **LOV** is not available. Press the DOWN arrow key to move to the next parameter.

### From Date

Earliest date to be considered in MM-DD-YYYY format.

### To Date

Latest date to be considered in MM-DD-YYYY format.

## What to Do Next

For normal processing, press **F8 (Exit Screen)** to return to the Equipment General Functions menu.


WellSky Corporation
Proprietary and confidential

# Sample Report

05-16-07 10:19 Equipment Report LCTS03 EQRWRKSH :Q
Rel: 01 Your Blood Center, Anywhere, USA Page: 1 of 1

Chapter: WAD UNIX 3.1

Equipment Type: 3000 Fenwal CS3000 ID: 1029 Reference No: EQ-000033

QC Type: QC Quality Control QC Ref. No: QC-000085
QC Status: I Incomplete QC Date: 16-MAY-2007 10:1

QC Result: Acceptable | QC Performed By: Celeste Hunter

QC Review: | QC Reviewed By: | Date/Time:

| Seq | Worksheet Item Description | Units of Measure | Target | MinVal | MaxVal | Observed |
|---|---|---|---|---|---|---|
| 1 | rpm | Rmps | 2500 | 2495 | 2505 | 2500 |

# 25.3 Equipment Supervisory Functions

Equipment Supervisory Functions are accessed from the following menu:

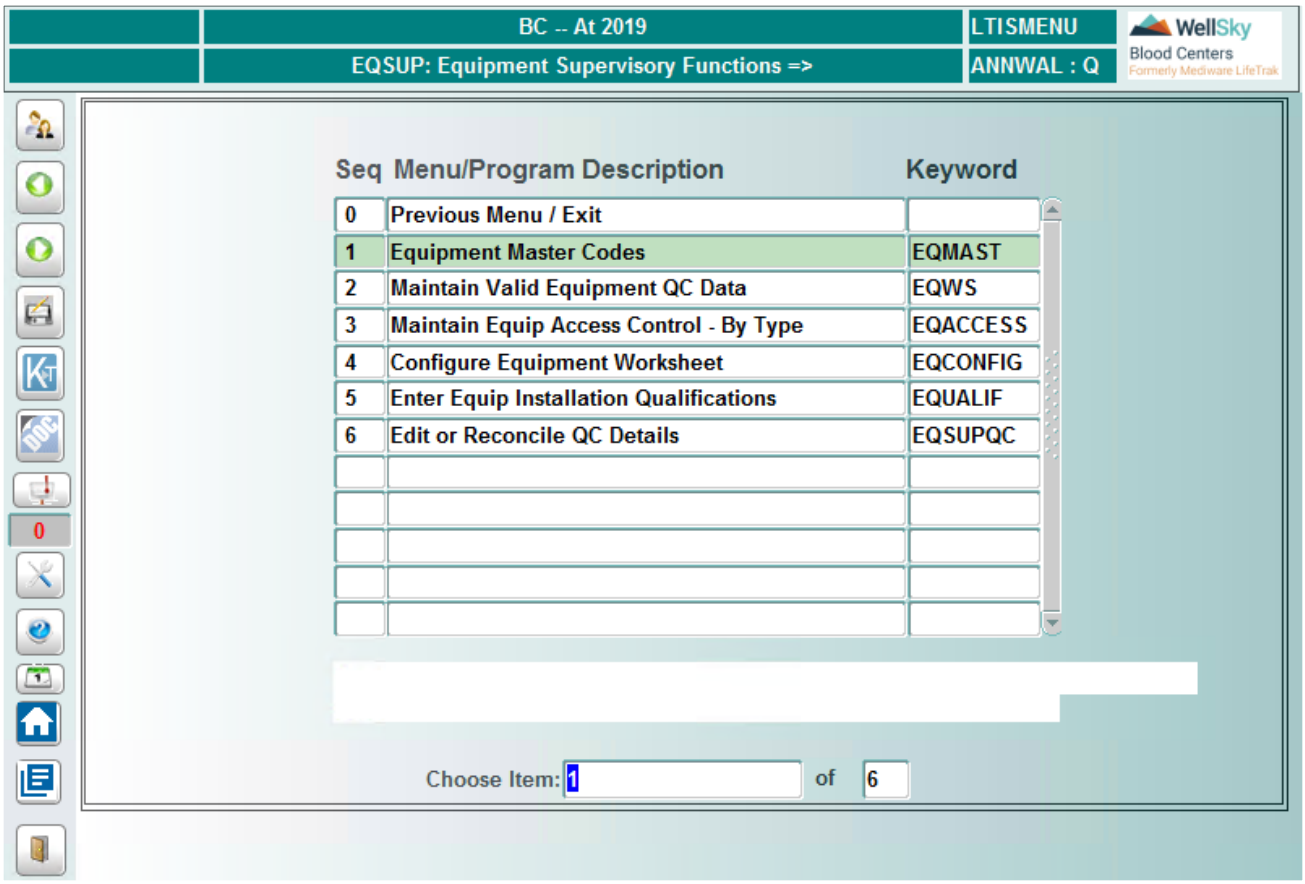


## 25.3.1 Maintain Valid Equipment QC Data (EQWS)

### Intended Use

Use Maintain Valid Equipment QC Data screen to establish the QC parameters that will be entered for each piece of equipment. This table is used to define the QC procedures to be performed for the equipment type including:

- Review level.
- Performance frequency.
- If the QC procedure is required for equipment installation qualification.

A customized worksheet can also be created specifying QC steps and the acceptable result for each step.

### Limitations

None


WellSky Corporation
Proprietary and confidential

# Prerequisites

Equipment Master Codes must have been defined.

# Accessing the Screen

Access this screen from the Maintain Valid Equipment QC Data menu or by entering the keyword `EQWS`.

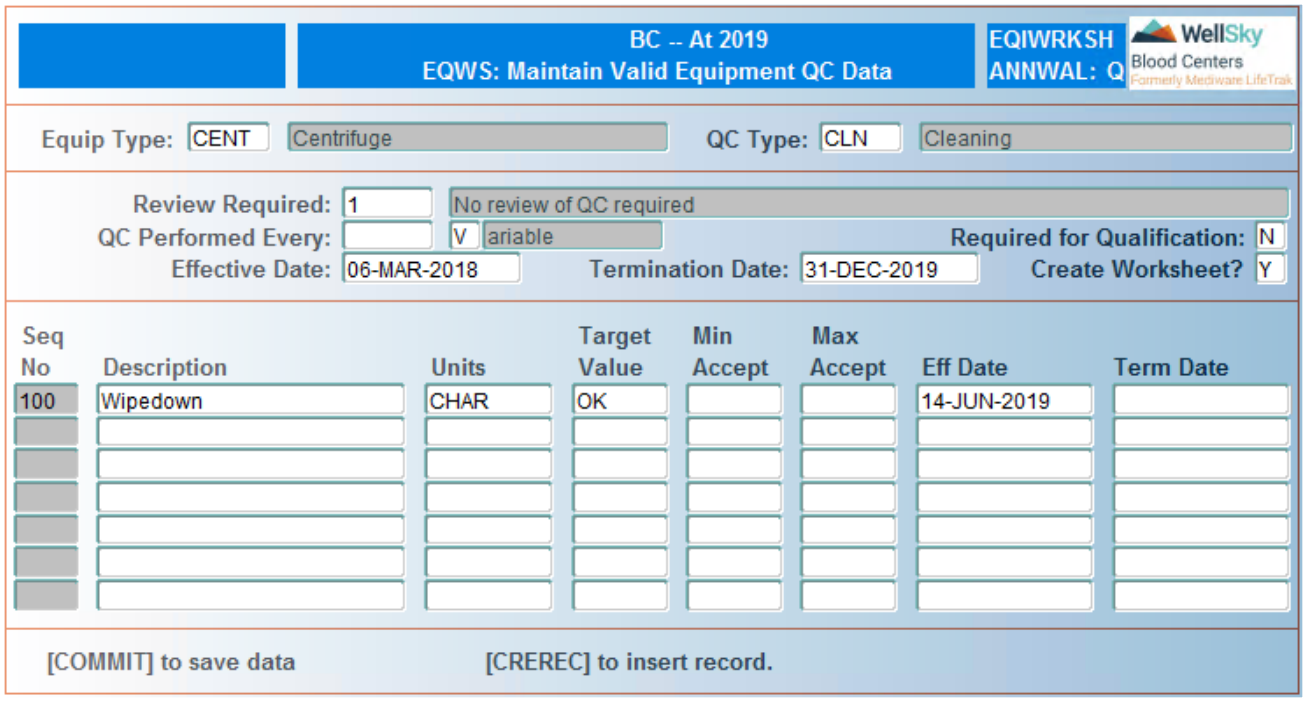


# Fields and Definitions

## Equipment Type

Enter valid equipment type or select from LOV.

## QC Type

Enter the QC procedure or select from LOV.

## Review Required

Enter the level of review required, or select valid level from LOV as follows:

- `1` – one tech entry, no tech review.
- `2H` – second review of final interpretation.
- `2D` – second review and entry of QC details.

**NOTE –** These values are hard coded within the system.

## QC Performed Every...

Enter frequency and performance period, or select frequency from LOV.

**NOTE –** Leaving this field blank indicates a variable frequency.

## Required for Qualification

Enter `Y` if this QC type is required to be completed and acceptable before the equipment can be qualified and placed into production, or enter `N` if QC is not required to be completed prior to qualification and use.

## Effective Date

Enter QC procedure effective date in DD-MON-YYYY format.

## Termination Date

Enter QC Procedure termination date in DD-MON-YYYY format.

## Create Worksheet

Indicates if a customized worksheet is defined for this equipment type: Enter `Y` or `N`.

**NOTE –** Permits entry of procedure steps in the next block.

## Seq No.

This is defined by the system. First sequence starts with 100.

**NOTE –** This is not a user entry field.

## Description

Enter or modify the description of the QC step to be performed in this field.

## Units

Enter or modify the unit of measure to be measured, or select valid unit from LOV.

**NOTE –** If user chooses the code CHAR, the minimal and maximum acceptable range is not entered.

## Target Value

Enter the needed value for this parameter.

## Min. Accept

Enter the value that will be the minimal requirement for this parameter.


WellSky Corporation
Proprietary and confidential

### Max Accept

Enter the value that will be the maximum requirement for this parameter.

> **NOTE –** The minimal and maximum value should complete an acceptable range.

### Effective Date

Enter the effective date for the QC procedure in DD-MON-YYYY format.

### Termination Date

Enter termination date for the QC procedure in DD-MON-YYYY format.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Equipment Supervisory Functions menu.

# 25.3.2 Maintain Equipment Access Control – by Type (EQACCESS)

## Intended Use

Use Maintain Equipment Access Control- by Type screen to assign access levels by function group for access to equipment in order to preclude update or access by other function groups not having appropriate authorization. This screen can be used to define access or query access for a specific group.

## Limitations

None

## Prerequisites

- Equipment Master Codes must have been defined.
- Function groups must have been defined.

## Accessing the Screen

Access this screen from the Equipment Supervisory menu or by entering the keyword `EQACCESS`.

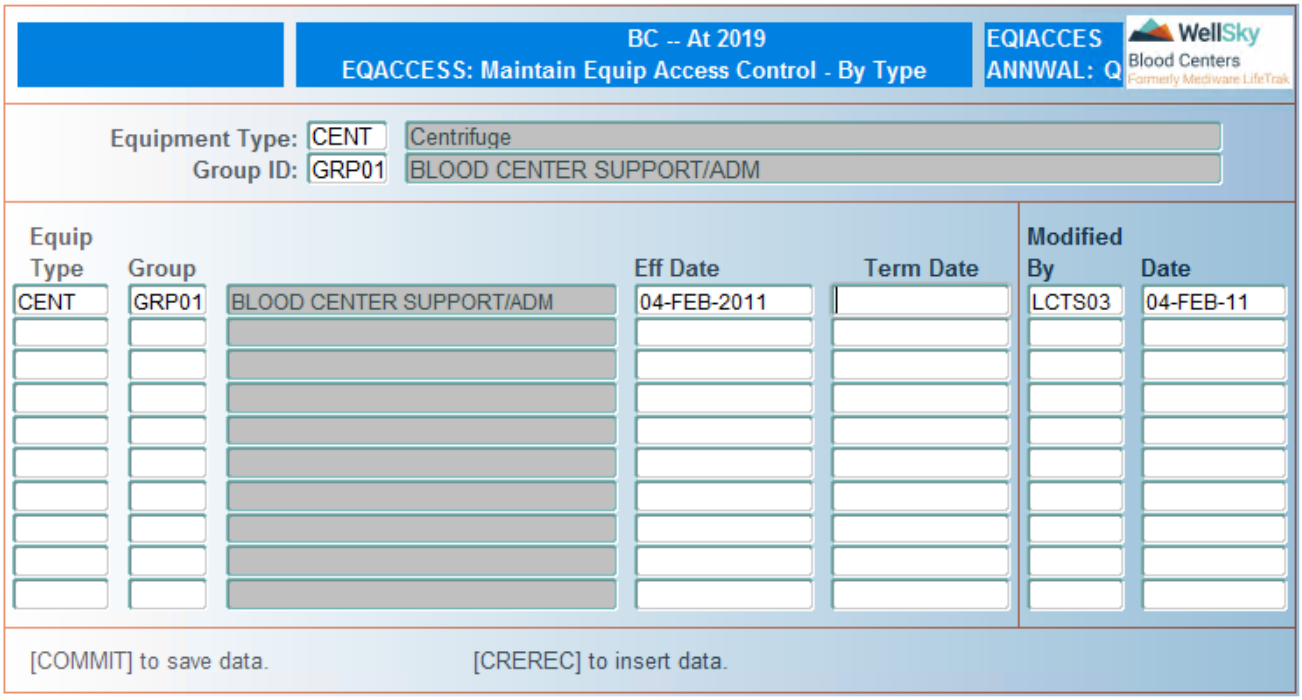


# Fields and Definitions

## Equipment Type

Enter valid equipment type, or select valid equipment type from LOV.

## Group ID

Enter the group ID, or select a valid group ID from LOV.

**NOTE –** This is not a required field. Only if being used to query equipment for a specific group. These groups are defined using Defined Group (GROUPS). This is performed by the System Administrator.

## Equipment Type

Enter a valid equipment type, or select valid type from LOV.

**NOTE –** LOV displays valid equipment type codes that were defined in Equipment Master Codes.

## Group

Enter the group ID, or select valid group from LOV.

**NOTE –** These groups are defined using Defined Group (GROUPS). This is performed by the System Administrator.


WellSky Corporation
Proprietary and confidential

### Effective Date
Enter QC Procedure effective date in DD-MON-YYYY field.

### Termination Date
Enter QC Procedure termination date in DD-MON-YYYY format.

### Modified by
System automatically displays tech ID that modified that entry.

### Modified Date
System automatically displays last modification date.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Equipment Supervisory Functions menu.

# 25.3.3 Configure Equipment Worksheet (EQCONFIG)

## Intended Use
Use Configure Equipment Worksheet screen to identify equipment data that are not required as part of a quality control procedure but which should be documented. The data entered in this table displays as required (if entered as such) data entry fields in this screen Enter Equipment Details (EQDET2) that are used to document receipt of equipment.

## Limitations
None

## Prerequisites
Equipment Master Codes must have been defined.

## Accessing the Screen
Access this screen from the Equipment Supervisory menu or by entering the keyword `EQCONFIG`.

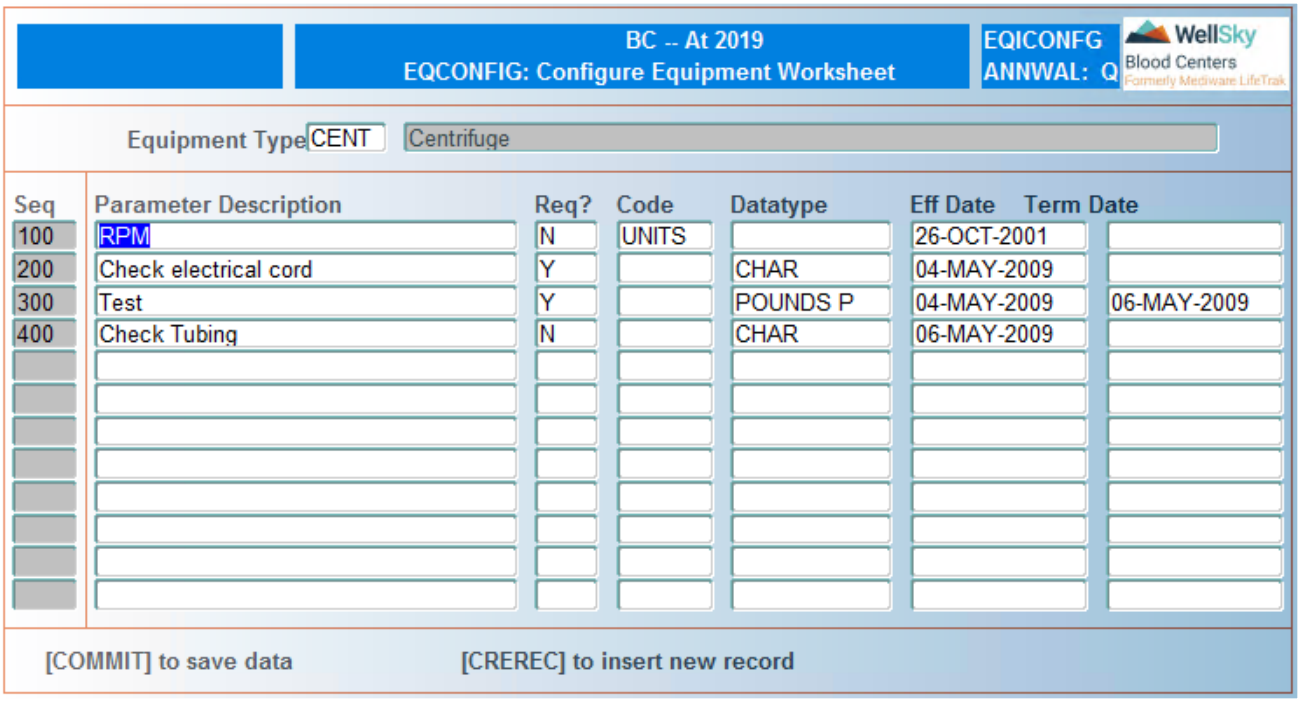


# Fields and Definitions

## Equipment Type

Enter a valid equipment type, or select valid type from LOV.

**NOTE –** LOV displays valid equipment type codes that were defined in Equipment Master Codes.

## Seq

Field automatically populates after each line is entered.

## Parameter Description

Enter the group ID.

## Req?

Enter `Y` if parameter is required, or enter `N` if parameter is not required.

## Code

Enter the code, or select valid code from LOV.

**NOTE –** If left blank the cursor moves to datatype.

## Datatype

Enter valid data type or select from LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** If left blank the cursor moves to datatype.

### Effective Date

Enter QC procedure effective date in DD-MON-YYYY format.

### Termination Date

Enter the QC Procedure termination date in DD-MON-YYYY format.

## What to Do Next

For normal processing, press **F8 (Exit Screen)** to return to the Equipment Supervisory menu.

# 25.3.4 Enter Equipment Installation Qualifications (EQUALIF)

## Intended Use

Use Enter Equipment Installation Qualifications screen to record qualification of an instrument prior to its use in production. Results of individual QC Procedures required for qualification are recorded in the Equipment QC Detail screens for both Tech1 and Tech2. While completion of all QC procedures required for qualification is prerequisite to installation qualification, this supervisory screen is used to record only final confirmation that the instrument is qualified to be used in the production environment and to set the first production date.

## Limitations

None

## Prerequisites

All scheduled QC must be completed and acceptable before an instrument can be placed in service even though that QC event is not required for instrument qualification.

## Accessing the Screen

Access this screen from the Equipment Supervisory menu or by entering the keyword `EQUALIF`.

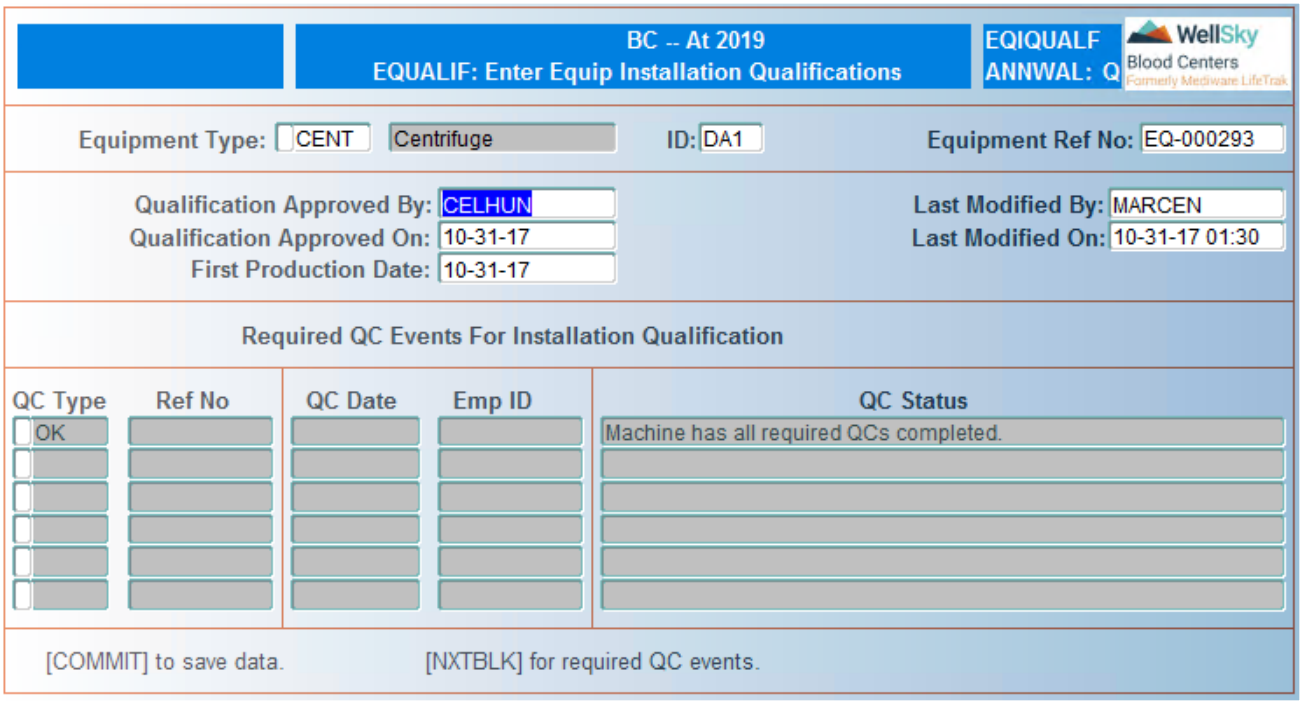


# Fields and Definitions

## Equipment Type

Enter valid equipment type, select from LOV, or scan equipment barcode.

**NOTE –** If the barcode is scanned, all fields in the Control Block automatically populate.

## ID

Enter valid equipment ID, or select valid ID from LOV.

**NOTE –** LOV displays IDs in the following order: (1) new instruments not yet in service, (2) instruments in service and (3) instruments removed from service.

## Equipment Ref No.

Enter valid equipment ID, or select valid ID from LOV.

## Qualification Approved By

ID of the user who last approved the qualification procedures for the specific instrument.

## Qualification Approved On

Date the instrument  procedures were last approved.


WellSky Corporation
Proprietary and confidential

### First Production Date
Date the instrument is scheduled to be placed into production.

### Last Modified by
ID of the user who last modified this screen automatically displays.

### QC Type
Type or QC event required automatically displays.

### Ref No.
Identifier for the equipment reference number automatically displays.

### QC Date
Date for which the QC event is scheduled automatically displays.

### Emp ID
ID of the user who completed the QC event automatically displays.

### QC Status
Current status of the QC event automatically displays.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Equipment Supervisory Functions menu.

# 25.3.5 Edit or Reconcile Equipment QC Details (EQSUPQC)

## Intended Use
Use Edit or Reconcile Equipment QC Details to resolve discrepancies recorded as QC event were performed. The supervisor may also use this screen to view the QC status of an instrument for which QC results are still pending.

## Limitations
None

## Prerequisites
Only a supervisor may access or make an entry into this screen and for only those instruments having pending or unacceptable QC results.

## Accessing the Screen
Access this screen from the Equipment Management menu or by entering the keyword `EQSUPQC`.

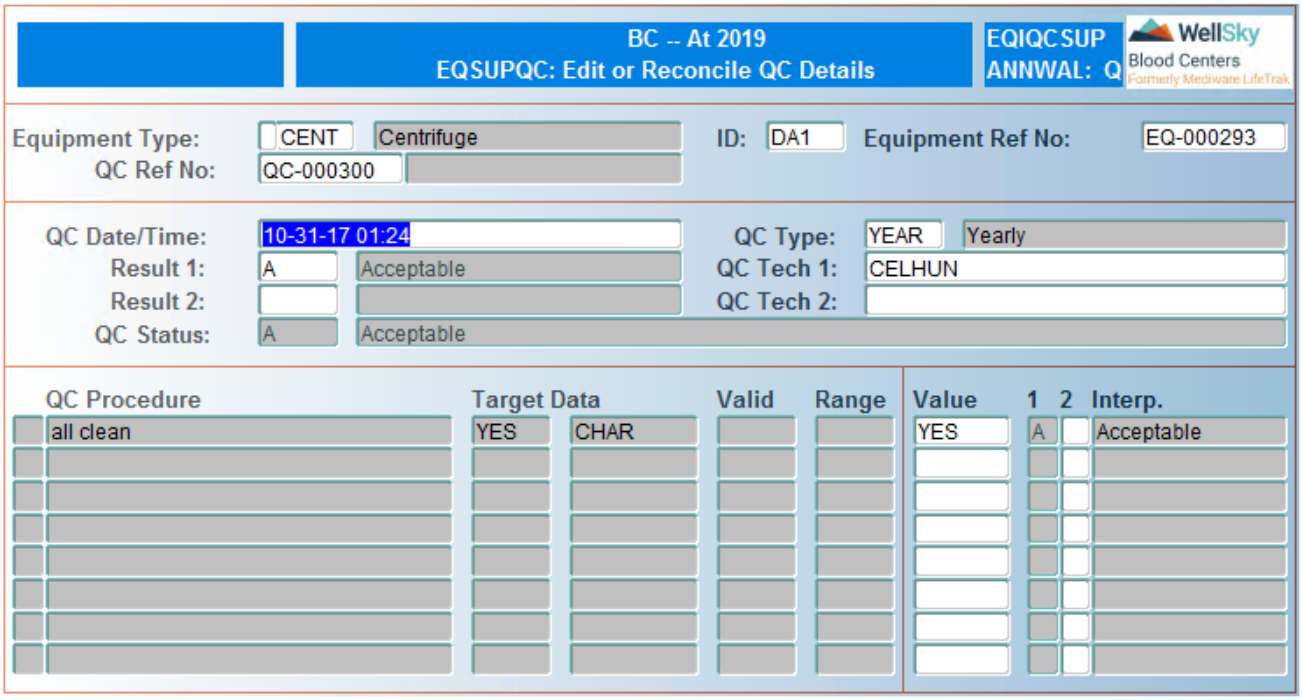


# Fields and Definitions

## Equipment ID

Enter valid equipment type or select from LOV, or scan the barcode on the instrument to populate all fields in the Control Block.

## ID

Enter valid equipment ID or select from LOV.

LOV displays ID in the following order:

1. New instruments not yet in service.
2. Instruments in service.
3. Instruments removed from service.

## Equipment Ref No

Enter equipment reference number or select from LOV.

## QC Ref No

Enter valid QC reference number or select from LOV.

## QC Date/Time

Enter QC date and time in MM-DD-YY HH24:MI format.


WellSky Corporation
Proprietary and confidential

## QC Type
Valid QC type automatically displays.

## Result 1
Enter the tech 1 QC result or select from LOV.

## QC Tech 1
User ID of the tech who completed the QC event and entered the final result displayed in the Result 1 field automatically displays. If tech 2 review is: required by the QC procedure and that review is not complete, no entry is permitted in the Tech 2 fields on this screen, entered a final result, the cursor advances the Result 2 field.

## Result 2
Enter tech 2 QC result, or select valid result from LOV.

## QC Tech 2
User ID of the tech who completed the QC review and entered the final result in the Results 2 field automatically displays.

## QC Procedure
QC procedures defined for the instrument automatically displays.

## Target Data
Value representing the optimum result for each procedure, followed by the unit of measure referenced by the value automatically displays.

## Valid Range
Minimum and maximum values establish acceptable limits for each procedure automatically displays, if applicable.

## Value
Enter the value entered by Tech 1 for each procedure.

**NOTE –** A supervisor may change the value entered by Tech 1, which causes a reinterpretation of the result. The cursor rests in this field for resolution of a discrepancy. If the: Change results in an unacceptable result for Tech1 and an interpretation of Acceptable, the discrepancy is resolved. Interpretation is Discrepancy, the supervisor may change the Tech2 result to resolve the discrepancy.

## 1
Results entered by Tech1 for each procedure automatically display.

## 2
Enter valid result.

**NOTE –** Results entered by Tech2 for each procedure will appear in this column. The supervisor may modify this result to agree with the Tech1 result to resolve the discrepancy.

### Interp

Result interpretation for each procedure automatically displays.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Equipment Supervisory Functions menu.


WellSky Corporation
Proprietary and confidential

# 25.4 Equipment Queries

Equipment Queries are accessed from the following menu:

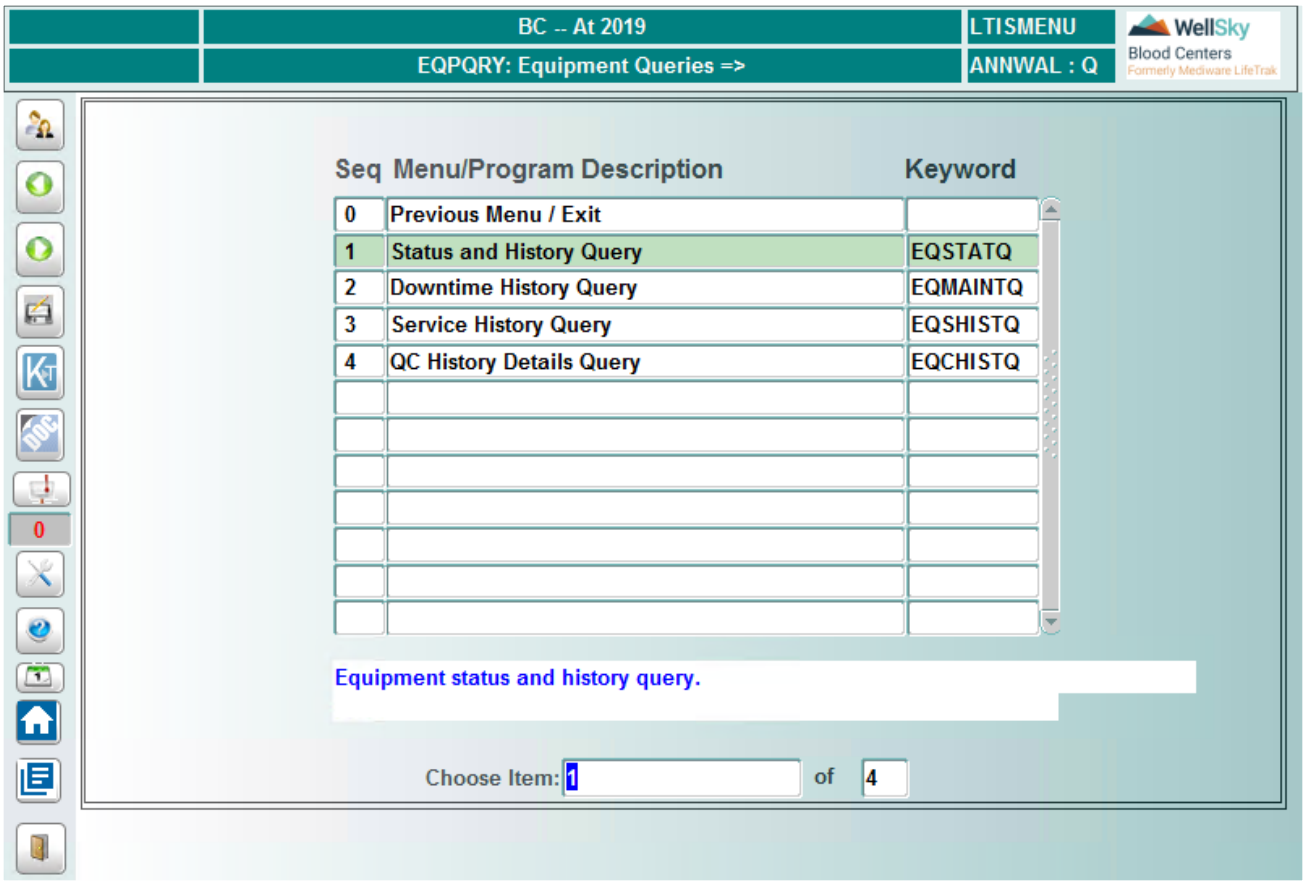


## 25.4.1 Status and History Query (EQSTATQ)

### Intended Use

Use the Status and History Query screen to view the current status and history of equipment. You can limit the extent of the query by specifying an equipment type, machine ID, system-assigned reference number, or a specific status code.

### Limitations

None

### Prerequisites

None

# Accessing the Screen

Access this screen from the Equipment Queries menu or by entering the keyword EQSTATQ.

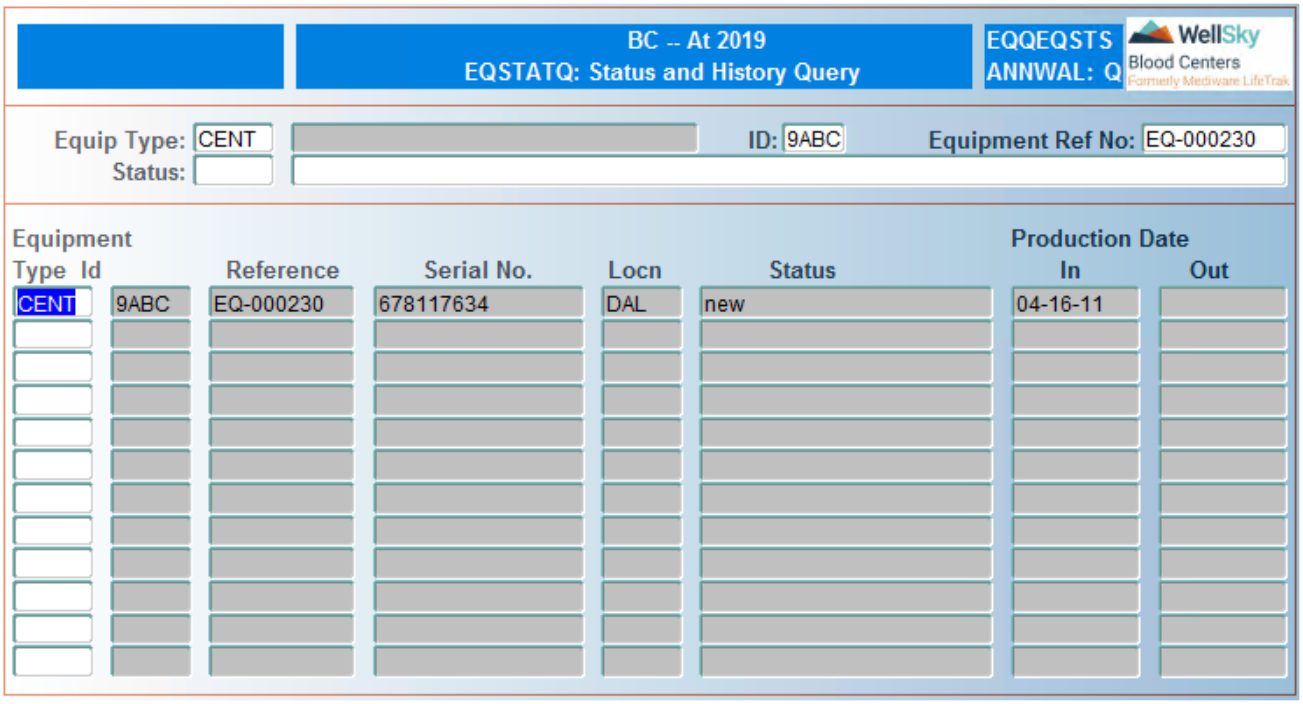


## Equipment Type Status

Enter manually; otherwise leave blank.

## ID

Enter manually for querying on one piece of equipment.

## Equipment Reference No.

Equipment reference number displays.

## Equipment Type

If you enter a specific type of equipment the query will only display that type. If a type was not selected it will display all types with current status.

## Equipment ID

ID of the equipment assigned by the user.

## Reference

System generated number when equipment is entered into the system.

## Serial No.

Serial Number on the equipment.


WellSky Corporation
Proprietary and confidential

## Locn
Equipment location.

## Status
Current Status.

## Production Date In
Date en the equipment was put into production.

## Production Date Out
Date the equipment was taken out of production.

# To Review Data for This Unit

**NOTE –** Cursor must be at Drive ID.

To review additional data about the unit, press F6 (Menu). The following window opens:

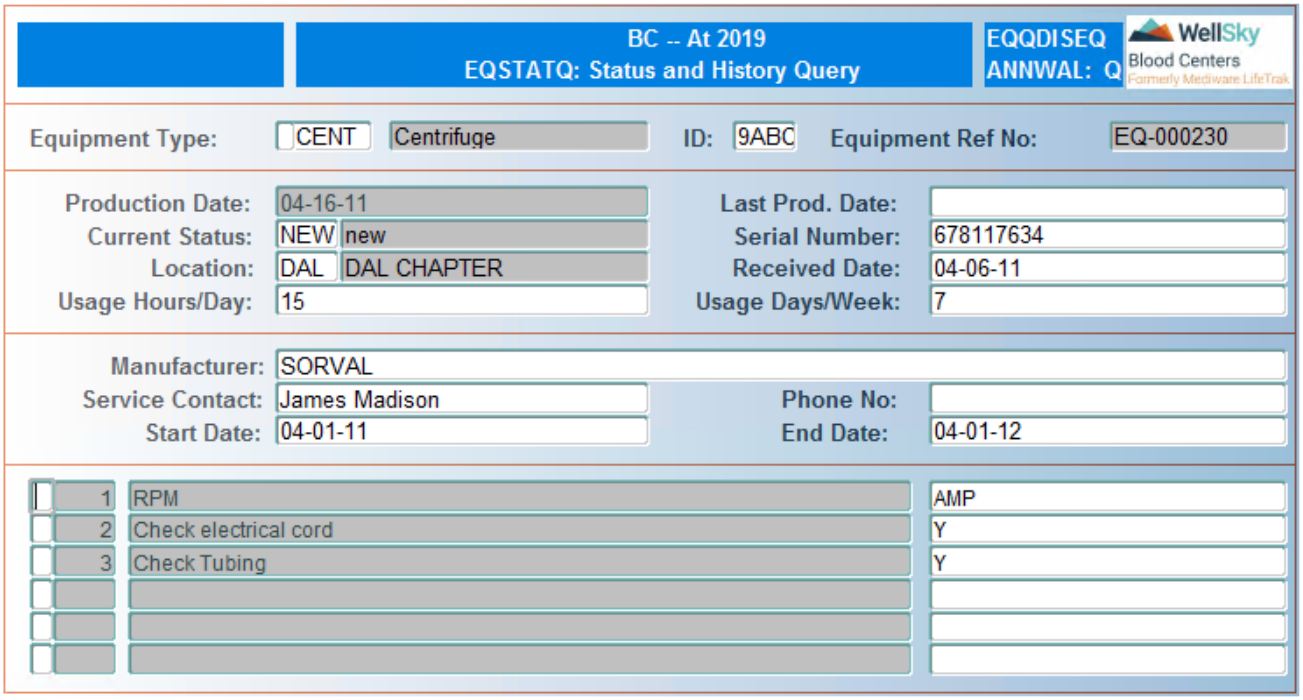


- Equipment Type
- ID
- Equipment Ref No.
- Production Date

- Current Status
- Location
- Usage Hours/Days
- Last Production Date
- Serial Number
- Received Date
- Usage Days/Weeks
- Manufacturer
- Service Contact
- Phone Number
- Start Date
- End Date
- Configurable details for the equipment

Press F2 (List of Values)to display equipment statistics. The following window opens:

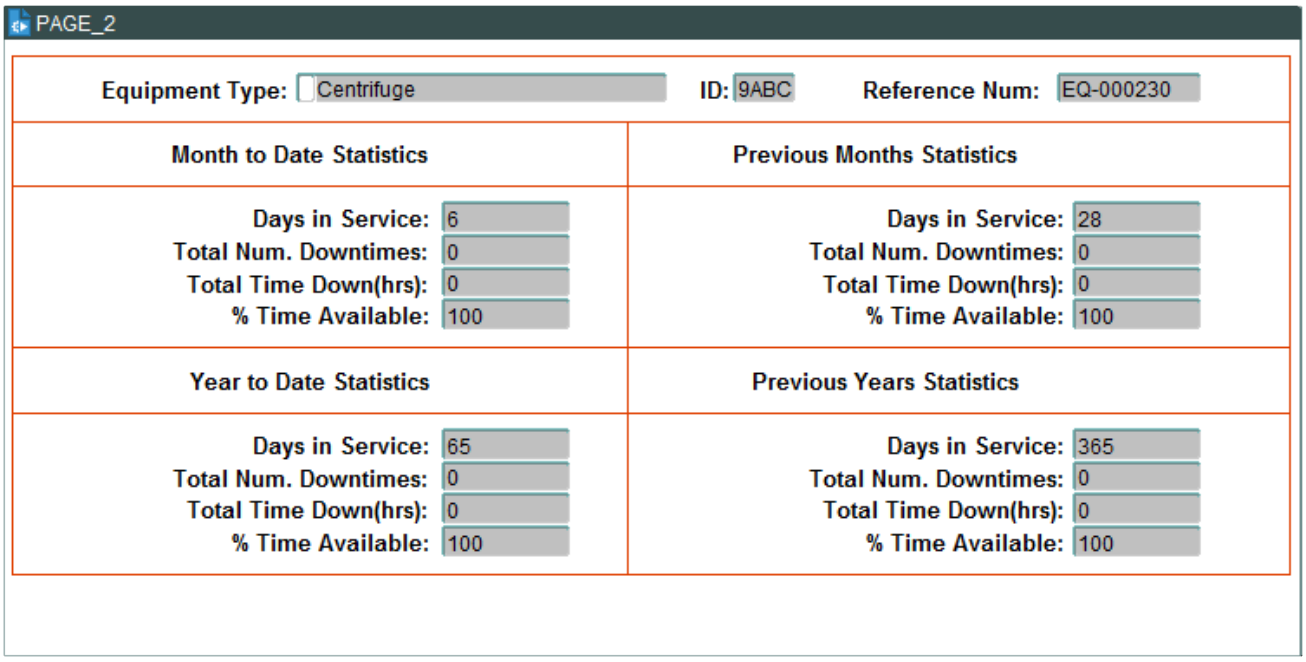


## Month To Date Statistics

Days in service, total number of downtimes, total number of downtime hours, % time available.


WellSky Corporation
Proprietary and confidential

### Year to Date Statistics

Days in service, total number of downtimes, total number of downtime hours, % time available.

### Previous Months to Date Statistics

Days in service, total number of downtimes, total number of downtime hours, % time available.

### Previous Years To Date Statistics

Days in service, total number of downtimes, total number of downtime hours, % time available.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Equipment Queries menu.

# 25.4.2 Downtime History Query (EQMAINTQ)

## Intended Use

Use the Downtime History Query screen to view the downtime history for one or more machines. The user may limit the extent of the query by specifying an equipment type, machine ID, system-assigned reference number, or downtime events within a specified timeframe. If service was performed during a downtime event for a machine included in the query, service details will display as well.

## Limitations

None

## Prerequisites

Downtime information must have been entered on at least one piece of equipment. If downtime information has not been entered the user will receive a message.

## Accessing the Screen

Access this screen from the Equipment Queries menu or by entering the keyword `EQMAINTQ`.

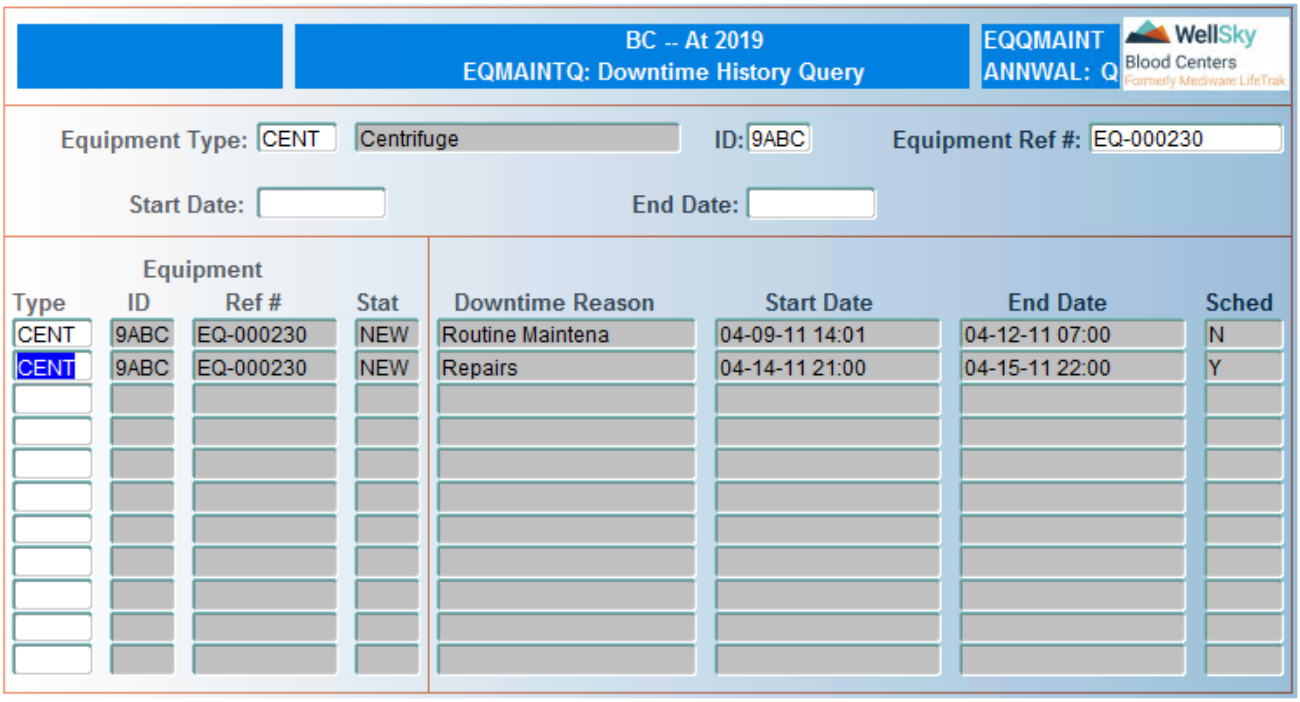


# Fields and Definitions

## Equipment Type

If you entered a specific equipment type the query will only display that type. If a type was not entered it will display that type. If a type was not entered it will display all types with a service history.

## ID

Equipment ID associated to the service performed for that equipment type.

## Equipment Ref No

Internal number generated by the system for that piece of equipment. This number is generated when the equipment details are entered the first time on the equipment.

## Stat

Status of the equipment.

## Start Date

The date when the service call was started.

## End Date

The date when the service call was completed.

## Schedule

Enter `Y` if the service call was scheduled. Enter `N` if the service call was not scheduled.


WellSky Corporation
Proprietary and confidential

## View Details

To view details, press **F6 (Menu)**. The following window opens:

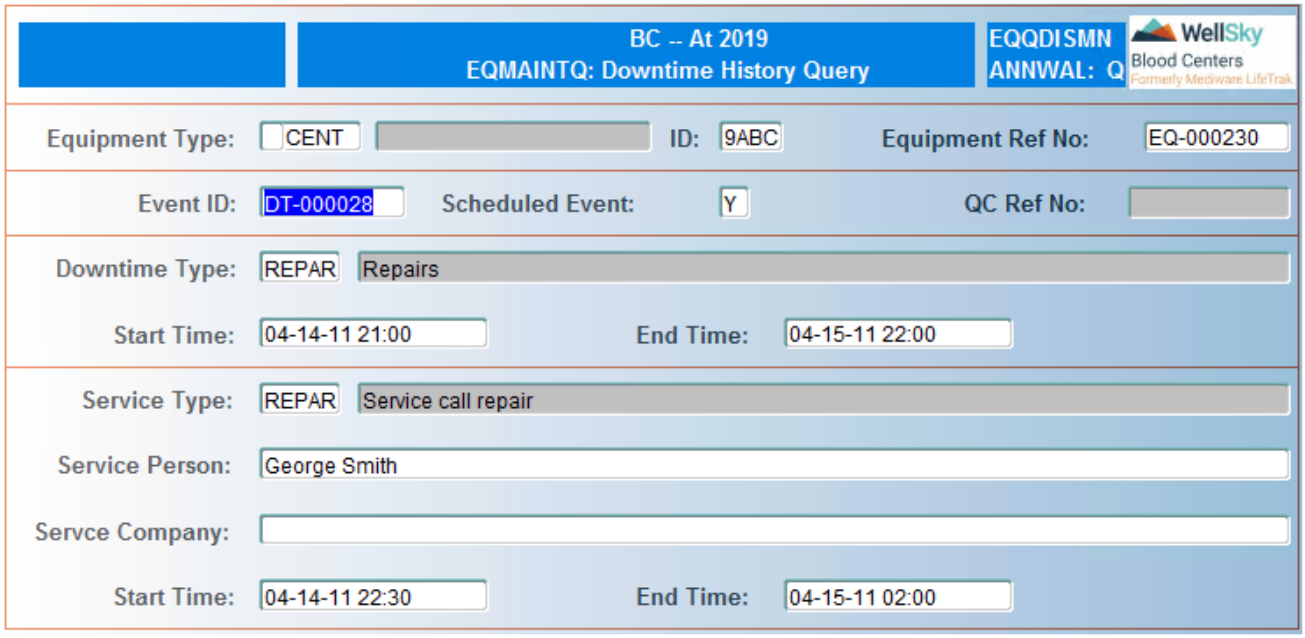


## What to Do Next

For normal processing, press **F8 (Exit Screen)** to return to the Equipment Queries menu.

# 25.4.3 Service History Query (EQSHISTQ)

## Intended Use

Use the Service History Query screen to view the service history for one or more machines. You can limit the extent of the query by specifying an equipment type, machine ID, system-assigned reference number, or service events within a specified time frame. If downtime was required for a machine at the time of service, downtime details for that machine will displays as well.

## Limitations

None

## Prerequisites

Service information must have been entered on at least one piece of equipment. If service information has not been entered the user will receive a message.

## Accessing the Screen

Access this screen from the Equipment Queries menu or by entering the keyword `EQSHISTQ`.

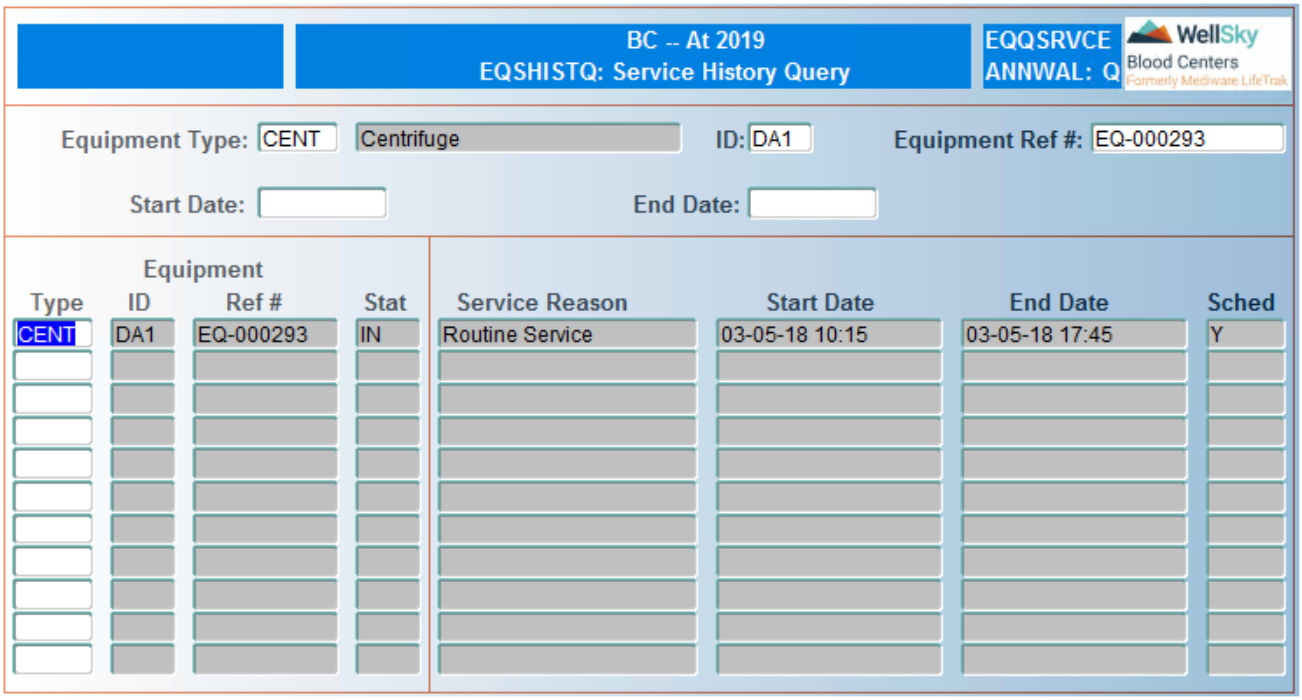


# Control Block Fields and Definitions

## Equipment Type

If you entered a specific equipment type the query will only display that type. If a type was not entered it will display that type. If a type was not entered it will display all types with a service history.

## ID

Equipment ID associated to the service performed for that equipment type.

## Equipment Ref No

Internal number generated by the system for that piece of equipment. This number is generated when the equipment details are entered the first time on the equipment.

## Stat

Status of the equipment.

## Start Date

The date when the service call was started.

## End Date

The date when the service call was completed.

## Schedule

Enter `Y` if the service call was scheduled. Enter `N` if the service call was not scheduled.

## View Details

To view details, press **F6** (Menu). The following window opens:

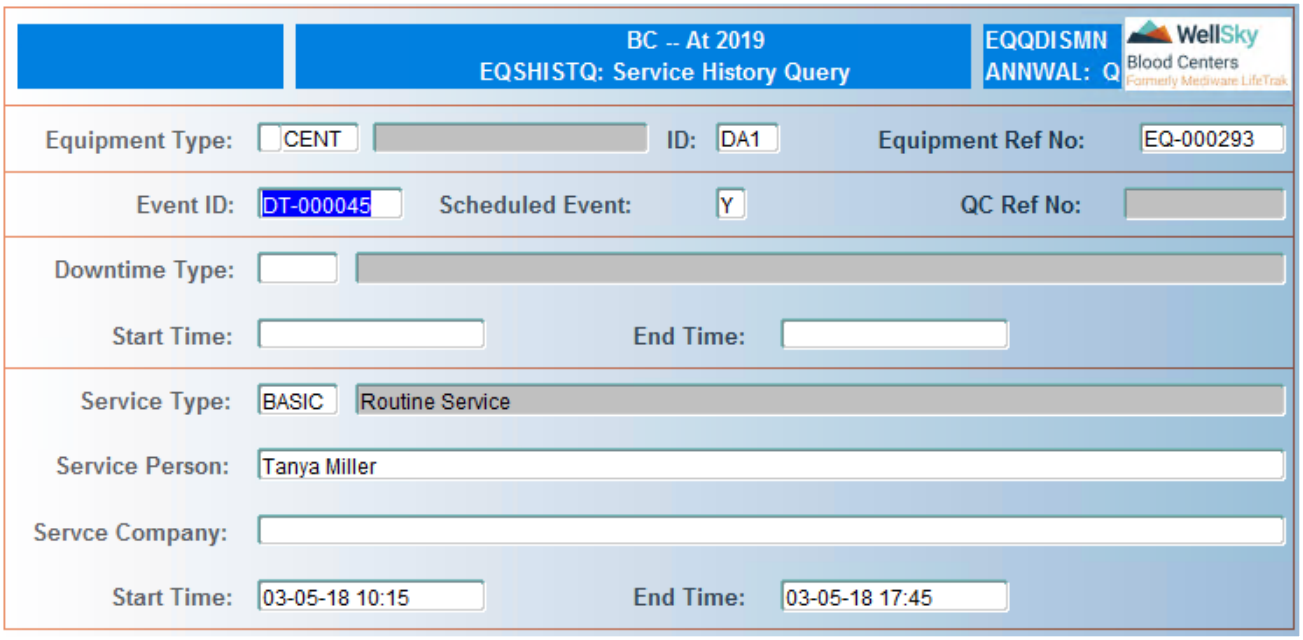


## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Equipment Queries menu.

# 25.4.4 QC History Details Query (EQCHISTQ)

## Intended Use

Use the QC History Details Query screen to view past, present, and future details for equipment for which a user has access. The user may limit the extent of the query by specifying an equipment type, machine ID, QC status, or a date range of QC events.

## Limitations

None

## Prerequisites

QC event must be present on at least one piece of equipment.

## Accessing the Screen

Access this screen from the Equipment Queries menu or by entering the keyword `EQCHISTQ`.

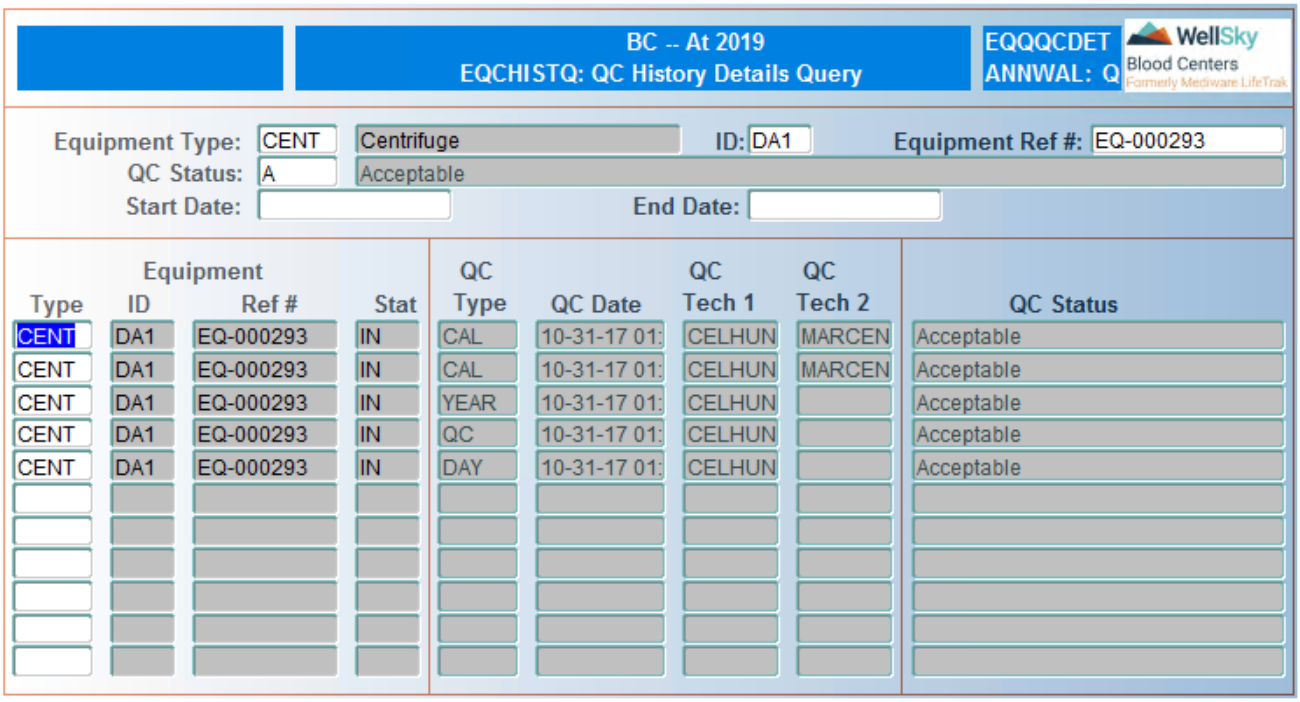


# Control Block Fields and Definitions

## Equipment Type

If you entered a specific equipment type the query will only display that type. If a type was not selected, it will display all types with current status.

## ID

ID of the equipment assigned by the user.

## Reference

System generated number.

## Stat

Status of the equipment.

## QC Type

Type of QC performed.

## QC Tech 1

Logon ID of technician entering QC for first Tech.

## QC Tech 2

Logon ID of technician entering QC for second tech. This field will only be populated if second technician is required.


WellSky Corporation
Proprietary and confidential

## QC Status

Final status after the QC data has been entered into the system.

# View Details

To view details, press **F6** (Menu). The following window opens:

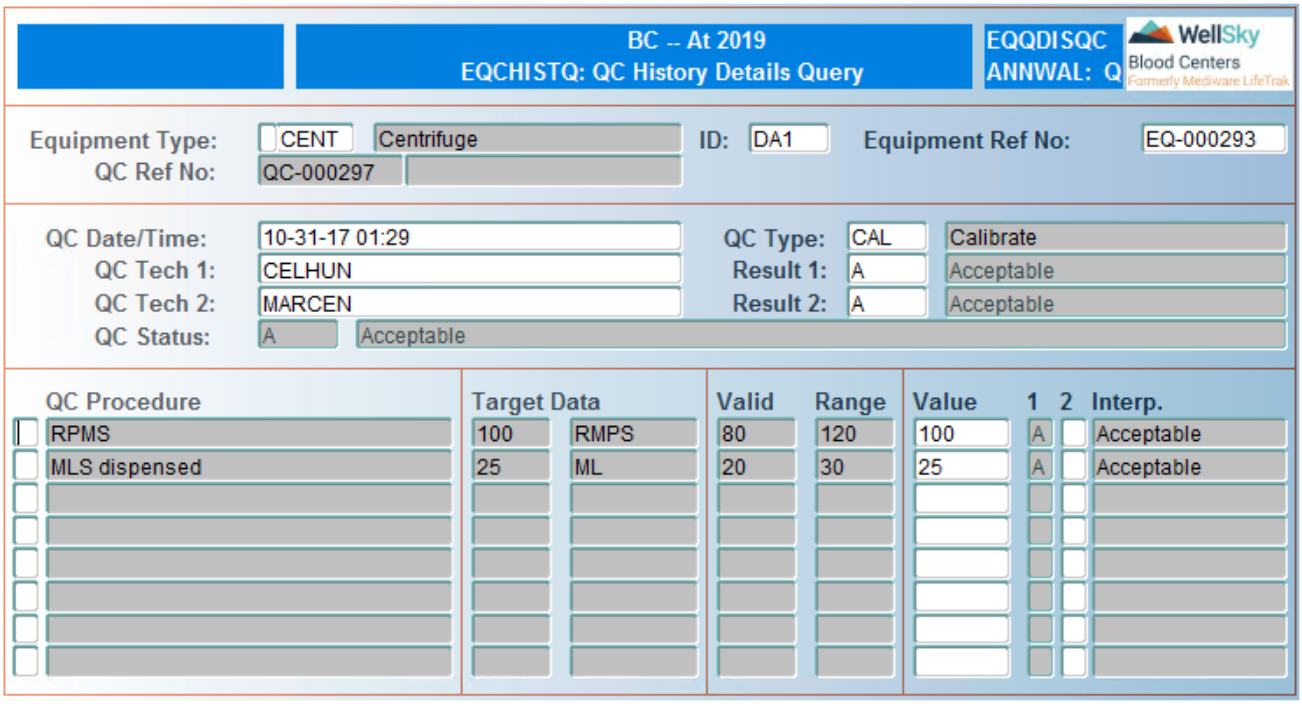


# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Equipment Queries menu.

This Page Intentionally Left Blank

26

# Chapter 26 - General Queries


26.1 Introduction ..... 1770
26.1.1 Overview ..... 1770
26.1.2 Structure ..... 1770
26.2 General Query Functions ..... 1771
26.2.1 Unit Query (UNITQ or UNITI) ..... 1771
26.2.2 Unit Information (UNITI) ..... 1788
26.2.3 Any Lot Number Query (ANYLOTQ) ..... 1788
26.2.4 ISBT Unit Check Digit Query (ISBTQL) ..... 1789
26.2.5 Place Notes on Multiple Units (MUNOTE) ..... 1790

# 26.1 Introduction

## 26.1.1 Overview

The General Query Functions module in Lab is designed to provide a mechanism to query a variety of information. The screens in this module provide a means querying unit, component, testing, interdiction, and attribute data.

## 26.1.2 Structure

This section describes the screens used in the following:

- Query unit and related data.
- Query component and related data.
- Query lot numbers used in production.
- Query product history.
- Find product meeting defined criteria.


WellSky Corporation
Proprietary and confidential

# 26.2 General Query Functions

General Query Functions are accessed from the following menu:

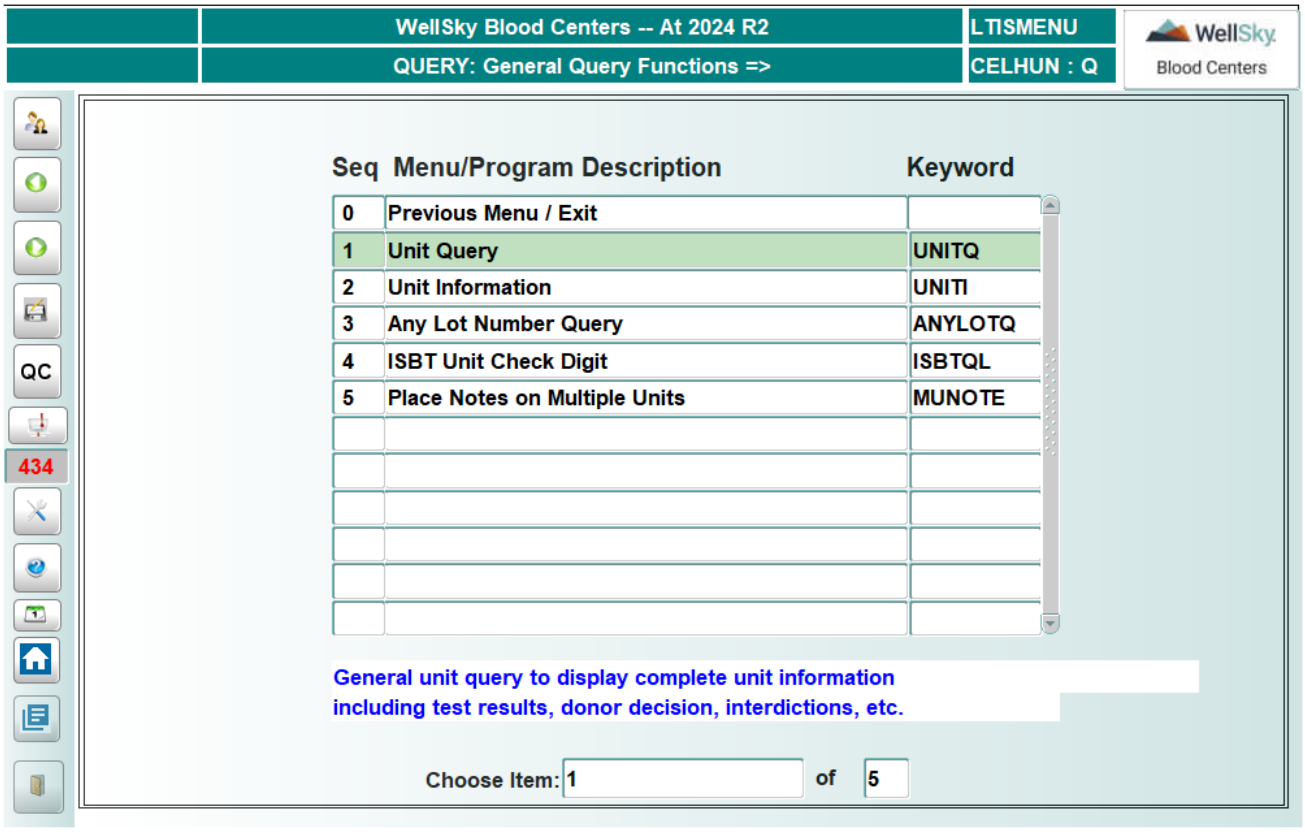


## 26.2.1 Unit Query (UNITQ or UNITI)

### Intended Use

Use the Unit Query or Unit Information screens to review complete information that has been entered for a particular unit. The following information can be queried:

- Product and unit attributes.
- Product and unit interdictions.
- Add-on bags.
- Freeze details.
- Component and unit notes.
- Unit and component details.
- Test results.

## Limitations

- Test results cannot be viewed in Unit Information (UNITI).
- You must have access permission to add or delete notes.
- System Parameter UNIT_ID must be configured in the SYSPARM table.
- The Pathogen Reduction button will not activate on the final pathogen reduction product, but it will be active on all other products.

## Prerequisites

Program parameter SUPER must be defined in the MENUITM in order to view test results.

## Accessing the Screen

Access this screen from the General Query Functions menu or by entering the keyword `UNITQ` or `UNITI`.

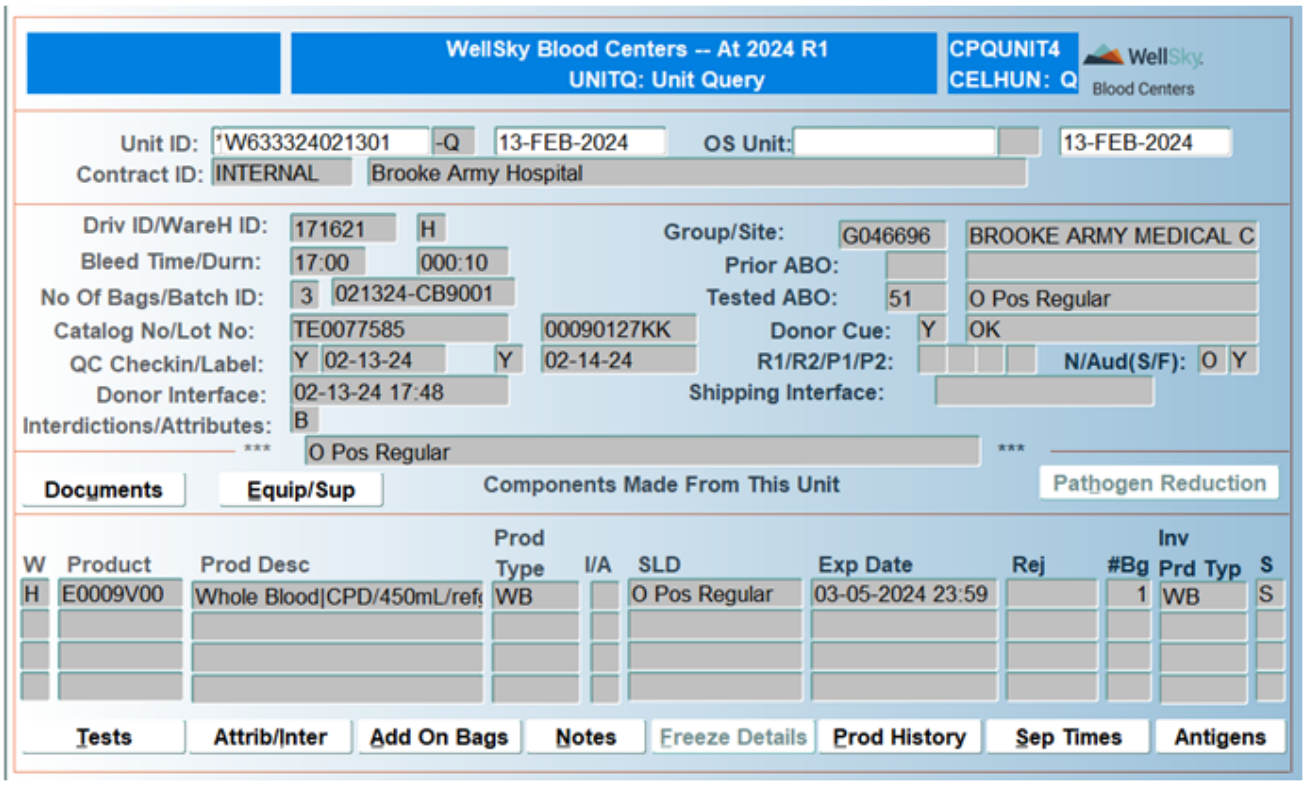


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID. Collection date automatically displays after the unit ID is entered. Leave field blank to query by outside unit ID.


WellSky Corporation
Proprietary and confidential

### OS Unit

Scan or manually enter outside unit ID. Check-in date automatically displays after the outside unit ID is entered. Field is only navigable if the unit ID field was left blank.

### Contract ID

Field automatically displays after the Unit ID or OS Unit ID field is populated. Field is not navigable.

## In the Unit Detail Block

After the unit ID or OS unit ID is entered, the following data displays, if present:

- Driv ID/WareH ID – Blood drive ID and warehouse in which unit was checked in.
- Group/Site – Group/site number.
- Bleed Time/Durn – Bleed start time and duration.
- Prior ABO – Historical ABO/Rh.
- No of Bags/Batch ID – Number of bags linked to catalog and the check-in batch ID.
- Tested ABO – Current tested ABO.
- Catalog No/Lot No – Catalog number/primary lot number.
- Donor CUE – Confidential unit exclusion/interpretation.
- QC Checkin/Label – Check-in QC status/date and labeling QC status/date.
- R1/R2/P1/P2 – Red1/Red2/Purple1/Purple2 tubes checked in? (Y if checked in).
- N/Aud(S/F) – Nursing audit status.
- Donor Interface – Date and time donor interface occurred.
- Shipping Interface – Date/time last product interfaced to distribution.
- Interdictions/Attributes– Interdictions and attributes at the unit level (I – interdictions, A – attributes, B – both attributes and interdictions). Field is blank if unit has neither interdictions nor attributes.

Computer displays either a 'Testing in Progress' or 'Testing Complete' message if products have not been labeled. If one or more products have been labeled, the tested ABO/RH displays.

## The Documents Button

Click **Documents** to view or delete documents from a test batch. The Document Library form opens to view or delete documents. To delete a document, the user must have access to UDOC, otherwise the user can view or add a document.

**NOTE –** The button will only be active if there are external documents linked to the unit.

# The Equip/Sup Button

Click **Equip/Sup** to view equipment and supplies used on the donation during the collection process. The detail information on equipment and supplies QC'd during donation will only display if the donation was collected through the OnSite module.

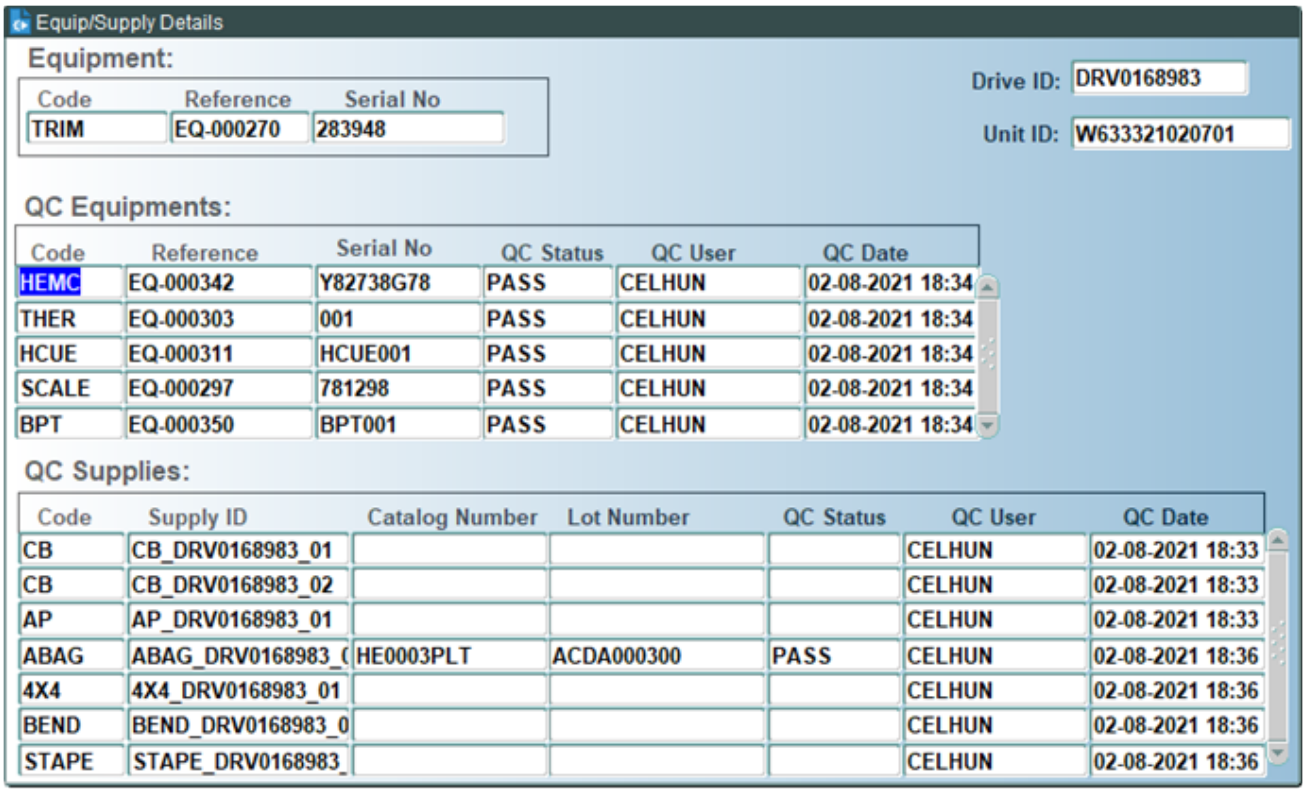


**NOTE –** If the unit was checked using Material Check-In Donor Source Card Entry, only the equipment type and serial number will display for the unit.


WellSky Corporation
Proprietary and confidential

If the OnSite module was not used for unit registration, the screen will be populated similar to the following screen:

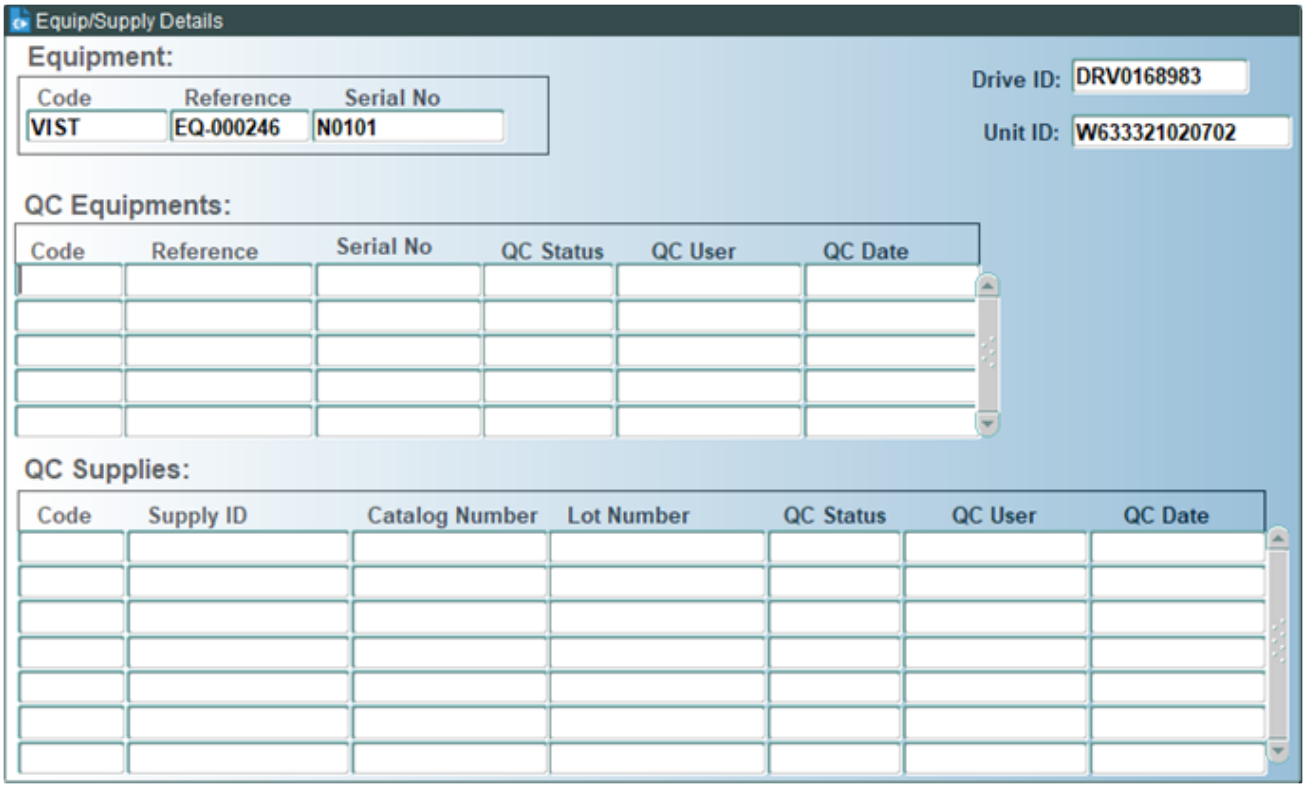


**NOTE –** If the unit was checked using Material Check-In "Check-In Details" (DSCE), only the equipment type and serial number will display for the unit.

If the unit has not been checked in on the Donor side, the Drive ID will be blank. Once the unit is registered in Donor, the drive will then be populated.

# To View Pathogen Reduction Information

Click **Pathogen Reduction**. The following window opens:

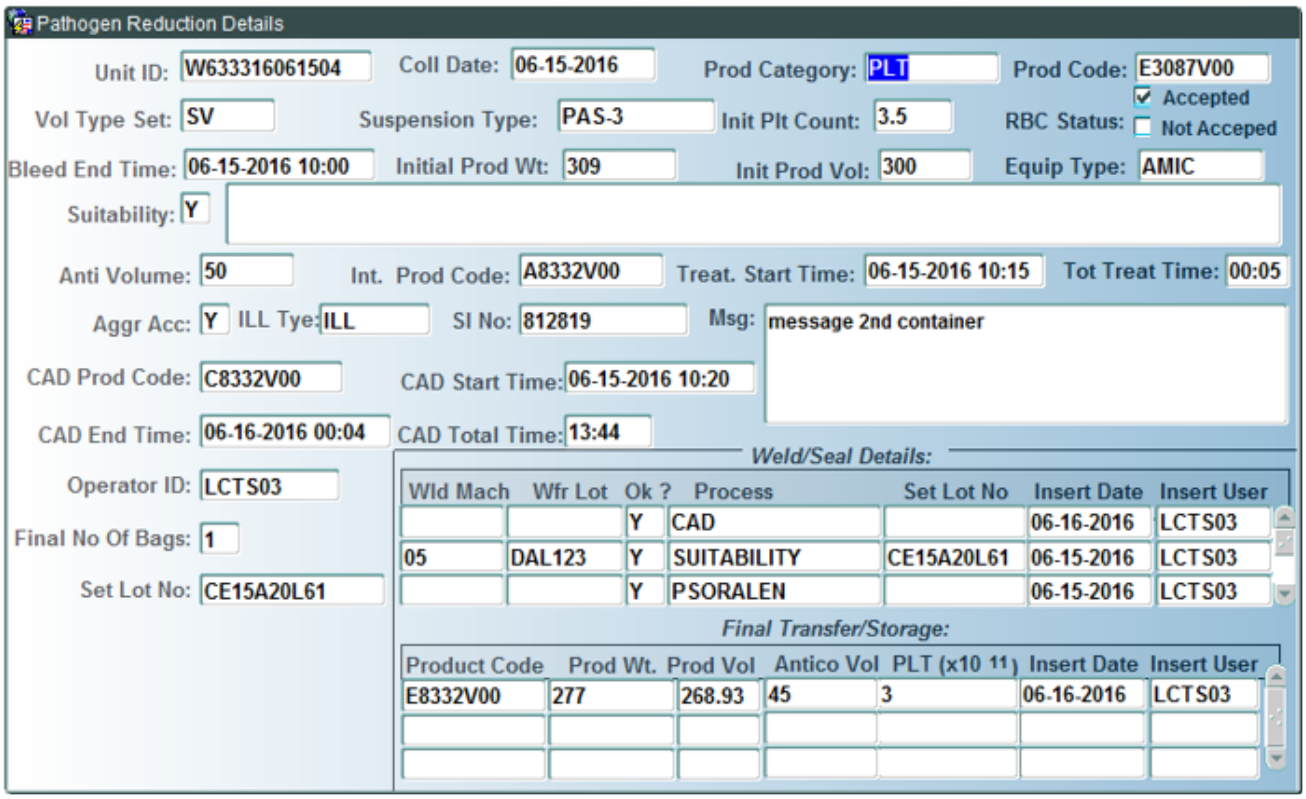


The following pathogen reduction information displays:

**NOTE –** Press **TAB** or **ENTER** to scroll across the fields.

- Unit ID – Unit ID.
- Coll Date – Collection date.
- Prod Category – Product category, which is selected in suitability.
- Prod Code – Product code. This field is only populated if the product is created first in CPIPHE2 (PHERI).
- Vol Type Set – Volume type set is selected in suitability.
- Suspension Type – Suspension type is selected in suitability.
- Init Plt Count – Initial platelet count displays in N x $10^{11}$.
- RBC Status – RBC content status entered in suitability.
- Bleed End Time – End bleed time. This is the bleed time entered in Check-In Details (DSCE).
- Initial Prod Wt – Initial product weight.
- Init Prod Vol – Initial product volume.


WellSky Corporation
Proprietary and confidential

- Equip Type – Equipment type - pheresis equipment in which the product was collected.
- Suitability – Product suitability status if the product passes, or lists data if suitability failed.
- Anti Volume – Anticoagulant volume.
- Int. Prod Code – Intermediate product code defined in suitability.
- Treat. Start Time – Treatment start time.
- Tot Treat Time – Total treatment time.
- Aggr Acc – Platelet aggregates acceptability.
- ILL Tye – Illuminator type.
- Sl No – Serial ID number of the illuminator.
- Msg – Instrument message from the illuminator.
- CAD Prod Code – CAD product code.
- CAD Start Time – CAD start time. The date and time the intermediate product was placed on the CAD rotator.
- CAD End Time – CAD end time. The date and time the intermediate product is removed from the CAD rotator.
- CAD Total Time – CAD total time. The amount of time the product spent on the CAD rotator.
- Operator ID – Operator ID.
- Final No Of Bags – Final number of bags.
- Set Lot No – Set lot number.

Weld/Seal Details

- Wld Mach – Weld machine used during sterile docking process.
- Wfr Lot – Wafer lot number.
- Ok? – Weld/Seal is good or bad.
- Process – Process data linked to process being performed.
- Set Lot No – Set lot number.
- Insert Date – Insert date.
- Insert User – Insert user.

Final Transfer/Storage

- Product Code – Product code (final product).
- Prod Wt. – Product weight (final product).
- Prod Vol – Product volume (final product).
- Antico Vol – Anticoagulant volume of the final product.
- PLT ($x10^{11}$) – Platelet count of the final product ($N \times 10^{11}$).

- Insert Date – Insert date.
- Insert User – Insert user.

Press F8 (Exit Screen) to return to the Unit Details Block.

## To View Scheduled Test Results

Click Tests or press LOV to view scheduled tests. The following window opens:

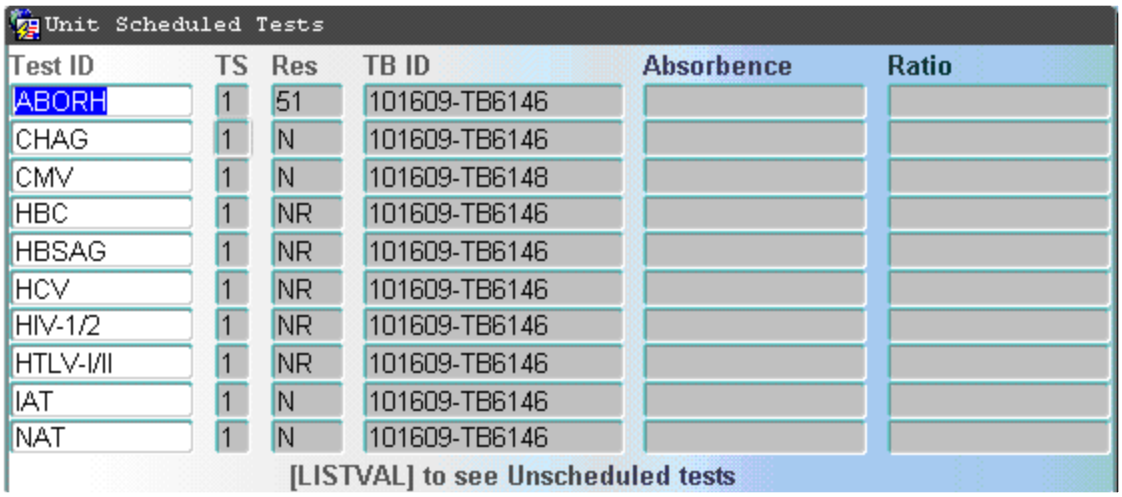


The following scheduled test information displays:

- Test ID – Test ID.
- TS – Test sequence number.
- Result – Test result.
- TB ID – Test batch ID.
- Absorbance – Absorbance reading (for viral testing).
- Ratio – Ratio of testing result to cutoff (viral).

Use the UP and DOWN arrow keys to scroll through the tests.

Press F8 (Exit Screen) to return to the main screen.


WellSky Corporation
Proprietary and confidential

## To View Unscheduled Test Results

Press LOV again from the Unit Scheduled Test window to view unscheduled test for the unit. The following window opens:

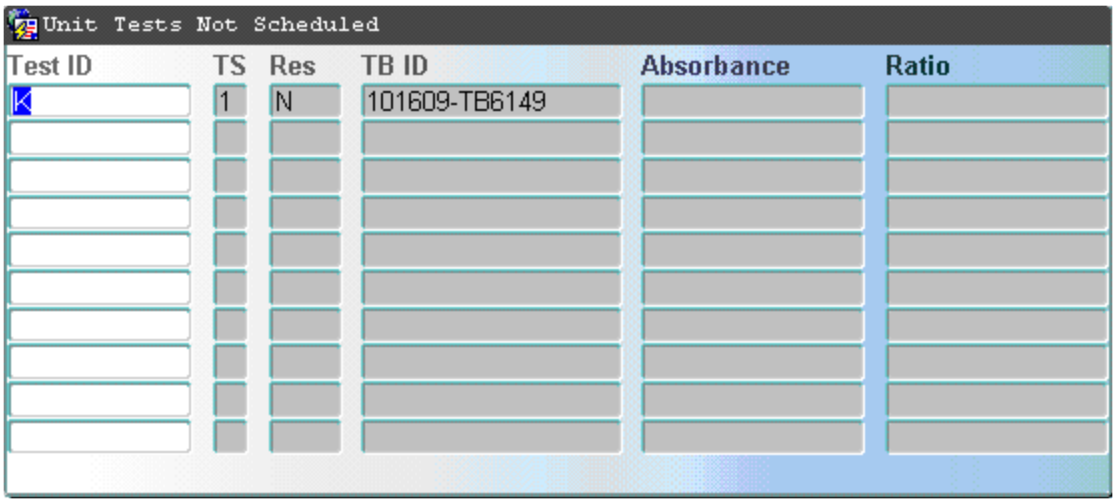


The following unscheduled test information displays:

- Test ID – Test ID.
- TS – Test sequence number.
- Result – Test result.
- TB ID – Test batch ID.
- Absorbance – Absorbance reading (for viral testing).
- Ratio – Ratio of testing result to cutoff (viral).

Use the **UP** and **DOWN** arrow keys to scroll through the tests.

Press **F8** (Exit Screen) to return to the Unit Scheduled Tests window.

## In the Component Detail Block

Press **CTRL** + **F3** (Next Block) to navigate to this block. Use the **UP** and **DOWN** arrow keys to scroll through the product codes. After the unit ID or OS unit ID is entered, the following component data displays:

- W – Component warehouse location.
- Product – Product code of component.
- Prod Desc– Product code description. Use right arrow to display entire description, if needed.
- Prod Type– Lab Product type, as defined in the Products table.
- I/A– Interdictions and attributes at the component level (I – interdictions, A – attributes, B – both attributes and interdictions). Field is blank if unit has neither interdictions nor attributes.

- SLD – System label decision. Use right arrow to display entire description, if needed.
- Exp Date –Component expiration date and time.
- Rej – Reject code if applicable.
- #Bg – Number of bags component is in.
- Inv Prd Typ– Inventory Product type, as defined in the Products table.
- S– Status of component custody (S=Distribution, L=Lab).

Press **CTRL** + **F4** (Previous Block) to return to the Unit Detail Block.

## To Review Unit Attributes and Interdictions

Click **Attr/Inter** or press **F6** (Menu) to view unit attributes and interdictions. The following window opens:

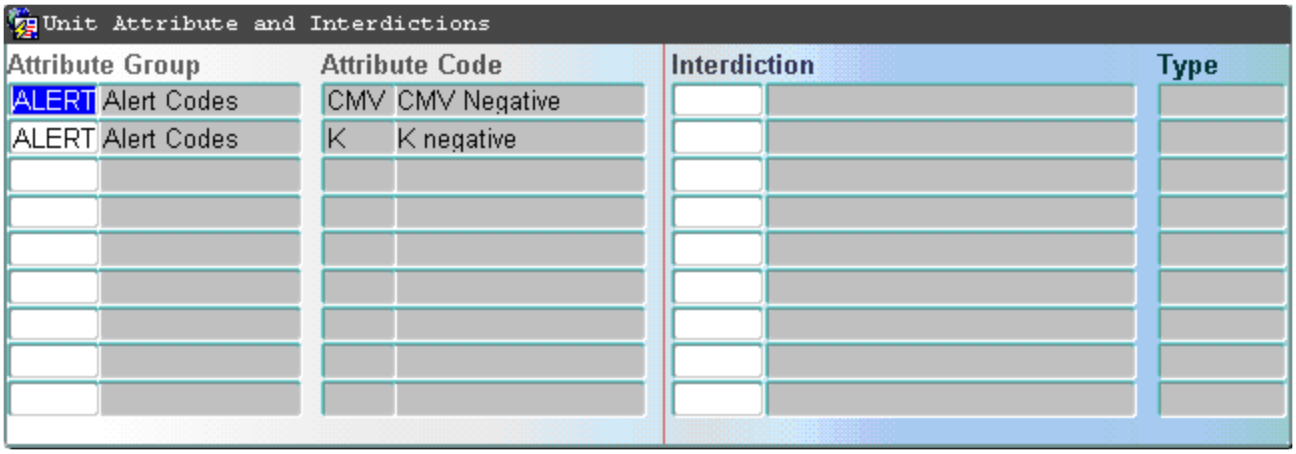


The following unit attribute and interdiction information displays:

- Attribute Group/Description
- Attribute Code/Description
- Interdiction Code/Description
- Interdiction Type

**NOTE –** Only active attributes and interdictions display.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the Unit Details Block.


WellSky Corporation
Proprietary and confidential

## The Notes Button

Click **Notes** to view, add, or delete notes for the selected Unit ID using the GEWNOTES window, as shown:

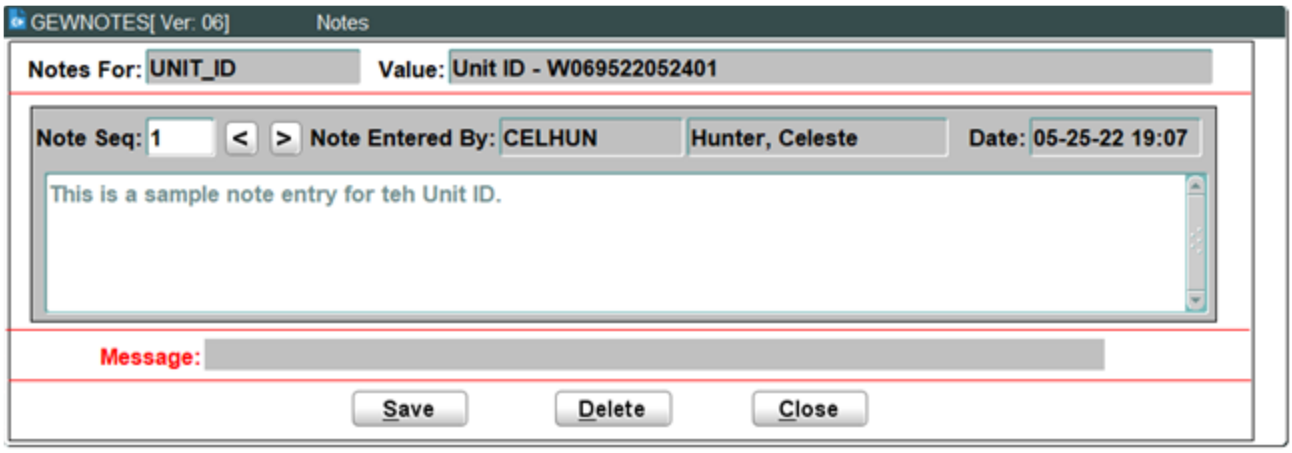


Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on using this window.

**NOTE –** You must have access permission to add or delete a note. Refer to the Notes (GEWNOTES) description in Chapter 13 - Called Windows for details on permissions.

## To Review Add-on Bag Details

Click **Add on Bags** or press **CTRL** + **F4** (Previous Block) to review add-on bag details. The following window opens:

**NOTE –** Press **ENTER** to scroll across the fields.

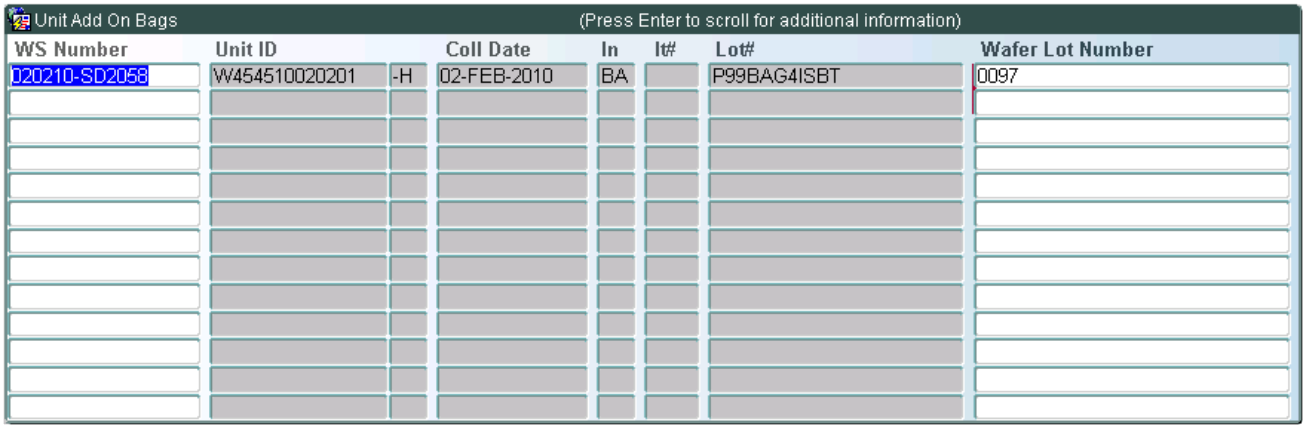

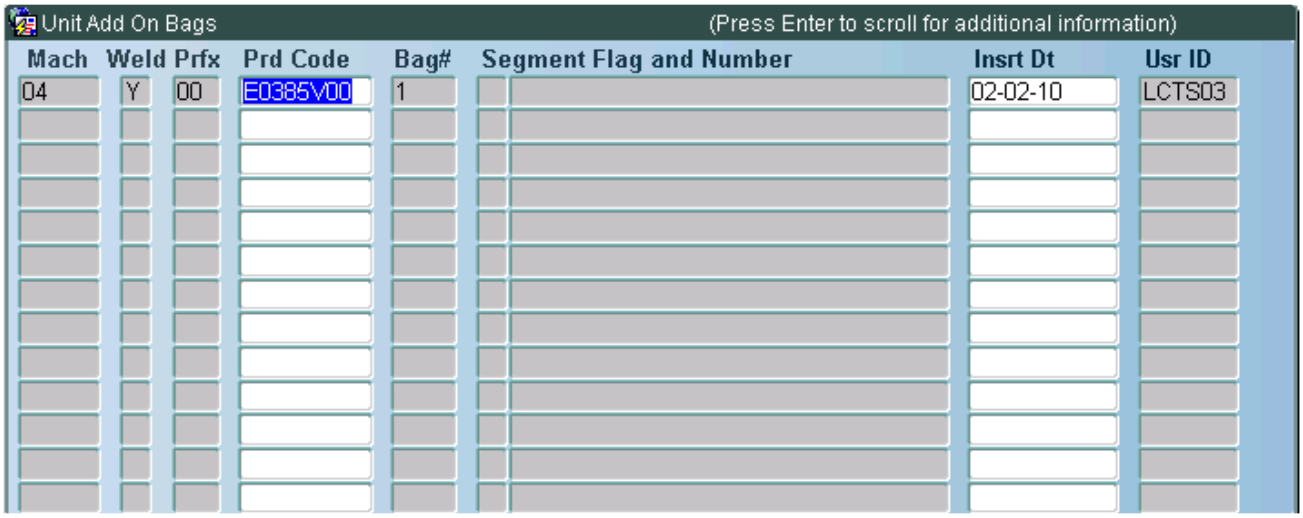


The following unit attribute and interdiction information displays:

**NOTE –** Press TAB or ENTER to scroll across the fields.

- WS Number – Sterile connection device worksheet ID.
- Unit ID – Unit ID.
- Coll Date – Unit collection date.
- In – Sterile dock type (e.g. 'BAG', 'SEGMENT').
- It# - Dockings taking place.
- Wafer Lot Number – Lot number of wafer.
- Mach – Sterile connecting device code.
- Weld – Weld acceptance indicator.
- Prfx – Aliquot number.
- Prd Code – Product code docked onto.
- Bag# - Number of products to relabel.
- Segment Flag and Number – Y if segment is docked.
- Number – Segment number.
- Insrt Dt – Date and time SCD data was entered.
- User ID – Login of the user who conducted sterile docking.


WellSky Corporation
Proprietary and confidential

# To Review Component Attributes and Interdictions

To review component attributes and interdictions, press F6 (Menu) at the desired product and the following window opens:

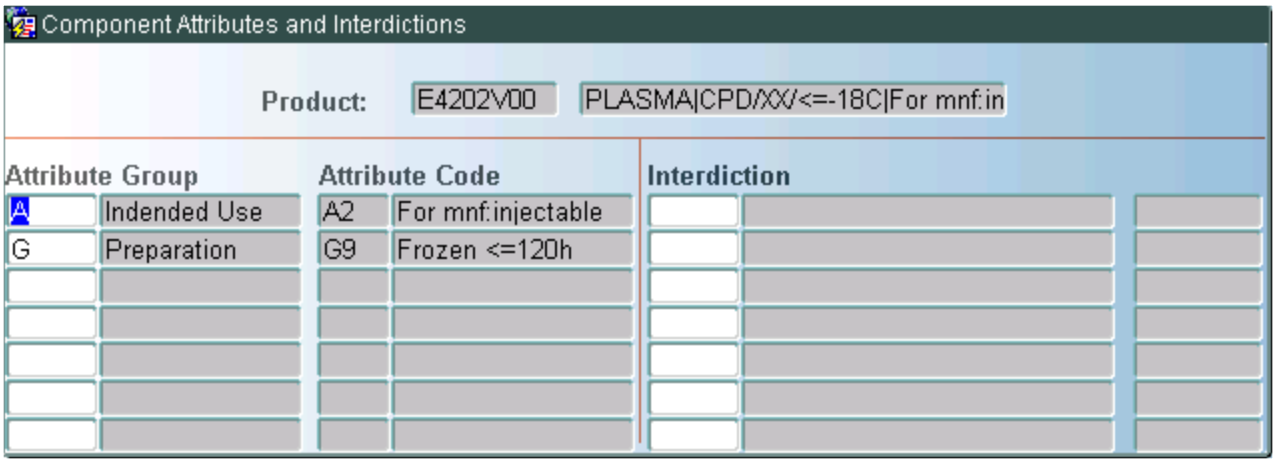


The following component attribute and interdiction information displays:

- Product Code and description
- Attribute Group/Description
- Attribute Code/Description
- Interdiction Code/Description
- Interdiction Type

**NOTE –** Only active attributes and interdictions display.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the Component Details Block.

## To Review Freeze Details

To review component freeze details, click **Freeze Details** or **CTRL** + **F3** (Next Block) at the desired product and the following window opens:

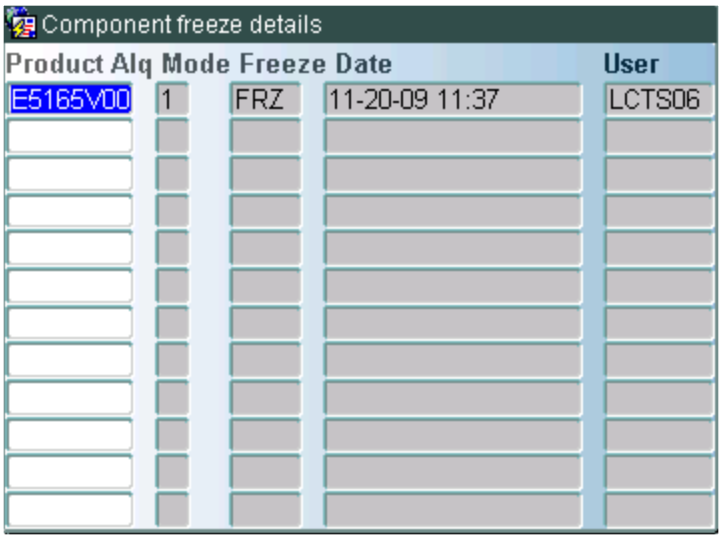


Press **F8** (Exit Screen) to return to the Component Details Block.

## To Review Product History

Click **Prod Hist** (or press **ALT + P**) to display product history. The following window opens:

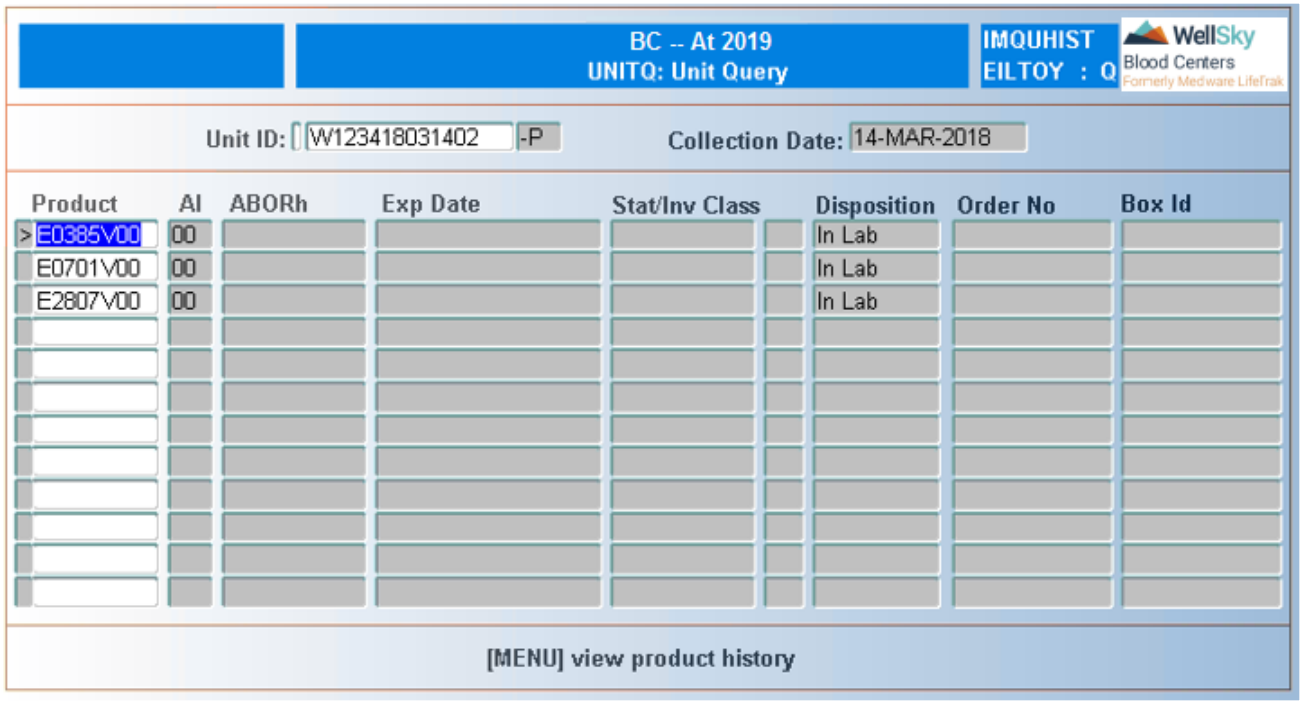

The following product history information appears:

- Product – product code.
- Al – aliquot number for the product.
- ABORh – blood type of the product.
- Exp Date – expiration date and time of the product.
- Stat/Inv Class – product status and inventory class.
- Disposition – current location (e.g. 'AV').
- Order No – order number with which the product is associated.
- Box ID – box ID if the product has been packed.

Use the UP and DOWN arrow keys to scroll through the list. Press F6 (Menu) to display details about the specified product. The following window opens:

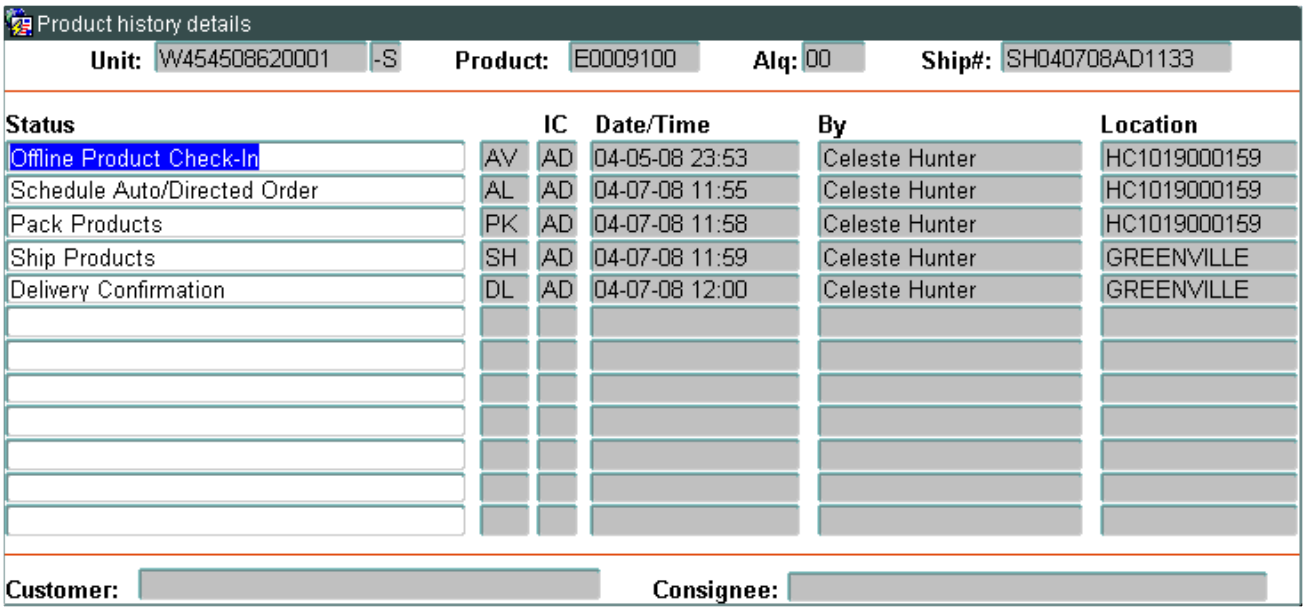


The following product history details appear:

- Unit ID – unit ID.
- Product – product code associated to the product.
- Alq – aliquot associated to the product.
- Ship# - shipment number associated with the product.
- Status – process status (for example, 'Check-In from Lab').
- IC – inventory class.
- Date/Time – date and time product reached this stage.

- By – user associated to the process.
- Location – location to which a product was shipped.

Use the up and down arrow keys to scroll through displayed data.

Press **F8** (Exit Screen) to return to the query screen.

## To Review Component Notes

Press **CTRL** + **F12** (Enter Query) at the desired product and the following window opens:

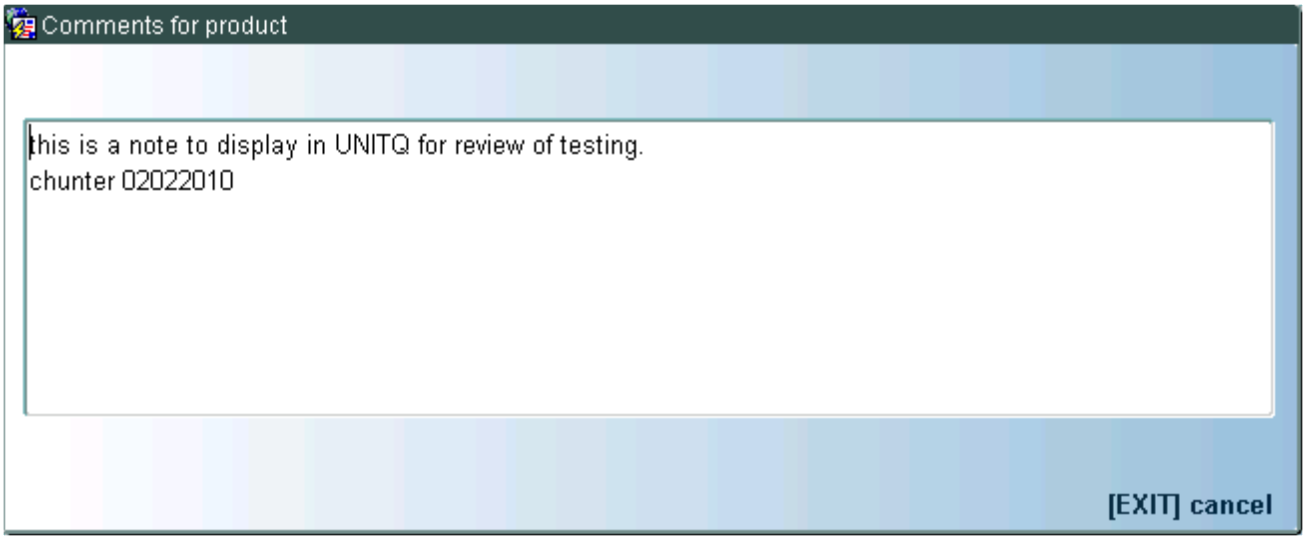


Press **F8** (Exit Screen) to return to the Component Details Block.

## The Sep Times Button

After the unit ID or OS unit ID is entered, click **Sep Time** (or press **ALT** + **S**) to display the following data for the 1st separation, 2nd separation, and 3rd separation, if present:

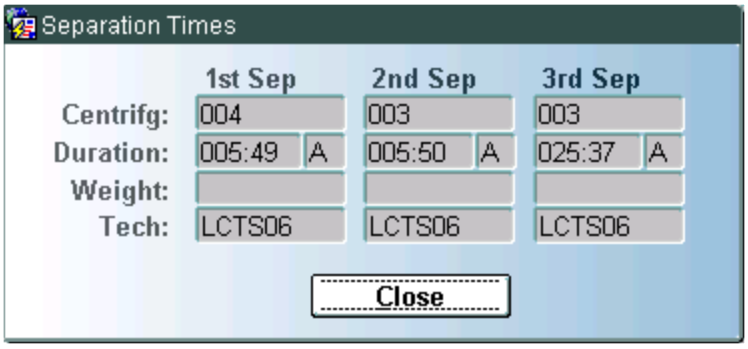


- Centrifuge – Centrifuge ID number
- Duration – Displays time of duration from bleed start time to separation in HHH:MM format and is followed by an 'M' (if data was manually entered) or an 'A' (if data was automatically updated).


WellSky Corporation
Proprietary and confidential

- Weight – Field not utilized. Component weights can be queried in Component Query (COMPQ).
- Tech – Technician entering separation times

**NOTE –** An asterisk (*) displays in the duration field if the separation time is too large or if the separation never took place.

Click **Close** to dismiss the window.

## Antigens Button

Click **Antigens** to view the antigens on the current unit. This will display current antigen testing and historical antigens from the donor applicant. The user must have access to the Unit & Donor Antigen Testing Query (ANTQL); if the user does not have access, the button will not be active.

If the user has access to the query, the following displays:

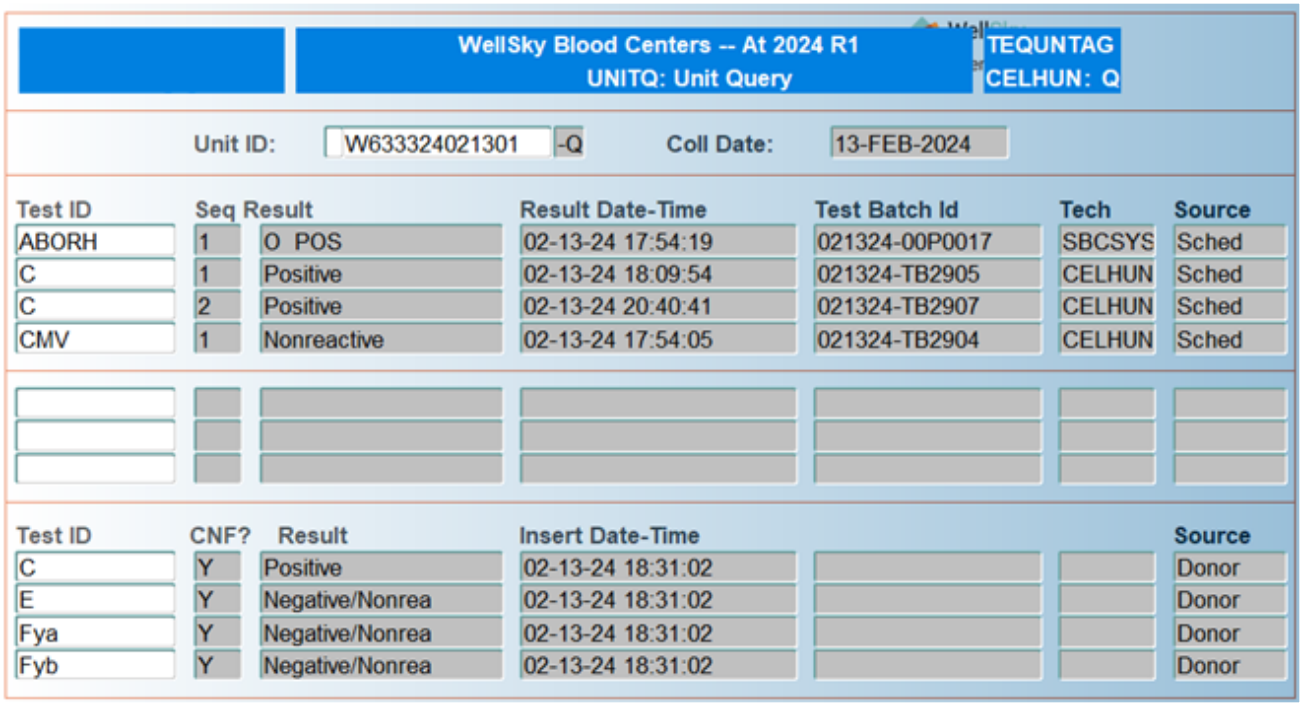


Press **F8** (Exit Screen) to close the query and move back to UNITQ. For more information on Unit & Donor Antigen Testing Query, "Unit & Donor Tested Antigen Query (ANTQL)" on page 1418

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the General Query Functions menu.

# 26.2.2 Unit Information (UNITI)

Refer to Unit Query (UNITQ or UNITI).

# 26.2.3 Any Lot Number Query (ANYLOTQ)

## Intended Use

Use the Any Lot Number Query screen to review information about lots used.

## Prerequisites

None

## Limitations

None

## Accessing the Screen

Access this screen from the General Query Functions menu or by entering the keyword `ANYLOTQ`.

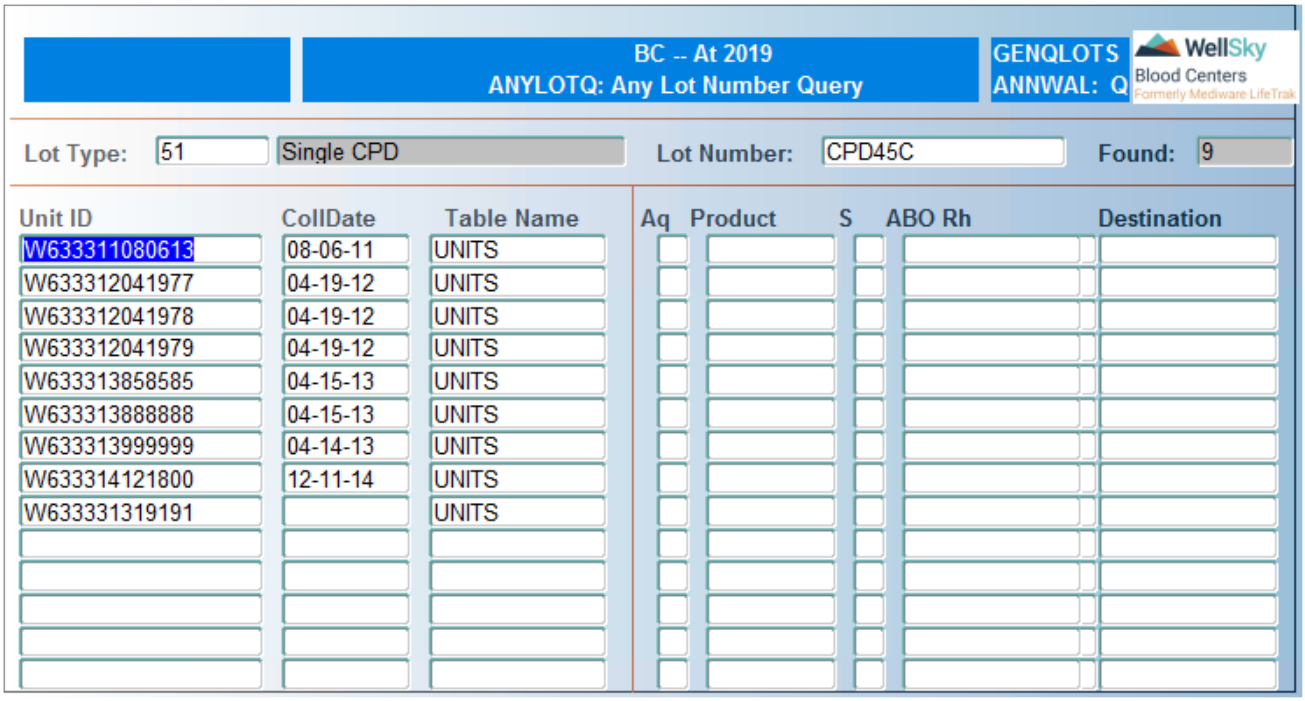


## Control Block Fields and Definitions

### Lot Type

Enter lot type or select from LOV.


WellSky Corporation
Proprietary and confidential

### Lot Number

Enter lot number or select from LOV. Press **TAB** to display records.

### Found

The number of records found automatically displays after the lot number is entered. Field is not navigable.

## In the Detail Block

After the lot number is entered, the following information displays:

- Unit ID – Unit ID.
- Coll Date – Unit collection date.
- Table Name – Table name where unit is located.
- Aq – Aliquot.
- Product – Product code.
- S –
- ABO Rh – Unit ABO Rh.
- Description –

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the General Query Functions menu.

# 26.2.4 ISBT Unit Check Digit Query (ISBTQL)

## Intended Use

Use the ISBT Unit Check Digit Query screen to query the check digit that is associated to a 13-character ISBT unit ID.

## Prerequisites

User must know the 13-character ISBT unit ID.

## Limitations

This is manual entry only.

## Accessing the Screen

Access this screen from the General Query Functions menu or by entering the keyword `ISBTQ`.

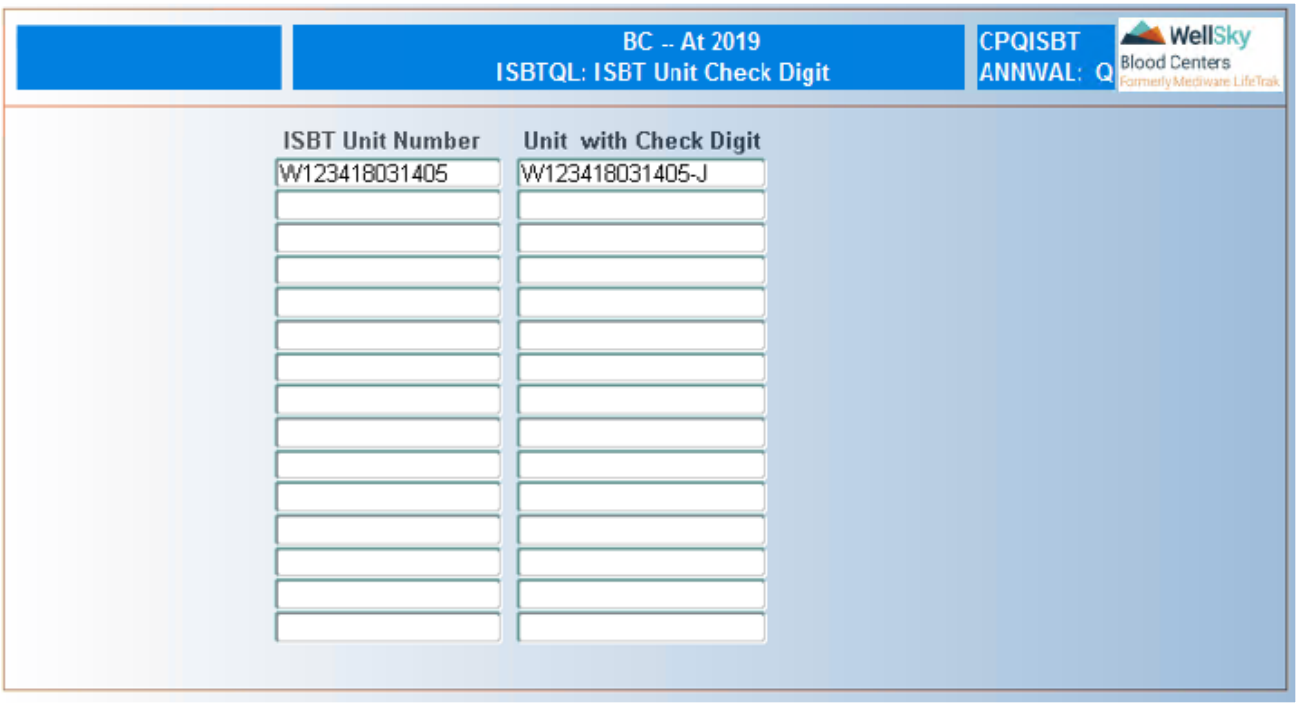


## Fields and Definitions

### Unit ID

Manually enter a 13-character ISBT unit ID.

**NOTE –** Unit does not have to be checked into the system in order to perform this query.

### Unit ID-Check Digit

The ISBT unit ID with check digit automatically displays after the 13-character ISBT unit ID is manually entered. Field is not navigable.

Use the UP and DOWN arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the General Query Functions menu.

# 26.2.5 Place Notes on Multiple Units (MUNOTE)

## Intended Use

Use the Place Notes on Multiple Units to add a note to a single unit or multiple units in one session.


WellSky Corporation
Proprietary and confidential

## Limitation

Not able to view prior notes or delete notes in this function.

## Prerequisites

The following needs to be configured:

- Define Lab User Access Codes (LUACCESS) – UNOTE must be assigned to the user to add notes.
- User must be assigned the program for their group and level to access the program.

## Accessing the Screen

Access this screen from the Regional Sample Tracking Functions menu or by entering the keyword MUNOTE.

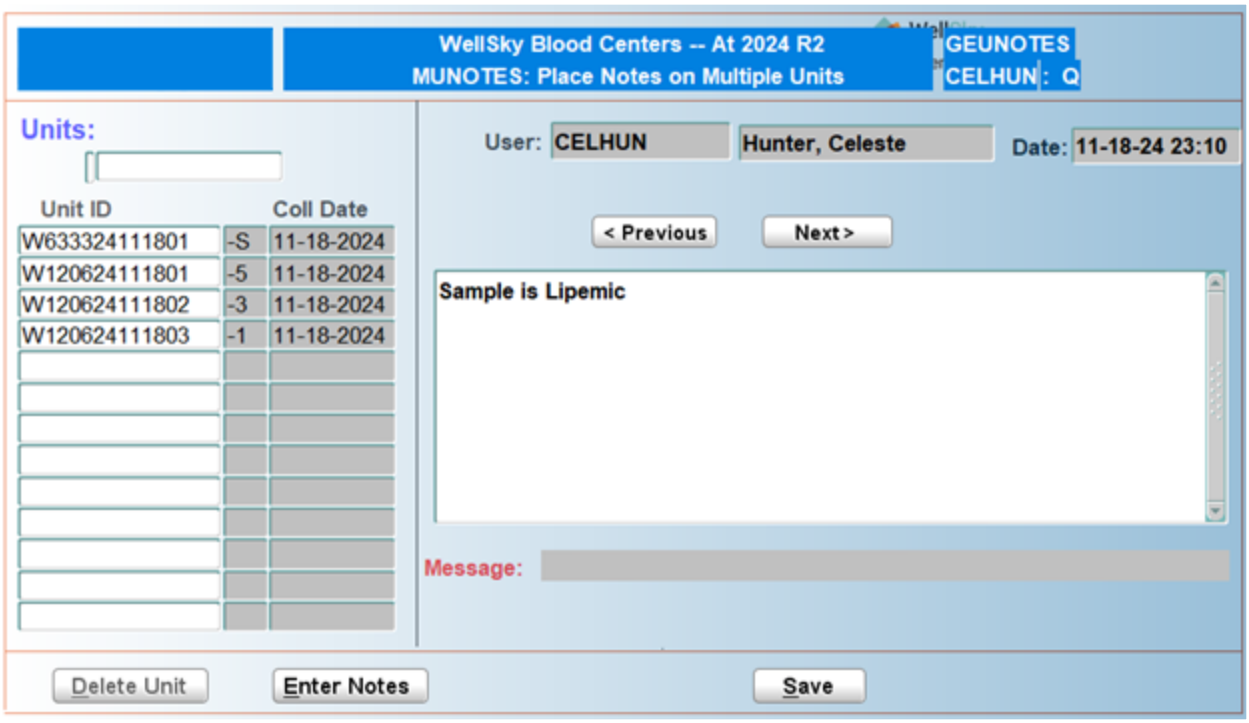


## Control Block Field and Definition

### Units

Scan or manually enter the unit ID. To manually enter, press **`Enter`**. The cursor will move to the next entry field. Manual entry requires single entry of the unit number (Codabar or ISBT 128). The number will display as the user enters the digits. Unit scheme ISBT 128 does not require entry of a check digit; the check digit will be calculated by the system.

## Units Detail Block Fields and Definitions

### Unit ID

This field is populated from the entry scanned or manually entered in the control block. This field cannot be updated.

## Collection Date (Coll Date)

This displays the collection date of the unit. This field cannot be updated.

# Notes Entry

Click **Enter Notes** or use **ALT + E** or press **CTRL** + **F3** (Next Block) until the cursor moves to the notes block.

## Notes Field

Enter text for the notes, which will accept a maximum of 1500 characters. Click **Save** to save the notes entered.

Once the cursor moves to the notes entry, the user ID, user name and date will automatically display based on the current chapter date and time and the user logged in to the system.

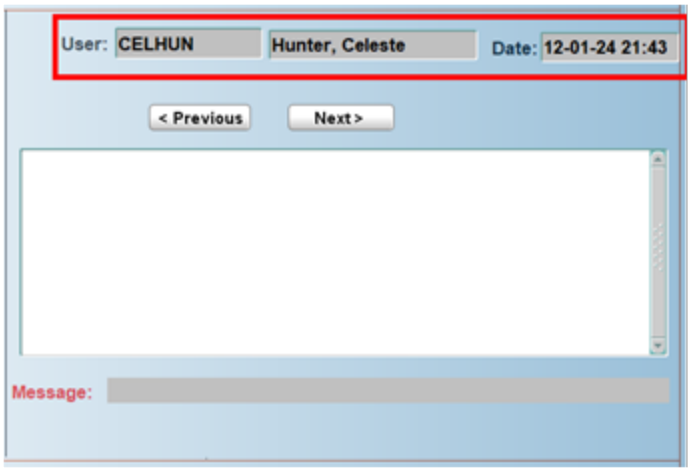


# Multiple Note Entry

Click **Enter Notes** or use **ALT + E** or press **CTRL** + **F3** (Next Block) until the cursor moves to the notes block.

Enter the notes that will be placed and click **NEXT** Next > to add another note. To go back to the previous note entry, click **PREVIOUS** < Previous .

# Access for Note Entry

The user must have access to add a note. The user must have UNOTE defined in Define Lab User Access (LUACCESS) to enter notes for a unit. If the user does not have access, the following message displays:

# To Delete a Unit

If a unit number was scanned in error, click **Delete Unit** Delete Unit or press **ALT + D** to remove the unit.

Steps for this process:


WellSky Corporation
Proprietary and confidential

1. The cursor must be in the detail block to delete the unit. If the cursor is in the Notes field, press CTRL + F4 (Previous Block) to move the cursor to the units detail block. The cursor will land on the first unit in the list.
2. Use the down arrow key ( ) to move down the list to the unit that needs to be removed.
3. Click Delete Unit

or press **ALT + D** to remove the unit, and the note will not be applied.

## To Delete a Note on a Unit

If a note is placed in error through this function, perform the appropriate procedure to delete the note.

- If the note is placed on a regional sample, go to Samples Query (SAMPQ) and remove the note that was placed in error.
- If the note is placed on an internal unit, go to Units Query (UNITQ) and remove the note that was placed in error.

**NOTE –** The user must have lab access to DNOTE to remove a note.

## At Commit

The system commits data to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Registration General Functions menu.

This Page Intentionally Left Blank

# Chapter 27 - Called Windows

27.1 Introduction ..... 1796
27.1.1 Access Control ..... 1796
27.2 Called Windows Descriptions ..... 1797
27.2.1 Notes (GEWNOTES) ..... 1797
27.2.2 Notation Window (CFWNOTAN) ..... 1800

# 27.1 Introduction

This chapter describes the use and function of a group of windows that cannot be accessed from the menu system, but that are called from within various programs throughout Lab. Some windows display information, while others permit data entry and modification to existing data.

Each of the windows described in this chapter contains its own programming logic and, in some cases, accesses one or more programming routines that are transparent to the user. Each called window is a program within itself, and its function is not dependent on the screen from which it is called.

In some instances, called windows receive information from the source screen (the screen from which it is called). Such information might be a batch ID, unit ID, etc. The called window can then automatically retrieve additional data that relates to the data element received from the source screen. In other instances, called windows might not receive data from the source screen, but allow you to enter required data in order to access the window's functional capabilities.

## 27.1.1 Access Control

Even though a screen might contain a button designed to invoke a called window, the user who is logged into the screen must have appropriate access to view the window. If you click a button but do not have access to the button's associated window, a message will advise you "You are not authorized access to this module."


WellSky Corporation
Proprietary and confidential

# 27.2 Called Windows Descriptions

The Called Windows are described in the following sections.

## 27.2.1 Notes (GEWNOTES)

### Intended Use

Use this window to view, add, and delete notes relating to a unit ID, test batch ID, or check-in batch ID.

### Limitations

You must have access permission to add or delete a note.

### Prerequisites

None

### Accessing the Screen

This window is not a stand-alone program and can be accessed only through certain screens within Lab.

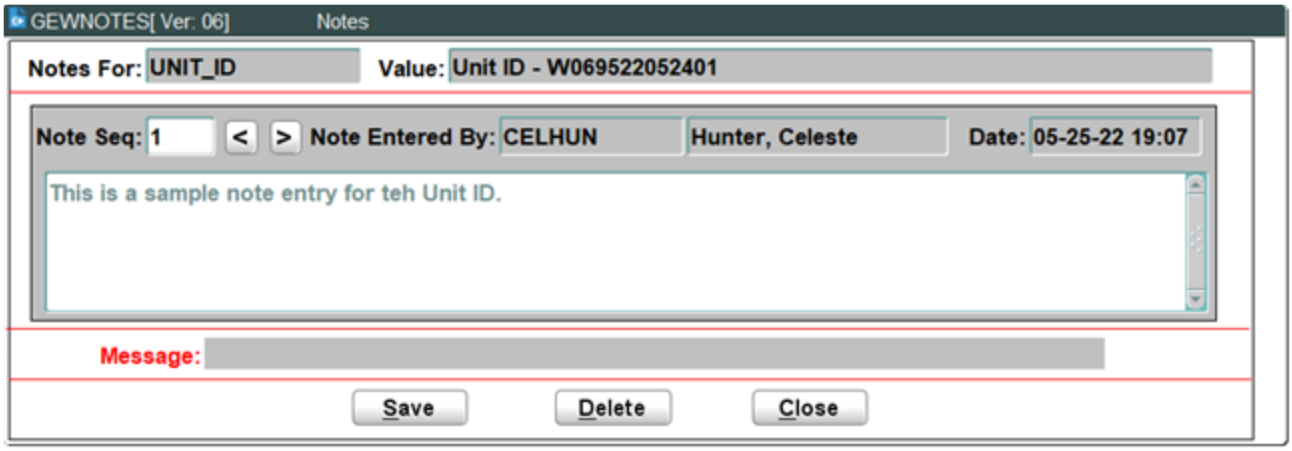


### Message

The *Message* Field at the bottom of the window displays a warning if you do not have permission to add or delete a note. Permission is granted by your system administrator using the Define User Access (UACCESS) screen.

Depending on your access permissions, you will see one of the following in the *Message* field:

### View Only

### View and Add Only

**Message:** Your access level is for viewing and adding notes. Deletion of notes is denied!!!!

### View and Delete Only

**Message:** Your access level is for viewing and deleting notes. Adding notes is denied!!!!

### View Delete and Save

The field is blank, indicating no warnings.

### Notes For

The system displays one of the following note types:

- Unit ID
- Test Batch ID
- Check-in Batch ID
- Test ID

### Value

The system displays the Unit ID, Test Batch ID, or Check-in Batch ID to which the note is associated.

### Note Seq

The system displays the sequence (order in which the notes were added) of the note that is currently displayed. Use the **Previous** and **Next** < > arrows to scroll through the notes.

### Note Entered By

The system displays the User ID and name of the user who added the note currently being viewed.

### Date

The system displays the date that the viewed note was added. In the case of a new note, the system displays today's date.

## Viewing Notes

When you open the window, any existing notes display in the note area. Use the **Previous** and **Next** < > arrows to scroll through the notes. The note sequence (order in which the notes were added) displays in the *Note Seq* field.

## Adding a Note

To add a note, do the following:


WellSky Corporation
Proprietary and confidential

1. If there are existing notes, use the Next arrow to scroll through the notes list until the note area is blank:

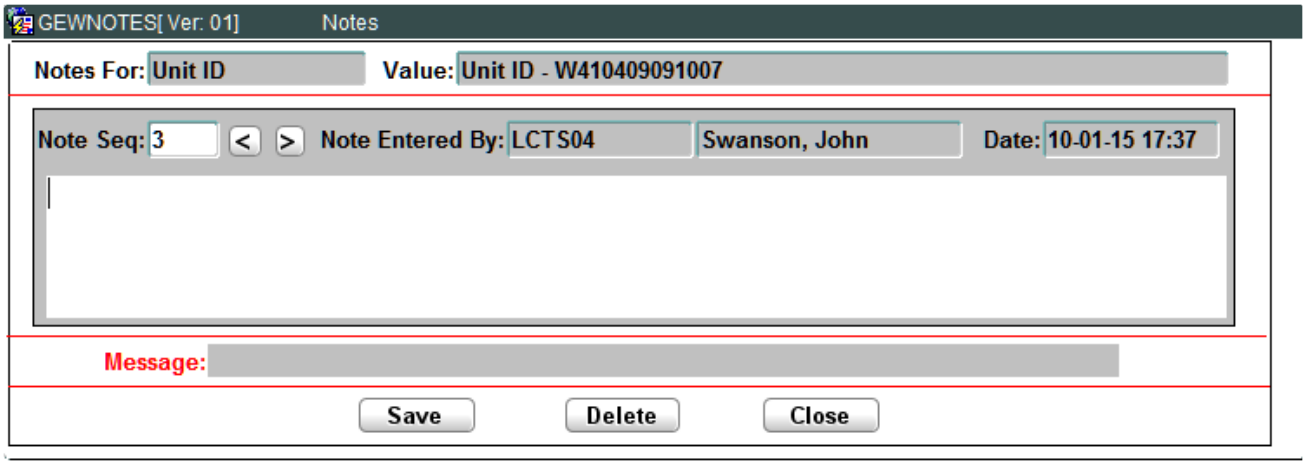


2. Enter the text for the note. A maximum of 1500 characters can be entered.

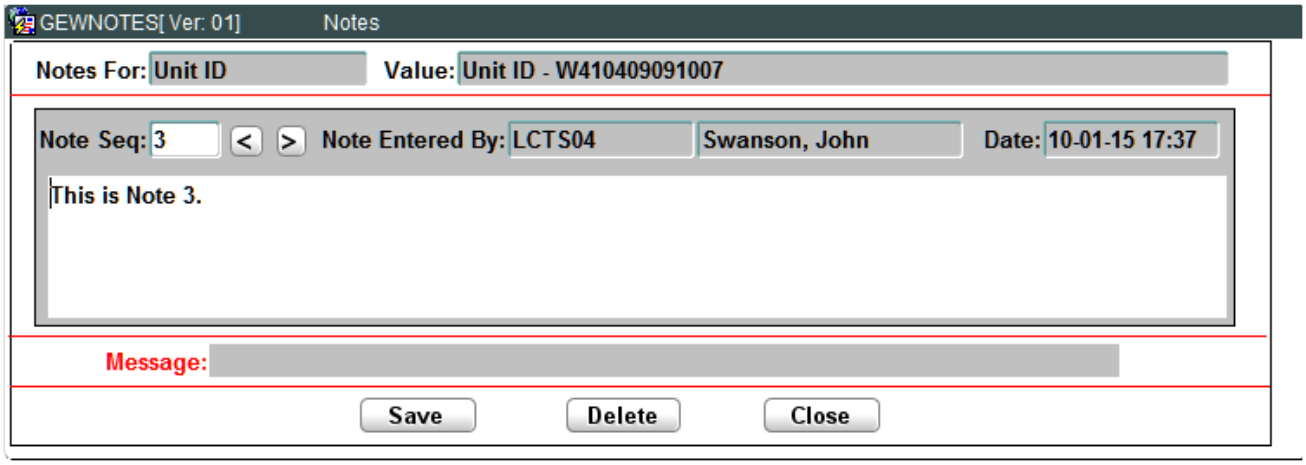


3. Click Save. The note text displays gray, indicating that the note has been saved.

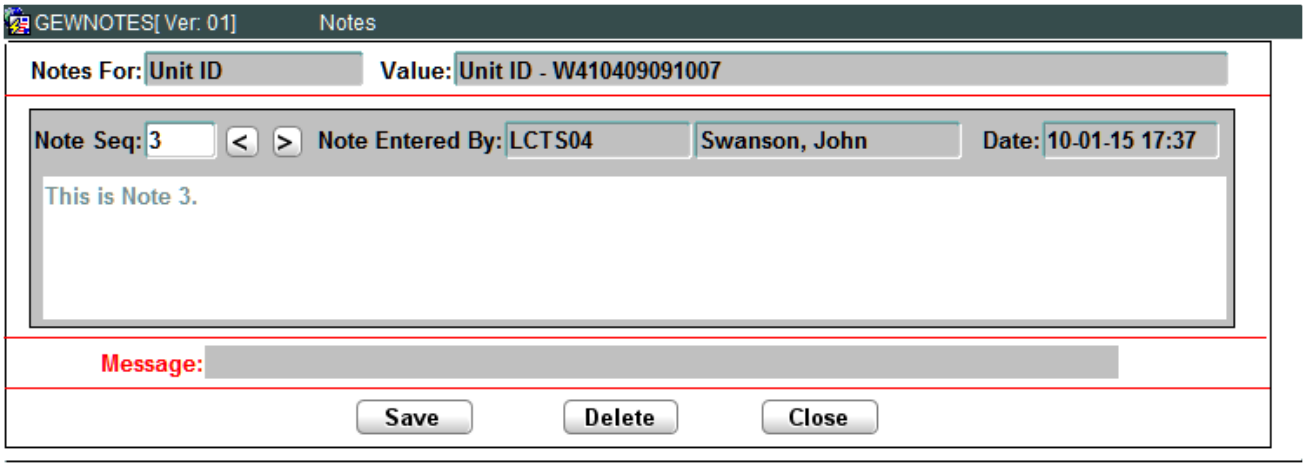


## Deleting a Note

To delete a note, do the following:

1. Use the **Previous** and **Next** < > arrows to locate the note you want to delete:

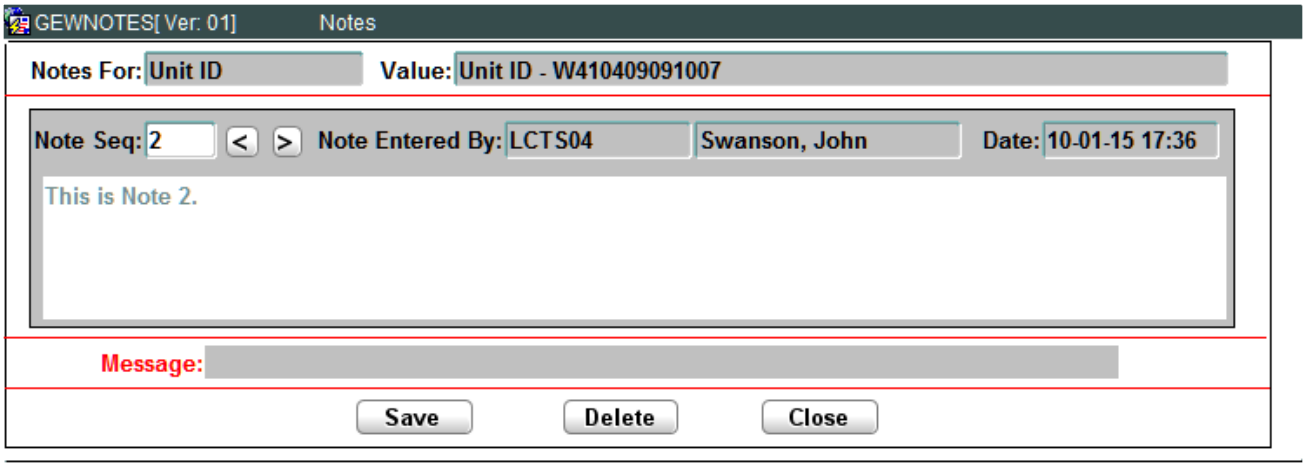


2. Click **Delete**. The deletion of the note is saved.

# 27.2.2 Notation Window (CFWNOTAN)

## Intended Use

Use this screen to associate notations to confirmatory samples. The Notation window allows entry of sample notations and test/result notations for samples.

## Limitations

- To link a notation that is associated to a test result, the unit must have the test scheduled.
- The Notation window can only be accessed through the Samples Query (SAMPQ) screen.

## Prerequisites

The user must have access to place or delete notations in User Access.

- CFRNO - delete a notation on a sample
- CFPNO - place a notation on a sample

## Accessing the Screen

This window is not a stand-alone program. It can only be accessed through the Samples Query (SAMPQ) screen.


WellSky Corporation
Proprietary and confidential

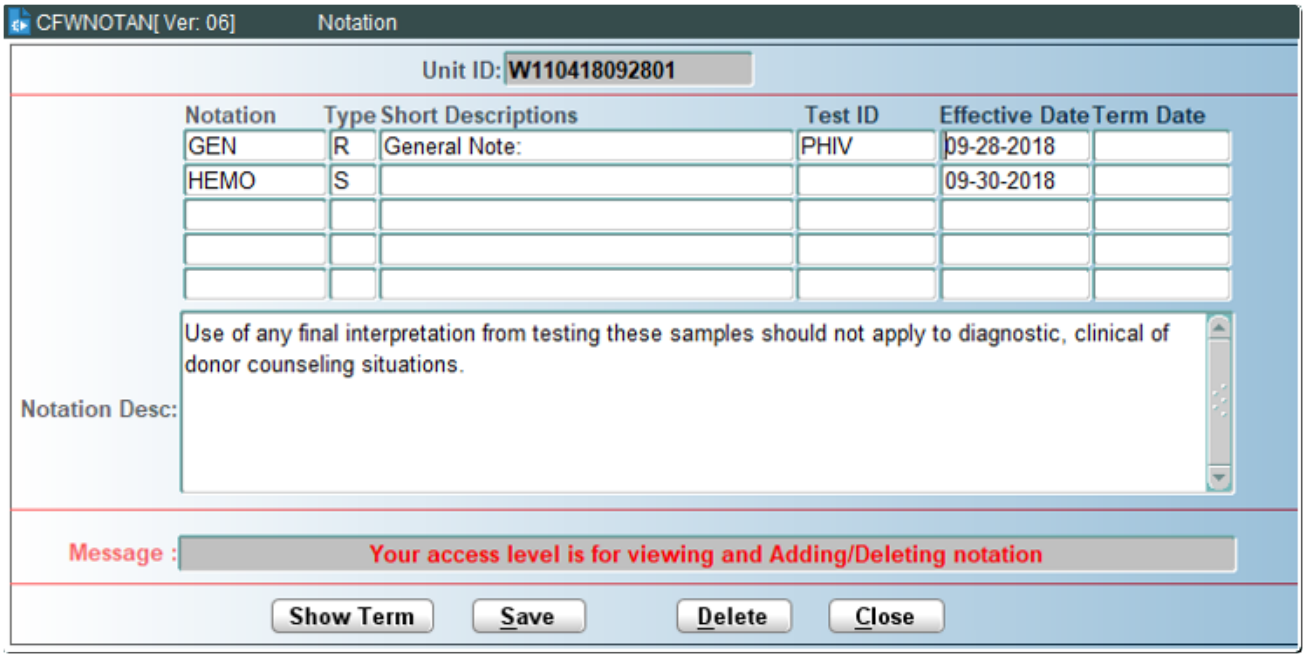


# Control Block Fields and Definitions

## Unit ID

The unit ID defaults based on the unit that was entered in SAMPQ. This is not a navigable field.

# Detail Block Fields and Definitions

## Notation Code

Manually enter or select from the LOV. The list of values comes from the Notation Code Configuration validation table.

**NOTE –** Selection of the notation code automatically defaults the type, short description, test ID (if associated), and the notation description.

**NOTE –** To place a R type notation, the sample must have the test ID scheduled on the unit.

## Type

This field is display-only.

- R = Result type notation code
- S = Sample type notation code

## Short Descriptions

This field is display-only. It displays a short header description to describe the notation.

### Test ID
This field is display-only. It displays the test ID linked to the notation in the Notation Configuration table.

### Effective Date
This field defaults to the current chapter date in MM-DD-YYYY format. The field can be updated to a future date.

### Term Date
Enter a date in MM-DD-YYYY format. The field can be updated to a future date.

**NOTE –** This is not a required field.

### Notation Desc:
This field is display-only. The complete description of the notation, with any additional information, displays here.

### Message
The Message field at the bottom of the window displays a warning if you do not have permission to add or delete a notation. Permission is granted by your system administrator using the Define User Access (LUACCESS) screen. Depending on your access permissions, you will see one of the following messages in this field:

#### View Only
**Your access level is for viewing notation only. Addition/Deletion is denied!!!!**

#### View and Add Only
**Your access level is for viewing and adding notation. Deletion of notation is denied!!!!**

#### View and Delete Only
**Your access level is for viewing and deleting notation. Adding notation is denied!!!!**

#### View, Add and Delete
**Your access level is for viewing and Adding/Deleting notation**

## Adding a Notation
Enter a notation, and press **Save** to add the notation to the sample.

## Deleting a Notation
Highlight a notation code, press **Delete**, and then press **Save**. The notation is removed from the sample.

## Viewing Terminated Notation Codes
To view terminated codes, press **Show Term**. The codes that have a current or past termination date display.


WellSky Corporation
Proprietary and confidential

## At Commit

The notation is saved to the database.

## What to Do Next

For normal processing, press **Close** to return to the Samples Query (SAMPQ) screen.

This Page Intentionally Left Blank

# [Product Management Functions (DIST)]

This Page Intentionally Left Blank

28

# Chapter 28 - Order Entry


28.1 Introduction ..... 1808
28.1.1 Overview ..... 1808
28.1.2 Structure ..... 1808
28.2 Order Entry Functions ..... 1809
28.2.1 Enter Regular Order (ORDER) ..... 1809
28.2.2 Enter Special Order (SPECIAL) ..... 1818
28.2.3 Enter Export Order (EXPORT) ..... 1825
28.2.4 Schedule Auto/Directed Order (AUTO) ..... 1830
28.3 Order Allocation Functions ..... 1833
28.3.1 Special Order Allocation (SALLO) ..... 1833
28.4 Order Maintenance Functions ..... 1842
28.4.1 Change Or Cancel Order (CANCEL) ..... 1842
28.4.2 Enter Standing Order (STANDO) ..... 1850
28.4.3 Cancel Unfilled Orders (CUO) ..... 1854
28.4.4 Release Standing Orders Batch Program (DCONVERT) ..... 1856
28.4.5 Enter Order Charges (CHARGE) ..... 1858
28.5 Transfer Orders Functions ..... 1862
28.5.1 Initiate Hospital Transfer (TRANS1) ..... 1862
28.5.2 Close Hospital Transfer (TRANS2) ..... 1867
28.6 Order Queries Functions ..... 1870
28.6.1 Open Orders Query (OPENQ) ..... 1870
28.6.2 Customer Orders Query (OCQ) ..... 1874
28.6.3 Allocated Products Query (ALLUN) ..... 1877
28.6.4 Standing Order Query (STANDQ) ..... 1879
28.6.5 Order Processing Status (OFLOW) ..... 1881
28.6.6 Order History – Single Order (ORDQ) ..... 1884
28.6.7 Order History – Multiple Orders (MORDQ) ..... 1890
28.6.8 Order Charges – By Order No (OCHGQ) ..... 1892
28.6.9 Finance Interface Details (DUMPI) ..... 1896

# 28.1 Introduction

## 28.1.1 Overview

The order entry module provides computer aids to take, record, and track orders for the blood center. All customer profile and product information necessary to create a valid order is displayed to the user who enters the order information into the system.

The following are the types of orders:

- Regular – non-autologous/directed orders that have no special antigens requested and are not being exported.
- Special – orders having products with requested antigens and/or attributes associated to them.
- Export – orders placed by customers that are not part of the facility's normal customer base
- Auto/Directed – orders for Autologous/Directed products

The system requires that only special order products be allocated since these products must have exactly the antigens and/or attributes ordered.

This module is also used to set up standing orders and modify orders that already exist. A standing order is an order that is requested by the customer on a regular basis. After a standing order is entered, it is easily converted to a regular order. This can be done on a one by one basis or by using a batch program to convert all standing orders.

**NOTE –** Hospital transfers are conducted when products are needed to fill an order. The system searches hospitals that have received the desired product in recent shipments and allows the user to select these products for transfer after the facility has been called for verification.

## 28.1.2 Structure

There following sections are included in the Distribution Order Entry module:

- Order Entry Functions
- Order Allocation
- Order Maintenance
- Transfer Orders
- Order Queries
- Order Reports

Order reports are described in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 28.2 Order Entry Functions

Order Entry Functions are accessed from the following menu:

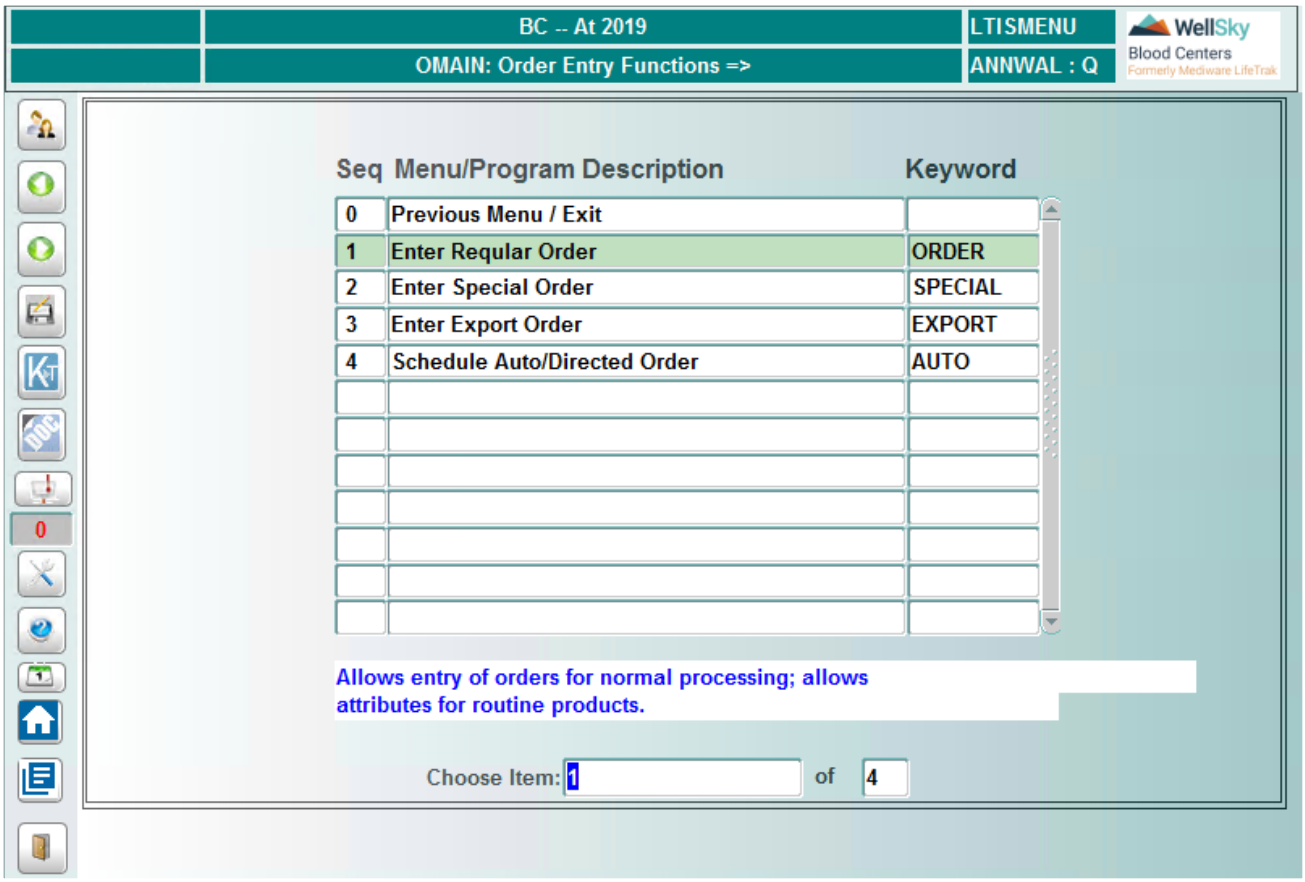


## 28.2.1 Enter Regular Order (ORDER)

### Intended Use

Use the Enter Regular Order screen to enter and modify an order for regular products.

This screen also provides the following features:

- Allows addition and modification of customer contacts.
- Displays other open regular orders for the customer.
- Displays blood center inventory for ordered products.
- Allows addition of service charges.
- Allows addition of order notes.

- Displays open orders that have not been allocated.
- Allows ability to cancel an item.

## Limitations

This screen is used for entry of blood product orders.

To allow the shipment of products outside the state, the following conditions must be met:

- The product must have the OSOK_FLAG in the ACTIVE_PRODUCTS table set to `Y`.
- The OUT_OF_STATE flag in the CONSIGNEE table should be set to `Y`. If this flag is set to N, then even if the customer type is export, the system will not check the OSOK_FLAG status of the product; this will allow a product that should not be shipped to be packed.
- The product (transfusable) should be a licensed product. There are multiple items that are checked at labeling to determine if the product is to be labeled as licensed or not (OSOK_FLAG is Y or N).

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Entry Functions menu or by entering the keyword `ORDER`.

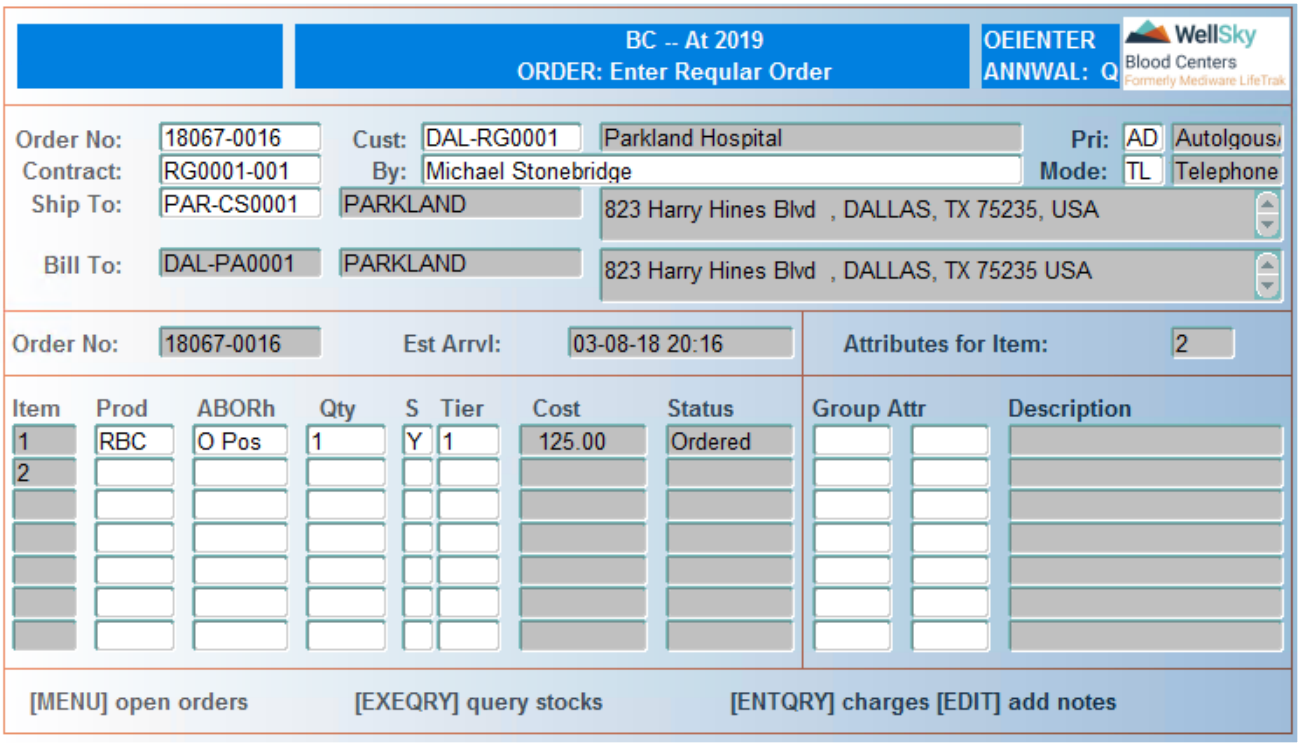

# Control Block Fields and Definitions

## Order No

Field is not navigable for new orders. Press **F4** (Previous Field) to access this field to select an existing order. Enter order number or select from LOV to select an existing order.

**NOTE –** Order number is generated for new orders after the first line item is entered.

**NOTE –** If entering a new order for a customer for which an order has just been entered, the customer information can be defaulted in by pressing **CTRL** + **F6** (Duplicate Field). Cursor will rest in the Status field.

## Cust

Enter customer ID or select from LOV. Customer name automatically displays after the customer ID is entered.

## Pri

Enter order priority or select from LOV.

**NOTE –** The priority determines how the system calculates the estimated time of arrival.

## Contract

Enter contract ID or select from LOV. Press **ENTER** to select default contract ID.

## By

Enter contact name or select from LOV. Press **ENTER** to select the default contact.

**NOTE –** The Ship to field must be entered before a new contact can be created.

**NOTE –** Refer to Modifying/Adding a Contact below to modify or add a contact.

## Mode

Enter order mode or select from LOV.

## Ship to

Enter consignee ID or select from LOV. Press **ENTER** to select default consignee ID.

## Bill to

Bill to ID, name, and address automatically display after the customer ID is entered. Field is not navigable.

# Order Items Block Fields and Definitions

## Order No

System-generated order number automatically displays after the first item is entered. Field is not navigable.

## Est Arrvl

Estimated arrival time automatically displays after the priority is entered. Field is not navigable.

## Item

Field automatically populates with the line item number. Field is not navigable.

## Prod

Enter product type being ordered or select from LOV.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

## ABORh

Enter blood type being ordered or select from LOV.

**NOTE –** The LOV only displays codabar ABORH values. Once the ISBT start date is set in the Chapter table, the LOV will contain ISBT ABORH values, (that is, A0- Group A Pooled Rh).

**NOTE –** Blood type can be entered in three ways: numerical ABO value or the value entered for mnemonic 1, or mnemonic 2 in Valid ABO (ABO).

## Qty

Enter the quantity of the product being ordered.

## S

Enter 'Y' if the customer will accept a substitution. Enter 'N' if the customer will not accept a substitution.

## Tier

Enter the ordered tier for the product or select from LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** Tiers are listed in ascending order from the date of collection. After the tier is entered, the system generates an order number.

**NOTE –** After this field is entered CTRL + F3 (Next Block) can be used to enter attributes.

### Cost
The cost automatically displays after the tier is entered. Field is not navigable.

### Status
Line item status automatically populates after the tier is entered. Field is not navigable.

## Entering Attributes
Press CTRL + F3 (Next Block) to enter attribute information, if applicable.

### Attributes for Item
The system automatically displays the line item for which attributes are being entered. Field is not navigable.

### Group
Enter attribute group or select from LOV.

### Attr
Enter attribute code or select from LOV.

### Description
Attribute description automatically displays after the attribute code is entered. Field is not navigable.

Press CTRL + F4 (Previous Block) to return to the order items block.

## Modifying/Adding a Contact
To modify or add a contact, press CTRL + F2 (Create Record) in the By field. The following window opens:

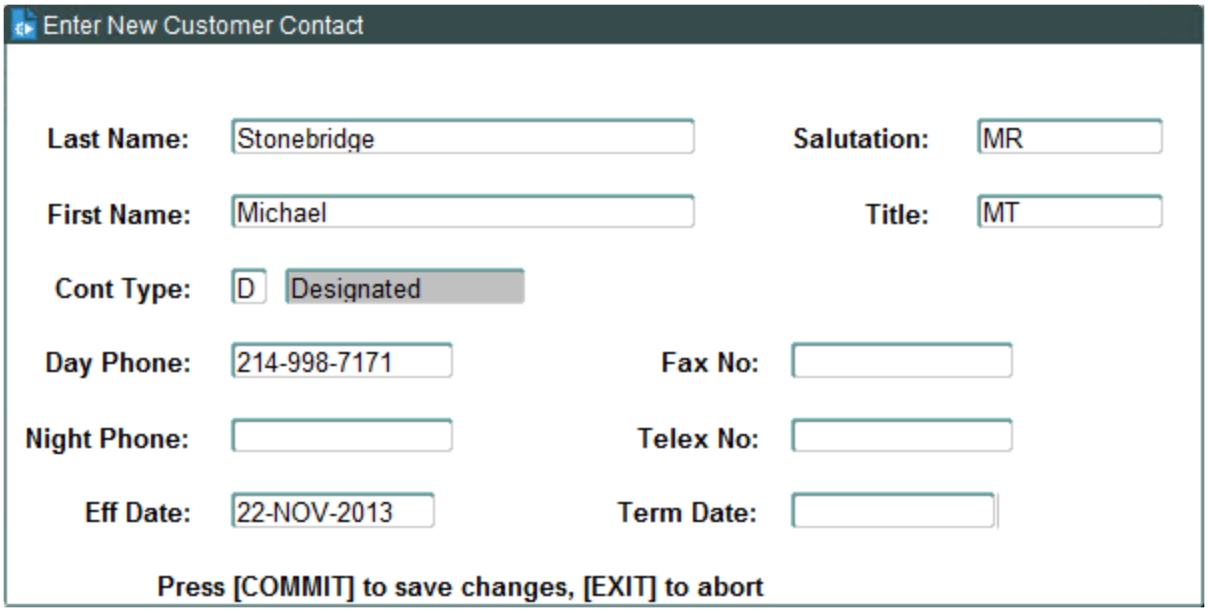


Enter the following information for each contact:

## Last Name

Enter contact's last name. A maximum of 50 characters is allowed.

## Salutation

Enter contact's salutation (for example, Mr.) or select from LOV. Entry in this field is not required.

## First Name

Enter contact's first name. A maximum of 50 characters is allowed.

## Title

Enter contact's title (for example, CEO). A maximum of 10 characters is allowed. Entry in this field is not required.

## Cont Type

Enter contact type or select from LOV.

## Day Phone

Enter contact's daytime phone number. Entry in this field is not required.

## Night Phone

Enter contact's after-hours phone number. Entry in this field is not required.

## Fax No

Enter customer's fax number. Entry in this field is not required.


WellSky Corporation
Proprietary and confidential

### Telex No

Enter customer's Telex number. Entry in this field is not required.

### Eff Date

Enter contact effective using the DD-MON-YYYY format.

### Term Date

Enter contact termination date using the DD-MON-YYYY format. Entry is required in this field only when terminating a contact.

Press F12 (Commit) to save contact information or Exit to abort without saving.

## Reviewing Open Orders

To review information on orders that have not yet been filled, press F6 (Menu) and the following window opens:

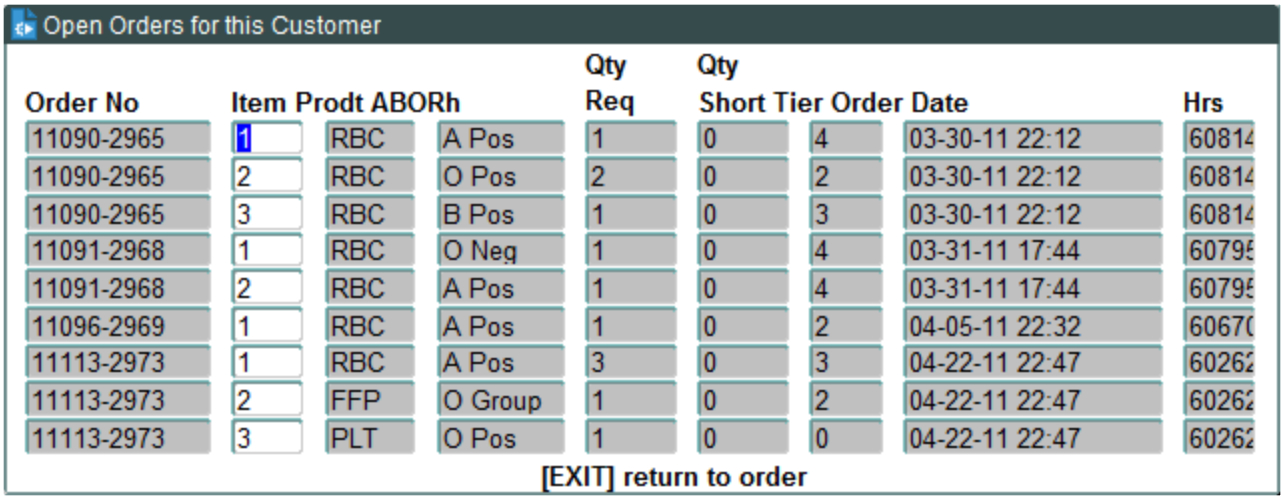


The following data displays in the query:

- Order No – order number.
- Item – order item number.
- Prodt – product type ordered.
- ABORh – blood type ordered.
- Qty Req – total quantity ordered.
- Qty Short – number of products not available to fill the order.
- Tier – product tier ordered.
- Order Date – date and time order was placed.
- Hrs – number of hours since the order was placed.

Use the UP and DOWN arrow keys to scroll through displayed data. Data cannot be updated in this query.

Press F8 (Exit Screen) to return to the entry screen.

## Reviewing Stock

To review inventory for an order line item, press ALT + F12 (Execute Query) and the following window opens:

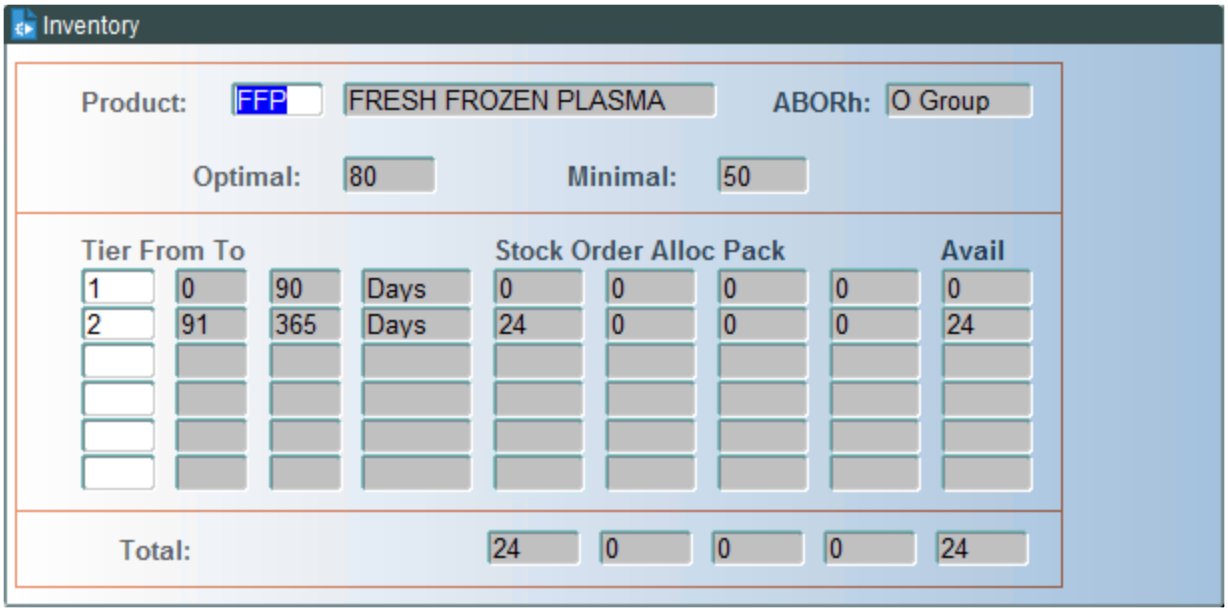


The following data displays in the query:

- Product – product type and description of line item.
- ABORh – blood type.
- Optimal – ideal inventory quantity for this product.
- Minimal – minimal inventory quantity for this product.
- Tier – tier number of product.
- From – beginning of date range for the tier number.
- To – end of date range for the tier number.
- Stock – number of ordered products in the tier in stock.
- Order – number of ordered products in the tier on order.
- Alloc – number of ordered products in the tier allocated.
- Pack – number of ordered products in the tier packed
- Avail – number of ordered products in the tier available.
- Total – totals for ordered, allocated, packed and available products regardless of tier.

Use the UP and DOWN arrow keys to scroll through displayed data. Data cannot be updated in this query.

Press F8 (Exit Screen) to return to the entry screen.


WellSky Corporation
Proprietary and confidential

# Entering Charges

To enter additional charges to the order due to supplementary processing, press CTRL + F12 (Enter Query) and the following window opens:

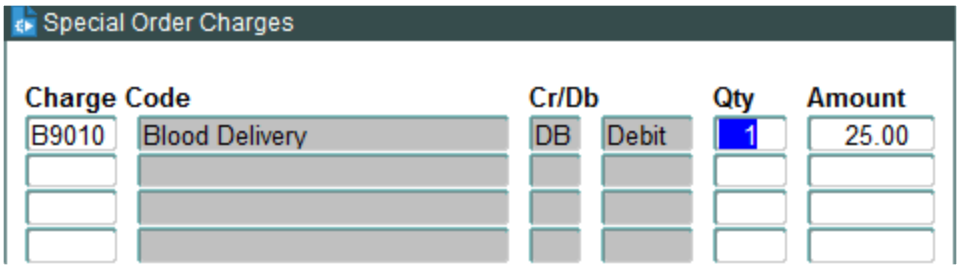


## Charge Code

Enter charge code or select from LOV. The system displays the charge code description after the code is entered.

## Cr/Db

Field automatically populates with DB and Debit for debit and CR and Credit for credit. Field is not navigable.

## Qty

Enter quantity to be charged.

## Amount

Enter charge amount or press ENTER to select the default charge.

**NOTE –** The system automatically displays the default amount for the charge code. The same charge cannot be entered twice. The charge must be doubled if the process is performed twice.

Press F8 (Exit Screen) to return to the entry screen.

# Entering Comments

To enter additional comments on the order, press CTRL + e (Edit) and the following window opens:

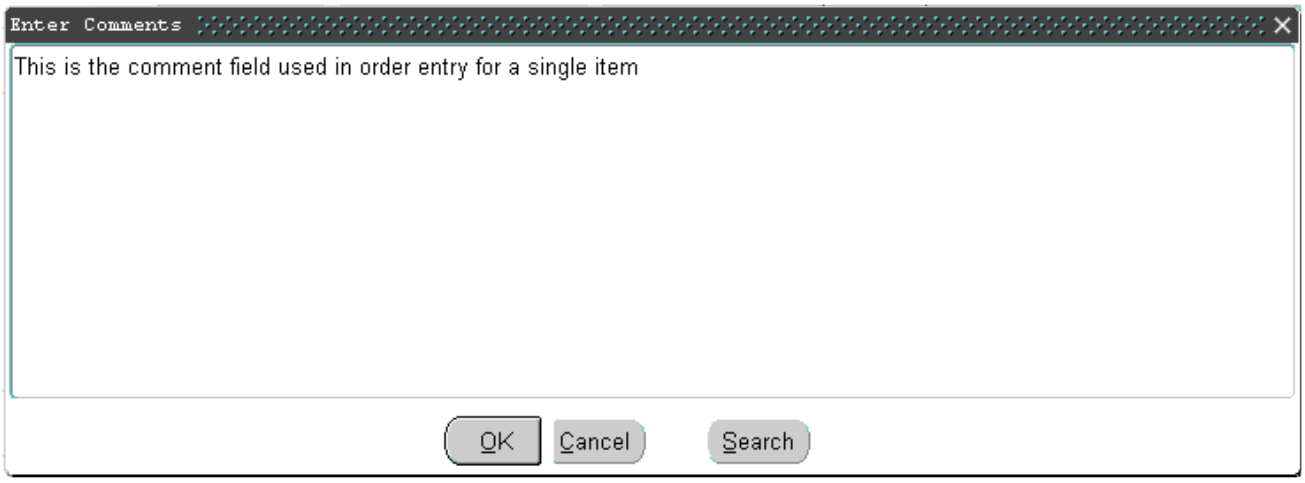


Enter free format notes. A maximum of 250 characters is allowed.

After notes are entered, press **F8** (Exit Screen) to return to the entry screen.

## Releasing the Order

To release the order for allocation, press **F8** (Exit Screen) and the following window opens:




### Release order for allocation? Y/N

Enter `Y` to release the order for allocation. An order slip automatically prints, and the order is ready for processing.

Enter `N` if you do not wish to release the order and return to the main entry screen.

Press **CTRL** + **F5** (Clear Form) to exit the screen without releasing the order.

## At Commit

- Order Slip prints
- Canceled items are marked User canceled
- Any additional charges are associated to the order
- Order is released for allocation

## What to Do Next

Pack products for the order using Pack Products (PACK) or Offline Product Packing (PACKO).

# 28.2.2 Enter Special Order (SPECIAL)

## Intended Use

Use the Enter Special Order screen to enter and modify an order for special products.


WellSky Corporation
Proprietary and confidential

This screen also provides the following features:

- Allows addition and modification of customer contacts.
- Displays other open regular orders for the customer.
- Displays blood center inventory for ordered products.
- Allows addition of service charges.
- Allows addition of order notes.
- Displays open orders that have not been allocated.
- Allows ability to cancel an item.

## Limitations

All customer and related tables (CUSTOMER, PAYEE, CONSIGNEE, CONTRACT, and CONTACT) must have been created at least one day before planned use of the customer.

To allow the shipment of products outside the state, the following conditions must be met:

- The product must have the OSOK_FLAG in the ACTIVE_PRODUCTS table set to `Y`.
- The OUT_OF_STATE flag in the CONSIGNEE table should be set to `Y`. If this flag is set to N, then even if the customer type is export, the system will not check the OSOK_FLAG status of the product; this will allow a product that should not be shipped to be packed.
- The product (transfusable) should be a licensed product. There are multiple items that are checked at labeling to determine if the product is to be labeled as licensed or not (OSOK_FLAG is Y or N).
- If the order for the product was placed as a Special Order, it can go out of state, regardless of the licensure status of the product.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Entry Functions menu or by entering the keyword `SPECIAL`.

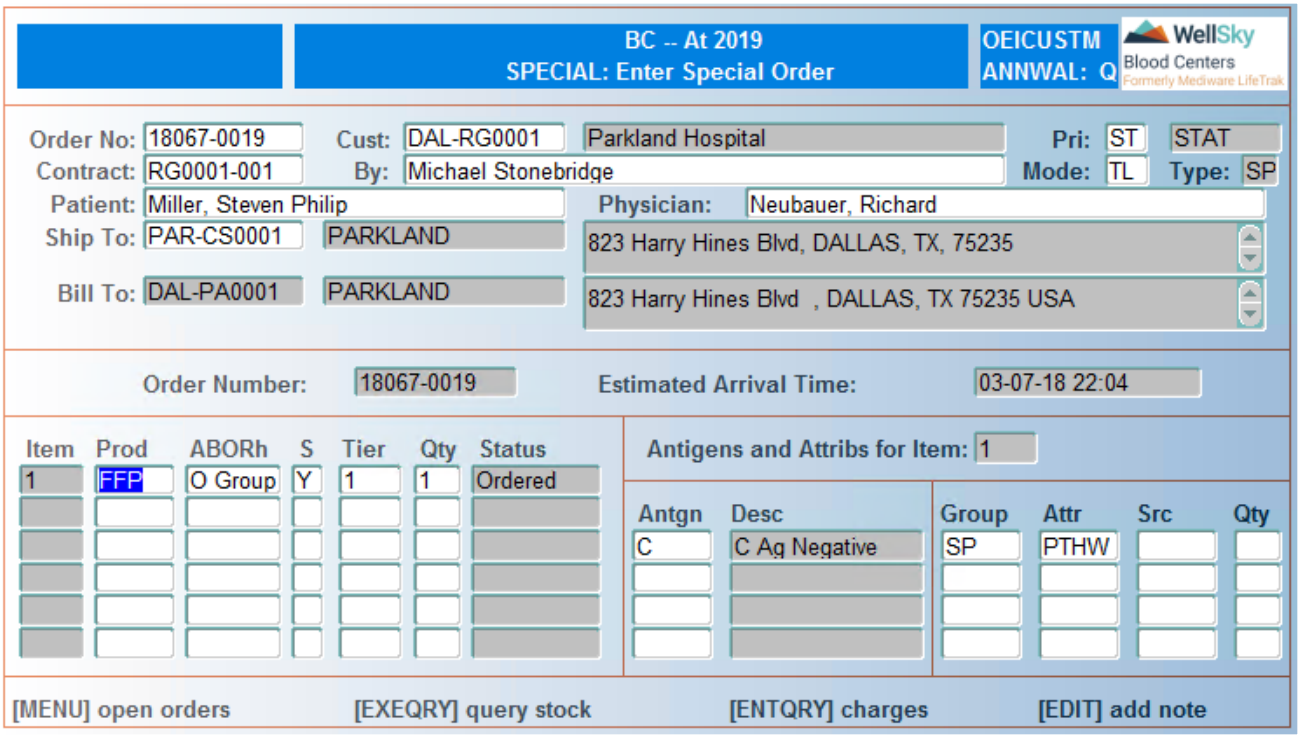


# Control Block Fields and Definitions

## Order No

Field is not navigable for new orders. Press **F4** (Previous Field) to access this field to select an existing order. Enter order number or select from LOV to select an existing order.

**NOTE –** Order number is generated for new orders after the first line item is entered.

**NOTE –** If entering a new order for a customer for which an order has just been entered, the customer information can be defaulted in by pressing **CTRL** + **F6** (Duplicate Field). Cursor will rest in the Status field.

## Cust

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

## Pri

Enter order priority or select from LOV.

**NOTE –** Priority determines how the system calculates the estimated time of arrival.


WellSky Corporation
Proprietary and confidential

### Contract
Enter contract ID or select from LOV. Press ENTER to select default contract ID.

### By
Enter contact name or select from LOV. Press ENTER to select the default contact.

**NOTE –** The Ship to field must be entered before a new contact can be created.

**NOTE –** Refer to Modifying/Adding a Contact below to modify or add a contact.

### Mode
Enter order mode or select from LOV.

### Ship to
Enter consignee ID or select from LOV. Press ENTER to select default consignee ID.

### Bill to
Bill to ID, name, and address automatically display after the customer ID is entered. Field is not navigable.

## Order Items Block Fields and Definitions

### Order No
System-generated order number automatically displays after the first item is entered. Field is not navigable.

### Est Arrvl
Estimated arrival time automatically displays after the priority is entered. Field is not navigable.

### Item
Field automatically populates with the line item number. Field is not navigable.

### Prod
Enter product type being ordered or select from LOV.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:



Press F8 (Exit Screen) to dismiss the message and then enter a different product.

### ABORh

Enter blood type being ordered or select from LOV.

**NOTE –** The LOV only displays codabar ABORH values. Once the ISBT start date is set in the Chapter table, the LOV will contain ISBT ABORH values, (for example, O pos Emergency).

### S

Enter `Y` if the customer will accept a substitution. Enter `N` if the customer will not accept a substitution.

**NOTE –** Substitution criteria are based on product type and valid blood type substitutions.

### Tier

Enter the ordered tier for the product or select from LOV.

**NOTE –** Tiers are listed in ascending order from the date of collection.

**NOTE –** After this field is entered CTRL + F3 (Next Block) can be used to enter attributes.

### Qty

Enter quantity of the product being ordered.

**NOTE –** The cursor automatically goes to the antigens block.

### Attributes for Item

The system automatically displays the line item for which attributes and antigens are being entered. Field is not navigable.

### Status

The system automatically displays the order status after each order item is entered. Field is not navigable.

## Entering Antigens

**NOTE –** If you order by antigen, the system will search for units that have historical donor testing, as well as current testing.


WellSky Corporation
Proprietary and confidential

### Antigen

Enter ordered antigen or select from LOV. Antigen description automatically displays after the antigen code is entered.

Press CTRL + F4 (Previous Block) to return to the line item or CTRL + F3 (Next Block) to enter attributes.

## Entering Attributes

**NOTE –** If you order by attribute, the system will only search for units that have current testing. Historical donor testing is not considered.

### Group

Enter attribute or select from LOV.

### Attr

Enter attribute code or select from LOV.

### Src

Enter source product type or select from LOV.

**NOTE –** Field is navigable only for pooled products.

### Qty

Enter quantity needed in pooled product.

**NOTE –** Field is navigable only for pooled products.

Press CTRL + F4 (Previous Block) two times to return to the order items block.

## Modifying/Adding a Contact

Refer to Enter Regular Order (ORDER), Modifying/Adding a Contact for instructions on performing this function.

## Reviewing Open Orders

Press F6 (Menu) to review open orders for this customer. The following window opens:

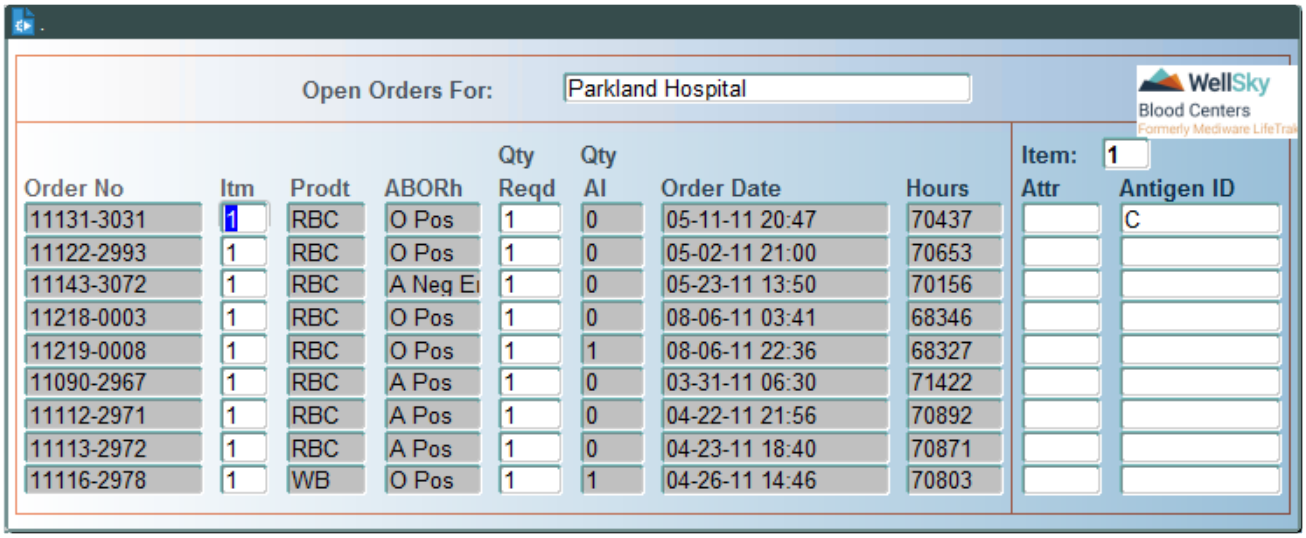


The following data displays in the query:

- Order No – order number
- Item – order item number
- Prodt – product type ordered
- ABORh – blood type ordered
- Qty Req – total quantity ordered
- Qty Short – number of products not available to fill the order
- Tier – product tier ordered
- Order Date – date and time order was placed
- Hrs – number of hours since the order was placed
- Attr – ordered attribute
- Antigen ID – ordered antigen

Use the **UP** and **DOWN** arrow keys to scroll through displayed data. Data cannot be updated in this query.

Press **F8** (Exit Screen) to return to the entry screen.

## Reviewing Stock

Refer to Enter Regular Order (ORDER), Reviewing Stock for instructions on performing this function.

## Entering Charges

Refer to Enter Regular Order (ORDER), Entering Charges for instructions on performing this function.

## Entering Comments

Refer to Enter Regular Order (ORDER), Entering Comments for instructions on performing this function.


WellSky Corporation
Proprietary and confidential

## Releasing the Order

To release the order for allocation, press **F8** (Exit Screen) and the following window opens:




### Release order for allocation? Y/N

Enter `Y` to release the order for allocation. An order slip automatically prints, and the order is ready for processing.

Enter `N` if you do not wish to release the order and return to the main entry screen.

Press **CTRL** + **F5** (Clear Form) to exit the screen without releasing the order.

## At Commit

- Order slip is generated.
- Canceled items are marked User canceled.
- Any additional charges are associated to the order.
- Order is released for allocation.

## What to Do Next

Allocate products for the order using Special Order Allocation (SALLO).

# 28.2.3 Enter Export Order (EXPORT)

## Intended Use

Use the Enter Export Order screen to enter and modify an order for export products. Export orders may be for normal products sold to non-affiliated facilities.

This screen also provides the following features:

- Allows addition and modification of customer contacts.
- Displays other open regular orders for the customer.
- Displays blood center inventory for ordered products.
- Allows addition of service charges.
- Allows addition of order notes.
- Allows for modification of product price, if Price Flag set to Y or null in Create Customer Profile (CUSTOMER).
- Displays open orders that have not been allocated.
- Allows ability to cancel an item.

## Limitations

To allow the shipment of products outside the state, the following conditions must be met:

- The product must have the OSOK_FLAG in the ACTIVE_PRODUCTS table set to `Y`.
- The OUT_OF_STATE flag in the CONSIGNEE table should be set to `Y`. If this flag is set to N, then even if the customer type is export, the system will not check the OSOK_FLAG status of the product; this will allow a product that should not be shipped to be packed.
- The product (transfusable) should be a licensed product. There are multiple items that are checked at labeling to determine if the product is to be labeled as licensed or not (OSOK_FLAG is Y or N).

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Entry Functions menu or by entering the keyword `EXPORT`.

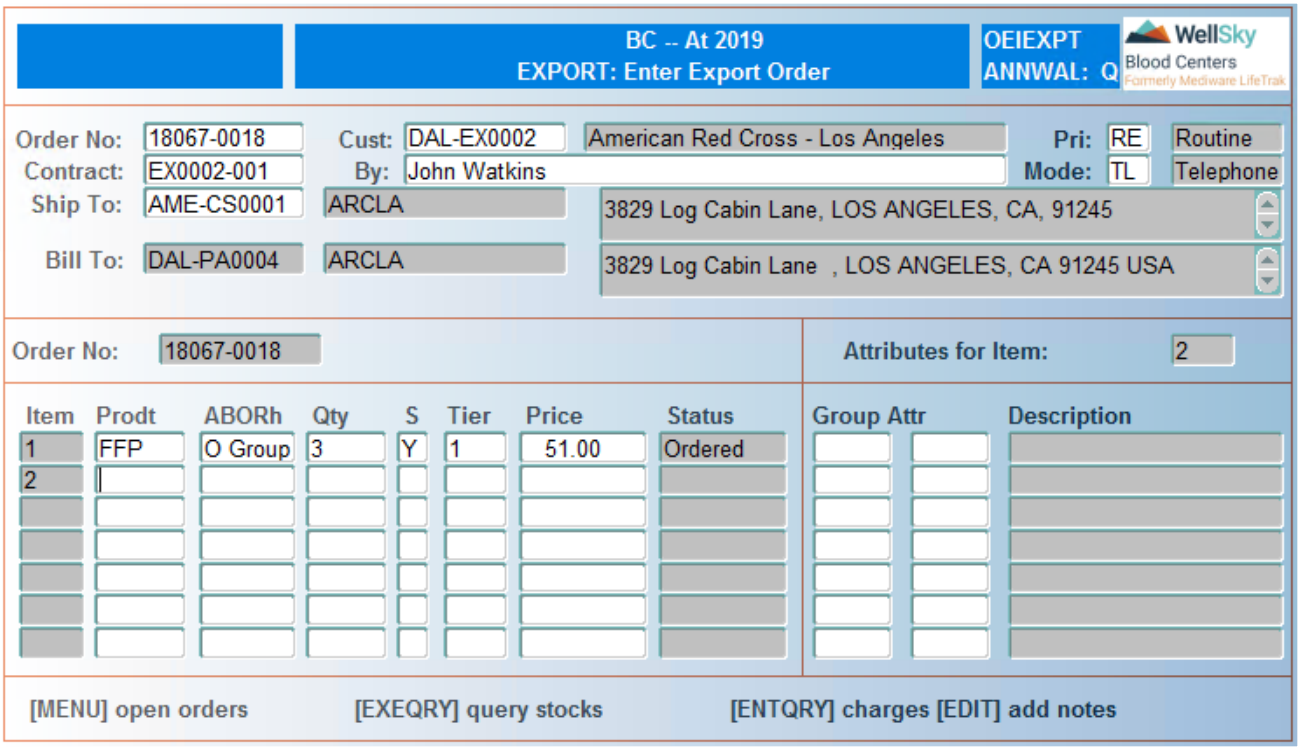


## Control Block Fields and Definitions

### Order No

Field is not navigable for new orders. Press **F4** (Previous Field) to access this field to select an existing order. Enter order number or select from LOV to select an existing order.

**NOTE –** Order number is generated for new orders after the first line item is entered.

**NOTE –** If entering a new order for a customer for which an order has just been entered, the customer information can be defaulted in by pressing CTRL + F6 (Duplicate Field). Cursor will rest in the Status field.

### Cust
Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

### Pri
Enter order priority or select from LOV.

**NOTE –** The priority determines how the system calculates the estimated time of arrival.

### Contract
Enter contract ID or select from LOV. Press ENTER to select default contract ID.

**NOTE –** Default contract ID automatically displays after the customer ID is entered.

### By
Enter contact name or select from LOV. Press ENTER to select the default contact.

**NOTE –** The Ship to field must be entered before a new contact can be created.

**NOTE –** Refer to Modifying/Adding a Contact below to modify or add a contact.

### Mode
Enter order mode or select from LOV.

### Ship to
Enter consignee ID or select from LOV. Press ENTER to select default consignee ID.

### Bill to
Bill to ID, name, and address automatically display after the customer ID is entered. Field is not navigable.

## Order Items Block Fields and Definitions

### Order No
System-generated order number automatically displays after the first item is entered. Field is not navigable.

## Item

Field automatically populates with the line item number.  Field is not navigable.

## Prodt

Enter product type being ordered, or select from LOV.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

## ABORh

Enter blood type being ordered, or select from LOV.

**NOTE –** The LOV only displays codabar ABORH values. Once the ISBT start date is set in the Chapter table, the LOV will contain ISBT ABORH values, (for example, A0- Group A Pooled Rh).

## Qty

Enter the quantity of the product being ordered.

## S

- `Y` – the customer will accept a substitution.
- `N` – the customer will not accept a substitution.

**NOTE –** Substitution criteria are based on product type and valid blood type substitutions.

## Tier

Enter the ordered tier for the product or select from LOV.

**NOTE –** Tiers are listed in ascending order from the date of collection.

## Price

Press ENTER to accept default product price or enter modified product price.


WellSky Corporation
Proprietary and confidential

**NOTE –** The system automatically defaults product price. Price can only be modified if the Price Change Flag is set to Y or is null for the customer in Create Customer Profile (CUSTOMER). Zero (0) may be entered.

### Status
The system automatically displays the order status after each order item is entered. Field is not navigable.

Press CTRL + F3 (Next Block) to enter attributes.

## Entering Attributes

### Attributes for Item
Line item automatically displays. Field is not navigable.

### Group
Enter attribute group or select from LOV.

### Attr
Enter attribute code or select from LOV.

### Description
Attribute code description automatically displays after code is entered. Field is not navigable.

Press CTRL + F4 (Previous Block) to return to the order items and press the Down arrow key to enter additional items.

## Modifying/Adding a Contact
Refer to Enter Regular Order (ORDER), Modifying/Adding a Contact for instructions on performing this function.

## Reviewing Stock
Refer to Enter Regular Order (ORDER), Reviewing Stock for instructions on performing this function.

## Entering Charges
Refer to Enter Regular Order (ORDER), Entering Charges for instructions on performing this function.

## Entering Comments
Refer to Enter Regular Order (ORDER), Entering Comments for instructions on performing this function.

## Releasing the Order
To release the order for allocation, press F8 (Exit Screen) and the following window opens:



### Release order for allocation? Y/N

Enter `Y` to release the order for allocation. An order slip automatically prints, and the order is ready for processing.

Enter `N` if you do not wish to release the order and return to the main entry screen.

Press **CTRL** + **F5** (Clear Form) to exit the screen without releasing the order.

## At Commit

Updates to the system at the time of Commit include:

- Data entered in this screen.
- Cancelled items are marked 'User cancelled'.
- Any additional charges are associated to the order.

## What to Do Next

Pack products for the order using Pack Products (PACK) or Offline Product Packing (PACKO).

# 28.2.4 Schedule Auto/Directed Order (AUTO)

## Intended Use

Use the Schedule Auto/Directed Order screen to schedule autologous and directed products for shipment to meet the customer's scheduled need date. The screen displays all autologous and directed products collected by the specified hospital by patient name.

## Limitations

- Products from restricted directed donations cannot be processed through this screen.
- All customer and related tables (CUSTOMER, PAYEE, CONSIGNEE, CONTRACT, and CONTACT) must have been created at least one day before planned use of the customer.

## Prerequisites

- Special patient registration and unit linking must have been performed in Donor prior to performing this function.
- Product must have been checked into Distribution.

## Accessing the Screen

Access this screen from the Order Entry Functions menu or by entering the keyword `AUTO`.


WellSky Corporation
Proprietary and confidential

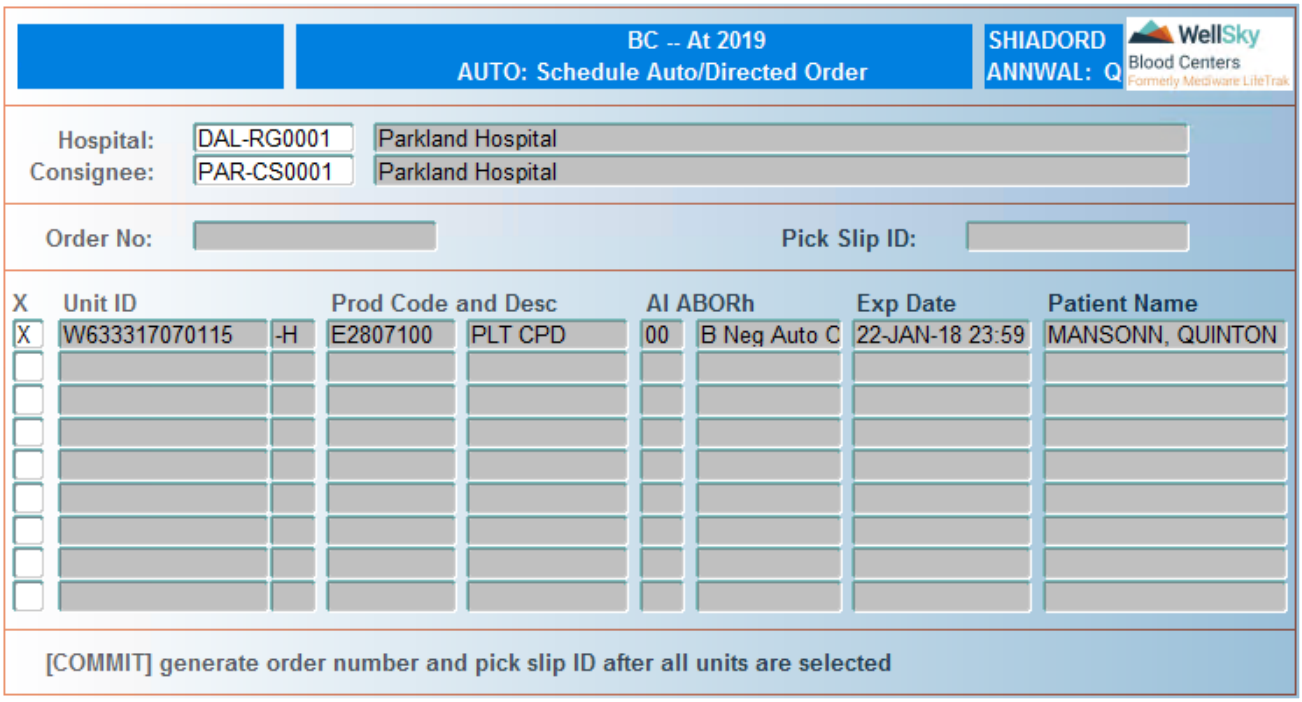


# Control Block Fields and Definitions

## Hospital

Enter facility placing autologouus/directed order or select from LOV.

> **NOTE –** Only facilities awaiting delivery of autologous and directed donations display in LOV.

## Consignee

Enter consignee ID or select from LOV.

## Order No

System-assigned order number automatically displays after products are selected. Field is not navigable.

## Pick Slip ID

System-assigned pick slip ID automatically displays after products are selected. Field is not navigable.

# Detail Block Fields and Definitions

## X

Use the **UP** and **DOWN** arrow keys to scroll through the list of units. Press x to select the unit. Press **F5** (Clear Field) to deselect the unit.

## Unit ID

Available unit ID automatically displays. Field is not navigable.

### Prod Code and Desc

Product code and description automatically display. Field is not navigable.

### AI

Aliquot number automatically displays. Field is not navigable.

### ABORh

Product ABO/Rh automatically displays. Field is not navigable.

### Exp Date

Product expiration automatically displays. Field is not navigable.

### Patient Name

Intended recipient name automatically displays. Field is not navigable.

Press F12 (Commit) once all desired products have been selected.

## At Commit

- Selected products are scheduled to be shipped to the customer.
- An order number is generated.
- A pick slip ID is generated.
- A pick slip is printed.

**NOTE –** A pick slip details the exact units that are reserved for the order.

## What to Do Next

Pack products for the order using Pack Products (PACK) or Offline Product Packing (PACKO).


WellSky Corporation
Proprietary and confidential

# 28.3 Order Allocation Functions

Order Allocation Functions are accessed from the following menu:

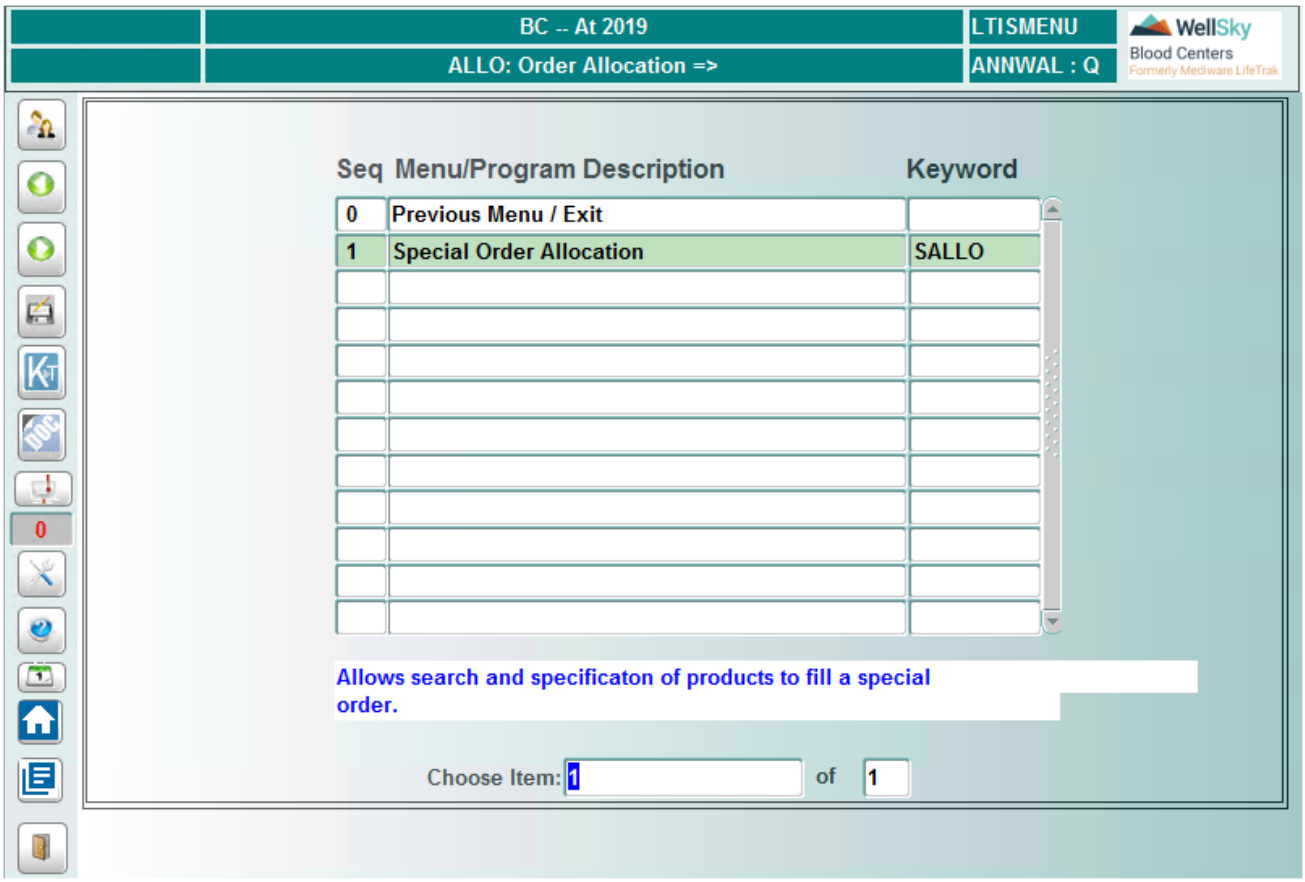


## 28.3.1 Special Order Allocation (SALLO)

### Intended Use

Use the Special Order Allocation screen to allocate products for special order (ordered products with special attributes and/or antigens).

This screen also provides the following features:

- Displays unit ID's allocated for an order item.
- Displays available stock for order item.
- Allows substitution for order items.

### Limitations

This screen allows unlicensed products to be allocated for a facility that is located out-of-state.

## Prerequisites

Order must have created using Enter Special Order (SPECIAL).

## Accessing the Screen

Access this screen from the Order Allocation menu or by entering the keyword SALLO.

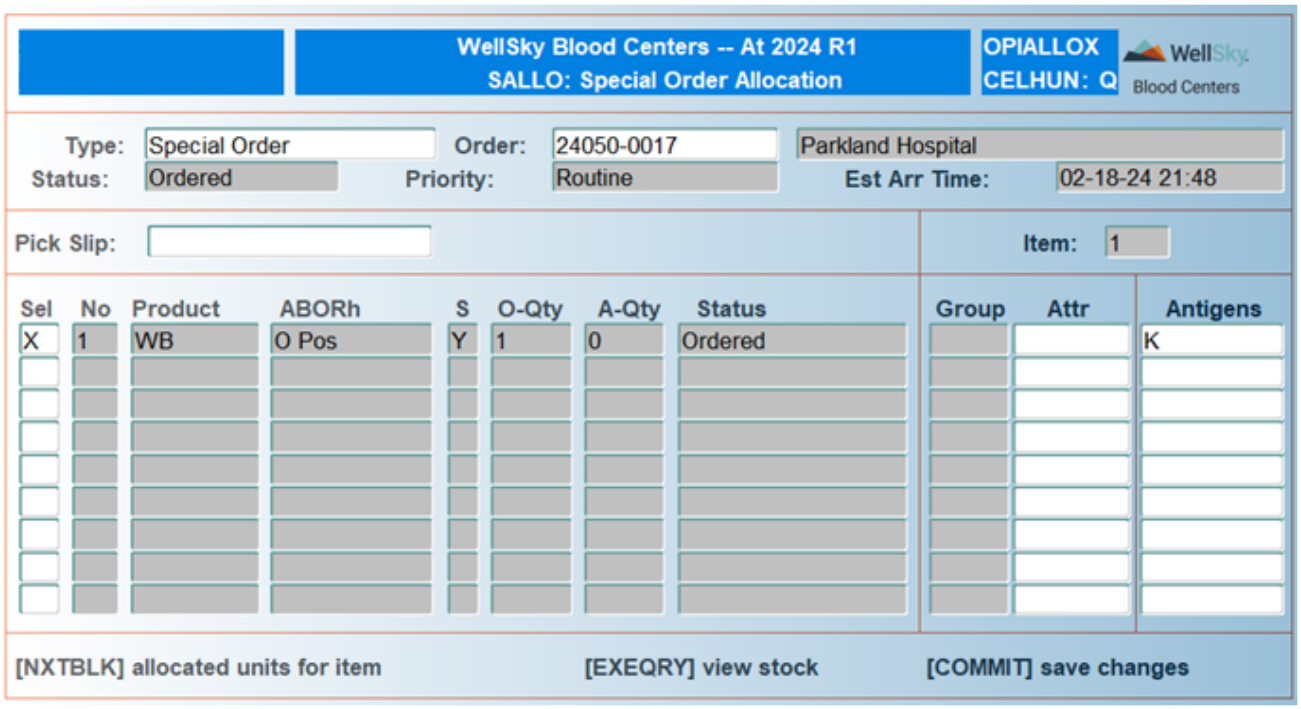


## Control Block Fields and Definitions

### Type

Special Order automatically populates in this field. Press ENTER to select default value.

### Order

Enter order number or select from LOV. The requesting facility name automatically displays after the order number is entered.

### Status

Order status automatically displays after the order number is entered. Field is not navigable.

### Priority

Order priority automatically displays after the order number is entered. Field is not navigable.

### Est Arr Time

Estimated arrival time automatically displays after the order number is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

# Order Items Block Fields and Definitions

## Pick Slip

Pick slip ID automatically displays after the first item is allocated. Field is not navigable.

## Item

Line Item number automatically displays. Field is not navigable.

## Sel

Enter x to select the item for allocation. Press CTRL + F12 (Enter Query) to select all items in the order for allocation.

## No

Order item number automatically displays. Field is not navigable.

## Product

Ordered product type automatically displays. Field is not navigable.

## ABORh

Ordered blood type automatically displays. Field is not navigable.

## S

Substitution flag automatically displays. Field is not navigable.

**NOTE –** Y indicates substitution is allowed for the line item.

## O-Qty

Ordered quantity automatically displays. Field is not navigable.

## A-Qt

Allocated quantity automatically displays. Field is not navigable.

## Status

Order item status automatically displays. Field is not navigable.

## Group

Ordered attribute group automatically displays, if applicable. Field is not navigable.

## Attr

Ordered attribute code automatically displays, if applicable. Field is not navigable.

## Antigens

Ordered antigen automatically displays, if applicable. Field is not navigable.

Use the UP and DOWN arrow keys to scroll through the list.

Press F6 (Menu) after the item for allocation has been selected.

## No Matching Products Found

If no matching products are found, the following window opens:

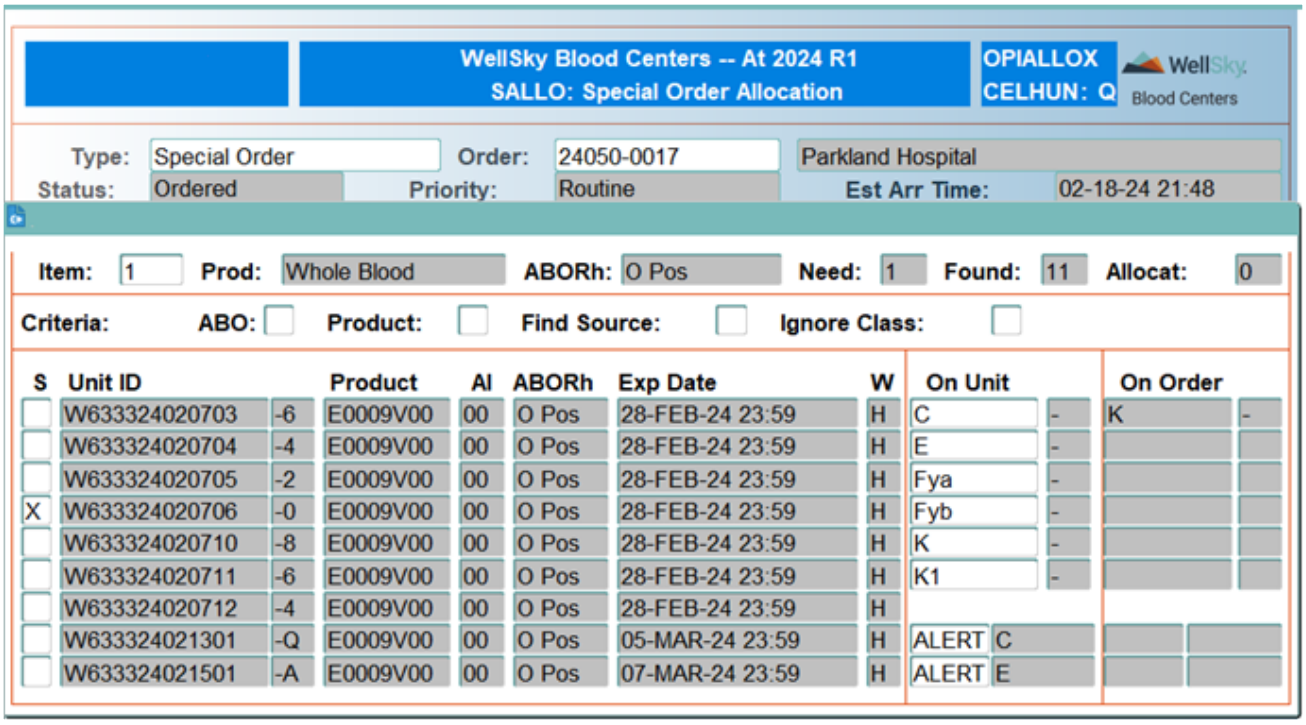


To find suitable products, it may be necessary to substitute certain criteria.

**NOTE –** If substitution was not allowed at order entry, the Change or Cancel order screen must be used to set the substitution flag to Y.

## Criteria Box Fields and Definitions

### ABO

Enter x to allow ABO substitution. Leave field blank if substitution of an alternate compatible ABO is not acceptable.

### Product

Enter x to allow product substitution. Leave field blank if substitution of an alternate product is not acceptable.

### Find Source

Leave field blank. This field is not utilized and must remain blank.


WellSky Corporation
Proprietary and confidential

## Ignore Class

Enter x in this field to allow substitution of product in RE inventory class. Leave field blank if inventory class substitution is not acceptable.

Once the Ignore class field has been populated, the system automatically performs new search based on the entered substitution criteria. The acceptable product will appear on the screen. Refer to Matching Products Found section below for further steps.

# Matching Products Found

The following window opens when products matching the entered criteria are found:

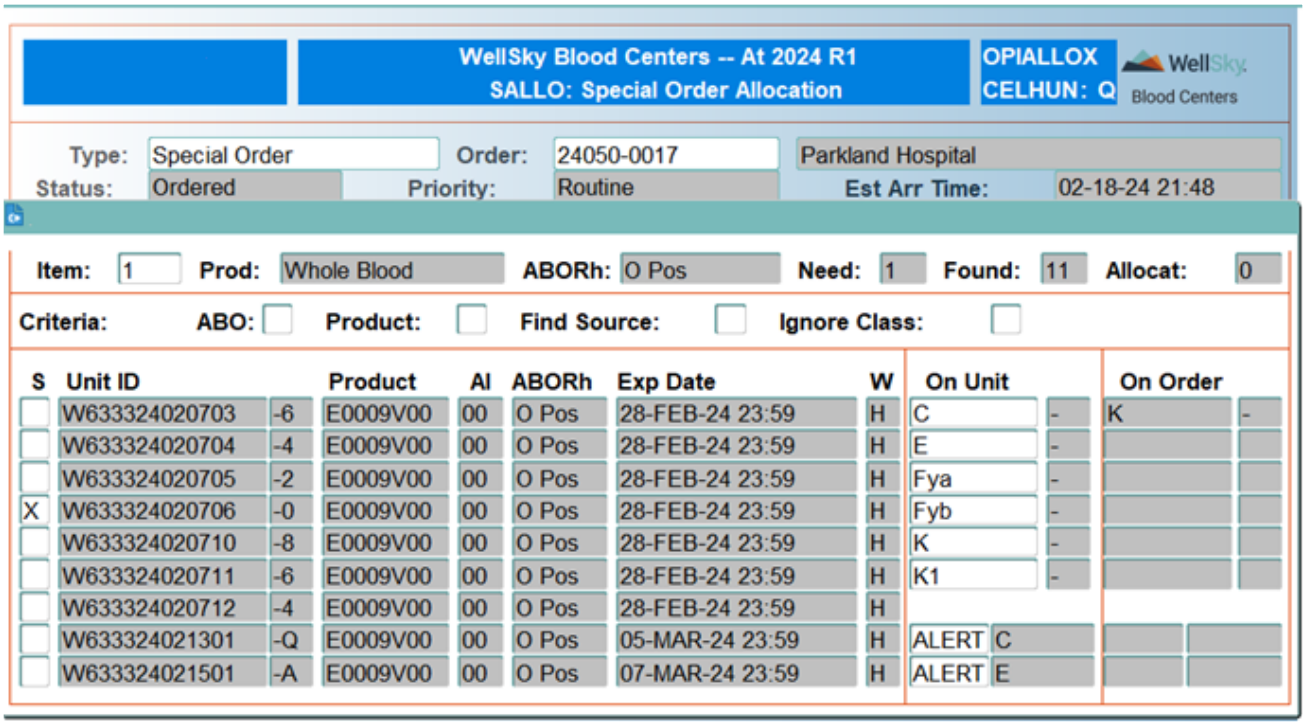


## S

Enter x beside each desired products or press **CTRL** + **F12** (Enter Query) to select all displayed products. Press **F5** (Clear Field) to de-select the product.

The following information displays:

Information about the order item:

- Item – selected order item number.
- Prod – product type.
- ABORh – blood type.
- Need – quantity of ordered product requested.

- Found – quantity of ordered product existing in the inventory.
- Allocat – quantity of ordered product already allocated.

Criteria for substituting products:

- ABO – blood type.
- Product – product type.
- Find Source – field not utilized.
- Ignore Class – inventory class.

Information about the order items:

- S – select field.
- Unit ID – unit ID of found product.
- Product – product code.
- Al – aliquot number.
- ABORh – blood type.
- Exp Date – expiration date and time.

Information about the ordered attribute/antigens:

- Unit – attributes/antigens associated to the product. (Serological and molecular antigens)
- Order – attributes/antigens requested at order entry.

**NOTE –** Press CTRL + F3 (Next Block) to navigate to the antigens block. Use the UP and DOWN arrow keys to scroll through the block. Press CTRL + F4 (Previous Block) to return to the ordered products block or press CTRL + F3 (Next Block) to move to the attributes block. Use the UP and DOWN arrow keys to scroll through the block. Press CTRL + F4 (Previous Block) twice to return to the ordered products block.

If an exact match is found, enter x and press F6 (Menu) in the S field to allocate the product.

To find substitute products (products with the ordered attributes/antigens, but different product type or blood type) enter x next to the appropriate substitution criteria.

**NOTE –** If substitution was not allowed at order entry, the Change or Cancel order screen must be used to set the substitution flag to Y.

If the system finds no substitutes, press F8 (Exit Screen). The following window opens:


WellSky Corporation
Proprietary and confidential

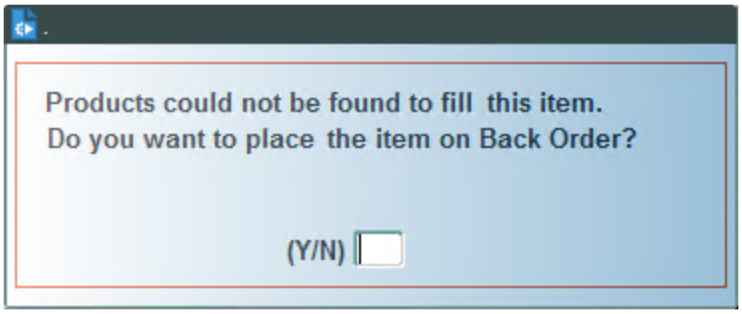


Enter `Y` to place the item on back order. Enter `N` to return to the allocation screen.

**NOTE –** Order status can only be updated to Back Ordered if at least 1 product was allocated for the order. If no products are allocated for the order, and it is necessary to update the order status to Back Ordered, this must be done in Change or Cancel Order (CANCEL).

Products meeting substitution requirements display. Enter `X` and press **F6** (Menu) in the S field to allocate the product.

## Reviewing Allocated Products

Press **CTRL** + **F3** (Next Block) to review allocated products for the order item. The following window opens:

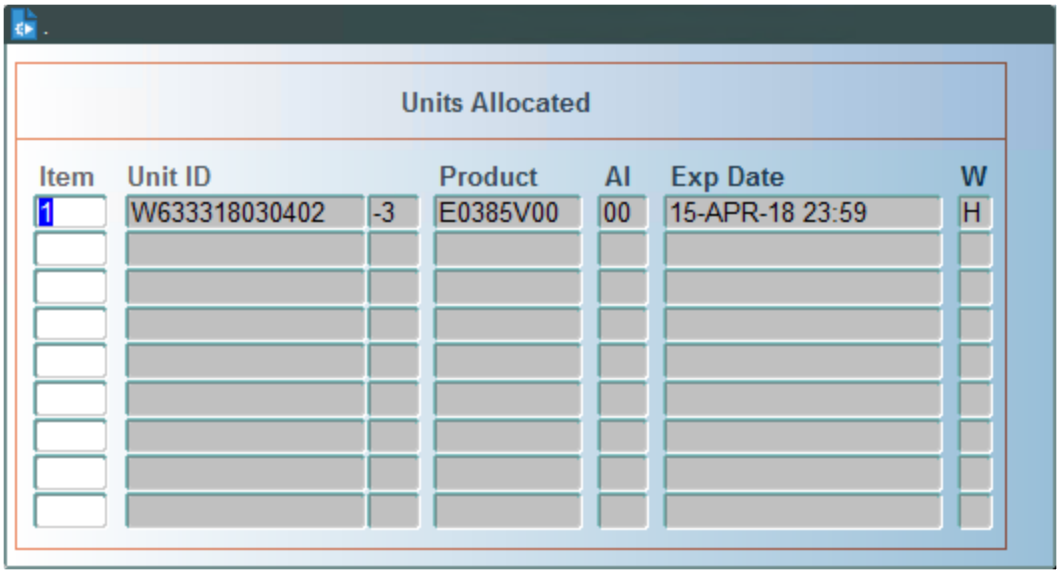


The following information displays:

- Item – order item number.
- Unit ID – unit ID of product.
- Product – product code.
- AI – aliquot number.

- Exp Date – expiration date and time.
- W - warehouse.

**NOTE –** The displayed data cannot be updated on this screen.

Use the UP and DOWN arrow keys to scroll through displayed data.

Press F8 (Exit Screen) to return to the entry screen.

## Reviewing Stock

Press ALT + F12 (Execute Query) to review inventory for an order line item. The following window opens:

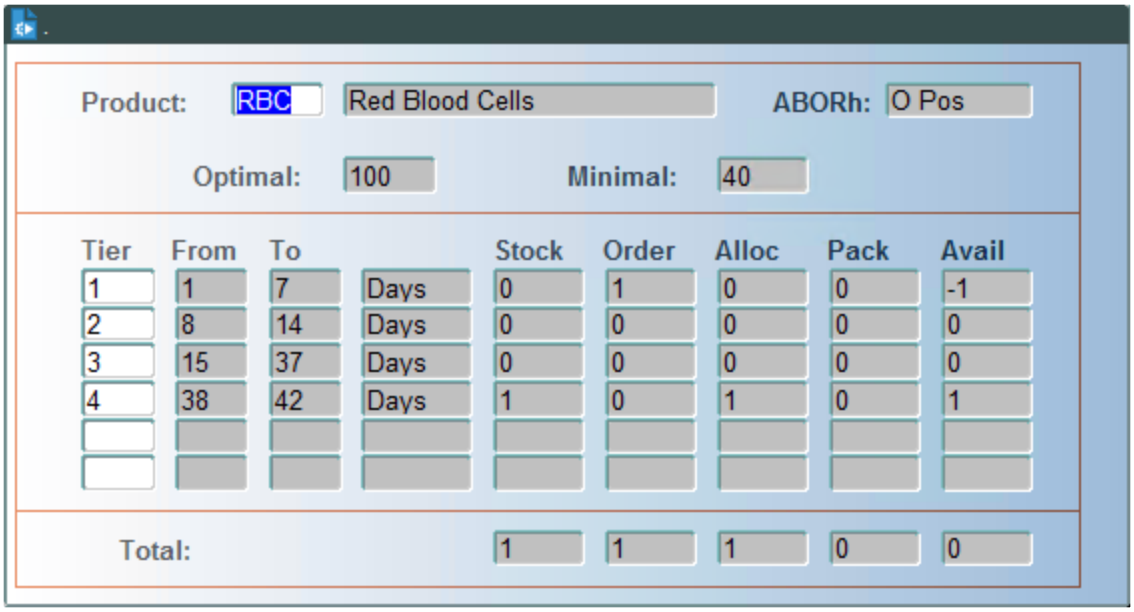


The following information displays:

- Product – product type and description of line item.
- ABORh – blood type.
- Optimal – ideal inventory quantity for this product.
- Minimal – minimal inventory quantity for this product.
- Tier – tier number of product.
- From – beginning of date range for the tier number.
- To – end of date range for the tier number.
- Stock – number or ordered products in the tier in stock.
- Alloc – number of ordered products in the tier allocated.

- Pack – number of ordered products in the tier packed.
- Avail – number of ordered products in the tier available.
- Total – totals for ordered, allocated, packed and available products regardless of tier.

**NOTE –** Data cannot be modified in this query.

Press F8 (Exit Screen) to return to the entry screen.

Press F12 (Commit) to save changes.

## At Commit

- Allocated products are reserved for the order.
- Allocated products print out on the pick slip.
- If no products are found (exact matches or substitutions) the system prompts the user to place the order on back order.
- The pick slip ID displays in the 'Pick Slip' field.

## What to Do Next

Pack products for the order using Pack Products (PACK) or Offline Product Packing (PACKO).

# 28.4 Order Maintenance Functions

Order Maintenance Functions are accessed from the following menu:

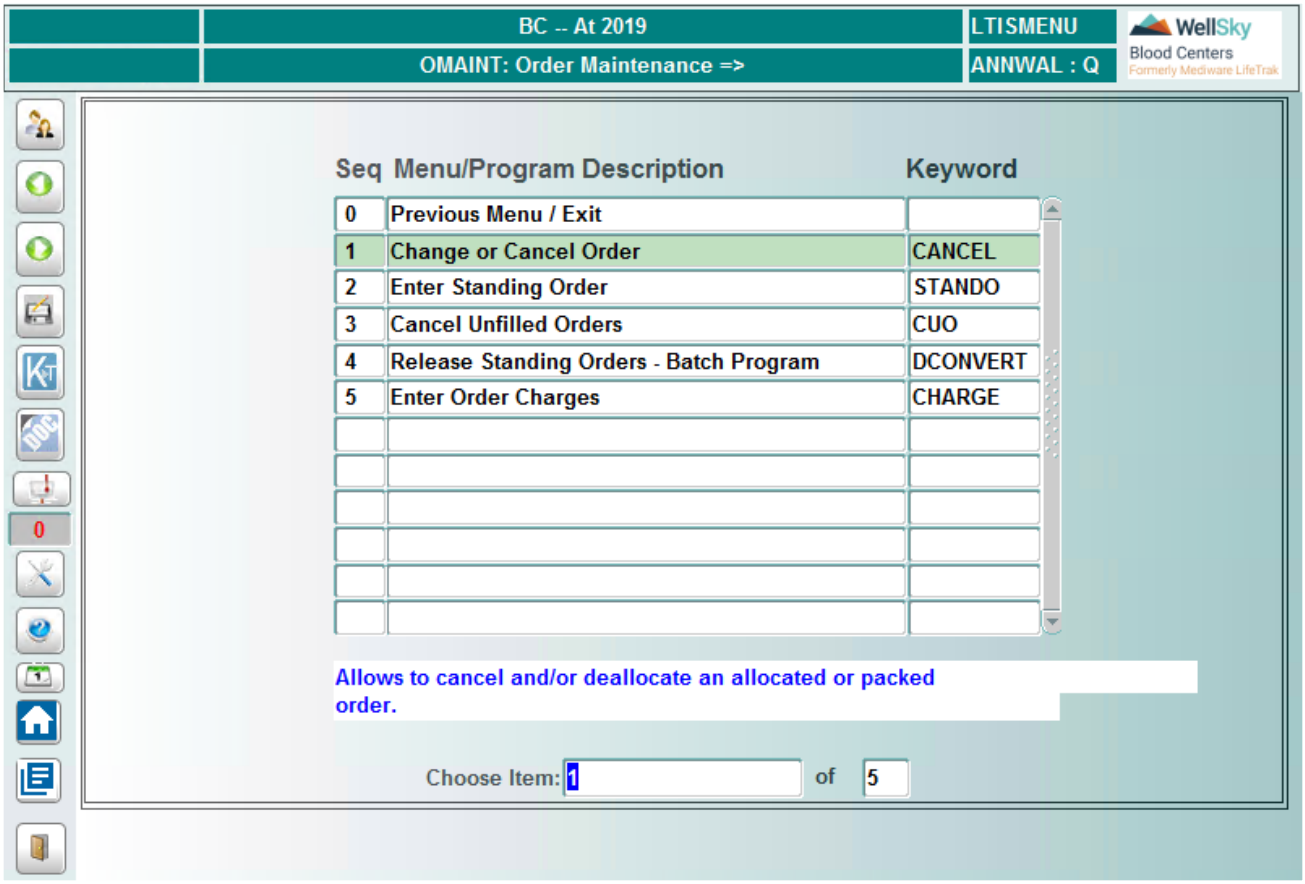


## 28.4.1 Change Or Cancel Order (CANCEL)

### Intended Use

Use the Change or Cancel Order screen to change or cancel an order. If the order has not yet been allocated, any parameter may be changed. If the order has been allocated, the quantity of an item may be reduced, an item may be canceled, or the entire order may be canceled.

This screen also displays order items and item attributes/antigens.

### Limitations

Orders with the status of allocated, packed, shipped, closed, or canceled cannot be modified or canceled.

### Prerequisites

Order must have been created.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Order Maintenance menu or by entering the keyword CANCEL.

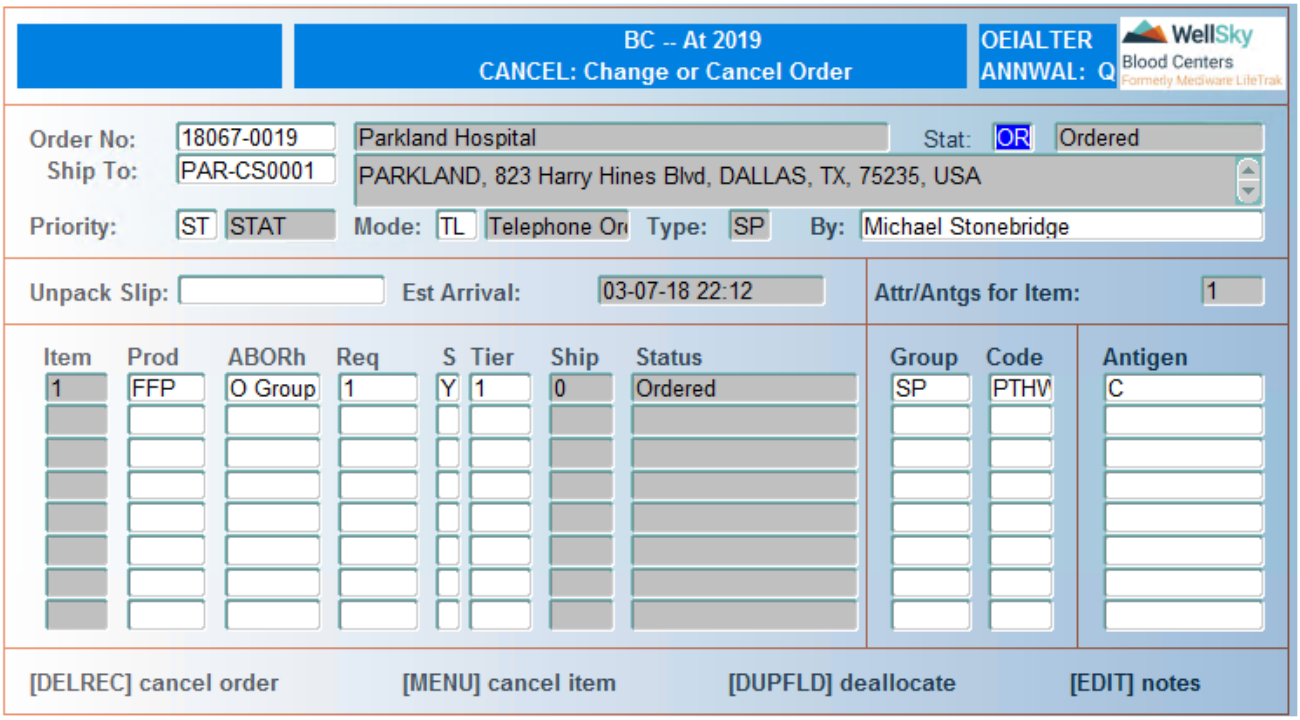


# Control Block Fields and Definitions

## Order No

Enter the order number or select from LOV.

## Stat

Enter correct order status or select from LOV. Press ENTER to accept the current status.

**NOTE –** Only enter this field if the status is being updated. This field may be used to change the order to Back Ordered if there are no products with which to fill the order.

## Ship to

Enter correct consignee ID or select from LOV. Press ENTER to accept the current consignee ID.

## Priority

Enter order priority or select from LOV. Press ENTER to accept the current priority.

**NOTE –** The counter restarts if the order is changed.

### Mode
Enter correct order mode or select from LOV. Press **ENTER** to accept current mode.

### Type
Order type automatically displays. Entry cannot be modified. Field is not navigable.

### By
Enter correct contact name or select from LOV. Press **ENTER** to accept the current contact.

### Unpack Slip
The system automatically generates an unpack slip ID if the entire order is canceled. Field is not navigable.

### Est Arrvl
Estimated arrival time automatically displays based on order time and priority. Field is not navigable.

### Attr/Antigens for Item
Number of attributes and antigens for order item automatically displays. Field is not navigable.

## Detail Block Fields and Definitions

**NOTE –** Use the **UP** and **DOWN** arrow keys to scroll to the line item to be modified.

### Item
Line item number automatically displays. Field is not navigable.

### Prod
Enter correct product type or select from LOV. Press **ENTER** to accept current entry. Field can only be modified if the line item status is Ordered.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press **F8** (Exit Screen) to dismiss the message and then enter a different product.

**NOTE –** If the ordered product type is incorrect and the line item has a status other than 'Ordered', cancel the line item and re-order the correct item.


WellSky Corporation
Proprietary and confidential

## ABORh

Enter correct ABO/Rh or select from LOV. Press **ENTER** to accept current entry. Field can only be modified if the line item status is 'Ordered.'

**NOTE –** If the ordered blood type is incorrect and the line item has a status other than Ordered, cancel the line item and re-order the correct blood type.

## Req

Enter correct order quantity or press **ENTER** to accept the current required quantity.

**NOTE –** Quantity limitations are as follows:

- Quantity can only be increased for line items with a status of Ordered.
- Quantity cannot be decreased to less than the allocated/packed/shipped quantity.
- Quantity cannot be changed to zero (0).

## S

- `Y` – the customer will accept a substitution.
- `N` – the customer will not accept a substitution.

Press **ENTER** to accept the current substitution flag.

**NOTE –** Substitution flag can only be modified for line items with a status of Ordered.

## Tier

Enter correct ordered tier for the product or select from LOV. Press **ENTER** to accept the current ordered tier.

**NOTE –** Substitution flag can only be modified for line items with a status of Ordered.

## Ship

Number of products shipped for the line item automatically displays. Field is not navigable.

## Status

Line item status automatically displays. Field is not navigable.

## Group

Attribute group associated with line item automatically displays. Field is not navigable.

## Code

Attribute code associated with group and line item automatically displays. Field is not navigable.

**NOTE –** If modifications are needed for the ordered attribute, the line item must be canceled and re-ordered with the correct information.

### Antigen

Antigen associated with line item automatically displays. Field is not navigable.

**NOTE –** If modifications are needed for the ordered antigen, the line item must be canceled and re-ordered with the correct antigen.

## Canceling Entire Order

Press CTRL+ F8 (Delete Record) from any field in the control block to delete the entire order. The following window opens:

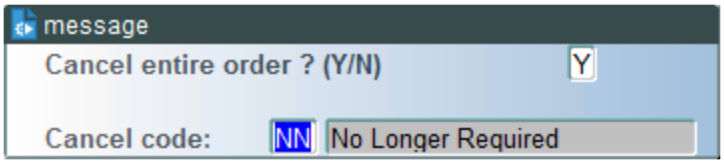


### Cancel entire order? (Y/N)

- Y – cancel entire order.
- N – keep order active and return to the main screen.

### Cancel Code:

Enter cancellation reason code or select from LOV.

**NOTE –** The Order Comments pop-up appears on the screen after the cancellation reason code is entered. Refer to Entering Order Comments below for further instruction.

## Canceling an Order Item

Use the UP and DOWN arrow keys to scroll to the line item to be canceled and press F6 (Menu). The following window opens:

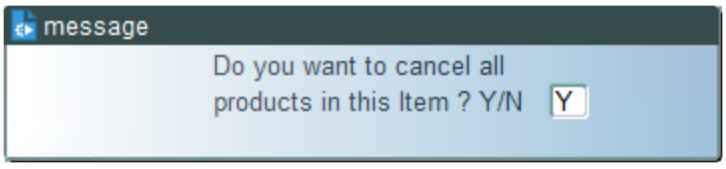


- Y – cancel the line item
- N – return to the main screen


WellSky Corporation
Proprietary and confidential

**NOTE –** Order items with a status or Ordered can be cancelled.

If Y is entered, line item is canceled and status updates to Usr Canceled.

## Deallocating/Unpacking Products

Use the UP and DOWN arrow keys to scroll to the line item to be deallocated or unpacked and press CTRL + F6 (Duplicate Field). The following window opens:

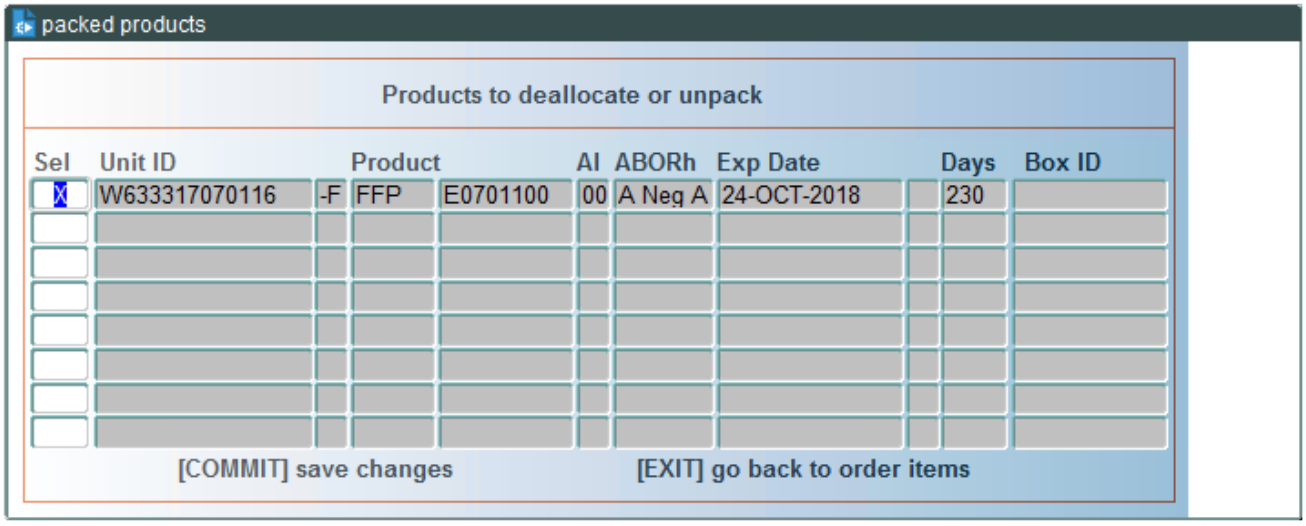


Use the UP and DOWN arrow keys to scroll to the product to be deallocated or unpacked.

### Sel

Enter x next to each product to be deallocated or unpacked. Press Space to remove the X and de-select the product.

### Unit ID

Unit IDs allocated or packed for selected line item automatically display. Field is not navigable.

### Product

Allocated or packed product codes and descriptions automatically display. Field is not navigable.

### AI

Aliquots automatically display. Field is not navigable.

### ABORh

Product ABO/Rh automatically displays. Field is not navigable.

### Exp Date

Product expiration date automatically displays. Field is not navigable.

### Days

Number of days until product expires automatically displays. Field is not navigable.

### Box ID

Box ID automatically displays for packed products. Field is not navigable.

Press F8 (Exit Screen) to return to the main screen with deallocating or unpacking products.

Press F12 (Commit) to deallocate or unpack selected products.

**NOTE –** Box status will be updated from OP to EP when the box has been unpacked and there are no units associated with the box. The units associated with the box are in UN and RS status.

**NOTE –** The box statuses are maintained in the Distribution Master Code BOXST. Some box statuses are hard-coded, so if they are not defined under the master code, the description will not display. Refer to the *WellSky® Blood Centers Database Administration Guide* for all box statuses under Distribution Master Codes.

## Entering Order Comments

Press CTRL + e (Edit) from the control block to enter order comments. The following order comments window opens:

**NOTE –** The Order Comments pop-up automatically appears on the screen after the cancellation reason code is entered.

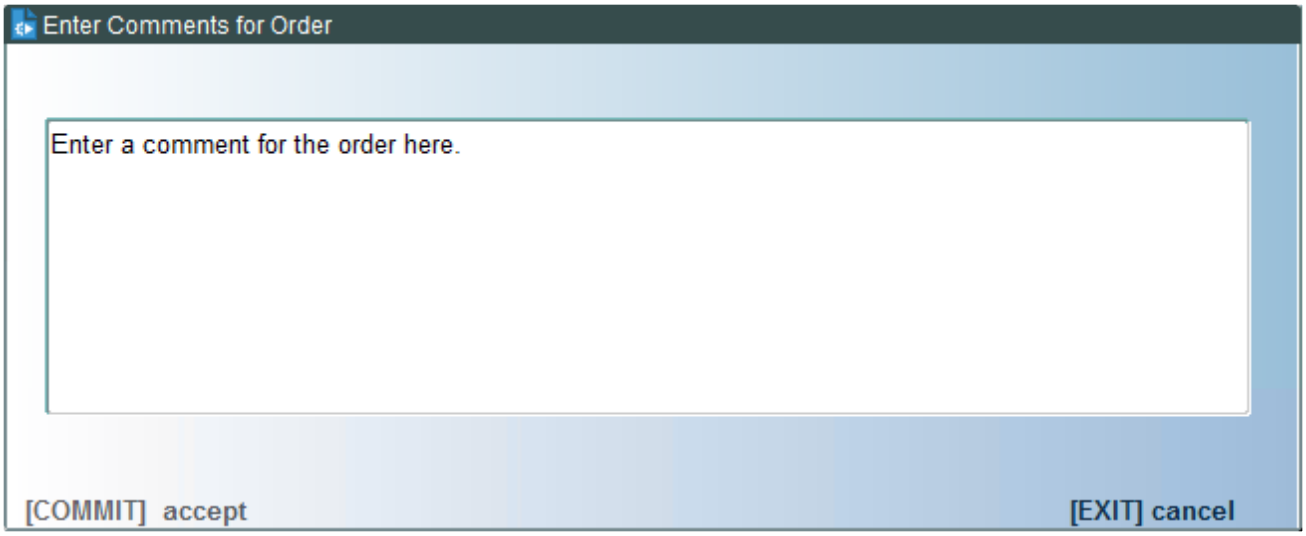


Enter a free format order comment. A maximum of 240 characters is allowed.

Press F8 (Exit Screen) to return to the main screen without saving comment.


WellSky Corporation
Proprietary and confidential

**NOTE –** Entry is required in order to cancel order.

Press F12 (Commit) to save comment and return to the main screen.

## Entering Line Item Comments

Press CTRL + e (Edit) from the correct line item to enter line item comments. The following window opens:

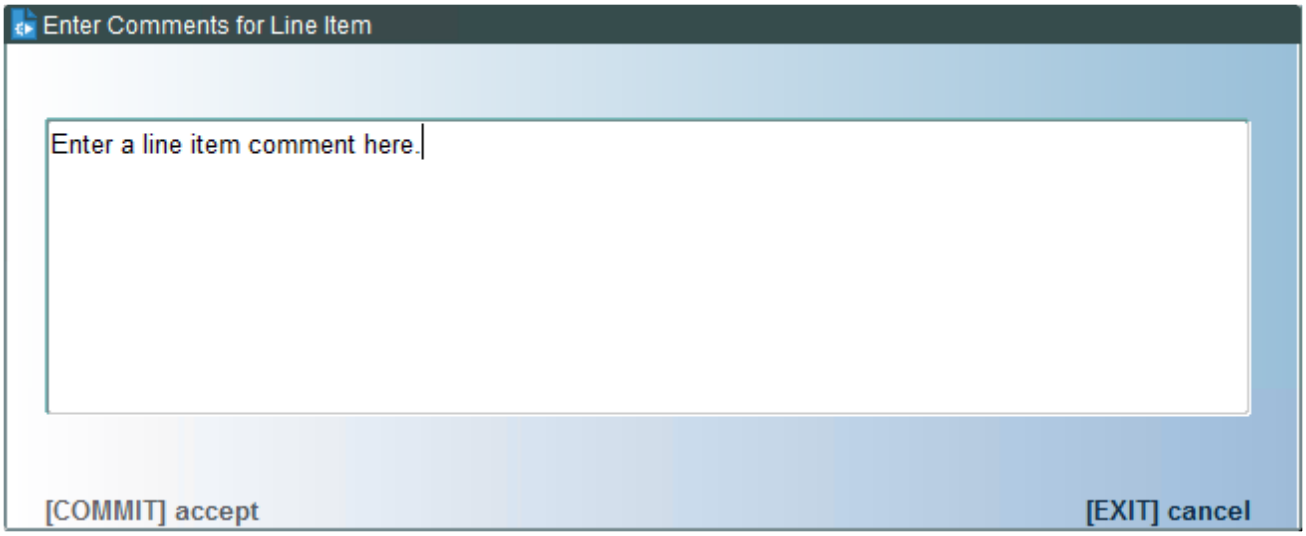


Enter a free format order comment. A maximum of 240 characters is allowed.

Press F8 (Exit Screen) to return to the main screen without saving comment.

Press F12 (Commit) to save comment and return to the main screen.

## At Commit

The following are updated/saved, if applicable:

- Status or canceled orders updates to Usr Canceled (CA).
- Status of canceled line items updates to Usr Canceled. Order status also updates to CA if the only line item in the order is canceled.
- Modified order details are saved.
- Order notes are saved.
- Line item notes are saved.
- Status of unpacked products updates to restock pending (RP) and an unpack slip is generated.
- Status of de-allocated products updates to available (AV).

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Maintenance menu.

# 28.4.2 Enter Standing Order (STANDO)

## Intended Use

Use the Enter Standing Order screen to enter a standing order. A standing order is defined as an order for products that a facility wants delivered on a regular basis, such as every Monday, Tuesday or Friday. These standing orders are entered into the system manually only once using this screen. They are then converted to regular orders using Release Standing Orders – Batch Program (CONVERT).

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Maintenance menu or by entering the keyword STANDO.

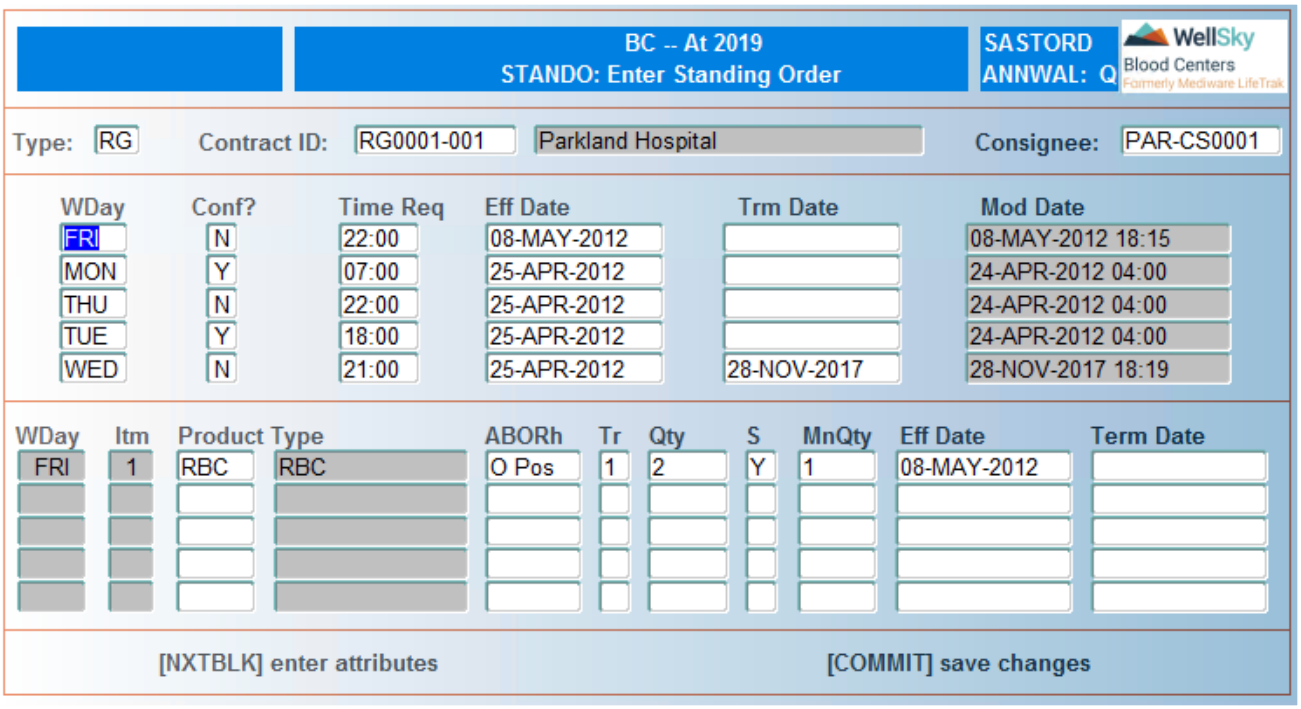


## Day of Week Control Block Fields and Definitions

### Type

Enter customer type or select from LOV.

### Contract ID
Enter contract ID or select from LOV.

### Consignee
Enter consignee ID or select from LOV.

### WDay
Enter the day of the week the order needs to be filled or select from LOV.

> **NOTE –** If a standing order already exists for the desired day, press CTRL + F3 (Next Block) to add products to the order. If a standing order exists for another day, press the DOWN arrow key.

### Conf
- Y – confirmation is required.
- N – confirmation is not required.

> **NOTE –** If Y is entered, orders are converted and placed on HOLD until released for allocation.

### Time Req
Enter time order is required HH24:MI.

### Eff Date
Enter the effective date DD-MON-YYYY.

> **NOTE –** Future date accepted.

### Trm Date
Enter the termination date DD-MON-YYYY, or leave blank. Entry required only when terminating an entry.

### Mod Date
Field automatically populates with the date modifications were last made. Field is not navigable.

> **NOTE –** After the Term Date field, press ENTER or CTRL + F3 (Next Block) to enter standing order items.

## Standing Order Detail Block Fields and Definitions

### Wday
Day defined in previous block automatically displays. Field is not navigable.

## Itm

Item number automatically displays. Field is not navigable.

## Product Type

Enter product type for standing order or select from LOV. Product description displays after type code is entered.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

## ABORh

Enter ABO/Rh or select from LOV.

## Tr

Enter tier or select from LOV. Press ENTER to default to 1.

## Qty

Enter the number of order items.

## S

- `Y` – substitutions are allowed.
- `N` – substitutions are not allowed.

**NOTE –** When filling the order, the system will make substitutions based on product type and blood type.

## MnQty

Enter the minimum number of products required to fill the order.

## Eff Date

Enter the effective date DD-MON-YYYY.

**NOTE –** A future date can be entered.


WellSky Corporation
Proprietary and confidential

### Term Date

Enter the termination date DD-MON-YYYY. Entry required only when terminating an entry.

**NOTE –** To enter another item after navigating through the Term Date field, press the DOWN arrow key to enter another order item.

Press F12 (Commit) to save entry.

## Entering Attributes

To enter attributes, press CTRL + F3 (Next Block) in the order items block. The following window opens:

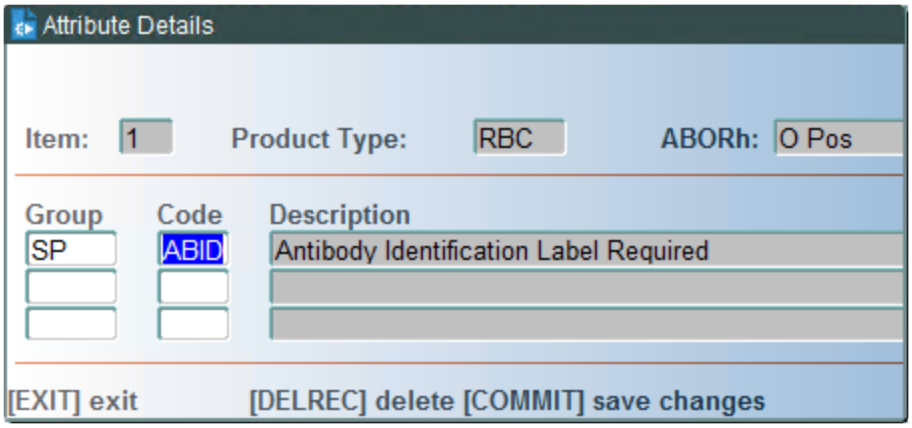


### Item

Line item number displays. Field is not navigable.

### Product Type

Product type displays. Field is not navigable.

### ABORh

ABO/Rh displays. Field is not navigable.

### Group

Enter attribute group or select from LOV.

### Code

Enter attribute code or select from LOV.

### Description

Attribute description automatically displays after code is entered. Field is not navigable.

Press F8 (Exit Screen) to return to the main screen without saving entry.

Press CTRL+ F8 (Delete Record) to delete attribute.

Press F12 (Commit) to save attributes.

**NOTE –** Pressing Commit here also saves the order to the database if Commit was not pressed on the main screen.

### At Commit

Standing order is created or modified as appropriate.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Maintenance menu.

## 28.4.3 Cancel Unfilled Orders (CUO)

### Intended Use

Use the Cancel Unfilled Orders screen to cancel orders that have not been allocated or packed.

### Limitations

None

### Prerequisites

Order must exist with a status of ordered (OR) or back ordered (BO).

### Accessing the Screen

Access this screen from the Order Maintenance menu or by entering the keyword CUO.


WellSky Corporation
Proprietary and confidential

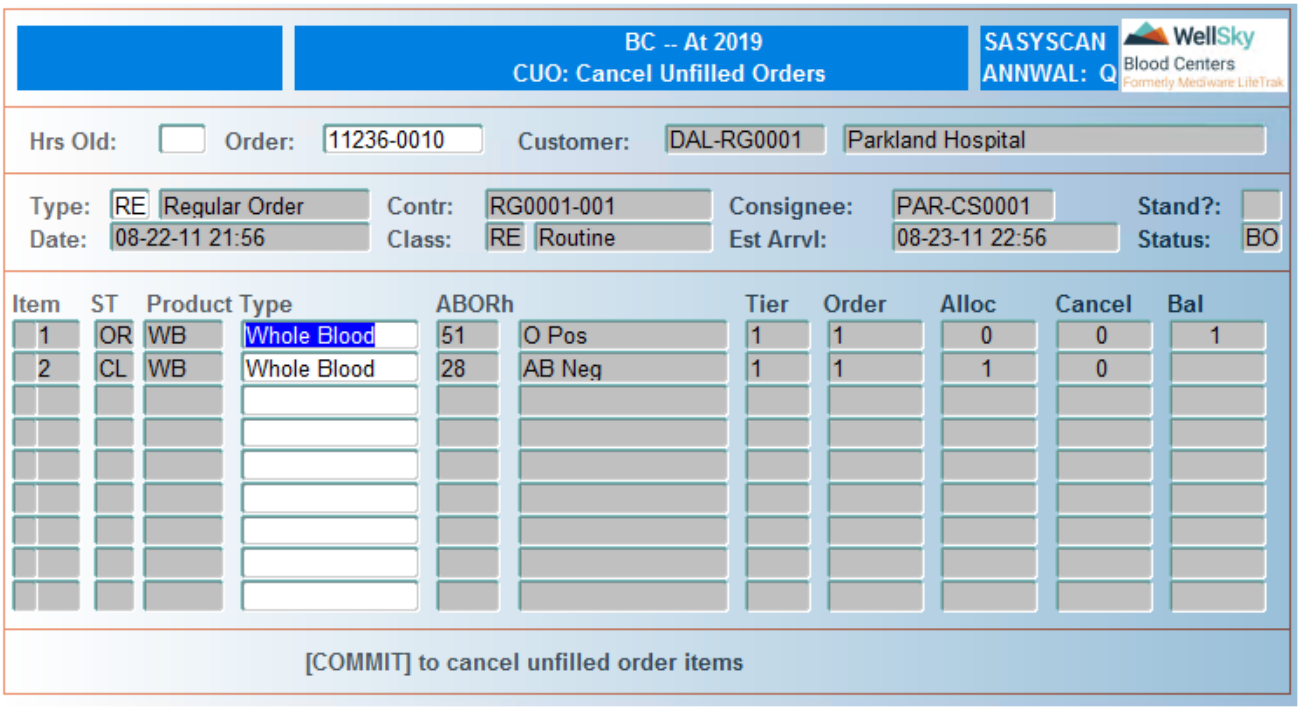


# Control Block Fields and Definitions

## Hrs

Enter the age of unfilled order being cancelled in hours or leave blank. A maximum value of 999 can be entered.

## Order

Enter order number to cancel or select from LOV.

> **NOTE –** If the Hrs field was left blank, LOV displays all orders with a BO status that are older than the order lifetime value defined in Chapter Details (CHAPTER). If a value was entered in the Hrs field, all orders with a status of OR or BO that are older than the value entered display.

# In the Detail Block

The following information displays after the order number is entered and cannot be modified:

- Type – order type and description.
- Contr – contract ID.
- Consignee – consignee ID.
- Stand? – Y if standing order; blank if not a standing order.
- Date – date and time order was placed.
- Class – order class

- Est Arrvl – estimated date and time order was due to be delivered.
- Status – status of order (e.g. OR – ordered).
- Item – number of order item
- ST – status of order item (e.g. OR – ordered).
- Product Type – Inventory product type and description.
- ABORh – blood type and description.
- Tier – tier ordered.
- Order – quantity ordered.
- Alloc – quantity allocated.
- Cancel – quantity cancelled.
- Bal – quantity remaining.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F12** (Commit) to cancel unfilled order items. The following window opens:

- `Y` – confirm order cancellation.
- `N` – return to the main screen without canceling order.

## At Commit

- Status of partially filled line items is updated to closed.
- Status of unfilled order items is updated to Sys Cancl'd.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Maintenance menu.

# 28.4.4 Release Standing Orders Batch Program (DCONVERT)

## Intended Use

Use the Release Standing Orders screen to automatically change the status of standing orders to Ordered (OR) for that day via a batch program. Order slips automatically print for each converted standing order.


WellSky Corporation
Proprietary and confidential

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Maintenance menu or by entering the keyword DCONVERT.

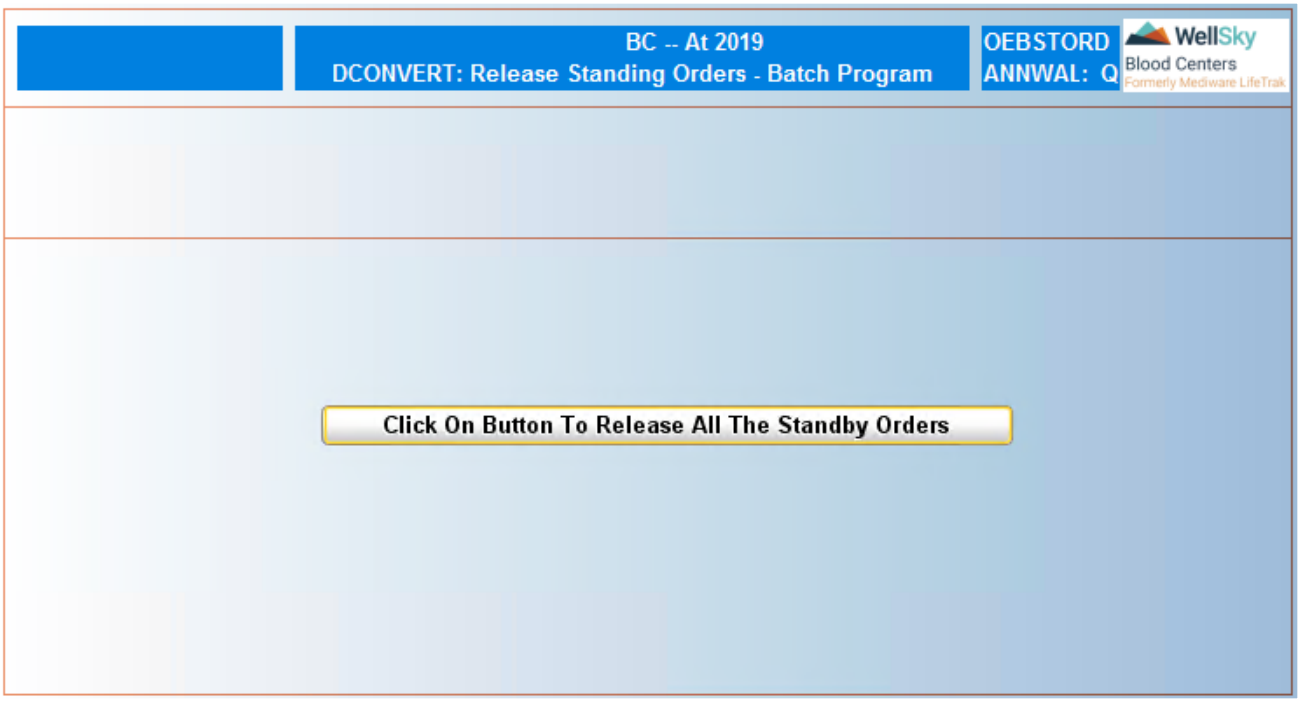


No data entry is required. Once this option is selected from the Order Maintenance menu, the program will convert all standing orders to a status of ordered (OR). Screen advises user when the operation is complete.

## At Commit

- Status of the day's standing order is changed to Ordered (OR).
- Order slips print for each converted order.

## What to Do Next

Once the system advises you that the operation is complete, press ENTER to return to the Order Maintenance menu.

# 28.4.5 Enter Order Charges (CHARGE)

## Intended Use

Use the Enter Order Charges screen to enter service charges for an open order. This screen also allows display of order items and attributes/antigens

## Limitations

None

## Prerequisites

Charges can only be added to existing orders.

## Accessing the Screen

Access this screen from the Order Maintenance menu or by entering the keyword CHARGE.

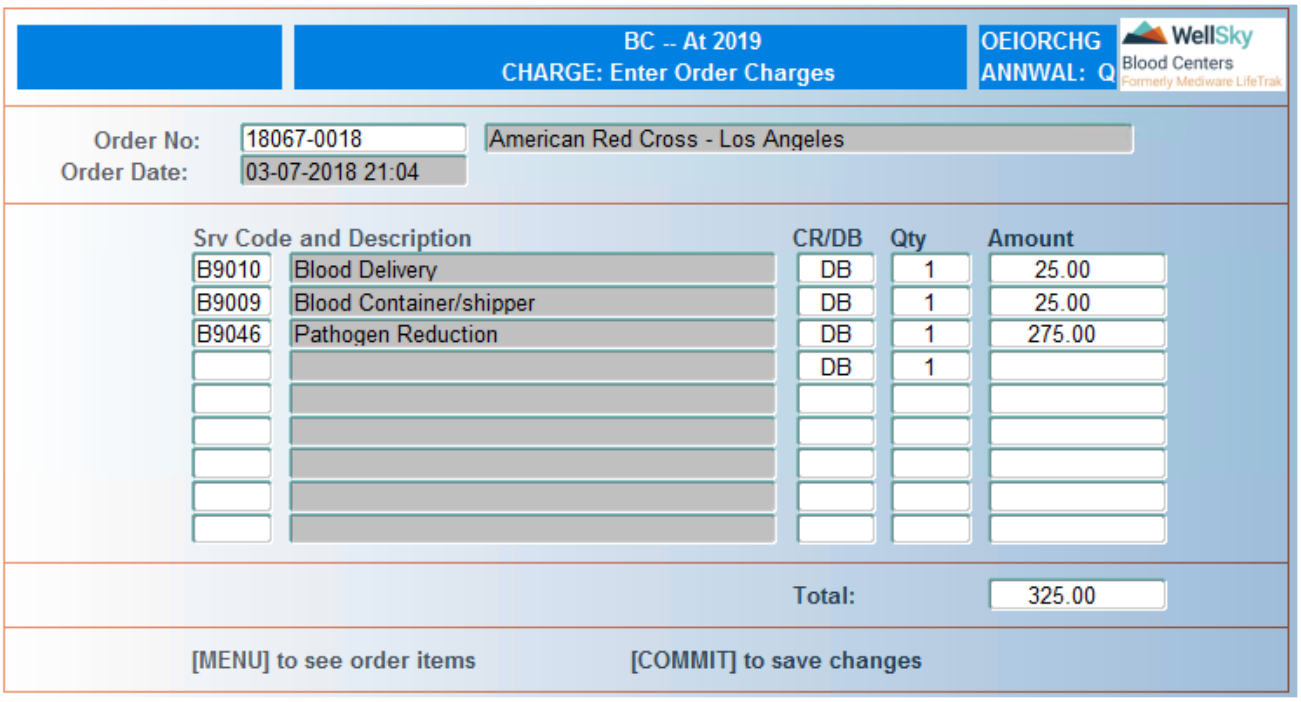


## Control Block Fields and Definitions

### Order No

Enter order number or select from LOV. Customer name displays after number is entered.

### Order Dt

Order date and time automatically displays after order number is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Srv Cd

Enter service code or select from LOV. Description automatically displays after order number is entered. Charges entered at the time of order entry or at shipping automatically display.

## CR/DB

Enter CR if entering a credit, enter DB if entering a debit, or select from LOV.

## Qty

Enter quantity to be charged.

**NOTE –** The system automatically defaults to '1' but can be edited.

## Amount

Press F5 (Clear Field) and enter the charge amount. Press ENTER to accept the default amount.

**NOTE –** Amount defined in Define Order Charges (VCHARGE) automatically displays. Value can only be modified if the edit flag is set to Y in Define Order Charges (VCHARGE) for the code.

## Total

Calculated total automatically displays as codes are added. Field is not navigable.

Press F12 (Commit) to save charges.

# Reviewing Order Items

Press F6 (Menu) to review order items. The following window opens:

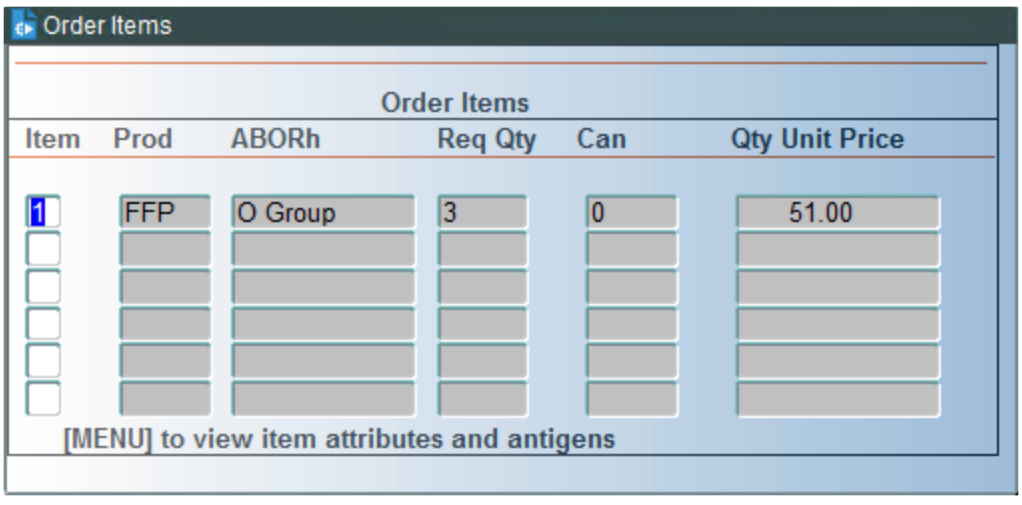


The following information displays:

- Item number – order item number.
- Prod – product type ordered.
- ABORh – blood type ordered.
- Req Qty – number of items ordered.
- Can Qty – number of items canceled.
- Unit Price – price of ordered item.

**NOTE –** Data cannot be modified in this query.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## Reviewing Ordered Attributes/Antigens

To review ordered attributes and antigens, press F6 (Menu) in the Order Items pop-up and the following window opens:

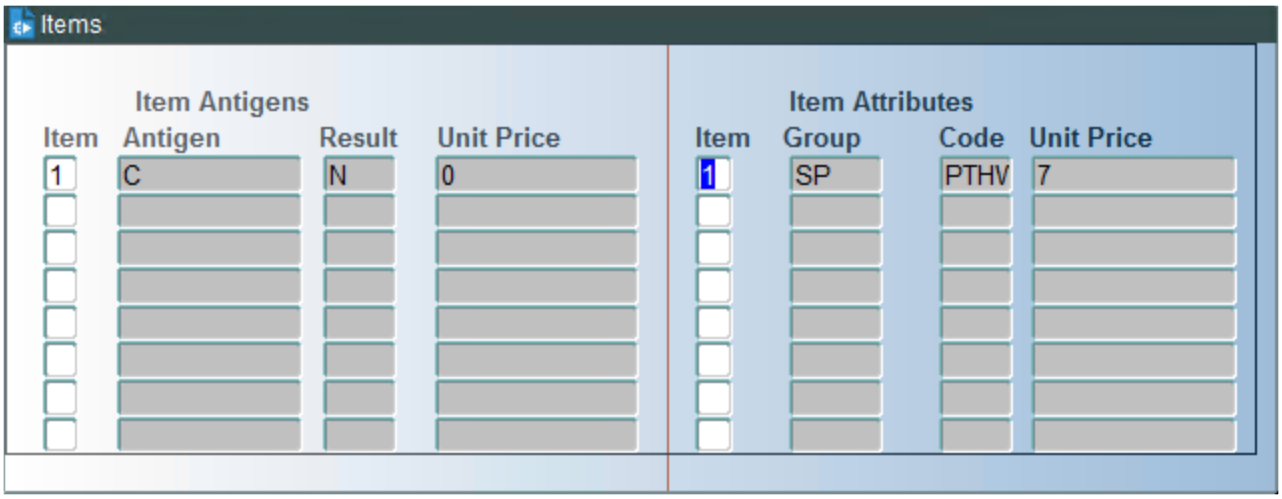


The following information displays:

- Item – order item number.
- Antigen – antigen ordered.
- Result – antigen result ordered.
- Unit Price – calculated price of product with the antigen.
- Item – order item number.
- Group – attribute group.


WellSky Corporation
Proprietary and confidential

- Code – attribute code ordered.
- Unit Price – calculated price of a product with the attribute.

**NOTE –** Data cannot be modified in this query.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) twice to return to the main entry screen.

## At Commit

Charges are saved to the system.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Maintenance menu.

# 28.5 Transfer Orders Functions

Transfer Orders Functions are accessed from the following menu:

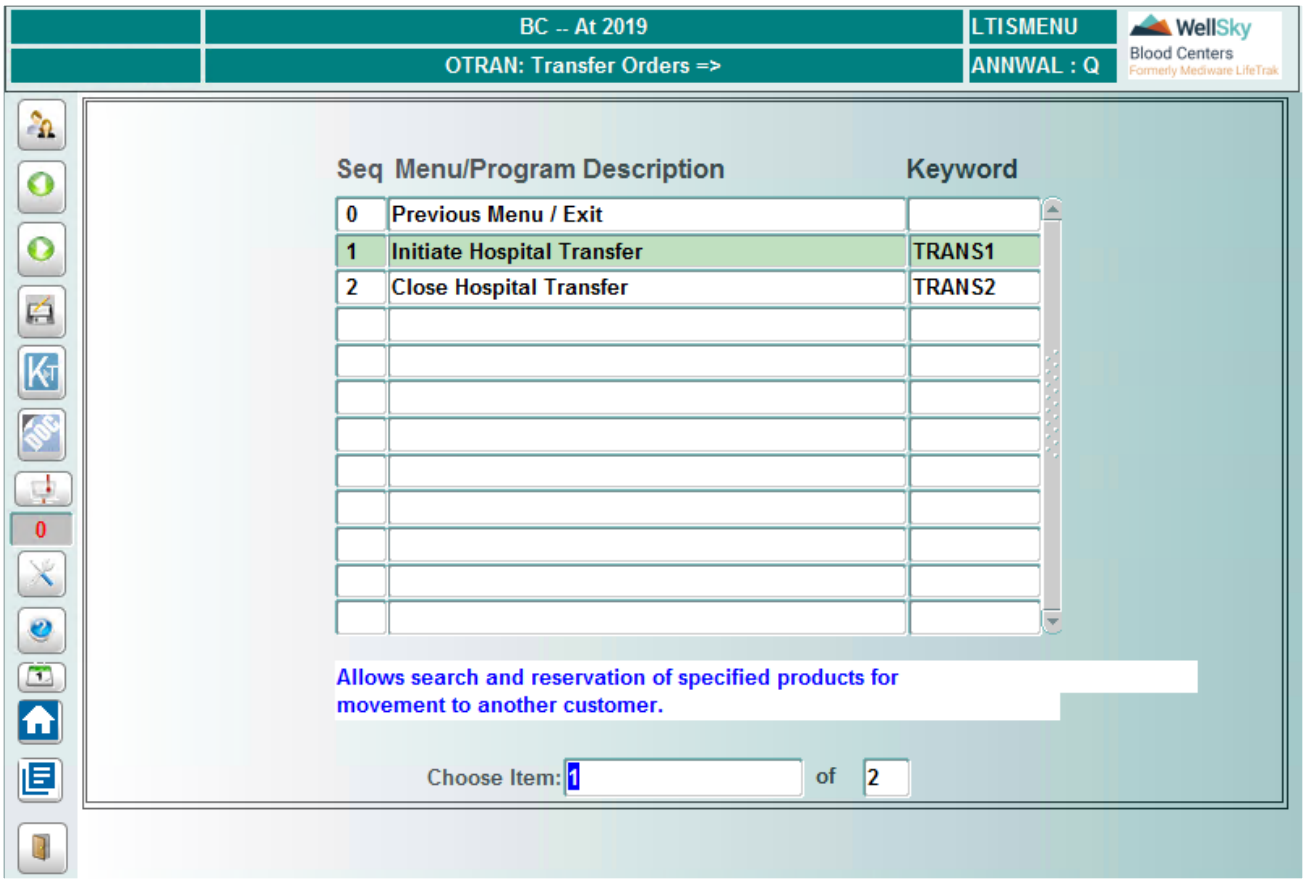


## 28.5.1 Initiate Hospital Transfer (TRANS1)

### Intended Use

Use the Initiate Hospital Transfer screen to identify and coordinate with a source facility to reserve products when an order cannot be filled from available stock in the facility's inventory.

### Limitations

- Delivery confirmation must have been entered in order for product matching requirements for order to be considered for transfer.
- In order for a product located at a customer facility to be suitable for transfer, the transfer order must be identical to the order associated to the product located at the customer facility.

### Prerequisites

A transfer can only be initiated if the order has been placed on back order.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Transfer Orders menu or by entering the keyword TRANS1.

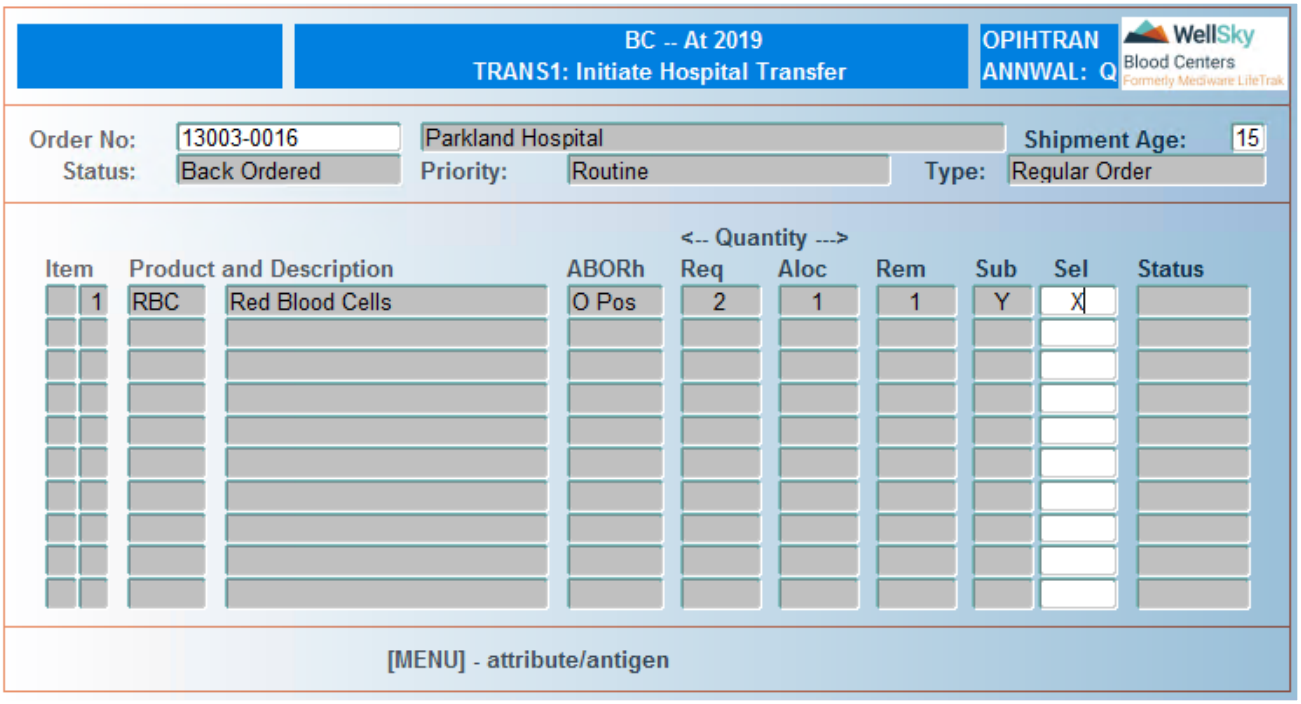


# Control Block Fields and Definitions

## Order No

Enter order number or select from LOV. Consignee ID automatically displays after order number is entered.

**NOTE –** The AGE column in the LOV refers to the age based on the server date and time.

## Shipment age

Enter the shipment age in number of days since shipping to be considered for the transfer.

## Status

Back Ordered automatically displays after order number is entered. Field is not navigable.

## Priority

Order priority automatically displays after order number is entered. Field is not navigable.

## Type

Order type automatically displays after order number is entered. Field is not navigable.

**NOTE –** The system automatically displays the order type after the order number is entered.

## Detail Block Fields and Definitions

### Item
Item number automatically displays. Field is not navigable.

### Product and Description
Product type and description displays. Field is not navigable.

### ABORh
ABO/Rh type displays.Field is not navigable.

### Req
Required quantity displays. Field is not navigable.

### Aloc
Allocated/packed quantity displays. Field is not navigable.

### Rem
Remaining required quantity displays. Field is not navigable.

### Sub
Substitution flag status displays (Y if substitution is allowed for the order item; N if substitution is not allowed). Field is not navigable.

### Sel
Select the order item to be filled through facility transfer by entering x next to the order item.

**NOTE –** If the selected product is not available at an affiliated facility, an error message displays. If a suitable product is found, the following window opens:


WellSky Corporation
Proprietary and confidential

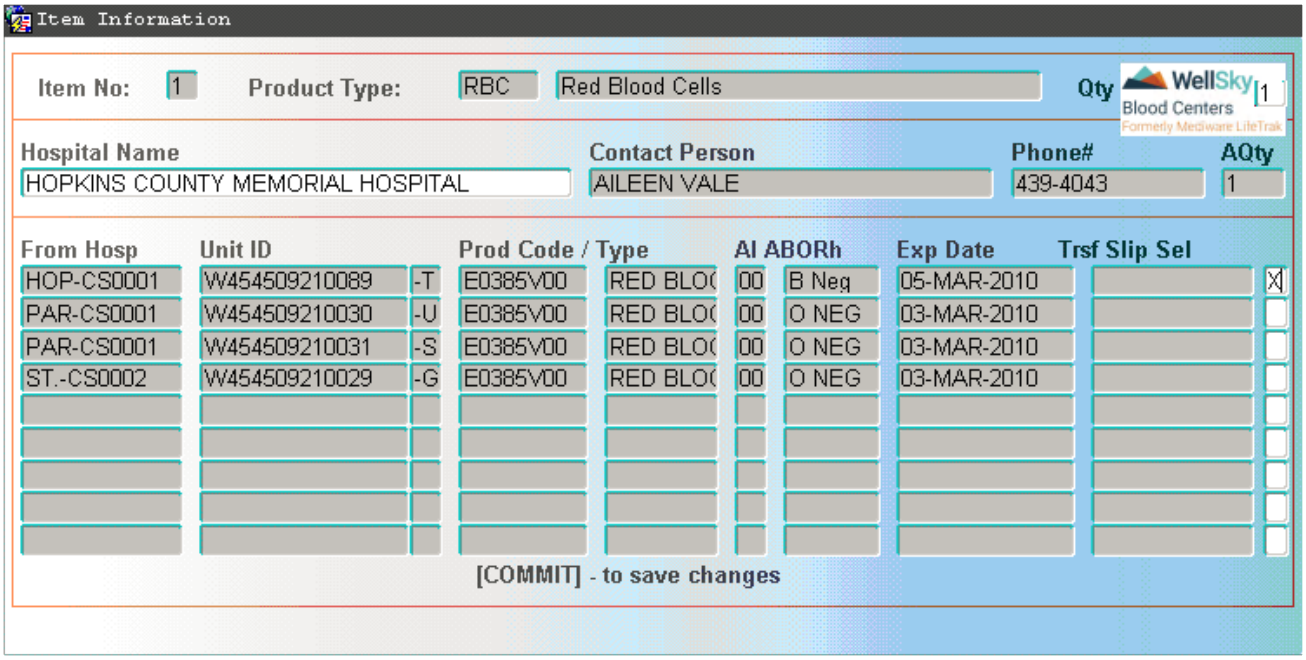


The following information displays about the product(s) found meeting the transfer criteria:

- Item No – back ordered item number.
- Product Type – product code and description.
- Qty Need – quantity back ordered.

The following information displays about the highlighted product's current location:

> **NOTE –** The information in this area changes as you scroll through the list of highlighted products found.

- Hospital Name – name of facility that has the needed product.
- Contact Person – name of facility contact.
- Phone # - phone number of contact person.
- AQty – quantity available.

As each product is highlighted, the following information is displayed about the product meeting the transfer criteria:

- From Hosp – Consignee ID displays.
- Unit ID – unit ID of product available at that facility.
- Prod Code/Type – product code and description.
- AI – aliquot number.
- ABORh – blood type.
- Exp Date – product expiration date

### Sel

Place an X next to the products to be transferred.

After the facility is confirmed as a source for the product, press **F12** (Commit) with the cursor next to the hospital to select products.

After the selection is committed, press **F8** (Exit Screen), and the following window opens:




Enter Y to print the transfer slip. Enter N if the transfer slip is not to be printed.

**NOTE –** The system automatically generates a transfer slip number and displays it in the Trsf Slip field. The product is then deleted from the bottom block and decrements the value in the Qty Need field.

After exiting from this pop-up, the X in the Select field is changed to P. The word Process displays in the adjoining field.

## Viewing Attributes/Antigens

To view attributes/antigens that were ordered with the product, navigate the cursor to the desired line item and press **F6** (Menu). The following window opens:

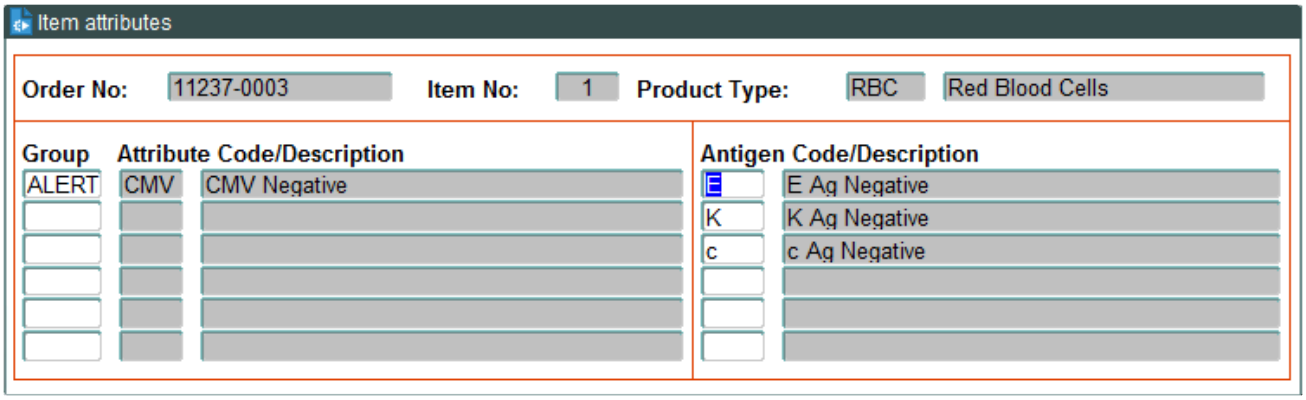


The following information displays if attributes/antigens are associated with the order:

- Order No – current selected order number.
- Item No – current selected line item number.
- Product Type – product type of selected line item.
- Group – attribute group.
- Attribute Code/Description – attribute ordered.
- Antigen Code/Description – antigen ordered.


WellSky Corporation
Proprietary and confidential

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the main entry screen.

## At Commit

- When Commit is pressed, selected products are saved.
- At Exit the system prompts you to print the transfer slip.

## What to Do Next

Complete the transfer using Close Hospital Transfer (TRANS2).

# 28.5.2 Close Hospital Transfer (TRANS2)

## Intended Use

Use the Close Hospital Transfer screen to close a hospital transfer slip and complete documentation of a facility-to-facility transfer.

## Limitations

None

## Prerequisites

A facility-to-facility transfer must have been started using Initiate Hospital Transfer (TRANS1).

## Accessing the Screen

Access this screen from the Transfer Orders menu or by entering the keyword `TRANS2`.

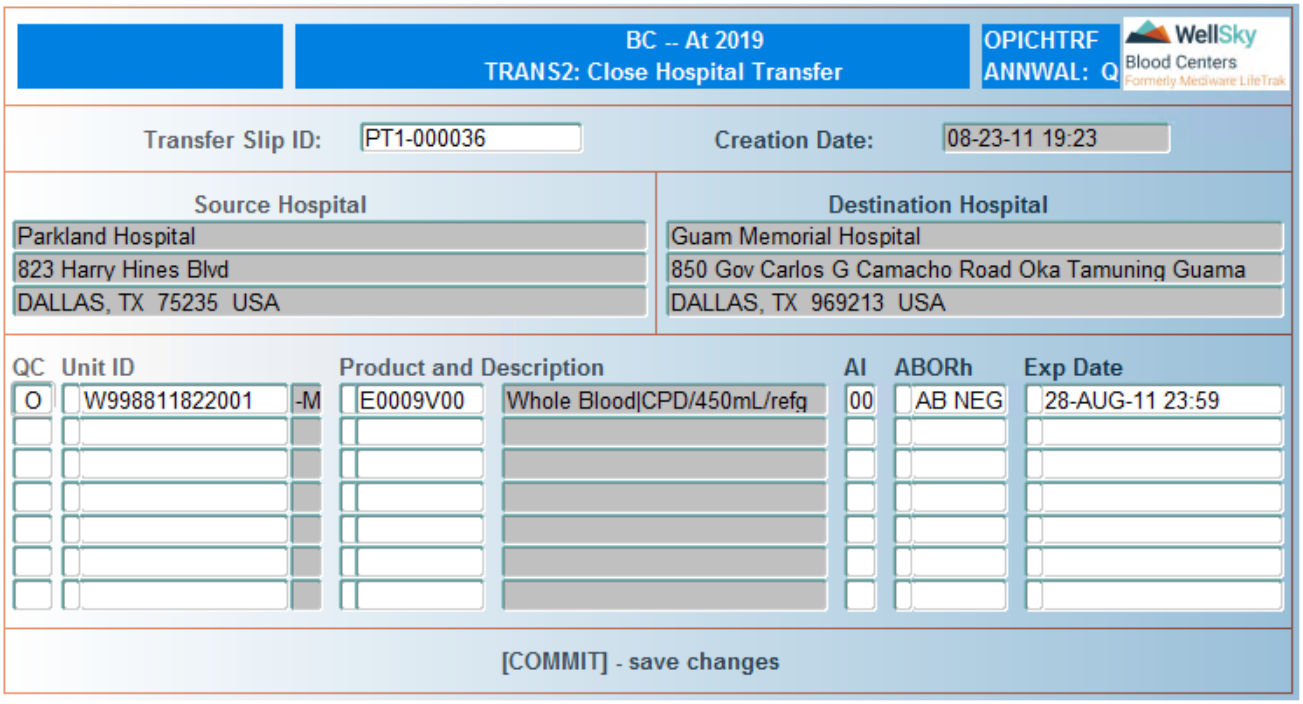


# Control Block Fields and Definitions

## Transfer Slip ID

Enter transfer slip ID or select from LOV.

## Creation Date

Transfer creation date automatically displays after the transfer slip ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Source Hospital

Source facility name and address automatically displays after the transfer slip ID is entered. Field is not navigable.

## Destination Hospital

Destination facility name and address automatically displays after the transfer slip ID is entered. Field is not navigable.

## QC

Enter `O` and press **F12** (Commit) if the product was transferred. Enter `M` to modify the product information. Enter `D` to deallocate a product.

**NOTE –** Product information is modified only if a substitute product was transferred. Products are deallocated if the product is ordered and substituted products are not available.


WellSky Corporation
Proprietary and confidential

### Unit ID

Scan or manually enter unit ID. Field is navigable only if M was entered in the QC field.

### Product

Scan, manually enter, or select product code from LOV. Field is navigable only if M was entered in the QC field.

### AI

Enter aliquot number or select from LOV. Field is navigable only if M was entered in the QC field.

### ABORh

Scan, manually enter, or select ABORh from LOV. Field is navigable only if M was entered in the QC field.

### Exp Date

Scan or manually expiration date. Field is navigable only if M was entered in the QC field.

Press F12 (Commit) to save entry.

## At Commit

- Selected product transfers are closed.
- Modified line items are updated in the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Transfer Orders menu.

# 28.6 Order Queries Functions

Order Queries Functions are accessed from the following menu:

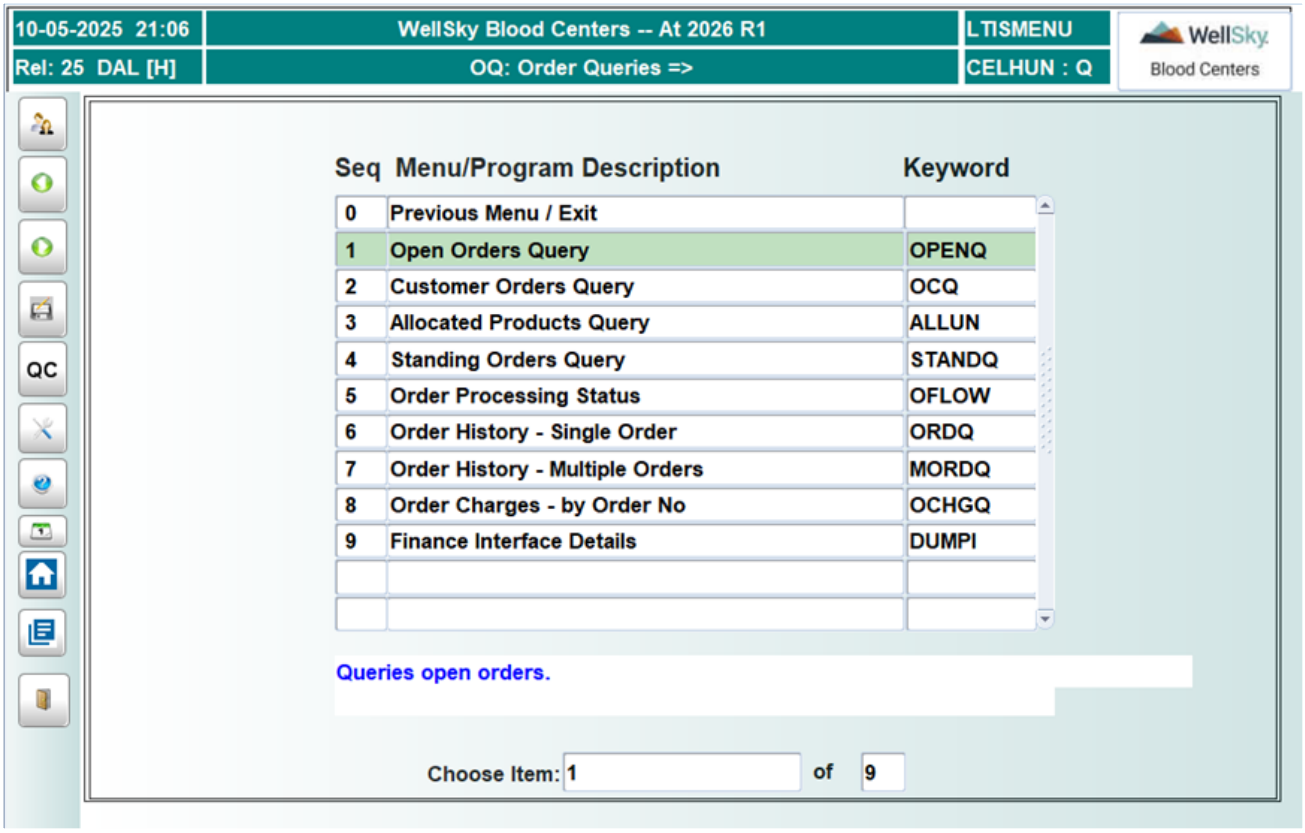


## 28.6.1 Open Orders Query (OPENQ)

### Intended Use

Use the Open Orders Query screen to review information about open orders, including the following:

- Order number.
- Customer placing order.
- Date and time of order.
- Estimated arrival time of order.
- Order items.

### Limitations

None


WellSky Corporation
Proprietary and confidential

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword OPENQ.

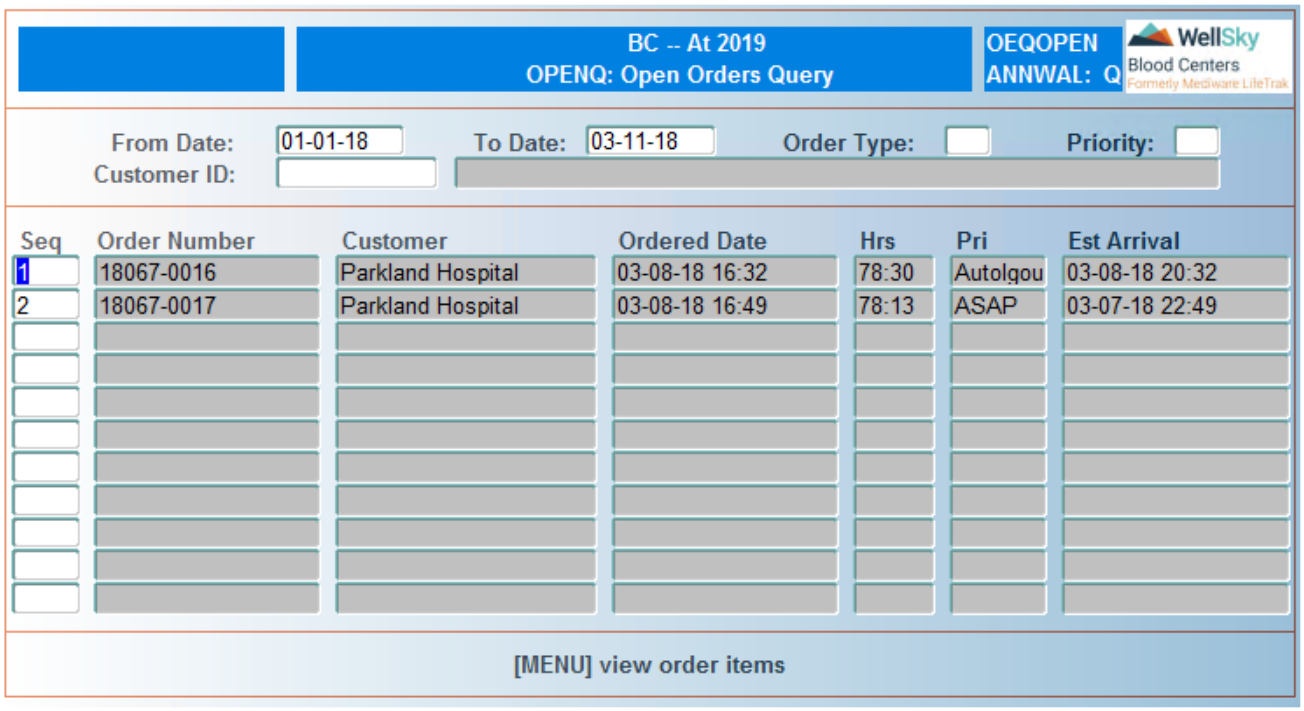


## Control Block Fields and Definitions

### From Date

Enter beginning date range in MM-DD-YY format.

**NOTE –** The system automatically defaults to the current date minus one day.

### To Date

Enter ending date range in MM-DD-YY format.

**NOTE –** The system automatically defaults to the current date.

### Order Type

Enter order type or select from LOV. Leave field blank to view all order types.

### Priority Code

Enter priority code or select from LOV. Leave field blank to view all order priorities.

### Customer ID

Enter customer ID or select from LOV. Leave field blank to view all customers.

## In the Detail Block

The following information displays:

- Seq - sequence number for each order.
- Order Number – order number for each open order.
- Customer – name of customer placing order.
- Ordered Date – date and time order was placed.
- Hrs – number of hours since order was placed.
- Pri – order priority.
- Est Arrival – date and time order was originally estimated to arrive.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## Reviewing Order Items

To review information on items in a specific order, scroll to the order number using the **UP** and **DOWN** arrow keys, press **F6** (Menu) and the following window opens:


WellSky Corporation
Proprietary and confidential

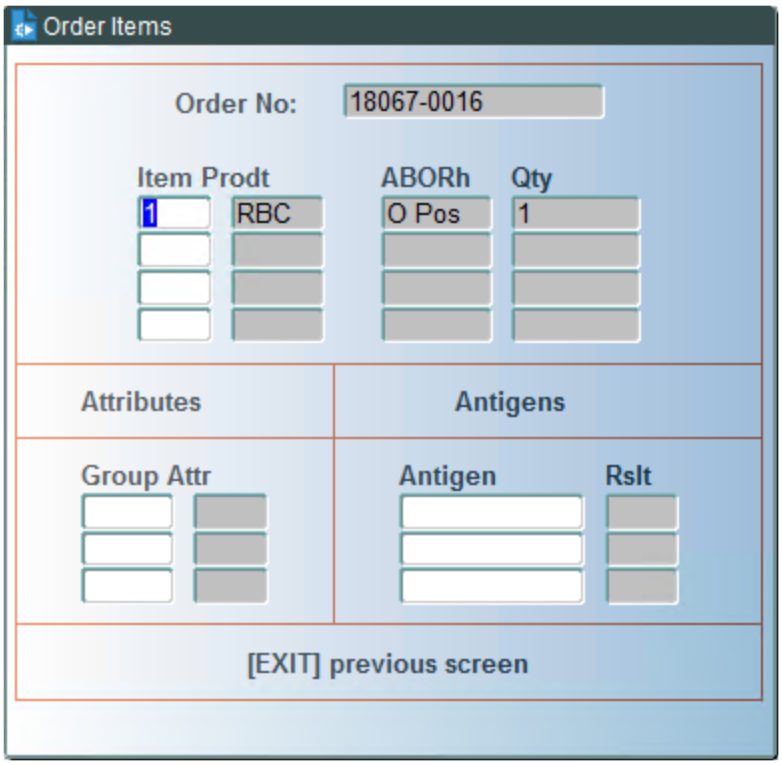


The following information displays in the query:

- Order No – order number of selected order.
- Item – line item number within the order.
- Prodt – product type ordered.
- ABORh – blood type of product ordered.
- Qty – quantity of product ordered.
- Attributes:
  - Group – attribute group requested.
  - Attr – attribute code requested.
- Antigens:
  - Antigen – antigen requested.
  - Rslt – antigen result requested.

Press **F8** (Exit Screen) to return to the query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Queries menu.

# 28.6.2 Customer Orders Query (OCQ)

## Intended Use

Use the Customer Orders Query screen to review information about any order placed by a customer within a date range, including the following:

- Order number.
- Order status.
- Date and time of order.
- Order items.
- Attributes/antigens placed with the order.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword OCQ.

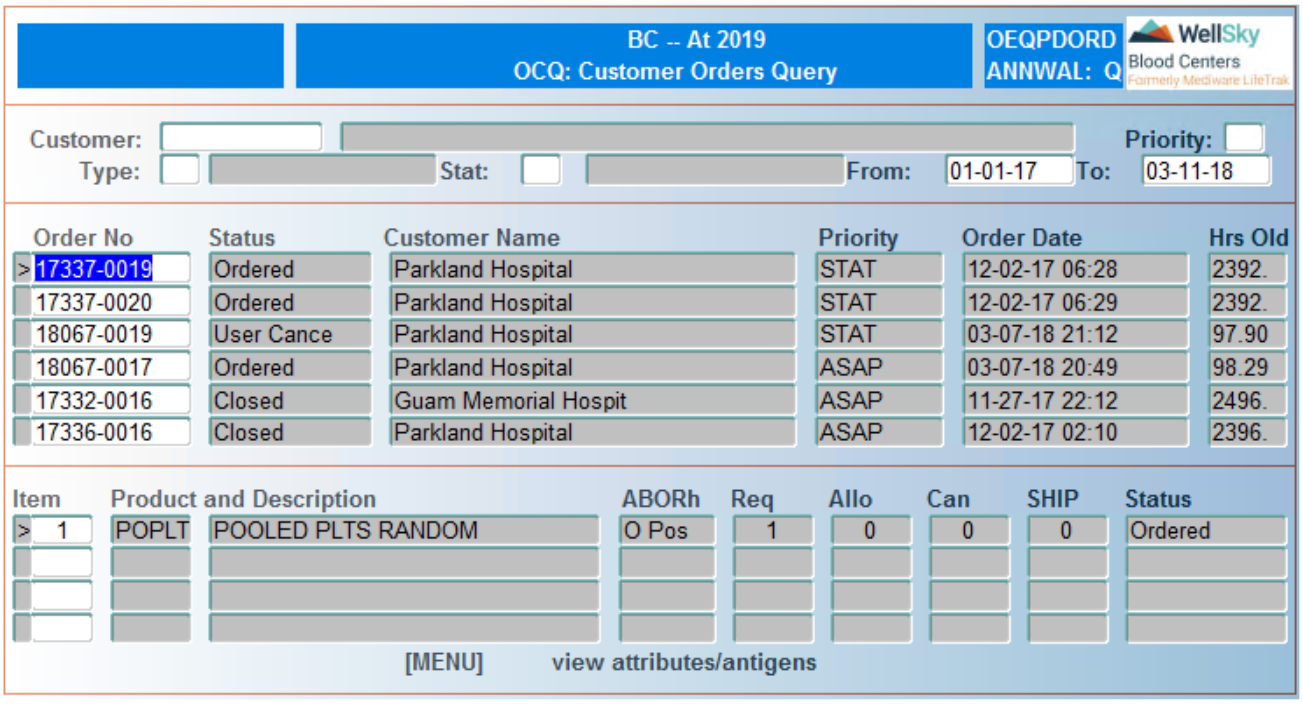



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Customer

Enter customer ID or select from LOV. Leave field blank to view all customers.

## Priority

Enter valid priority code or select from LOV. Leave field blank to view all priority codes.

## Type

Enter order type or select from LOV. Leave field blank to view all order types.

## Stat

Enter order status or select from LOV. Leave field blank to view all statuses.

## From

Enter beginning date range in MM-DD-YY format.

## To

Enter ending date range in MM-DD-YY format.

**NOTE –** The field will default to the current date.

# In the Order Summary Block

The following information displays after the control block is populated:

- Order No – order number for each order.
- Status – order status for each order.
- Customer Name – ID and name for customer placing order.
- Priority – order priority.
- Order Date – date and time order was placed.
- Hrs Old – number of hours since order was placed.

Use the UP and DOWN arrow keys to scroll through the orders.

Press CTRL + F3 (Next Block) to advance to the Order items block.

# In the Order Items Block

The following information displays in the Order Items Block as an order is highlighted in the block above:

- Item – item number.
- Product Type/Desc – ordered product type and description.

- ABORh – ordered blood type of the products.
- Req – quantity of items requested.
- Allo – quantity of items allocated.
- Can – quantity of items cancelled.
- Ship – quantity of items shipped.
- Status – status of ordered item.

Use the UP and DOWN arrow keys to scroll through the list.

## Viewing Ordered Attributes And Antigens

To review attributes and antigens on products in a specific order, press F6 (Menu) from the Order Items Block. The following window opens:

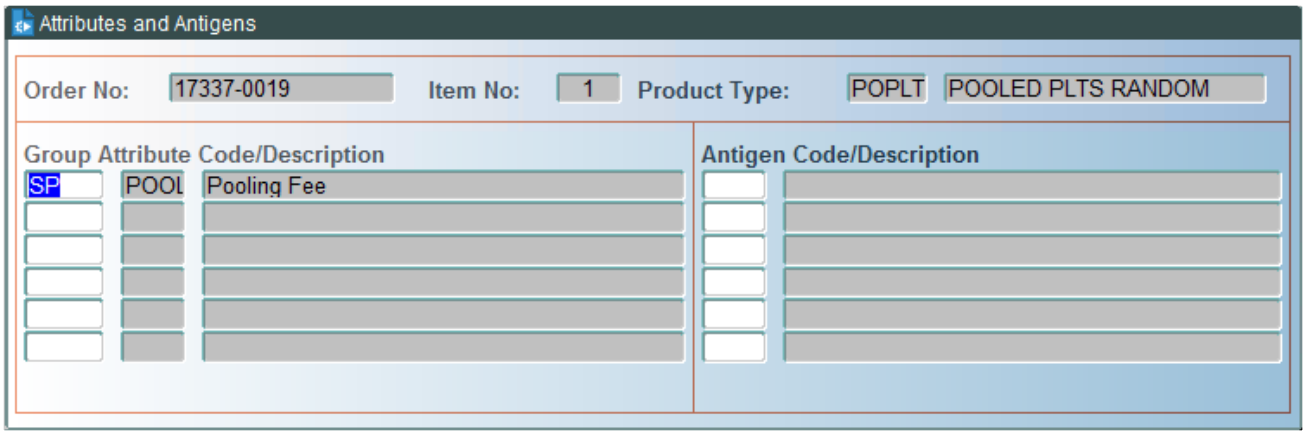


The following information displays in this query:

- Order No – order number of selected order.
- Item No – line item number within the order.
- Product Type – product type ordered.
- Group Attribute Code/Description – attribute group and code requested.
- Antigen Code/Description – antigen requested.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Queries menu.


WellSky Corporation
Proprietary and confidential

# 28.6.3 Allocated Products Query (ALLUN)

## Intended Use

Use the Allocated Products Query screen to review the status and customers of allocated products. This screen is used when allocating a high priority order (STAT) when the inventory for the product has been depleted.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword `ALLUN`.

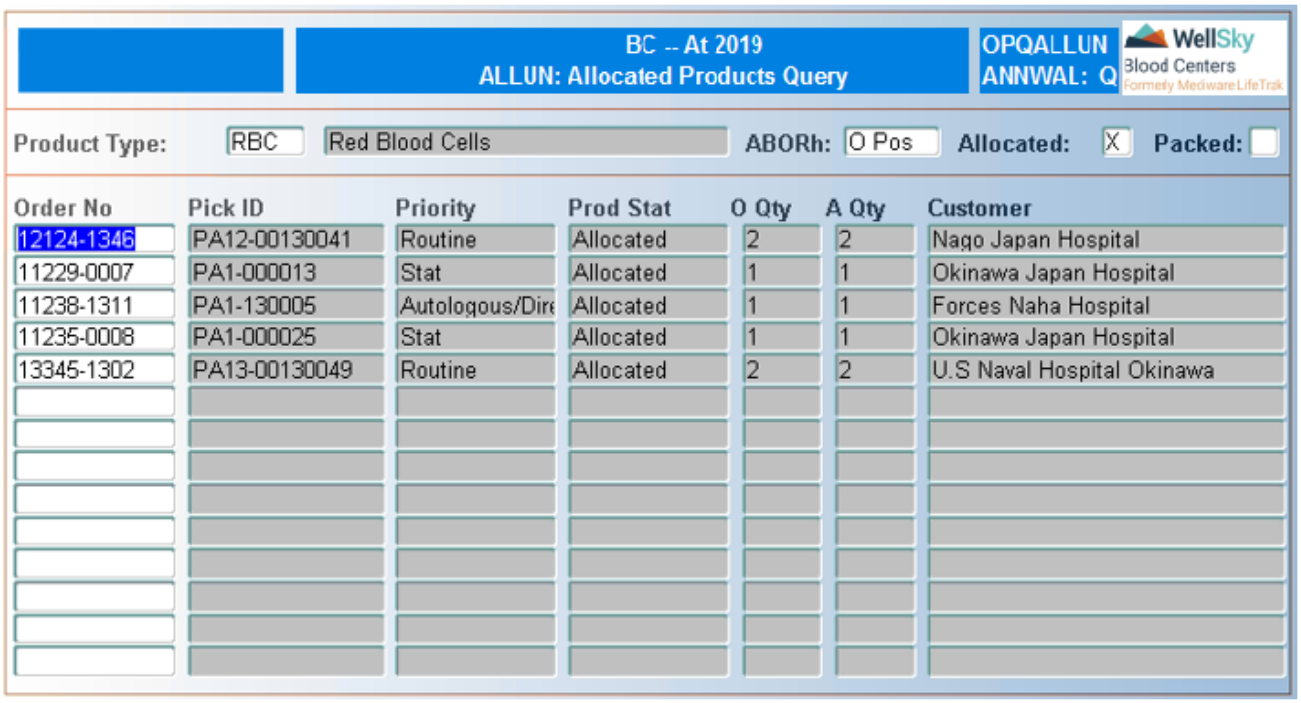


## Control Block Fields and Definitions

### Product Type

Enter product type or select from LOV.

**NOTE –** If the Description portion of the Product Type (created from the PRODTYP Administration screen) exceeds 20 characters, an error will be generated; however, the error can be ignored and the Product Type can still be selected from the list of values LOV.

### ABORh

Enter ABORh or select from LOV.

### Allocated

Enter x to view allocated products or leave field blank if you do not want to view allocated orders.

### Packed

Enter x to view packed products or leave field blank if you do not want to view packed orders

**NOTE –** Allocated and pack products will display if both fields are selected. At least one field must be selected.

## In the Detail Block

The following information displays in the query:

- Order No – order number with allocated products.
- Pick ID – pick slip number.
- Priority – order priority.
- Product Stat – status of selected products.
- O Qty – quantity of selected products ordered.
- A Qty – number of selected products allocated.
- Customer – customer receiving order.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Queries menu.


WellSky Corporation
Proprietary and confidential

# 28.6.4 Standing Order Query (STANDQ)

## Intended Use

Use the Standing Orders Query screen to review information about any standing order placed by a customer, including the following:

- Day of the week.
- Consignee.
- Effective and termination dates of standing order.
- Order items.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword STANDQ.

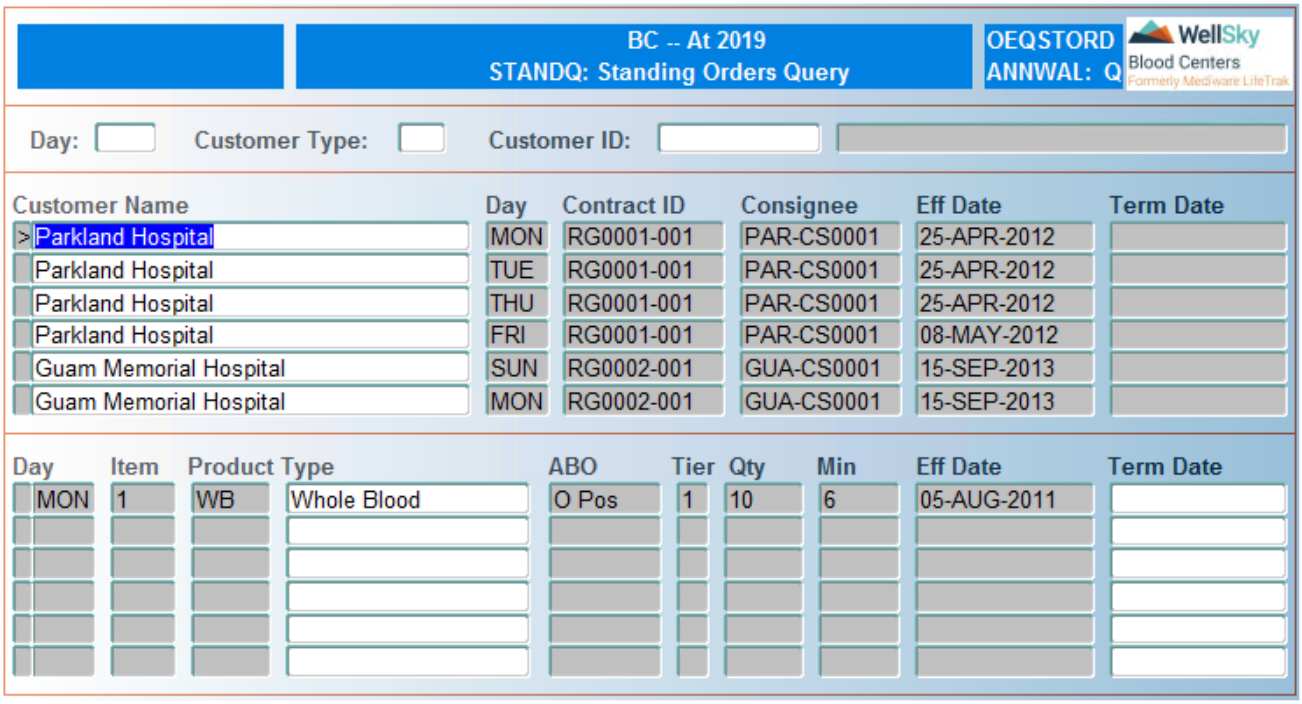

# Control Block Fields and Definitions

## Day

Enter a three-character weekday abbreviation or select from LOV. Leave field blank to select all days.

## Customer Type

Enter customer type or select from LOV. Leave field blank to select all customer types.

## Customer ID

Enter customer ID or select from LOV. Leave field blank to select all customers.

# In the Order Summary Block

The following information displays in the order summary block:

- Customer Name – ID and name of customer placing order.
- Day – day of the week order is to be shipped.
- Contract ID – contract ID with this customer.
- Consignee – consignee ID.
- Eff Date – date standing order becomes effective.
- Term Date – date standing order is to be terminated.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Order Details Block.

# In the Order Details Block

The following information displays in the order details block:

- Day – day of the week order is set up for.
- Item – item number.
- Product Type – ordered product type and description.
- ABO Desc – ordered blood type of the product.
- Tier – tier of the product.
- Qty – quantity of items requested.
- Min – minimum quantity of items needed for the order.
- Eff Date – date item in standing order becomes effective.
- Term Date – date item in standing order is to be terminated.

Use the **UP** and **DOWN** arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

## Viewing Ordered Attributes And Antigens

Press **CTRL** + **F3** (Next Block) from the Order Details Block to view order attributes. The following window opens:

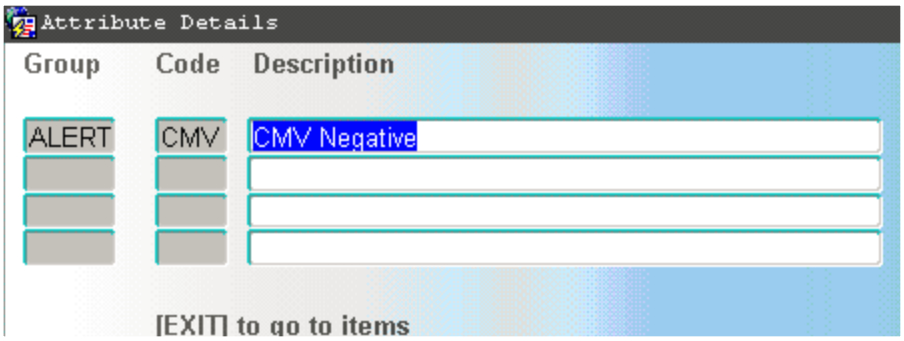


The following information displays in this query:

- Group – attribute group.
- Code – attribute code.
- Description – attribute description.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the main query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Queries menu.

# 28.6.5 Order Processing Status (OFLOW)

## Intended Use

Use the Order Processing Status screen to view a list of pending orders, categorized by order type.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword `OFLOW`.

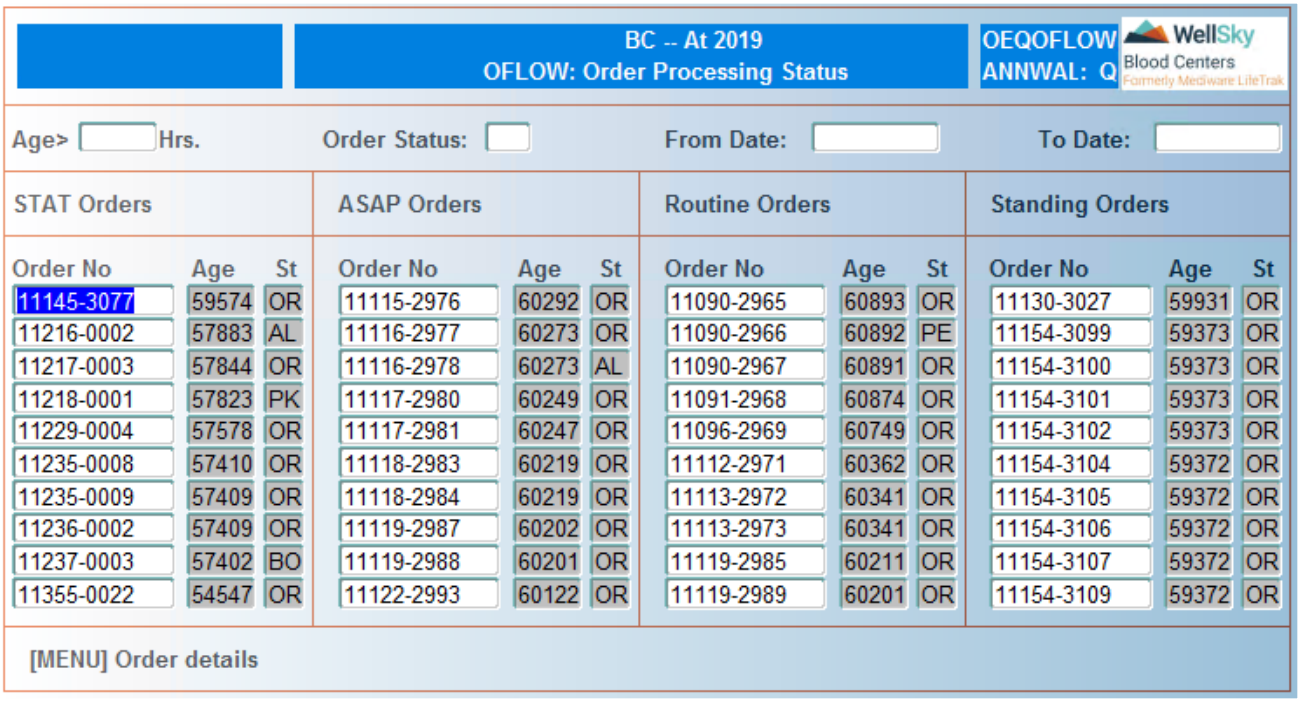


# Control Block Fields and Definitions

## Age

Enter an age limit of orders (in hours) to be displayed. Leave field blank to retrieve a list of pending orders with no age limit.

## Order Status

Enter order status or select from LOV. Leave field blank in order to retrieve a list of pending orders without regard to order status.

## From Date

Enter from date in MM-DD-YY format. Leave field blank to retrieve a list that includes all pending orders through the To Date specified.

## To Date

Enter to date in MM-DD-YY format. Leave field blank to retrieve a list that includes all pending orders through the current date.

# In the Stat Orders Block

The following information displays:

- Order No – order number.
- Age – order age.
- St – order status.


WellSky Corporation
Proprietary and confidential

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the ASAP Orders Block.

## In the ASAP Orders Block

The following information displays:

- Order No – order number.
- Age – order age.
- St – order status.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Routine Orders Block.

Press **CTRL** + **F4** (Previous Block) to return to the Stat Orders Block.

## In the Routine Orders Block

The following information displays:

- Order No – order number.
- Age – order age.
- St – order status.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to navigate to the Standing Orders Block.

Press **CTRL** + **F4** (Previous Block) to return to the ASAP Orders Block.

## In the Standing Orders Block

The following information displays:

- Order No – order number.
- Age – order age.
- St – order status.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F4** (Previous Block) to return to the Routine Orders Block.

## Viewing Order Details

Press **F6** (Menu) from any order block to view order details. The following window opens:

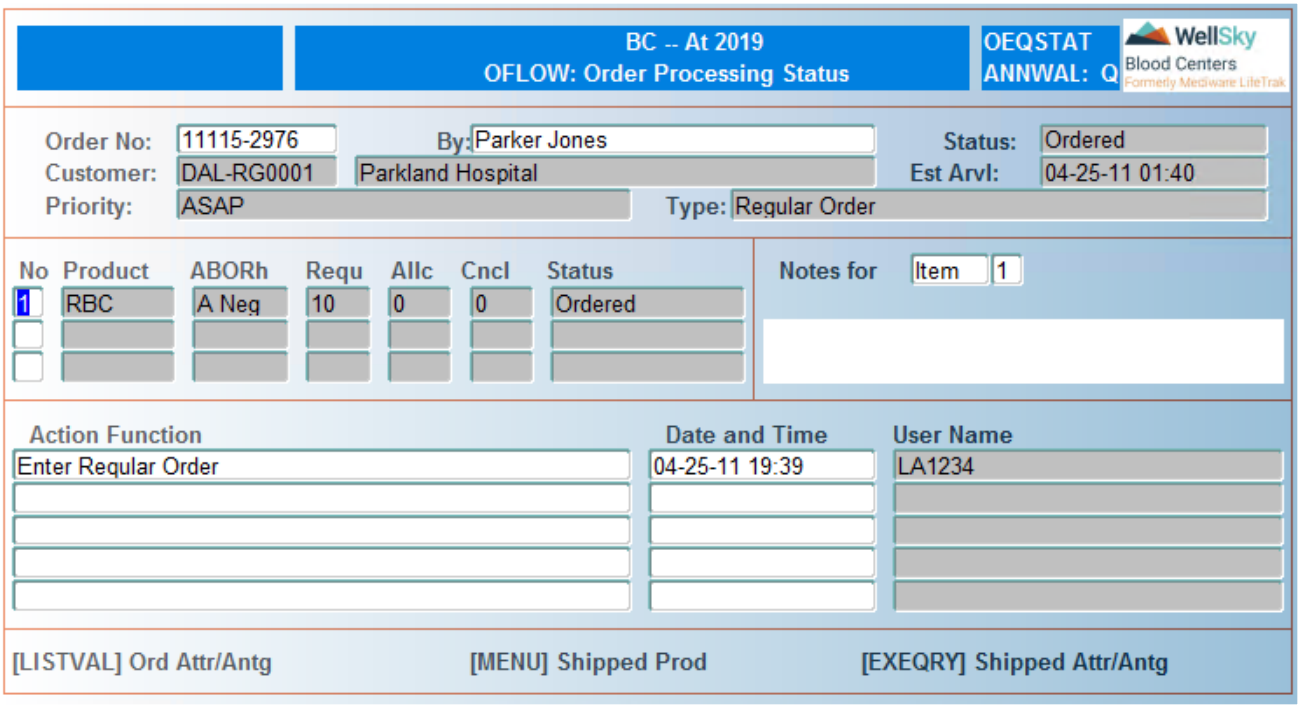


Refer to Order History – Single Order (ORDQ) for further information about this query.

Press F8 (Exit Screen) to return to the main query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Queries menu.

# 28.6.6 Order History – Single Order (ORDQ)

## Intended Use

Use the Order History – Single Order screen to review information about a particular order, including the following:

- Customer.
- Estimated arrival.
- Order type.
- Products ordered.
- Order processing history.
- Antigens and attributes offered.


WellSky Corporation
Proprietary and confidential

- Antigens and attributes shipped.
- Products shipped.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword ORDQ.

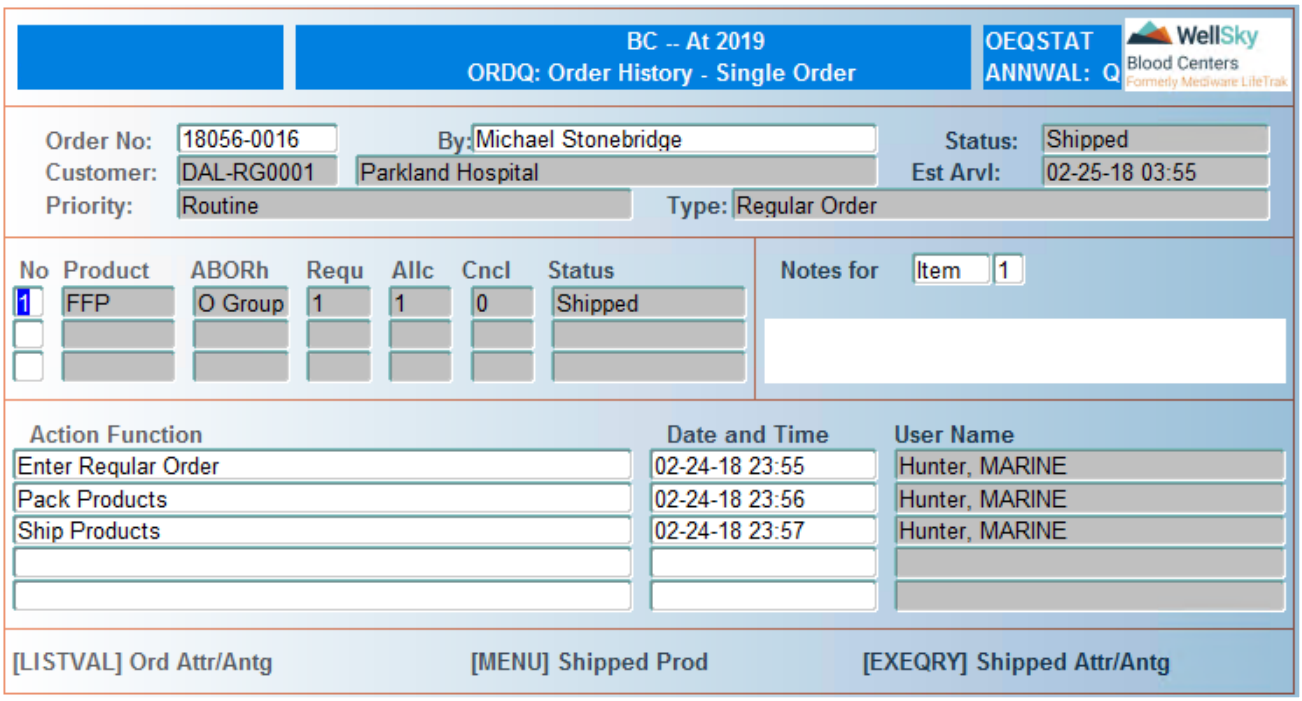


## Control Block Fields and Definitions

### Order No

Enter order number or select from LOV.

After the order number is entered, the following order information displays in the Control Block:

- By – name of contact.
- Status – current status of the order.
- Customer – name and ID of customer who placed the order.
- Est Arvl – date and time order is estimated to be delivered.

- Priority – priority of the order (for example, ASAP).
- Type – type of order (for example, Special)

## In the Order Summary Block

The following information displays in this area:

- No – item number.
- Product – product type ordered.
- ABORh – blood type ordered.
- Req – quantity of products requested.
- Allc – quantity of products allocated.
- Cncl – quantity of products cancelled.
- Status – status of item ordered.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to move to the Action Function Block.

## In the Action Function Block

The following information displays in this area:

- Action Function – function associated with the order.
- Date – date on which function was performed.
- Time – time at which function was performed.
- User Name – name of user performing function.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F3** (Next Block) to move to the Notes Block.

Press **CTRL** + **F4** (Previous Block) to return to the Order Summary Block.

## In the Notes Block

The following information displays in this area:

- Notes – notes about the order or a particular line item.

Press **CTRL** + **F4** (Previous Block) to return to the Action Function Block.

## Viewing Ordered Attributes And Antigens

Press **F2** (List of Values) from the Order Summary Block to view attributes and antigens on items in the order. The following window opens:


WellSky Corporation
Proprietary and confidential

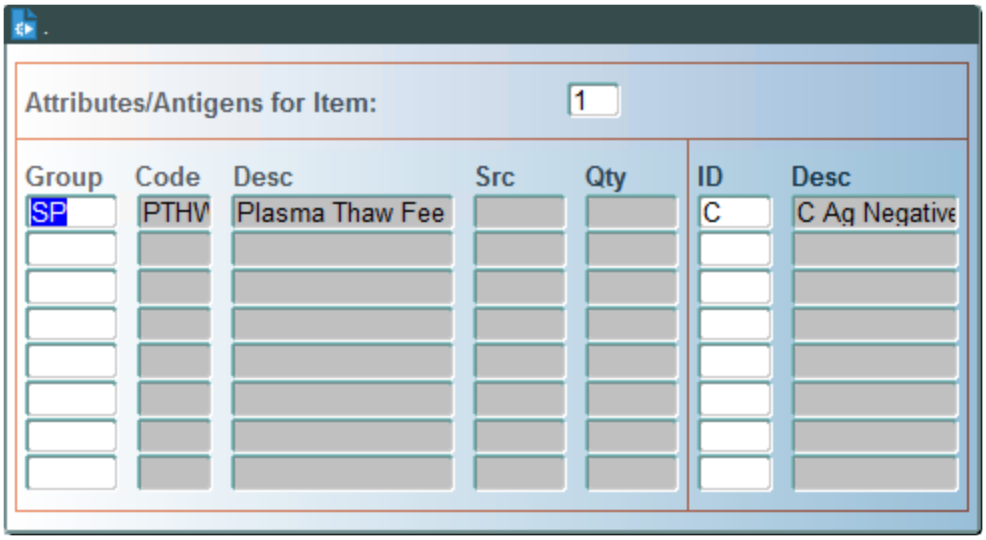


The following information displays in the query:

- Attributes/Antigens for Item – the item number for which attributes and antigens display.
- Group – attribute group.
- Code – attribute code.
- Desc – description of attribute code.
- Src – source (displays only for pools).
- Qty – quantity (displays only for pools).
- ID – antigen requested.
- Desc – description of antigen.

Use the **UP** and **DOWN** arrow keys to scroll through data.

Press **F8** (Exit Screen) to return to the query screen.

## Reviewing Shipped Products

Press **F6** (Menu) from the Order Summary block to view shipped products. The following window opens:

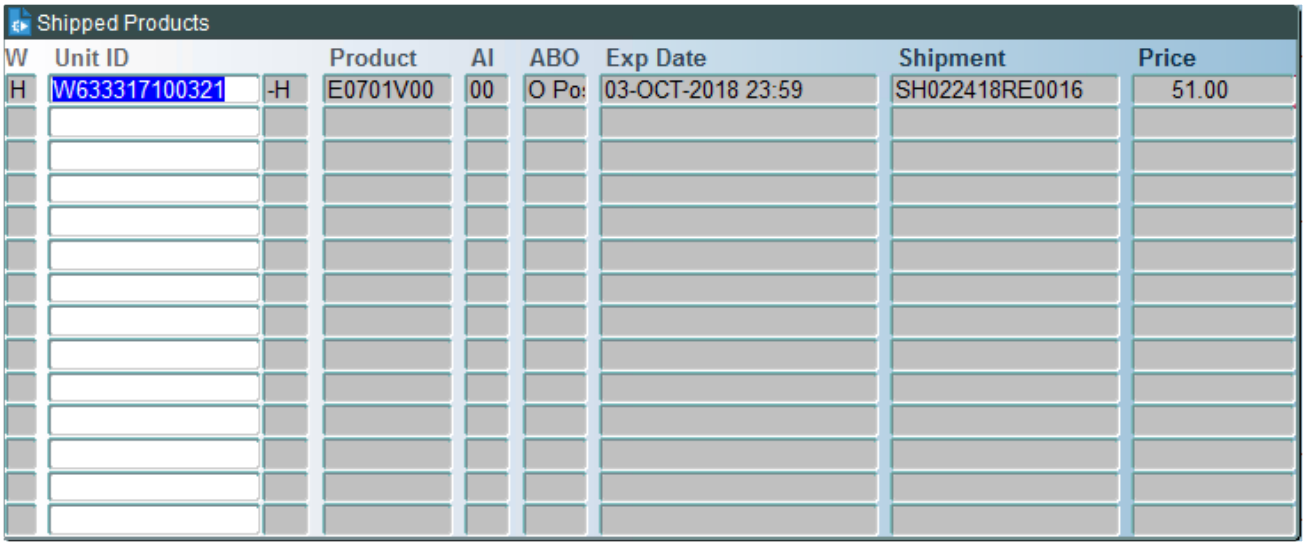


The following information displays in the query:

- W – Warehouse from which product was shipped
- Unit ID – unit ID of shipped product
- Product – product code of shipped product
- AI – shipped product aliquot number
- ABO – blood type
- Exp Date – expiration date and time or product
- Shipment – shipment number to which product is associated
- Price – product charge

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the query screen.

## Viewing Shipped Attributes And Antigens

Press **ALT** + **F12** (Execute Query) to review attributes and antigens on products that were shipped. The following window opens:


WellSky Corporation
Proprietary and confidential

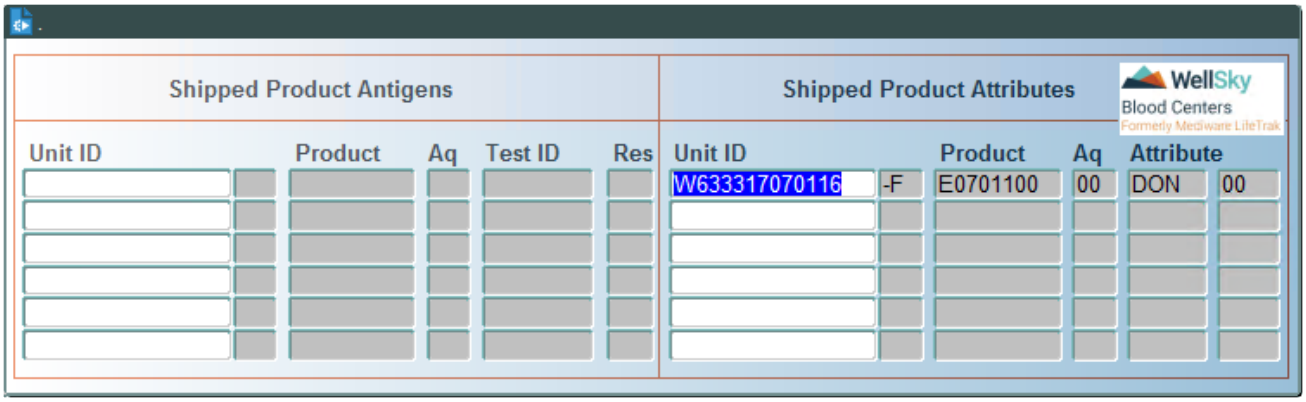


The following information displays in the query:

## Shipped Product Antigens

- Unit ID – unit ID of shipped product
- Product – product code of shipped product
- Aq– shipped product aliquot number
- Test ID – shipped product antigen
- Res – shipped product antigen test result

## Shipped Product Attributes

- Unit ID – unit ID of shipped product
- Product – product code of shipped product
- Aq – shipped product aliquot
- Attribute – shipped product attribute group and code

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the query screen.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Queries menu.

# 28.6.7 Order History – Multiple Orders (MORDQ)

## Intended Use

Use the Order History – Multiple Orders screen to review information about multiple orders for a customer, including the following:

- Order date
- Order number
- Order priority
- Order type
- Current order status

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword `MORDQ`.

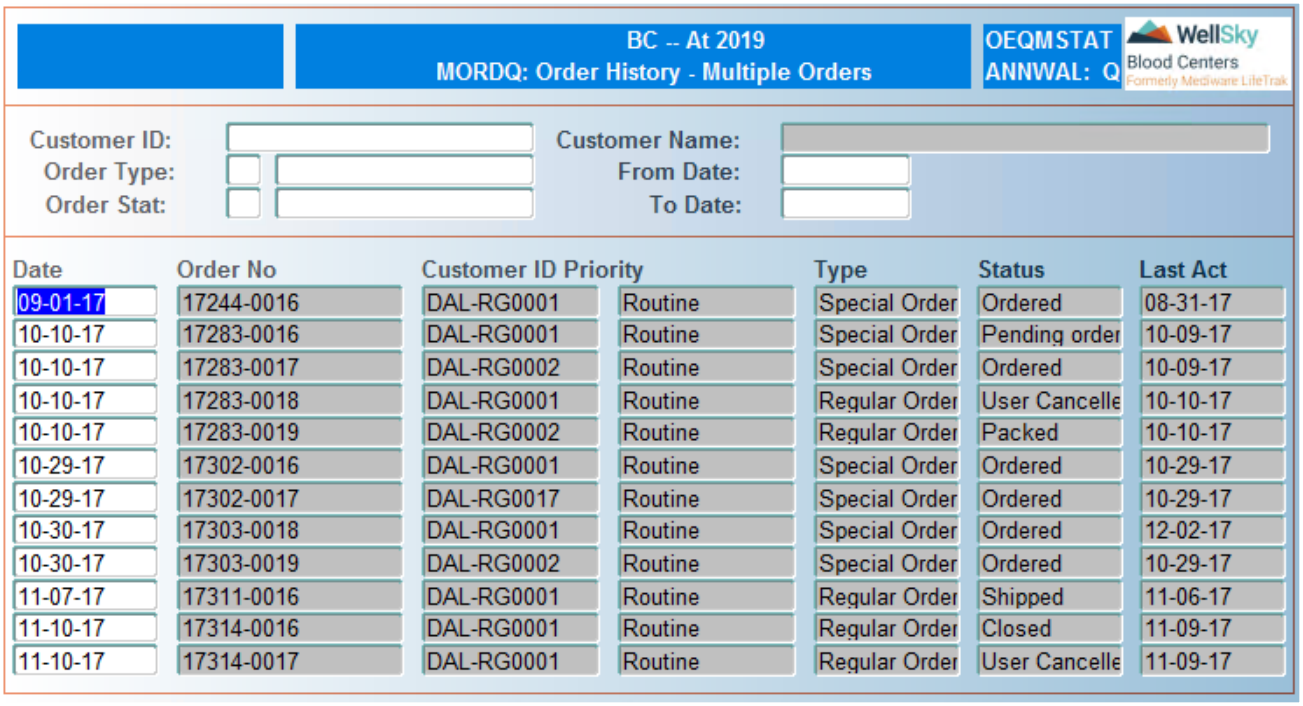



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Customer ID

Enter customer ID or select from LOV. Leave field blank to retrieve all customers.

## Customer Name

Customer name automatically displays after the customer ID is entered. Field is not navigable.

**NOTE –** Field will be blank if the customer ID field is left blank.

## Order No

Enter order number or select from LOV. Leave blank to view orders for all orders.

## Order Type

Enter order type or select from LOV. Leave blank to view all order types.

## Order Stat

Enter status (for example, OR – ordered) or select from LOV. Leave blank to all order statuses.

## From Date

Enter from date in MM-DD-YY format for the beginning of the date range. Leave blank to view orders placed on any date.

## To Date

Enter to date in MM-DD-YY format for the end of the date range. Leave blank to view orders placed up to the current date.

# In the Detail Block

The following information displays in the query:

- Date – date order was placed.
- Order No – order number.
- Customer ID – ID of customer placing order.
- Priority – priority of order (for example, ASAP).
- Type – type of order (for example, Special).
- Status – status of order (for example, Ordered).
- Last Act – last date action was taken on the order.

Use the UP and DOWN arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Queries menu.

# 28.6.8 Order Charges – By Order No (OCHGQ)

## Intended Use

Use the Order Charges – By Order No screen to display order charges for a specified order number.

This screen also provides the following features:

- Displays attribute/antigen details for products in the order.
- Displays order details.
- Displays other charges (customer debits/credits associated to the order).

## Limitations

None

## Prerequisites

- The Order Charges – By Order Number screen will query an order after it has been released for allocation.
- No product charges will appear until products have been associated to the order during packing.
- As additional products are packed and associated to the order, additional order charges will be displayed by this screen.

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword `OCHGQ`.


WellSky Corporation
Proprietary and confidential

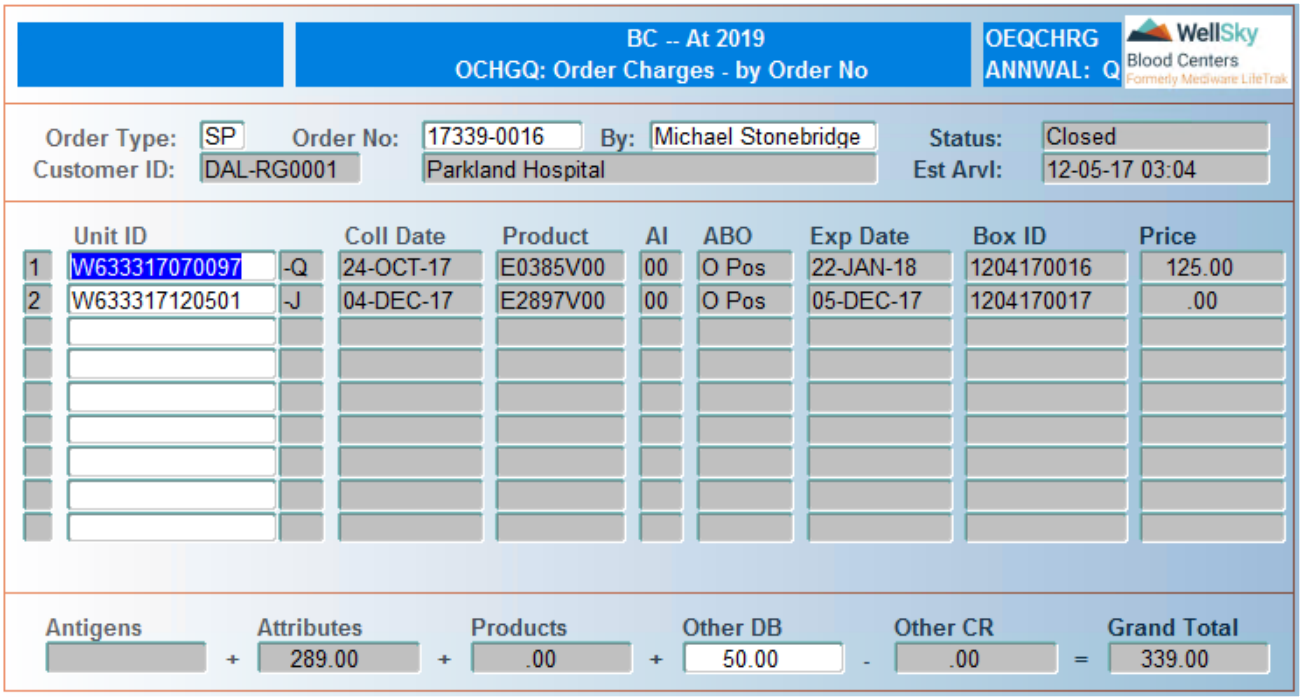


# Control Block Fields and Definitions

## Order Type

Enter order type or select from LOV. Leave field blank to view order numbers from all order types.

## Order No

Enter order number or select from LOV.

The following information displays in the control block after the order number is entered:

- By – person placing order.
- Status – order status.
- Customer ID – customer ID and name.
- Est Arvl – estimated arrival time .

# In the Detail Block

The following information displays, if present in the detail block after the order number is entered:

- Unit ID - unit ID.
- Coll Date – unit collection date.
- Product – product code.
- AI - aliquot number.
- ABO - product ABO/Rh.

- Exp Date – product expiration date.
- Box ID – box ID.
- Price – product price.
- Antigens – total antigen price.
- Attributes – total attribute price.
- Products – total product price.
- Other DB – other debits total.
- Other CR – other credits total.
- Grand Total – grand total (sum of antigens, attributes, products, other debits and credits).

**NOTE –** Charges entered in Order and Services Debit/Credit (CDSVC) display in Other DB.

Use the UP and DOWN arrow keys to scroll through the list.

## Reviewing Attributes/Antigens

To review attribute/antigen information for products associated with the order, press CTRL + F3 (Next Block) . The following window opens:

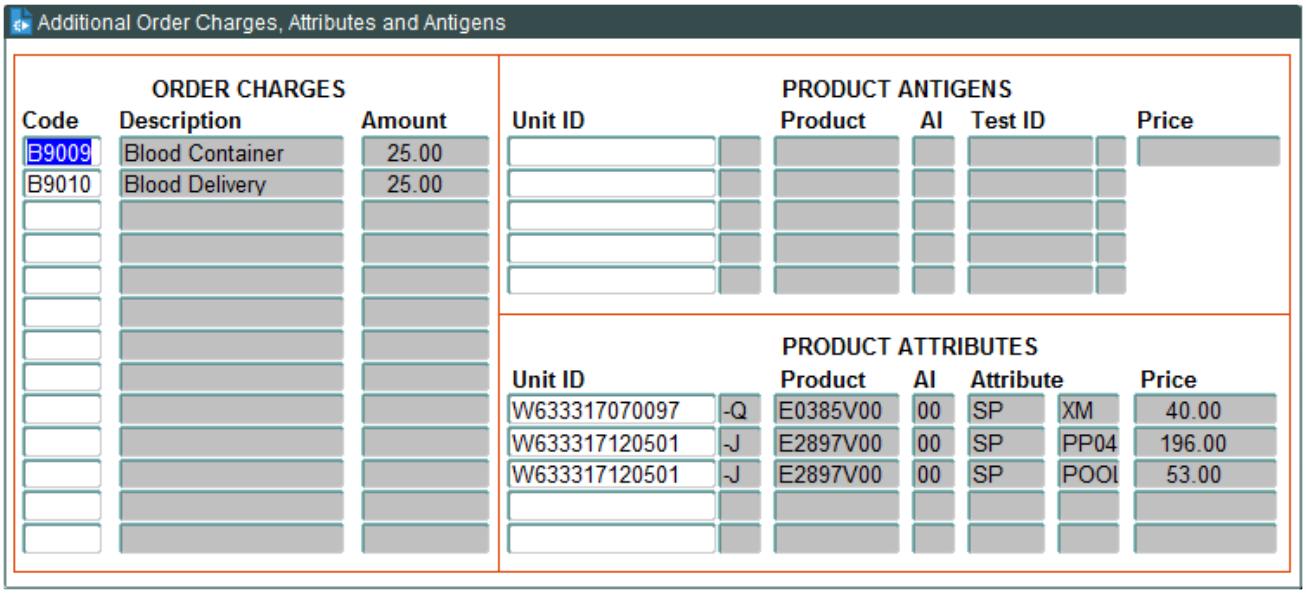


The following information displays in the query:

### Order Charges Block

- Code – charge code.
- Description – charge description.


WellSky Corporation
Proprietary and confidential

- Amount – charge amount.

**NOTE –** Charges entered at the time of order and at shipment display in this area.

Use the **UP** and **DOWN** arrow keys to scroll through displayed data.

Press **CTRL** + **F3** (Next Block) to move to product antigens block.

Press **CTRL** + **F4** (Previous Block) or Exit to return to the main query.

### Product Antigens Block

- Unit ID – unit ID.
- Product – product code.
- Al – aliquot.
- Test ID – test ID.
- Price – total of all antigen charges.

Use the **UP** and **DOWN** arrow keys to scroll through displayed data.

Press **CTRL** + **F3** (Next Block) to move to product attributes block.

Press **CTRL** + **F4** (Previous Block) to return to the order charges block.

Press **F8** (Exit Screen) to return to the main query.

### Product Attributes Block

- Unit ID – Unit ID.
- Product – product code.
- Al - aliquot.
- Attribute – attribute group and code.
- Price – attribute price.

Use the **UP** and **DOWN** arrow keys to scroll through displayed data.

Press **CTRL** + **F4** (Previous Block) to return to the product antigens block.

Press **CTRL** + **F3** (Next Block) to move to the order charges block.

Press **F8** (Exit Screen) to return to the main query.

## Viewing Order Details

Press **F6** (Menu) from the main query screen to view order details. The following window opens:

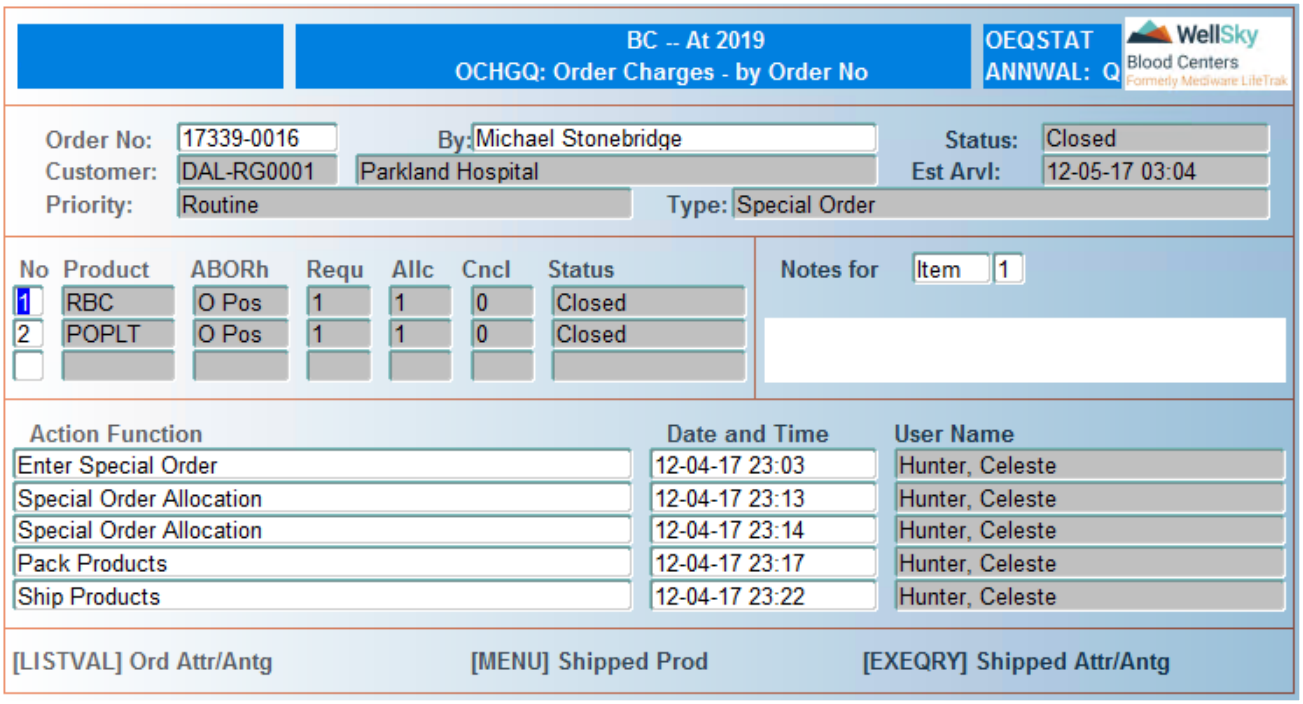


Refer to Order History – Single Order (ORDQ) for further information about this query.

Press F8 (Exit Screen) to return to the main query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Order Queries menu.

# 28.6.9 Finance Interface Details (DUMPI)

## Intended Use

Use the Finance Interface Details screen to display financial interface data for a specified order number.

## Limitations

None

## Prerequisites

The Finance Interface Details screen will display financial interface details for any order that has been at least partially shipped, and that has therefore interfaced with an A/R system.

## Accessing the Screen

Access this screen from the Order Queries menu or by entering the keyword `DUMPI`.


WellSky Corporation
Proprietary and confidential

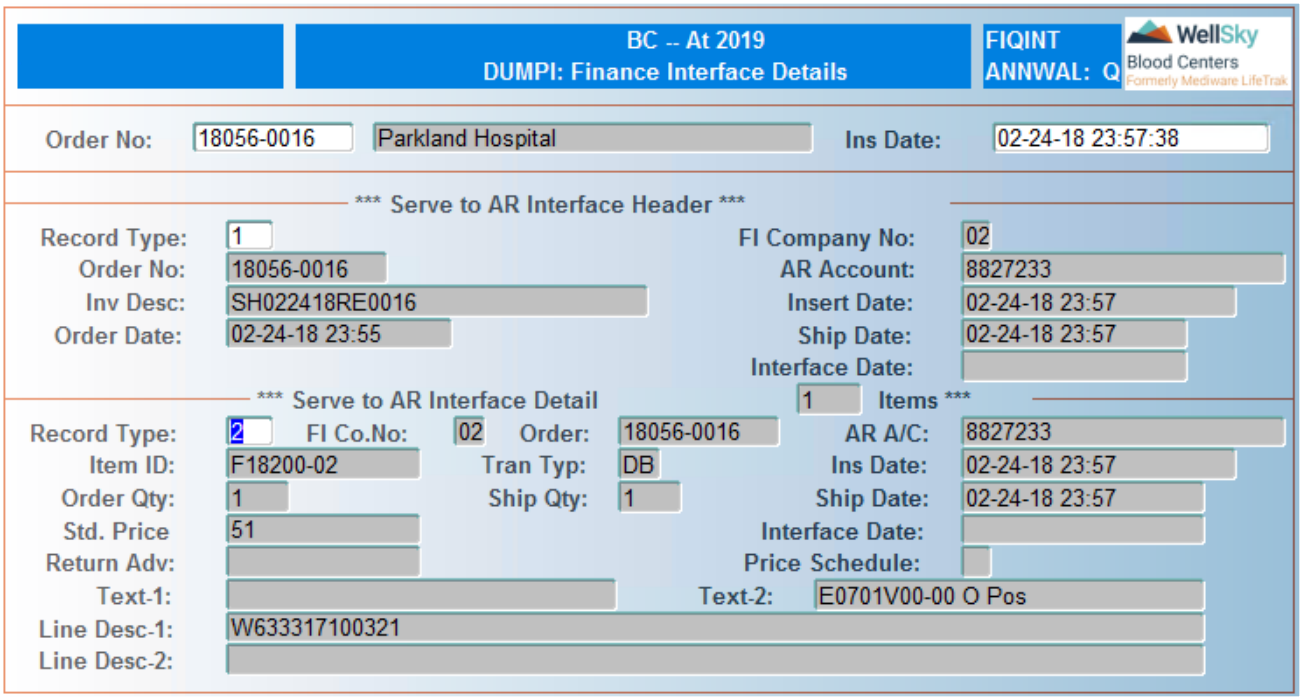


# Control Block Fields and Definitions

## Order No

Enter order number or select from LOV. Customer name displays after order number is entered.

## Ins Date

Enter insert date or select from LOV.

# In the Serve to AR Interface Header Block

The following information displays after the insert date is entered:

- Record Type – record type.
- FI Company No - financial company number (a link to financial interface data).
- Order No – order number.
- AR Account – account receivable account number.
- Inv Desc – pack list number.
- Insert Date – insert date/time.
- Order Date – order number.
- Ship Date – shipment date and time.
- Interface Date – interface date.

## In the Serve to AR Interface Detail Block

The following information displays after the insert date is entered:

- Record Type – record type.
- FI Co. No – financial company number (a link to MAS90 data).
- Order No – order number.
- AR A/C – account receivable account number.
- Item ID – service code.
- Tran Typ – transaction type.
- Insert Date – insert date/time.
- Order Qty – order quantity for item.
- Ship Qty – shipped quantity for item.
- Ship Date – shipment date for item.
- Std. Price – price for this item.
- Interface Date – interface date for this detail item.
- Return Adv – return advice.
- Price Schedule – product price tier.
- Tran Type – transaction type (debit or credit).
- Text 1 – description of ordered item.
- Text 2 – product code/aliquot/ABO.
- Line Desc-1 – description of service or unit ID.
- Line Desc-2 – description of service or unit ID.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Order Queries menu.


WellSky Corporation
Proprietary and confidential

29

# Chapter 29 - Distribution Module


29.1 Introduction ..... 1900
29.1.1 Overview ..... 1900
29.1.2 Structure ..... 1900
29.2 Packing Functions ..... 1901
29.2.1 Pack Products (PACK) ..... 1901
29.2.2 Pack Recovered Plasma (PACKRP) ..... 1909
29.2.3 Pack Inv Rejects To Discard (PACKOD) ..... 1912
29.2.4 Pack Inv Rejects To Salvage (PACKOS) ..... 1916
29.2.5 Pack Lab Discards To Discard (PACKLD) ..... 1920
29.2.6 Pack Lab Discards To Salvage (PACKLS) ..... 1926
29.2.7 Close Box (CLBOX) ..... 1932
29.3 Shipping Functions ..... 1935
29.3.1 Ship Products (SHIP) ..... 1935
29.3.2 Ship Discard And Salvage Products (SHIPD) ..... 1941
29.3.3 Delivery Confirmation (DELCON) ..... 1947
29.3.4 Regenerate Electronic Plasma File (GENXML) ..... 1948
29.3.5 Electronic Plasma File Error Log (XMLLOG) ..... 1950
29.4 Distribution Queries ..... 1952
29.4.1 Pickslip Status (DPICKQ) ..... 1952
29.4.2 Open Boxes (OPENBOXQ) ..... 1954
29.4.3 Boxes Ready For Shipment (OKBOXQ) ..... 1957
29.4.4 Box Details (BOXDTQ) ..... 1959
29.4.5 Shipments In Transit (TXQ) ..... 1962
29.4.6 Delivered Shipments (DELQ) ..... 1964
29.4.7 Shipments By Ship Date (SHIPQ) ..... 1967

# 29.1 Introduction

## 29.1.1 Overview

The distribution module consists of functions relating to product packing, shipment and delivery. Packing functions are divided into the type of products being distributed, such as transfusable products to customers, R&D products, recovered plasma and discards. The packing functions verify the order against what is being packed. Entries to verify product labeling are done during the packing process that includes checks into Lab and Donor for product and donor suitability. Discarded products do not enlist check of product or donor suitability for release.

During shipping the packlist is generated which includes routing, order and product information with the option to print or not the pricing. For recovered plasma shipments, the volume/price in liters per box and total for shipment, as well as weight of shipment is displayed. The billing interface then creates a billing transaction for use within the institution's financial software.

After all requested products are packed, shipped, and delivered the associated order is closed. More than one order can be transacted in a single shipment. The delivery status is set for the shipment.

## 29.1.2 Structure

There following sections make up the Distribution module:

- Packing Functions
- Shipping Functions
- Distribution Queries
- Distribution Reports

**NOTE –** The Distribution Reports are covered in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 29.2 Packing Functions

Packing Functions are accessed from the following menu:

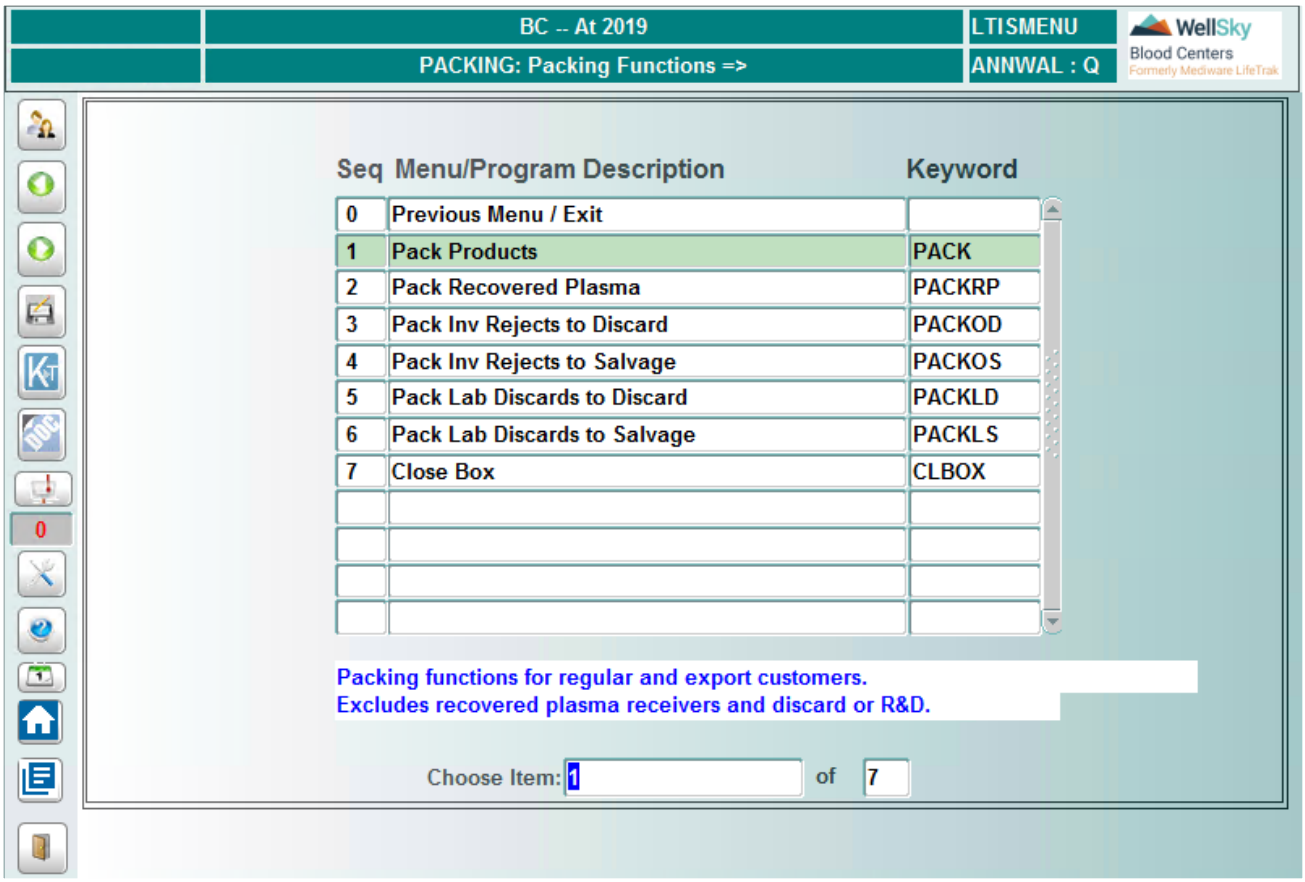


## 29.2.1 Pack Products (PACK)

### Intended Use

Use the Pack Products screen to pack products for orders using the Order Slip generated during the order entry or the Pick Slip generated during order allocation. Products that meet order slip prerequisites for product and any attributes are picked from inventory and packed. Products are reserved during allocation and only those products may be used to fulfill the order. This screen verifies product requirements of the order, product labeling integrity and checks the product and donor status in Lab and Donor for acceptability to release.

This screen also provides the following features:

- Displays unit IDs of packed order items.
- Displays information on products in a specific box.
- Ensures products with different temperatures are in different boxes.
- Close current box and open another.

## Limitations

- Unlike products cannot be packed in the same box.
- Autologous/Biohazardous products cannot go in the same box as regular products.
- Expired products cannot be packed using this screen. Expired products must be packed using Pack Products – Offline (PACKO).

To allow the shipment of products outside the state, the following conditions must be met:

- The product must have the OSOK_FLAG in the ACTIVE_PRODUCTS table set to `Y`.
- The OUT_OF_STATE flag in the CONSIGNEE table should be set to `Y`. If this flag is set to N, then even if the customer type is export, the system will not check the OSOK_FLAG status of the product; this will allow a product that should not be shipped to be packed.
- The product (transfusable) should be a licensed product. There are multiple items that are checked at labeling to determine if the product is to be labeled as licensed or not (OSOK_FLAG is Y or N).
- If the order for the product was placed as a Special Order, it can go out of state, regardless of the licensure status of the product.

## Prerequisites

- When packing products for a regular order, the order must be placed.
- When packing products for a special order, the order must be placed and products must be allocated.
- When packing autologous and directed orders, the order must be entered in Schedule Auto/Directed Order (AUTO).
- Products must be located in user's log-on warehouse in order to be packed for an order.

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword `PACK`.


WellSky Corporation
Proprietary and confidential

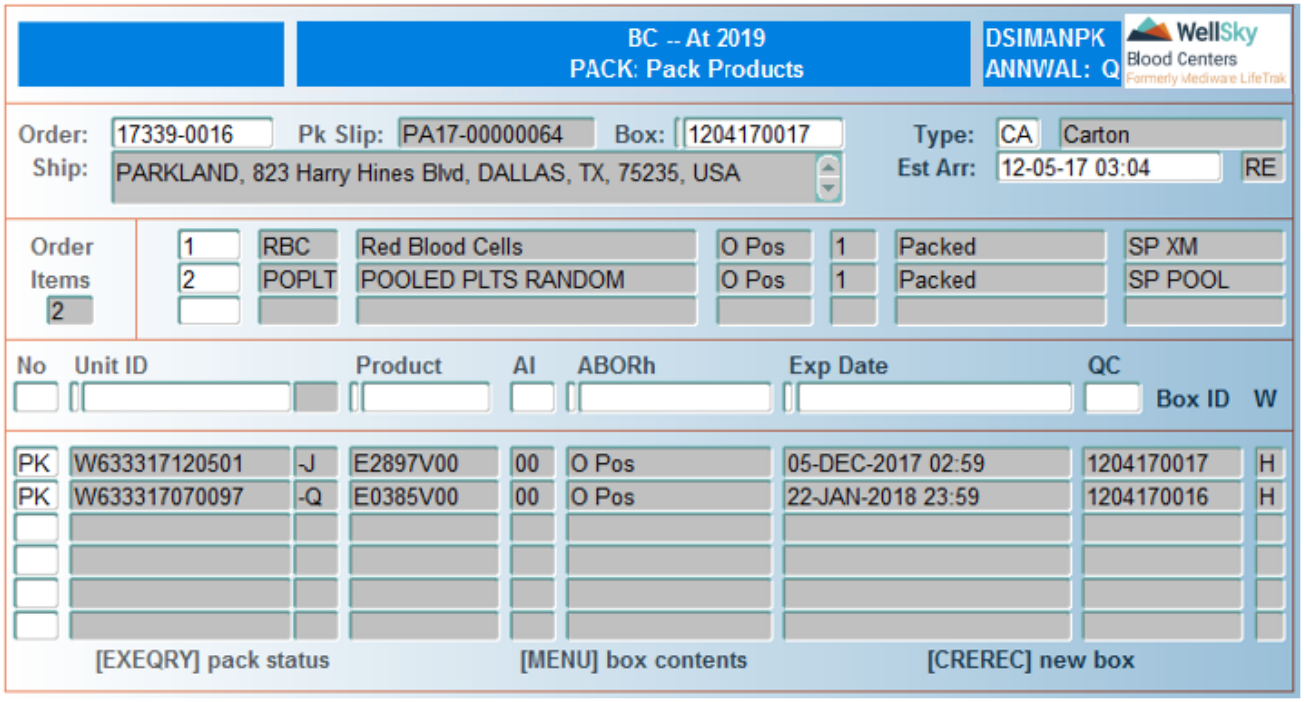


# Control Block Fields and Definitions

## Order No

Enter order number or select from LOV.

## Pk Slip

Pack slip ID displays after all products have been packed. Field is not navigable.

## Box

Manually enter box ID or select from LOV. Leave field blank to create a new box. Box ID displays after the first product is packed when creating a new box.

## Type

Enter packing container type or select from LOV.

## Ship

Consignee name and address automatically display after order number is entered. Field is not navigable.

## Est Arr

Estimated delivery time based on value defined for order class in Order Class Codes (ORDCL) and order status automatically display after order number is entered. Field is not navigable.

# Order Items Block Fields and Definitions

## Order Items

Number of line items displays after order number is entered. Field is not navigable.

Information about each order item also displays:

- Line item number.
- Product type.
- Product description.
- Ordered Quantity.
- Ordered ABO/Rh.
- Ordered attributes.

# Packing Detail Block Fields and Definitions

**NOTE –** Enter item number being packed.

**NOTE –** Field defaults with the next line item number after the order number is entered. Press **F4** (Previous Field) to change the default value. Items must be packed by the correct order item number to ensure proper order filling. In Packed Products block, PK for each product packed. Unlike line item products cannot be packed in the same type of box.

## Unit ID

Scan the unit ID or manually enter unit ID.

## Product

Scan product code, manually enter product code, or use LOV to select product code.

**NOTE –** The LOV only displays the inventory product codes that are available for the specified customer. Inventory product codes that are not available to the customer are listed in the VCUSTPRD table. If you enter a product code that is not available, you will receive the following error:




Press **F8** (Exit Screen) to dismiss the message and then enter a different product.


WellSky Corporation
Proprietary and confidential

**NOTE –** The system allows a compatible product to be entered if it is a defined product substitution and allowed at order entry.

### Al

Enter aliquot or select from LOV.

**NOTE –** The system automatically defaults to 1 if there is only 1 aliquot. The cursor will stop in the field if there is more than one aliquot of the same product code.

**NOTE –** After entry in this field, user will be stopped if interdictions placed after labeling are present at the unit or component level or if designated interdictions are present on the donor in Donor.

### ABORh

Scan, manually enter or select ABO/Rh from LOV.

**NOTE –** The system allows a compatible blood type to be scanned if it is a defined ABO/Rh substitution and allowed at order entry.

### Exp Date

Scan expiration date or manually enter date and time in DDMONYYYYHH24MI format.

### QC

- `Y` – the product is visually acceptable.
- `N` – the product does not appear visually acceptable.

**NOTE –** Y places the product in a new or existing box. N stops product release and places it in Quarantine. Quarantine products are unavailable for distribution until released to stock.

**NOTE –** When all order items are filled, the system displays a warning message.

**NOTE –** When a box has reached its defined maximum for the products it contains, you will be asked if you want to continue to add products to the box. You may continue, but will be required to respond for each additional product placed in the box.

## In the Packed Details Block

The following information displays in the Packed Details Block as each item is packed:

- Unit ID - unit ID.
- Product - product code.
- AI - product aliquot.
- ABORh - product ABO/Rh.
- Exp Date - product expiration date.
- Box ID - system-assigned box ID.
- W - warehouse where product packed.

Press CTRL + F3 (Next Block) from the No or Unit ID field to navigate to this block. Use the UP and DOWN arrow keys to scroll through the block. Press CTRL + F4 (Previous Block) to return to the Packing Detail Block.

## Reviewing Pack Status

Press ALT + F12 (Execute Query) to review information on products in the order that have already been packed or allocated. The following window opens:

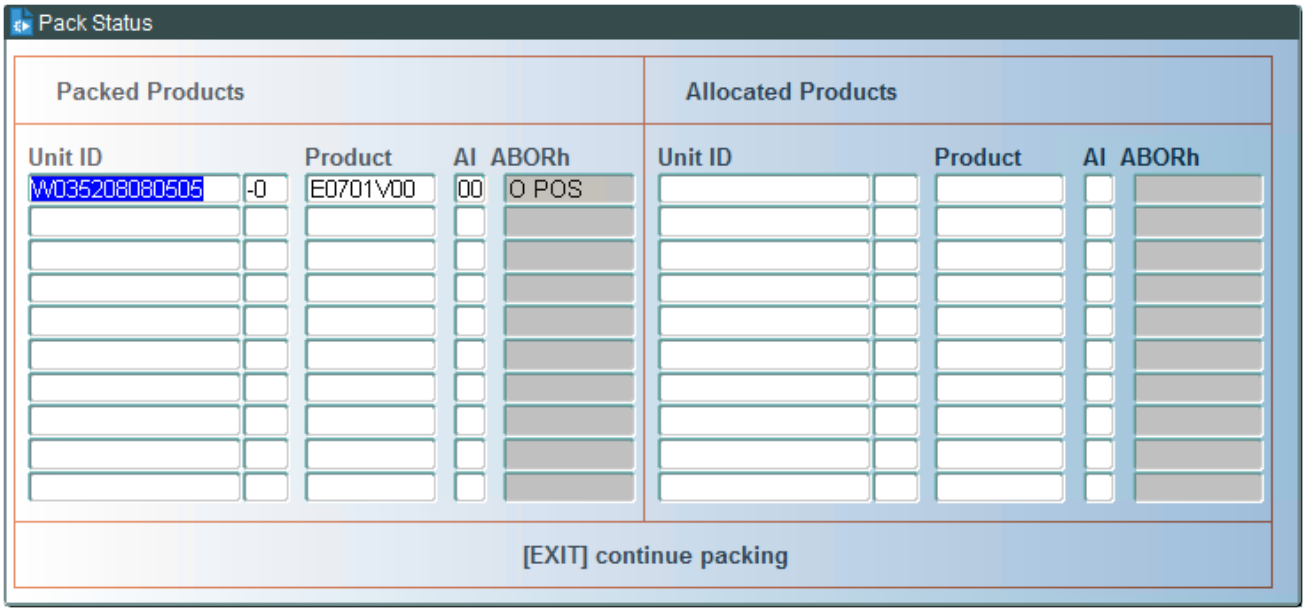


The following information displays in the query:

### Packed Products

- Unit ID – unit ID.
- Product – product code.
- AI – aliquot.
- ABORh – blood type.


WellSky Corporation
Proprietary and confidential

## Allocated Products

- Unit ID – unit ID.
- Product – product code
- Al – aliquot.
- ABORh – blood type.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press **F8** (Exit Screen) to return to the entry screen.

# Reviewing Box Contents

Press **F6** (Menu) to review information on products in the selected box that have already been packed. The following window opens:

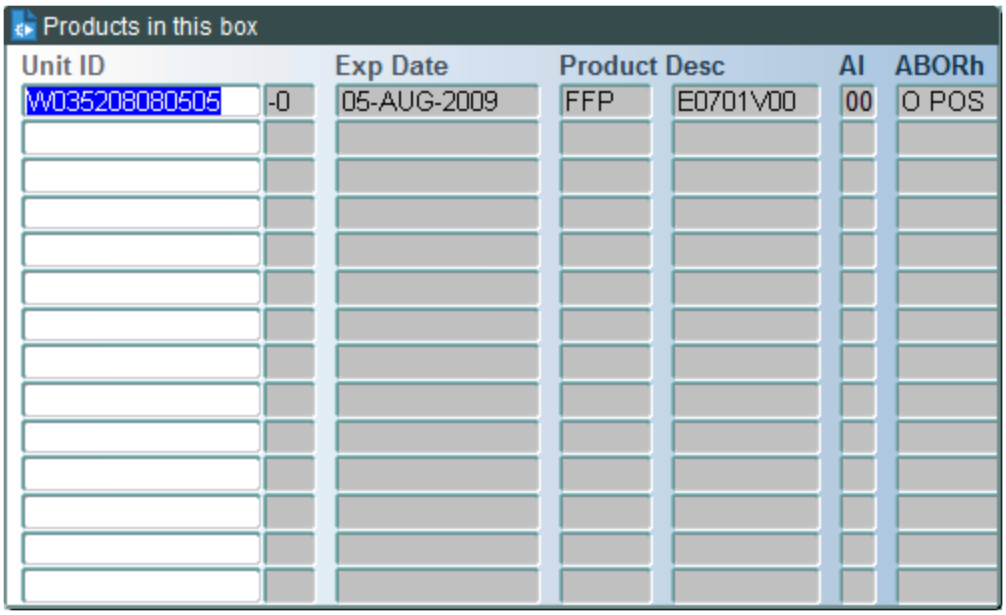


**NOTE –** Because more than one box can exist per order, this pop-up displays data based on the box ID entered at the beginning of the screen.

The following information displays in the query:

- Unit ID – unit ID.
- Exp date – product expiration date.
- Product Desc – product type and product code.

- AI – aliquot associated to the product.
- ABORh – product ABO/Rh.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

**NOTE –** The displayed data cannot be updated on this screen.

Press **F8** (Exit Screen) to return to the entry screen.

## Opening A New Box

Press **CTRL** + **F2** (Create Record) to close the current box and open a new box. The following window opens:

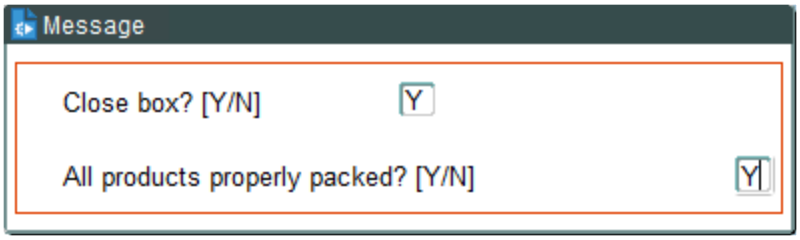


### Close Box? Y/N

Enter `Y` to close the box. Enter `N` to return to the main screen.

### All products properly packed? Y/N

Enter `Y` if products are properly packed. Enter `N` to abort the window.

**NOTE –** If Y is entered in both fields, a new box ID displays at the top of the screen after the next product is packed in a new box.

## At Commit

- Box is assigned to the warehouse in which the user is logged.
- If exiting while order item is partially filled, the system puts the order on back order.
- When an order item is completely filled, the status changes in the order block to Packed.

## What to Do Next

Ship products using Ship Products (SHIP) or Ship Products – Offline (SHIPO).

# 29.2.2 Pack Recovered Plasma (PACKRP)

## Intended Use

Use the Pack Recovered Plasma screen to pack recovered plasma products that are sold by volume in cost/liter. It is not necessary to place an order for recovered plasma products since the order number is generated here. This screen ensures that the products meet regulatory requirements and updates the inventory to maintain inventory management control. Recovered plasma products may be packed directly from Lab without check-in to Distribution or from Distribution after check-in.

## Limitations

- For codabar products, only one product code and product type (RPL, RPFF) per order.
- For ISBT 128 products, more that one product code but only one product type (RPL, RPFF) per order. When more than one product code is packed in the same box, all product codes must have the same price.
- There can be only one order per product type (RPL, PRFF) open per customer at a time. After delivery confirmation, a new order for the customer/product type can be started.
- System automatically closes the box when the maximum number of products has been packed; you must then start a new box.
- If a product is unpacked, it cannot be re-packed into the same box for the same order.

## Prerequisites

- Plasma customers must exist in Create Customer Profile (CUSTOMER) with customer type MG.
- Products must be located in your current log-on warehouse.
- The volume of the recovered plasma in liters and value of the cost per liter is calculated for each box and the total for the shipment.
- Define calculated weights for each bag and box in Master Code PPLST to be added to the volume/weight of the plasma. If not defined, only the plasma volume will be calculated in pounds on the packing slip.
- Define ISBT product codes that can be packed together in one box in Master Code PKPLM.
- Company No must be entered in the Chapter Detail (Chapter) for the pack list to print and billing interface to execute.

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword `PACKRP`.

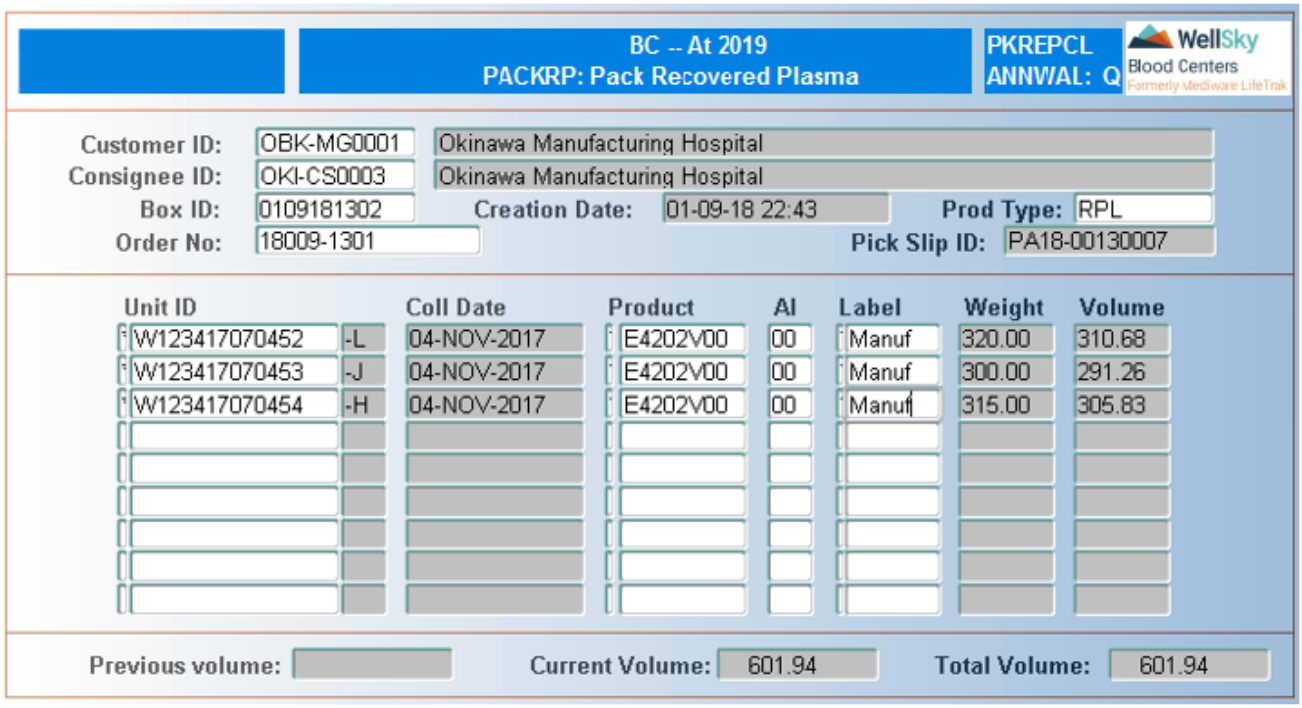


# Control Block Fields and Definitions

## Customer ID

Enter customer, part of customer name, customer ID, or select from LOV. Leave field blank to add to an existing box.

**NOTE –** After customer ID is entered, system displays consignee ID, and cursor moves to the *Prod Type* field. If no customer ID is entered, the cursor moves to the *Box ID* field.

## Consignee ID

Consignee displays after customer ID is entered. Field is not navigable.

## Box ID

Enter box ID or select from LOV.

**NOTE –** To continue packing an existing box, the *Customer ID* field must be left blank and the box can be selected from the LOV. If the *Customer ID* field is entered, the system automatically generates a box ID after the first product is packed.

## Creation Date

Creation date automatically displays after the first product is packed. Field is not navigable.

## Prod Type

Enter product code or select from LOV.


WellSky Corporation
Proprietary and confidential

### Order No

Order number automatically displays after the first product is entered for new orders.

**NOTE –** Limited to one order per customer/product type at any given period.

### Pick Slip ID

Pick slip ID displays after the first product is packed. Field is not navigable.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Coll Date

Collection date displays after unit ID is entered. Field is not navigable.

### Product

Scan, manually enter, or select product code from LOV.

**NOTE –** If you attempt to pack products with different prices, or if the products are not defined in Master Code PKPLM, an error will display.

### Al

Enter aliquot or select from LOV.

**NOTE –** The system automatically defaults to 1 in this field after the product code is entered. The cursor then moves to the next field. Use **F4** (Previous Field) to modify.

### Label

Scan, manually enter, or select ABO/RH from LOV.

### Weight

Product weight automatically displays after product code is entered. Field is not navigable.

### Volume

Product volume automatically displays after product code is entered. Field is not navigable.

### Previous volume

Field displays only if the box was not closed and you open the box again to display the volume that was last saved for that box ID. Field is not navigable.

### Current Volume

Displays volume of units that have currently been put in box.  Field is not navigable.

### Total Volume

Total volume of products in box displays.  This is the sum of the previous volume and the current volume. Field is not navigable.

Screen does a line-by-line commit.

## At Commit

Product status updated to Packed (PK).

## What to Do Next

- For normal processing press **F8** (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Products (SHIP).

# 29.2.3 Pack Inv Rejects To Discard (PACKOD)

## Intended Use

Use the Pack Inv Rejects to Discard screen to pack products that have already outdated or that have been rejected in Distribution custody.

This screen also provides the following features:

- Displays information on products in a specific box.
- Closes current box and opens another.

## Limitations

None

## Prerequisites

- Only D type customers are accessed.
- Products must be a Discard (DI) product status in Distribution.
- You have access to discard products in your current warehouse.
- Discard products do not generate revenue or a billing interface.
- Discarded inventory products sold as R&D are packed using Pack Inventory Products to Salvage (PACKOS).
- Discarded Lab products are packed using Pack Lab Discards to Discard (PACKLD).
- R&D Lab products are packed using Pack Lab Discards to Salvage (PACKLS).


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword PACKOD.

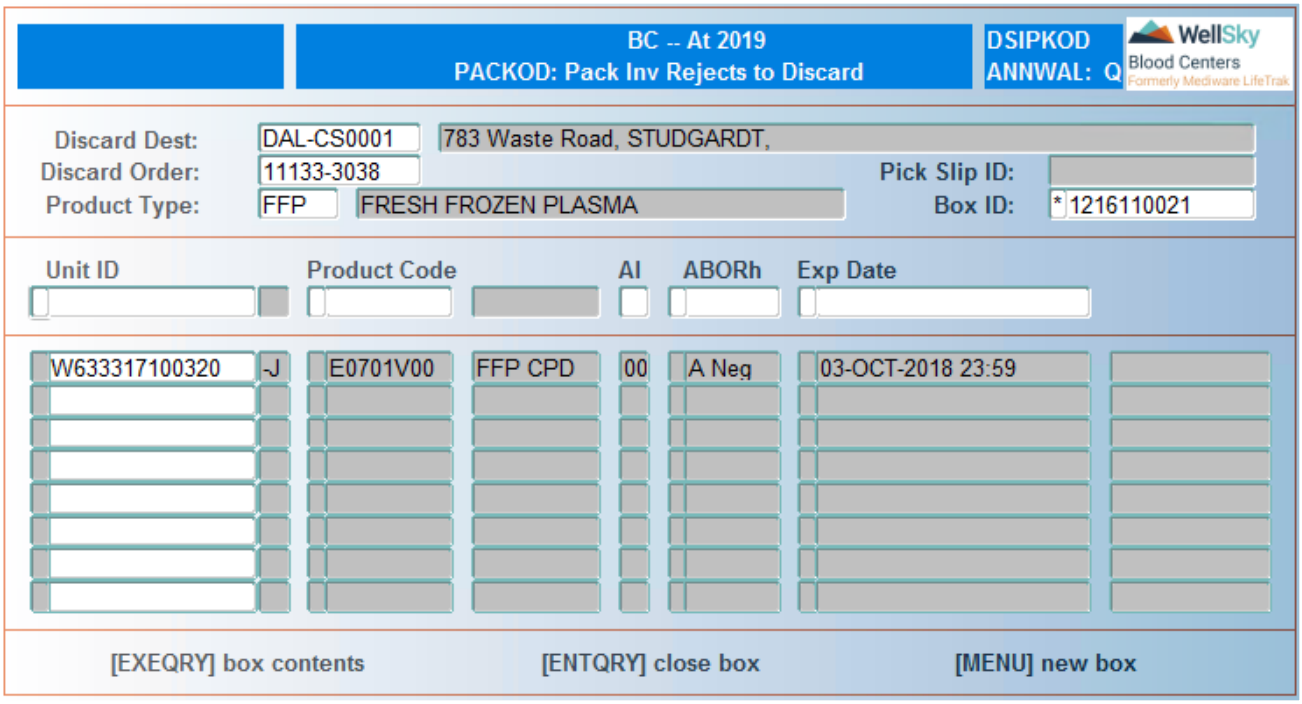


# Control Block Fields and Definitions

## Discard Dest

Enter discard destination or select from LOV.

> **NOTE –** Only consignees that can accept salvage products display in the LOV.

## Discard Order

Enter order number or select from LOV. Leave field blank to start a new order.

> **NOTE –** If no order number is entered, the cursor moves to the Product Type field.

## Product Type

Enter product type or select from LOV. Leave blank to pack any product.

> **NOTE –** Only those product types that have rejected products or are outdated display in the LOV.

### Pick Slip ID

Pick slip number displays after the order number is entered. For new orders, the pick slip ID displays after the first product is packed. Field is not navigable.

### Box ID

Enter box ID or select from LOV. Leave field blank in order to start a new box.

**NOTE –** If this field is left blank, the system will generate a box ID after the first product is packed.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually, or select product code from LOV.

### Alq

Enter aliquot number or select from LOV.

**NOTE –** The system automatically defaults to 1 in this field after the product code is entered.

### ABORh

Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date

Product expiration automatically displays after aliquot is entered. Field is not navigable.

## Viewing Box Contents

Press ALT + F12 (Execute Query) to view box contents. The following window opens:


WellSky Corporation
Proprietary and confidential

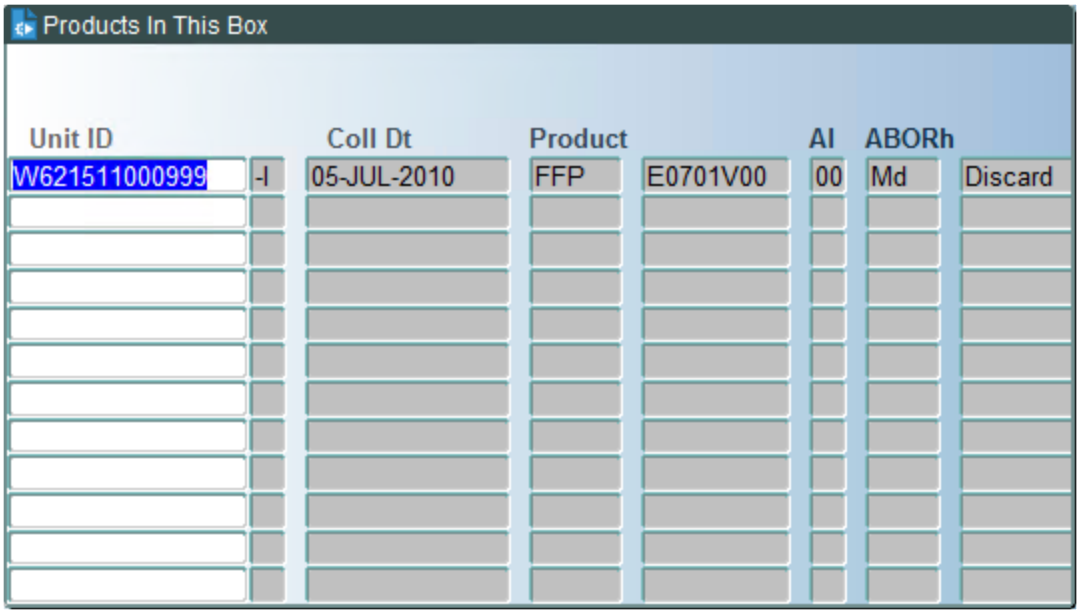


The following information displays in the query:

- Unit ID – unit ID.
- Coll Date – unit collection date.
- Product – product code and type associated to the product.
- AI – aliquot associated to the product.
- ABORh – blood type associated to the product.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated in this screen.

Press **F8** (Exit Screen) to return to the entry screen.

## Closing A Box

Press **CTRL** + **F12** (Enter Query) to close the box. The following window opens:

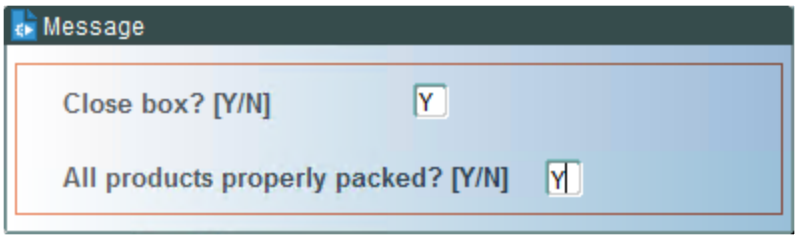


### Close Box? Y/N

Enter `Y` to close the box. Enter `N` to keep the box open and abort the pop-up.

### All products properly packed? Y/N

Enter `Y` if products were properly packed. Enter `N` to abort the pop-up.

> **NOTE –** If Y is entered in both fields, all data is committed.

## Opening A New Box

To open a new box, press **F6** (Menu), and a new box ID is generated on this screen.

## At Commit

- Box is assigned to the warehouse into which the user is logged.
- Product status is updated to packed.

## What to Do Next

- For normal processing press **F8** (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Discard and Salvage Products (SHIPD).

# 29.2.4 Pack Inv Rejects To Salvage (PACKOS)

## Intended Use

Use the Pack Inv Rejects to Salvage screen to pack products that have already outdated or that have been rejected in Distribution custody. Products packed using this screen are not considered waste, but are salvaged for research facilities.

This screen also provides the following features:

- Displays information on products in a specific box.
- Closes current box and opens another.

## Limitations

None

## Prerequisites

- Only RD type customers are accessed.
- Products must be a Discard (DI) product status in Distribution.
- You have access to discard products in your current warehouse.
- Salvage products generate revenue and a billing interface.
- Discard inventory waste products are packed using Pack Inventory Rejects to Discard (PACKOD).


WellSky Corporation
Proprietary and confidential

- Discarded Lab products are packed using Pack Lab Discards to Discard (PACKLD).
- R&D Lab products are packed using Pack Lab Discards to Salvage (PACKLS).

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword PACKOS.

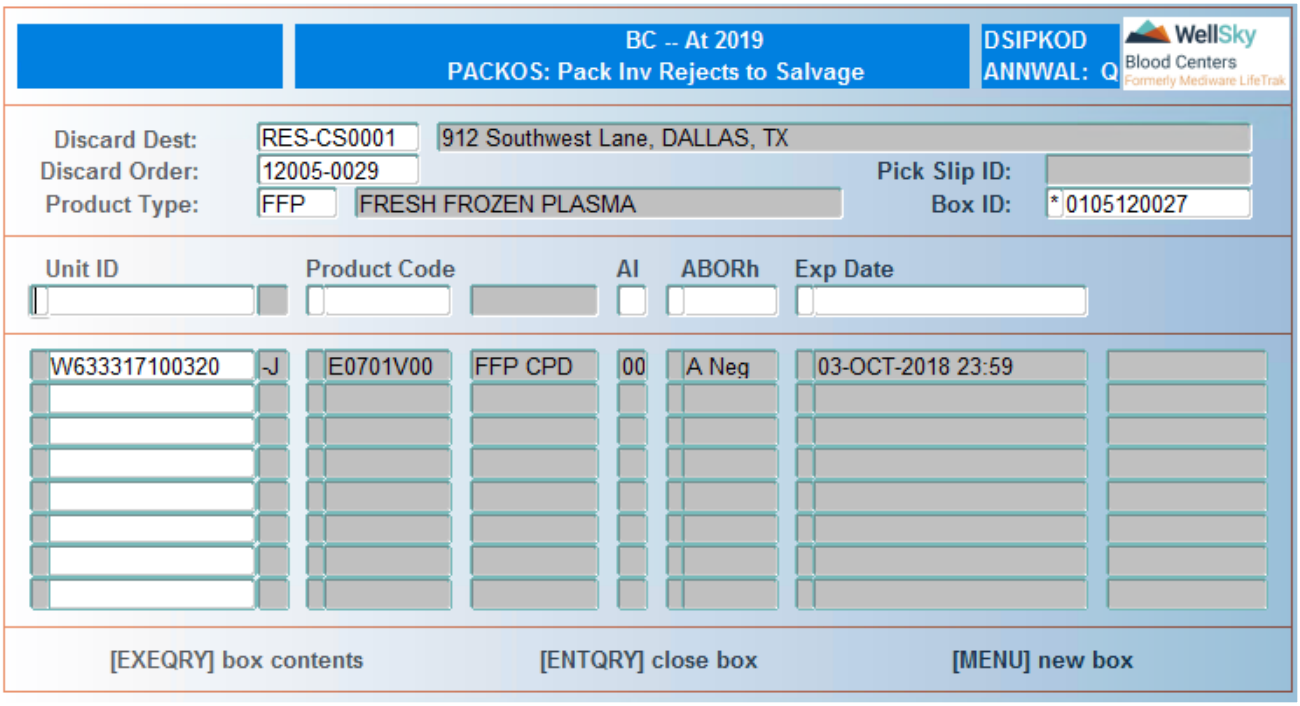


## Control Block Fields and Definitions

### Discard Dest

Enter discard destination or select from LOV.

> **NOTE –** Only consignees that can accept salvage products display in the LOV.

### Discard Order

Enter order number or select from LOV. Leave field blank to start a new order.

> **NOTE –** If no order number is entered, the cursor moves to the Product Type field.

### Product Type

Enter product type or select from LOV. Leave blank to pack any product.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

**NOTE –** Only those product types that have rejected products or are outdated display in the LOV.

### Pick Slip ID

Pick slip number displays after the order number is entered. For new orders, the pick slip ID displays after the first product is packed. Field is not navigable.

### Box ID

Enter box ID or select from LOV. Leave field blank in order to start a new box.

**NOTE –** If this field is left blank, the system will generate a box ID after the first product is packed.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually, or select product code from LOV.

**NOTE –** The LOV only displays the inventory product codes that are available for the specified customer. Inventory product codes that are not available to the customer are listed in the VCUSTPRD table. If you enter a product code that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

The system will check the product restriction table to verify that the product entered or selected is allowed for the customer or consignee. If the product is disallowed, you will receive a warning message. You must then select a different product.


WellSky Corporation
Proprietary and confidential

### Alq

Enter aliquot number or select from LOV.

**NOTE –** The system automatically defaults to 1 in this field after the product code is entered.

### ABORh

Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date

Product expiration automatically displays after aliquot is entered. Field is not navigable.

## Viewing Box Contents

Press ALT + F12 (Execute Query) to view box contents. The following window opens:

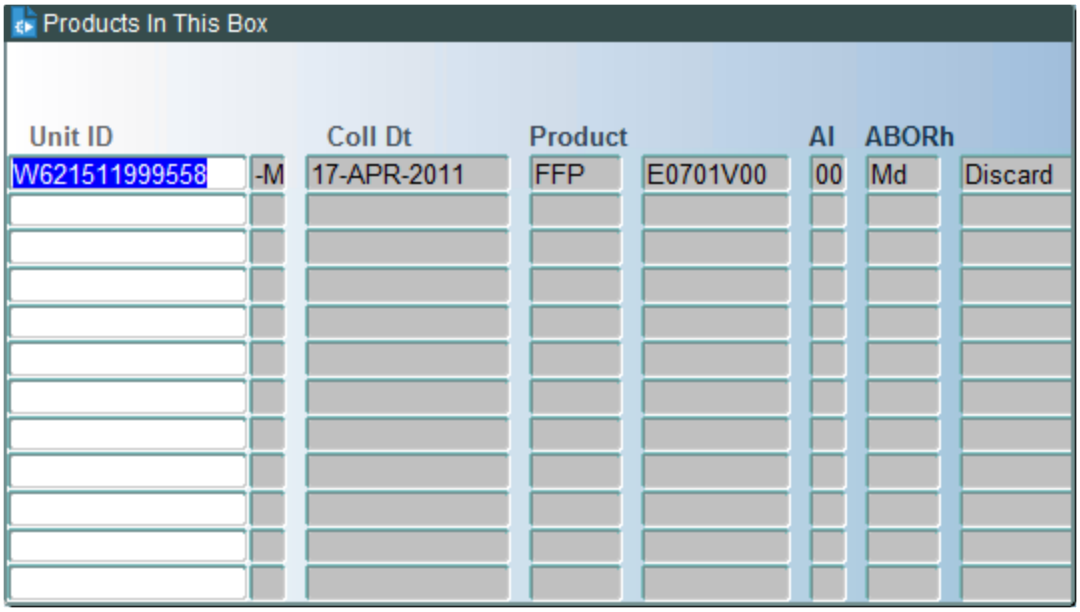


The following information displays in the query:

- Unit ID – unit ID.
- Coll Date – unit collection date.
- Product – product code and type associated to the product.
- AI – aliquot associated to the product.
- ABORh – blood type associated to the product.

Use the UP and DOWN arrow keys to scroll through the list.

The displayed data cannot be updated in this screen.

Press F8 (Exit Screen) to return to the entry screen.

## Closing A Box

Press **CTRL** + **F12** (Enter Query) to close the box. The following window opens:

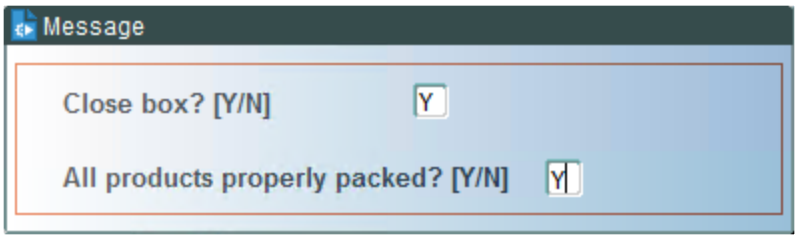


### Close Box? Y/N

Enter `Y` to close the box. Enter `N` to keep the box open and abort the pop-up.

### All products properly packed? Y/N

Enter `Y` if products were properly packed. Enter `N` to abort the pop-up.

**NOTE –** If Y is entered in both fields, all data is committed.

## Opening A New Box

To open a new box, press **F6** (Menu) and a new box ID is generated on this screen.

## At Commit

- Box is assigned to the warehouse into which the user is logged.
- Product status is updated to packed.

## What to Do Next

- For normal processing press **F8** (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Discard and Salvage Products (SHIPD).

# 29.2.5 Pack Lab Discards To Discard (PACKLD)

## Intended Use

Use the Pack Lab Discards to Discard screen to pack products that are labeled/rejected in the laboratory as unacceptable for release to inventory (NFT and BIO) and in Lab custody. Products packed using this screen are waste.

This screen also provides the following features:

- Displays information on all discarded products in the system.
- Displays information on products in a specific box.


WellSky Corporation
Proprietary and confidential

- Closes current box and opens another.

## Limitations

None

## Prerequisites

- Only DI type customers are accessed.
- Products must be labeled NFT or BIO in Lab.
- The Box ID will be assigned to your current warehouse.
- Discard products do not generate revenue or a billing interface.
- Discarded Lab products sold as R&D are packed using Pack Lab Discards to Salvage (PACKLS).
- Discarded Distribution waste products are packed using Pack Inventory Rejects to Discard (PACKOD).
- R&D discard products in Distribution are packed using Pack Inventory Products to Salvage (PACKOS).

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword `PACKLD`.

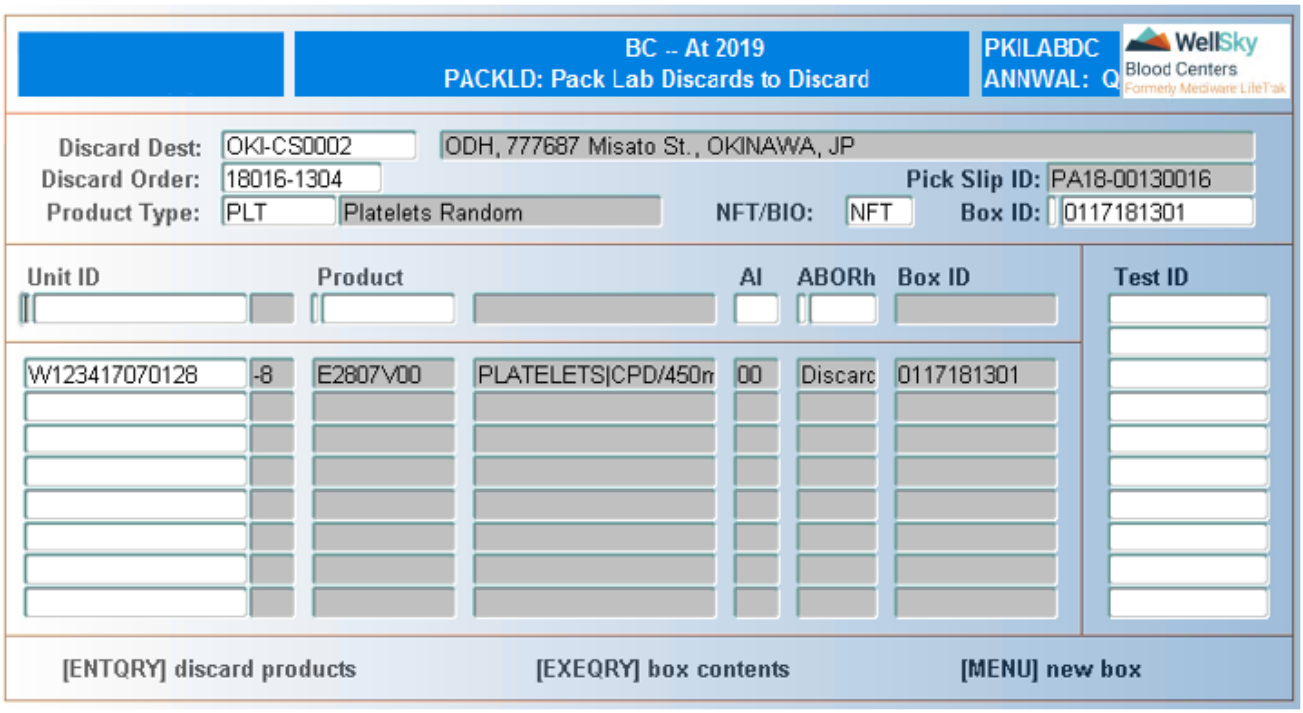


## Control Block Fields and Definitions

### Discard Dest

Enter discard destination or select from LOV.

**NOTE –** Only consignees that can accept discard products display in the LOV.

## Discard Order

Enter order number or select from LOV. Leave field blank to start a new order.

**NOTE –** The system generates a new order number after the discard destination is entered. If no order number is entered, the cursor moves to the 'Product Type' field.

## Pick Slip ID

For existing orders, the pick slip ID displays after order number is entered. For new orders, the pick slip ID displays after the first product is packed. Field is not navigable.

## Product Type

Enter product type or select from LOV. Leave field blank to pack any product.

**NOTE –** Product types display in the LOV when the following conditions are met:

1. The 'Inv Product Type' field in the PRODUCT table (same table in Lab or Distribution) and the 'Type' field in the PRODTYP table (Distribution) must be identical.
2. The product must be in Lab custody (status 'L').
3. The product must be labeled either 'Discard' or 'Bio'.

## NFT/BIO

Enter NFT or BIO or select from LOV. Leave field blank to pack both NFT and BIO.

## Test ID

Enter test ID or select from LOV. Field is navigable only if BIO was entered in the NFT/BIO field. Press CTRL + F3 (Next Block) to move to the box ID field.

**NOTE –** This is an optional field. The test you select will have a reactive result for that test. After a test ID is selected, the system allows all products that have tested positive for these tests to be packed. Consideration is only give for the requested test to be positive/reactive. Other tests may be reactive or non-reactive. If the block is left blank, all BIO products can be packed.

## Box ID

Enter box ID or select from LOV. Leave field blank to start a new box.

**NOTE –** If this field is left blank, the system generates a box ID after the first product is packed.


WellSky Corporation
Proprietary and confidential

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product Code

Scan, manually enter, or select product code from LOV. Product description displays after code is entered.

> **NOTE –** If a value was entered in the product type field in the control block, a warning is given if the product code entered does not match the product type.

## AI

Enter aliquot number or select from LOV.

> **NOTE –** The system automatically defaults to '1' in this field after the product code is entered.

## ABORh

Scan, manually enter, or select blood type from LOV.

## Box ID

Box ID displays after product is packed. Field is not navigable.

Products are committed to the box on a line-by-line basis.

Press **F8** (Exit Screen) to close the box. The following window opens:

## Close box?

Enter `Y` to close the box. Enter `N` to leave box open.

# Viewing Discard Products

To view information on products that have been discarded in the lab, press **CTRL** + **F12** (Enter Query). The following window opens:

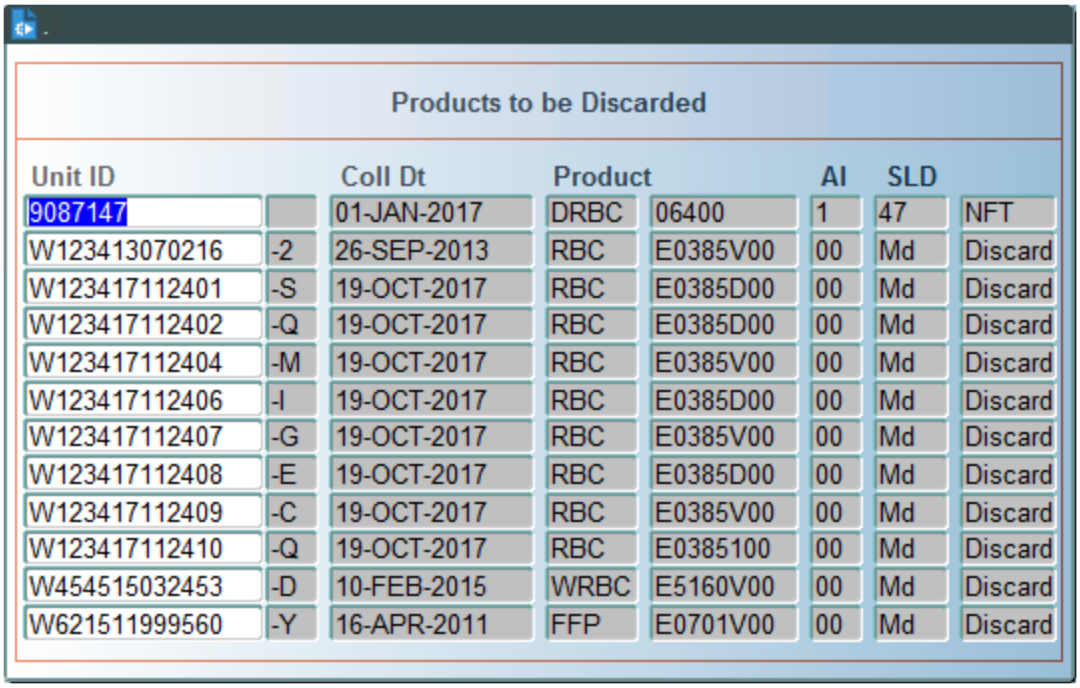

Products to be Discarded

| Unit ID | | Coll Dt | Product | | AI | SLD | |
|---|---|---|---|---|---|---|---|
| 9087147 | | 01-JAN-2017 | DRBC | 06400 | 1 | 47 | NFT |
| W123413070216 | -2 | 26-SEP-2013 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112401 | -S | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112402 | -Q | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112404 | -M | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112406 | -I | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112407 | -G | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112408 | -E | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112409 | -C | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112410 | -Q | 19-OCT-2017 | RBC | E0385100 | 00 | Md | Discard |
| W454515032453 | -D | 10-FEB-2015 | WRBC | E5160V00 | 00 | Md | Discard |
| W621511999560 | -Y | 16-APR-2011 | FFP | E0701V00 | 00 | Md | Discard |

The following information displays in the query:

- Unit ID – unit ID.
- Coll Dt – collection date.
- Product – product type and code associated to the product.
- AI – aliquot associated to the product.
- SLD – system label decision (NFT or BIO).

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press **F8** (Exit Screen) to return to the entry screen.

## Viewing Box Contents

To view information on products in the selected box that have already been packed press **ALT** + **F12** (Execute Query). The following window opens:


WellSky Corporation
Proprietary and confidential

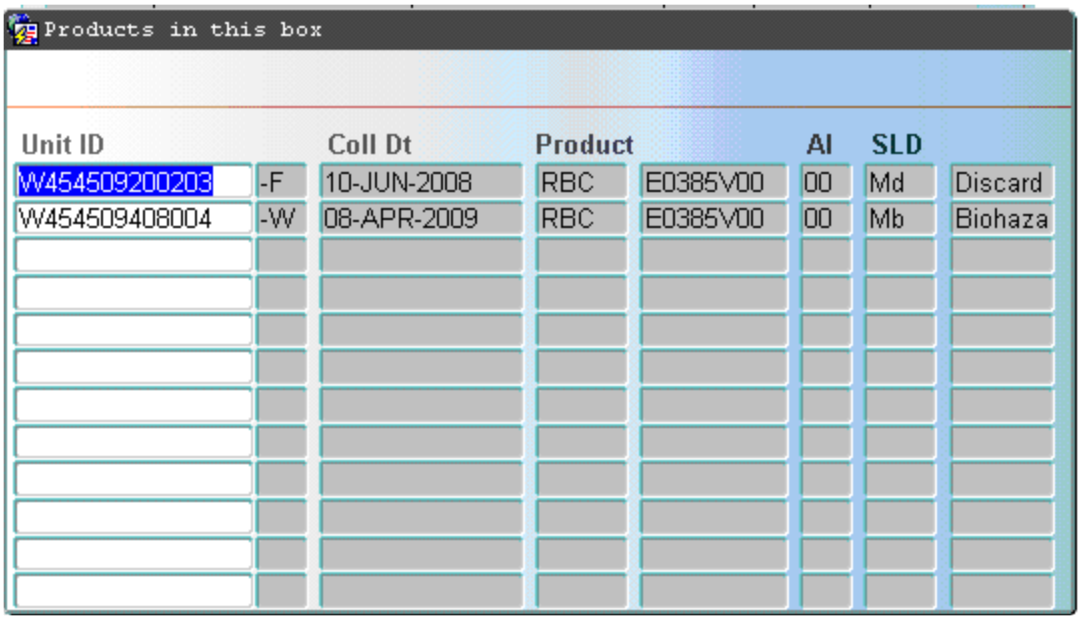


The following information displays in the query:

- Unit ID – unit ID.
- Coll Dt – date the unit was collected.
- Product – product type and code associated to the product.
- AI – aliquot associated to the product.
- SLD – system label decision (NFT or BIO).

Use the UP and DOWN arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press F8 (Exit Screen) to return to the entry screen.

## Opening A New Box

To open a new box, simply press F6 (Menu) and a new box ID is generated on this screen.

## At Commit

- The box is assigned to the warehouse that you are logged into.
- Product status is updated to packed (PK).

## What to Do Next

- For normal processing press F8 (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Discard and Salvage Products (SHIPD).

# 29.2.6 Pack Lab Discards To Salvage (PACKLS)

## Intended Use

Use the Pack Lab Discards to Salvage screen to pack products that are labeled/rejected in the laboratory as unacceptable for release to inventory (NFT and BIO) and in Lab custody. Products packed using this screen are shipped out to research facilities.

This screen also provides the following features:

- Displays information on all discarded products in the system.
- Displays information on products in a specific box.
- Closes current box and opens another.

## Limitations

None

## Prerequisites

- Only R type customers are accessed.
- Products must be labeled NFT or BIO in Lab.
- The Box ID will be assigned to your current warehouse.
- Salvage products generate revenue and a billing interface.
- Discarded Lab waste products are packed using Pack Lab Discards to Discard (PACKLD).
- Discarded Distribution waste products are packed using Pack Inventory Rejects to Discard (PACKOD).
- R&D discard products in Distribution are packed using Pack Inventory Products to Salvage (PACKOS).

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword `PACKLS`.


WellSky Corporation
Proprietary and confidential

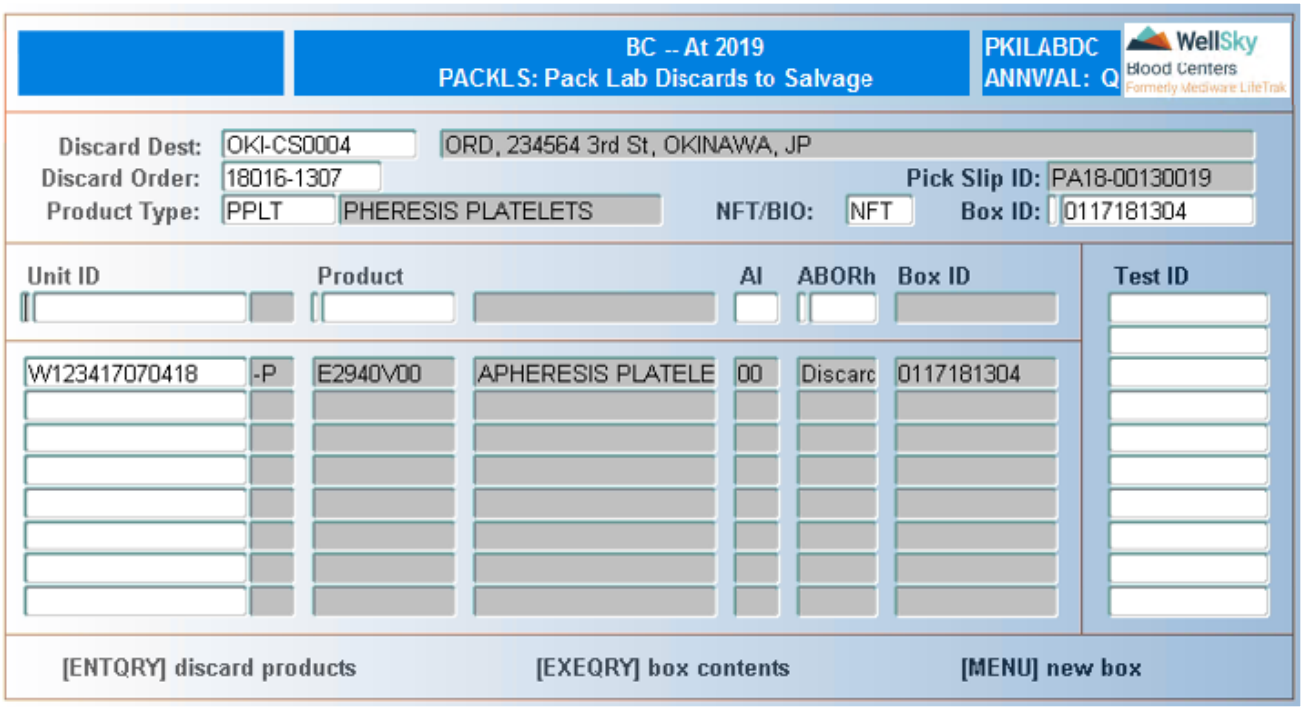


# Control Block Fields and Definitions

## Discard Dest

Enter discard destination or select from LOV.

**NOTE –** Only consignees that can accept discard products display in the LOV.

## Discard Order

Enter order number or select from LOV. Leave field blank to start a new order.

**NOTE –** The system generates a new order number after the discard destination is entered. If no order number is entered, the cursor moves to the Product Type field.

## Pick Slip ID

For existing orders, the pick slip ID displays after order number is entered. For new orders, the pick slip ID displays after the first product is packed. Field is not navigable.

## Product Type

Enter product type or select from LOV. Leave field blank to pack any product.

**NOTE –** Product types display in the LOV when the following conditions are met:

1. The 'Inv Product Type' field in the PRODUCT table (same table in Lab or Distribution) and the 'Type' field in the PRODTYP table (Distribution) must be identical.
2. The product must be in Lab custody (status 'L').
3. The product must be labeled either 'Discard' or 'Bio'.

**NOTE –** The LOV only displays the product types that are available for the specified customer. Product types that are not available to the customer are listed in the VCUSTPRD table. If you try to enter a product type that is not available, you will receive the following error:




Press F8 (Exit Screen) to dismiss the message and then enter a different product.

### NFT/BIO

Enter NFT or BIO or select from LOV. Leave field blank to pack both NFT and BIO.

### Test ID

Enter test ID or select from LOV. Field is navigable only if BIO was entered in the NFT/BIO field. Press CTRL + F3 (Next Block) to move to the box ID field.

**NOTE –** This is an optional field. The test you select will have a reactive result for that test. After a test ID is selected, the system allows all products that have tested positive for these tests to be packed. Consideration is only give for the requested test to be positive/reactive. Other tests may be reactive or non-reactive. If the block is left blank, all BIO products can be packed.

### Box ID

Enter box ID or select from LOV. Leave field blank to start a new box.

**NOTE –** If this field is left blank, the system generates a box ID after the first product is packed.

## Detail Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually enter, or select product code from LOV. Product description displays after code is entered.


WellSky Corporation
Proprietary and confidential

**NOTE –** The LOV only displays the inventory product codes that are available for the specified customer. Inventory product codes that are not available to the customer are listed in the VCUSTPRD table. If you enter a product code that is not available, you will receive the following error:




Press **F8** (Exit Screen) to dismiss the message and then enter a different product.

**NOTE –** If a value was entered in the product type field in the control block, a warning is given if the product code entered does not match the product type.

### Al

Enter aliquot number or select from LOV.

**NOTE –** The system automatically defaults to 1 in this field after the product code is entered.

### ABORh

Scan, manually enter, or select blood type from LOV.

### Box ID

Box ID displays after product is packed. Field is not navigable.

Products are committed to the box on a line-by-line basis.

Press **F8** (Exit Screen) to close the box. The following window opens:

### Close box?

Enter `Y` to close the box. Enter `N` to leave box open.

## Viewing Discard Products

To view information on products that have been discarded in the lab, press **CTRL** + **F12** (Enter Query). The following window opens:

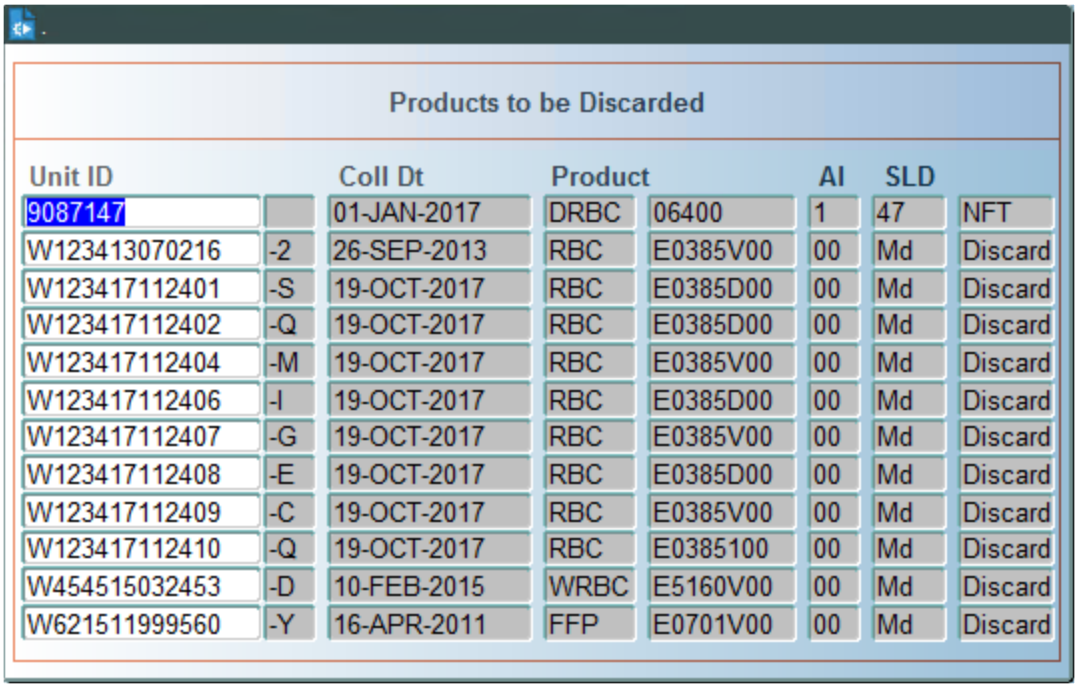

Products to be Discarded

| Unit ID | | Coll Dt | Product | | AI | SLD | |
|---|---|---|---|---|---|---|---|
| 9087147 | | 01-JAN-2017 | DRBC | 06400 | 1 | 47 | NFT |
| W123413070216 | -2 | 26-SEP-2013 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112401 | -S | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112402 | -Q | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112404 | -M | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112406 | -I | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112407 | -G | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112408 | -E | 19-OCT-2017 | RBC | E0385D00 | 00 | Md | Discard |
| W123417112409 | -C | 19-OCT-2017 | RBC | E0385V00 | 00 | Md | Discard |
| W123417112410 | -Q | 19-OCT-2017 | RBC | E0385100 | 00 | Md | Discard |
| W454515032453 | -D | 10-FEB-2015 | WRBC | E5160V00 | 00 | Md | Discard |
| W621511999560 | -Y | 16-APR-2011 | FFP | E0701V00 | 00 | Md | Discard |

The following information displays in the query:

- Unit ID – unit ID.
- Coll Dt – collection date.
- Product – product type and code associated to the product.
- AI – aliquot associated to the product.
- SLD – system label decision (NFT or BIO).

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press **F8** (Exit Screen) to return to the entry screen.

## Viewing Box Contents

To view information on products in the selected box that have already been packed press **ALT** + **F12** (Execute Query). The following window opens:


WellSky Corporation
Proprietary and confidential

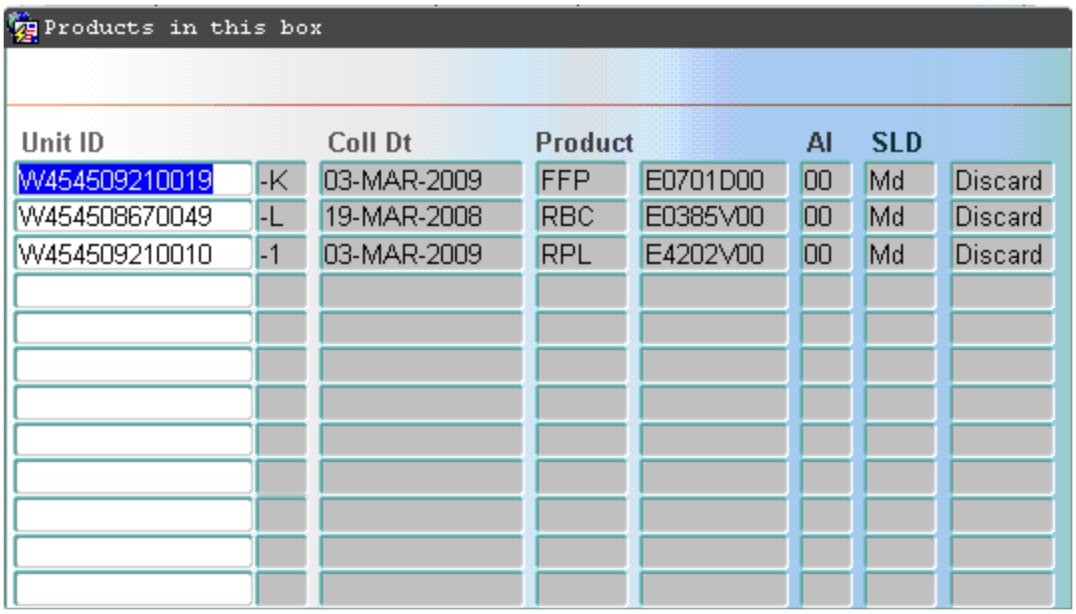


The following information displays in the query:

- Unit ID – unit ID.
- Coll Dt – date the unit was collected.
- Product – product type and code associated to the product.
- AI – aliquot associated to the product.
- SLD – system label decision (NFT or BIO).

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press **F8** (Exit Screen) to return to the entry screen.

## Opening A New Box

To open a new box, simply press **F6** (Menu) and a new box ID is generated on this screen.

## At Commit

- Product status is updated to packed (PK).
- The box is assigned to the warehouse into which user is logged.

## What to Do Next

- For normal processing press **F8** (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Discard and Salvage Products (SHIPD).

# 29.2.7 Close Box (CLBOX)

## Intended Use

Use the Close Box screen to close an open box after it has been packed and is ready to be shipped out. After the box is closed, the system does not allow any products to be added. If a product must be added to an order after a box has been closed, a new box must be used.

## Limitations

None

## Prerequisites

A box must have been packed using one of the following:

- Pack Products - Manual Pick.
- Pack Recovered Plasma.
- Pack Inv Rejects to Discard.
- Pack Inv Rejects to Salvage.
- Pack Lab Discards to Discard.
- Pack Lab Discards to Salvage.

## Accessing the Screen

Access this screen from the Packing Functions menu or by entering the keyword `CLBOX`.

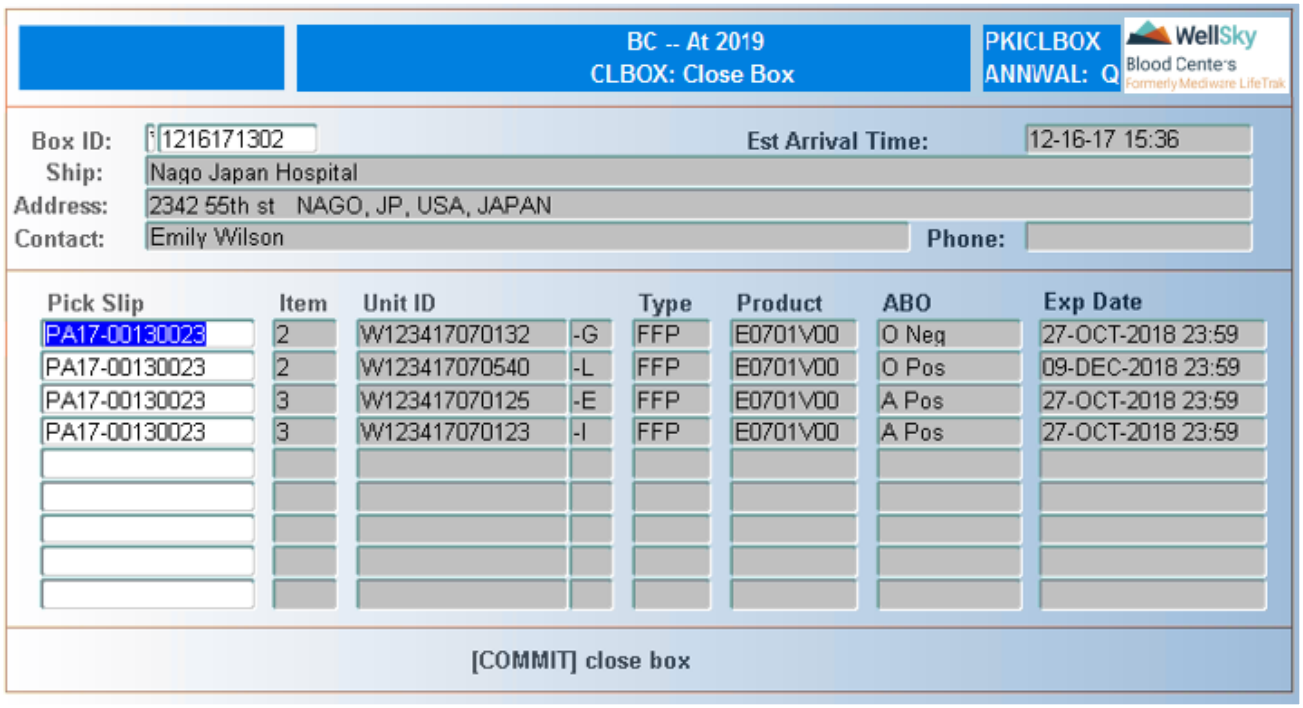



WellSky Corporation
Proprietary and confidential

## Control Block Fields and Definitions

**NOTE –** All fields, with the exception of *Box ID*, are display only.

### Box ID
Scan the box ID or enter manually or select the open box ID from the LOV.

### Est Arrival Time
Date and time the system has calculated the box to be received by the consignee.

### Ship
ID and name of consignee that placed the order.

### Address
Address of consignee.

### Contact
Name of representative for consignee.

### Phone
Phone number at which contact can be reached.

### Box ID
Enter box ID or select from LOV.  Leave field blank to start a new box.

## In the Detail Block

**NOTE –** All fields are display only.

### Pack Slip
Pack slip number associated to the order.

### Item
Item number of each packed product.

### Unit ID
Unit ID of the units contained in the box.

### Type
Product Type associated to the unit and product code.

### Product
Product code packed.

### ABO
ABORh of the product packed.

### Exp Date
Expiration date of the product.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

## Closing the Box
To close the box, press **F12** (Commit). The following window opens:

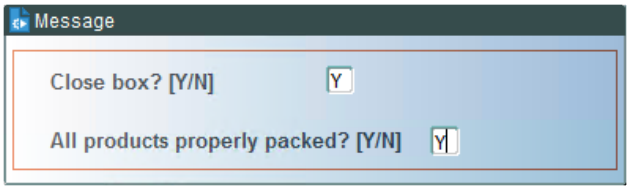


### Close Box? Y/N
Enter `Y` to close the box or `N` to continue adding products to the box.

### All products properly packed? Y/N
Enter `Y` if products are properly packed, or `N` if further attention is required.

## At Commit
At the time of Commit, the box is closed and ready for shipping.  No additional products can be added.

## What to Do Next
- For normal processing press **F8** (Exit Screen) to return to the Packing Functions menu.
- Ship boxes using Ship Products (SHIP).


WellSky Corporation
Proprietary and confidential

# 29.3 Shipping Functions

Shipping Functions are accessed from the following menu:

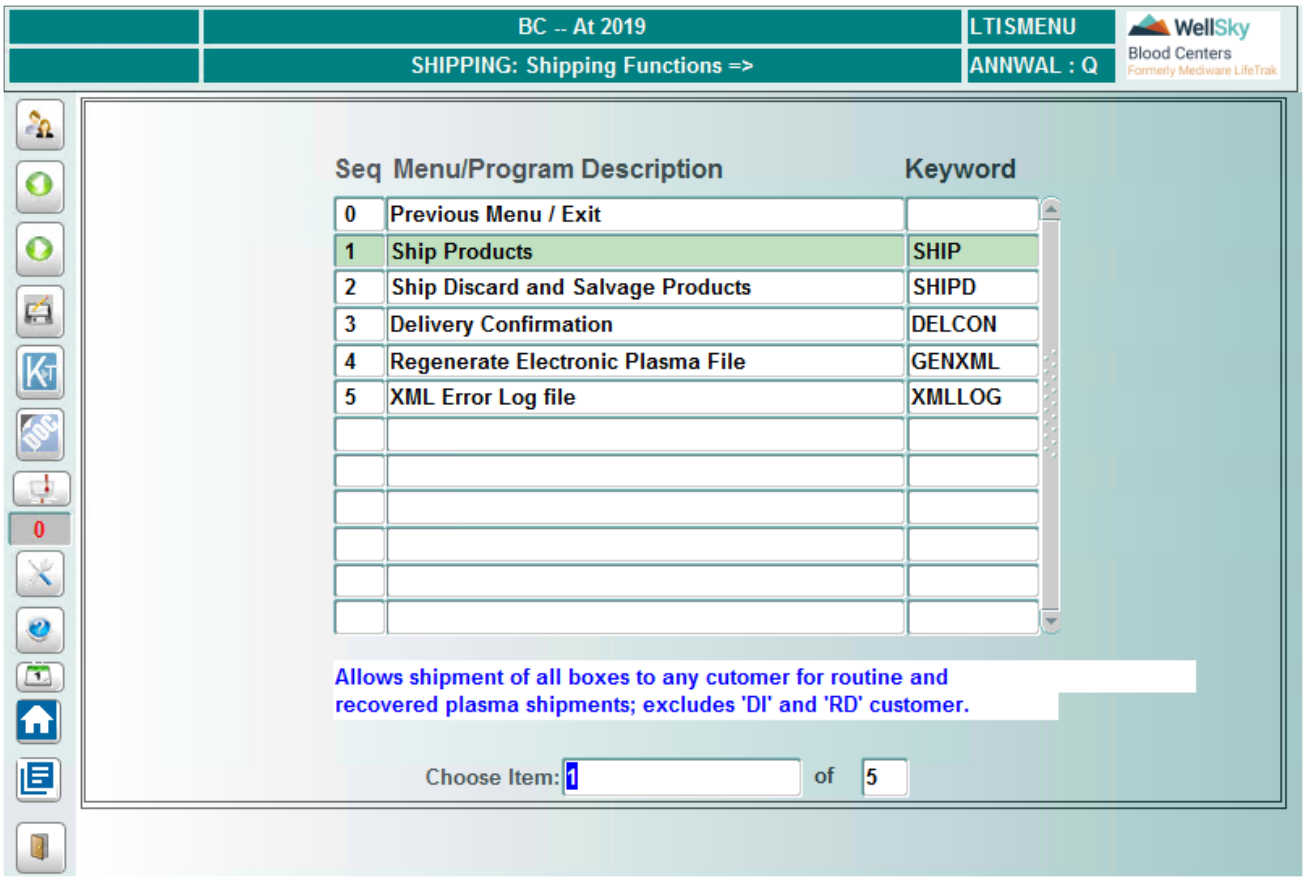


## 29.3.1 Ship Products (SHIP)

### Intended Use

Use the Ship Products screen to ship boxes that were packed and closed using either Pack Products or Pack Recovered Plasma. This screen associates one to many boxes from one or more orders going to the same consignee as a single shipment.

This screen also provides the following features:

- Displays information on products in a specific box.
- Displays consignees of pending shipments in the same geographical zone as the current shipment.
- Allows manual adjustment of additional charges via a pop-up screen that appears prior to printing the pack list.
- Generates an XML or CSL (ASCII) file for MG (recovered plasma) customers who are set up to receive an Electronic Delivery Note in Create Customer Profile (CUSTOMER).

## Limitations

- When shipping products of the type RPL and RPFF in the same shipment, the XML and CSL (ASCII) file will *not* generate regardless of the EDN flag being set to Y in Create Customer Profile (CUSTOMER).
- Shipments to discard (DI) or salvage (RD) customers must be done in Ship Discard Products (SHIPD).

## Prerequisites

- Use this screen to ship RG, EX and MG type customers.
- Boxes must have been packed using Pack Products or Pack Recovered Plasma.
- Boxes must have been closed using either a pack screen, or the Close Box screen.
- Boxes must be located in the user's current warehouse.

## Accessing the Screen

Access this screen from the Shipping Function menu or by entering the keyword `SHIP`.

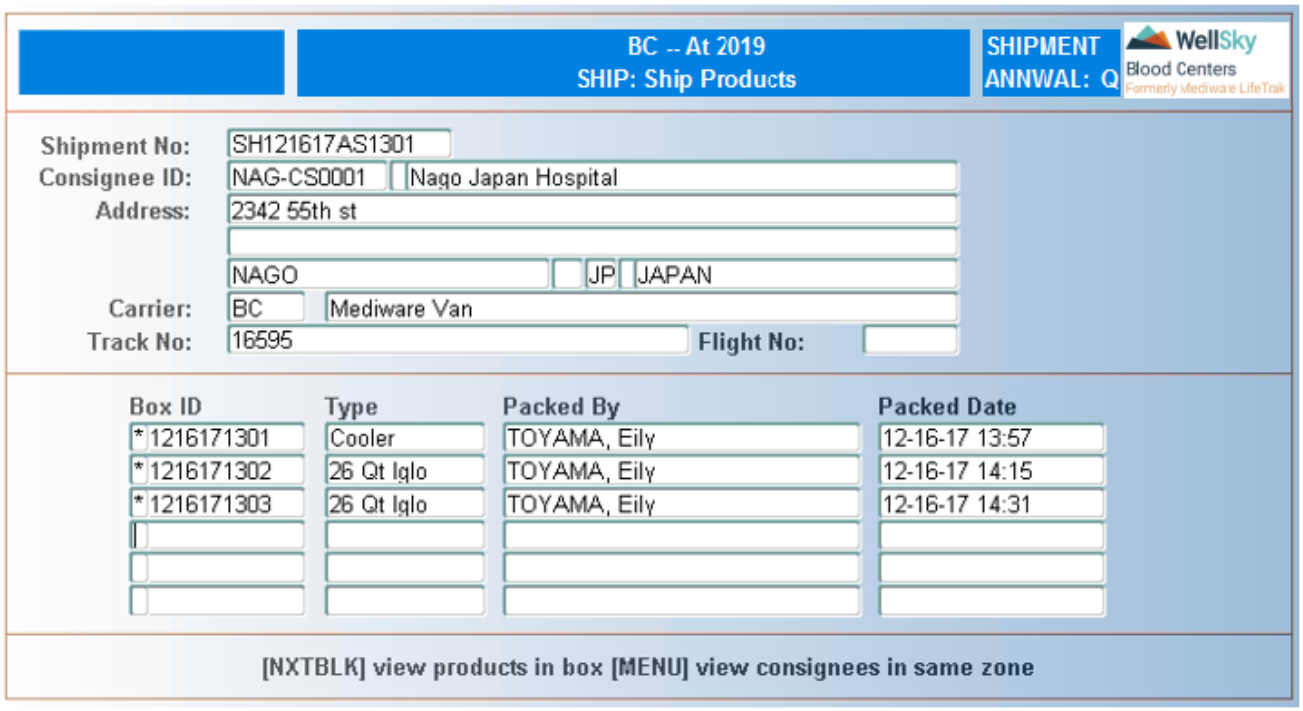


## Control Block Fields and Definitions

### Shipment No

Enter shipment number or select from LOV. Leave field blank to start a new shipment.


WellSky Corporation
Proprietary and confidential

**NOTE –** If an existing shipment number is chosen, the system displays consignee information and the cursor moves to the *Box ID* field. If the field is left blank, the cursor moves to the *Consignee ID* field.

### Consignee ID
Enter consignee ID or select from LOV.

**NOTE –** Only consignees with packed/closed boxes display in the LOV.

### Address
Consignee address displays after consignee ID is entered. Field is not navigable.

### Carrier
Enter carrier ID or select from LOV.

### Track No
Enter tracking number. A maximum of 15 characters is allowed.

### Flight No
Enter flight number. A maximum of 6 characters is allowed. Entry in this field is not required.

## Detail Block Fields and Definitions

### Box ID
Enter box ID or select from LOV.

**NOTE –** Only closed boxes that are pending shipment for the listed customer display in LOV. After the box ID is entered, it is associated to the shipment. If this is a new shipment, the shipment number displays after the first box is assigned.

### Type
Box type display after box ID is entered. Field is not navigable.

### Packed By
Name of person packing the box displays after box ID is entered. Field is not navigable.

### Packed Date
Packing date and time display after box ID is entered. Field is not navigable.

Boxes are added to the shipment on a line-by-line commit basis.

## Reviewing Box Contents

To review information on boxes in the current shipment that have already been packed, press CTRL + F3 (Next Block). The following window opens:

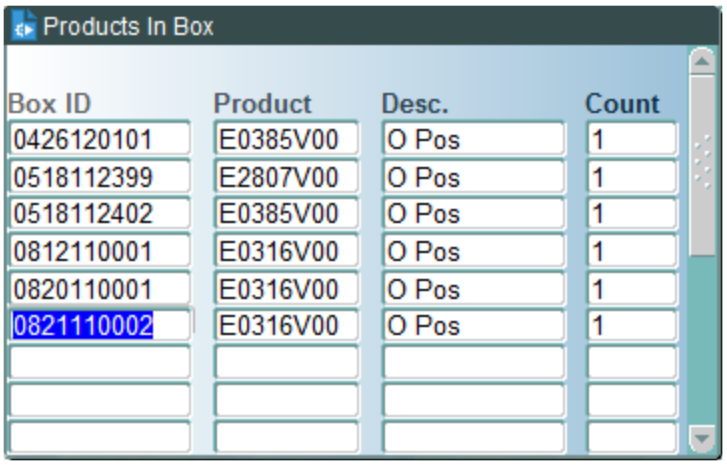


The following information is displayed in the query:

- Box ID – box identification number
- Product – product code
- Desc – blood type
- Count – number of products of that ABO/Rh in the box

The displayed data cannot be updated in this screen.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the entry screen.

## Viewing Consignees In The Same Zone

Press F6 (Menu) to view consignees in the same zone with pending shipments. The following window opens:

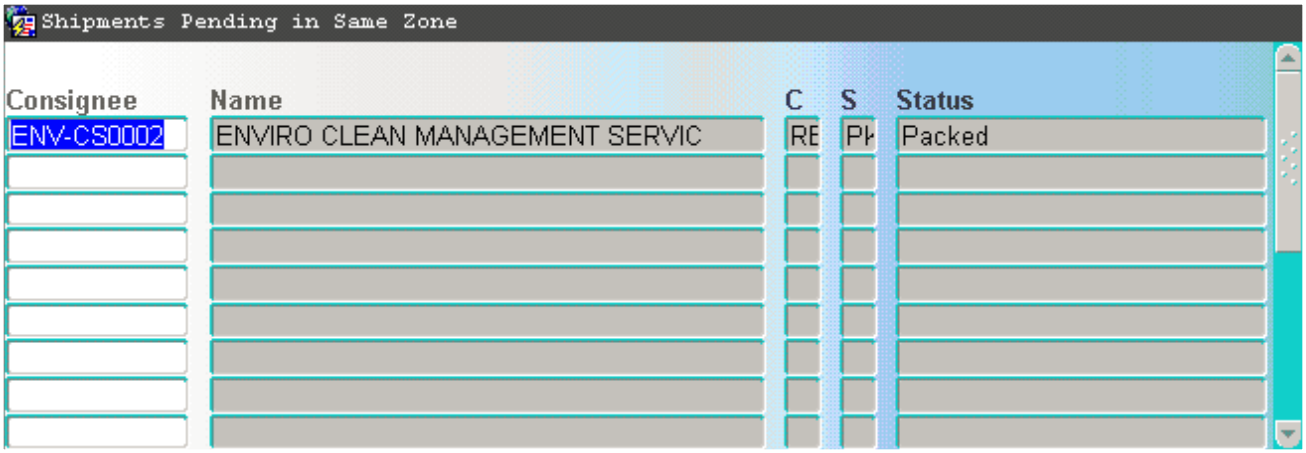



WellSky Corporation
Proprietary and confidential

The computer displays the following fields:

- Consignee – consignee ID
- Name – name of consignee
- C – inventory class
- S – status code
- Status – status description

Data cannot be updated in this query.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the entry screen.

## Printing The Pack List

To print the pack list, press F8 (Exit Screen) after at least one box has been associated to the shipment and the following window opens:

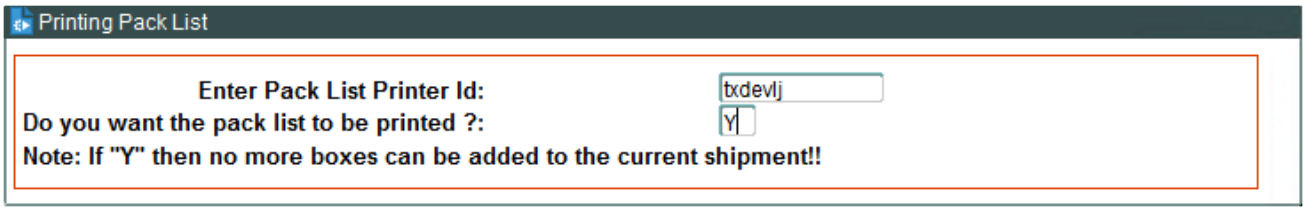


**NOTE –** The *Pack List Printer Id* field is no longer used. The pack list is generated as a PDF file, which can be viewed and printed using the PRINT or SPRINT screen.

You are asked: 'Do you want the pack list to be printed?'

- Enter `Y` to print the pack list and generate a record in the financial interface.
- Enter `N` to keep shipment open:
  - The pack list will not print
  - You can add more boxes to this pack list
  - Delivery confirmation cannot be performed
- After the pack list is printed, no boxes can be added to the shipment.

## Entering Order Charges

If Y has been entered to print the pack list, a pop-up screen will appear immediately after pressing Exit that allows customization of order charges:

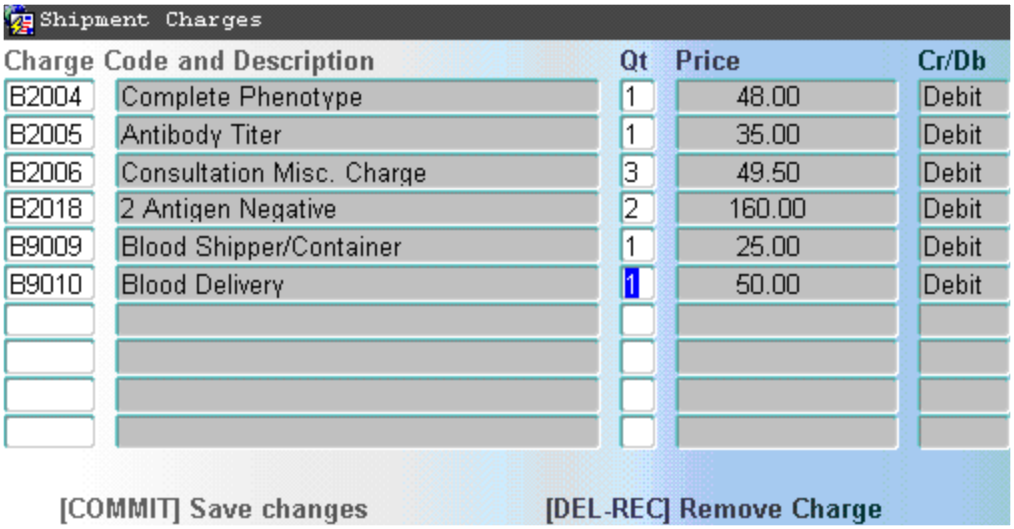


## Charge Code and Description

Enter charge code or select from LOV.

**NOTE –** The same charge code may be selected multiple times for multiple charges of the same code. Entry of charges is not mandatory.

## Qt

Enter quantity to be charged.

## Price

Price associated to code displays after code is entered. Press **ENTER** to accept the default price. To modify price, press **F5** (Clear Field) and enter correct price.

**NOTE –** Price can only be modified if the edit flag is set to `Y` in Define Order Charges (VCHARGE).

## Cr/Db

CR display if the code is for a credit; DB displays if the code is for a debit. Field is not navigable.

Use the **UP** and **DOWN** arrow keys to scroll though the list.

**NOTE –** To remove a particular charge or defaulted charge, scroll to the desired charge and press **CTRL+ F8** (Delete Record).

Press **F12** (Commit) to save charges and print the pack list.


WellSky Corporation
Proprietary and confidential

## At Commit

- After pack list is printed, a status of Shipped is associated to the shipment and a record is inserted for the financial interface.
- XML or CSL (ASCII) file is generated for MG (recovered plasma) customers who are set up to receive them.

## What to Do Next

For normal processing, go to Delivery Confirmation (DELCON).

# 29.3.2 Ship Discard And Salvage Products (SHIPD)

## Intended Use

Use the Ship Discard and Salvage Products screen to ship boxes that were packed and closed using one of the discard or salvage packing screens. This screen associates one to many boxes from one or more orders going to the same consignee as a single shipment.

This screen also provides the following features:

- Displays information on products in a specific box.
- Displays consignees of pending shipments in the same geographical zone as the current shipment.
- Allows manual adjustment of additional charges via a pop-up screen that appears prior to printing the pack list.

## Limitations

None

## Prerequisites

- Use this screen to ship DI and RD type customers.
- Boxes must have been packed using Discard or Salvage packing screens.
- Boxes must have been closed using either a pack screen, or the Close Box screen.
- Boxes must be located in the user's current warehouse.
- Use Ship Products (SHIP) for shipping to RG, EX and MG type customers.

## Accessing the Screen

Access this screen from the Shipping Functions menu or by entering the keyword `SHIPD`.

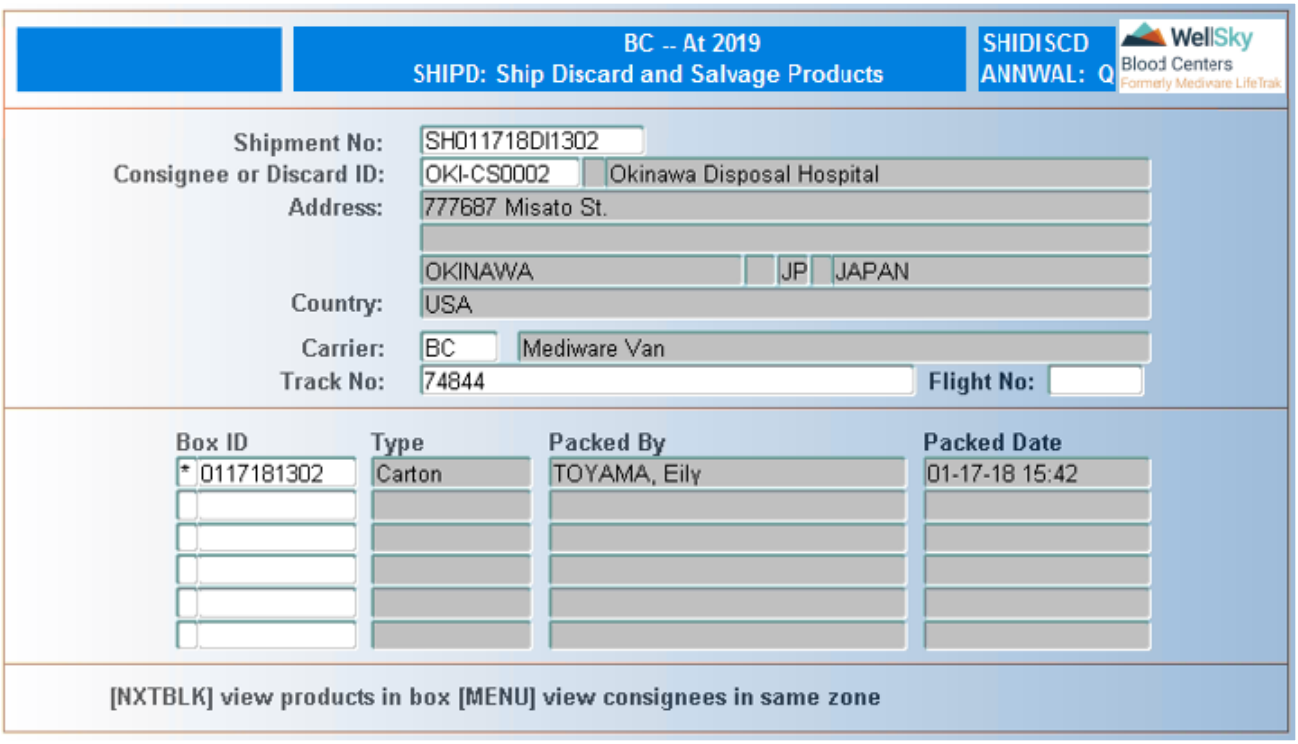


# Control Block Fields and Definitions

## Shipment No

To associate a box to an existing shipment number, enter shipment number or select from LOV. Leave field blank to start a new shipment.

**NOTE –** If an existing shipment number is chosen, the system displays consignee information and the cursor moves to the Box ID field. If the field is left blank, the cursor moves to the Consignee ID field.

## Consignee ID

Enter consignee ID or select from LOV.

**NOTE –** Only consignees that accept discards display in the LOV.

## Address

Consignee address displays after consignee ID is entered. Field is not navigable.

## Country

Consignee country displays after consignee ID is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Carrier
Enter carrier ID or select from LOV.

### Track No
Enter tracking number. Maximum of 15 characters is allowed. Entry in this field is not required.

### Flight No.
Enter flight number. A maximum of 6 characters is allowed. Entry in this field is not required.

## Detail Block Fields and Definitions

### Box ID
Enter box ID or select from LOV.

> **NOTE –** Only closed boxes that are pending shipment for the listed customer display in LOV. After the box ID is entered, it is associated to the shipment. If this is new shipment, the shipment number displays at the top of the screen after the first box is assigned.

### Type
Box type display after box ID is entered. Field is not navigable.

### Packed By
Name of person packing the box displays after box ID is entered. Field is not navigable.

### Packed Date
Packing date and time display after box ID is entered. Field is not navigable.

Boxes are added to the shipment on a line-by-line commit basis.

## Reviewing Box Contents
To review box information on boxes in the current shipment that have already been packed press CTRL + F3 (Next Block) and the following window opens:

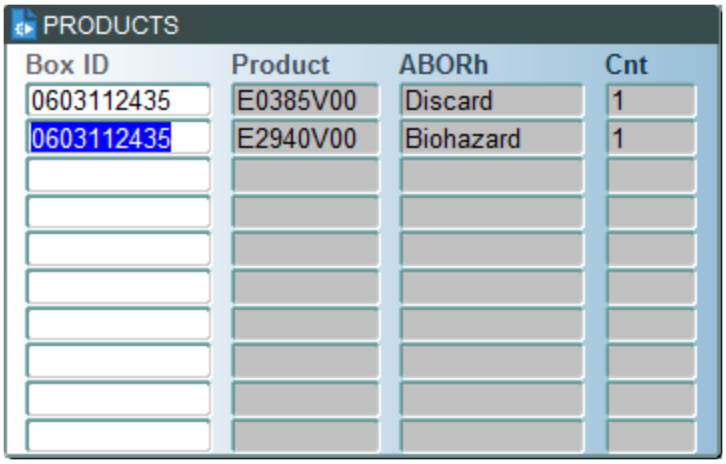


The following information displays in the query:

- Box ID – box identification number.
- Product – product type.
- ABORh – blood type.
- Cnt – number of products of that ABORh in the box.

**NOTE –** Data cannot be updated in this query.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the entry screen.

## Reviewing Consignees In The Same Zone

To review consignees in the same zone, press F6 (Menu) and the following window opens:

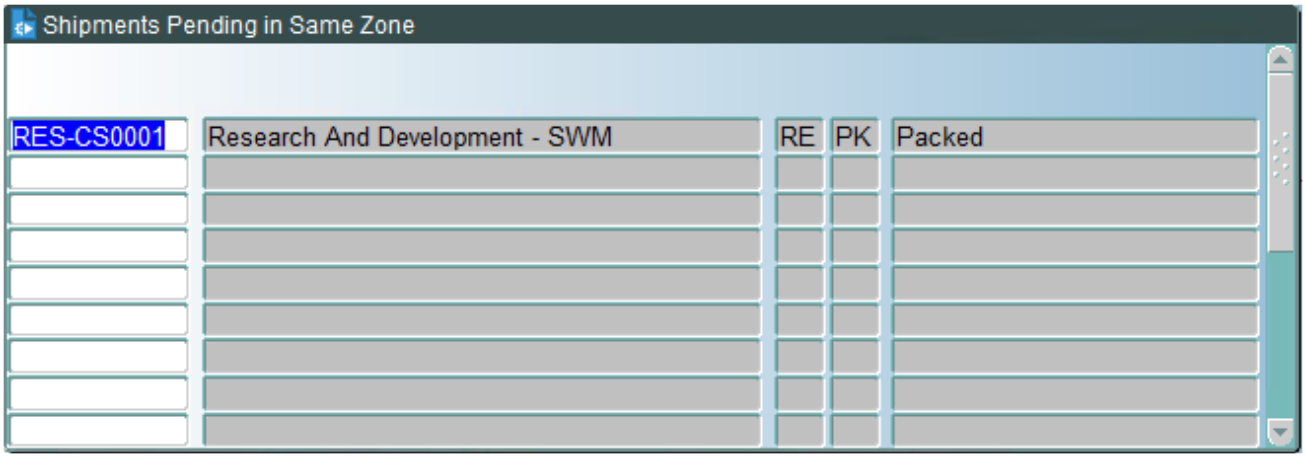


The computer displays the following fields:

- Consignee ID – consignee ID and name of consignee.
- Order Type – type of order (e.g. RE or SP).
- Status – status code and description (e.g. PK Packed).

Use the up and down arrow keys to scroll through displayed data.

Press **F8** (Exit Screen) to return to the entry screen.

## Printing The Pack List

To print the pack list, press **F8** (Exit Screen) after at least one box has been associated to the shipment and the following window opens:

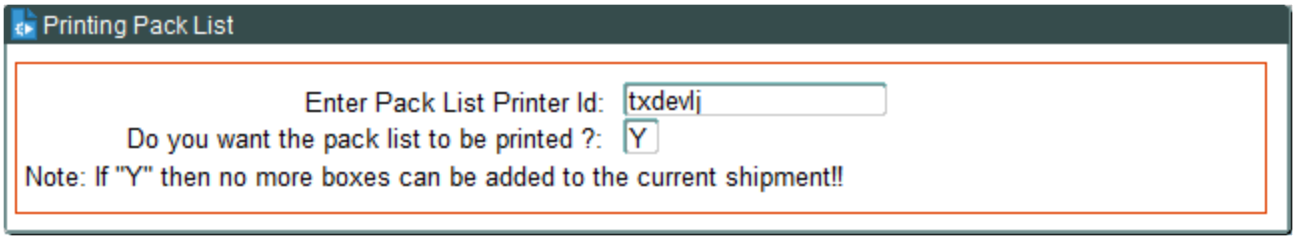


**NOTE –** The *Pack List Printer Id* field is no longer used. The pack list is generated as a PDF file, which can be viewed and printed using the PRINT or SPRINT screen.

You are asked: 'Do you want the pack list to be printed?'

- Enter `Y` to print the pack list and generate a record in the financial interface.
- Enter `N` to keep shipment open:
  - The pack list will not print
  - You can add more boxes to this pack list
  - Delivery confirmation cannot be performed
- After the pack list is printed, no boxes can be added to the shipment.

## Order Charges

If Y has been entered to print the pack list, the following window will open immediately after pressing Exit that allows customization of order charges:

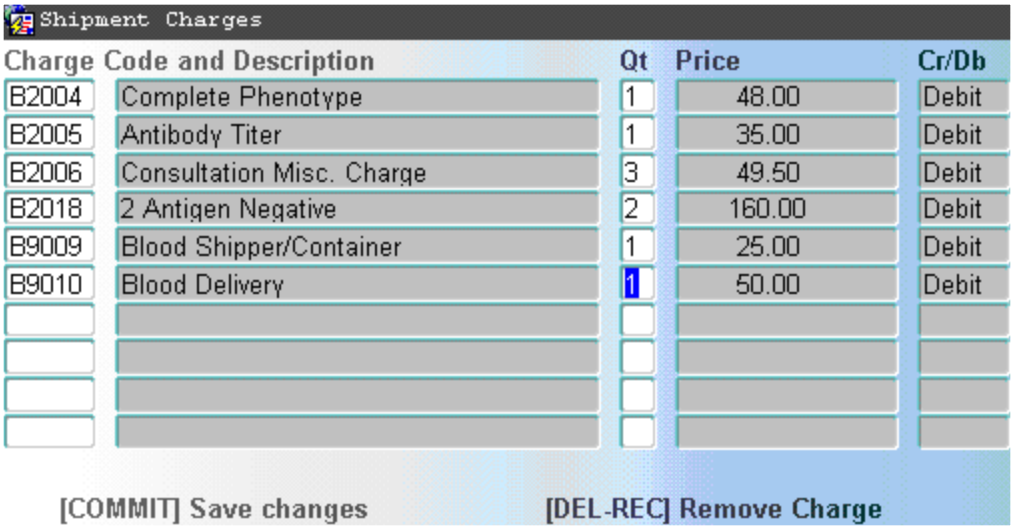


## Control Block Fields and Definitions

### Charge Code

Enter charge code or select from LOV.

> **NOTE –** The same charge code may be selected multiple times for multiple charges of the same code. Entry of charges is not required.

Use the UP and DOWN arrow keys to scroll though displayed data.

To remove a particular charge or defaulted charge, scroll to the desired charge and press CTRL+ F8 (Delete Record).

> **NOTE –** Charge amount can be changed if the edit flag is set to Y for the charge in Define Order Charges (VCHARGE).

When order charges are complete, press F12 (Commit).

## At Commit

- The order charges, if present, will be applied to the order and the use may proceed and the pack list is printed.
- After pack list is printed, a status of Shipped is associated to the shipment and a record is inserted for the financial interface for RD customers.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Shipping Functions menu.
- Perform delivery confirmation after shipments are delivered using Delivery Confirmation (DELCON).


WellSky Corporation
Proprietary and confidential

# 29.3.3 Delivery Confirmation (DELCON)

## Intended Use

Use the Delivery Confirmation screen to confirm delivery of a single shipment to a consignee. After each order is completed and shipped, the shipment is assigned a 'Closed' status at Delivery Confirmation. The delivery information gathered in this screen is used in customer reports for promptness. This screen also allows the user to insert comments about the shipment

## Limitations

Open shipments, those without a pack list generated, cannot be confirmed as delivered.

## Prerequisites

Shipment must have been shipped and received by customer.

## Accessing the Screen

Access this screen from the Shipping Functions menu or by entering the keyword `DELCON`.

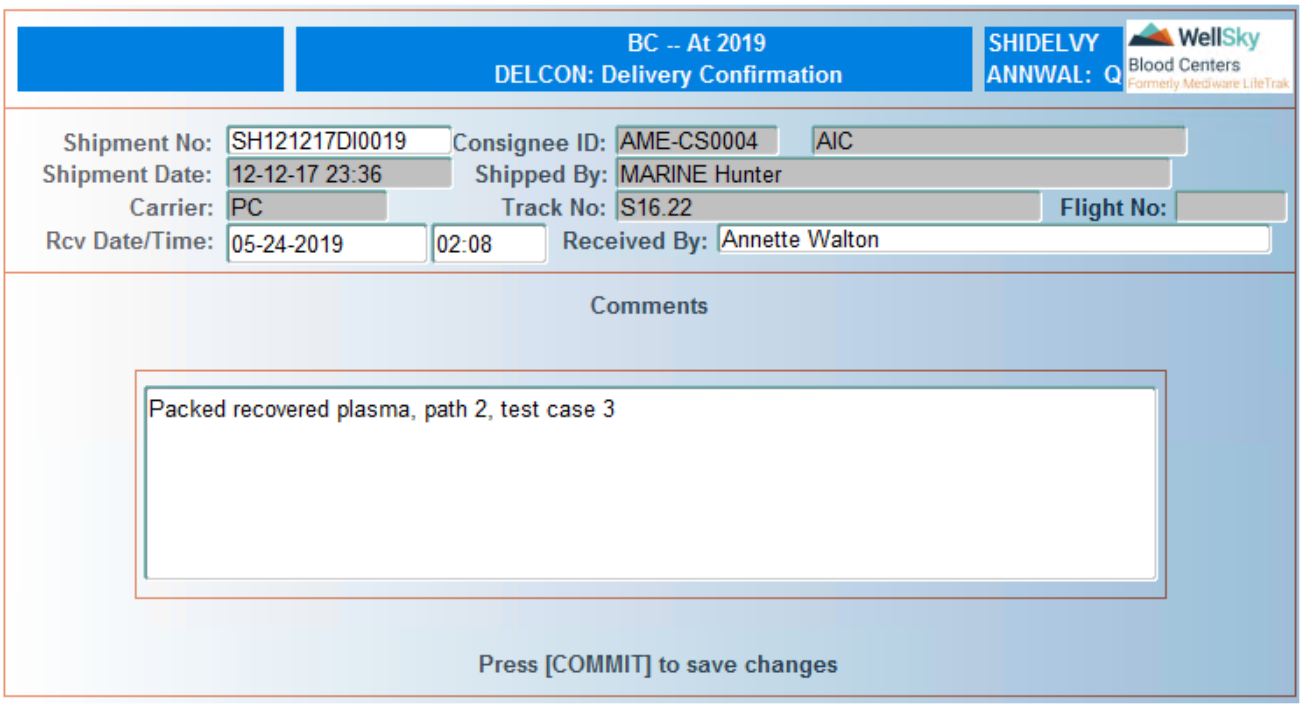


## Control Block Fields and Definitions

### Shipment No.

Enter shipment number or select from LOV.

### Consignee ID
Consignee ID and name display after shipment number is entered. Field is not navigable.

### Shipment Date
Shipment date and time display after shipment number is entered. Field is not navigable.

### Shipped By
Name of person who performed shipping displays after shipment number is entered. Field is not navigable.

### Carrier
Carrier displays after shipment number is entered. Field is not navigable.

### Track No
Tracking number displays after shipment number is entered. Field is not navigable.

### Rcv Date/Time
Enter shipment receipt date in MM-DD-YY format, or press ENTER to accept the current default date. Enter receipt time in HH24MI format. The system automatically formats the time to HH24:MI.

### Received By
Enter name of person who received the shipment. A maximum of 34 characters is allowed.

**NOTE –** After this field is entered, the cursor moves to the Comments block.

### Comments
Enter shipment comment. A maximum of 240 characters is allowed. Entry in this field is not required. Press F12 (Commit) to save comments.

Press F12 (Commit) to save the entire transaction.

## At Commit
The shipment is assigned a status of Closed by the system.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Shipping Functions menu.

# 29.3.4 Regenerate Electronic Plasma File (GENXML)

## Intended Use
Use the Regenerate Electronic Plasma File screen to regenerate electronic delivery notes for recovered plasma shipments.


WellSky Corporation
Proprietary and confidential

## Limitations

- The regenerated file will replace the existing file.
- This is to be used for recovered plasma (MG) customers only.

## Prerequisites

- Shipment must be for customer who has EDN flag set to Y in Create Customer Profile (CUSTOMER) and plasma file type selected.
- Directories must be properly defined.
- User must have access to directories.

## Accessing the Screen

Access this screen from the Shipping Functions menu or by entering the keyword `GENXML`.

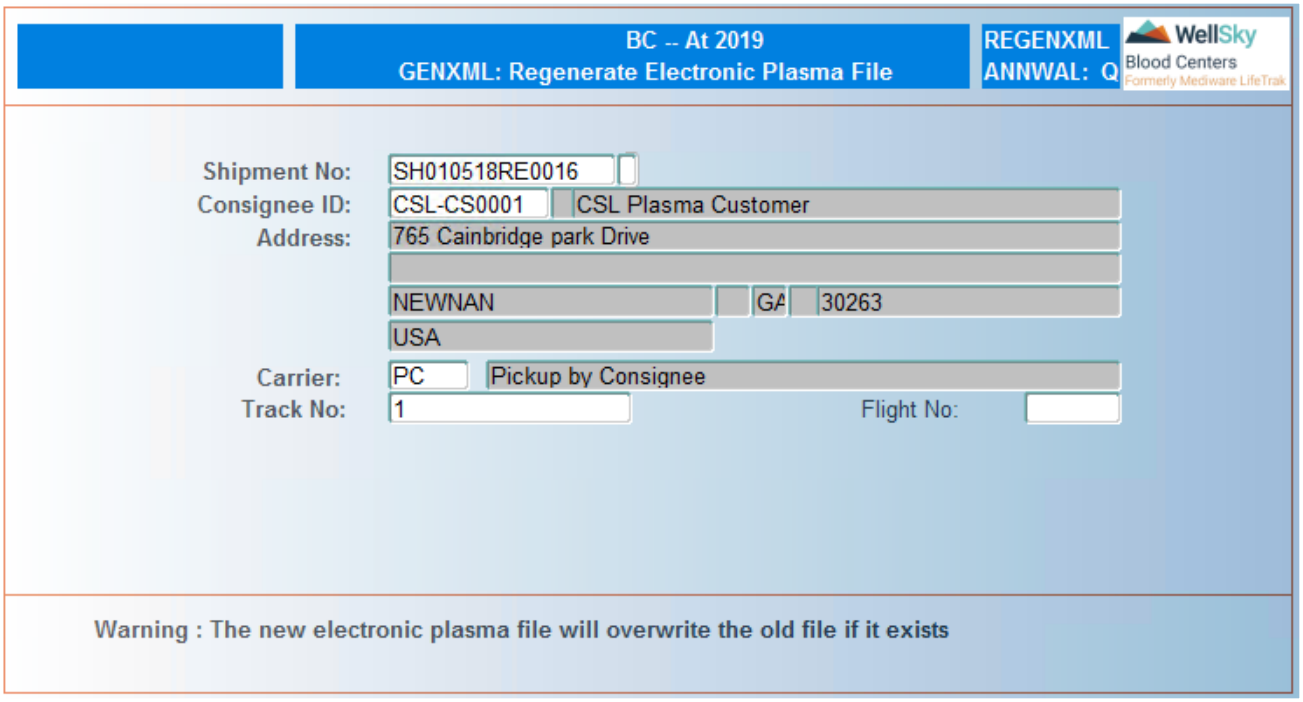


## Fields and Definitions

### Shipment No

Enter shipment number or select from LOV.

The following information displays after the shipment number is entered:

- Consignee ID – consignee ID and name.
- Address – consignee address.
- Carrier - carrier.

- Track No – tracking number.
- Flight No – flight number, if applicable.

Press F12 (Commit) to regenerate the XML or CSL (ASCII) file. The following window opens:




Enter `Y` to continue or `N` to cancel.

## At Commit

The XML or CSL (ASCII) file is regenerated and placed on the server.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Shipping Functions menu.

# 29.3.5 Electronic Plasma File Error Log (XMLLOG)

## Intended Use

Use the Electronic Plasma File Error Log screen to display any error or success messages for when the XML or CSL (ASCII) file is being generated when shipping recovered plasma for customers that need the XML or CSL (ASCII) file.

## Limitations

If the facility is set to multiple chapters, the Detail Block does not discriminate between chapters. Files from all chapters display no matter what chapter the user is logged into.

## Prerequisites

The EDN flag must be set to Y for any messages to be displayed in this log and the plasma file type must have been selected.

## Accessing the Screen

Access this screen from the Shipping Functions menu or by entering the keyword `XMLLOG`.


WellSky Corporation
Proprietary and confidential

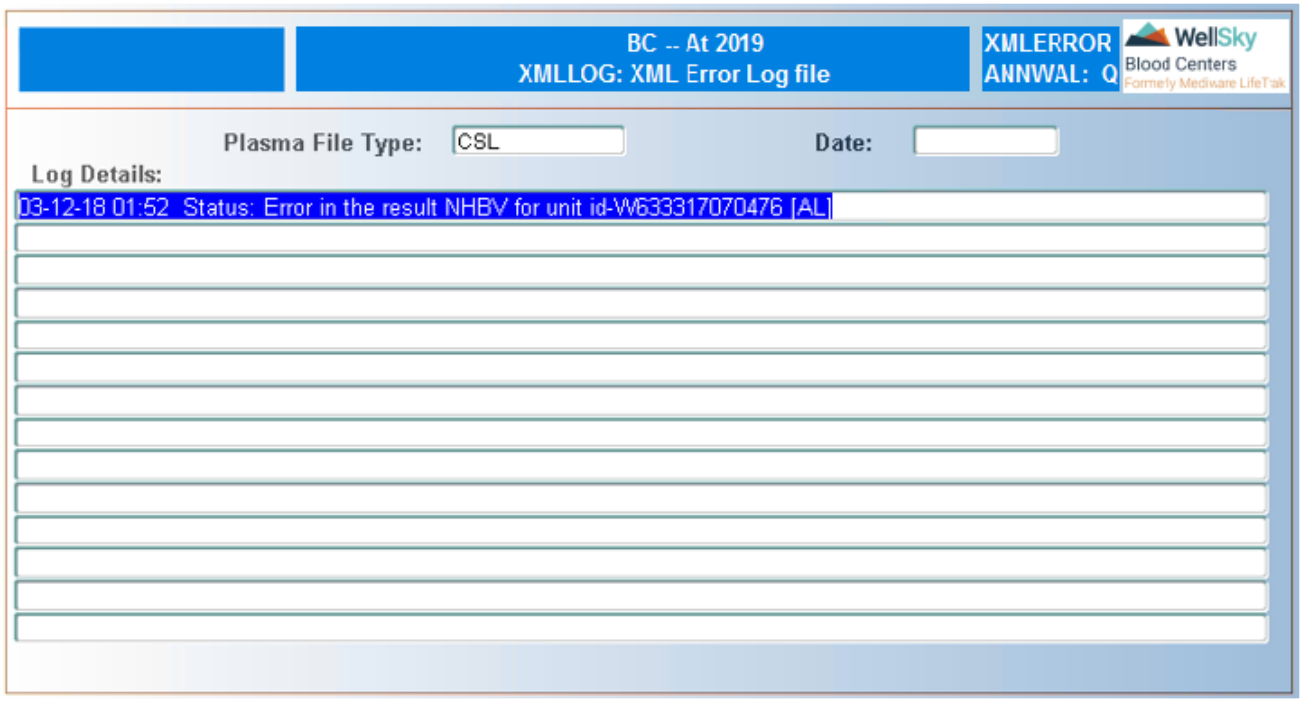


# Control Block Fields and Definitions

## Plasma File Type

Enter the plasma file type or select from LOV. LOV is populated from the master code PLFIL. This is a required field and must be entered.

## Date

Enter date in MMDDYY format to display messages for a specific date, or leave field blank to display the entire log file.

# In the Detail Block

## Log Details

System displays all message log details associated with the date entered. If a date is not entered, the system displays the entire message log.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Shipping Functions menu.

# 29.4 Distribution Queries

Distribution Queries are accessed from the following menu:

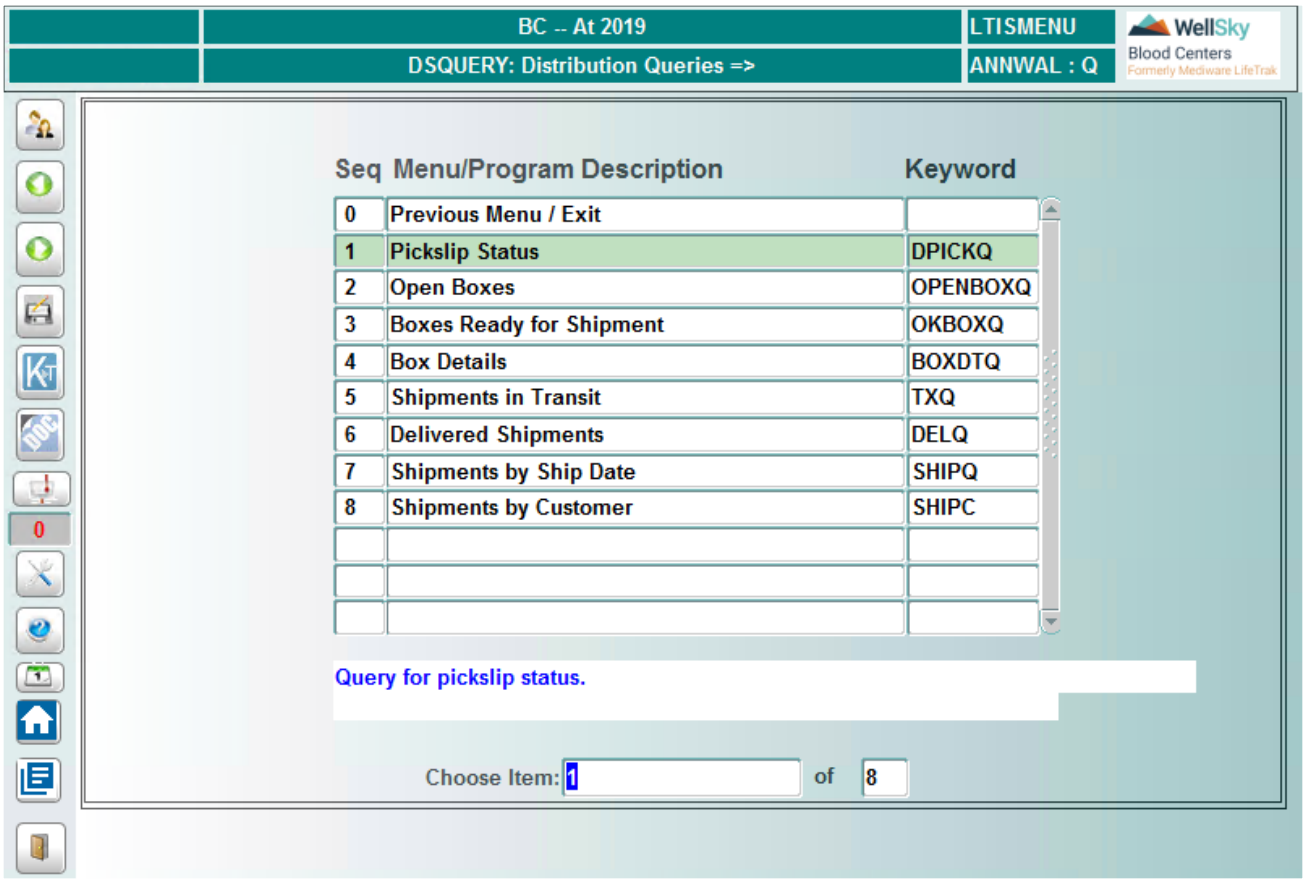


## 29.4.1 Pickslip Status (DPICKQ)

### Intended Use

Use the Pickslip Status screen to review the status of products listed in a pick slip. Information that displays on this screen includes:

- Customer
- Product
- Status
- Unit ID
- ABO/Rh
- Box ID


WellSky Corporation
Proprietary and confidential

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `PICKQ`.

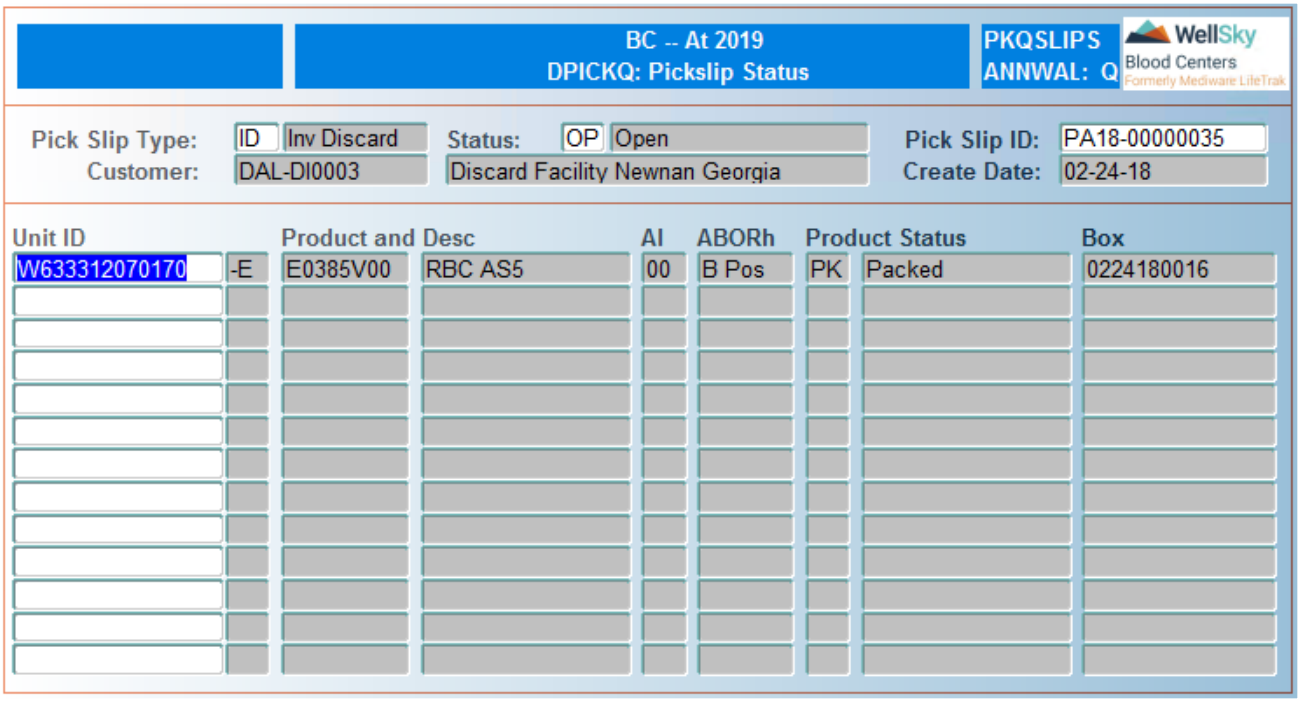


## Control Block Fields and Definitions

### Pick Slip Type

Enter pick slip type or select from LOV.

### Status

Enter pick slip status or select from LOV. Leave field blank to select pick slips with any status.

### Pick Slip ID

Enter pick slip ID or select from LOV.

### Customer

Customer ID displays after pick slip ID is entered. Field is not navigable.

### Create Date

Pick slip creation date displays after pick slip ID is entered. Field is not navigable.

## In the Detail Block

The following information displays after the control block is populated:

- Unit ID – unit identification.
- Product and Desc – product code and description.
- Al – aliquot number of the product.
- ABORh – blood type of the product.
- Product Status – status of the product (for example, . Allocated)
- Box – box ID in which the product is packed.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Distribution Queries menu and proceed to pack and/or close open boxes for shipment.

# 29.4.2 Open Boxes (OPENBOXQ)

## Intended Use

Use the Open Boxes screen to display boxes that have been packed but not closed for shipment (either currently or during a specified date range). Specific details about products already packed in a given box can be viewed once the list of open boxes is displayed.

## Limitations

None

## Prerequisites

Boxes must have an Open status.

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `OPENBOXQ`.


WellSky Corporation
Proprietary and confidential

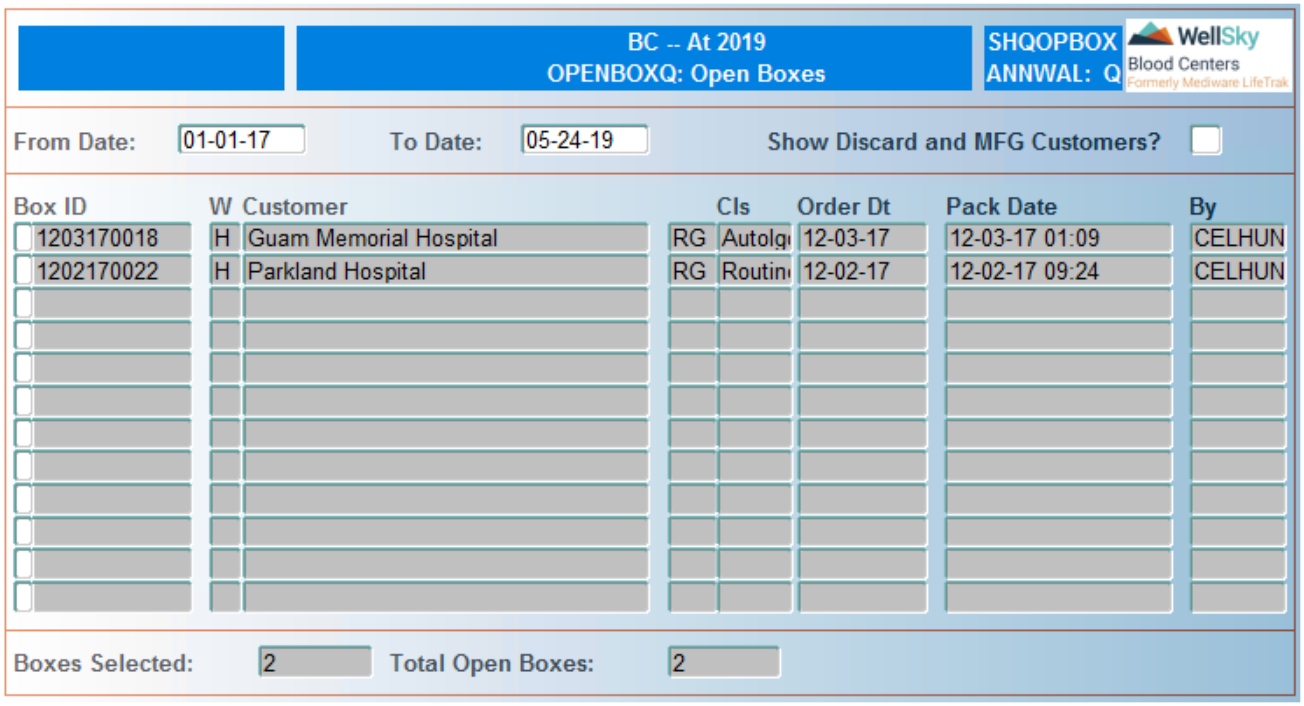


# Control Block Fields and Definitions

## From Date

Enter From Date in MM-DD-YY format. Leave field blank to display all open boxes.

**NOTE –** If no date is entered, the system will assume the user wants to display all open boxes, and the cursor will skip the To Date field.

## To Date

Enter To Date in MM-DD-YY format.

## Show Discard And MFG Customers?

Enter `Y` to show discard and manufacturing customers (MG and DI). Enter `N` to exclude these customer types.

# In the Detail Block

The following information displays in the query:

- Box ID – box ID.
- W – warehouse.
- Customer – customer name and type.
- Cls – order class.
- Order Dt – order date.

- Pack Date – packing date and time.
- By – ID of user performing packing.
- Boxes Selected – number of boxes selected.
- Total Open Boxes – total number of open boxes.

Use the UP and DOWN arrow keys to scroll through the list.

## Viewing Box Details

To review details of products already packed in open boxes, highlight the desired box number by using the arrow keys and press F6 (Menu). The following window opens:

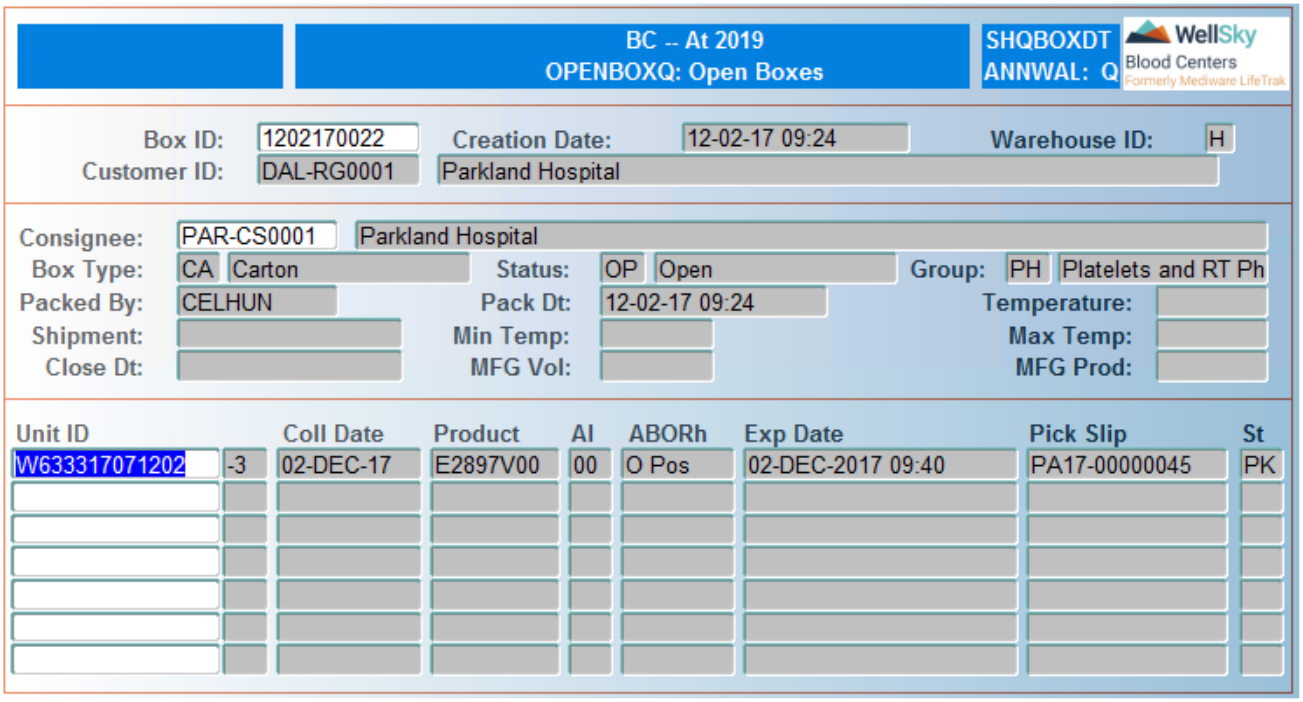


Refer to Box Details (BOXDTQ) for further information about this query.

Press F8 (Exit Screen) to return to the main query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing press F8 (Exit Screen) to return to the Distribution Queries menu and proceed to pack and/or close open boxes for shipment.


WellSky Corporation
Proprietary and confidential

# 29.4.3 Boxes Ready For Shipment (OKBOXQ)

## Intended Use

Use the Boxes Ready for Shipment screen to review information about boxes that have already been packed, closed and are awaiting shipment to the consignee.  Data that displays here include:

- Box ID
- Priority
- Consignee
- Estimated arrival time
- Order number
- Box type
- Packed by
- Closed date

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `OKBOXQ`.

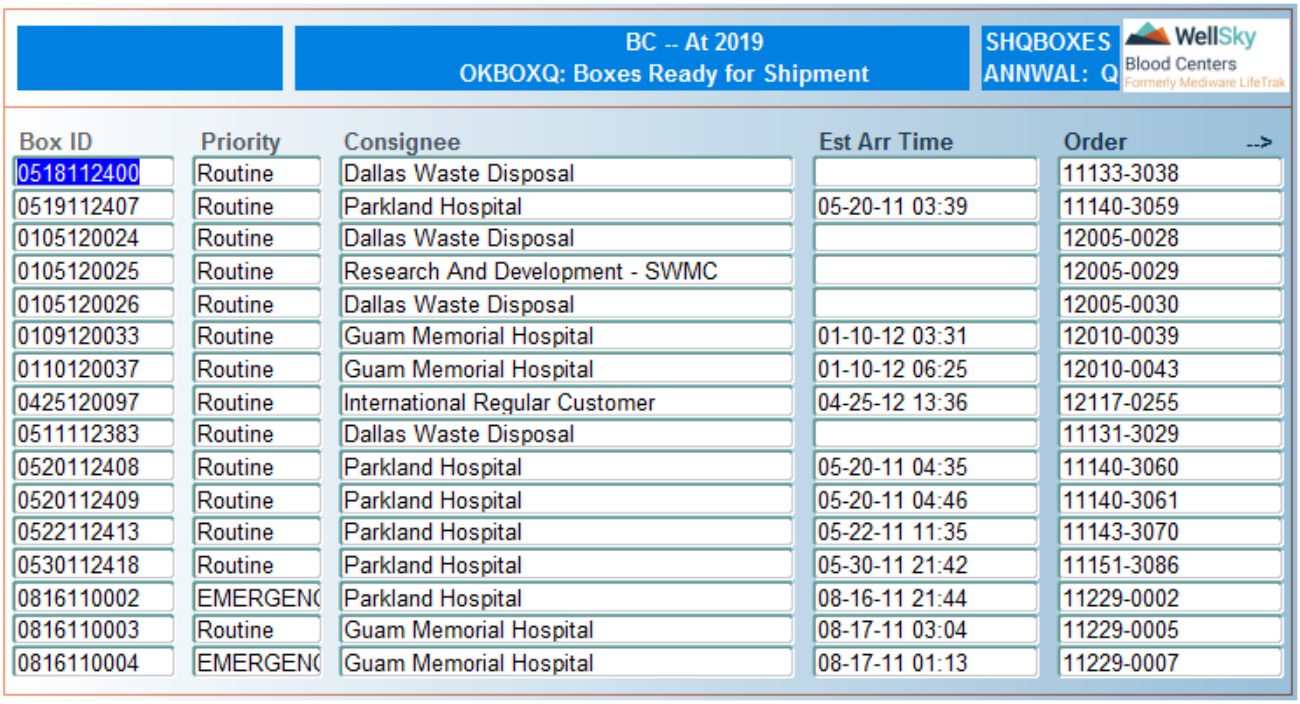


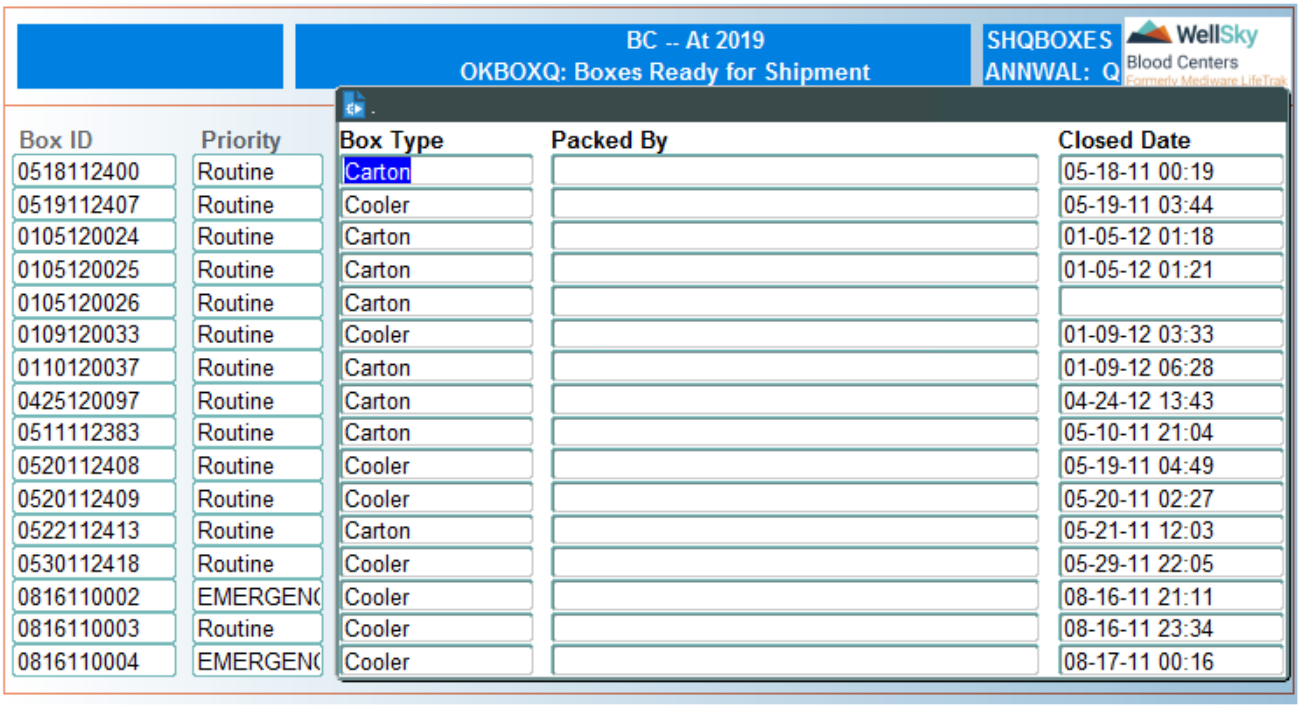


The following information displays upon entering the screen:

- Box ID – box identification.
- Priority – order priority.
- Consignee – consignee to whom the box is being shipped.


WellSky Corporation
Proprietary and confidential

- Est Arr Time – date and time box is expected (estimated at order entry).
- Order – order to which box is associated.

Navigate the cursor past the Order field using the ENTER key. This opens a window displaying the following additional fields:

- Box Type – type of box (for example, Carton).
- Packed By – name of person who packed the box.
- Closed Date – date and time box was closed.

Use the UP and DOWN arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing press F8 (Exit Screen) to return to the Distribution Queries menu.

# 29.4.4 Box Details (BOXDTQ)

## Intended Use

Use the Box Details screen to review information about a particular box. Data that displays here include:

- Box ID
- Customer
- Consignee
- Box type
- Status
- Pack date
- Shipment number
- Close date
- Unit ID
- Other unit information

## Limitations

None

## Prerequisites

None

# Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword BOXDTQ.

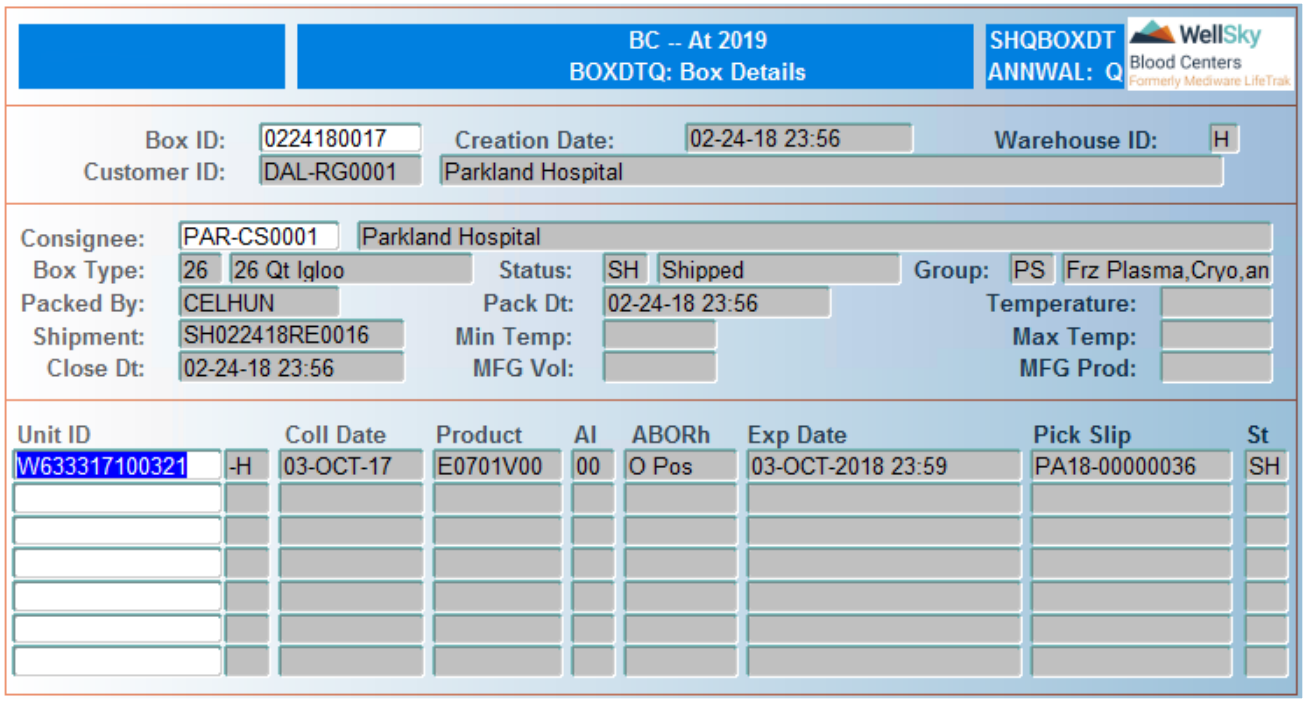


# Control Block Fields and Definitions

## Box ID

Enter box ID or select from LOV.

The following information displays in the control block after the box ID is entered:

- Box ID – box identification.
- Creation Date – date the first product was packed in the box.
- Warehouse ID – the warehouse in which the box was packed.
- Customer ID – identification and name of the customer.

**NOTE –** Fields are not navigable.

# In the Detail Blocks

The following information displays after the control block is populated.


WellSky Corporation
Proprietary and confidential

## Shipment Details

- Consignee – identification and name of the consignee.
- Box Type – type of box (for example, Carton).
- Status – status of the box (for example, Packed).
- Group – product grouping (certain products can be packed together).
- Packed By – user who packed the box.
- Pack Dt – date and time box was packed.
- Temperature – field not utilized.
- Shipment – shipment number box is associated to.
- Min Temp – field not utilized.
- Max Temp – field not utilized.
- Close Dt – date and time box was closed.
- MFG Vol – volume of manufacturing products.
- MFG Prod – manufacturing product type in box.

## Product Details

- Unit ID – unit identification.
- Coll Date – date unit was collected.
- Product – product code.
- Al – aliquot number of product.
- ABORh – blood type of product.
- Exp Date – expiration date for product.
- Pick Slip – pick slip ID for product (if any).
- St - status.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Distribution Queries menu.

# 29.4.5 Shipments In Transit (TXQ)

## Intended Use

Use the Shipments in Transit screen to review information about a particular shipment that has not yet been delivered: Data that displays here includes the following:

- Box ID
- Carrier
- Number of boxes
- Consignee
- Unit information

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `TXQ`.

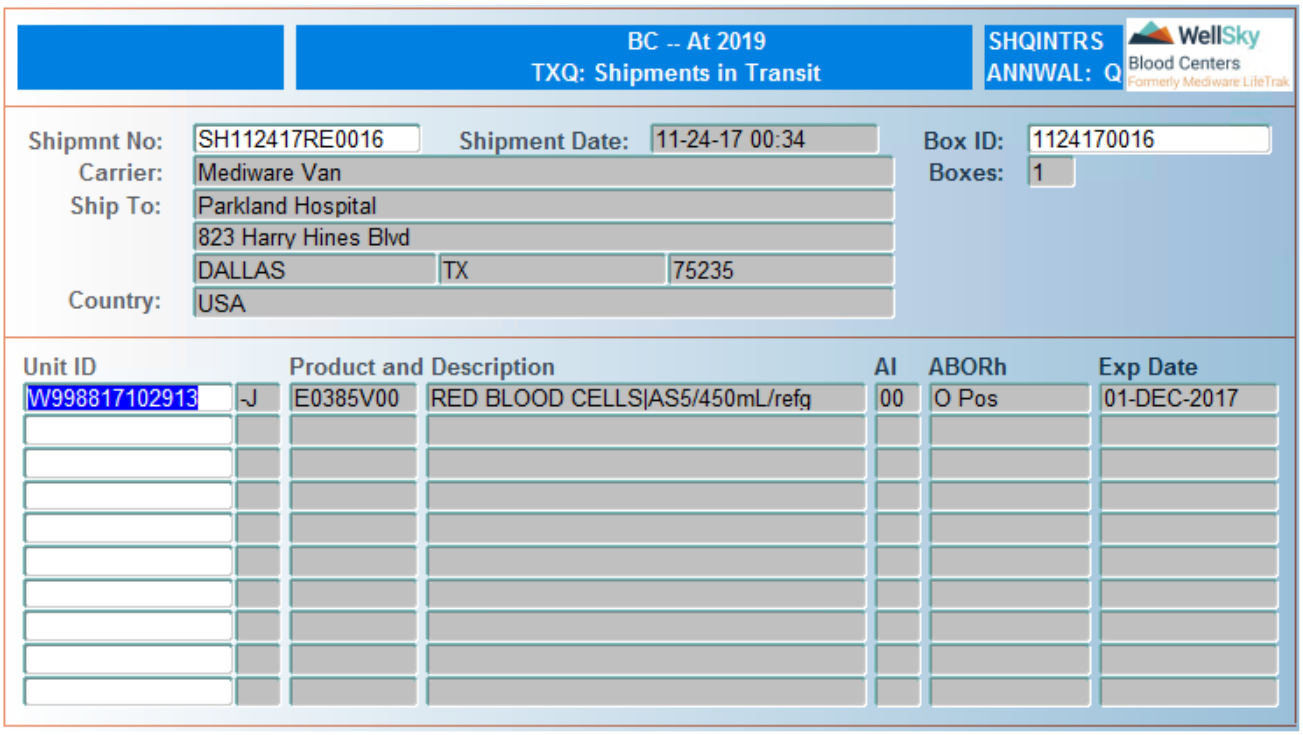



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Shipment No

Enter shipment number or select from LOV.

## Shipment Date

Shipment date automatically displays after shipment number is entered. Field is not navigable.

## Box ID

Enter box ID or select from LOV. Leave field blank to display all boxes in the shipment.

## Carrier

Carrier automatically displays after shipment number is entered. Field is not navigable.

## Boxes

Number of boxes in the shipment automatically displays after shipment number is entered. Field is not navigable.

## Ship To

Consignee name and address display after box ID is entered. Field is not navigable.

# In the Detail Block

The following information displays after the control block is populated:

- Unit ID – unit identification.
- Product and Description – product code and description.
- Al – aliquot number of product.
- ABORh – product blood type .
- Exp Date – product expiration date.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# At Commit

No updates are made to the system from this screen.

# What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Distribution Queries menu.

# 29.4.6 Delivered Shipments (DELQ)

## Intended Use

Use the Delivered Shipments screen to review information about a particular shipment that has been delivered. Data that displays here includes:

- Box ID
- Carrier
- Total number of boxes
- Consignee
- Unit information

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `DELQ`.

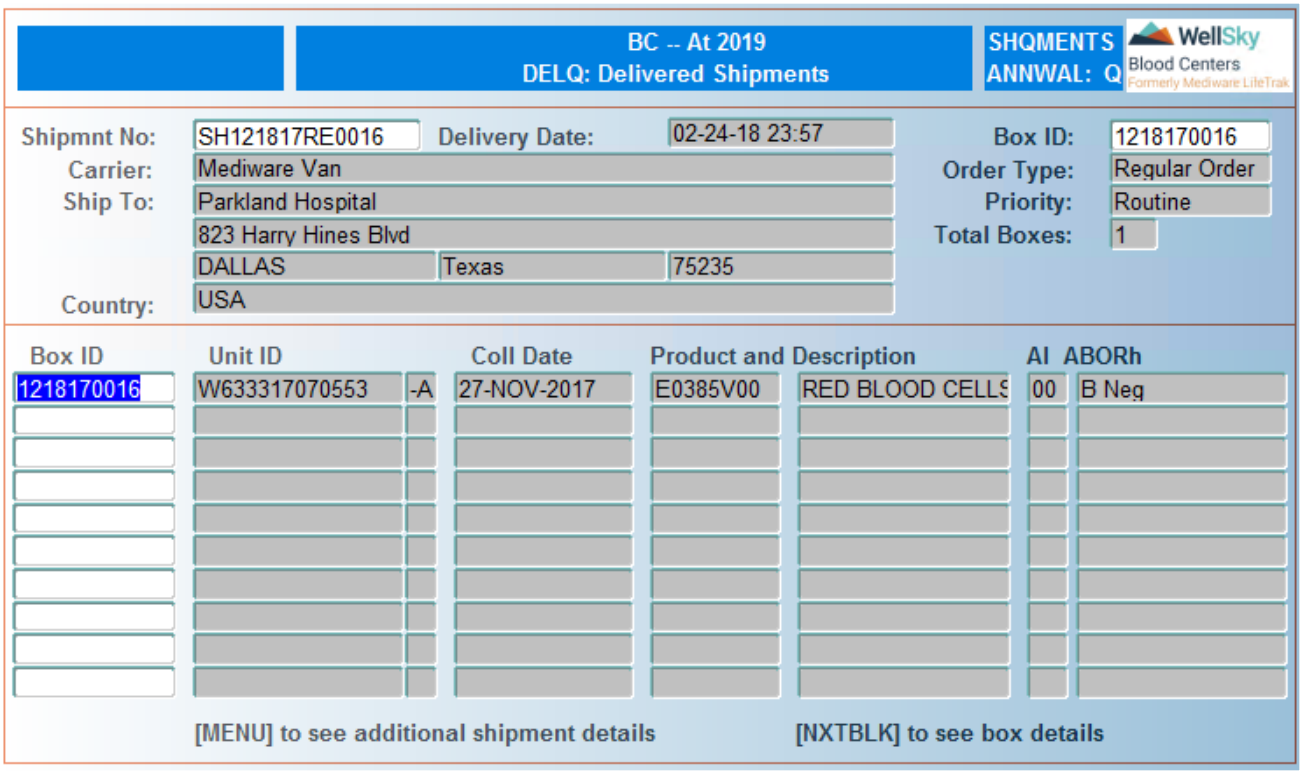



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Shipment No

Enter the shipment number or select from LOV.

## Delivery Date

Delivery date automatically displays after shipment number is entered. Field is not navigable.

## Box ID

Enter he box ID or select from LOV. Leave field blank to view all boxes in the shipment.

**NOTE –** If a box ID is not entered, the system does not display the order type and priority.

## Carrier

Carrier automatically displays after shipment number is entered. Field is not navigable.

## Order Type

Order type automatically displays after box ID is entered. Field is not navigable.

## Ship To

Consignee name and address automatically display after shipment number is entered. Field is not navigable.

## Priority

Order priority automatically displays after box ID is entered. Field is not navigable.

## Total Boxes

Total number of boxes in shipment displays after box ID field is populated. Field is not navigable.

# In the Detail Block

The following information displays after the control block is populated:

- Box ID – box identification.
- Unit ID – unit identification.
- Coll Date – date unit was collected.
- Product and Description – product code and description.
- Al – aliquot number of product.
- ABORh – blood type of product.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## Reviewing Additional Shipment Details

To review additional shipment details on items in a specific shipment, scroll to the item using the UP and DOWN arrow keys, and press F6 (Menu). The following window opens:

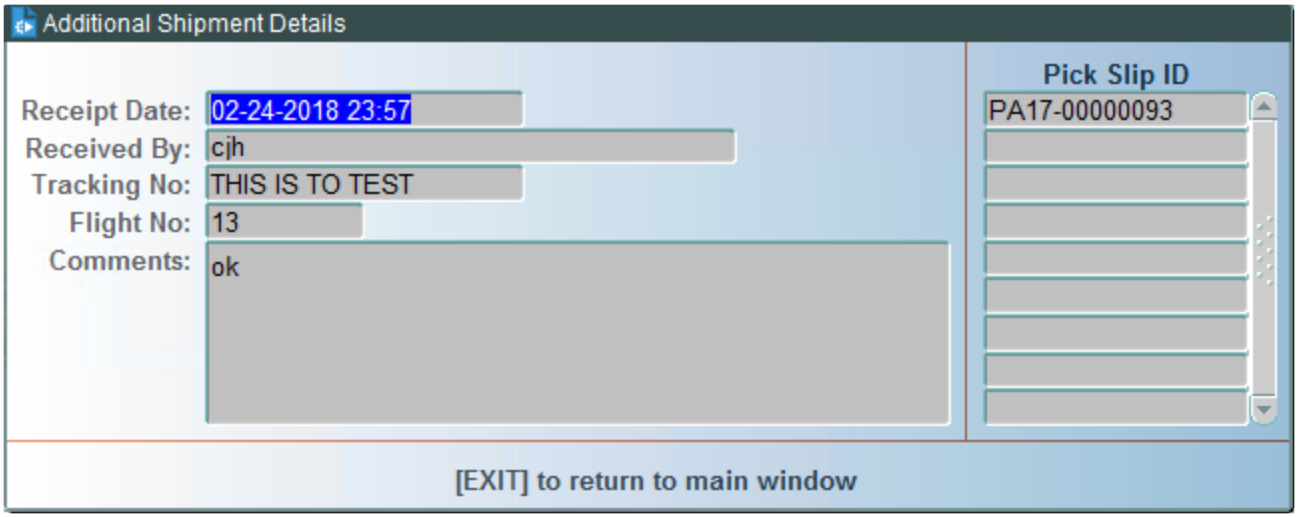


The following information displays:

- Receive Date
- Received by
- Tracking Number
- Flight Number
- Delivery comments and delivery confirmation
- List of Pick Slip IDs

Press F8 (Exit Screen) to return to the query screen.

## Reviewing Box Details

To review box details on items in a specific shipment, scroll to the item using the UP and DOWN arrow keys, and press CTRL + F3 (Next Block). The following screen opens:


WellSky Corporation
Proprietary and confidential

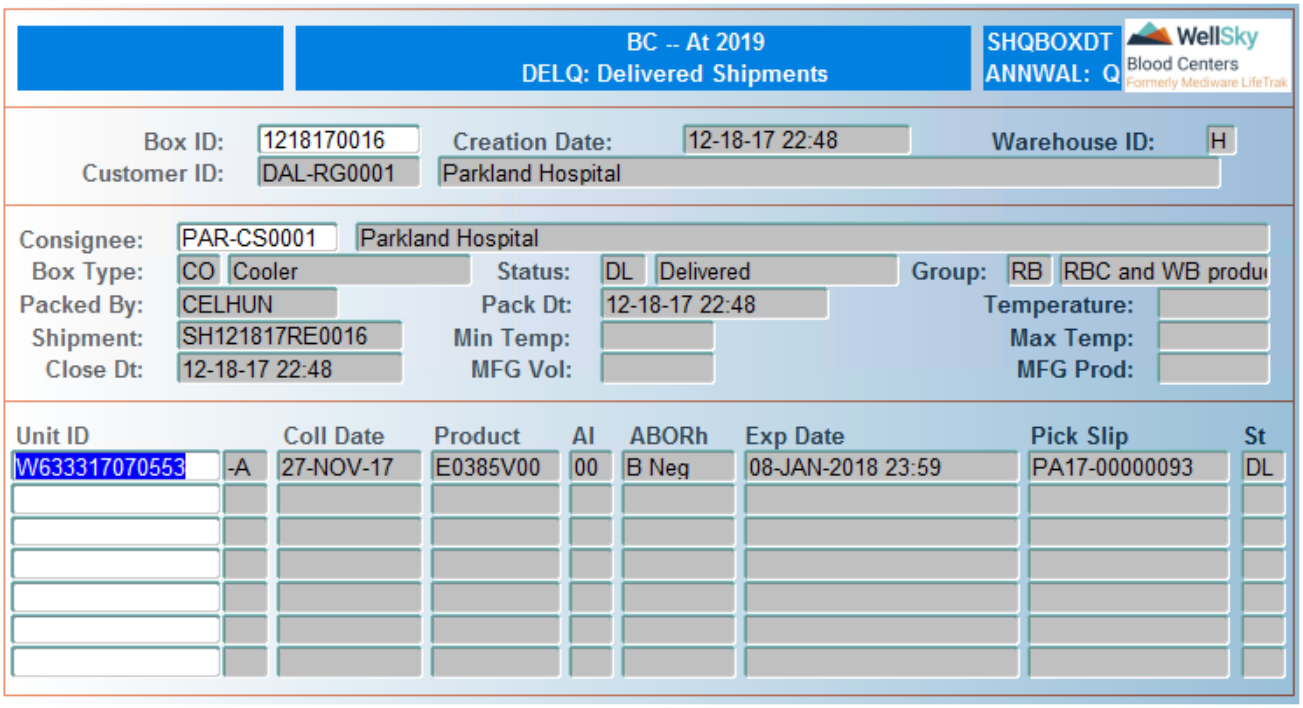


The information in this screen is identical to the information in the Box Details (BOXDTQ) screen. Refer to the BOXDTQ section of this document for information.

Press F8 (Exit Screen) to return to the main DELQ screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing press F8 (Exit Screen) to return to the Distribution Queries menu.

# 29.4.7 Shipments By Ship Date (SHIPQ)

## Intended Use

Use the Shipments by Ship Date screen to review information about shipments and facility-to-facility transfers within a date range. Data that displays here includes:

- Shipment number
- Shipment date
- Consignee
- Status
- Order type

- Box details
- Shipped products

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Distribution Queries menu or by entering the keyword `SHIPQ`.

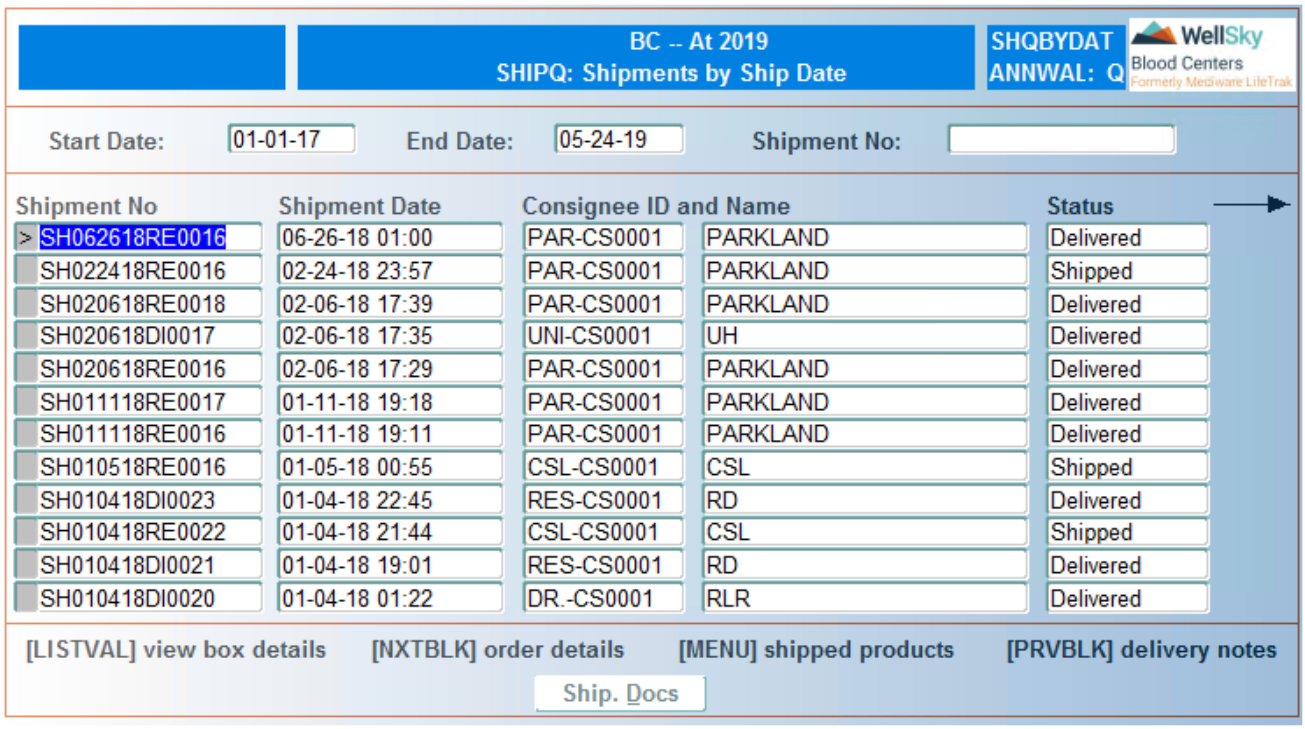


## Control Block Fields and Definitions

### Start Date

Enter beginning date range using the MM-DD-YY format.

**NOTE –** Enter the date that is one day prior to today's date to retrieve all associated data for the shipment.

### End Date

Enter ending date range using the MM-DD-YY format. Leave field blank to view shipments up to the present.


WellSky Corporation
Proprietary and confidential

### Shipment No

Enter shipment number or select from LOV. Leave field blank to view all shipments.

The following information displays:

- Shipment No – shipment number
- Shipment Date – date and time of shipment
- Consignee ID and Name – identification and name of consignee
- Status – status of shipment (e.g. Delivered)

To navigate past the Status field, press **ENTER**.

The following information displays in the query:

- Type – type of shipment
- Date Received – date and time shipment was received by the consignee
- Temp – temperature of shipment
- Carrier – type of delivery carrier (for example, WellSky Van)
- Flight – flight number of shipment
- Track Number – tracking number

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## Reviewing Box Details

To review box details on items in a specific shipment, scroll to the item using the **UP** and **DOWN** arrow keys, and press **F2** (List of Values). The following window opens:

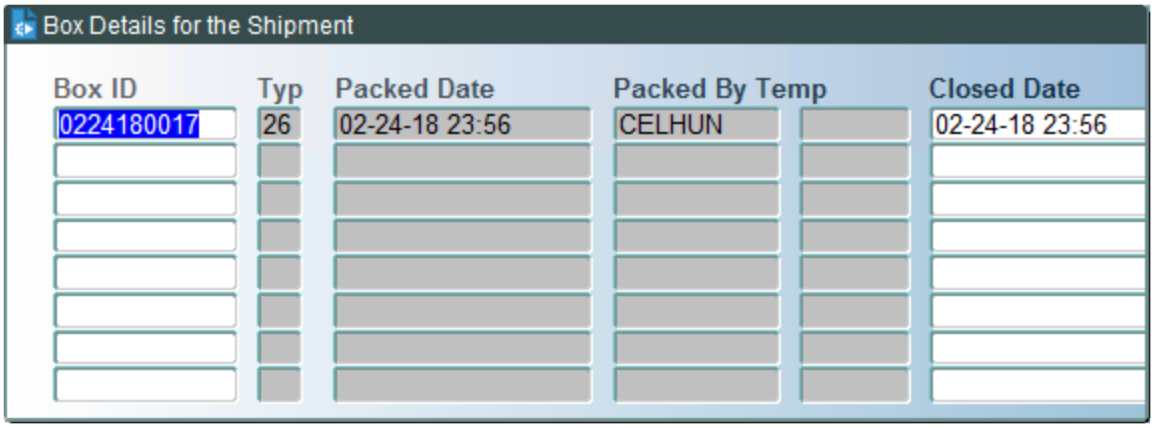


The following information displays:

- Box ID – box identification of boxes in the shipment
- Typ – box type

- Packed Date – date and time box was packed
- Packed By – user login of person who packed the box
- Temp – field not utilized
- Closed Date – date and time box was closed

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the query screen.

## Reviewing Order Details

To review order details, scroll to the item using the **UP** and **DOWN** arrow keys, and press **CTRL** + **F3** (Next Block) . The following window opens:

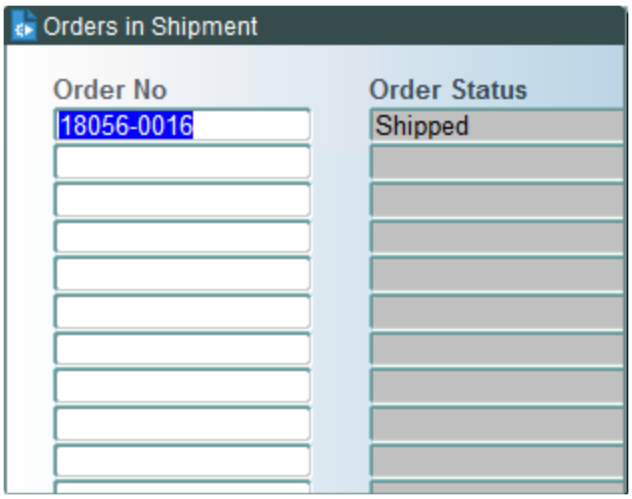


The following information displays:

- Order No – order number
- Order Status – order status

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the main screen.

## Reviewing Shipped Product Details

To review shipped product details on items in a specific shipment, scroll to the item using the **UP** and **DOWN** arrow keys and press **F6** (Menu). The following window opens:

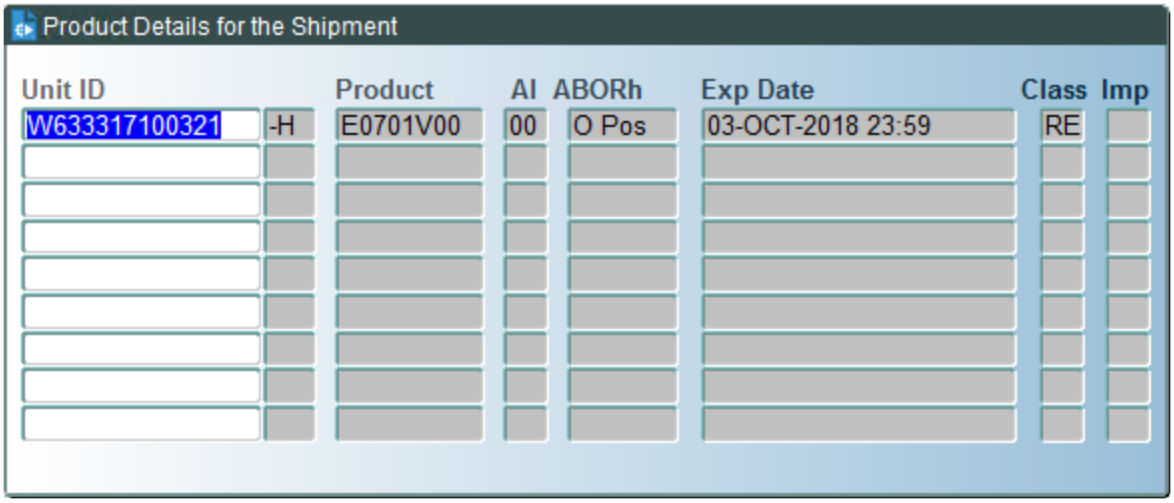


The following information displays in the query:

- Unit ID – unit ID
- Product – product code
- AI – product aliquot
- ABORh – product blood type
- Exp Date – product expiration date and time
- Class – product inventory class
- Im – whether or not product was imported

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **F8** (Exit Screen) to return to the query screen.

## Reviewing Delivery Notes

To review delivery notes [which are created using the Delivery Confirmation (DELCON) screen], scroll to the item using the **UP** and **DOWN** arrow keys, and press **CTRL** + **F4** (Previous Block). The following window opens:

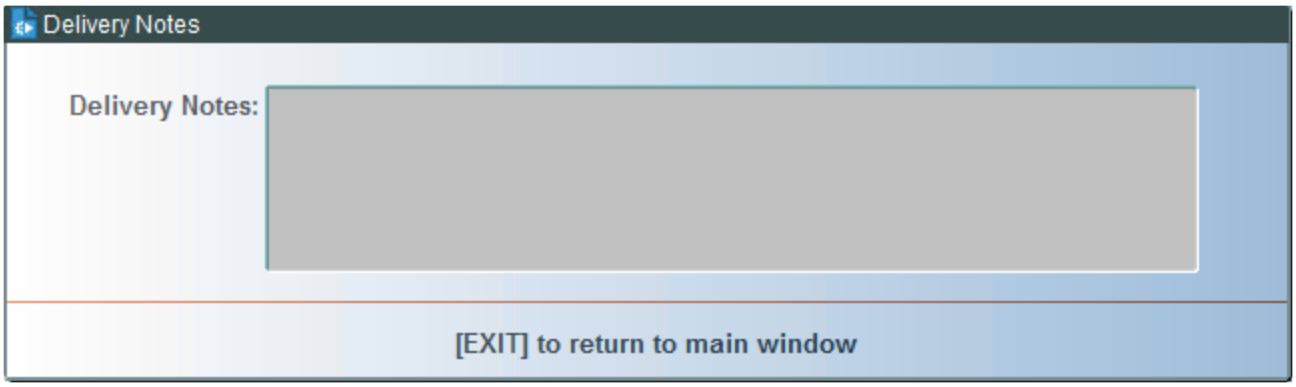


Press **F8** (Exit Screen) to return to the main screen.

## Ship. Docs Button

Click **Ship. Docs** to view or delete documents from a shipment. The Document Library form opens. Use this from to view or delete documents. To delete a document, the user must have access to UDOC, otherwise the user can view or add a document.

The button will only be active if there are external documents linked to the shipment.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing press **F8** (Exit Screen) to return to the Distribution Queries menu.


WellSky Corporation
Proprietary and confidential

30

# Chapter 30 - Inventory Management


30.1 Introduction ..... 1974
30.1.1 Overview ..... 1974
30.1.2 Structure ..... 1974
30.2 Product Management ..... 1975
30.2.1 Check-In From Blood Centers Lab (CHKIN) ..... 1975
30.2.2 Check-In From Blood Centers Lab – Batch Process (BATCH) ..... 1978
30.2.3 Restock Unshipped Products (RESTOCK) ..... 1980
30.2.4 Hospital Returns (RETURN) ..... 1983
30.2.5 Release Returned Product Quarantine (RQU2) ..... 1986
30.2.6 Place Product Quarantine (PQU) ..... 1989
30.2.7 Release Product Quarantine (RQU) ..... 1991
30.2.8 Reject Inventory Products (INVREJ) ..... 1993
30.2.9 Checkin Discard Products to Inventory (CHKDIS) ..... 1995
30.2.10 Generate Outdates Picklist (OUTDATE) ..... 1997
30.2.11 Move Outdates To Outdate Location (MOVEOUT) ..... 1999
30.2.12 Change Inventory Class (CHCLASS) ..... 2002
30.2.13 Enter Product Attributes (ATTR) ..... 2004
30.2.14 Unit Transfer to Transfusion System (SNDHCLL) ..... 2006
30.3 Warehouse Transport ..... 2011
30.3.1 Warehouse Check-Out (WHOUT) ..... 2011
30.3.2 Warehouse Check-In (WHIN) ..... 2014
30.3.3 Reconcile Transport Batch (WHRCL) ..... 2017
30.3.4 Transport Batch Query (WHQ) ..... 2019
30.4 Inventory Queries ..... 2022
30.4.1 Available Products Query (APQ) ..... 2022
30.4.2 Unit And Product History (PHISTQ) ..... 2025
30.4.3 Product Current Status (PRODQ) ..... 2028
30.4.4 Products In Quarantine (QUQ) ..... 2031
30.4.5 Interdicted Active Stock (PINTQ) ..... 2033
30.4.6 Products with Antigens (PAGQ) ..... 2035
30.4.7 Find Units And Products (FINDU) ..... 2037

# 30.1 Introduction

## 30.1.1 Overview

The Inventory Management module provides functions for controlling the inventory, including:

- checking products in from Lab
- accepting return products
- placing products in quarantine
- rechecking products to Lab
- releasing products from quarantine
- generating an outdates picklist
- moving outdates to an outdate location
- rejecting products in inventory
- restocking unshipped products
- changing inventory class
- entering product attributes
- inventory transport functions between warehouses
- product storage devices and location

This module also provides the ability to track products in inventory by general product information, and provides extensive information on inventory status. The optimal (safe) inventory stock and minimal inventory levels can be defined in the system. Inventory can be accessed as priced based on outdate ranges. Returned products can be placed into active stock, quarantine, or discard, based on information on hand or system information. Customer accounts can be credited to reflect any returns, and inventory reconciliation is performed to account for all stock items.

## 30.1.2 Structure

There following sections are included in the Inventory Management module:

- Product Management Functions
- Product Location
- Inventory Management Queries
- Warehouse Transport Functions
- Inventory Management Reports

**NOTE –** The inventory management reports are covered in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 30.2 Product Management

Product Management functions are accessed from the following menu:

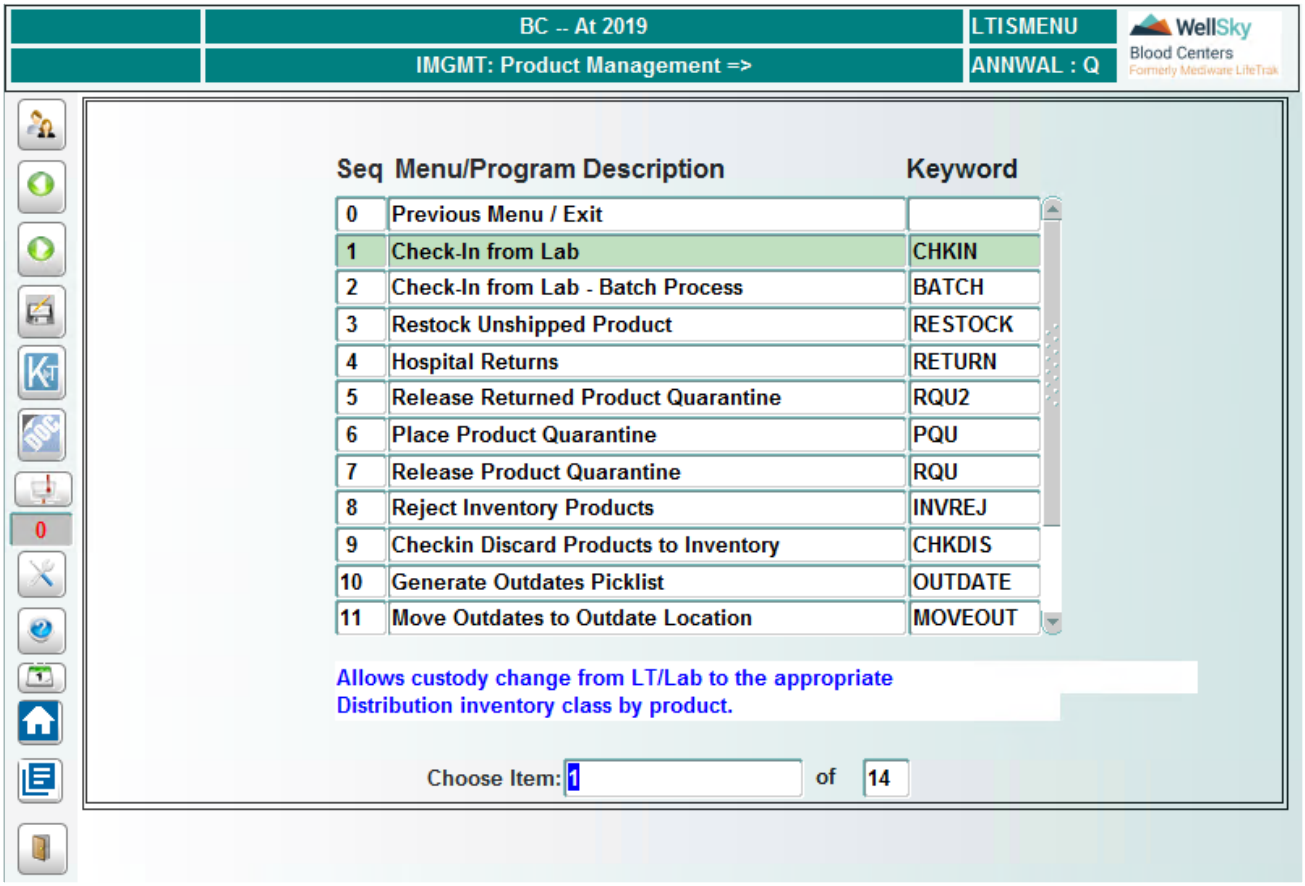


## 30.2.1 Check-In From Blood Centers Lab (CHKIN)

### Intended Use

Use the Check-In from Blood Centers Lab screen to move data for labeled products from Lab to Distribution. Until this is done, no products can be packed or shipped.

### Limitations

User log-in warehouse determines the warehouse location of components checked in.

### Prerequisites

Products must be labeled and must be in Lab.

### Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `CHKIN`.

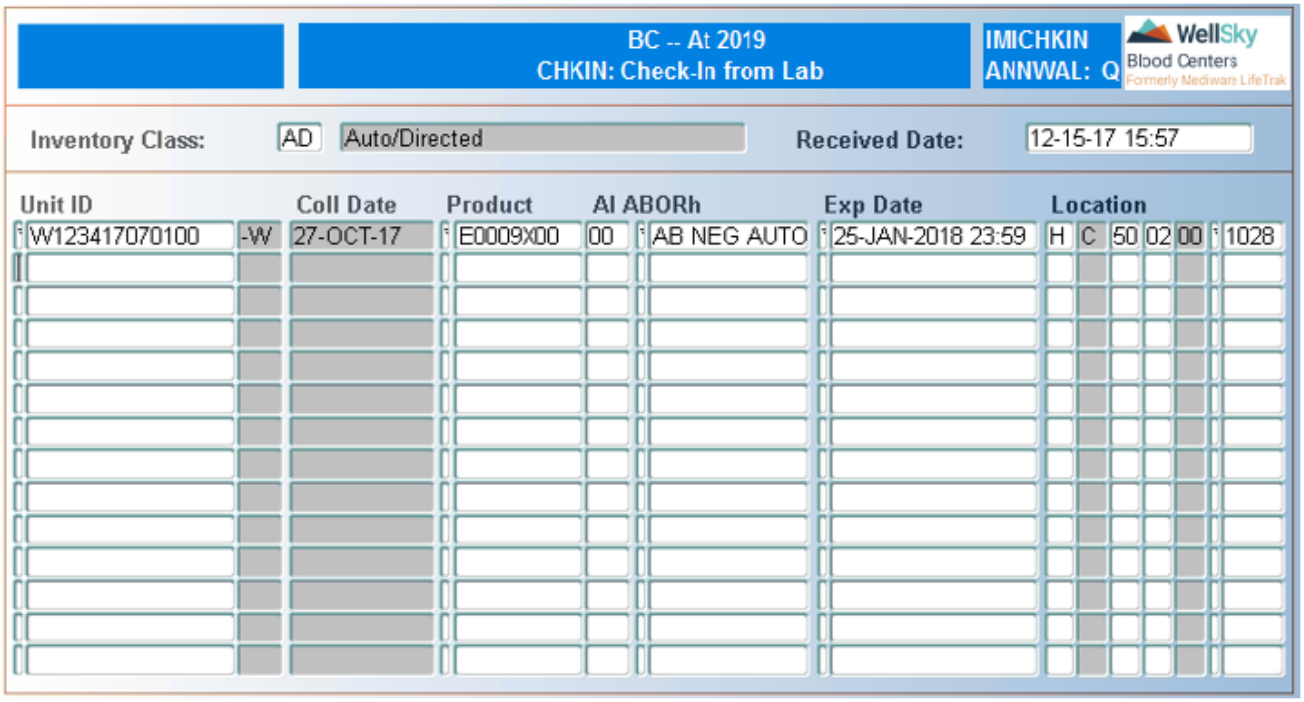


# Control Block Fields and Definitions

## Inventory Class

Enter inventory class or select from LOV.

**NOTE –** Only products in the entered class can be checked-in. Inventory class types are:

- RE – regular
- AD – autologous/directed
- SP – special

## Received Date

Enter date and time using the MM-DD-YY HH24:MI format for checking units into the system or press ENTER to accept current date and time.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after unit ID is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Prod Code
Scan, manually enter, or select product code from LOV.

### AI
Enter aliquot number.

> **NOTE –** The system automatically displays the aliquot number after the product code is entered if only 1 aliquot exists for the product.

### ABORh
Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date
Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

### Location - consists of the following sub-fields:

#### Warehouse ID
Automatically populates with warehouse ID to which user is currently logged in.  Field is not navigable.

#### Device Number
Enter device number or select from LOV.

#### Rack Number
Enter rack number or select from LOV.

#### Tray Number
Scan, manually enter, or select tray from LOV.

> **NOTE –** For subsequent products, press ENTER in this field to use the same tray.

Screen does a line-by-line commit.

## At Commit
Updates made to the system at the time of Commit include:

- Data entered on this screen.
- Products previously in Lab are now ready to be packed and shipped.
- Warehouse is set as the warehouse to which user is logged in

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.2 Check-In From Blood Centers Lab – Batch Process (BATCH)

## Intended Use

Use the Check-In from Blood Centers Lab – Batch Process screen to move data for labeled products from Lab to Distribution into a batch process. Until completion of the batch check-in process, two reports print:

- Successful Move Report
- Failed Move Report

## Limitations

- Products that have more than one defined storage device will be checked in to the first defined device.
- The following products do NOT move to distribution when the batch check-in process is performed:
  - Unlabeled products
  - Components with unit and/or component level interdictions since labeling.
  - Components that have been rechecked into Lab.
  - Components labeled as Discard, Quarantine, Biohazard, Manufacturing, or Research.
  - Pooled components.
  - Inventory product types with no defined storage device.
- The license status (out-of-state) flag will be set for imported products according to the Out-of-State set-up for the product code in Product Codes (PRODUCT).
- Components move into their proper inventory class, RE, SP, or AD.
- User warehouse log-in determines the warehouse location of components to be moved.

**EXAMPLE –** If the user is logged on to the H warehouse in Distribution when the batch check-in process is performed, only components in the H warehouse in Lab will move.

## Prerequisites

Products must be labeled and must be in Lab.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `BATCH`.


WellSky Corporation
Proprietary and confidential

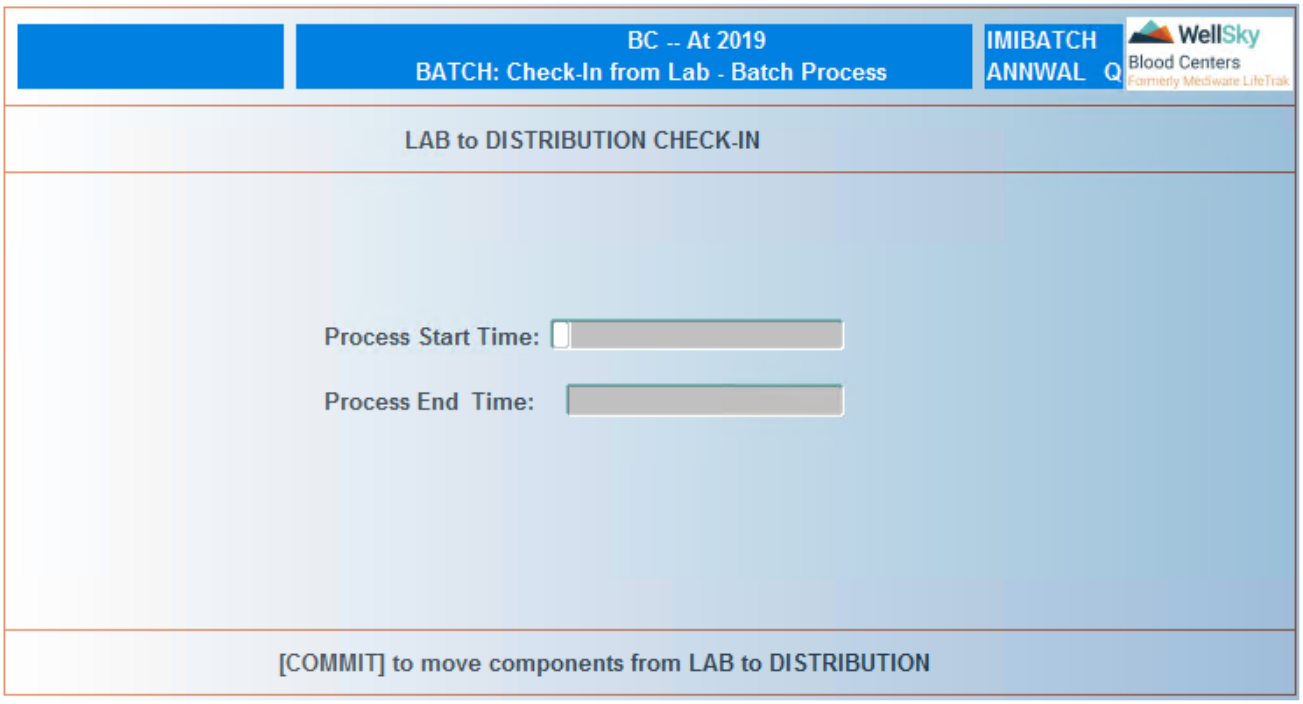


Press F12 (Commit) to begin the check-in process. The following window opens, requiring confirmation to begin the check-in process:

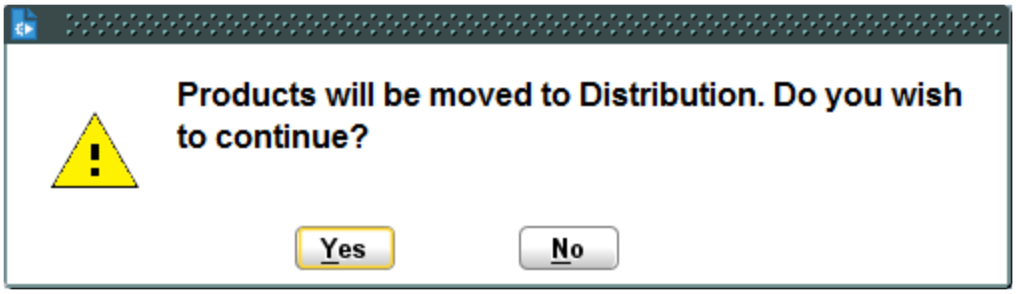


Enter `Yes` to begin the check-in process. Enter `No` to cancel the check-in process.

## At Commit

When the process is complete:

- Process start time and process end time fields automatically populate with the proper times.
- Components meeting criteria are checked-in to Distribution.
- Component status updates to S.
- Successful and unsuccessful move reports automatically print.

**NOTE –** Move reports can be reprinted in User Report Actions (PRINT) or Supervisory Report Actions (SPRINT) only until a new batch has been checked in.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.3 Restock Unshipped Products (RESTOCK)

## Intended Use

Use the Restock Unshipped Products screen to return products to inventory that have been packed but not shipped. This screen is accessed by the unpack slip ID that is generated in Change or Cancel Order (CANCEL).

## Limitations

Products cannot be restocked unless the order for which they were packed is canceled or the products have been deallocated in Change or Cancel Order (CANCEL).

## Prerequisites

- An unpack slip ID must have been generated using Change or Cancel Order (CANCEL).
- Only boxes in the user's currently assigned warehouse can be unpacked.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `RESTOCK`.

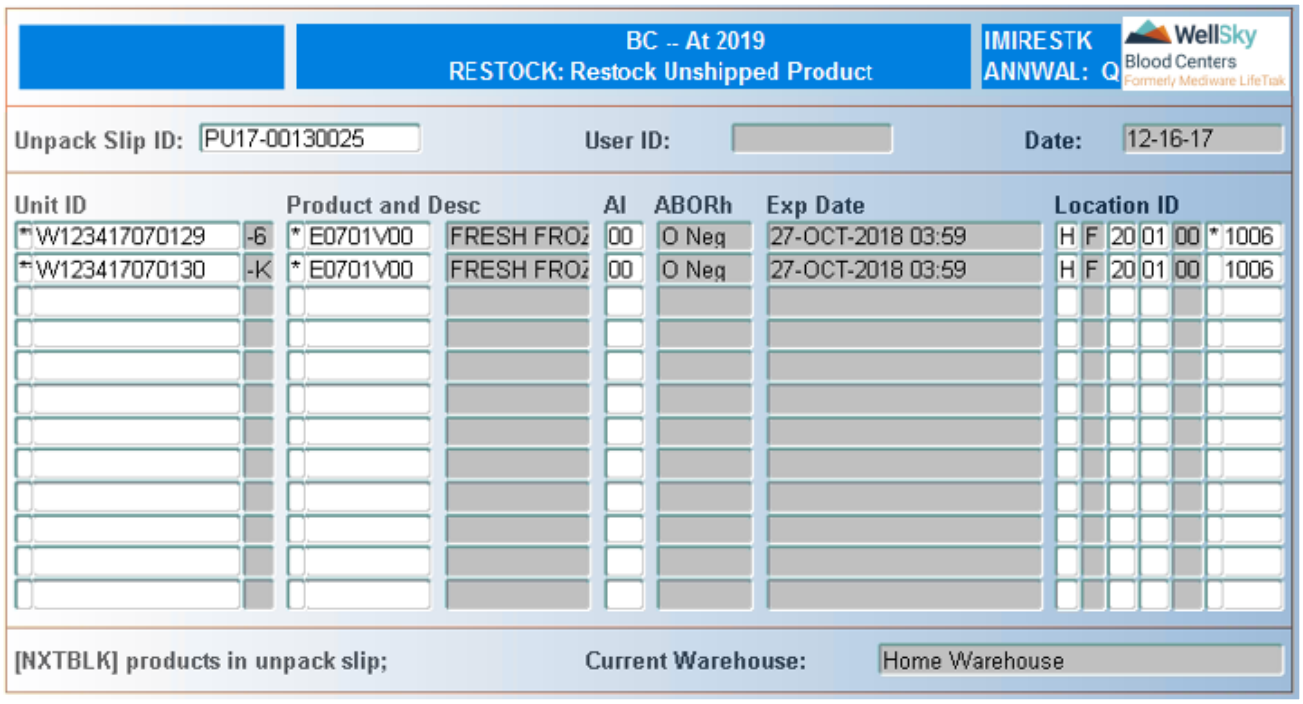



WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Unpack Slip ID

Enter unpack slip ID or select from LOV.

## User ID

Field is not utilized and is not navigable.

## Date

Date product was unpacked or deallocated automatically displays after the unpack slip ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product and Desc

Scan, manually enter, or select product code from LOV. Product description automatically displays after code is entered.

## Al

Enter aliquot number or select from LOV. Press **ENTER** to accept the default aliquot number.

## ABORh

Product ABO/Rh automatically displays after aliquot is entered. Field is not navigable.

## Exp Date

Product expiration date and time automatically display after aliquot is entered. Field is not navigable.

## Location ID

**NOTE –** The storage location may default depending on the device set-up. If entry of the device is required, enter the following:

### Warehouse ID

Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

### Device Number

Enter device number or select from LOV.

### Rack Number

Enter rack number or select from LOV.

### Tray Number

Scan, manually enter, or select tray from LOV.

Screen does a line-by-line commit.

## Reviewing Products in the Unpack Slip

Press **CTRL** + **F3** (Next Block) to view products on the unpack slip. The following window opens:

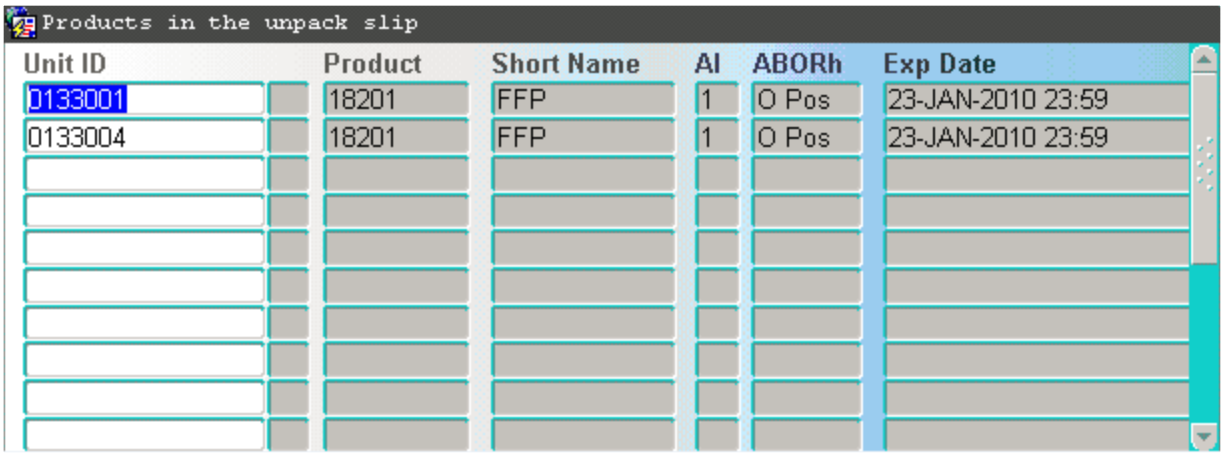


The following data displays in the query:

- Unit ID – unit ID.
- Product – product code.
- Short Name – short name for product (for example, AS-5 RBC).
- AI – aliquot number.
- ABORh – blood type.
- Exp Date – product expiration date and time.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Data cannot be updated in this query.

Press **F8** (Exit Screen) to return to the main screen.

## At Commit

Products entered in this screen are assigned to a new inventory location.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.4 Hospital Returns (RETURN)

## Intended Use

Use the Hospital Returns to return previously shipped products from a consignee. Depending on the Return Reason Code, the consignee may receive a credit for the return. Depending on configuration of attributes, a consignee may or may not be given credit for the attributes. Inventory, quarantine or discard destination is determined by selection of the Return Reason Code.

## Limitations

- If a product/unit now has a Hold type interdiction since packing, it will be placed in Quarantine.
- If a product/unit now has a BIO or NFT interdiction since packing, it will be placed in discard.
- Products labeled emergency release cannot go directly to inventory. They will go only to Quarantine or Discard, if applicable.
- NFT or BIO labeled products packed via the pack Lab Discard screens can only be returned to Discard.
- Expired products will be placed in Discard.

## Prerequisites

- Delivery Confirmation must be completed to return.
- Return flag for the customer must be set to Y in Customer Details (CUSTOMER) in order to accept returns from the customer.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `RETURN`.

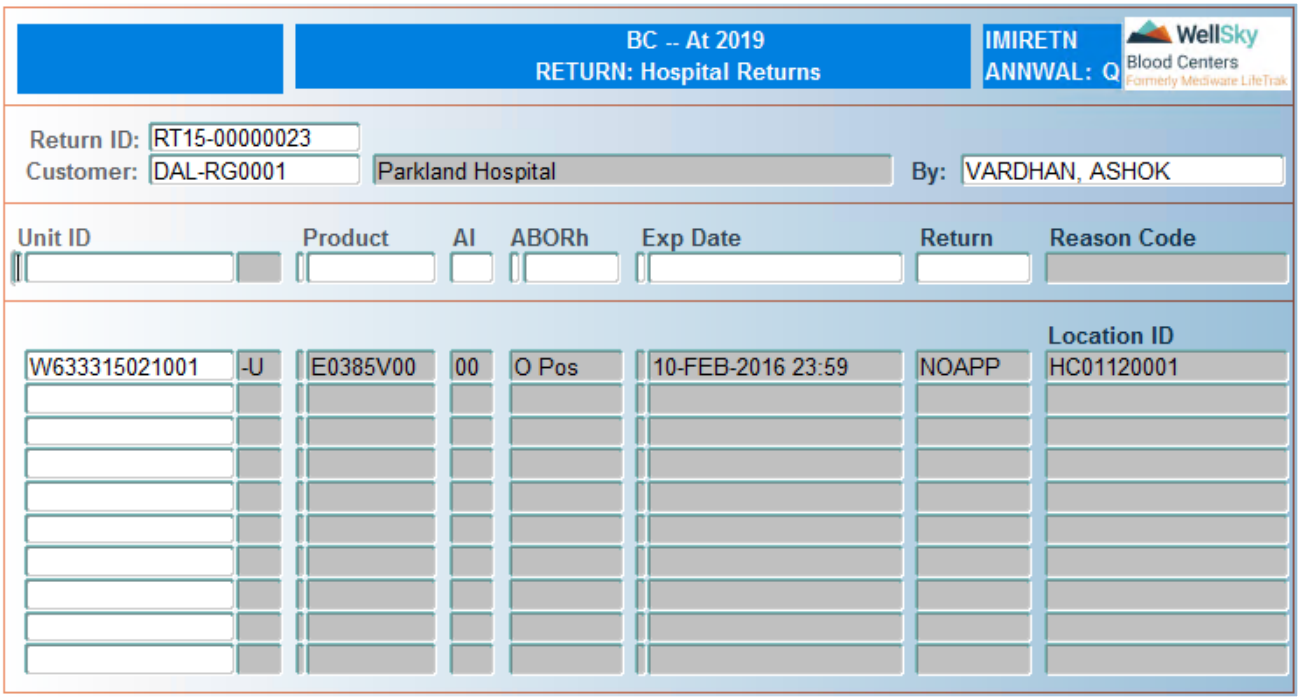


# Control Block Fields and Definitions

## Return ID

Enter an existing return ID or select from LOV. Leave field blank to create a new return ID.

## Customer

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

## By

Enter contact name or select from LOV. Entry is not required in this field.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.

## Alq

Enter aliquot number or select from LOV. Press **ENTER** to accept default.

**NOTE –** The system automatically displays the aliquot.


WellSky Corporation
Proprietary and confidential

## ABORh

Scan, manually enter, or select ABO/Rh from LOV.

**NOTE –** Only valid blood type for product displays in LOV. If product is being returned from a different customer than it was shipped to, a window opens to Override Returned Customer.

## Exp Date

Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

## Return Reason Code

Enter return reason code or select from LOV. The LOV displays the following:

- Reason Code.
- Reason Description.
- Allowed Credit (Y or N).
- Enforce Return Policy (Should be N).

## Location ID

Location automatically displays after return reason code is entered. Field is not navigable.

Screen does a line-by-line commit.

Once all products have been entered, press **F8** (Exit Screen). The following window opens:

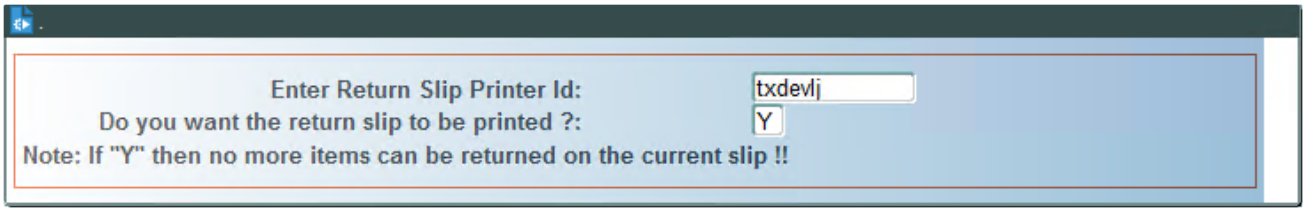


## Enter Return Slip Printer ID

Default printer automatically displays. Press **F4** (Previous Field) to return to this field. Enter printer ID or select from LOV.

## Do you want the return slip to be printed?

Enter `Y` to print the return slip. Enter `N` to keep the return ID open.

**NOTE –** Additional items cannot be returned using the return ID if the return slip has been printed.

## Overriding Returned Customer

If the product is being returned from a different customer than it was shipped to, the following window opens after the blood type is entered:

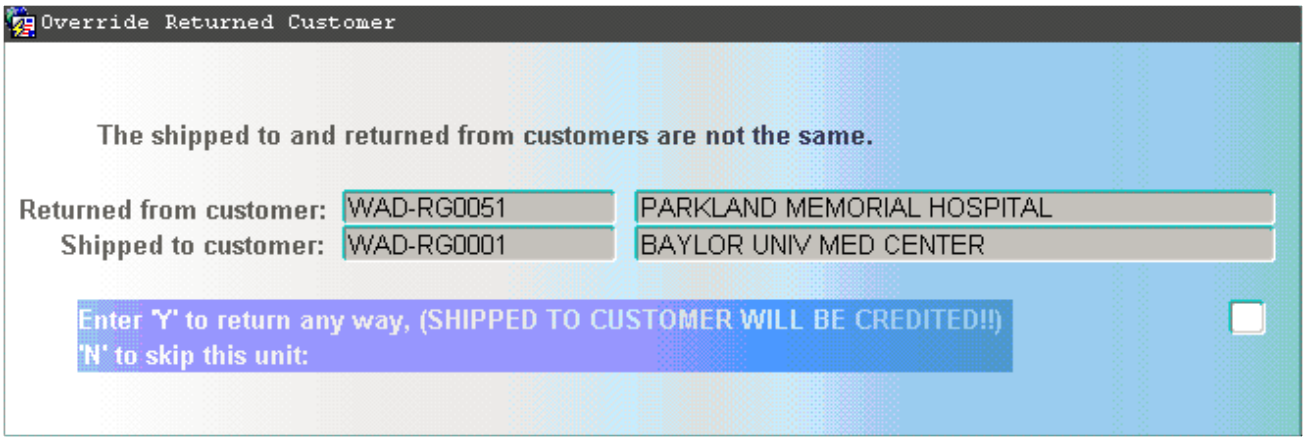


The system automatically displays the following:

- The name of the customer from which the product is being returned.
- The name of the customer to which the product was shipped.

Enter `Y` to return the product. Enter `N` to skip the unit from return.

**NOTE –** Credit will be given to the shipped to customer.

## At Commit

Updates made to the system at the time of Commit include:

- Returned products are placed appropriately in Available, Quarantine or Discard inventory.
- Return slip prints.
- Credit is issued, if applicable.

## What to Do Next

- For normal processing, press **F8** (Exit Screen) to return to the Product Management menu.
- If product was placed in quarantine during return, release quarantine on the applicable products using Release Product Quarantine (RQU) or Release Returned Product Quarantine (RQU2).

# 30.2.5 Release Returned Product Quarantine (RQU2)

## Intended Use

Use the Release Returned Product Quarantine screen to release returned products to stock or discard. If the product is accepted for stock, it automatically updates the status to available. If the product is selected for discard the user


WellSky Corporation
Proprietary and confidential

must enter a reason for the rejection of the product. Products/units with interdictions post packing cannot be released to stock.

## Limitations

None

## Prerequisites

Products must be in current warehouse to which you are logged in and can only be released to that warehouse.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `RQU2`.

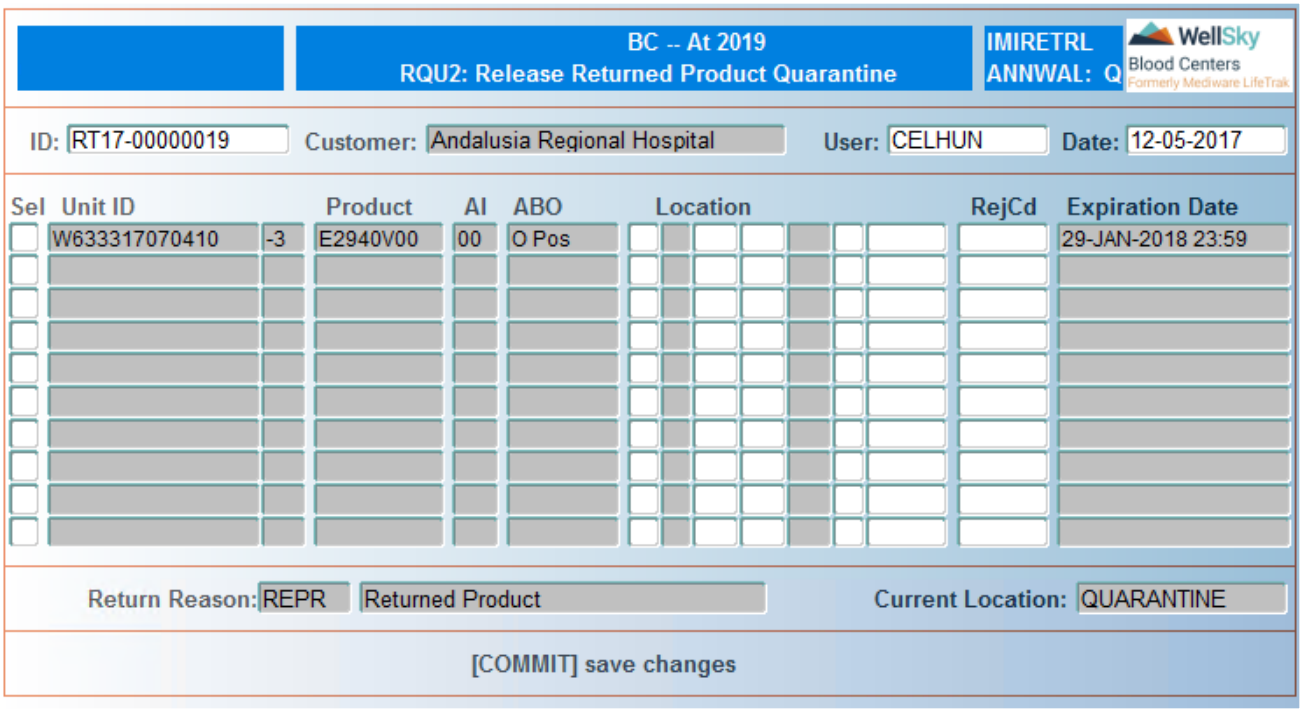


## Control Block Fields and Definitions

### ID

Enter return ID or select from LOV.

### Customer

Consignee ID automatically displays after the return ID is entered. Field is not navigable.

### User

ID of user returning units automatically displays after the return ID is entered. Field is not navigable.

### Date
Return date automatically displays after the return ID is entered. Field is not navigable.

## Detail Block Fields and Definitions

**NOTE –** Once the Return ID is entered, the system displays units. Use the UP and DOWN arrow keys to scroll through the list of products to be released from quarantine.

### Sel
Enter Y to restock the product or enter N to discard the product.

**NOTE –** If N is selected the user is required to associate a reject reason code. The cursor will move to the RejCd field. This field is only required if N is selected.

### Unit ID
Unit ID automatically displays after the return ID is entered. Field is not navigable.

### Prod
Product code automatically displays after the return ID is entered. Field is not navigable.

### Al
Aliquot automatically displays after the return ID is entered. Field is not navigable.

### ABO
Product ABO/Rh automatically displays after the return ID is entered. Field is not navigable.

### Location - consists of the following sub-fields:

**NOTE –** Field is navigable only if Y was entered in the Sel field.

#### Warehouse ID
Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

#### Device Number
Enter device number or select from LOV.

#### Rack Number
Enter rack number or select from LOV.


WellSky Corporation
Proprietary and confidential

### Tray Number

Scan, manually enter, or select tray from LOV.

### RejCd

Enter reject code or select from LOV.

**NOTE –** Field is navigable only if N was entered in the Sel field.

### Return Reason

Return reason assigned in Hospital Returns (RETURN) automatically displays. Field is not navigable.

### Current Location

Product current location automatically displays. Field is not navigable.

Press F12 (Commit) to save changes.

## At Commit

Returned products are assigned a status of AV for products that are restocked and DI for products that are discard.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.6 Place Product Quarantine (PQU)

## Intended Use

Use Place Product Quarantine to place products in quarantine due to questions about the product that require further investigation. If the product is later found to be non-transfusable, the product can be released to discard; if acceptable for transfusion, released to stock.

## Limitations

Product must be located in Distribution.

## Prerequisites

Products must be in warehouse to which you are logged in and can only be quarantined to that warehouse.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword PQU.

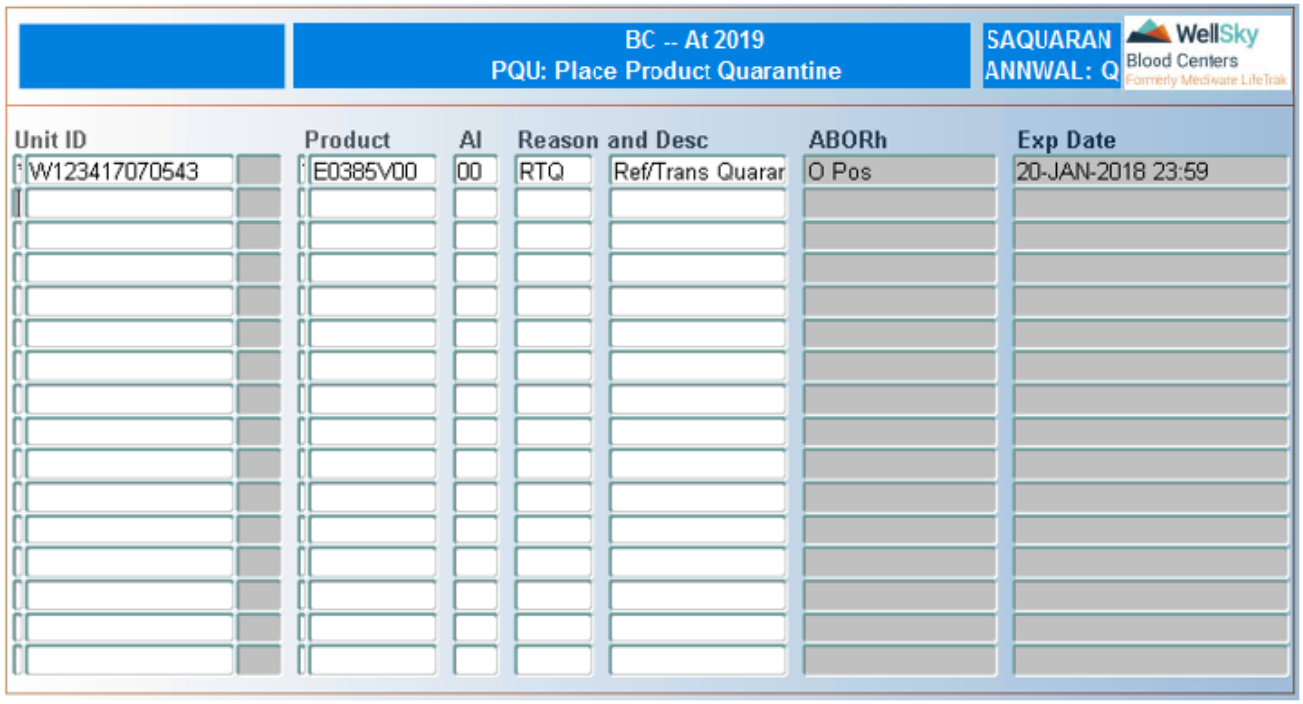


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select from LOV.

## AI

Enter aliquot number or select from LOV. Press **ENTER** to accept the default aliquot number.

## Reason and Desc

Enter quarantine reason code or select from LOV. Description automatically displays after code is entered.

## ABORh

Product ABO/Rh automatically displays after the aliquot is entered. Field is not navigable.

## Exp Date

Product expiration date and time automatically displays after the aliquot is entered. Field is not navigable.

Screen does a line-by-line commit.

# At Commit

Entered products are assigned a status of quarantine that prevents them from being allocated, packed and shipped.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.7 Release Product Quarantine (RQU)

## Intended Use

Use the Release Product Quarantine screen to allow a product in quarantine to be returned to stock or to go to discard.

## Limitations

Products with interdictions cannot be returned to stock.

## Prerequisites

Products must have been placed in quarantine due to the following:

- A quarantine reason being placed manually using Place Product Quarantine (PQU).
- A quarantine reason being placed because the product was returned from a customer.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `RQU`.

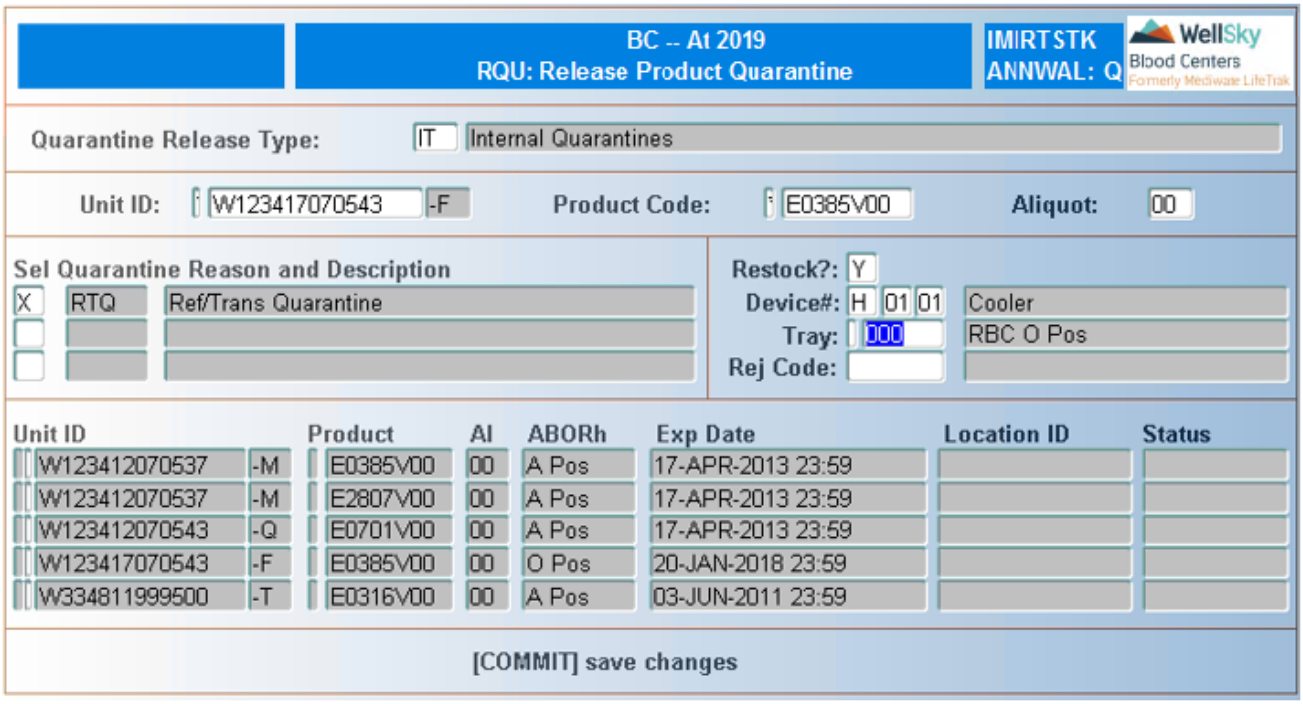

# Control Block Fields and Definitions

## Quarantine Release Type

Enter release type or select from LOV.

## Unit ID

Scan or manually enter unit ID.

## Product Code

Scan, manually enter, or select product code from LOV.

## AI

Enter aliquot number or select from LOV. Press **ENTER** to accept the default aliquot number.

# In the Release Quarantine Block

## Sel, Quarantine Reason and Description

Enter X beside the quarantine reason being released from the product.

**NOTE –** If there are multiple quarantine reasons associated to a product, the product cannot be returned to regular inventory until all quarantine reasons have been released.

## Restock?

Enter Y to restock the product. Enter N to reject the product.

## Device# - consists of the following sub-fields:

**NOTE –** Field is navigable only if Y was entered in the Restock field.

### Warehouse ID

Warehouse ID to which user is currently logged in automatically displays. Field is not navigable.

### Device Number

Enter device number or select from LOV.

### Rack Number

Enter rack number or select from LOV.

## Tray

Scan, manually enter, or select tray ID from LOV.


WellSky Corporation
Proprietary and confidential

### Rej Code

Enter reject code or select from LOV.

**NOTE –** Field is navigable only if N was entered in the Restock field.

Press F12 (Commit) to save the transaction.

## In the Quarantined Units Block

Press CTRL + F3 (Next Block) to navigate to the quarantine units block. The following information automatically displays after the quarantine release type is entered:

- Unit ID – Unit ID.
- Product – Product code.
- Al – Aliquot number.
- ABORh – ABO/Rh.
- Exp Date – Product expiration date and time.
- Location ID – Location ID (updates location entered above or Discard-Bin after entry is committed).
- Status - Status (updates to DONE after entry is committed).

Use the UP and DOWN arrow keys to scroll through the list.

Press CTRL + F4 (Previous Block) to return to the Release Quarantine Block.

## At Commit

At the time of Commit, the product is released either to discard or as available products in the user's warehouse.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.8 Reject Inventory Products (INVREJ)

## Intended Use

Use the Inventory Rejects screen to reject products from the inventory. Later, these products are packed and shipped for discard or salvage.

## Limitations

None

## Prerequisites

The user can only reject products that are in his currently assigned warehouse with an available (AV) status.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `INVREJ`.

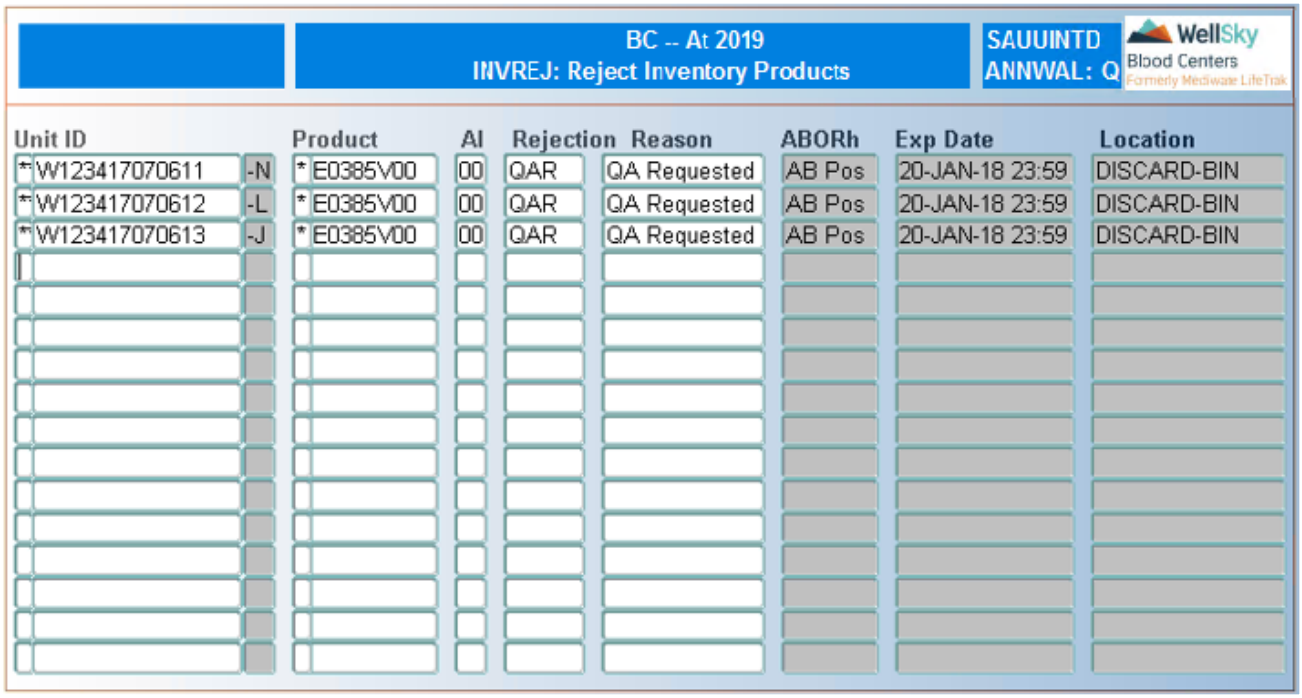


## Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Product Code

Scan, manually enter, or select product code from LOV.

### AI

Enter aliquot number or select from LOV. Press **ENTER** to accept the default aliquot number.

> **NOTE –** The system defaults to 1 in this field.

### Rejection Reason

Enter reject code or select from LOV. Reject description automatically displays after the code is entered.

### ABORh

Product ABO/Rh automatically displays after the aliquot is entered. Field is not navigable.

### Exp Date

Product expiration date automatically displays after the aliquot is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Location

Location automatically updates to DISCARD-BIN after the aliquot is entered. Field is not navigable.

Screen does a line-by-line commit.

> **NOTE –** If a product is rejected by mistake, it can be returned to an available status using Checkin Discard Products to Inventory (CHKDIS).

## At Commit

At Commit the products are moved from inventory to the reject location, and a reject code is associated to the product.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.9 Checkin Discard Products to Inventory (CHKDIS)

## Intended Use

Use the Checkin Discard Products to Inventory screen to move products from discard to available inventory when products have been rejected by mistake or moved to the outdate location.

## Limitations

None

## Prerequisites

Product must be located in discard in the user's current log-on warehouse.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `CHKDIS`.

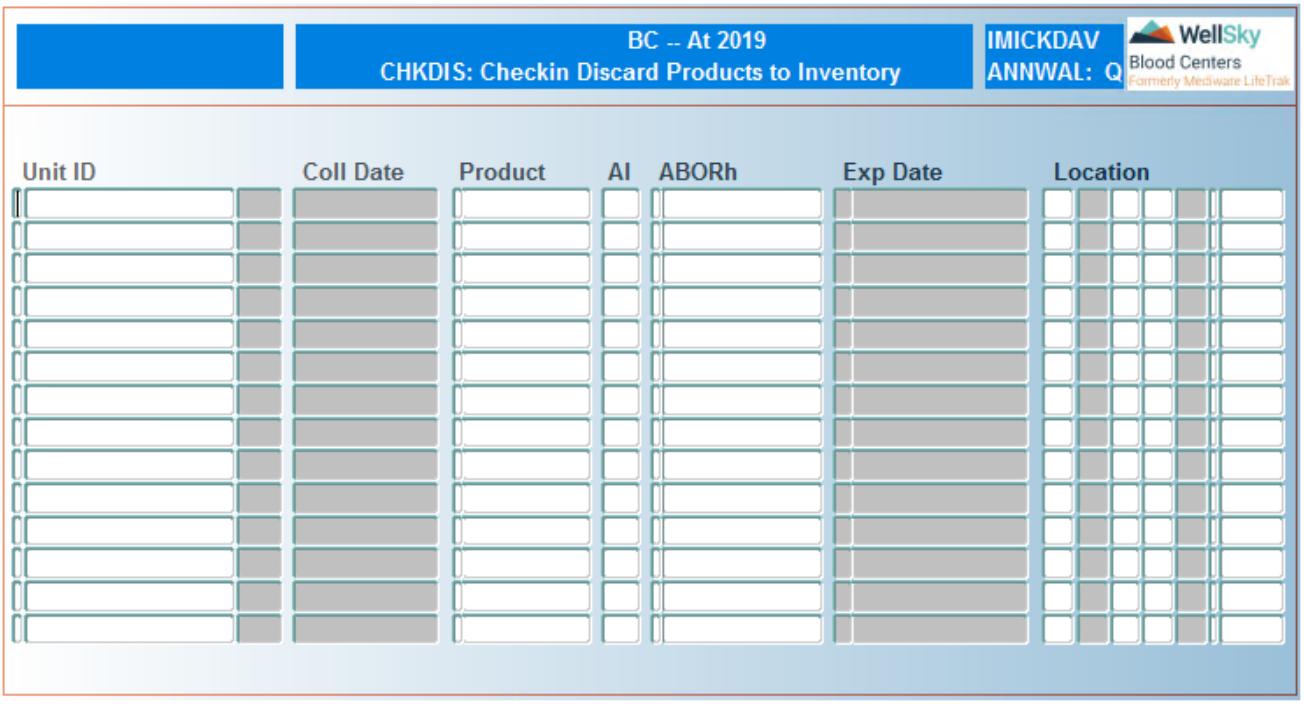


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

## AI

Enter product aliquot or select from LOV.

**NOTE –** If the product is expired, the following window opens:

Enter `Y` to continue, or enter `N` to return to the product code field.

## ABORh

Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date

Product expiration displays after aliquot is entered. Field is not navigable.

### Location

**NOTE –** The storage location may default depending on the device set-up. If entry of the device is required, enter the following fields:

#### Warehouse ID

Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

#### Device Number

Enter device number or select from LOV.

#### Rack Number

Enter rack number or select from LOV.

#### Tray Number

Scan, manually enter, or select tray from LOV.

Screen does a line-by-line commit.

## At Commit

The product is moved from discard to available inventory in the user log-on warehouse.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.10 Generate Outdates Picklist (OUTDATE)

## Intended Use

Use the Generate Outdates Picklist screen to generate a picklist before packing outdates. The system identifies expired products and prints the picklist for retrieval of expired products.

## Limitations

None

## Prerequisites

In order to generate a pick list, expired products must exist in user's currently assigned warehouse.

# Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword OUTDATE.

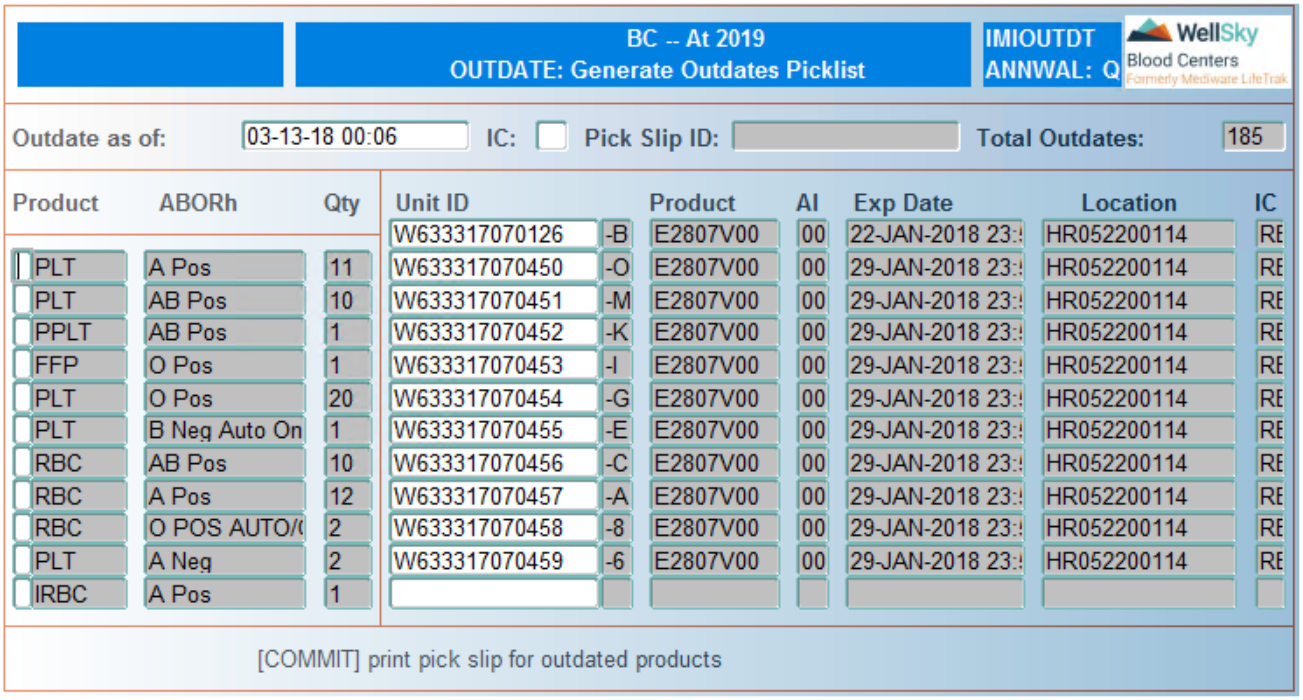


# Control Block Fields and Definitions

## Outdate as of

Enter outdate date and time in MM-DD-YY HH24:MI format. Press ENTER to accept the current date and time.

## IC

Enter inventory class or select from LOV. Leave field blank to search for outdated products in all inventory classes.

## Pick Slip ID

System-assigned pick slip ID automatically populates after the screen is committed. Field is not navigable.

## Total Outdates

Total number of outdates automatically displays after the screen is committed. Field is not navigable.

# In the Product Outdate Block

The following information automatically displays after the inventory class field is populated:

- Product – Inventory product type.
- ABORh - ABO/Rh distribution within the product type.
- Qty – Outdate quantity.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## In the Outdate Detail Block

Press **CTRL** + **F3** (Next Block) from the Product Outdate Block to navigate to the Outdate Detail Block. The following information displays:

- Unit ID – Unit ID.
- Product – Product code.
- AI – Aliquot number.
- Exp Date – Product expiration date.
- Location – Product location.
- IC – Product inventory class.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Press **CTRL** + **F4** (Previous Block) to return to the Product Outdate Block.

Press **F12** (Commit) to print the picklist for outdated products.

## At Commit

At Commit the pick list is printed.

## What to Do Next

- For normal processing, press **F8** (Exit Screen) to return to the Product Management menu.
- Move products to the outdate location using Move Outdates to Outdate Location (MOVEOUT).

# 30.2.11 Move Outdates To Outdate Location (MOVEOUT)

## Intended Use

Use Move Outdates to Outdate Location to verify retrieval of products listed on an outdate picklist before packing. Later, these products are packed and shipped for discard or salvage.

## Limitations

Although you will see all pick slips from all warehouses, you can only select products from a pick slip from the currently assigned warehouse.

## Prerequisites

A pick slip for outdates must have been generated using Generate Outdates Picklist (OUTDATE).

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `MOVEOUT`.

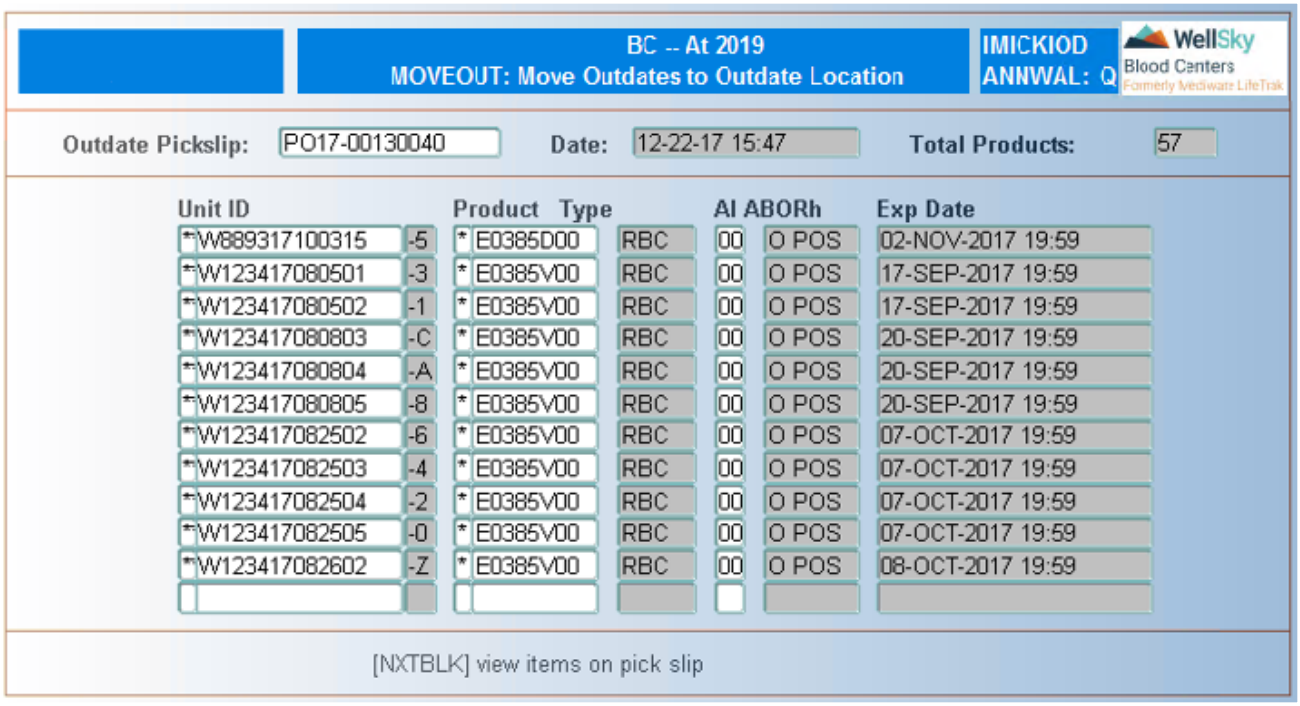


# Control Block Fields and Definitions

## Outdate Pickslip

Enter outdate pick slip ID or select from LOV.

**NOTE –** If there are no values listed in the LOV, there are no pick slips with products remaining to be reconciled.

## Date

Date and time the outdate pick slip was generated automatically displays after the pick slip ID is entered. Field is not navigable.

## Total Products

Total number of products on the outdate pick slip automatically displays after the outdate pick slip ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Scan, manually enter, or select product code from LOV.


WellSky Corporation
Proprietary and confidential

### Type
Inventory product type automatically displays after the product code is entered. Field is not navigable.

### AI
Enter the aliquot number or select from LOV.

> **NOTE –** Defaults to 1 if only one aliquot exists for the product selected.

### ABORh
Product ABO/Rh automatically displays after the aliquot is entered. Field is not navigable.

### Exp Date
Product expiration automatically displays after the aliquot is entered. Field is not navigable.

Screen does a line-by-line commit.

## Viewing Products On The Pick Slip

Press CTRL + F3 (Next Block) to view information on outdated products to be moved to the outdate location. The following window opens:

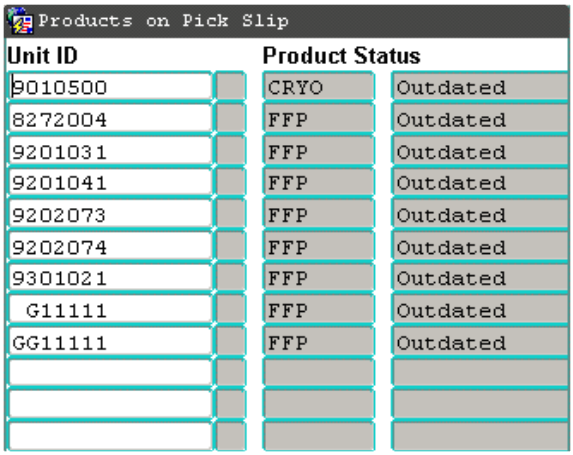


The following information displays in the query:

- Unit ID – unit ID
- Product – product code
- Status – product status, as follows:
  - Canceled – product has been canceled from that pack list
  - Chk to Discard – product has been reconciled and moved to an outdate location
  - Outdated – product has not been moved to an outdate location

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

The products are moved from inventory to the outdate location.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.12 Change Inventory Class (CHCLASS)

## Intended Use

Use the Change Inventory Class screen to change the inventory class to which a product is associated.

## Limitations

- Components in regular (RE) and special (SP) classes cannot be changed to auto/directed (AD) class.
- Inventory class can only be changed for products with an available (AV) status.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `CHCLASS`.

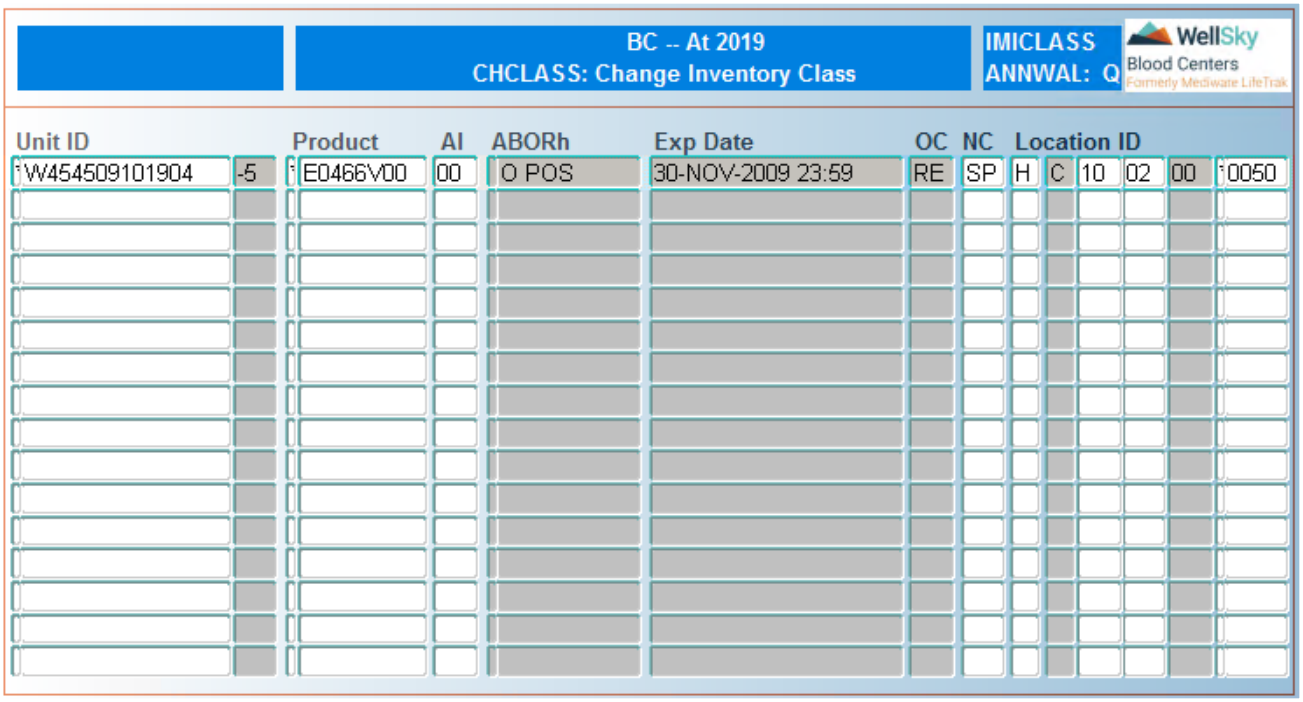



WellSky Corporation
Proprietary and confidential

# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product Code

Scan, manually enter, or select product code from LOV.

## AI

Enter aliquot number or select from LOV.

**NOTE –** Field defaults to 1 if only one aliquot exists for a product.

## ABORh

Product ABO/Rh automatically displays after the aliquot is entered. Field is not navigable.

## Exp Date

Product expiration date automatically displays after the aliquot is entered. Field is not navigable.

## OC

Current inventory class automatically displays. Field is not navigable.

## NC

Enter new inventory class or select from LOV.

## Location ID

**NOTE –** The storage location may default depending on the device set-up. If entry of the device is required, enter the following:

### Warehouse ID

Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

### Device Number

Enter device number or select from LOV.

### Rack Number

Enter rack number or select from LOV.

### Tray Number

Scan, manually enter, or select tray from LOV.

Screen does a line-by-line commit.

## At Commit

All products entered on this screen are assigned to a new inventory class in the current warehouse.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Product Management menu.

# 30.2.13 Enter Product Attributes (ATTR)

## Intended Use

Use the Enter Product Attributes screen to enter attributes associated to a product.

## Limitations

- Attributes with associated life spans cannot be added in this screen.
- Product must be located in Distribution in order to be processed through this screen.

## Prerequisites

- Attribute must be a valid attribute for the individual product.
- Product must be located in Distribution.

## Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword `ATTR`.


WellSky Corporation
Proprietary and confidential

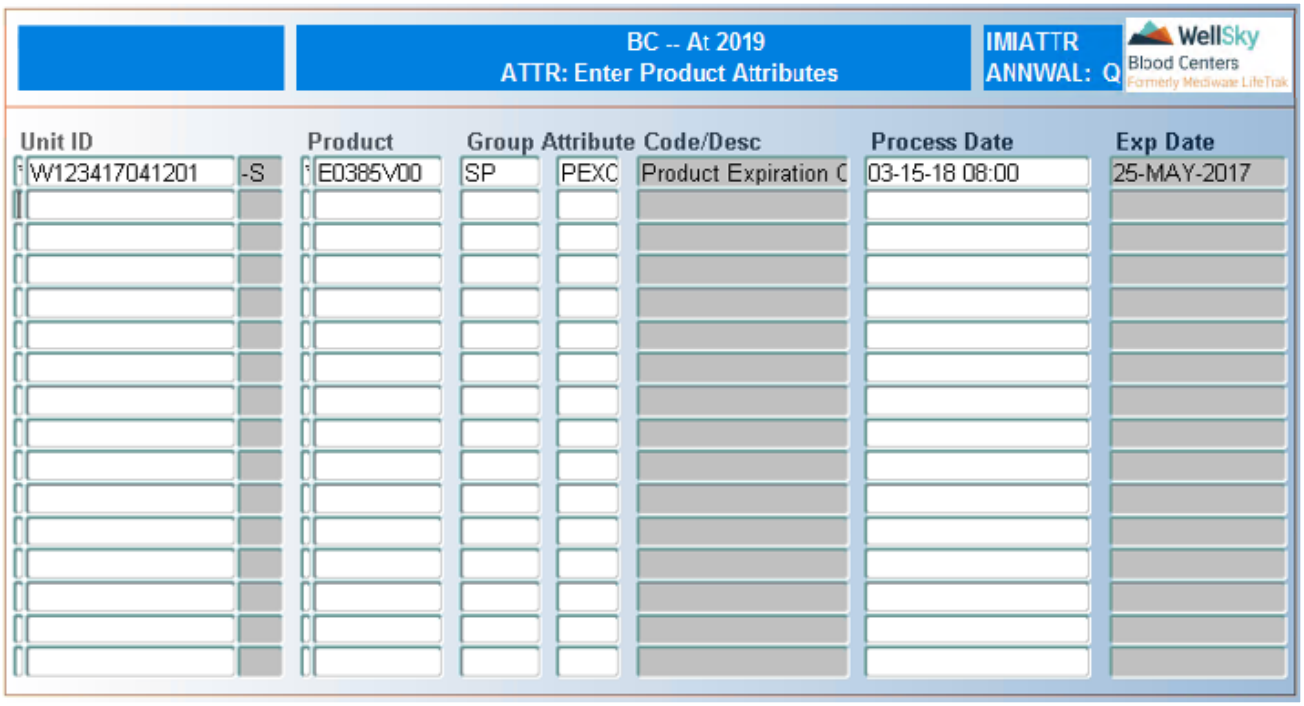


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product Code

Scan, manually enter, or select product code from LOV.

## Group

Enter attribute group or select from LOV.

## Attribute Code

Enter attribute code or select from LOV.

## Process Date

Enter date and time attribute was associated to the product using the MM-DD-YY HH24:MI format.

**NOTE –** Press CTRL + F6 (Duplicate Field) to copy the process date/time from the previous line.

## Exp Date

Product expiration date automatically displays after the product code is entered. Field is not navigable.

Screen does a line-by-line commit.

## At Commit

The attribute is added to the product.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.

# 30.2.14 Unit Transfer to Transfusion System (SNDHCLL)

## Intended Use

Use the Unit Transfer to Transfusion System screen to move data for labeled products from Lab to Transfusion in a batch process. Upon completion of the batch transfer process, two reports are generated: Successful Move Report (SUC) and a Failed Move Report (ERR).

## Limitations

- The following products do *not* move to Transfusion when the batch check-in process is performed:
- Unlabeled components.
- Components with unit and/or component level interdictions added since labeling.
- Components labeled as "Emergency Use Only, NFT, HOLD, BIO, or Manufacturing."
- Imported components that have not had import QC performed
- Pooled Components.
- There is not a check for interdictions that have been placed on the donor prior to creation of the file.
- Attributes associated to antigen testing will transfer to the attribute table; they do NOT transfer to the antigen table.
- Autologous and directed products must be linked to the recipient in Donor in order for the products to transfer to Transfusion.
- Autologous products with BIO interdictions do transfer, provided they have been linked to the recipient in Donor.
- Directed products with BIO interdictions must be manually checked into Transfusion.
- Components that have been checked into Distribution and rechecked back into Lab have CP6I attribute placed. This attribute must be removed if the component is to be transferred to the transfusion system.
- The system will export all components that meet the criteria for Transfusion, regardless of the chapter the user is logged in.

## Prerequisites

- Products must have been labeled and reside in Lab.
- Storage devices and racks must be defined for the product types.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Product Management menu or by entering the keyword SNDHCLL.

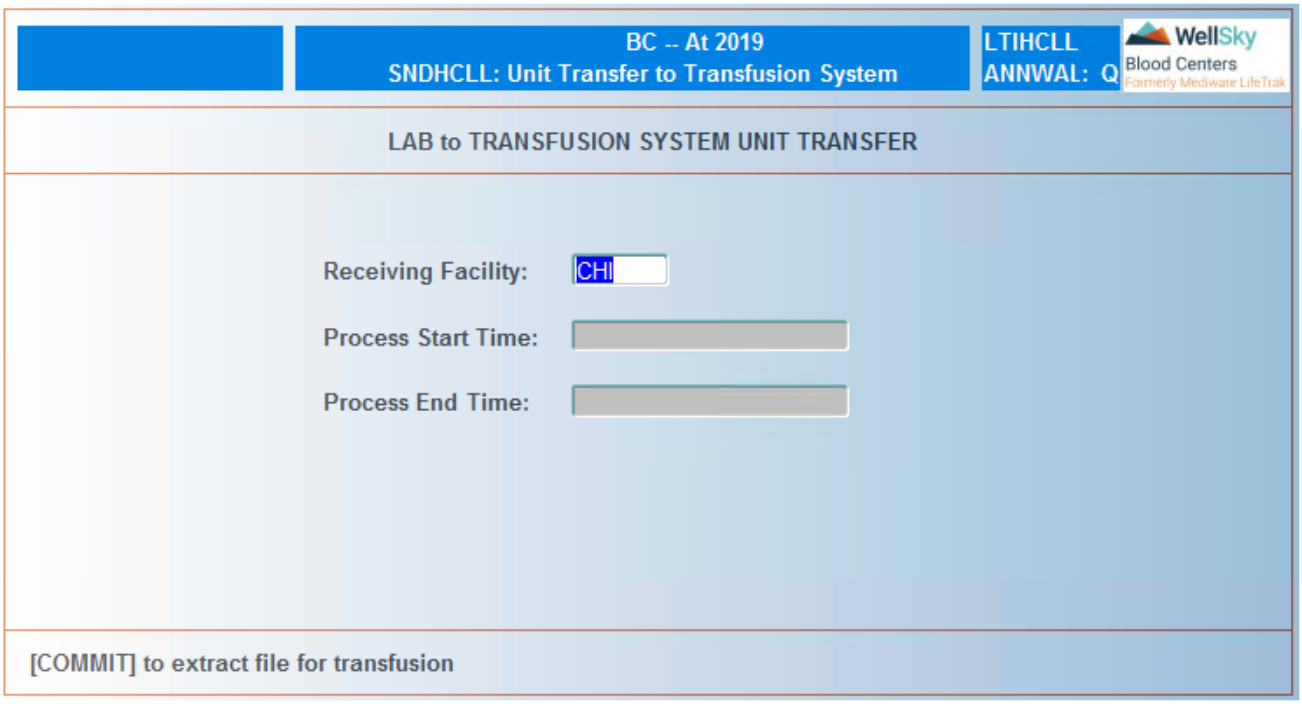


# Fields and Definitions

## Receiving Facility

Enter receiving facility code or select from LOV.

Press **F12** (Commit) after the receiving facility has been entered to start the transfer. The following window opens:

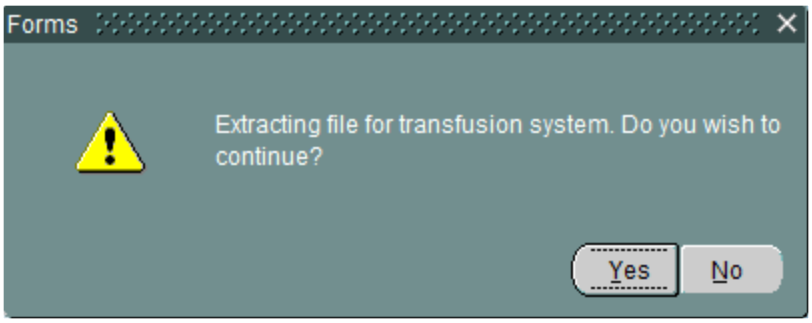


Click **Yes** to start the transfer process, or click **No** to abort the transfer process and return to the main screen.

If you click **Yes**, the following window opens:

Click OK to close the window.

### Process Start Time

Transfer process start date and time automatically display after the transfer process is complete. Field is not navigable.

### Process End Time

Transfer process end date and time automatically displays after the transfer process is complete. Field is not navigable.

## Printing the Reports

The SUC and ERR reports can be printed by using User Report Actions (PRINT) or Supervisory Report Actions (SPRINT).

The SUC report lists the units that were successfully transferred, as shown:


WellSky Corporation
Proprietary and confidential

-13 22:08 :Q
.OGREP Rel: 04
Page 1 of 1

Successful Interface file extraction from LT/Lab - dated 09-26-13 18:06
(These units have been extracted into the interface file )

| # | Unit Id | Product |
|---|---|---|
| 1 | W633313070102-L | E0385V00 |
| 2 | W633313070103-J | E0385V00 |
| 3 | W633313070104-H | E0385V00 |
| 4 | W633313070105-F | E0385V00 |
| 5 | W633313090503-Y | E0385VA0 |
| 6 | W633313090503-Y | E0385VB0 |
| 7 | W633313060511-J | E0701V00 |
| 8 | W633313070101-N | E0701V00 |
| 9 | W633313070102-L | E0701V00 |
| 20 | W633313070105-F | E2807V00 |
| 21 | W633313071012-9 | E2807V00 |
| 22 | W633313071502-A | E2807V00 |
| 23 | W633313090503-Y | E2807V00 |
| 24 | W633313090901-6 | E2940V00 |

End of Check in 09-26-13 18:06

The ERR report lists the units that were not successfully transferred, as shown:

09-25-13 22:07 :Q
GERLOGREP Rel: 04
Page 1 of 1

Errors in LT-Interface - dated 09-26-13 18:06
(These units are still in LT-LAB)

| # | Unit Id | Product | Error |
|---|---|---|---|
| 1 | W633313090503-Y | E0385 | Component Interdiction WELD |

End of Check in 09-26-13 18:06

**NOTE –** Each time data is transferred using SNDHCLL, the information in the SUC and ERR reports is overwritten. To recover data from a previous transfer, do the following:

1. Contact the Blood Centers Database Manager.
2. Access the Blood Centers database.
3. Navigate to the `/tmp` directory and then to the `/util` directory associated with your database

(for example, `/tmp/plab_util`).

4. Open the needed LTIHCLLIN_SUC.log or LTIHCLLIN_ERR.log file to view the recovered data.

## At Commit

- Products meeting transfer criteria are transferred to Transfusion.
- Component status updates to S.  Out-of-system date is set for moved products.
- Successful and Failed Moved Reports print.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Product Management menu.


WellSky Corporation
Proprietary and confidential

# 30.3 Warehouse Transport

Warehouse Transport functions are accessed from the following menu:

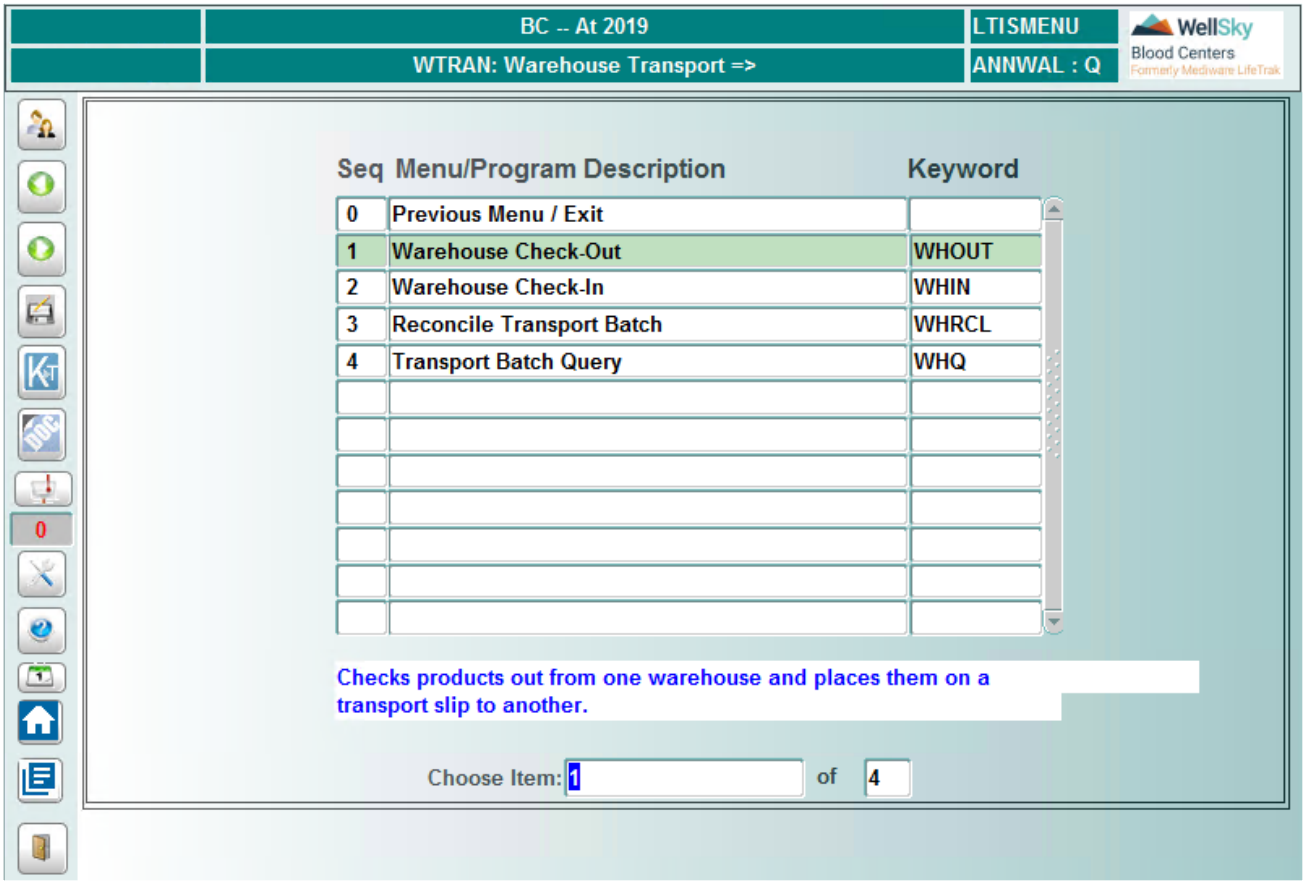


## 30.3.1 Warehouse Check-Out (WHOUT)

### Intended Use

Use the Warehouse Check-Out screen to check available products out of one warehouse, designate a target, and status the product as in transit until it is checked into the receiving warehouse. Products are checked out in batches so they can be reconciled at the receiving warehouse. A product in transit is not available for use until it has been checked into the receiving warehouse.

### Limitations

None

## Prerequisites

- All products must have a status of available before they can be checked out.
- Product must be located in user's current log-on warehouse.
- The system will assume the user's assigned warehouse to be the check-out warehouse. Users having access to multiple warehouses must login to the appropriate warehouse before using this screen.
- Only like products can be grouped in a transport batch.

## Accessing the Screen

Access this screen from the Warehouse Transport menu or by entering the keyword `WHOUT`.

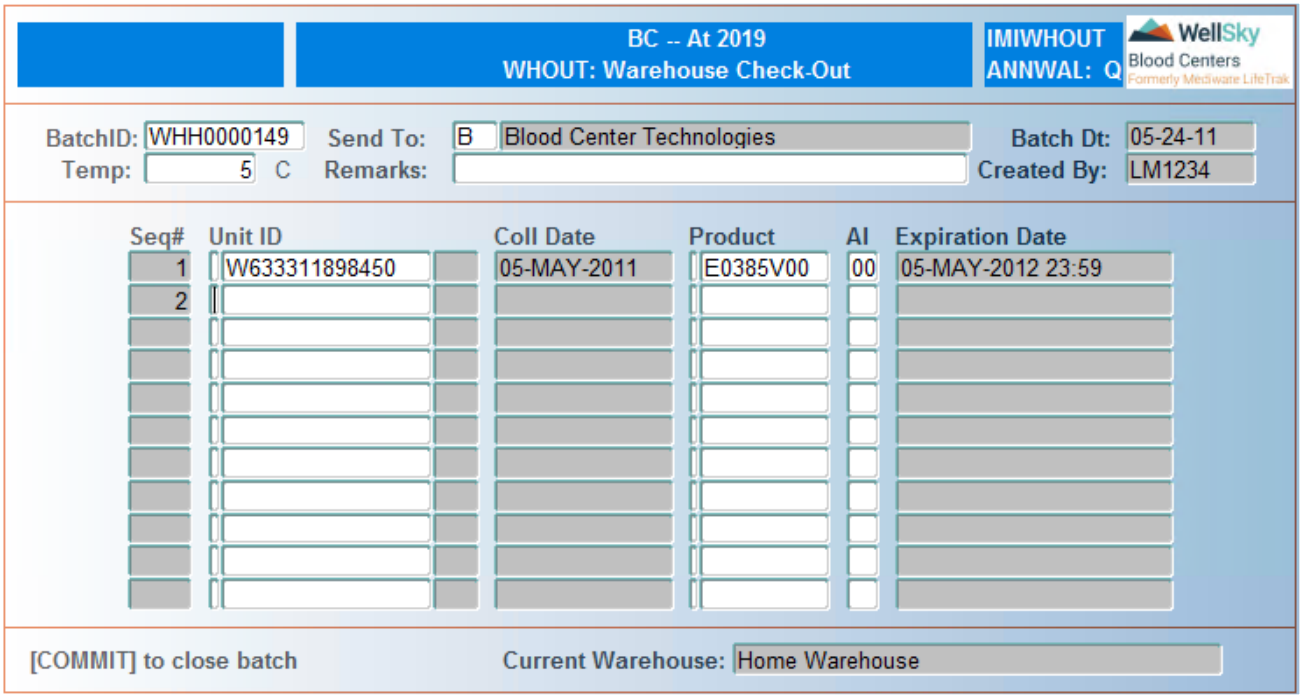


## Control Block Fields and Definitions

### Batch ID

Enter batch ID or select from LOV to add to an existing batch. Leave field blank to create a new transfer batch.

**NOTE –** If creating a new batch, the batch ID is automatically assigned after the first unit is checked into the batch.

### Send To

Enter send to warehouse ID or select from LOV.


WellSky Corporation
Proprietary and confidential

### Batch Dt
Batch creation date automatically displays after an existing batch ID is entered or when a new batch is created. Field is not navigable.

**NOTE –** This field displays the server date and not the Chapter's date based on the offset.

### Temp
Enter packing temperate (°C).

### Remarks
Enter transfer comments. A maximum of 30 characters is allowed. Entry is not required in this field.

### Created By
ID of user creating the transfer batch automatically displays after an existing batch ID is entered or when a new batch is created. Field is not navigable.

## Detail Block Fields and Definitions

### Seq#
System assigned sequence number automatically displays as products are entered into the batch. Field is not navigable.

### Unit ID
Scan or manually enter unit ID.

### Coll Date
Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

### Product
Scan, manually enter, or select product code from LOV.

### Al
Enter the aliquot number or select from LOV if more than one exists.

**NOTE –** If there is only one aliquot for the specified product code, the system automatically defaults to 1 and field is not navigable.

### Expiration Date
Product expiration date and time automatically displays after the aliquot is entered. Field is not navigable.

As each product is added to the batch, its status will be committed to the database as in transit.

**NOTE –** Regardless of the destination of the check-out batch, the system will permit any product to be checked in to the warehouse from which it was checked out. To remove a product from the batch, use Warehouse Check-In (WHIN) to check the product back into the originating warehouse.

Press F12 (Commit) to close the transfer batch. The following window opens:




Enter `Y` to close the transfer batch. Enter `N` to keep the transfer batch open.

## At Commit

- The batch will be closed.
- A transport slip will print at the user's default system printer.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Warehouse Transport menu.

# 30.3.2 Warehouse Check-In (WHIN)

## Intended Use

Use the Warehouse Check-In screen to check products into a warehouse from a transport batch created at another warehouse.

## Limitations

None

## Prerequisites

Products must be on a transport slip.

## Accessing the Screen

Access this screen from the Warehouse Transport menu or by entering the keyword `WHIN`.


WellSky Corporation
Proprietary and confidential

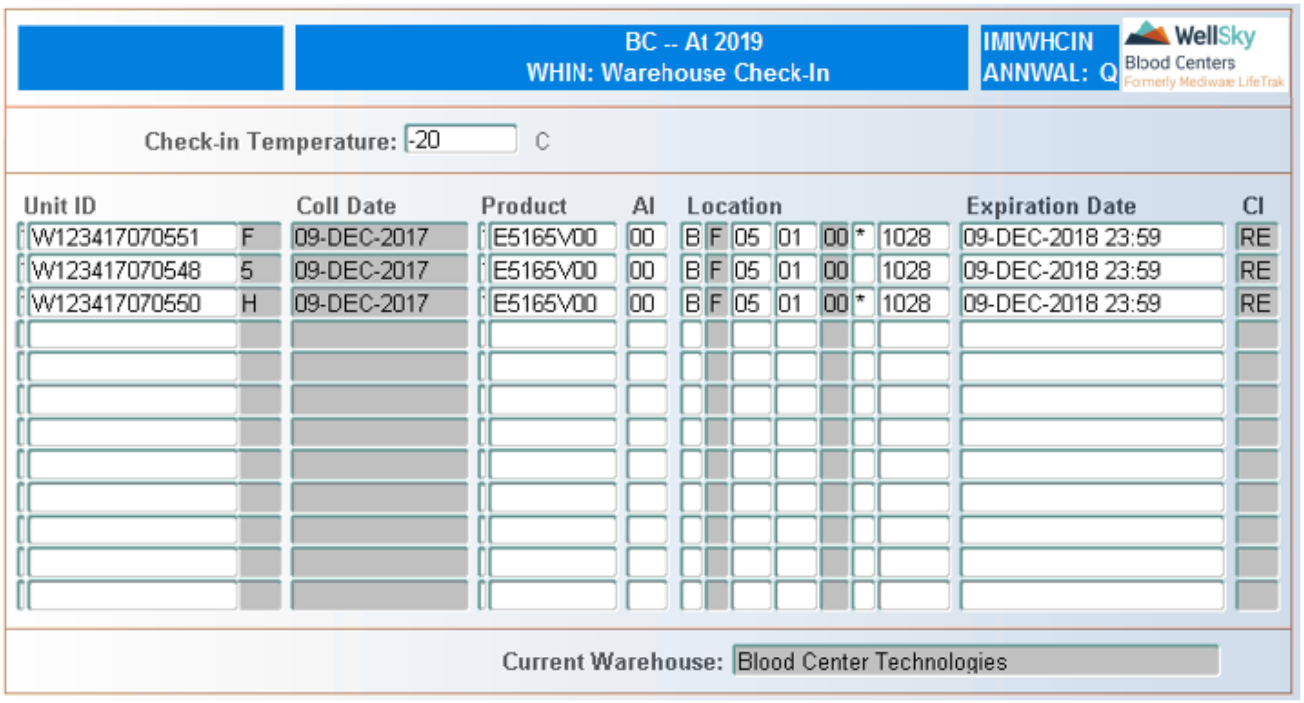


# Control Block Fields and Definitions

## Check-In Temperature

Enter product check-in temperature (°C).

**NOTE –** The receiving temperature will be validated against the packing temperature. Any out-of-limit temperature will cause the product to be quarantined and to receive a CMT interdiction.

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Unit collection date automatically displays after the unit ID is entered. Field is not navigable.

## Product

Scan, manually enter, or select product code from LOV.

## AI

Enter aliquot number or select from LOV.

**NOTE –** Field defaults to 1 if only 1 aliquot exists for the product. Field is navigable only if more than 1 aliquot exists for the product.

**NOTE –** If the product is in AD or SP inventory class, the following window opens:

Press **F8** (Exit Screen) to continue.

## Location - consists of the following sub-fields:

**NOTE –** The system automatically displays unless multiple devices are available at the check-in warehouse.

### Warehouse ID

Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

### Device Number

Enter device number or select from LOV.

### Rack Number

Enter rack number or select from LOV.

### Tray

Scan, manually enter, or select tray ID from LOV.

## Expiration Date

Product expiration date and time automatically displays after the aliquot is entered. Field is not navigable.

## CI

Product inventory class automatically displays after the aliquot is entered. Field is not navigable.

Screen does a line-by-line commit.

# At Commit

- As each unit is checked-in, it will immediately be committed to the database with a status of Available.
- Once all products have been checked in, the transport batch will be marked as reconciled by the system.
- A product not in transit may be checked into a warehouse, but will be placed under quarantine.
- A product in transit will be checked in as Available even if it is checked in at other than the destination warehouse.
- Products out of temperature range will be placed in quarantine.


WellSky Corporation
Proprietary and confidential

- A product checked back into the originating warehouse will have the status of Available as it is checked in.
- Product is placed in the same inventory class as it was located prior to transfer.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Warehouse Transport menu.

# 30.3.3 Reconcile Transport Batch (WHRCL)

## Intended Use

Use the Reconcile Transport Batch screen to check in products with a status of in transit but that have not been checked in to any warehouse.

## Limitations

None

## Prerequisites

Only unreconciled products from transport batches will be shown in this screen.

## Accessing the Screen

Access this screen from the Warehouse Transport menu or by entering the keyword `WHRCL`.

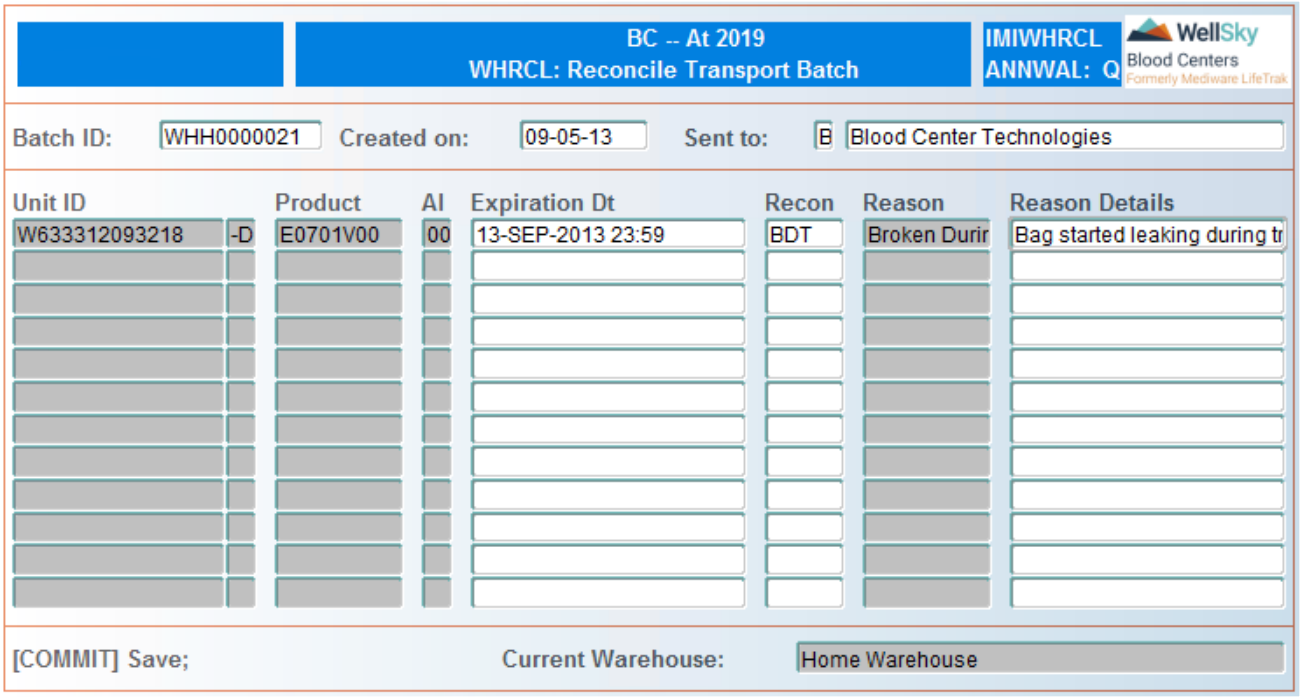

# Control Block Fields and Definitions

## Batch ID

Enter unreconciled batch ID or select from LOV.

## Created on

Batch creation date automatically displays after batch ID is entered. Field is not navigable.

## Sent To

Destination warehouse automatically displays after batch ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Unit ID(s) not reconciled automatically display after batch ID is entered. Field is not navigable.

## Product

Product code automatically displays after batch is entered. Field is not navigable.

## Al

Aliquot automatically displays after batch ID is entered. Field is not navigable.

## Expiration Dt

Expiration date automatically displays after batch ID is entered. Field is not navigable.

## Recon

Enter reconciliation code or select from LOV.

## Reason

Reconciliation reason displays after code is entered. Field is not navigable.

## Recon Details

Enter free-text comment. A maximum of 16 alphanumeric characters is allowed. Entry in this field is not required.

## Current

Warehouse user's current log-on warehouse displays. Field is not navigable.

Press F12 (Commit) to save entries.

# At Commit

- All units marked as reconciled will be placed under quarantine in the user's current log-on warehouse.
- If all listed products are marked as reconciled, the entire batch will be marked as reconciled.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Warehouse Transport menu.

# 30.3.4 Transport Batch Query (WHQ)

## Intended Use

Use the Transport Batch Query screen to view the status of transport batches, as follows:

- Within a date range you specify.
- From one specified warehouse to another specified warehouse.
- Having a specified batch status.
- Any combination of the above.
- For a single transport batch you specify.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Warehouse Transport menu or by entering the keyword `WHQ`.

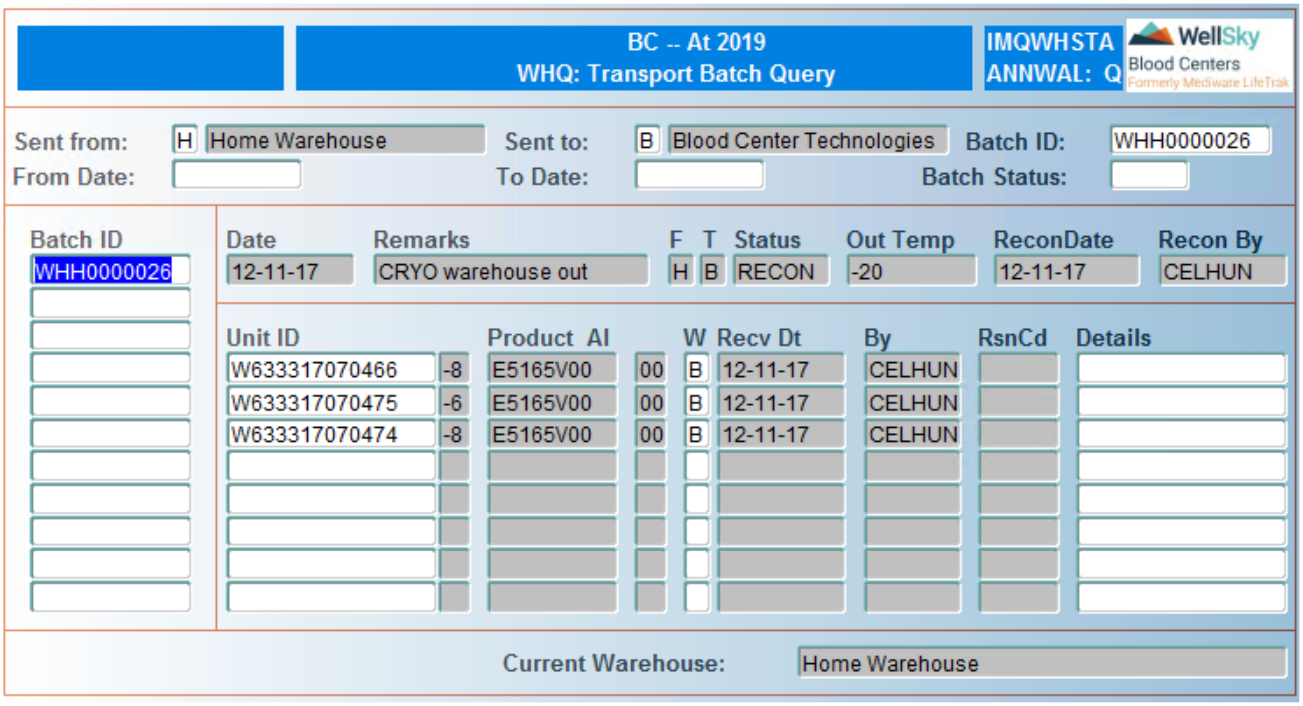

# Control Block Fields and Definitions

## Sent From

Enter warehouse ID or select from LOV. Leave field blank to query batches from any send from warehouse.

## Sent To

Enter warehouse ID or select from LOV. Leave field blank to query batches from any send to warehouse.

## Batch ID

Enter batch ID or select from LOV. Leave field blank to query all batch IDs meeting other submission criteria.

## From Date

Enter earliest batch date to be considered in MM-DD-YY format. Leave field blank to retrieve batches from the last 30 days meeting other submission criteria.

## To Date

Enter latest batch date to be considered in MM-DD-YY format. Leave field blank to default to the current date.

## Batch Status

Enter batch status code or select from LOV. Leave field blank to retrieve any batch status meeting the other submission criteria.

# Detail Block Fields and Definitions

All batches matching the criteria you have specified will be listed. Use the UP and DOWN arrow keys to highlight any displayed batch ID.

As a batch ID is highlighted, the following details will be displayed for the batch:

## Batch Data

- Date - Batch Date.
- Remarks - Batch Remarks.
- F - Originating Warehouse.
- T - Destination Warehouse.
- Status - Batch Status.
- Out Temp - Temperature when Packed.
- ReconDate – Batch reconciliation date.
- Recon by - User ID of the person who reconciled the batch.


WellSky Corporation
Proprietary and confidential

### Product Data

- Unit ID – unit ID.
- Product - Product Code.
- Al - Aliquot Number.
- W - Receiving Warehouse.
- Recv Dt - Received Date.
- By - User ID of person who checked product in.
- RsnCd - Reconciliation reason code.
- Details - Product transport details.

The current warehouse will display at the bottom of the screen as each batch is highlighted.

## At Commit

No data can be committed to the database from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Warehouse Transport menu.

# 30.4 Inventory Queries

Inventory Queries are accessed from the following menu:

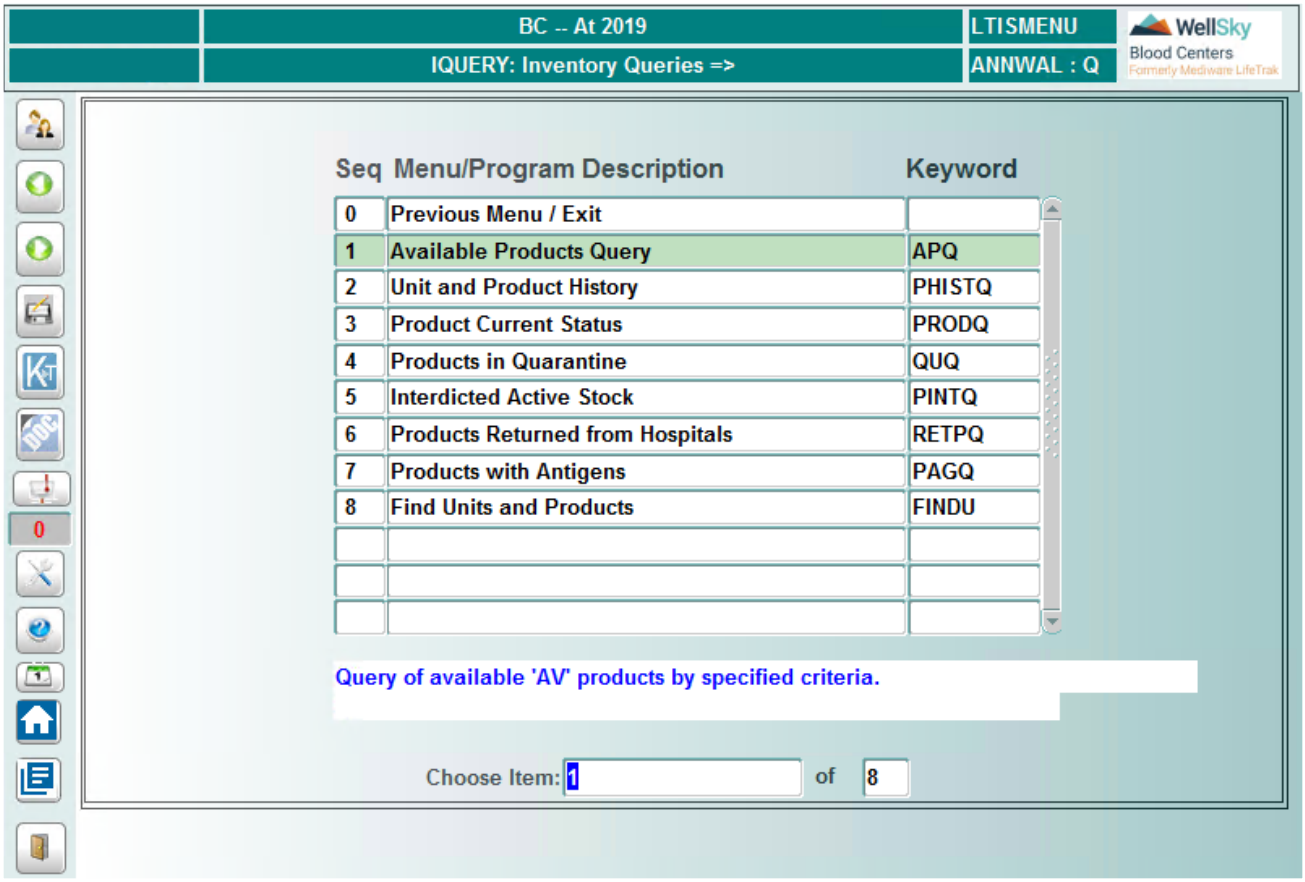


## 30.4.1 Available Products Query (APQ)

### Intended Use

Use the Available Products Query screen to review information about products that are available in the inventory for packing, including the following:

- Unit ID
- Product code
- Blood type
- Expiration date
- Attributes and antigens associated to the product
- Antigen Confirmation


WellSky Corporation
Proprietary and confidential

**NOTE –** Units with donor interdictions but with no corresponding overrides are not displayed.

## Limitations

APQ displays all autologous products in Distribution regardless of whether the product has been interdicted post-labeling or has other interdictions. Therefore, autologous products must be investigated independently of APQ.

## Prerequisites

- The inventory table must be defined for all blood types and products types to populate the ABORH field in the control block. This is done in Setup Inventory Levels for a Blood Center (LEVEL).
- Attributes associated to antigen testing need to be defined in the Test table in Lab.
- Antigen tests(ANTGN) should be defined.

## Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `APQ`.

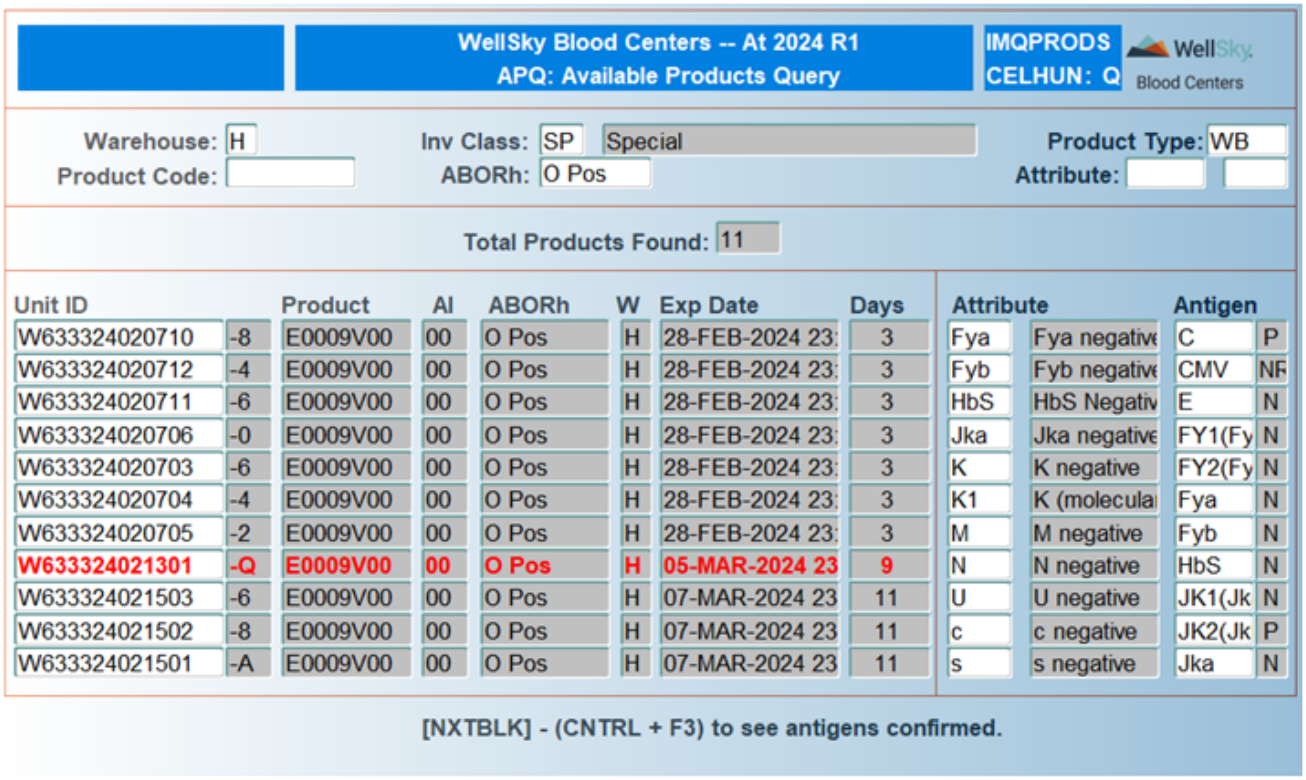

WellSky Blood Centers -- At 2024 R1
APQ: Available Products Query
IMQPRODS
CELHUN: Q
WellSky Blood Centers

Warehouse: H  Inv Class: SP Special  Product Type: WB
Product Code:  ABORh: O Pos  Attribute:

Total Products Found: 11

| Unit ID | | Product | AI | ABORh | W | Exp Date | Days | Attribute | | Antigen | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| W633324020710 | -8 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | Fya | Fya negative | C | P |
| W633324020712 | -4 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | Fyb | Fyb negative | CMV | NF |
| W633324020711 | -6 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | HbS | HbS Negativ | E | N |
| W633324020706 | -0 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | Jka | Jka negative | FY1(Fy | N |
| W633324020703 | -6 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | K | K negative | FY2(Fy | N |
| W633324020704 | -4 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | K1 | K (molecula | Fya | N |
| W633324020705 | -2 | E0009V00 | 00 | O Pos | H | 28-FEB-2024 23: | 3 | M | M negative | Fyb | N |
| W633324021301 | -Q | E0009V00 | 00 | O Pos | H | 05-MAR-2024 23 | 9 | N | N negative | HbS | N |
| W633324021503 | -6 | E0009V00 | 00 | O Pos | H | 07-MAR-2024 23 | 11 | U | U negative | JK1(Jk | N |
| W633324021502 | -8 | E0009V00 | 00 | O Pos | H | 07-MAR-2024 23 | 11 | c | c negative | JK2(Jk | P |
| W633324021501 | -A | E0009V00 | 00 | O Pos | H | 07-MAR-2024 23 | 11 | s | s negative | Jka | N |

[NXTBLK] - (CNTRL + F3) to see antigens confirmed.

**NOTE –** The unit number row will be in RED in order to be able to distinguish which row is being viewed for attributes, antigens and confirmation window.

# Control Block Fields and Definitions

## Warehouse

Enter warehouse ID or select from LOV. Press **ENTER** to accept the default warehouse ID.

**NOTE –** The system defaults to the current warehouse to which the user is logged on.

## Inv Class

Enter inventory class or select from LOV.

## Product Type

Enter product type or select from LOV.

## Product Code

Enter product code or select from LOV. Leave field blank to select all product codes.

## ABORh

Enter blood type or select from LOV. Leave field blank to select all blood types.

## Attribute

Enter attribute code or select from LOV. Leave field blank to select all attribute codes.

The computer displays the following fields:

- Total Products Found – total number of specified products found in the system.
- Unit ID – unit ID.
- Product – product code.
- AI – aliquot number for the product.
- ABORh – blood type of the product.
- Exp Date – expiration date of the product.
- Days – number of days until product expires.
- Attribute – attributes associated to the product
- Antigen – antigens associated to the product.

# Antigen Confirmation

Highlight a row that contains antigen testing and use **CTRL** + **F3** (Next Block) to open the antigen confirmation window.


WellSky Corporation
Proprietary and confidential

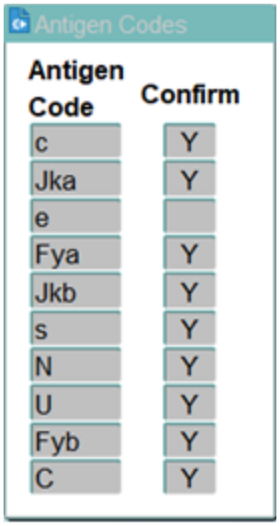
Antigen Codes

| Antigen Code | Confirm |
|---|---|
| c | Y |
| Jka | Y |
| e | |
| Fya | Y |
| Jkb | Y |
| s | Y |
| N | Y |
| U | Y |
| Fyb | Y |
| C | Y |

Displays the antigen code and if the antigen has been confirmed based on the validation table Antigen Manager - Serological/Moledular (AGMGR) in Donor.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Inventory Queries menu.

# 30.4.2 Unit And Product History (PHISTQ)

## Intended Use

Use the Unit and Product History screen to review information about a specific product, including the following:

- Product code.
- Blood type.
- Expiration date.
- Product status.
- Disposition.
- Order number with which the product was associated.
- Box ID if the unit was packed.
- Shipment number.
- Inventory class.
- Product status.
- Customer and consignee where products have been shipped.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `PHISTQ`.

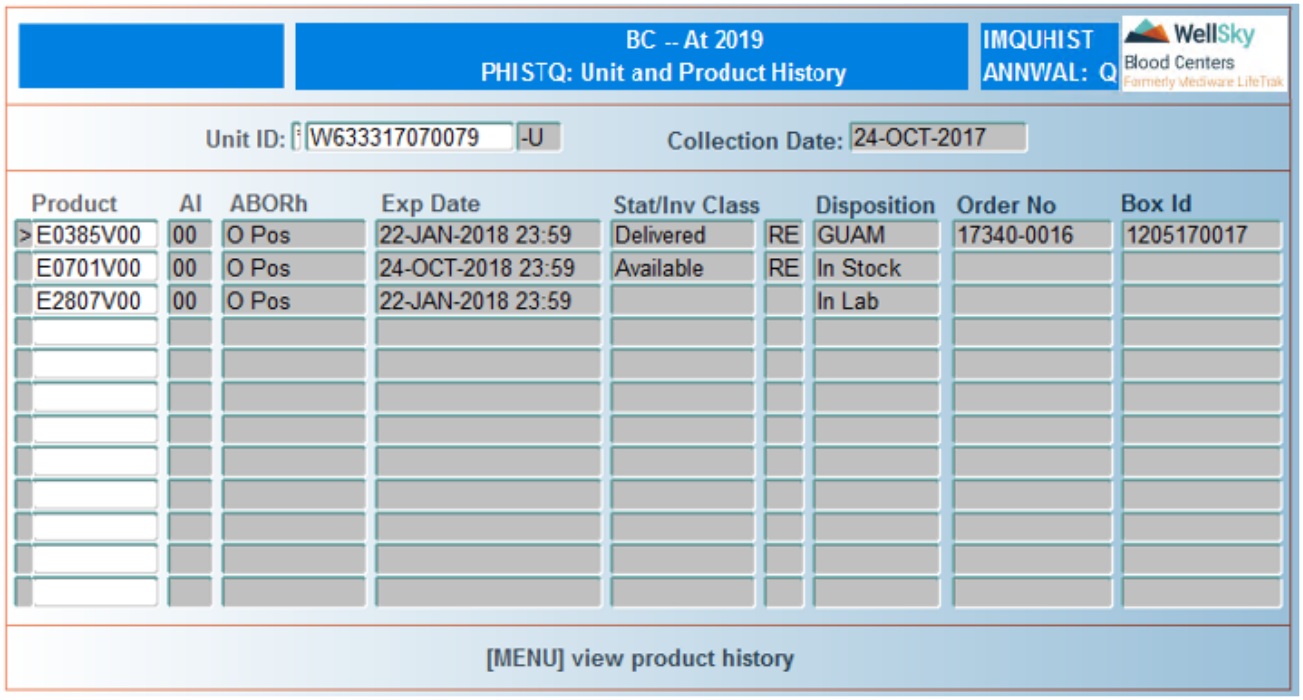


## Control Block Fields and Definitions

### Unit ID

Scan or manually enter unit ID.

### Collection Date

The system automatically displays unit collection date. Field is not navigable.

## In the Detail Block

The following fields display:

- Product – product code.
- AI – aliquot number for the product.
- ABORh – blood type of the product.

- Exp Date – expiration date and time of the product.
- Stat/Inv Class – product status and inventory class.
- Disposition – current location (for example, AV).
- Order No – order number with which the product is associated.
- Box ID – box ID if the product has been packed.

Use the UP and DOWN arrow keys to scroll through displayed data.

## Reviewing Pack Status

To review product history, scroll down to the selected product and press F6 (Menu) and the following window opens:

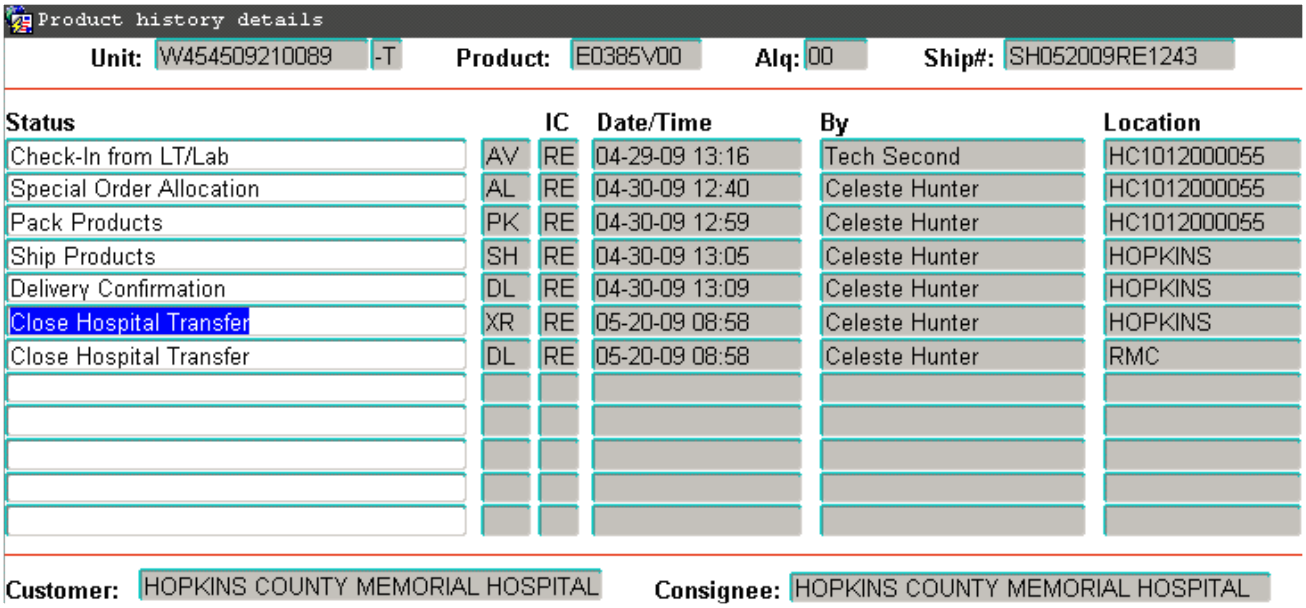


This window is used to find out the date and time a process occurred, status of product, which user entered the data, and product movements. Data displayed here cannot be updated on this screen.

The computer displays the following fields:

- Unit ID – unit ID.
- Product – product code associated to the product.
- Alq – aliquot associated to the product.
- Ship# - shipment number associated with the product.
- Status – process status (for example, Check-In from Lab).
- IC – inventory class.
- Date/Time – date and time product reached this stage.

- By – user associated to the process.
- Location – location to which a product was shipped.

Use the **UP** and **DOWN** arrow keys to scroll through displayed data.

Press **F8** (Exit Screen) to return to the query screen.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Inventory Queries menu.

# 30.4.3 Product Current Status (PRODQ)

## Intended Use

Use the Product Current Status screen to review information about a specific product, including the following:

- Product code
- Blood type
- Expiration date
- Inventory class
- Antigens and attributes
- Shipment number
- Shipped date
- Product location
- Product disposition
- Antigen confirmation

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `PRODQ`.


WellSky Corporation
Proprietary and confidential

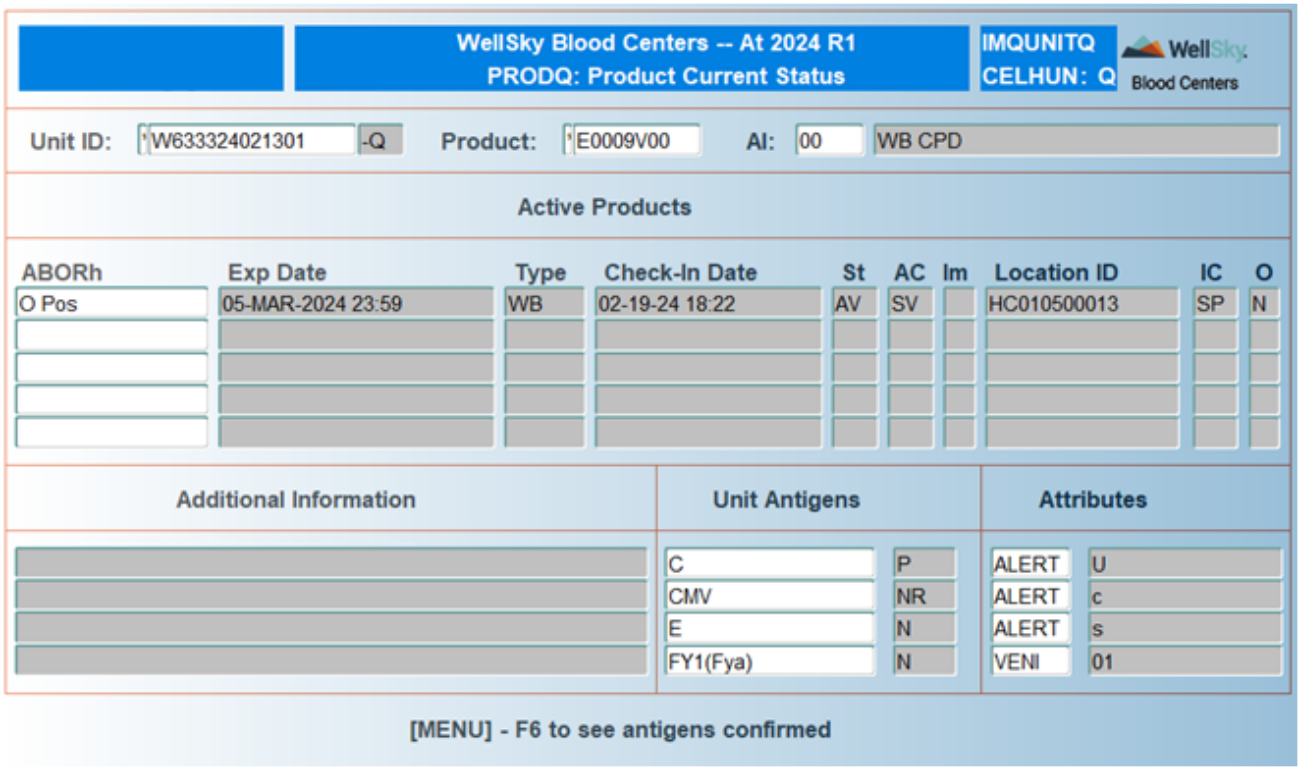


# Control Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Enter product code or select from LOV.

## AI

Enter aliquot number or select from LOV. Product description displays after aliquot is entered.

**NOTE –** The system automatically defaults to 1 aliquot.

# In the Detail Block

The following information displays after the control block is populated:

- ABORh – blood type of the product.
- Exp Date – expiration date of the product.
- Type – product type.
- Check-In Date – date product was checked in.

- Status – product status (for example, AV).
- AC – application custody (for example, LC – Lab).
- Im – import flag (Y if imported, otherwise blank).
- Location ID – identification number of storage location.
- IC – product inventory class (for example, RE).
- Work Order – work order number (if available).
- Additional Information – notes about the product.
- Unit Antigens – antigens associated to the product (serological and molecular).
- Attributes – attributes associated to the product.

## Reviewing Data

The following window opens if the product has already been shipped:

The computer displays the following fields:

- ABORh – blood type of the product.
- Exp Date – expiration date and time of the product.
- Type – product type.
- ST – product status.
- ShipDt – date product was shipped.
- Ship To – consignee for shipped product.
- Shipment No – shipment number product is associated to.
- PatID – patient ID.
- I – import flag (Y if imported, otherwise blank).
- IC – product inventory class (for example, RE).
- O – OK to ship outside the state (N = No, blank = OK).
- Additional Information – notes about the product.

Use the **UP** and **DOWN** arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

## Antigen Confirmation [F6 (Menu)]

To see which antigens have been confirmed, use **F6** (Menu) to open the window, and use **F8** (Exit Screen) to close the window.

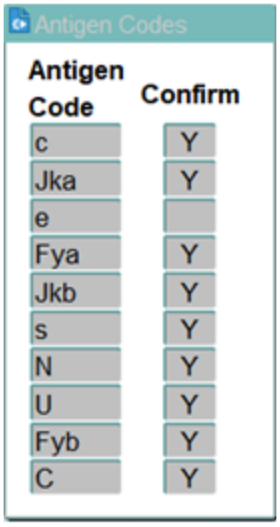


## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Inventory Queries menu.

# 30.4.4 Products In Quarantine (QUQ)

## Intended Use

Use the Product in Quarantine screen to review information about quarantined products, including the following:

- Unit ID
- Product code
- Blood type
- Expiration date
- Customer ID

## Limitations

None

## Prerequisites

None

# Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword QUQ.

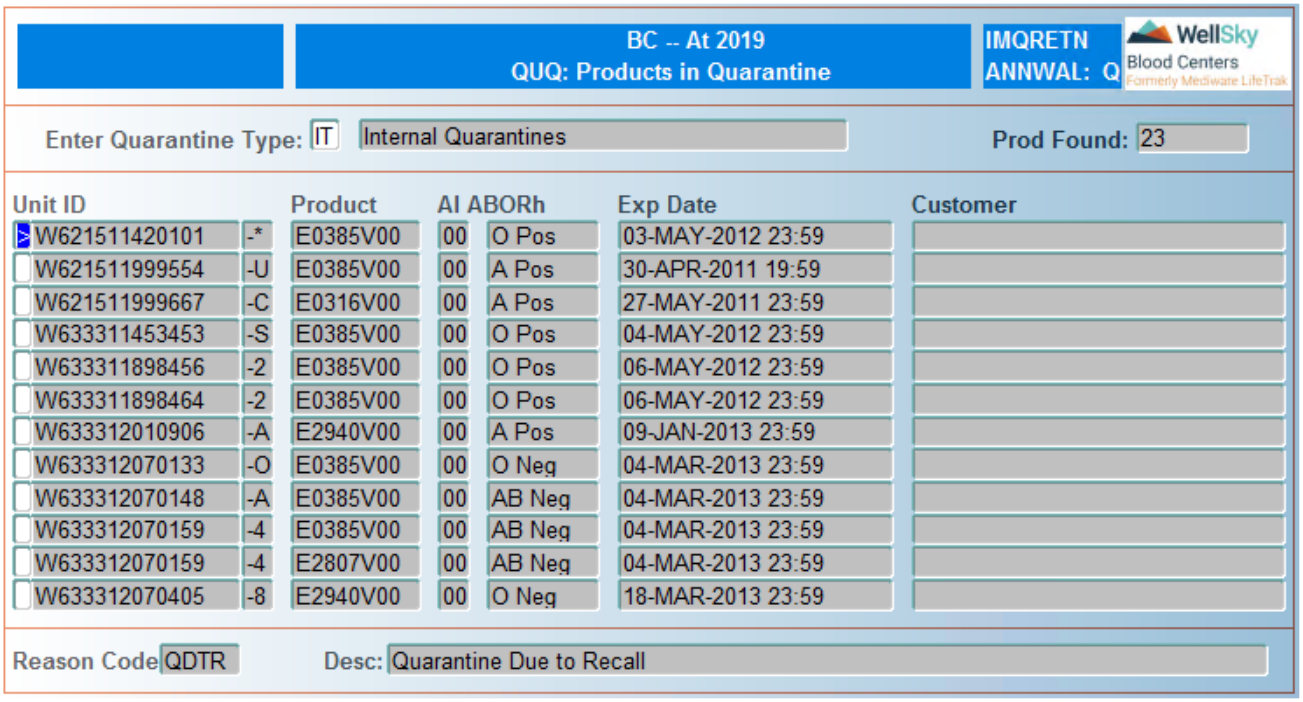


# Control Block Fields and Definitions

## Quarantine Type

Enter quarantine type or select from LOV.

## Prod Found

Number of products found in quarantine type specified automatically displays after quarantine type is entered. Field is not navigable.

# In the Detail Block

The following information displays after the quarantine type is entered:

- Unit ID – unit identification.
- Product – product code.
- AI – aliquot number for the product.
- ABORh – blood type of the product.
- Exp Date – product expiration date and time.
- Customer – customer ordering product, if applicable.

Use the UP and DOWN arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

As products are highlighted, the following displays at the bottom of the screen:

- Reason Code – quarantine reason code.
- Description – quarantine description.

### At Commit

No updates are made to the system from this screen.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Inventory Queries menu.

## 30.4.5 Interdicted Active Stock (PINTQ)

### Intended Use

Use the Interdicted Active Stock screen to review products in the inventory that have interdictions that were placed in Lab after labeling.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `PINTQ`.

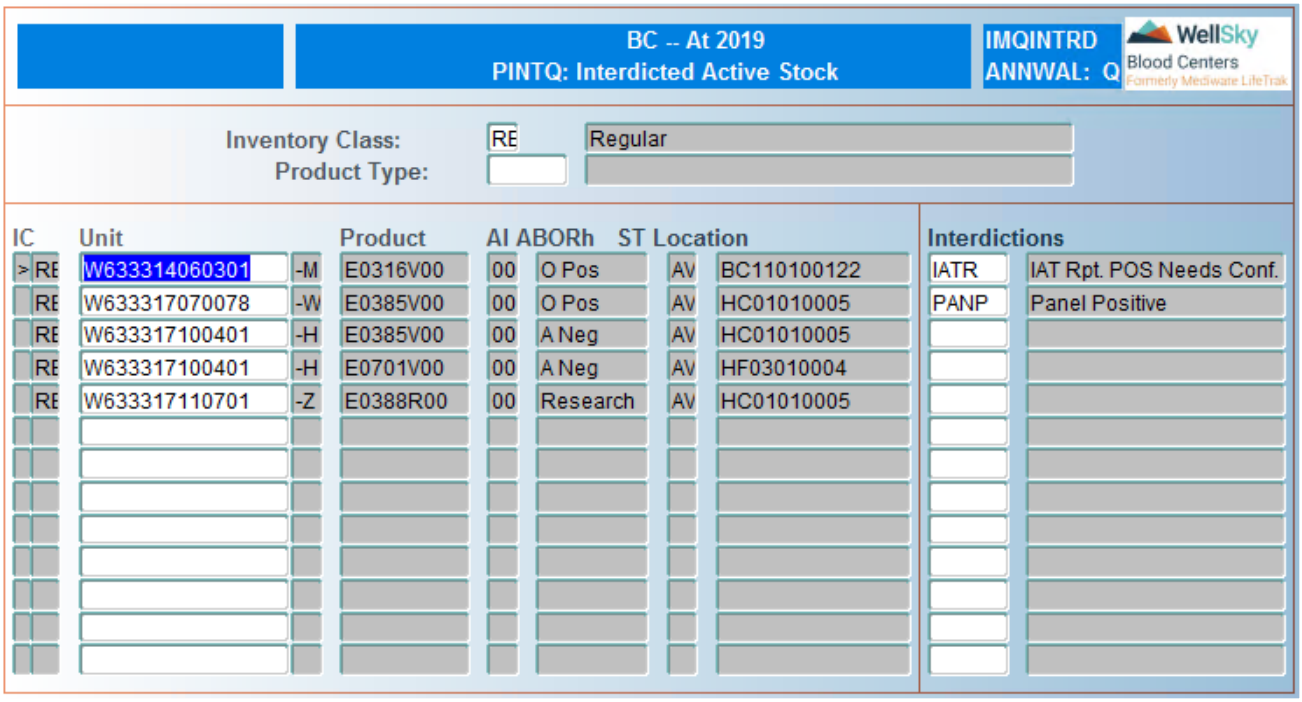


# Control Block Fields and Definitions

## Inventory Class

Enter inventory class or select from LOV. Leave field blank to select all inventory classes.

## Product Type

Enter product type or select from LOV to select product type. Leave field blank to select all product types.

# In the Detail Block

The following information displays after the control block is populated:

- IC – inventory class.
- Unit – unit ID.
- Product – product code.
- AI – product aliquot number.
- ABORh – blood type.
- ST – stock status.
- Location – location ID of the interdicted product.
- Interdictions – system displays all interdiction on the highlighted line item.

Use the **UP** and **DOWN** arrow keys to scroll through the list.


WellSky Corporation
Proprietary and confidential

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Inventory Queries menu.

# 30.4.6 Products with Antigens (PAGQ)

## Intended Use

Use the Products with Antigens screen to review product with specific antigen or group of antigens from the donor's historical and current antigen types.

Data that displays on this screen includes the following:

- Antigen list
- Unit ID
- Product code
- Expiration date
- Antigens associated to the product (serological and molecular)

## Limitations

Query only displays products with a status of available (AV).

## Prerequisites

None

## Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `PAGQ`.

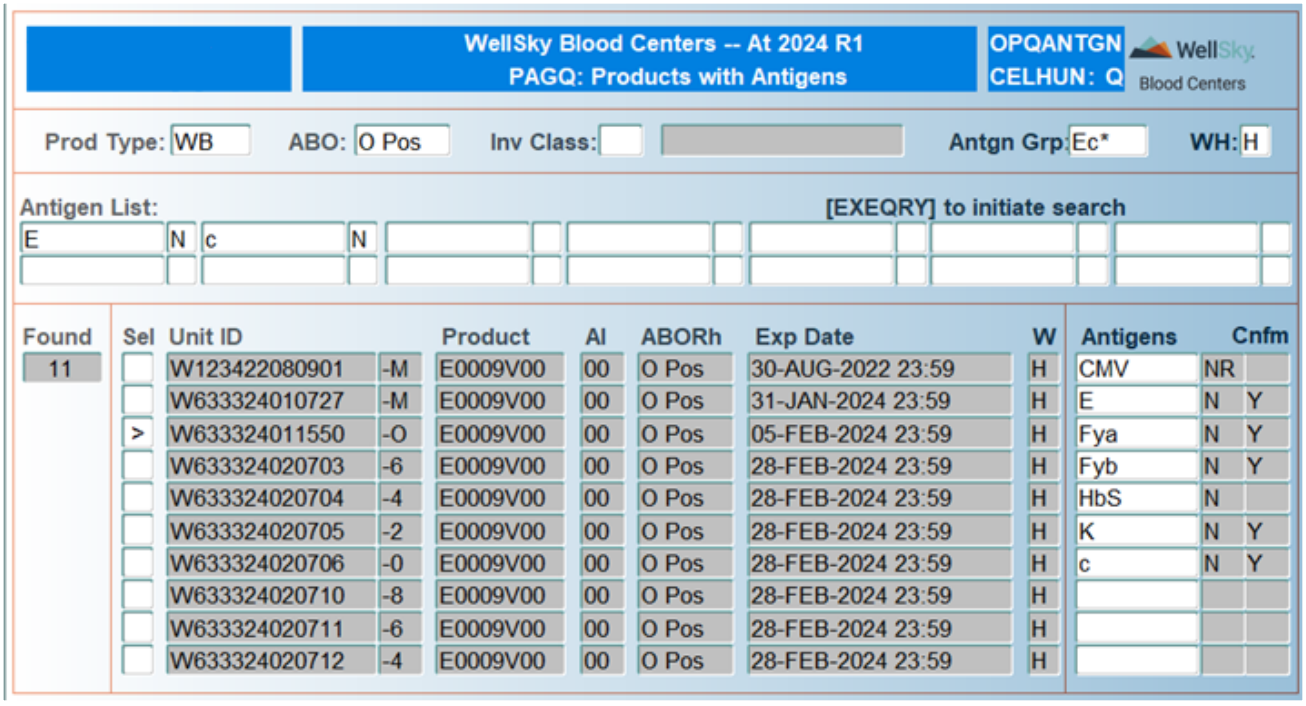


# Control Block Fields and Definitions

## Prod Type

Enter product type or select from LOV.

## ABO

Enter blood type or select from LOV. Leave field blank to select all blood types.

## Inv Class

Enter inventory class or select from LOV. Leave field blank to select all inventory classes.

## Antgn Grp

Enter antigen group or select from LOV. Press **ENTER** to specify the antigens. The antigens and results automatically populate based on the selected antigen group code.

## WH

User's current log-in warehouse automatically displays. Field is not navigable.

## Antigen List

Enter desired antigen and result (`N` or `P`).

**NOTE –** This LOV is populated from the Available Test (Test) table. It displays any group of AG, MAG, and ROUG.

Press ALT + F12 (Execute Query) after all antigens have been entered.

### In the Detail Block

The following information displays after the control block is populated:

- Found – number of requested products found in the system.
- Sel – point indicated unit being currently highlighted.
- Unit ID – unit ID.
- Product – product code.
- Al – product aliquot number.
- ABORh – product blood type.
- Exp Date – product expiration date and time.
- Antigens – all antigens associated with the product and the corresponding result.

Use the UP and DOWN arrow keys to scroll through the list.

Press CTRL + F3 (Next Block) and use the UP and DOWN arrow to review all antigens associated to a product.

### At Commit

No updates are made to the system from this screen.

### What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Inventory Queries menu.

## 30.4.7 Find Units And Products (FINDU)

### Intended Use

Use the Find Units and Products screen to view a list of products in inventory that meet the defined criteria.

### Limitations

None

### Prerequisites

None

### Accessing the Screen

Access this screen from the Inventory Queries menu or by entering the keyword `FINDU`.

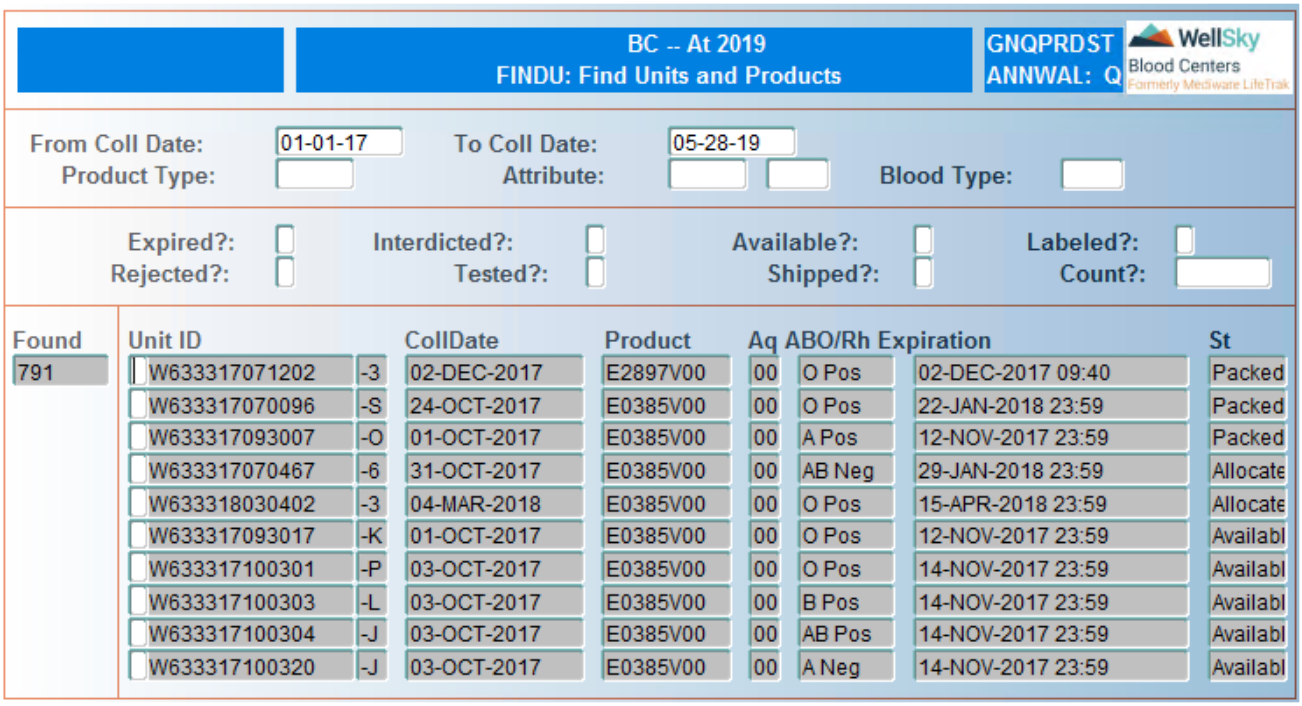


# Control Block Fields and Definitions

## From Coll Date

Enter earliest collection date to be considered in MM-DD-YY format.

## To Coll Date

Enter the latest collection date to be considered in MM-DD-YY format.

## Product Type

Enter product type or select from LOV. Leave field blank to retrieve all product types.

## Attribute

Enter valid attribute code or select from LOV. Leave field blank to retrieve all attributes.

## Blood Type

Enter blood type or select from LOV. Leave field blank to retrieve all blood types.

## Expired?

Enter `Y` to display only expired products or enter `N` to display only products that are not expired. Leave field blank to disregard product expiration status.

## Interdicted?

Enter `Y` to display only products that are currently interdicted or enter `N` to display only products that are not interdicted. Leave field blank to disregard interdiction status.


WellSky Corporation
Proprietary and confidential

### Available?

Enter Y to display only products that are in stock or enter N to display only products that are not in stock. Leave field blank to disregard availability status.

### Labeled?

Enter Y to display only products that have been labeled or enter N to display only products that are not labeled. Leave field blank to disregard label status.

### Rejected?

Enter Y to display only products that have been rejected or enter N to display only products that have not been rejected. Leave the field blank to disregard reject status.

### Tested?

Enter Y to display only products for which testing is complete or enter N to display only products with incomplete testing. Leave field blank to disregard test status.

### Shipped?

Enter Y to display only products that have been shipped or enter N to display only products that have never been shipped. Leave field blank to disregard shipped status.

### Count?

Enter a number to limit the number of records that will be retrieved. A maximum of 6 numeric characters can be entered.

## In the Detail Block

The following information displays after the control block is populated:

- Found – number of records found.
- Unit ID – unit ID for each product found.
- CollDate – collection date for each product found.
- Product – product code for each product found.
- Al – aliquot number for each product found.
- ABO/Rh – blood type for each product found.
- Expiration – expiration date and time for each product found.
- St – current status of each product found.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

## At Commit

No updates are made to the system from this screen.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Inventory Queries menu.


WellSky Corporation
Proprietary and confidential

31

# Chapter 31 - Offline Data Entry Functions


31.1 Introduction ..... 2042
31.1.1 Overview ..... 2042
31.1.2 Structure ..... 2042
31.2 Offline Data Entry Functions ..... 2043
31.2.1 Offline Product Check-In (CHKOFF) ..... 2043
31.2.2 Offline Product Packing (PACKO) ..... 2046
31.2.3 Offline Product Shipment (SHIPO) ..... 2052
31.2.4 Removal From Outdate List (ODTOFF) ..... 2057

# 31.1 Introduction

## 31.1.1 Overview

The Offline Data Entry Functions module provides a mechanism for offline entry of data after system downtime.

## 31.1.2 Structure

This following sections make up the Offline Data Entry Functions menu:

- Offline Product Check-In
- Offline Product Packing
- Offline Product Shipment
- Removal from Outdate List

**NOTE –** Reports are covered in the *WellSky® Blood Centers Reports Guide*.


WellSky Corporation
Proprietary and confidential

# 31.2 Offline Data Entry Functions

Offline Data Entry Functions are accessed from the following menu:

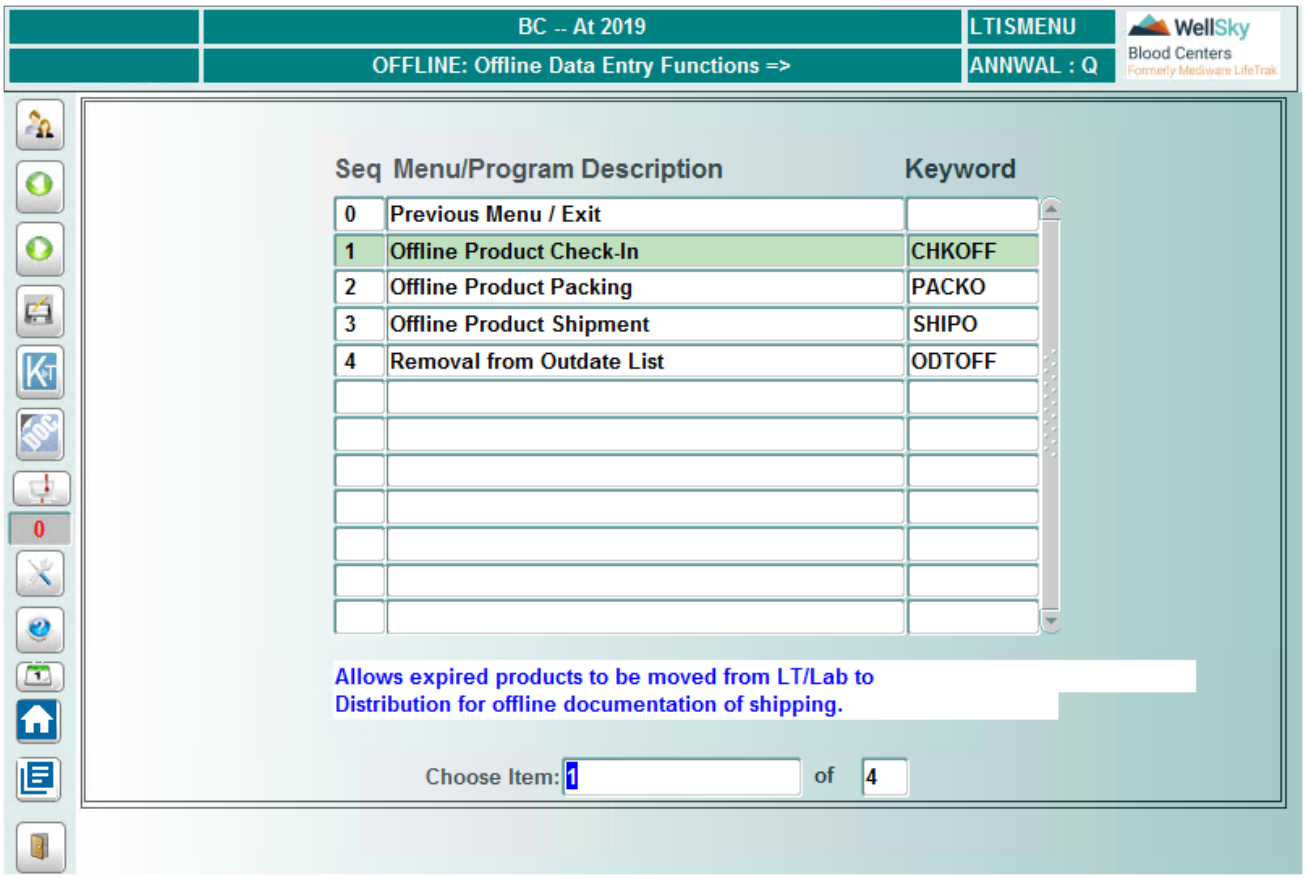


## 31.2.1 Offline Product Check-In (CHKOFF)

### Intended Use

Use the Offline Product Check-In screen to move labeled products from Lab to Distribution when the system was unavailable at the actual time of check-in. Until check-in is accomplished, no products can be packed or shipped. Offline check-in displays warnings instead of error for products with unit and/or component level interdictions; this allows actual documentation of movement with appropriate warnings for any action needed.

### Limitations

None

### Prerequisites

Products must be labeled.

# Accessing the Screen

Access this screen from the Offline Data Entry menu or by entering the keyword CHKOFF.

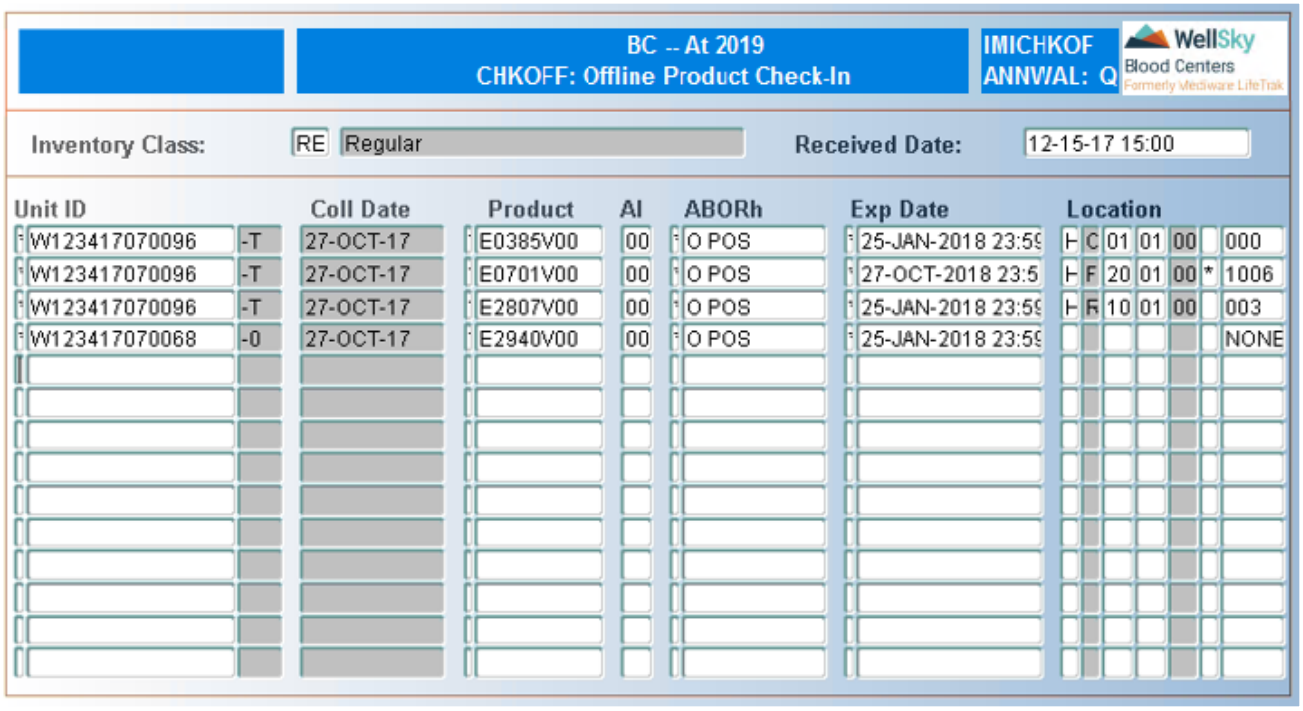


# Control Block Fields and Definitions

## Inventory Class

Enter inventory class or select from LOV. Inventory class description automatically displays after the code is entered.

**NOTE –** Only products in the entered class can be checked-in. The inventory class types are RE – regular, AD – autologous/directed, and SP – special.

## Received Date

Enter date and time products were actually checked into the system in MM-DD-YY HH24:MI format.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Coll Date

Field automatically displays collection date after the unit ID is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Prod Code
Scan, manually enter, or select product code from LOV.

### AI
Enter aliquot number or select from LOV.

> **NOTE –** The system automatically defaults to 1 if only one aliquot exists for the product.

### ABORh
Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date
Scan or manually enter expiration date in DD-MON-YYYY HH24:MI format.

### Location - consists of the following sub-fields:

#### Warehouse ID
Automatically populates with warehouse ID to which user is currently logged in. Field is not navigable.

#### Device Number
Enter device number or select from LOV.

#### Rack Number
Enter rack number or select from LOV.

#### Tray Number
Scan, manually enter, or select tray from LOV.

> **NOTE –** For subsequent products, press **Enter** in this field to use the same tray.

> **NOTE –** For like products, after the first product is checked-in, the same tray can be used for subsequent products by pressing **Enter**.

Screen does a line-by-line commit.

## At Commit
Updates made to the system at the time of Commit include:

- The data entered on this screen.
- Product status is updated to distribution and are now ready to be packed and shipped.

- Warehouse is set as the warehouse to which user is logged in.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Offline Data Entry Functions menu.

# 31.2.2 Offline Product Packing (PACKO)

## Intended Use

Use the Offline Product Packing screen to pack expired products and others physically packed while Distribution was unavailable, or at some time other than the current date and time. Products in this screen are packed from the manual pack list.

The screen also provides the following features:

- Displays unit IDs of packed order items.
- Displays information on products in a specific box.
- Closes current box and open another.
- Offline packing displays warnings instead of error for products with unit and/or component level interdictions; this allows documentation of packing with appropriate warnings for any actions needed.

## Limitations

- Program allows packing of any compatible ABO/RH or product type, regardless of the substitution flag entered for the order.
- Autologous/Biohazardous products cannot go in the same box as regular products.
- Only like products (products shipped at the same temperature) can be packed in the same box.

## Prerequisites

- When packing products for a regular order, the order must be placed.
- When packing product for a special order, the order must be placed and products must have been allocated prior to system down time.
- When packing autologous and directed orders, the order must be entered in Schedule Auto/Directed Order (AUTO).
- Only products in the user's assigned warehouse can be packed.

## Accessing the Screen

Access this screen from the Offline Data Entry menu or by entering the keyword `PACKO`.


WellSky Corporation
Proprietary and confidential

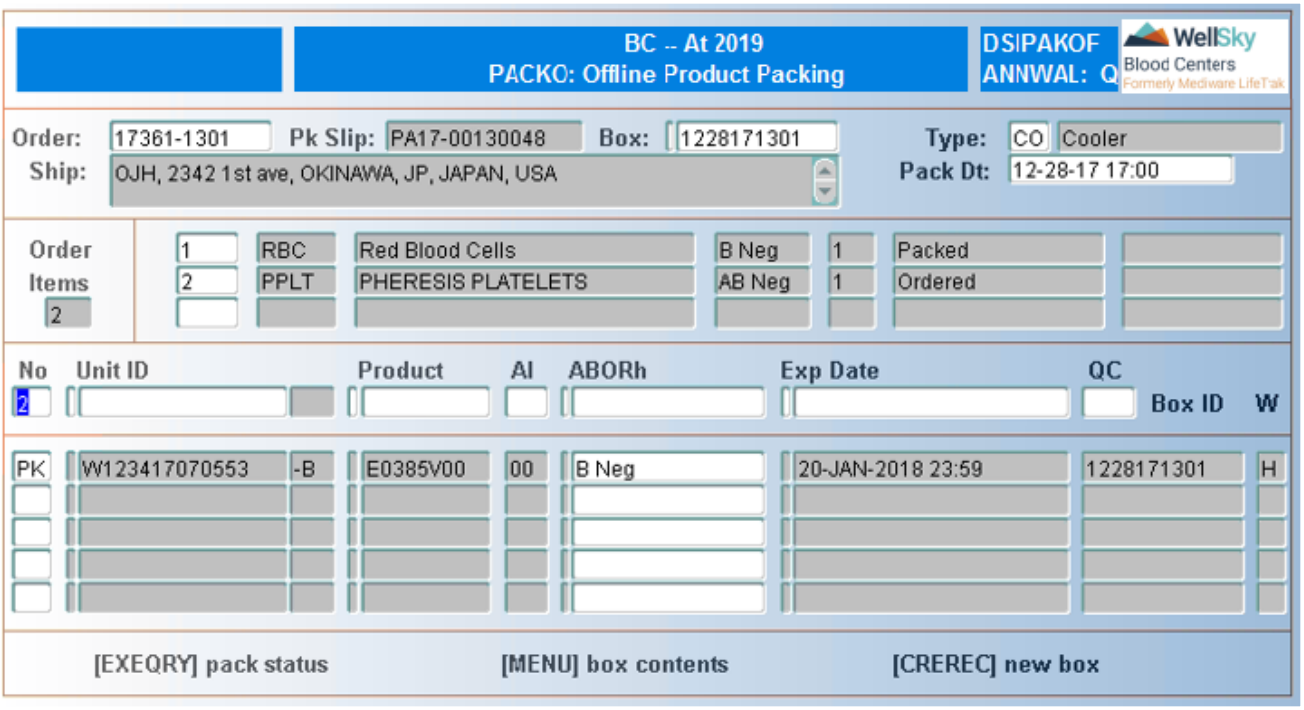


# Control Block Fields and Definitions

## Order

Enter order number or select from LOV.

## Pk Slip

System automatically assigns pick slip ID after the first product is packed in the box. Field is not navigable.

## Box

Scan, manually enter, or select box ID from LOV. Leave field blank to start a new box.

**NOTE –** If this field is left blank, the system will generate a box ID after the first product is packed.

## Type

Enter container type or select from LOV. Press ENTER to select default.

## Ship

Consignee short name and address automatically display after the order number is entered. Field is not navigable.

## Pack Dt

Enter actual packing date and time in MM-DD-YY HH24:MI format.

## In the Order Items Block

The following information automatically displays in the Order Items Block after the order number is entered.

**NOTE –** Block is navigable only from the Packing Block by pressing CTRL + F4 (Previous Block).

- Order Items - Number of line items.
- Line Item Number – System assigned sequence number.
- Product Type and Description – Inventory product type and description.
- ABO/Rh – ABO/Rh type of item ordered.
- Quantity – Quantity ordered.
- Status – Line item status.

Use the UP and DOWN arrow keys to scroll through the block.

Data in these fields cannot be modified.

Press CTRL + F3 (Next Block) to return to the Packing Block.

## Packing Block Fields and Definitions

### No

Enter item number being packed.

**NOTE –** The system automatically displays next eligible item number. To change the item number, use CTRL + F4 (Previous Block). Items must be packed by corresponding item numbers. PK automatically displays in this field after each product is packed.

### Unit ID

Scan or manually enter unit ID.

### Product

Scan, manually enter, or select product code from LOV.

**NOTE –** The LOV only displays the inventory product codes that are available for the specified customer. Inventory product codes that are not available to the customer are listed in the VCUSTPRD table. If you enter a product code that is not available, you will receive the following error:





WellSky Corporation
Proprietary and confidential

Press F8 (Exit Screen) to dismiss the message and then enter a different product.

### AI

Enter aliquot number or select from LOV.

**NOTE –** The system automatically defaults to 1 or the lowest aliquot in this field after the product code is entered.

**NOTE –** After entry in this field, user will be warned if interdictions placed after labeling are present at the unit or component level or if designated interdictions are present on the donor in Donor.

### ABORh

Scan, manually enter, or select ABO/Rh from LOV.

### Exp Date

Scan or manually enter expiration date and time in DD-MON-YYYY HH24:MI format.

### QC

If visual QC is acceptable, enter `Y`. If visual QC is unacceptable, enter `N`; the following window opens:

Enter `Y` to place the product in quarantine. Enter `N` to return to the QC field for correction.

**NOTE –** When Y is entered in the pop-up, the system places the product in Quarantine. The unit is not available for packing until released from quarantine.

## In the Packed Products Block

Field is navigable from the Packing Block by pressing CTRL + F3 (Next Block) from the No or Unit ID fields. The following data displays in this block about packed products:

- Status – Status of items packed for the order.
- Unit ID - Unit ID of packed product.
- Product - Product code packed.
- AI – Aliquot of packed product.
- Box ID – ID of box product packed in.

Press CTRL + F4 (Previous Block) to return to the Packing Block.

# Viewing Pack Status

Press ALT + F12 (Execute Query) to view packed and allocated products. The following window opens:

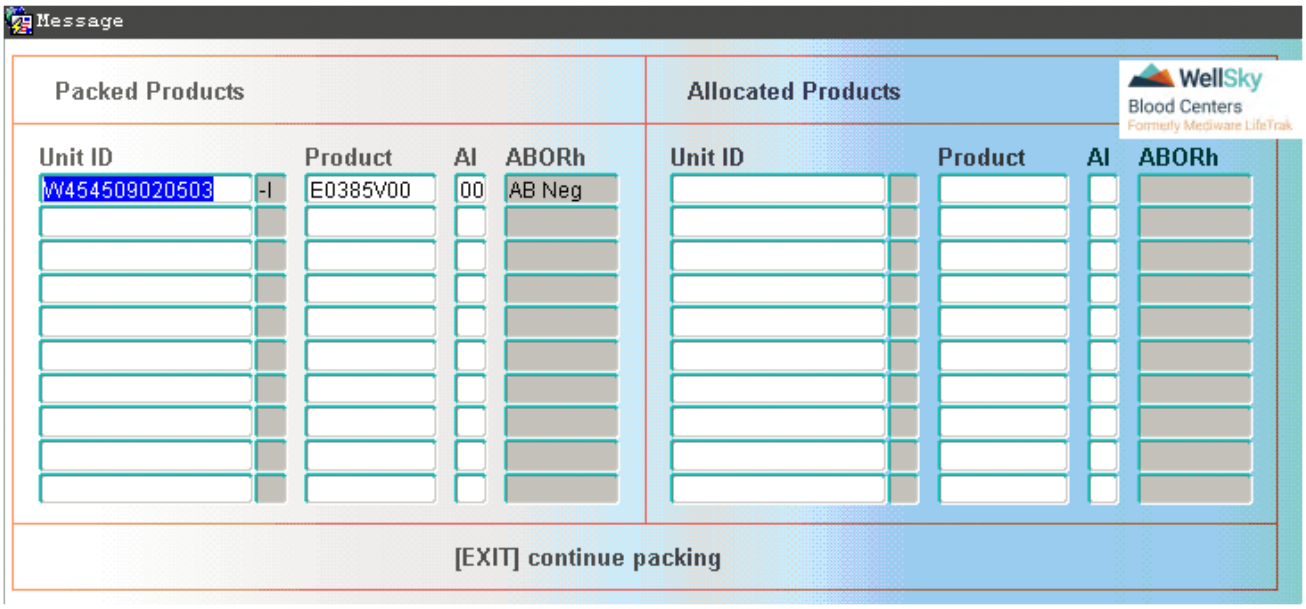


The following data appears if present:

- Packed Products- Products packed for the order appear in this block.
- Unit ID – Unit ID.
- Product – Product Code.
- AI - Aliquot.
- ABORh – ABO/Rh.
- Allocated Products - Products allocated for the order appear in this block.
- Unit ID – Unit ID..
- Product – Product Code.
- AI - Aliquot.
- ABORh – ABO/Rh.

Use the UP and DOWN arrow keys to scroll through the list.

Data cannot be updated in this screen.

Press F8 (Exit Screen) to return to the main screen.

# Viewing Items in the Box

Press F6 (Menu) to view items in the current box. The following window opens:


WellSky Corporation
Proprietary and confidential

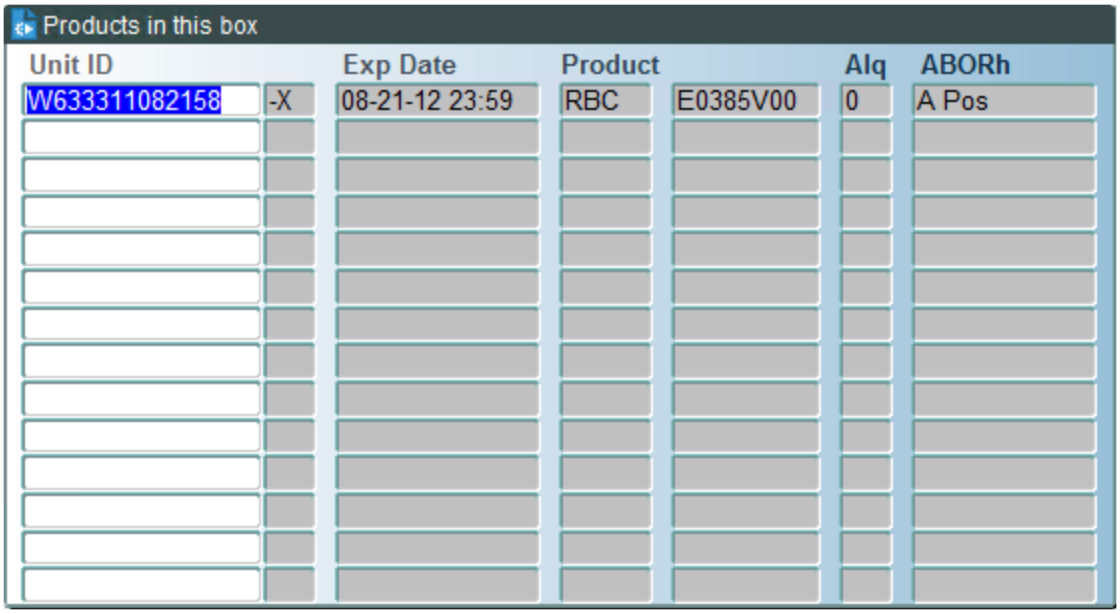


The following data displays:

- Unit ID – Unit ID.
- Exp Date – Product expiration date.
- Product Desc – Product code and description.
- Al - Aliquot.
- ABORh – Product ABO/Rh.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

Data cannot be updated in this screen.

Press **F8** (Exit Screen) to return to the main screen.

## Closing and Creating a New Box

Press **CTRL** + **F2** (Create Record) to close the current box or create a new box. The following window opens:

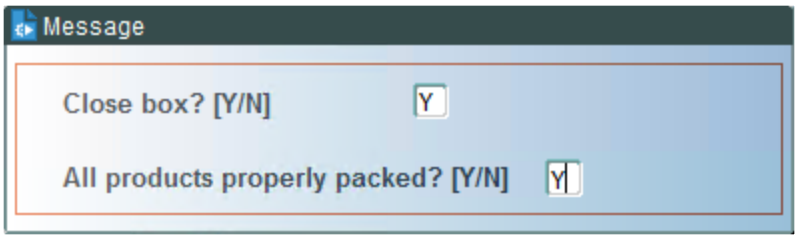


### Close Box?

Enter `Y` to close the box. Enter `N` to leave box current box open and start a new box.

### All products properly packed?

Enter `Y` if all items were properly packed. Box status will update to closed. Cursor returns to the Type field.

**NOTE –** If Y is entered in both fields, a new box ID displays at the top of the screen after the next product is packed in a new box.

Enter `N` if all items were not properly packed. Box status remains open. Cursor returns to the Type field.

Screen does a line-by-line commit.

**NOTE –** If exiting while order item is partially filled, the system automatically places the order on back order.

**NOTE –** A warning message displays when the defined capacity has been reached.

## At Commit

Updates made to the system at the time of Commit include the following:

- Boxes will be assigned to the warehouse into which the user is logged.
- Product status updated to packed.
- Order status updates.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Offline Data Entry Functions menu.

# 31.2.3 Offline Product Shipment (SHIPO)

## Intended Use

Use the Offline Product Shipment screen to ship boxes when the actual shipment date and time was other than the current time and date, or to add to an existing offline shipment. This screen associates many boxes from one or more orders going to the same consignee as a single shipment.

The screen also provides the following features:

- Displays information on products in a specific box.
- Displays consignees of pending shipments in the same geographical zone as the current shipment.
- Allows manual adjustment of charges via a pop-up screen that appears prior to printing the pack list.

## Limitations

This screen should not be used to mix current shipments with offline shipments.


WellSky Corporation
Proprietary and confidential

## Prerequisites

- Boxes must have been packed using Pack Products (PACK), Offline Product Packing (PACKO), or Pack Recovered Plasma (PACKRP).
- Boxes must have a status of closed.

## Accessing the Screen

Access this screen from the Offline Data Entry Functions menu or by entering the keyword SHIPO.

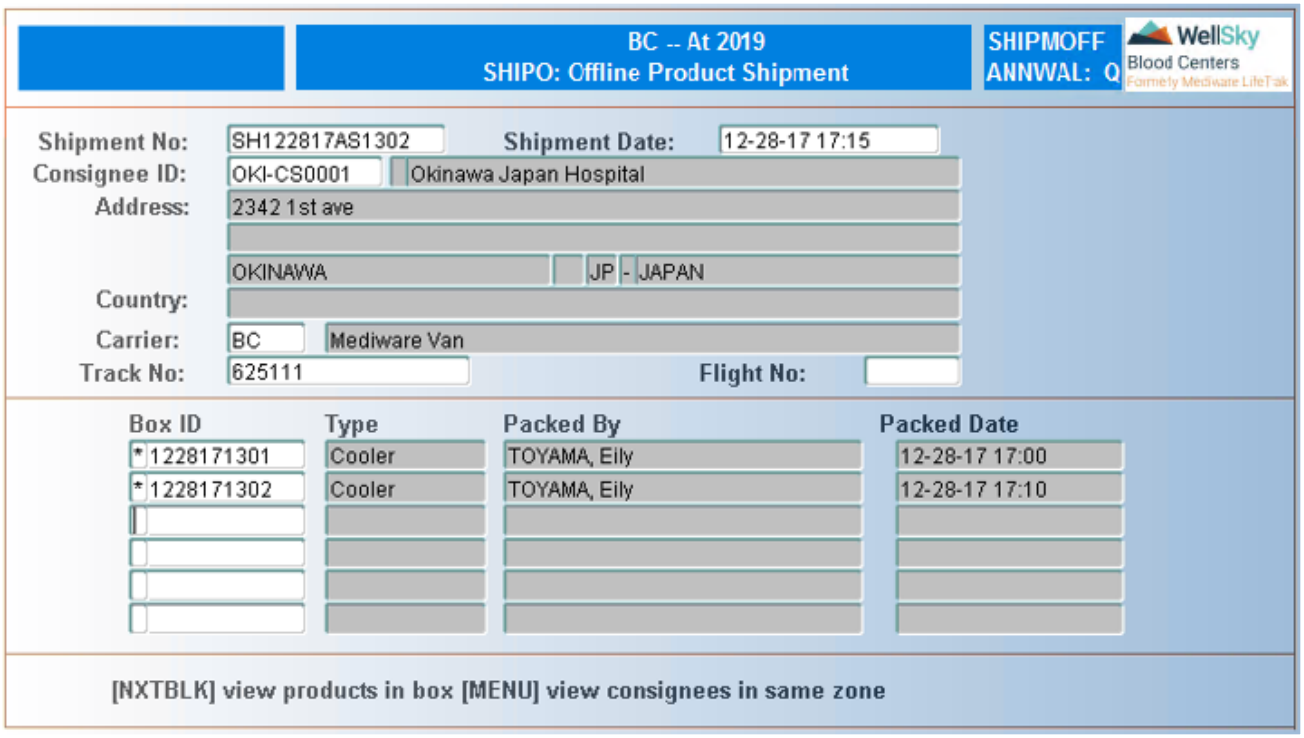


## Control Block Fields and Definitions

### Shipment No

Enter shipment number or select from LOV. Leave field blank to start a new shipment; System assigned shipment number automatically displays after the first box is shipped.

**NOTE –** If an existing shipment number is chosen, the system displays consignee information and moves to the Box ID field. If the field is left blank, the cursor moves to the Consignee ID field.

### Shipment Date

Enter actual shipment date and time in MM-DD-YY HH24:MI format.

### Consignee ID

Enter consignee ID or select from LOV. Consignee name automatically displays after the ID is entered.

### Address
Consignee address automatically displays after the consignee ID is entered. Field is not navigable.

### Carrier
Enter carrier ID or select from LOV.

### Track No
Enter tracking number. A maximum of 15 characters is allowed.

### Flight No
Enter flight number. A maximum of 6 characters is allowed. Entry is not required in this field.

## Detail Block Fields and Definitions

### Box ID
Scan, manually enter, or select box ID from LOV.

### Type
Box type automatically displays after the box ID is entered. Field is not navigable.

### Packed By
Name of person performing packing automatically displays after the box ID is entered. Field is not navigable.

### Packed Date
Packing date and time automatically displays after the box ID is entered. Field is not navigable.

## Reviewing Box Contents
Press CTRL + F3 (Next Block) to review information on boxes in the current shipment. The following window opens:

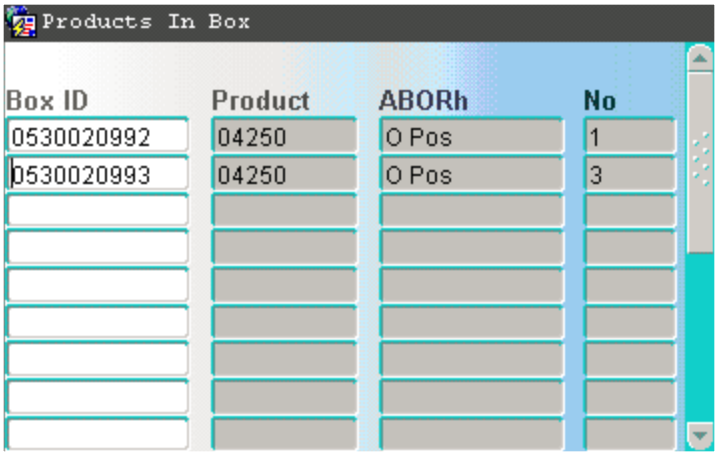


The following information displays in the query:

- Box ID – box identification number.
- Product – product code.
- ABORh – ABO/Rh.
- No – number of products of that ABO/Rh in the box.

Use the UP and DOWN arrow keys to scroll through the list.

The displayed data cannot be updated on this screen.

Press F8 (Exit Screen) to return to the main screen.

## Reviewing Consignees In The Same Zone

Press F6 (Menu) to view pending shipments in the same zone. The following window opens:

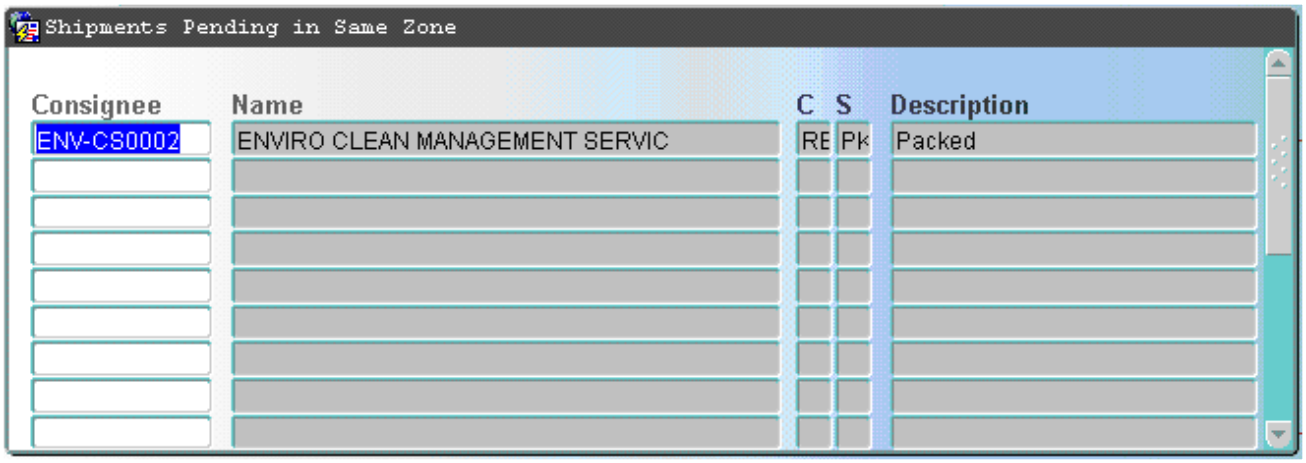


The following information displays in the query:

- Consignee – consignee ID.
- Name – name of consignee.
- C – order type.
- S – order status.
- Description – status description.

Use the UP and DOWN arrow keys to scroll through the list.

Press F8 (Exit Screen) to return to the entry screen.

## Printing the Pack List

Press F8 (Exit Screen) to print the pack list. The following window opens:

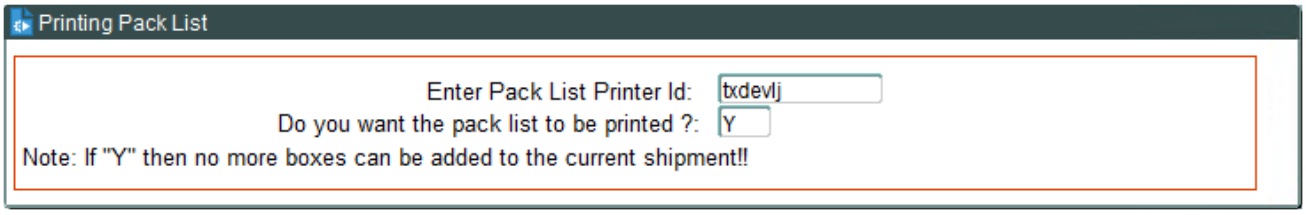


## Enter Pack List Printer Id

Enter printer to be used for printing the pack list or select from LOV.

**NOTE –** Field is navigable by pressing **F4** (Previous Field) from the Do you want to the pack list to be printed? field.

**NOTE –** Default is the printer defined in Maintain Reports Master Table (RMASTER) for FLP form type with sequence 1.

## Do you want the pack list to be printed?

Enter `Y` to print the pack list and close the shipment. Enter `N` to keep shipment open (pack list will not print).

**NOTE –** After the pack list is printed, no boxes can be added to the shipment.

**NOTE –** The financial interface takes place when the pack list is printed.

# Entering Order Charges

If Y has been entered to print the pack list, the following window opens, allowing entry of order charges:

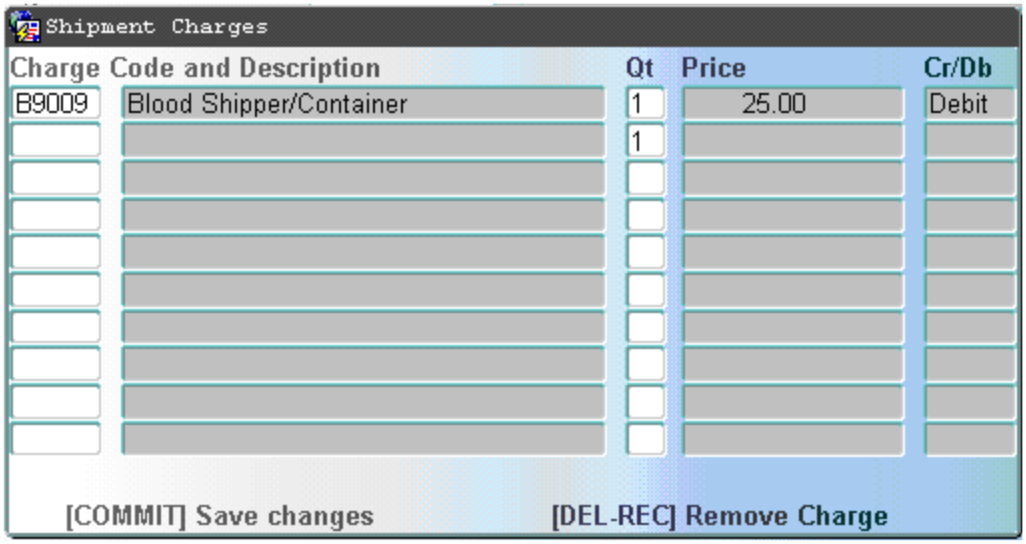



WellSky Corporation
Proprietary and confidential

### Charge Code And Description

Enter charge code or select from LOV. If no additional charges are to be entered, press F12 (Commit).

> **NOTE –** The same charge code may be selected multiple times for multiple charges of the same code.

Use the UP and DOWN arrow keys to scroll through the list of charges.

To remove a particular charge or defaulted charge, scroll to the desired charge and press CTRL+ F8 (Delete Record).

Press F12 (Commit) when necessary charges have been entered. The pack list automatically prints.

## At Commit

Updates made to the system at the time of Commit include the following:

- The data entered on this screen.
- After the pack list is printed, a status of 'Shipped' is associated to the shipment.
- Financial interface takes place.
- Pack list prints.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Offline Data Entry Functions menu.
- Once products have been delivered, perform Delivery Confirmation (DELCON).

# 31.2.4 Removal From Outdate List (ODTOFF)

## Intended Use

Use the Removal from Outdate List screen to remove products from the outdate pick slip that are currently outdated but that were not outdated when actually packed and shipped. Such products must be removed from the outdate list before they can be packed and shipped via the Offline Product Packing and Offline Product Shipment screens.

## Limitations

None

## Prerequisites

Products must be on an outdate pick slip. Refer to Unit and Product History (PHISTQ) to determine the date and time of the outdate pick slip.

## Accessing the Screen

Access this screen from the Offline Data Entry Functions menu or by entering the keyword `ODTOFF`.

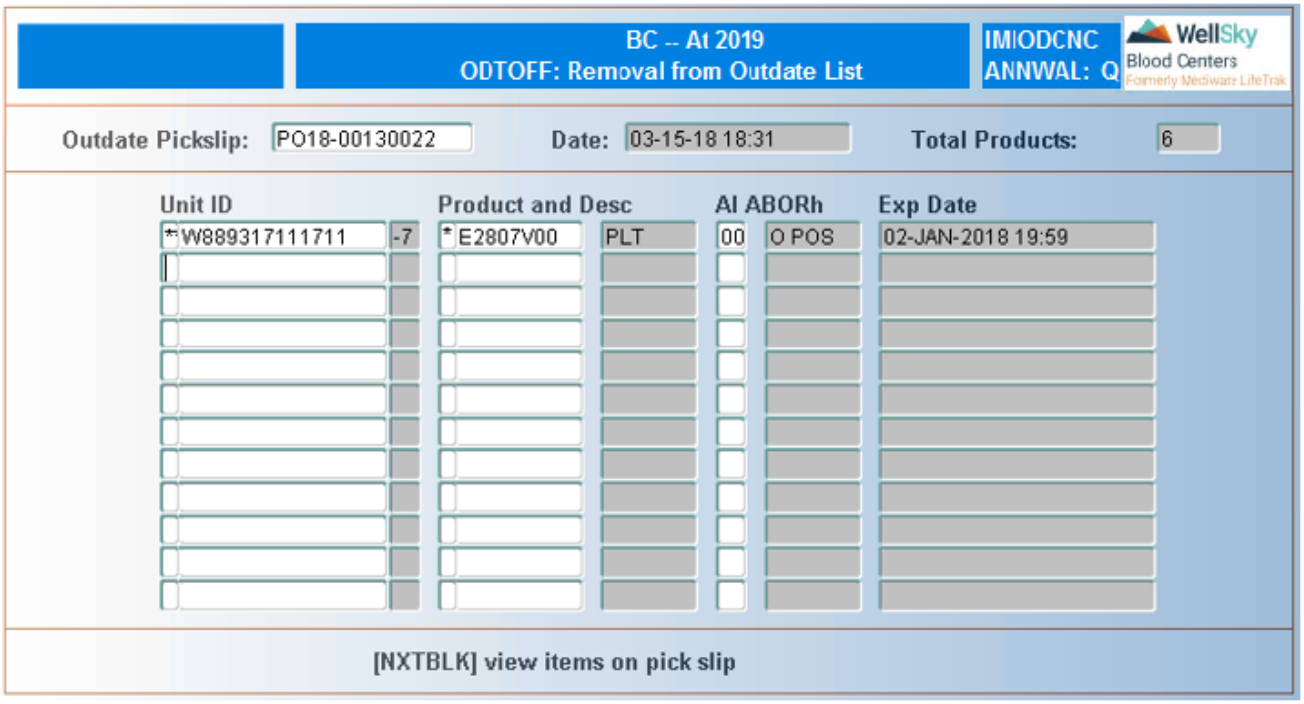


# Control Block Fields and Definitions

## Outdate Pickslip

Enter outdate pick slip number or select from LOV.

**NOTE –** LOV contains open outdate pick slips showing time and date.

## Date

Outdate pick slip date and time automatically display after the pick slip ID is entered. Field is not navigable.

## Total Products

Total number of products on the pick slip automatically displays. Field is not navigable.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product and Desc

Scan, manually enter, or select product code from LOV. Product description automatically displays after the product code is entered.

## AI

Enter product aliquot or select from LOV.


WellSky Corporation
Proprietary and confidential

**NOTE –** Field is navigable only if more than 1 aliquot exists for the product code on the pick slip.

### ABORh

Product ABO/Rh automatically displays after the product code is entered. Field is not navigable.

### Exp Date

Product expiration date and time automatically displays after the product code is entered. Field is not navigable.

## Viewing Products on Outdate Pick Slip

Press **CTRL** + **F3** (Next Block) to view products on the outdate pick slip. The following window opens:

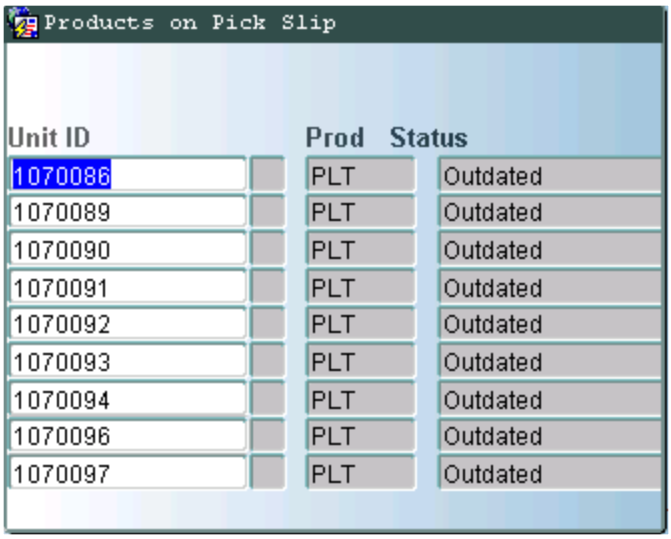


The following data displays in this query:

- Unit ID – Unit ID.
- Prod – Product code.
- Status – Product pick slip status.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

**NOTE –** Data cannot be updated from this screen.

Press **F8** (Exit Screen) to return to the main screen.

Screen does a line-by-line commit.

## At Commit

Pick slip status of removed products updated to Cancelled.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Offline Data Entry Functions menu.


WellSky Corporation
Proprietary and confidential

32

# Chapter 32 - Customer Debit/Credit


32.1 Introduction ..... 2062
32.1.1 Overview ..... 2062
32.1.2 Structure ..... 2062
32.2 Customer Debit/Credit ..... 2063
32.2.1 Blood Product Credit (CDPROD) ..... 2063
32.2.2 Order and Services Debit and Credit (CDSVC) ..... 2066
32.2.3 Cancel Debit/Credit Advice (CDCAN) ..... 2069
32.2.4 Debit and Credit Query (CDQL) ..... 2072

# 32.1 Introduction

## 32.1.1 Overview

The Customer Debit/Credit module provides a mechanism for debiting and crediting charges for products and services to customers. This section describes the screens that are accessed directly from the Customer Debit/Credit Functions menu.

## 32.1.2 Structure

The following sections make up the Customer Debit/Credit Module:

- Blood Product Credit
- Order and Services Debit/Credit
- Cancel Debit/Credit Advice
- Debit/Credit Query

**NOTE –** The Customer Debit/Credit reports are covered in the *WellSky® Blood Centers Reports Guide*.

# 32.2 Customer Debit/Credit

Customer Debit/Credit functions are accessed from the following menu:

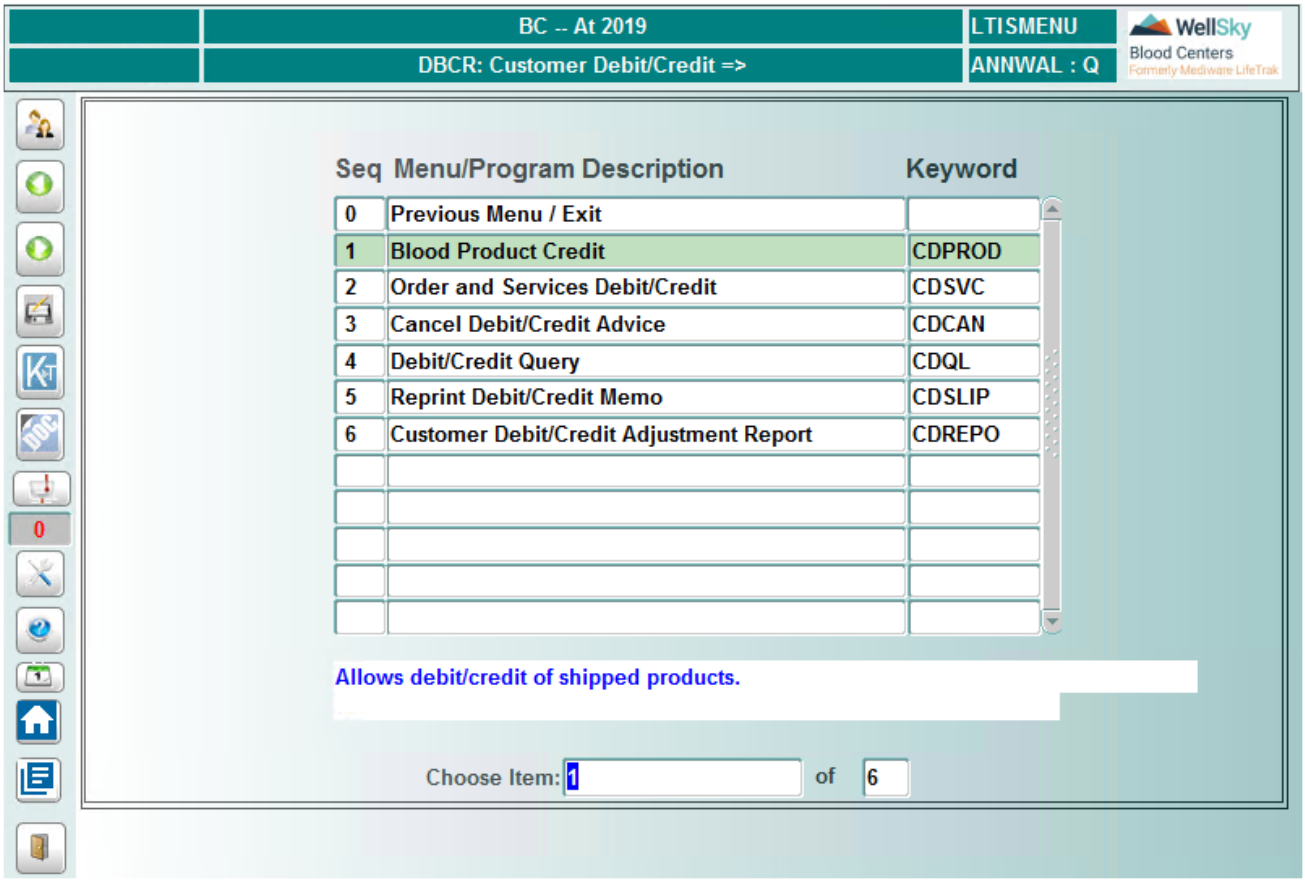


## 32.2.1 Blood Product Credit (CDPROD)

### Intended Use

Use the Blood Product Credit screen to debit or credit customer accounts for products destroyed or damaged at the hospital when the product is not returnable but account adjustment is appropriate.

### Limitations

- A credit can only be issued against a previously issued debit.
- This screen is not used to credit normal returns.

### Prerequisites

- Product must have been shipped to or returned from the facility.
- A specific unit and product must be known before proceeding with the credit or debit entry.

# Accessing the Screen

Access this screen from the Customer Debit/Credit menu or by entering the keyword CDPROD.

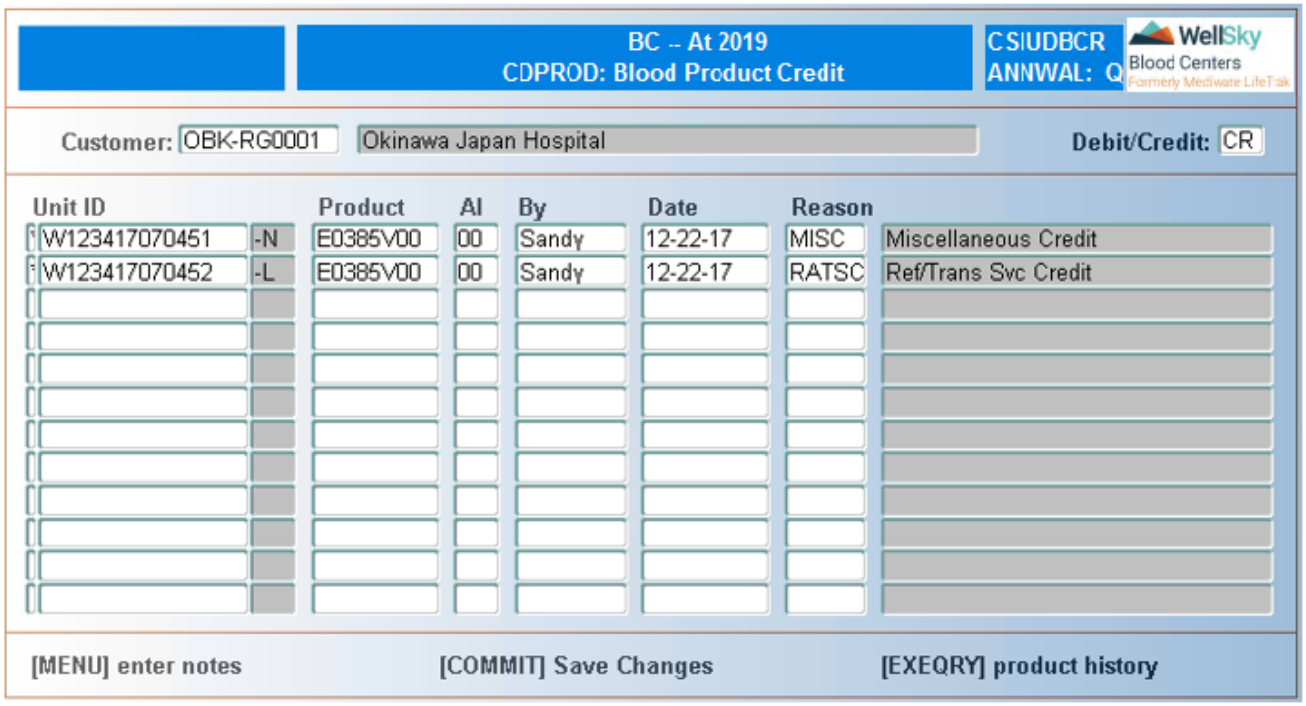


# Control Block Fields and Definitions

## Customer

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

## Debit/Credit

Enter DB to debit or CR to credit the customer's account for a specific product.

# Detail Block Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Product

Manually enter or select product code from LOV.

## AI

Press **ENTER** to accept the default aliquot or enter the correct aliquot.

**NOTE –** The system automatically defaults to aliquot 1 if there is only one aliquot.


WellSky Corporation
Proprietary and confidential

### By

Enter name of person requesting the debit/credit. A maximum of 50 characters is allowed. Entry in this field is not required.

### Date

Enter debit/credit request date in MM-DD-YY format.

### Reason

Enter return reason or select from LOV. Reason description automatically displays after the code is entered.

Press **F12** (Commit) to save the entry.

## Entering Notes

Press **F6** (Menu) to enter notes. The following window opens:

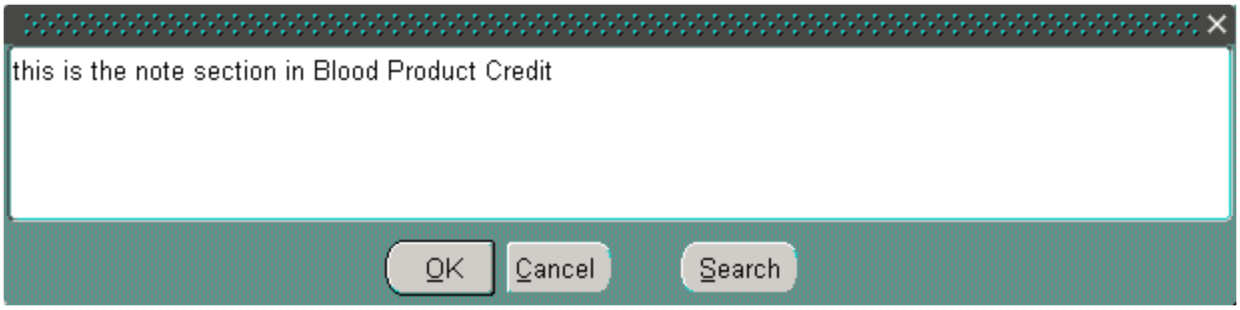


Enter free format notes. A maximum of 240 characters is allowed.

Press **F12 (Commit)** once all comments have been entered or press **F8** (Exit Screen) to return to the main screen.

## Viewing Product History

Press **ALT** + **F12** (Execute Query) to view product history. The following window opens:

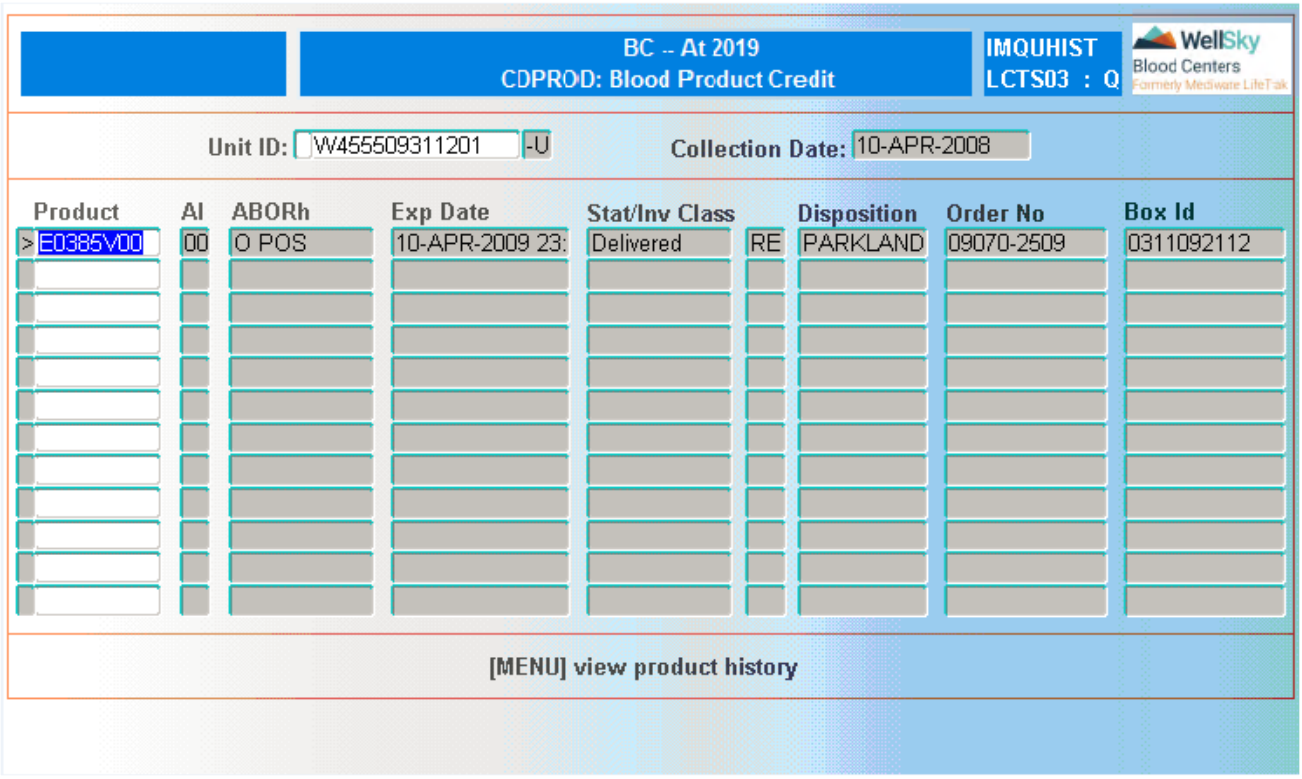


Refer to Unit and Product History (PHISTQ) for more information on this query.

Press F8 (Exit Screen) to return to the main screen.

## At Commit

- The information entered is saved.
- A debit/credit memo is produced upon completion which contains an advice number corresponding to the Credit (CMyy-zzzzzzzz) or Debit DMyy-zzzzzzzz) transaction, where yy represents the 2-digit year and zzzzzzzz represents an 8-digit unique identifier, which is system generated.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Customer Debit/Credit menu.

# 32.2.2 Order and Services Debit and Credit (CDSVC)

## Intended Use

Use the Order and Services Debit/Credit screen to debit/credit a customer for a service (e.g. antibody screen) or disposables (for example, filters). This information is associated with a specific order number or patient when possible.

## Limitations

A credit can be applied only against a previously applied debit.


WellSky Corporation
Proprietary and confidential

## Prerequisites

None

## Accessing the Screen

Access this screen from the Customer Debit/Credit menu or by entering the keyword CDSVC.

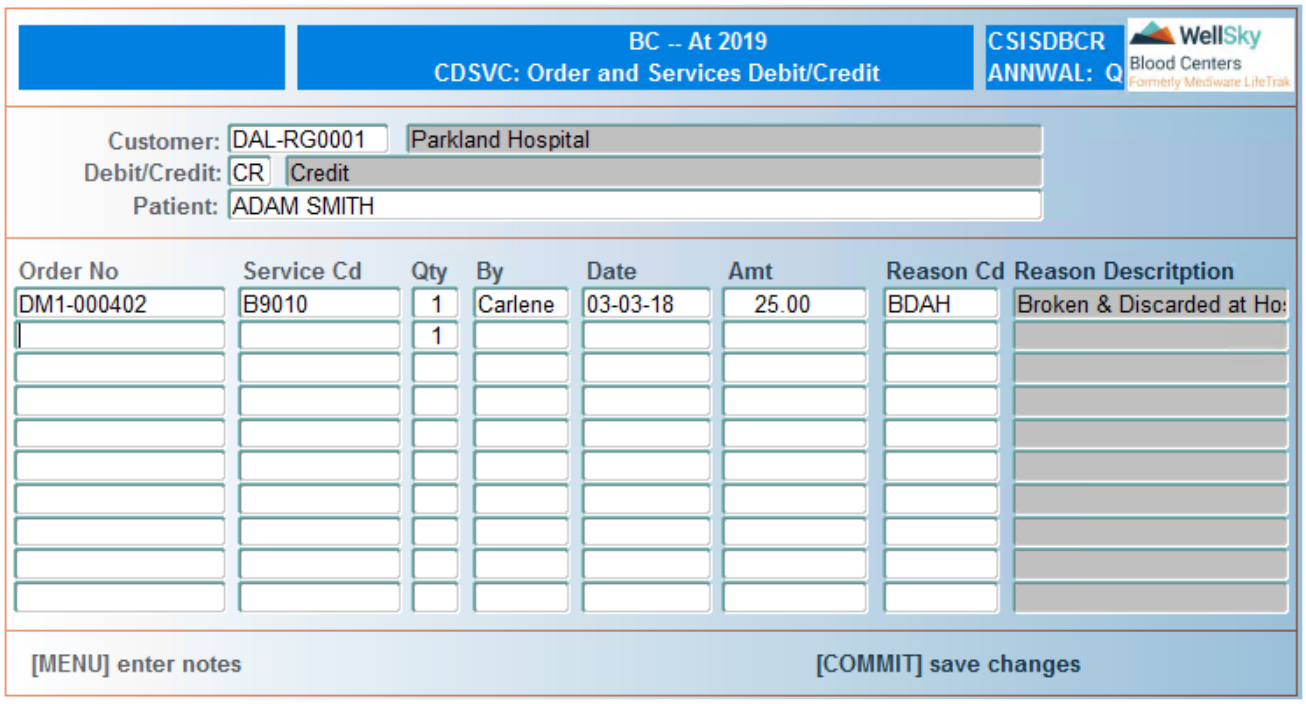


## Control Block Fields and Definitions

### Customer

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

### Debit/Credit

Enter DB to debit or CR to credit the customer's account for a specific service.

### Patient

Enter patient name or press **ENTER** to leave blank. Entry in this field is not required

> **NOTE –** If credit is being given, the system ensures that the same patient who was debited receives the credit.

### Service Cd

Enter service code or select from LOV.

**NOTE –** If entering a credit, only applicable debited items will display in the LOV.

### Order No

Enter the associated order number, if applicable. If no order number exists, either a debit or credit advice may be issued.

**NOTE –** This field does not require entry, but should be used if the credit or debit is associated with a known order.

**NOTE –** LOV displays only data for the last 21 days; manual entry of an order number is allowed for orders older than 21 days.

### By

Enter the person's initials requesting the debit/credit or select from LOV.

### Date

Enter the date that the debit/credit was requestedin MM-DD-YY format.

### Amt

Populates with the amount associated to the service code.

**NOTE –** User has the ability to change the amount if the service code is set to Y in Define Order Charges (VCHARGE).

### Reason

Enter the debit/credit reason code or select from LOV. Reason description automatically displays after the code is entered.

## Entering Notes

Press F6 (Menu) to enter notes. The following window opens:


WellSky Corporation
Proprietary and confidential

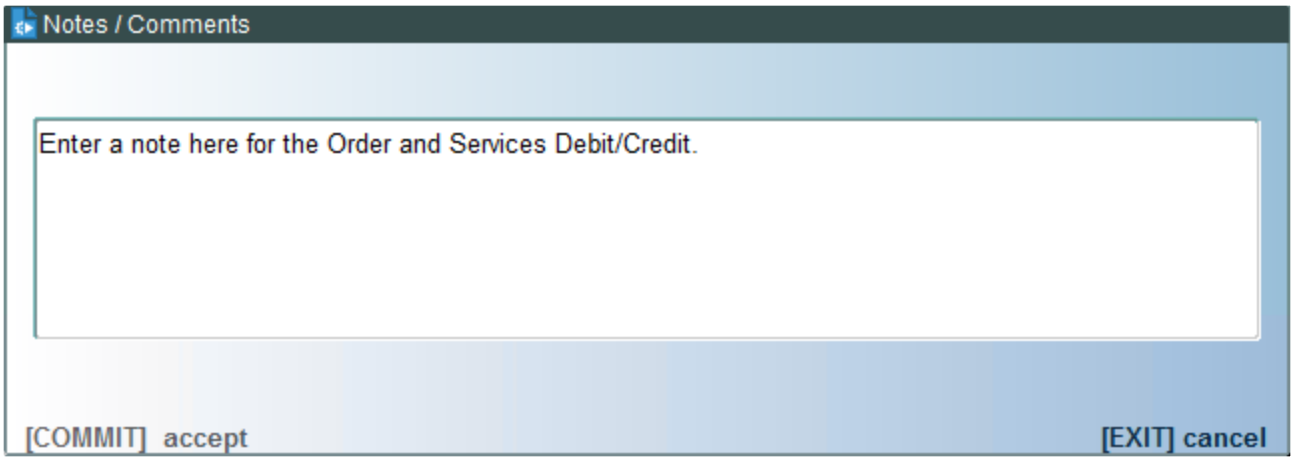


Enter free format notes. A maximum of 240 characters is allowed.

Press **F12 (Commit)** once all comments have been entered or press **F8** (Exit Screen) to return to the main screen.

## Saving Entry

Press **F12** (Commit) once all entries have been made. The following window opens:

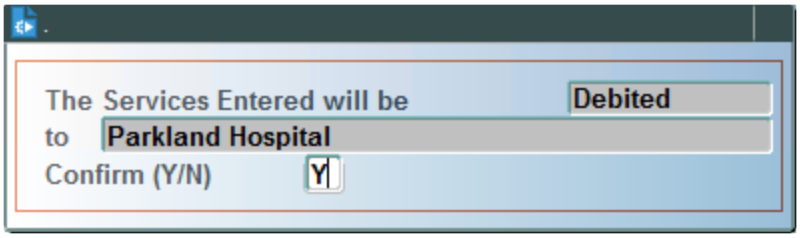


Enter `Y` to confirm the entry. Enter `N` to return to the screen and make changes.

## At Commit

- The information entered is saved.
- A debit/credit memo is produced upon completion which contains an advice number corresponding to the Credit (CMyy-zzzzzzzz) or Debit DMyy-zzzzzzzz) transaction, where yy represents the 2-digit year and zzzzzzzz represents an 8-digit unique identifier, which is system generated.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Customer Debit/Credit menu.

# 32.2.3 Cancel Debit/Credit Advice (CDCAN)

## Intended Use

Use the Cancel Debit/Credit Advice screen to cancel a debit/credit advice previously issued to a customer.

## Limitations

This screen cancels each item associated to the debit/credit advice.

## Prerequisites

A specific advice number must be known.

## Accessing the Screen

Access this screen from the Customer Debit/Credit menu or by entering the keyword CDCAN.

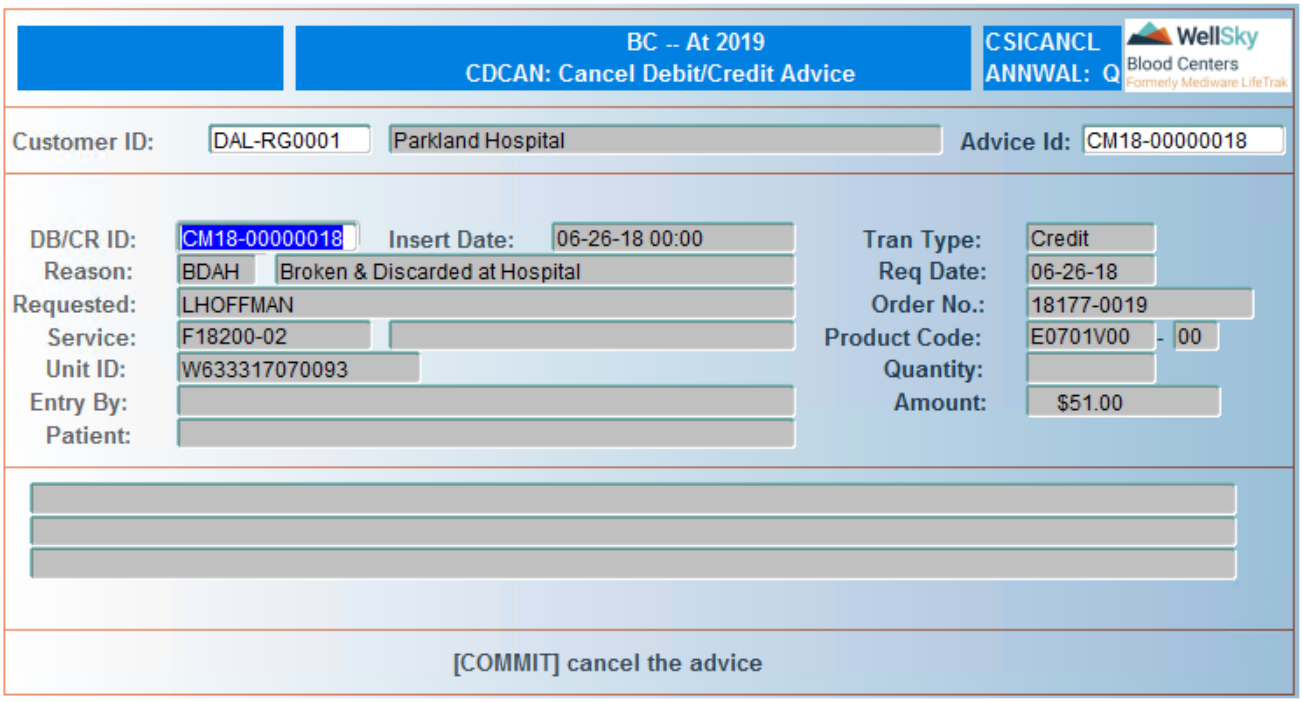


## Control Block Fields and Definitions

### Customer

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

### Advice ID

Enter advice ID or select from LOV.

## In the Detail Block

The following information displays, if present, after the advice ID is entered. Data cannot be updated in these fields:

- DB/CR ID – Debit/Credit advice ID.
- Insert Date – Date debit/credit created.
- Tran Type – Transaction type (debit or credit).

- Reason – Reason code and description.
- Req Date – Request date.
- Requested – Requested item.
- Order No – Order number.
- Service – Service code and description.
- Product Code – Product code and aliquot.
- Unit ID – Unit ID.
- Quantity – Quantity.
- Entry By – Name of person entering debit/credit.
- Amount – Credit/debit amount.
- Patient – Patient name.

Use the **UP** and **DOWN** arrow keys to scroll through multiple items in the advice ID.

Press **F12 (Commit)** to cancel the advice ID. The following window opens:

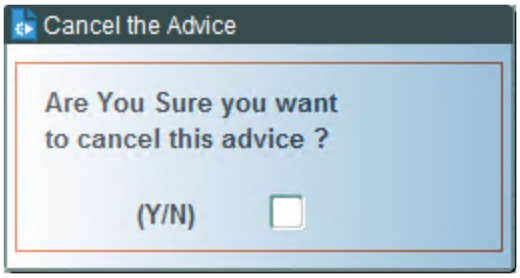


Enter `Y` to confirm the entry. Enter `N` to return to the screen and make changes.

## At Commit

Updates made to the system at the time of Commit include the following:

- System checks for advice confirmation.
- Advice is cancelled.
- Transaction is submitted to the financial interface.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Customer Debit/Credit menu.

# 32.2.4 Debit and Credit Query (CDQL)

## Intended Use

Use the Debit/Credit Query screen to view debit/credit information for a specific customer by a specific order number or advice ID.

## Limitations

None

## Prerequisites

None

## Accessing the Screen

Access this screen from the Customer Debit/Credit menu or by entering the keyword CDQ.

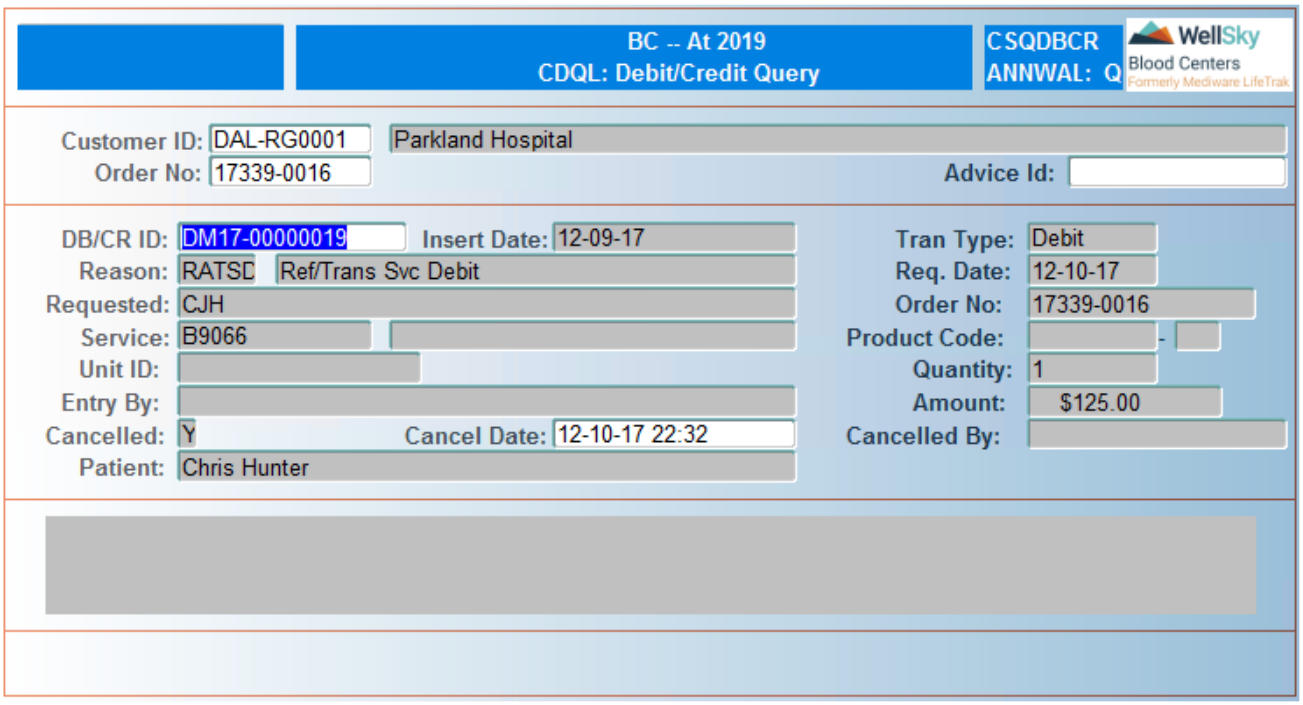


## Control Block Fields and Definitions

### Customer ID

Enter customer ID or select from LOV. Customer name automatically displays after the ID is entered.

### Order No

Enter order number or select from LOV. Entry in this field is not required.


WellSky Corporation
Proprietary and confidential

### Advice ID

Enter advice ID or select from LOV. Entry in this field is required only if no entry was made in the Order No field.

## In the Detail Block

The following data displays, if present, after the control block is populated:

- DB/CR ID – Debit/Credit advice ID.
- Insert Date – Date Debit/Credit entered.
- Tran Type – Transaction type – Debit or Credit.
- Reason – Debit/Credit reason.
- Req Date – Date debit/credit requested.
- Requested – Item requested.
- Order No – Order number.
- Service – Service code and description.
- Product Code – Product code and aliquot.
- Unit ID – Unit ID.
- Quantity – Quantity debited/credited.
- Entry By – Name of person entering debit/credit.
- Amount – Amount debited/credited.
- Cancelled – Y appears if the advice has been cancelled; otherwise, field is blank.
- Cancelled By – Name of user canceling advice ID.
- Patient – Patient name.
- Notes – Notes associated to the advice ID.

Use the **UP** and **DOWN** arrow keys to scroll through multiple items in the advice ID.

## At Commit

No updates are made to the system in this screen.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Customer Debit/Credit menu.

This Page Intentionally Left Blank

33

# Chapter 33 - Customer and Internal Administration


33.1 Introduction ..... 2076
33.1.1 Customer Administration ..... 2076
33.1.2 Internal Administration ..... 2076
33.2 Customer Administration ..... 2078
33.2.1 Create Customer Profile (CUSTOMER) ..... 2078
33.2.2 Create Payee Details (PAYEE) ..... 2082
33.2.3 Create Consignee Details (CONSIGN) ..... 2085
33.2.4 Customer Contract Details (CONTRACT) ..... 2088
33.2.5 Customer Contact Names (CONTACT) ..... 2091
33.2.6 Setup Customer Preferred Product Tiers (CPPTIER) ..... 2094
33.2.7 Enter Customer Tier Pricing (CUSTIER) ..... 2096
33.2.8 Customer Product Tier Pricing Query (TIERQ) ..... 2099
33.2.9 Customer Consignee Product Details (VCUSTPRD) ..... 2101
33.3 Internal Administration ..... 2104
33.3.1 Setup Inventory Levels for Blood Center (LEVEL) ..... 2104
33.3.2 Enter Standard Tier Pricing (TIER) ..... 2107
33.3.3 Enter Product Service Codes (CPROD) ..... 2110
33.3.4 Enter Master Service Codes (FCODE) ..... 2113
33.3.5 Enter Attribute Service Codes (CATTR) ..... 2116
33.3.6 Blood Center Inventory Level Query (LEVELQ) ..... 2118
33.3.7 Define Order Charges (VCHARGE) ..... 2120
33.3.8 Antigen Pricing Matrix (AGPRICE) ..... 2122

# 33.1 Introduction

This section describes the screens that are accessed directly from the Customer and Internal Administration menu. Further submenus divide functions into Customer Administration including all customer related information and Internal Administration, relating to internal inventory levels and pricing.

## 33.1.1 Customer Administration

- Create Customer Profile*
- Create Payee Details*
- Create Consignee Details*
- Customer Contract Details*
- Customer Contact Names*
- Setup Customer Preferred Product Tiers
- Enter Customer Tier Pricing
- Customer Product Tier Pricing Query

**NOTE –** For a customer to become usable, entry is required in all screens denoted by an asterisk (*) with a current effective date. Those steps include the following keywords:
– CUSTOMER
– PAYEE (accessible from CUSTOMER)
– CONSIGN
– CONTRACT
– CONTACT

**NOTE –** A future effective date or past/current termination date in any of these screens for an active customer will disallow that customer from being used. Future effective dates are allowed for additional payees, consignees, contracts or contacts, but they should not be used for the customer until that date.

## 33.1.2 Internal Administration

- Setup Inventory Levels for Blood Center
- Enter Standard Tier Pricing
- Enter Product Service Codes
- Enter Master Service Codes
- Define Order Charges
- Enter Attribute Service Codes


WellSky Corporation
Proprietary and confidential

- Antigen Pricing Matrix
- Blood Center Inventory Level Query

# 33.2 Customer Administration

Customer Administration functions are accessed from the following menu:

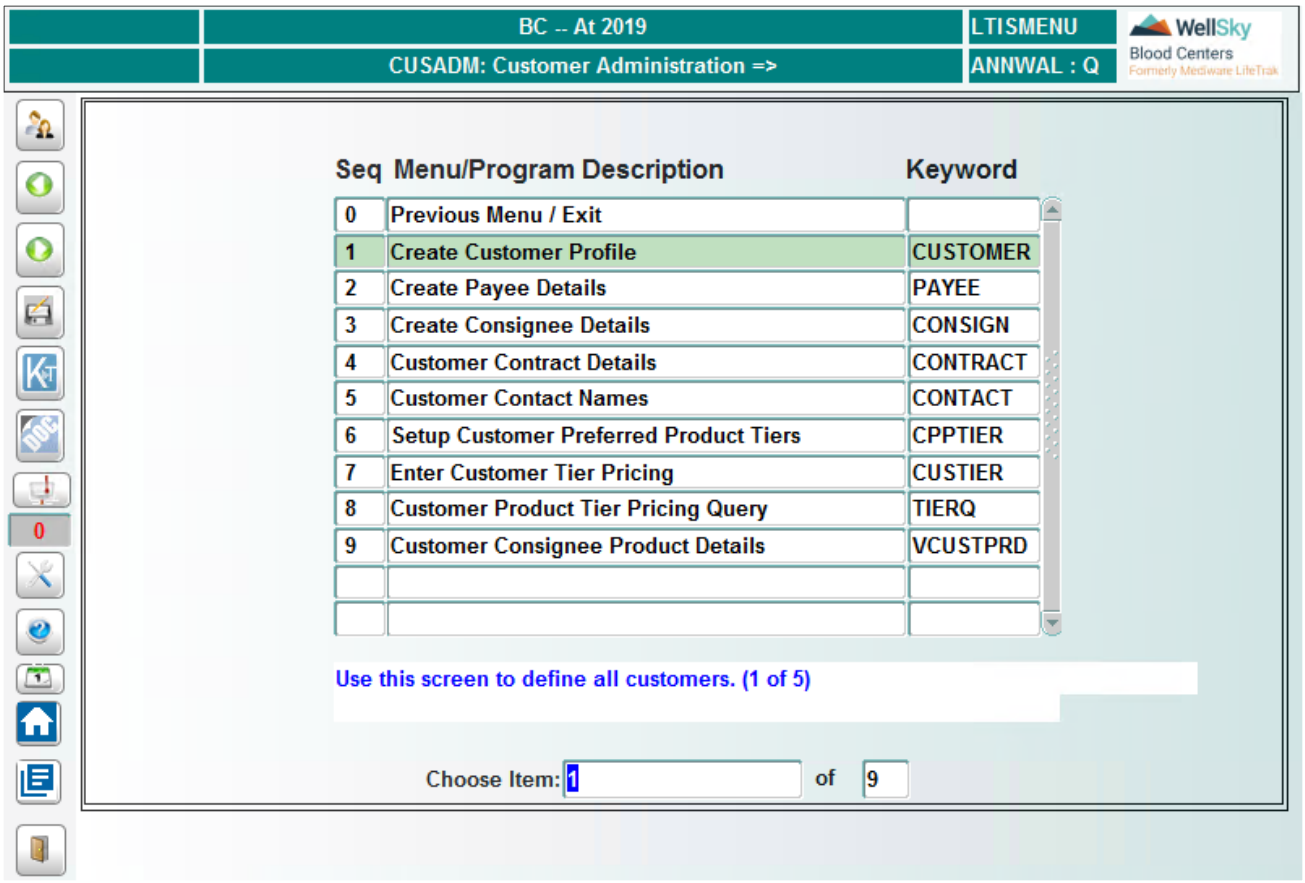


## 33.2.1 Create Customer Profile (CUSTOMER)

### Intended Use

Use the Create Customer Profile screen to define new customers in the system, or to revise details on previously entered customers. After a customer is defined, the payee can be created. The customer is identified on the packlist as the BILL TO information. Use this screen to identify the internal STANDARD (type) customer information. The blood center is identified on the packlist as the FROM information.

### Limitations

The STANDARD customer must be defined for every chapter in order for the proper information to print in the FROM section on the pack list.

### Prerequisites

This is the first screen required in entry of new customer accounts.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword CUSTOMER.

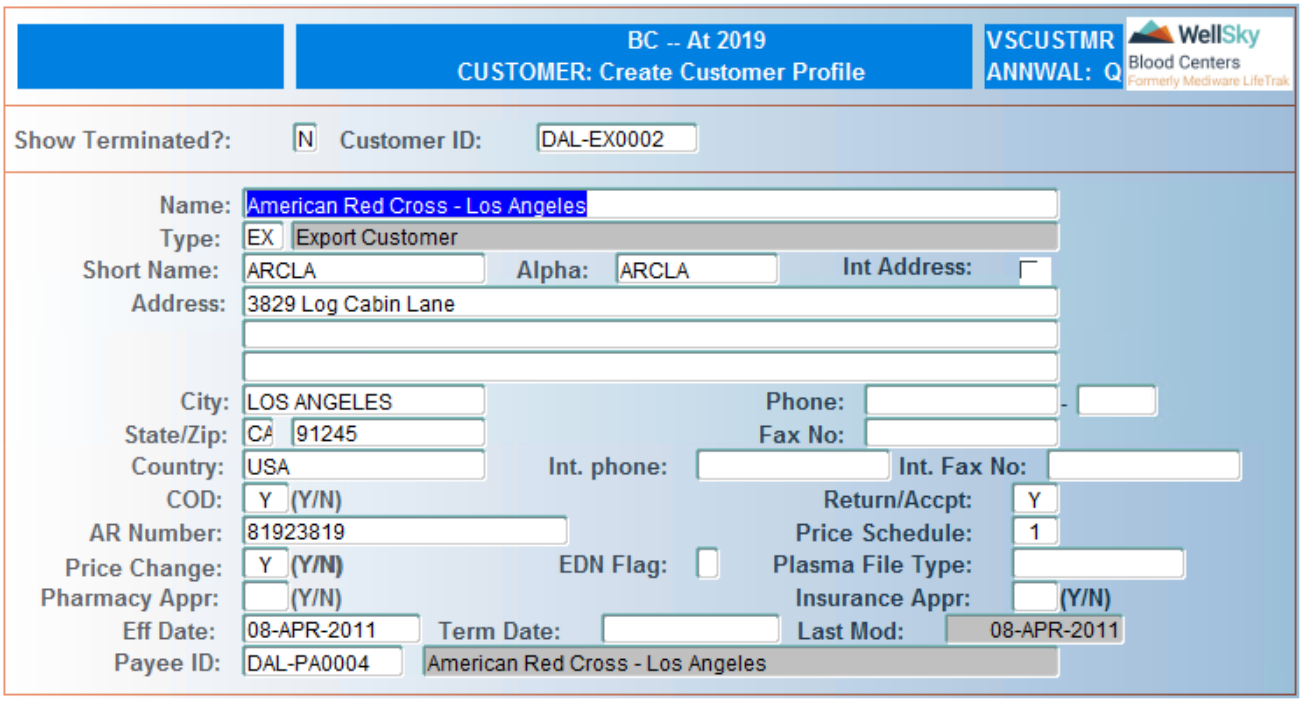


# Control Block Fields and Definitions

## Show Terminated?

Enter N to exclude terminated customers from the list. Enter Y to include terminated customers.

**NOTE –** Default value is N.

## Customer ID

To modify current customer information, enter the customer ID or select from LOV. To create a new customer, leave field blank.

# Detail Block Fields and Definitions

## Name

Enter full customer name. A maximum of 50 characters is allowed.

## Type

Enter customer type code or select from LOV.

## Short Name

Enter customer short name. A maximum of 15 characters is allowed.

## Alpha
Entry not required in this field. Field not utilized.

## Int Address (check box)
For an international address, select this check box. A check mark ( ) appears. For a domestic address, clear this check box.

## Address
Entry in the first line is required. Enter the address. Three lines are available to record the address information. Entry is limited to a maximum of 50 characters in each of the address lines.

## City
Enter city. Entry is limited to a maximum of 20 characters.

## Phone
Enter the main telephone number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## State/Zip
Enter state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters. Enter postal or zip code. Entry is limited to a maximum of 15 characters.

## Fax No
Enter the domestic Fax number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## Country
Enter the country. Entry is limited to a maximum of 15 characters.

## Int. Phone
Enter the internal telephone number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Int. Fax No
Enter the international Fax number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## COD
Enter `Y` if pricing is to be printed on pack lists and return slips. Enter `N` if pricing is not to be printed.

## Return/Accpt
Enter `Y` if returns can be accepted from customer. Enter `N` if returns cannot be accepted from customer.

**NOTE –** The Q value, which appears in the Help Line at the bottom of the screen, is obsolete and no longer valid.


WellSky Corporation
Proprietary and confidential

## AR Number

Enter customer's accounts receivable number. A maximum of 20 characters is allowed.

**NOTE –** This is the account number interfaced to the financial system.

## Price Schedule

This field is not used.

## Price Change

Enter Y or leave blank if pricing can be modified for export products. Enter N if pricing cannot be modified for export products.

**NOTE –** This field is only navigable for EX (export) type customers.

## EDN Flag

Enter Y if an electronic delivery note is to be generated for the customer. Enter N or leave blank if an electronic delivery note is not to be generated.

**NOTE –** This field is only navigable for MG (manufacturing) type customers.

## Plasma File Type

Enter the plasma file type or select from LOV. LOV is populated from the master code PLFIL.

**NOTE –** This field is navigable only if the customer type is MG.

## Pharmacy Appr

This field is not used.

## Insurance Appr

This field is not used.

## Eff Date

Enter effective date in DD-MON-YYYY format.

## Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing customer.

## Last Mod

Field automatically populated with the last date modification made. Field is not navigable.

### Payee ID

To update payee ID to an existing payee, enter payee ID or select from LOV. To create a new payee ID, press **CTRL** + **F2** (Create Record).

**NOTE –** Refer to Create Payee Details (PAYEE) for further instructions on creating new payees.

After the payee details are entered, information for both the customer and the payee is ready to be committed. Press **F12 (Commit)** one time to commit the payee details. Press **F12 (Commit)** a second time to commit the customer profile.

## At Commit

The customer information is saved to the database.

## What to Do Next

- For normal processing, press **F8 (Exit Screen)** to return to the Customer Administration menu.
- If a new contract is being setup, you must next go to Create Consignee Details (CONSIGN).

# 33.2.2 Create Payee Details (PAYEE)

## Intended Use

Use the Create Payee Details screen to define new payees in the system or to revise details on previously entered payees. The payee can be different from the customer. This is the second screen required in entry of new customer accounts.

## Limitations

- There can only be one active payee per customer.
- When creating a future payee for a customer, that payee has to be manually associated to that customer on the effective date of the payee.
- The PAYEE screen can be accessed in Create Customer Profile (CUSTOMER) from the Payee ID field by using the **CTRL** + **F2** (Create Record) key. The Customer information is then copied into Create Payee Details (PAYEE).

## Prerequisites

The Customer must have already been created in Create Customer Profile (CUSTOMER).

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `PAYEE`.


WellSky Corporation
Proprietary and confidential

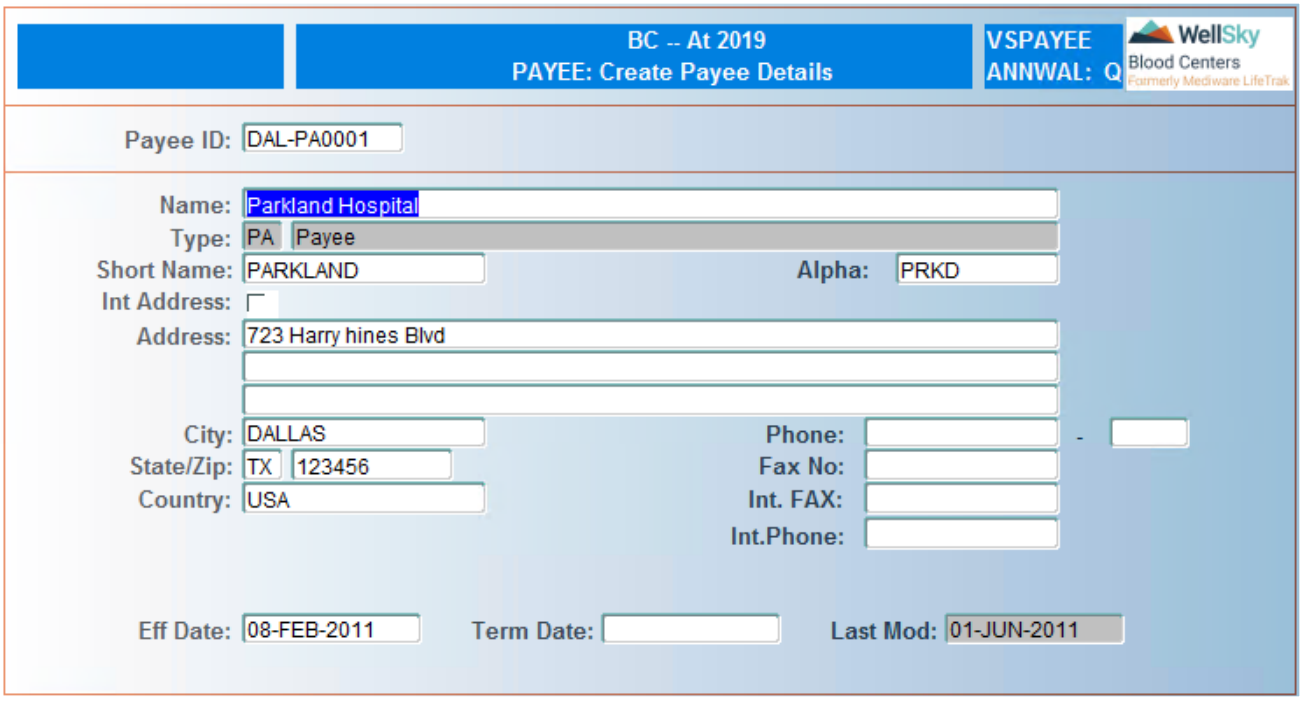


# Control Block Fields and Definitions

## Payee ID

To modify current payee information, enter the Payee ID or select from LOV. To create a new payee, leave field blank.

# Detail Block Fields and Definitions

## Name

Enter full payee name. A maximum of 50 characters is allowed.

## Type

The system defaults PA to indicate payee. Field is not navigable.

## Short Name

Enter the customer's short name. A maximum of 15 characters is allowed.

## Alpha

Although entry in this field is required, it is no longer utilized.

## Int Address (check box)

For an international address, select this check box. A check mark ( ☑ ) appears. For a domestic address, clear this check box.

## Address
Entry in the first line is required. Enter the address. Three lines are available to record the address information. Entry is limited to a maximum of 50 characters in each of the address lines.

## City
Enter city. Entry is limited to a maximum of 20 characters.

## Phone
Enter the main telephone number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## State/Zip
Enter state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters. Enter postal or zip code. Entry is limited to a maximum of 15 characters.

## Fax No
Enter the domestic Fax number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## Country
Enter the country. Entry is limited to a maximum of 15 characters.

## Int Fax
Enter the international Fax number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Int Phone
Enter the internal telephone number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Eff Date
Enter effective date using the DD-MON-YYYY format. Effective date cannot be prior to system date.

**NOTE –** The payee cannot be used until the effective date.

## Term Date
Enter termination date using the DD-MON-YYYY format. Entry in this field is only required when terminating an existing payee.

## Last Mod
Field automatically populated with the last date modification made. Field is not navigable.

Press F12 (Commit) once all entries have been made.

# At Commit
Payee information is saved to the database.


WellSky Corporation
Proprietary and confidential

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.
- If a new customer is being created, you must next go to Create Consignee Details (CONSIGN).

# 33.2.3 Create Consignee Details (CONSIGN)

## Intended Use

Use the Create Consignee Details screen to define new consignees in the system or to revise details on previously entered consignees. The consignee reflects who actually received the shipment. The consignee can be different from the customer. A single customer may have one or many consignees. The consignee is identified on the packlist as SHIP TO information.

## Limitations

A future effective date may affect the usability of the customer as a whole.

## Prerequisites

The Customer must have already been created in Create Customer Profile (CUSTOMER). This is the third screen required in entry of new customer accounts.

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword CONSIGN.

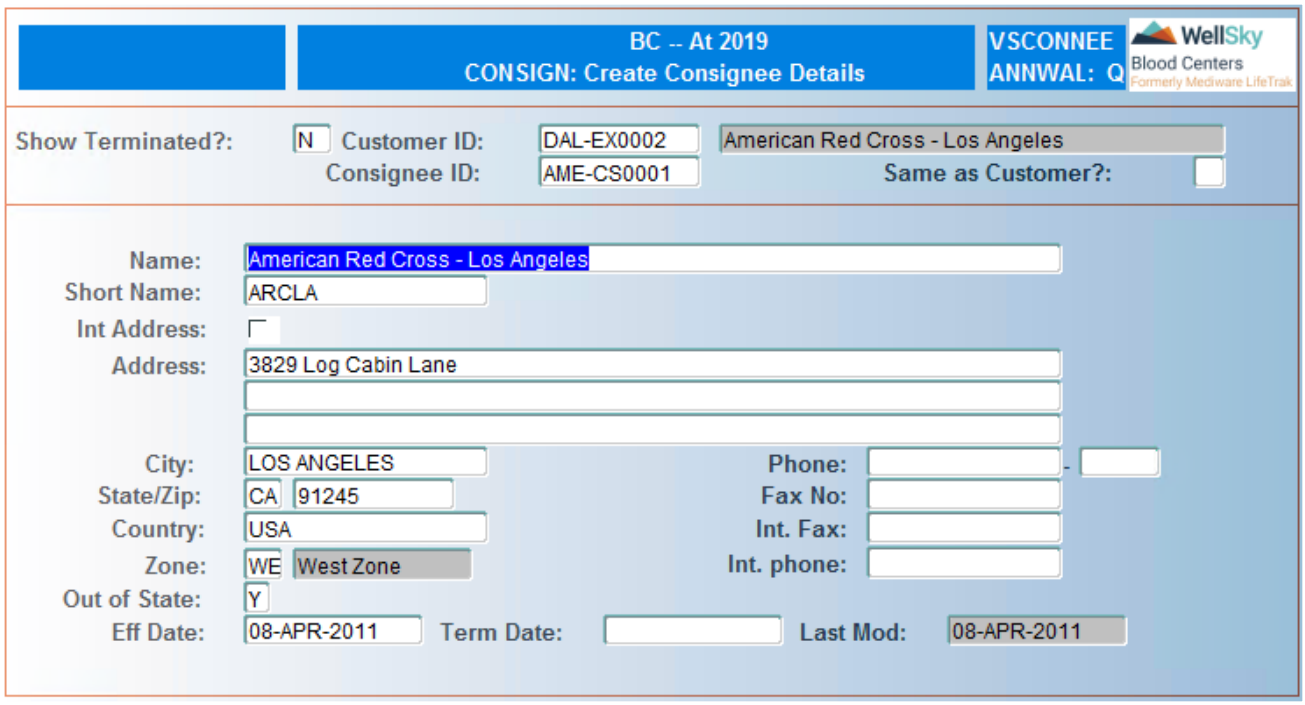

# Control Block Fields and Definitions

## Show Terminated?

System defaults to N to exclude terminated customers from the list. To include terminated customers, enter `Y`.

## Customer ID

Enter customer ID or select from LOV.

## Consignee ID

To modify current consignee information, enter the Consignee ID or select from LOV. Leave blank to create a new consignee.

**NOTE –** After an existing Consignee ID is entered, consignee data automatically populates the screen.

## Same as Customer?

Enter `Y` to populate the information entered in the customer table. Enter `N` or leave blank to create different information for the consignee.

**NOTE –** Information copied from the customer table can be modified.

# Detail Block Fields and Definitions

## Name

Enter full consignee name. A maximum of 50 characters is allowed.

## Short Name

Enter consignee short name. A maximum of 15 characters is allowed.

## Int Address (check box)

For an international address, select this check box. A check mark ( ) appears. For a domestic address, clear this check box.

## Address

Entry in the first line is required. Enter the address. Three lines are available to record the address information. Entry is limited to a maximum of 50 characters in each of the address lines.

## City

Enter city. Entry is limited to a maximum of 20 characters.

## Phone

Enter the main telephone number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.


WellSky Corporation
Proprietary and confidential

## State/Zip

Enter state abbreviation or select from LOV. Entry is limited to a maximum of 2 characters. Enter postal or zip code. Entry is limited to a maximum of 15 characters.

## Fax No

Enter the domestic Fax number. Entry in this field is not required. Entry is limited to a maximum of 10 characters.

## Country

Enter the country. Entry is limited to a maximum of 15 characters.

## Int Fax

Enter the international Fax number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Zone

Enter the zone identifying the geographical location of the consignee or select from LOV.

**NOTE –** This field helps to identify pending shipments going in the same geographical direction.

## Int Phone

Enter the internal telephone number. Entry in this field is not required. Entry is limited to a maximum of 15 characters.

## Out of State

Enter `Y` to indicate this is an out of state shipment. An N in this field indicates the consignee is in the same state. An N in this field also overrides out of state shipment restrictions imposed on unlicensed products if the consignee is located out of the state.

## Eff Date

Enter effective date in DD-MON-YYYY format.

## Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing consignee.

## Last Mod

Field automatically populated with the last date modification made. Field is not navigable.

Press F12 (Commit) once all entries have been made.

# At Commit

Consignee information is saved to the database.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.
- If a new customer is being created, you must next go to Customer Contract Details (CONTRACT).

# 33.2.4 Customer Contract Details (CONTRACT)

## Intended Use

Use the Customer Contract Details screen to define new contracts for the customer or to revise details on a previously entered customer contract. There are three required entry fields in the screen.

## Limitations

- There can only be one active contract per customer.
- If creating a future contract for a customer, that contract has to be manually associated to that customer on the effective date of the contract.
- This screen is used to maintain information only. It does not govern or restrict any decisions on the customer.

## Prerequisites

The customer must have already been created in Create Customer Profile (CUSTOMER). This is the fourth screen required in entry of new customer accounts.

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `CONTRACT`.


WellSky Corporation
Proprietary and confidential

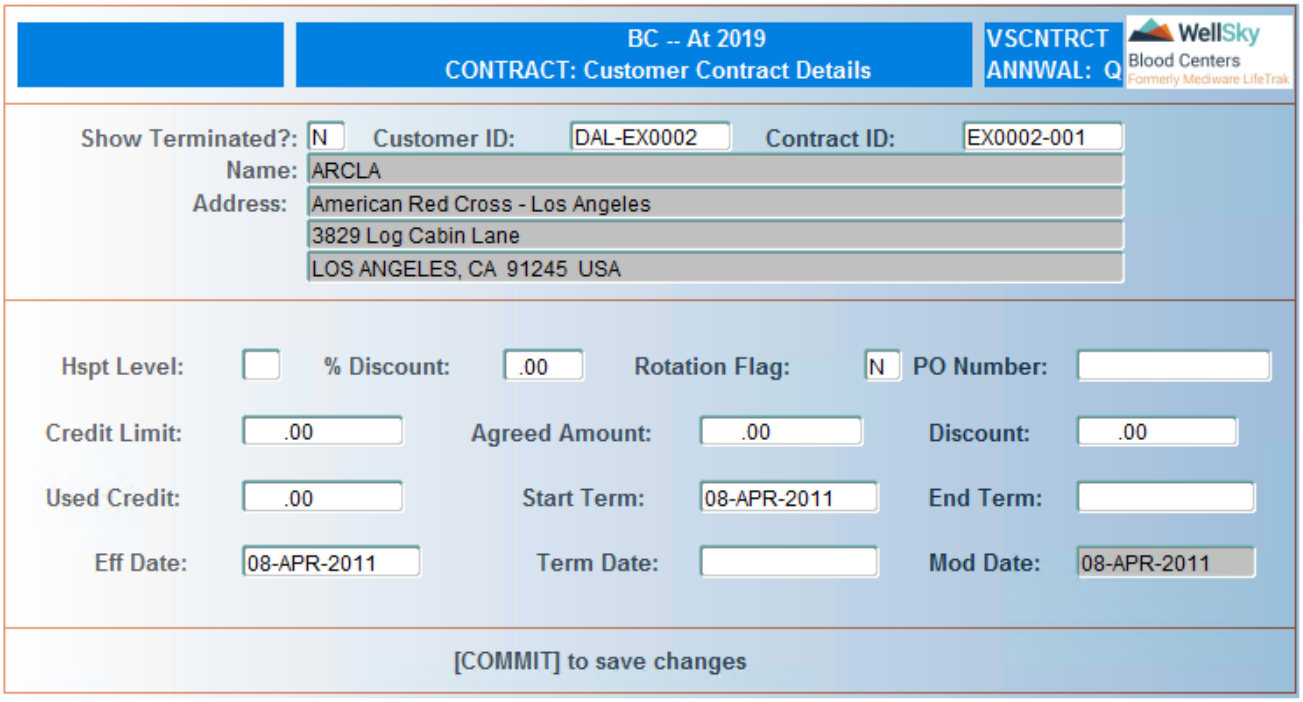


# Control Block Fields and Definitions

## Show Terminated?

Enter `N` to exclude terminated customers from the list. Enter `Y` to include terminated customers.

## Customer ID

Enter customer ID, part of the customer name, or select from LOV.

> **NOTE –** The short name and address of the customer automatically display when creating a new contract. If a contract exists for the customer, the Contract ID will populate in the Contract ID field and the contract data automatically populates the screen.

## Contract ID

If the customer does not have an existing contract, leave field blank. The contract ID will be generated when the information is completed.

Press ENTER to modify the current displayed contract information.

To create another contract for an existing customer, leave field blank.

## Name

Customer name automatically displays after the customer ID is entered. Field is not navigable.

## Address

Customer address automatically displays after the customer ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Hspt Level

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter a whole numeric value from 1 to 99.

## % Discount

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the percent discount the customer receives from 00.01 to 99.99.

## Rotation Flag

Entry is required. Enter `Y` to indicate this customer utilizes routine stock rotation orders, otherwise enter `N`. This information is not utilized.

## PO Number

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the customer's purchase order number. A maximum of 12 characters is allowed.

## Credit Limit

Entry is required. Enter the customer's credit limit up to 9999999.99. This information is not utilized.

## Agreed Amount

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the customer's agreed amount up to 9999999.99.

## Discount

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the discount the customer receives up 9999999.99.

## Used Credit

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the customer's used credit amount up to 9999999.99.

## Start Term

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the beginning date of the contract in DD-MON-YYYY format.

## End Term

Field is not utilized. Entry in this field is not required. Use of this field is at your discretion. Enter the ending date of the contract in DD-MON-YYYY format.

## Eff Date

Enter effective date in DD-MON-YYYY format.


WellSky Corporation
Proprietary and confidential

### Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing contract.

### Last Mod

Field automatically populated with the last date modification made. Field is not navigable.

## At Commit

Contract information is saved to the database.

## What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.
- If a new customer is being created, you must next go to Customer Contact Details (CONTACT).

# 33.2.5 Customer Contact Names (CONTACT)

## Intended Use

Use the Customer Contact Names screen to identify contacts for the customer, to enter your internal STANDARD contact, or to revise details on a previously entered customer contact. There can be one F (Financial) and one D (Designated) contact for the customer. The designated contact is the customer's default contact in the order screens. Updates to this table can be achieved for new contacts by using CTRL + F2 (Create Record) at the contact field in the Order Entry screens.

Use this screen to identify the blood center contact name that prints on the packlist as FROM. This contact is created as the D (designated) type contact for your blood center as a STANDARD customer.

## Limitations

There can only be one financial and one designated contact per customer.

## Prerequisites

- The customer must have already been created in Create Customer Profile (CUSTOMER).
- Any new contact types must be set up in Master Codes (MASTER), code CONTT.
- This is the fifth screen required in entry of new customer accounts.

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `CONTACT`.

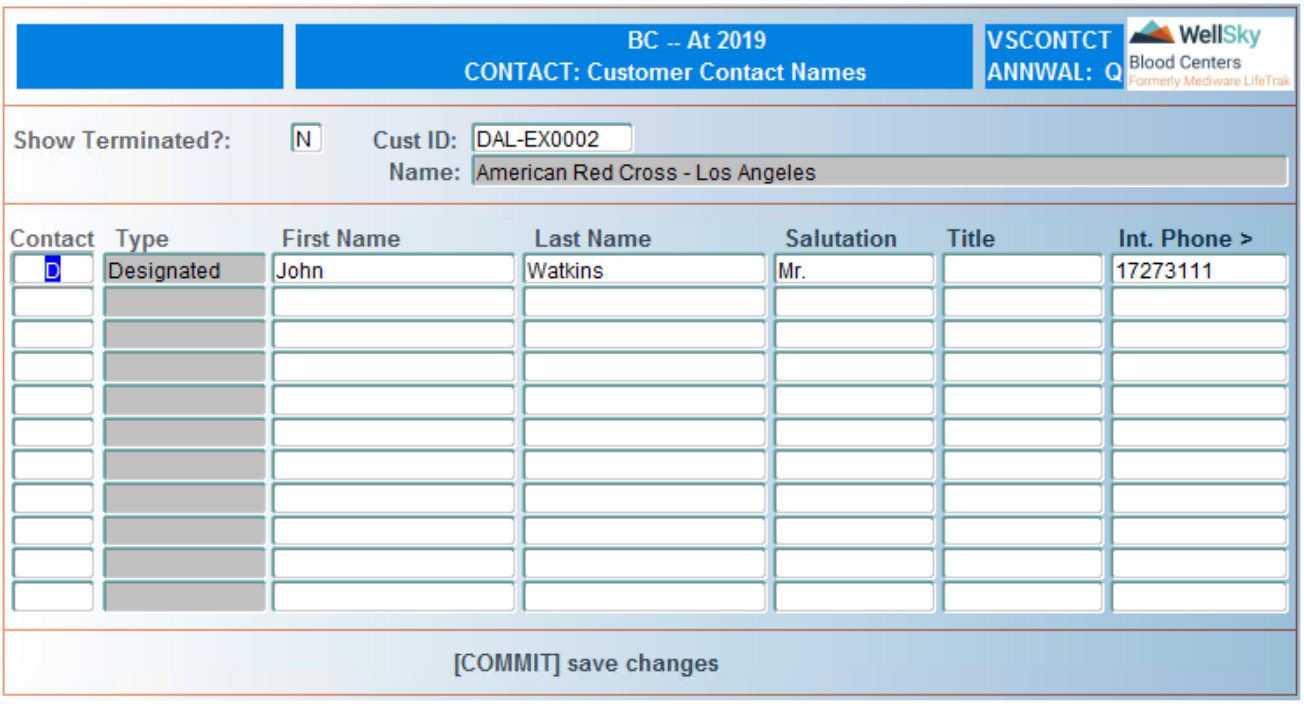


# Control Block Fields and Definitions

## Show Terminated?

System defaults to N to exclude terminated customers from the list. To include terminated customers, enter `Y`.

## Customer ID

Enter customer ID, part of customer name, or select from LOV.

## Name

Customer name automatically displays after the ID is entered. Field is not navigable.

# Detail Block Fields and Definitions

## Contact Type

Enter the contact type or select from LOV. One character is allowed.

**NOTE –** A designated (D) type contact must be present for each contract to allow for packlist printing at the time of shipping.

## First Name

Enter contact first name. A maximum of 50 characters is allowed.

## Last Name

Enter contact last name. A maximum of 50 characters is allowed,


WellSky Corporation
Proprietary and confidential

### Salutation
Enter the contact's salutation. A maximum of 10 characters is allowed. Entry in this field is not required.

### Title
Enter the contact's title. A maximum of 10 characters is allowed. Entry in this field is not required.

### Day Phone
Enter the daytime phone number of the contact in NNNNNNNNNN format. The system will format to NNN-NNN-NNNN.

### Night Phone
Enter the nighttime phone number of the contact in 'NNNNNNNNNN' format. The system will format to NNN-NNN-NNNN. Entry in this field is not required.

### Fax Number
Enter the fax number of the contact in NNNNNNNNNN format. The system will format to NNN-NNN-NNNN. Entry in this field is not required.

### Telex No
Enter the telex number of the contact in NNNNNNNNNN format. The system will format to NNN-NNN-NNNN. Entry in this field is not required.

### Eff Date
Enter effective date in DD-MON-YYYY format.

### Term Date
Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing contact.

### Last Mod
Field automatically populated with the last date modification made. Field is not navigable.

Press F12 (Commit) to save entries.

## At Commit
Data entered is saved to the database.

## What to Do Next
- For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.
- To always enforce a specific tier of an inventory product type for a customer, go to Setup Customer Preferred Product Tiers (CPPTIER). (For example, recovered plasma receivers who do not want to receive product over 120 days old.)

# 33.2.6 Setup Customer Preferred Product Tiers (CPPTIER)

## Intended Use

Use the Setup Customer Preferred Product Tiers screen to identify inventory product types that would always enforce a specific tier for a customer at packing. This is especially useful for recovered plasma receivers who wish to restrict the age of the product they receive. At packing, the system restricts that the inventory product type is within the customer's preferred tier (age to expiration).

Tiers identified in Enter Standard Tier Pricing (TIER) default in this screen for the same inventory product types. Those tier timeframes cannot be modified here. Tiers identify inventory product types by timeframes (hours, days, weeks, years) to expiration. There can be as many tiers for an inventory product type as your business requires. A set of tier timeframes must cover the entire dating period for an inventory product type. The following is an example of an RBC inventory product type with a maximum 42-day expiration date:

- Tier 1 = 0 to 7 (days to expiration, oldest).
- Tier 2 = 8 to 37 (days to expiration).
- Tier 3 = 38 to 42 (days to expiration, freshest).

## Limitations

- There can only be one set of tiers for a single inventory product type.
- The tier timeframes are identical in the Enter Standard Tier Pricing (TIER), and Setup Customer Preferred Product Tiers (CPPTIER) programs.

## Prerequisites

- The customer must have already been created in Create Customer Profile (CUSTOMER).
- Tiers must be defined in Enter Standard Tier Pricing (TIER).

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `CPPTIER`.


WellSky Corporation
Proprietary and confidential

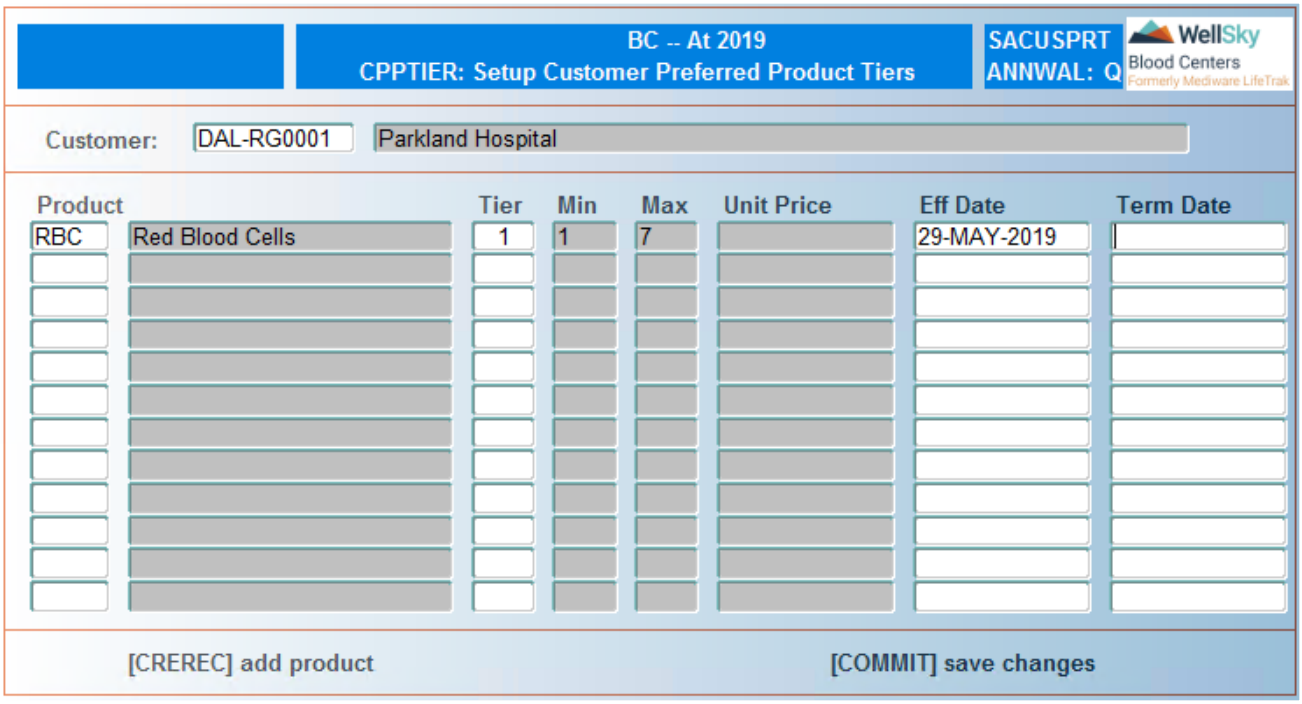


# Control Block Fields and Definitions

## Customer ID

Enter customer ID, part of the customer name, or select from LOV. Customer name automatically displays after the customer ID is entered.

# Detail Block Fields and Definitions

## Product

Enter inventory product type or select from LOV.

## Tier

Enter customer's preferred tier.

**NOTE –** The tier must be valid for the inventory product type in Enter Standard Tier Pricing (TIER).

## Min

Minimum age defined for the tier automatically displays. Field is not navigable.

## Max

Maximum age defined for the tier automatically displays. Field is not navigable.

## Unit Price

Field not utilized or navigable.

### Eff Date

Enter effective date in DD-MON-YYYY format.

### Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing preferred product tier.

Press F12 (Commit) to save entries.

## At Commit

Data entered in the screen is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.

# 33.2.7 Enter Customer Tier Pricing (CUSTIER)

## Intended Use

Use the Enter Customer Tier Pricing screen to associate specific inventory product type pricing for a customer that is different from the standard inventory product type price. This screen is intended for use with RG (regular) and RD (research and development) type customers. Differential pricing can be set at each tier for the inventory product type if needed. Tiers that do not have a different associated price will be charged at the standard price for the inventory product type and tier.

## Limitations

- Do not use this screen to define pricing for EX or MG type customers.
- Differential pricing for EX type customers is done in Enter Export Order (EXPORT), if allowed at your facility.
- Pricing for MG type customers is defined by product code in the Product Codes (PRODUCT) table.
- The dating timeframe is predefined for the tiers and cannot be changed in this screen.
- There can only be one set of tiers for a single inventory product type.
- The tier timeframes are identical in the Enter Standard Tier Pricing (TIER), Setup Customer Preferred Product Tiers (CPPTIER), and Enter Customer Tier Pricing (CUSTIER) programs.

## Prerequisites

The customer must be active. Entries in Inventory Product Types (PROTYP) and Enter Standard Tier Pricing (TIER) must be valid.

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `CUSTIER`.


WellSky Corporation
Proprietary and confidential

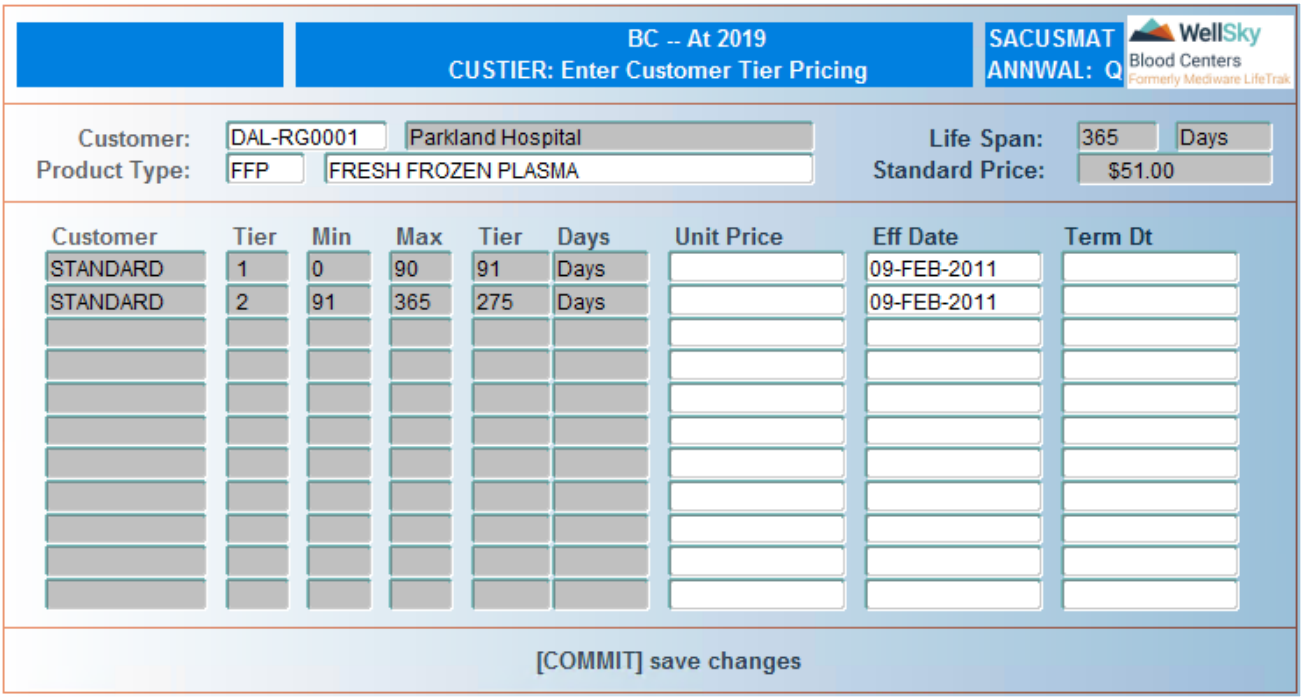


# Control Block Fields and Definitions

## Customer ID

Enter customer ID, part of the customer name, or select from LOV. Customer name automatically displays after the ID is entered.

## Product Type

Enter inventory product type or select from LOV.

## Lifespan

Maximum lifespan defined in Inventory Product Types (PRODTYP) for product with matching inventory product type automatically displays. Field is not navigable.

## Standard Price

Defaults from the Inventory Product Types (PRODTYP) table. If not defined there, it displays the maximum price for that inventory product type defined in Product Codes (PRODUCT). Field is not navigable.

# Detail Block Fields and Definitions

## Customer

STANDARD defaults if there is no differential pricing for a tier. Once a specific tier with pricing other than standard has been committed, the customer ID displays in this field (for example, WAD-RD0019). Field is not navigable.

## Tier

The tiers defined in Enter Standard Tier Pricing (TIER) for the inventory product type display. Field is not navigable.

**NOTE –** There can only be one set of tiers for a single inventory product type.

## Min

Minimum age defined for the tier automatically displays. Field is not navigable.

## Max

Maximum age defined for the tier automatically displays. Field is not navigable.

## Tier Days

The system defaults to the defined breakdown for the timeframe of the inventory product type. It may display Hours or Days from the Inventory Product Types (PRODTYP) table. Field is not navigable.

**NOTE –** Years does not display.

## Unit Price

Enter the price up to 99999.99. This is the price the customer will normally be charged for this product. There may be some additional circumstances where the customer will not be billed this price. That is considered during the product substitution process.

**NOTE –** When product substitution is allowed at order entry, if a more expensive product is substituted for a less expensive ordered product, the customer is billed at the cost of the ordered product (less). If a less expensive product is substituted for a more expensive ordered product, the customer is billed at the cost of the substituted product (less). The customer is billed at the tier level shipped whether or not substitution is allowed.

## Eff Date

Enter effective date in DD-MON-YYYY format.

**NOTE –** You may create a future effective date for a customer's tier that will automatically become effective on that date. This can be done only if STANDARD is displayed in the Customer field in the Detail block. If the customer ID is displayed in the Detail block, you cannot create an additional row for future pricing.

## Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing product tier price.

Press F12 (Commit) once all entries have been made.

# At Commit

Entries made are saved to the database.


WellSky Corporation
Proprietary and confidential

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.

# 33.2.8 Customer Product Tier Pricing Query (TIERQ)

## Intended Use

Use the Customer Product Tier Pricing Query screen to query specific inventory product type pricing for a customer that is different from the standard inventory product type price.

## Limitations

- EX or MG type customers should not have data to query.
- Pricing for MG type customers is defined by product code in the Product Codes (PRODUCT) table.
- The dating timeframe is predefined for tiers in the Enter Standard Tier Pricing (TIER) screen.

## Prerequisites

Entries are required in Inventory Product Types (PRODTYP). Enter Standard Tier Pricing (TIER) and Enter Customer Tier Pricing (CUSTIER).

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `TIERQ`.

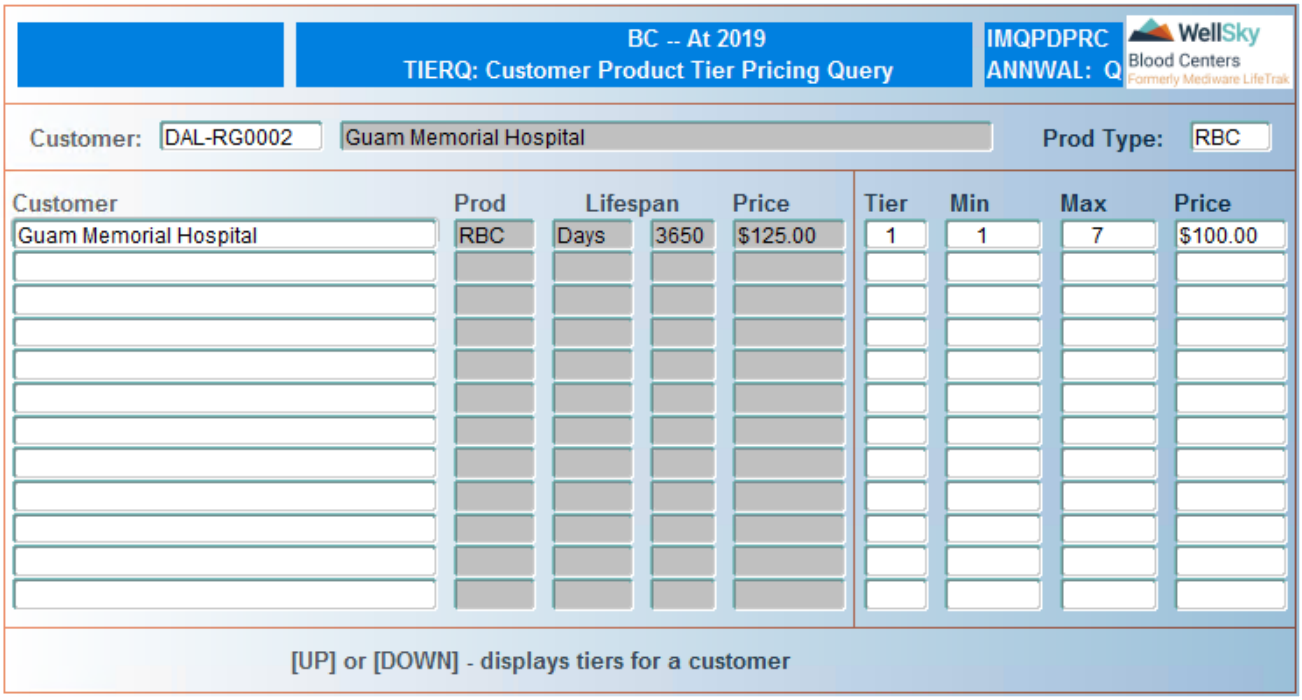

# Control Block Fields and Definitions

## Customer ID

Enter the customer ID, part of the customer name, or select from LOV. Customer name automatically displays after the ID is entered. Entry in this field is not required.

## Product Type

Enter the inventory product type or select from LOV. Entry in this field is not required.

**NOTE –** If a customer is selected, LOV is limited to inventory product types where the customer has other than standard pricing. Entry is optional. If you do not select an inventory product type, the search may be restricted to all inventory product types for a specific customer.

**NOTE –** If a customer or inventory product type is not selected, all customers and all inventory product types with pricing other than standard will be retrieved.

# In the Detail Block

The following information displays after the control block is populated:

- Customer – Customer name.
- Prod - Inventory product type.
- Lifespan – Product lifespan (Hours, Days, or if blank in years).
- Price - Standard price of the inventory product type..
- Tier - Breakdown of number of tiers for a specific inventory product type.
- Min - Minimum value of hours, days or years for a particular tier.
- Max - Maximum value of hours, days, or years for a particular tier.
- Price - Price associated to a particular tier for the inventory product type for the customer.

Use the UP and DOWN arrow keys to scroll through the list.

Press F12 (Commit) to save entries.

# At Commit

Data cannot be modified in this screen.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Customer Administration menu.


WellSky Corporation
Proprietary and confidential

# 33.2.9 Customer Consignee Product Details (VCUSTPRD)

## Intended Use

Use this screen to specify the inventory product types or product codes that will be unavailable to specified customers and consignees. The specified values will then be removed from the Product Code or Product Type LOV in the following screens:

- Enter Regular Order (ORDER)
- Enter Special Order (SPECIAL)
- Enter Export Order (EXPORT)
- Enter Standing Order (STANDO)
- Cancel or Change Order (CANCEL)
- Pack Products (PACK)
- Pack Inv Rejects to Salvage (PACKOS)
- Pack Lab Discards to Salvage (PACKLS)
- Offline Packing (PACKO)

## Limitations

None

## Prerequisites

None

# Entering/Viewing Data

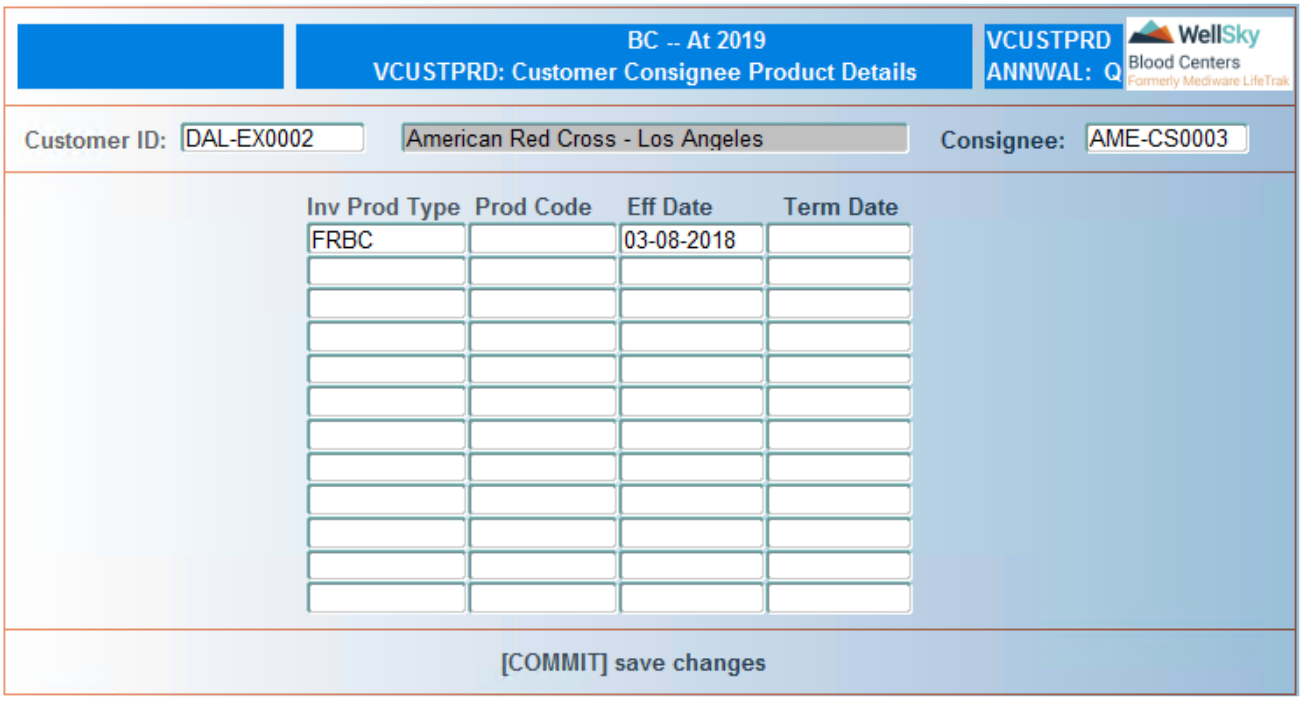


# In the Control Block

## Customer ID

Enter the Customer ID or select from LOV. Entry is required.

## Consignee

Enter the Consignee or select from LOV. Entry is optional. Leave field blank to restrict inventory product codes or product types for all consignees associated to the selected customer.

# In the Detail Block

**NOTE –** For each entry, you can select either an inventory product code or a product type, but not both.

## Inv Prod Type

Enter inventory product type or select from LOV. To specify a product code, press (missing or bad snippet) or (missing or bad snippet) to move the cursor to the Prod Code field.

## Prod Code

Enter product code or select from LOV.

### Eff Date

Enter effective date in MMDDYYYY format.

### Term Dt

Enter termination date in MMDDYYYY format.

Press the (missing or bad snippet) arrow to add additional entries.

Press (missing or bad snippet) to save changes.

## What to Do Next

There is no next step for this screen.

# 33.3 Internal Administration

Internal Administration functions are accessed from the following menu:

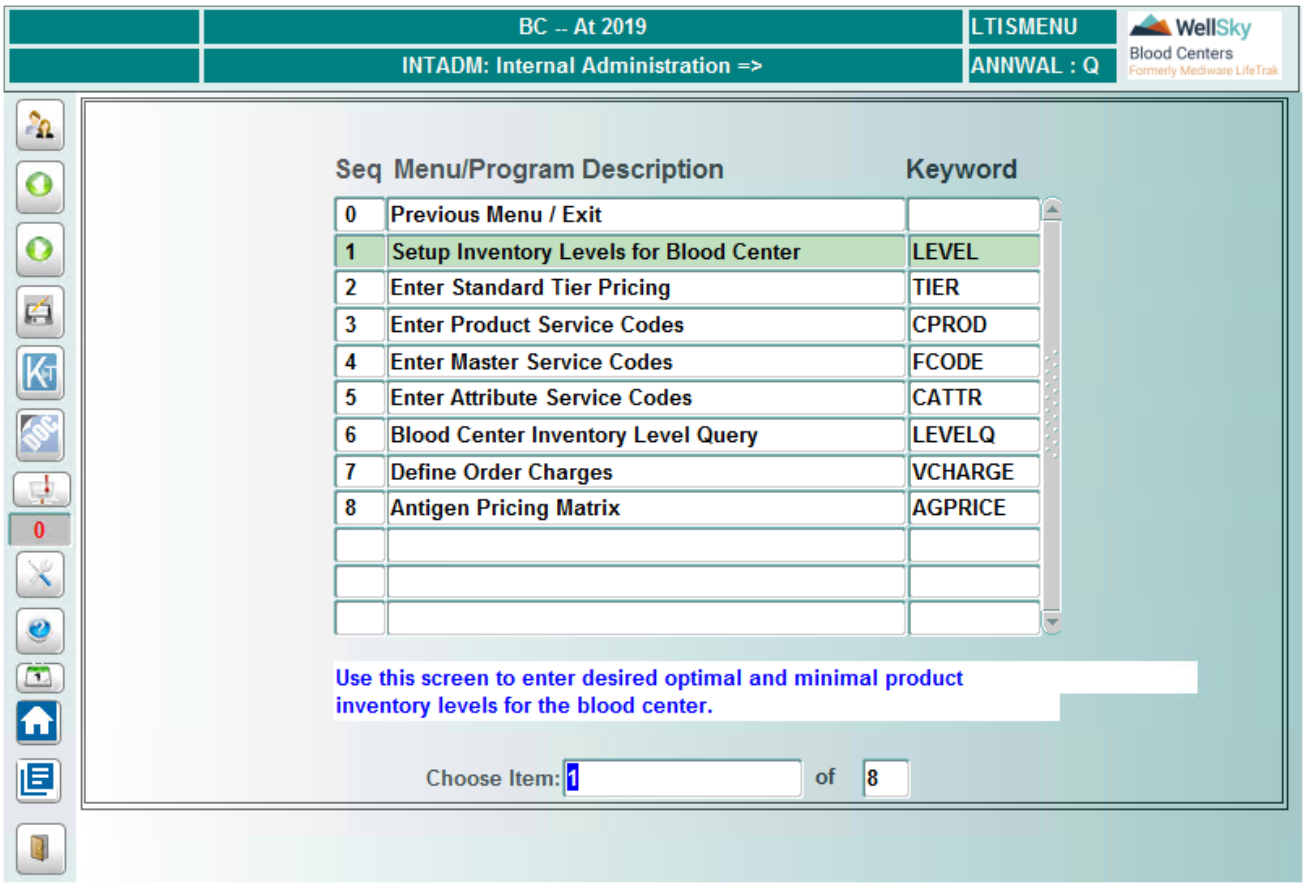


## 33.3.1 Setup Inventory Levels for Blood Center (LEVEL)

### Intended Use

Use the Setup Inventory Levels for Blood Center screen to enter the minimal and optimal levels for inventory product types for different inventory classes. Levels can be maintained separately by specific attributes that are associated to inventory product types (for example, a level for RBC, a different level for RBC that are also CMV-). For inventory monitoring purposes, levels should be set up for inventory product types that you intend to keep in stock. It is not useful to set up inventory levels for those product types that are not considered your stock items.

Setting up inventory levels for specific red cell antigen types is not required. Specific antigen types considered SP (special) class are user-definable in the Lab screens SP Antigen Group Definitions (ANTGGRP) and SP Antigen Rarity Combinations (RARITY). The RARITY program works in combination with the Rartiy % field in the Chapter Details (CHAPTER) table. RBC products (Lab product type) that meet the user-defined criteria as special or rare can only be checked into SP inventory from Lab.


WellSky Corporation
Proprietary and confidential

## Limitations

Once defined, the Inv Level and Product Type fields cannot be changed, only terminated. The only field that should be changed is the QTY (quantity).

## Prerequisites

Inventory product types and applicable attributes must be defined.

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `LEVEL`.

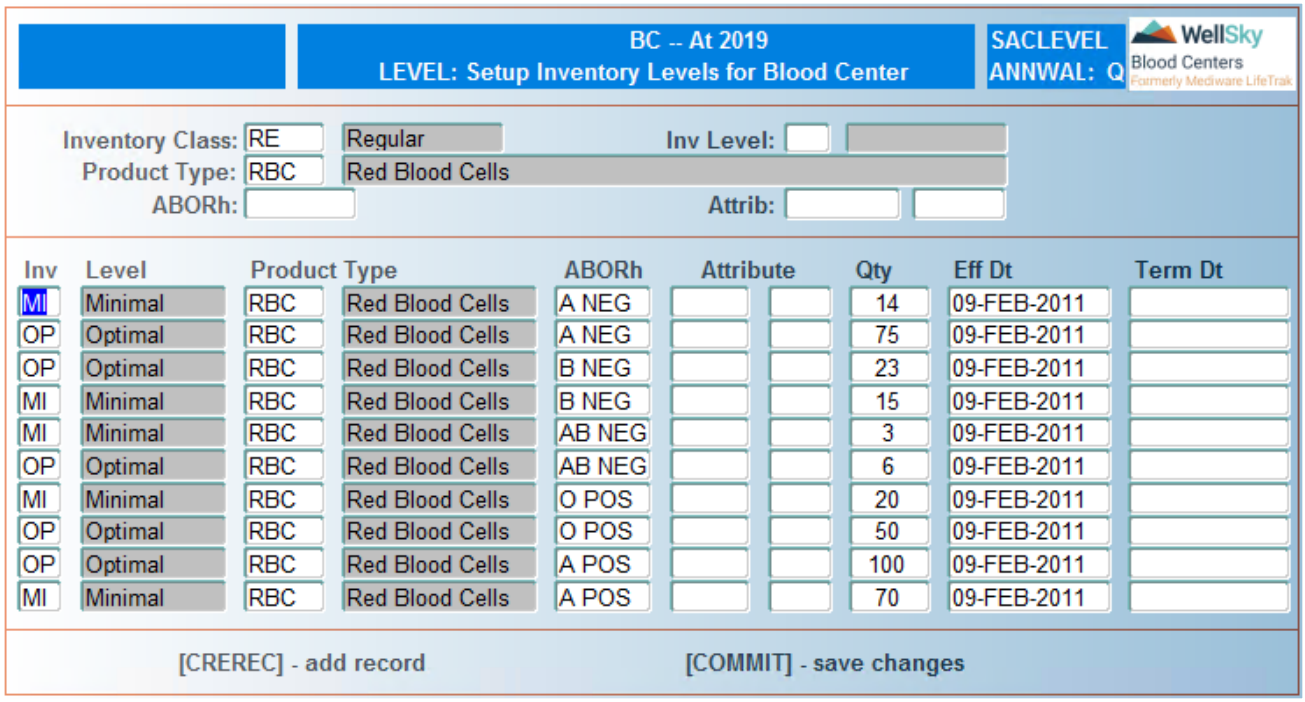


## Control Block Fields and Definitions

### Inventory Class

Enter the inventory class or select from LOV.

### Inv Level

Enter `MI` to define minimal, `OP` to define optimal, or leave blank to define either inventory level.

### Product Type

Enter the inventory product type or select from LOV. Leave blank to define any inventory product type.

### ABORh

Enter the ABORh or select from LOV. Leave blank to define any ABORh.

**NOTE –** Do not define any system label decision, such as BIO, HOLD , NFT, etc. Only define useable ABORh types, such as O Pos, Group A, B Neg, etc.

### Attrib

Enter attribute group, select from LOV, or leave blank to define any attribute. Entry is not required in this field.

Enter attribute code or select from LOV.

**NOTE –** If data is already present, it will be displayed based on the criteria entered in the control block.

## Detail Block Fields and Definitions

### Inv Level

Enter the inventory level `MI` (minimal), `OP` (optimal), or select from LOV.

### Product Type

Enter inventory product type or select from LOV. Product type description automatically displays after the code is entered.

### ABORh

Enter ABORh or select from LOV.

**NOTE –** BIO, NFT, HOLD, etc., should not be defined; only define usable system label decisions.

### Attribute

Enter attribute group or select from LOV.

**NOTE –** This should be used only for when attributes need to be associated and it was not entered in the control block.

Enter attribute code or select from LOV.

### Qty

Enter minimal or optimal quantity of the inventory product type. A maximum value of 9999 is allowed.

### Eff Date

Enter effective date in DD-MON-YYYY format.

### Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing inventory product type level.


WellSky Corporation
Proprietary and confidential

Press F12 (Commit) to save changes.

## At Commit

Data entered on the screen is saved.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.

# 33.3.2 Enter Standard Tier Pricing (TIER)

## Intended Use

Use the Enter Standard Tier Pricing screen to enter pricing that is different from standard. This tier level pricing overrides the standard price the blood center charges for the inventory product type.

Tiers identify inventory product types by timeframes (hours, days, weeks, years) to expiration. There can be as many tiers for an inventory product type as your business requires. A set of tier timeframes must cover the entire dating period for an inventory product type. The following is an example of an RBC inventory product type with a maximum 42-day expiration date:

- Tier 1 = 0 to 7 (days to expiration, oldest).
- Tier 2 = 8 to 37 (days to expiration).
- Tier 3 = 38 to 42 (days to expiration, freshest).

Differential pricing can be set at each tier for the inventory product type if needed. Tiers that do not have a different associated price will be charged at the standard price for the inventory product type. Tier pricing will be used on the RG (regular) and RD (research and development) type customers. It is also used on the EX (export) type customers if the price of the inventory product type is not overridden in the Price field in Enter Export Order (EXPORT).

If a particular RG or RD type customer has custom tier pricing entered in Enter Customer Tier Pricing (CUSTIER), standard or tier pricing in this table is overridden.

## Limitations

- There can only be one set of tiers for a single inventory product type. The tier timeframes are identical in Enter Standard Tier Pricing (TIER), Setup Customer Preferred Product Tiers (CPPTIER), and Enter Customer Tier Pricing (CUSTIER).
- The standard price displayed in this screen reflects the price in Inventory Product Types (PRODTYP). It does not reflect any pricing at the individual product code level. The system prices inventory product types utilizing the following hierarchy:
  - First it looks for pricing of inventory product types in Inventory Product Types (PRODTYP).
  - If not priced in that table, it uses the price for the individual product code in Product Types (PRODUCT).
  - If no pricing is entered in PRODTYP or PRODUCT, then the system takes the price from Enter Customer Tier Pricing (CUSTIER) for RG and RD type customers or from the Enter Export Order (EXPORT) screen for EX type customers, if allowed by your facility.

- Exception for MG (manufacturing) type customers:
  - Do not use this screen to change price of recovered plasma products (RPFF and RPL).
  - The cost of those products/shipment is calculated by liter based only on the amount entered in the Std Price field in Product Codes (PRODUCT).

## Prerequisites

Inventory product types must be defined.

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `TIER`.

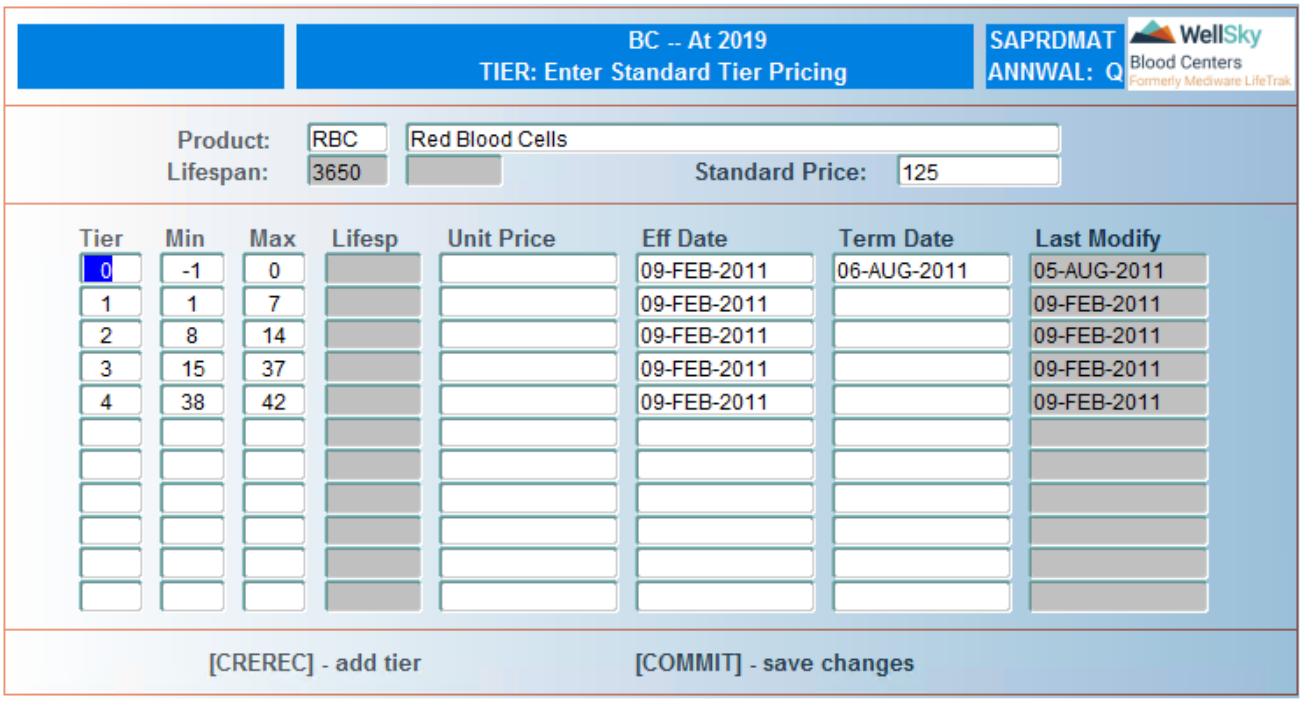


## Control Block Fields and Definitions

### Product

Enter inventory product type or select from LOV.

### Lifespan

Lifespan defined in Inventory Product Types (PRODTYP) for the product type automatically displays after product type is entered. Field is not navigable.

### Standard Price

Standard price defined in Inventory Product Types (PRODTYP) for the product type automatically displays after the product type is entered. Field is not navigable.


WellSky Corporation
Proprietary and confidential

**NOTE –** Price does not display if defined in Product Codes (PRODUCT).

# Detail Block Fields and Definitions

## Tier

Displays if already entered. You can modify existing or create new tiers. Tiers are definable based on the increments of the lifespan defined for the inventory product type in Inventory Product Types (PRODTYP) table. As described in the Intended Use statement, tiers define timeframes until product expiration. Therefore, Tier 1 represents products closest to expiration:

- Tier 1 = 0 to 7 (days to expiration, oldest).
- Tier 2 = 8 to 37 (days to expiration).
- Tier 3 = 38 to 42 (days to expiration, freshest).

## Min

Enter minimum days to expiration for the tier.

## Max

Enter maximum days to expiration for the tier.

**NOTE –** Minimum and maximum values cannot overlap from one tier to another. Do not skip any number between a maximum value for a tier and the minimum value for the next tier.

## Lifesp

Does not display information and is not navigable.

## Unit Price

Enter the price to be charged for the tier. A maximum value of 999999.99 is allowed.

## Eff Date

Enter effective date in DD-MON-YYYY format. After initial definition of the tier a future effective date cannot be entered. The price of the tier must be changed on the required date.

## Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing standard tier price.

## Last Modify

System automatically updates this field with the date that the tier was last modified. Field is not navigable.

Press F12 (Commit) to save changes.

## At Commit

Changes are saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.

# 33.3.3 Enter Product Service Codes (CPROD)

## Intended Use

Use the Enter Product Service Codes screen to enter or modify particular information in Product Codes (PRODUCT). The information in this screen is a subset of the fields in that table. When modifying the data in this screen, the respective field in the product code table is updated. This screen allows access to update particular information without giving access to the product code table.

## Limitations

Modification to any of these fields is automatically updates Product Codes (PRODUCT).

## Prerequisites

- The product must be defined in Product Codes (PRODUCT).
- Service codes must be defined in Enter Master Service Codes (FCODE).

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `CPROD`.


WellSky Corporation
Proprietary and confidential

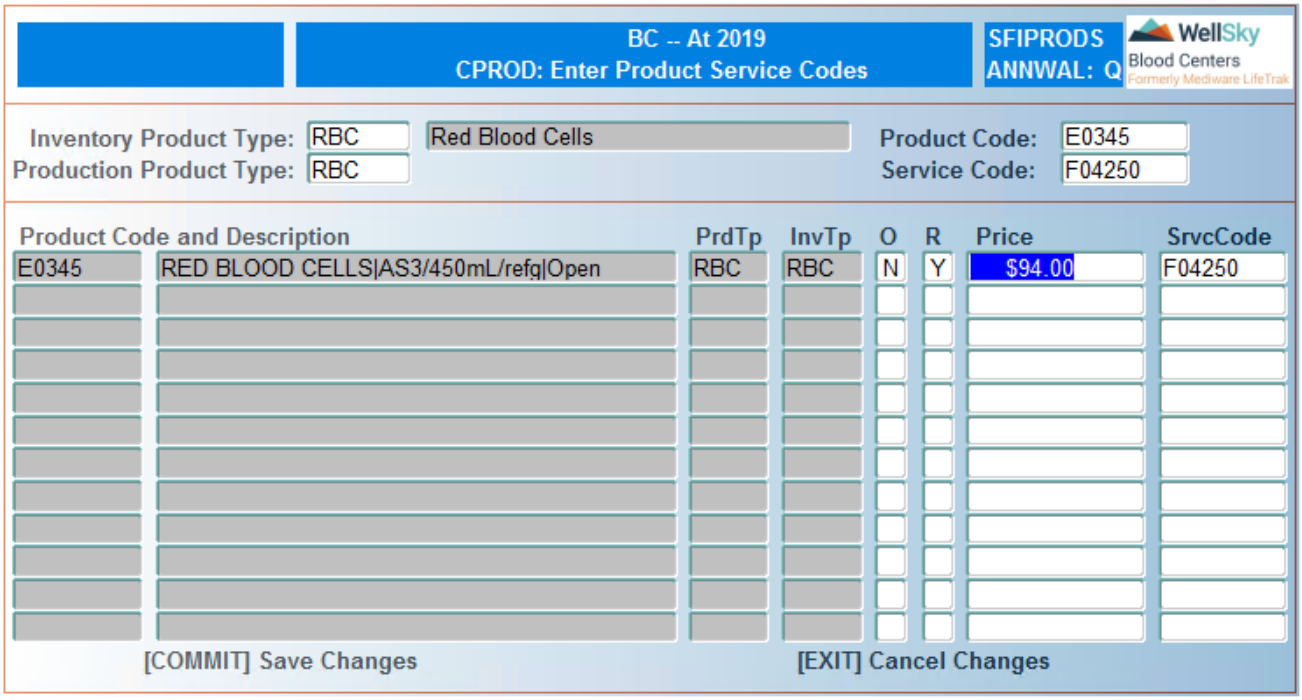


# Control Block Fields and Definitions

**NOTE –** Entry in the control block is optional for all fields. The retrieved data is restricted by entries in the control block.

## Inventory Product Type

Enter inventory product type or select from LOV. Entry is not required in this field.

## Production Product Type

Enter lab product type or select from LOV. Entry is not required in this field.

## Product Code

Enter product code or select from LOV. Entry is not required in this field.

## Service Code

Enter service code or select from LOV. Entry is not required in this field. A maximum of 7 characters is allowed.

# Detail Block Fields and Definitions

## Product Code and Description

Product code and description automatically display after control block is populated. Field is not navigable.

## PrdTp

Lab product type automatically displays after the control block is populated. Field is not navigable.

### InvTp
Inventory product type automatically displays after the control block is populated. Field is not navigable.

### O
Out-of state licensure status automatically displays after the control block is populated. Field cannot be modified in this screen.

### R
Returnable status automatically displays after the control block is populated. Field cannot be modified in this screen.

### Price
Enter product price. A maximum value of 9999999.99 is allowed.

**NOTE –** This updates the Std Price field in Product Codes (PRODUCT).

**NOTE –** If the facility does not keep pricing in Inventory Product Types (PRODTYP), but keeps it at the product code level, update that pricing here. If your facility keeps pricing in Inventory Product Types (PRODTYP), that pricing will not be seen here. It is suggested for ease of maintenance that pricing be kept in Inventory Product Types (PRODTYP).

**NOTE –** RPL and RPFF pricing is driven by the cost for those product codes in Product Codes (PRODUCT) only. There is no need to keep it in Inventory Product Types (PRODTYP).

### SrvcCode
Enter service code. A maximum of 7 characters is allowed. This code represents the product when interfacing to the billing system. Refer to Enter Master Service Codes (FCODE) before updating this field. This code must be defined in Enter Master Service Codes (FCODE) to be utilized correctly.

**NOTE –** This updates the Srv Code field in Product Codes (PRODUCT).

Press F12 (Commit) to save new data or changes to existing data.

## At Commit
Changes are saved to the system.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.


WellSky Corporation
Proprietary and confidential

# 33.3.4 Enter Master Service Codes (FCODE)

## Intended Use

Use Enter Master Service Codes to identify all service codes that represent billing for products, services, or other items. This is a master list of all of the service codes in Distribution and Lab that should generate a charge (or credit). These service codes interface to your billing system and should have a like service code in that system.

There are several screens in Distribution and Lab that have a service code field. Service code entry in that field can automatically generate an associated cost when that charge, product, attribute, etc., is ordered. Other processes within the system help to automatically generate the charge. The following screens have a service code field:

- Attribute Codes (ATTRIB), in Lab.
- Product Codes (PRODUCT), in Lab.
- Enter Product Service Codes (CPROD).
- Define Order Charges (VCHARGE).
- Enter Attribute Service Codes (CATTR).

## Limitations

The value 99999 is not defined here. It is used in Attribute Codes (ATTRIB) to identify attributes that display on the packlist but have no associated charge.

## Prerequisites

The service codes must be defined in the billing system for the interface of charges (or credits) to occur.

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `FCODE`.

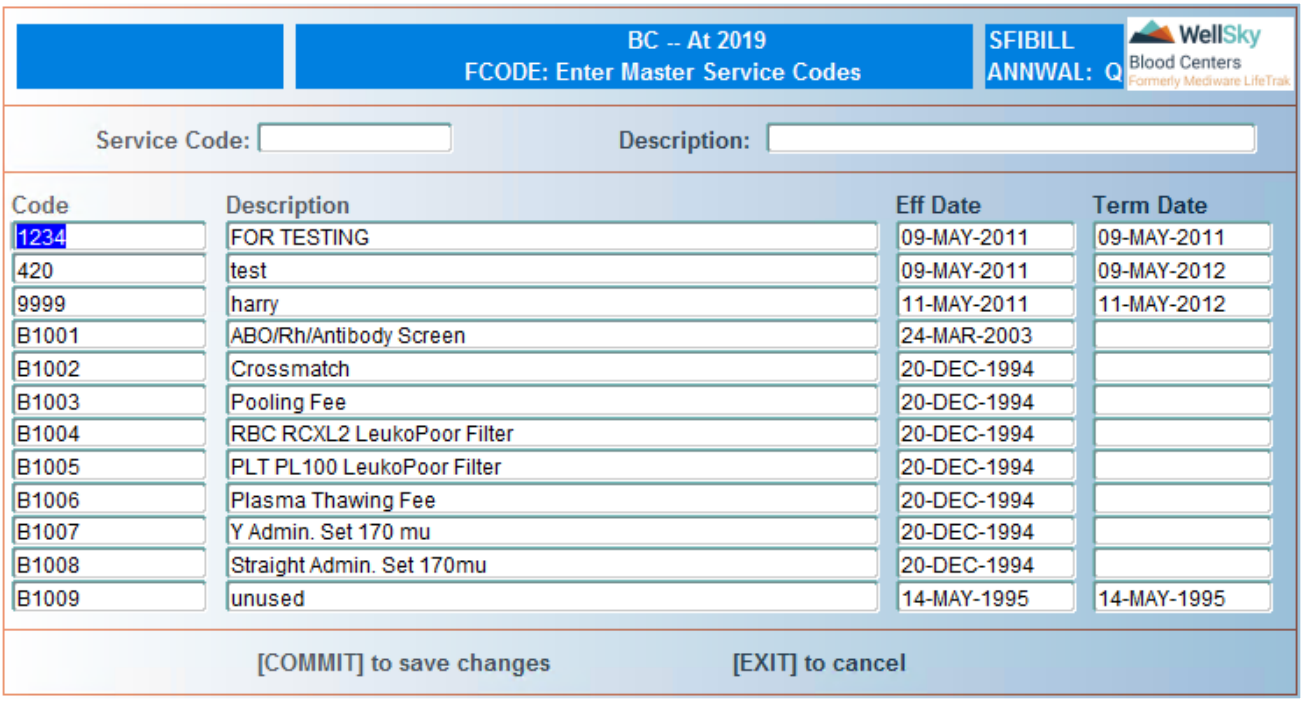


# Control Block Fields and Definitions

**NOTE –** Entry in the control block is optional for both fields. The retrieved data is restricted by entries in the control block.

## Service Code

Enter a service code or part of a service code.

## Description

Enter the service code description or part of the description. A maximum of 30 characters is allowed.

# Detail Block Fields and Definitions

## Code

Enter service code. A maximum of 7 characters is allowed.

**NOTE –** When a product service code is defined in this table (FCODE), you must define the service code and append the tier. The service code/tier must be defined for each tier of the inventory product type. For example, if the inventory product for LRBC has 4 tiers, define a service code for each tier of


WellSky Corporation
Proprietary and confidential

the inventory product type in as follows:

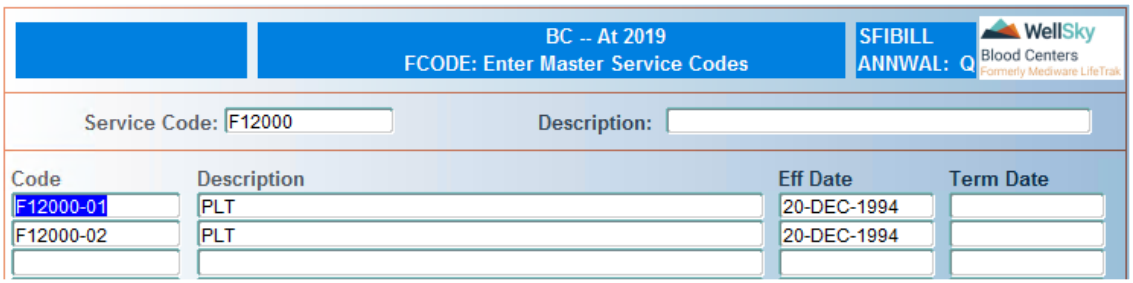


## Description

Enter service code description. A maximum of 50 characters is allowed.

**NOTE –** It is suggested to use the Short Name defined in Product Codes (PRODUCT) for product codes. Keep in mind that this field may not be 50 characters in other tables, such as in Define Order Charges (VCHARGE) where the user is limited to 30 characters.

## Eff Date

Enter effective date in DD-MON-YYYY format.

## Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing service code.

Press F12 (Commit) to save new data or changes to existing data.

# At Commit

Changes made are saved to the system.

# What to Do Next

- For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.
- Once service codes are defined, define as necessary in the following screens:
  - Attribute Codes (ATTRIB), in Lab.
  - Product Codes (PRODUCT), in Lab.
  - Enter Product Service Codes (CPROD).
  - Define Order Charges (VCHARGE).
  - Enter Attribute Service Codes (CATTR).
  - Antigen Pricing Matrix (AGPRICE).

# 33.3.5 Enter Attribute Service Codes (CATTR)

## Intended Use

Use Enter Attribute Service Codes to enter or modify particular information in the Attribute Codes (ATTRIB) table in Lab. The information in this screen is a subset of the fields in that table. When modifying the data in this screen, the respective field in the attribute codes table is updated. This screen allows access to update particular information without giving access to the attribute codes table.

## Limitations

Modification to any of these fields is automatically updates Attribute Codes (ATTRIB).

## Prerequisites

- The attribute code must be defined in the Attribute Codes (ATTRIB) in Lab.
- Service codes must be defined in Enter Master Service Codes (FCODE).

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `CATTR`.

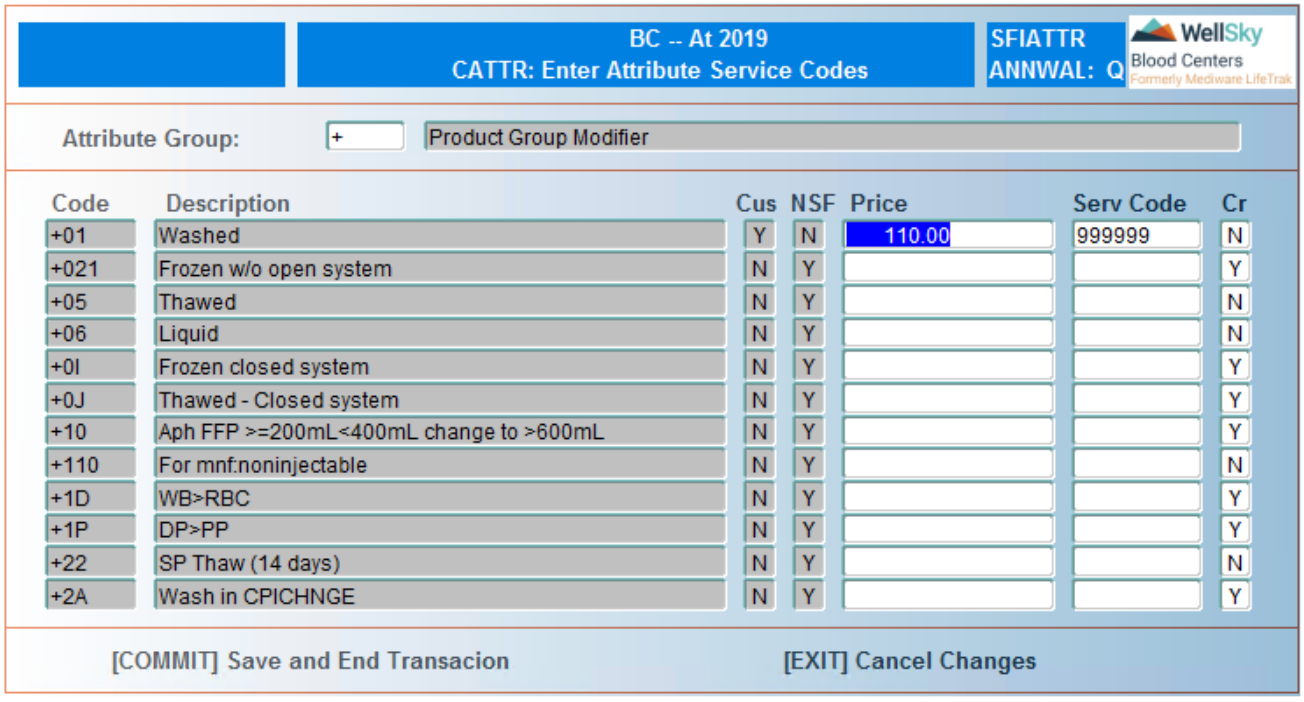


## Control Block Fields and Definitions

### Attribute Group

Enter attribute group or select from LOV. This field is required.


WellSky Corporation
Proprietary and confidential

**NOTE –** The data in the CUS field and NSF field are pulled from the C field and N field in the Lab Attribute Codes (ATTRIB) screen. If the values in the ATTRIB screen for both the C field and N field are set to N for a given code, then that code is not displayed in the CATTR screen.

# Detail Block Fields and Definitions

## Code

The attribute code displays after the control block is populated. Field is not navigable.

## Description

Attribute code description automatically displays after the control block is populated. Field is not navigable.

## Cus

Custom order attribute status automatically displays after the control block is populated. Field is not navigable.

## NSF

Normal stock status automatically displays after the control block is populated. Field is not navigable.

## Price

Enter attribute price. A maximum value of 9999.99 should be entered.

**NOTE –** This updates the Amt field in Attribute Codes (ATTRIB).

## Serv Code

Enter service code. A maximum of 7 characters is allowed. Refer to Enter Master Service Codes (FCODE) before updating this field. This code must be defined in Enter Master Service Codes (FCODE) to be utilized correctly.

**NOTE –** This updates the Srv Code field in Attribute Codes (ATTRIB).

## Cr

Enter one of the following:

- `Y` – if credit is to be given for the attribute when the product is returned if the return reason code used allows credit for the product.
- `N` – if credit is not to be given for the attribute when the product is returned regardless of the return reason code.

**NOTE –** This updates the Cr (credit) field in the Attribute Codes (ATTRIB) table.

Press F12 (Commit) to save new data or changes to existing data.

## At Commit

All changes are saved to the system.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.

# 33.3.6 Blood Center Inventory Level Query (LEVELQ)

## Intended Use

Use the Blood Center Inventory Level Query screen to query specific information associated to defined minimal and optimal inventory levels for inventory product types and inventory for products with attributes. This is a query of the data entered in Set Up Inventory Levels for Blood Center (LEVELQ).

## Limitations

None

## Prerequisites

Inventory levels must have been previously defined in Set Up Inventory Levels for Blood Center (LEVELQ).

## Accessing the Screen

Access this screen from the Customer Administration menu or by entering the keyword `LEVELQ`.

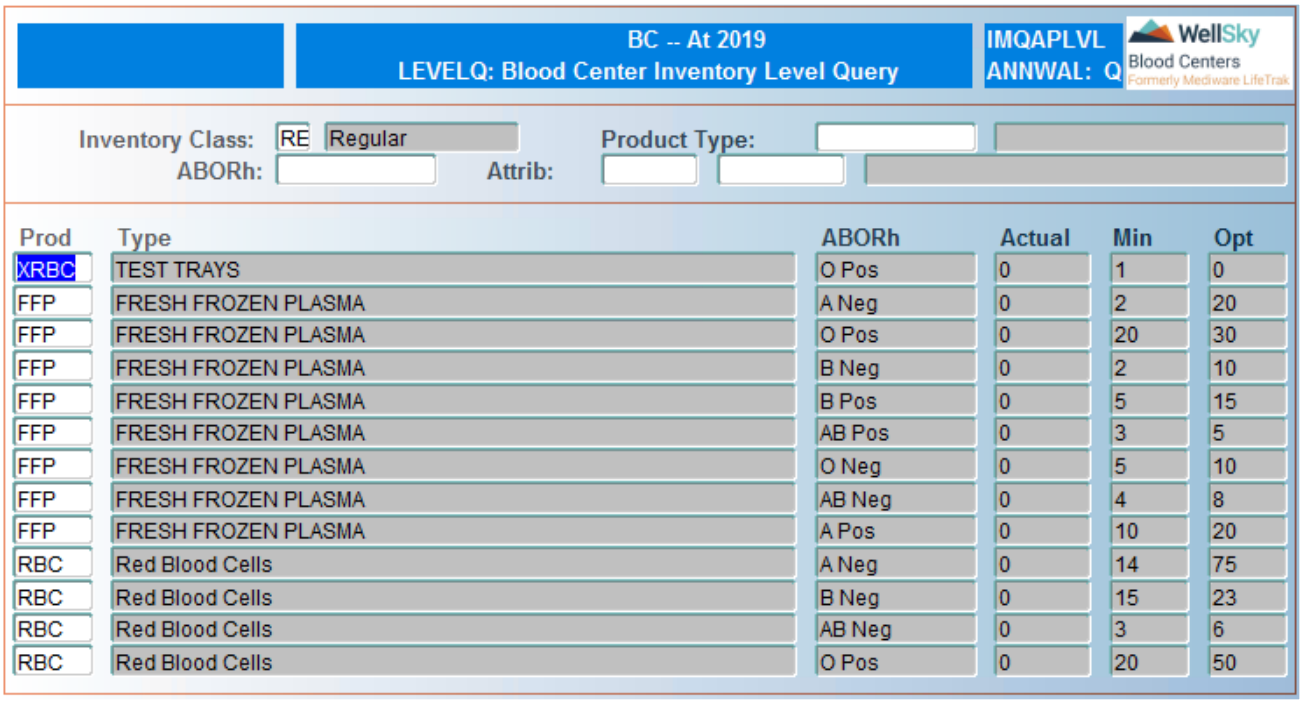


| Prod | Type | ABORh | Actual | Min | Opt |
|---|---|---|---|---|---|
| XRBC | TEST TRAYS | O Pos | 0 | 1 | 0 |
| FFP | FRESH FROZEN PLASMA | A Neg | 0 | 2 | 20 |
| FFP | FRESH FROZEN PLASMA | O Pos | 0 | 20 | 30 |
| FFP | FRESH FROZEN PLASMA | B Neg | 0 | 2 | 10 |
| FFP | FRESH FROZEN PLASMA | B Pos | 0 | 5 | 15 |
| FFP | FRESH FROZEN PLASMA | AB Pos | 0 | 3 | 5 |
| FFP | FRESH FROZEN PLASMA | O Neg | 0 | 5 | 10 |
| FFP | FRESH FROZEN PLASMA | AB Neg | 0 | 4 | 8 |
| FFP | FRESH FROZEN PLASMA | A Pos | 0 | 10 | 20 |
| RBC | Red Blood Cells | A Neg | 0 | 14 | 75 |
| RBC | Red Blood Cells | B Neg | 0 | 15 | 23 |
| RBC | Red Blood Cells | AB Neg | 0 | 3 | 6 |
| RBC | Red Blood Cells | O Pos | 0 | 20 | 50 |


WellSky Corporation
Proprietary and confidential

# Control Block Fields and Definitions

## Inventory Class

Enter inventory class or select from LOV. The description displays after the code is entered.

## Product Type

Enter inventory product type or select from LOV. Product type description automatically displays after the code is entered. Leave field blank to retrieve all inventory product types for the inventory class with inventory levels defined.

## ABORh

Enter ABORh type or select from LOV. The description displays. Leave field blank to retrieve all ABORh types associated to the inventory class and product type with inventory levels defined.

## Attrib

Enter attribute group or select from LOV. Leave field blank to exclude inventory product levels defined with attributes.

Enter attribute code or select from LOV.

# In the Detail Block

The following information displays after the control block is populated:

- Prod - Inventory product type.
- Type - Description from Inventory Product Types (PRODTYP).
- ABORh - ABO/Rh.
- Actual - Actual inventory level of active products available that meets the criteria in the control block.
- Min - Minimal inventory level defined that meets the criteria defined in the control block.
- Opt - Optimal inventory level defined that meets the criteria defined in the control block.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

# At Commit

Data cannot be modified in this screen.

# What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Customer Administration menu.

# 33.3.7 Define Order Charges (VCHARGE)

## Intended Use

Use Define Order Charges to identify all service codes that can be charged with an order or shipment, or that can be charged through the Customer Credit/Debit functions.

## Limitations

None

## Prerequisites

The service codes must be defined in Enter Master Service Codes (FCODE) to use it this screen. The service codes must also be defined in the billing system for the interface of charges (or credits) to occur.

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `VCHARGE`.

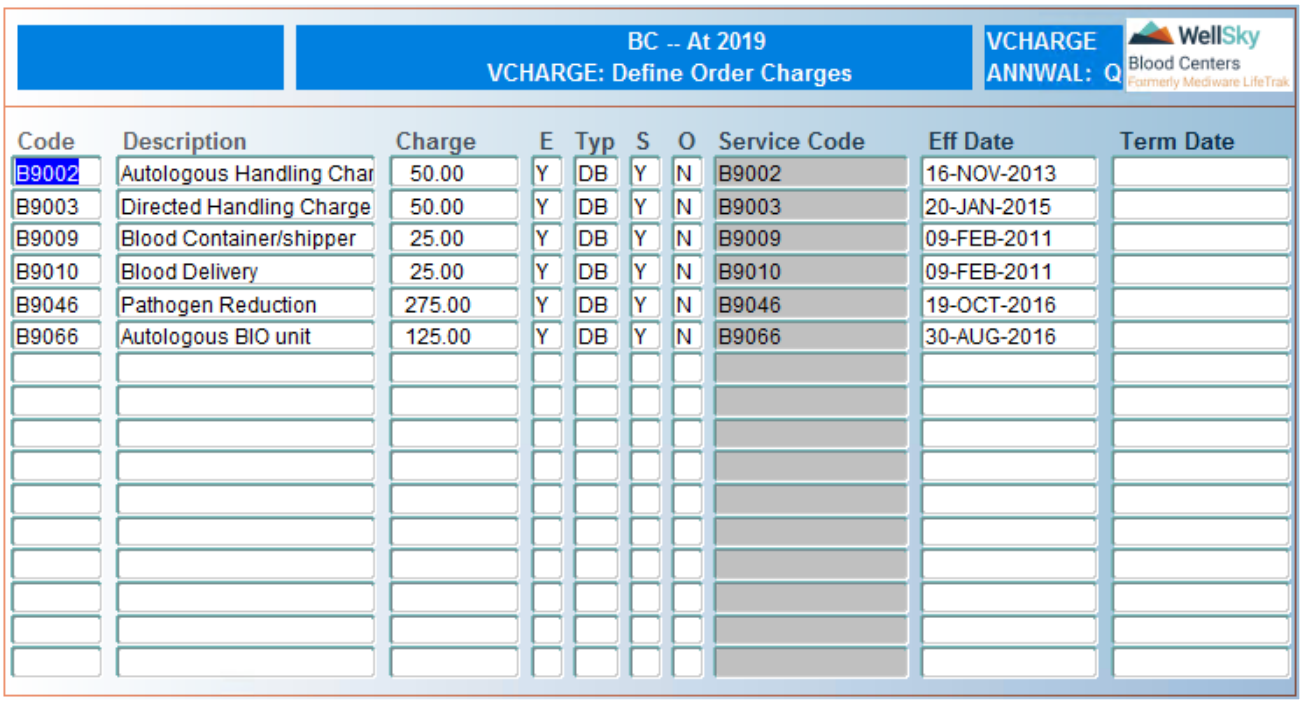

BC -- At 2019
VCHARGE: Define Order Charges

VCHARGE
ANNWAL: Q

WellSky Blood Centers
Formerly Medware LifeTrak

| Code | Description | Charge | E | Typ | S | O | Service Code | Eff Date | Term Date |
|---|---|---|---|---|---|---|---|---|---|
| B9002 | Autologous Handling Char | 50.00 | Y | DB | Y | N | B9002 | 16-NOV-2013 | |
| B9003 | Directed Handling Charge | 50.00 | Y | DB | Y | N | B9003 | 20-JAN-2015 | |
| B9009 | Blood Container/shipper | 25.00 | Y | DB | Y | N | B9009 | 09-FEB-2011 | |
| B9010 | Blood Delivery | 25.00 | Y | DB | Y | N | B9010 | 09-FEB-2011 | |
| B9046 | Pathogen Reduction | 275.00 | Y | DB | Y | N | B9046 | 19-OCT-2016 | |
| B9066 | Autologous BIO unit | 125.00 | Y | DB | Y | N | B9066 | 30-AUG-2016 | |

Press **CTRL** + **F2** (Create Record) or scroll to bottom of the list to enter the service code.

## Fields and Descriptions

### Code

Enter service code. A maximum of 7 characters is allowed.


WellSky Corporation
Proprietary and confidential

## Description

Enter service code description. A maximum of 30 characters is allowed.

**NOTE –** The Description field does not automatically enter the description entered in Enter Master Service Codes (FCODE). It must be re-entered here. For consistency, use the same description in both tables. In FCODE, 50 characters is allowed.

## Charge

Enter charge amount. A maximum value of 99999.99 can be entered. Negative dollar amounts can be used up to –9999.99.

**NOTE –** When negative dollar amounts are defined, that amount is subtracted on the pack list or debit slip. If a negative dollar amount is used and returned that order is credited correctly.

## E

Enter `Y` if the user can modify the charge amount during the debit or charge action. Enter `N` if the amount cannot be modified.

## Typ

Enter `CR` for a credit or `DB` for a debit.

**NOTE –** In the Order and Services Debit/Credit (CDSVC) the user indicates if the amount is to be a CR (credit) or DB (debit). When entering order charges through the order entry, order charges or shipment functions, it only allows the amount to be a credit (subtracts amount) or debit (charges amount) as defined in this table.

## S

Enter one of the following:

- `Y` – if the charge code can be used in the Shipment Charges box at shipment. Leave blank if it cannot be used at shipment.
- `S` – if the charge code should default in the Shipment Charges box for the shipment. The amount will be calculated once for the shipment if used. It can be deleted from the Shipment Charges box if desired during shipment.
- `B` – if the charge code should be used for each box in the shipment. The amount will be calculated times the number of boxes in the shipment, if used. It can be deleted from the Shipment Charges box if desired during shipment.

## O

Enter one of the following:

- N – (or leave blank) if this charge code can be debited without an order number. This means that charge code can be directly debited through Order and Services Debit/Credit (CDSVC) screen without an existing order number.
- Y – if this charge code requires an order number to be debited through Order and Services Debit/Credit (CDSVC). This means an order number must already exist to use this charge code.

### Service Code

Field automatically displays the value entered in the Code field. Field is not navigable.

### Eff Date

Enter effective datein DD-MON-YYYY format.

### Term Date

Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing charge code.

Press **F12** (Commit) to save new data or changes to existing data.

## At Commit

Data entered is saved to the system.

## What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Internal Administration menu.

# 33.3.8 Antigen Pricing Matrix (AGPRICE)

## Intended Use

Use the Antigen Pricing Matrix screen to enter or modify pricing for antigens when charged by multiples/quantities. Using this matrix, a specific amount can be charged for antigens based on number of antigens requested per number of products. The system uses this table to automatically associate a cost to the number of antigens ordered. Antigens can be charged based on historical information using this table.

**EXAMPLE –** Two RBC products are ordered that are K-, E-, c-. The charge for 3 antigens as defined in the screen shot under Accessing the Screen is $120. With 2 products ordered, the charge would be 2 X $120 = $240 for antigen screening.

## Limitations

- Each service code must be unique.
- Multiple rows for the same service code with different effective dates are not allowed.
- This screen does not take into consideration the complexity or rarity of any antigen combinations.

- Additional charges for a specific antigen or level of complexity are associated to the specific antigen-related attribute in Attribute Codes (ATTRIB) in Lab. These antigen-related attribute codes are defined under Attribute Group Alert and can be associated to specific antigen test results in Available Tests (TEST) table in Lab.

## Prerequisites

The service codes must be defined in Enter Master Service Codes (FCODE).

## Accessing the Screen

Access this screen from the Internal Administration menu or by entering the keyword `AGPRICE`.

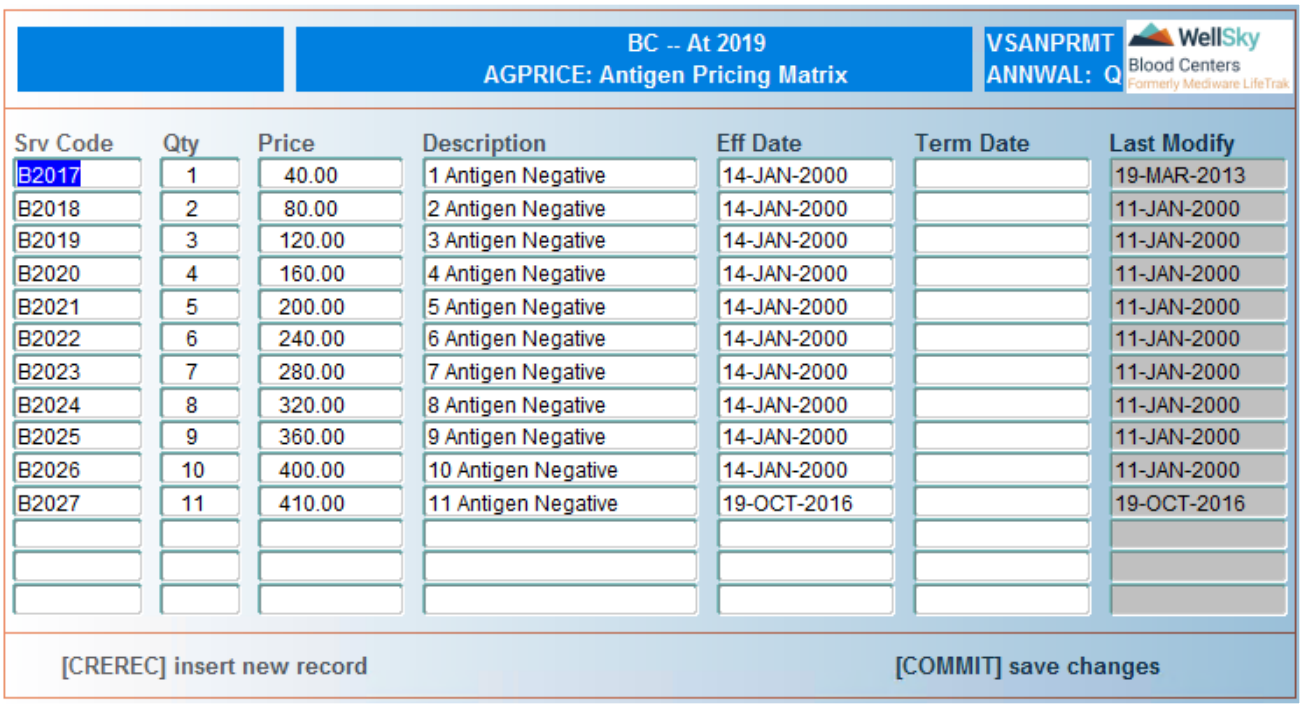


## Detail Block Fields and Definitions

Use **CTRL** + **F2** (Create Record) to insert a new record, or use the DOWN arrow to move to the next available row.

### Srv Code

Enter service code that will print on the pack list and interface to the billing system. A maximum of 7 characters is allowed.

### Qty

Enter quantity of antigens associated to the service code. A maximum value of 99 is allowed.

### Price

Enter charge associated to the number of antigens ordered. A maximum value of 99999.99 is allowed.

### Description
Enter description of the antigen negative quantity. A maximum of 50 characters is allowed.

### Eff Date
Enter effective date in DD-MON-YYYY format.

### Term Date
Enter termination date in DD-MON-YYYY format. Entry in this field is only required when terminating an existing antigen charge code.

### Last Modify
The system defaults to the last date the record was modified. Field is not navigable.

Press F12 (Commit) to save new data or changes to existing data.

## At Commit
Data entered is saved in the system.

## What to Do Next
- For normal processing, press F8 (Exit Screen) to return to the Internal Administration menu.
- Enter specific charges for antigen rarity or complexity in Attribute Codes (ATTRIB), Attribute Group Alert in Lab. Refer to Limitations above.


WellSky Corporation
Proprietary and confidential

# 34

# Chapter 34 - Application Interfaces


34.1 Introduction ..... 2126
34.2 Donor Interface Functions ..... 2127
34.2.1 Lab Interface Results (LABIN) ..... 2127
34.2.2 Lab- Donor Interface Log Query (ILOGQ) ..... 2130
34.3 Lab Interface Functions ..... 2134
34.3.1 Reset Donor Interface Status in Lab (DIRESET) ..... 2134
34.3.2 Re-Interface Donor to Lab (REINTER) ..... 2136
34.3.3 Drive Interface from Donor to Lab (AIIDNDRV) ..... 2137
34.3.4 Manual Donor Interface - NONPRODUCTION (DONINT) ..... 2139
34.3.5 Upload Test Results from Outside Source (APIUPLD) ..... 2141
34.3.6 Regional Check-in Batch API ..... 2143
34.3.7 API Add/Cancel Test and Place/Release Interdiction ..... 2146

# 34.1 Introduction

The Application Interfaces Module is that portion of Donor designed to provide an interface to laptop PCs and Lab-to-Donor functions.

The following screens provide the capability to view laptop log information, read unit test results into Donor from Lab, and view Lab-to-Donor log information.


WellSky Corporation
Proprietary and confidential

# 34.2 Donor Interface Functions

These functions are accessed from the following menu:

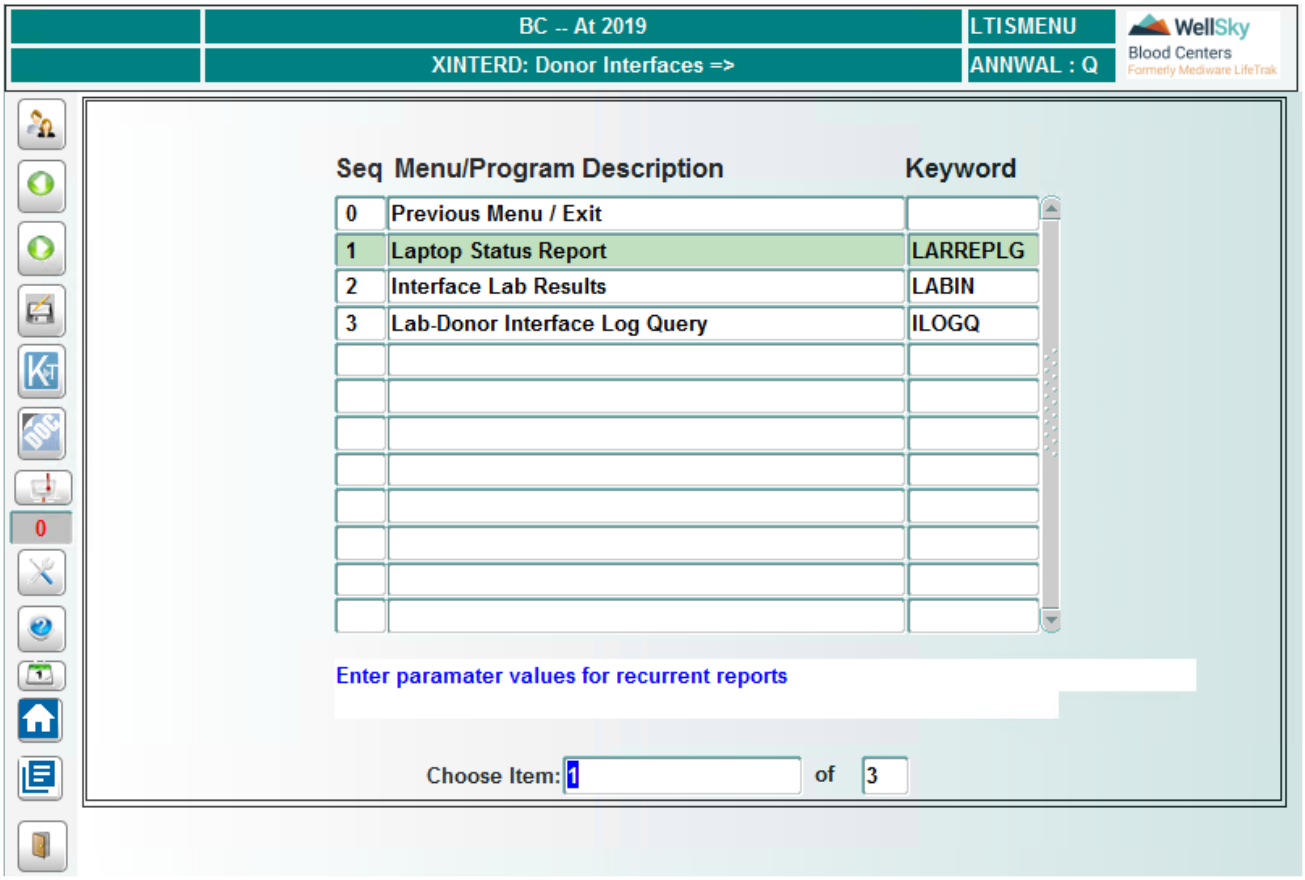


## 34.2.1 Lab Interface Results (LABIN)

### Intended Use

Use this screen to read the unit test results into Donor from Lab for a specific unit ID or a specific collection date.

### Limitations

None

### Prerequisites

When you use the Option 'By Units,' you must enter the check digit.

### Accessing the Screen

Access this screen from the Application Interfaces menu or by entering the keyword `LABIN`.

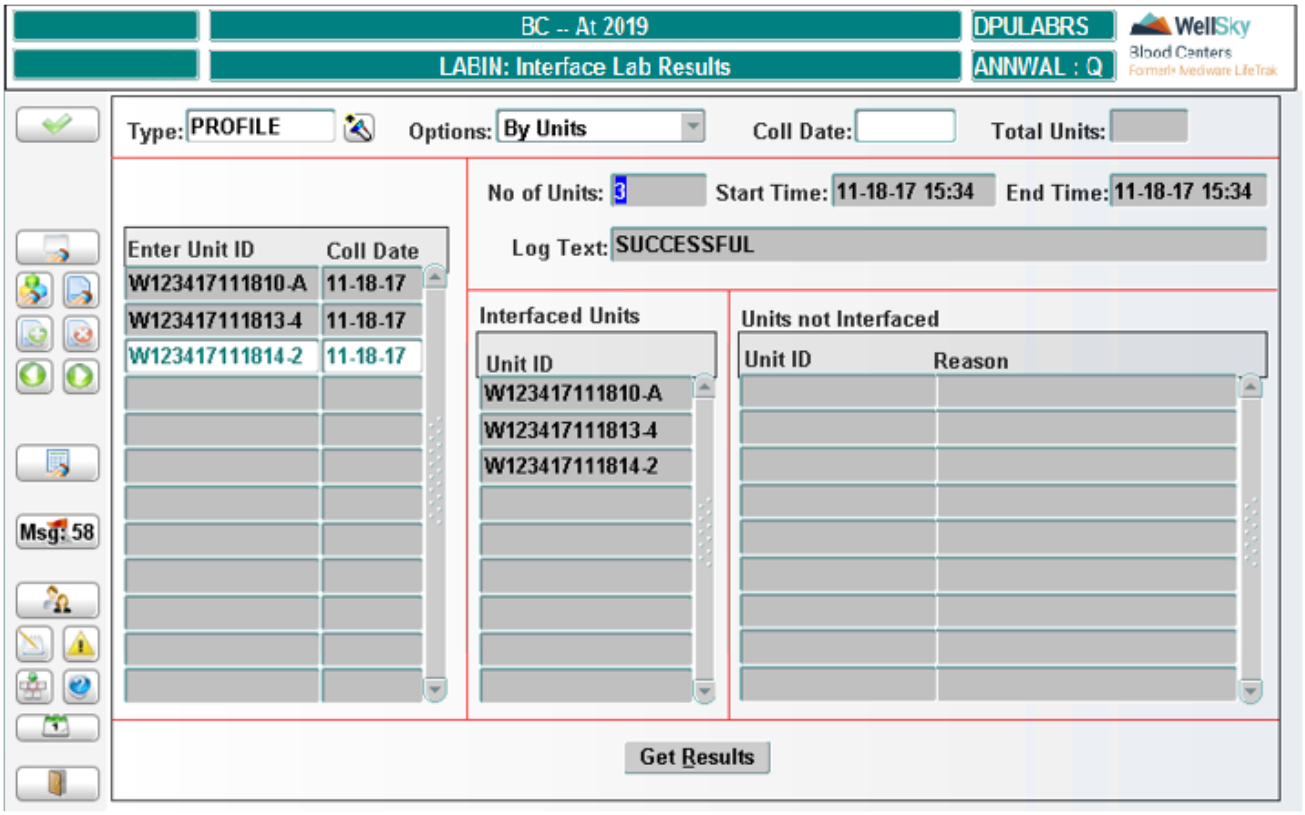


# Control Block Fields and Definitions

## Type

Enter result type, or select from the LOV, as follows:

- ANTIGEN
- CONFIRM
- PROFILE

## Options

Enter option, or select from the LOV, as follows:

- By Draw Date
- By Units

**NOTE –** When you use the By Units option , you must enter the check digit.

## Coll Date

Enter collection date if the By Draw Date option is selected.

**NOTE –** If the By Unit option is selected, this field is skipped and the cursor automatically moves to the Enter Unit ID field.

### Total Units
Field automatically populates with the total number of units interfaced plus the number of units not interfaced. Even if the unit is displayed multiple times, the system only counts it one time.

### Enter Unit ID
Enter the unit ID if the By Units option is selected. When you enter the Unit ID, the *Coll Date* field automatically populates.

### Coll Date
Field automatically populates after Unit ID is entered.

After all parameters are entered, click **Get Results** to display interface results. The following window opens:

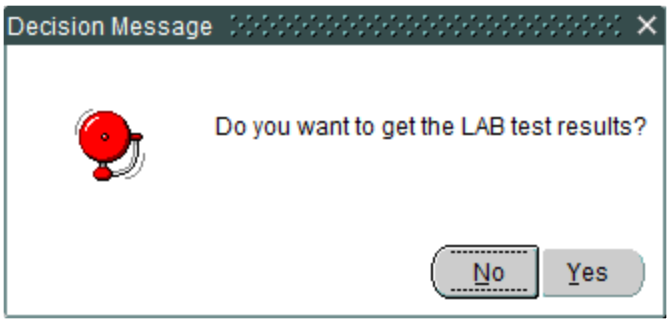


Click **Yes** to display the Lab test results. Click **No** to abort.

## Detail Block Fields and Descriptions

### No of Units
System displays the total number of units interfaced.

### Start Time
System displays the start time.

### End Time
System displays the end time.

### Log Text
System displays the text of the log entry associated with the unit.

## Interfaced Units Block

### Unit ID

System displays a list of all interfaced unit IDs.

## Units Not Interfaced Block

### Unit ID and Reason

System displays a list of all unit IDs that were not interfaced, along with the reason they were not interfaced.

**NOTE –** A single unit can be listed multiple times in this block if the unit is located in the log file with different reasons.

## At Commit

No data may be committed to the database from this screen.

## What to Do Next

There is no next step.

# 34.2.2 Lab- Donor Interface Log Query (ILOGQ)

## Intended Use

Use this screen to view Lab-to-Donor log information.

## Limitations

Reason codes must be configured in Master code NOINR.

## Prerequisites

None

## Accessing the Screen

Access this screen from the Application Interfaces menu or by entering the keyword `ILOGQ`.


WellSky Corporation
Proprietary and confidential

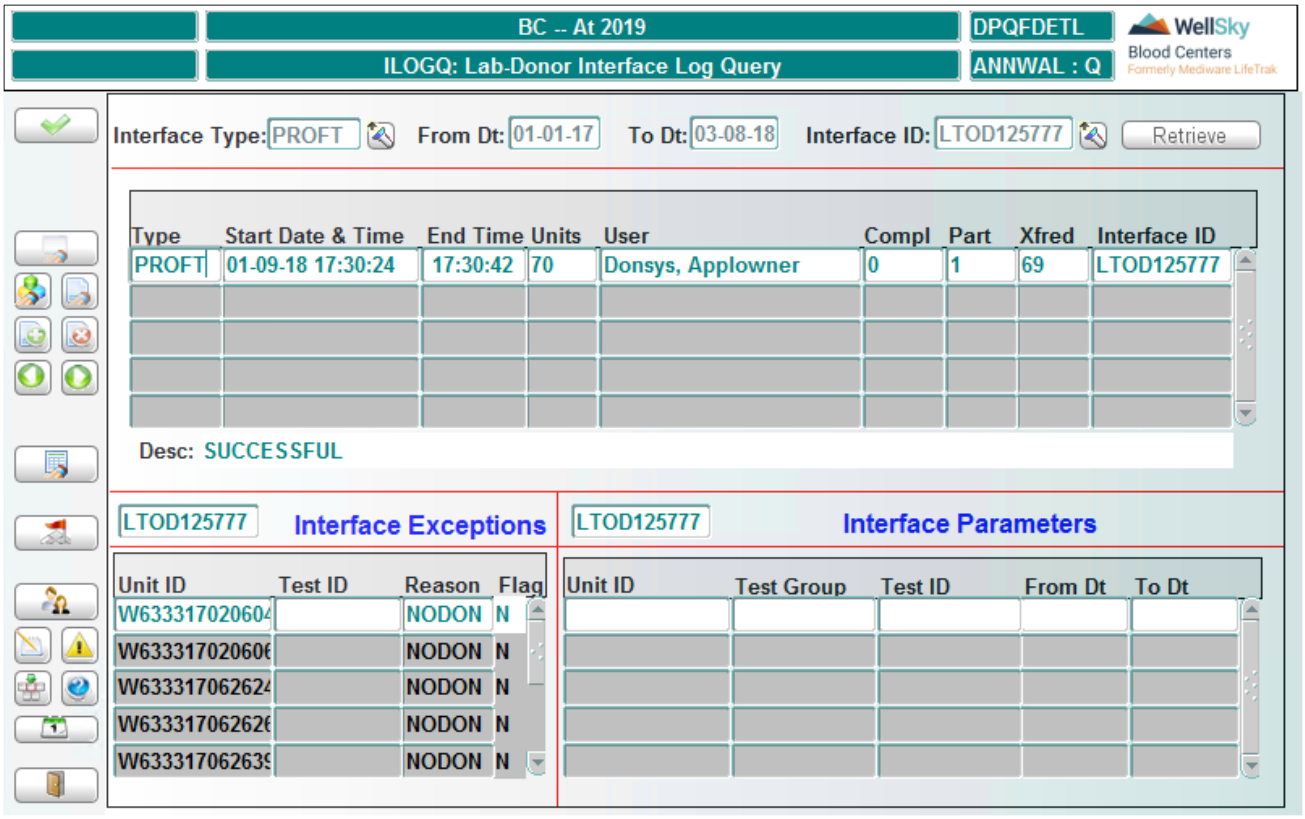


# Control Block Fields and Definitions

## Interface Type

Enter interface or select from the LOV. Leave field blank to view all interface types.

## From Date

Enter the earliest date for which log information is to be displayed, in MMDDYYYY format. Leave blank to view all log information.

## To Date

Enter the latest date for which a log information is to be displayed, using the MMDDYY format. Leave blank to view all log information.

**NOTE –** A From Date must be entered in order to enter a To Date

## Interface ID

Enter interface ID or select from the LOV. Leave field blank to view all interface IDs.

# Retrieving Data

Click **Retrieve** to display log information that match the entered criteria.

## The Detail Block

The following information displays:

- Type
- Start Date & Time
- End Time
- Units
- User
- Compl
- Part
- Xferd
- Interface ID

Use the scroll bar or **UP** and **DOWN** arrow keys to scroll through the list.

## Interface Exceptions Block

The following information displays about the record that is highlighted in the Detail Block:

- Interface ID (this field is not labeled)
- Unit ID
- Test Group
- Test ID
- Reason
- Flag

Use the scroll bar or **UP** and **DOWN** arrow keys to scroll through the list.

## Interface Parameters Block

The following information displays about the record that is highlighted in the Detail Block:

- Interface ID (this field is not labeled)
- Unit ID
- Test ID
- Reason
- Flag
- From Dt
- To Dt


WellSky Corporation
Proprietary and confidential

Use the scroll bar or UP and DOWN arrow keys to scroll through the list.

## At Commit

No data may be committed to the database from this screen.

## What to Do Next

There is no next step.

# 34.3 Lab Interface Functions

These functions are accessed from the following menu:

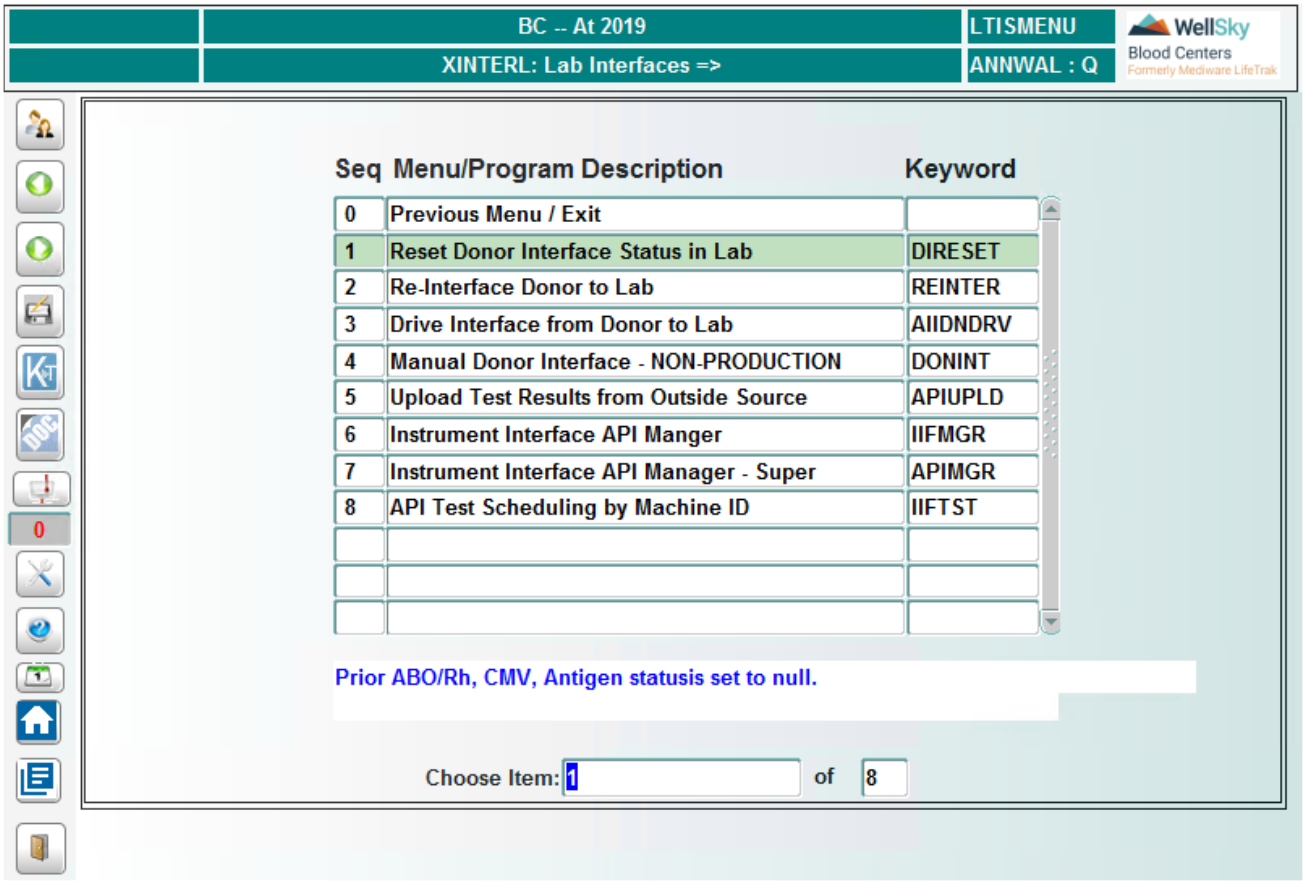


## 34.3.1 Reset Donor Interface Status in Lab (DIRESET)

### Intended Use

Use the Reset Donor Interface Status in Lab screen to void details from the Donor interface for a given unit. The screen does not alter Donor data; rather, it merely voids historical Donor data (ABO/Rh, CMV, and Prior Antigen Results) as it applies to the specified unit.

### Limitations

None

### Prerequisites

Donor interface data must have already been linked to a unit, either automatically or manually.


WellSky Corporation
Proprietary and confidential

# Accessing the Screen

Access this screen from the Application Interfaces menu or by entering the keyword DIRESET.

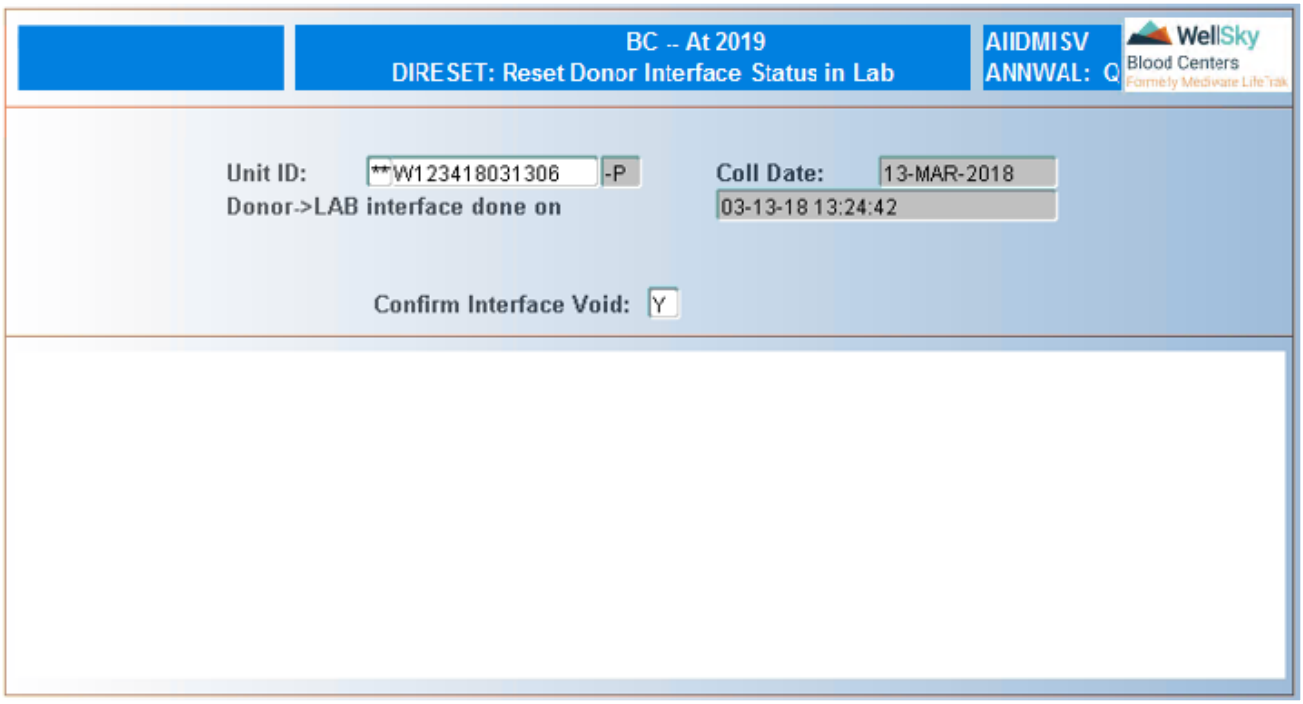


## Unit ID

Scan or manually enter unit ID.

## Coll Date

The system displays the unit collection date after the unit ID is entered. Field is not navigable.

## Donor ->LAB interface done on

System displays the date and time that the donor interface was applied to the unit. Field is not navigable.

## Confirm Interface void

Enter Y if the donor interface is to be voided for this unit. Enter N if donor interface is not to be voided for this unit.

# Interface Information Detail Block

If the user has confirmed that they interface is to be voided, the system will display the following information:

- Msg: Prior test results deleted.
- Msg: Permanent deferral interdiction deleted.
- Msg: Units table updated.

The transaction is then committed.

## At Commit

Data entered on the screen is transmitted to Lab.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Application Interfaces menu.

# 34.3.2 Re-Interface Donor to Lab (REINTER)

## Intended Use

Use the Re-Interface Donor to Lab screen to prompt Donor information for specified unit(s) to Lab whether or not information had been sent to Lab previously.

## Limitations

REINTER does not interface interdictions on autologous (AU) or therapeutic (TH) units.

## Prerequisites

Prior interface transaction must have occurred.

Define Master Code UTSPN with code IFDYS which determines how many day in the past the unit can be interfaced from Donor to Lab.

## Accessing the Screen

Access this screen from the Applications Interfaces menu or by entering the keyword `REINTER`.

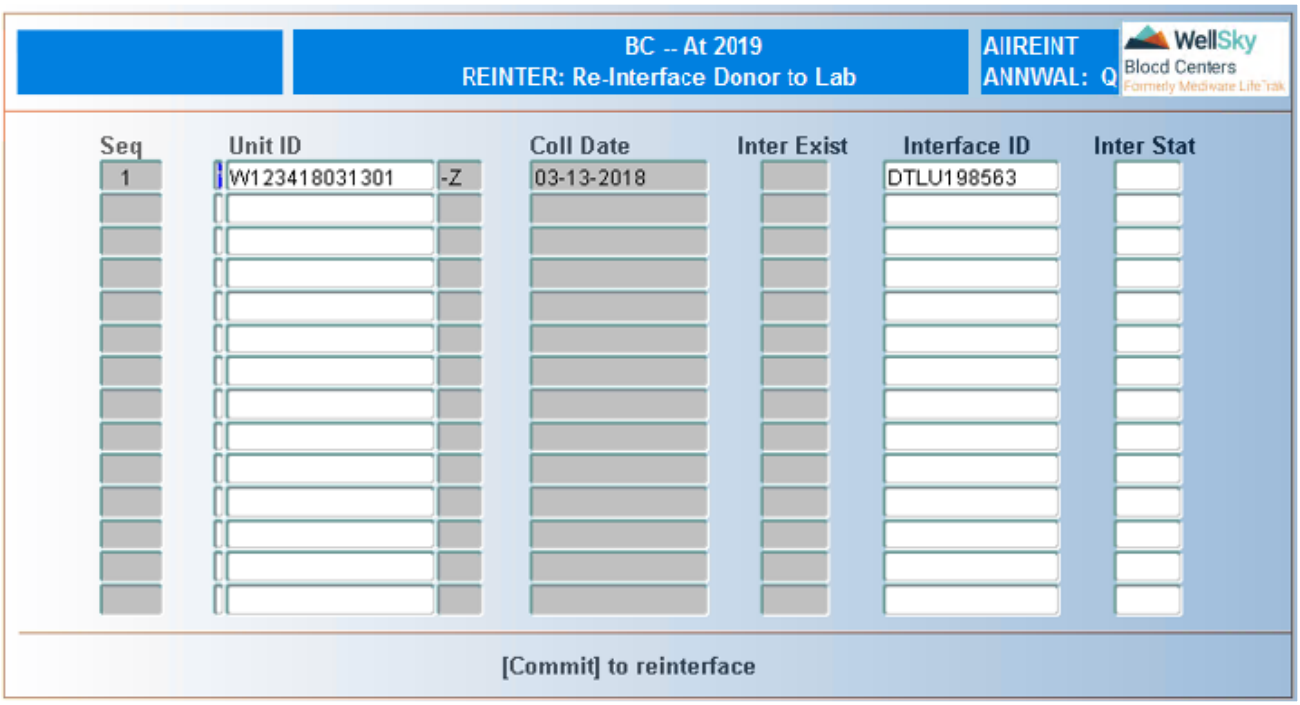

## Fields and Definitions

### Unit ID
Scan or manually enter unit ID.

### Collection Date
The collection date automatically displays after the unit ID is entered. Field is not navigable.

### Inter Exist
The column will display Y if interdictions exist and will be null if no interdictions are present. Field is not navigable.

### Interface ID
Displays ID generated by the system upon commit. Field is not navigable.

### Inter Stat
The column will display Y if interdictions are placed on the unit through the interface and will be null if no interdictions have been placed through the interface. Field is not navigable.

## At Commit

- Upon pressing **F12** (Commit), the Donor interface flag is reset for the units specified so information will be automatically sent to Lab. The interface date will be set to the current date and time.
- Data entered on the screen is transmitted to Lab.
- Whenever a unit is re-interfaced, all existing unit interdictions placed by one of the interfaces are deleted.
- If the underlying condition causing the interdiction to be placed has been corrected, the interdiction will not reappear.
- If the condition has not been corrected, the interdiction will be placed again.

## What to Do Next
For normal processing, press **F8** (Exit Screen) to return to the Application Interfaces menu.

# 34.3.3 Drive Interface from Donor to Lab (AIIDNDRV)

## Intended Use
Use the Drive Interface from Donor to Lab screen to bring drive data from Donor to Lab.

## Limitations
None

## Prerequisites
Drive must have been created in Donor.

# Accessing the Screen

Access this screen from the Application Interfaces menu or by entering the keyword AIIDNDRV.

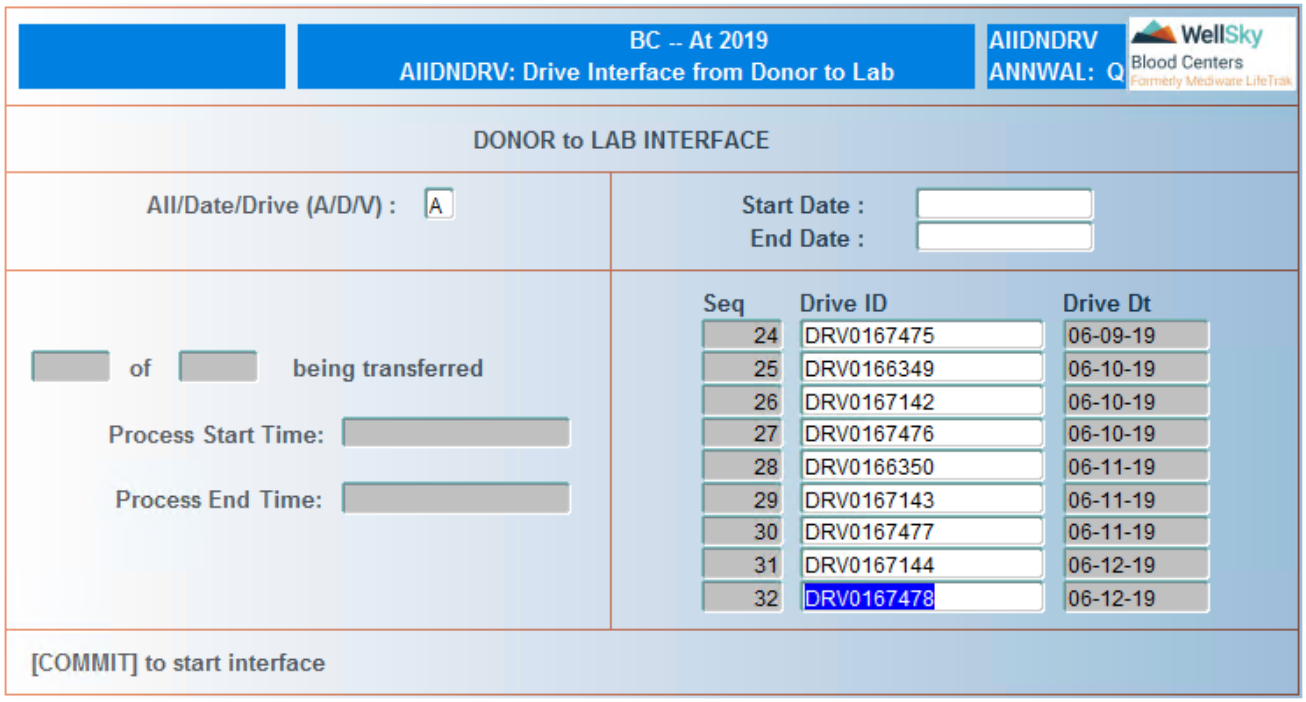


# Fields and Definitions

## All/Date/Drive

Enter A to retrieve all drives. Enter D to retrieve drives by date range. Enter V to retrieve all drives.

## Start Date

If retrieving drives by date range, enter start of date range in DD-MON-YYYY format.

## End Date

If retrieving drives by date range, enter end of date range in DD-MON-YYYY format.

## [blank] of [blank] being transferred

Displays number of total number of drives being transferred. Field is not navigable.

## Process Start Time

Time transfer process began displays. Field is not navigable.

## Process End Time

Time transfer process completed displays. Field is not navigable.


WellSky Corporation
Proprietary and confidential

### Seq
Drive sequence within total number of drives.  Field is not navigable.

### Drive ID
System-assigned identification number of drive.  Field is not navigable.

### Drive DT
Drive date automatically populates after drive ID is entered.  Field is not navigable.

## At Commit
Drive data selected is transferred from Donor to Lab.

## What to Do Next
For normal processing, press F8 (Exit Screen) to return to the Application Interfaces menu.

# 34.3.4 Manual Donor Interface - NONPRODUCTION (DONINT)

## Intended Use
To update the interface manually, use the Manual Donor Interface screen to transmit the donor information from Donor to the Lab system.

## Limitations
None

## Prerequisites
None

## Accessing the Screen
Access this screen from the Application Interfaces menu or by entering the keyword `DONINT`.

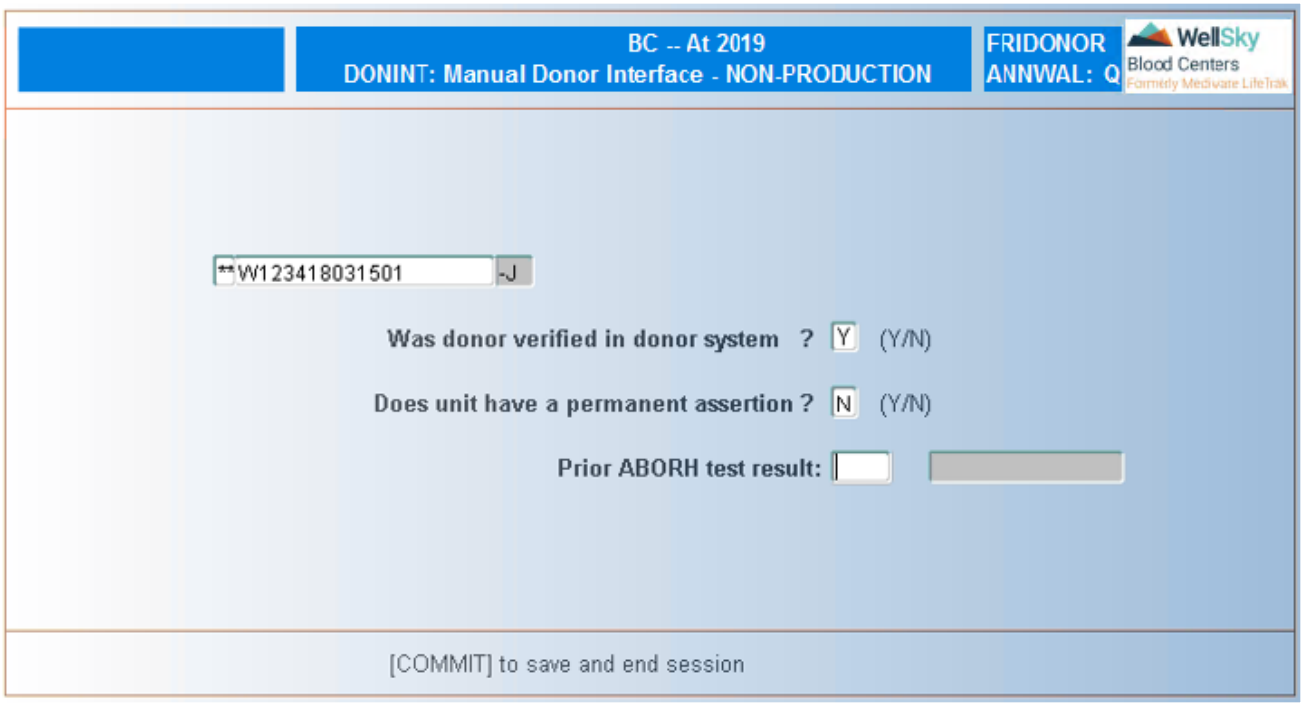


# Fields and Definitions

## Unit ID

Scan or manually enter unit ID.

## Was the Donor verified in donor system?

Enter one of the following:

- `Y` – donor information was verified
- `N` – donor information was not verified

## Does the unit have a permanent assertion?

Enter one of the following:

- `Y` – the unit has a permanent assertion
- `N` – the unit does not have a permanent assertion

## Prior ABORh test result

Enter the prior ABORh test result or select from LOV. Entry in this field is not required.

# At Commit

Data entered on the screen is transmitted to Lab.

# What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Application Interfaces menu.

# 34.3.5 Upload Test Results from Outside Source (APIUPLD)

## Intended Use

Use the Upload Test Results from Outside Source screen to upload test results from a local computer to Blood Centers. This will enable sites to collect reference lab results in various formats, place them into a directory on their computer (PC or laptop), and initiate the upload to the Blood Centers primary database server. The EIE will be used to collect results in various file formats and convert them into a common format, and then insert them into the Blood Centers system.

Files will be uploaded in either Surround format or Blood Centers format.

## Limitations

The file name length for the upload file is limited to 17 characters, including the file extension. This is because the file name format has a total character length of 30 (including the extension), and Blood Centers appends 13 characters to the file name. Example of a valid file name is DAL_INIATIAL.txt (16 characters).

## Prerequisites

- A directory on the local computer c: drive must be designated for uploads.
- The directory for the file path must be set to c:/LifeTrak TEST_RESULTS in the Master Code LOGDR FILOC. This is the directory where files are placed to be uploaded.
- The test results to be uploaded must be available in the designated directory on the c: drive of the local computer.
- You must have sufficient application permissions to access the Master Code Log and Applications Interface menu.
- You must have the Surround interface.
- The LT_INTERFACE_FILES staging table must be set as follows:
  - `Y` – Blood Centers format
  - `N`– Surround format
- The Master Code SURND must have the READ code set as follows:
- `T` – to read data from the table
- `F` – to read data from the file and move directly to the database
- The directory for the archive of test result files must be set to c:/LifeTrak TEST_RESULTS/ARCHIVE in the Master Code LOGDR ARLOC. This is the location where the files will be moved after loading from first staging table.

## Accessing the Screen

Access this screen from the Application Interfaces menu or by entering the keyword `APIUPLD`.

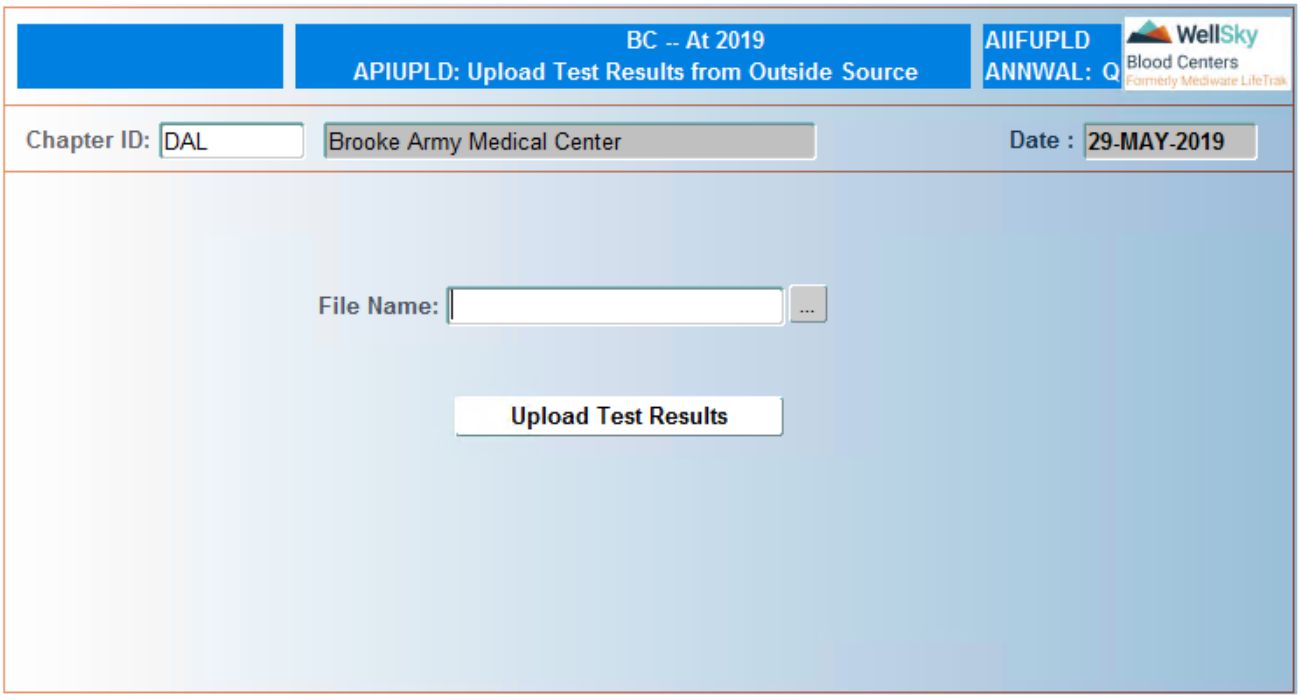


# Fields and Definitions

## Chapter ID

Entry is required. Enter the Chapter ID or select from LOV. The chapter description automatically displays.

## Date

Display only. The current date of the upload displays in MM-DD-YYYY format.

## File Name

Entry is required. Enter the name of the file you want to upload, or browse your local computer directory and select the file.

**NOTE –** Maximum file name length is 16 characters, including file extension.

# The Upload Test Results Button

Click **Upload Test Results** to initiate the upload to the Blood Centers primary database server. When the file is successfully uploaded to the Blood Centers application, the original input file is moved to a separate archive directory on the c: drive.

When the file has been loaded to the first staging table, you will receive the following message:


WellSky Corporation
Proprietary and confidential

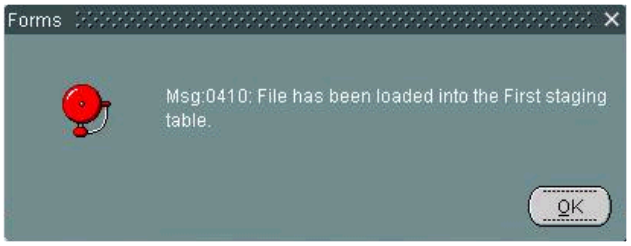


If the file cannot be processed by the Surround interface, the failure reason will be displayed in the APILOG.

After results have been uploaded to the Blood Centers database, all Blood Centers functions pertaining to test results are applicable.

## At Commit

The designated input file on your local computer is uploaded to the Blood Centers application.

## What to Do Next

Go to the Lab EDIT screen to edit the uploaded test results, if necessary.

# 34.3.6 Regional Check-in Batch API

## Intended Use

The tube check-in batch process allows a record to be uploaded to the database and automatically check-in the outside sample to the respective client contract. Sample tube information is placed into the Blood Centers API table by the customer. This information is then transferred to the Blood Centers system. The following data is transferred to the API table:

1. Contract ID
2. External Batch ID
3. Collection Date
4. Receive Date
5. External Unit ID (Outside Source Unit ID)
6. Internal Unit ID
7. ISBT Copy Flag

This data is described in detail later in this section.

## Limitations

- When ordering test for the contract, if the test results are performed prior to the tube being checked into the system, the test results will not move into Scheduled test. You must use the same process currently being used.
- All codabar units should have the stop and start codes removed prior to uploading the file to the API table.

# Prerequisites

Master code OSAPP must be defined with TUBE to view the errors for the TUBE Checkin process.

# Populated Data

The following data is populated in the API table. Requirements are listed under each data element.

## Contract ID

The system will check if the contract is present. If the contract is not present it does not allow the save of the record to the database.

The system will check if the contract is active, terminated or not defined. Any errors encountered will be logged to the API Log Query.

## External Batch ID

The system will check for the external batch ID to be present in the table. The external batch ID can only be associated to a single contract ID, single internal batch ID. An error is generated under the following conditions:

- If the external batch ID is associated to a different contract.
- If there is no external batch ID.
- If the external batch ID has already been through tube QC (the RGRECON screen).

## Collection Date

The system will check that the collection date is in the correct format. The system will also ensure the collection date is not in the future; if the date is a future date, an error is generated.

If the collection date is null (not present) for a record, that record will be aborted and written to the API Log Query. Record will not save with null collection date.

The system will ensure the collection date for existing external batch is the same each time an external batch number is used. An external batch can only contain a single collection date. If multiple collection dates are found, the API will take the first collection date processed and associate it to the external batch; any other collection date found the record will be aborted and placed in the API Log query. The batch will not be aborted; however, the individual records with different collection dates will be aborted.

## Receive Date

The receive date can be prior to system date, and it cannot be null. Also, the receive date cannot be prior to collection date.

## External Unit ID (Outside Source Unit ID)

The system will check the associated contract ID to the type of unit scheme the contract will accept. If the contract is set to Codabar numeric, the system will accept 7 digit numeric number. If the contract is set to alpha numeric, the system will accept the following:

- A 7 digit number that the system will translate into a alpha numeric number.
- A single or double digit alpha Codabar numeric number (for example, F12345, or FG98765).


WellSky Corporation
Proprietary and confidential

If the contract is set to ISBT, the following apply:

- The contract must have a Facility Identification Number (FIN) defined in Valid Collection Facilities (COLLID). Blood Centers will validate if the FIN defined in COLLID is active or not for the contract.
- Receiving of an ISBT will check the format for the unit scheme:
  - Receive a unit number with =W12341112345600, Blood Centers will remove the '=' and '00' from the unit number prior to loading into the database tables.
  - Receive a unit number with =W123411123456 Blood Centers will remove the '=' from the unit number prior to loading into the database tables.
  - Receive a unit number with W12341112345600, Blood Centers will remove the '00' from the unit number prior to loading into the database tables.

For Codabar or alpha numeric Codabar contracts that have a active FIN defined in the COLLID , the system will allow Codabar and ISBT unit numbers checked in for the contract.

### Internal Unit ID

The unit scheme for Internal Unit ID will be defined based on the Chapters table and Institution table. If the ISBT start date has not been defined in the Chapters table, the system will check the Institution table for unit scheme format (Codabar, alpha numeric Codabar) as follows:

- If it is set to numeric, the system will require a 7 digit number for internal unit ID.
- If it is set to alphanumeric, the system will accept 7 digit number. The system will translate to alphanumeric number. It will also take a single alpha numeric or a double alpha numeric.

If the ISBT start date has been defined in the Chapters table, the system will expect an ISBT formatted unit number. The FIN must be defined in valid collection facilities table (COLLID) for the internal contract and it must be active (not terminated, effective date cannot be in the future).

The system will also check the format of the unit number, as follows:

The system will remove the '=' and '00' from the unit number prior to loading into the database tables.

- If the system receives a unit number with =W123411123456, it will remove the '=' from the unit number prior to loading into the database tables.
- If the system receives a unit number with W12341112345600, it will remove the '00' from the unit number prior to loading into the database tables.

### ISBT Copy Flag

The system will check if the ISBT copy flag is set to 'Y' or 'N': If it is set to 'Y', the system will copy the external unit ID into the internal unit ID field. The system will not require an internal unit number in the API table, but if the internal unit number is populated in the API table, it must be equal to the external unit number.

If the ISBT copy flag is set to 'N,' the system will require the internal unit number to be populated with an internal number that is not used by another external number, or already found within the system.

## Ordering of Test for the Contract

Once the unit is checked into the system, the tests associated to the contract will be ordered. Tests will be placed in to UTRS – profile tests.

**NOTE –** If the test results are performed prior to the tube being checked into the system, the test results will not move into Scheduled test. You must use the same process currently being used.

## Archive Records

Once the record is processed with the system, it will be archived into the Archive table API_TUBE_CHECKIN_ARCH. The user will be responsible for archiving data from this table and purging the contents.

## Duplicate Tubes

Duplicate external unit numbers for the different tube types will not be allowed. An error will be found in the API Log Query. Duplicate internal unit numbers will not be allowed, and an error will be found in API Log Query.

# 34.3.7 API Add/Cancel Test and Place/Release Interdiction

## Intended Use

This API process allows a record to be uploaded to the database and automatically schedule, cancel a test and/or place, release an interdiction The information is placed into the Blood Centers API table by the facility. This information is then transferred to the Blood Centers system. The following data is transferred to the API table:

1. External Batch ID
2. Chapter ID
3. Internal Unit number
4. Test ID
5. Interdiction code
6. Cancel flag (test)
7. Release flag (interdiction

This data is described in detail later in this section.

## Limitations

- If a unit has an outside codabar unit number which exist in the UNITS table that belongs to another contract, and the sample is not renumbered, when inserted into the API table with the wrong unit number the test or interdiction process will occur on the wrong unit. It is the facility's responsibility to make sure the inserted unit numbers and data is correct.
- Invalid information that is inserted into the API table is responsibility of the facility, WellSky is not responsible for parsing the customer file and inserting into the API table.
- The package will not check the contract information of the unit number prior to scheduling or canceling a test. The facility is responsible for checking that information prior to loading the API table.


WellSky Corporation
Proprietary and confidential

# Prerequisites

Master Code APADD must be defined . This Master Code defines the parameters that will be used in the package. Define the Master Code as follows. The codes are static but the description can change.

- CANR – enter the cancel reason for canceling a test. This reason must be defined in Master Code VOID.
- DAYS – number of days you would like a record to stay in the API table before archiving. This is linked to records in which the unit is not checked into the system when the record is processed in the API table.

To determine the number of days to allow a record to remain in the API table, the following logic should be used: Sysdate – insert_date should be greater than code DAYS (number). Records will be processed at midnight when reaches limit.

# Populated Data

The following data is populated in the API table. Requirements are listed under each data element.

## External Batch ID

The system will check for the external batch ID to be present in the table. The external batch ID can be linked to multiple records. The external batch ID can only be 20 characters. If the external batch ID is not supplied, the system will abort all records without a external batch and write to the log file.

## Chapter ID

The chapter ID is a required field. The chapter ID is supplied to the package through the cron job. The incoming chapter ID is validated from the CHAPTERS table. If the chapter ID is not valid, the entire process will be aborted, and the details will be written in the log file.

## Unit ID (Internal Unit ID)

Unit ID is validated. If a 16 digit ISBT number is in the API table (for example, =W45451212031200), the interface parse the valid 13 digit number by trimming the start and flag characters. If the length does not match with ISBT standards, the interface will reject the record and skip to the next record by throwing an appropriate message, “Invalid Unit ID.”

If a 15 digit ISBT number is in the API table (for example, W45451212031200) without start code and with flag characters, the interface will parse the valid 13 digit number by trimming the flag characters. If the length does not match with ISBT standards, the interface will reject the record and skip to the next record by throwing an appropriate message, “Invalid Unit ID.”

For codabar units, the 7 digit numeric or alphanumeric length is validated. If it is an alpha unit, the alpha characters are verified in the barcode prefixes table.

The collection date of the unit is retrieved from the UNITS table.

If a unit is not checked into the system at the time of processing (for any type of actions ordering/ canceling a test or placing/ releasing an interdiction), the record will be on hold in the API table until the hold period is over (the hold period is mentioned in Master Code APADD, DAYS) . In that case, the process status will be changed to ‘H’ to indicate the record is on hold and the record would be retained in the same API table.

# Test ID and Cancel Flag

## If the Test ID is populated and the Cancel flag is null in the API table:

- This means the request is to schedule the test populated in the TEST_ID column .
- The test ID is validated against the VALID_TESTS table. If the test is not valid, a message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is already scheduled with or without results in the UTRS table or if the test is present in the UTB or the HOLDING_TESTS table for that unit, the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is already in the UTRS table but has been cancelled, the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the above conditions are satisfied, the test will be scheduled (that is, an entry will be created in the UTRS table for that unit and test ID). The program ID will be populated as LTAPI in the table.

## If the Test ID is populated and the Cancel flag is not null in the API table:

- This means the request is to cancel the test populated in the TEST_ID field.
- The cancel reason code should be defined under Master Code CANR with the code type APADD. This Master Code should be active and the same code should also be defined under the VOID Master Code. If the code is not defined, the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is not present in the UTRS for that unit, the test cannot be cancelled and an appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is present in the UTRS table with the results populated, the test cannot be cancelled and the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is present in the UTB (UNIT_TEST_BASE) with the results populated, the test cannot be cancelled and the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the test is present in the HOLDING_TESTS table with the results populated, the test cannot be cancelled and the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If it passes all the above conditions, the test will be cancelled by updating the CANCEL_FLAG in the UTRS table and creating an entry in the TEST_VOIDS table.
- If the same test is scheduled multiple times in the UTRS table, the system will cancel only the tests that do not have the result in it. If none of the tests have results, all of the tests will be cancelled.


WellSky Corporation
Proprietary and confidential

## Interdiction Code and Release Flag

### If the Inter code is populated and the INTER_RELEASE_FLAG is null in the API table:

- This means the request is to place the interdiction populated in the INTER_CODE field on the unit.
- Check if the interdiction code is present in the VALID_INTERDCTIONS table as active. If the code is not present or is terminated, the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the unit ID is not in the system (not checked in yet), the interdiction cannot be placed and the appropriate message will be logged in the log file. The record will remain in the API table for the number of days defined in DAYS with process status of H.
- If the interdiction is already present in the UNIT_INTERDICTIONS table for that unit, the interdiction cannot be placed again and the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If all the above conditions are satisfied, the interdiction will be placed on the unit by creating an entry in the UNIT_INTERDICTIONS table.
- If the test ID and the inter code fields are populated then the test will be scheduled and the interdiction will be placed if all the required conditions are satisfied.

### If the Inter code and the INTER_RELEASE_FLAG is not null in the API table:

- This means the request is to release the interdiction populated in the INTER_CODE field from that unit.
- If the unit ID is not in the system, the interdiction cannot be released and the appropriate message will be logged in the log file (Err: 17). The record will remain in the API table for the number of days defined in DAYS with process status of H.
- Verify if the interdiction is present on the unit (entry in the UNIT_INTERDICTIONS table). If the interdiction is not present, there is nothing to release, and the appropriate message will be logged in the log file. The record will be moved to the archive table with a status of E.
- If the interdiction is present and all the above conditions are satisfied, the interdiction will be released regardless of the interdiction access rights.

# Records on HOLD in the API table

All the processed records except hold status (H) will be moved to the archive table (API_ADD_TEST_INTER_ARC) and the records will be deleted from the main API table for the processed batch.

The hold status (H) records will be moved automatically to the archive table after the HOLD period is reached (SYSDATE- insert_date > DAYS) and the units are still not checked in. If those units are checked in before the hold period is over, those records will be processed as usual. During the HOLD period, the system will not read those records.

# Archive Records

Once the record is processed, it will be archived into the Archive table API_ADD_TEST_INTER_ARC. The user will be responsible for archiving data from this table and purging the contents.

This Page Intentionally Left Blank

35

# Chapter 35 - Blood Centers API - Lab and Distribution Functions


35.1 Introduction ..... 2152
35.2 Blood Centers API Menu ..... 2153
35.2.1 Blood Centers API Log Information (APILOG) ..... 2153
35.2.2 Convert External Data to LT Data (APICONV) ..... 2155

# 35.1 Introduction

This section describes the screens that are accessed directly from the Blood Centers API menu. The following screens are described:

- Blood Centers API Log Information (APILOG)


WellSky Corporation
Proprietary and confidential

# 35.2 Blood Centers API Menu

Blood Centers API Menu functions are accessed from the following menu:

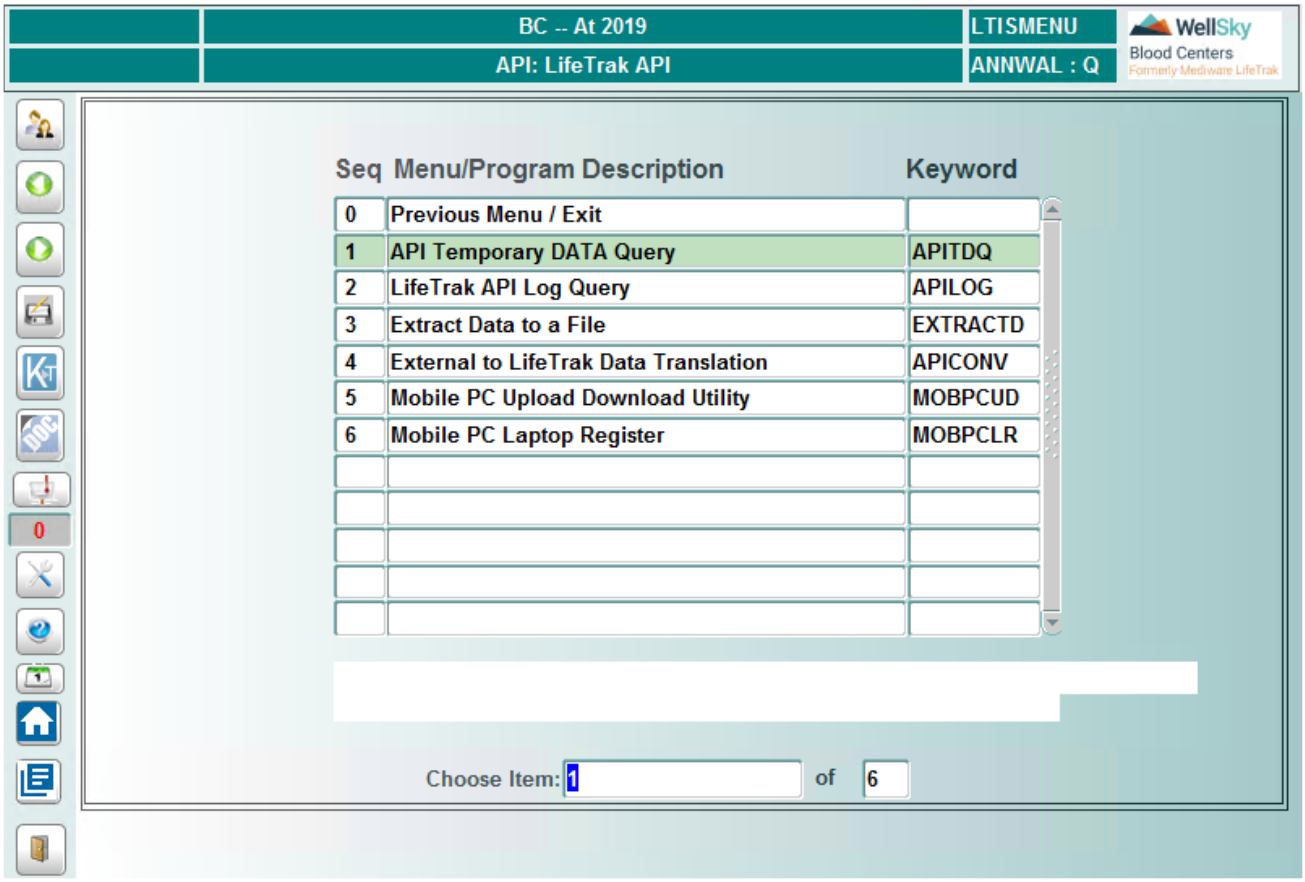


## 35.2.1 Blood Centers API Log Information (APILOG)

### Intended Use

Use the Blood Centers API Log Information screen to view messages that have been interfaced to Blood Centers from an outside source and using the API interface.

### Limitations

None

### Prerequisites

Messages have been sent from an outside source to the API interface.

Master Codes (MASTER), code type OSAPP - define external ID.

# Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword `APILOG`.

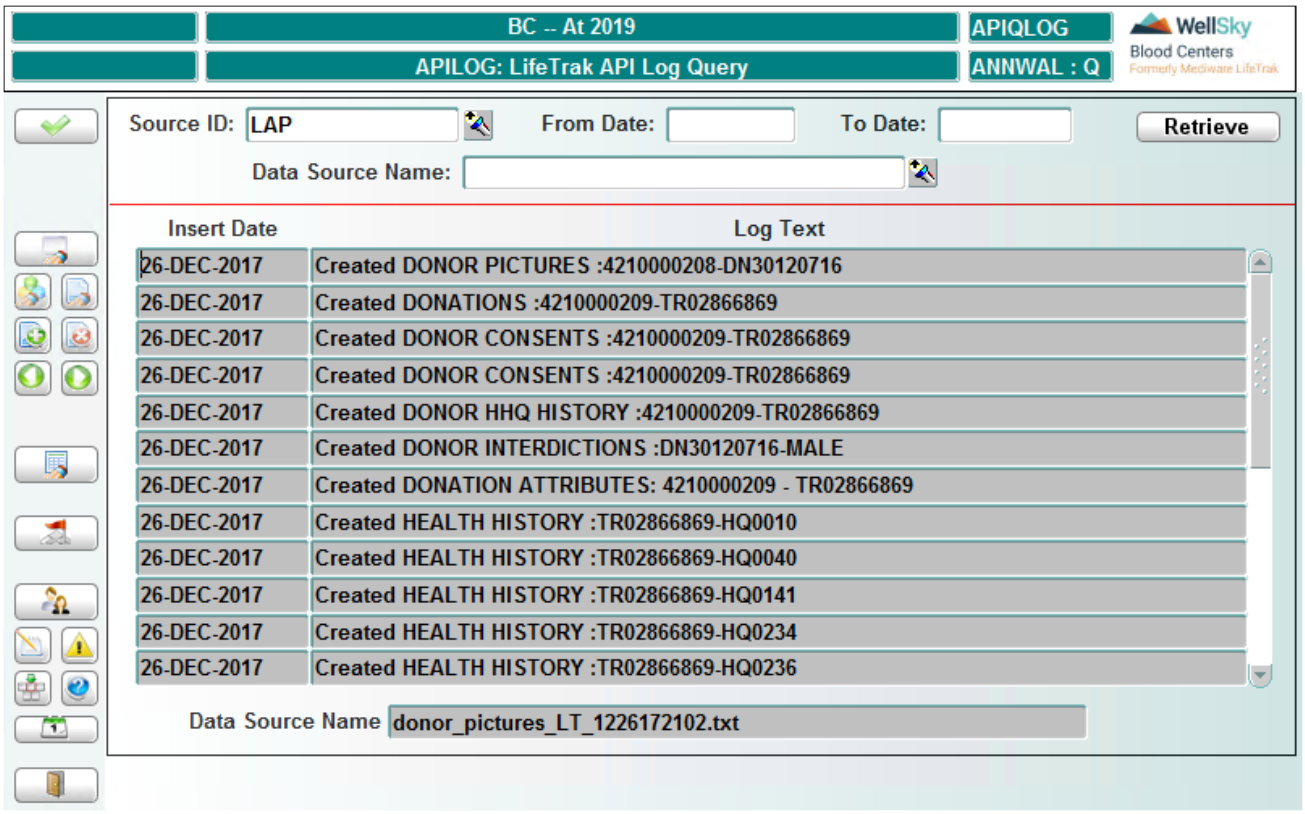


# Control Block Fields and Definitions

## Source ID

Enter external application ID or select from LOV.

> **NOTE –** This list comes from master code OSAPP.

## From Date

Enter from date in MMDDYYYY. Leave field blank to retrieve a list that includes all log entries.

## To Date

Enter to date in MMDDYYYY. Leave field blank to retrieve a list that includes all log entries.

# In the Detail Block

The following information displays after the control block is populated:


WellSky Corporation
Proprietary and confidential

- Internal ID – internal identification number (number generated by Blood Centers).
- External ID – unique ID number that is linked to the outside application.
- Date – inserted into the Blood Centers API tables.
- Log Text – description of the data entry. If the data was successful, a message will display with successful entry. If a problem was encountered when trying to upload the message, an error condition will display.

Use the **UP** and **DOWN** arrow keys to scroll through the list.

### At Commit

The information is saved to the database.

### What to Do Next

For normal processing, press **F8** (Exit Screen) to return to the Blood Centers API menu.

## 35.2.2 Convert External Data to LT Data (APICONV)

### Intended Use

Use the Convert External Data to LT Data screen to convert data that is coming from external sources into the Blood Centers application.

### Limitations

None

### Prerequisites

- Master Code LTTYP – target value description for Blood Centers
- Master Code OSAPP – external source coming into the API tables

### Accessing the Screen

Access this screen from the Blood Centers API menu or by entering the keyword `APICONV`.

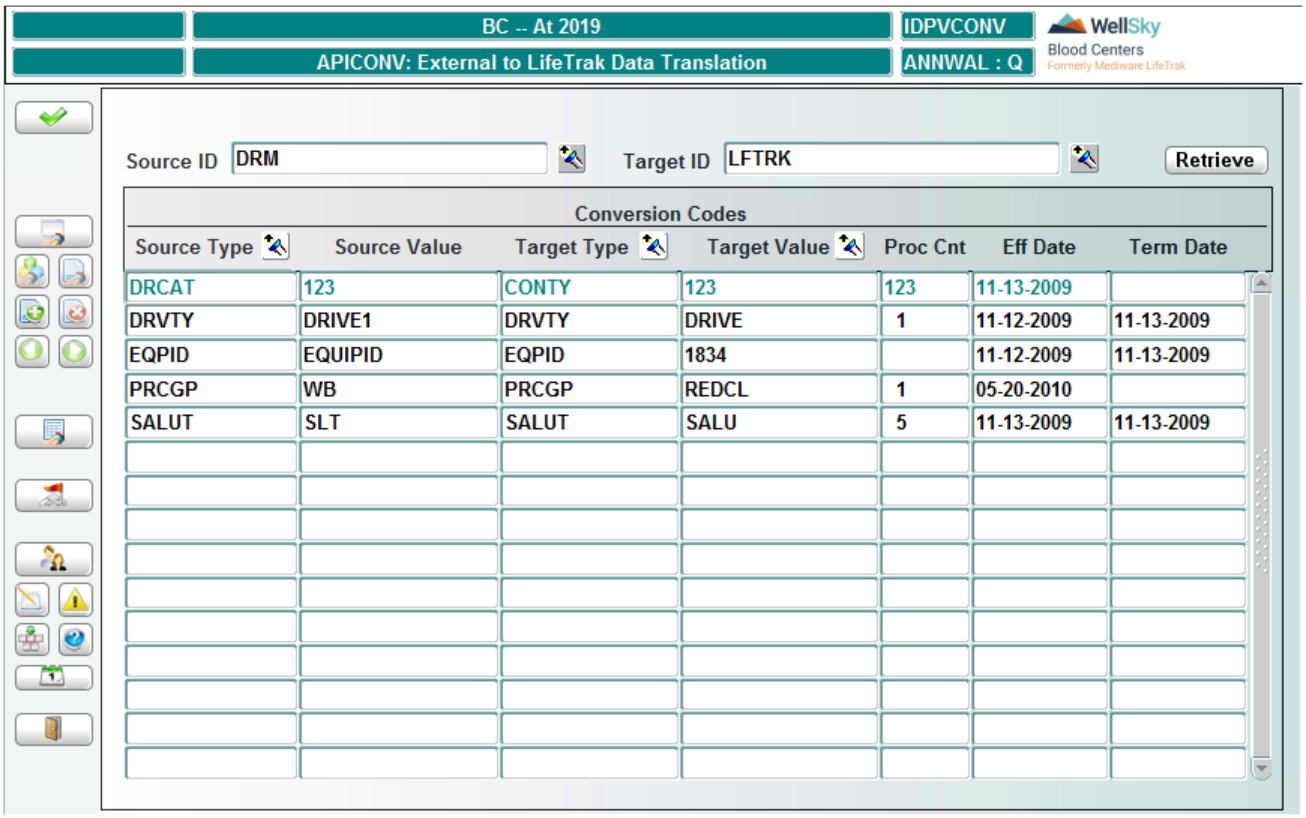


# Control Block Fields and Definitions

## Source ID

Enter external application ID or select from LOV.

> **NOTE –** This list comes from master code OSAPP.

## Target ID

Target ID automatically populates. Field is not navigable.

# Detail Block Fields and Definitions

Press **CTRL** + **F2** (Create Record) to create a new record. Use the **UP** and **DOWN** arrow keys to scroll through the records.

## SRC Value

Enter the source value, which is the value that is populating the API table from the outside source.

## Tgt Value

Enter the target value, which is the value that is associated to the Blood Centers application.


WellSky Corporation
Proprietary and confidential

### Tgt Value Type

Enter the target value type or select from the LOV.

**NOTE –** This target value description comes from Master Code LTTYP.

### Eff Date

Enter the effective date in DD-MON-YYYY format.

### Term Date

Enter the termination date in DD-MON-YYYY format.

### Last Mod Date

Modification date automatically populates. Field is not navigable.

## At Commit

The information is saved to the database.

## What to Do Next

For normal processing, press F8 (Exit Screen) to return to the Blood Centers API menu.

This Page Intentionally Left Blank

# Appendix A - REGMAINT Guidelines

This appendix provides guidelines for using the Update Donation (REGMAINT) screen to modify certain fields based on whether or not other screens have been completed. The following scenarios are described:

Scenario 1

- Unit registered using OnSite registration
- The following screens have been completed:
  - Health History and Physical Findings
  - Bleed Time/Phlebotomy Data
  - Perform Visual Audit (VISNU)

Scenario 2

- Unit registered using Register Donation (REGIS)
- Either Audit Donation (DONAUDIT) or Perform Visual Audit (VISNU) has been completed

Scenario 3

- Unit registered using Register Donation (REGIS)
- Neither Audit Donation (DONAUDIT) nor or Perform Visual Audit (VISNU) has been completed

## Scenario 1

- Unit registered using OnSite registration
- The following screens have been completed:
  - Health History and Physical Findings
  - Bleed Time/Phlebotomy Data
  - Perform Visual Audit (VISNU)

The following information *cannot* be updated using Update Donation (REGMAINT):

- Donation type
- Procedure code

The following information can be updated using REGMAINT:

- Bleed times
- VENI codes
- Reaction codes
- Reviewer ID
- Verified ID
- Alternate sponsor
- Address and phone number
- Alternate ID type and ID
- International address

**NOTE –** You can use Modify Onsite Registration Data (MODONSIT) to update demographics for Donors (even if audit has been completed). You can also use Bleed Time/Phlebotomy Data to update all available fields (even if audit is completed). This includes updating the procedure codes.

**NOTE –** For OnSite registrations if you need to update the donation type and the template is different, you will not be able to use Health History and Physical Findings to update the donation type. Contact WellSky technical support for assistance.

## Scenario 2

- Unit registered using Register Donation (REGIS)
- Either Audit Donation (DONAUDIT) or Perform Visual Audit (VISNU) has been completed

The following fields *cannot* be updated using Update Donation (REGMAINT):

- Donation type
- Procedure code

The following information can be updated using REGMAINT:

- Bleed times
- VENI codes
- Reaction codes
- Reviewer ID
- Verified ID
- Alternate sponsor
- Address and phone number


WellSky Corporation
Proprietary and confidential

- Alternate ID type and ID
- International address

**NOTE –** For back office registration, you can update the donation code and procedure code by doing the following:

- Perform Rollback Donation Audit (AUROLL)
- Update the fields using Audit Donation (DONAUDIT)

## Scenario 3

- Unit registered using Register Donation (REGIS)
- Neither Audit Donation (DONAUDIT) nor Perform Visual Audit (VISNU) has been completed

The following information can be updated using REGMAINT:

- Donation type
- Procedure code
- Bleed times
- VENI codes
- Reaction codes
- Reviewer ID
- Verified ID
- Alternate Sponsor
- Address and phone number
- Alternate ID type and ID
- International address

This Page Intentionally Left Blank

B

# Appendix B - Licensure Requirements

## Label Printing of Licensure

### Non-Apheresis Products

All facilities are now set to MULTI_CHAPTER; the LICPROD table now applies to the license of products.

| Drive | Site/Group | Licensed Product Table - Product in Table | Product Code | Equipment | Equipment Matrix | Output |
|---|---|---|---|---|---|---|
| Y | Null | E0385 | E0385 Y | | | License number prints |
| Y | Y | E0701 | E0701 N | | | License number prints |
| Y | N | E2807 | E2807 Y | | | License number does not print |
| Null | Null | E0385 | E0385 Y | | | License number prints |
| Null | Y | E0385 | E0385 Y | | | License number prints |
| Y | Y | E0009-N | E0009 N | | | License number does not print |

| Drive | Site/Group | Licensed Product Table - Product in Table | Product Code | Equipment | Equipment Matrix | Output |
|---|---|---|---|---|---|---|
| N | Y | E0098 | E0098 Y | | | License number does not print |

- Null value in Drive or Site/Group is treated as a Y value.
- Drives Table in LAB will have Outside flag that will be set (check that flag to determine 1st step in determining licensure)
- SITE/GROUP table in LAB will have an outside flag that will be set (check the flag to determine 2nd step in determining licensure)
- Non-Apheresis products will be check in Products table (PRODUCT) – check out of state flag
  - If facility has multiple chapters defined then they must define LICPROD table for products.
  - If the multi chapter is Y (that is true in all facilities now ), the products must be defined in the LICPRODS table , otherwise it is not licensed.

## Apheresis Products

| Drive | Site/Group | Licensed Product Table - Product in Table | Product Code | Equipment | Equipment Matrix | Output |
|---|---|---|---|---|---|---|
| Y | Y | E2940 | N | Y-10291 EQ-000033 | Y | License number prints |
| Y | Y | E2940 | N | N-1031M EQ-000029 | Y | License number does not print |
| Y | Y | E3103 | N | Y | Not Defined | License number does not print |
| Y | Y | E4544 - Y | Y | Y-123ALYX EQ000177 | N | License number does not print |
| Y | Y | E3102 - N | Y | Y | Y | License number prints |


WellSky Corporation
Proprietary and confidential

| Drive | Site/Group | Licensed Product Table - Product in Table | Product Code | Equipment | Equipment Matrix | Output |
|---|---|---|---|---|---|---|
| Null | N | E2940 | Y | Y | Y | License number does not print |
| Y | Null | E2940 | Y | Y | Y | License number prints |
| Y | Y | E2940 | Y | Y | Y | License number prints |
| N | Y | E2940 | Y | Y | Y | License number does not print |
| Y | N | E2940 | Y | Y | Y | License number does not print |
| Y | Y | E3077 | N | Y | N | License number does not print |

- Null value in Drive or Site/Group is treated as a Y value.
- Apheresis products DO NOT check the Product Table for OSOK flag.
- Drives Table in LAB will have Outside flag that will be set (check that flag to determine 1st step in determining licensure)
- SITE/GROUP table in LAB will have an outside flag that will be set (check the flag to determine 2nd step in determining licensure)
- Apheresis products will be checked in the Products table (PRODUCT) – check out of state flag
  - If the facility has multiple chapters defined, then they must define the LICPROD table for products.
  - If the multi chapter is Y (that is, true in all facilities now), the products must be defined in the LICPRODS table, otherwise it is not licensed.
- Apheresis products require the setup of the equipment, and the Export flag must be set.
  - Y means the productcan be exported out of state
  - N means any product made on that equipment cannot be exported out of state.
- Apheresis products must be defined in the EQUIPROD table. The product code must be defined for each piece of equipment with the OSOK flag. If it is not defined, the license number will not print.

This Page Intentionally Left Blank

C

# Appendix C - Audit Tables

## Purpose

As a unit moves through Lab, information such as unit ID, donor CUE, unit attributes, component attributes, interdictions and lot numbers, is added to the system. This information allows the unit to be traced throughout its processing. It also provides the ability to retrace the status of the unit at any previous time.

Audit tables are used to make sure that any changes to critical information are also traceable. These tables keep track of what information is changed, who changed it and when the change was made.

## Tables

Below is a list of all the tables within the Lab system that are audited. These tables are audited in either of two ways:

| Audit Table | Form |
|---|---|
| Chapters | F |
| Components | D |
| Component Attributes | D |
| Component Interdictions | D |
| Contracts | F |
| Contract Tests | F |
| Donor Decision Codes | F |
| Master Codes | F |
| Pooled Components | D |
| Product Matrix | F |
| Units | D |
| Unit Add On Bags | D |
| Unit Attributes | D |
| Unit Interdictions | D |
| Unit Test Base | D |

| Audit Table | Form |
|---|---|
| UTRS | D |
| Valid ABO OBS | F |
| Valid Attributes | F |
| Valid Centrifuges | F |
| Valid CRYO Methods | F |
| Valid HIV-WB OBS | F |
| Valid HTLV-WB OBS | F |
| Valid Instrument Tests | F |
| Valid Interdictions | F |
| Valid Lots | F |
| Valid Products | F |
| Valid Product Attributes | F |
| Valid Product Bag ID | F |
| Valid Product Conversion | F |
| Valid Tests | F |
| Valid Test Results | F |


WellSky Corporation
Proprietary and confidential

# Appendix D - Error Messages

## Overview

From time to time, the user will receive instructional messages. These fall into three categories:

- Messages - prompt users and describe actions that have taken place (e.g. 'TRANSACTION COMMITTED').
- Errors - indicate data inconsistencies and errors in scanning or entry (e.g. 'Invalid blood type').
- Warnings - alert users when specific units are affected (for example, 'The product has already expired; will be stored as NFT').

The warnings, messages and errors are maintained numerically in a table.

- CODE - a reference number assigned to each error. You may be asked for this when reporting a problem to the help desk.
- TYPE - a determination of whether the message is a system message (M), (m); an error (E), (e); or a warning (W).
- AUDIT - identifies critical errors for capturing and reporting.
- ERROR DESCRIPTION - a brief description of the error.

Within this table the use of upper case or lower case configuration signifies how the user will view the messages.

- M or E will display the Message or Error on the status line.
- m or e will display the message or error as a window which requires an acknowledgment to continue.

All warnings will be displayed in a window format. You must answer Yes or No to continue with the entry.

## Critical Errors

Critical errors are saved by the system in a separate table. These errors, along with the logins of users who made the errors, can be reviewed by supervisors to help identify areas in which supplemental training is required.

If you are uncertain of how to respond to an error message, refer to the User Guide and your SOPs or contact a supervisor.

This Page Intentionally Left Blank

# Appendix E - Blood Centers Interface Operations

This appendix provides details of Blood Centers interface operations including required conditions for the interfaces to operate. The following interfaces are described:

- Donor to Lab
  - Donor to Lab Information
  - Donor to Lab Nursing Audit Interface
  - Donor to Lab PRIOR ABO_CMV Interface
  - Donor to Lab Drive Interface
- Lab to Donor
  - Lab to Donor Contract Test Result Interface
  - Lab to Donor Supplemental Test Result Interface
  - Lab to Donor Antigen Test Result Interface
- Donor to Distribution
  - Donor to Distribution Deferral Interface

## Donor to Lab

### Donor to Lab Information

All of the following conditions must be met prior to the interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- Donation record must be completely registered on the Donor system.
- Donation record must be attached to a donor record on the Donor system.
- No HOLD interdictions with a null termination date can exist on either the donor or donation records on the Donor system.

**NOTE –** If the HOLD interdiction does have a termination date (even if it is in the future), this condition *does not* apply.

- Donation audit must be complete on the Donor system.
- Unit must not have already been interfaced (Donor to Lab Unit Interface), unless the unit is specifically requested by unit ID.

When the interface successfully runs, the following actions occur:

- Automatically submits the prior ABO/CMV interface for the unit.
- Compares the drive ID associated in the Lab system to that of the Donor system. If different, it creates an interface log exception DRVUP.
- Verifies that all non-autologous, non-therapeutic donors were eligible to donate the unit being interfaced. If the donor was not eligible, the unit is interdicted on the Lab system.
- Marks the unit as successfully interfaced.

**NOTE –** If the interface is not successfully run, the unit is not marked as successfully interfaced and as such no product from that unit is suitable for final labeling decision on the Lab system.

## Donor to Lab Nursing Audit Interface

All of the following conditions must be met prior to this interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- Donation record must be completely registered on the Donor system.
- Donation record must be attached to a donor record on the Donor system.
- No HOLD interdictions with a null termination date can exist on either the donor or donation records on the Donor system.

**NOTE –** If the HOLD interdiction does have a termination date (even if it is in the future), this condition *does not* apply.

- Donation audit must be complete on the Donor system.
- Unit must have not already been interfaced (Nursing Audit Interface), unless the unit is specifically requested by unit ID.

When the interface runs successfully, the following actions occur:

- The nursing audit flag and status will be updated on the unit record of the Lab system.


WellSky Corporation
Proprietary and confidential

- For all non-autologous, non-therapeutic donations, the interface places lab interdictions on the unit interdictions table in Lab, where a donor or donation interdiction exists on the Donor system and that interdiction is configured to place a lab interdiction on the Lab system.

**NOTE –** If the interface is not successfully run for a unit, that unit will be marked with a nursing audit status of 'H' on the Lab system. This prevents products from that unit from being labeled with a final labeling decision.

## Donor to Lab PRIOR ABO/CMV Interface

All of the following conditions must be met prior to this interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- Donation record must be completely registered on the Donor system.
- Donation record must be attached to a donor record on the Donor system.
- Unit must have not already been interfaced (Donor to Lab unit interface), unless the unit is specifically requested by unit ID.
- Collection date must be prior to system date.

When the interface successfully runs, the following actions occur:

- The prior donor blood type, CMV status, rare status, and very rare status on the unit record in the Lab system will be set according to the interdictions on the donor record in the Donor system.
- If an existing CMV test with a negative result exists on the unit in the Lab system, where the donor is historically CMV positive on the Donor system, a discrepancy interdiction will be placed on the unit interdictions record of the Lab system.
- If there is no existing CMV test scheduled for the unit on the Lab system, the interface will schedule one according to the following logic:
  - The donor does not have a CMV positive or a CMV discrepancy interdiction on the Donor system.
  - The donation type of the unit is not configured to skip the CMV test scheduling.
  - The procedure code of the unit is configured to automatically schedule a CMV test.
  - The historical blood type of the unit is configured to automatically schedule a CMV test.
- All historically donor tested RBC antigens from the Donor system will be placed into the donor tested units table in the Lab system.
- The donors historical blood type from the Donor system will be placed into the donor tested units table in the Lab system.
- The donors historical CMV status from the Donor system will be placed into the donor tested units table in the Lab system.

**NOTE –** If the interface is not successfully run for a unit, there are no alterations made to the lab data.

### Donor to Lab Drive Interface

The drive interface will take place between the Donor and Lab systems for all drives that do not have a status of HOLD or CANCELLED on the Donor system. If the drive does not exist on the Lab system, the interface will create a record for it. If it does exist on the Lab system, the drive data on the Lab system will be updated. The drive data from the Donor system will always overwrite what is in the Lab system for the same drive. The only data that are relevant are the drive date, the drive sponsor, and the OK to ship out of state flag. The OK to ship out of state flag is set to 'N' if the site is unlicensed or if the vehicle itself is unlicensed.

## Lab to Donor

### Lab to Donor Contract Test Result Interface

All of the following conditions must be met prior to the interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- Either one component from the unit has to have a non-hold labeling decision, or the unit must be the donation type 'SM' sample only.
- The donation record must be attached to a donor record on the Donor system.
- The unit on the Lab system must have at least one contract test scheduled on the Lab system, where the result has not been interfaced to the Donor system.

For each contract test that is complete on the Lab system, the following information will be passed to the Donor system.

#### Test is ABORH

If the test is ABORH, the interface will place the result in the unit test results of the Donor system.

The interface will compare the ABORH test result to the donor's historical ABO. If the donor has no ABO, and the procedure is not configured to skip the donor ABORH update (for example, cord blood), the interface will place the tested ABORH into the donor record on the Donor system. If the donor record has an existing blood type, and that blood type is different from the tested blood type of the unit on the Lab system, the interface will not update the blood type on the donor. Instead, it will place an ABO discrepancy interdiction on both the donor and donation records on the Donor system.

#### Test is Not ABORH

If the test is not ABORH, the interface will insert the record into the Donor system if there is not already a record in the unit test result table on the Donor system. When the test result is inserted, the appropriate interdictions associated with that test result in the valid test results table will be placed on the donor interdictions table in the Donor system. If there already is a record for this test result on the Donor system, the interface will consult the valid result override table to see if it should overwrite the existing test result with the new test result. If the result is overwritten, the interface will insert interdictions associated with the new test result in the donor interdictions table on the Donor system, but *will not* delete interdictions associated with the overwritten result. These interdictions must be removed manually.


WellSky Corporation
Proprietary and confidential

**NOTE –** If all of the contract test results on the Lab system are not successfully interfaced to the Donor system, the unit will not be marked as interfaced.

### Lab to Donor Supplemental Test Result Interface

All of the following conditions must be met prior to the interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- The donation record must be attached to a donor record on the Donor system.
- The contract testing interface must have moved over *all* of the contract test results for the unit.

If the unit is successfully interfaced, the test result from the Lab system is placed on the Donor system, and the appropriate interdictions from the valid test results table are placed on the donor interdictions table of the Donor system.

If there already is a record for this test result on the Donor system, the interface will consult the valid result override table to see if it should overwrite the existing test result with the new test result. If the result is overwritten, the interface will insert interdictions associated with the new test result in the donor interdictions table on the Donor system, but *will not* delete interdictions associated with the overwritten result. These interdictions must be removed manually.

### Lab to Donor Antigen Test Result Interface

All of the following conditions must be met prior to the interface completing successfully:

- The unit ID, collection date, and chapter ID must completely agree between the Lab and Donor systems.
- Unit must be checked in on the Lab system.
- The donation record must be attached to a donor record on the Donor system.

If the unit is successfully interfaced, the test result from the Lab system is placed on the Donor system. If there already is a record for this test result on the Donor system, the interface will consult the valid result override table to see if it should overwrite the existing test result with the new test result. The antigen interface does not assign interdictions to the donor interdictions table on the Donor system based upon a test result.

## Donor to Distribution

### Donor to Distribution Deferral Interface

This interface runs for every product that exists in the Distribution system. It looks at the Donor system to see if there are any interdictions assigned to the donor of this unit, where the interdiction is configured to stop this product from being released. This is controlled through the LAB_HOLD_FLAG that is associated to each interdiction on the Donor system. If an interdiction has been placed, the product is marked for either quarantine or discard.

This Page Intentionally Left Blank

# Appendix F - Scanning Product Labels

## Introduction

When scanning product labels, Lab/Distribution provides the ability to scan individual bar codes, or to scan using a single concatenated scan for two bar codes. To scan individual bar codes, each label bar code must be scanned into its corresponding field on the screen. To use a concatenated scan, you must have a scanner that allows concatenation, and it must be configured for concatenation.

**NOTE –** Refer to the manufacturer's documentation for information on how to configure the bar code scanner.

## How to Scan Using Concatenation

The label below is an example of an ABO/Rh label for a unit of red blood cells. There are two distinct rows that display bar codes:

- unit number and blood type
- product code and expiration date

By scanning only twice, four data elements are recorded.

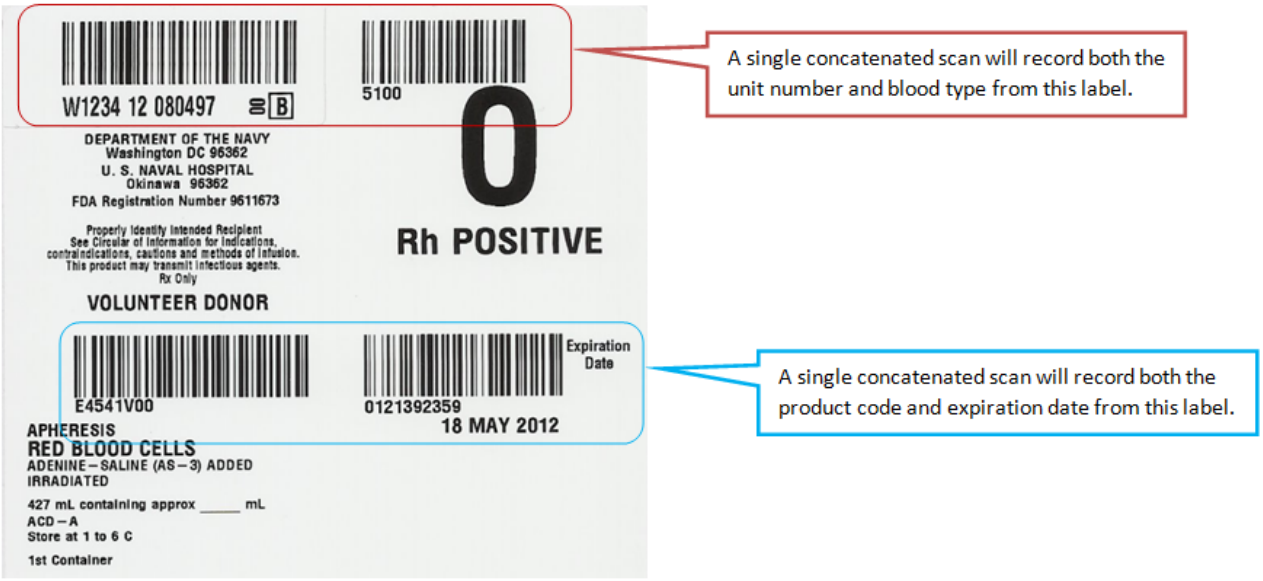


To scan using concatenation, follow the steps below:

**NOTE –** Be sure to configure your bar code scanner for concatenation prior to scanning the labels.

1. Hold the bar code scanner far enough away from the label so that the scanner light covers the entire row of the bar codes (both the unit number and blood type), and pull the scanner trigger.
   The unit number and blood type bar codes are read by the scanner.
2. Repeat for the product code and expiration date bar codes.
   The product code and expiration date bar codes are read by the scanner.

## Using Concatenated Scans with Blood Centers Software

The screen below is an example of the ISBT labeling screen. The steps outlined below will refer to the fields in the LABELI screen shown.

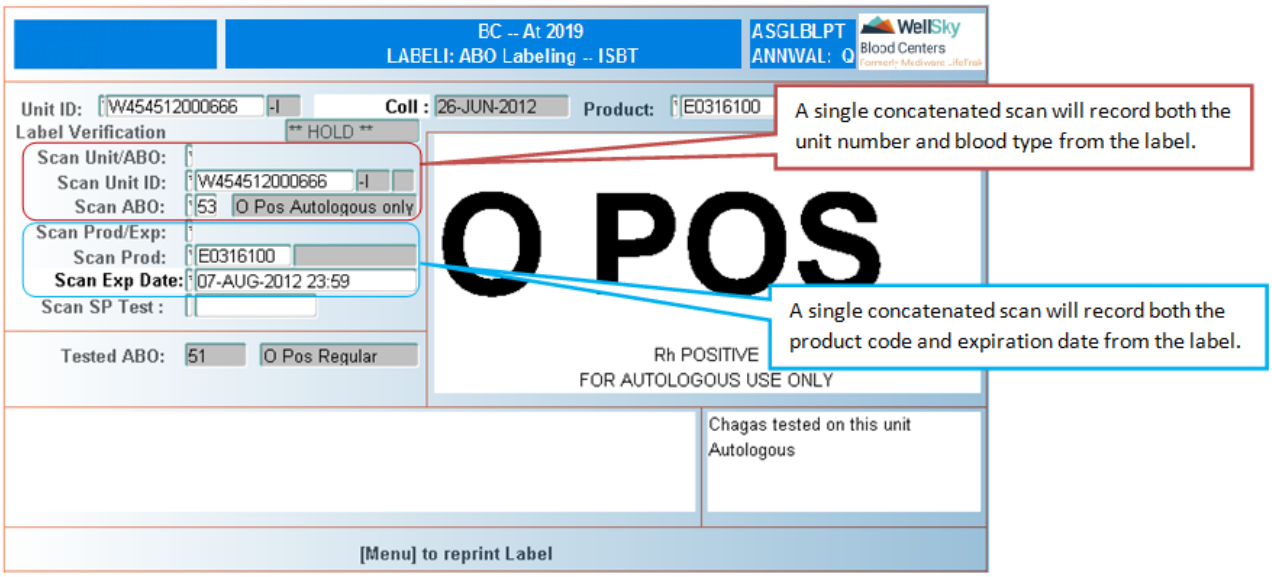


To scan using concatenation, follow the steps below:

1. Identify the unit to label by scanning or manually entering the unit number in the Unit ID field.

> **NOTE –** This is not a concatenated scan; only the unit ID should be scanned individually into the Unit ID field.

2. Identify the product to label by scanning or manually entering the product code in the *Product* field.

> **NOTE –** This is not a concatenated scan; only the product code should be scanned individually into the *Product* field.

3. With the cursor in the *Scan Unit/ABO* field, scan the concatenated row of bar codes for the unit ID and blood type as described above.

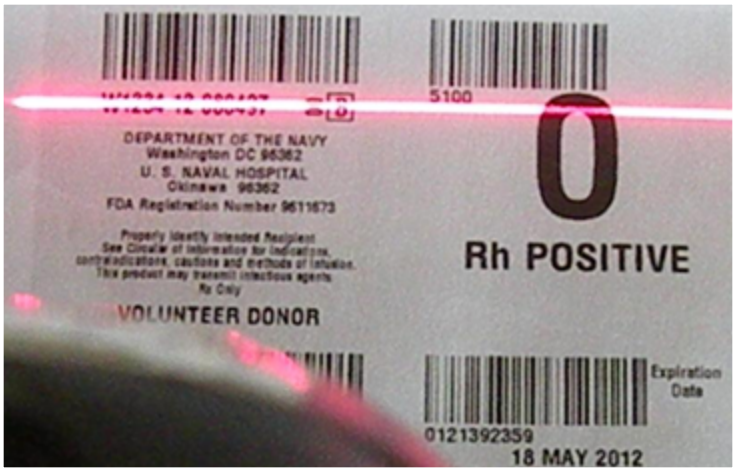


Both the *Scan Unit ID* and *Scan ABO* fields are populated on the screen with the values from the label – in a

single scan.




4. With the cursor in the *Scan Prod/Exp* field, scan the concatenated row of bar codes for the product code and expiration date as described above.
   Both the Scan Prod and Scan Exp Date fields are populated with the values from the label.


WellSky Corporation
Proprietary and confidential

# Appendix G - Logging In to Blood Centers and Password Configuration

Logging into the Blood Centers application have multiple methods:

- Blood Center Login - Using Blood Center application user ID and password (traditional password).
    - Strong password – ON / OFF
- Active Directory - Using network user password.
- Common Access Card (CAC)
- OKTA - Using Okta User ID and Okta Password..
- Logging in to the Blood Centers Database - .
    - Oracle Wallet is used to store database credentials, such as usernames and passwords, in an encrypted format. This eliminates the need to embed these credentials directly within scripts (like cron scripts, interface scripts) or application code that requires database connectivity.

## Blood Centers Login – Traditional Password (With Strong Password OFF)

Facility is using the Blood Centers user ID and password created within Blood center to Log in to the Application for Blood Centers and OnSite Module. Facility is not using Strong Password configuration to determine password requirements.

- Password must be at least 6 characterS
- Must start with Alpha characters
- Must contain at least one numeric value.
- Maximum number for length of the password is 20 characters.

The LT_APPLICATION_CONFIG table must have the following fields set:

- STRONG_PWD_ENABLED = N
- EXTERNAL_AUTH = N
- AD_ENABLED = N
- OKTA_AUTH = N

# Blood Centers Login – Traditional Password (With Strong Password ON)

A strong password is a password that is designed to be difficult for others to guess or crack. It typically includes a combination of uppercase and lowercase letters, numbers, and special characters, and avoids common words or easily accessible personal information. Using a strong password helps enhance the security of your account and protects sensitive information from unauthorized access.

The administrator will need to setup the following:

1. Configure LT_APPLICATION_CONFIG table
    - STRONG_PWD_ENABLED = Y
2. Configure Password Configuration (PWDCFG)

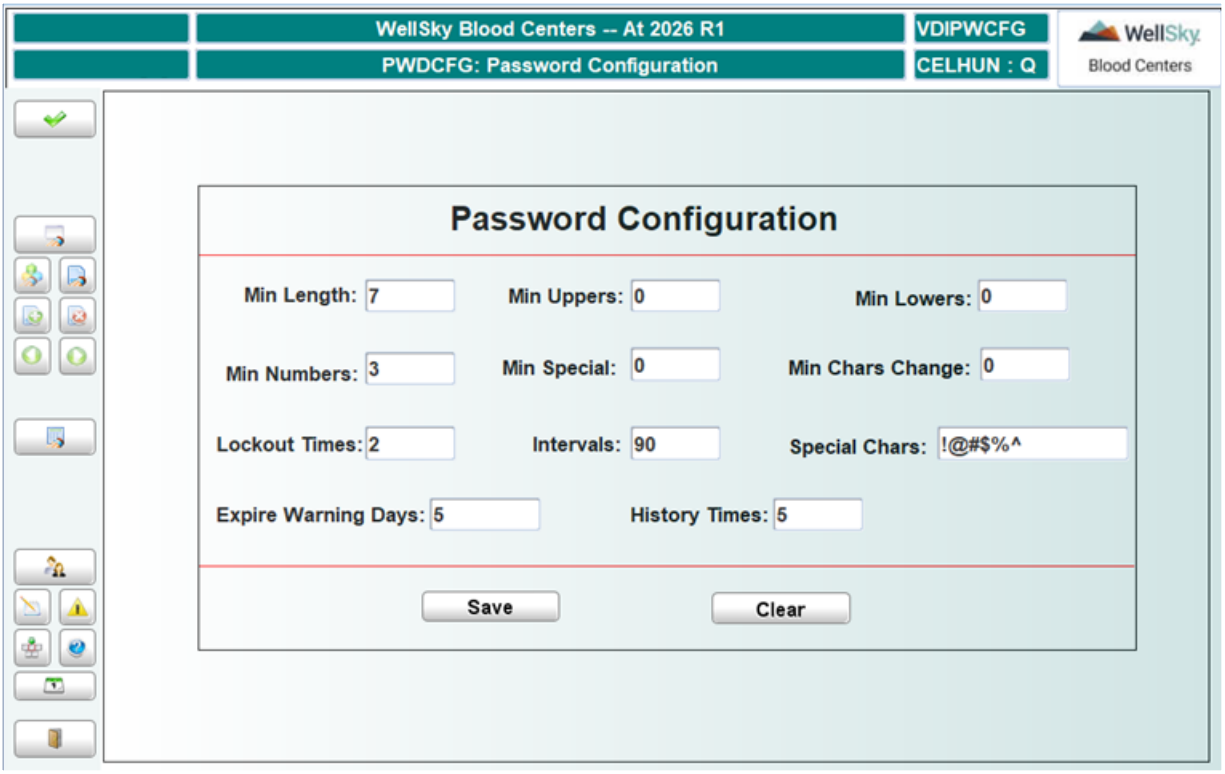


The user will be required to configure the password based on the conditions entered in password configuration when initially logging into Blood Centers or OnSite Module or when the password has been reset.

**NOTE –** Maximum length the password can be set to is 20.

3. Add system users (ADDUSER)
    - The system user must be defined in Blood Centers. See section 3.5.1 Common User Administration in the *Administration Guide* to see how the user is defined.


WellSky Corporation
Proprietary and confidential

# Active Directory

Active Directory is a directory service developed by Microsoft for Windows domain networks. It stores information about objects on the network, such as users, computers, and resources, and makes this information easily accessible and manageable for administrators and users. Active Directory enables centralized authentication and authorization, allowing users to log in with a single set of credentials and access various network resources securely.

If your system administrator has implemented Active Directory, use your network user ID and password to log into Blood Centers. When Blood Centers is using Active Directory authentication, your Blood Centers user ID and password will no longer allow you to log into Blood Centers.

Active directory applies only to your initial login to Blood Centers. Once you are in Blood Centers, use your normal Blood Centers user ID and Active Directory password for all functions within Blood Centers.

## Limitation:

- Maximum length is 20 characters for the password to be used in Blood Centers and OnSite Module.
- When active directory is turned on the Blood Centers system does not look at strong password configuration.

The system administrator will set up the LT_APPLICATION_CONFIG table and set the following column AD_ENABLED to Y. This setup will require the user to login to the system using your network user ID and password.

Add System User (ADDUSER) must have the AD user ID defined.

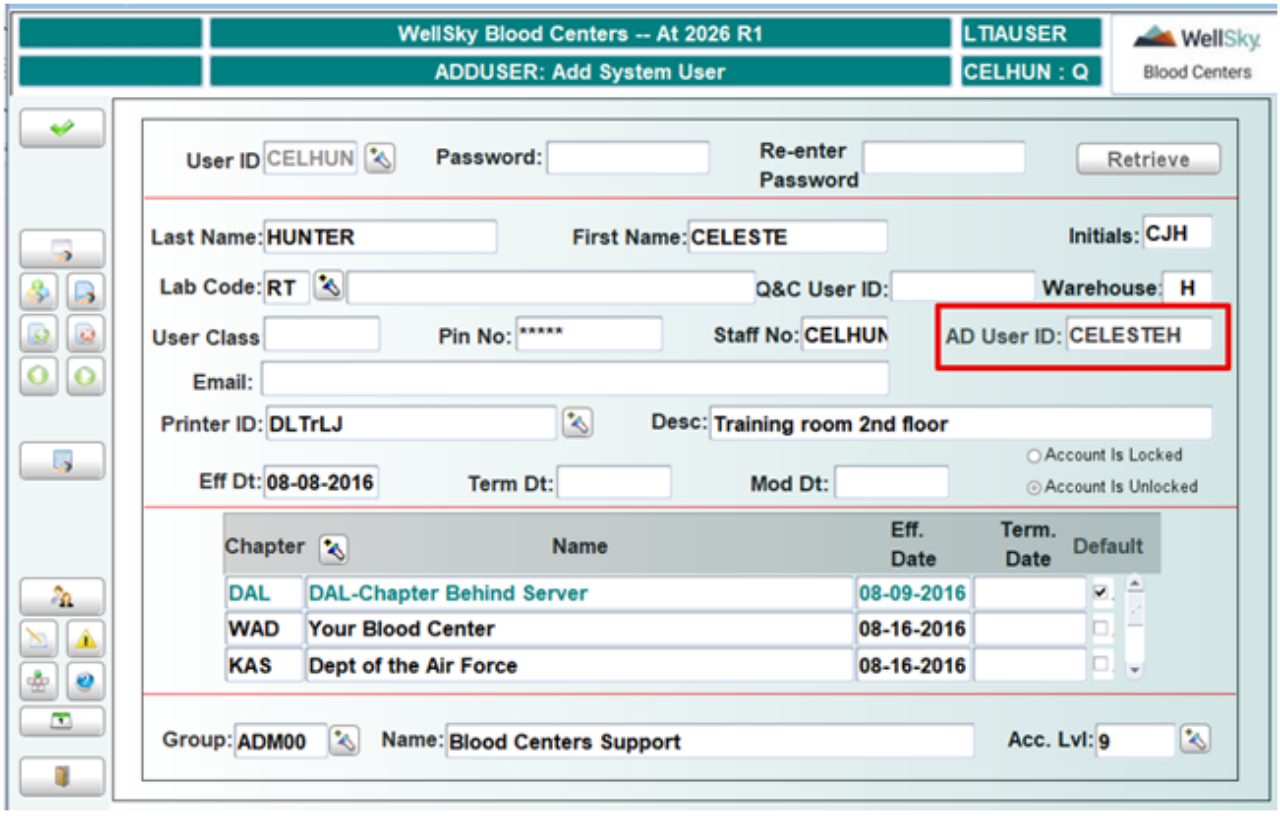


The LT_APPLICATION_CONFIG table must have the following fields set:

- STRONG_PWD_ENABLED = N or Y
- EXTERNAL_AUTH = N
- AD_ENABLED = N
- OKTA_AUTH = N

## Scenarios

- At login (with AD turned ON), BC Application does not look at Strong password setting.
- At login, the app authenticates the AD User ID and AD password against the LDAP server. AD password is not governed by the BC application password rules. Once the user is authenticated, the system updates BC password with AD password. Now, the BC application user has the same password as the AD password.
- After logging in, the user has to use the BC user ID with AD password for sign off. At signoff, the system only authenticates the user name and password. It does not check if the password meets the password rules minimum criteria.
- If a user tries to RESET PASSWORD in ONSITE, the system checks if STRONG PASSWORD is ON or OFF to make sure that the new password entered follows the password configuration rules. However, the new password set using RESET PASSWORD with AD ON is only valid for the session. Once a user logs out and logs back in with their AD User ID and AD password, the system updates BC Password with AD password.

**NOTE –** NOTE: The RESET PASSWORD never updates AD password. It is used only to update BC App password.

- Password rules if STRONG PASSWORD is ON. Rules configuration is taken from lt_password_config table.
  - MIN LENGTH Check
  - MIN NUMBERS Check
  - MIN UPPER CASE Check
  - MIN LOWER CASE Check
  - MIN SPECIAL CHAR Check
  - PWD HISTORY CHECK (cannot be same as old pwd)
- Password rules if STRONG PASSWORD is OFF. These rules are hardcoded.
  - First letter of password must be alpha.
  - A minimum of one numeric character is required.
  - Minimum length of password is 6 chars.

# Common Access Card (CAC)

A Common Access Card (CAC) is a smart card issued by the U.S. Department of Defense to military personnel, civilian employees, and eligible contractors. It serves as a secure identification card and provides access to Department of Defense computer systems, buildings, and other resources. The CAC contains embedded chips and security features that help verify the cardholder's identity and enable secure authentication for network login and

digital signatures.

The following tables must be defined:

1. Configure LT_APPLICATION_CONFIG table
    a. EXTERNAL_AUTH = Y
    b. AD_ENABLED = N
    c. OKTA_AUTH = N
    d. STRONG_PWD_ENABLED = Y
2. Configure Password Configuration (PWDCFG)

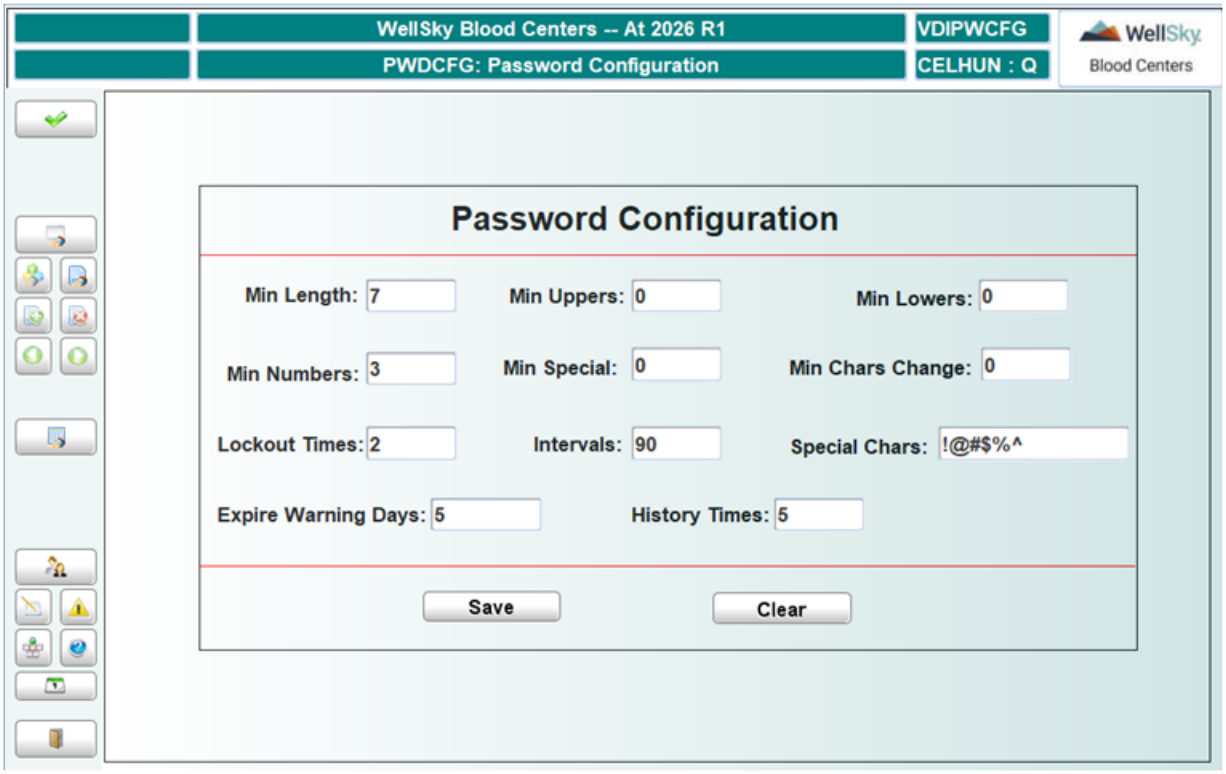


The user will be required to configure the password based on the conditions entered in password configuration when initially logging into Blood Centers or OnSite Module or when the password has been reset.

**NOTE –** Maximum length the password can be set to is 20.

3. Add system users (ADDUSER)
    - The system user must be defined in Blood Centers. See section 3.5.1 Common User Administration in the *Administration Guide* to see how the user is defined.

# OKTA

OKTA is an identity and access management service that enables organizations to securely manage user authentication and authorization across different applications and systems. By integrating OKTA, companies can provide single sign-on (SSO), multi-factor authentication, and centralized user management, which enhances security and streamlines the login experience for users.

1. Configure LT_APPLICATION_CONFIG table
    a. EXTERNAL_AUTH = N
    b. AD_ENABLED = N
    c. OKTA_AUTH = Y
    d. STRONG_PWD_ENABLED = N
2. Configure **Password Configuration (PWDCFG)**
3. Add system users (ADDUSER)
    - The system user must be defined in Blood Centers. See section **3.5.1 Common User Administration** in the *Administration Guide* to see how the user is defined.
        - The user email field must match what is defined in OKTA for the user.
4. You must have the OKTA URL to link to Blood Centers. This will come from the WellSky IT department.

## Scenarios

1. Go to the LT_APPLICATION_CONFIG and set the **OKTA_AUTH** to "Y", but the user is clicking the Blood Centers application URL or the OnSite Module url that is not linked to OKTA the user will receive error message.

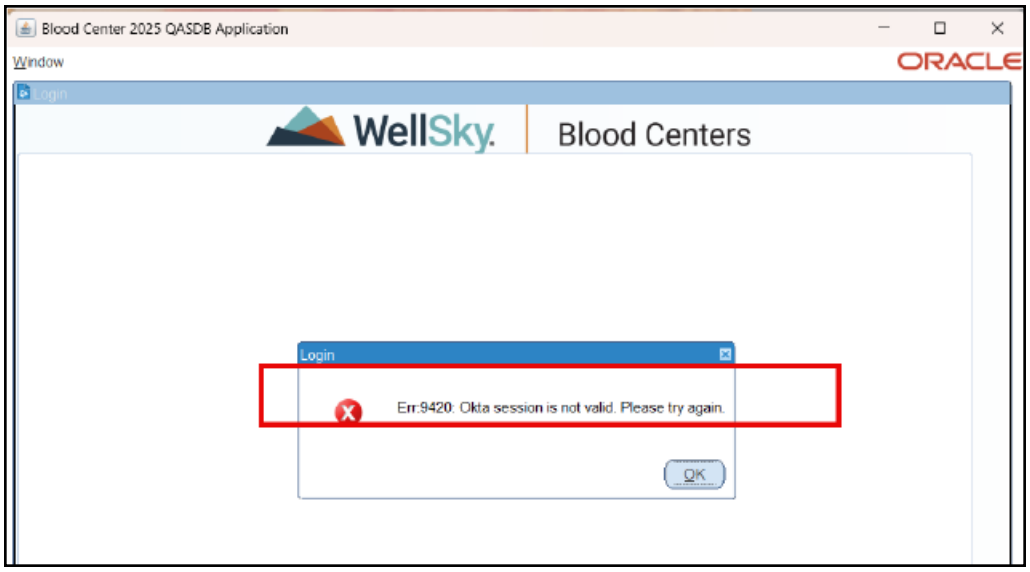


2. OKTA turned on, launching application for first time user logs in.

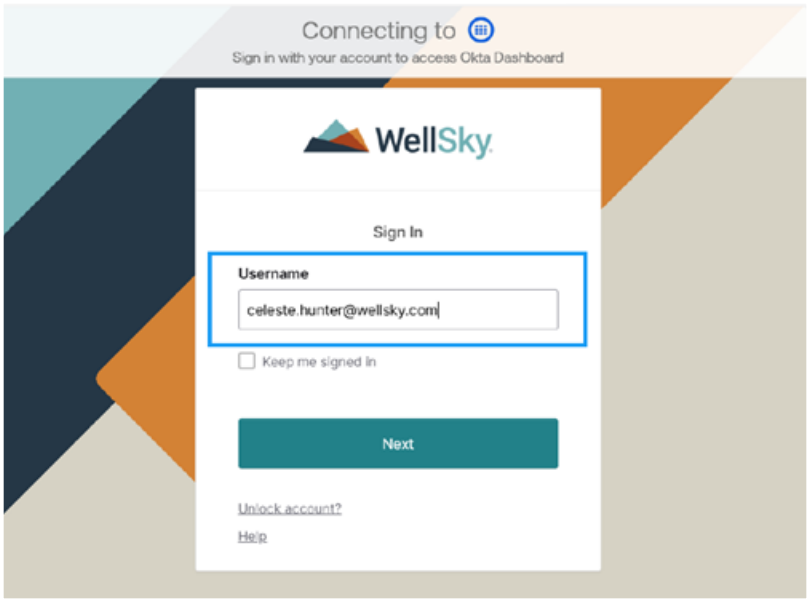


3. When logging in to OKTA the first time, the user will need to select method of notification.

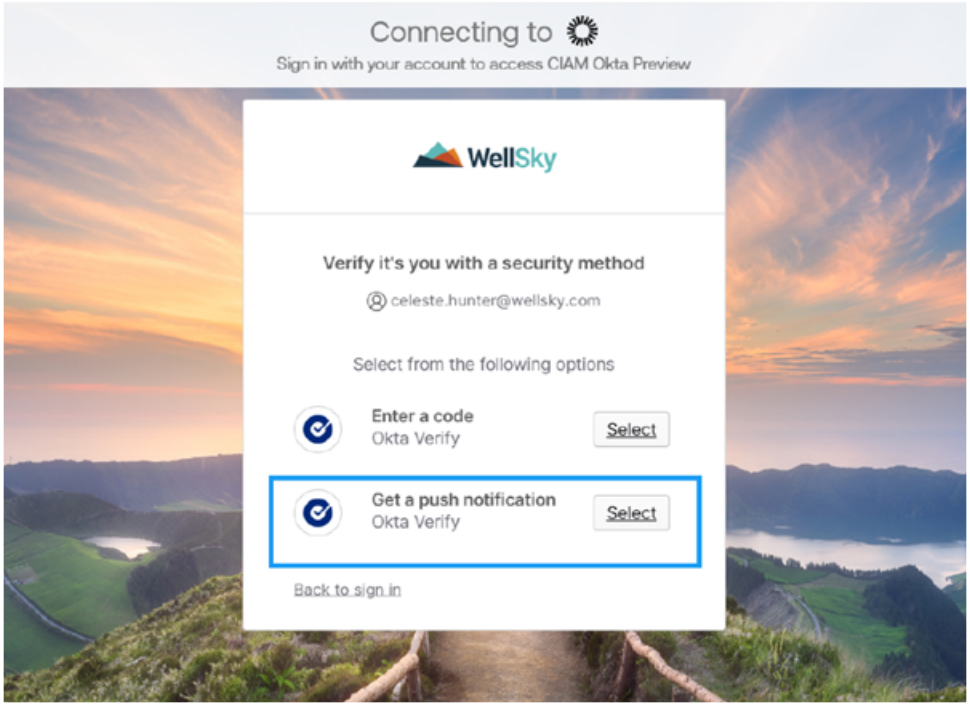

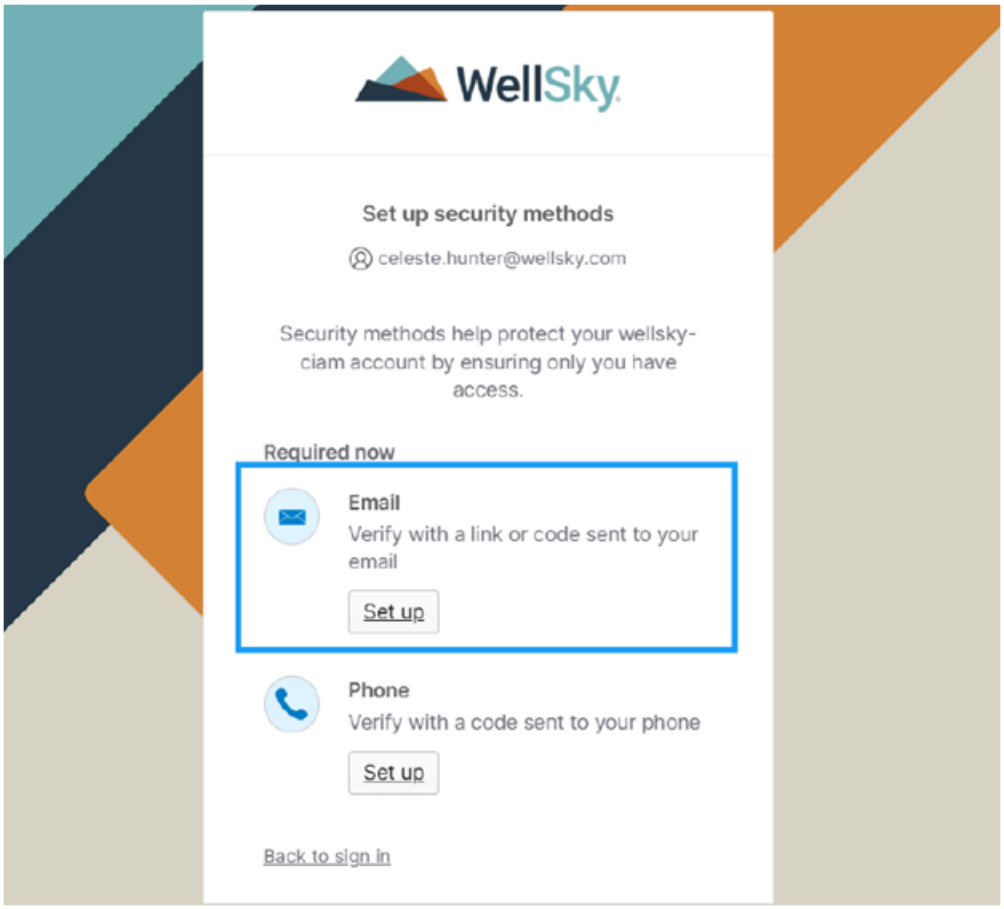


4. The user will receive a message to verify their email.

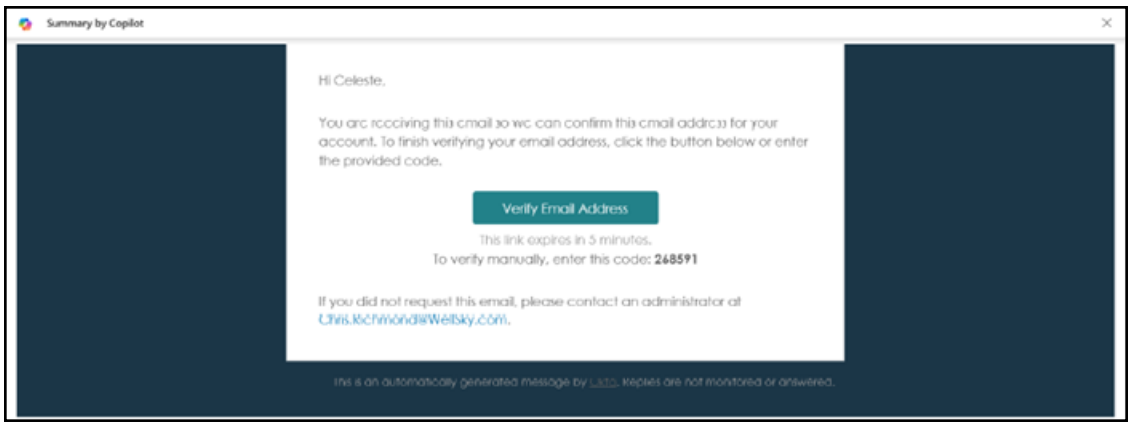

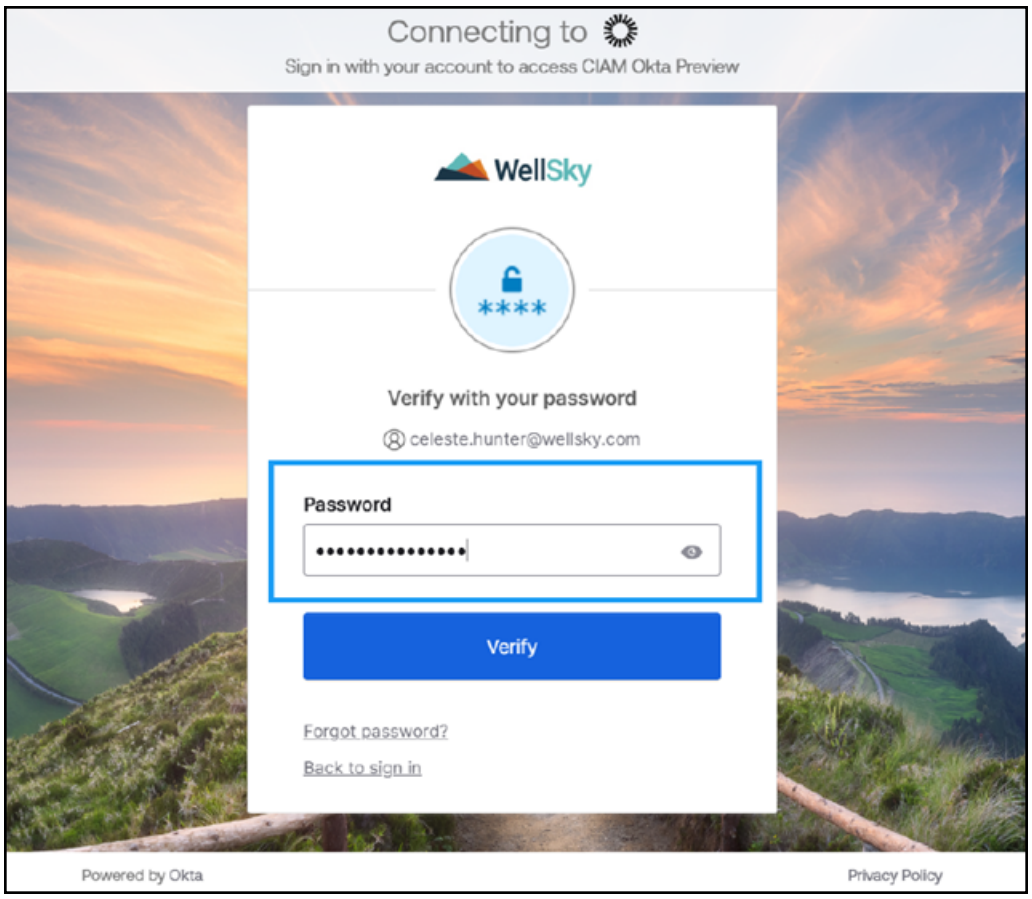


5. Entering the password and validating OKTA will open the page that contains the Tiles for Blood Center and OnSite.

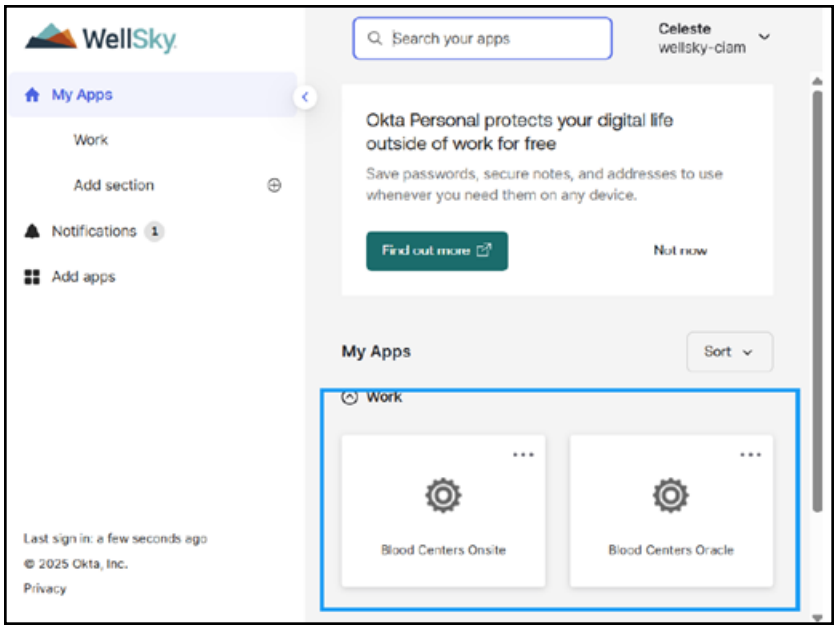


6. Select the **Blood Centers Oracle** Tile.

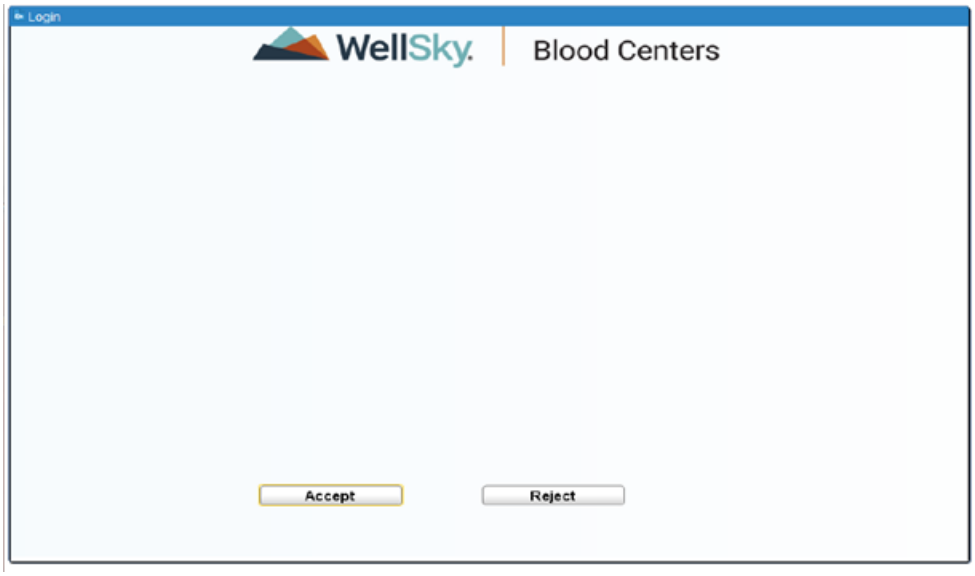


7. Select **Accept** to open the Blood Center application.
8. Select the **Blood Centers OnSite** Tile.

9. Select **Log In/Accept** to open the OnSite Module.
10. OKTA_AUTH flag=Y using OKTA URL for login.
    - This will direct you to the OKTA login page.

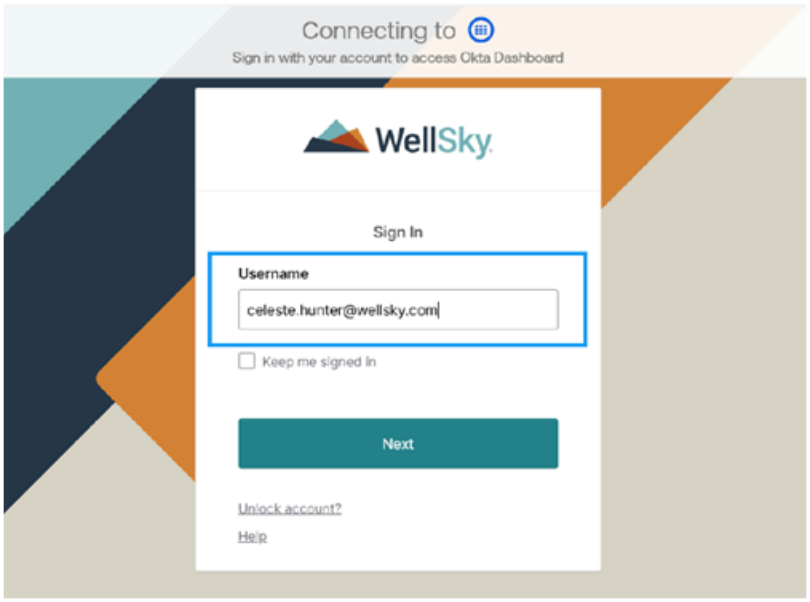


11. Once you enter your email address the page opens for entry of the network password.

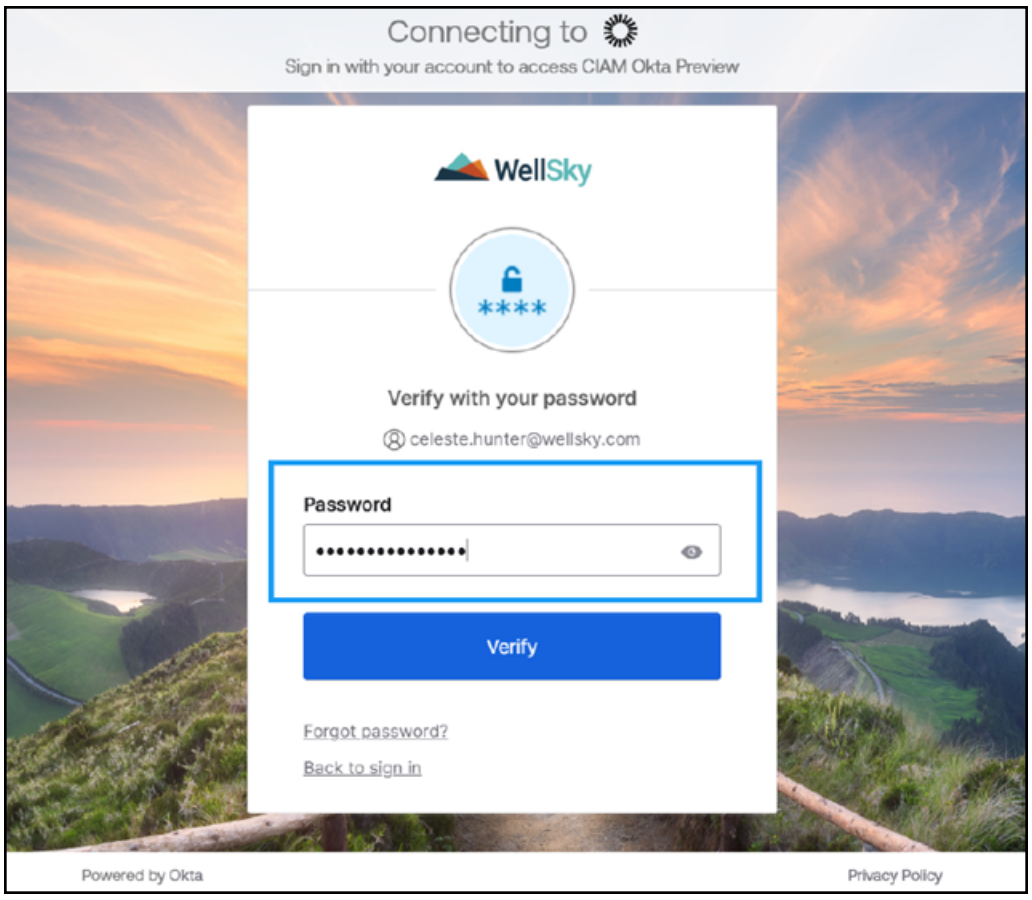


12. If your credentials are validated then the following will display

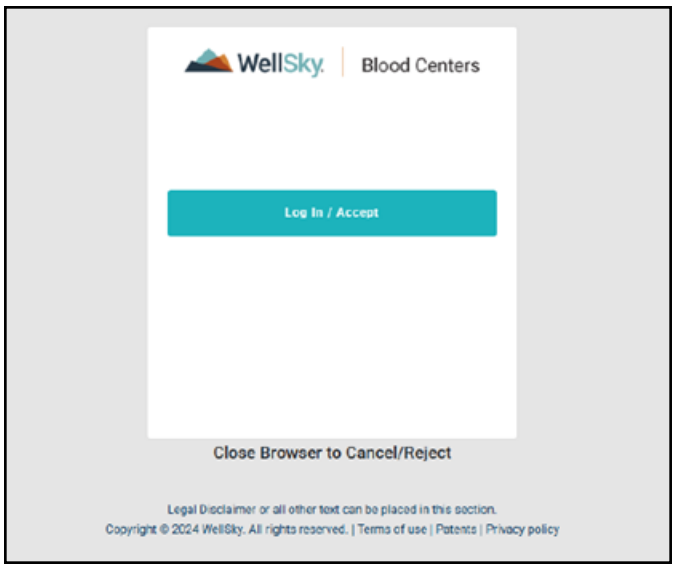


## Oracle Wallet

Oracle Wallet is a secure software container used by Oracle databases to store authentication credentials, such as passwords, certificates, and private keys. It allows applications to connect to databases and other services securely without hard-coding sensitive information into scripts or configuration files. By using Oracle Wallet, organizations can enhance security and streamline access management for users and applications

Oracle Wallet itself does not directly maintain application users; rather, it securely stores authentication credentials such as passwords, certificates, and private keys that are used to connect to Oracle databases and services. The management of users for the Blood Centers application is still handled through ADDUSER, meaning that user accounts and permissions are maintained in the application's user management system, not within Oracle Wallet.

Therefore, Oracle Wallet contains the credentials necessary for secure database access, but the specific users who are granted access to the application are managed separately in ADDUSER, as mentioned in the context above.

# Appendix H - Paperless Nursing Audit

## Instructions you can edit, share, and print


H.1 Set-Up Required ..... 2194
H.2 Display of Data in the Paperless Nursing Audit Form (PAUDIT) ..... 2199
H.3 Exclusion of a Unit ..... 2201
H.4 Queries to be Used After Nursing Audit is Set ..... 2202
H.5 Release of the PAUD After Audit is Completed ..... 2205

**NOTE –** Paperless Nursing Audit can only be used with units collected using the OnSite Module.

# H.1 Set-Up Required

The following is the set-up required for the paperless nursing audit to work. Paperless Nursing Audit is a database package (DON_NURSING_AUDIT.PKG).

Master Codes to be defined:

- ADTPG – Donation or deferrals to be brought to the form. This master code controls the selection of 'Donation' or 'Deferral' in the Paperless Nursing Audit and Visual Audit screens.
- NUKEY – The codes listed under this master code are static and should not be changed.

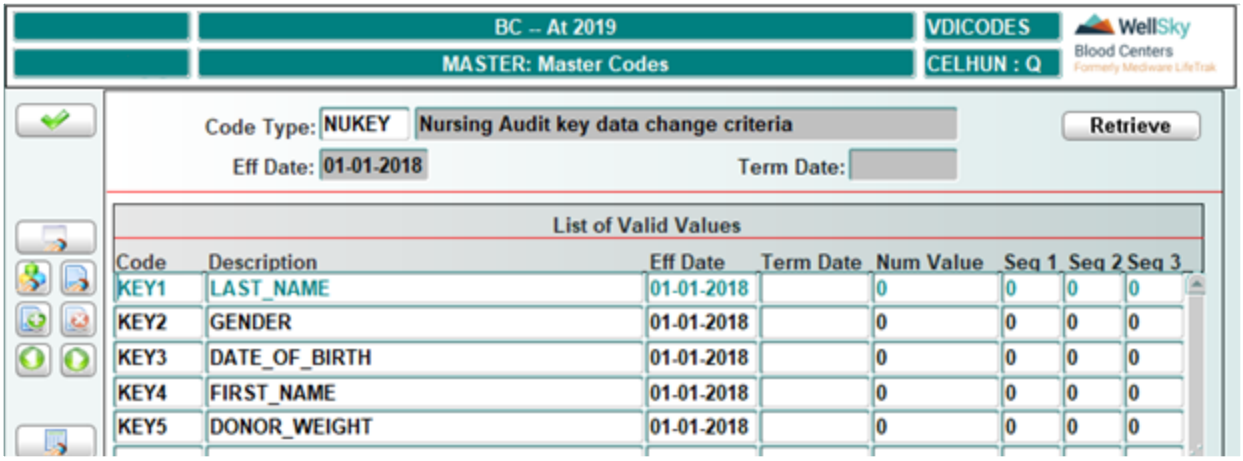


The code value and description are hard-coded within the package. The user can choose to terminate the code, if needed.

System Parameters to be defined:

- PAUDIT – Y - Paperless Audit is enabled; N - Not enabled.

  If the parameter is set to N, the facility has chosen not to use paperless nursing audit. If they access the program DRIMAUDT (PAUDIT), the following error message displays.

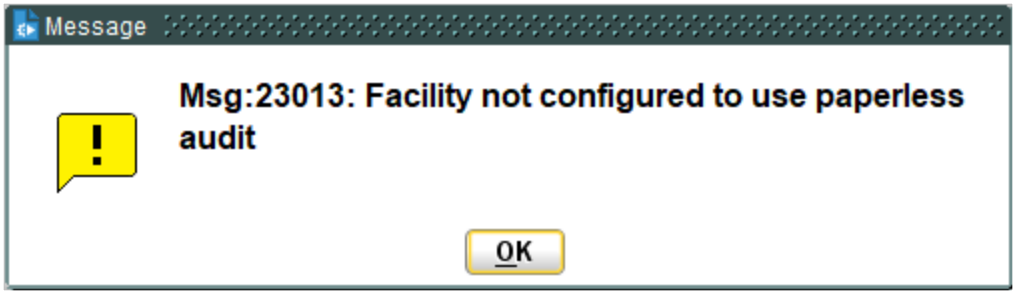


  If the facility has set the parameter to Y, the program opens when they access the program DRIMAUDT (PAUDIT).

# Registration Table Definition: Registration Holds Table (RHOLDS)

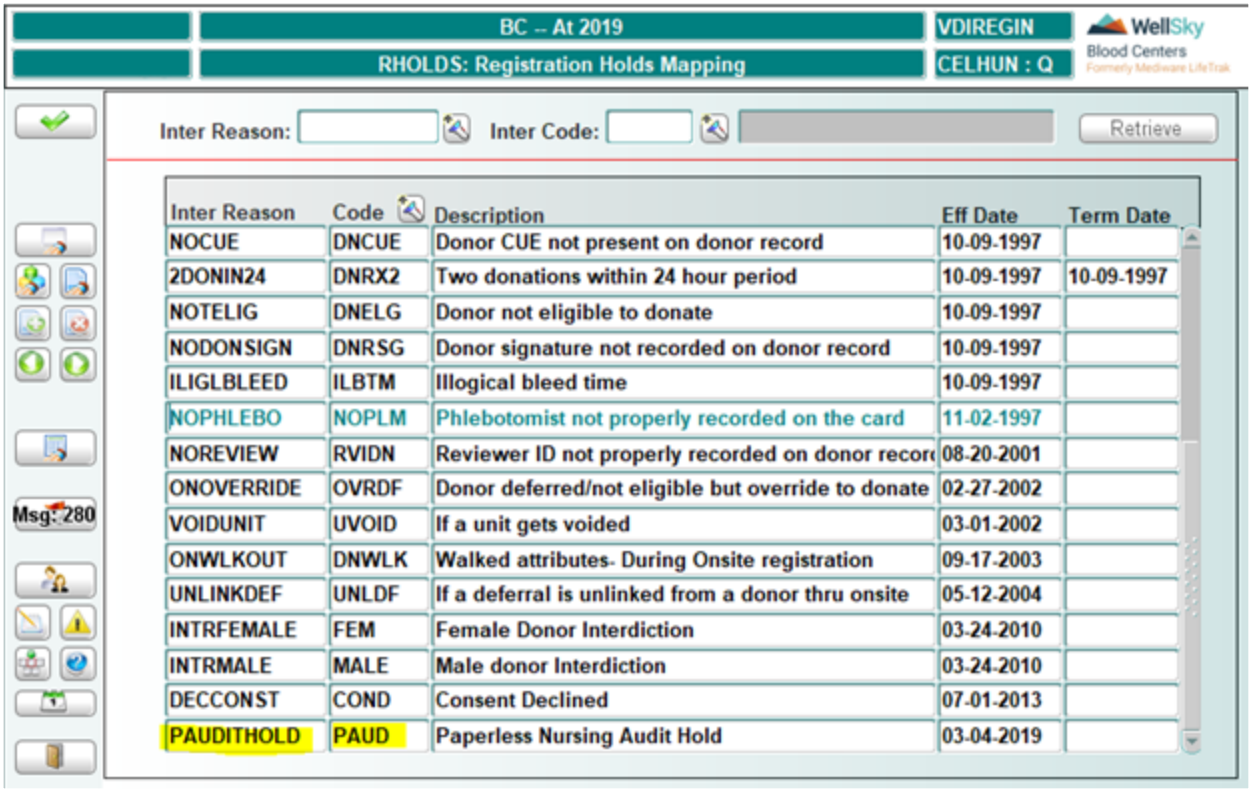


| Inter Reason | Code | Description | Eff Date | Term Date |
|---|---|---|---|---|
| NOCUE | DNCUE | Donor CUE not present on donor record | 10-09-1997 | |
| 2DONIN24 | DNRX2 | Two donations within 24 hour period | 10-09-1997 | 10-09-1997 |
| NOTELIG | DNELG | Donor not eligible to donate | 10-09-1997 | |
| NODONSIGN | DNRSG | Donor signature not recorded on donor record | 10-09-1997 | |
| ILIGLBLEED | ILBTM | Illogical bleed time | 10-09-1997 | |
| NOPHLEBO | NOPLM | Phlebotomist not properly recorded on the card | 11-02-1997 | |
| NOREVIEW | RVIDN | Reviewer ID not properly recorded on donor recor | 08-20-2001 | |
| ONOVERRIDE | OVRDF | Donor deferred/not eligible but override to donate | 02-27-2002 | |
| VOIDUNIT | UVOID | If a unit gets voided | 03-01-2002 | |
| ONWLKOUT | DNWLK | Walked attributes- During Onsite registration | 09-17-2003 | |
| UNLINKDEF | UNLDF | If a deferral is unlinked from a donor thru onsite | 05-12-2004 | |
| INTRFEMALE | FEM | Female Donor Interdiction | 03-24-2010 | |
| INTRMALE | MALE | Male donor Interdiction | 03-24-2010 | |
| DECCONST | COND | Consent Declined | 07-01-2013 | |
| PAUDITHOLD | PAUD | Paperless Nursing Audit Hold | 03-04-2019 | |

Interdiction needs to be defined for the paperless nursing audit so it can be completed with HOLD status. If the user wants a HOLDS interdiction that is specific to the paperless nursing audit process, the user will need to create a new interdiction in the Interdiction Codes table for Donor.

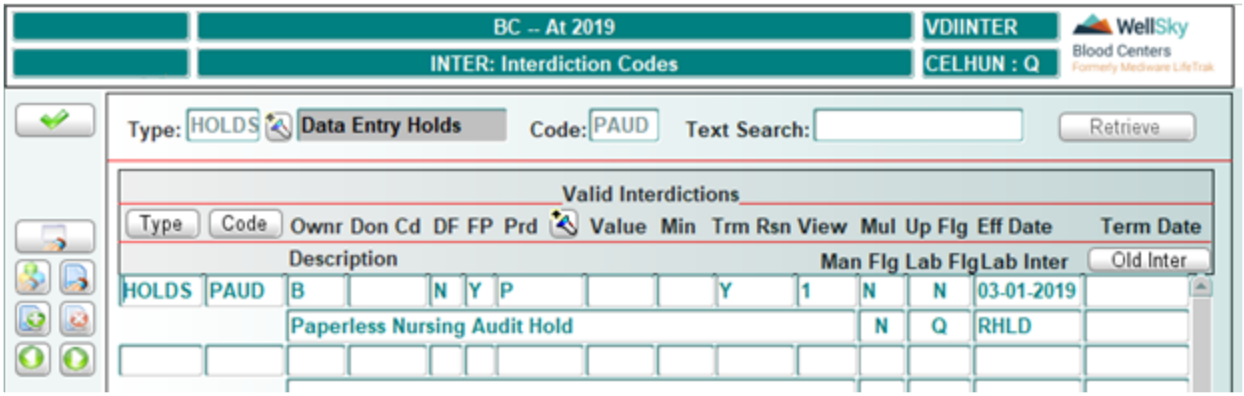

# Define Physical Findings Values (PHYRULE)

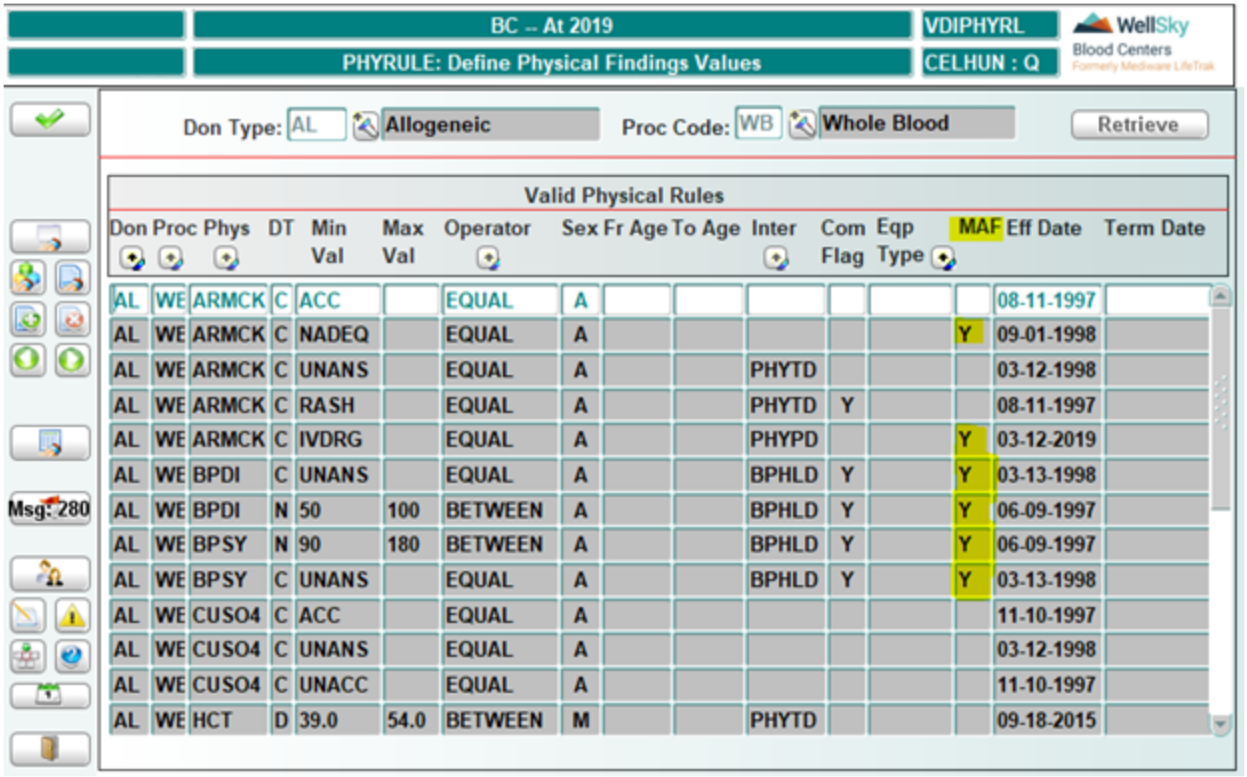


| Don | Proc | Phys | DT | Min Val | Max Val | Operator | Sex | Fr Age | To Age | Inter | Com Flag | Eqp Type | MAF | Eff Date | Term Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AL | WE | ARMCK | C | ACC | | EQUAL | A | | | | | | | 08-11-1997 | |
| AL | WE | ARMCK | C | NADEQ | | EQUAL | A | | | | | | Y | 09-01-1998 | |
| AL | WE | ARMCK | C | UNANS | | EQUAL | A | | | PHYTD | | | | 03-12-1998 | |
| AL | WE | ARMCK | C | RASH | | EQUAL | A | | | PHYTD | Y | | | 08-11-1997 | |
| AL | WE | ARMCK | C | IVDRG | | EQUAL | A | | | PHYPD | | | Y | 03-12-2019 | |
| AL | WE | BPDI | C | UNANS | | EQUAL | A | | | BPHLD | Y | | Y | 03-13-1998 | |
| AL | WE | BPDI | N | 50 | 100 | BETWEEN | A | | | BPHLD | Y | | Y | 06-09-1997 | |
| AL | WE | BPSY | N | 90 | 180 | BETWEEN | A | | | BPHLD | Y | | Y | 06-09-1997 | |
| AL | WE | BPSY | C | UNANS | | EQUAL | A | | | BPHLD | Y | | Y | 03-13-1998 | |
| AL | WE | CUSO4 | C | ACC | | EQUAL | A | | | | | | | 11-10-1997 | |
| AL | WE | CUSO4 | C | UNANS | | EQUAL | A | | | | | | | 03-12-1998 | |
| AL | WE | CUSO4 | C | UNACC | | EQUAL | A | | | | | | | 11-10-1997 | |
| AL | WE | HCT | D | 39.0 | 54.0 | BETWEEN | M | | | PHYTD | | | | 09-18-2015 | |

- Set the MAF flag to 'Y' to cause manual audit.
- If a flag is set for a physical code that is based on a range of numerical values, it will only be pulled to manual audit if the physical code is out of range.
- If the response is a character, then when that response is selected, it will be slated for manual nursing audit.


WellSky Corporation
Proprietary and confidential

## Health History Questions Bank:

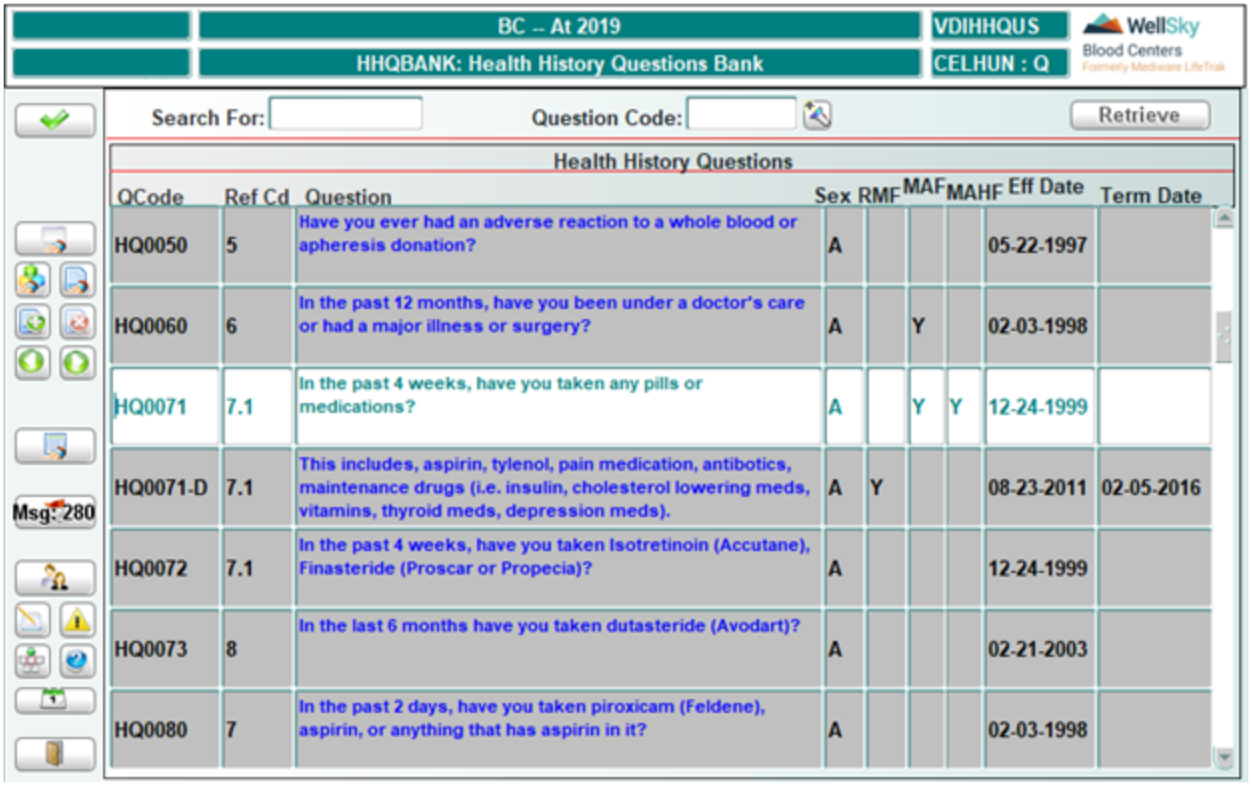


Set the MAF flag to 'Y' if the screener (staff) change the answer on the question. This will cause the audit to be set to HOLD.

## Define Health History Responses (HHR):

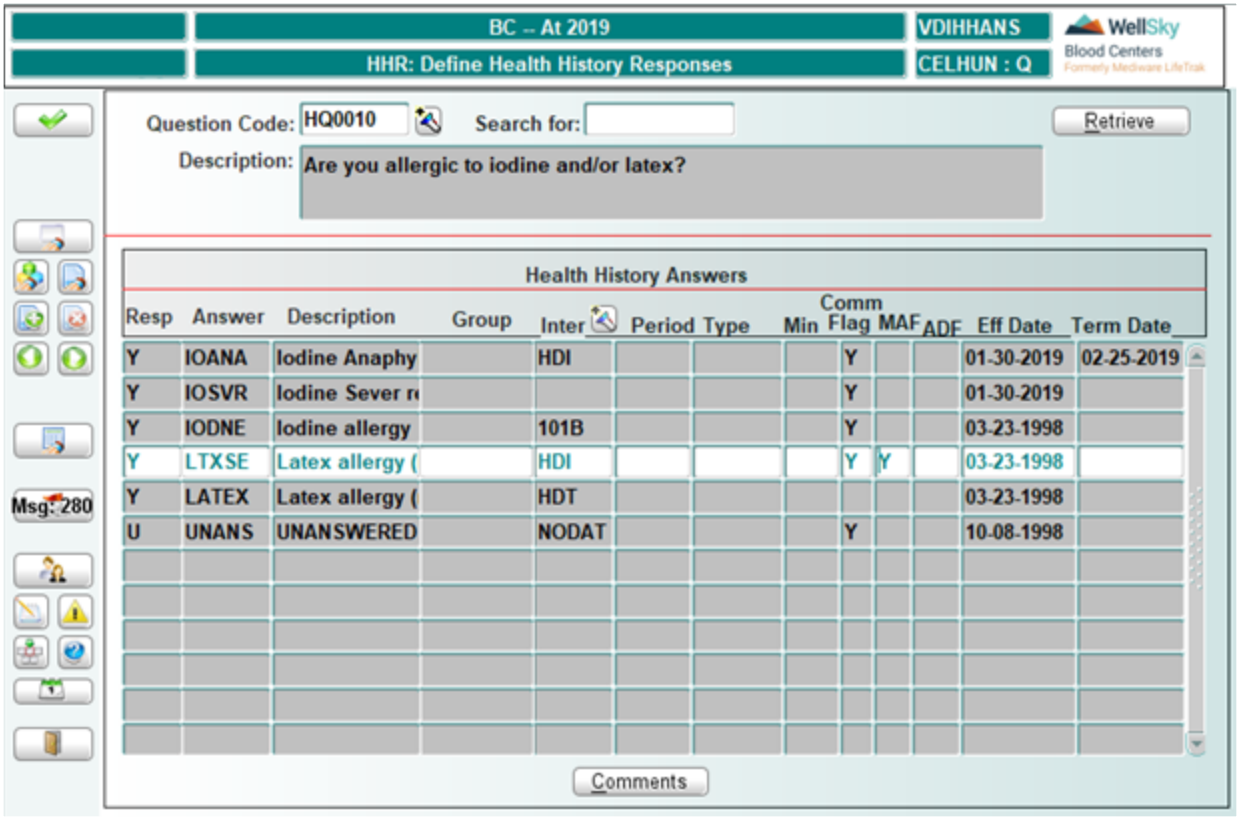


Set the MAF flag for manual audit to be performed if the response is entered for health history questions.


WellSky Corporation
Proprietary and confidential

# H.2 Display of Data in the Paperless Nursing Audit Form (PAUDIT)

When initially entering the form, 'Donation' will display in the Option field. If the master code ADTPG is only defined for one option, there will not be a drop-down available, and the field will display what is active in the ADTPG master code.

The user will enter a date range, and it will only pull the units collected in the OnSite Module during that period of time.

When the user clicks **Retrieve**, the database package fires off and set the status for the units/deferrals. The status cannot be updated in the form.

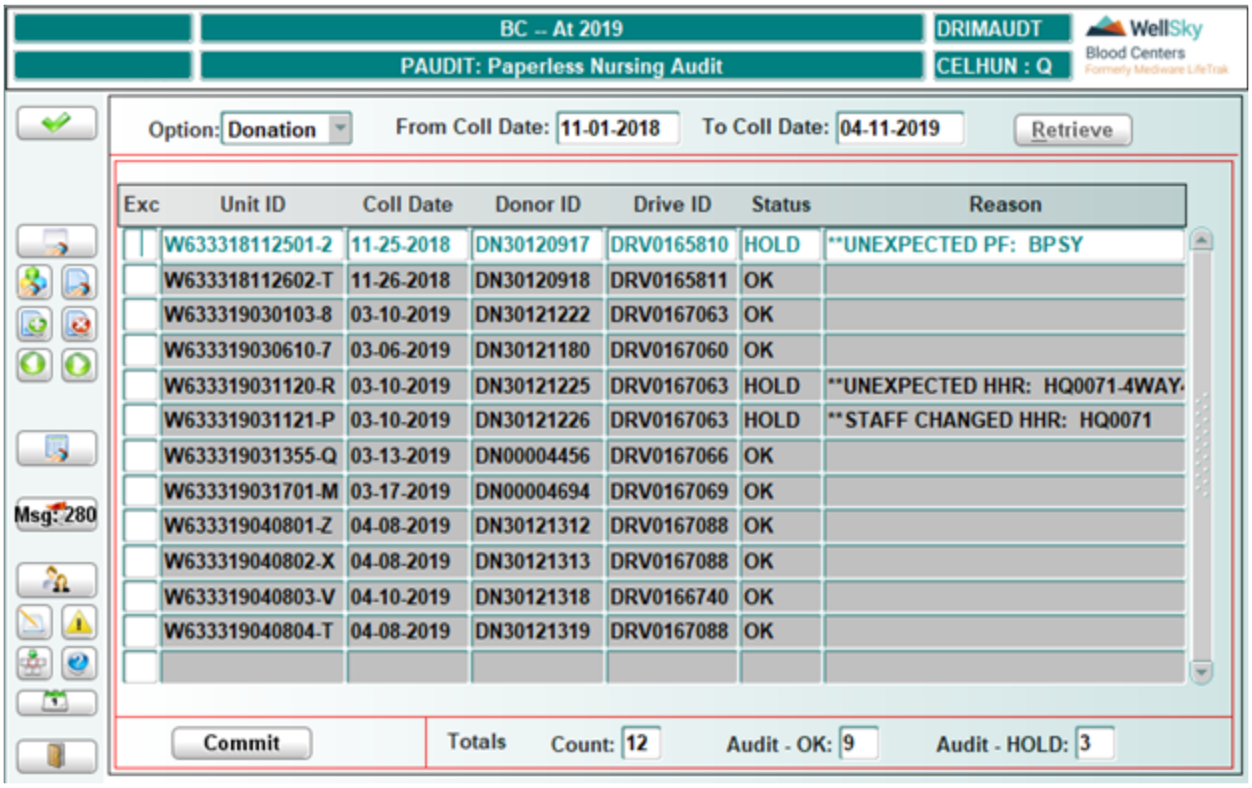

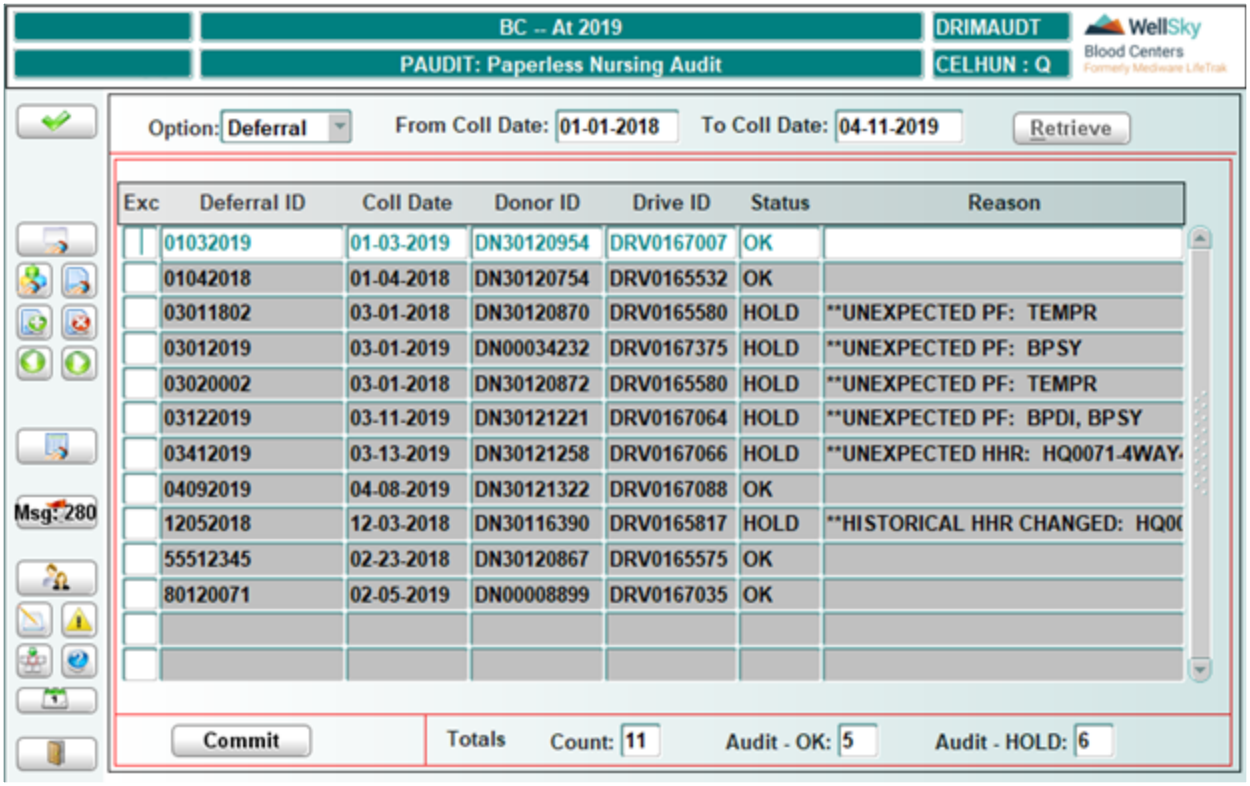
BC -- At 2019
DRIMAUDT
PAUDIT: Paperless Nursing Audit
CELHUN : Q
WellSky
Blood Centers
Option: Deferral
From Coll Date: 01-01-2018
To Coll Date: 04-11-2019
Retrieve
Exc
Deferral ID
Coll Date
Donor ID
Drive ID
Status
Reason
01032019 01-03-2019 DN30120954 DRV0167007 OK
01042018 01-04-2018 DN30120754 DRV0165532 OK
03011802 03-01-2018 DN30120870 DRV0165580 HOLD **UNEXPECTED PF: TEMPR
03012019 03-01-2019 DN00034232 DRV0167375 HOLD **UNEXPECTED PF: BPSY
03020002 03-01-2018 DN30120872 DRV0165580 HOLD **UNEXPECTED PF: TEMPR
03122019 03-11-2019 DN30121221 DRV0167064 HOLD **UNEXPECTED PF: BPDI, BPSY
03412019 03-13-2019 DN30121258 DRV0167066 HOLD **UNEXPECTED HHR: HQ0071-4WAY
04092019 04-08-2019 DN30121322 DRV0167088 OK
12052018 12-03-2018 DN30116390 DRV0165817 HOLD **HISTORICAL HHR CHANGED: HQ0
55512345 02-23-2018 DN30120867 DRV0165575 OK
80120071 02-05-2019 DN00008899 DRV0167035 OK
Msg: 280
Commit
Totals
Count: 11
Audit - OK: 5
Audit - HOLD: 6

# H.3 Exclusion of a Unit

If a unit appears in the list in the detail block, the user can exclude the unit from the process by placing an "X" in the Exc column.

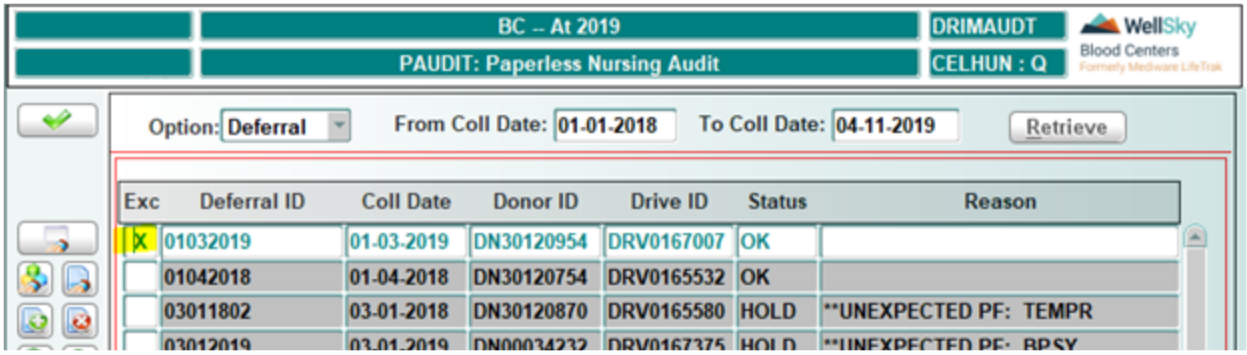


**NOTE –** This will not set the nursing audit flag for unit/deferral.

# H.4 Queries to be Used After Nursing Audit is Set

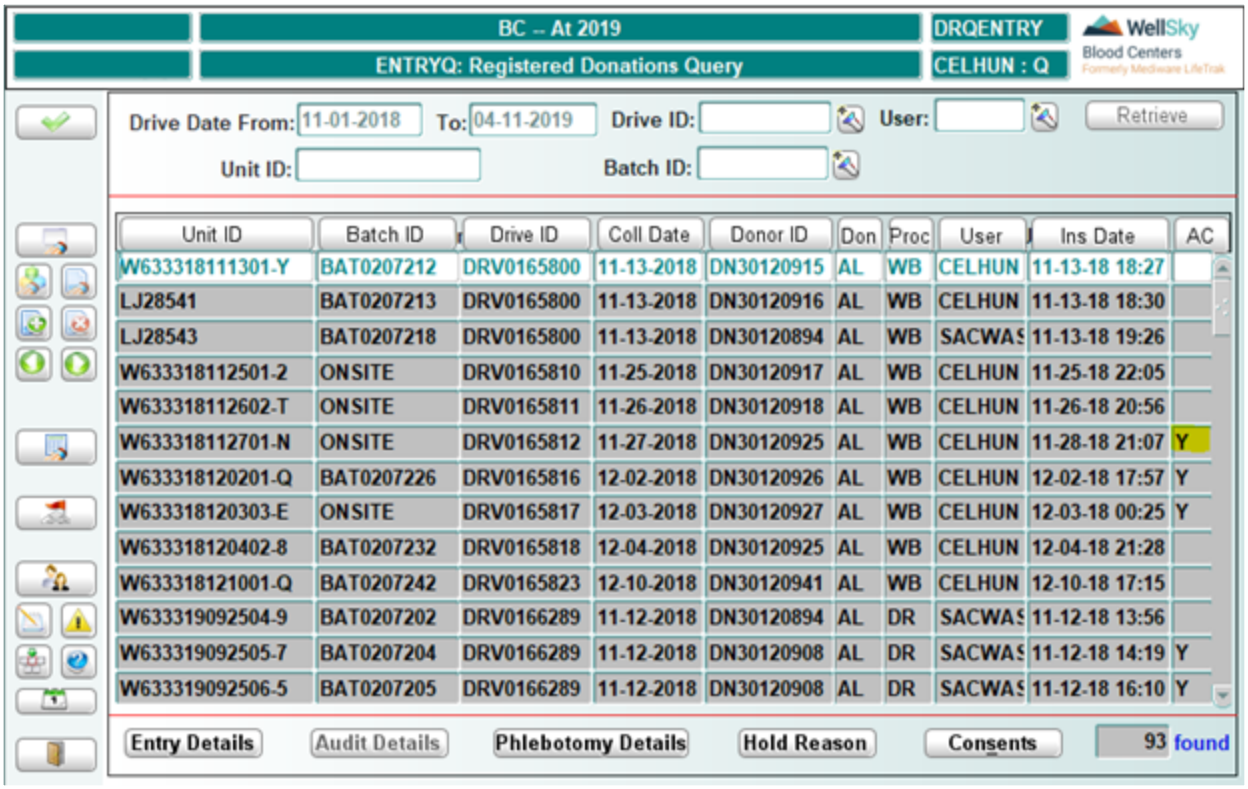


Registered Donations Query (ENTRYQ) – if the audit is set to OK status, it will have a 'Y' in the AC column. The AC column will be blank for units that are on HOLD.


WellSky Corporation
Proprietary and confidential

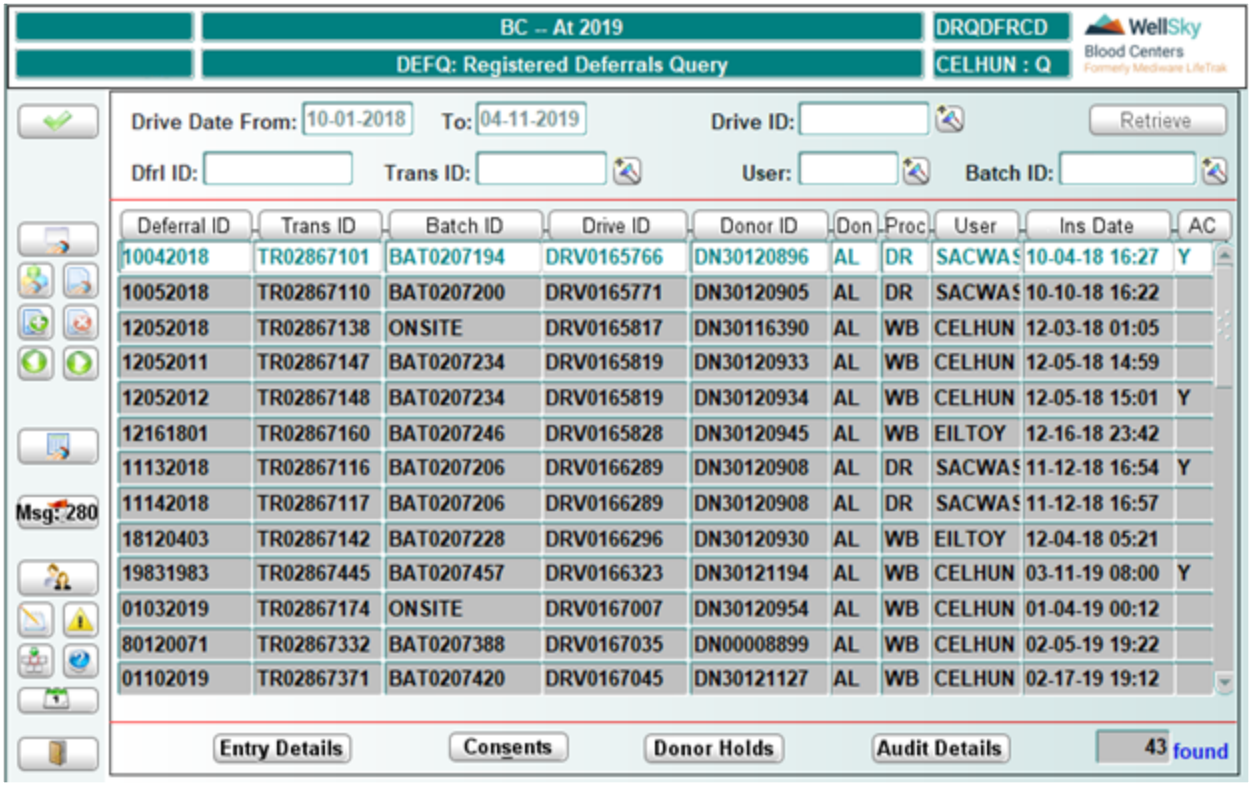


Registered Deferrals Query (DEFQ) – if the audit is set to OK status, it will have a 'Y' in the AC column. The AC column will be blank for units that are on HOLD.

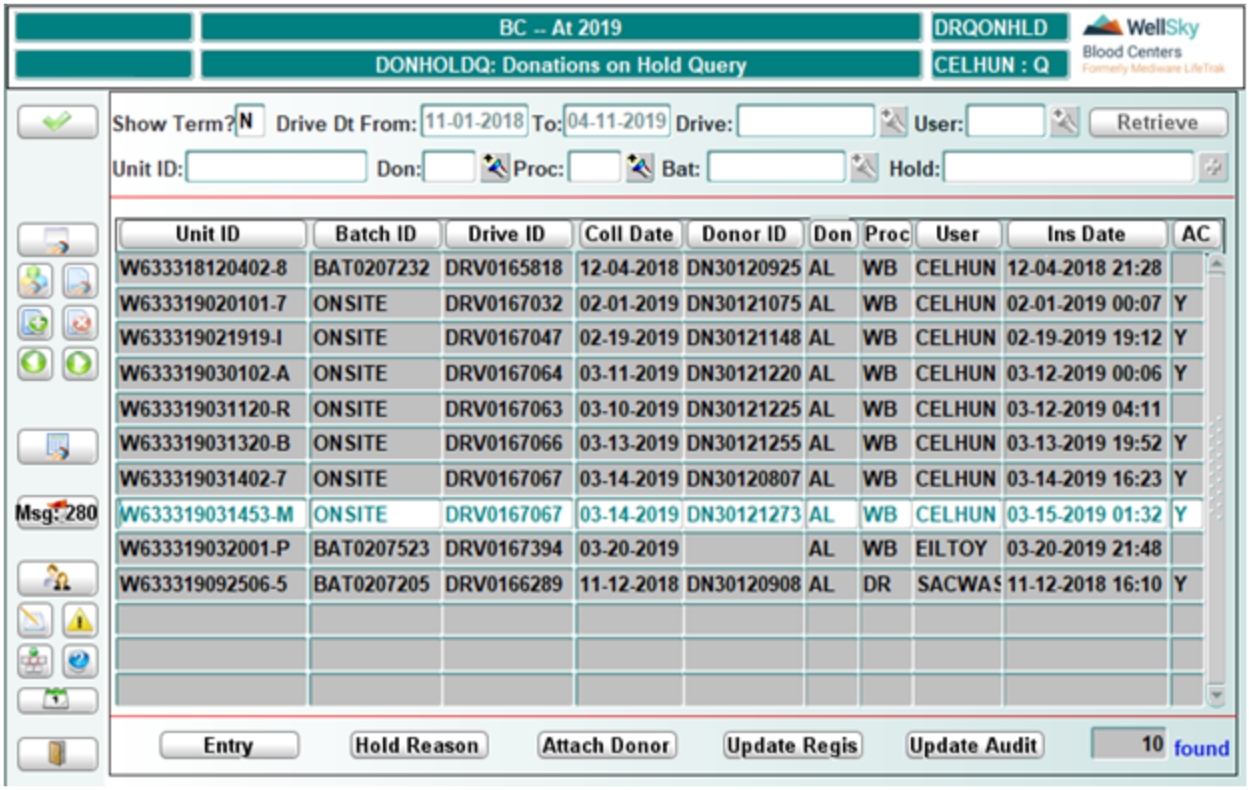

Donations on Hold Query (DONHOLDQ) – displays the units that have the nursing audit to HOLD.

You can view the ready why the audit is on hold by clicking **Hold Reason**.

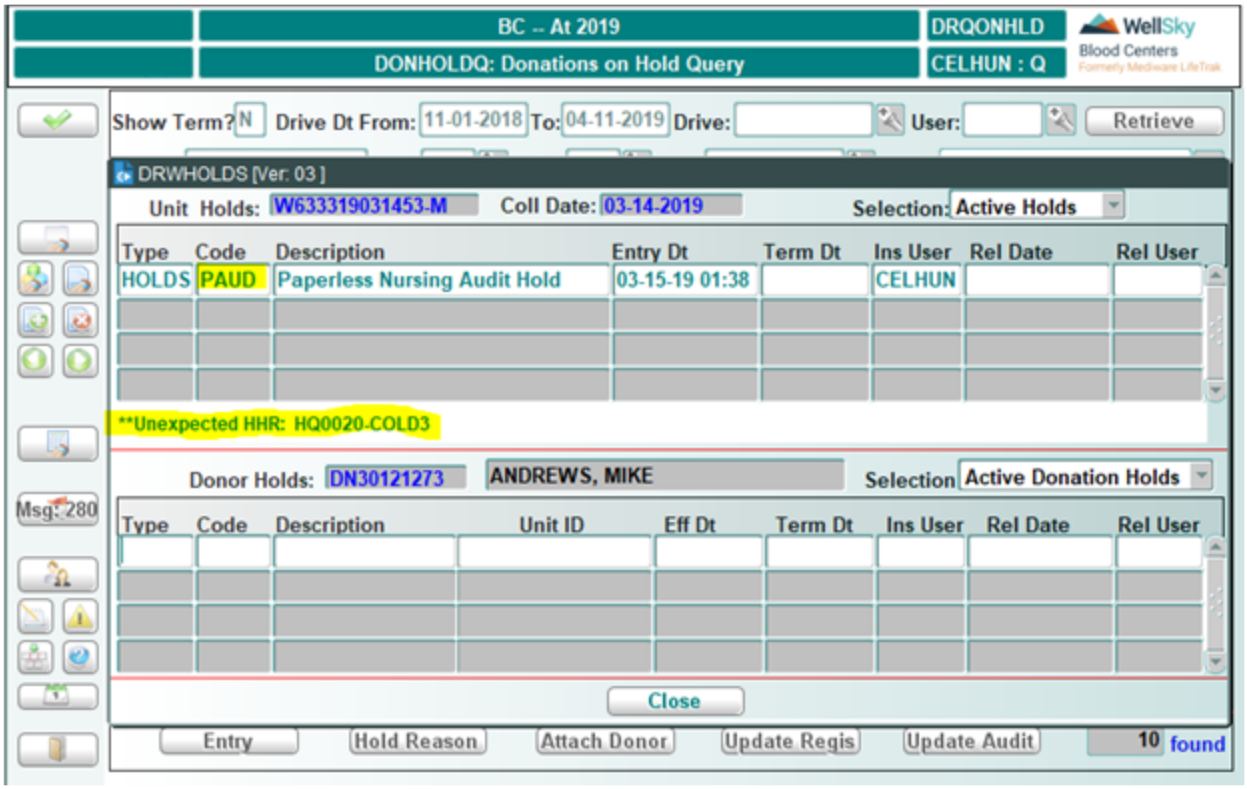


From this screen, you can move to **Update Audit** and review it and complete the audit.


WellSky Corporation
Proprietary and confidential

# H.5 Release of the PAUD After Audit is Completed

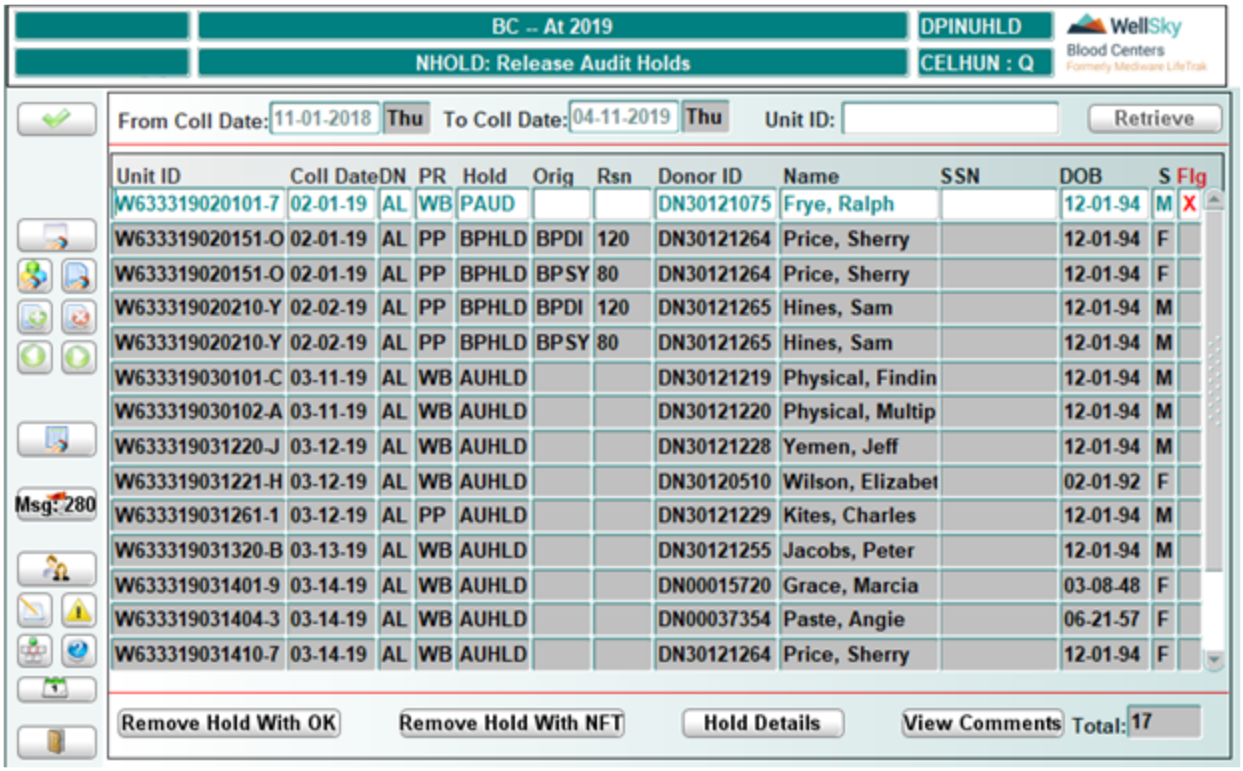


| Unit ID | Coll Date | DN | PR | Hold | Orig | Rsn | Donor ID | Name | SSN | DOB | S | Flg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W633319020101-7 | 02-01-19 | AL | WB | PAUD | | | DN30121075 | Frye, Ralph | | 12-01-94 | M | X |
| W633319020151-O | 02-01-19 | AL | PP | BPHLD | BPDI | 120 | DN30121264 | Price, Sherry | | 12-01-94 | F | |
| W633319020151-O | 02-01-19 | AL | PP | BPHLD | BPSY | 80 | DN30121264 | Price, Sherry | | 12-01-94 | F | |
| W633319020210-Y | 02-02-19 | AL | PP | BPHLD | BPDI | 120 | DN30121265 | Hines, Sam | | 12-01-94 | M | |
| W633319020210-Y | 02-02-19 | AL | PP | BPHLD | BPSY | 80 | DN30121265 | Hines, Sam | | 12-01-94 | M | |
| W633319030101-C | 03-11-19 | AL | WB | AUHLD | | | DN30121219 | Physical, Findin | | 12-01-94 | M | |
| W633319030102-A | 03-11-19 | AL | WB | AUHLD | | | DN30121220 | Physical, Multip | | 12-01-94 | M | |
| W633319031220-J | 03-12-19 | AL | WB | AUHLD | | | DN30121228 | Yemen, Jeff | | 12-01-94 | M | |
| W633319031221-H | 03-12-19 | AL | WB | AUHLD | | | DN30120510 | Wilson, Elizabet | | 02-01-92 | F | |
| W633319031261-1 | 03-12-19 | AL | PP | AUHLD | | | DN30121229 | Kites, Charles | | 12-01-94 | M | |
| W633319031320-B | 03-13-19 | AL | WB | AUHLD | | | DN30121255 | Jacobs, Peter | | 12-01-94 | M | |
| W633319031401-9 | 03-14-19 | AL | WB | AUHLD | | | DN00015720 | Grace, Marcia | | 03-08-48 | F | |
| W633319031404-3 | 03-14-19 | AL | WB | AUHLD | | | DN00037354 | Paste, Angie | | 06-21-57 | F | |
| W633319031410-7 | 03-14-19 | AL | WB | AUHLD | | | DN30121264 | Price, Sherry | | 12-01-94 | F | |

Release Audit Hold – the hold interdiction has to be placed in AHOLD master code for the units to appear in the screen. From that point, the process should follow the screen functions.

This Page Intentionally Left Blank

# Appendix I - Resolving an ABO Discrepancy Between Lab and Donor

I.1 Scenario for Resolving an ABO Discrepancy Between Lab and Donor ..... 2208

# I.1 Scenario for Resolving an ABO Discrepancy Between Lab and Donor

The current test result is O Pos, but the historical test result from the donor interface was A Neg. So, when the test result was entered, it scheduled a second ABORH on the unit because it did not match the donor.

- When viewing the results in All Tests for Unit Query (TESTQ), you are able to see the initial test result, that it is canceled, and that a new ABORH is ordered.
- Using the F6 (Menu) key, you can see the interdiction ABOD placed due to the discrepancy.
- The initial ABORH that was resulted for sequence 1 now has a cancel flag of 'D' (D=discrepancy), and a second ABORH is ordered with a sequence of 2.

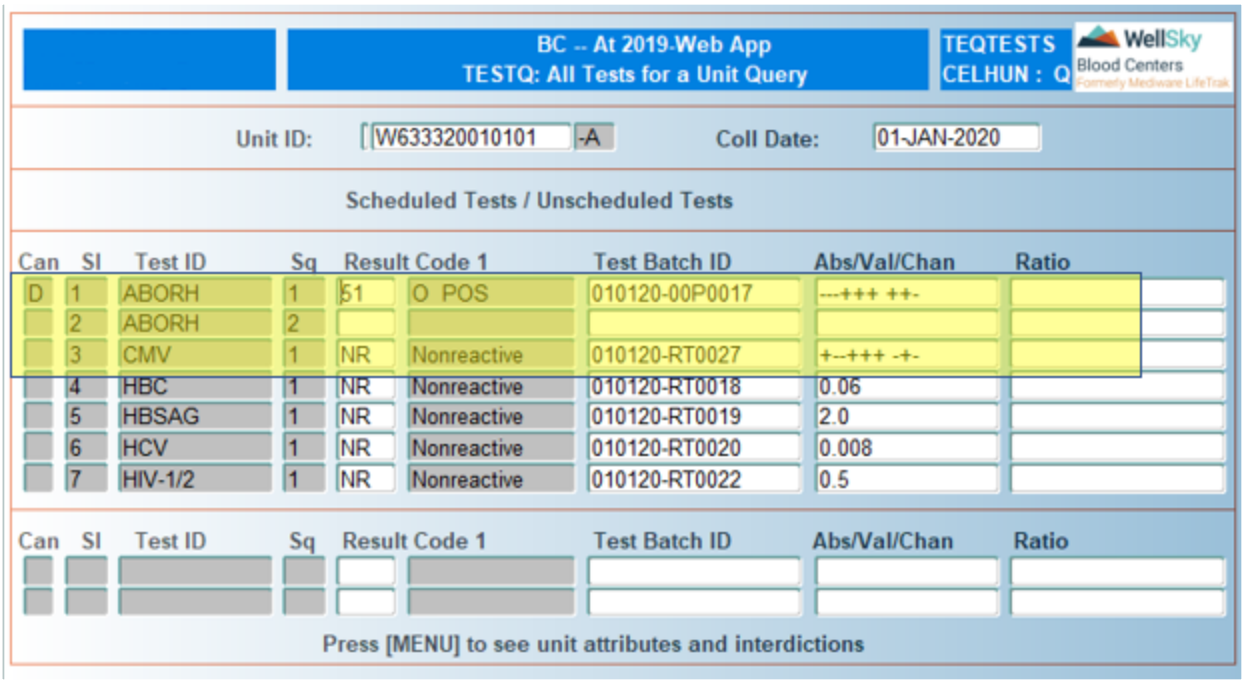



WellSky Corporation
Proprietary and confidential

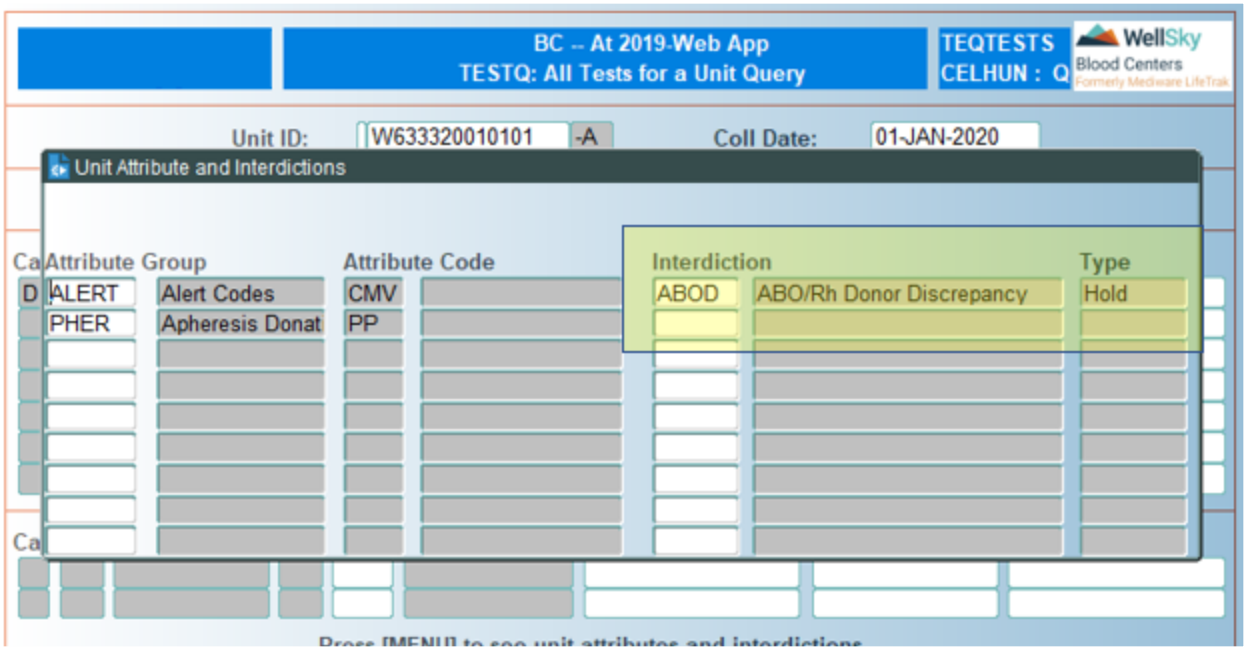


**NOTE –** Use the F6 (Menu) key to view the interdictions placed due to the ABO discrepancy.

## Unit Query (UNITQ)

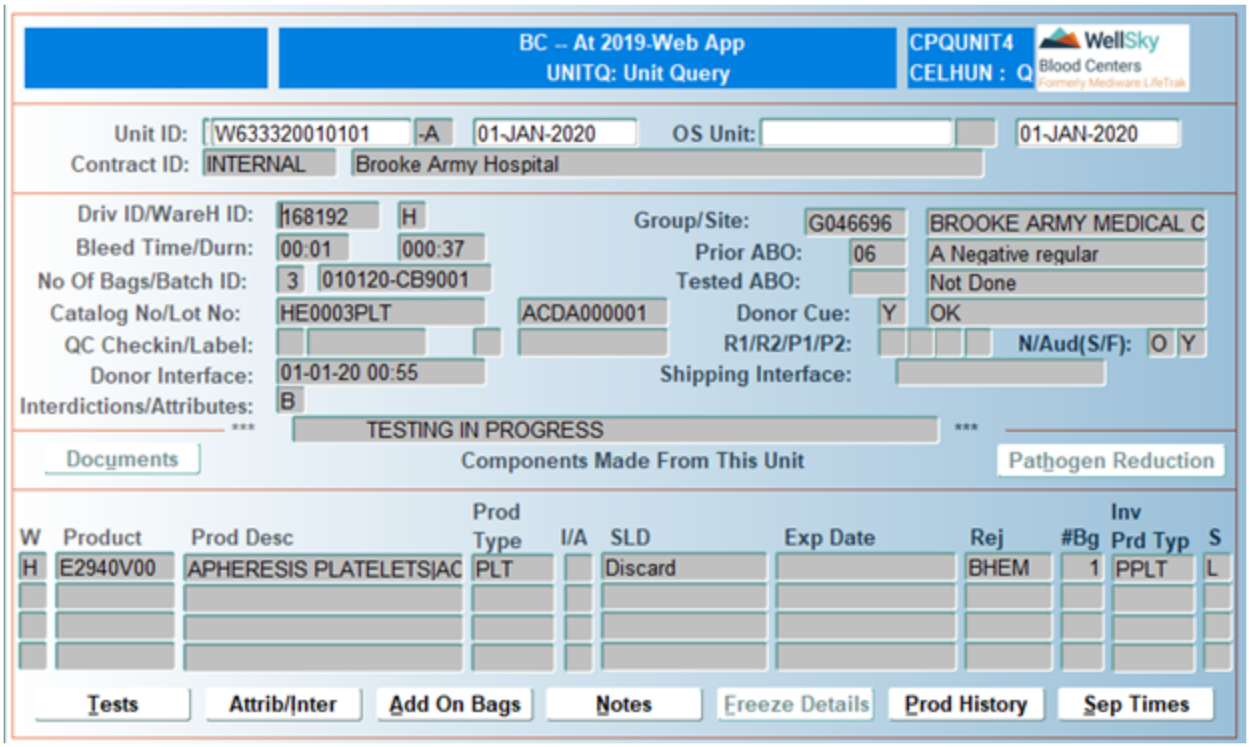

The prior ABO, which is 06 (A Negative), is present. You can view test results by using the F2 (List of Values) key to view test results present on the unit.

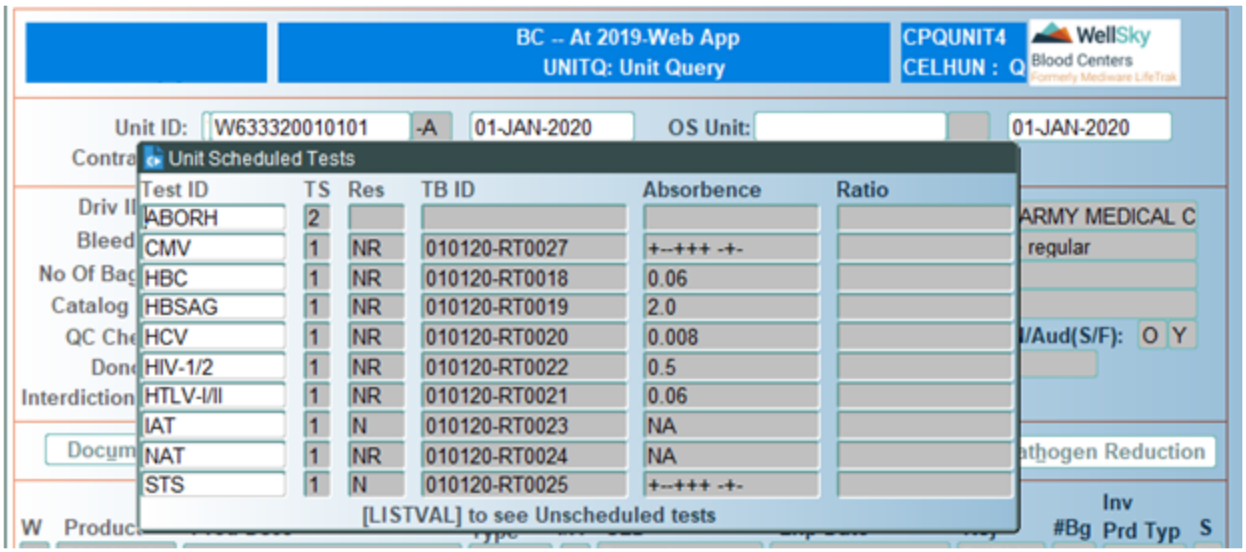


1. Use the F6 (Menu) key to view the attributes and interdictions.

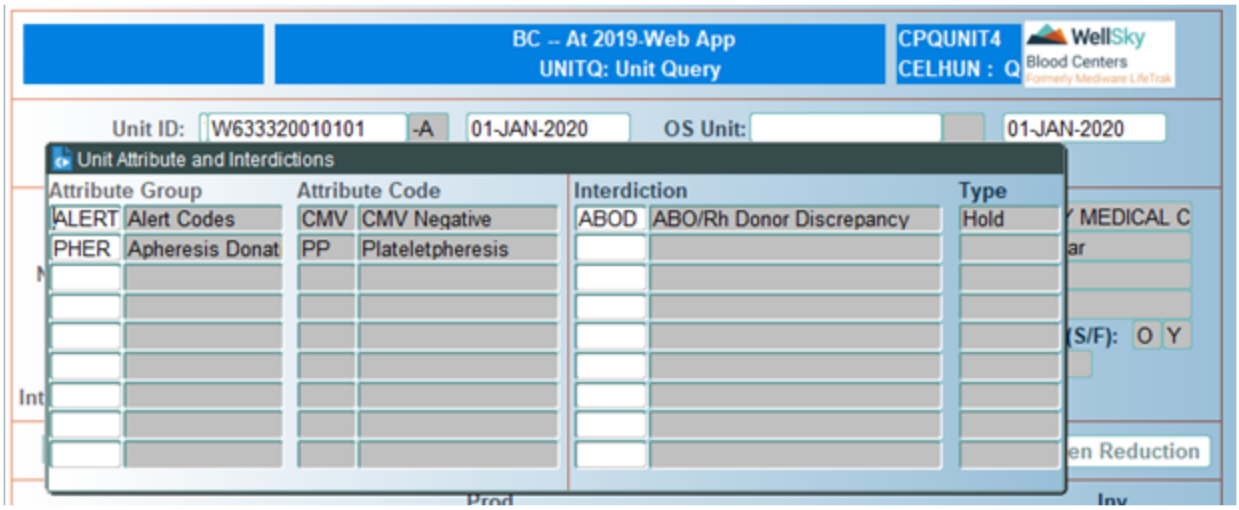


2. To view the historical ABORH present on the donor, go to the Unit and Donor Tested Antigen Query (ANTQL) screen. The bottom detail block displays the historical ABORH testing from the Donor application.

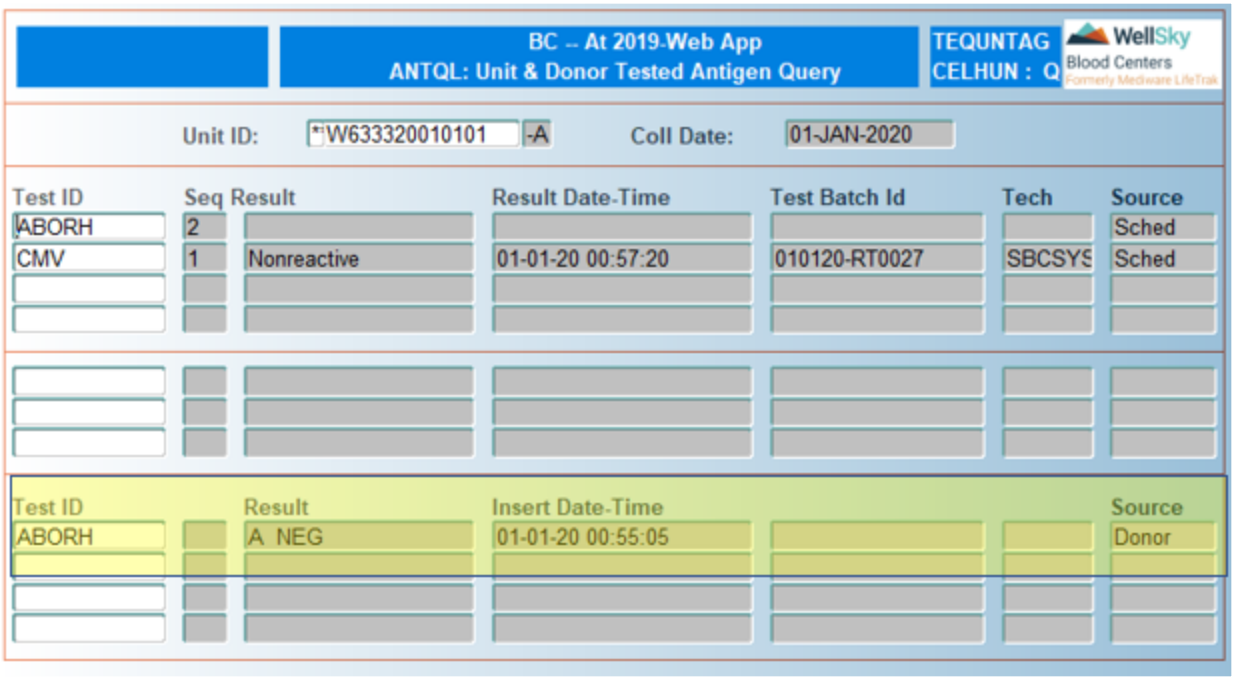


3. After you have determined the ABORH of the unit, and it is truly discrepant from the donor, then you will need to go into Donor (MODKYDAT screen) and remove the ABORH result that is present.

> **NOTE –** If you do not remove the ABORH from the donor, and re-interface the donor, then the discrepancy will continue to be placed, and it will just keep looping.

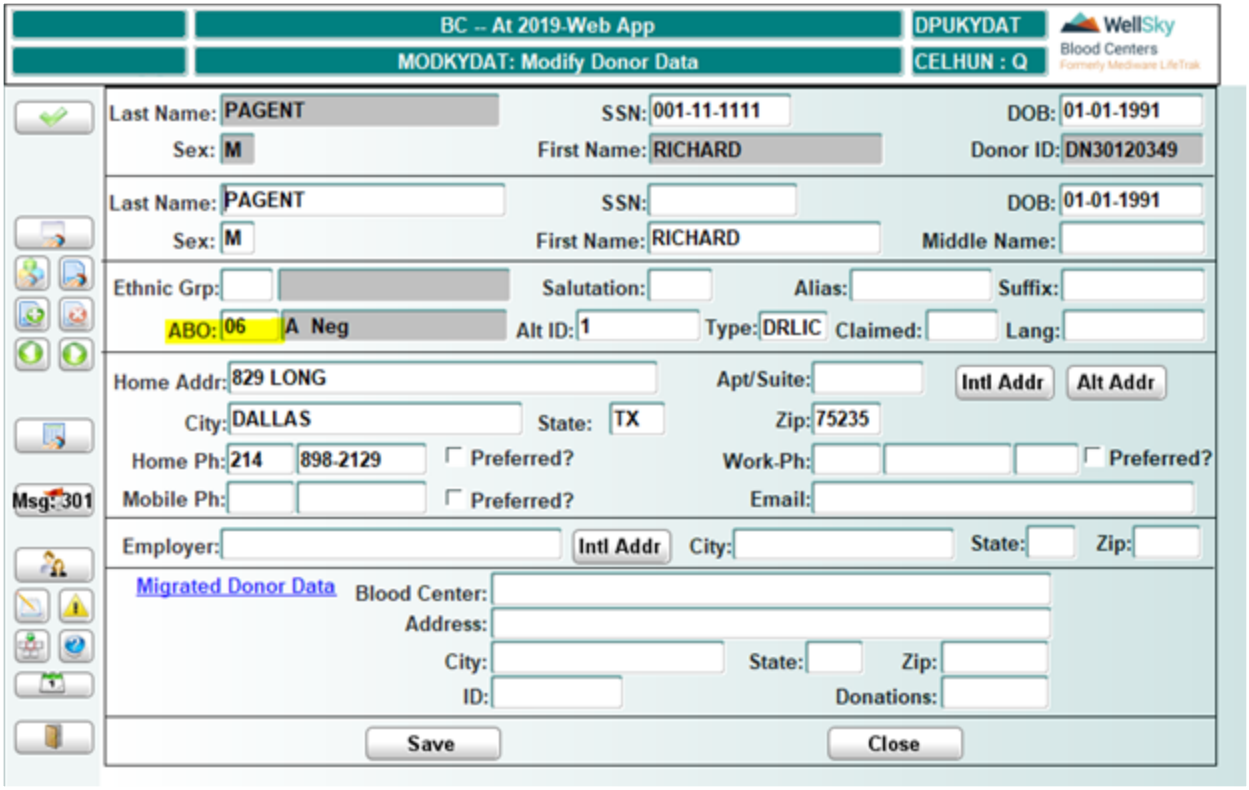


4. Remove the ABORH.

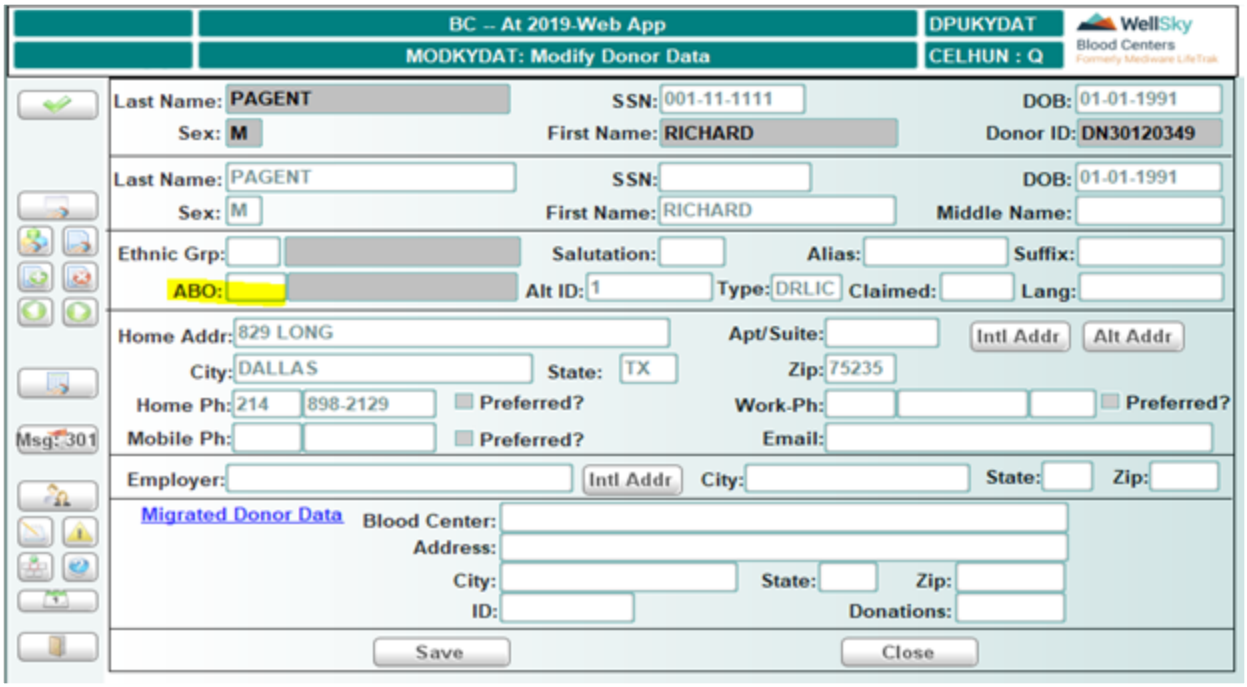


5. Go into Lab and the Reset Donor Interface Status (DIRESET) screen, and perform your testing for ABORH.
6. Re-interface Donor to Lab (REINTER).

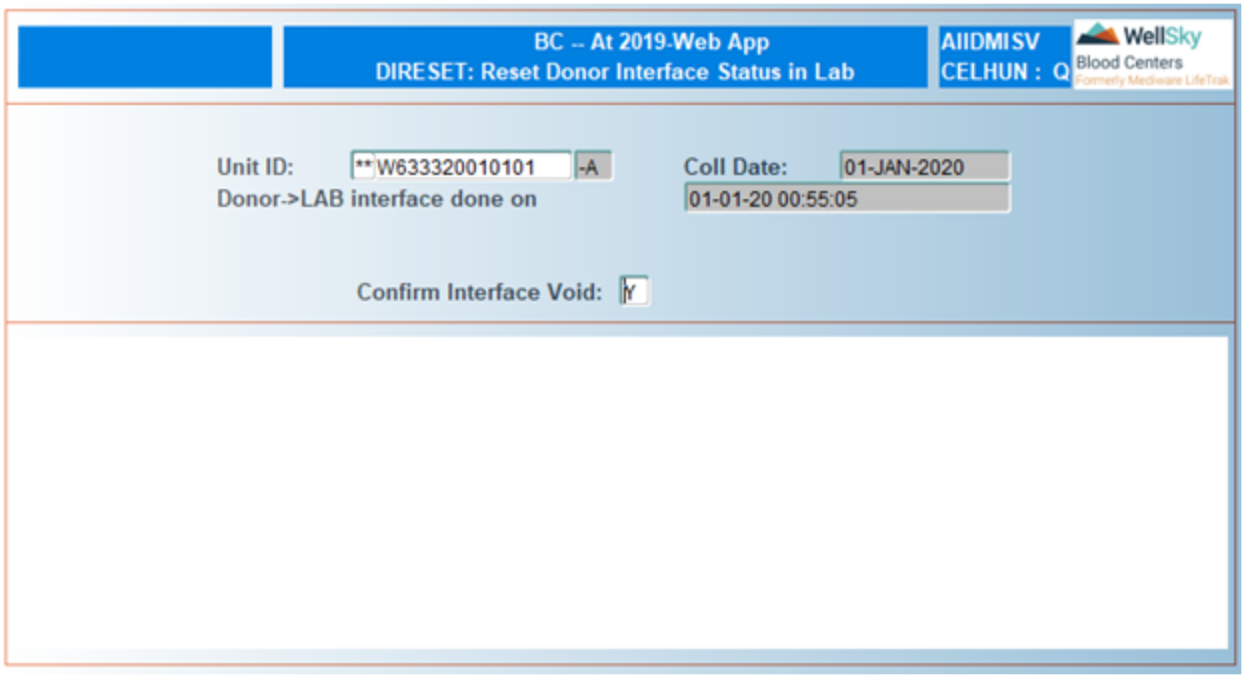


7. Perform testing.

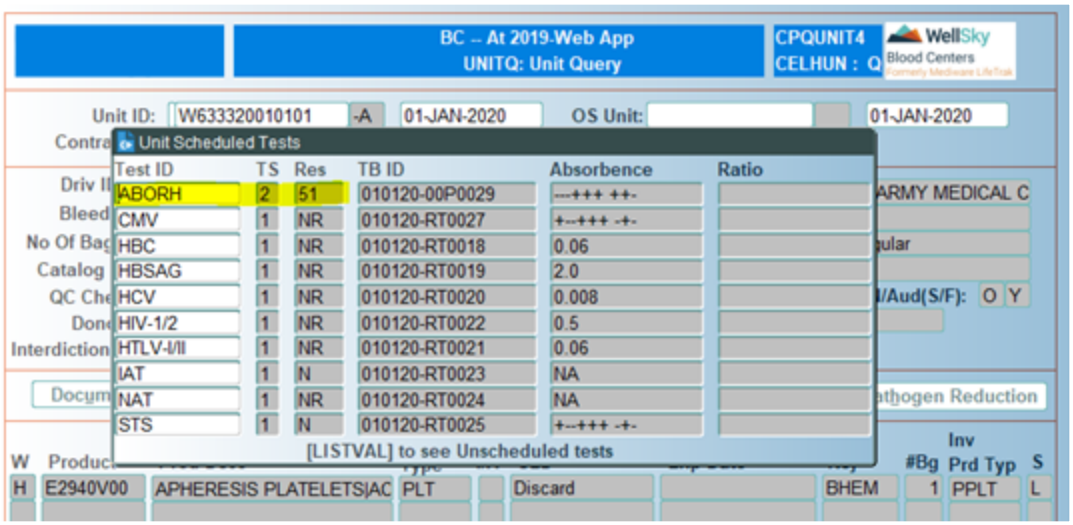


8. Re-interface the Donor to Lab (REINTER):

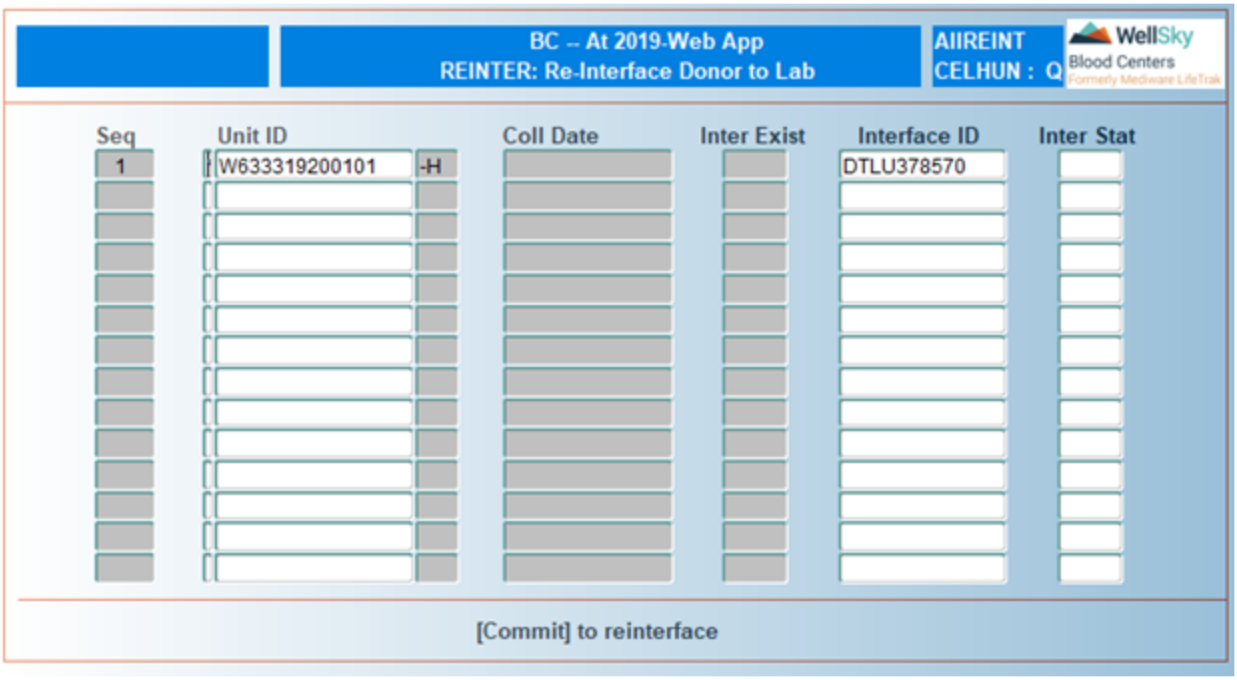


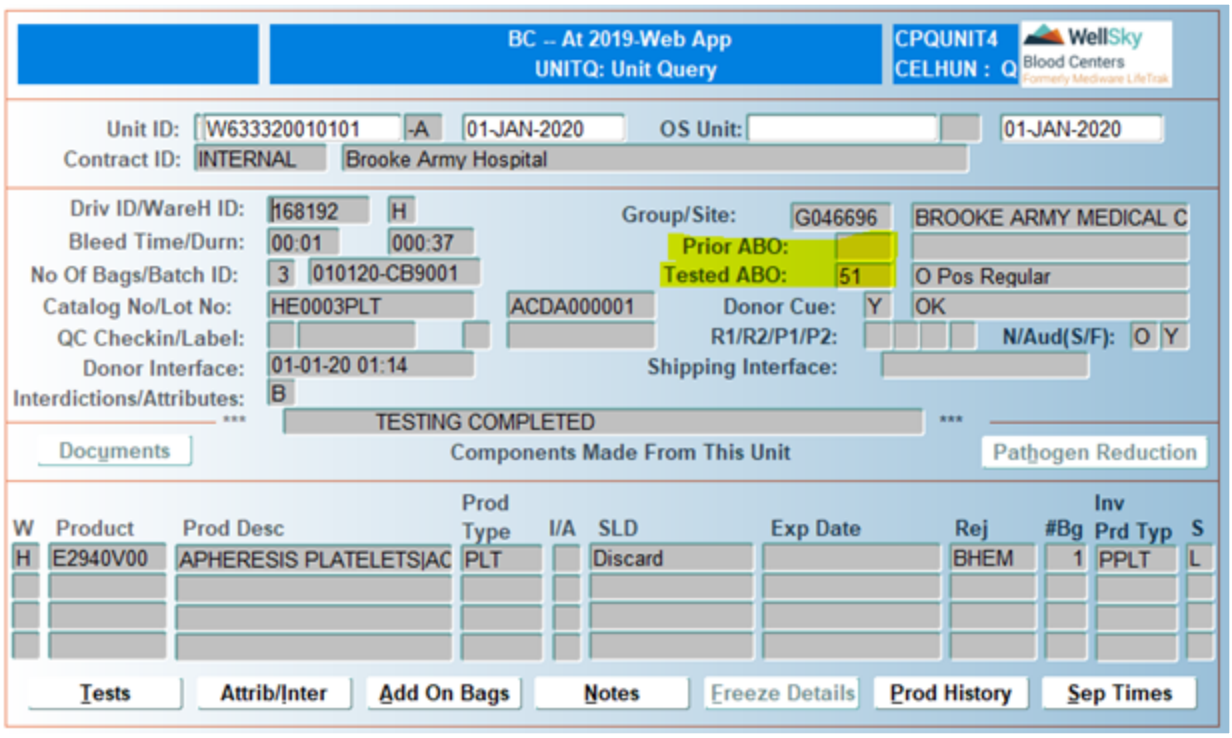


The prior ABORH has been removed from the donor, and only the current tested ABO is present.

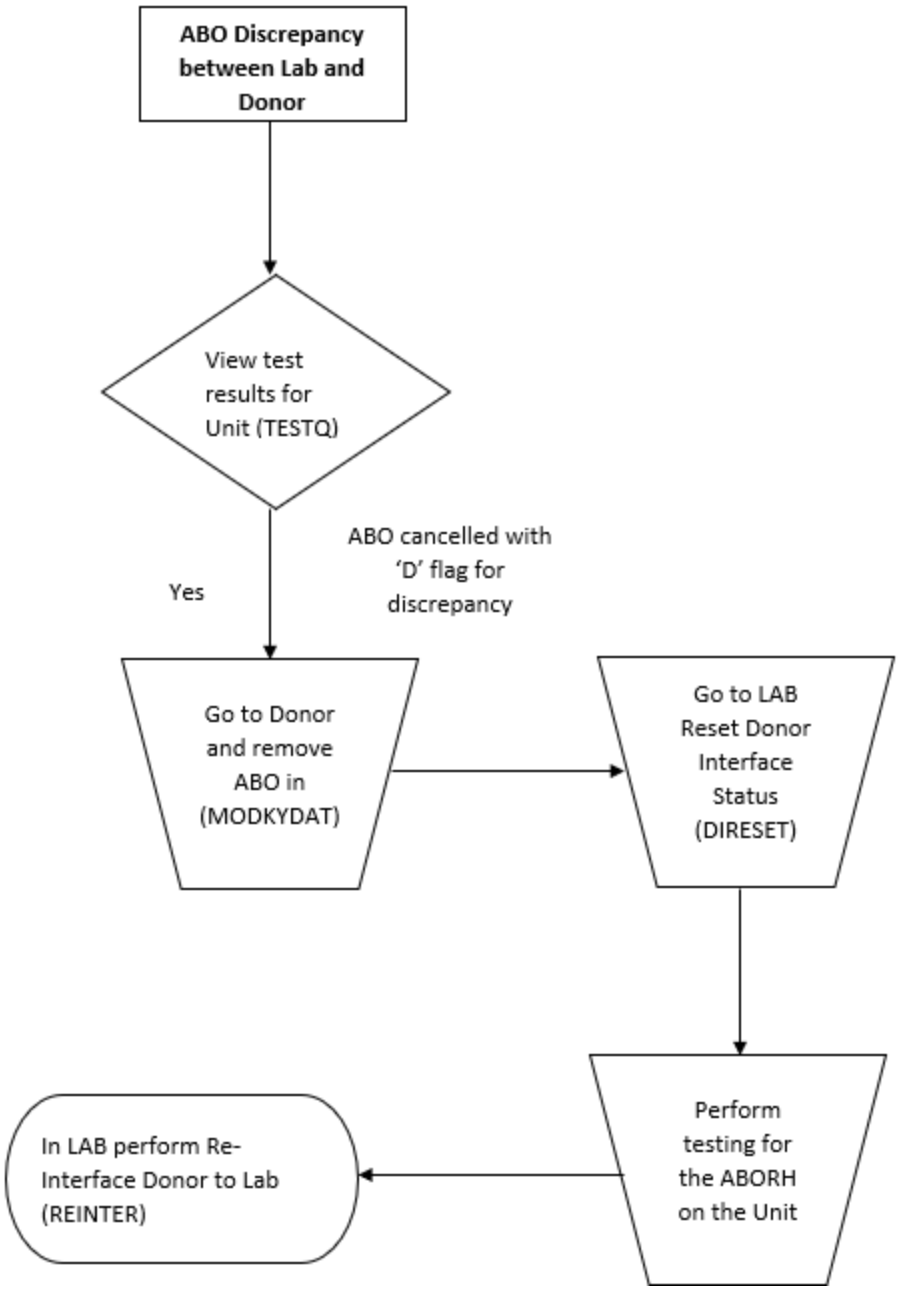
ABO Discrepancy between Lab and Donor
View test results for Unit (TESTQ)
Yes
ABO cancelled with 'D' flag for discrepancy
Go to Donor and remove ABO in (MODKYDAT)
Go to LAB Reset Donor Interface Status (DIRESET)
Perform testing for the ABORH on the Unit
In LAB perform Re-Interface Donor to Lab (REINTER)

This Page Intentionally Left Blank

# Appendix J - PHYRULE Examples

This appendix provides examples of how the Define Physical Findings Values (PHYRULE) table can be populated.

## Example of PULSE

### Setup

| Data Type | Min Value | Max Value | Operator | Sex | Min Age | Max Age | Inter Code | Equip Type |
|---|---|---|---|---|---|---|---|---|
| N | 40 | | LESS | A | | | D105 | |
| N | 40 | 49 | BETWEEN | A | | | D237 | |
| N | 50 | 100 | BETWEEN | A | | | | |
| N | 100 | | MORE | A | | | D109 | |

- Any value less than 40 is OUT OF RANGE, and the system places the D105 interdiction.
- Any value between 40 and 49 is OUT OF RANGE, and the system places the D237 interdiction.
- Any value between 50 and 100 is GOOD, and an interdiction is not placed.
- Any value greater than 100 is OUT OF RANGE, and the system places the D109 interdiction.

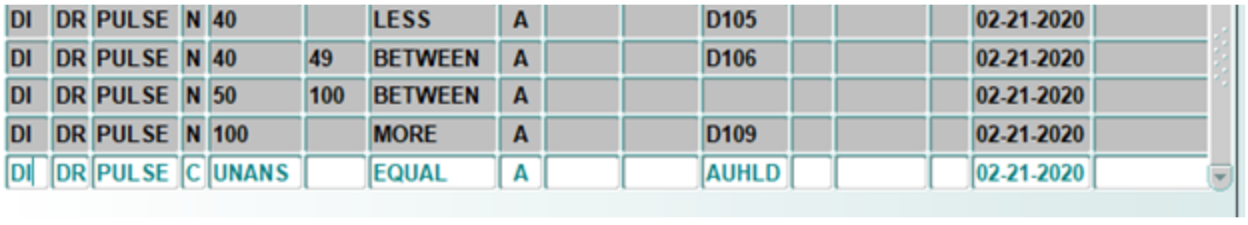

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DI | DR | PULSE | N | 40 | | LESS | A | | | D105 | | | | 02-21-2020 |
| DI | DR | PULSE | N | 40 | 49 | BETWEEN | A | | | D106 | | | | 02-21-2020 |
| DI | DR | PULSE | N | 50 | 100 | BETWEEN | A | | | | | | | 02-21-2020 |
| DI | DR | PULSE | N | 100 | | MORE | A | | | D109 | | | | 02-21-2020 |
| DI | DR | PULSE | C | UNANS | | EQUAL | A | | | AUHLD | | | | 02-21-2020 |

# TBV with TRIMA Equipment

## Setup

| Data Type | Min Value | Max Value | Operator | Sex | Min Age | Max Age | Inter Code | Equip Type |
|---|---|---|---|---|---|---|---|---|
| D | 4.5 | | LESS | A | 15 | 110 | TBV1 | TRIMA |
| D | 99.9 | | MORE | A | 15 | 110 | TBV1 | TRIMA |
| D | 4.5 | 99.9 | BETWEEN | A | 17 | 110 | | TRIMA |
| D | 4.5 | 99.9 | INRANGE | A | 15 | 16 | AP16 | TRIMA |

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DI | DR | TBV | D | 4.50 | 99.90 | BETWEEN | A | 17 | 110 | | | TRIM |
| DI | DR | TBV | D | 4.50 | | LESS | A | 15 | 110 | TBV1 | | TRIM |
| DI | DR | TBV | D | 99.9 | | MORE | A | 15 | 110 | TBV1 | | TRIM |
| DI | DR | TBV | D | 4.50 | 99.90 | INRANGE | A | 15 | 16 | AP16 | | TRIM |

For donors 15 - 16 years of age:

- Any value placed between 4.5 and 99.9 is a GOOD value, and AP16 is placed.
- Any value less than 4.5 is OUT OF RANGE, and TBV1 is placed.
- Any value more than 99.9 is OUT OF RANGE, and TBV1 is placed.

For donors 17 years of age and older:

- Any value between 4.5 and 99.9 is a GOOD value, and no interdiction is placed because of the blank inter code in that rule.
- Any value less than 4.5 is OUT OF RANGE, and TBV1 is placed.
- Any value more than 99.9 is OUT OF RANGE, and TBV1 is placed.

# TBV with ALYX Equipment

This setup is more complex because of the different ranges and inter codes set up for age ranges. However, this section will cover three different scenarios between ages 15 and 110.

## Setup

| Data Type | Min Value | Max Value | Operator | Sex | Min Age | Max Age | Inter Code | Equip Type |
|---|---|---|---|---|---|---|---|---|
| D | 99.0 | | MORE | A | 15 | 110 | TBV1 | ALYX |
| D | 0.1 | | LESS | A | 19 | 110 | TBV1 | ALYX |
| D | 3.5 | | LESS | A | 15 | 18 | TBV1 | ALYX |
| D | 0.1 | 99.9 | BETWEEN | A | 19 | 110 | | ALYX |
| D | 3.5 | 99.9 | BETWEEN | A | 17 | 18 | | ALYX |


WellSky Corporation
Proprietary and confidential

| Data Type | Min Value | Max Value | Operator | Sex | Min Age | Max Age | Inter Code | Equip Type |
|---|---|---|---|---|---|---|---|---|
| D | 3.5 | 99.9 | IN RANGE | A | 15 | 16 | AP16 | ALYX |

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DI | DR | TBV | D | 3.50 | 99.90 | BETWEEN | A | 17 | 18 | | | ALYX |
| DI | DR | TBV | D | 3.50 | | LESS | A | 15 | 18 | TBV1 | | ALYX |
| DI | DR | TBV | D | 0.10 | 99.90 | BETWEEN | A | 19 | 110 | | | ALYX |
| DI | DR | TBV | D | 3.50 | 99.90 | INRANGE | A | 15 | 16 | AP16 | | ALYX |
| DI | DR | TBV | D | 0.10 | | LESS | A | 19 | 110 | TBV1 | | ALYX |
| DI | DR | TBV | D | 99.90 | | MORE | A | 15 | 110 | TBV1 | | ALYX |

For donors 15 - 16 years of age:

- Any value between 3.5 and 99.9 is a GOOD value, and AP16 is placed.
- Any value less than 3.5 is OUT OF RANGE, and TBV1 is placed.
- Any value more than 99.9 is OUT OF RANGE, and TBV1 is placed.

For donors 17 - 18 years of age:

- Any value between 3.5 and 99.9 is a GOOD value, and no interdiction is placed because of the blank inter code in that rule.
- Any value less than 3.5 is OUT OF RANGE, and TBV1 is placed.
- Any value more than 99.9 is OUT OF RANGE, and TBV1 is placed.

For donors 19 years of age and older:

- Any value between 0.1 and 99.9 is a GOOD value, and no interdiction is placed because of the blank inter code in that rule.
- Any value less than 0.1 is OUT OF RANGE, and TBV1 is placed.
- Any value more than 99.9 is OUT OF RANGE, and TBV1 is placed.

## Definitions:

**SINGLE Rule:** One rule only available when sex and equip type are taken into consideration.

**MULTIPLE Rule:** More than one rule available whensexr and equip type are taken into consideration.

**Requirements for a rule to be considered as MULTIPLE rule:**

- Rules must have 1 LESS operator.
- Rules must have 1 MORE operator.
- Rules can have any number of BETWEEN operators.

## OUT OF RANGE Calculations AND Interdiction Placement

For SINGLE Rule:

1. If the rule has a LESS operator, any value less than the Min Value is considered OUT OF RANGE, and the interdiction associated to that rule is PLACED.
2. If the rule has a MORE operator, any value greater than the Min Value is considered OUT OF RANGE, and the interdiction associated to that rule is PLACED.
3. If the rule has a BETWEEN operator:
    - any value between the Min Value and Max Value is GOOD, but no interdiction is placed.
    - any value outside of the Min Value and Max Value is OUT OF RANGE, and the interdiction associated to that rule is PLACED.

For MULTIPLE Rule:

1. If the rule has a LESS operator, and the entered value is less than the Min value, we consider it as OUT OF RANGE, and the interdiction associated to that rule is PLACED.
    - If the entered value is OUT OF RANGE with this check, the system does not do any further checks.
    - If the entered value is NOT OUT OF RANGE at this step, the system will continue with the next check.
2. If the rule has a MORE operator, any value greater than the Min Value is considered as OUT OF RANGE, and the interdiction associated to that rule is PLACED.
    - If the entered value is OUT OF RANGE with this check, the system does not do any further checks.
    - If the entered value is NOT OUT OF RANGE at this step, the system will continue with the next check.
3. If the rule setup has one or more BETWEEN operators, any value between the Min Value and Max Value is considered as OUT OF RANGE if the inter code is on the rule, and GOOD if the inter code is not present.
    - If the entered value is GOOD, the system does not do any further checks and places an interdiction if any code is defined under the Inter Code column.
    - If the entered value is not in the range, the system checks for other operator rules and repeats the above step.
4. If the rule setup has INRANGE operators, any value between the Min Value and the Max Value is considered as GOOD irrespective of the inter code. An interdiction is placed if an inter code is present.


WellSky Corporation
Proprietary and confidential



# Appendix K - SalesForce API

## Intended Use

SalesForce API is used to transfer data from the LifeTrak application over to SalesForce. The client is responsible for reading the API tables and populating SalesForce.

## Limitations

This API is only populated through the OnSite module. Back office registration does not insert into the API tables.

## Prerequisites

System Parameters:

- STS_IFC – turns the API on and off

Master Codes:

- SFPC – list of the procedure codes that will be calculated and sent over to SalesForce for donor eligibility.
- SFPF – list of the physical codes that will be sent over to SalesForce from the template and resulted in Physical Findings.
- APISC – code SFA for SalesForce API.

The Database Schema for the SalesForce API is located in the database under SFAPI.

The tables associated to the SFAPI are the following:

- API_SF_DONOR_DONS
- API_SF_DONOR_DONS_ARCH
- API_SF_DONOR_ELIGIBILITY
- API_SF_DONOR_ELIGIBILITY_ARCH
- API_SF_COMPONENTS
- API_SF_COMPONENTS_ARCH
- API_SF_DONOR_PHYSICAL

- API_SF_DONOR_PHYSICAL_ARCH
- API_SF_DONOR_PROFILE
- API_SF_DONOR_PROFILE_ARCH
- API_SF_PROCESS_SIGNALS
- API_SF_PROCESS_SIGNALS_ARCH
- API_SF_SHIPMENTS
- API_SF_SHIPMENTS_ARCH
- API_SF_TEST_RESULT_TIME
- API_SF_TEST_RESULT_TIME_ARCH
- API_SF_COMP_SPLITRATE
- API_SF_COMP_SPLITRATE_ARCH
- SF_DONOR_DATA_HIST
- SF_DONOR_CONTROLLER
- SF_DONOR_CONTROLLER_ARCH
- SF_LAB_DATA_HIST
- SF_LAB_CONTROLLER
- SF_LAB_CONTROLLER_ARCH
- API_SF_DELETED_DATA
- API_SF_DELETED_DATA_ARCH

# Tables and Functions

## API_SF_DONOR_PROFILE

This table contains all the donor demographic information.

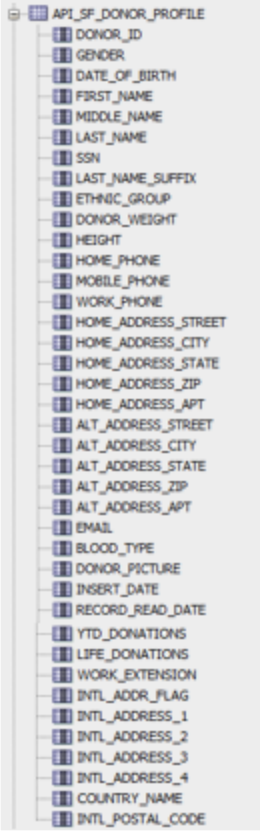


Input into the API table when the donor is registered in ONPLKREG or ONILKREG, where this is the initial insert into the table. If the user goes back and updates the information, the updated information needs to be sent to the API table and noted as an update record. Any time the user goes back and updates the donor demographics or updates any information captured in ONPLKREG or ONILKREG, a new record inserts in the API table.

If the donor demographic information is updated anywhere in the system, including other Oracle programs, such as the demographic window in SDONQ (DPWDEMGR), Modify key data (DPUKYDAT), or Update Registration (DRUREGIS), the trigger will insert into the SF_DONOR_CONTROLLER to set the cron job to update the API tables.

If an update occurs, and the original record has not been read by SalesForce (date inserted for RECORD_READ_DATE), the original record will be deleted, and the new updated record will be inserted.

## API_SF_DONOR_PROFILE_ARCH

When the API_SF_DONOR_PROFILE table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_DONOR_ELIGIBILITY

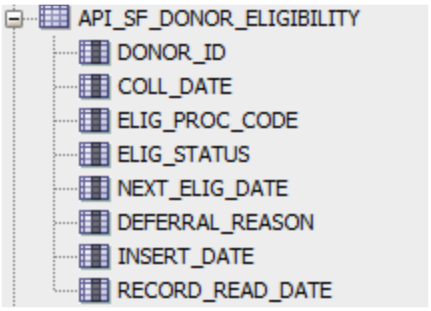


This table contains the eligibility records for the procedures that are defined in master code SFPC. It will send the eligibility status for each procedure, based on the current donation.

If an interdiction is placed on the donor which would defer the donor, new eligibility will be sent because of the interdiction placement. This interdiction placement could be during an update process or even applied during place donor interdiction.

If an update occurs and the original record has not been read by SalesForce (date inserted for RECORD_READ_DATE), the original record will be deleted, and the new updated record will be inserted.

## API_SF_DONOR_ELIGIBILITY_ARCH

When the API_SF_DONOR_ELIGIBILITY table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_COMPONENTS

This table contains all the components made on the unit (donation) in the Lab application. An insert occurs into the SF_LAB_DATA_HIST table for every component that is created, rejected, modified, or converted.

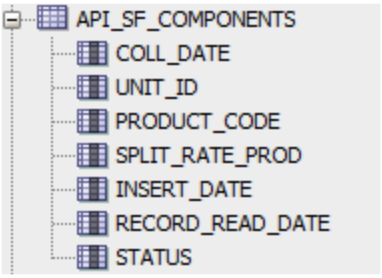


Status is used to determine if the original product has been created, deleted, converted, modified, or rejected. It is preferable to send the final product and not all the intermediate products made to get to the final product. The following have status entries:

- NEW – the original product will be listed as NEW.
- MODIFY – if the product has been modified. An example of a modified product would be an irradiated red cell. The old product is not listed as converted with REJECT code; that record just has the new product code inserted.

- CONVERT – when the product is converted. An example of a converted product is a leukoreduced product. Take the old product code, and put the CONVERT reason on it. An entirely new record for the converted product code is present in the COMPONENTS table.
- DELETE – if the wrong component was created for some reason, delete the product code to make a new product code.
- REJECT – reject the product, especially in pathogen reduction. You are able to reject the component during different phases of the process.

### Examples:

1. Create E3077, but go through pathogen reduction and make A8331, C8331. Do not send over the dummy products.
2. Create E2940, but change the product to E3077. Send over one product, not two products.

If an update occurs and the original record has not been read by SalesForce (date inserted for RECORD_READ_DATE), the original record will be deleted, and the new updated record will be inserted.

SPLIT_RATE_PROD is calculated based on the number of products that are created.

- Collection procedure PP (single platelet) split rate = 1
- Collection procedure DP (double platelet) split rate = 2
- If a single platelet is collected, but count is high enough for a double platelet, then the split rate = 2
- If a double platelet is collected, but count is low enough for a single platelet, then the split rate = 1

## API_SF_COMPONENTS_ARCH

When the API_SF_HIST_COMPS table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_DONOR_PHYSICAL

This table is populated with the physical finding. Master code SFPF will contain the physical codes that are needed to be sent to SalesForce. All of the physical codes may not be needed.

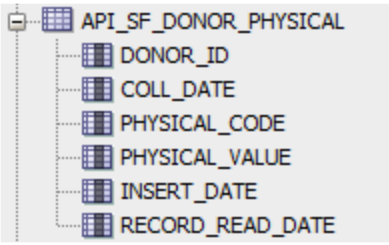


If an update occurs and the original record has not been read by SalesForce (date inserted for RECORD_READ_DATE), the original record will be deleted, and the new updated record will be inserted.

If initial and repeat values are entered in physical findings, the repeat values will be inserted into the API table.

## API_SF_DONOR_PHYSICAL_ARCH

When the API_SF_DONOR_PHYSICAL table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_PROCESS_SIGNALS

This table contains different information about the process points in the system for the donor and the unit.

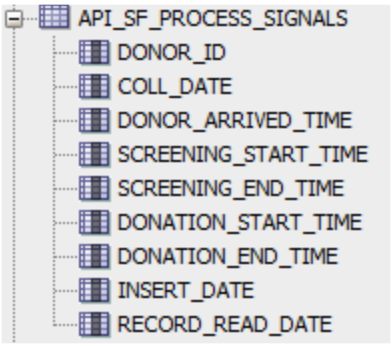


| Name Field for SalesForce |
|---|
| A way to signal the donor arrived for the appointment – DONOR_ARRIVED_TIME. We are using the time the donor starts the registration process. Captured in the API_SF_PROCESS_SIGNALS table. |
| A way to signal they started their screening assessment – SCREENING_START_TIME. Check for the earliest time for the three processes to determine the screening start time. Captured in the API_SF_PROCESS_SIGNALS table. |
| A way to signal they completed their screening – SCREENING_END_TIME. Check for the latest time for the three processes to determine the end of screening. Captured in the API_SF_PROCESS_SIGNALS table. |
| A way to signal they started their donation – DONATION_START_TIME (start bleed time). Captured in the API_SF_PROCESS_SIGNALS table. |
| A way to signal the donor has completed their donation – DONATION_END_TIME (end bleed time). Captured in the API_SF_PROCESS_SIGNALS table. |
| A way to signal the donor's unit is being processed (component actually being created) – COMP_START_TIME is captured in the SF_API_COMPONENTS table. |
| A way to signal the donor's sample results were received – actually captured in the API_SF_TEST_RESULT_TIME table. |
| A way to signal their component was shipped to a hospital is captured in the API_SF_SHIPMENT table. |

This table will be inserted at various times during the processing of the unit.

## API_SF_PROCESS_SIGNALS_ARCH

When the API_SF_PROCESS_SIGNALS table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_SHIPMENTS

This table contains the shipping information for the unit, including the customer and consignee the unit was shipped to. If the unit is returned and shipped to another customer, it will not update the API tables.

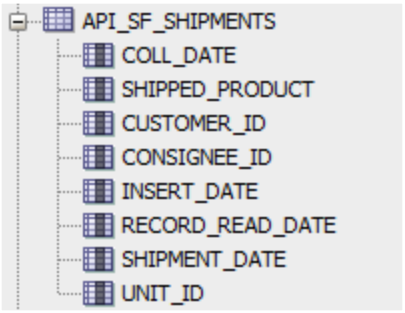


## API_SF_SHIPMENTS_ARCH

When the API_SF_SHIPMENTS table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_TEST_RESULT_TIME

This table contains the date when the results have been received from the testing facility. It is checking scheduled test for when the result date is populated.

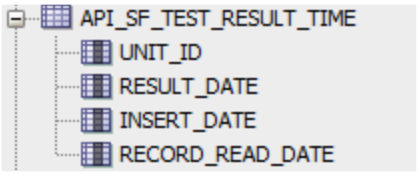


## API_SF_TEST_RESULT_TIME_ARCH

When the API_SF_TEST_RESULT_TIME table is read by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## API_SF_COMP_SPLITRATE

This table contains the data dealing with the split rate for a unit based on the number of components defined, but have not been converted, rejected, or deleted.

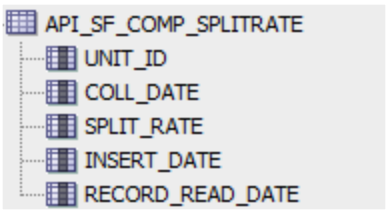

## API_SF_COMP_SPLITRATE_ARCH

When the API_SF_COMP_SPLITRATE table is ready by SalesForce, the RECORD_READ_DATE is populated, and the cron job is run to check if the date is populated. If the date is populated, the record is automatically moved to the archive table.

## SF_DONOR_CONTROLLER

The donor controller table is used to insert the record for the Donor side. The cron job reads the table based on minutes defined for the cron job, and when a record is found, it calls SF_API.sh (script calls DONOR_DATA_PROCESSOR), and it inserts the data into the appropriate API tables.

## SF_LAB_CONTROLLER

The lab controller table is used to insert the record for the Lab side. The cron job reads the table based on minutes defined for the cron job, and when a record is found, it calls SF_API.sh (script calls LAB_DATA_PROCESSOR), and it inserts the data into the appropriate API tables.

## API_SF_DELETED_DATA

This table contains records that have gone through the detach process and records that need to be deleted in the SalesForce application.

If a donor is detached from a unit number, the records need to be updated in SalesForce, so the API_SF_DELETED_DATA table will contain the information and all tables that need to be read and data that would need to be removed from the SalesForce application.

**NOTE –** It is the responsibility of the customer facility to understand the linkage between the Mediware API tables and the tables in SalesForce and the fields that need to be updated in SalesForce.

## API_SF_DELETED_DATA_ARCH

When the cron job runs and sees the record has been read from the API_SF_DELETED_DATA table, it will move the record to the archive table.

## INSERT PROCESS

When the bleed process is completed, it checks the ONLINE_STATUS table where there is a status of "C", "D", or "W" to determine the process is completed. The donor controller table is populated with the record through a trigger.

The cron job will be checking the CONTROLLER tables for records every "X" number of minutes (defined by the facility). The cron job will call the SF_API package, which will insert data into each API table associated to Donor. After the record has been processed through the controller table, the status will be set to "C". The SF_API package will remove the record and insert it into the controller archive table.

When the unit is checked into the Lab side, a record is created in the controller table for the unit number. As the unit is being processed in Lab, certain processes are captured. The list of captured processes is as follows:

- Components defined
- Split rate determined


WellSky Corporation
Proprietary and confidential

- Test results upload

As the components are being defined, a record is created and inserted into the API table. If the product is modified, converted, rejected, or deleted, the status of the old product is updated to reflect the process, and the new product is inserted with status of NEW. The last calculation while products are being created determines the split rate for the unit. For example:

- Single component defined is equal to a split rate of 1.
- Double components defined are equal to a split rate of 2.
- Single component collected, but 2 components defined is a split rate of 2.
- Double components collected, but only 1 component defined is a split rate of 1.
- Two different product types collected equates to a split rate of 2.

When products are finally shipped, the shipment information is sent over to the API table. The API shipment table contains the unit ID, product, customer ID, and consignee.

Once SalesForce reads the API tables, it will populate the READ_RECORD_DATE (insert date for when the record was read), and the SF_API.pkg will check for the date and automatically archive the data to the respective archive table.

Any errors encountered when the SalesForce API is being used display in the API Log Query (APILOG).

This Page Intentionally Left Blank

# Appendix L - View into WellSky Transfusion for Antigen Testing

Instructions you can edit, share, and print.


L.1 Set-Up Required ..... 2232
L.2 External to Blood Centers Data Translation (APICONV) ..... 2233
L.3 Antigen Manager (AGMGR) ..... 2234
L.4 Cron Job, Scripts and Packages that Need to be Present ..... 2236
L.5 Processing the Records from Transfusion that are in the API Table ..... 2237


**NOTE –** View into WellSky Transfusion for Antigen Results can only be used if the RBC Antigen Manager is used.

# L.1 Set-Up Required

The following is the set-up required for the View into WellSky Transfusion for Antigen results. Antigen Transfusion Interface AG_TF_INTERFACE.pkg is a database package.

## Master Codes to be Defined in Donor:

- IDPSR – TF should be present for WellSky Transfusion and is static and cannot be changed.
- IDPTP – The codes TEST and RESULT need to be added to the list. These are static codes and cannot be changed.

The code value and description are hard-coded within the package. The user can choose to terminate the code, if needed.

## Master Codes to be Defined in Lab:

- AGMGR – Antigen Manager master code
- ADTST – this is the header section on the Tie Tag for additional testing. Enter the description you want to display on the tie tag.
- ATEST – these are the manual tests that will be reported on the tie tag if performed on the unit.
- CNFRM – header for Confirmed Historically
- CURDIN – header for Tested on Current Donation
- DBDIR – AGDIR should be listed and cannot be changed; this is static.
- DNPP – these are the tests that should not print on the tie tag if the test was positive (Do Not Print Positives)
- ENBLE – set to **Y** to turn on the antigen manager; **N** to turn off the antigen manager. For the antigen manager to process antigen results in scheduled tests, this must be set to 'Y' and the package must be present.
- FDSEP – separator to use to separate antigen codes (, or ;)
- PHENO – to print the phenotype on the tie tag
  - ALL – will print both the serological and molecular phentoype
  - AG – serological only
  - MAG – molecular only
  - No – phenotype will not print
- PRUNL – print the 'Confirm Unlicensed/Unapproved Testing' section on the tie tag label (**Y** or **N**)
- UNAPL – header for Confirm Unlicensed/Unapproved Testing


WellSky Corporation
Proprietary and confidential

# L.2 External to Blood Centers Data Translation (APICONV)

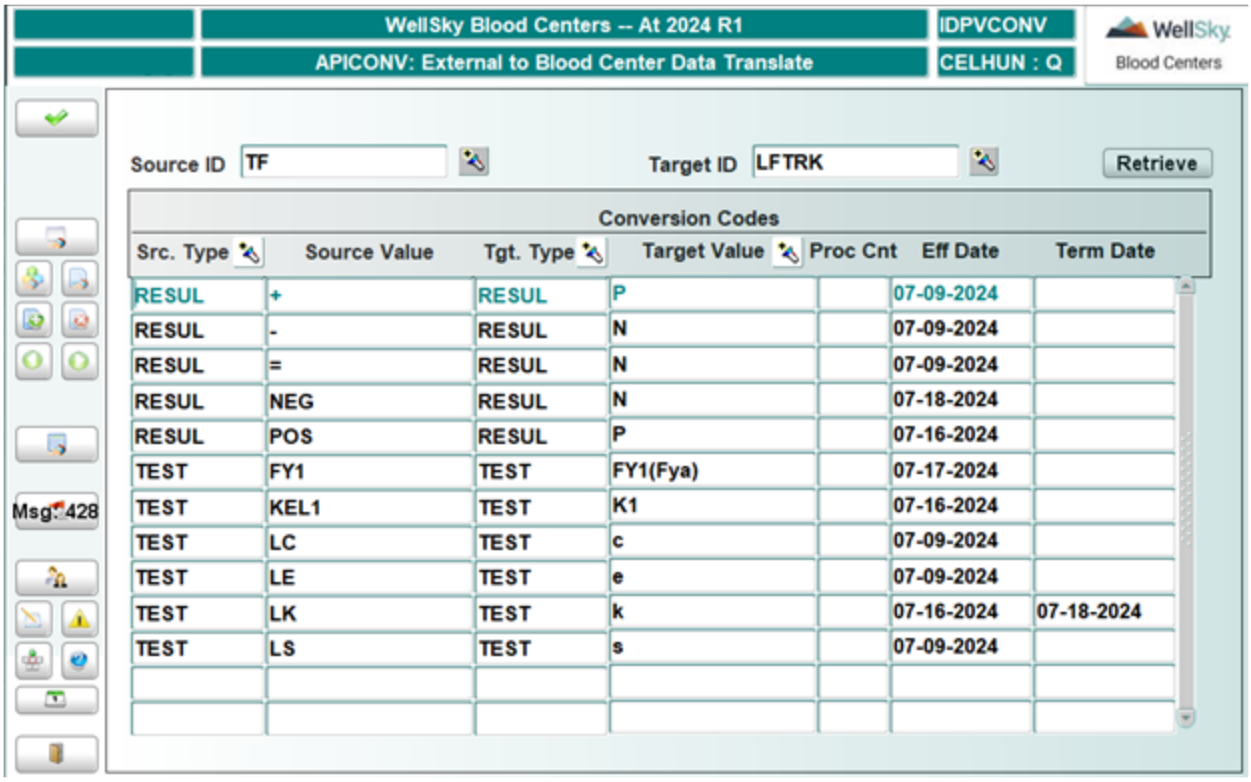


Data definition for test IDs and test results when the antigen test code and test result codes do not match in Blood Centers Lab tests. These tests should match in both Lab and Donor.

# L.3 Antigen Manager (AGMGR)

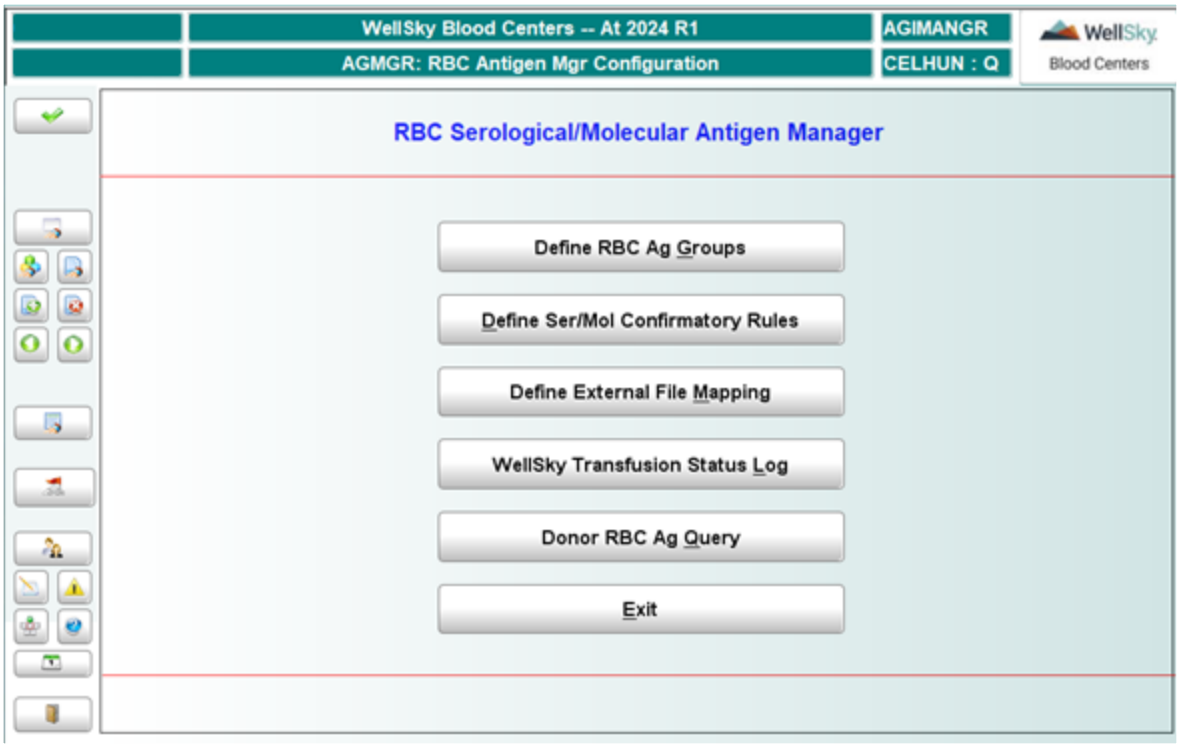


## Define Ser/Mol Confirmatory:

The antigens have to be configured in the table prior to processing the records from the view from Transfusion.

**NOTE –** When processing the records and antigens are defined as L, U, A and this configuration is not present in the Ser/Mol Confirmation table, the antigens will not be processed and used in the antigen confirmation.

Once the antigen results are uploaded to the UTRS table, the AG_CORE.pkg will process the antigens and upload the information in the antigen manager tables.

## Define External File Mapping:

The Transfusion extension must be defined with the antigens and license type to be processed.

The antigen code and the license (A = Approved use for molecular, L=Licensed use for serological, U=unlicensed use for serological, unapproved use for molecular).

The TF for test batch prefix cannot be changed and should be used for the Transfusion view test batch creation.


WellSky Corporation
Proprietary and confidential

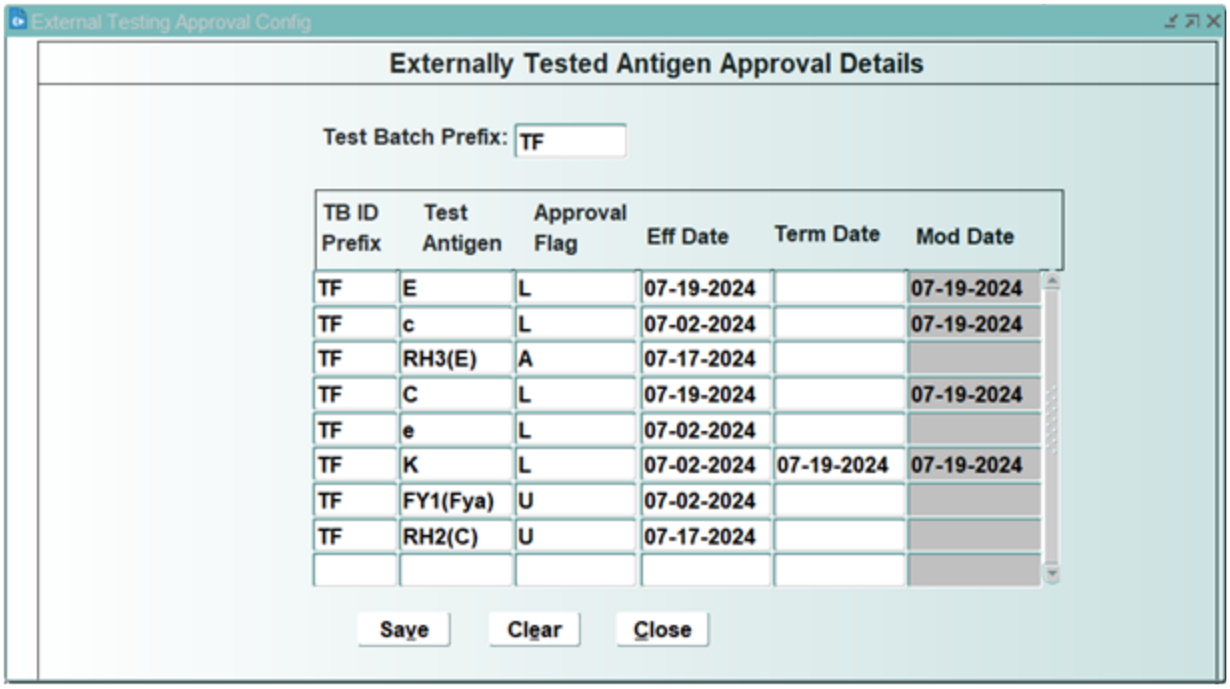


If both serological and molecular tests are coming from Transfusion, these test IDs need to be different. You cannot use the same antigen code for both the molecular and serological tests.

**NOTE –** If an antigen is brought over from Transfusion and is not defined in the External File Mapping table, the antigen is uploaded with an Unlicensed method flag.

# L.4 Cron Job, Scripts and Packages that Need to be Present

1. TF_DATA_EXTRACT.sql (OS cron job)
   a. Run every other day. It is going to copy the records from Transfusion view and insert them into AG_TF_API table. In addition, it calls the AG_TF_INTERFACE.pkg for processing the units.
   b. Cron job status will be logged to the AG_TF_CONTROLLER table. JOB_DATE and STATUS messages are captured in the table. The status can be viewed from AGMGR > WellSky Transfusion Status Log screen.
   c. Data retrieval from the Transfusion system will be based on the last time the cron job ran successfully. If, for some reason, the cron job failed to run, it will attempt to rerun the next day.
2. AG_TF_INTERFACE.pkg
   a. Routine PROCESS_TF_API: It processes each record from the AG_TF_API table and stores it in the UTRS table.
   b. All the error messages are updated in the AG_TF_API table with BC_STATUS as 'ERROR' and the COMMENTS with the error message. The status can be viewed from the WellSky Transfusion Status Log screen.


WellSky Corporation
Proprietary and confidential

# L.5 Processing the Records from Transfusion that are in the API Table

As the records are being processed and placed into the API table, the system is checking the following:

- Antigen tests with a type test in Lab of 'AG' or 'MAG'.
- If the tests need to be converted based on what is defined in the External to Blood Center data translate (APICONV).
  - Test from external to Blood Centers
  - Test results from external to Blood Centers
- The unit ID is an internal unit number based on the Valid Facility Identifiers (FINCD) and has been checked in to the Lab system.
- The Blood Center status is either OK or ERROR. The following errors have been defined:
  - If the test is not a valid test in Lab, the following error displays: Test not found in Blood Centers system.
  - If the result is not found for the test, the following error displays: Result not found in Lab Blood Center's system.
  - If the unit is not present in the Lab system: Unit not found in Blood Center's system.
  - The facility ID is not defined in the Valid Facility Identifier table: Invalid Facility ID.
  - If the record processes without issues, the status is set to OK.
  - If the antigen test is not present: Antigen code is required.
  - If the result for the test is not present: Result code is required.
- When the record is processed, the test batch ID is created based on TB_ID in the Application Sequence Numbers (NUMBERS).
  - Begins with the system date.
  - Prefix to the test batch will be TF.
  - User ID will be TFUSR.
  - The test batch ID will apply to all antigens according to the unit number.
    - Example: W633324071201 will get a test batch ID 071224-TF1234 for K, E, c.
    - Example: W633324071202 will get a test batch ID 071224-TF1235 for K.
- The test is automatically inserted into the schedule test table (UTRS).
- If the Transfusion system sends a cancel date or an invalidate date, two things will occur:
  - If the cancel or invalidate date comes across with the initial record, then Blood Centers will not process the record.
  - If the test comes across and has already been inserted into the UTRS table, and then a record comes in with the cancel or invalidate date, Blood Centers will process the record and update the UTRS table with the cancel flag. The AG_CORE.pkg will process the canceled tests and not use the record in antigen confirmation.

This Page Intentionally Left Blank

# G

# Glossary

## – # –

**2D Barcode**
A matrix code that provides a two-dimensional way of representing information in a scannable form.

## – A –

**Access Class**
A numeric or alpha code that defines which kind of interdictions the user can view, place, or remove or if a user has special permissions within the application such as overrides.

**Access Level**
Defines the specific level of permission granted to the user to access system functions. Access Levels rank as follows: 0 = lowest; 9 = highest.

**Action Interdiction**
An Interdiction that can be placed on the Donor record that can be the source, existing, or a new interdiction.

**Active Template**
The status of the selected Health History template. The current template's status is Active. A terminated template's status is Inactive.

**Alert Message**
A message created by a user for other system users. Messages can be created and sent to a single recipient or multiple recipients or messages from a user can be forwarded to other designated recipients.

**ALL**
A Static Access Class that provides the user access to all interdictions (1-9 level) if all the interdictions are assigned to that class.

**Allowable Results**
A table defining the testing and qualification tests needed for a donor to become qualified.

**Alpha Character**
Letter(s) from the alphabet (as opposed to numeric character).

**Alternate ID**
A form of identification presented by a donor, such as a driver's license or passport.

**ALTS**
A Static Access Class that enables the user to update the alternate sponsor in the Registration program.

**Answer**
Defines the text that qualifies as a valid answer to a question in the Health History Question Bank.

**API**
Application Program Interface

**Application ID**
An alpha code that has been assigned to describe a particular Module.

**Attribute**
Coded information to identify special characteristics of a donor or unit; an informational type of interdiction. For example: Donor prefers non latex gloves for phlebotomy.

**Attribute Code**
An alpha/numeric code naming convention, associated to a specifric attribute to identify special characteristics of a donor or unit.

**Audit Screen**
Donation or deferral final review for acceptability.

**Automatic Printing**
An option available when generating a report; the report automatically prints to the default printer determined by your user login.

## – B –

**Band Code**
Used as the header when resulting cellular level results for ABORH or other tests as configured.

**Band Name**
Used as the header when resulting cellular level results for ABORH or other tests as configured.

**Banner Block**
The very top of any Blood Centers screen that displays the name of the application, user ID, name of the screen/function that you are accessing, warehouse ID if needed, date and time of screen access, keyword, and program ID.

**BDMS**
Blood Donor Management System

**Bill of Lading**
The carrier's tracking identifier for the shipment.

**BIO**
A label that is placed on a product to indicate a Biohazard. Products with a BIO interdiction are labeled as Biohazard and the label will be printed with the universal Biohazard symbol.

**BO Status**
Designates that the status of an order is "back ordered."

**Box Type**
The type of box that you are packing products for shipment in, such as 'igloo cooler' or carton.

**Box/Carton/Case**
Interchangeable terms used to describe the container into which samples or products are packed.

## – C –

**CAC**
Common Access Card A standard identification smart card issued by the Department of Defense that identifies active duty members of the Uniformed Services and other related personnel and contractors.

**Campaign Theme**
The theme that you are using for your campaign to market your mobile blood drive, such as pint-for-pint (pint of ice cream for pint of blood), football challenge (win football tickets), or free gift wrapping during the holidays when you donate blood.

**Campaign Type**
The type of campaign that you are using to market your mobile blood drive, such as media campaign or billboard campaign.



WellSky Corporation
Proprietary and confidential

### Cell Type
Identifies groupings of products collected for use in eligibility determination. There are two kinds of cell types: RBC – Red Blood Cell and PLASM – Plasma

### Center
One of many physical locations of a blood donor center. A Center may be referred to as a Chapter.

### cGMP
Current Good Manufacturing Practice.

### Chapter
One of many physical locations of a blood donor center. A Chapter may be referred to as a Center.

### Charge Code
Code defined by each facility to indicate a specific charge for services and or products.

### checksum
A character that is used to validate a string of numbers.

### CMV
Cytomegalovirus

### Codabar ABORh Values
Numeric values that are associated to specified ABORHs used in barcoding and resulting ABORH tests in Blood Centers.

### Codabar Unit Scheme
Indicates if the unit number is Codabar alpha or Codabar numeric.

### Common Access Card (CAC)
A standard identification smart card issued by the Department of Defense that identifies active duty members of the Uniformed Services and other related personnel and contractors.

### Communication Code
A code for the specific type of communication sent to a donor. For example, customer service communication may have several sub codes to further idtentify the specific communication such as T-Shirt mailed, request for donation history, or donor apology.

### Communication Letter
Letter that could be sent to a donor that is not related to interdictions. These communications mainly relate to infomration that the donor may have requested or customer service.

### Communication Type
A code to indicate the type or category of communication that you would send to a donor, such as; Notification, Customer Service, Scheduling, Nursing Service, Medical Director or General.

### Communications Log
A log of cummnications that are associated to a donor, these could include notification communications, donor relationship codes, request for information codes, medical director communication, and donor appointment scheduling as a few examples.

### Compensation Card
A card number issued to the donor to maintain a record of the funds received by the donor for current and previous donations.

### Component
Individual part of a pheresis or whole blood donation.

### Consignee
Identifies to whom the product was shipped.

### Consignee ID
A delivery address or site of the customer.

**Consumable**
Items that are used during the donation and manufacturing processes, that must be inventoried and replenished as needed.

**Contact Type**
Indication of the type of contact you are associating to a contract, such as Designated or Financial.

**Contract Code**
Two character code that indicates the type of contract that is being defined, such as Internal, Testing, Proficiency Testing, or Imported Blood.

**CORE Routine**
A system routine that reads uploaded test results and schedules additional tests, as needed, and places indicated interdictions.

**CPU**
Cost per unit

**cron job**
Cron is a time-based job scheduler. It enables you to schedule jobs (scripts) to run periodically at certain times or dates.

**CUE**
Confidential Unit Exclusion. A barcode applied by the donor to the donor record to indicate 'USE' or 'Do NOT Use' my blood. The system will still display the CUE on specific screens, even if the CUE is not in use by the facility.

**Customer**
The purchaser of the product.

**Customer Type**
A code categorizing the customer as one of the following: o IN for Internal o DI for Discard o EX for Export o MG for Manufacturing o RD for Research and Development o RG for Regular Customers

## – D –

**Data access**
Authorized user access that is limited to information specifically required to perform a user's assigned tasks.

**DBA Privileges**
A user with DBA privileges has the authority to write to the database and create users.

**Deferral**
A code indicating if an interdiction is associated to a deferral period. For example: Y = Yes, donor or unit is deferred for this location. N = this interdiction is not associated to a deferral period.

**Deferral Period**
An amount of time associated to an interdiction that defines the duration of the interdiction. A Deferral Period can be defined as a fixed or variable amount of time.

**Deferral Type**
Defines whether a deferral is or is not for a fixed amount of time. An interdiction may have a fixed deferral period or various deferral periods associated with it. For example: A generic interdiction, HDT; Health History Deferral – Temporary, can have different deferral periods associated with the answer.

**Device Type**
Type of storage device for example Refrigerator, Freezer, Platelet Rotator, or Room Temperature Table.

**Differential Code**
Cellular differential code.

**Discard Product**
Product from a unit that has been discarded.

### Discrepancy Check
A review of test results to check for discrepancies and validate the findings.

### DNRSG
Donor signature.

### Donation Class
The classification of a donor specific to a particular collection. Valid Donation Classes are: AP = Applicant; QL = Qualified; AN = Annual Donation; RG = Regular Donation. Donation Classes are static values and are defined in the Donation Class table. A user is not allowed to choose a donor's donation class. System logic determines a donor's donation class at registration.

### Donation Credit
The number of credits the donor will receive for a particular procedure.

### Donation Group
A group of donation types. Associating certain donation types together under a group such as Special group would include Autologous, Directed, or Therapeutic. Grouping donation types together aids in appointment scheduling.

### Donation Type
The classification of a donor specific to a particular collection.

### Donor Grade Match
Donors are given a numeric grade ranging from 0 to 5 according to the Donor Grading Matrix (GRADMAT) controlled under WellSky Restricted Validation Tables (MEDRVT). A valid entry is required to retrieve the donor grade matches. For example: An entry of 3 would return donor grade matches 3, 2 and 1. Refer to the Grading Matrix Query (QGRADMAT) screen.

### Donor Grading Matrix
Defines critical donor data elements and assigns a grade based on a comparison with other donor data elements using the Find Donor block and other processes.

### Double Blind Entry
Manual entry of a value twice prior to the system allowing the cursor to advance to the next field.

### Download
To move data that was captured in a Cron job export file from the Blood Centers application server to the master mobile laptop.

### DR Type Interdiction
An Informational type of interdiction related to donor recruitment, such as call after 5:00 p.m. or do not send e-mail.

### DRIVE
A Static Access Class that enables the user to create and modify drives other than their own.

### Drive Category
A category of drives that aids in the ability to schedule staff or limit the number of drives within that category from being booked on the same day. Example would be High School Drives, you may want extra staff as well as to limit that only 2 High School drives could be booked on the same day.

### DRVBK
A Static Access Class that enables the user to enter a drive date in the past in the onsite registration module only.

### DUFFP
Dummy FFP. This is a product type that allows further manufacturing into a cryo precipitate or a cryo precipitate and cryo poor plasma products.

### Duplicate Donor
When a donor has two or more separate records in the database.

### Dynamic Access Class

Those access classes that can be defined internally for classes of interdictions or properties (attributes).

### Dynamic Master Code

An existing code type that may be added to internally or removed from (terminated) a code type. Compare to Static Master Code. Refer to the Master Codes appendix.

## – E –

### EDIPI

Electronic Data Interchange Person Identifier A unique number assigned to a record in a database that identifies a person and a personnel category.

### EDN

Electronic Delivery Note

### EIE

Enterprise Integration Engine - This is WellSky's enterprise level interface sub-system for the automatic transmission of data between a transmitting and target system.

### Employee ID

The code that has been associated to the User ID or the employee ID associated to the User ID.

### Enlistment Type

Types of enlistment lists to group enlistment criteria under the enlistment type.

### EPASS

A Static Access Class that enables the user to change laptop passwords for mobile staff.

### Equipment ID

The location where the product is stored.

### Equipment Master Code

Master Codes that are related to the Equipment management module in Lab.

### Equipment Type

The type of location where the product is stored or a type of laboratory/screening equipment.

### Error Message

There are four types of Messages: System Error Messages must be acknowledged to continue. User Error Messages appear when the user makes an entry that cannot be accepted. Warning Messages display when a user attempts to perform an operation that should be considered carefully before committing data. Informational Messages provide information only and require no action to continue.

### Existing Interdiction

The interdiction currently existing on the Donor; the interdiction is either a SURVE or INTER type, as defined by the Interdiction Codes table.

### Export

To transfer data from the Blood Centers primary database server to a Blood Centers application server.

### Extract

To move donor data that was captured offline during a mobile drive from the donor database on the mobile master laptop to the designated location on the mobile laptop hard drive.

## – F –

### Facility Code

Code defined in HCLL Transfusion for physical locations for transfusion service.

### False Duplicates

Two donor records that appear to be the same donor but are, in fact, different donors.



WellSky Corporation
Proprietary and confidential

### FFP
Fresh Frozen Plasma

### Find Donor (vs. Search for)
Used to search for, identify, and retrieve donor records in critical programs. A window that displays automatically in the ONILK-REG (Lookup and Registration) screen. The functionality of the window can be customized and configured independently for each program that uses it.

### Find Donor Block
Screen that allows a user to find a graded result for donors with the input demographic data.

### Flat File
A file that is generated to send test results into the system.

### Frequency Code
A code that has been assigned to identify how often a particular donor task is performed, as defined in the Master Code FRQCD.

### Functional/Working Group
The user's group that defines their function within the organization. For example: accounting, registration, collections. Each user is assigned a group when created.

### Future Template
The status of the selected Health History template. A Future Template will become Active on a specified effective date in the future and replace the current Active template. When the Future template replaces the current template, the current Active template is terminated and becomes Inactive.

## – G –

### GMT Offset
Greenwich Mean Time plus or minus a specified number of hours and minutes

### Goal Type
Collection Goals used in Donor, Types of goals could be institution level, sponsor, recruiter, or even collection site.

### Group ID
The working/functional group code that has been assigned to a user.

## – H –

### Half Address
When the number portion of an address contains one half; for example, 123 1/2.

### HLA/RBC searches
Searches that will locate RBC and/or HLA antigen matched donors and/or units for recruitment.

### HOLD Type Interdiction
A type of interdiction, such as a data entry hold or a hold on physical findings.

## – I –

### INFOR Type Interdiction
A type of interdiction, such as donor attributes, that should display during donor look up.

### Informational Message
A message that provides information only and requires no action to continue; the user is only required to close the pop-up.

### Institution
The code that represents the name of the institution.

### Intended Use Code
Letter or number code that is in the 6th position of the product code that specify the usage of the product.

### Inter Classes (Interdiction Classes)
Classes set up to group interdictions for ease of security assignments.

### INTER Type Interdiction
An Interdiction category that is associated to a deferral or a process control in the system, such as test result related interdictions and donor history related interdictions.

### Interdiction
A type of identifier for a unit or donor that can be a deferral type identifier or used to aid in management of a process.

### Interdiction Owner
A code assigned to designate the owner of the interdiction. For example, D = Donor, U = Unit, B = Both.

### Interdiction Type
A sub-type of interdictions such as informational, deferral, hold.

### Interdiction Upgrade/Downgrade Logic
An interdiction that is not allowed multiple placements on the unit/donor and must be set to N to go through. See Interdiction Upgrade Matrix (INTUP) for more information.

### INTUP Function
Interdiction Upgrade Matrix function.

### Inventory Class
A code catezorizing an inventoried product as one of the following: - RE -- Regular - AD -- Autologous/directed - SP -- Special

### Inventory Product Type
A category to place common products together. Valid inventory product types are associated in Master Codes, code type PRTYP in Distribution.

### ISBT
International Society Blood Transfusion

### ISBT Code 128
ISBT 128 is the global standard for the identification, labeling, and information processing of human blood, cell, tissue, and organ products across international borders and disparate health care systems. The standard has been designed and perfected over a period of almost two decades to ensure the highest levels of accuracy, safety, and efficiency for the benefit of donors, patients, and health care professionals around the world.

## – J –

### Job Code
Specific code that indicates what job the staff member can perform.

## – K –

### Keyword
An abbreviation for a program name, a menu command, a master code, a system parameter or a validation table.

## – L –

### Lab Code
Lab user affiliation, which should be RT for all users.

### Label Code
Code associated to a specific testing and storage statement for labels.

### Line-by-line Basis
Where data is committed to the system as each field is completed by pressing ENTER.

### LOB
Line of Business

### Long Audit Process
When you use the DONAUDIT or the DEFAUDIT screens to audit the donation back office. This will record questions and answers as well as physical findings codes.

### Lot Category
A code that identifies a valid lot category each consumable bag is associated to, as defined in Master Code BAGID.

### Lot Number
A required entry code that identifies each consumable bag using a maximum of 30 characters.

### LOV
The List of Values contains all valid data for a particular field.

## – M –

### Manual Hold
A hold that is placed manually on the Donor during the registration process. If a suspect duplicate donor is found during registration, two or more donors can be placed on hold and not allowed to continue.

### Manufacturing Process
The steps used to transform the units collected into products that can be shipped.

### Mapsco
A company that provides printed street level maps.

### MAS90 Data
Financial or Billing interface file format.

### Master Code Type
A classification under which Master Codes are grouped. A table of underlying codes is associated to each code type. Master Code types are defined and stored by WellSky.

### Master Codes
A set of code types used by individual modules to provide flexibility to the application. Some Master Codes define valid data/values for other tables in the system (for example, Street Types: CIR, AVE, ST, BLVD). WellSky may be required to add new or modify existing Master Codes.

### Maximum Cell Loss
The maximum loss of red cell or plasma a donor may have over a specified number of days and still maintain eligibility. If the donor goes over the maximum amount in the specified number of days, he becomes ineligible.

### Merge Donors
To join two donor records that belong to the same donor into a single donor record.

### Message ID
The code that identifies an Alert Message.

### Mul Flag
Multiple Flag in the interdiction table for donor.

### My Term
My definition

## – N –

### New Donor
A first time donor.

### NFT
Not for Transfusion. A label that is placed on a product. Not for Transfusion for ISBT the system will print Discard, for codabar the system will print 'NFT' on the label.

### Nickname
The donor's familiar name that is associated to a first name for use in the donor grading matrix for possible donor matches when searching for a donor record.

### Notification Letter Template
A template that defines the information included in a letter sent to a donor. A Notification Letter is a Controlled Document.

### Notification Mode
One of two modes, Standard and Notification, in which the Donor Detail Query screen can operate. If this screen is called from the Donor Notification functions of the application, the Donor Detail Query screen will run in Notification mode.

### NT Results
Results that are not tested.

### Number Value (for a Master Code)
An optional entry made when defining a Master Code; entering Number Values establishes the valid entries for a specific parameter defined by a particular Master Code. Refer to the Master Codes appendix before making an entry.

## – O –

### Offline Data Entry
Entry of data when recovering from downtime that bypasses certain system controls to allow proper documentation of activities that occurred while system was down.

### OR Status
Designates that the status of an order is "ordered."

### Order Class
Defines the urgency of the order- stat, asap, emergency, routine.

### Order Entry Module
Provides computer aids to take, record, and track orders for the blood center.

### Order Mode
A code that indicates how the order was placed (e-mail, phone, interface).

### Order Number
A number that identifies an order; it is generated by the system after the first line item is entered.

### Order Type
Special, Auto Directed, Regular, Export.

### Ordered Tier
Freshness indicator for the products orderd.

### OSUPR
A Static Access Class that enables Supervisor override in the onsite registration module. It allows the user the ability to re-enter data for health history, physical findings and to modify registration information.

### Overlapping Interdictions
Interdictions associated to more than one class.

## – P –

### Parent Question
A question in the Health History Question Bank that can trigger a related question to display. The related question usually requires more detailed information from the donor.

### Payee
The billing address of the Customer. Use the Payee screen to define new payees in the system or to revise details on previously entered payees. The payee can be different from the customer. This is the second screen required in entry of new customer accounts.

### PDF 417 Barcode format
A stacked, linear barcode symbol format. This is a 2D barcode used by a CAC, State driver's license, and other State-issued IDs.

### Physical Code
A type of physical finding, such as temperature.


WellSky Corporation
Proprietary and confidential

### Physical Findings Template

A template for the donor physical. You may define a specific template for each of the different donation cycles, as well as a template for future use. This table is institutional and can only be defined once for all chapters. The chapter should remain at the default value.

### Physical Findings Values

A screen used to set up physical entries that the donor must pass in order to donate. The allowable range or the allowable character value can be documented and/or associated to an interdiction for placement if the physical does not match the allowed. This table is institutional.

### PLASM Loss

Defines the acceptable amount of plasma loss for the specified procedure to be considered valid by the system. The standard loss includes the amount of blood that is routinely taken for the procedure and all test tubes collected. If the blood center desires, the amount of blood circulating in an apheresis machine (extra-corporeal volume) can be added into the eligibility calculations. The value entered in Define Procedure Codes (PROCS) is used if the PLASMA Loss field is left blank during collection.

### Plate Sequence

Determines which type of result it is. I = The result code is for initial results; R = The result code is for repeat results; If the result can be both initial and repeat entry it must entered twice.

### Point of data responsibility

The person who has authority to enter or change data in any database within Life-Trak/Distribution.

### PRINT

A print mode that enables all non-supervisory users to view, print, or delete reports that only they have generated. The print mode for supervisors is SPRINT.

### Print Header

The name that displays on the header for reports run at the institution level.

### Procedure Code

The type of draw the donor will have.

### Product Type

A code categorizing the product as one of the following:

### Program

Each screen or window is a separate functional program governed by a set of codes.

## – Q –

### QC

Quality Control.

### Quarantine

A status assigned to suspect products that prevents them from being allocated, packed, and shipped; pending investigation into their viability.

### Question Code

The five-letter code associated with a particular question that is available to be included on the Health History Questionnaire.

## – R –

### Randomize Flag

A code used to designate the order in which the questions are displayed on the Donor response screen. For example: Y = Display the questions in no particular order. N = Display the questions in numerical order according to the template.

### RBC Loss

Defines the acceptable amount of red cell loss for the specified procedure to be considered valid by the system. The standard loss includes the amount of blood that is routinely taken for

the procedure and all test tubes collected. If the center desires, the amount of blood circulating in an apheresis machine (extra-corporeal volume) can be added into the eligibility calculations. The RBC value entered in Define Procedure Codes (PROCS) is used if the RBC Loss field is left blank during collection.

### Recruiter Caretaker

Staff member that will have access to drives created by specific recruiter to allow modifications to those blood drives.

### Reference Code

The data that is used in query or audit screens. This is the value that users see in other screens.

### Registration Hold

A type of interdiction that is placed automatically on a donor record at a defined process in the system as a result of unexpected field level entries, or placed manually during the registration process. Deferral period and manual placement allowance must be verified. Registration Holds are defined in Interdiction Codes (INTER), type HOLDS. Holds placed on the donor record can be removed by using the Remove Donor Interdiction or Remove Unit Interdiction functionality by a System Administrator or WellSky Staff.

### Registration Holds Mapping Table (PLIREGIN)

Configuration table that allows definition of various interdictions that are placed by certain outcomes in the application.

### Registration Override

When a donor is not suitable for donation but is allowed to donate by a user with appropriate authority, who overrides the restriction.

### Releasing an Interdiction

The action that should be taken if the interdiction should not have been placed on a donor or unit record.

### Repeat Donor

A donor who has donated previously.

### Response Code

Designates the code for the valid responses to each question in the question bank. Y = Yes, N = No, U = Unanswered.

### Restricted Validation Table

Tables that are set up to run the system. Valid values define the functionality pieces of the system.

### Return Slip

A report of products that were returned to a center.

### RMF Read More Field

This field is used when a question code has a –D suffix, indicating that the question has additional information to be displayed. Valid entries are Y or N, which designates whether or not the Question Details window automatically pops up in the Donor Response screen. Entering a Y in the RMF field will require the donor to see additional information related to a question.
Example: Referring to the screen picture, Q Code H0010 is the basic question (Are you allergic to iodine and/or latex?). Q Code H0010-D displays more detailed information, which appears in the Question Details window. The RMF field is set to Y, so the window will pop up automatically. If the RMF field is set to N (or blank), the donor must click the Read More button to display the Question Details window.

### RPFF

Recovered Plasma Fresh Frozen

### RPL

Recovered Plasma Liquid

## – S –

**Safeblood Format**
Electronic resulting file format.

**Salvage**
Products that are used for further manufacturing.

**Sample Pack List Report**
A report of samples that are being sent to a specific laboratory for testing.

**Scheduled Test**
Tests that are automatically assigned to a unit. An expected test.

**Sequence (For a Master Code)**
An optional entry made when defining a Master Code; the Sequence is specific to each code type. WellSky will note if Sequence entry is required. Otherwise, this field may be left blank. Refer to the Master Codes appendix before making an entry.

**SLD**
System Label Decision--whether to label the product either NFT or BIO.

**SOP**
Standard operational procedures.

**Source Interdiction**
The interdiction being placed on the donor record; the interdiction being placed is either a SURVE or INTER type, as defined by the Interdiction Codes table.

**Source Product Type**
Product type that will be used to make another product type via modification or conversion.

**SPKEY**
A Static Access Class that enables the user to reprint a donor card in donor look-up.

**Sponsor Category**
Indicator for how successful the drives have been or should be for the sponsor.

**Sponsor Rating**
Indicator for how successful the drives have been or should be for the sponsor.

**SPRINT**
A print mode that enables supervisors to view, print, or delete reports that other users have generated. The print mode for non-supervisory users is PRINT.

**SQL**
Structured Query Language

**STAFF**
A Static Access Class that enables the user to have access to the drive sign off process.

**Standard Mode**
One of two modes, Standard and Notification, in which the Donor Detail Query screen can operate. If this screen is called from the Donor Profile or Shipment functions of the application, the Donor Detail Query screen will run in Standard mode.

**STAT**
Used to indicate urgent or rushed.

**Static Access Class**
Those access classes that cannot be defined internally due to their explicit functionality. These are defined only by WellSky.

**Static Master Code**
An existing code type that may not be added to internally or removed from a code type. Only

WellSky may add, modify, or remove a Static Master Code. Compare to Dynamic Master

### Strong Password

A password that has more complex configuration than a traditional password. For example, a strong password could consist of at least 15 characters (and no more than 50 characters) with at least two upper case and two lower case alpha characters, two numbers, and two special characters.

### SUPER Mode

One of two modes in which the Notification Letters screen can operate. SUPER mode enables you to authorize, print, and send the letter to the donor. USER mode allows you to generate a notification letter.

### Super User

A user who is defined by a site as having additional privileges/security access than other users in the system.

### Supervisor Mode

Allows the user to access reports generated by all users.

### SURVE Type Interdiction

A surveillance-type interdiction related to test results and whether or not a donor deferral period should be upgraded depending on a donor incurring a second occurrence of the same interdiction code.

### System Date

The current date and time to which the system is set using the set date screen.

### System Error Message

A message that informs the user of any system errors that have occurred.

### System Name

The name that displays on the Application Menu at the first entry screen at log on.

### System news

A notification system to inform the user of occurrences that may affect the Blood Centers application; for example, when down time is scheduled for maintenance or when changes have been made to the system.

### System Parameters

Configurable elements that define various components, types of values to enter. For example: The amount of time a password is valid for.

### System User

A user who has the appropriate access level, has a login/password and can access the system, and is found in the ADD USER list.

## – T –

### Tax ID

The Federal Employment Identification Number (FEIN).

### Test Kit

A table that lists the test kit associated to each screening test that was performed in order to print the testing table onto the COA report.

### Test Lab

The laboratory that performs the designated tests on the samples. The specific tests conducted by a particular lab are defined in Lab Test Table (PLLABTES). The Test Lab is used to define the results that should post onto the donor's record.

### Tier

Tiers define timeframes until product expiration. • Tier 1 = 0 to 7 (days to expiration, oldest) • Tier 2 = 8 to 37 (days to expiration) • Tier 3 = 38 to 42 (days to expiration, freshest) Minimum and

maximum values cannot overlap from one tier to another.

### Tracking Number
Identifier that is attached to shipments and is used to track the shipment.

### Traditional Password
A password that has a less complex configuration than a strong password. A traditional password must contain at least six characters (and no more than 50 characters) and must contain at least one alpha character and one numeric character.

### Transfusion Implicated Interdiction
A type of interdiction that is mapped to the appropriate test result in the Define Test Results (RESULT) table and is manually placed on the donor, but automatically goes through this logic when appropriately mapped.

### TVIEW
A Static Access Class that provides the user with the ability to view test results; View ability is associated to the view level, V Level field in Define Tests (TESTS).

## – U –

### Unit Interdiction
An interdiction placed on a unit for deferral purposes.

### Unit Scheme
The one-digit Scheme currently in use at your institution, as defined in the Master Code BARCD. Valid Unit Schemes are C for Codabar or I for ISBT.

### UNLDF
A Static Access Class that enables the user to access the Unlink Deferral button.

### UNOTE
A Static Access Class that enables the user to add notes to donation in Donation window.

### Unpack Slip
A list of items that the system generates if the entire order is cancelled, accounting for the items to be unpacked from the order.

### Unscheduled Test
A test that is not expected on a unit but is interfaced into the system. Or an additional test result on an already-resulted, scheduled test.

### Up Flag
Upgrade Flag, in the Donor Interdiction Code table that indicates if the interdiction should be upgraded or not via the INTUP table (upgrade matrix).

### Upgrade Matrix
Configuration table that defines the action of two interdictions that when used in conjunction can elicit the placement or removal of another interdiction.

### Upload
To move data that was captured offline from the hard drive of the mobile master laptop to the Blood Centers application server.

### User Class
A group of valid users that the administrator can assign to an access class.- Not used

### User Error Message
A message that appears when the user makes an entry that cannot be accepted.

### User Mode
Restricts access to only reports generated by the user.

**USER Mode**
One of two modes in which the Notification Letters screen can operate. USER mode allows you to generate a notification letter. SUPER mode allows you to authorize, print, and send the letter to the donor.

**UTB**
Unit Test Base

– V –

**Valid System User**
A user who has the appropriate access level, has a login/password and can access the system, and is found in the ADD USER list.

**Validation Table**
A list of restricted functions that can only be accessed by Users with administrator-level access due to their impact and interaction with the Blood Centers application.

**VBN**
Vendor Batch Number

**Venipuncture Attribute Code**
A code that is associated to information about a particular venipuncture during the donation process. For example: No Blood Collected, Donor Walked Out, or Double Stick.

**View Level**
Numeric value attached to interdictions and test results that will limit the ability of end users to see specific test results and interdiction codes.

**VWSSN**
A Static Access Class that provides a user with access to view the SSN of the donor in the list browser.

– W –

**Walkout**
A donor who signed in but did not complete the donation process.

**Warning Message**
A message that displays when a user attempts to perform an operation that should be carefully considered before committing data to the database.

**Working/Functional Group**
The user's group that defines their function within the organization. For example: accounting, registration, collections. Each user is assigned a group when created.

# Index


## #

# Batches field ....1621
# Comp field ....1239
# Units field ....1621
# Units w/o Results field ....1621
#Comp field ....1158

## %

% Discount field ....2090

## #

3 Months button ....998

## A

A/L/U field ....1442
ABO
  Label Override Query (LBLOVRQ) ....1530
  Labeling - ISBT – Super (SUPLABLI) ....1488
  Labeling - Super (SUPLABEL) ....1512
ABO Breakdown for Drive (MCWABODR) ....936
ABO Breakdown for Sponsor (MCWABOSP) ....937
ABO field ....1144, 1477, 1500, 1836
ABO Label field ....1712, 1716
ABO Labeling (LABEL or SUPLABEL) ....1508
ABO Spread button ....194
ABO Type field ....1209
ABO/Rh Batch field ....1520
ABORh field ....1237, 1240, 1247, 1255, 1878, 2024
Abs/Val/Chan field ....1386
Acc field ....1366, 1369
access
  Path Window screen ....67
Ad Hoc Tube Check-In (AHTUBES) ....1694
ADATE system parameter ....388
add checklist actions to a drive ....109
Add Donor (ADDDONOR) ....682
Add Interdictions for Units Not Checked (ADDIN) ....1297
Add on Bags button ....1781
ADDDONOR ....682
ADDIN ....1297
Addl Test field ....1562
Address button ....128
ADTDN master code ....344
ADTPG master code ....344
Advice ID field ....2070
After Time field ....1583
AG ....1337
Age field ....1882
AGE_LOW system parameter ....494, 918
AGE_UPPER system parameter ....494, 918
Aggregates field ....1182
AGMGR ....807
AGPRICE ....2122
AGQ ....825

AGRDISCR ..... 836
Agreed Amount field ..... 2090
AHCNTR ..... 1687
AHTUBES ..... 1694
AIIDNDRV ..... 2137
AI field .. 1082, 1085, 1087, 1139, 1143, 1149, 1224, 1236, 1238, 1249, 1251, 1253, 1255, 1485, 1712, 1847
Aliquot field ..... 1145, 1175, 1258, 1311, 1510, 1716
Aliquot No. field ..... 1166
All or Pending field ..... 1402
All products properly packed? Y/N field ..... 1934
All Tests for a Unit Query (TESTQ) ..... 1399
All/Date/Drive field ..... 2138
All/Exceptions field ..... 1619
Allocated field ..... 1878
Allocated Products Query (ALLUN) ..... 1877
ALLUN ..... 1877
Alternate Demographics (DPWAADDR) ..... 938
Amount field ..... 1859
Amt field ..... 2068
ANATT master code ..... 1076
answer health history questions ..... 550
Antgn Grp field ..... 2036
ANTGR master code ..... 1337
Anticoag Vol field ..... 1146, 1171, 1197
Anticoagulant Vol field ..... 1181
antigen
  donor RBC query ..... 825
  manager, RBC ..... 807
antigen confirmation ..... 2024
Antigen field ..... 1846
Antigen List field ..... 2036
antigen manager ..... 807
  define confirmatory rules ..... 812
  define RBC Ag groups ..... 809
  external file mapping ..... 818
  RBC configuration ..... 807
  WellSky Transfusion status log ..... 821
Antigen Pricing Matrix (AGPRICE) ..... 2122
Antigen Result Entry (AG) ..... 1337
antigens
  define confirmatory rules ..... 812
  define groups ..... 809
  external file mapping ..... 818
ANTQ ..... 791
ANTQ2 ..... 761
ANTQL ..... 1418
Any Lot Number Query (ANYLOTQ) ..... 1788
ANYLOTQ ..... 1788
APHER master code ..... 573, 618
API tables ..... 1024
API Temporary Data Query (APITDQ) ..... 1032
APICONV ..... 1038, 2155
APIDR master code ..... 1036
APILOG ..... 1034, 2153
APISC master code ..... 1034
APITDQ ..... 1032
APITY master code ..... 1032
APIUPLD ..... 2141
Application Program Interface ..... 1024
Apply button ..... 789
Appointments button ..... 274
APPT ..... 265
Appts button ..... 239
APQ ..... 2022
AR Number field ..... 2081
ASP (Alternate Sponsor Code) field ..... 359
Assign Reagents to Test Batch/Worksheet (REAGENT) 1328
Assign Staff to Donor Center (FIXSTAFF) ..... 295
Assign Territory to Recruiter (TTOR) ..... 155
Assigned Equipment Information (DSWEQUIP) ..... 940
associate drive sponsors to drive locations ..... 104

Associate Strong Reactivity (HLAXX) ..... 801
Associated Antigen field ..... 795
ATTACH ..... 408
Attach Donor (ATTACH) ..... 408
Attach Donor button ..... 430, 434
ATTR ..... 2004
Attr field ..... 1158
Attr/Inter button ..... 1780
Attrib Code field ..... 1293
Attrib field ..... 2106
Attribute Code field ..... 1069, 1223, 1289, 1291, 1295
Attribute field ..... 1135, 1170, 2024, 2038, 2106
Attribute Group field ..... 1069, 1100, 1223, 1243, 1289, 1291, 2116
Attribute Type field ..... 1243
Attributes button ..... 719, 745, 749, 759, 763, 844, 848, 853, 865, 868
attributes on a donor, place ..... 693
ATTRQ or ATTRQ2 ..... 1283
ATTRQ2 ..... 1266
AUATTR ..... 1290
AUBIO master code ..... 1474
Audit button ..... 437
Audit Deferral (DEFAUDIT) ..... 334
Audit Details button ..... 423, 427
Audit Donation (DONAUDIT) ..... 326
audit tracking ..... 7
AUROLL ..... 398
Auth Letter button ..... 847
AUTHLET ..... 844
Authorize button ..... 943
Authorize Donor Notification (AUTHLET) ..... 844
Authorize Notification Letter (DNWSNDLT) ..... 942
AUTO ..... 1830
AUTO_PRINT system parameter ..... 495, 918
automatic time-out ..... 10
Automatic, File Upload ..... 1204
AUTOQ ..... 1269
Avail field ..... 1446, 1448, 1459
Avail Resource button ..... 93
Avail Slots button ..... 277, 289
Available Products Query (APQ) ..... 2022
Available? field ..... 2039

## B

Back to Questions button ..... 554
Bag Check-In (BAGS) ..... 1070
Bag Config field ..... 1068
Bag field ..... 1246
Bag ID field ..... 1141
Bag Lot No. field ..... 1229, 1238, 1251
BAG master code ..... 1140
BAGID master code ..... 1140
Bags field ..... 1239
Bags for Components field ..... 1251
Bags Spiked field ..... 1251
Bags Used field ..... 1251
Band Values field ..... 1344, 1347, 1353
banner block ..... 26
bar codes ..... 11
BATCH ..... 1978
Batch (check-in) field ..... 1100
Batch Count field ..... 1570, 1590
Batch field ..... 1710
Batch ID field ..... 1114, 1116, 1118, 1123, 1267, 1424, 1559, 1565, 1568, 1570, 1573, 1577, 1582, 1590, 1594, 1598, 1600, 1605, 1608, 1610, 1620, 1693, 1695, 1699-1700, 1716, 2018
Batch In Progress Query (BIPQ) ..... 1618
Batch Status field ..... 718, 762, 2020
Batch/Worksheet ID field ..... 1383
BATCHDQ ..... 1115
BATCHEXQ ..... 1117
BATCHQ ..... 1113
BBQ ..... 216

BC_SCAN_RE system parameter ..... 495, 918
BIPQ button ..... 1588, 1613
BIPQ field ..... 1618
Bleed End Time field ..... 1068, 1181
Bleed Start Time field ..... 1068
Bleed Time field ..... 1133
Bleed Time/Phlebotomy Data ..... 572
Bleed TimeEntry - Back Office ..... 617
BLFA master code ..... 1066, 1068, 1099, 1137
Blood Center Inventory Level Query (LEVELQ) ..... 2118
Blood Centers API Log Information (APILOG) ..... 2153
Blood Centers API Log Query (APILOG) ..... 1034
Blood Product Credit (CDPROD) ..... 2063
Blood Type field ..... 2038
box
  Download Data to Mobile Server ..... 636
  Upload Data from Mobile Server to Main Database ..... 639
Box Details (BOXDTQ) ..... 1959
Box ID ..... 2054
Box ID field ..... 1960
BOXDTQ ..... 1959
Boxes Ready For Shipment (OKBOXQ) ..... 1957
BPQ ..... 1276
BUC ..... 1170
button
  Link ..... 610
  LINKQ ..... 610
  Physical Findings Query ..... 609
buttons
  (Un)Remind ..... 273
  3 Months ..... 998
  ABO Spread ..... 194
  Add on Bags ..... 1781
  Address ..... 128
  Apply ..... 789
Appointments ..... 239, 274
Attach Donor ..... 430, 434
Attr/Inter ..... 1780
Attributes719, 745, 749, 759, 763, 844, 848, 853, 865, 868
Audit ..... 437, 439
Audit Details ..... 423, 427
Auth Letter ..... 847
Authorize ..... 943
Avail Resource ..... 93
Avail Slots ..... 277, 289
Back to Questions ..... 554
BIPQ ..... 1588, 1613
By Don Type ..... 179
By Proc Type ..... 179
Calc Resource ..... 92
Call Stat ..... 247
Cancel Drive ..... 103
Change Priority ..... 251
Change View Options ..... 85
Check Comments ..... 609
Check List ..... 176
Check Suitability ..... 1182
Checklist ..... 166, 209
Coll Stats ..... 203, 207, 284, 289
Collections ..... 196
Comm ..... 240, 749, 864, 868
Comm Letters ..... 744, 852
Comm Log ..... 273, 843, 847
Comments ..... 702, 724
Complete Form ..... 541, 545
Confirm ..... 139
Contact Address ..... 124
Create Call List ..... 790

Create Drive ..... 186
Create New ..... 879
Criteria ..... 242, 248
Daily ..... 153
Daily Stat button ..... 203
Date Range ..... 153
Def Entry ..... 433
Delete Notes ..... 98
Delete Template ..... 234, 255
Demographics ..... 240, 718, 724, 744, 749, 759, 763, 844, 848, 852, 865, 868
Describe Criteria ..... 172, 251
De-select All ..... 790
Directions ..... 290
Display Drives ..... 87, 205, 282
Don Entry ..... 437
Don/Def Audit ..... 961
Don/Def Entry ..... 961
Donations ..... 240, 719, 724, 744, 749, 759, 763, 852, 865, 868, 931, 943, 995
Donor Antigens ..... 743, 851
Donor Appts ..... 274, 277, 289
Donor Card ..... 749, 865, 868
Donor Comm ..... 745
Donor Consents ..... 558
Donor Details ..... 1034
Donor Holds ..... 426, 617, 766
Donor Info ..... 755
Donor Interdictions ..... 761, 793
Donor Responses ..... 531, 551
Donor Walkout ..... 617
Donors ..... 247
Donors Held ..... 246
Double ..... 1009
Download Data to Mobile Laptop ..... 1041
Drive ABO ..... 168, 1006
Drive Details ..... 116, 177, 194, 209, 225, 283, 286
Drive List ..... 185
Drive Sheet ..... 169
Drive Stats ..... 168, 196, 286
Drives ..... 201
Drives By Size ..... 198
Edit Letters ..... 873-874
Editor ..... 261
Eligibility ..... 274, 749, 865, 868
Entry ..... 430
Entry Details ..... 403, 426
Equip Details ..... 270
Existing Schds ..... 270
Exit ..... 1204
Extend Life ..... 248
Filter button ..... 789
Find donor ..... 724
Fixed Sites ..... 180
Freeze Details ..... 1784
Full Eligibility ..... 529, 928
Generate Labels ..... 871
Goal ..... 947, 1015
Goal Statistics ..... 176
HH Answer ..... 332
HH/PHY ..... 519
Hide Attributes ..... 963
Hide AUX Units ..... 962
Hide Donors ..... 990
Hide Letter ..... 874
Hide Term ..... 755, 983
Hide Units ..... 948, 989

Hold ..... 993
Hold Reason ..... 423, 430, 433
Initial Sterile Docking ..... 1183
Inquiry ..... 515
Int Addr ..... 309
Interdictions ..... 724, 744, 749, 763, 844, 847, 852, 865, 868, 943, 995
Intl Addr (International Address) ..... 118, 122
Letter Details ..... 1005
Link ..... 888
List Log ..... 247
List of Values ..... 27
List Stat ..... 240
Location Notes ..... 124
Look Stat ..... 278
Lookup ..... 278
Manual ..... 1010
Mark No Letter ..... 843, 847
Merge ..... 162, 722, 1014
Merged Donors ..... 743, 851
Modify Key Data ..... 718, 763
Monthly ..... 153
NEBQ ..... 1588
New Physician ..... 882
New Zip ..... 913
Next Question ..... 331, 340, 554
Notes ..... 94, 108, 129, 961, 1781
Notify Comm ..... 853
Notify Letters ..... 744, 852
Open for Appt ..... 274
Other Holds ..... 754
Other Inter ..... 759
Past Drives ..... 91, 116, 186
Pending ..... 545
Performance ..... 201
PHERI ..... 1184
Phlebotomy Details ..... 423
Phy Findings ..... 331
Physical ..... 333, 340
Pickup Sched ..... 277
Pickups ..... 167
Piggyback ..... 95
Place Interdictions ..... 727, 734
Previoud Question ..... 331, 340
Previous Question ..... 554
Print Card ..... 610
Print Cards ..... 931, 959
Print Donors ..... 790
Print Label ..... 1185, 1192
Print Report ..... 443
Printer List ..... 931
Procedures ..... 168
Prod Hist ..... 1784
Query Request ..... 783
Query Status ..... 1199
Questions ..... 331, 340
Read More ..... 554
Recruiter Goals ..... 88
Recruiters ..... 290
Redisplay ..... 979
Register ..... 512, 930
Reject ..... 944, 996, 1184, 1192, 1195
Release ..... 249
Remove ..... 698, 1195
Remove Hold With NFT ..... 391
Remove Hold With OK ..... 389
Remove Illumination Bag ..... 1190

Remove Interdictions ..... 731, 737
Remove Psoralen ..... 1184
Remove Temp ..... 101
Reprint ..... 956
RePrint Card ..... 610
RePrint Label ..... 1197
Resolve ..... 723
Resources ..... 166
Resubmit ..... 249
Rollback ..... 400
SAMPQ ..... 1588, 1613
Save Drive ..... 92
Save Request ..... 782
Save Template ..... 234, 255
Sched Donor ..... 278, 290
Schedule ..... 884
Schedule Drives ..... 88
Scheduled Drives ..... 156
Search Donor ..... 240, 274, 520, 931
Search List Button ..... 239
Select Interdictions ..... 726, 730, 733, 736
Select Processing Facility ..... 1470
Select Question ..... 543
Select to Release ..... 397, 705, 714
Select to Terminate ..... 713
Send Alerts ..... 290
Send Letter ..... 843, 954
Sep Time ..... 1786
Set Differential ..... 223
Set Print Flag 'N' ..... 870
Set Print Flag 'Y' ..... 871
Show Attributes ..... 962
Show AUX Units ..... 962
Show Donors ..... 788, 989
Show Drives ..... 162
Show Equip/Supply ..... 963
Show Goals ..... 997
Show Letter ..... 856, 949
Show Schedule ..... 281
Show Slots ..... 269
Show Term ..... 695, 698, 702, 710, 755, 976, 983
Show Units ..... 947, 989, 1016
Site Directions ..... 270, 277
Site Slots ..... 277, 290
Site Stat ..... 286
Site Stats ..... 202, 207, 284
Spn Contact ..... 116
Spon Acct ..... 289
Sponsor Dets ..... 186
Sponsor Instructions ..... 122
Sponsor Notes ..... 123
Sponsor Roll Prefs ..... 124
Sponsor Stats ..... 197
Standard Criteria ..... 234, 255
Statistics ..... 1008
Suitable Dates ..... 93
Summary ..... 973
Supplies ..... 167
TBatch Notes ..... 1411
Terr Perform ..... 197
Territories ..... 179
Test Results ..... 743, 844, 848, 851
Tests ..... 1778
To Browser ..... 248
Today's Drive ..... 288
Unit Holds ..... 765

Unlink ... 888
Unlink Deferral ... 570
Update Audit ... 430, 434
Update Defer ... 434
Update Regis ... 430
Upload ... 1203
Upload Data to from Mobile Laptop to Blood Centers Application ... 1043
View Comments ... 393
View Comments, physical findings ... 963
View Competency ... 541
View Letters ... 873
By Don Type button ... 179
By field ... 1844
By Proc Type button ... 179
Bypass CAC Log in ... 23

## C

CAC ... 18
CAD Elapsed Time field ... 1195
CAD End Time field ... 1195
CAD Prod field ... 1191, 1194
CAD Start Time field ... 1191, 1195
CAD Status field ... 1195
Calc Resource button ... 92
CALEN ... 84
calendar, viewing master ... 84
Call Stat button ... 247
called windows ... 61
CANCEL ... 1842
Cancel Appt button ... 273
Cancel Debit/Credit Advice (CDCAN) ... 2069
Cancel Drive (CANDRIVE) ... 102
Cancel Drive button ... 103
Cancel entire order? (Y/N) field ... 1846
Cancel Fixed and Special Drives (CANSF ... 292
Cancel Special Drive (CANSPDRV) ... 144
Cancel Test Batch (in Holding Area) (CANCELTB) ... 1396
Cancel Test Results (VOIDCA) ... 1371
Cancel Unfilled Orders (CUO) ... 1854
canceling a drive ... 102
CANCELTB ... 1396
CANDRIVE ... 102
CANSF ... 292
CANSPDRV ... 144
Carrier field ... 2054
Carton Count field ... 1103
Carton ID field ... 1711
Cartons field ... 1711
Catalog No field ... 1100, 1143, 1157, 1163, 1170, 1212, 1222, 1229, 1244
Catalog No. field ... 1072
Catalog Number field ... 1136, 1217
CATTR ... 2116
CBC ID ... 1627
CBC Rslt field ... 1557
CBC Test ID field ... 1554, 1556
CBCID master code ... 1538
CBEX interdiction ... 1070
CDCAN ... 2069
CDPROD ... 2063
CDQ ... 207
CDQL ... 2072
CDSVC ... 2066
Cell Code field ... 1248
Cent field ... 1211
Cent ID field ... 1132, 1151
Center ID field ... 1605, 1684, 1690, 1706
Centrifuge field ... 1147
Centrifuge ID field ... 1217
Ch field ... 1368
change
Label Printer (CHLBP) ... 1469

change a password ..... 15
Change Drive ID or Collection Date (MODDRV) ..... 414
Change Inventory Class (CHCLASS) .....2002
Change List Priority (LISTPRI) .....249
Change Or Cancel Order (CANCEL) .....1842
Change Priority button .....251
Change Testing Unit Collection Date (TUCOLDAT) .....1599
Change Unit Collection Date (COLLDATE) .....1106
Change View Options button ..... 85
changing the currently selected label printer ..... 1469
Chapter field .....1582, 1683, 1689, 1706
Chapter ID Description field ..... 1202
Chapter ID field .....1202, 1577, 1620, 1742, 2142
CHARGE .....1858
Charge Code field ..... 1946
CHCLASS ..... 2002
Check Comments button .....609
Check List button ..... 176
check reagents out of the repository .....1446
Check Status
Mobile Upload Download ..... 641
Check Suitability button .....1182
check-box Int Address .....1539, 1705
CHECKEXQ .....1119
check-in
and Donor Source Card Entry (DSCE or DSCE2) .....1065
Batch Data Query (BATCHDQ) ..... 1115
Batch Exception Query (BATCHEXQ) ..... 1117
Batch Query with Unit Data (BATCHQ) ..... 1113
Exception Query (CHECKEXQ) ..... 1119
Check-In Batch field .....1596
Checkin Discard Products to Inventory (CHKDIS) ..... 1995
Check-In From Blood Centers Lab – Batch Process (BATCH) ..... 1978
Check-In From Blood Centers Lab (CHKIN) .....1975
Check-in Temperature field ..... 1084
Check-In Temperature field ..... 2015
Check-in User field .....1104, 1565, 1716
Checklist button .....166, 209
checklist, customizing for a sponsor .....130
checklist, drive, customizing .....109
CHGBAGS .....1174
Chk Digit field ..... 1540
CHKDIS .....1995
CHKIN .....1975
CHKOFF .....2043
CHKOQC ..... 1446
CHKOUT ..... 1457
CHLBP .....1469
CI field ..... 1436
City, State, and Zip Query (CITYQ) ..... 911
CITYQ ..... 911
CLBOX .....1932
Client Chapter ID field ..... 1540
Close Box (CLBOX) .....1932
Close Box? Y/N field .....1934
Close Hospital Transfer (TRANS2) ..... 1867
CMCI .....1161
CMPINT2 ..... 1296
CMVLB master code .....1474, 1478
Cnf field .....1366, 1369
CNFM_FLD system parameter .....494, 918
CNOTE .....1310
Cnt (**10) field .....1173
Cntr field ..... 1445
Cntr ID field .....1542
COD field .....2080
Code field .. 1162, 1359, 1362, 1365, 1369, 1434, 1437, 1439, 1445, 1750
Coll ID field .....1719
Coll ID Head field ..... 1721
Coll Name field .....1720

Coll Stats button ..... 203, 207, 284, 289
COLLDATE ..... 1106
Collection Date Mismatch Query (DCOLLQ) ..... 441
Collection Goals by Date Query (GOALDTQ) ..... 181
Collection Statistics (DRWCSTAT) ..... 945
Collections button ..... 196
COLLID ..... 1718
Column field ..... 260
Comm button ..... 240, 749, 864, 868
Comm Letters button ..... 744, 852
Comm Log button ..... 273, 843, 847
Comment field ..... 1110
Comments button ..... 702, 724
Comments field ..... 1486
Commit button ..... 345
Commit Reagents for Component (REAG) ..... 1239
Common Access Card ..... 18
Communication Letters (DCWVWLTR) ..... 948
Communication Log (DCWDCOMM) ..... 950
Company field ..... 1682, 1688, 1704
COMPATT ..... 1288
COMPENTI ..... 1133
Complete Form button ..... 541, 545
Component ID field ..... 1284, 1286
Component Notes (CNOTE) ..... 1310
Component Query (COMPQ) ..... 1263
Component Review field ..... 1521, 1525
Components Made from the Unit - ISBT (COMPENTI) ..1133
COMPQ ..... 1263
COMPWT ..... 1144
Conf field ..... 1851
Conf Tests? field ..... 1541
Configurable Equipment Details field ..... 1727, 1739
configuration
  RBC antigen manager ..... 807
configuration, password ..... 14, 449
Configure Equipment Worksheet (EQCONFIG) ..... 1749
CONFIRM ..... 137
Confirm button ..... 139
Confirm Interface void field ..... 2135
Confirm On-Hold Drives (CONFIRM) ..... 137
Confirm Test field ..... 1684, 1690
Confirm Tests field ..... 1706
confirmation
  donor antigens query ..... 825
CONSIGN ..... 2085
Consignee ID field ..... 2053, 2086
CONTACT ..... 2091
Contact Address button ..... 124
Contact field ..... 1933
contactsd. sponsor, maintaining ..... 126
Container field ..... 1439, 1445
CONTRACT ..... 2088
Contract field ..... 1558, 1565, 1598, 1827
Contract ID field ..1098, 1109, 1291, 1539, 1554, 1556, 1567, 1570, 1573, 1581, 1590, 1601, 1605, 1608, 1610, 1612, 1615, 1617, 1619, 1682, 1686, 1688, 1692, 1695, 1704, 1710, 1716, 1719, 1773, 2089
Contract Profile Test Query (RGPROFQ) ..... 1616
Contract Type field ..... 1539, 1682, 1688, 1704
control block ..... 26
Control Indicator field ..... 1436
Control Value field ..... 1344, 1347
CONV ..... 1244
convert
  Component into Spiked Bag – ISBT (CONVI) ..... 1242
  Component into Spiked Bag (CONV) ..... 1244
Convert / Modify Components (ISBT) (CMCI) ..... 1161
Convert External Data to LT Data (APICONV) ..... 2155
CONVI ..... 1242
Copy ISBT field ..... 1542
Copy OS Units field ..... 1541

corporate header block ..... 460
Correct Imported Unit Data (IMPCORR) ..... 1714
Count % field ..... 1248
Count field ..... 1403, 1582, 1599
Count? field ..... 2039
CPPTIER ..... 2094
CPROD ..... 2110
CPU ..... 220
CPUQ ..... 223
CR/DB field ..... 1859
Create Call List button ..... 790
Create Consignee Details (CONSIGN) ..... 2085
Create Customer Profile (CUSTOMER) ..... 2078
Create Drive button ..... 186
Create Drive from Temporary Drive (FROMTEMP) ..... 98
Create Drive Sponsor Profile (SPON2) ..... 116
Create Fixed Drives Automatically (FIXDR2) ..... 292
Create New button ..... 879
Create or Modify Mobile Drive (DRIVE) ..... 89
Create or Modify Mobile Drive screen ..... 89
Create or Modify Special Drives (SPDRIVE) ..... 141
Create or Modify Special Drives (SPDRIVE2) ..... 292
Create Payee Details (PAYEE) ..... 2082
Create Standard Templates (SLIST) ..... 251
Create Test Batch/ Worksheet (WKS) ..... 1325
Create Worksheet field ..... 1746
Created By field ..... 1081
Created On field ..... 1087
Created on field ..... 2018
creating drive from temporary drive ..... 98
creating drve sponsor profile ..... 116
creating mobile drive ..... 89
Creation Date field ..... 1403
Credit Limit field ..... 2090
Criteria button ..... 242, 248
Criterion field ..... 260
cron job ..... 1024
CRYO field ..... 1217
Cryo Prd field ..... 1212
CRYO Worksheet ID field ..... 1215
CRYO1 ..... 1207
CRYO2 ..... 1210
CTREC ..... 158
Ctrl field ..... 1445, 1454
Ctrl Ind field ..... 1439
Ctrl Value field ..... 1353
Ctrl/Reagent field ..... 1450, 1452, 1454
CUE field ..... 1072
CUE Override Query (CUEQ) ..... 1121
CUEOVR ..... 1108
CUEQ ..... 1121
CUEYN system parameter ..... 917
CUO ..... 1854
Current CUE field ..... 1121
Current field ..... 2018
Current Label field ..... 1485
Current Label Printer field ..... 1261, 1502
Current Status field ..... 1726, 1738
Current Unit ID field ..... 1338
currently selected label printer, changing the ..... 1469
CUSTIER ..... 2096
CUSTOMER ..... 2078
Customer Consignee Product Details(VCUSTPRD) ..... 2101
Customer Contact Names (CONTACT) ..... 2091
Customer Contract Details (CONTRACT ..... 2088
Customer field ..... 1875, 2097
Customer ID field ..... 2089
Customer Orders Query (OCQ) ..... 1874
Customer Product Tier Pricing Query (TIERQ) ..... 2099
Customize Checklist for a Sponsor (SPONCHK) ..... 130
Customize Drive Checklist (DRVCUST) ..... 109
customizing checklist for a sponsor ..... 130

customizing drive checklist ..... 109

## D

D/F field ..... 1542
Daily button ..... 153
Daily Stat button ..... 203
Data field ..... 1733, 1736
data from blood bags, entering ..... 1070
data integrity ..... 7
Data Source Name field ..... 1035
Data Type field ..... 1359
Database Name in URL system parameter ..... 17, 21-22, 24
Datatype field ..... 260, 1750
Date Range button ..... 153
date/time stamp ..... 7
Day field ..... 1880
Day Phone field ..... 2093
DCATTR ..... 1292
DCOLLQ ..... 441
DCOMQ ..... 865
DCONVERT ..... 1856
DCQ ..... 286
DCWDCOMM ..... 950
DCWLOOKS ..... 986
DCWSNDLT ..... 1013
DCWVWLTR ..... 948
Debit and Credit Query (CDQL) ..... 2072
Debit/Credit field ..... 2064, 2067
Def Entry button ..... 433
DEFAUDIT ..... 334
Default Op field ..... 260
DEFDET ..... 405
Deferral Entry Details (DRWDEFRL) ..... 954
Deferrals on Hold Query (DEFHOLDQ) ..... 431
define
external file mapping ..... 818
RBC Ag groups ..... 809
Search Criteria (SEARCH) ..... 258
Define Apheresis Machines (MCODE) ..... 296
Define Critical Controls for Test (TSTPARM) ..... 1360
Define HLA Antigens (HLANTI) ..... 794
Define HLA Cross Reactive Groups (HLAEPI) ..... 796
Define HLA Interim Output (HLAINT) ..... 803
Define HLA Matching Grades (HLAGRAD) ..... 798
Define List Types (LISTTYP) ..... 255
Define Order Charges (VCHARGE) ..... 2120
Define Resource Exceptions (RESXP) ..... 147
Define Sponsor Rollover Preferences (SPONROLL) ..... 132
defining
valid collection facility identification number (FIN) ..... 1718
defining sponsor rollover preferences ..... 132
DEFMAINT ..... 361
DEFPENDQ ..... 437
DEFQ ..... 423
DEFREGIS ..... 317
Del field ..... 1165, 1300-1301, 1303-1304
DELCOMP ..... 1256
DELCON ..... 1947
DELCRYO ..... 1214
Delete Component (DELCOMP) ..... 1256
Delete Component Attributes (DCATTR) ..... 1292
Delete Component? field ..... 1259
Delete field ..... 1106, 1215, 1309
Delete Non-Unit Tubes (DTUBE) ..... 1104
Delete Notes button ..... 98
Delete Pooled Components (DELPOOL) ..... 1232
Delete Regional Sample Check-In Batch (SUPERDEL) ..... 1595
Delete Template button ..... 234, 255
Delete Unit Attributes (DUATTR) ..... 1294
Delete Unit from System (DELUNIT) ..... 1110
Delete Units from CRYO Worksheet (DELCRYO) ..... 1214
Delete Units from SCD Worksheet (DELSCD) ..... 1164
deletion, data ..... 8

Delivered Shipments (DELQ) ..... 1964
Delivery Confirmation (DELCON) ..... 1947
DELPOOL ..... 1232
DELQ ..... 1964
DELSCD ..... 1164
DELUNIT ..... 1110
Demographics button ..... 240, 718, 724, 744, 749, 759, 763, 844, 848, 852, 865, 868
demographics, modify donor ..... 689
DEQ ..... 861
Derived Product field ..... 1159, 1163
Desc Text field ..... 260
Describe Criteria ..... 251
Describe Criteria button ..... 172
De-select All button ..... 790
Destin field ..... 1459
Destined field ..... 1212, 1217
DETACH ..... 401
Detach Donor from Deferral (DEFDET) ..... 405
Detach Donor from Donation (DETACH) ..... 401
detail block ..... 26
detail info from donor cards, enter/edit ..... 1065
Details button ..... 952, 1004
Determine Care-Taker Recruiter (CTREC) ..... 158
Device# field ..... 1992
DEWCRITN ..... 1021
DEWDONBR ..... 1018
DEWDONRS ..... 1019
DIFF ..... 1246
Directions button ..... 290
DIRESET ..... 2134
Discard Dest field ..... 1913, 1917
Discard Empty Bags (DISMTBAG) ..... 1139
Discard Order field ..... 1913, 1917
Discount field ..... 2090
DISMTBAG ..... 1139
Display Drives button ..... 87, 205, 282
display Month To Date Statistics ..... 1760
Display Notification Letter (DNWLTQRY) ..... 955
display Previous Months to Date Statistics ..... 1761
display Previous Years To Date Statistics ..... 1761
display Year to Date Statistics ..... 1761
Disposition field ..... 1440
DLABEL ..... 869
DLCOM master code ..... 950
DNR_HINT system paramaeters ..... 550
DNR_RES system paramaeter ..... 550
DNWDCOMM ..... 1003
DNWDFIND ..... 1010
DNWELIGB ..... 980
DNWLTQRY ..... 955
DNWSNDLT ..... 942, 994
DNWVWLTR ..... 1001
Do you want the pack list to be printed? field ..... 2056
DOB field ..... 566
Does the unit have a permanent assertion? field ..... 2140
Don Corr field ..... 863
Don Entry button ..... 437
Don Grp field ..... 280
DON master code ..... 1070
Don/Def Audit button ..... 961
Don/Def Entry button ..... 961
Donation Entry Details (DRWENTRY) ..... 957
Donation History (DPWDCARD) ..... 958
Donation History (DPWDNDTL) ..... 960
Donation History—Test Results (DPWDNTST) ..... 964
Donation Hold Details (DRWHOLDS) ..... 966
Donation Notes (DRWNOTES) ..... 968
Donation Sites Available for a Given Time (DSWAVSIT) ..... 970
Donation Slots (DSWASLOT) ..... 971
Donation/Deferral Audit Details (DRWAUDIT) ..... 973
Donations button ..... 240, 719, 724, 744, 749, 759, 763, 852,

865, 868, 931, 943, 995
Donations on Hold Query (DONHOLDQ) ..... 427
Donations Pending Audit Query (DONPENDQ) ..... 435
DONAUDIT ..... 326
DONHOLDQ ..... 427
DONINT ..... 2139
DONIQ ..... 755
DONNOTE ..... 840
Donor ->LAB interface done on field ..... 2135
donor antigen discrepancy report ..... 836
donor antigens
confirmation query ..... 825
Donor Antigens button ..... 743, 851
Donor Antigens Query (ANTQ) ..... 791
Donor Antigens Query (ANTQ2) ..... 761
Donor Appts button ..... 274, 277, 289
Donor Attributes (DPWPROPR) ..... 975
Donor by Interdiction Query (DONIQ) ..... 755
Donor Card ABO ..... 1070
Donor Card ABO field ..... 1068, 1100
Donor Card button ..... 749, 865, 868
Donor Center Details Query (DCQ) ..... 286
Donor Center Procs and Staff Query (FIXQ) ..... 279
Donor Comm button ..... 745
Donor Communication Query (DCOMQ) ..... 865
Donor Consents button ..... 558
Donor CUE field ..... 1100
Donor Demographics (DPWDEMGR) ..... 976
Donor Detail Query (SDONQ) ..... 737
Donor Details button ..... 1034
Donor Details Query (NDONQ) ..... 848
Donor Eligibility & Attributes (DNWELIGB) ..... 980
Donor Eligibility (DPWELGBY) ..... 979
Donor Hold button ..... 617
Donor Holds button ..... 426, 766
Donor Info button ..... 755
Donor Interdictions ..... 793
Donor Interdictions (DPWDNINT) ..... 981
Donor Interdictions button ..... 761
Donor Profile Audit Query (DPAQ) ..... 767
donor RBC antigen
query ..... 825
donor RBC antigen query ..... 825
Donor Response button ..... 531
Donor Responses ..... 550
Donor Responses button ..... 551
Donor Schedule by Center Query (DONSQ) ..... 275
Donor Schedule on Donor Centers (DSWDONIS) ..... 984
Donor Statistics (DCWLOOKS) ..... 986
Donor Walkout ..... 614
Donor Walkout button ..... 617
Donors button ..... 247
Donors by Events Query (DEQ) ..... 861
Donors Held button ..... 246
DONPATT ..... 693
DONPENDQ ..... 435
DONPINT ..... 699
DONRATT ..... 696
DONRINT ..... 703
DONSQ ..... 275
double blind entry ..... 9
Double button ..... 1009
Download Data to Mobile Laptop button ..... 1041
Download Data to Mobile Server box ..... 636
Downtime History Query (EQMAINTQ) ..... 1761
Downtime Type field ..... 1730, 1741
DPAQ ..... 767
DPICKQ ..... 1952
DPWDCARD ..... 958
DPWDEMGR ..... 976
DPWDNDTL ..... 960
DPWDNINT ..... 981

DPWDNTST ..... 964
DPWELGBY ..... 979
DPWHLDRN ..... 988
DPWIADDR ..... 998
DPWPROPR ..... 975
Draw Query (DRAWQ) ..... 203
Draw Statistics and Drives Query (DRAW2Q) ..... 281
DRAW2Q ..... 281
DRAWQ ..... 203
Drive ABO button ..... 168, 1006
Drive Checklist ..... 194
Drive Checklist button ..... 194
drive checklist, customizing ..... 109
drive data, modifying non-critical ..... 96
Drive Details ..... 116
Drive Details button ..... 177, 194, 209, 225, 283, 286
Drive Details Query (DRIVEQ) ..... 164
drive ID and date, set ..... 915
Drive ID field ..... 1067, 2139
Drive Interface from Donor to Lab (AIIDNDRV) ..... 2137
Drive List button ..... 185
drive location, maintaining ..... 104
Drive Name field ..... 1072
drive planning activity ..... 112
Drive Sheet button ..... 169
drive sponsor profile, creating ..... 116
drive sponsor, create a profile for ..... 116
Drive Statistics (DPWHLDRN) ..... 988
Drive Stats button ..... 168, 196, 286
drive, canceling ..... 102
DRIVELOC ..... 104
DRIVEQ ..... 164
Drives Above Optimal CPU Query (CPUQ) ..... 223
Drives and Goals by Recruiter Query (RECQ) ..... 174
Drives button ..... 201
Drives by Creation Date Query (CDQ) ..... 207
Drives By Size button ..... 198
Drives by Sponsor Query (DRSPONQ) ..... 191
DRSPONQ ..... 191
Drv ID field ..... 1072
DRVCHK ..... 112
DRVCUST ..... 109
DRVMOD ..... 96
DRWAUDIT ..... 973
DRWCSTAT ..... 945
DRWDEFRL ..... 954
DRWENTRY ..... 957
DRWHOLDS ..... 966
DRWNOTES ..... 968
DRWSSTAT ..... 1014
DSCE ..... 1065
DSCE 2 ..... 1065
DSWASLOT ..... 971
DSWAVSIT ..... 970
DSWDONIS ..... 984
DSWEQUIP ..... 940
DTUBE ..... 1104
DType field ..... 1157
DUATTR ..... 1294
DUMPI ..... 1896
DUPQ ..... 761

## E

E field ..... 2121
EDABS master code ..... 1385
EDI Input field ..... 1684, 1690, 1706
EDI Input? field ..... 1542
EDIT ..... 1385
Edit Chrgs field ..... 1541
Edit Equipment Details (EQEDIT) ..... 1737
Edit Equipment Downtime and Service Details (EQEDTMN) ..... 1739
Edit field ..... 1386
Edit Letters button ..... 873-874

Edit or Reconcile Equipment QC Details (EQSUPQC) ....1753
Edit Reason field .....1353
Edit Spiking Details (EDITSP) ..... 1250
Edit Standard Donor Comm Letters (EDLET) .....872
Edit Test Observation Results (EDITOBS) ..... 1352
Edit Test Results (EDIT) .....1385
EDITOBS ..... 1352
Editor button .....261
EDITSP ..... 1250
EDLET .....872
EDN Flag field .....2081
Eff Date field .....1434, 1706
EFF field .....1548
Eff. Date field .....1437
Effective Date field ..... 1360, 1362
effective date, future ..... 8
EGRPINT .....1305
EIRC .....1569
electronic donor registration .....498, 920
Electronic Plasma File Error Log (XMLLOG) ..... 1950
Eligibility button ..... 274, 749, 865, 868
Emergency Label field .....1485
Emergency Medical Release (EMGREL) ..... 1483
Emergency Reason Code field .....1486
EMGREL .....1483
EMP .....417
Emp ID field .....1753
End Date field ..... 1426
ENLIST master code ..... 255
Enlistment field .....259
ENLST master code .....228, 230, 259
Enter 'NT' Results (NT) ..... 1393
Enter Attribute Service Codes (CATTR) ..... 2116
Enter Calendar Highlights (HILITE) ..... 150
Enter Component Attributes (COMPATT) ..... 1288
Enter Component Differential (DIFF) ..... 1246
Enter Component Interdiction (CMPINT2) ..... 1296
Enter Control Values for Test Batch (TECH1) .....1363
Enter Customer Tier Pricing (CUSTIER) .....2096
Enter Date field ..... 1424
Enter Equipment Details (EQDET2) ..... 1725
Enter Equipment Downtime and Service Details (EQMAINT) .....1728
Enter Equipment Installation Qualifications (EQUALIF) .1751
Enter Equipment QC Details – First Tech (EQC1) .....1730
Enter Equipment QC Details – Second Tech (EQC2) .... 1734
Enter Export Order (EXPORT) ..... 1825
Enter Extract Time field ..... 1591
Enter HLA Results (HLARESUL) .....784
Enter HLA/RBC Request (REQUEST) .....776
Enter Interim Result Code (EIRC) .....1569
Enter Master Service Codes (FCODE) .....2113
Enter No. of Test Recheck-In field .....1456
Enter Note for Special Processing (NOTE) ..... 1248
Enter Order Charges (CHARGE) ..... 1858
Enter Pack List Printer Id field .....2056
Enter Pheresis Components - ISBT (PHERI) ..... 1168
Enter Pheresis Count (PLCOUNT) .....1172
Enter Post Drive Data for Staff CPU (CPU) .....220
Enter Product Attributes (ATTR) .....2004
Enter Product Service Codes (CPROD) .....2110
Enter Promotional Items (ITEMS) .....153
Enter Reagents into Repository – Super (STORE2) .....1441
Enter Reagents into Repository (STORE) .....1438
Enter Regional Testing Contract (RGCON) .....1537
Enter Regular Order (ORDER) .....1809
Enter Results Mapping (RMAP) .....1555
Enter Special Order (SPECIAL) .....1818
Enter Standard Tier Pricing (TIER) ..... 2107
Enter Standing Order (STANDO) .....1850
Enter Supplier Code field .....1434
Enter Test Mapping (TMAP) ..... 1553

Enter Test Observations ..... 1342
Enter Unit Attributes (AUATTR) ..... 1290
entering data from blood bags ..... 1070
entering detail information from the donor cards ..... 1065
entering or modifying order for regular products ..... 1809
Entry and Offline CRYO Separation/Freeze Details (CRYO2) ..... 1210
Entry button ..... 430
Entry Details button ..... 403, 426
ENTRYQ ..... 420
EQACCESS ..... 1747
EQBRQ master code ..... 524, 573, 618
EQC1 ..... 1730
EQC2 ..... 1734
EQCHISTQ ..... 1765
EQCONFIG ..... 1749
EQDET2 ..... 1725
EQEDIT ..... 1737
EQEDTMN ..... 1739
EQMAINT ..... 1728
EQMAINTQ ..... 1761
EQSHISTQ ..... 1763
EQSTATQ ..... 1757
EQSUPQC ..... 1753
EQUALIF ..... 1751
Equip Details button ..... 270
EQUIP master code ..... 573, 618
Equip Type field ..... 1189
Equipment & Supply QC ..... 480
Equipment ID field ..... 1742, 1754, 1758
Equipment Ref No field ..... 1740
Equipment Ref No. field ..... 1726, 1729, 1731, 1738, 1752, 1754, 1762, 1764
Equipment Reference No. field ..... 1758
Equipment Type field ..... 1181, 1726, 1729, 1731, 1735, 1737, 1740, 1745, 1748, 1750, 1752, 1758, 1762, 1764, 1766
Equipment Type ID field ..... 1742
Equipment Type Status field ..... 1758
Equipment Worksheet Report (EQWORK) ..... 1742
EQWORK ..... 1742
EQWS ..... 1744
ERRTY master code ..... 102
ETHGP master code ..... 311, 366, 685, 925
ETHNIC system parameter ..... 359, 495, 918
Event ID field ..... 1729, 1740
EX field ..... 1548
Existing Schds button ..... 270
Exit button ..... 1204
Exp Date field ..... 1241, 1439, 1443, 1446, 1448, 1452, 1454, 1459, 1501
Exp. Date Time ..... 1445
Expiration Date field ..... 1223-1224, 1237, 1240, 1247, 1255, 1450
expiration, password ..... 16, 450
Expired? field ..... 2038
Expires field ..... 1368
EXPORT ..... 1825
Export Flag field ..... 1727, 1739
Extend Life button ..... 248
External to LifeTrak Data Translation (APICONV) ..... 1038
External Unit ID field ..... 1700, 1712, 1715
Extract Data to File (EXTRACTD) ..... 1036
EXTRACT field ..... 1580
Extract Mobile Server Data ..... 633
Extract Test Results (EXTRACT) ..... 1580
EXTRACTD ..... 1036

## F

Facility field ..... 1222
FCODE ..... 2113
FCRYO master code ..... 1223
FDRIVEQ ..... 284
fields
# Batches ..... 1621

# Comp ..... 1239
# Units ..... 1621
# Units w/o Results ..... 1621
#Comp ..... 1158
%Discount ..... 2090
(check-in) ..... 1100
A/L/U ..... 1442
ABO ..... 1144, 1477, 1500, 1836
ABO Label ..... 1712, 1716
ABO Type ..... 1209
ABO/Rh Batch ..... 1520
ABORh ..... 1237, 1240, 1247, 1255, 1878, 2024
Abs/Val/Chan ..... 1386
Acc ..... 1366, 1369
Addl Test ..... 1562
Advice ID ..... 2070
After Time ..... 1583
Age ..... 1882
Aggregates ..... 1182
Agreed Amount ..... 2090
Al ..... 1082, 1085, 1087, 1139, 1143, 1149, 1224, 1236, 1238, 1249, 1251, 1253, 1255, 1485, 1712, 1847
Aliquot ..... 1145, 1175, 1258, 1311, 1510, 1716
Aliquot No. ..... 1166
All or Pending ..... 1402
All products properly packed? Y/N ..... 1934
All/Date/Drive ..... 2138
All/Exceptions ..... 1619
Allocated ..... 1878
Amount ..... 1859
Amt ..... 2068
Antgn Grp ..... 2036
Anticoag Vol ..... 1146, 1171, 1197
Anticoagulant Vol ..... 1181
Antigen ..... 1846
Antigen List ..... 2036
AR Number ..... 2081
Attr ..... 1158
Attrib ..... 2106
Attrib Code ..... 1293
Attribute ..... 1135, 1170, 2024, 2038, 2106
Attribute Code ..... 1069, 1223, 1289, 1291, 1295
Attribute Group 1069, 1100, 1223, 1243, 1289, 1291, 2116
Attribute Type ..... 1243
Avail ..... 1446, 1448, 1459
Available? ..... 2039
Bag ..... 1246
Bag Config ..... 1068
Bag Lot No. ..... 1158, 1229, 1238, 1251
Bags ..... 1239
Bags for Components ..... 1251
Bags Spiked ..... 1251
Bags Used ..... 1251
Band Values ..... 1344, 1347, 1353
Batch ..... 1710
Batch Count ..... 1570, 1590
Batch ID ..... 1114, 1116, 1118, 1123, 1267, 1424, 1559, 1565, 1568, 1570, 1573, 1577, 1582, 1590, 1594, 1598, 1600, 1605, 1608, 1610, 1620, 1693, 1695, 1699-1700, 1716, 2018
Batch Status ..... 2020
Bleed End Time ..... 1068, 1181
Bleed Start Time ..... 1068
Bleed Time ..... 1133
Blood Type ..... 2038
Box ID ..... 1960
By ..... 1844
CAD Elapsed Time ..... 1195

CAD End Time ..... 1195
CAD Prod ..... 1191, 1194
CAD Start Time ..... 1191, 1195
CAD Status ..... 1195
Cancel entire order? (Y/N) ..... 1846
Carrier ..... 2054
Carton Count ..... 1103
Carton ID ..... 1711
Cartons ..... 1711
Catalog No ..... 1100, 1143, 1157, 1163, 1170, 1212, 1222, 1229, 1244
Catalog No. ..... 1072
Catalog Number ..... 1136, 1141, 1217
CBC Rslt ..... 1557
CBC Test ID ..... 1554, 1556
Cell Code ..... 1248
Cent ID ..... 1132, 1151
Center ID ..... 1605, 1684, 1690, 1706
Centrifuge ..... 1147
Centrifuge ID ..... 1217
Ch ..... 1368
Chapter ..... 1582, 1683, 1689, 1706
Chapter ID ..... 1202, 1577, 1620, 1742, 2142
Chapter ID Description ..... 1202
Charge Code ..... 1946
Check-In Batch ..... 1596
Check-in Temperature ..... 1084
Check-In Temperature ..... 2015
Checkin User ..... 1104
Check-In User ..... 1565
Check-in User ..... 1716
Chk Digit ..... 1540
CI ..... 1436
Client Chapter ID ..... 1540
Close Box? Y/N ..... 1934
Cnf ..... 1366, 1369
Cnt (**10) ..... 1173
Cntr ..... 1445
Cntr ID ..... 1542
COD ..... 2080
Code ..... 1162, 1359, 1362, 1365, 1369, 1434, 1437, 1439, 1445, 1750
Coll ID ..... 1719
Coll ID Head ..... 1721
Coll Name ..... 1720
Column ..... 260
Comment ..... 1110
Comments ..... 1486
Company ..... 1682, 1688, 1704
Component ID ..... 1284, 1286
Component Review ..... 1521, 1525
Conf ..... 1851
Conf Tests? ..... 1541
Configurable Equipment Details ..... 1727, 1739
Confirm Interface void ..... 2135
Confirm Test ..... 1684, 1690
Confirm Tests ..... 1706
Consignee ID ..... 2053, 2086
Contact ..... 1933
Container ..... 1439, 1445
Contract ..... 1558, 1565, 1598, 1827
Contract ID ..... 1098, 1109, 1291, 1539, 1554, 1556, 1567, 1570, 1573, 1581, 1590, 1601, 1605, 1608, 1610, 1612, 1615, 1617, 1619, 1682, 1686, 1688, 1692, 1695, 1704, 1710, 1716, 1719, 1773, 2089
Contract Type ..... 1539, 1682, 1688, 1704
Control Indicator ..... 1436
Control Value ..... 1344, 1347

Copy ISBT ..... 1542
Copy OS Units ..... 1541
Count ..... 1403, 1582, 1599
Count % ..... 1248
Count? ..... 2039
CR/DB ..... 1859
Create Worksheet ..... 1746
Created By ..... 1081
Created On ..... 1087
Created on ..... 2018
Creation Date ..... 1403
Credit Limit ..... 2090
Criterion ..... 260
CRYO ..... 1217
Cryo Prd ..... 1212
CRYO Worksheet ID ..... 1215
Ctrl ..... 1445, 1454
Ctrl Ind ..... 1439
Ctrl Value ..... 1353
Ctrl/Reagent ..... 1450, 1452, 1454
CUE ..... 1072
Current ..... 2018
Current CUE ..... 1121
Current Label ..... 1485
Current Label Printer ..... 1261, 1502
Current Status ..... 1726, 1738
Current Unit ID ..... 1338
Customer ..... 1875
Customer field ..... 2097
Customer ID ..... 2089
D/F ..... 1542
Data ..... 1733, 1736
Data Type ..... 1359
Datatype ..... 260, 1750
Day ..... 1880
Day Phone ..... 2093
Debit/Credit ..... 2064, 2067
Default Op ..... 260
Del ..... 1165, 1300-1301, 1303-1304
Delete ..... 1106, 1215, 1309
Delete Component? ..... 1259
Derived Product ..... 1159, 1163
Desc Text ..... 260
Destin ..... 1459
Destined ..... 1211-1212, 1217
Device# ..... 1992
Discard Dest ..... 1913, 1917
Discard Order ..... 1913, 1917
Discount ..... 2090
Disposition ..... 1440
Do you want the pack list to be printed? ..... 2056
Does the unit have a permanent assertion? ..... 2140
Donor ->LAB interface done on ..... 2135
Donor Card ABO ..... 1068, 1100
Donor CUE ..... 1100
Downtime Type ..... 1730, 1741
Drive ID ..... 1067, 2139
Drive Name ..... 1072
Drv ID ..... 1072
DType ..... 1157
E ..... 2121
EDI Input ..... 1684, 1690, 1706
EDI Input? ..... 1542
Edit ..... 1386
Edit Chrgs ..... 1541
Edit Reason ..... 1353

EDN Flag ..... 2081
EFF ..... 1548
Emergency Label ..... 1485
Emergency Reason Code ..... 1486
Emp ID ..... 1753
Enlistment ..... 259
Enter Date ..... 1424
Enter Extract Time ..... 1591
Enter No. of Test Recheck-In ..... 1456
Enter Pack List Printer Id ..... 2056
Enter Supplier Code ..... 1434
Equip Type ..... 1189
Equipment ID ..... 1742, 1754, 1758
Equipment Ref No ..... 1726, 1729, 1731, 1738, 1740, 1754, 1762, 1764
Equipment Ref No. ..... 1752
Equipment Reference No. ..... 1758
Equipment Type ..... 1181, 1726, 1729, 1731, 1735, 1737, 1740, 1745, 1748, 1750, 1752, 1758, 1762, 1764, 1766
Equipment Type ID ..... 1742
Equipment Type Status ..... 1758
Event ID ..... 1729, 1740
EX ..... 1548
Exp Date ..... 1241, 1439, 1443, 1446, 1448, 1452, 1454, 1459, 1501
Exp. Date Time ..... 1445
Expiration Date 1223-1224, 1237, 1240, 1247, 1255, 1450
Expired ..... 2038
Expires ..... 1368
Export Flag ..... 1727, 1739
External Unit ID ..... 1700, 1712, 1715
Facility ..... 1222
File Name ..... 1202
Filter ..... 1229
Filter Lot No. ..... 1239, 1251
Filter Lot# ..... 1158
Find Source ..... 1836
First Production Date ..... 1753
First Tech ..... 1366, 1369
Flight No ..... 2054
Found ..... 1789
Found in [Blank] Sets ..... 1277
Freeze Date ..... 1217
Freeze Start ..... 1139, 1149
Freeze Time ..... 1213
Frm Coll ..... 1270
From Upload Date ..... 1430
Frz Time ..... 1222
Ftype ..... 1158
Generate RSM Report ..... 1583, 1591
Group ..... 1551, 1696, 1748, 1829
Group ID ..... 1552, 1748
Group/Site ..... 1099
Hosp ..... 1271
Hospital ..... 1831
Hrs ..... 1855
Hspt Level ..... 2090
IC field ..... 1998
Ignore Class ..... 1837
Ignore NT ..... 1416
Include Units w/o Results ..... 1621
Initial Platelet Count ..... 1181
Initial Prod Vol ..... 1181
Inst Message ..... 1190
Instrument Message ..... 1190
Inter Exist ..... 2137
Inter Prod Code ..... 1182, 1189, 1194

Inter Stat ..... 2137
Inter Type ..... 1298, 1301, 1303, 1305
Interdicted? ..... 2038
Interdiction ..... 1297
Interdiction Code ... 1298, 1300-1301, 1303-1304, 1307, 1309
Interdiction Type ..... 1309
Interface ID ..... 2137
Interim ..... 1570, 1610
Internal Unit ID ..... 1601, 1700, 1712
Interp ..... 1756
Inv Class ..... 2024
Inv Level ..... 2105
Inventory Class ..... 1976, 2044, 2119
InvTp ..... 2112
IR ..... 1571
Ires ..... 1578
Join ..... 261
Kit ..... 1365, 1368, 1437
Kit ID ..... 1442, 1447, 1450-1451, 1454
Kit Lot ..... 1439
Kit Lot No ..... 1445
Label Type ..... 1499
Labeled ..... 1173
Labeled? ..... 2039
Last Modified by ..... 1753
Lbl ..... 1708
Licensed/Approved ..... 1440
Lifespan ..... 2097, 2108
Local Rslt ..... 1556
Location ..... 1445, 1727, 1738
Locn ..... 1759
Lot ..... 1072
Lot Number ..... 1100, 1167, 1222, 1241, 1368, 1443, 1446, 1448, 1450, 1452, 1454, 1459, 1461, 1789
Lot Type ..... 1788
LOV SQL ..... 260
LOV Title ..... 260
M/C ..... 1157
Machine ..... 1069, 1101, 1167, 1424
Manufacturer ..... 1241, 1368, 1727, 1739
Max ..... 1362
Max Accept ..... 1747
Max Temp ..... 1071, 1439, 1566, 1711
Mfg ..... 1229
Min Temp ..... 1071, 1439, 1566, 1711
Min. Accept ..... 1746
Mod Dt ..... 1539
Mode ..... 1306, 1308, 1844
Modified by ..... 1749
Modify Date ..... 1360
Modify? ..... 1700
Need by ..... 1270
New Bag? ..... 1229
New Coll Dt ..... 1107
New Contract ID ..... 1699
New Prd ..... 1244
New Product ..... 1230, 1293
New Product Code ..... 1246
New Profile ..... 1700
Night Phone ..... 2093
No of Bags ..... 1196
No of Dup ..... 1542
No of Labels ..... 1261
No Results ..... 1574
No. of Tests ..... 1440

No. of Units ....1157, 1222
Notes for the Component ....1249
Notes for the Unit ....1313
Notes on UNIT ....1349
NP-EF ....1543
NSF ....2117
Number of Bags ....1167, 1276
Number of Items ....1167
Number of Units ....1103
Number of Unscheduled units in this worksheet ....1520
Number ofUnits ....1105
O ....2112, 2121
OK ....1213, 1217
Old Coll Dt ....1107
Old Contract ID ....1699
Old Profile ....1700
Operator ....260
Operator ID ....1190
Opt ....1568
Option ....1559
Order ....1855
Order No ....1826, 2068
Orig Product Code ....1243, 1246
Original Product ....1159, 1162
OS Purp 1 ....1560
OS Purp 2 ....1560
OS Red ....1559
OS Unit ....1773
OS Unit ID ....1568, 1601, 1693
Other Bands ....1345, 1348
Out ....1446, 1448, 1459
Out of State ....2087
Outdate as of field ....1998
Outdate Pickslip ....2058
Outside Unit ID ....1582, 1590
Override Code ....1110
P1 ....1563, 1575, 1695
P2 ....1563, 1575, 1695
Packed ....1878
Parameter Description ....1750
Parm ID ....1585, 1590, 1594, 1598
Pass ....261
Patient ....1271, 2067
Patient ID ....1221
Patient Name ....1222
Payee ID ....2082-2083
Pick Slip ID ....1998
Pick Slip Type ....1953
Pkg Insert Date ....1440
Plasma File Type ....1951, 2081
Plastic ID ....1246
Plat/Batch/Worksheet ID ....1383
Plate Capacity ....1541
Plate/Batch/Worksheet ID ....1413
Plate/Batch/WS ....1406
Platelet Count ....1197
PO Number ....1540, 2090
Pool ID ....1221, 1268
Pool Product Code ....1222
Pool Unit ID ....1221
Pool Weight ....1224, 1230
Pooled ABO/Rh ....1222
Pooling Time ....1222
PrdTp ....2111
Prep ....1437
Pri ....1811

Price ..... 2123
Price Change ..... 2081
Prior ABORh test result ..... 2140
Priority ..... 1843, 1875
Process ..... 1175, 1228, 1251
Process Code ..... 1236, 1238, 1240, 1243, 1245, 1247, 1249, 1253, 1255
Process Date ..... 1151, 1159, 1163, 1230, 1243, 1255, 1289, 2005
Process Date Time ..... 1181
Prod ..... 1501, 1844
Prod Category ..... 1180
Prod Code ..... 1197
Prod Found ..... 2032
Prod Type ..... 1711
Prod Weight ..... 1181
PRodt ..... 1828
Product ..... 1136, 1138, 1143, 1145, 1149, 1154, 1166, 1170, 1173, 1224, 1228, 1236, 1238, 1240, 1247, 1251, 1253, 1255, 1258, 1289, 1293, 1299, 1477-1478, 1484, 1494, 1510, 1712, 1836, 2108
Product Code ..... 1082, 1085, 1087, 1180, 1233, 1249, 1261, 1297, 1301, 1303, 1311, 1486, 1499, 1715-1716, 1994, 2024
Product Code and Description ..... 2111
Product Type ..... 1103, 1135, 1162, 1169, 1276, 1877, 2024, 2097, 2119
Prof Set ..... 1605
Prof Tests ..... 1562
Profile Seq ..... 1566, 1617
Profile Set ID ..... 1577, 1617, 1699-1700
Program ..... 1426
Purple 1 ..... 1560, 1693
Purple 2 ..... 1693
Purple Top ..... 1078
Purple Top Tube ..... 1076
Purple Tube Count ..... 1684, 1690
QC ..... 1096, 1454-1455, 1575, 1868
QC Date ..... 1100, 1753
QC Exp ..... 1443
QC for Labeling ..... 1521, 1525
QC Frequency ..... 1451
QC Performed Every ..... 1746
QC Procedure ..... 1733, 1736, 1755
QC Ref No ..... 1732, 1735, 1754
QC Results 1 ..... 1733
QC Results 2 ..... 1736
QC Status ..... 1100, 1733, 1736, 1753, 1767
QC Tech 1 ..... 1732, 1755, 1766
QC Tech 2 ..... 1736, 1755, 1766
QC Type ..... 1732, 1736, 1742, 1745, 1753, 1755, 1766
Qty ..... 1828, 2123
Qualification Approved By ..... 1752
Qualification Approved On ..... 1752
Quarantine Release Type ..... 1992
Quarantine Type ..... 2032
R ..... 1360, 2112
R Type ..... 1436
R/I/O ..... 1078
R1 ..... 1563, 1575, 1693, 1695
R2 ..... 1563, 1575, 1695
Ratio ..... 1386
RBC Content ..... 1181
Rcvd Date ..... 1460, 1463
Reactive ..... 1417
Reagent ..... 1229, 1241
Reagent Code ..... 1460
Reagent ID ..... 1439, 1444, 1456, 1461

Reagent Lot ..... 1439
Reagent Name ..... 1368, 1437
Reagents ..... 1448, 1459
Reason ..... 1087, 1459, 1568, 2068
Reason and Desc ..... 1990
Reason for Rejection ..... 1140
Received Date ..... 1439
Receiving Facility ..... 2007
Recon ..... 1087
Recon Details ..... 2018
Red ..... 1560
Red 1 ..... 1693
Red 2 ..... 1693
Red Top ..... 1078
Red Top Tube ..... 1075
Red Tube Count ..... 1684, 1690
Ref No. ..... 1753
Reference ..... 1758, 1766
Registration Number ..... 1721
RejCd ..... 1989
Reject Cd ..... 1143
Reject Reason ..... 1440
Rejected? ..... 2039
Rejection Reason ..... 1994
Rel ..... 1362
RelCd ..... 1360
Remarks ..... 1081, 2013
Report OD? ..... 1541
Req ..... 1547, 1687, 1845
Req? ..... 1750
Required for Qualification ..... 1746
Reset ..... 1594
Restock ..... 1992
Result ..... 1353, 1386, 1578
Result 1 ..... 1755
Result 2 ..... 1755
Result Code ..... 1332, 1334, 1339
Result Ind ..... 1706
Result Intp Desc ..... 1344
Result IntpDesc ..... 1347
Result Type ..... 1582
Results Ind ..... 1684, 1690
Results QC User ..... 1566
Results Typ ..... 1542
Return ID ..... 1984
Return Reason Code ..... 1985
Return/Accpt ..... 2080
Review Required ..... 1745
Rgt Exp Date ..... 1229
Rgt. Lot # ..... 1229
RMAP ..... 1555
Rotation Flag ..... 2090
Rslt ..... 1590
Rslt Ind ..... 1541
Rsn ..... 1448
RTyp ..... 1436
Run ID ..... 1364, 1368
S ..... 1458, 1845
Same as Customer ..... 2086
Sample Unit ID ..... 1528
Samples ..... 1565
Scan ABO ..... 1225, 1231, 1491, 1495, 1511
Scan Exp Date ..... 1226, 1231-1232
Scan Exp/Prod ..... 1231
Scan Prod ..... 1226, 1231
Scan Prod/Exp ..... 1226

Scan SP Test ..... 1226, 1232
Scan Unit ID ..... 1225, 1231, 1491, 1495, 1511
Scan Unit/ABO ..... 1225, 1231
Scan unit/ABO ..... 1491, 1495, 1511
SCD Worksheet ID ..... 1164
Schedule ..... 1764
Scheduled ..... 1729
Scheduled Event ..... 1741
Sel ..... 1847, 1988
Sel, Quarantine Reason and Description ..... 1992
Select Label Printer ..... 1502
Select Reagents By ..... 1458
Sent From ..... 1123, 2020
Sent To ..... 1087, 1123, 2020
Separation, First ..... 1151
Separation, Second ..... 1151
Separation,First ..... 1133
Separation. Second ..... 1133
Seq ..... 1075, 1078, 1209, 1327, 1331, 1334, 1338, 1362, 1559, 1578, 1711, 1750, 2139
Seq No. ..... 1072, 1082, 1215, 1223, 1336, 1353, 1365, 1369, 1746
Serial No ..... 1189
Serial No. ..... 1069, 1101, 1758
Serial Number ..... 1727, 1738
Service CD ..... 2067
Service Company ..... 1741
Service Contact ..... 1727, 1739
Service Person ..... 1730, 1741
Service Type ..... 1741
Set ID Lot No ..... 1190, 1197
Ship Bill # ..... 1710
Ship to ..... 1843
Shipment age ..... 1863
Shipment Date ..... 2053
Shipment No ..... 1942, 2053
Shipped? ..... 2039
Short Name ..... 1160, 1163
Show Cancel ..... 1417
Show Discard and MFG Customers? ..... 1955
Show Expired ..... 1442
Show Term ..... 1682, 1688
Show Terminated ..... 1434, 2079
Show Terminated? ..... 1436, 1538, 2086
Skipped Units ..... 1573
SLD ..... 1224
Source ID ..... 2154, 2156
Source Table ..... 260
SP Test ..... 1478
SP. Testing ..... 1501
Spiking Type ..... 1251
Sq ..... 1386
SQC ..... 1574
Srv Cd ..... 1859
Srv Code ..... 2123
Srvc Code ..... 2112
Stage ..... 1240, 1247
Standard Price ..... 2097, 2108
Start ..... 1593
Start Extract ..... 1585
Starting Seq ..... 1327
Stat ..... 1762, 1764, 1766, 1843, 1875
Status ..... 1759
Status, illumination ..... 1190
Status, suitability check ..... 1182
Storage Loc ..... 1440
Sub ..... 1864

Sup ..... 1337, 1351
Super ..... 1455
Supervisor ..... 1351, 1354
Suppl ..... 1459
Supplier ..... 1439, 1443, 1450, 1452, 1454, 1463
Supplier Name ..... 1434
suppliers ..... 1448
Surg Dt ..... 1271
Susp Type ..... 1180
T ..... 1707
T1 ..... 1351
T2 ..... 1351
Target ..... 1733, 1736
Target Data ..... 1755
Target Value ..... 1746
Tax ID Form ..... 1541, 1683, 1689, 1706
TB ID ..... 1353
TB/WS# ..... 1331
Tech 1 ..... 1354
Tech 1 Result ..... 1337
Tech 2 ..... 1354
Tech 2 Result ..... 1337
Tech1 ..... 1362, 1450, 1454
Tech2 ..... 1362, 1452, 1454
Temp ..... 2013
Term Date ..... 1360, 1363, 1434, 1706
Test ..... 1413, 1458
Test ABO ..... 1485
Test Batch ID ..... 1364, 1368, 1386, 1403, 1428
Test Batch/ Worksheet No. ..... 1326, 1334
Test Batch/Worksheet ID ..... 1329
Test Description ..... 1552
Test ID ..... 1327, 1329, 1331, 1334, 1336, 1339, 1343, 1347, 1353, 1355, 1361, 1364, 1368, 1383, 1386, 1394, 1397, 1402, 1406, 1416, 1421, 1424, 1428, 1436, 1438, 1442, 1444, 1447, 1449, 1451, 1453, 1456, 1460, 1528, 1547, 1550-1551, 1556, 1570-1571, 1578, 1590, 1610, 1686, 1707
Test ID (Internal Code) ..... 1554, 1556
Test Kit ..... 1329, 1331
Test Kit ID ..... 1327
Test Result ..... 1529
Test Type ..... 1347, 1350
Test/Group ID ..... 1394
Tested ABO ..... 1478, 1511
Tested? ..... 2039
Testing Chapter ..... 1520
Tests ..... 1445
Thaw Method ..... 1211, 1217
Thaw Temperature ..... 1217
Tier ..... 2095, 2109
Tier Days ..... 2098
Time ..... 1594
Title Text ..... 261
TMAP ..... 1553
TMax ..... 1445
TMin ..... 1445
Tmp ..... 1211
To Coll ..... 1270
To Upload Date ..... 1430
Total Bags ..... 1264
Total Outdates ..... 1998
Total Tests ..... 1365, 1368
Total Units ..... 1573
TQC ..... 1574
Track No ..... 2054
Transmit ALL Test Results? ..... 1528

Tray ....1992
Treatment Date .... 1190
Treatment Time ....1190
TS .... 1571, 1590
TSN ....1529
Tube Check-In Format ....1075
Tube Date .... 1605
Typ .... 2121
Type .... 1297, 1343, 1353, 1361, 1439, 1443, 1719, 1875
Unit Count .... 1605, 1610, 1711
Unit ID .....1111, 1180, 1189, 1194, 1212-1213, 1577
Unit ID in Pool .... 1233
Unit ID Pattern .... 1684, 1690, 1706
Unit Pattern .... 1541
Unit Price ....2095, 2098, 2109
Unit Scheme ....1541, 1683, 1689, 1706
Units ....1746
Units in Batch ....1118, 1608
units in this batch ....1397
Units Missing Tubes .... 1608
Unpack Slip ID ....1981
Usage Day/Weeks .... 1727, 1738
Usage Hour/Days ....1727, 1738
Used Credit .... 2090
User ....1435, 1551
Valid Range .... 1733, 1755
Valid range ....1736
Valu ....1458
Value .....1306, 1309, 1365, 1369, 1739, 1755
Value Obtained .... 1733, 1736
Verify ....1197
Visual QC? ....1440
VM/NAT/Both ....1078
Void ....1360
Void Code .... 1383
Vol .... 1146, 1197, 1224, 1230
Vol Type Set ....1181, 1190, 1197
Volume ....1136, 1171
Vrfy Prd .....1136, 1143, 1160, 1163, 1171, 1213, 1244
Vrfy Unit ID and Lbl ....1144
Wafer Lot .... 1157, 1167
Warehouse ....2024
Was the Donor verified in donor system? ....2140
WDay ....1851
Weight .... 1136, 1146, 1171, 1197
Weld ....1167
Weld OK .... 1160
Where Clause .... 261
Wi ....1547
Worksheet ID .....1208, 1336, 1338, 1343, 1347, 1350
Worksheet No. .... 1166
Zone ....2087
File Name field .... 1202, 2142
File, Upload Automatically ....1204
File, Upload Manually ....1201
Filter button .... 789
Filter field .... 1229
Filter Lot No. field ....1239, 1251
Filter Lot# field ....1158
Final Transfer, Storage ....1193
Finance Interface Details (DUMPI) ....1896
Find button .... 57
FIND DONOR ....990
Find Donor (FIND DONOR) .... 990
Find Donor button ....724
Find Donor window .... 61
Find Menu Tree (TREE) .... 66

Find Source field ..... 1836
Find Units And Products (FINDU) ..... 2037
FINDU ..... 2037
First Production Date field ..... 1753
First Tech field ..... 1366, 1369
First Tech Test Result (RES1) ..... 1330
First Time and Gallon Donor Labels (DLABEL) ..... 869
First/Last Unit ID field ..... 306
FIXDR2 ..... 292
Fixed Profile Tube Check-In (TSTUBES) ..... 1691
Fixed Site Drives Data Query (FDRIVEQ) ..... 284
Fixed Sites button ..... 180
FIXQ ..... 279
FIXSTAFF ..... 295
Flight No field ..... 2054
Found field ..... 1789
Found in [Blank] Sets field ..... 1277
Freeze Date field ..... 1217
Freeze Details button ..... 1784
Freeze Start field ..... 1139, 1149
Freeze Start Time (FRZ) ..... 1137
Freeze Time field ..... 1213
Frm Coll field ..... 1270
FROMTEMP ..... 98
FROZP master code ..... 1138
FRZ ..... 1137
Frz Time field ..... 1222
Ftype field ..... 1158
Full Eligibility button ..... 529, 928
function key ..... 41
functions, maintenance
HLA/RBC ..... 794
future effective date ..... 8

## G

GALLON_VAL system parameter ..... 494, 918
Generate button ..... 294, 995, 1014
Generate Labels button ..... 871
Generate Notification Letter (DNWSNDLT) ..... 994
Generate Outdates Picklist (OUTDATE) ..... 1997
Generate RSM Report field ..... 1583, 1591
GENXML ..... 1948
Goal button ..... 947, 1015
Goal Information (MRWRPERF) ..... 997
Goal Statistics button ..... 176
Goal Type field ..... 178
GOALDTQ ..... 181
GOALMONQ ..... 177
Goals vs Proj vs Actual Collections (BBQ) ..... 216
GPPDON ..... 725
GPPUNIT ..... 731
GPRDON ..... 728
GPRUNIT ..... 734
Graded Donors Query (GRADEQ) ..... 764
GRADEQ ..... 764
Group field ..... 1551, 1696, 1748, 1829
Group ID field ..... 1552, 1748
Group/Site field ..... 1099

## H

Health History and Physical Findings ..... 523
health history questions, answer ..... 550
help line ..... 62
HGHT master code ..... 356, 363, 495, 507, 918, 924
HGHT system parameter ..... 495, 918
HH Answer button ..... 332
HH/PHY button ..... 519
HHPFC master code ..... 524
Hide Attributes button ..... 963
Hide AUX Units button ..... 962
Hide Donors button ..... 990
Hide Letter button ..... 874
Hide Term button ..... 755, 983
Hide Units button ..... 948, 989

HILITE ..... 150
history, password strong ..... 16, 450
HLA/RBC maintenance functions ..... 794
HLA/RBC Request Query (REQUESTQ) ..... 786
HLAC master code ..... 798, 800
HLAEPI ..... 796
HLAGR master code ..... 798, 800
HLAGRAD ..... 798
HLAINT ..... 803
HLANTI ..... 794
HLARESUL ..... 784
HLAXX ..... 801
HLSTD master code ..... 796
Hold button ..... 993
hold code ..... 752
Hold Code field ..... 753
Hold Details ..... 393
Hold Details button ..... 393
Hold Reason button ..... 423, 430, 433
HOLDQ ..... 1401
Hosp field ..... 1271
Hospital field ..... 1831
Hospital Returns (RETURN) ..... 1983
Hospital/Patient Ad Hoc Testing Contract (AHCNTR) ..... 1687
Hospital/Patient Contract Profile Tests (TSTEST) ..... 1685
Hospital/Patient Testing Contract (TSCNTR) ..... 1681
Hrs field ..... 1855
Hspt Level field ..... 2090

I

IC field ..... 1998
ID_VERIFY system parameter ..... 495
IDPSR master code ..... 1038-1039, 1055-1056
IDPTP master code ..... 1038-1039, 1055, 1057
IDPTR master code ..... 1038-1039, 1055-1056
IDPTV master code ..... 1038-1039, 1055, 1057
IELQ ..... 1425
Ignore Class field ..... 1837
Ignore NT field ..... 1416
ILOGQ ..... 2130
IMCONTR ..... 1703
IMPCORR ..... 1714
IMPORT ..... 1708
Imported Blood Contract (IMCONTR) ..... 1703
Imported Blood Product Check-In (IMPORT) ..... 1708
Include Units w/o Results field ..... 1621
indicator, reactive unit ..... 1574
Informational Messages ..... 63, 470
Initial Platelet Count field ..... 1181
Initial Prod Vol field ..... 1181
Initial Sterile Docking button ..... 1183
Initiate Hospital Transfer (TRANS1) ..... 1862
Inquiry button ..... 515
Inst Message field ..... 1190
instructions to a sponsor ..... 123
Instrument Error Log Query (IELQ) ..... 1425
Instrument Message field ..... 1190
Instrument Upload Log Query (IULQ) ..... 1423
Int Address (check box) ..... 1539, 1705
Inter Exist field ..... 2137
Inter Prod Code field ..... 1182, 1189, 1194
Inter Stat field ..... 2137
Inter Type field ..... 1298, 1301, 1303, 1305
Interdicted Active Stock (PINTQ) ..... 2033
Interdicted? field ..... 2038
Interdiction Code field ..... 1298, 1300-1301, 1303-1304, 1307, 1309
Interdiction field ..... 1297
Interdiction Query (LINTQ) ..... 1285
Interdiction Type field ..... 1309
interdiction, placing a unit ..... 707
Interdictions ..... 8, 444, 718
Interdictions button ..... 718, 724, 744, 749, 763, 844, 847, 852, 865, 868, 943, 995

Interdictions Query (INTQ) ... 750
Interface ID field ... 2137
Interim field ... 1570, 1610
Interim Results Query (IRQ) ... 1609
Intermediate Process ... 1187
Internal Unit ID field ... 1601, 1700, 1712
International Address (DPWIADDR) ... 998
Interp field ... 1756
Intl Addr (International Address) button ... 118, 122, 309
INTQ ... 750
INTRFEMALE ... 692
INTRMALE ... 692
Inv Class field ... 2024
Inv Level field ... 2105
Inventory Class field ... 1976, 2044, 2119
INVEST ... 715
Investigate Duplicate Donor Records (INVEST) ... 715
INVREJ ... 1993
InvTp field ... 2112
IR field ... 1571
Ires field ... 1578
IRQ ... 1609
ISBT Unit Check Digit (DNWISBTQ) ... 914
ISBT Unit Check Digit Query (ISBTQL) ... 1789
ISBTQL ... 1789
ITEMS ... 153
IULQ ... 1423

## J

Join field ... 261

## K

keyword
LABIN ... 2127
MUNOTE ... 1790
keywords
ADDDONOR ... 682
ADDIN ... 1297
AG ... 1337
AGPRICE ... 2122
AHCNTR ... 1687
AHTUBES ... 1694
AIIDNDRV ... 2137
ALLUN ... 1877
ANTQ ... 791
ANTQ2 ... 761
ANTQL ... 1418
ANYLOTQ ... 1788
APICONV ... 1038, 2155
APILOG ... 1034, 2153
APITDQ ... 1032
APIUPLD ... 2141
APPT ... 265
APQ ... 2022
ATTACH ... 408
ATTR ... 2004
ATTRQ orATTRQ2 ... 1283
AUATTR ... 1290
AUROLL ... 398
AUTO ... 1830
AUTOQ ... 1269
BATCH ... 1978
BATCHDQ ... 1115
BATCHEXQ ... 1117
BATCHQ ... 1113
BBQ ... 216
BIPQ ... 1618
BOXDTQ ... 1959
BPQ ... 1276
CAC ... 18
CALEN ... 84

CANCEL ..... 1842
CANDRIVE ..... 102
CANSF ..... 292
CANSPDRV ..... 144
CATTR ..... 2116
CDCAN ..... 2069
CDPROD ..... 2063
CDQ ..... 207
CDQL ..... 2072
CDSVC ..... 2066
CHARGE ..... 1858
CHCLASS ..... 2002
CHECKEXQ ..... 1119
CHGBAGS ..... 1174
CHKDIS ..... 1995
CHKIN ..... 1975
CHKOFF ..... 2043
CHKOQC ..... 1446
CHKOUT ..... 1457
CHLBP ..... 1469
CITYQ ..... 911
CLBOX ..... 1932
CMCI ..... 1161
CMPINT2 ..... 1296
CNOTE ..... 1310
COLLDATE ..... 1106
COLLID ..... 1718
COMPATT ..... 1288
COMPENTI ..... 1133
COMPQ ..... 1263, 1266
COMPWT ..... 1144
CONFIRM ..... 137
CONTACT ..... 2091
CONTRACT ..... 2088
CONV ..... 1244
CONVI ..... 1242
CPPTIER ..... 2094
CPROD ..... 2110
CPU ..... 220
CPUQ ..... 223
CRYO1 ..... 1207
CRYO2I1 ..... 1210
CTREC ..... 158
CUEOVR ..... 1108
CUEQ ..... 1121
CUO ..... 1854
CUSTIER ..... 2096
CUSTOMER ..... 2078
DCATTR ..... 1292
DCOLLQ ..... 441
DCOMQ ..... 865
DCONVERT ..... 1856
DCQ ..... 286
DCWDCOMM ..... 950
DCWLOOKS ..... 986
DCWSNDLT ..... 1013
DCWVWLTR ..... 948
DEFAUDIT ..... 334
DEFDET ..... 405
DEFHOLDQ ..... 431
DEFMAINT ..... 361
DEFPENDQ ..... 437
DEFQ ..... 423
DEFREGIS ..... 317
DELCON ..... 1947
DELCRYO ..... 1214

DELPOOL ..... 1232
DELQ ..... 1964
DELSCD ..... 1164
DELUNIT ..... 1110
DEQ ..... 861
DETACH ..... 401
DEWCRITN ..... 1021
DEWDONBR ..... 1018
DEWDONRS ..... 1019
DIFF ..... 1246
DIRESET ..... 2134
DISMTBAG ..... 1139
DLABEL ..... 869
DNWDCOMM ..... 1003
DNWDFIND ..... 1010
DNWELIGB ..... 980
DNWLTQRY ..... 955
DNWSNDLT ..... 942, 994
DNWVWL ..... 1001
DONAUDIT ..... 326
DONHOLDQ ..... 427
DONINT ..... 2139
DONIQ ..... 755
DONNOTE ..... 840
Donor Card ABO ..... 1070
DONPATT ..... 693
DONPENDQ ..... 435
DONPINT ..... 699
DONRATT ..... 696
DONRINT ..... 703
DONSQ ..... 275
DPAQ ..... 767
DPWAADDR ..... 938
DPWDCARD ..... 958
DPWDEMGR ..... 976
DPWDNDTL ..... 960
DPWDNINT ..... 981
DPWDNTST ..... 964
DPWELGBY ..... 979
DPWHLDRN ..... 988
DPWPROPR ..... 975
DRAW2Q ..... 281
DRAWQ ..... 203
DRIVE ..... 89
DRIVELOC ..... 104
DRIVEQ ..... 164
DRSPONQ ..... 191
DRVCHK ..... 112
DRVCUST ..... 109
DRVMOD ..... 96
DRWAUDIT ..... 973
DRWCSTAT ..... 945
DRWDEFRL ..... 954
DRWENTRY ..... 957
DRWHOLDS ..... 966
DRWNOTES ..... 968
DRWSSTAT ..... 1014
DSCE ..... 1065
DSCE 2 ..... 1065
DSWASLOT ..... 971
DSWAVSIT ..... 970
DSWDONIS ..... 984
DSWEQUIP ..... 940
DTUBE ..... 1104
DUATTR ..... 1294
DUMPI ..... 1896

DUPQ ..... 761
EDIT ..... 1385
EDITOBS ..... 1352
EDITSP ..... 1250
EDLET ..... 872
EGRPINT ..... 1305
EIRC ..... 1569
EMGREL ..... 1483
EMP ..... 417
ENTRYQ ..... 420
EQACCESS ..... 1747
EQC1 ..... 1730
EQC2 ..... 1734
EQCHISTQ ..... 1765
EQCONFIG ..... 1749
EQDET2 ..... 1725
EQEDIT ..... 1737
EQEDTMN ..... 1739
EQMAINT ..... 1728
EQMAINTQ ..... 1761
EQSHISTQ ..... 1763
EQSTATQ ..... 1757
EQSUPQC ..... 1753
EQUALIF ..... 1751
EQWORK ..... 1742
EQWS ..... 1744
EXTRACT ..... 1580
EXTRACTD ..... 1036
FCODE ..... 2113
FDRIVEQ ..... 284
FIND DONOR ..... 990
FINDU ..... 2037
FIXDR2 ..... 292
FIXQ ..... 279
FIXSTAFF ..... 295
FROMTEMP ..... 98
FRZ ..... 1137
GENXML ..... 1948
GOALMONQ ..... 177
GPPDON ..... 725
GPPUNIT ..... 731
GPRDON ..... 728
GPRUNIT ..... 734
GRADEQ ..... 764
HILITE ..... 150
HLAEPI ..... 796
HLAGRAD ..... 798
HLAINT ..... 803
HLANTI ..... 794
HLARESUL ..... 784
HLAXX ..... 801
HOLDQ ..... 1401
IDNWISBTQ ..... 914
IELQ ..... 1425
ILOGQ ..... 2130
IMCONTR ..... 1703
IMPCORR ..... 1714
IMPORT ..... 1708
INTQ ..... 750
INVEST ..... 715
INVREJ ..... 1993
IRQ ..... 1609
ISBTQL ..... 1789
ITEMS ..... 153
IULQ ..... 1423
LABEL ..... 1508

LBLOVR ..... 1480
LBLOVRQ ..... 1530
LBLQC ..... 1519
LBLRSH ..... 1488
LBLUNQC ..... 1523
LBWHIN ..... 1083
LBWHOUT ..... 1079
LBWHQ ..... 1122
LBWHRCL ..... 1085
LETQ ..... 854
LEVEL ..... 2104
LEVELQ ..... 2118
LINKL ..... 1527
LINTQ ..... 1285
LIST ..... 229
LISTBR ..... 235
LISTPRI ..... 249
LISTQ ..... 241
LISTTYP ..... 255
LSUPER ..... 244
LTRCNFWS ..... 1356
LTRWKSHT ..... 1339
MCODE ..... 296
MCWABODR ..... 936
MCWABOSP ..... 937
MDONQ ..... 745
MDONQ2 ..... 861
MDRIVEQ ..... 169
MERGDON ..... 720
MOBPCUD ..... 1040
MODBATCH ..... 1102
MODCRYO ..... 1216
MODDRV ..... 414
MODDSC ..... 1097
MODFRZ ..... 1148
MODKYDAT ..... 689
MODPOOL ..... 1227
MODSCD ..... 1165
MODSEP ..... 1146
MODTSCON ..... 1698
MORDQ ..... 1890
MOVEOUT ..... 1999
MRWPADRV ..... 1005
MRWROLLP ..... 1017
MRWRPERF ..... 997
MSTUBEQ ..... 1607
NDONQ ..... 848
NEBQ ..... 1611
NHOLD ..... 387
NOTE ..... 1248
NOTEQ ..... 909
NT ..... 1393
OBS1 ..... 1342
OBS2 ..... 1346
OBSQ ..... 1354
OCHGQ ..... 1892
OCQ ..... 1874
ODTOFF ..... 2057
OFLOW ..... 1881
OKBOXQ ..... 1957
OPENBOXQ ..... 1954
OPENQ ..... 1870
ORDER ..... 1809, 1825
ORDQ ..... 1884
OUTDATE ..... 1997
PACK ..... 1901

PACKLD ..... 1920
PACKLS ..... 1926
PACKO ..... 2046
PACKOD ..... 1912
PACKOS ..... 1916
PACKRP ..... 1909
PAGQ ..... 2035
PAUDIT ..... 350
PAYEE ..... 2082
PENDCRY ..... 1266
PHERI ..... 1168
PHISTQ ..... 2025
PHY ..... 901
PICKQ ..... 1952
PINTQ ..... 2033
PLCOUNT ..... 1172
PLPIQ ..... 1268
POOL ..... 1219
PQU ..... 1989
PRELBL ..... 1492
PRMGR ..... 1176
PRODQ ..... 2028
PSPONQ ..... 189
QCCHK ..... 1093
QUQ ..... 2031
RCHKIN ..... 1455
RCHOLD ..... 1298
RCINT ..... 1300
RCSYSINT ..... 1302
REAG ..... 1239
REAGENT ..... 1328
REAGQ ..... 1420
RECHECK, RECHECK2, or RECHK2 ..... 1153
RECHK2 ..... 1260
RECOBS ..... 1349
RECQ ..... 174
REGIS ..... 304
Register Deferral ..... 317
REGMAINT ..... 354
REGTUBES ..... 1557
REJECT ..... 1141
REPLBL ..... 1498
REQ ..... 1614
REQUEST ..... 776
REQUESTQ ..... 786
RES2 ..... 1333
RESKIP ..... 1567
RESTOCK ..... 1980
RESULQ ..... 760
RESXP ..... 147
RETURN ..... 1983
REXTRACT ..... 1589
RGCON ..... 1537
RGMODBAT ..... 1564
RGPRINT ..... 1307
RGPROFQ ..... 1616
RGQRY ..... 1459
RGRQC ..... 1571
RGTUBEQ ..... 1604
RKNPQ ..... 1441
RLINT ..... 394
RPREP ..... 1443
RQU ..... 1991
RQU2 ..... 1986
RSP ..... 1252
RSTATQ ..... 212

RSUPER ..... 1452
RTECH1 ..... 1449
RTECH2 ..... 1450
RTQ ..... 214
RUNT ..... 1431
RUSYSINT ..... 1303
SALLO ..... 1833
SAMPQ ..... 1625
SAYQ ..... 199
SBYTQ ..... 183
SDD ..... 1155
SDONQ ..... 737
SDRIVE ..... 140
SEARCH ..... 258
Select to Terminate ..... 706
SEP ..... 1131
SEPO ..... 1150
SETDRV ..... 915
SHIP ..... 1935
SHIPD ..... 1941
SHIPO ..... 2052
SHIPQ ..... 1967
SLINK ..... 884
SLIST ..... 251
SNDHCLL ..... 2006
SPCONQ ..... 187
SPCQ ..... 1427
SPDRIVE ..... 141
SPDRIVE2 ..... 292
SPECIAL ..... 1818
SPIKE ..... 1237
SPMRG ..... 160
SPON2 ..... 116
SPONCHK ..... 130
SPONCONT ..... 126
SPONROLL ..... 132
SPQ ..... 1273
SPQRY ..... 1462
SPREQ ..... 877
SPUNITQ ..... 889
SSWSSTAT ..... 1007
STANDO ..... 1850
STANDQ ..... 1879
STIN ..... 1641
STORE ..... 1438
STORE2 ..... 1441
STOUT ..... 1638
SUIT ..... 1235
SUITO ..... 1254
SUPERDEL ..... 1595
SUPEXRST ..... 1597
SUPLABEL ..... 1508, 1512
SUPLABLI ..... 1488
TBQ ..... 1405
TDRIVEQ ..... 210
TECH1 ..... 1363
TECH2 ..... 1367
TERQ ..... 194
TESTQ ..... 1399
TIER ..... 2107
TIERQ ..... 2099
TPARM ..... 1358
TRANS1 ..... 1862
TRANS2 ..... 1867
TREE ..... 66
TRR ..... 1335

TSCNTR ..... 1681
TSHIP ..... 1076
TSRANTWS ..... 1341
TSTEST ..... 1685
TSTPARM ..... 1360
TSTUBES ..... 1691
TTOR ..... 155
TUBES ..... 1074
TUCOLDAT ..... 1599
TXQ ..... 1962
UDONAUD ..... 369
UNDEXT ..... 1593
UNITHQ ..... 752
UNITI ..... 1788
UNITPINT ..... 707
UNITQ or UNITI ..... 1771
UNITRINT ..... 710
UNOTE ..... 1312
UNQ ..... 440
UNTINT2 ..... 1313
UPDQ ..... 1429
UTQ ..... 1415
VCHARGE ..... 2120
VCONV ..... 1054
VCUSTPRD ..... 2101
VERROR ..... 1058
VISNU ..... 343
VOIDTB ..... 1382
VREAG ..... 1435
VSTATUS ..... 1051
VSUPPL ..... 1433
VTBQ ..... 1412
VTUQ ..... 1413
WELCOME ..... 917
WHIN ..... 2014
WHOUT ..... 2011
WHQ ..... 2019
WHRCL ..... 2017
WKS ..... 1325
XMLLOG ..... 1950
Kit field ..... 1365, 1368, 1437
Kit ID field ..... 1442, 1447, 1450-1451, 1454
Kit Lot field ..... 1439
Kit Lot No fielod ..... 1445

## L

Lab- Donor Interface Log Query (ILOGQ) ..... 2130
Lab Interface Results (LABIN) ..... 2127
Lab Warehouse Check-In (LBWHIN) ..... 1083
Lab Warehouse Checkout (LBWHOUT) ..... 1079
Lab Warehouse Transfer Query (LBWHQ) ..... 1122
LABEL ..... 1508
label printer, changing cthe urrently selected ..... 1469
Label Type field ..... 1499
Labeled field ..... 1173
Labeled? field ..... 2039
Last Modified by field ..... 1753
Lbl field ..... 1708
LBLOVR ..... 1480
LBLOVRQ ..... 1530
LBLQC ..... 1519
LBLUNQC ..... 1523
LBWHIN ..... 1083
LBWHOUT ..... 1079
LBWHQ ..... 1122
LBWHRCL ..... 1085
LETQ ..... 854
Letter Details button ..... 1005
LEVEL ..... 2104
LEVELQ ..... 2118

Licensed/Approved field ..... 1440
Lifespan field ..... 2097, 2108
Link button ..... 610, 888
Link Test Results (LINKL) ..... 1527
Link Unit to Special Donation (SLINK) ..... 884
Link/UnlinkUnit or Deferral ..... 564
LINKL ..... 1527
LINKQ button ..... 610
LINTQ ..... 1285
LIST ..... 229
List Browser (LISTBR) ..... 235
List Call Status (LISTQ) ..... 241
List Log button ..... 247
List Manager – Super (LSUPER) ..... 244
list of values (LOV) ..... 27, 462
List of Values button ..... 27
List Stat button ..... 240
LISTBR ..... 235
LISTPRI ..... 249
LISTQ ..... 241
LISTTYP ..... 255
LOB field (Line of Business) ..... 119
Local Rslt field ..... 1556
Location field ..... 1445, 1727, 1738
Location Notes button ..... 124
location, drive, maintaing ..... 104
lock mobile users ..... 649
Locn field ..... 1759
LOCUS master code ..... 794, 796
LOGDR master code ..... 2141
Logging On with a Common Access Card (CAC) ..... 18
Login Warning system parameter ..... 20, 22, 24
Look Stat button ..... 278
Lookup and Registration (OnSite) ..... 494
Lookup and Registration (WELCOME) ..... 917
Lookup button ..... 278
Loss button ..... 742
Lot field ..... 1072
Lot No. field ..... 1158
Lot Number field ..... 1100, 1167, 1222, 1241, 1368, 1443, 1446, 1448, 1450, 1452, 1454, 1459, 1461, 1789
Lot Type field ..... 1788
LOV SQL field ..... 260
LOV Title field ..... 260
LSUPER ..... 244
LTRCNFWS ..... 1356
LTRWKSHT ..... 1339

## M

M/C field ..... 1157
Machine field ..... 1069, 1101, 1167, 1424
Maintain Batch Data (RGMODBAT) ..... 1564
Maintain Donor Employer (EMP) ..... 417
Maintain Drive Location (DRIVELOC) ..... 104
Maintain Equipment Access Control – by Type (EQACCESS) ..... 1747
Maintain Physician List (PHY) ..... 901
Maintain Sponsor Contacts (SPONCONT) ..... 126
Maintain Valid Equipment QC Data (EQWS) ..... 1744
maintaining drive location ..... 104
maintenance functions
HLA/RBC ..... 794
maintianing sponsor contacts ..... 126
manager, RBC antigen ..... 807
Manual button ..... 1010
Manual Donor Interface (DONINT) ..... 2139
MANUAL HOLD window ..... 315, 375, 385
Manual, File Upload ..... 1201
Manufacturer field ..... 1241, 1368, 1727, 1739
mapping, external file definition ..... 818
Mark No Letter ..... 847
Mark No Letter button ..... 843
master calendar, viewing ..... 84
master code APIDR ..... 635, 1040

master codes
ADTDN ..... 344
ADTPG ..... 344
ANATT ..... 1076
ANTGR ..... 1337
APHER ..... 573, 618
APIDR ..... 635, 1036, 1040
APISC ..... 1034
APITY ..... 1032
AUBIO ..... 1474
BAG ..... 1140
BAGID ..... 1140
BLFA ..... 1066, 1068, 1099, 1137
CBCID ..... 1538
CMVLB ..... 1474
DLCOM ..... 950
DON ..... 1070
EDABS ..... 1385
ENLIST ..... 255
ENLST ..... 228, 230, 259
EQBRQ ..... 524, 573, 618
EQUIP ..... 573, 618
ERRTY ..... 102
ETHGP ..... 311, 366, 685, 925
FCRYO ..... 1223
HGHT ..... 356, 363, 495, 507, 918, 924
HHPFC ..... 524
HLAC ..... 800
HLAGR ..... 798, 800
HLSTD ..... 796
IDPSR ..... 1038-1039, 1055-1056
IDPTP ..... 1038-1039, 1055, 1057
IDPTR ..... 1038-1039, 1055-1056
IDPTV ..... 1038-1039, 1055, 1057
LOCUS ..... 794, 796
LOGDR ..... 2141
MATVE ..... 573, 618
OSAPP ..... 2144, 2147
PBLEP ..... 796
PHOTO ..... 495
PLCAP ..... 1078
REAC ..... 965
RECON ..... 1087
RESON ..... 147
RETYP ..... 1490
SPATR ..... 1134, 1156, 1161, 1169, 1242
SRVCK ..... 1709
STATE ..... 1718
STER ..... 1156
SURND ..... 2141
TABB ..... 573, 618
UTSPN ..... 2136
MATVE master code ..... 573, 618
Max Accept field ..... 1747
Max field ..... 1362
Max Temp field ..... 1071, 1439, 1566, 1711
MCODE ..... 296
MCWABODR ..... 936
MCWABOSP ..... 937
MDONQ ..... 745
MDONQ2 ..... 861
MDRIVEQ ..... 169
Merge button ..... 162, 722, 1014
Merge Duplicate Sponsors (SPMRG) ..... 160
Merge/Resolve Duplicate Donor Records (MERGDON) ..... 720
Merged Donors button ..... 743, 851
Mfg field ..... 1229

Min field ..... 1362
Min Temp field ..... 1071, 1439, 1566, 1711
Min. Accept field ..... 1746
Missing Tubes Query (MSTUBEQ) ..... 1607
mobile drive
lock users ..... 649
reset user password ..... 650
unlock users ..... 649
mobile drive, creating or modifying ..... 89
Mobile PC Upload/Download Utility (MOBPCUD) ..... 1040
Mobile PC Upload/Download Utility (OnSite) ..... 634
Mobile Upload Download
check status ..... 641
MOBPCUD ..... 1040
Mod Date field ..... 1434, 1707
Mod Dt field ..... 1539
MODBATCH ..... 1102
MODCRYO ..... 1216
MODDRV ..... 414
MODDSC ..... 1097
Mode field ..... 1306, 1308, 1844
MODFRZ ..... 1148
Modified by field ..... 1749
Modify button ..... 273
Modify Check-In Batch Details (MODBATCH) ..... 1102
Modify Component Weight (COMPWT) ..... 1144
Modify Contract for Hospital/Patient Batch (MODTSCON) ..... 1698
Modify CRYO Details (MODCRYO) ..... 1216
Modify Date field ..... 1360
Modify Donor Data (MODKYDAT ..... 689
Modify Donor Source Card Details (MODDSC) ..... 1097
Modify Drive ..... 209
Modify Drive button ..... 209
Modify Drive Details – Super (SDRIVE) ..... 140
Modify Freeze Start Time (MODFRZ) ..... 1148
Modify Key Data button ..... 718, 763
Modify Non Critical Drive Data screen ..... 96
Modify Non-Critical Drive Data (DRVMOD) ..... 96
Modify Pooled Components (MODPOOL) ..... 1227
Modify Registration Data (OnSite) ..... 494
Modify SCD Details (MODSCD) ..... 1165
Modify Separation Times (MODSEP) ..... 1146
Modify? field ..... 1700
modifying mobile drive ..... 89
modifying non-critical drive data ..... 96
modifying or entering order for regular products ..... 1809
MODKYDAT ..... 689
MODPOOL ..... 1227
MODSCD ..... 1165
MODSEP ..... 1146
MODTSCON ..... 1698
molecular confirmatory rules, define ..... 812
Month To Date Statistics, displaying ..... 1760
Monthly button ..... 153
Monthly Collection Goals Query (GOALMONQ) ..... 177
MORDQ ..... 1890
Move Outdates To Outdate Location (MOVEOUT) ..... 1999
MOVEOUT ..... 1999
MRWPADRV ..... 1005
MRWROLLP ..... 1017
MRWRPERF ..... 997
MSTUBEQ ..... 1607
Multiple Donors Query (MDONQ) ..... 745
Multiple Donors Query (MDONQ2) ..... 861
Multiple Drive Selection Query (MDRIVEQ) ..... 169
Multiple Observation Reconciliation (RECOBS) ..... 1349
multiple selections from an LOV ..... 29
MUNOTE ..... 1790

## N

NDONQ ..... 848
NEBQ ..... 1611

NEBQ button ..... 1588
Need by field ..... 1270
New Bag? field ..... 1229
New Coll Dt field ..... 1107
New Contract ID field ..... 1699
New Employer ..... 418
New Employer button ..... 418
New Physician button ..... 882
New Prd f ield ..... 1244
New Product Code field ..... 1246
New Product field ..... 1230, 1293
New Profile field ..... 1700
New Surgery ..... 882
New Surgery button ..... 882
New Zip button ..... 913
Next Question button ..... 331, 340, 554
NHOLD ..... 387
Night Phone field ..... 2093
No of Bags field ..... 1196
No of Dup field ..... 1542
No of Labels field ..... 1261
No Results field ..... 1574
No. of Tests field ..... 1440
No. of Units field ..... 1157, 1222
non-critical drive data, modifying ..... 96
Non-Extracted Batches Query (NEBQ) ..... 1611
NOTE ..... 1248
NOTEQ ..... 909
Notes button ..... 94, 108, 129, 961, 1781
Notes by Date Range Query (NOTEQ) ..... 909
Notes for the Component field ..... 1249, 1311
Notes for the Component ..... 1311
Notes for the Unit field ..... 1313
Notes on UNIT field ..... 1349
Notes window ..... 123
Notification Letters (DNWVWLTR) ..... 1001
Notification Log (DNWDCOMM) ..... 1003
Notify Comm button ..... 853
Notify Letters button ..... 744, 852
NP-EF field ..... 1543
NSF field ..... 2117
NT ..... 1393
Number of Bags field ..... 1167, 1276
Number of Items field ..... 1167
Number of Units field ..... 1103, 1105
Number of Unscheduled units in this worksheet field ... 1520

## O

O field ..... 2112, 2121
OBS1 ..... 1342
OBS2 ..... 1346
OBSQ ..... 1354
OCHGQ ..... 1892
OCQ ..... 1874
ODTOFF ..... 2057
Offline Product Check-In (CHKOFF) ..... 2043
Offline Product Packing (PACKO) ..... 2046
Offline Product Shipment (SHIPO) ..... 2052
OFLOW ..... 1881
OK field ..... 1213, 1217
OKBOXQ ..... 1957
Old Coll Dt field ..... 1107
Old Contract ID field ..... 1699
Old Profile field ..... 1700
ONACCESS system parameter ..... 495
OnSite
Mobile PC Upload/Download Utility ..... 634
OnSite Status Query ..... 607
Open Boxes (OPENBOXQ) ..... 1954
Open for Appt button ..... 274
Open Orders Query (OPENQ) ..... 1870
OPENBOXQ ..... 1954
OPENQ ..... 1870

Operator field ..... 260
Operator ID field ..... 1190
Opt field ..... 1568
Option field ..... 1559
ORDER ..... 1809
Order and Services Debit and Credit (CDSVC) ..... 2066
Order Charges – By Order No (OCHGQ) ..... 1892
Order field ..... 1855
order for regular products, entering ..... 1809
order for regular products, modifying ..... 1809
Order History – Multiple Orders (MORDQ) ..... 1890
Order History – Single Order (ORDQ) ..... 1884
Order No field ..... 1826, 2068
Order Processing Status (OFLOW) ..... 1881
ORDQ ..... 1884
Orig Product Code field ..... 1243, 1246
Original Product field ..... 1159, 1162
OS Purp 1 field ..... 1560
OS Purp 2 field ..... 1560
OS Red field ..... 1559
OS Unit field ..... 1773
OS Unit ID field ..... 1568, 1601, 1693
OSAPP master code ..... 2144, 2147
Other Bands field ..... 1345, 1348
Other button ..... 520, 931
Other Holds button ..... 754
Other Inter button ..... 759
Out field ..... 1446, 1448, 1459
Out of State field ..... 2087
OUTDATE ..... 1997
Outdate as of field ..... 1998
Outdate Pickslip field ..... 2058
Outside Unit ID field ..... 1582, 1590
Override Code field ..... 1110
Override Donor CUE (CUEOVR) ..... 1108

## P

P1 field ..... 1563, 1575, 1695
P2 field ..... 1563, 1575, 1695
PACK ..... 1901
Pack Inv Rejects To Discard (PACKOD) ..... 1912
Pack Inv Rejects To Salvage (PACKOS) ..... 1916
Pack Lab Discards To Discard (PACKLD) ..... 1920
Pack Lab Discards To Salvage (PACKLS) ..... 1926
Pack Lab Discards to Salvage screen ..... 1926
Pack Products (PACK) ..... 1901
Pack Products screen ..... 1902
Pack Recovered Plasma (PACKRP) ..... 1909
Pack Recovered Plasma screen ..... 1909
Pack/Ship Shippers to Lab ..... 600
Packed field ..... 1878
PACKLD ..... 1920
PACKLS ..... 1926
PACKO ..... 2046
PACKOD ..... 1912
PACKOS ..... 1916
PACKRP ..... 1909
PAGQ ..... 2035
Paperless Nursing Audit (PAUDIT) ..... 350
Parameter Description field ..... 1750
Parent Sponsors Query (PSPONQ) ..... 189
Parm ID field ..... 1585, 1590, 1594, 1598
Pass field ..... 261
password
    reset, mobile drive ..... 650
password, application ..... 8
password, strong ..... 23
passwords ..... 14, 449
Past Drives ..... 116
Past Drives button ..... 91, 186
Past Drives Sponsor (MRWPADRV) ..... 1005
Pathogen Reduction ..... 1176

Pathogen Reduction Manager ..... 1176
Patient ..... 1271
Patient field ..... 2067
Patient ID field ..... 1221
Patient Name fieold ..... 1222
PAUDIT ..... 350
PAYEE ..... 2082
Payee ID field ..... 2082-2083
PBLEP master code ..... 796
PENDCRY ..... 1266
Pending button ..... 545
Perform Visual Audit (VISNU) ..... 343
Performance button ..... 201
peripheral devices ..... 12
Permanent ID field ..... 1034
PHERI ..... 1168
PHERI button ..... 1184
PHISTQ ..... 2025
Phlebotomy Details button ..... 423
PHOTO master code ..... 495
PHY ..... 901
Phy Findings button ..... 331
Physical button ..... 333, 340
Physical Findings Query button ..... 609
physical findings, View Comments button ..... 963
PIC_ENABLE system parameter ..... 495
Pick Slip ID field ..... 1998
Pick Slip Type field ..... 1953
Pickslip Status (DPICKQ) ..... 1952
Pickup Sched button ..... 277
Pickups button ..... 167
Piggyback button ..... 95
pilot tube samples, recording receipt of ..... 1074
PINTQ ..... 2033
Pkg Insert Date field ..... 1440
Place Donor Attribute (DONPATT) ..... 693
Place Donor Interdiction (DONPINT) ..... 699
Place Group Interdiction on Donors (GPPDON) ..... 725
Place Group Interdiction on Units (GPPUNIT) ..... 731
Place Group Interdiction or Hold (EGRPINT) ..... 1305
Place Interdictions button ..... 727, 734
Place Notes on Multiple Units (MUNOTE) ..... 1790
Place Product Quarantine (PQU) ..... 1989
Place Unit Interdiction (UNITPINT) ..... 707
Place/Release Multiple Unit Interdiction (UNTINT2) ..... 1313
Plasma File Type field ..... 1951, 2081
Plastic ID field ..... 1246
Plate Capacity field ..... 1541
Plate Controls Query (SPCQ) ..... 1427
Plate/Batch/Worksheet ID field ..... 1413
Plate/Batch/WS field ..... 1406
Platelet Count field ..... 1197
PLCAP master code ..... 1078
PLCOUNT ..... 1172
PLPIQ ..... 1268
PO Number field ..... 1540, 2090
point of venipuncture ..... 360
pollover proferences, sponsor, defining ..... 132
POOL ..... 1219
Pool ID field ..... 1221, 1268
Pool Product Code field ..... 1222
Pool Unit ID field ..... 1221
Pool Weight field ..... 1224, 1230
Pooled ABO/Rh field ..... 1222
Pooled Component Query- by Pool ID (PLPIQ) ..... 1268
Pooling Time field ..... 1222
Potential Duplicate Batch Query (DUPQ) ..... 761
PPLBL ..... 1260
PQU ..... 1989
PrdTp field ..... 2111
Pre-Label Frozen Product (PRELBL) ..... 1492
Prepare Donor Notification (DONNOTE) ..... 840

Prepare Pooled Components (POOL) ..... 1219
Prepare Reagents for Testing (RPREP) ..... 1443
Prepfield ..... 1437
Prev Question button ..... 331, 340
Previous Months to Date Statistics, displaying ..... 1761
Previous Question button ..... 554
Previous Years To Date Statistics, displaying ..... 1761
Pri field ..... 1811
Price Change field ..... 2081
Price field ..... 2123
Print Antigen Worksheet (TSRANTWS) ..... 1341
Print Card button ..... 610, 931, 959
Print Donors button ..... 790
Print Label button ..... 1185, 1192
Print Labels ..... 871
Print Labels button ..... 871
Print Manual Testing Worksheet (LTRWKSHT) ..... 1339
Print Multiple Observation Worksheet (LTRCNFWS) ..... 1356
Print Product Labels (PPLBL) ..... 1260
Print Report button ..... 443
Printer List button ..... 931
Prior ABORh test result field ..... 2140
Priority field ..... 1843, 1875
Priority, Options and Override Donor Selection field ..... 253
Procedures button ..... 168
Process Code field ..... 1236, 1238, 1240, 1243, 1245, 1247, 1249, 1253, 1255
Process Date field 1151, 1159, 1163, 1243, 1255, 1289, 2005
Process Date Time field ..... 1181
Process Dt. field ..... 1230
Process field ..... 1175, 1228, 1251
Process, Intermediate ..... 1187
Prod Category field ..... 1180
Prod Code field ..... 1197
Prod field ..... 1501, 1844
Prod Found field ..... 2032
Prod Hist button ..... 1784
Prod Type field ..... 1711
Prod Weight field ..... 1181
PRODQ ..... 2028
Prodt field ..... 1828
Product field ..... 1154, 1224
Product Bags Combination Query (BPQ) ..... 1276
Product Code and Description field ..... 2111
Product Code field ..... 1082, 1085, 1087, 1180, 1233, 1249, 1261, 1297, 1301, 1303, 1311, 1486, 1499, 1715-1716, 1994, 2024
Product Current Status (PRODQ) ..... 2028
Product field ..... 1136, 1138, 1143, 1145, 1149, 1166, 1170, 1173, 1228, 1236, 1238, 1240, 1247, 1251, 1253, 1255, 1258, 1289, 1293, 1299, 1477-1478, 1484, 1494, 1510, 1712, 1836, 2108
Product Type field ..... 1103, 1135, 1162, 1169, 1276, 1877, 2024, 2097, 2119
Products from Autologous/Directed Donations (AUTOQ) ..... 1269
Products In Quarantine (QUQ) ..... 2031
Products with Antigens (PAGQ) ..... 2035
Prof Set field ..... 1605
Prof Tests field ..... 1562
Profile Seq field ..... 1566, 1617
Profile Set ID field ..... 1577, 1617, 1699-1700
profile, drive sponsor, creating ..... 116
Program field ..... 1426
PSPONQ ..... 189
Purple 1 field ..... 1560, 1693
Purple 2 field ..... 1693
Purple Top field ..... 1078
Purple Top Tube field ..... 1076
Purple Tube Count field ..... 1684, 1690

## Q

QC Date field ..... 1100, 1753
QC Exp field ..... 1443
QC field ..... 1096, 1454-1455, 1575, 1868

QC for Labeling (LBLQC) ..... 1519
QC for Labeling field ..... 1521, 1525
QC Frequency field ..... 1451
QC History Details Query (EQCHISTQ) ..... 1765
QC of Check-In Batch (QCCHK) ..... 1093
QC Performed Every field ..... 1746
QC Procedure field ..... 1733, 1736, 1755
QC Ref No field ..... 1732, 1735, 1754
QC Results 1 field ..... 1733
QC Results 2 field ..... 1736
QC Status field ..... 1100, 1733, 1736, 1753, 1767
QC Tech 1 field ..... 1732, 1755, 1766
QC Tech 2 field ..... 1736, 1755, 1766
QC Type field ..... 1732, 1736, 1742, 1745, 1753, 1755, 1766
QCCHK ..... 1093
Qty field ..... 1828, 2123
Qualification Approved By field ..... 1752
Qualification Approved On field ..... 1752
Quality & Compliance ..... 45
Quarantine Release Type field ..... 1992
Quarantine Type field ..... 2032
query
donor antigens confirmation ..... 825
donor RBC antigen ..... 825
Query Request button ..... 783
Query Status button ..... 1199
Questions button ..... 331, 340
QUQ ..... 2031

## R

R field ..... 1360, 2112
R Type field ..... 1436
R/I/O field ..... 1078
R1 field ..... 1563, 1575, 1693, 1695
R2 field ..... 1563, 1575, 1695
Ratio field ..... 1386
RBC antigen manager ..... 807
RBC Content field ..... 1181
RCHKIN ..... 1455
RCHOLD ..... 1298
RCINT ..... 1300
RCSYSINT ..... 1302
Rcv'd Date field ..... 1460, 1463
REAC master code ..... 965
Reactive field ..... 1417
reactive unit indicator ..... 1574
Read More button ..... 554
READ_MORE system parameter ..... 550
REAG ..... 1239
REAGENT ..... 1328
Reagent Check-Out - - Send Out (CHKOUT) ..... 1457
Reagent Code field ..... 1460
Reagent field ..... 1229, 1241
Reagent ID field ..... 1439, 1444, 1456, 1461
Reagent Kit (No Pre-Qualification) (RKNPQ) ..... 1441
Reagent Lot field ..... 1439
Reagent Name field ..... 1368, 1437
Reagent Query (RGQRY) ..... 1459
Reagents Check-Out - Internal QC (CHKOQC) ..... 1446
Reagents field ..... 1448, 1459
Reagents QC Entry ..... 1449-1450
REAGQ ..... 1420
Reason and Desc field ..... 1990
Reason field ..... 1087, 1459, 1568, 2068
Reason for Rejection field ..... 1140
Received Datefield ..... 1439
Receiving Facility field ..... 2007
Re-check Product from Inventory-Super (RECHK2) ..... 1260
Re-Check Products from Inventory (RECHECK, RECHECK2, or RECHK2) ..... 1153
Re-Check Reagents into Repository (RCHKIN) ..... 1455
RECHECK, RECHECK2, or RECHK2 ..... 1153
RECHK2 ..... 1260

RECOBS ..... 1349
Recon Details fields ..... 2018
Recon field ..... 1087
RECON master code ..... 1087
Reconcile Lab Warehouse Batch (LBWHRCL) ..... 1085
Reconcile Transport Batch (WHRCL) ..... 2017
recording receipt of pilot tube samples ..... 1074
RECQ ..... 174
Recruiter Goals button ..... 88
Recruiter Territories Query (RTQ) ..... 214
Recruiters button ..... 290
Red 1 field ..... 1693
Red 2 field ..... 1693
Red field ..... 1560
Red Top field ..... 1078
Red Top Tube field ..... 1075
Red Tube Count field ..... 1684, 1690
Re-Extract Test Results (REXTRACT) ..... 1589
Ref No. field ..... 1753
Reference field ..... 1758, 1766
Refresh Status button ..... 251
Regenerate XML File (GENXML) ..... 1948
Regional Check-in Batch API ..... 2143
REGIS ..... 304
Register button ..... 512, 930
Register Deferral (DEFREGIS) ..... 317
Register Donation (REGIS) ..... 304
register donor ..... 494
Register Special Donation Request (SPREQ) ..... 877
Registered Deferrals Query (DEFQ) ..... 423
Registered Donations Query (ENTRYQ) ..... 420
Registration Number field ..... 1721
REGMAINT ..... 354
REGNXT system parameter ..... 494
REGTUBES ..... 1557
RejCd field ..... 1989
Reject ..... 1141
REJECT ..... 1141
Reject button ..... 944, 996, 1184, 1192, 1195
Reject Cd field ..... 1143
Reject Inventory Products (INVREJ) ..... 1993
Reject Reason field ..... 1440
Reject Unit/Component (REJECT) ..... 1141
Rejected? field ..... 2039
Rejection Reason field ..... 1994
Rel field ..... 1362
RelCd field ..... 1360
Release Audit Holds (NHOLD) ..... 387
Release Audit Interdictions (RLINT) ..... 394
Release button ..... 249
Release Component Hold (RCHOLD) ..... 1298
Release Component Interdiction (RCINT) ..... 1300
Release Component System Interdiction (RCSYSINT) ..... 1302
Release from Special Processing (RSP) ..... 1252
Release Group Interdiction or Hold (RGRPINT) ..... 1307
Release order for allocation? Y/N screen ..... 1830
Release Product Quarantine (RQU) ..... 1991
Release Returned Product Quarantine (RQU2) ..... 1986
Release Standing Orders Batch Program (DCONVERT) 1856
Release Test Results (RGRQC) ..... 1571
Release Unit System Interdiction (RUSYSINT) ..... 1303
Remarks field ..... 1081, 2013
Removal From Outdate List (ODTOFF) ..... 2057
Remove button ..... 1195
Remove Donor Attribute (DONRATT) ..... 696
Remove Donor Interdiction (DONRINT) ..... 703
Remove Group Interdiction from Donors (GPRDON) ..... 728
Remove Group Interdiction from Units (GPRUNIT) ..... 734
Remove Hold With NFT button ..... 391
Remove Hold With OK button ..... 389
Remove Illumination Bag button ..... 1190
Remove Interdictions button ..... 731, 737

Remove Psoralen button ..... 1184
Remove Temp button ..... 101
Remove Unit Interdiction (UNITRINT) ..... 710
REPLBL ..... 1498
report
donor antigen discrepancy ..... 836
Report OD? field ..... 1541
Reprint button ..... 956
RePrint Card button ..... 610
RePrint Label button ..... 1197
Reprint Labels (REPLBL) ..... 1498
REQ ..... 1614
Req field ..... 1547, 1687, 1845
Req? field ..... 1750
REQUEST ..... 776
REQUESTQ ..... 786
Required for Qualification field ..... 1746
RES1 ..... 1330
RES2 ..... 1333
Research Product Labeling (LBLRSH) ..... 1488
Reset Donor Interface Status in Lab (DIRESET) ..... 2134
Reset Extract for Parm/Batch Sample (SUPEXRST) ..... 1597
Reset field ..... 1594
Reset Under Extract Flag (UNDEXT) ..... 1593
reset user password
mobile drive ..... 650
RESKIP ..... 1567
Resolve button ..... 723
Resolve Reagent QC Discrepancy (RSUPER) ..... 1452
RESON master code ..... 147
Resource Status Query (RSTATQ) ..... 212
Resources button ..... 166
RESP DELAY_NW system paramaeter ..... 550
RESP_DELAY system parameter ..... 550
RESTOCK ..... 1980
Restock Unshipped Products (RESTOCK) ..... 1980
Restock? field ..... 1992
Resubmit button ..... 249
RESULQ ..... 760
Result 1 field ..... 1755
Result 2 field ..... 1755
Result Code field ..... 1332, 1334, 1339
Result field ..... 1353, 1386, 1578
Result Ind field ..... 1706
Result Intp Desc field ..... 1344
Result IntpDesc field ..... 1347
Result Type field ..... 1582
Results Extract Query (REQ) ..... 1614
Results Ind field ..... 1684, 1690
Results Observation Query (OBSQ) ..... 1354
Results QC User field ..... 1566
Results Typ field ..... 1542
RESXP ..... 147
RETURN ..... 1983
Return ID field ..... 1984
Return Reason Code field ..... 1985
Return/Accpt field ..... 2080
RETYP master code ..... 1490
Review Required field ..... 1745
REXTRACT ..... 1589
RGCON ..... 1537
RGMODBAT ..... 1564
RGPROFQ ..... 1616
RGQRY ..... 1459
RGRPINT ..... 1307
RGRQC ..... 1571
Rgt Exp Date field ..... 1229
Rgt. Lot # field ..... 1229
RGTUBEQ ..... 1604
RHOLDS table ..... 692
RKNPQ ..... 1441
RLINT ..... 394

RMAP field ..... 1555
RMF flag ..... 551
Rollback button ..... 400
Rollback Donation Audit (AUROLL) ..... 398
Rotation Flag field ..... 2090
RPREP ..... 1443
RQU ..... 1991
RQU2 ..... 1986
Rslt field ..... 1590
Rslt Ind field ..... 1541
Rsn field ..... 1448
RSP ..... 1252
RSTATQ ..... 212
RSUPER ..... 1452
RT Results and Upload Query by Unit ID (RUNT) ..... 1431
RT Results File Detail Status Query (UPDQ) ..... 1429
RTECH1 ..... 1449
RTECH2 ..... 1450
RTQ ..... 214
RTyp field ..... 1436
Run ID field ..... 1364, 1368
RUSYSINT ..... 1303

## S

S field ..... 1458, 1845, 2121
SALLO ..... 1833
Same as Customer? field ..... 2086
Sample Transfer In (STIN) ..... 1641
Sample Transfer Out (STOUT) ..... 1638
Sample Unit ID field ..... 1528
Samples field ..... 1565
Samples Query (SAMPQ) ..... 1625
SAMPQ ..... 1625
SAMPQ button ..... 1588, 1613
Save Drive button ..... 92
Save Request button ..... 782
Save Template button ..... 234, 255
SAYQ ..... 199
SBYTQ ..... 183
Scan ABO field ..... 1225, 1231, 1491, 1495, 1511
Scan Exp Date field ..... 1226, 1231-1232
Scan Exp/Prod field ..... 1231
Scan Prod field ..... 1226, 1231
Scan Prod/Exp field ..... 1226
Scan SP Test field ..... 1226, 1232
Scan Unit ID field ..... 1225, 1231, 1491, 1495, 1511
Scan Unit/ABO field ..... 1225, 1231
Scan unit/ABO field ..... 1491, 1495, 1511
Scan Units for CRYO Processing (CRYO1) ..... 1207
SCD Worksheet ID field ..... 1164
Sched Donor button ..... 278, 290
Schedule Auto/Directed Order (AUTO) ..... 1830
Schedule button ..... 239, 884
Schedule Donors (APPT ..... 265
Schedule Drives button ..... 88
Schedule field ..... 1764
Schedule Status (SSWSSTAT) ..... 1007
scheduled drive, canceling ..... 102
Scheduled Drives button ..... 156
Scheduled Event field ..... 1741
Scheduled field ..... 1729
screens
  Pack Lab Discards to Salvage ..... 1926
  Pack Products ..... 1902
  Pack Recovered Plasma ..... 1909
  Release Order for allocation? Y/N ..... 1830
  Ship Discard and Salvage Products ..... 1941
  Ship Products ..... 1936
SDD ..... 1155
SDONQ ..... 737
SDRIVE ..... 140
SEARCH ..... 258
Search button ..... 261

search criteria standard template ..... 251
Search Donor button .....240, 274, 520, 931
Search for Donor (DNWDFIND) .....1010
Search List button ..... 239
searching .....27, 463
Second Tech Test Result Verification (RES2) .....1333
security ..... 6
Sel field ..... 1847, 1988
Sel, Quarantine Reason and Description field .....1992
Select Interdictions button .....726, 730, 733, 736
Select Label Printer field ..... 1502
Select Processing Facility button ..... 1470
Select Question Button ..... 543
Select Reagents By field ..... 1458
Select to Release button .....397, 705, 714
Select to Terminate button .....706, 713
Send Alerts button ..... 290
Send Letter (DCWSNDLT) ..... 1013
Send Letter button .....843, 954
Sent From field .....1123, 2020
Sent To field .....1087, 1123, 2020
SEP .....1131
Sep Time button .....1786
Separation fields .....1133, 1151
Separation Times – Offline (SEPO) ..... 1150
Separation Times (SEP) .....1131
Seperation Date/Time field .....1212
SEPO .....1150
Seq field .. 1075, 1078, 1209, 1327, 1331, 1334, 1338, 1362, 1386, 1559, 1578, 1711, 1750, 2139
Seq No. field ..... 1353, 1746
Seq# field ..... 1072, 1082, 1215, 1223, 1336, 1365, 1369
Serial No field ..... 1189
Serial No. field .....1069, 1101
Serial No.field ..... 1758
Serial Number field .....1727, 1738
serological confirmatory rules, define .....812
Service Cd field ..... 2067
Service Company field .....1741
Service Contact field .....1727, 1739
Service History Query (EQSHISTQ) ..... 1763
Service Person field ..... 1730, 1741
Service Type field .....1730, 1741
Set Differential Button .....223
Set Drive Date and ID (SETDRV) .....915
Set ID Lot No field .....1190, 1197
Set Print Flag 'N' button .....870
Set Print Flag 'Y' button .....871
SETDRV .....915
Setup Customer Preferred Product Tiers (CPPTIER) ....2094
Setup Inventory Levels for Blood Center (LEVEL) .....2104
SHIP ..... 1935
Ship Bill # field ..... 1710
Ship Discard And Salvage Products (SHIPD) ..... 1941
Ship Discard and Salvage Products screen ..... 1941
Ship Products (SHIP .....1935
Ship Products screen .....1936
Ship to field .....1843
SHIPD .....1941
Shipment age field ..... 1863
Shipment Date field .....2053
Shipment No field .....1942, 2053
Shipments By Ship Date (SHIPQ) .....1967
Shipments In Transit (TXQ) ..... 1962
SHIPO .....2052
Shipped? field .....2039
SHIPQ .....1967
Short Name field .....1160, 1163
Show Attributes button ..... 962
Show AUX Units button .....962
Show Cancel field ..... 1417
Show Discard And MFG Customers? field .....1955

Show Donors button ..... 788, 989
Show Drives button ..... 162
Show Equip/Supply button ..... 963
Show Expired field ..... 1442
Show Goals button ..... 997
Show Instructions button ..... 193
Show Letter button ..... 856, 949
Show Schedule button ..... 281
Show Slots button ..... 269
Show Term button ..... 695, 698, 702, 710, 755, 976, 983
Show Term field ..... 1682, 1688
Show Terminated field ..... 1434
Show Terminated? field ..... 1436, 1538, 2079, 2086
Show Units button ..... 947, 989, 1016
Site Collection Statistics (DRWSSTAT) ..... 1014
Site Directions button ..... 270, 277
Site Slots button ..... 277, 290
Site Stats button ..... 202, 207, 284, 286
Skip Results from Extraction (RESKIP) ..... 1567
Skipped Units field ..... 1573
SLD field ..... 1224
SLINK ..... 884
SLIST ..... 251
SNDHCLL ..... 2006
Source ID field ..... 2154, 2156
Source Table field ..... 260
SP Test field ..... 1478
SP. Testing field ..... 1501
SPATR master code ..... 1134, 1156, 1161, 1169, 1242
SPCONQ ..... 187
SPCQ ..... 1427
SPDRIVE ..... 141
SPDRIVE2 ..... 292
SPECIAL ..... 1818
Special Donation Status Query (SPUNITQ) ..... 889
Special Order Allocation (SALLO) ..... 1833
Special Processing Query (SPQ) ..... 1273
SPIKE ..... 1237
Spike a Component (SPIKE) ..... 1237
Spiking Type field ..... 1251
SPMRG ..... 160
Spn Contact ..... 116
Spon Acct button ..... 289
SPON2 ..... 116
SPONCHK ..... 130
SPONCONT ..... 126
SPONROLL ..... 132
sponsor contact details, maintain ..... 126
sponsor contacts maintaining ..... 126
Sponsor Contacts Query (SPCONQ) ..... 187
Sponsor Dets button ..... 186
Sponsor Instructions ..... 122
Sponsor Instructions button ..... 122
Sponsor Notes ..... 123
Sponsor Notes button ..... 123
sponsor profile, creating ..... 116
Sponsor Roll Prefs button ..... 124
Sponsor Rollover Preferences (MRWROLLP) ..... 1017
sponsor rollover preferences, defining ..... 132
Sponsor Stats button ..... 197
sponsor, customizing checklist for ..... 130
sponsor, instructions to a ..... 123
Sponsors by Territory Query (SBYTQ) ..... 183
SPQ ..... 1273
SPQRY ..... 1462
SPREQ ..... 877
SPUNITQ ..... 889
SQC field ..... 1574
Srv Cd field ..... 1859
Srv Code field ..... 2123
SrvcCode field ..... 2112
SRVCK master code ..... 1709

SSWSSTAT ..... 1007
Stage field ..... 1240, 1247
Standard Criteria button ..... 234, 255
standard operating procedures (SOPs) ..... 6, 12
Standard Price field ..... 2097, 2108
Standing Order Query (STANDQ) ..... 1879
STANDO ..... 1850
STANDQ ..... 1879
Start Date field ..... 1426
Start Extract field ..... 1585
Start field ..... 1593
Starting Seq field ..... 1327
Stat field ..... 236, 878, 1762, 1764, 1766, 1843, 1875
STATE master code ..... 1718
Statistics button ..... 1008
Status and History Query (EQSTATQ) ..... 1757
Status field ..... 1182, 1190, 1759
status log
WellSky Transfusion ..... 821
STER master code ..... 1156
Sterile Docking Definition (SDD) ..... 1155
STIN ..... 1641
Storage Loc field ..... 1440
Storage, Final Transfer ..... 1193
STORE ..... 1438
STORE2 ..... 1441
STOUT ..... 1638
strong password ..... 23
strong password history ..... 16, 450
Sub field ..... 1864
Submit button ..... 234, 255
Submit List and Create Template (LIST) ..... 229
Submit Search button ..... 783
SUIT ..... 1235
Suitability, Verify ..... 1178
Suitable Dates button ..... 93
SUITO ..... 1254
Summary button ..... 973
Sup field ..... 1337, 1351
Super field ..... 1455
SUPERDEL ..... 1595
Supervisor field ..... 1351, 1354
SUPEXRST ..... 1597
SUPLABEL ..... 1508, 1512
SUPLABLI ..... 1488
Suppl field ..... 1459
Supplier field ..... 1439, 1443, 1450, 1452, 1454, 1463
Supplier Name field ..... 1434
Supplier Query (SPQRY) ..... 1462
suppliers field ..... 1448
Supplies button ..... 167
Surg Dt field ..... 1271
SURND master code ..... 2141
Susp Type field ..... 1180
System Error Messages ..... 63, 470
system parameters ..... 7
ADATE ..... 388
AGE_LOW ..... 494, 918
AGE_UPPER ..... 494, 918
AUTO_PRINT ..... 495, 918
BC_SCAN_RE ..... 495, 918
CNFM_FLD ..... 494, 918
CUEYN ..... 917
Database Name in URL ..... 17, 21-22, 24
DNR_HINT ..... 550
DNR_RES ..... 550
ETHNIC ..... 359, 495, 918
GALLON_VAL ..... 494, 918
HGHT ..... 495, 918
ID_VERIFY ..... 495
Login Warning ..... 20, 22, 24

ONACCESS ..... 495
PIC_ENABLE ..... 495
READ_MORE ..... 550
REGNXT ..... 494
RESP_DELAY ..... 550
RESP_DELAY_NW ..... 550
system paramters
TBVH ..... 495

## T

T field ..... 1707
T1 field ..... 1351
T2 field ..... 1351
TABB master code ..... 573, 618
tables, validatoin ..... 7
Target Data field ..... 1755
Target field ..... 1733, 1736
Target Value field ..... 1746
Tax ID Form field ..... 1541, 1683, 1689, 1706
TB ID field ..... 1353
TB/WS# field ..... 1331
TBatch Notes Button ..... 1411
TBQ ..... 1405
TBVH system parameter ..... 495
TDRIVEQ ..... 210
Tech 1 (OBS1) ..... 1342
Tech 1 (RTECH1) ..... 1449
Tech 1 field ..... 1354
Tech 1 Result field ..... 1337
Tech 2 (OBS2) ..... 1346
Tech 2 (RTECH2) ..... 1450
Tech 2 field ..... 1354
Tech 2 Result field ..... 1337
TECH1 ..... 1363
Tech1 field ..... 1362, 1450, 1454
TECH2 ..... 1367
Tech2 field ..... 1362, 1452, 1454
Temp field ..... 2013
temporary drive, creating drive from ..... 98
Temporary Drives Query (TDRIVEQ) ..... 210
Term Date field ..... 1360, 1363, 1434, 1706
TERQ ..... 194
Terr Perform button ..... 197
Territories button ..... 179
Territory Statistics Query (TERQ ..... 194
Test ABO field ..... 1485
Test Batch ID field ..... 1364, 1368, 1386, 1403, 1428
Test Batch/ Worksheet # field ..... 1334
Test Batch/Worksheet # field ..... 1326
Test Batch/Worksheet ID field ..... 1329
Test Batches Details Query (TBQ) ..... 1405
Test Batches in Holding Area Query (HOLDQ) ..... 1401
Test Description field ..... 1552
Test field ..... 1413, 1458
Test ID (Internal Code) field ..... 1554, 1556
Test ID field .. 1327, 1329, 1331, 1334, 1336, 1339, 1343, 1347, 1353, 1355, 1361, 1364, 1368, 1383, 1386, 1394, 1397, 1402, 1406, 1416, 1421, 1424, 1428, 1436, 1438, 1442, 1444, 1447, 1449, 1451, 1453, 1456, 1460, 1528, 1547, 1550-1551, 1556, 1570-1571, 1578, 1590, 1610, 1686, 1707
Test Kit field ..... 1329, 1331
Test Kit ID field ..... 1327
Test Kit Reagents Query (REAGQ) ..... 1420
Test Result field ..... 1529
Test Result Reconciliation (TRR) ..... 1335
Test Results button ..... 743, 844, 848, 851
Test Type field ..... 1347, 1350
Test/Group ID field ..... 1394
Tested ABO field ..... 1478, 1511
Tested? field ..... 2039
Testing Chapter field ..... 1520
TESTQ ..... 1399
Tests button ..... 1778

Tests field ....1445
Thaw Method field ....1211, 1217
Thaw Temperature field .... 1217
TIER ....2107
Tier Days field ....2098
Tier field .... 2095, 2109
TIERQ ....2099
Time field .... 1594
Title Text field ....261
TMAP field ....1553
TMax field ....1445
TMin field .... 1445
Tmp field ....1211
To Browser button ....248
To Coll field ....1270
To Date field ....1421
To Dt field ....1416
To field .... 1463
To Upload Date field ....1430
Today's Drive button .... 288
tool bars .... 44
Total Bags field ....1264
Total Outdates field ....1998
Total Tests field ....1365, 1368
Total Units field ....1573
TPARM .... 1358
TQC field .... 1574
Track No field .... 2054
TRANS1 ....1862
TRANS2 ....1867
Transmit ALL Test Results? field ....1528
Transport Batch Query (WHQ) ....2019
Tray field .... 1992
Treatment Date field ....1190
Treatment Time field .... 1190
TREE .... 66
TRR .... 1335
TS field ....1571, 1590
TSCNTR ....1681
TSHIP ....1076
TSN field .... 1529
TSRANTWS ....1341
TSTEST .... 1685
TSTPARM ....1360
TSTUBES ....1691
TTOR .... 155
Tube Check-In (TUBES) ....1074
Tube Check-In Format field .... 1075
Tube Date field ....1605
Tube Shipment (TSHIP) ....1076
Tubes Check-In (REGTUBES) .... 1557
Tubes Check-in Query (RGTUBEQ) ....1604
TUCOLDAT .... 1599
TXQ .... 1962
Typ field ....2121
Type field ...1297, 1343, 1353, 1361, 1439, 1443, 1719, 1875

## U

UDEFAUD ....378
UDONAUD ....369
UNDEXT ....1593
Unit & Donor Tested Antigen Query (ANTQL) ....1418
Unit and Component Attribute Query (ATTRQ or ATTRQ2) ....1283
Unit and Component Attributes Query (ATTRQ2) ....1266
Unit And Product History (PHISTQ) ....2025
Unit by Hold Code Query (UNITHQ) ....752
Unit Count field ....1605, 1610, 1711
Unit Holds button .... 765
Unit ID field .... 1111, 1180, 1189, 1194, 1212-1213, 1577
Unit ID in Pool field ....1233
Unit ID Pattern field ....1684, 1690, 1706
Unit Information (UNITI) .... 1788
Unit Level QC for Labeling (LBLUNQC) ....1523

Unit Notes (UNOTE) ....1312
Unit Pattern field ....1541
Unit Price field .... 2095, 2098, 2109
Unit Query (UNITQ or UNITI) .... 1771
Unit Scheme field ....1541, 1683, 1689, 1706
Unit Test Results Query (RESULQ) ....760
Unit Transfer to Transfusion System (SNDHCLL) .... 2006
Unit/Deferral Link Status Query .... 613
UNITHQ .... 752
UNITI ....1788
UNITPINT ....707
UNITQ or UNITI .... 1771
UNITRINT ....710
Units Awaiting CRYO Results Query (PENDCRY) ....1266
Units field .... 1746
Units in Batch field ....1118, 1608
units in the batch, viewing .... 1073
units in this batch field .... 1397
Units Missing Tubes field ....1608
Unlink button ....888
Unlink Deferral button ....570
unlock mobile users .... 649
UNOTE .... 1312
Unpack Slip ID field .... 1981
UNQ ....440
Unregistered Donations (UNQ) .... 440
UnRemind button .... 273
Unscheduled Tests Query (UTQ) .... 1415
UNTINT2 ....1313
Update Audit button ....430, 434
Update Defer button ....434
Update Deferral (DEFMAINT) ....361
Update Deferral Audit (UDEFAUD) ....378
Update Donation (REGMAINT) .... 354
Update Donation Audit (UDONAUD) ....369
Update Drive Checklist (DRVCHK) .... 112
Update Number of Bags for Component (CHGBAGS) .. 1174
Update Regis button ....430
updating detail information from the donor cards ....1065
UPDQ .... 1429
Upload button ....1203
Upload Data from Mobile Server to Main Database box ..639
upload data into Blood Centers tables .... 1024
Upload Data to from Mobile Laptop to Blood Centers Application button .... 1043
Upload File Automatically ....1204
Upload File Manually .... 1201
Upload Test Results from Outside Source (APIUPLD) .. 2141
Usage Day/Weeks field ....1727, 1738
Usage Hour/Days field ....1727, 1738
Used Credit field ....2090
User Error Messages .... 63, 470
User field .... 1435, 1551
User List Browser (DEWDONBR) .... 1018
UTQ .... 1415
UTSPN master code ....2136

## V

Valid Collection Facilities (COLLID) .... 1718
valid collection facility identification number (FIN), defining .... 1718
Valid Range field ....1733, 1755
Valid range field ....1736
Valid Reagent Codes (VREAG) ....1435
Valid Reagent Supplier Codes (VSUPPL) .... 1433
Valid Test Staging Parameters (TPARM) ....1358
validation tables .... 7
Valu field .... 1458
Value field .... 1306, 1309, 1365, 1369, 1739, 1755
Value Obtained field ....1733, 1736
VCHARGE ....2120
VCUSTPRD .... 2101
Verify Component Suitability – Offline (SUITO) .... 1254
Verify Component Suitability (SUIT) ....1235

Verify Control Values for Test Batch (TECH2) ..... 1367
Verify field ..... 1197
Verify Suitability ..... 1178
Verify Test Observations ..... 1346
view
Full Eligibility ..... 511
View Comments button ..... 393
View Comments button, physical findings ..... 963
View Competency button ..... 541
View Donor Letters (LETQ) ..... 854
View Donors in List (DEWDONRS) ..... 1019
View Full Eligibility ..... 511
View Letters ..... 954
View Letters button ..... 873
View List Criteria (DEWCRITN) ..... 1021
View Master Calendar (CALEN) ..... 84
View Master Calendar screen ..... 85
viewing master calendar ..... 84
VISNU ..... 343
Vista Interface Status (VSTATUS) ..... 1051
Vista-Blood Centers Conversion Table (VCONV) ..... 1054
Vista-Blood Centers Error Log (VERROR) ..... 1058
Visual QC? field ..... 1440
viwing units in the batch ..... 1073
VM/NAT/Both field ..... 1078
Void Code field ..... 1383
Void field ..... 1360
Void Product Label into HOLD (LBLOVR) ..... 1480
Void Test Batch (VOIDTB) ..... 1382
Void/SUPVOID/Cancel Test Results (VOIDCA) ..... 1371
VOIDCA ..... 1371
Voided Tests by Test Batch ID Query (VTBQ) ..... 1412
Voided Tests by Unit ID Query (VTUQ) ..... 1413
VOIDTB ..... 1382
Vol field ..... 1146, 1197, 1224, 1230
Vol Type Set field ..... 1181, 1190, 1197
Volume field ..... 1136, 1171
VREAG ..... 1435
Vrfy Prd field ..... 1136, 1143, 1160, 1163, 1171, 1213, 1244
Vrfy Unit ID and Lbl field ..... 1144
VSUPPL ..... 1433
VTBQ ..... 1412
VTUQ ..... 1413

## W

Wafer Lot field ..... 1157, 1167
Warehouse Check-In (WHIN) ..... 2014
Warehouse Check-Out (WHOUT) ..... 2011
Warehouse field ..... 2024
Warning Messages ..... 63, 470
Was the Donor verified in donor system? field ..... 2140
WDay field ..... 1851
Weight field ..... 1136, 1146, 1171, 1197
Weld field ..... 1167
Weld OK field ..... 1160
WellSky Transfusion
status log ..... 821
Where Clause field ..... 261
WHIN ..... 2014
WHOUT ..... 2011
WHQ ..... 2019
WHRCL ..... 2017
Wi field ..... 1547
With Donor Base field ..... 184
WKS ..... 1325
Worksheet ID field ..... 1208, 1336, 1338, 1343, 1347, 1350
Worksheet No. field ..... 1166

## X

XMLLOG ..... 1950

## Y

Year to Date Statistics, displaying ..... 1761
Yearly Goals field ..... 158

## Z

Zone field ..... 2087

# Keyboard Templates

| CTRL+ | Show Keys | Create Record | Next Block | Previous Block | | Clear Form | Dup Field (DUPFLD) | Display Error | Delete Record | | More Windows | | | Enter Query (ENTQRY) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALT+ | | Scroll | | | | Clear Record | Redisplay | | | | | | | Execute Query (EXEQRY) |
| | F1 | F2 | F3 | F4 | | F5 | F6 | F7 | F8 | | F9 | F10 | F11 | F12 |
| | | List of `Values (LOV) | Next Field | Previous Field | | Clear Field | Menu | Screen Print | Exit Screen | | Alert Messages | | History | Commit |

END = Enter Query
HOME = Execute Query

PGDN = Next Block
PGUP = Previous Block

WellSky | Blood Centers

– cut here –

| CTRL+ | Show Keys | Create Record | Next Block | Previous Block | | Clear Form | Dup Field (DUPFLD) | Display Error | Delete Record | | More Windows | | | Enter Query (ENTQRY) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ALT+ | | Scroll | | | | Clear Record | Redisplay | | | | | | | Execute Query (EXEQRY) |
| END=ENTQRY<br>HOME=EXEQRY<br><br>PGDN=Next Blk<br>PGUP=Prev Blk<br>Blood Centers | | | | | | | | | | | | | | |
| | | List of Values (LOV) | Next Field | Previous Field | | Clear Field | Menu | Screen Print | Exit Screen | | Alert Messages | | History | Commit |

The following is an alternate template option:

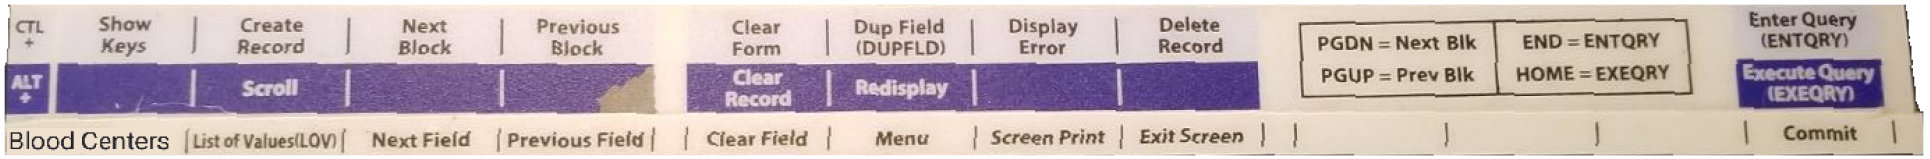



WellSky Corporation
Proprietary and confidential